



TEST REPORT

No. 2013TAR186

for

TCT Mobile Limited

GSM quad band mobile phone

Model Name: Tahiti 1Sim Wifi+DTV

Marketing Name: ALCATEL 3042G

FCC ID : RAD339

with

Hardware Version: PIO

Software Version: v523

Issued Date: 2013-03-15

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629A-1

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100191

Tel:+86(0)10-62304633-2561 , Fax:+86(0)10-62304633-2504 Email:welcme@emcite.com. www.emcite.com

CONTENTS

1. TEST LABORATORY	3
1.1. TESTING LOCATION	3
1.2. TESTING ENVIRONMENT	3
1.3. PROJECT DATA	3
1.4. SIGNATURE	3
2. CLIENT INFORMATION	4
2.1. APPLICANT INFORMATION	4
2.2. MANUFACTURER INFORMATION	4
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1. ABOUT EUT	5
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
4. REFERENCE DOCUMENTS	7
4.1. REFERENCE DOCUMENTS FOR TESTING	7
5. LABORATORY ENVIRONMENT	8
6. SUMMARY OF TEST RESULTS	9
7. TEST EQUIPMENTS UTILIZED	10
ANNEX A: MEASUREMENT RESULTS.....	11

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: No 52, Huayuan beilu, Haidian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 0086-10-62304633-2561
Fax: 0086-10-62304633-2504

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%


1.3. Project data

Testing Start Date: Mar. 7th, 2013
Testing End Date: Mar. 9th, 2013

1.4. Signature



Qu Pengfei
(Prepared this test report)



Sun Xiangqian
(Reviewed this test report)



Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, E building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
City: Shanghai
Postal Code: 201203
Country: China
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM quad band mobile phone
Model Name	Tahiti 1Sim Wifi+DTV
FCC ID	RAD339
Extreme vol. Limits	3.5VDC to 4.2VDC (nominal: 3.8VDC)

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	013504000000840	PIO	v523

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	SN
AE1	Battery	B095241F49A
AE2	Battery	/
AE3	Travel charger	/
AE4	Travel charger	/
AE5	USB cable	/
AE6	USB cable	/

AE1

Model	CAB31L0000C1
Manufacturer	BYD
Capacitance	1000mAh
Nominal voltage	3.7V

AE2

Model	CAB31L0000C2
Manufacturer	BAK
Capacitance	1000mAh
Nominal voltage	3.7V

AE3

Model	CBA3002AG0C3
Manufacturer	Yingju
Length of cable	129cm

AE4

Model	CBA3002AG0C1
Manufacturer	BYD
Length of cable	120cm

AE5

Model	CDA3122002C1
Manufacturer	Juwei
Length of cable	100cm

AE6

Model	CDA3122002C2
Manufacturer	Shenghua
Length of cable	100cm

*AE ID: is used to identify the test sample in the lab internally.

EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1+ AE1 +AE3	Charging Mode
Set.2	EUT1+ AE1 +AE4	Charging Mode
Set.3	EUT1+ AE1 +AE5	USB Mode

Note: Micro card was installed in the device during the test. A new battery was used during the tests under charging mode.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices	10-1-11Edition
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003

5. LABORATORY ENVIRONMENT

Conducted chamber/ Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber SAC-2 (10 meters×6.7meters×6.1meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Fully-anechoic chamber FAC-3 (9 meters×6.5 meters×4 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:	
P	Pass
NA	Not applicable
F	Fail

Clause	List	Clause in FCC rules	Verdict
1	Radiated Emission	15.109(a)	P
2	Conducted Emission	15.107(a)	P

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE
1	LISN	ESH2-Z5	829991/012	R&S	2013-04-16
2	Test Receiver	ESCI	100344	R&S	2013-03-28
3	EMI Antenna	VULB 9163	9163-514	Schwarzbeck	2014-11-10
4	Test Receiver	ESU26	100376	R&S	2013-11-07
5	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31
6	Universal Radio Communication Tester	CMU200	102228	R&S	2013-07-07
7	Universal Radio Communication Tester	E5515C	Agilent	MY48361083	2014-03-16

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission (§15.109(a))

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at a distance of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 8.3.

A.1.2 EUT Operating Mode:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.1.3 Measurement Limit

Frequency of emission (MHz)	Field strength (microvolts/meter)
30-88	100
88-216	150
216-960	200
960-4000	500

A.1.4 Test Condition

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100kHz/300kHz	5
1000-4000	1MHz/1MHz	15

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{\text{Rpl}} = P_{\text{Mea}} + G_A + G_{\text{PL}}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Charging Mode Set.1

Frequency(MHz)	Result(dBuV/m)	GPL (dB)	GA (dB/m)	PMea(dBuV)	Polarity
2999.600	42.3	-29.0	33.8	37.479	VERTICAL
2995.000	42.3	-29.0	33.8	37.479	VERTICAL
2999.800	42.3	-29.0	33.8	37.479	VERTICAL
2995.200	42.3	-29.0	33.8	37.479	VERTICAL
2993.800	42.3	-29.0	33.8	37.479	VERTICAL
3000.000	42.2	-28.4	34.1	36.472	HORIZONTAL

Charging Mode Set.2

Frequency(MHz)	Result(dBuV/m)	GPL (dB)	GA (dB/m)	PMea(dBuV)	Polarity
3000.000	42.3	-28.4	34.1	36.572	HORIZONTAL
2997.000	42.3	-29.0	33.8	37.479	VERTICAL
2992.000	42.3	-29.0	33.8	37.479	VERTICAL
2999.800	42.2	-29.0	33.8	37.379	VERTICAL
2999.600	42.2	-29.0	33.8	37.379	VERTICAL
2989.000	42.2	-29.0	33.8	37.379	VERTICAL

USB Mode Set.3

Frequency(MHz)	Result(dBuV/m)	GPL (dB)	GA (dB/m)	PMea(dBuV)	Polarity
2999.800	42.3	-29.0	33.8	37.479	HORIZONTAL
3000.000	42.3	-28.4	34.1	36.572	HORIZONTAL
2994.400	42.2	-29.0	33.8	37.379	HORIZONTAL
2999.200	42.2	-29.0	33.8	37.379	VERTICAL
2995.600	42.2	-29.0	33.8	37.379	VERTICAL
2995.200	42.2	-29.0	33.8	37.379	HORIZONTAL

Charging Mode 1

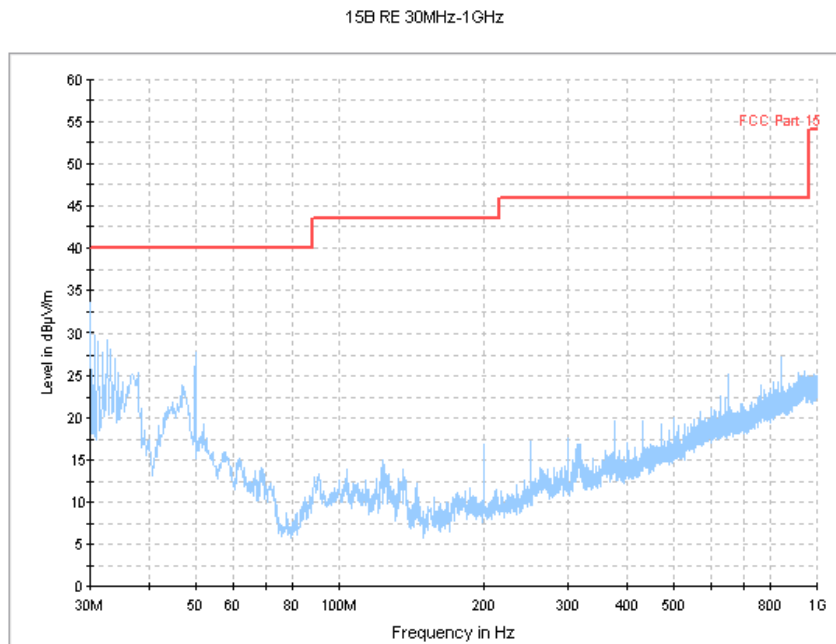


Figure A.1 Radiated Emission from 30MHz to 1GHz

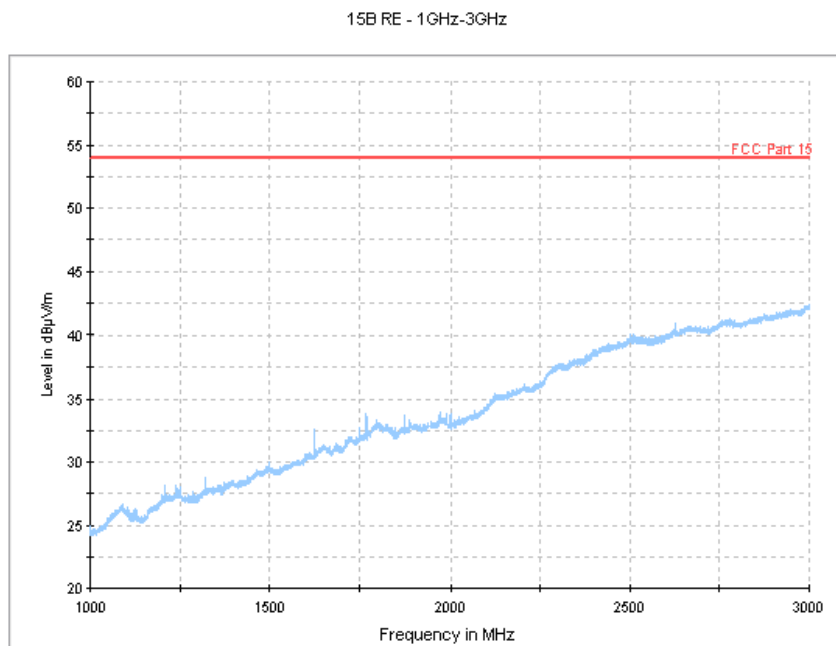


Figure A.2 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-4GHz

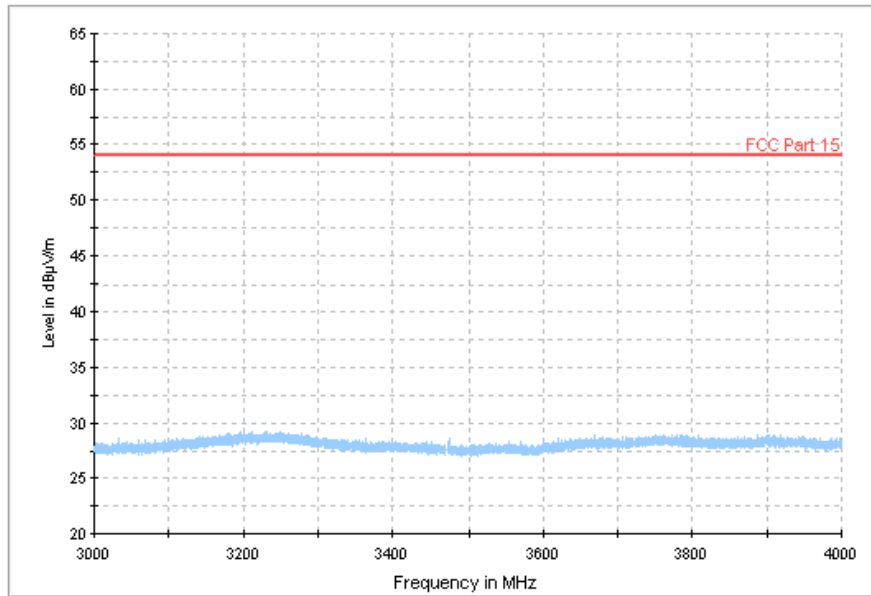


Figure A.3 Radiated Emission from 3GHz to 4GHz

Charging Mode 2

15B RE 30MHz-1GHz

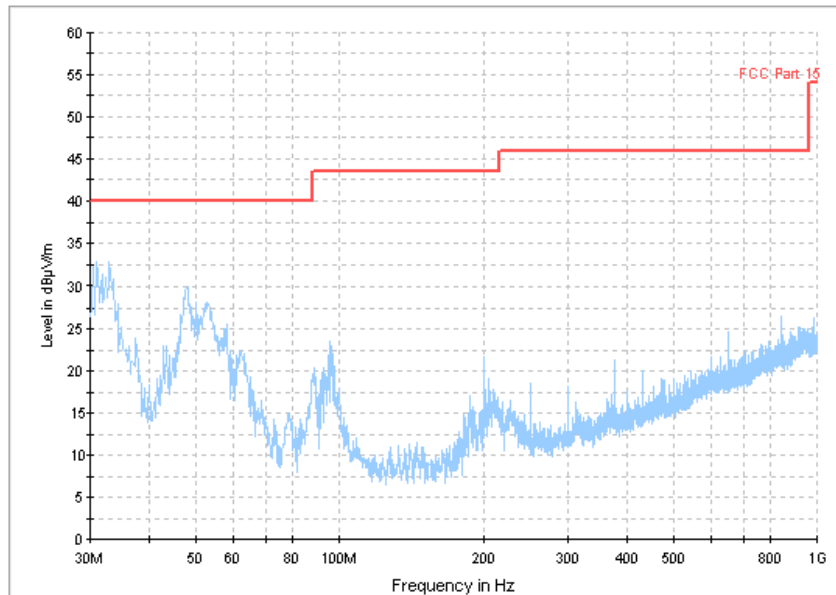


Figure A.4 Radiated Emission from 30MHz to 1GHz

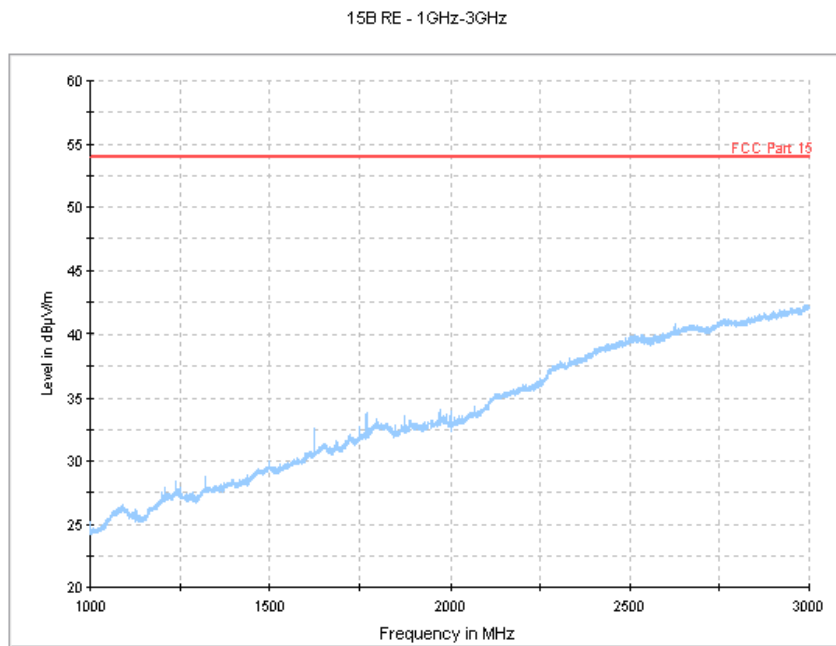


Figure A.5 Radiated Emission from 1GHz to 3GHz

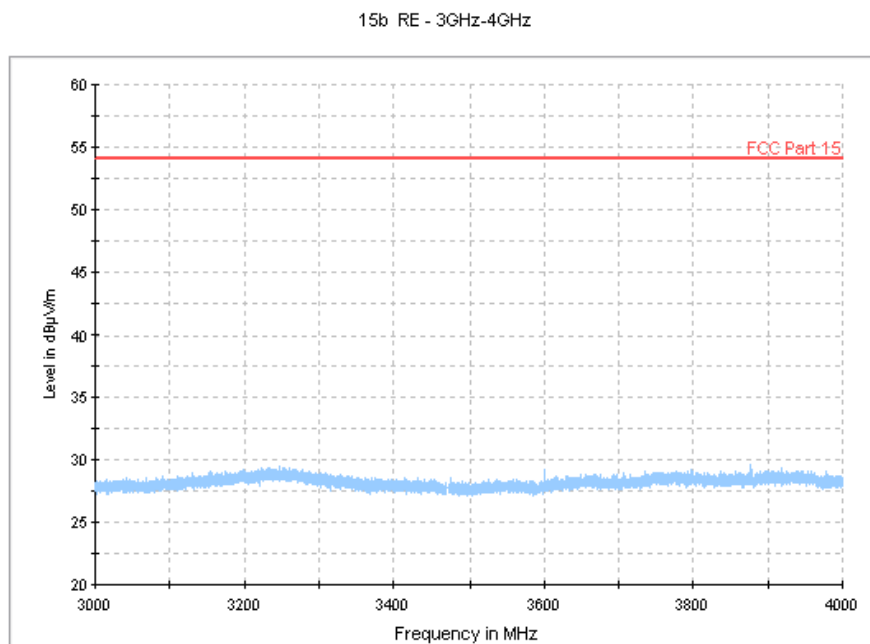


Figure A.6 Radiated Emission from 3GHz to 4GHz

USB Mode

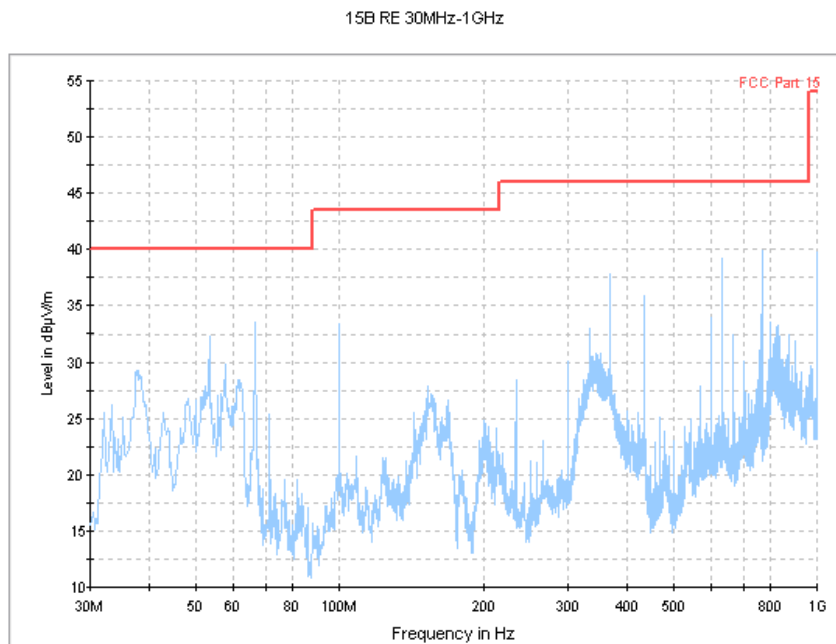


Figure A.7 Radiated Emission from 30MHz to 1GHz

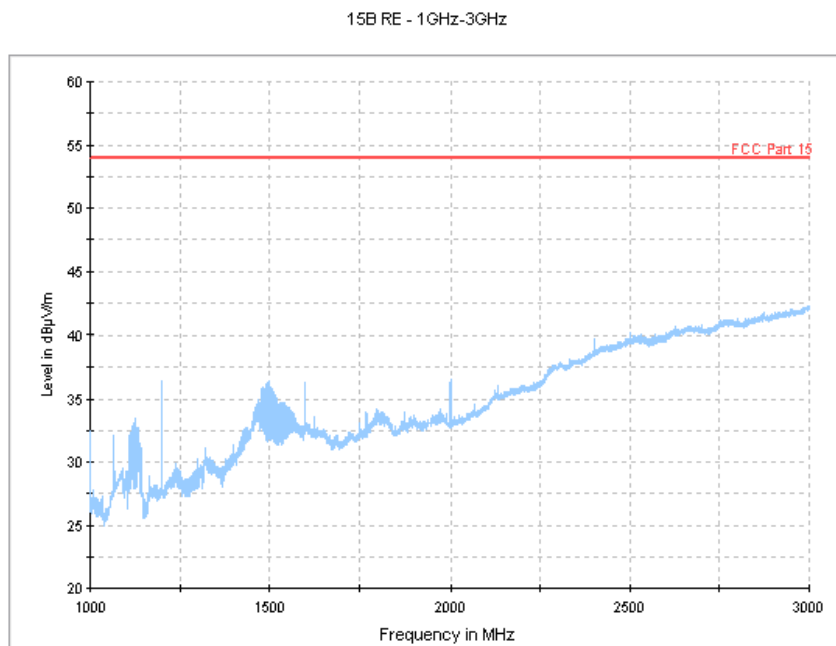


Figure A.8 Radiated Emission from 1GHz to 3GHz

15b RE - 3GHz-4GHz

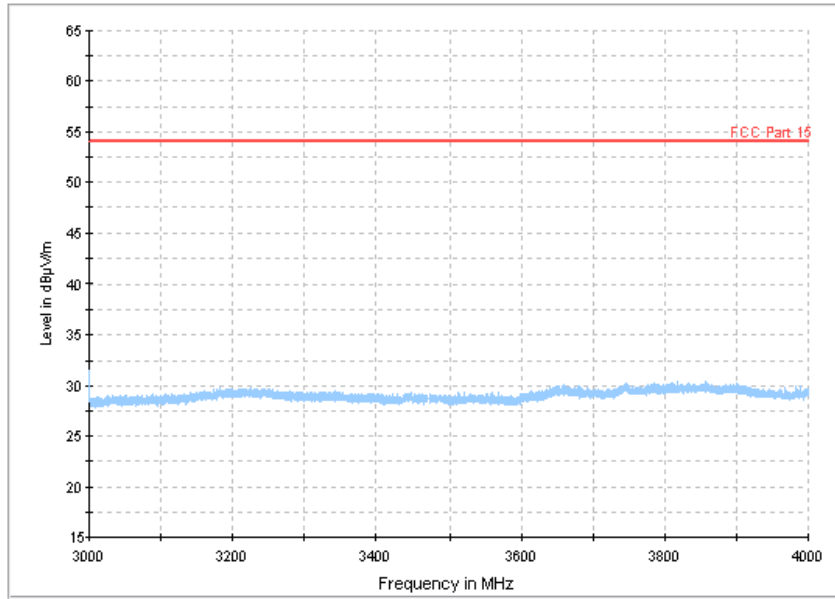


Figure A.9 Radiated Emission from 3GHz to 4GHz

A.2 Conducted Emission (§15.107(a))

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 - 2003, section 7.2.

A.2.2 EUT Operating Mode:

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL OPTIPLEX 755, and the serial number of the PC is 3908243625. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency		

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results
Charging Mode 1

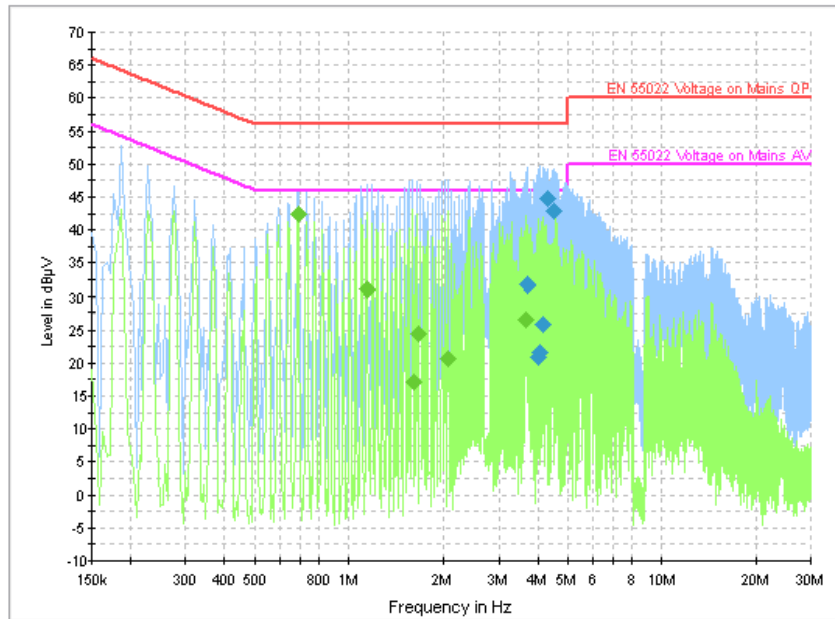


Figure A.10 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
3.700500	31.8	GND	N	10.0	24.2	56.0
4.024500	21.0	GND	L1	10.0	35.0	56.0
4.069500	21.6	GND	L1	10.0	34.4	56.0
4.168500	25.8	GND	L1	10.0	30.2	56.0
4.290000	44.6	GND	L1	10.0	11.4	56.0
4.492500	42.9	GND	L1	10.0	13.1	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.690000	42.4	GND	N	10.0	3.6	46.0
1.144500	31.1	GND	L1	10.0	14.9	46.0
1.603500	17.2	GND	L1	10.0	28.8	46.0
1.648500	24.5	GND	L1	10.0	21.5	46.0
2.062500	20.7	GND	L1	10.0	25.3	46.0
3.646500	26.6	GND	L1	10.0	19.4	46.0

Charging Mode 2

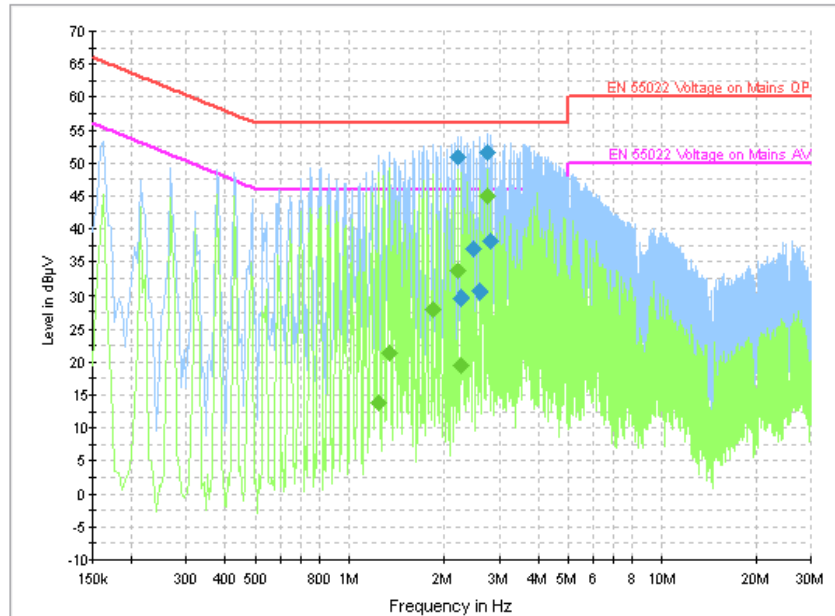


Figure A.11 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
2.206500	51.0	GND	L1	10.0	5.0	56.0
2.265000	29.7	GND	L1	10.0	26.3	56.0
2.481000	36.9	GND	L1	10.0	19.1	56.0
2.589000	30.7	GND	L1	10.0	25.3	56.0
2.746500	51.7	GND	L1	10.0	4.3	56.0
2.805000	38.1	GND	L1	10.0	17.9	56.0

Final Result 2

Frequency (MHz)	Average (dBμV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
1.239000	13.8	GND	L1	10.0	32.2	46.0
1.347000	21.5	GND	L1	10.0	24.5	46.0
1.833000	28.0	GND	L1	10.0	18.0	46.0
2.206500	33.6	GND	L1	10.0	12.4	46.0
2.265000	19.6	GND	L1	10.0	26.4	46.0
2.746500	45.1	GND	L1	10.0	0.9	46.0

USB mode

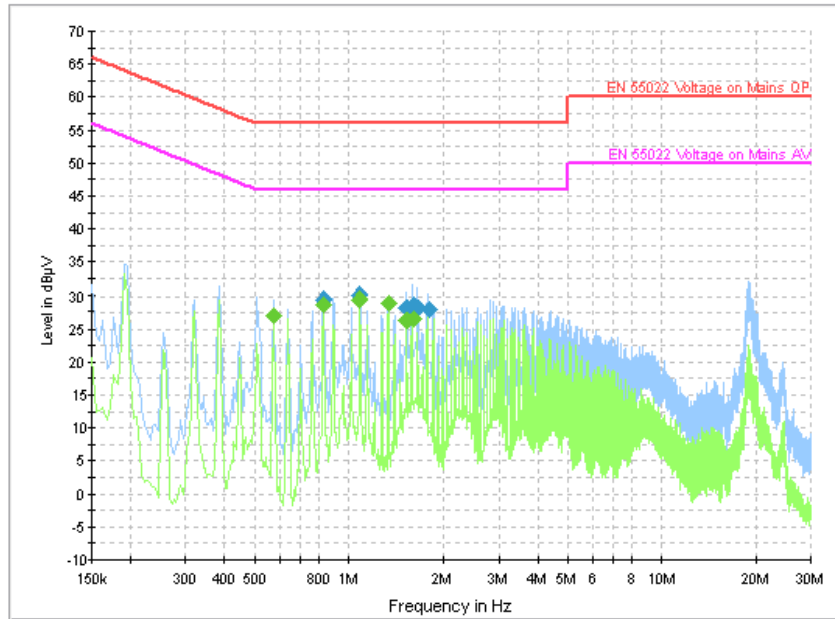


Figure A.12 Conducted Emission

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.829500	29.3	GND	N	10.0	26.7	56.0
1.086000	30.0	GND	N	10.0	26.0	56.0
1.531500	28.3	GND	N	10.0	27.7	56.0
1.594500	28.6	GND	N	10.0	27.4	56.0
1.662000	28.2	GND	N	10.0	27.8	56.0
1.788000	28.1	GND	N	10.0	27.9	56.0

Final Result 2

Frequency (MHz)	Average (dBµV)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.573000	27.0	GND	N	10.0	19.0	46.0
0.829500	28.6	GND	N	10.0	17.4	46.0
1.086000	29.4	GND	N	10.0	16.6	46.0
1.342500	28.9	GND	N	10.0	17.1	46.0
1.531500	26.3	GND	N	10.0	19.7	46.0
1.594500	26.6	GND	N	10.0	19.4	46.0

END OF REPORT