



TEST REPORT

No. I14Z45961-GTE01

for

TCT Mobile Limited

CDMA 1X BC0/BC1/BC10 mobile phone

Model Name : B3G 1X

Marketing Name : 2017B/2017P

FCC ID : RAD506

with

Hardware Version : Revision 1.1

Software Version : 2017BVB2

Issued Date : 2014-06-26

Note :

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

Test Laboratory:

DAR accreditation (DIN EN ISO/IEC 17025): No. D-PL-12123-01-01

FCC 2.948 Listed: No.733176

IC O.A.T.S listed: No.6629B

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai Dian District, Beijing, P. R. China, 100191.

Tel:+86(0)10-62304633-2604, Fax:+86(0)10-62304793, Email:welcome@emcite.com, web: www.emcite.com

CONTENTS

1.	TEST LABORATORY	3
1.1.	TESTING LOCATION	3
1.2.	TESTING ENVIRONMENT.....	3
1.3.	PROJECT DATA	3
1.4.	SIGNATURE	3
2.	CLIENT INFORMATION.....	4
2.1.	APPLICANT INFORMATION.....	4
2.2.	MANUFACTURER INFORMATION.....	4
3.	EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	5
3.1.	ABOUT EUT	5
3.2.	INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	5
3.3.	INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	5
3.4.	NORMAL ACCESSORY SETTING.....	5
3.5.	GENERAL DESCRIPTION	5
4.	REFERENCE DOCUMENTS.....	7
4.1.	REFERENCE DOCUMENTS FOR TESTING.....	7
5.	LABORATORY ENVIRONMENT	8
6.	SUMMARY OF TEST RESULTS	9
7.	TEST EQUIPMENTS UTILIZED	10
	ANNEX A: MEASUREMENT RESULTS.....	11
A.1	OUTPUT POWER.....	11
A.2	EMISSION LIMIT.....	15
A.3	CONDUCTED EMISSION	21
A.4	FREQUENCY STABILITY	26
A.5	OCCUPIED BANDWIDTH	28
A.6	EMISSION BANDWIDTH	32
A.7	BAND EDGE COMPLIANCE.....	36
A.8	CONDUCTED SPURIOUS EMISSION	39

1. Test Laboratory

1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT
Address: 3/F Shou Xiang Technology Building, No.51 Xueyuan Road, Hai
Dian District, Beijing, P. R. China
Postal Code: 100191
Telephone: 00861062304633
Fax: 00861062304793

1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2014-05-21
Testing End Date: 2014-06-09

1.4. Signature

Zi Xiaogang
(Prepared this test report)

Sun Xiangqian
(Reviewed this test report)

Lu Bingsong
Deputy Director of the laboratory
(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
Contact Person: Gong Zhizhou
Contact Email: Zhizhou.gong@tcl.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCT Mobile Limited
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Pudong Area Shanghai, P.R. China. 201203
Contact Person: Gong Zhizhou
Contact Email: Zhizhou.gong@tcl.com
Telephone: 0086-21-61460890
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	CDMA 1X BC0/BC1/BC10 mobile phone
Model Name	B3G 1X
Marketing Name	2017B
FCC ID	RAD506
Antenna	Integrated
Output power	27.30dBm maximum EIRP measured for CDMA BC1
Extreme vol. Limits	3.6VDC to 4.2VDC (nominal: 3.7VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MIIT of People's Republic of China.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version
UT05a	270113183512242650	Revison 1.1	2017BVB2
UT06a	270113183512242651	Revison 1.1	2017BVB2

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1

Model	CAB3120000C1
Manufacturer	BYD
Capacitance	850mAh
Nominal Voltage	3.7V

AE2

Model	CBA3002AG0C2
Manufacturer	Tenpao

*AE ID: is used to identify the test sample in the lab internally.

3.4. Normal Accessory setting

Fully charged battery was used during the test.

3.5. General Description

The Equipment Under Test (EUT) is a model of CDMA 1X BC0/BC1/BC10 mobile phone with

integrated antenna. It consists of normal options: lithium battery, charger. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-13 Edition
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-13 Edition
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2003
KDB971168 D01	Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems	v02r01, 2013

5. LABORATORY ENVIRONMENT

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber 2 (8.6 meters × 6.1 meters × 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 4000 MHz

Semi-anechoic chamber 2 / Fully-anechoic chamber 3 (10 meters × 6.7 meters × 6.15 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.5 dB, 3 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

6. SUMMARY OF TEST RESULTS

CDMA BC0

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	§2.1046(a),22.913(a)	A.1	P
2	Emission Limit	22.917, 2.1051	A.2	P
3	CONDUCTED EMISSION	15.107/15.207	A.3	P
4	Frequency Stability	22.235, 2.1055	A.4	P
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P
6	Emission Bandwidth	22.917(b)	A.6	P
7	Band Edge Compliance	22.917(b)	A.7	P
8	Conducted Spurious Emission	22.917, 2.1057	A.8	P

CDMA BC1

Items	Test Name	Clause in FCC rules	Section in this report	Verdict
1	Output Power	24.232(c)	A.1	P
2	Emission Limit	24.238,2.1051	A.2	P
3	CONDUCTED EMISSION	15.107/15.207	A.3	P
4	Frequency Stability	24.235,2.1055	A.4	P
5	Occupied Bandwidth	2.1049(h)(i)	A.5	P
6	Emission Bandwidth	24.238(b)	A.6	P
7	Band Edge Compliance	24.238(b)	A.7	P
8	Conducted Spurious Emission	24.238,2.1057	A.8	P

7. Test Equipments Utilized

NO .	Description	TYPE	series number	MANUFACTUR E	CAL DUE DATE	CALIBRATIO N INTERVAL
1	Test Receiver	ESCI	100344	R&S	2015-03-03	1 year
2	Test Receiver	ESU26	100376	R&S	2014-11-05	1 year
3	EMI Antenna	VULB 9163	514	Schwarzbeck	2014-11-10	3years
4	EMI Antenna	3117	00139065	ETS-Lindgren	2014-07-31	3years
5	LISN	NV216	101200	R&S	2014-07-11	1 year
6	Universal Radio Communication Tester	CMU200	102228	R&S	2014-06-23	1 year
7	Universal Radio Communication Tester	E5515C	MY4836108 3	Agilent	2015-02-27	1 year
8	Spectrum Analyzer	E4440A	MY4825064 2	Agilent	2015-02-27	1 year
9	EMI Antenna	9117	177	Schwarzbeck	2014-06-29	3years
10	EMI Antenna	VULB 9163	9163 175	Schwarzbeck	2014-07-13	3years
11	EMI Antenna	3117	00119024	ETS-Lindgren	2016-01-20	3years
12	Signal Generator	N5183A	MY4906005 2	Agilent	2015-03-02	1 year
13	Climate chamber	SH-241	92007454	ESPEC	2015-12-14	2 year
14	Loop Antenna	HFH2-Z 2	829324/007	R&S	2014-12-12	3years

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation. This result contains peak output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation. These measurements were done at 3 frequencies of CDMA BC0&BC1 (bottom, middle and top of operational frequency range).

CDMA BC0

Measurement result

Channel	Frequency(MHz)	Channel power(dBm)
1013	824.70	24.03
384	836.52	24.12
777	848.31	24.15

CDMA BC1

Measurement result

Channel	Frequency(MHz)	Channel power(dBm)
25	1851.25	23.96
600	1880.00	24.02
1175	1908.75	24.10

A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(c) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603C-2004 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

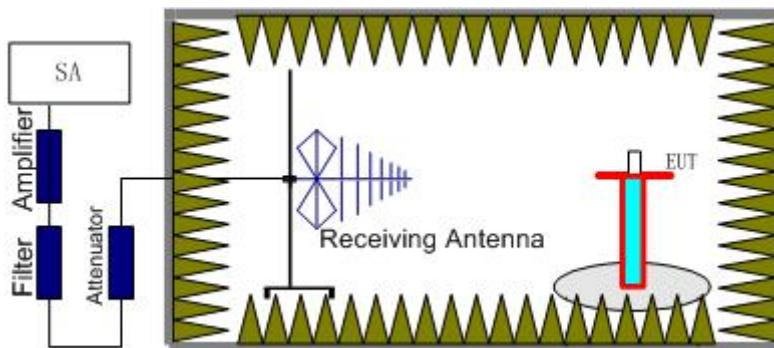

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

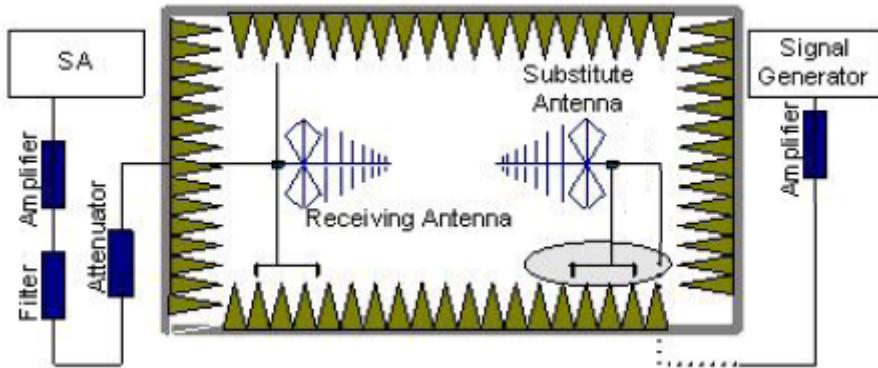

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is

connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna.

The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

CDMA BC0-ERP
Limits

		Burst Peak ERP (dBm)
CDMA BC0		≤38.45dBm (7W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	Correction (dB)	ERP(dBm)	Limit(dBm)	Margin(dB)	Polarization
824.70	-23.58	2.07	-53.00	0.84	2.15	24.36	38.45	14.09	V
836.52	-23.19	2.08	-53.00	0.90	2.15	24.68	38.45	13.77	V
848.31	-24.27	2.09	-53.00	0.95	2.15	23.54	38.45	14.91	V

Frequency: 836.52MHz

Peak ERP(dBm)= P_{Mea}(-23.19dBm)- P_{cl}(2.08dB)-P_{Ag}(-53.00dB)-G_a (0.90dB)-2.15dB=24.68dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz
CDMA BC1-EIRP
Limits

		Burst Peak EIRP (dBm)
CDMA BC1		≤33dBm (2W)

Measurement result

Frequency(MHz)	P _{Mea} (dBm)	P _{cl} (dB)	P _{Ag} (dB)	G _a Antenna Gain(dB)	EIRP(dBm)	Limit(dBm)	Margin(dB)	Polarization
1851.25	-27.13	3.18	-50.00	-4.55	24.24	33.00	8.76	H
1880.00	-25.15	3.11	-50.00	-4.43	26.17	33.00	6.83	H
1908.75	-23.82	3.18	-50.00	-4.30	27.30	33.00	5.70	H

Frequency: 1908.75MHz

Peak EIRP(dBm)= P_{Mea}(-23.82dBm)- P_{cl}(3.18dB)- P_{Ag}(-50.00dB)-G_a(-4.30dB) =27.30dBm

ANALYZER SETTINGS: RBW = VBW = 3MHz

A.2 EMISSION LIMIT


A.2.1 Measurement Method

The measurements procedures in TIA-603C-2004 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238 and Part 24.917. The spectrum is scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of CDMA BC0 and BC1.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

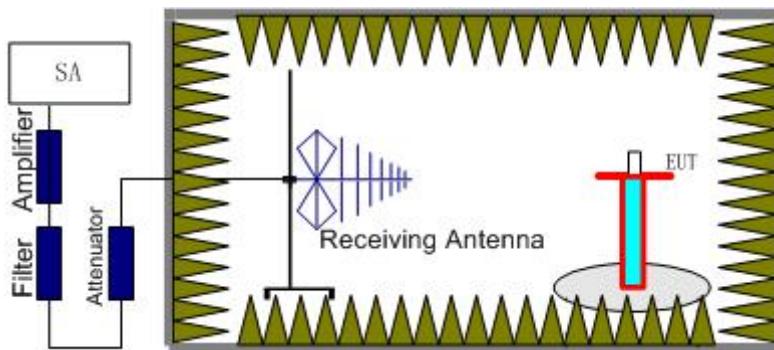

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

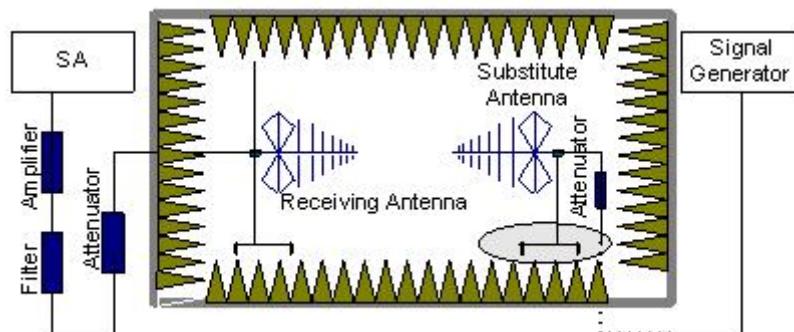

In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{pl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

A.2.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of CDMA BC0 and BC1. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of CDMA BC0 and BC1 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

A.2.4 Measurement Results Table

Frequency	Channel	Frequency Range	Result
CDMA BC0	Low	30MHz-10GHz	Pass
	Middle	30MHz-10GHz	Pass
	High	30MHz-10GHz	Pass
CDMA BC1	Low	30MHz-20GHz	Pass
	Middle	30MHz-20GHz	Pass
	High	30MHz-20GHz	Pass

A.2.5 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
CDMA BC0	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
CDMA BC1	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

CDMA BC0 Channel 1013/824.7MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3267.14	-57.65	4.16	-7.34	2.15	-56.62	-13.00	43.62	V
4685.17	-56.41	4.93	-9.13	2.15	-54.36	-13.00	41.36	V
5344.86	-60.87	5.41	-9.91	2.15	-58.52	-13.00	45.52	V
6879.19	-57.86	6.07	-10.98	2.15	-55.10	-13.00	42.10	V
7965.09	-57.75	6.97	-11.87	2.15	-55.00	-13.00	42.00	V
8577.96	-59.49	7.21	-12.26	2.15	-56.59	-13.00	43.59	V

CDMA BC0 Channel 384/836.52MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3300.80	-59.47	4.20	-7.42	2.15	-58.40	-13.00	45.40	H
4073.74	-60.94	4.84	-8.54	2.15	-59.39	-13.00	46.39	V
5226.39	-59.38	5.26	-9.84	2.15	-56.95	-13.00	43.95	H
6252.73	-58.03	5.82	-10.40	2.15	-55.60	-13.00	42.60	H
7209.48	-58.00	6.36	-11.23	2.15	-55.28	-13.00	42.28	H
8491.07	-58.97	7.02	-12.19	2.15	-55.95	-13.00	42.95	V

CDMA BC0 Channel 777/848.31MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Correction (dB)	Peak ERP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3217.38	-58.56	4.13	-7.22	2.15	-57.62	-13.00	44.62	H
4096.79	-57.74	4.71	-8.56	2.15	-56.04	-13.00	43.04	H
5230.42	-59.74	5.26	-9.84	2.15	-57.31	-13.00	44.31	H
6889.45	-58.47	6.08	-10.99	2.15	-55.71	-13.00	42.71	H
7901.59	-57.27	6.97	-11.80	2.15	-54.59	-13.00	41.59	V
8654.61	-58.82	7.47	-12.32	2.15	-56.12	-13.00	43.12	V

CDMA BC1 Channel 25/1851.25MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3701.82	-49.13	4.44	-8.14	-45.43	-13.00	32.43	V
5553.57	-36.00	5.45	-10.02	-31.43	-13.00	18.43	V
7403.82	-50.71	6.42	-11.34	-45.79	-13.00	32.79	V
9637.65	-60.56	7.91	-12.54	-55.93	-13.00	42.93	V
13598.12	-53.76	9.17	-13.84	-49.09	-13.00	36.09	H
15782.41	-49.66	10.02	-13.17	-46.51	-13.00	33.51	H

CDMA BC1 Channel 600/1880.00MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3759.27	-49.44	4.53	-8.21	-45.76	-13.00	32.76	V
5640.07	-33.73	5.45	-10.06	-29.12	-13.00	16.12	H
7520.31	-49.64	6.82	-11.42	-45.04	-13.00	32.04	H
8607.06	-58.38	7.47	-12.29	-53.56	-13.00	40.56	H
9545.67	-56.44	7.78	-12.58	-51.64	-13.00	38.64	H
13763.61	-52.53	9.14	-13.91	-47.76	-13.00	34.76	H

CDMA BC1 Channel 1175/1908.75MHz

Frequency(MHz)	P _{Mea} (dBm)	Path Loss	Antenna Gain	Peak EIRP(dBm)	Limit (dBm)	Margin(dB)	Polarization
3817.37	-47.40	4.49	-8.28	-43.61	-13.00	30.61	V
5726.75	-32.74	5.54	-10.09	-28.19	-13.00	15.19	V
7633.38	-51.91	6.81	-11.53	-47.19	-13.00	34.19	H
9560.10	-59.99	7.76	-12.58	-55.17	-13.00	42.17	V
13929.93	-53.75	9.26	-13.97	-49.04	-13.00	36.04	V
15223.95	-51.66	9.86	-13.46	-48.06	-13.00	35.06	H


A.3 CONDUCTED EMISSION

The measurement procedure in ANSI C63.4-1003 is used. Conducted Emission is measured with travel charger.

A.3.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50


* Decreases with logarithm of the frequency

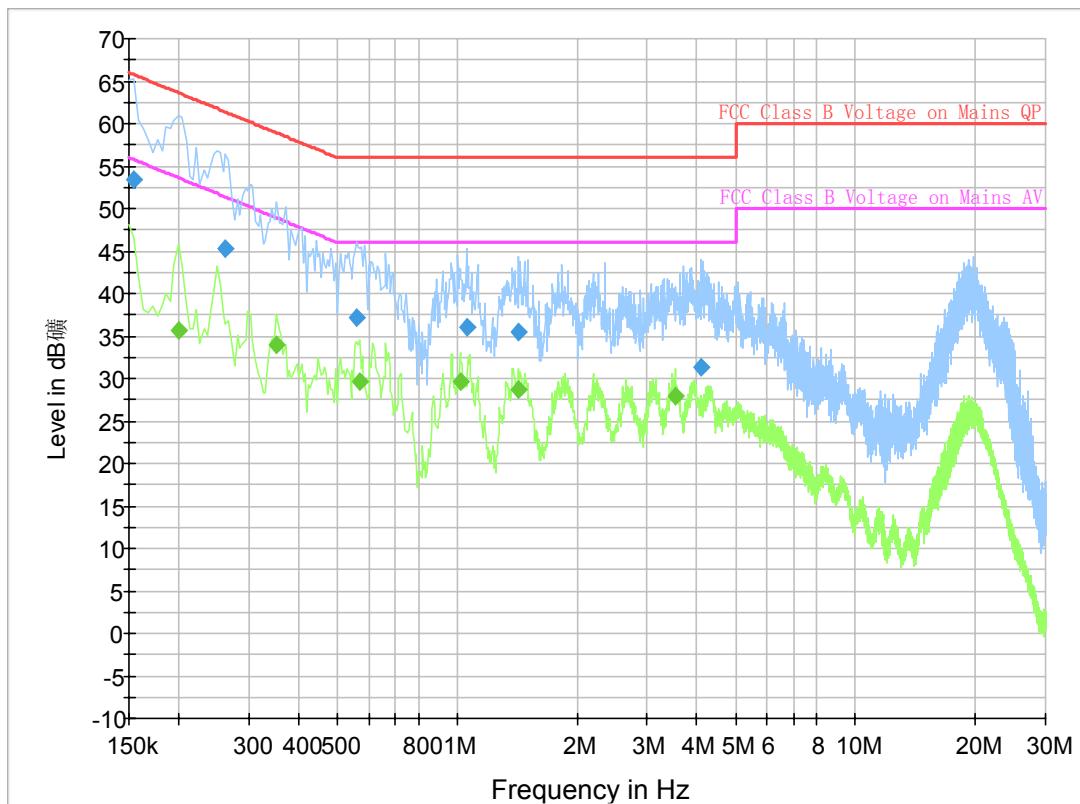A.3.2 Measurement result
CDMA BC0

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154500	53.4	GND	L1	9.8	12.4	65.8
0.262500	45.4	GND	L1	9.8	16.0	61.4
0.559500	37.3	GND	L1	9.8	18.7	56.0
1.054500	36.1	GND	L1	9.7	19.9	56.0
1.423500	35.5	GND	L1	9.7	20.5	56.0
4.105500	31.4	GND	L1	9.7	24.6	56.0

Final Result 2

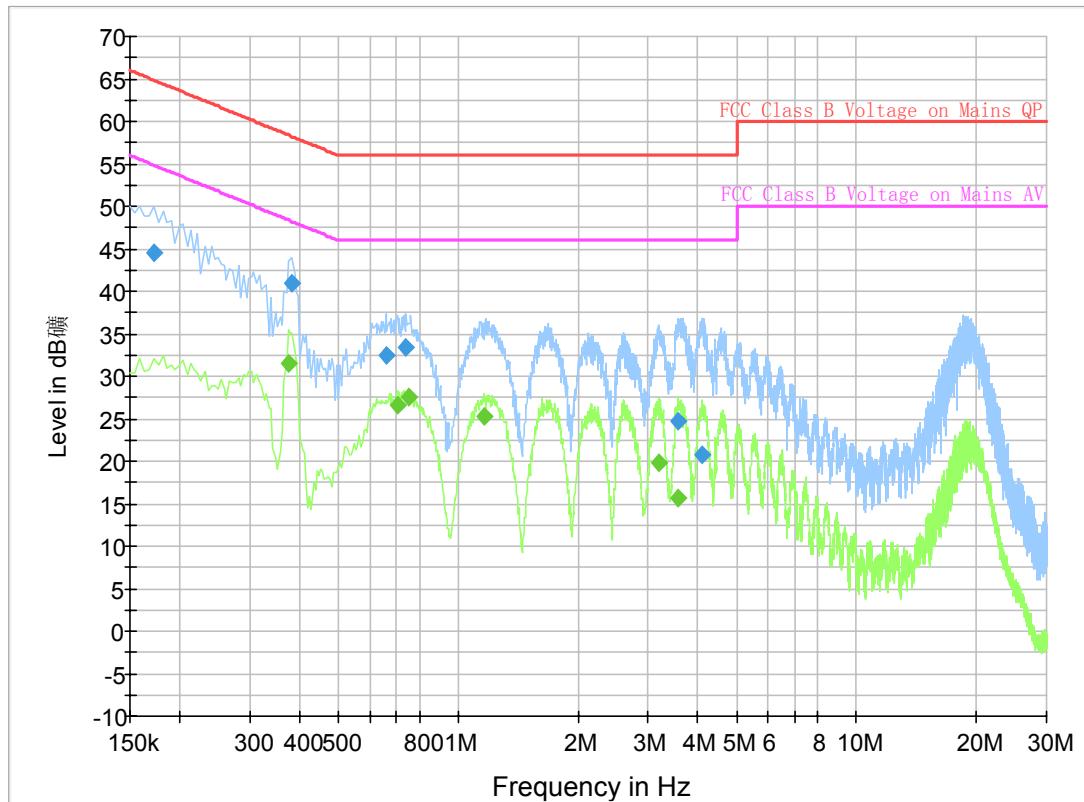
Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.199500	35.6	GND	L1	9.8	18.0	53.6
0.352500	34.1	GND	L1	9.8	14.9	48.9
0.568500	29.6	GND	L1	9.8	16.4	46.0
1.018500	29.6	GND	L1	9.7	16.4	46.0
1.423500	28.6	GND	L1	9.7	17.4	46.0
3.520500	27.9	GND	L1	9.7	18.1	46.0

CDMA BC1

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.172500	44.5	GND	L1	9.8	20.3	64.8
0.384000	40.9	GND	L1	9.8	17.3	58.2
0.658500	32.5	GND	L1	9.8	23.5	56.0
0.739500	33.3	GND	L1	9.8	22.7	56.0
3.579000	24.7	GND	L1	9.7	31.3	56.0
4.110000	20.7	GND	L1	9.7	35.3	56.0

Final Result 2

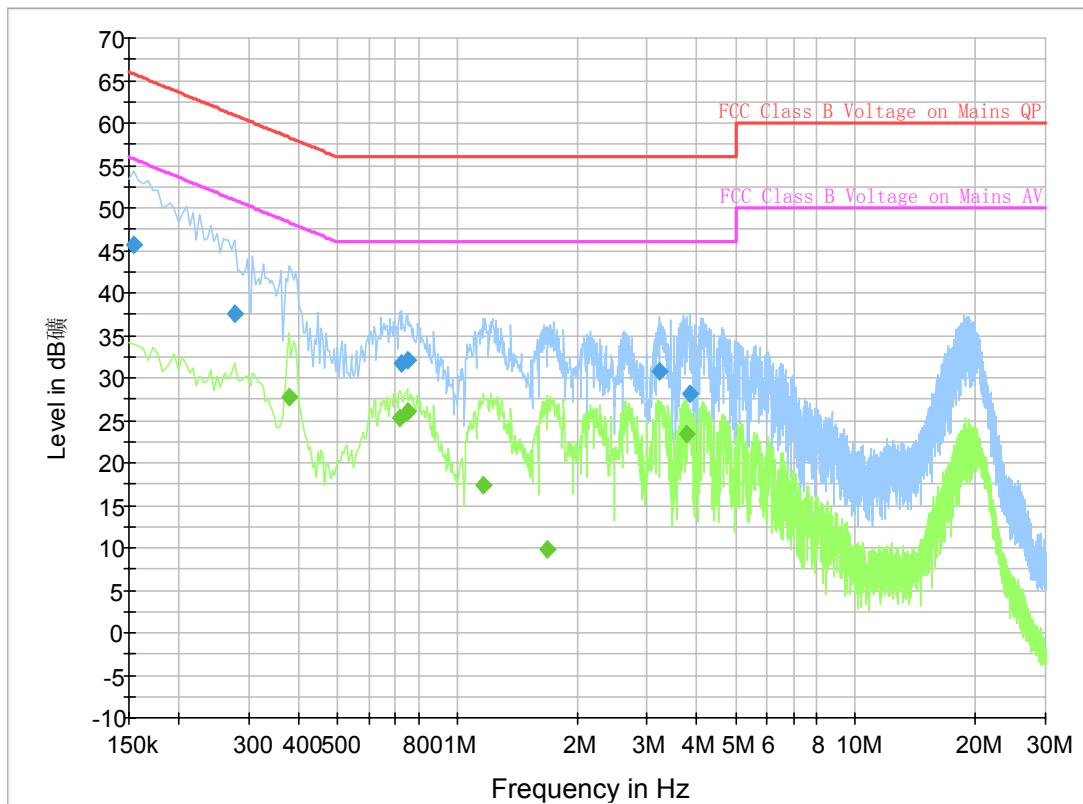
Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit v
0.375000	31.5	GND	L1	9.8	16.9	48.4
0.703500	26.7	GND	L1	9.8	19.3	46.0
0.748500	27.5	GND	L1	9.8	18.5	46.0
1.162500	25.3	GND	L1	9.7	20.7	46.0
3.192000	19.7	GND	L1	9.7	26.3	46.0
3.579000	15.6	GND	L1	9.7	30.4	46.0

MP3

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.154500	45.7	GND	L1	9.8	20.0	65.8
0.276000	37.6	GND	L1	9.8	23.3	60.9
0.726000	31.7	GND	L1	9.8	24.3	56.0
0.748500	32.0	GND	L1	9.8	24.0	56.0
3.214500	30.8	GND	L1	9.7	25.2	56.0
3.835500	28.1	GND	L1	9.7	27.9	56.0

Final Result 2

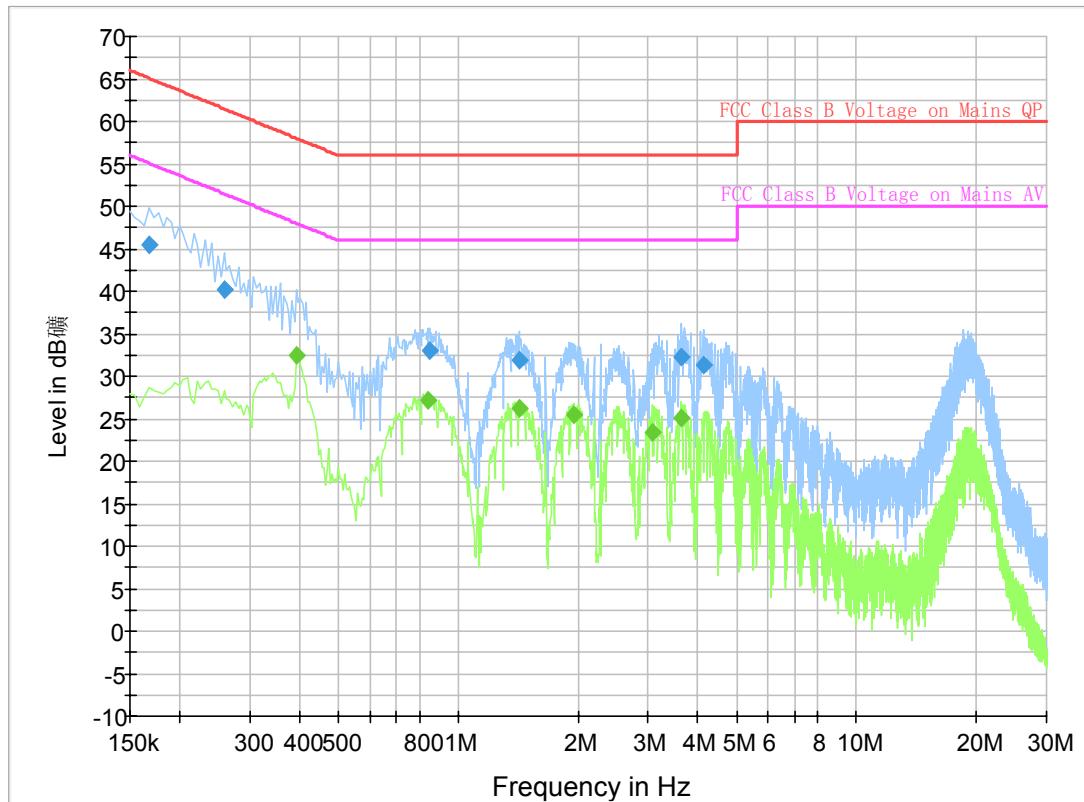Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.379500	27.8	GND	L1	9.8	20.5	48.3
0.717000	25.4	GND	L1	9.8	20.6	46.0
0.748500	26.0	GND	L1	9.8	20.0	46.0
1.167000	17.3	GND	L1	9.7	28.7	46.0
1.675500	9.7	GND	L1	9.7	36.3	46.0
3.777000	23.4	GND	L1	9.7	22.6	46.0

CAMERA

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.168000	45.5	GND	N	9.8	19.6	65.1
0.258000	40.2	GND	N	9.8	21.3	61.5
0.847500	33.1	GND	L1	9.8	22.9	56.0
1.419000	31.8	GND	L1	9.7	24.2	56.0
3.646500	32.3	GND	L1	9.7	23.7	56.0
4.141500	31.3	GND	L1	9.7	24.7	56.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	PE	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.393000	32.4	GND	L1	9.8	15.6	48.0
0.838500	27.2	GND	L1	9.8	18.8	46.0
1.419000	26.2	GND	L1	9.7	19.8	46.0
1.950000	25.4	GND	L1	9.7	20.6	46.0
3.079500	23.5	GND	L1	9.7	22.5	46.0
3.642000	25.1	GND	L1	9.7	20.9	46.0

A.4 FREQUENCY STABILITY

A.4.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of CDMA BC0 and BC1, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.4.2 Measurement Limit

A.4.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

A.4.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section

2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

A.4.3 Measurement results

CDMA BC0

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-1	-0.001
3.7	-2	-0.002
4.2	-1	-0.001

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-6	-0.007
-20	-8	-0.010
-10	-1	-0.001
0	-3	-0.004
10	1	-0.004
20	-4	-0.005
30	-6	-0.007
40	-7	-0.008
50	-2	-0.002

CDMA BC1

Frequency Error vs Voltage

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.6	-3	-0.002
3.7	5	0.003
4.2	2	0.001

Frequency Error vs Temperature

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	4	0.002
-20	-1	-0.001
-10	3	0.002
0	-2	-0.001
10	-1	-0.001
20	3	0.002
30	5	0.003
40	-2	-0.001
50	1	0.001

A.5 OCCUPIED BANDWIDTH

A.5.1 Occupied Bandwidth Results

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

Test Condition

RBW	VBW	Span	Sweptime	Detector	Trace Mode
20KHz	50KHz	5MHz	40ms	Peak	Max Hold


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 99% bandwidth.


CDMA 800 (99% BW)

Channel	Occupied Bandwidth (99% BW)(MHz)
1013	1.274
384	1.282
777	1.282


CDMA 800

Channel 1013-Occupied Bandwidth (99% BW)

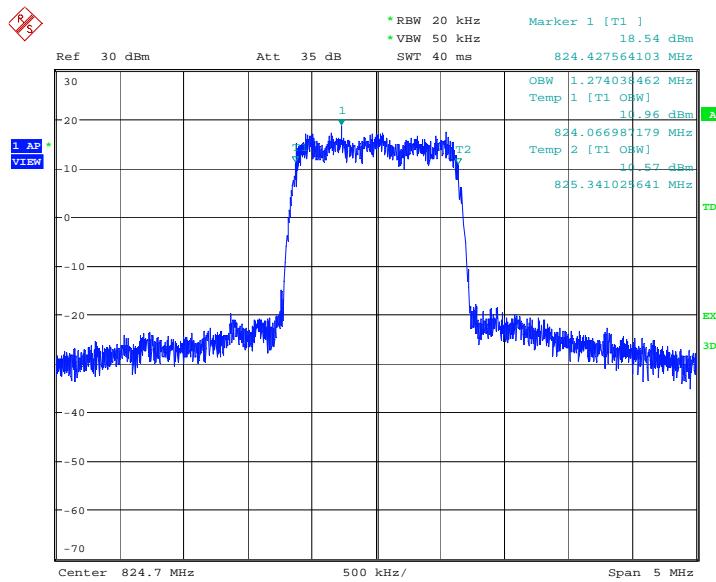

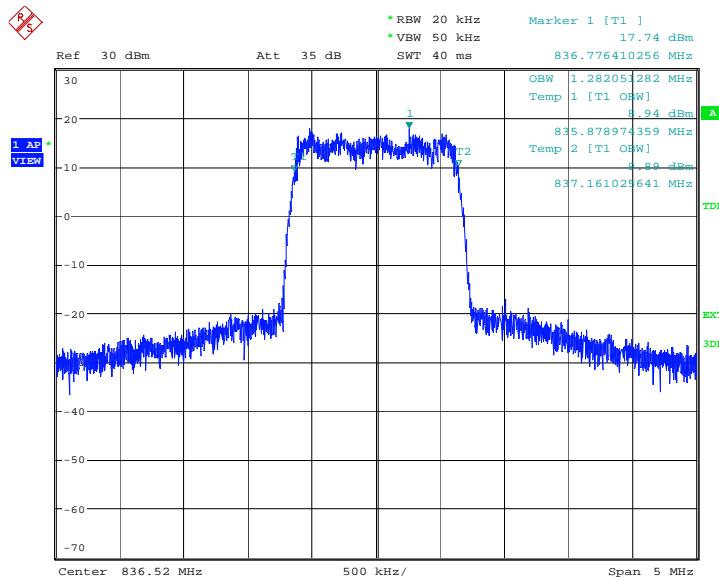Channel 384-Occupied Bandwidth (99% BW)


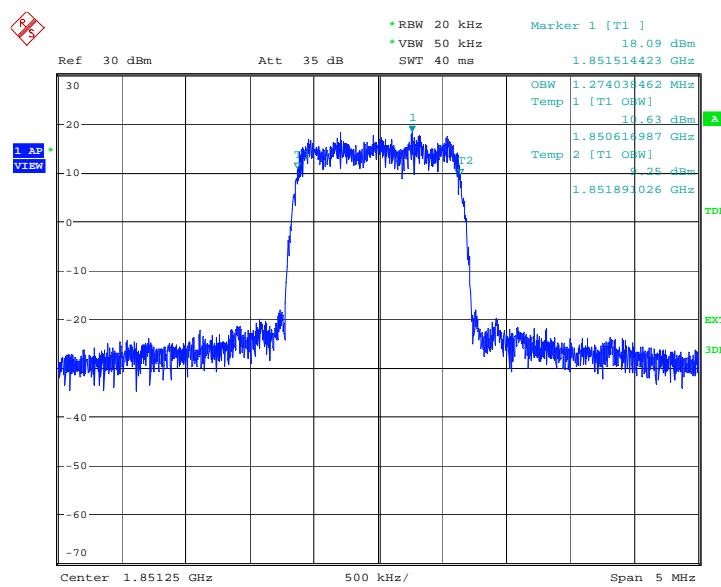
Date: 23.MAY.2014 17:06:31

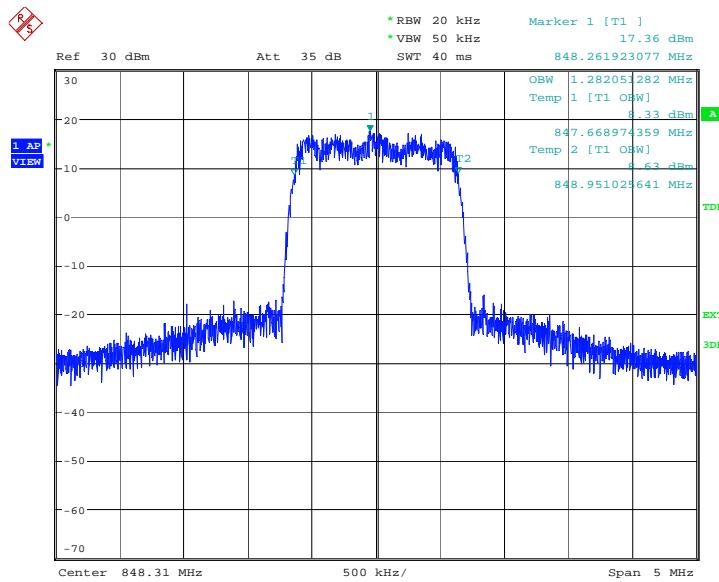Channel 777-Occupied Bandwidth (99% BW)


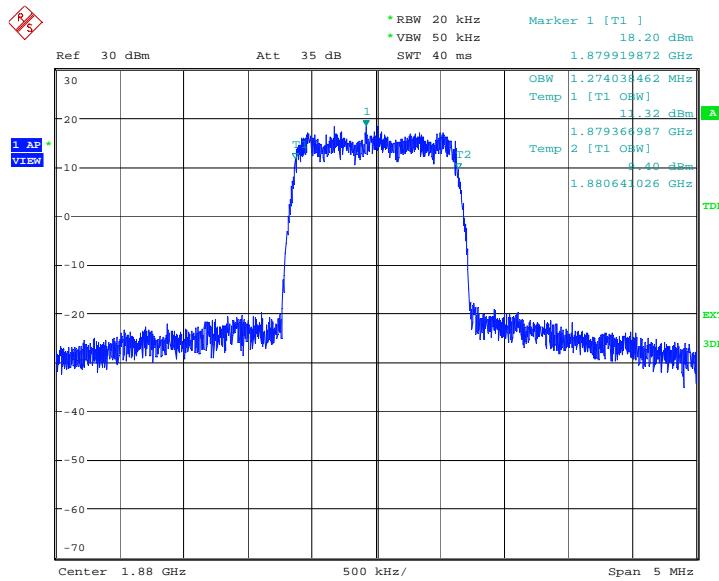
Date: 23.MAY.2014 17:10:06

CDMA 1900 (99% BW)


Channel	Occupied Bandwidth (99% BW)(MHz)
25	1.274
600	1.274
1175	1.282

CDMA 1900
Channel 25-Occupied Bandwidth (99% BW)


Date: 23.MAY.2014 17:14:00

Channel 600-Occupied Bandwidth (99% BW)


Date: 23.MAY.2014 17:19:21

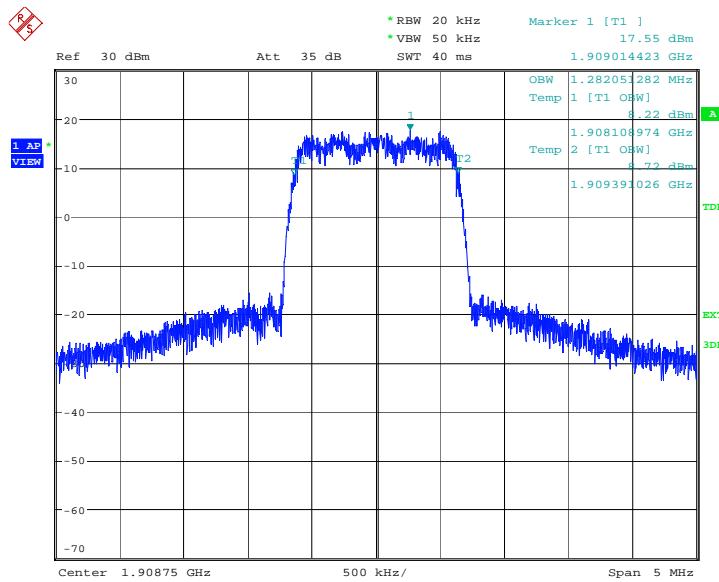Channel 1175-Occupied Bandwidth (99% BW)


Date: 23.MAY.2014 17:45:34

A.6 EMISSION BANDWIDTH

A.6.1 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the CDMA frequency band. Table below lists the measured 100% BW. Spectrum analyzer plots are included on the following pages.

Test Condition

RBW	VBW	Span	Sweeptime	Detector	Trace Mode
20KHz	50KHz	5MHz	40ms	Peak	Max Hold


The EUT was set up for the max output power with pseudo random data modulation. Use the Occupied Bandwidth function of SA to measure the 100% bandwidth.



CDMA 800 (100% BW)

Channel	Emission Bandwidth (100% BW)(MHz)
1013	1.370
384	1.370
777	1.378

CDMA 800


Channel 1013-Emission Bandwidth (100% BW)

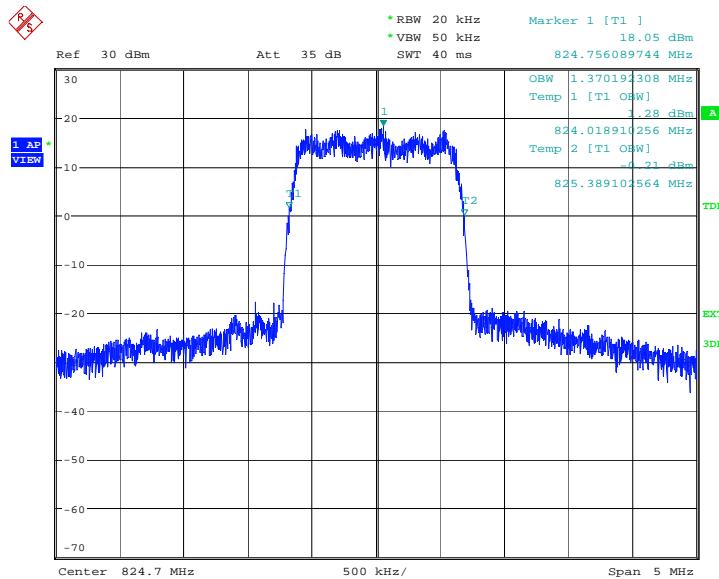

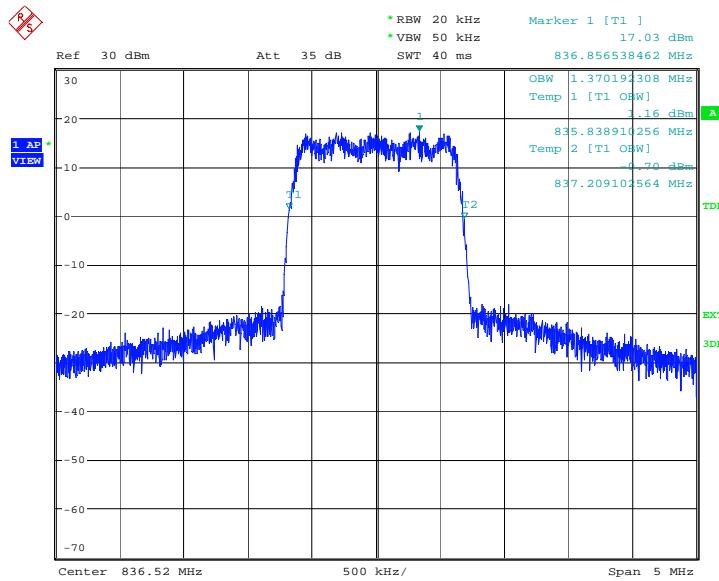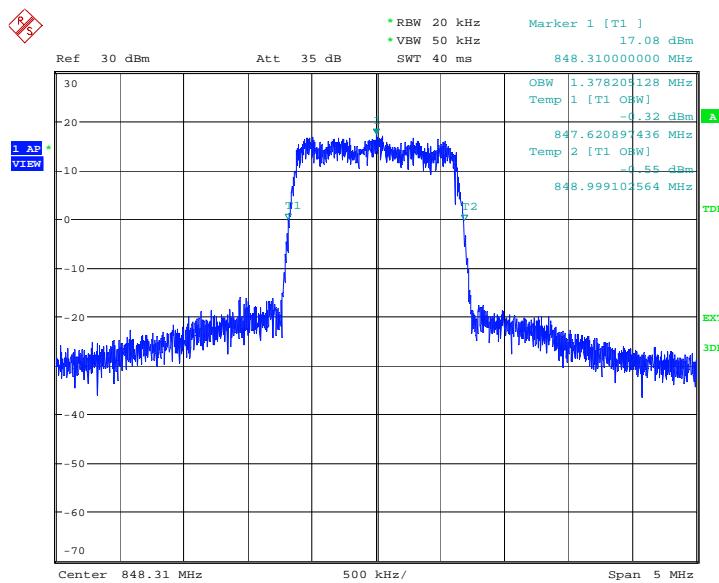
Channel 384-Emission Bandwidth (100% BW)

Channel 777-Emission Bandwidth (100% BW)


CDMA 1900 (100% BW)

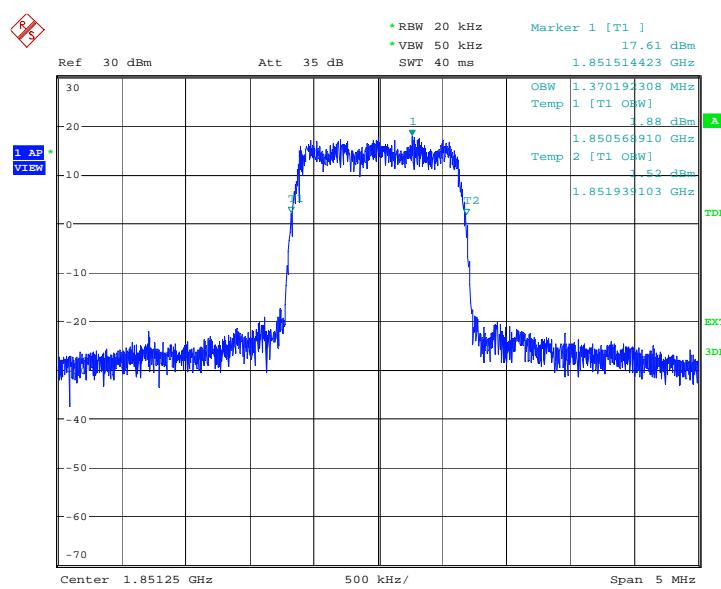
Channel	Emission Bandwidth (100% BW)(MHz)
25	1.370
600	1.370
1175	1.378

CDMA 1900
Channel 25-Emission Bandwidth (100% BW)

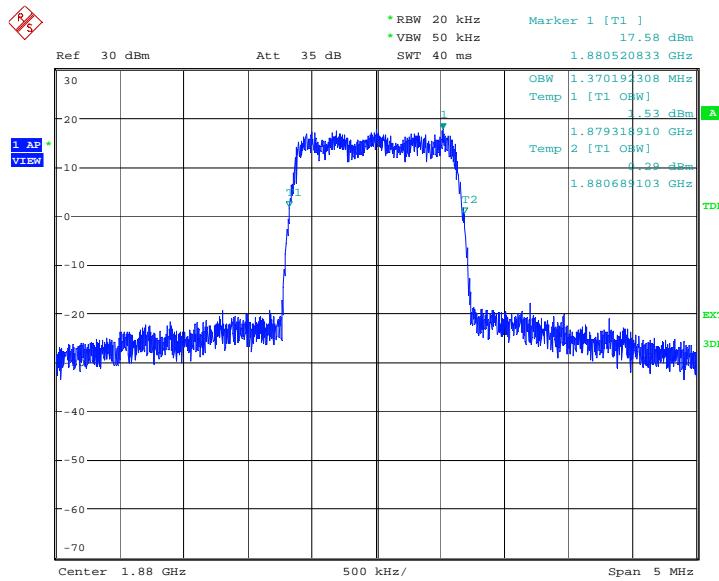
Date: 23.MAY.2014 17:14:39

Channel 600-Emission Bandwidth (100% BW)


Date: 23.MAY.2014 17:19:59

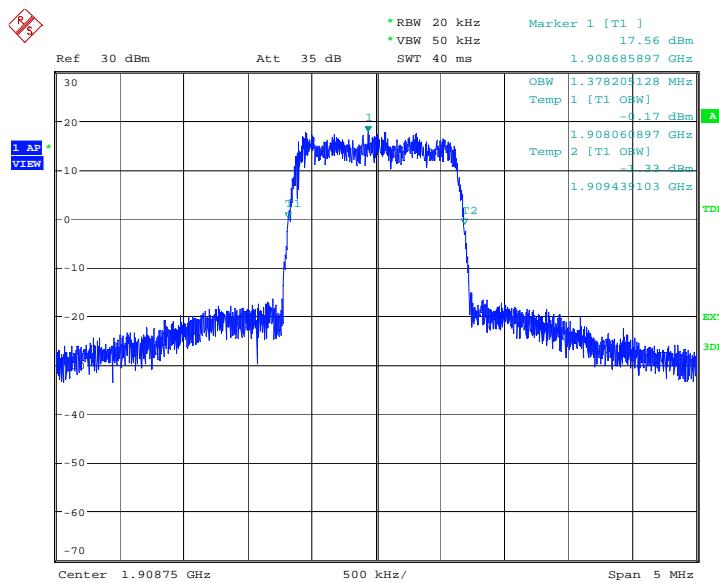Channel 1175-Emission Bandwidth (100% BW)


Date: 23.MAY.2014 17:46:12

A.7 BAND EDGE COMPLIANCE


Test Condition

RBW	VBW	Span	Sweptime	Detector	Trace Mode
20KHz	50KHz	2MHz	20ms	Average	Max Hold


Search the peak marker below low frequency for low band edge or above high frequency for high band edge.

CDMA 800


BAND EDGE BLOCK-Channel 1013

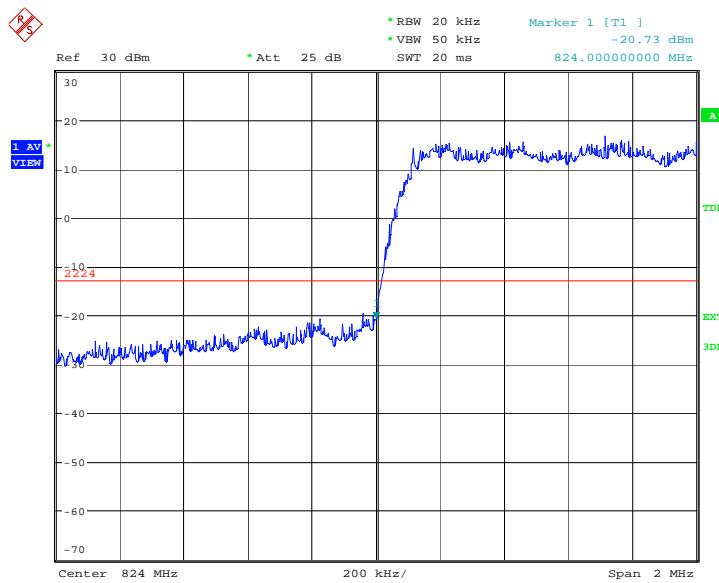


Date: 23.MAY.2014 17:49:52

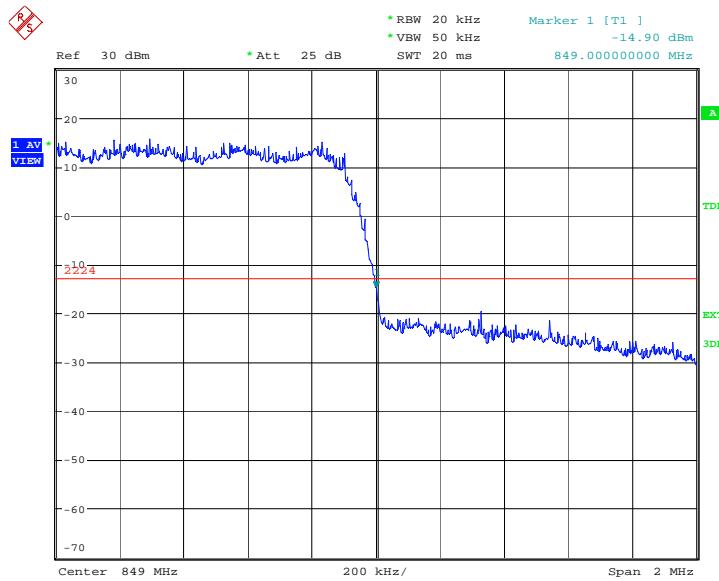HIGH BAND EDGE BLOCK-Channel 777


Date: 23.MAY.2014 17:51:06

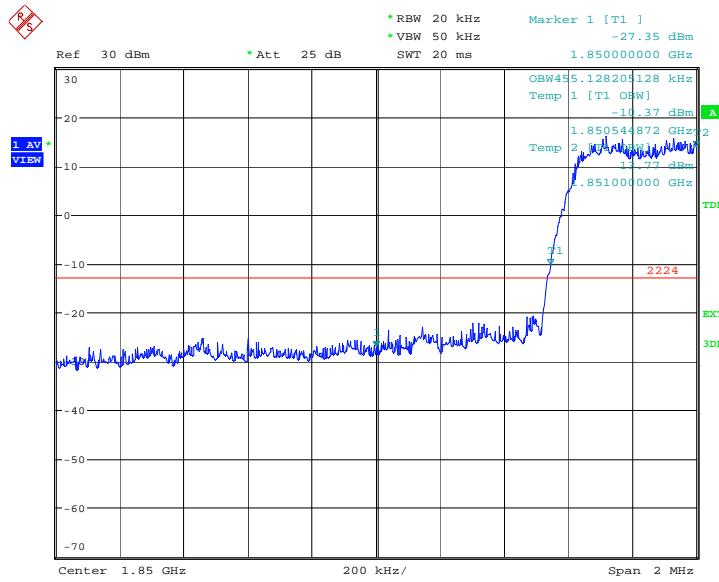CDMA 1900
BAND EDGE BLOCK-Channel 25


Date: 23.MAY.2014 17:14:51

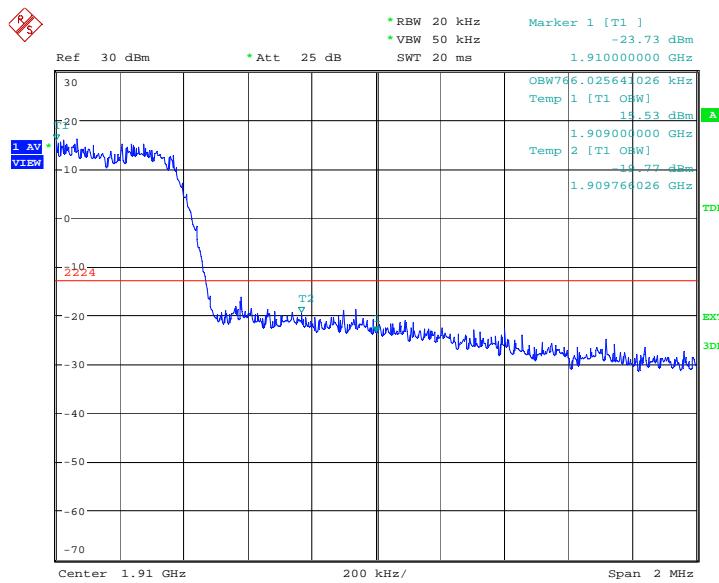HIGH BAND EDGE BLOCK-Channel 1175

Date: 23.MAY.2014 17:46:24

A.8 CONDUCTED SPURIOUS EMISSION

A.8.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of CDMA1900, , data taken from 30 MHz to 20 GHz. For CDMA800, data taken from 30 MHz to 10GHz.
2. The sweep time is set automatically by instrument itself. That should be the optimal sweep time for the span and the RBW. If the sweep time is too short, that is sweep is too fast, the sweep result is not accurate; If the sweep time is too long, that is sweep is too low, some frequency components may be lost. The instrument will give a optimal sweep time according the selected span and RBW.
3. The procedure to get the conducted spurious emission is as follows:
The trace mode is set to MaxHold to get the highest signal at each frequency;
Wait 25 seconds;
Get the result.
4. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

CDMA 800 Transmitter

Channel	Frequency (MHz)
1013	824.70
384	836.52
777	848.31

CDMA 1900 Transmitter

Channel	Frequency (MHz)
25	1851.25
600	1880.00
1175	1908.75

A. 8.2 Measurement Limit

Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.8.3 Measurement result

CDMA 1900

A. 8.3.1 Channel 25: 30MHz –1GHz

Spurious emission limit –13dBm.

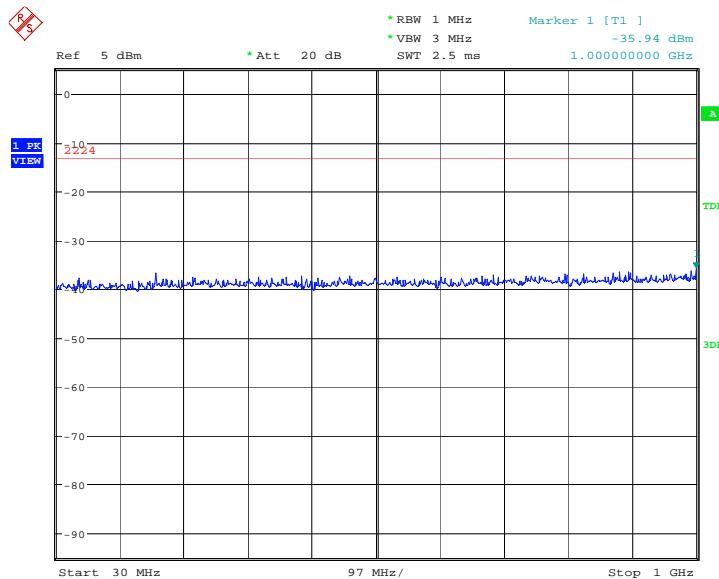


Date: 28.MAY.2014 14:27:55

A.8.3.2 Channel 25: 1GHz –2.5GHz

Spurious emission limit –13dBm.


NOTE: peak above the limit line is the carrier frequency.

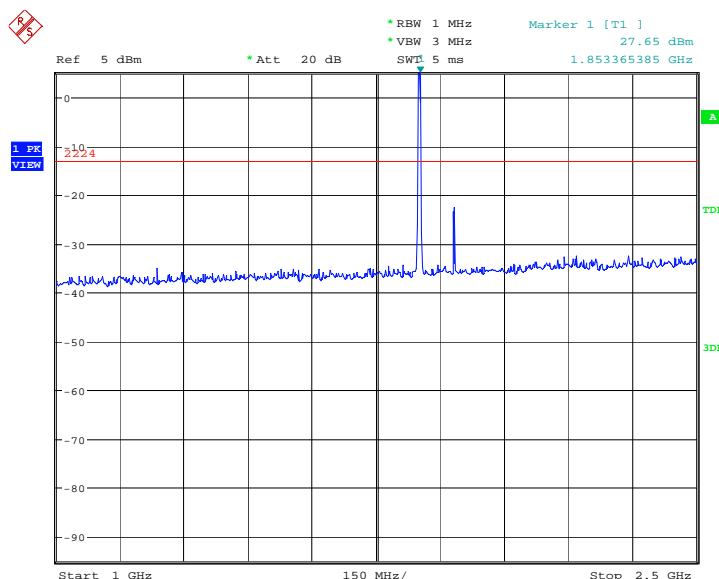

Date: 28.MAY.2014 14:28:22

A.8.3.3 Channel 25: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

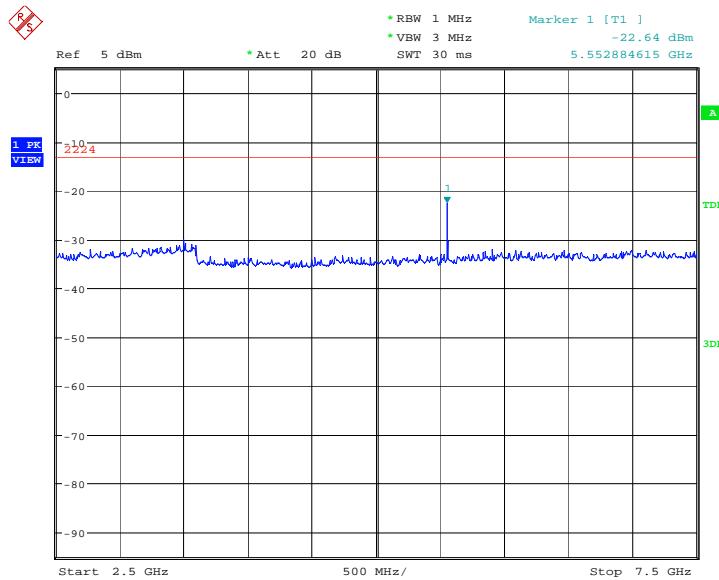

Date: 28.MAY.2014 14:28:49

A.8.3.4 Channel 25: 7.5GHz –10GHz


Spurious emission limit –13dBm.

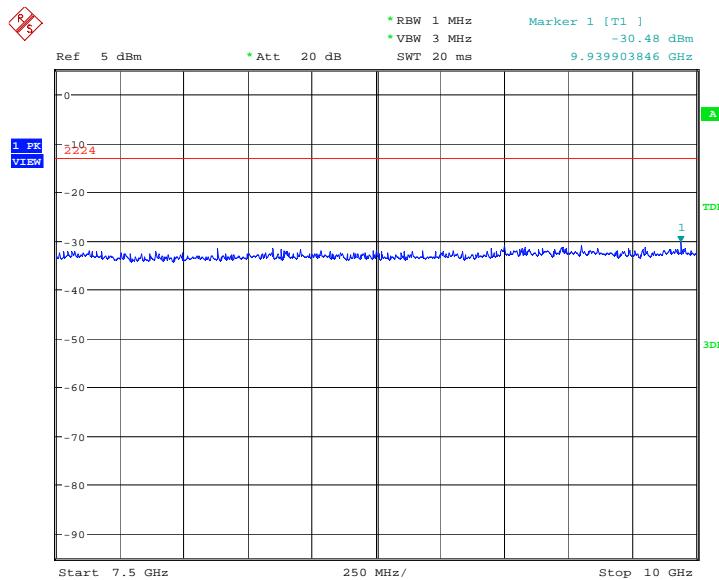

Date: 28.MAY.2014 14:29:16


A.8.3.5 Channel 25: 10GHz –15GHz

Spurious emission limit –13dBm.

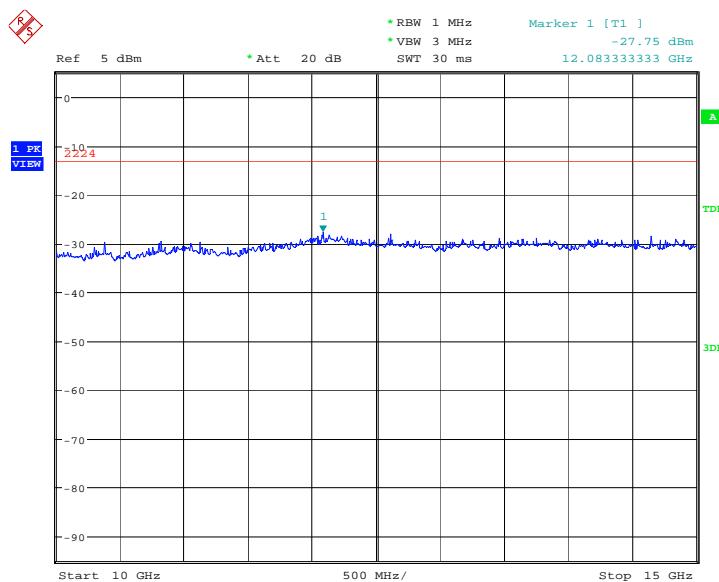


A.8.3.6 Channel 25: 15GHz –20GHz

Spurious emission limit –13dBm.

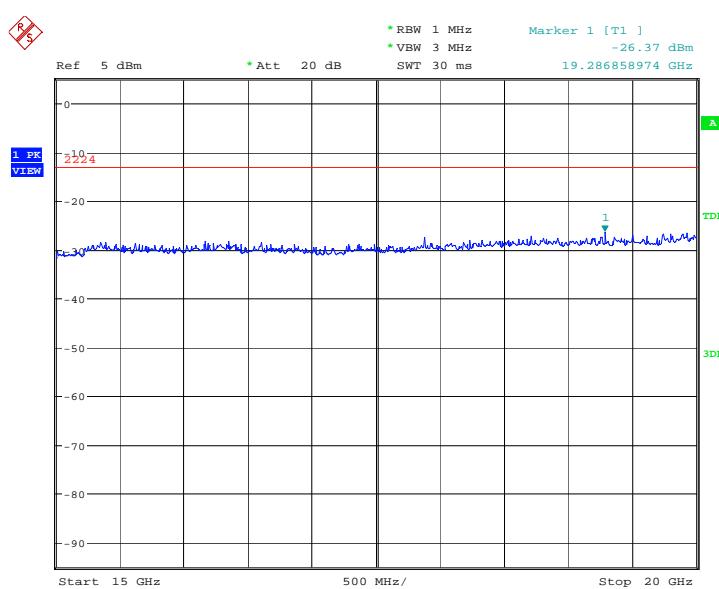

A. 8.3.7 Channel 600: 30MHz –1GHz


Spurious emission limit –13dBm.

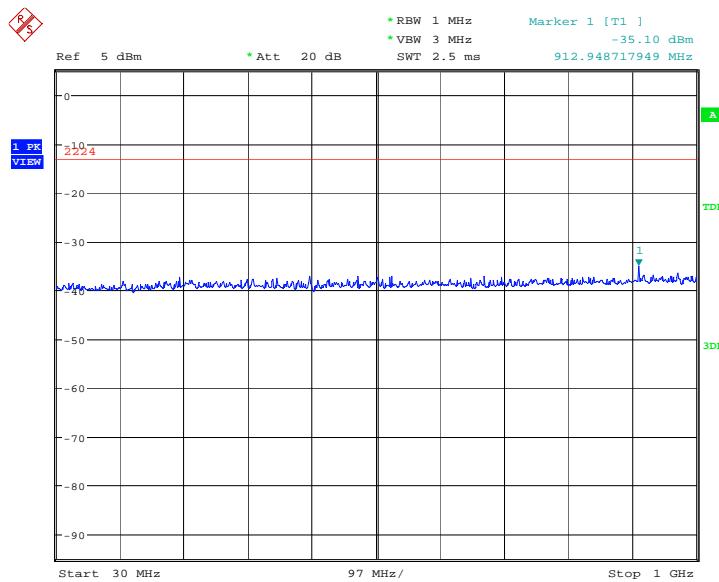

A.8.3.8 Channel 600: 1GHz –2.5GHz


Spurious emission limit –13dBm.

NOTE: peak above the limit line is the carrier frequency.

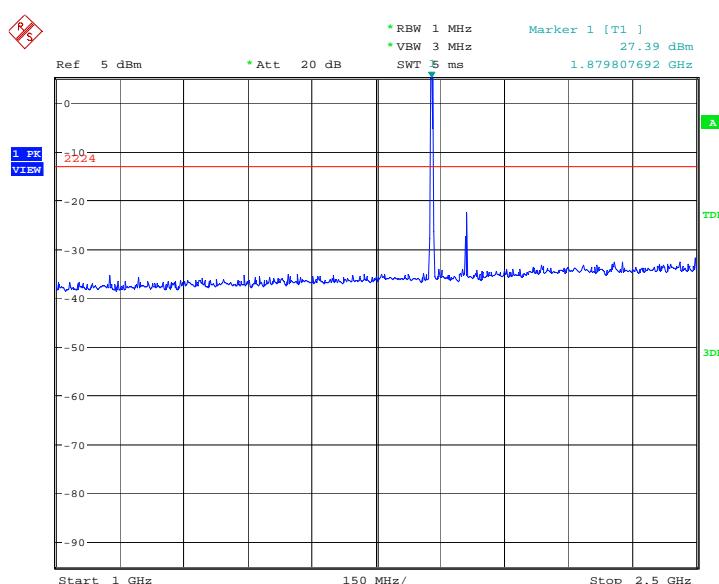

A.8.3.9 Channel 600: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

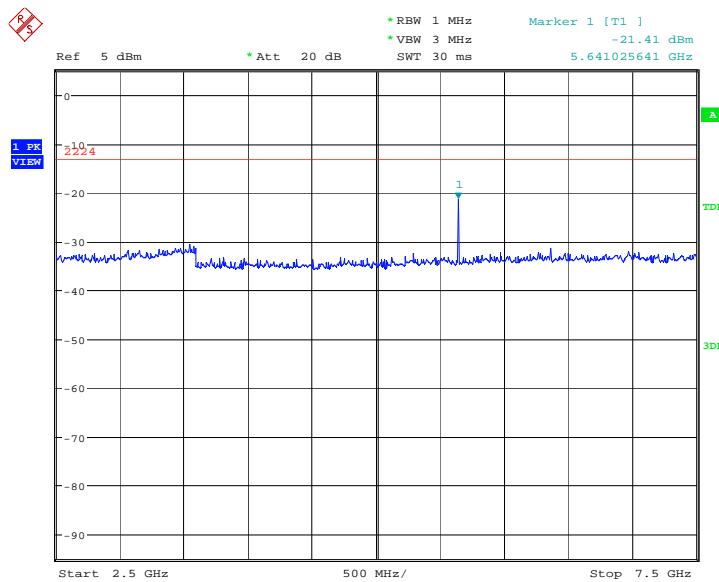

Date: 28.MAY.2014 14:32:13

A.8.3.10 Channel 600: 7.5GHz –10GHz


Spurious emission limit –13dBm.

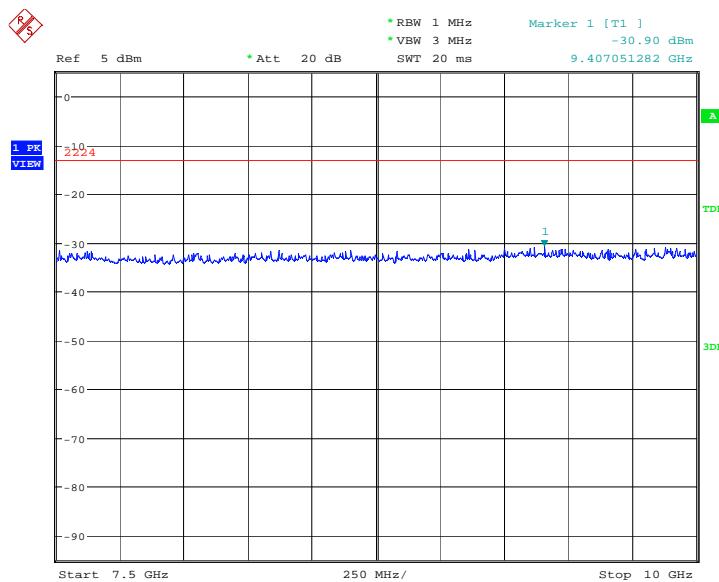

Date: 28.MAY.2014 14:32:40

A.8.3.11 Channel 600: 10GHz –15GHz


Spurious emission limit –13dBm.

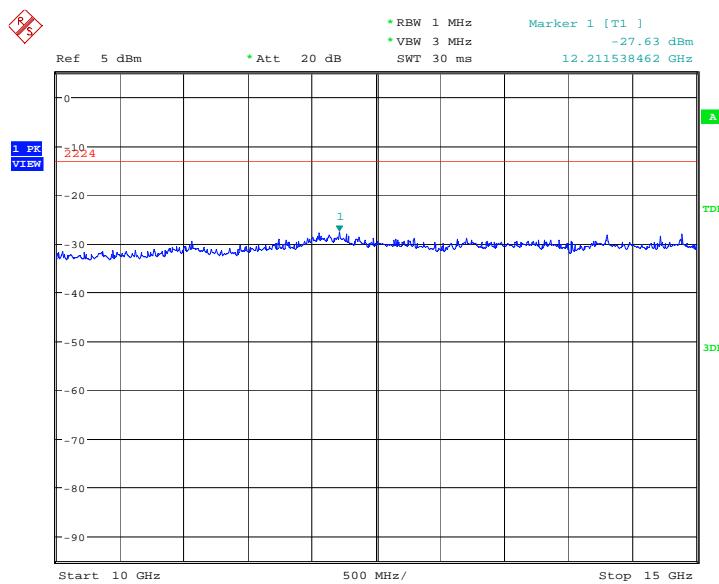

Date: 28.MAY.2014 14:33:07

A.8.3.12 Channel 600: 15GHz –20GHz


Spurious emission limit –13dBm.

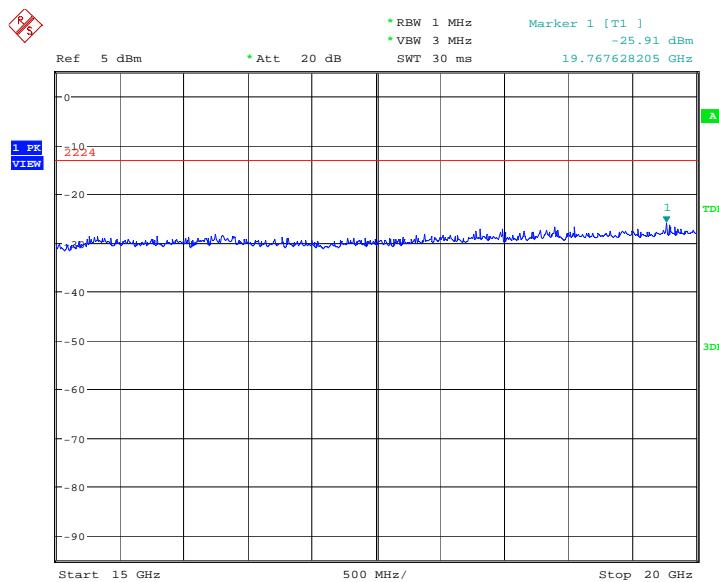

Date: 28.MAY.2014 14:33:34

A. 8.3.13 Channel 1175: 30MHz –1GHz


Spurious emission limit –13dBm.

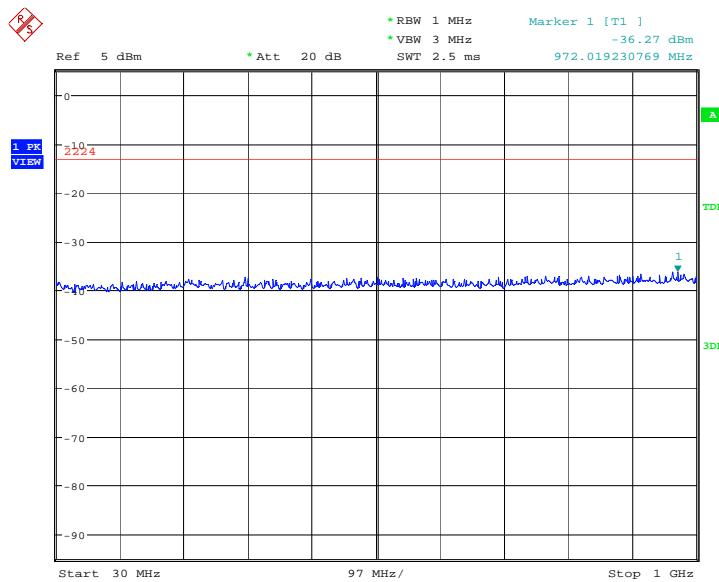

Date: 28.MAY.2014 14:34:27

A.8.3.14 Channel 1175: 1GHz –2.5GHz


Spurious emission limit –13dBm.

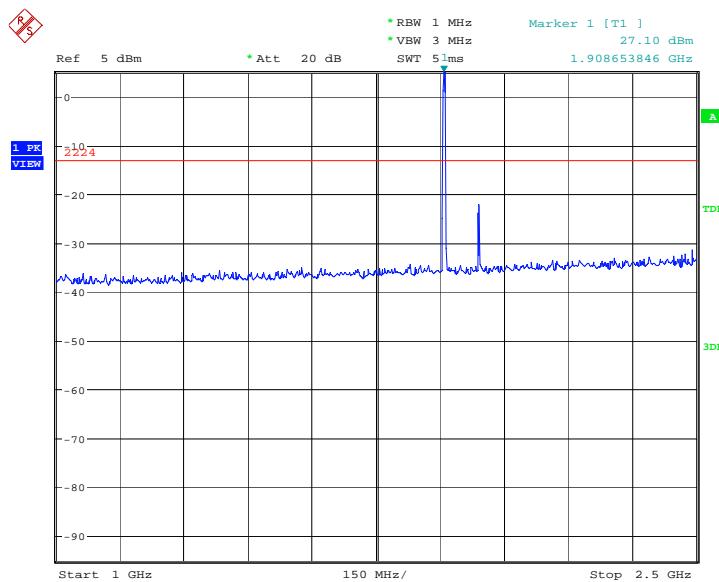NOTE: peak above the limit line is the carrier frequency.


Date: 28.MAY.2014 14:34:54

A.8.3.15 Channel 1175: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

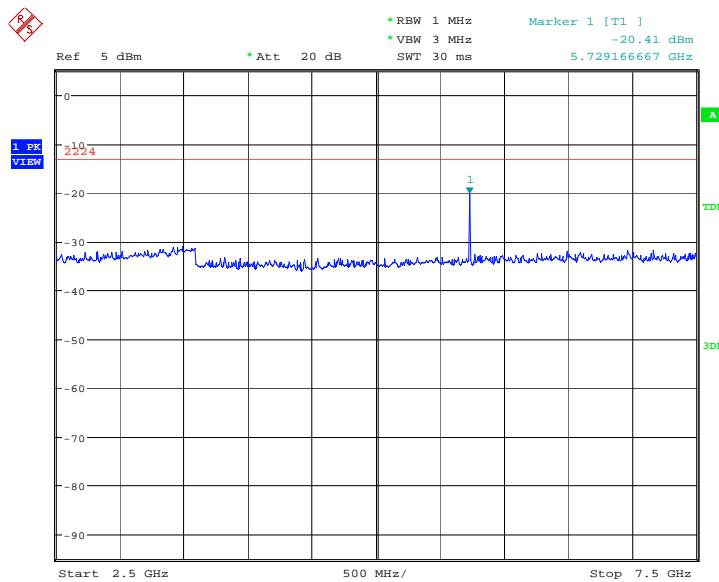

Date: 28.MAY.2014 14:35:21

A.8.3.16 Channel 1175: 7.5GHz –10GHz


Spurious emission limit –13dBm.

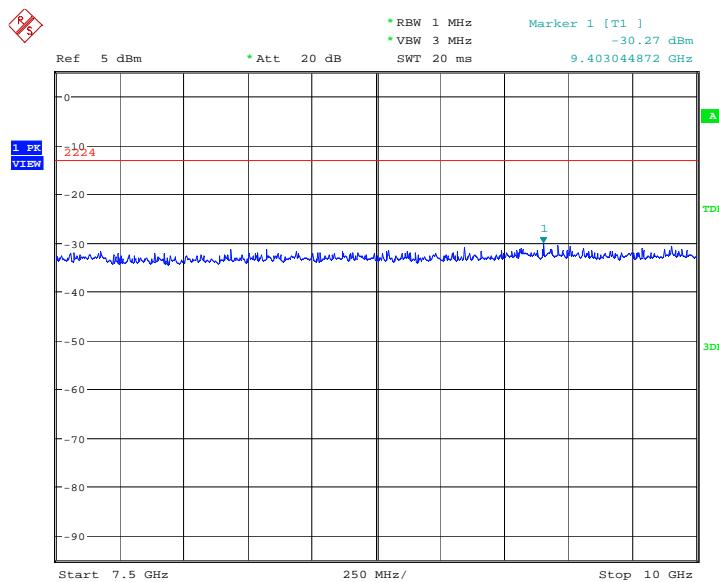

Date: 28.MAY.2014 14:35:48

A.8.3.17 Channel 1175: 10GHz –15GHz


Spurious emission limit –13dBm.

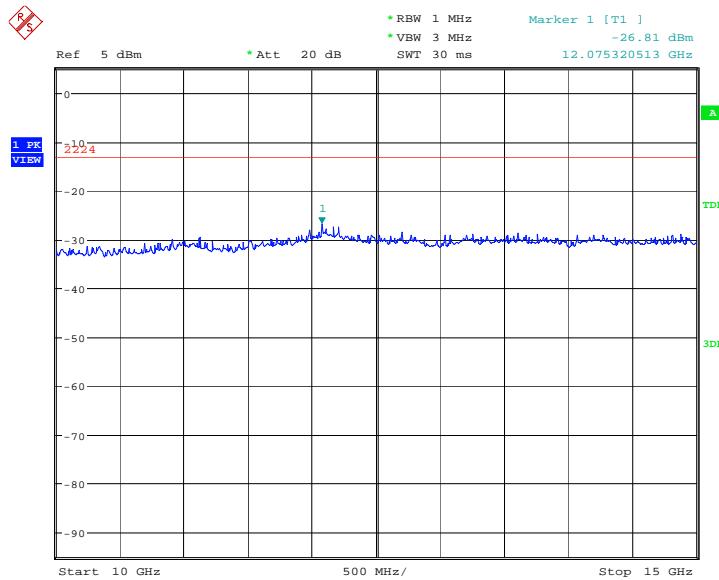

Date: 28.MAY.2014 14:36:16

A.8.3.18 Channel 1175: 15GHz –20GHz


Spurious emission limit –13dBm.

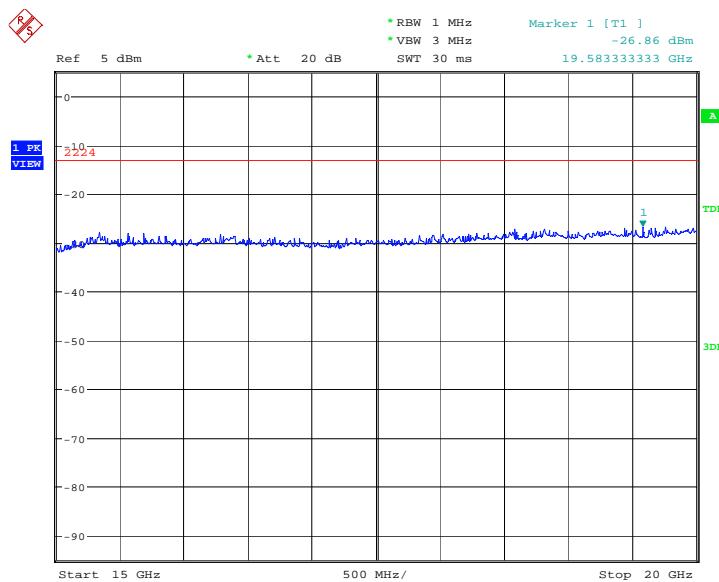

Date: 28.MAY.2014 14:36:43

CDMA 800
A. 8.3.19 Channel 1013: 30MHz –1GHz


Spurious emission limit –13dBm.

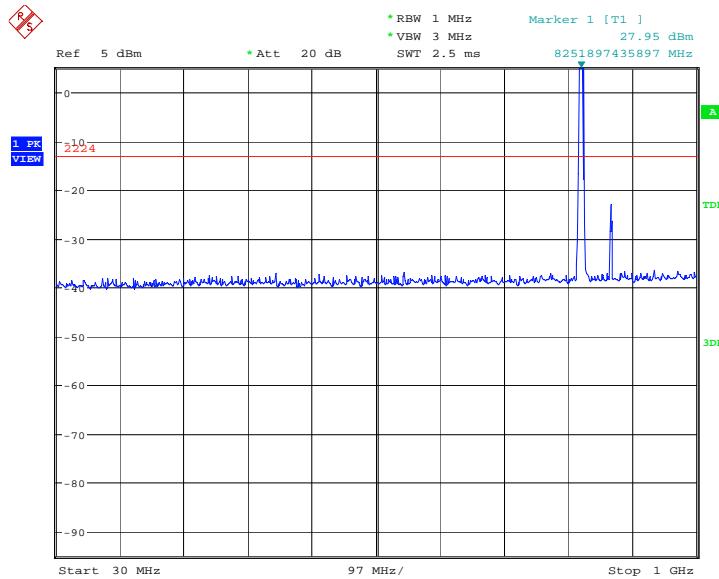NOTE: peak above the limit line is the carrier frequency.


Date: 28.MAY.2014 14:21:17

A. 8.3.20 Channel 1013: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

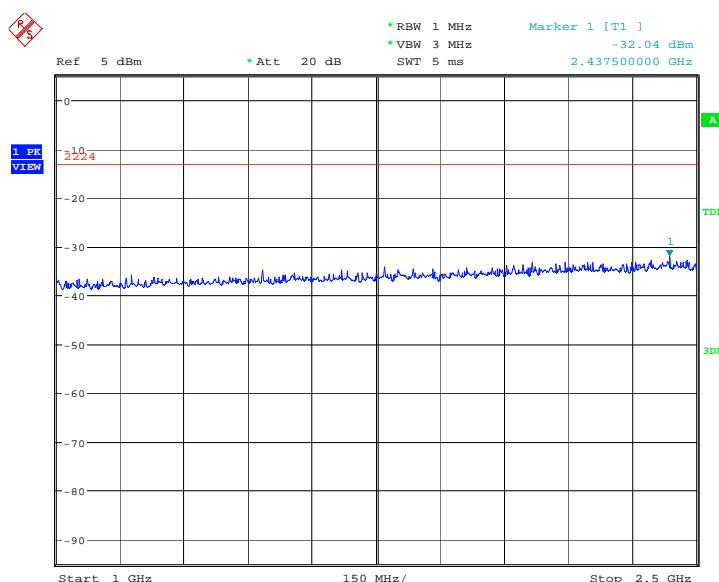

Date: 28.MAY.2014 14:21:44

A. 8.3.21 Channel 1013: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

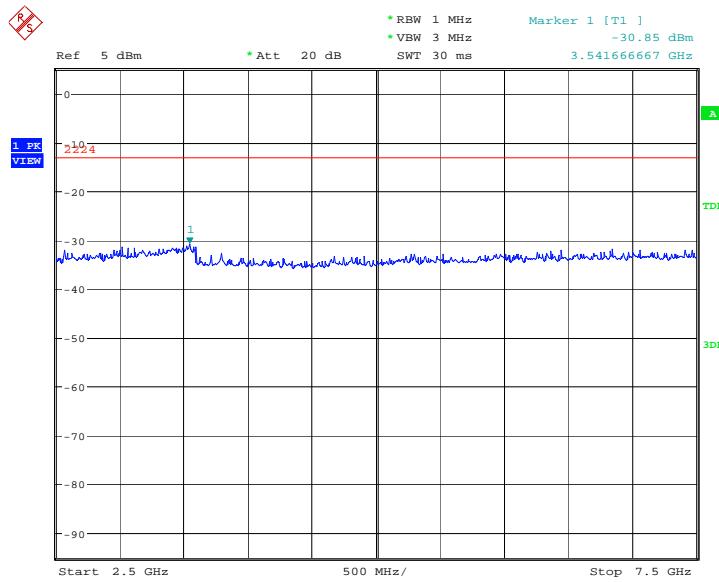NOTE: peak above the limit line is the carrier frequency.


Date: 28.MAY.2014 14:22:11

A. 8.3.22 Channel 1013: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

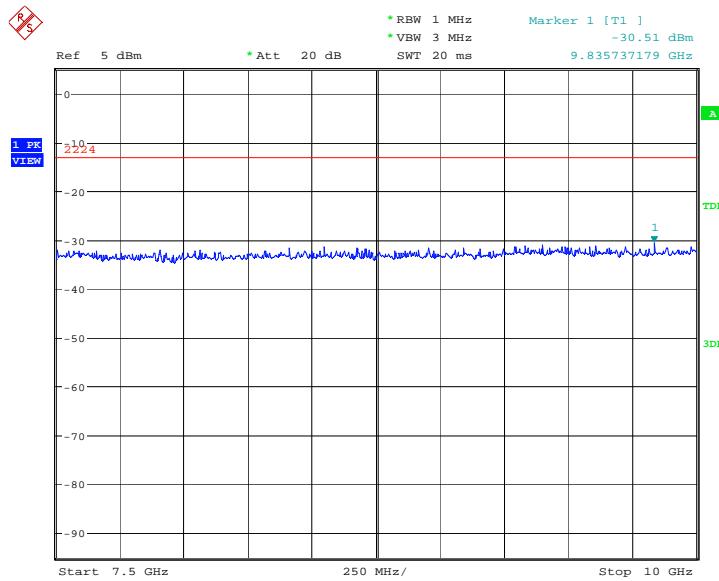

Date: 28.MAY.2014 14:22:38

A. 8.3.23 Channel 384: 30MHz –1GHz


Spurious emission limit –13dBm.

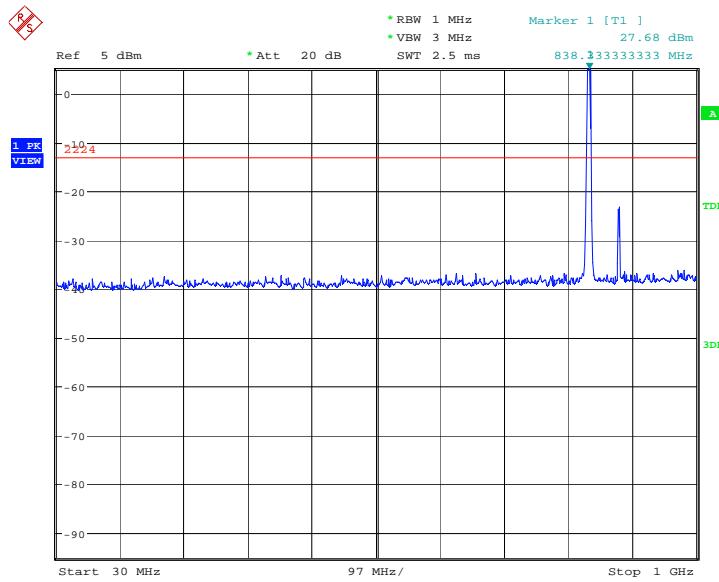NOTE: peak above the limit line is the carrier frequency.


Date: 28.MAY.2014 14:23:26

A.8.3.24 Channel 384: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

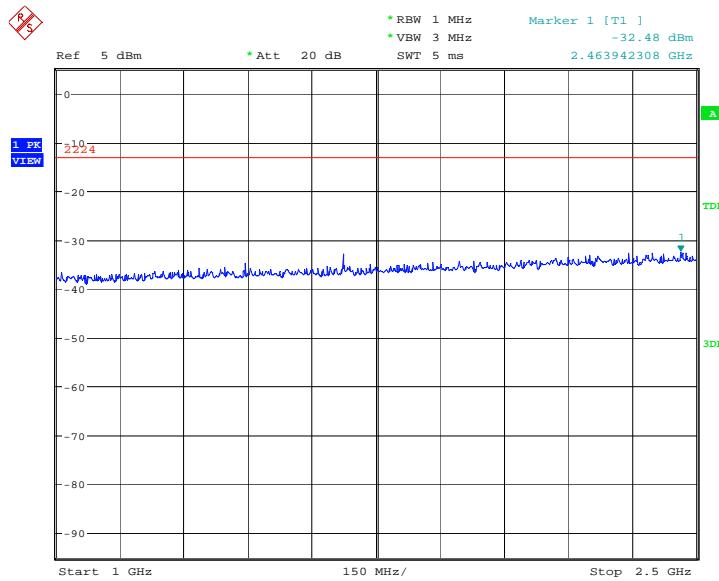

Date: 28.MAY.2014 14:23:53

A. 8.3.25 Channel 384: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

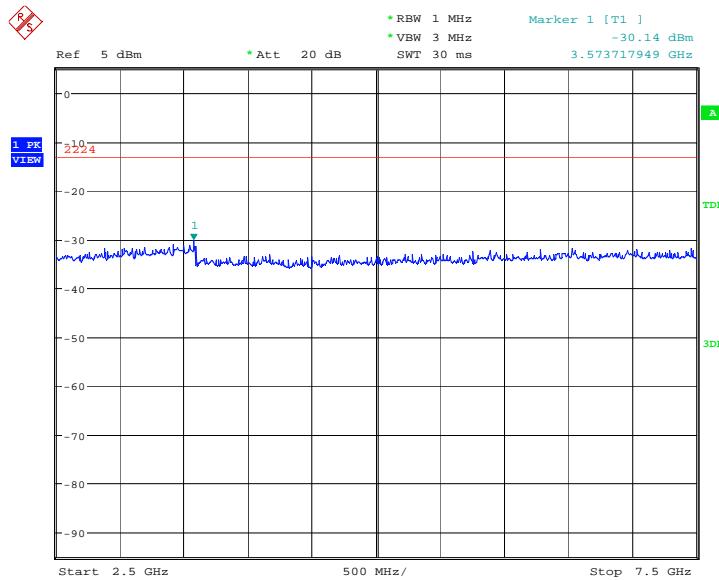

Date: 28.MAY.2014 14:24:20

A. 8.3.26 Channel 384: 7.5GHz – 10GHz


Spurious emission limit –13dBm.

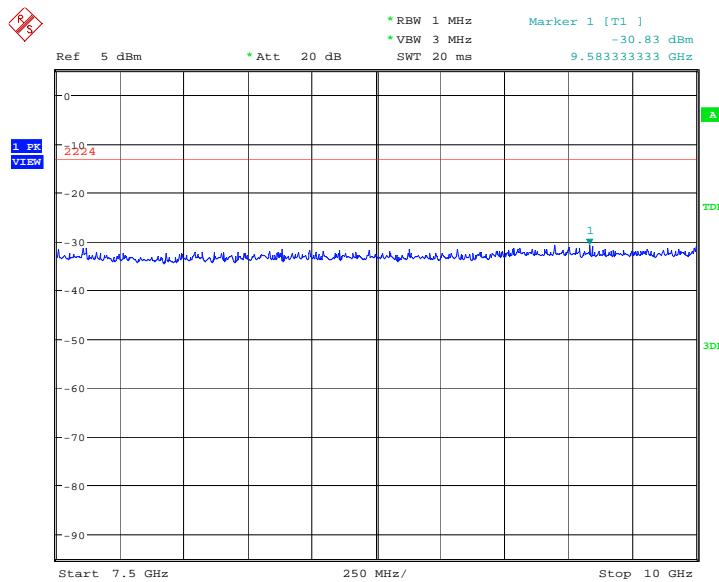

Date: 28.MAY.2014 14:24:47

A. 8.3.27 Channel 777: 30MHz –1GHz


Spurious emission limit –13dBm.

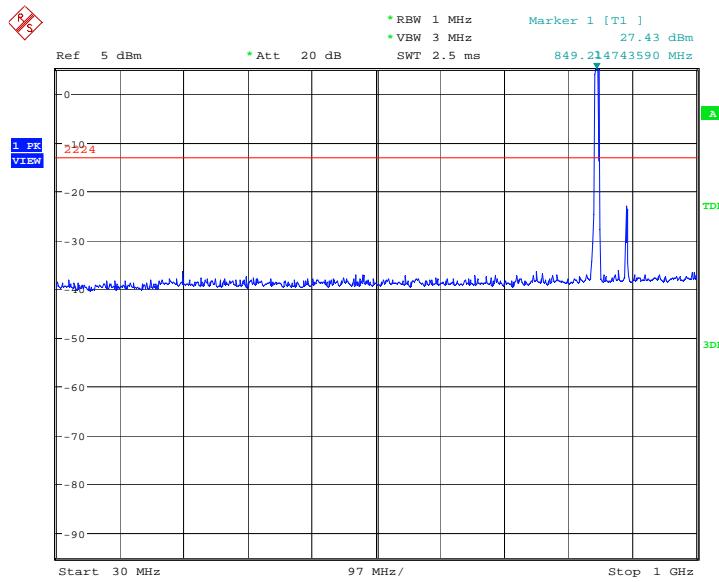NOTE: peak above the limit line is the carrier frequency.


Date: 28.MAY.2014 14:25:39

A. 8.3.28 Channel 777: 1GHz – 2.5GHz


Spurious emission limit –13dBm.

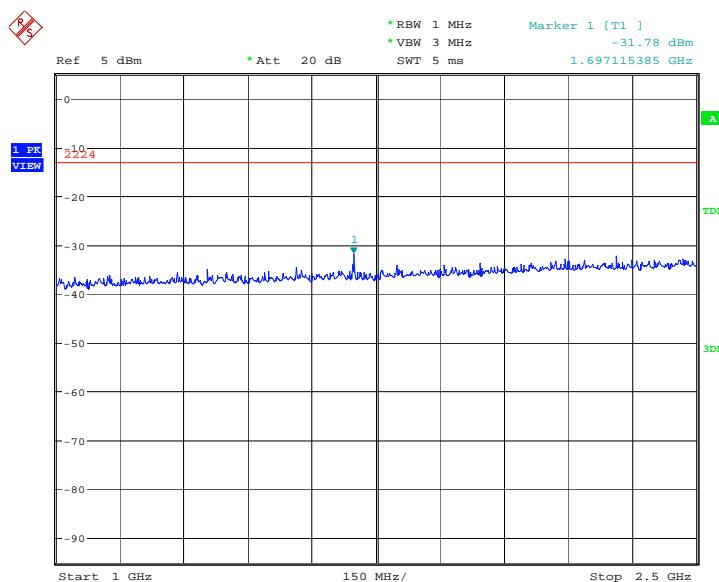

Date: 28.MAY.2014 14:26:06

A. 8.3.29 Channel 777: 2.5GHz –7.5GHz


Spurious emission limit –13dBm.

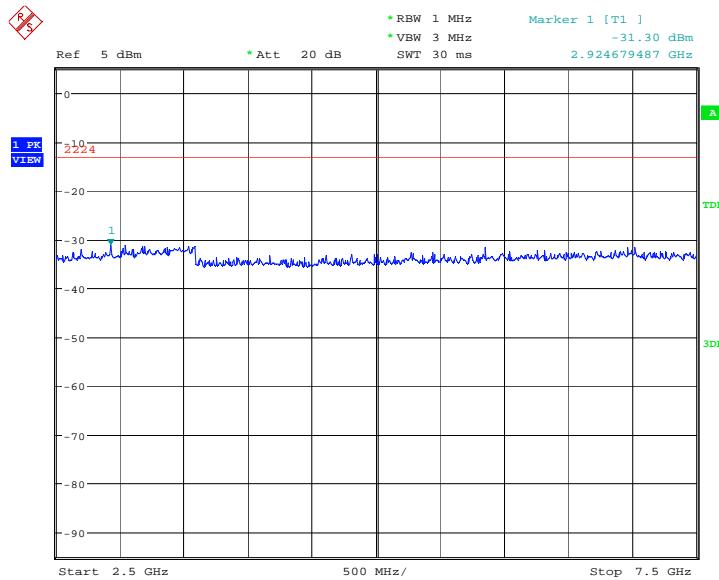

Date: 28.MAY.2014 14:26:33

A. 8.3.30 Channel 777: 7.5GHz – 10GHz

Spurious emission limit –13dBm.

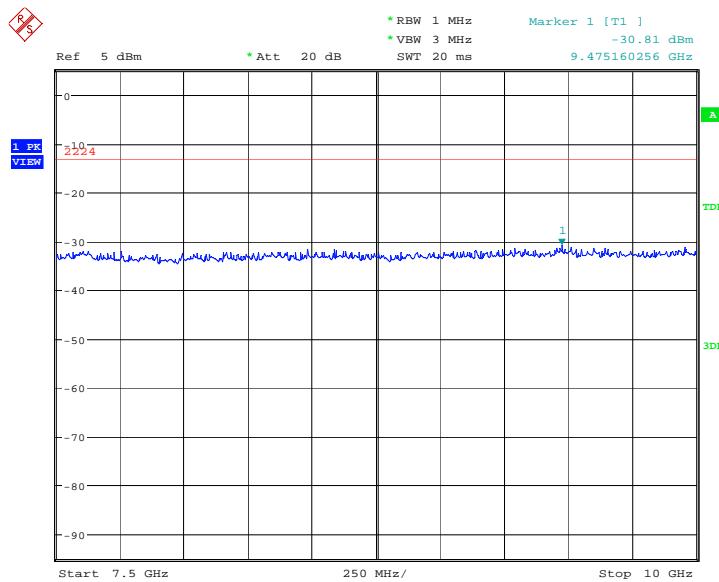

Date: 28.MAY.2014 14:27:00

*****END OF REPORT*****