




**Fig.A.6.1.51 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-2.5 GHz)**

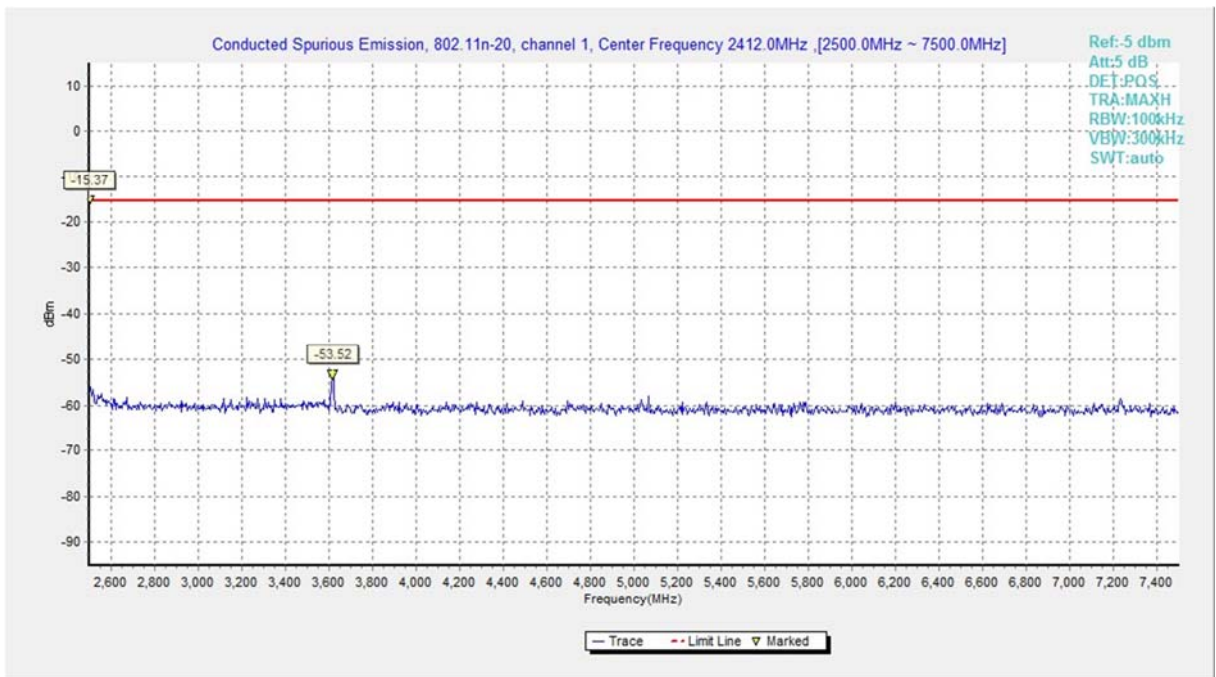


**Fig.A.6.1.52 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 2.5 GHz-7.5 GHz)**

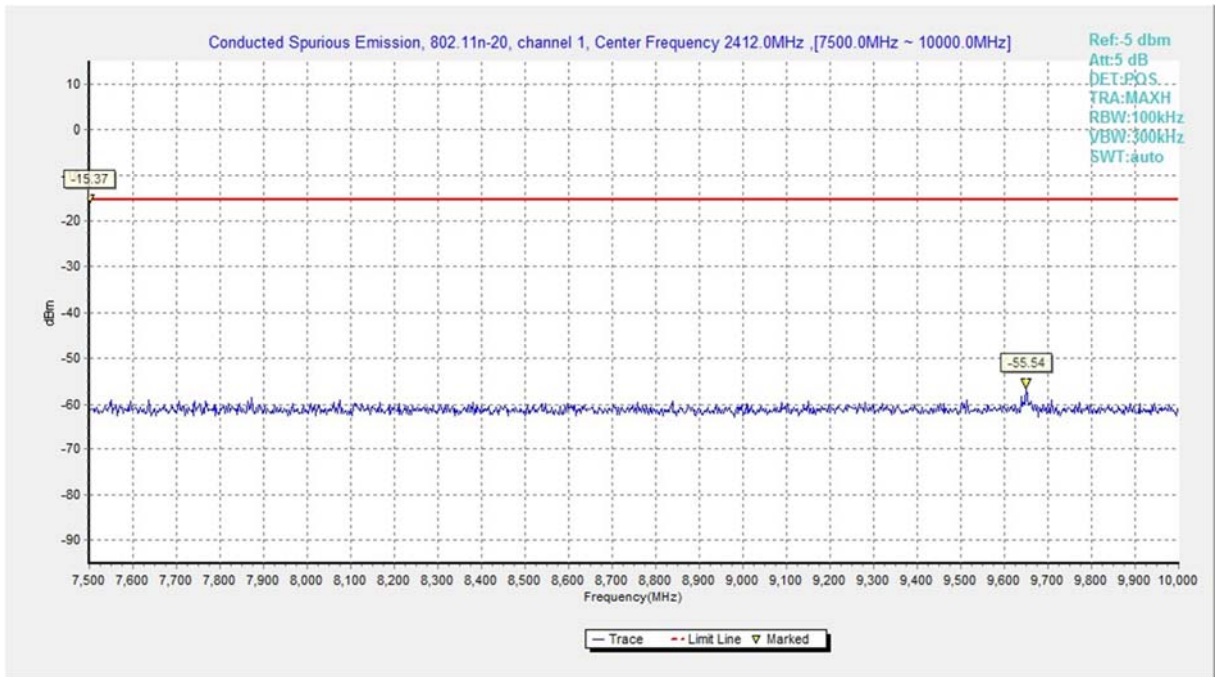


**Fig.A.6.1.53 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 7.5 GHz-10 GHz)**

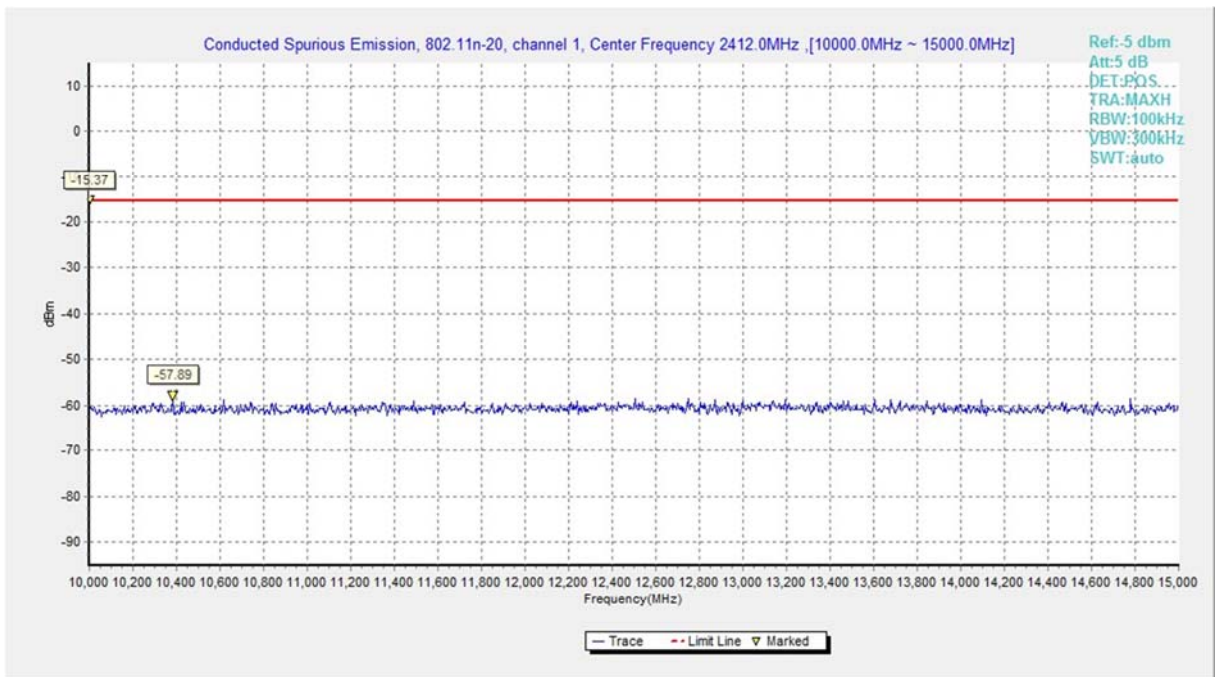

**Fig.A.6.1.54 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 10 GHz-15 GHz)**

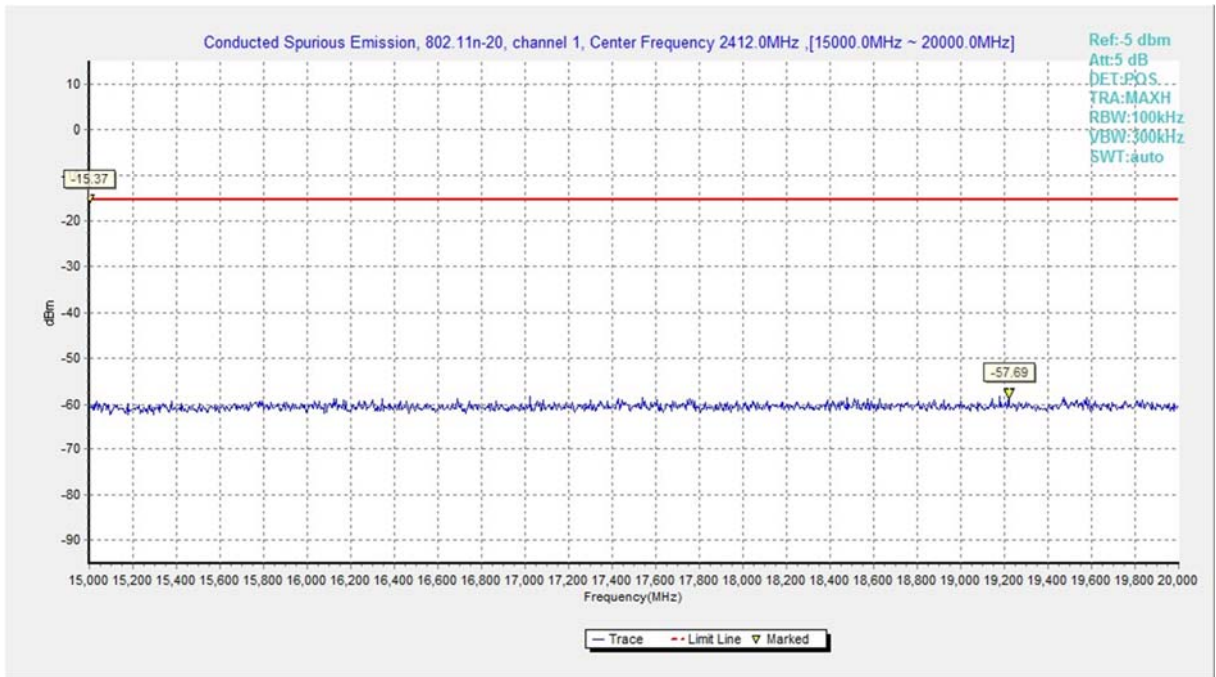


**Fig.A.6.1.55 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 15 GHz-20 GHz)**

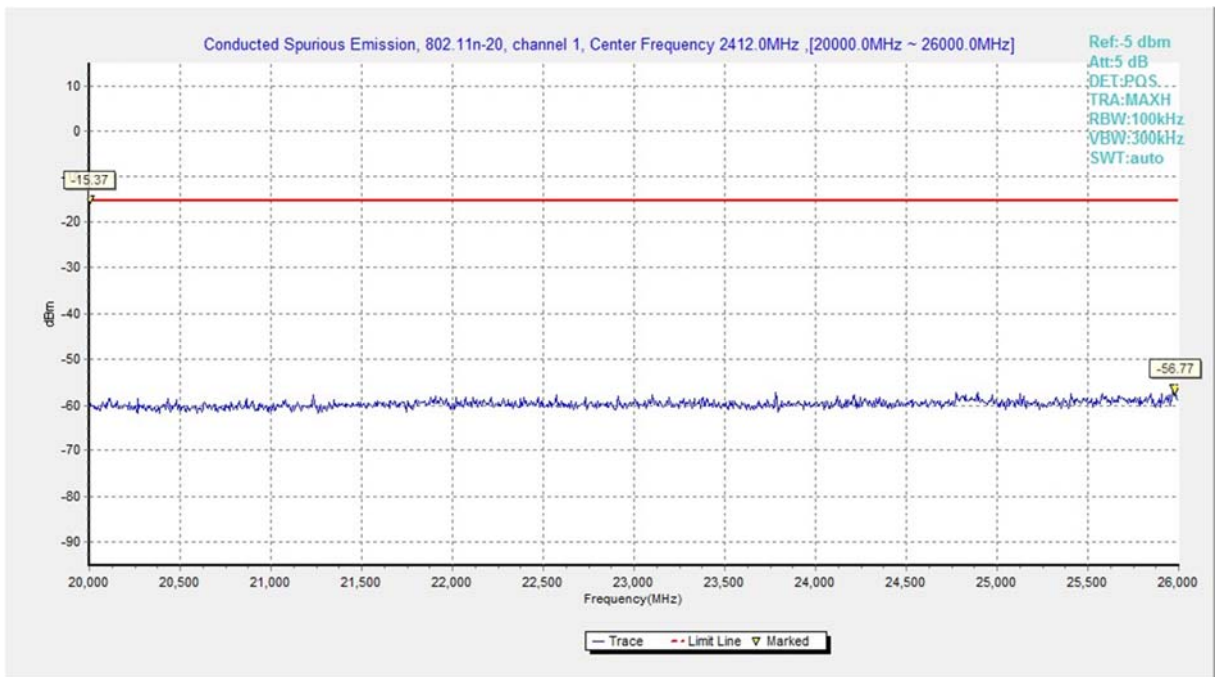


**Fig.A.6.1.56 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 20 GHz-26 GHz)**




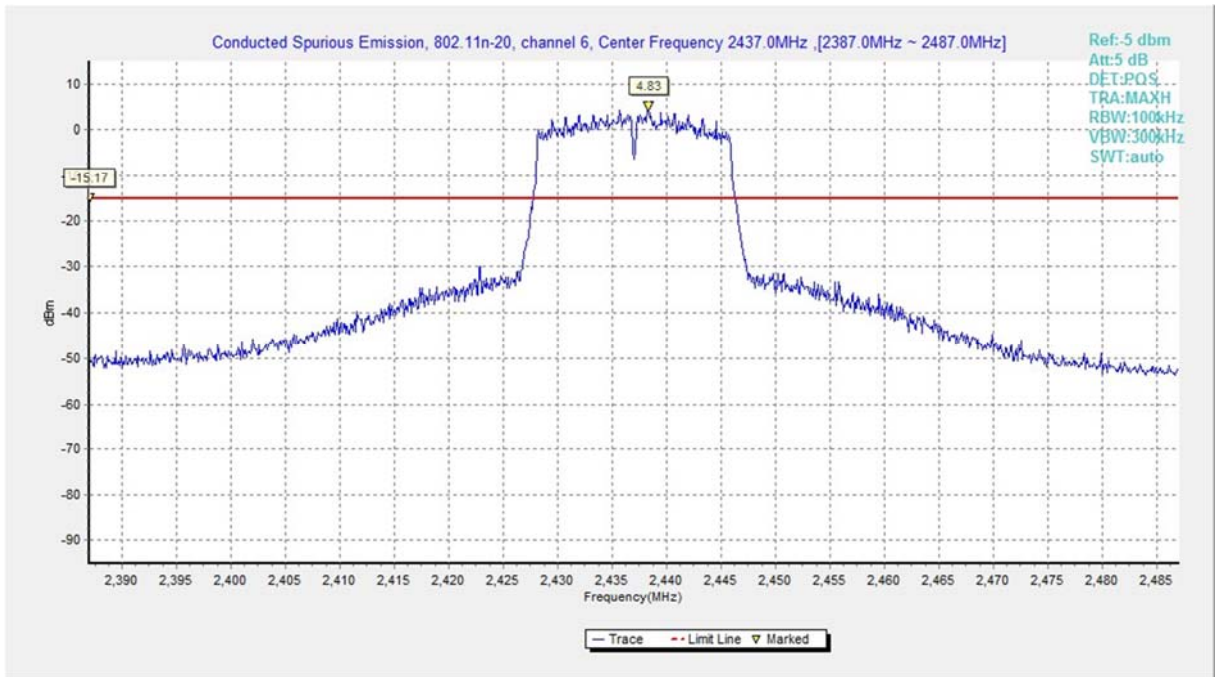


**Fig.A.6.1.57 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)**

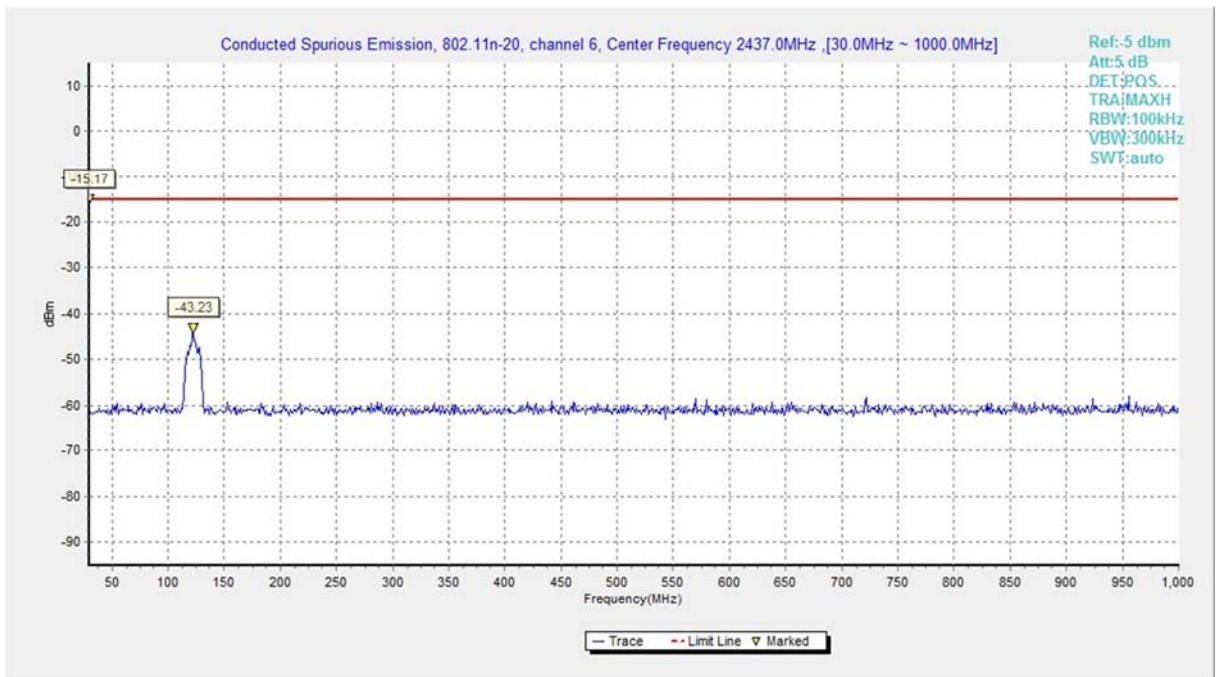


**Fig.A.6.1.58 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)**

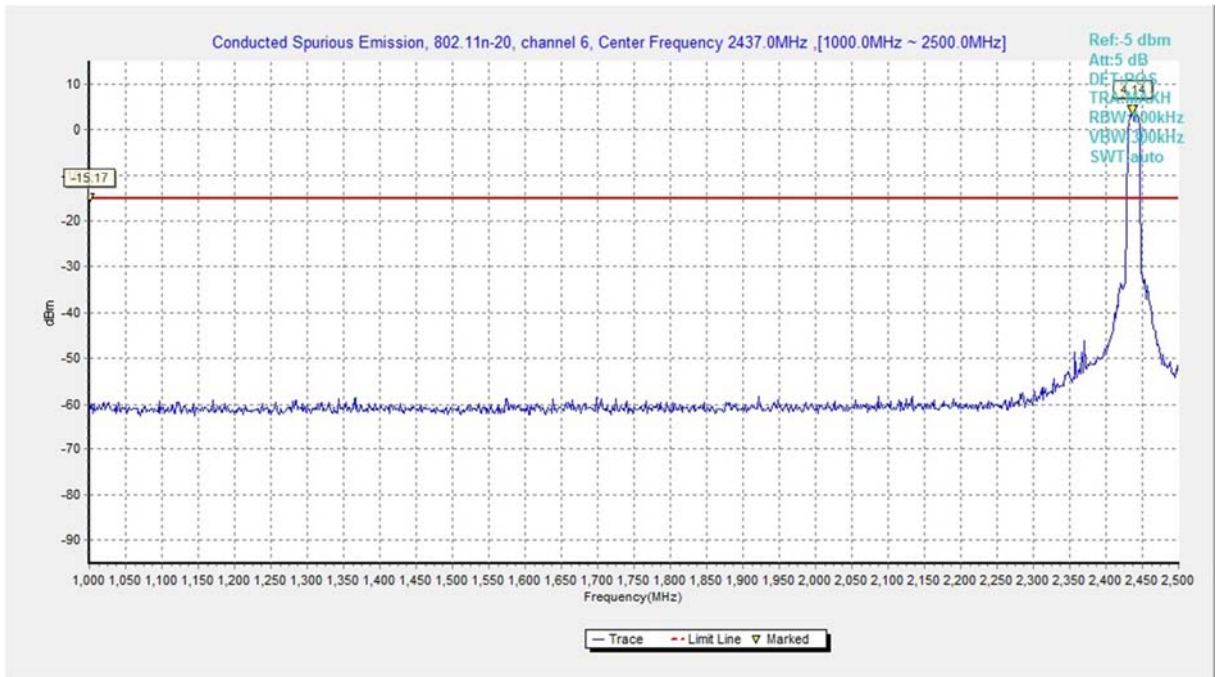


**Fig.A.6.1.59 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-2.5 GHz)**

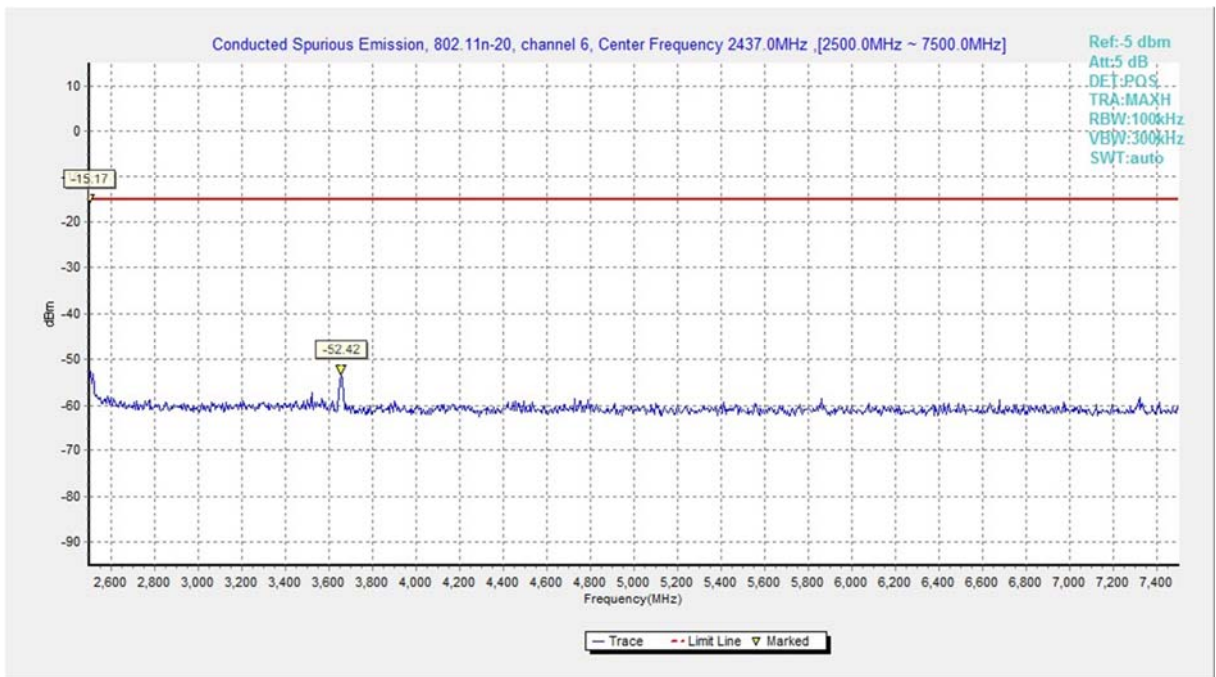

**Fig.A.6.1.60 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 2.5 GHz-7.5 GHz)**

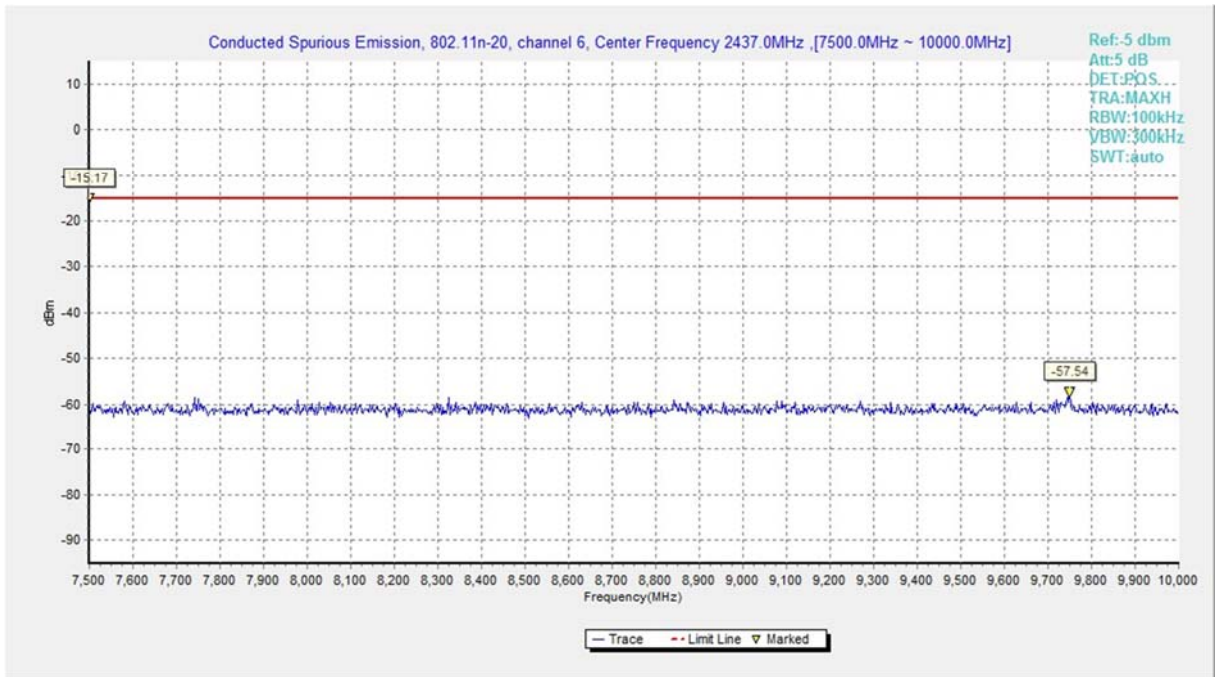


**Fig.A.6.1.61 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 7.5 GHz-10 GHz)**

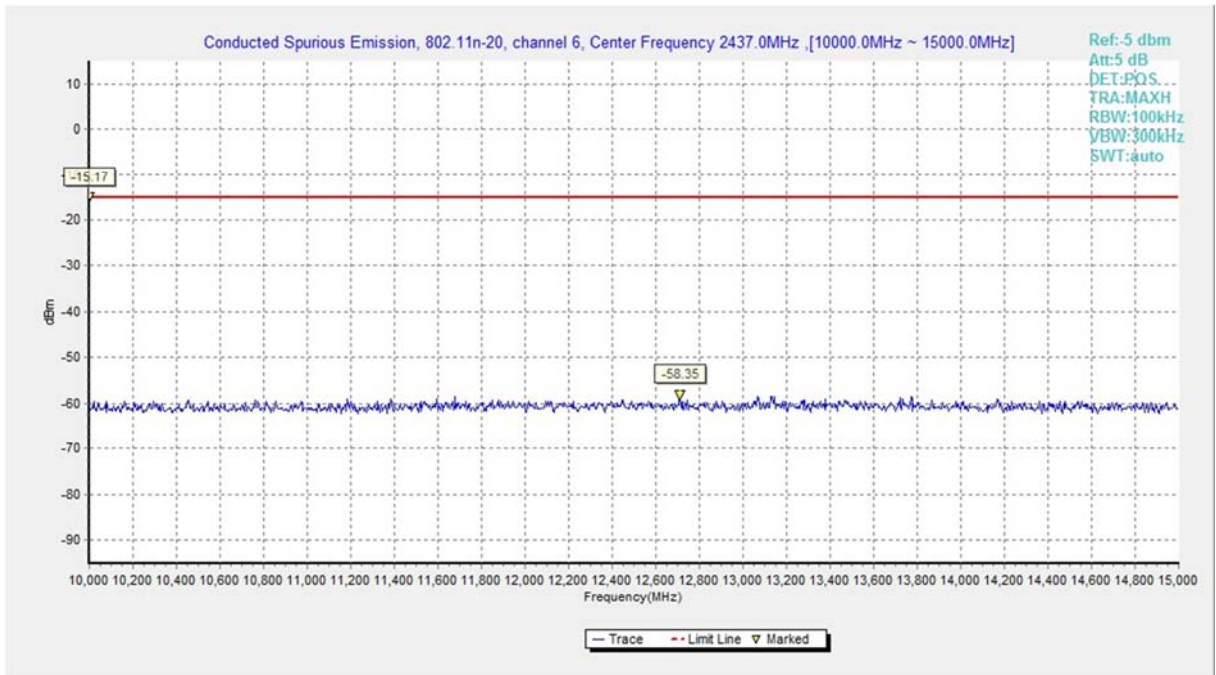


**Fig.A.6.1.62 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 10 GHz-15 GHz)**




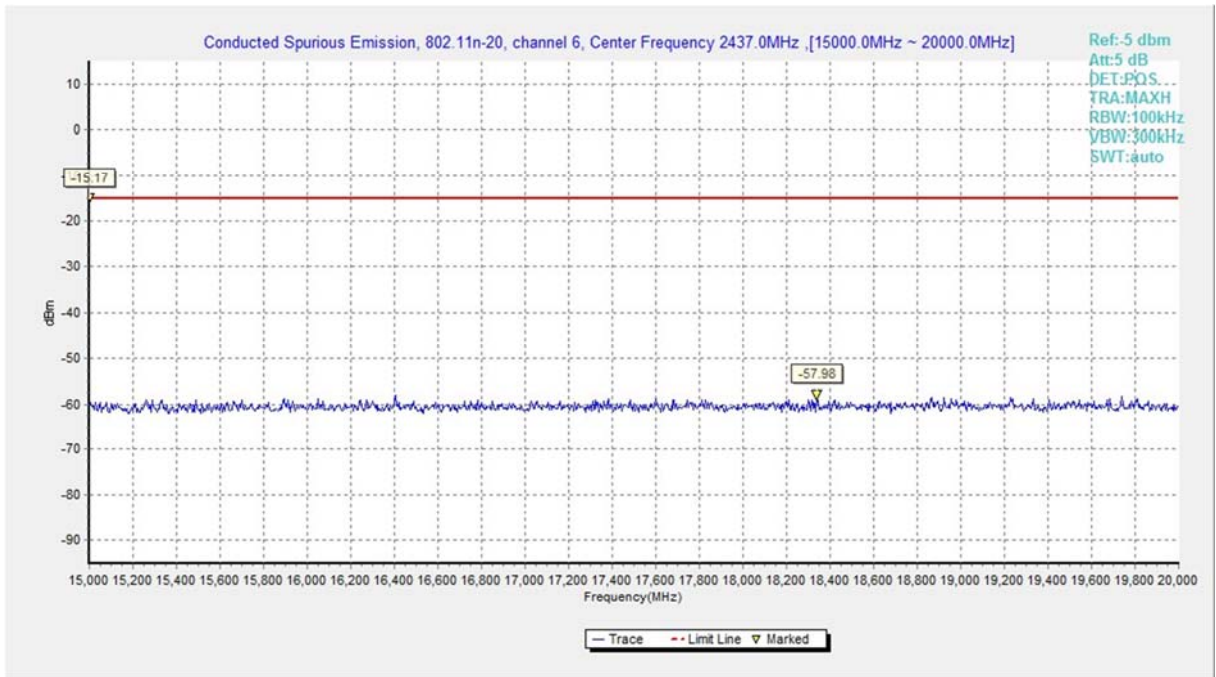


**Fig.A.6.1.63 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 15 GHz-20 GHz)**

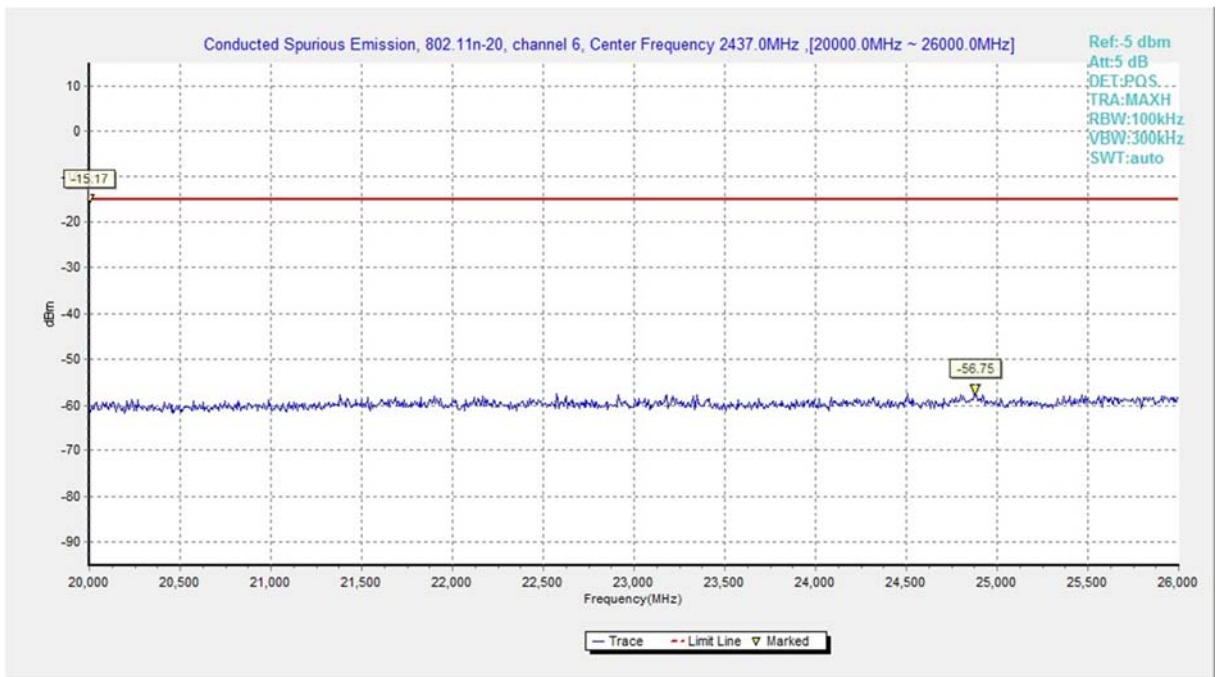

**Fig.A.6.1.64 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 20 GHz-26 GHz)**

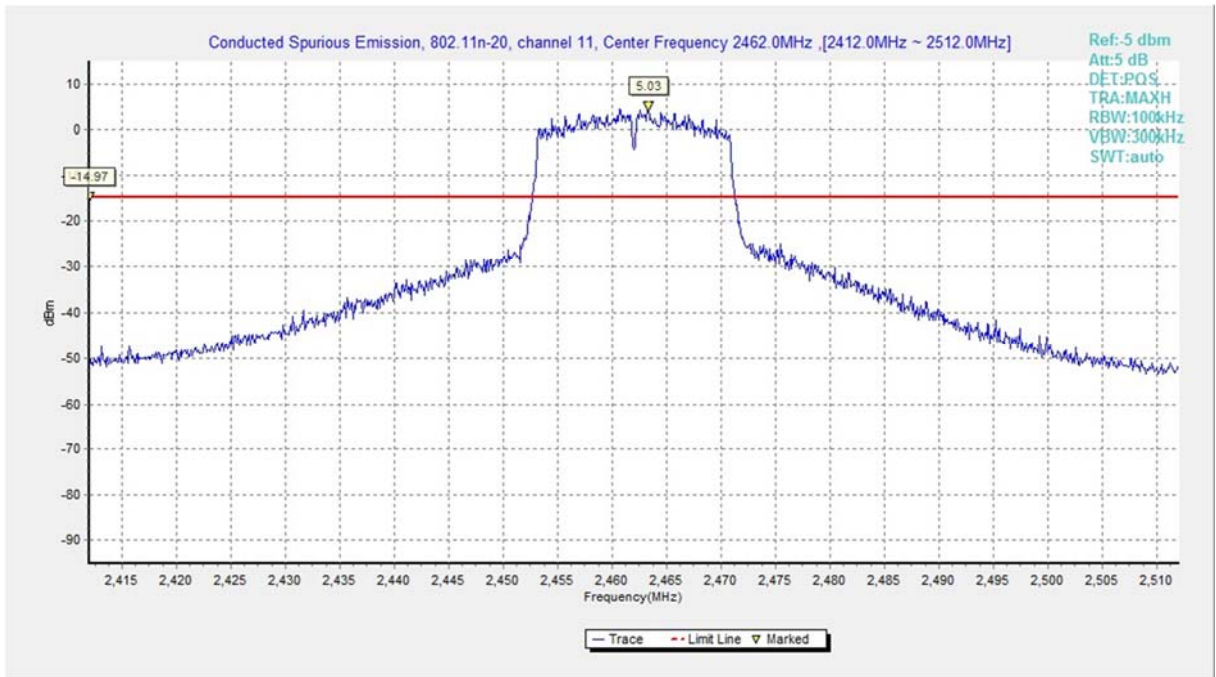


**Fig.A.6.1.65 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)**

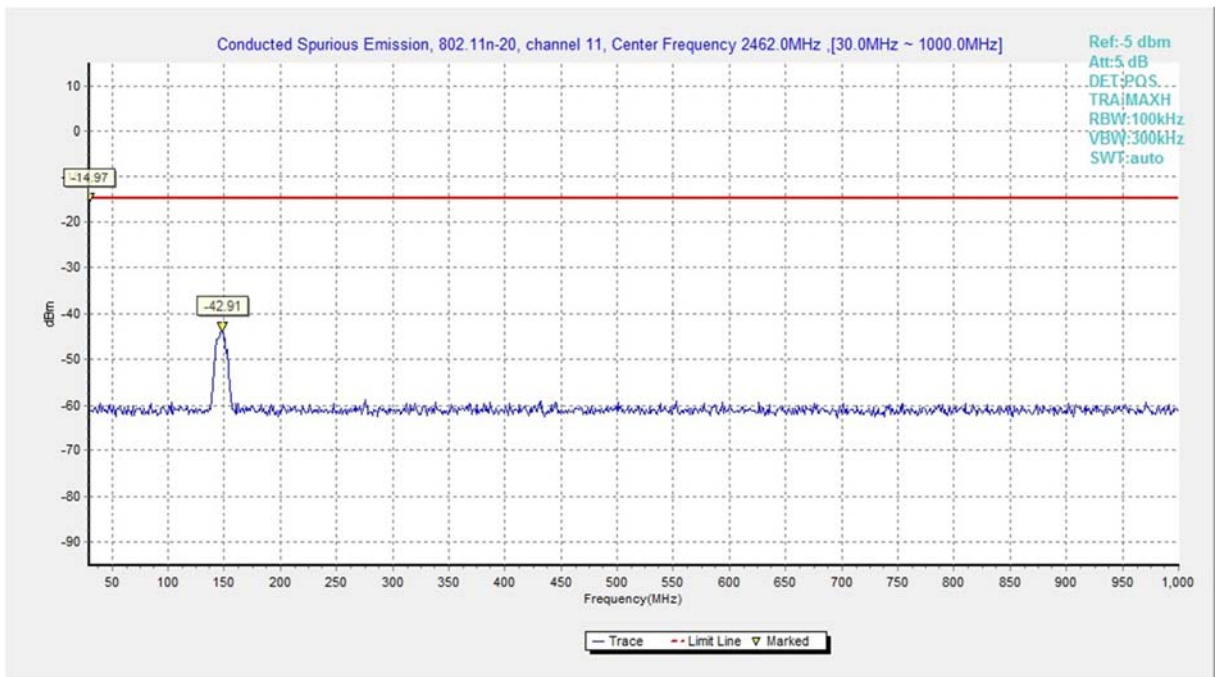


**Fig.A.6.1.66 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)**




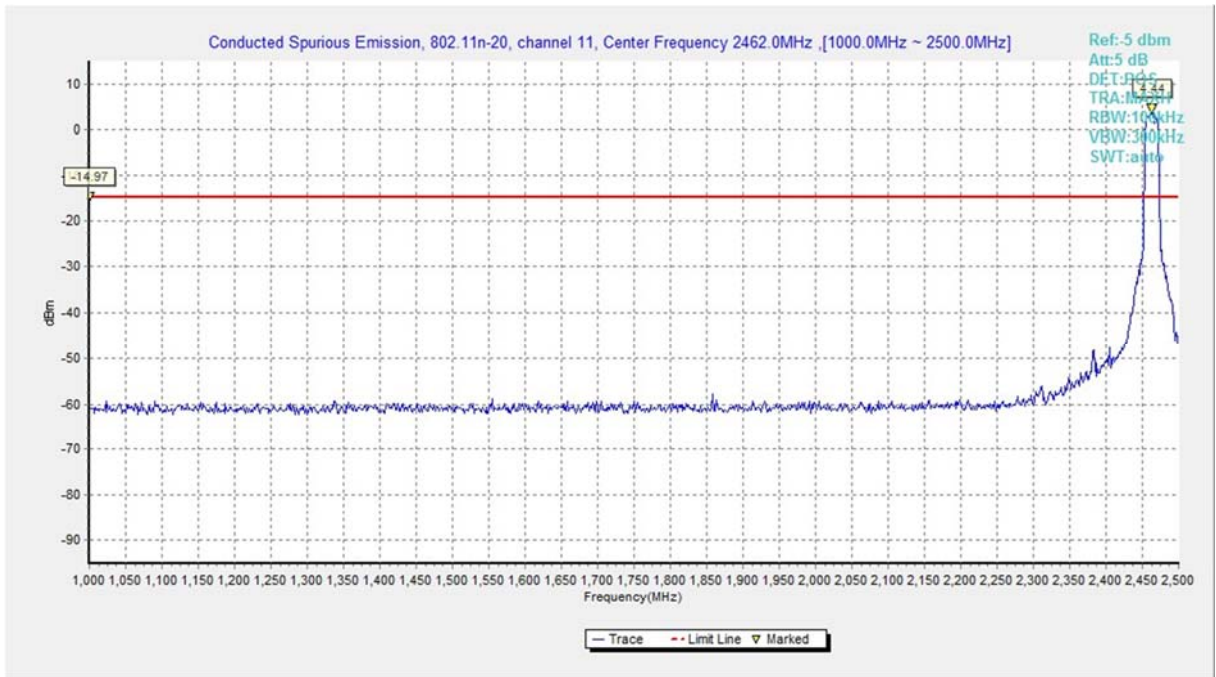


**Fig.A.6.1.67 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-2.5 GHz)**

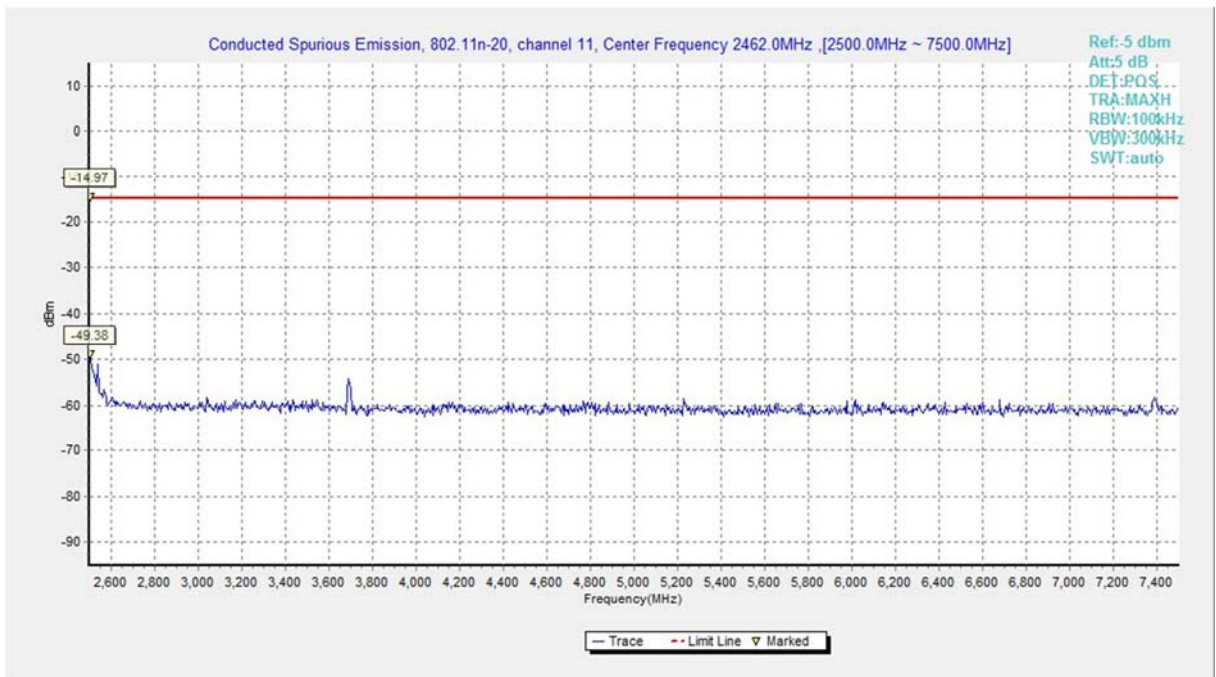


**Fig.A.6.1.68 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 2.5 GHz-7.5 GHz)**

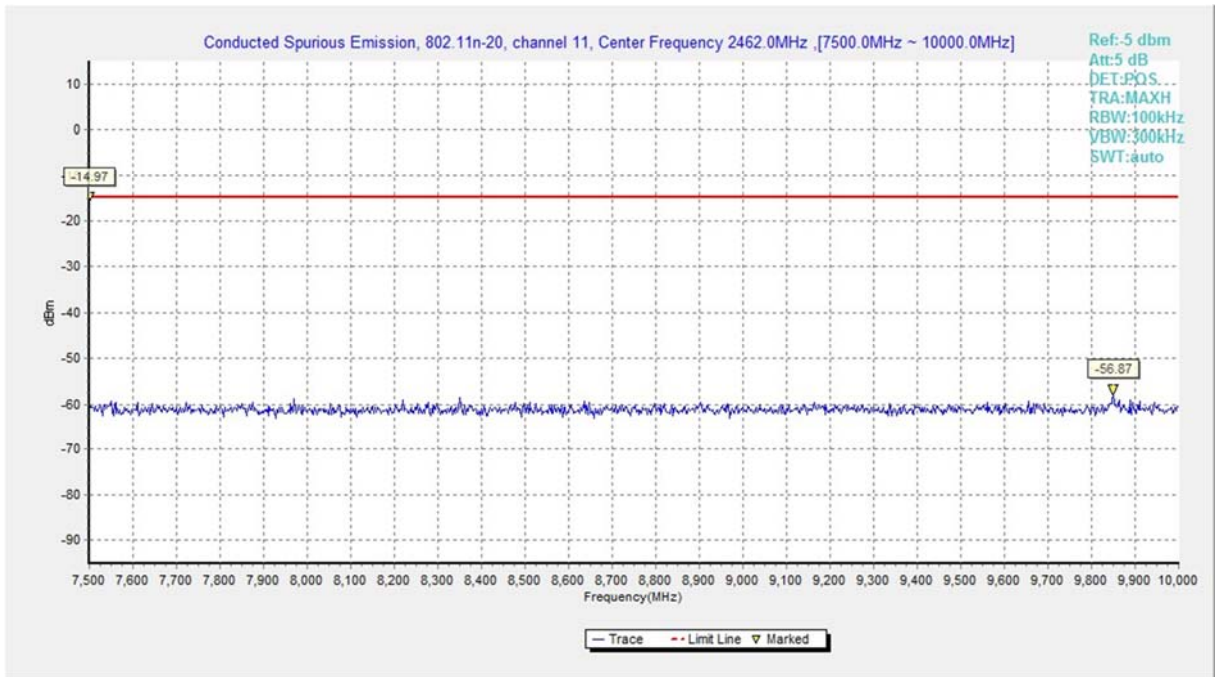


**Fig.A.6.1.69 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 7.5 GHz-10 GHz)**

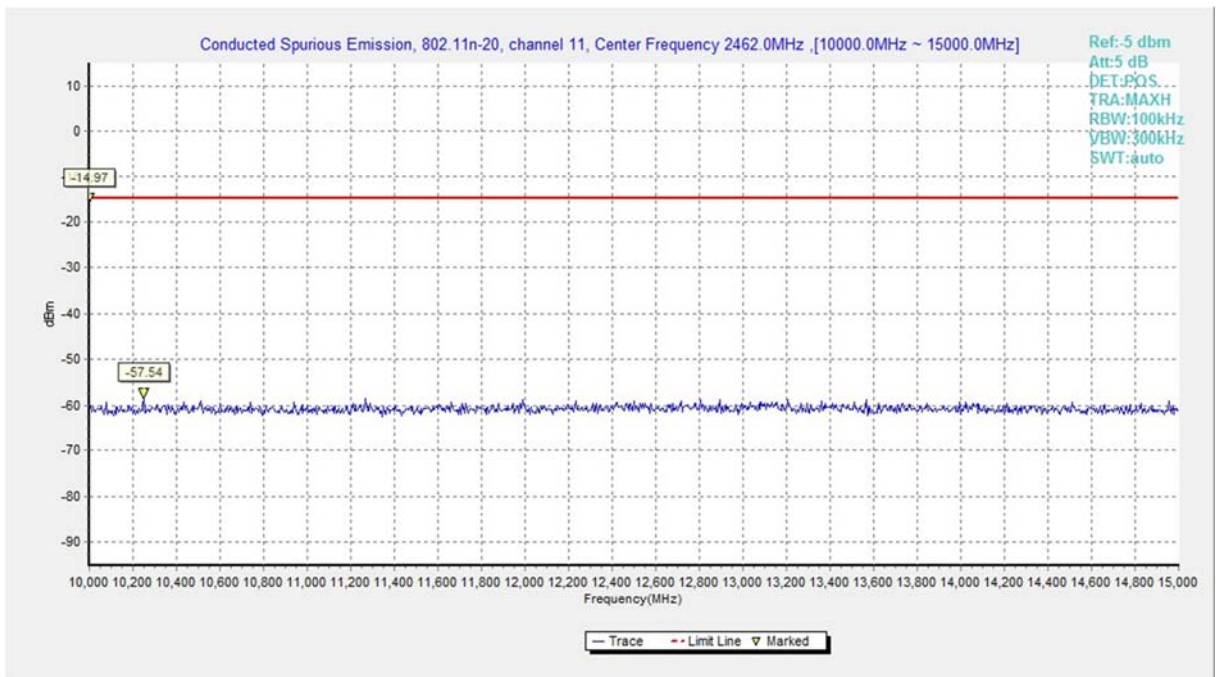

**Fig.A.6.1.70 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 10 GHz-15 GHz)**

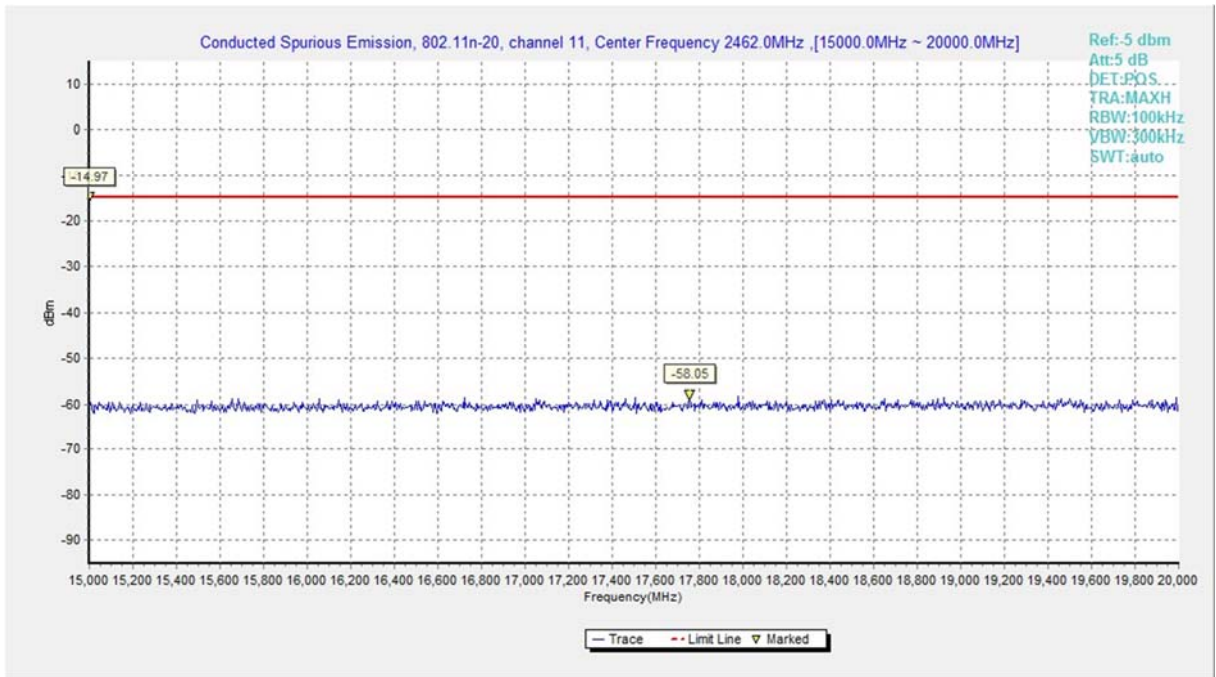


**Fig.A.6.1.71 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 15 GHz-20 GHz)**

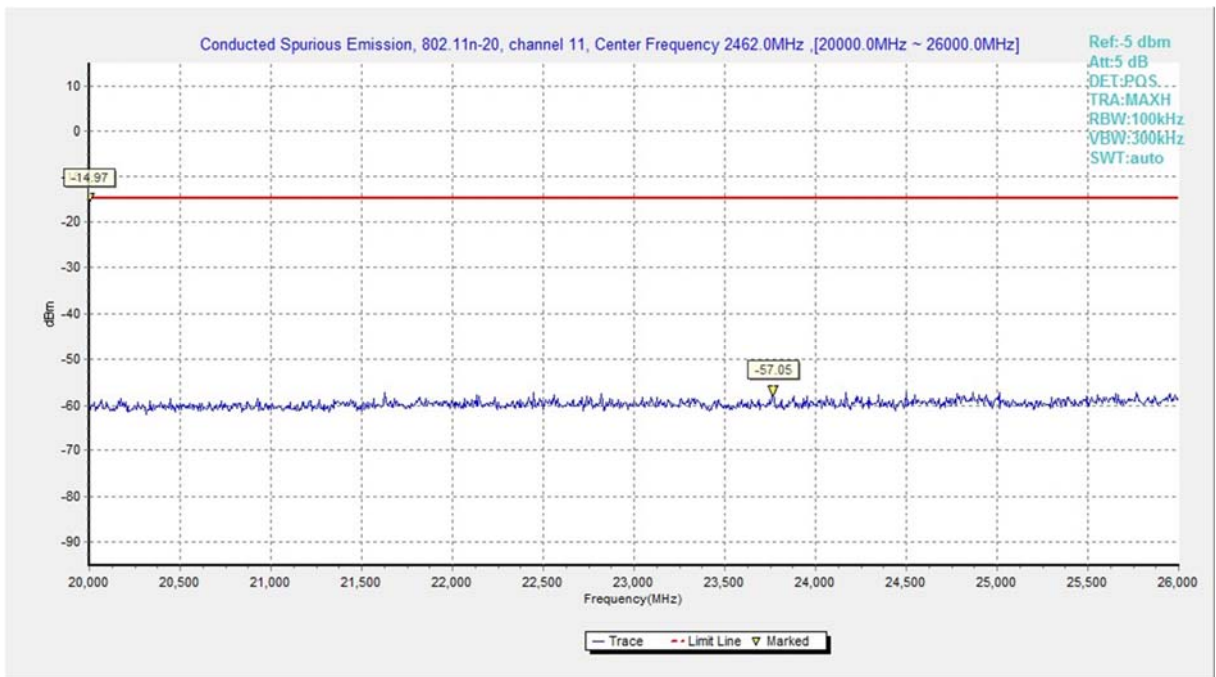


**Fig.A.6.1.72 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 20 GHz-26 GHz)**




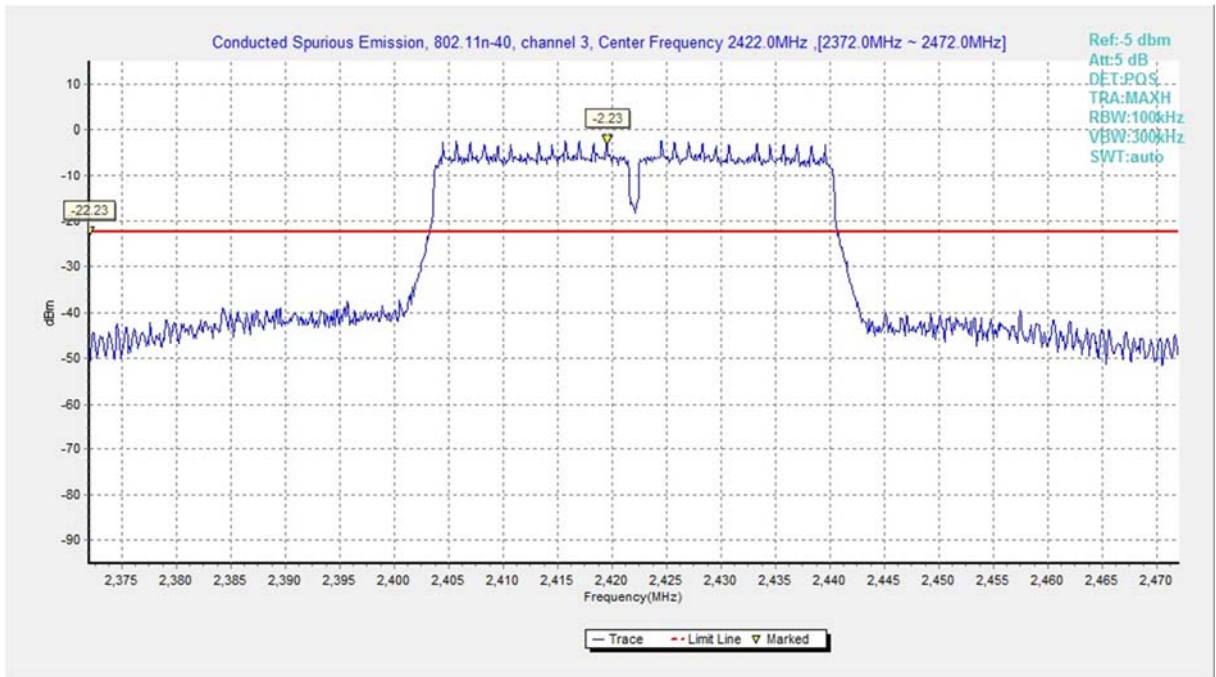


**Fig.A.6.1.73 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, Center Frequency)**

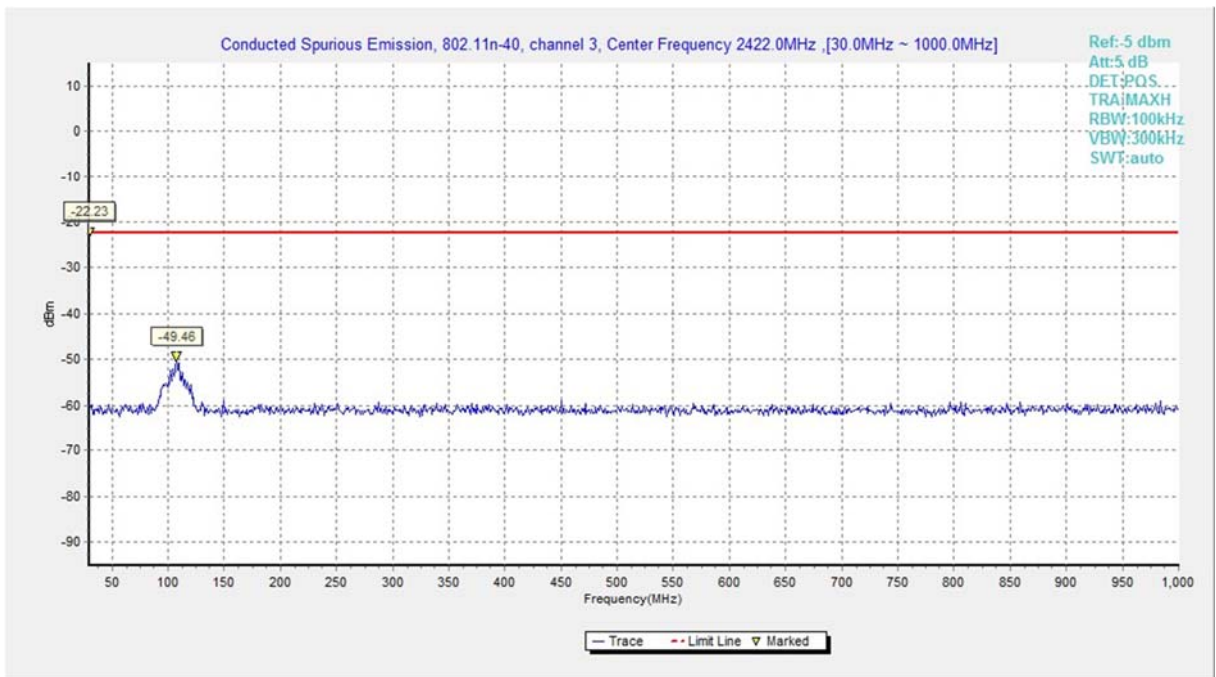


**Fig.A.6.1.74 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 30 MHz-1 GHz)**

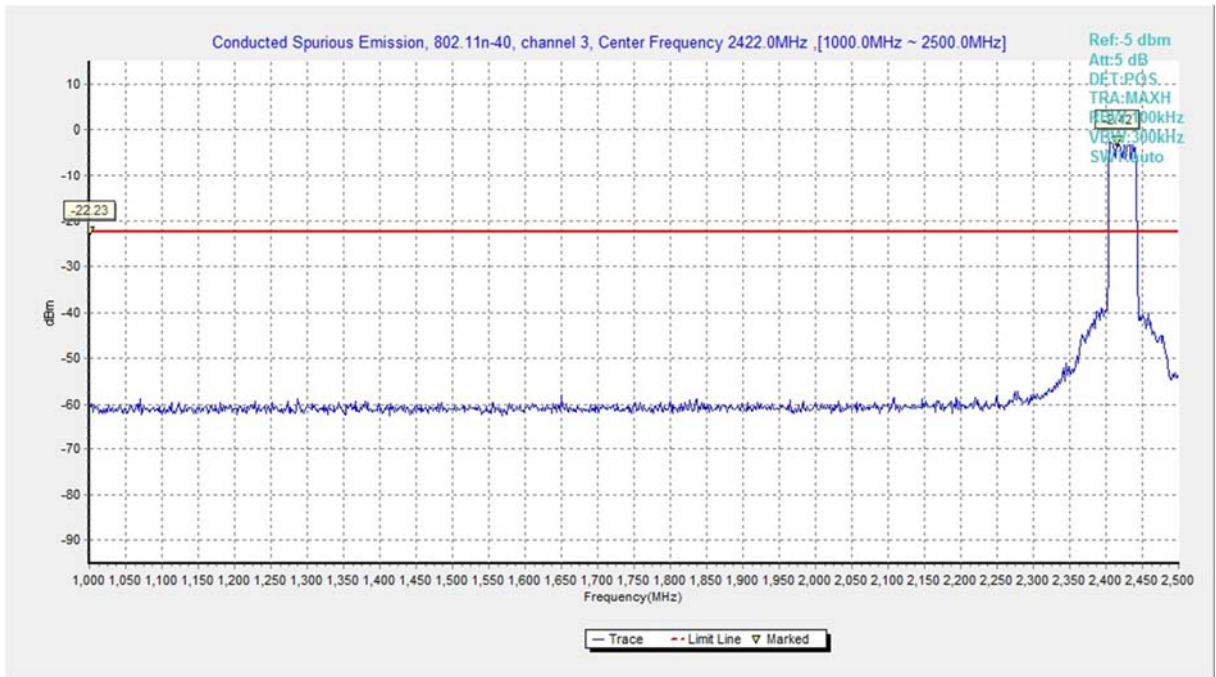


**Fig.A.6.1.75 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 1 GHz-2.5 GHz)**

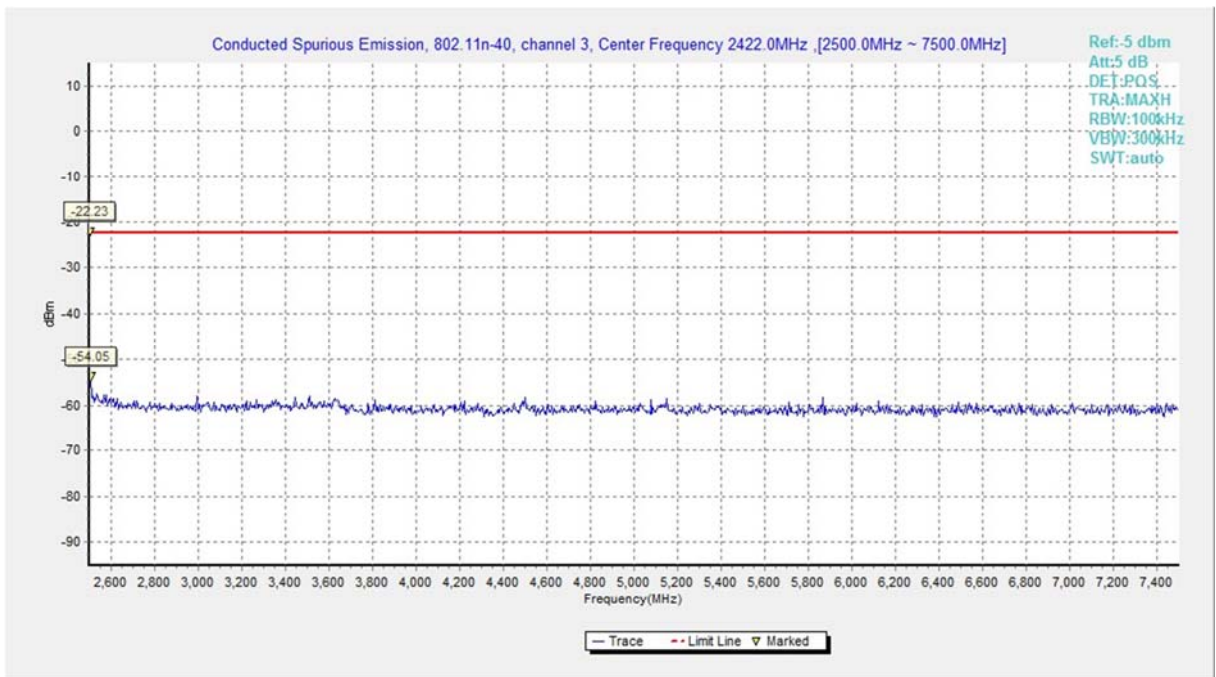

**Fig.A.6.1.76 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 2.5 GHz-7.5 GHz)**

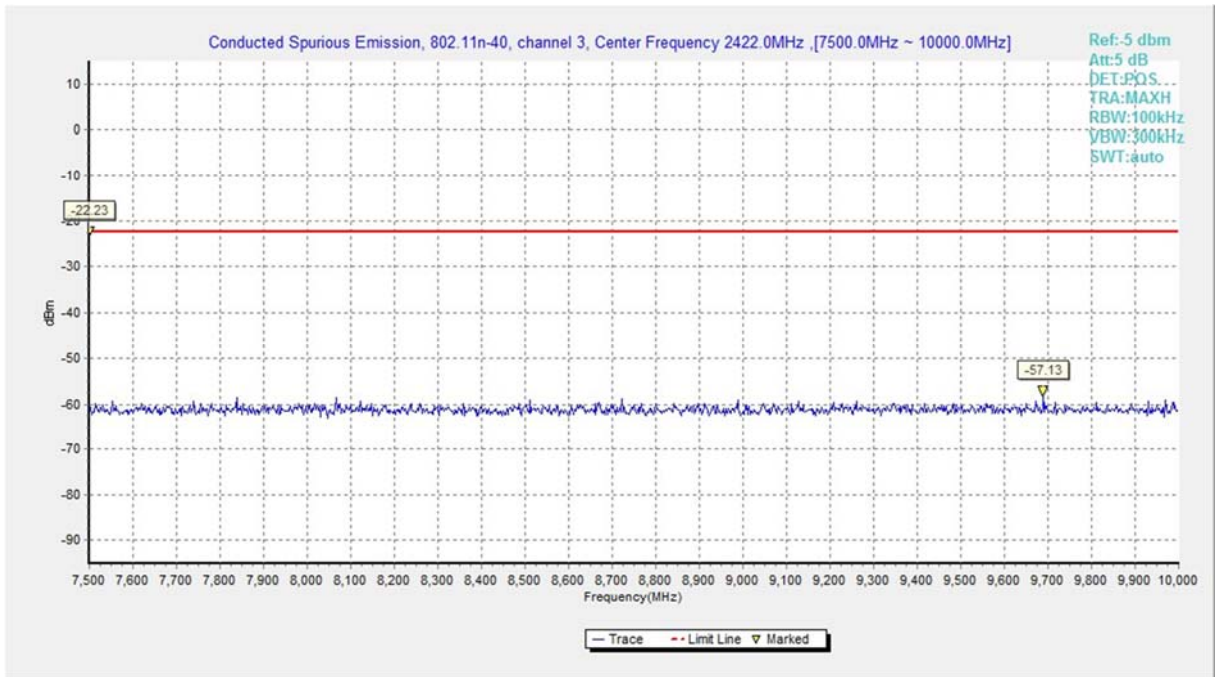


**Fig.A.6.1.77 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 7.5 GHz-10 GHz)**

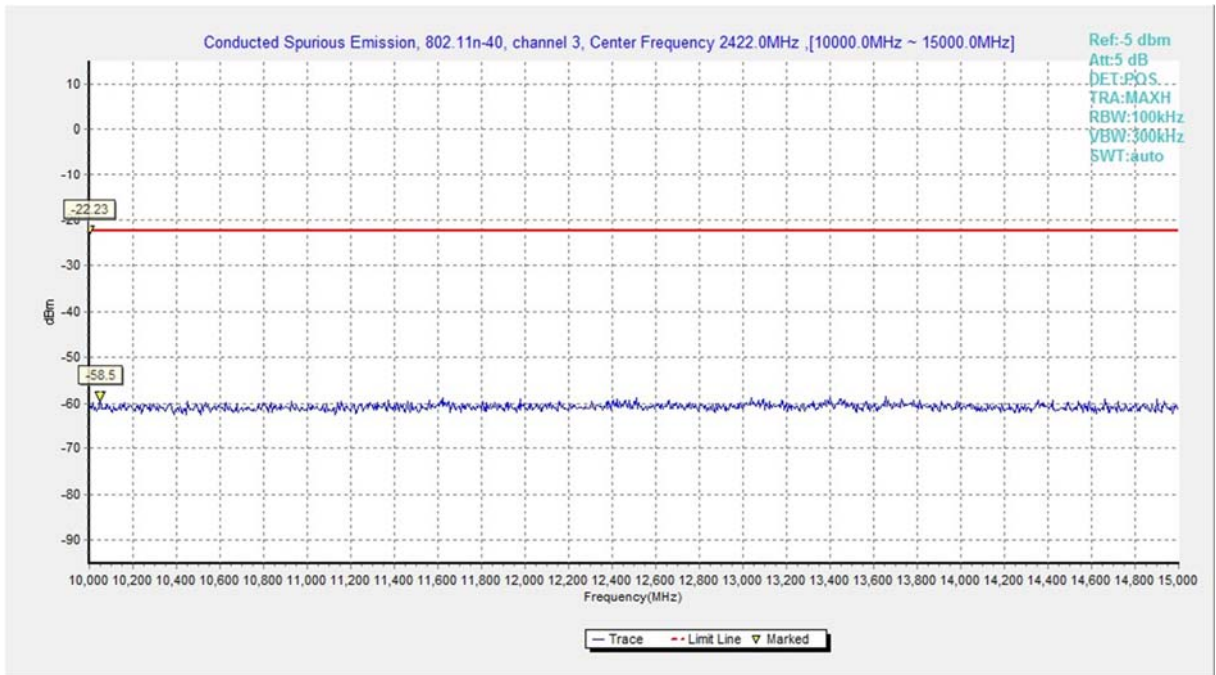


**Fig.A.6.1.78 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 10 GHz-15 GHz)**




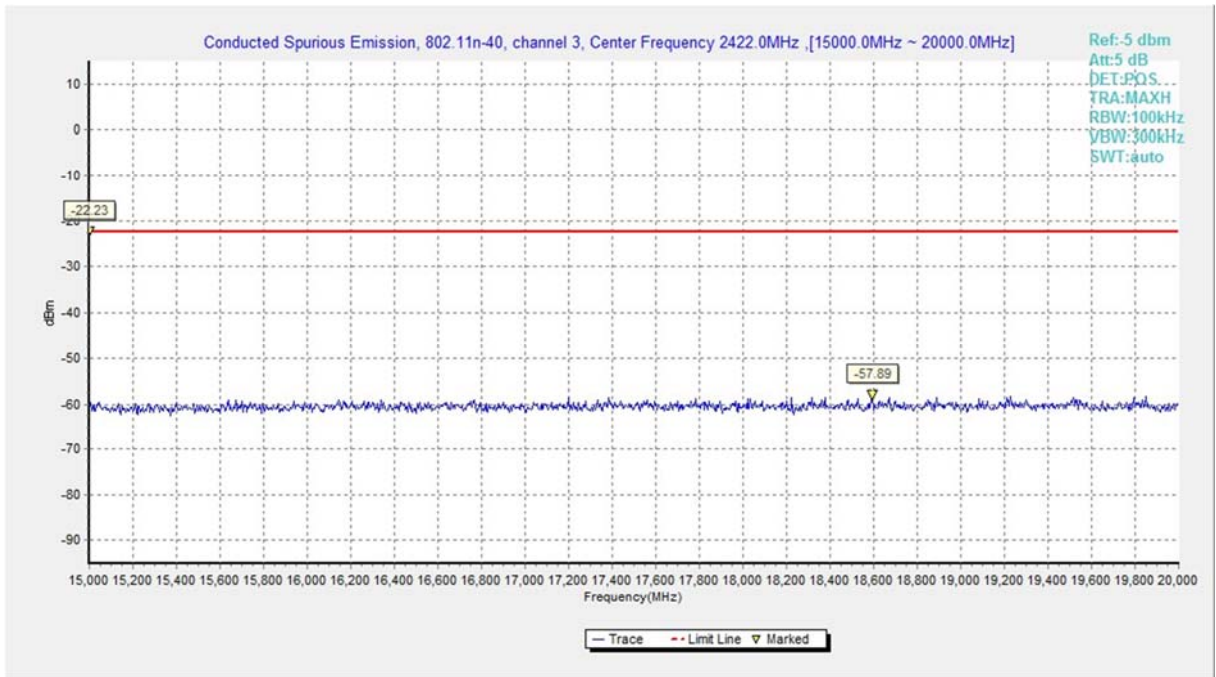


**Fig.A.6.1.79 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 15 GHz-20 GHz)**

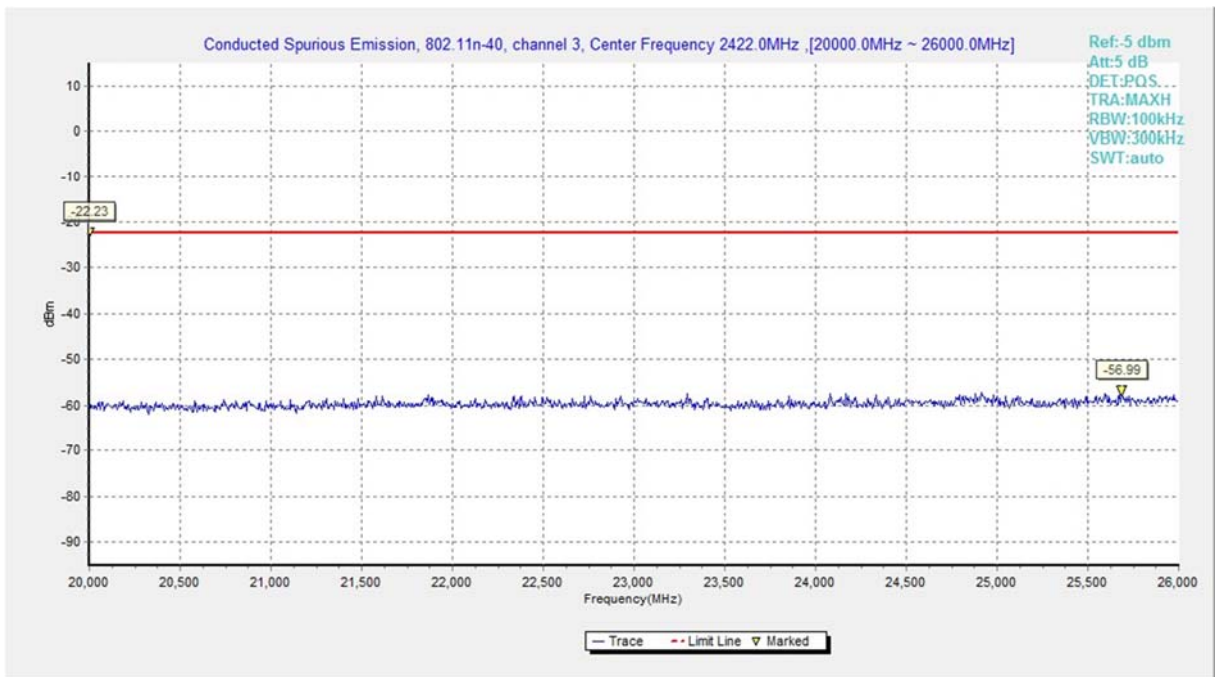


**Fig.A.6.1.80 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 20 GHz-26 GHz)**

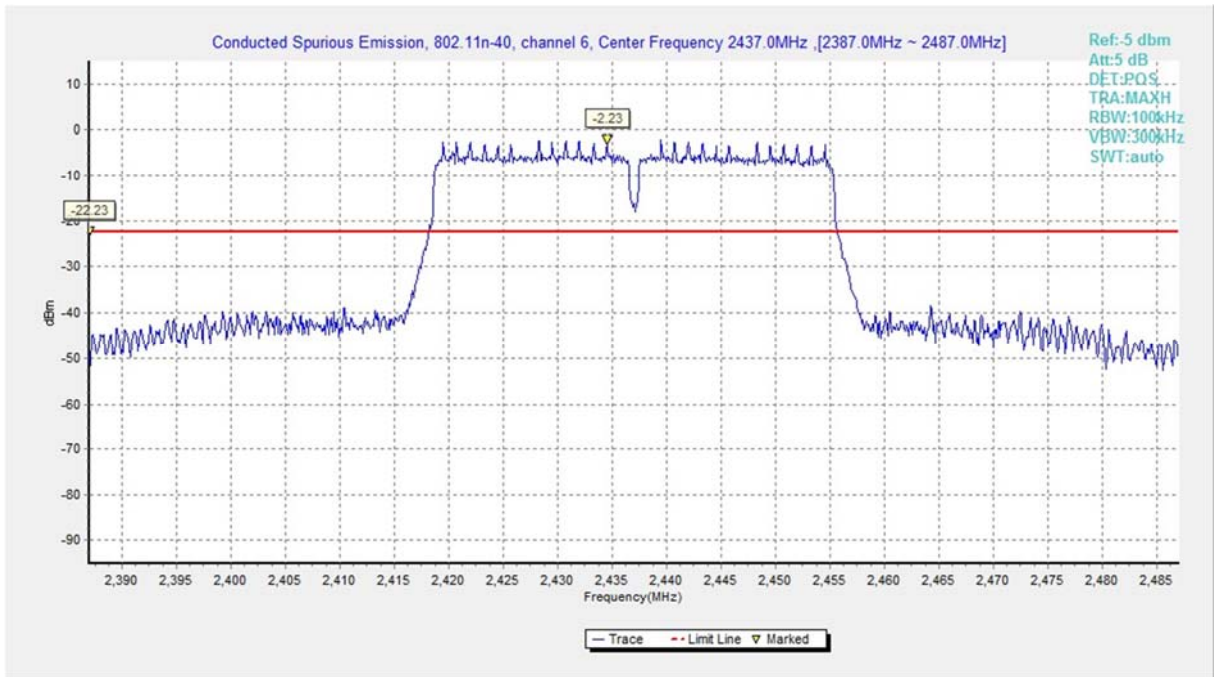


**Fig.A.6.1.81 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, Center Frequency)**

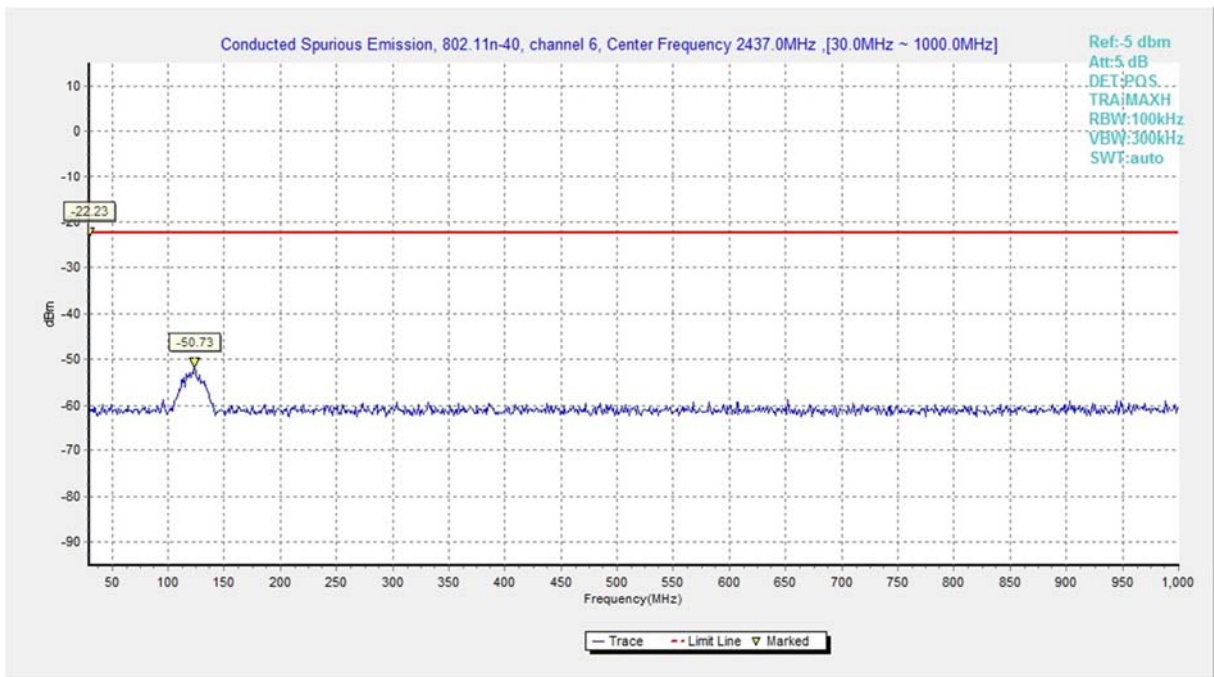

**Fig.A.6.1.82 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 30 MHz-1 GHz)**

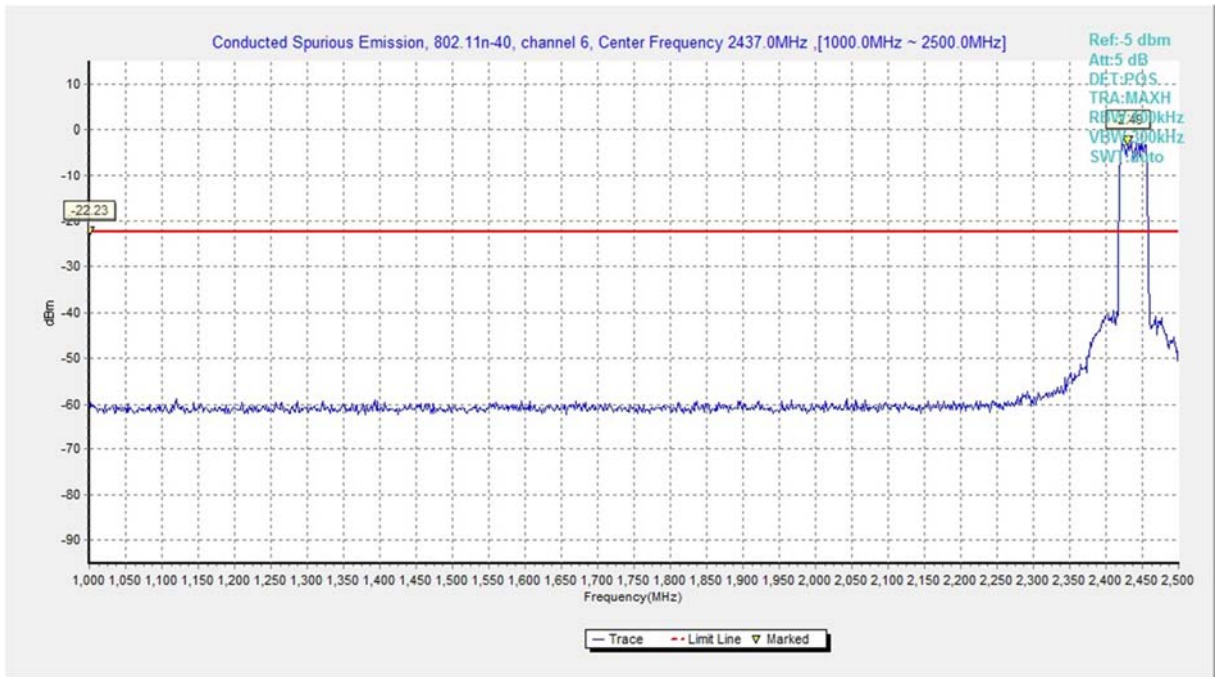


**Fig.A.6.1.83 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 1 GHz-2.5 GHz)**

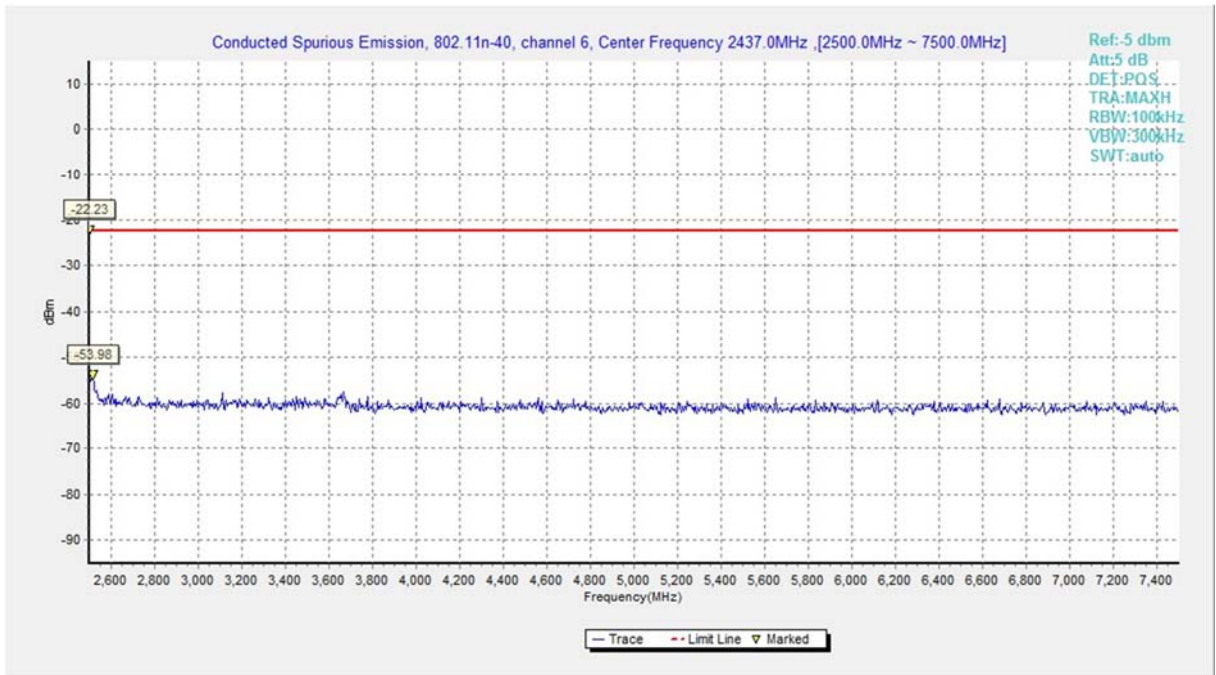


**Fig.A.6.1.84 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 2.5 GHz-7.5 GHz)**




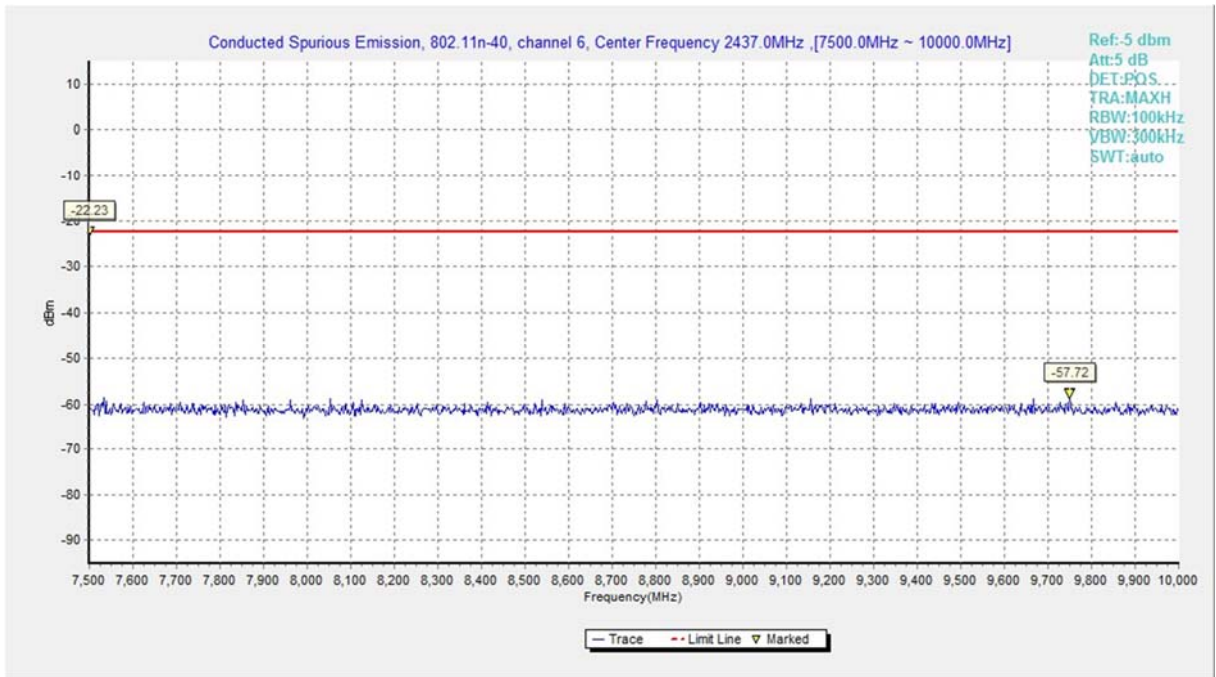


**Fig.A.6.1.85 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 7.5 GHz-10 GHz)**

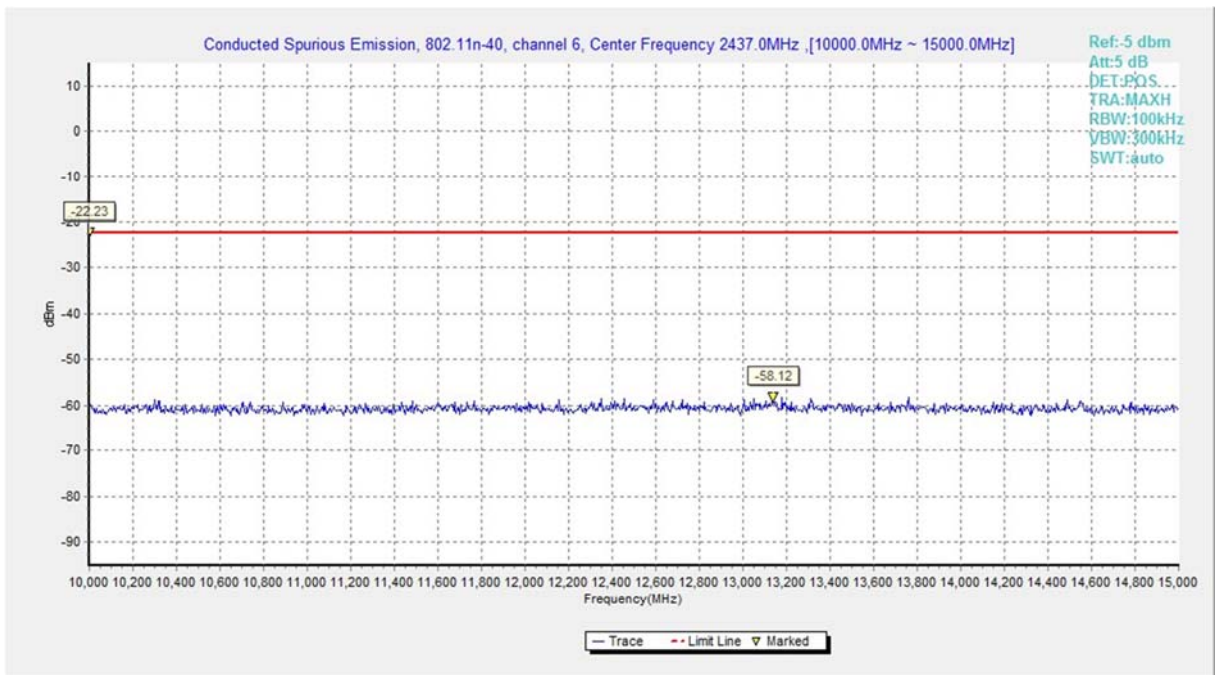


**Fig.A.6.1.86 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 10 GHz-15 GHz)**

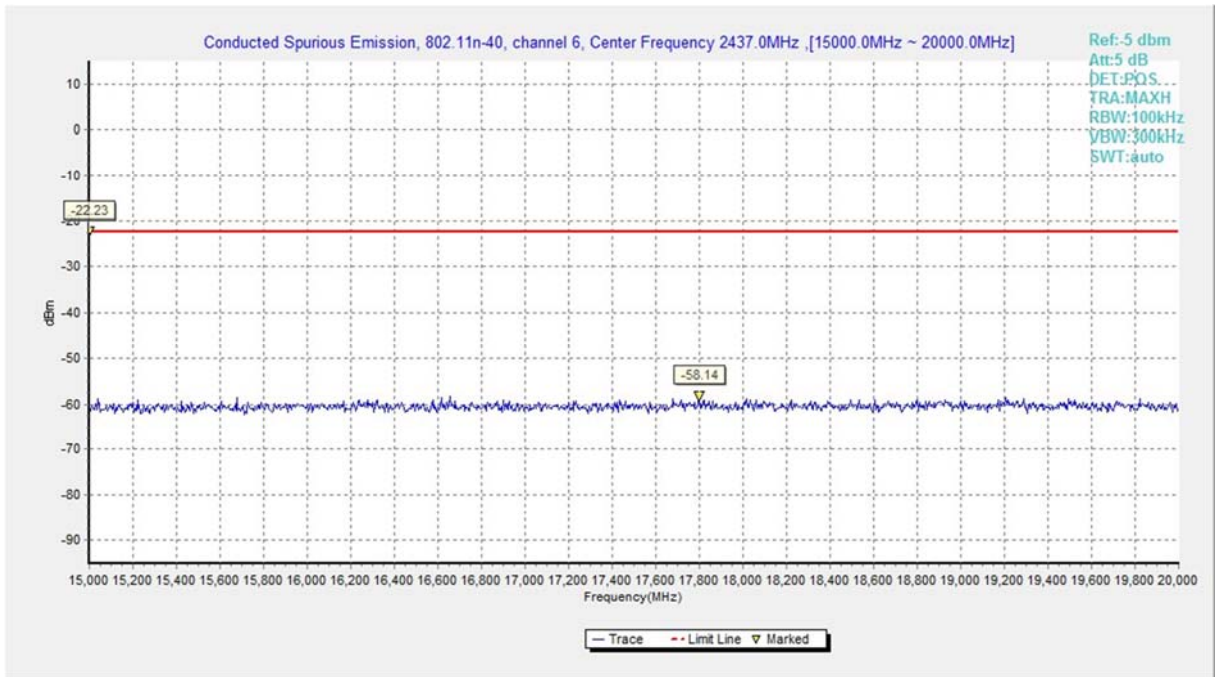


**Fig.A.6.1.87 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 15 GHz-20 GHz)**

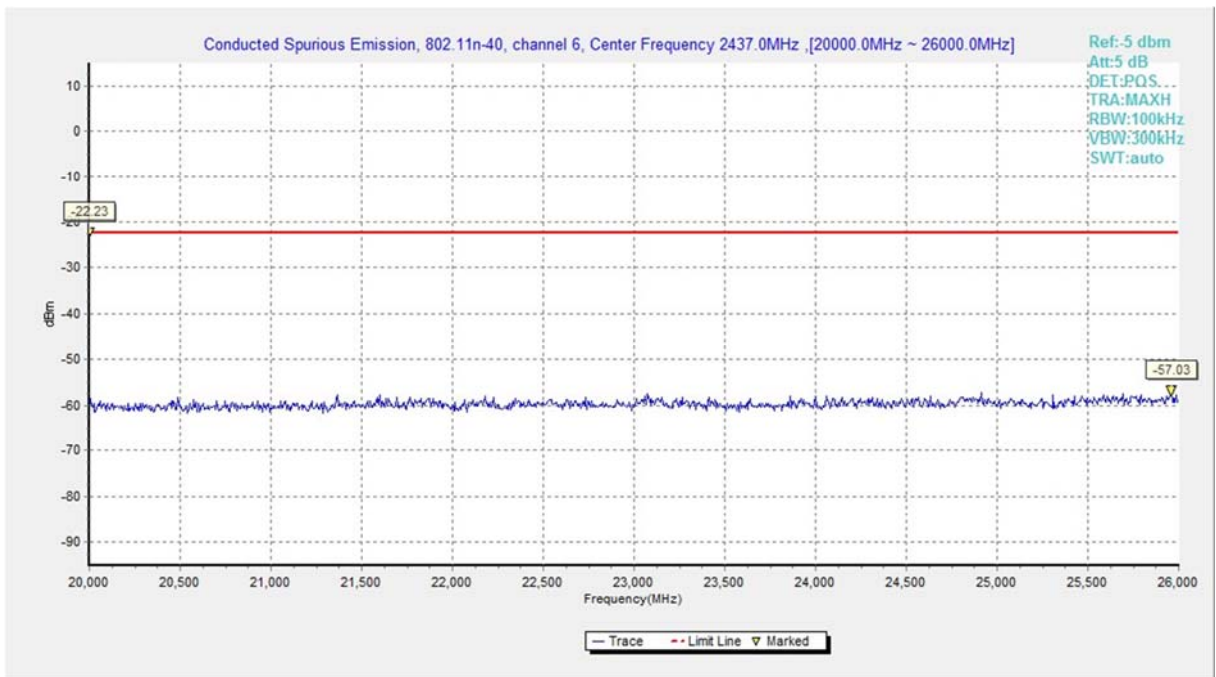

**Fig.A.6.1.88 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 20 GHz-26 GHz)**

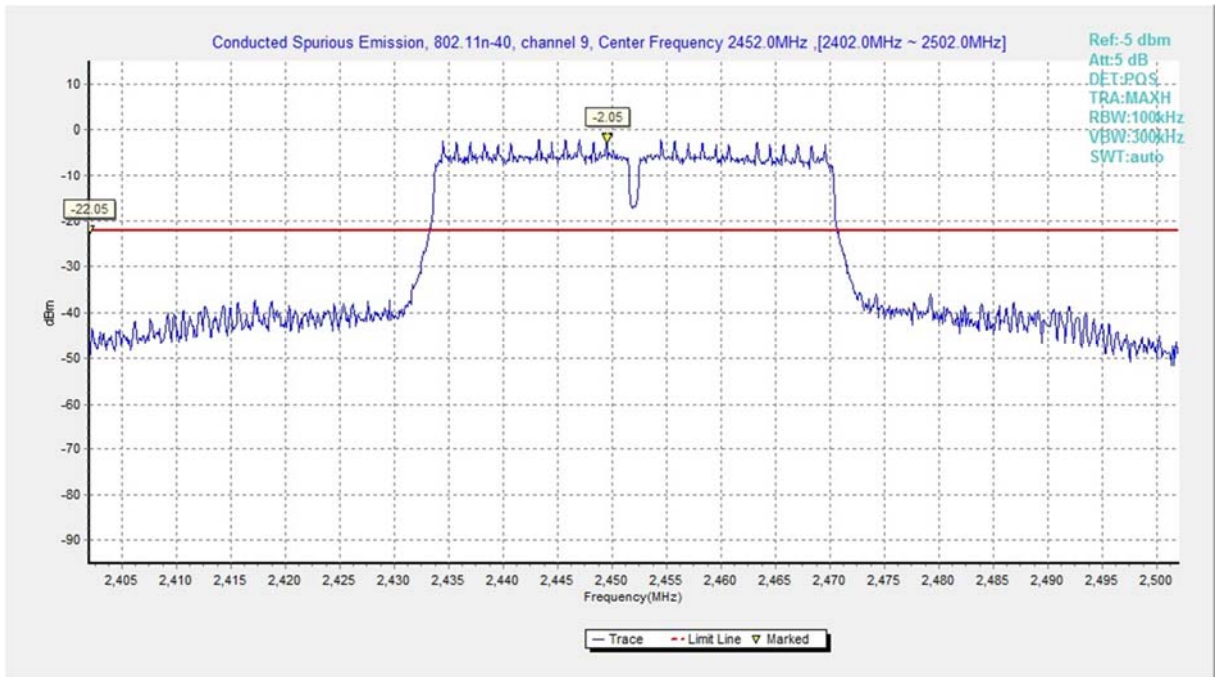


**Fig.A.6.1.89 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, Center Frequency)**

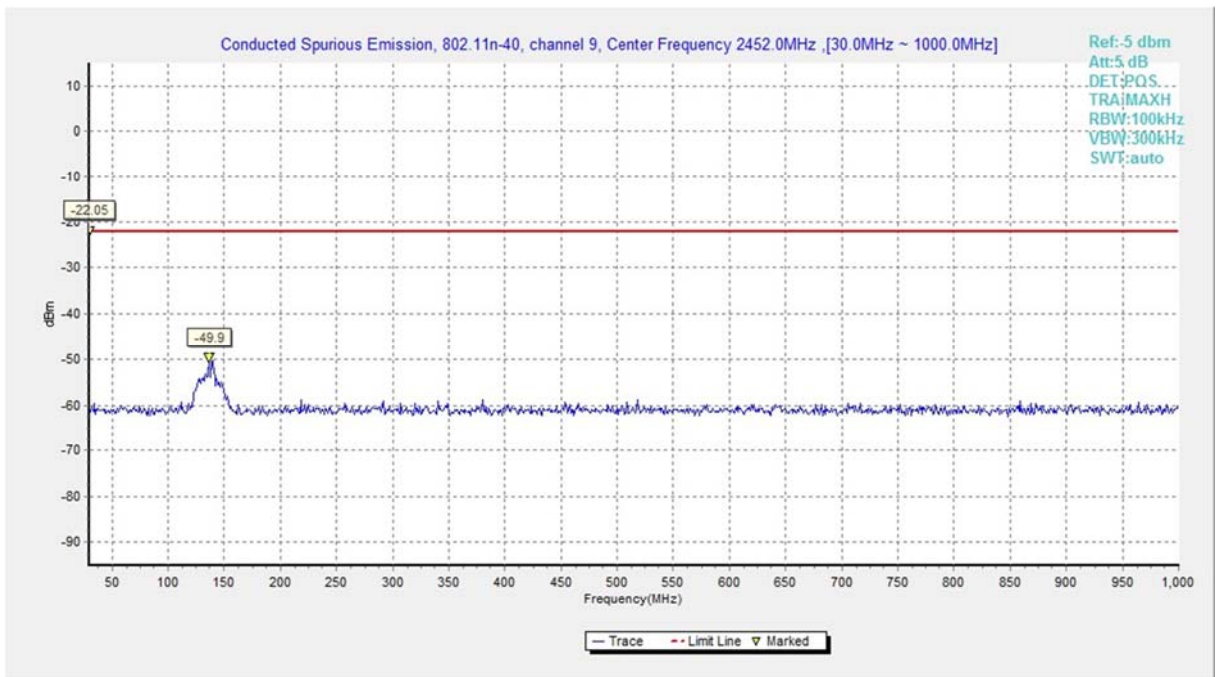


**Fig.A.6.1.90 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 30 MHz-1 GHz)**




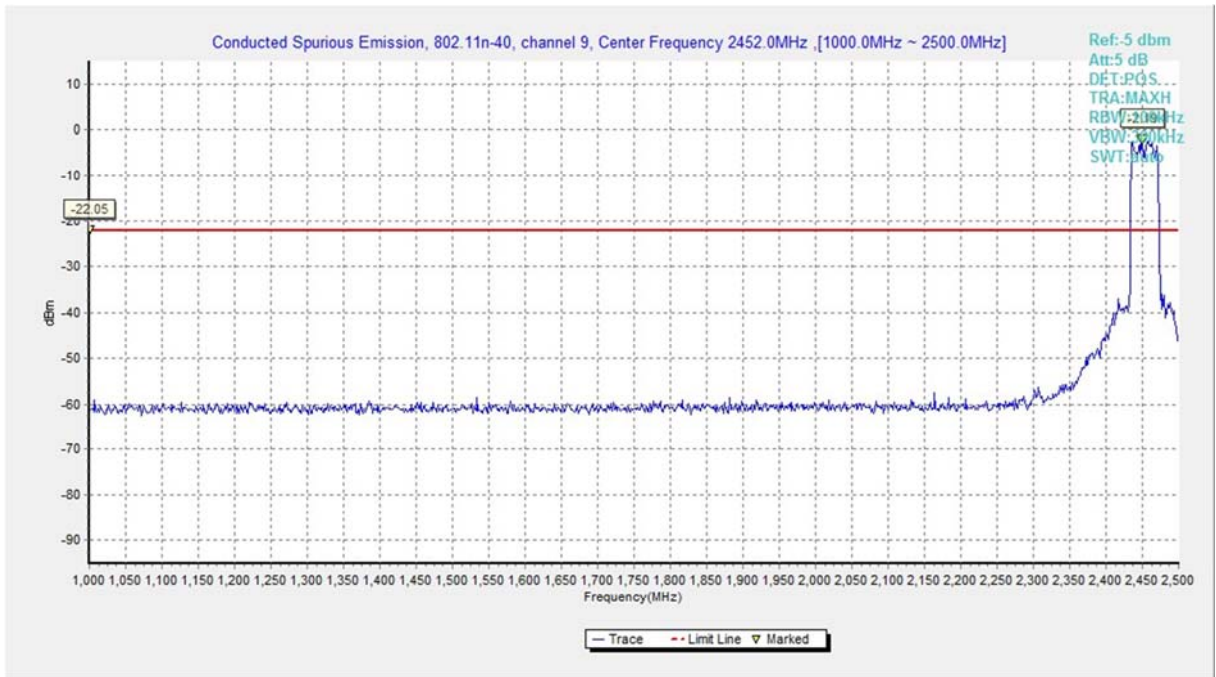


**Fig.A.6.1.91 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 1 GHz-2.5 GHz)**

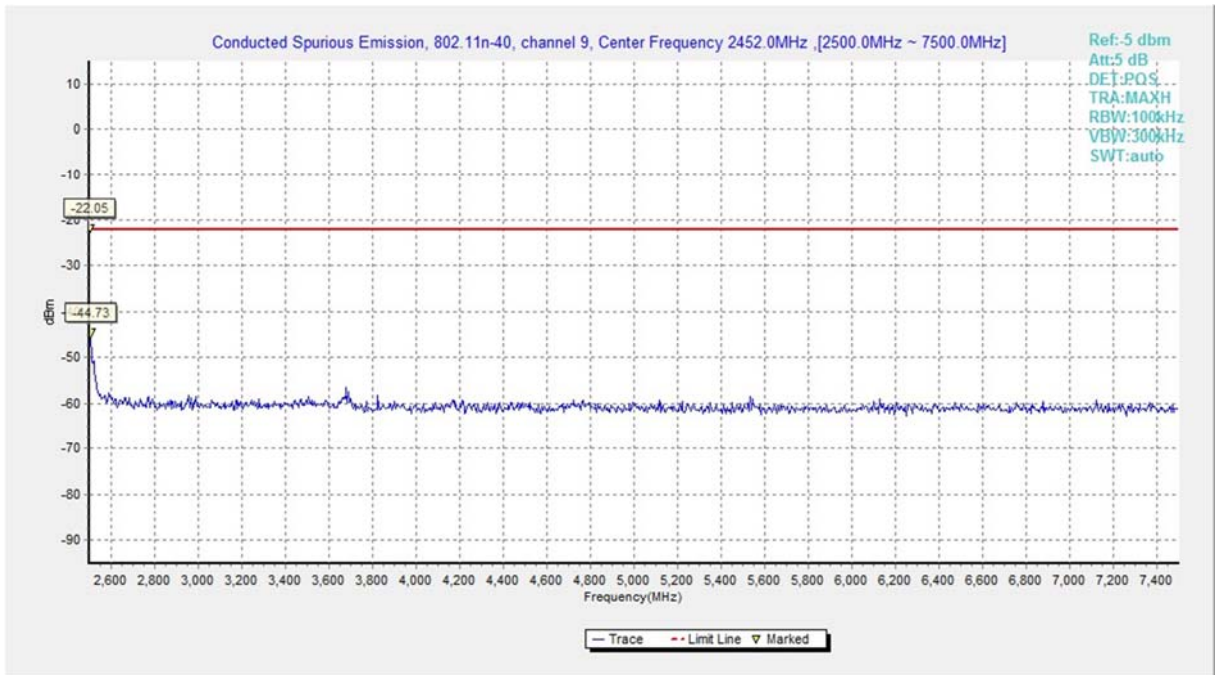


**Fig.A.6.1.92 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 2.5 GHz-7.5 GHz)**

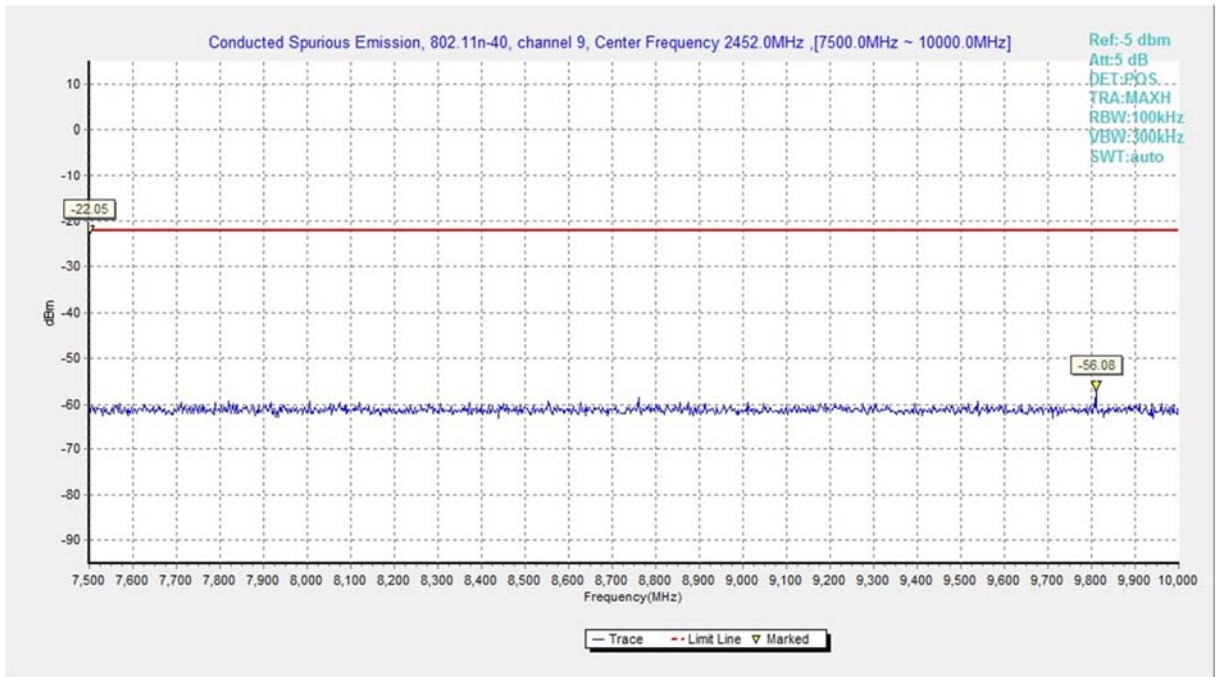


**Fig.A.6.1.93 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 7.5 GHz-10 GHz)**

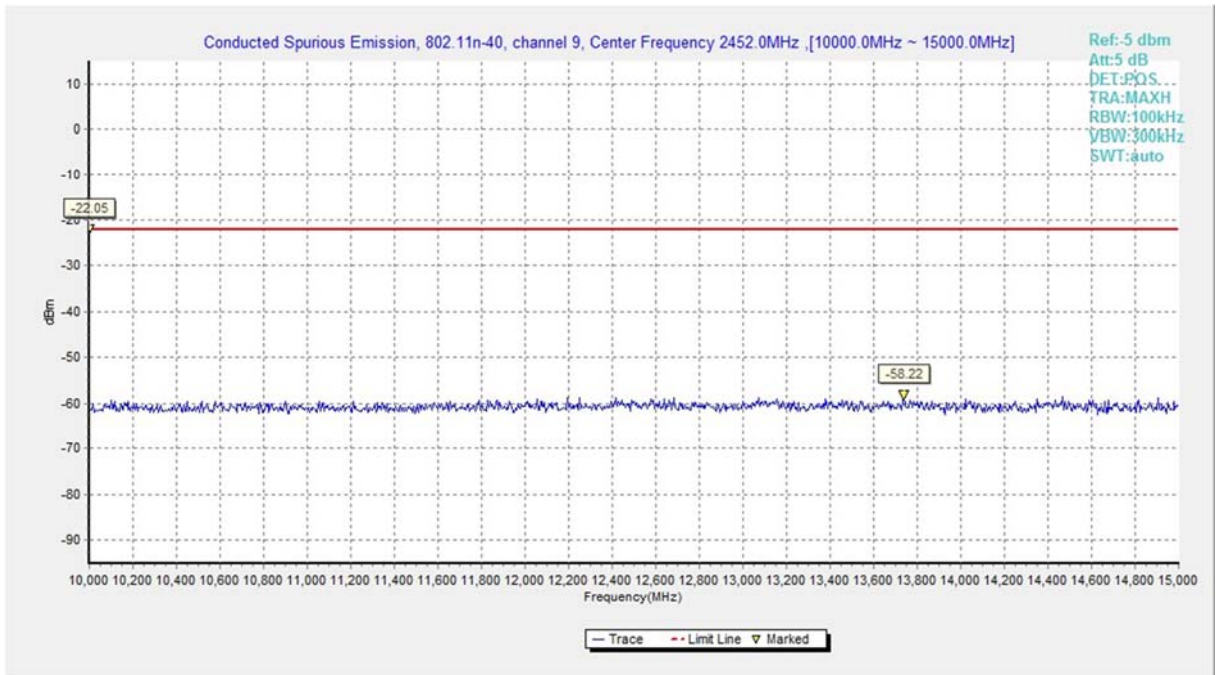

**Fig.A.6.1.94 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 10 GHz-15 GHz)**

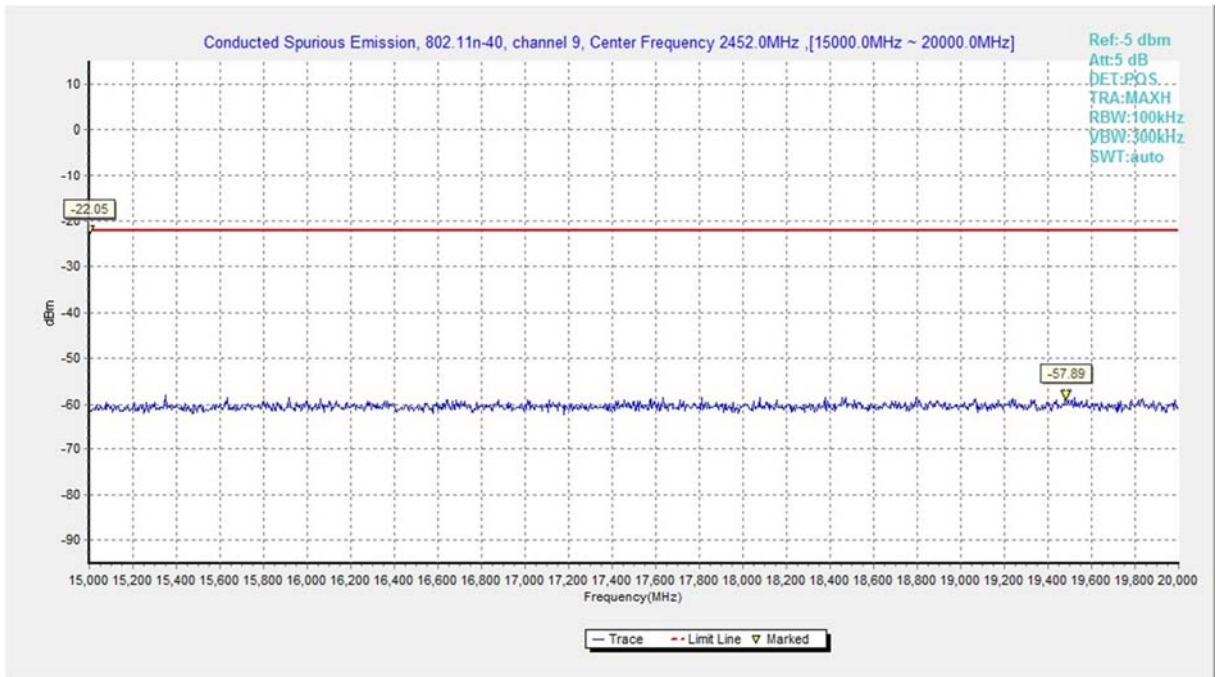

**Fig.A.6.1.95 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 15 GHz-20 GHz)**

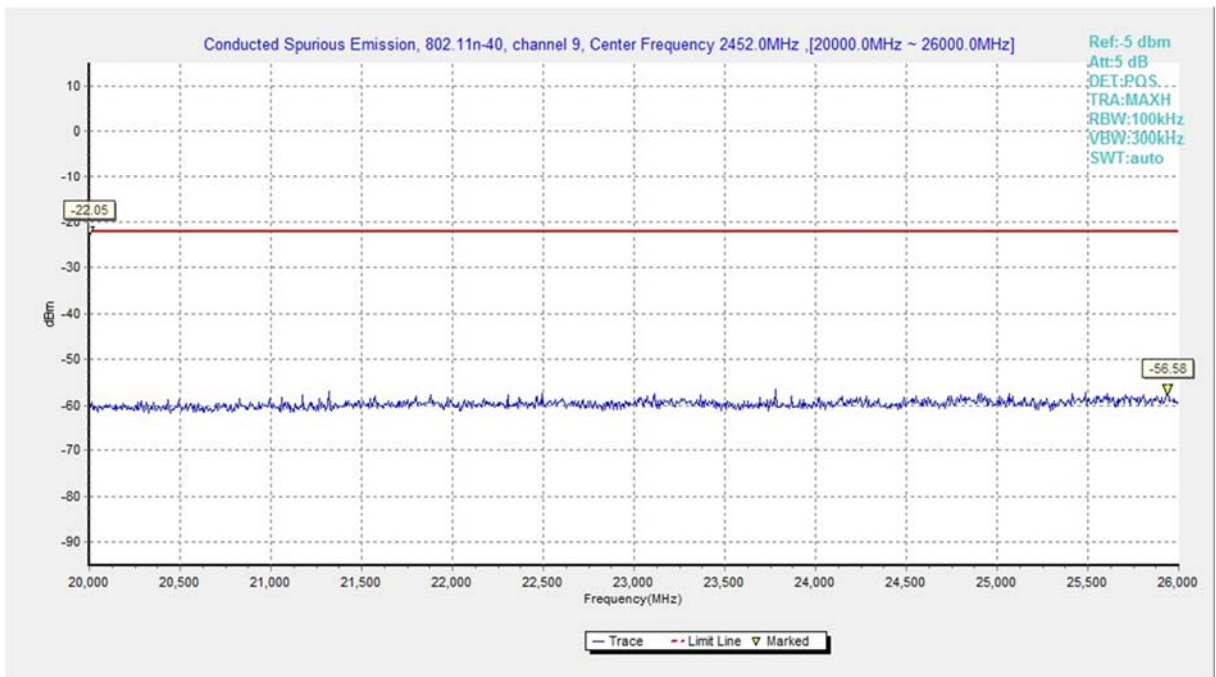

**Fig.A.6.1.96 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 20 GHz-26 GHz)**



### A.6.2 Transmitter Spurious Emission - Radiated

**Method of Measurement: See ANSI C63.10-2009-clause 6.5 & 6.6**

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

**Test Condition**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

**EUT ID: EUT1**

**Measurement Results:**

**802.11b mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	Power	2.38GHz ~2.45GHz	Fig.A.6.2.1	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.2	P
		3 GHz ~ 18 GHz	Fig.A.6.2.3	P
	6	9 kHz ~30 MHz	Fig.A.6.2.4	P
		30 MHz ~1 GHz	Fig.A.6.2.5	P
		1 GHz ~ 3 GHz	Fig.A.6.2.6	P
		3 GHz ~ 18 GHz	Fig.A.6.2.7	P
	Power	18 GHz~ 26.5 GHz	Fig.A.6.2.8	P
		2.45GHz ~2.5GHz	Fig.A.6.2.9	P
		11	1 GHz ~ 3 GHz	Fig.A.6.2.10
	3 GHz ~ 18 GHz		Fig.A.6.2.11	P

**802.11g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	Power	2.38GHz ~2.43GHz	Fig.A.6.2.12	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.13	P
		3 GHz ~ 18 GHz	Fig.A.6.2.14	P
	6	30 MHz ~1 GHz	Fig.A.6.2.15	P
		1 GHz ~ 3 GHz	Fig.A.6.2.16	P
		3 GHz ~ 18 GHz	Fig.A.6.2.17	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.18	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.19	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.20	P
		3 GHz ~ 18 GHz	Fig.A.6.2.21	P

**802.11n-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.22	P
	1	1 GHz ~ 3 GHz	Fig.A.6.2.23	P
		3 GHz ~ 18 GHz	Fig.A.6.2.24	P
	6	30 MHz ~1 GHz	Fig.A.6.2.25	P
		1 GHz ~ 3 GHz	Fig.A.6.2.26	P
		3 GHz ~ 18 GHz	Fig.A.6.2.27	P
		18 GHz~ 26.5 GHz	Fig.A.6.2.28	P
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.29	P
	11	1 GHz ~ 3 GHz	Fig.A.6.2.30	P
		3 GHz ~ 18 GHz	Fig.A.6.2.31	P

**802.11n-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	Power	2.38GHz ~2.45GHz	Fig.A.6.2.32	<b>P</b>
	3	1 GHz ~ 3 GHz	Fig.A.6.2.33	<b>P</b>
		3 GHz ~ 18 GHz	Fig.A.6.2.34	<b>P</b>
	6	30 MHz ~1 GHz	Fig.A.6.2.35	<b>P</b>
		1 GHz ~ 3 GHz	Fig.A.6.2.36	<b>P</b>
		3 GHz ~ 18 GHz	Fig.A.6.2.37	<b>P</b>
		18 GHz~ 26.5 GHz	Fig.A.6.2.38	<b>P</b>
	Power	2.45GHz ~2.5GHz	Fig.A.6.2.39	<b>P</b>
	9	1 GHz ~ 3 GHz	Fig.A.6.2.40	<b>P</b>
		3 GHz ~ 18 GHz	Fig.A.6.2.41	<b>P</b>

**Conclusion: Pass**

**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**802.11b**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	$P_{Mea}$ (dBuV/m)	Polarization
2387.425	45.3	-38.8	27.7	56.400	V
17995.313	58.6	-17.7	45.6	30.700	V
17856.563	58.4	-18.5	45.6	31.300	H
17876.250	58.2	-18.5	45.6	31.100	V
17858.438	58.0	-18.5	45.6	30.900	H
17903.438	57.6	-18.5	45.6	30.500	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	$P_{Mea}$ (dBuV/m)	Polarization
17983.125	57.1	-17.7	45.6	29.200	V
17978.438	57.0	-17.7	45.6	29.100	V
17892.188	57.0	-18.5	45.6	29.900	V
17888.438	56.9	-18.5	45.6	29.800	H
17962.500	56.9	-17.7	45.6	29.000	V
17910.938	56.9	-18.5	45.6	29.800	H





Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2485.156	47.5	-38.9	27.7	58.700	V
17548.500	54.0	-19.2	45.6	27.600	V
17983.500	52.3	-17.7	45.6	24.400	H
17769.000	52.3	-18.5	45.6	25.200	H
17856.000	51.8	-18.5	45.6	24.700	V
17851.500	51.4	-18.5	45.6	24.300	H

802.11g

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2389.725	51.7	-38.8	27.7	62.800	V
17877.188	58.5	-18.5	45.6	31.400	V
17863.125	58.0	-18.5	45.6	30.900	H
17886.563	57.8	-18.5	45.6	30.700	H
17887.500	57.8	-18.5	45.6	30.700	V
17934.375	57.7	-17.7	45.6	29.800	V

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
17860.313	57.5	-18.5	45.6	30.400	V
17865.938	57.3	-18.5	45.6	30.200	V
17907.188	57.2	-18.5	45.6	30.100	V
17986.875	57.1	-17.7	45.6	29.200	H
17983.125	57.1	-17.7	45.6	29.200	V
17917.500	57.1	-17.7	45.6	29.200	V

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2484.625	56.6	-38.9	27.7	67.800	H
17909.063	57.4	-18.5	45.6	30.300	V
17859.375	57.3	-18.5	45.6	30.200	V
17855.625	57.2	-18.5	45.6	30.100	V
17949.375	57.2	-17.7	45.6	29.300	H
17887.500	57.1	-18.5	45.6	30.000	V

**802.11n-HT20**

Ch1

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2388.775	52.1	-38.8	27.7	63.200	V
17880.938	57.2	-18.5	45.6	30.100	V
17904.375	57.0	-18.5	45.6	29.900	H
17884.688	57.0	-18.5	45.6	29.900	H
17925.000	57.0	-17.7	45.6	29.100	V
17888.438	56.9	-18.5	45.6	29.800	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
17893.125	58.1	-18.5	45.6	31.000	H
17947.500	57.9	-17.7	45.6	30.000	H
17892.188	57.3	-18.5	45.6	30.200	V
17880.000	57.2	-18.5	45.6	30.100	V
17871.563	57.2	-18.5	45.6	30.100	V
17882.813	57.1	-18.5	45.6	30.000	H

Ch11

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2483.675	58.7	-38.9	27.7	56.100	V
17893.125	58.1	-19.2	45.6	26.100	H
17947.500	57.9	-18.9	45.6	25.700	V
17892.188	57.3	-17.7	45.6	24.300	H
17880.000	57.2	-18.5	45.6	25.100	H
17871.563	57.2	-18.5	45.6	25.100	V

**802.11n-HT40**

Ch3

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2388.300	51.0	-38.8	27.7	62.100	V
17860.313	58.0	-18.5	45.6	30.900	H
17931.563	57.5	-17.7	45.6	29.600	H
17888.438	57.2	-18.5	45.6	30.100	V
17866.875	57.1	-18.5	45.6	30.000	V
17859.375	57.1	-18.5	45.6	30.000	H

Ch6

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
17940.938	58.4	-17.7	45.6	30.500	V
17894.063	57.7	-18.5	45.6	30.600	V
17854.688	57.7	-18.5	45.6	30.600	V
17880.938	57.6	-18.5	45.6	30.500	H
17885.625	57.3	-18.5	45.6	30.200	H
17949.375	57.3	-17.7	45.6	29.400	H


Ch9

Frequency(MHz)	Result (dBuV/m)	Cable Loss(dB)	Antenna Factor	P <sub>Mea</sub> (dBuV/m)	Polarization
2485.525	57.4	-38.9	27.7	68.600	V
17924.063	57.5	-17.7	45.6	29.600	V
17927.813	57.3	-17.7	45.6	29.400	V
17933.438	57.2	-17.7	45.6	29.300	V
17967.188	57.1	-17.7	45.6	29.200	V
17897.813	57.1	-18.5	45.6	30.000	H

Test graphs as below:




RE-Power\_2.38G-2.43GHz

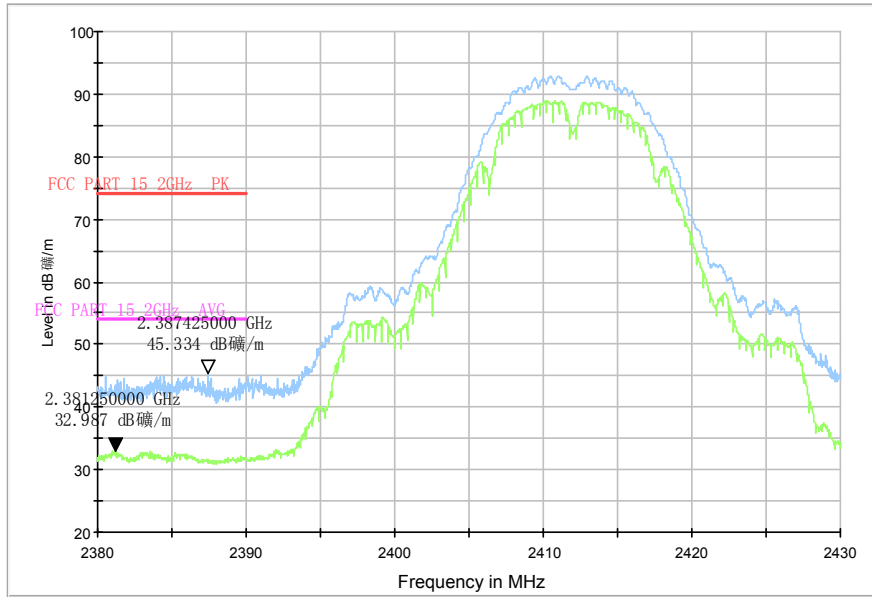


**Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.38 GHz – 2.45GHz**


RE\_WLAN\_1G-3GHz

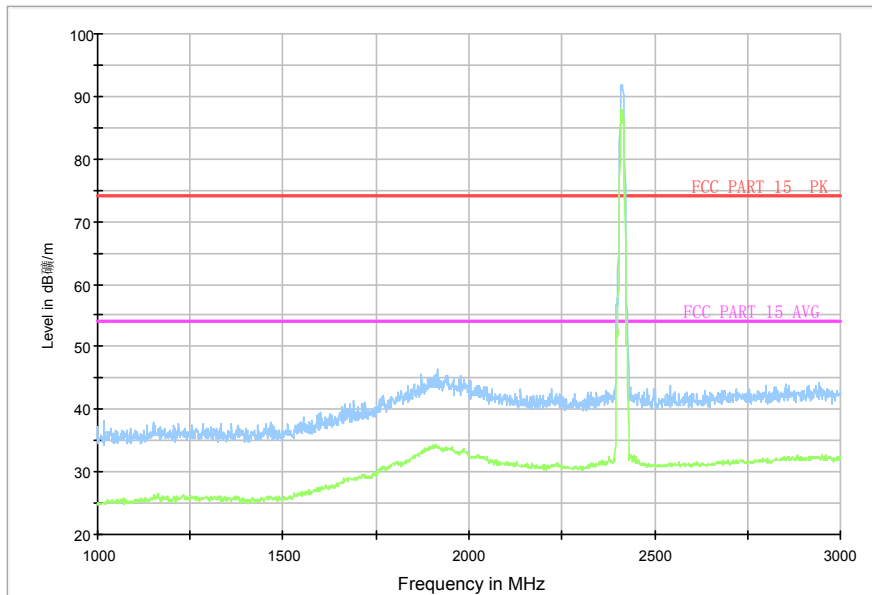


**Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 1 GHz-3 GHz)**

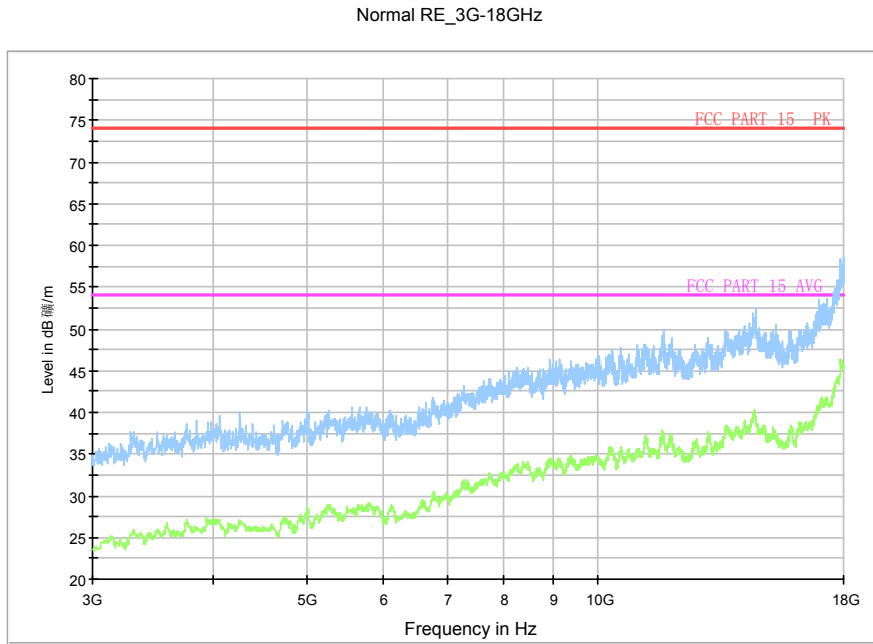


**Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (802.11b, Ch1, 3 GHz-18 GHz)**

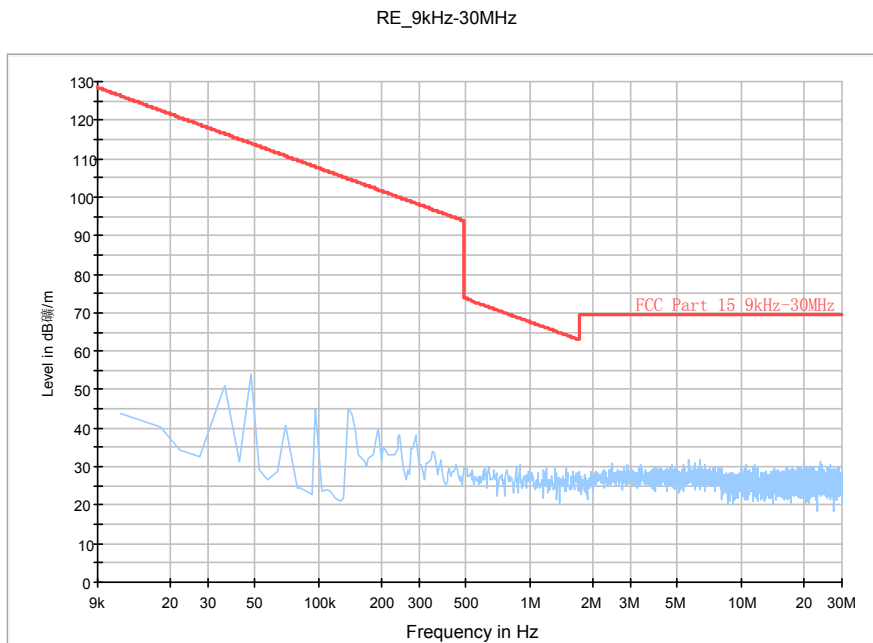


**Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 9kHz-30 MHz)**

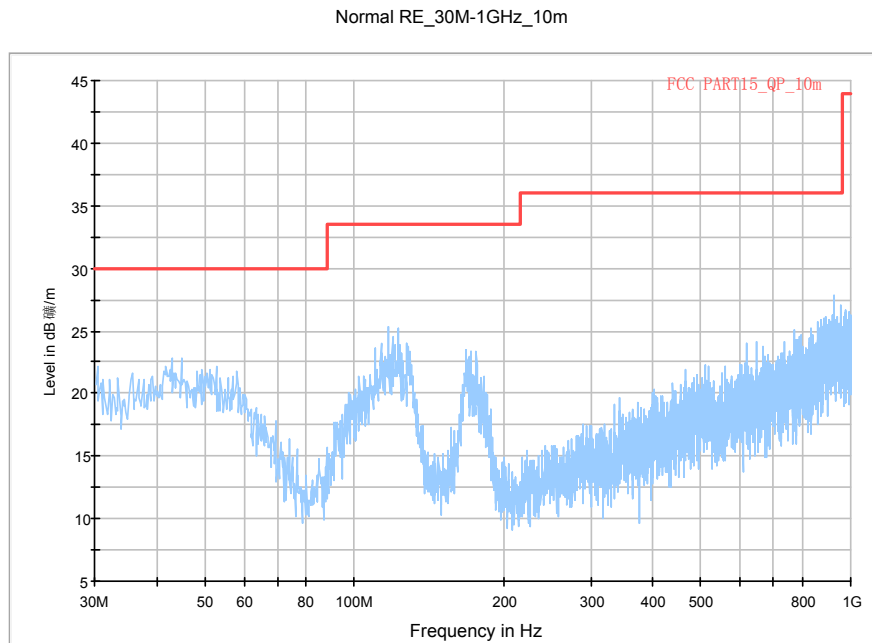


**Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 30 MHz-1 GHz)**

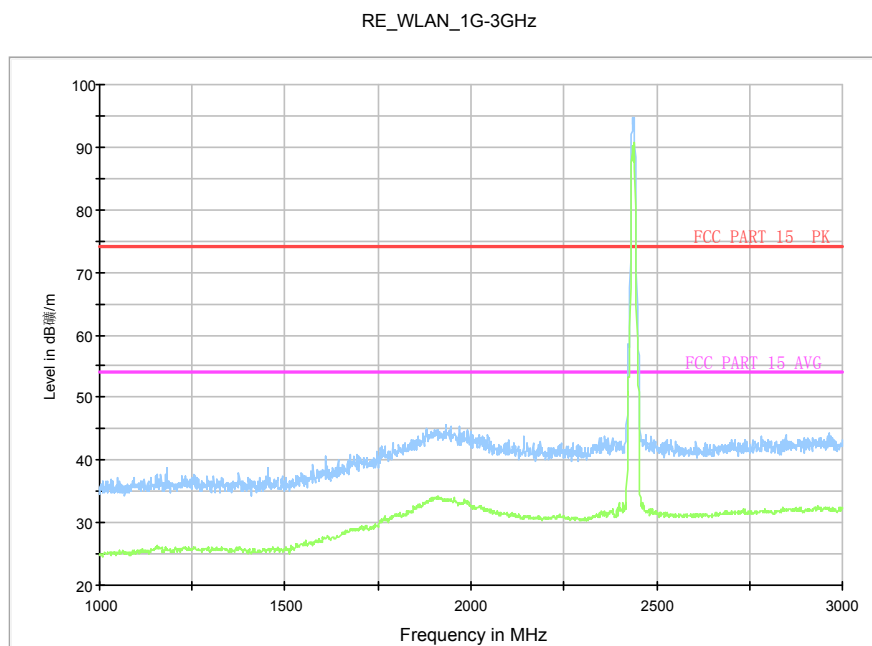

**Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 1 GHz-3 GHz)**

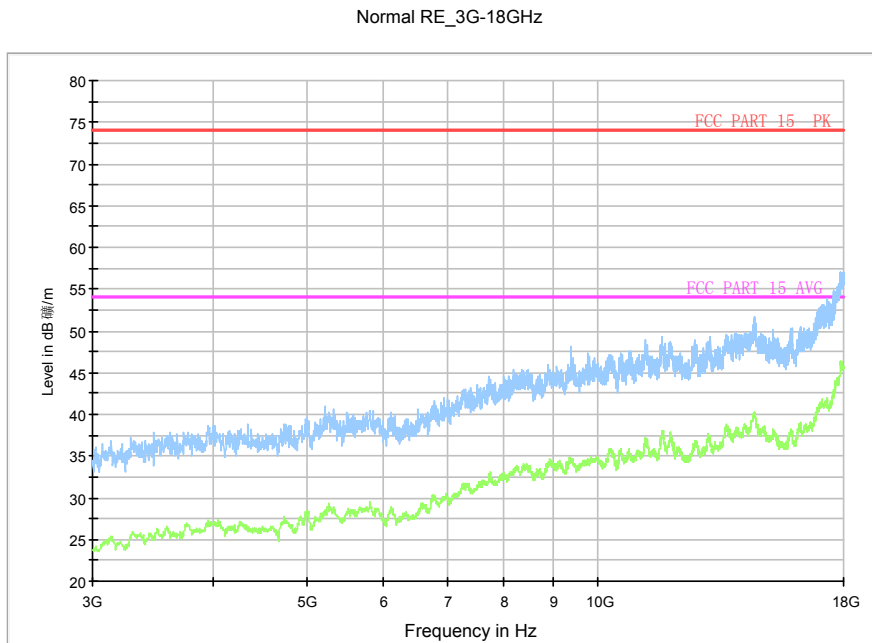


**Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 3 GHz-18 GHz)**

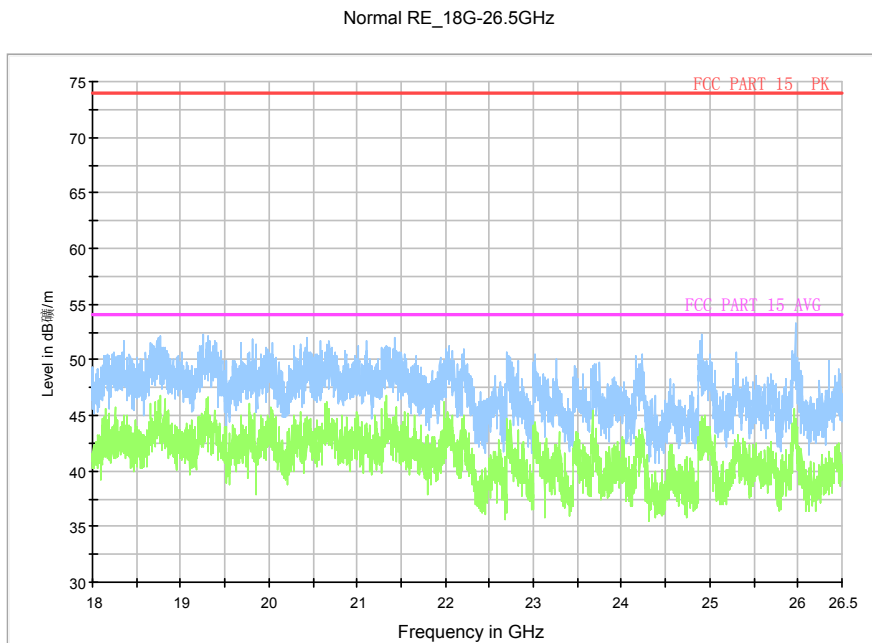


**Fig.A.6.2.8 Transmitter Spurious Emission - Radiated (802.11b, Ch6, 18GHz – 26.5GHz)**




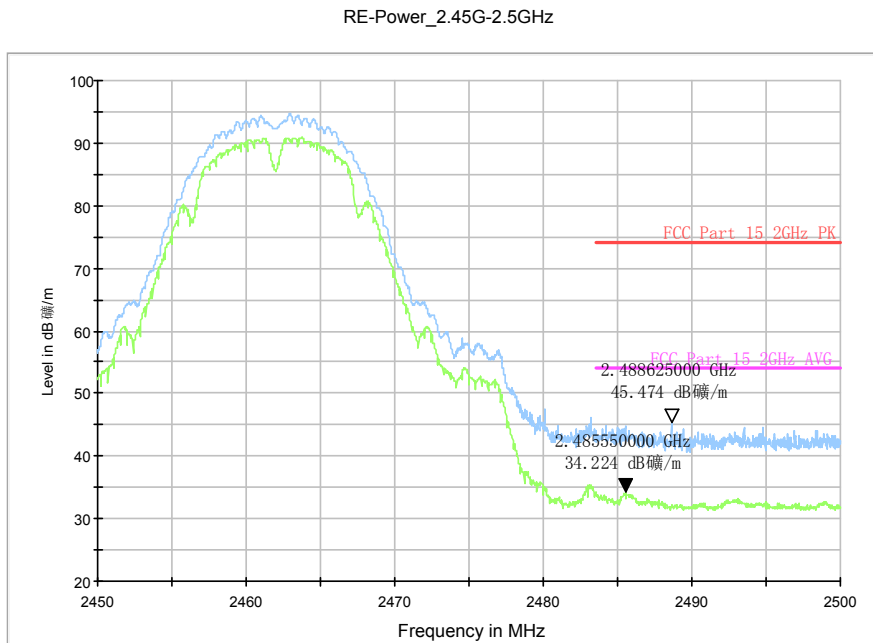


**Fig.A.6.2.9 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz**

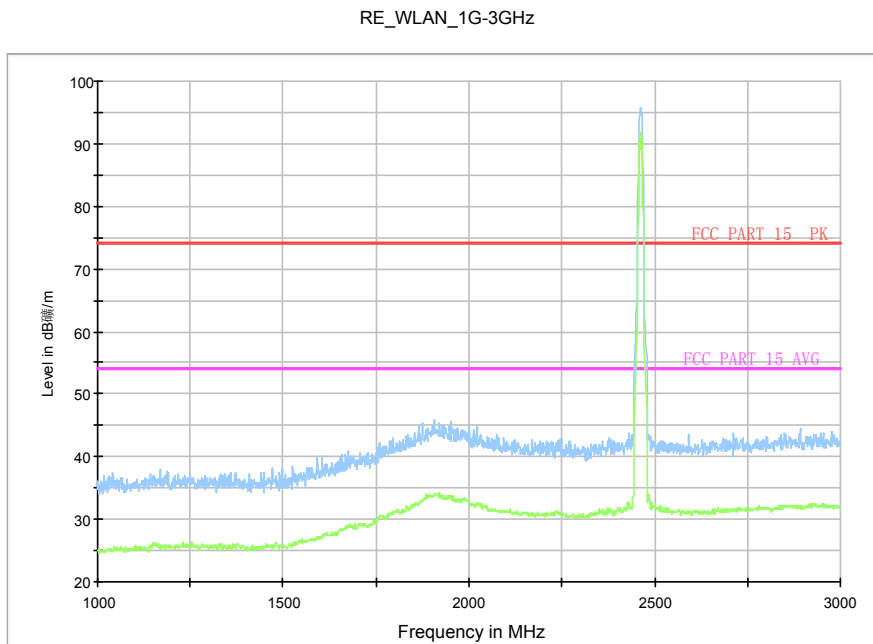

**Fig.A.6.2.10 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 1 GHz-3 GHz)**

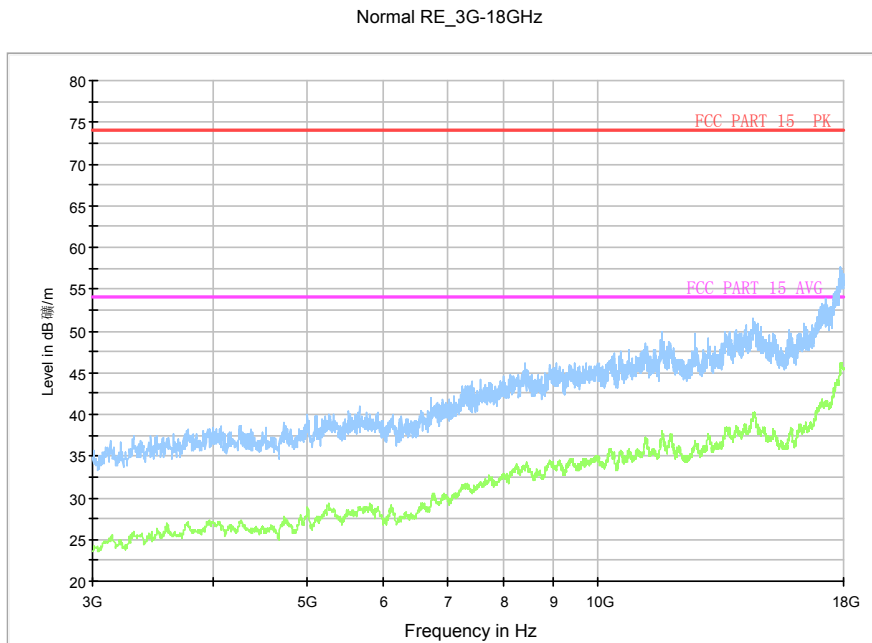

**Fig.A.6.2.11 Transmitter Spurious Emission - Radiated (802.11b, Ch11, 3 GHz-18 GHz)**

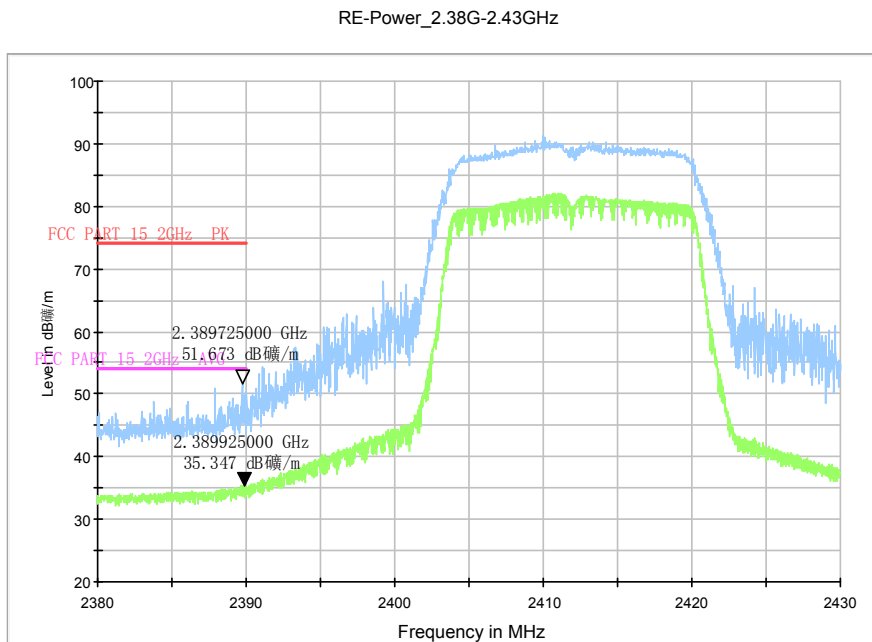

**Fig.A.6.2.12 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.38 GHz - 2.45GHz**

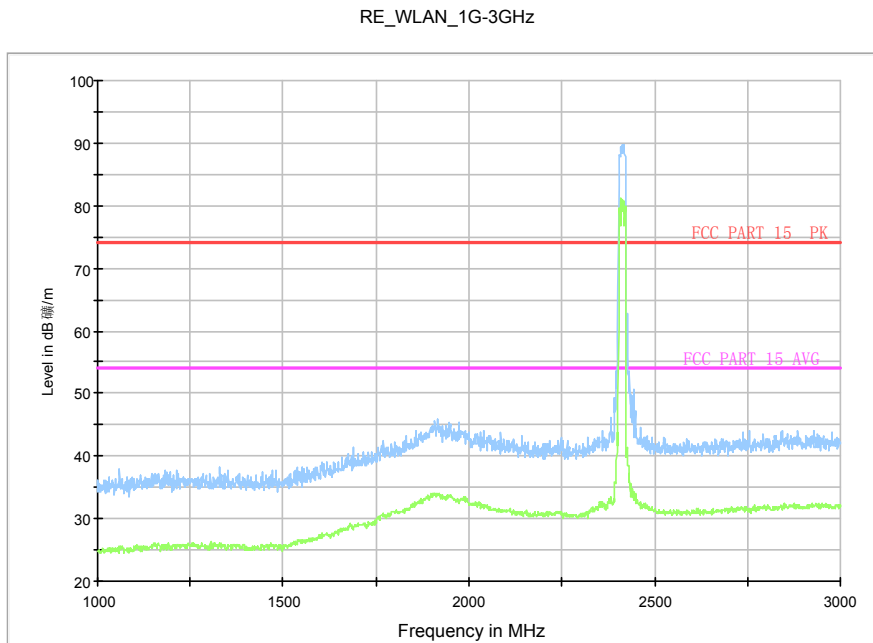


Fig.A.6.2.13 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 1 GHz-3 GHz)


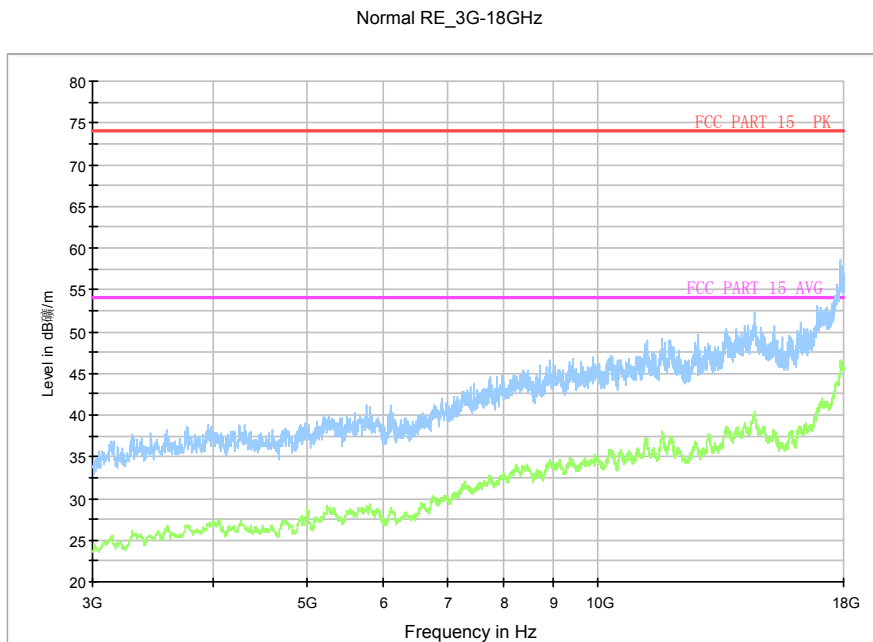



Fig.A.6.2.14 Transmitter Spurious Emission - Radiated (802.11g, Ch1, 3 GHz-18 GHz)

Normal RE\_30M-1GHz\_10m

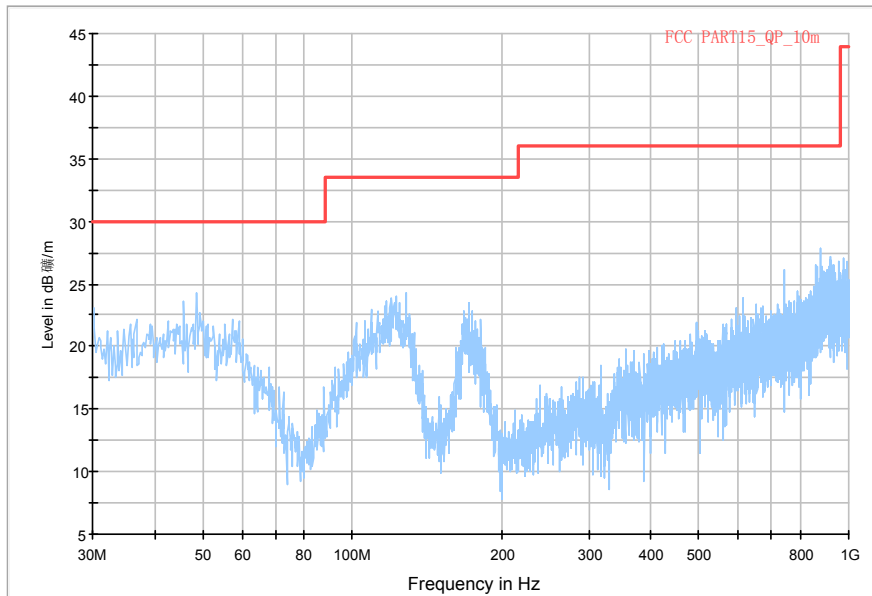


**Fig.A.6.2.15 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 30 MHz-1 GHz)**

RE\_WLAN\_1G-3GHz

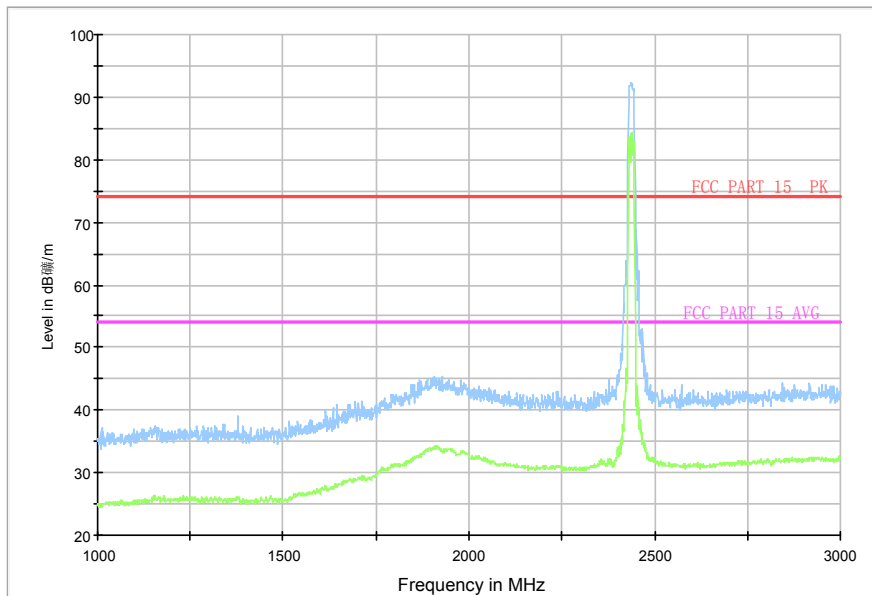


**Fig.A.6.2.16 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 1 GHz-3 GHz)**




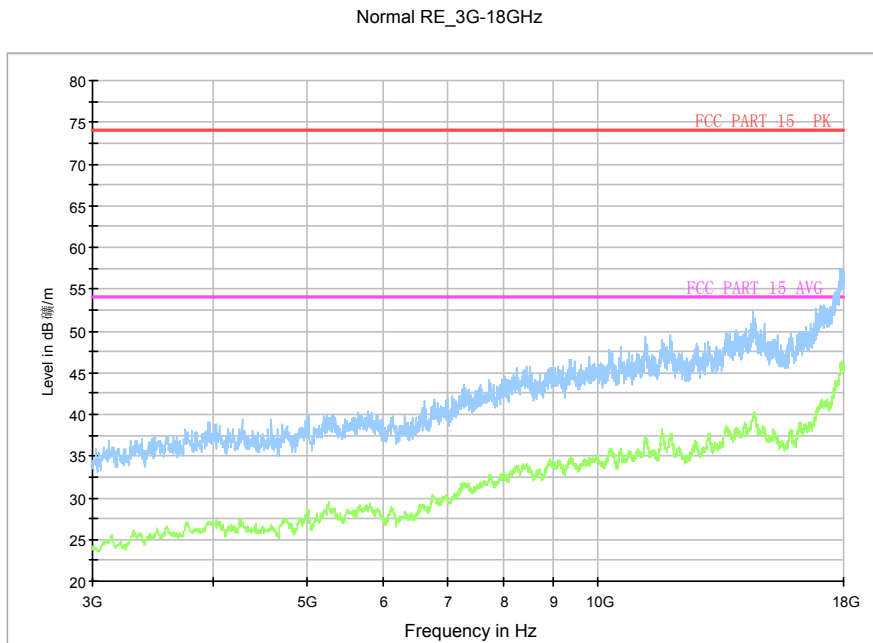


**Fig.A.6.2.17 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 3 GHz-18 GHz)**

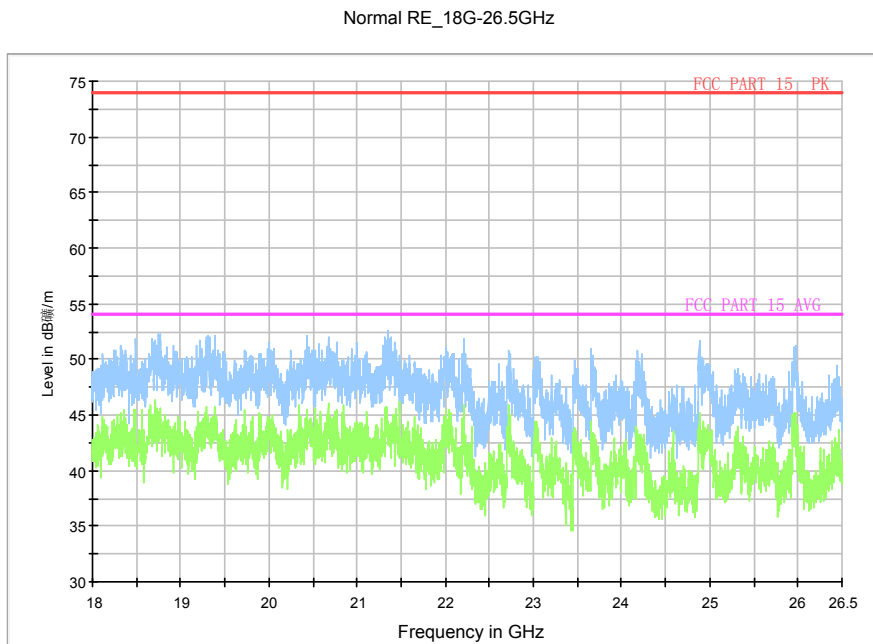


**Fig.A.6.2.18 Transmitter Spurious Emission - Radiated (802.11g, Ch6, 18GHz – 26.5GHz)**

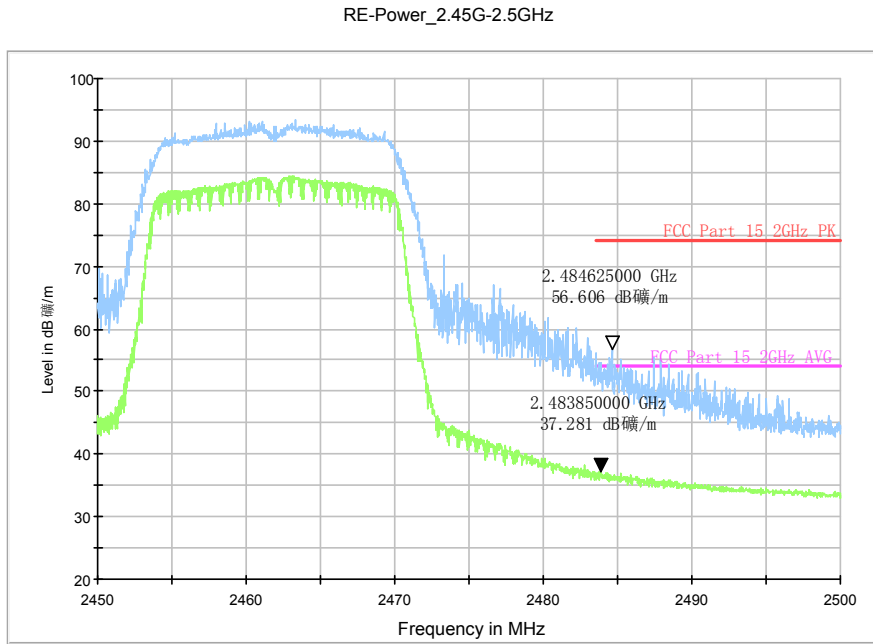


**Fig.A.6.2.19 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**

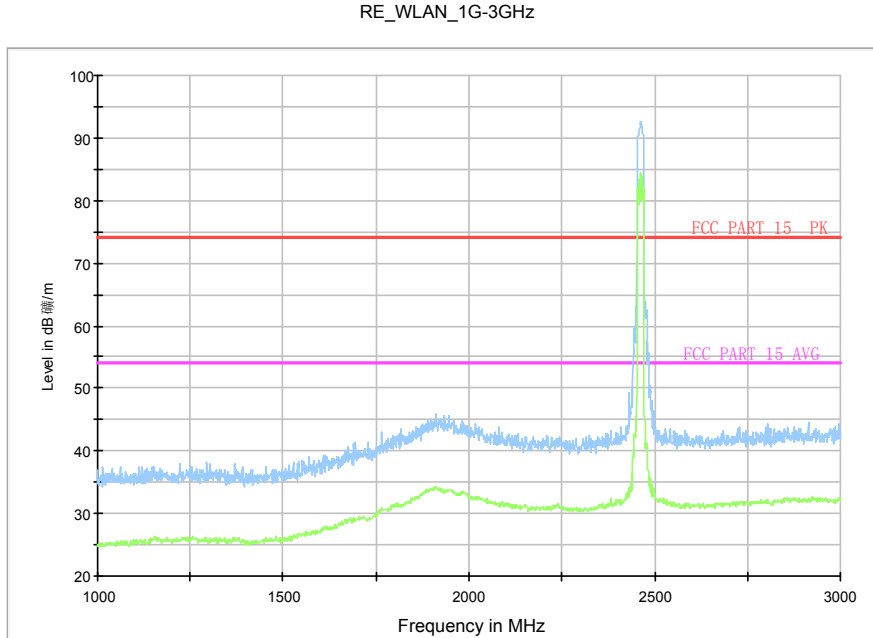


**Fig.A.6.2.20 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 1 GHz-3 GHz)**

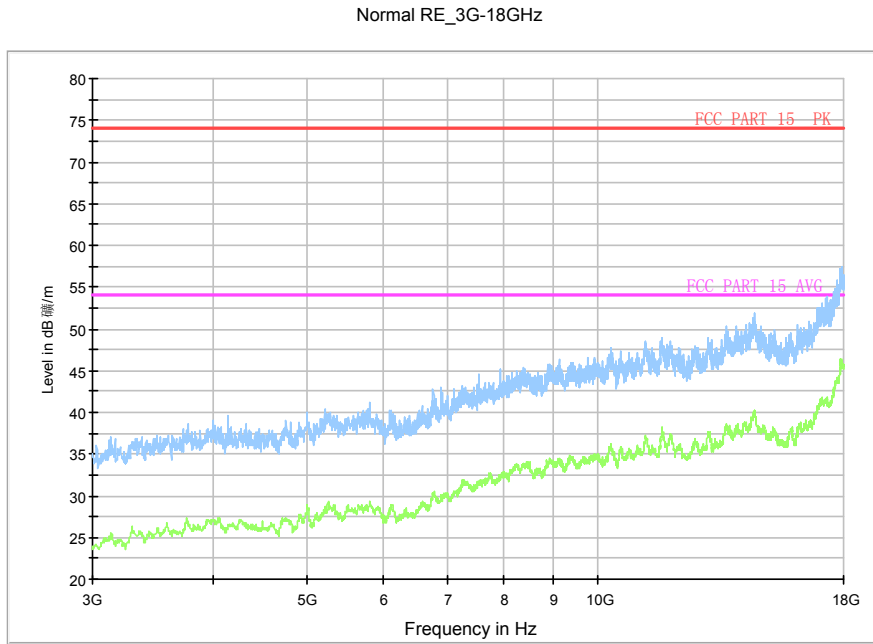


**Fig.A.6.2.21 Transmitter Spurious Emission - Radiated (802.11g, Ch11, 3 GHz-18 GHz)**

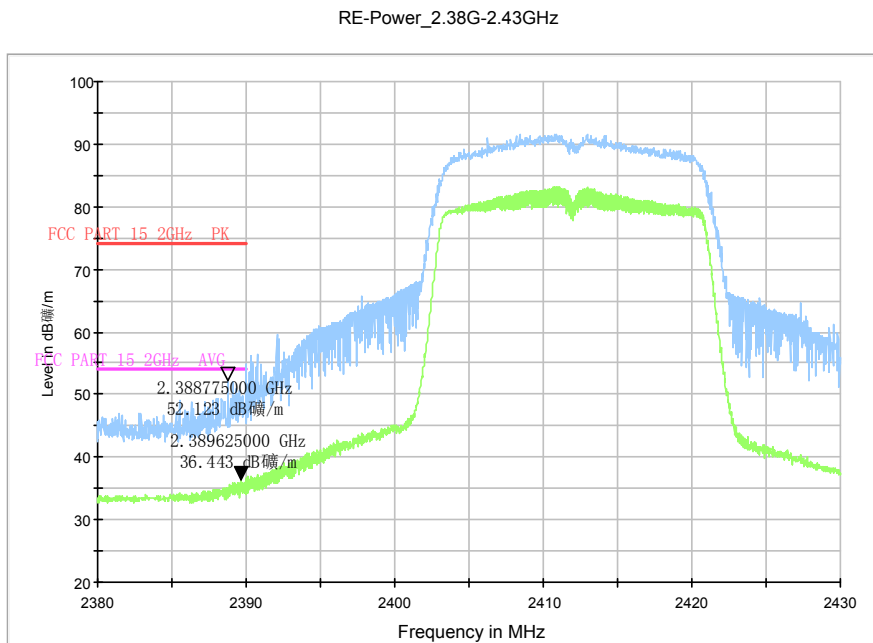

**Fig.A.6.2.22 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.38 GHz - 2.45GHz**

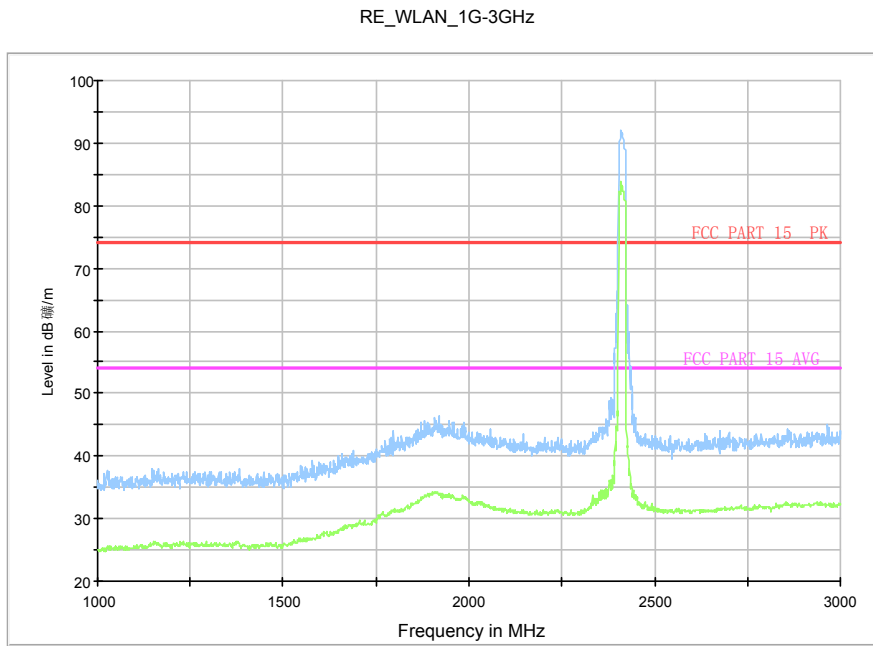


**Fig.A.6.2.23 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 1 GHz-3 GHz)**

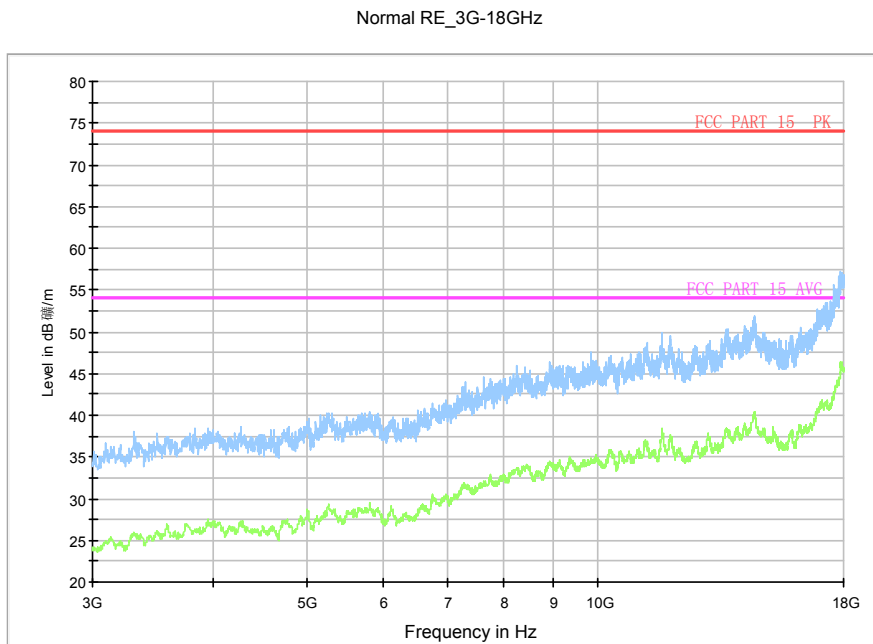


**Fig.A.6.2.24 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch1, 3 GHz-18 GHz)**




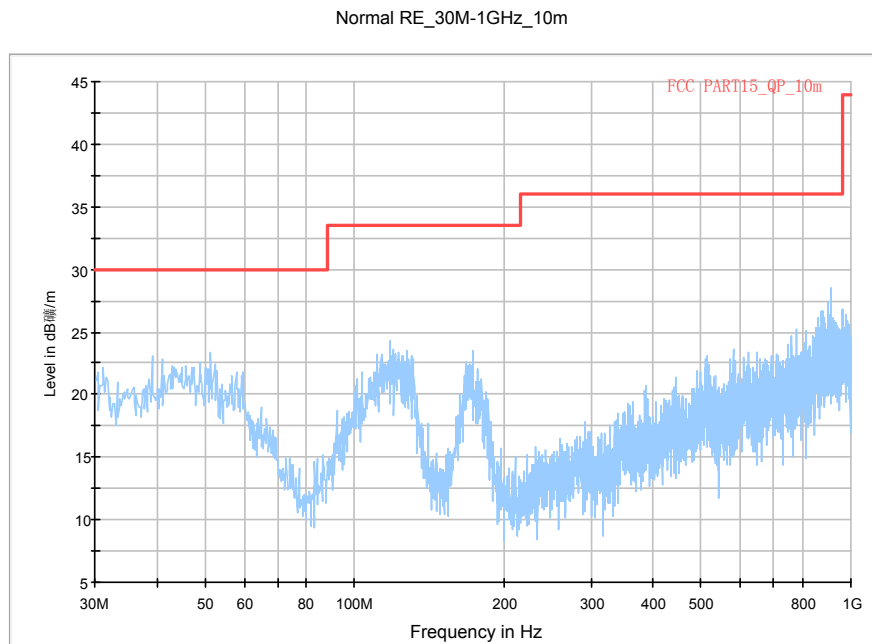


**Fig.A.6.2.25 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 30 MHz-1 GHz)**

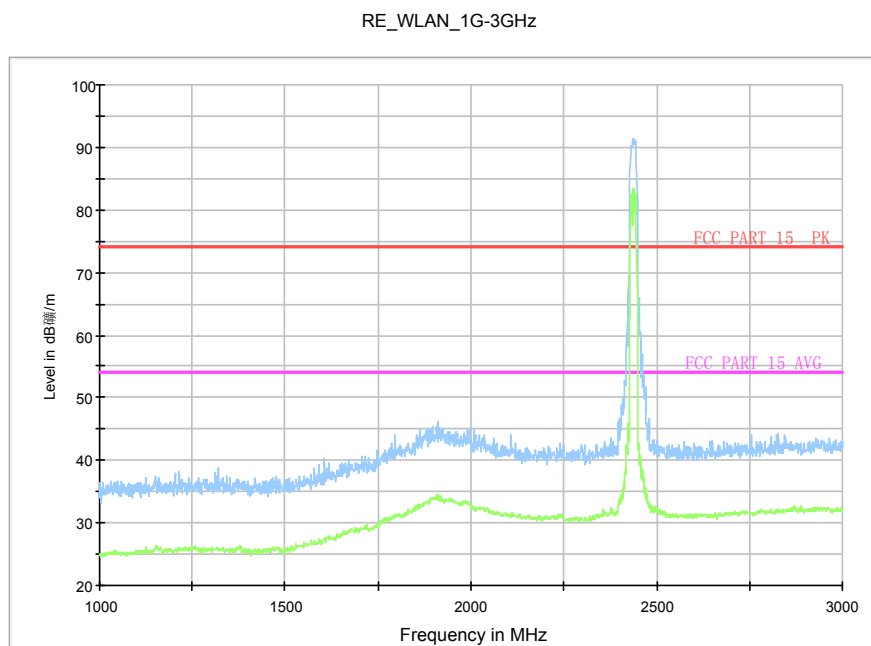


**Fig.A.6.2.26 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 1 GHz-3 GHz)**

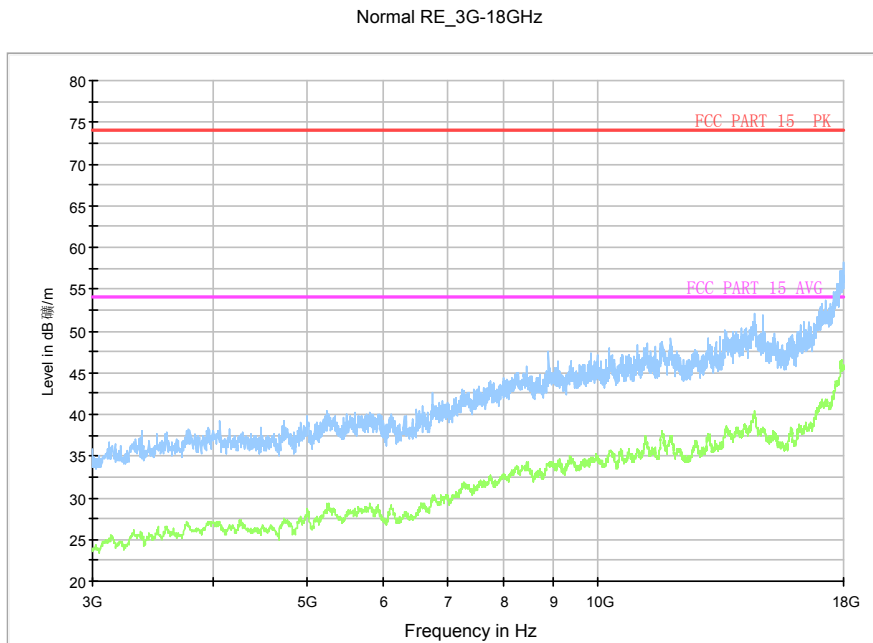


**Fig.A.6.2.27 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 3 GHz-18 GHz)**

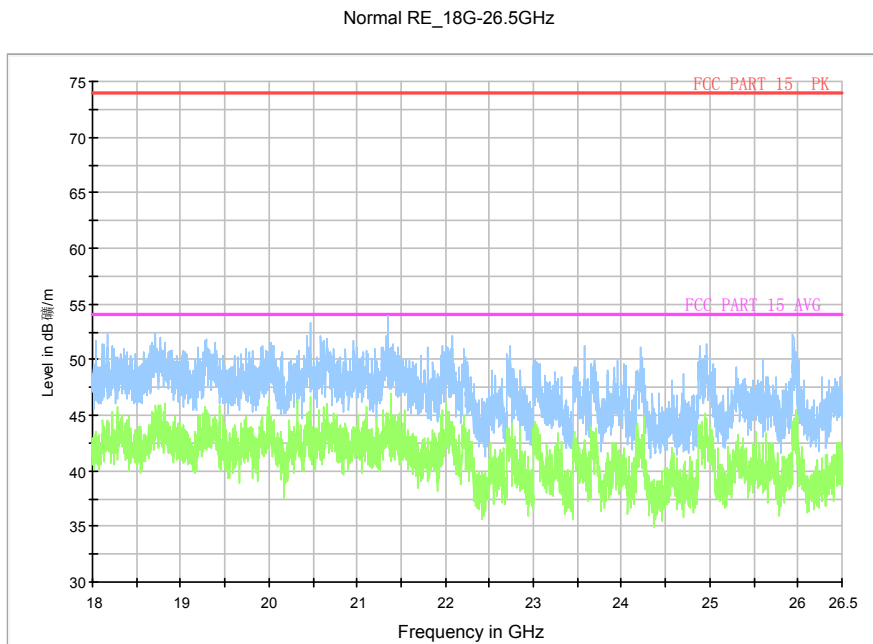


**Fig.A.6.2.28 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch6, 18GHz - 26.5GHz)**

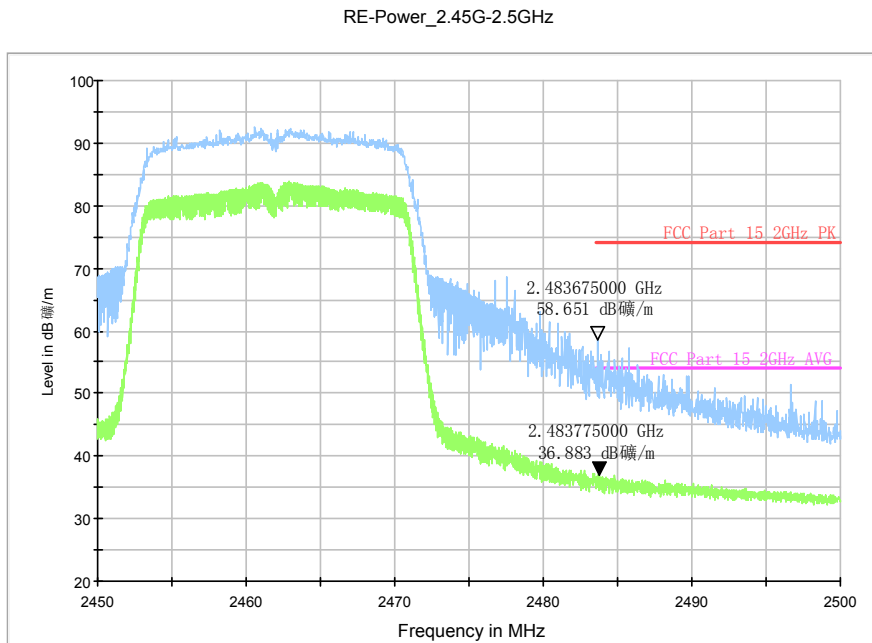


**Fig.A.6.2.29 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz**

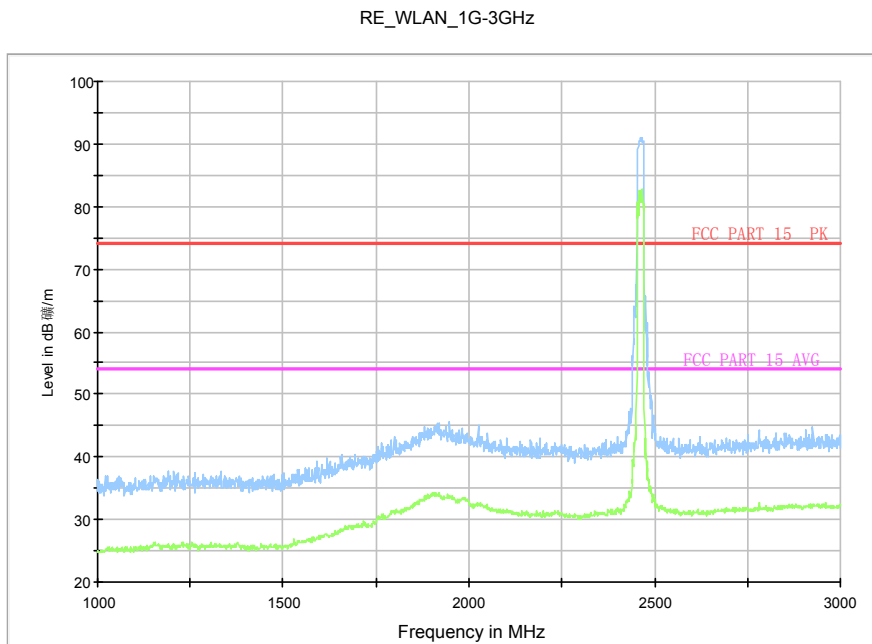

**Fig.A.6.2.30 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 1 GHz-3 GHz)**

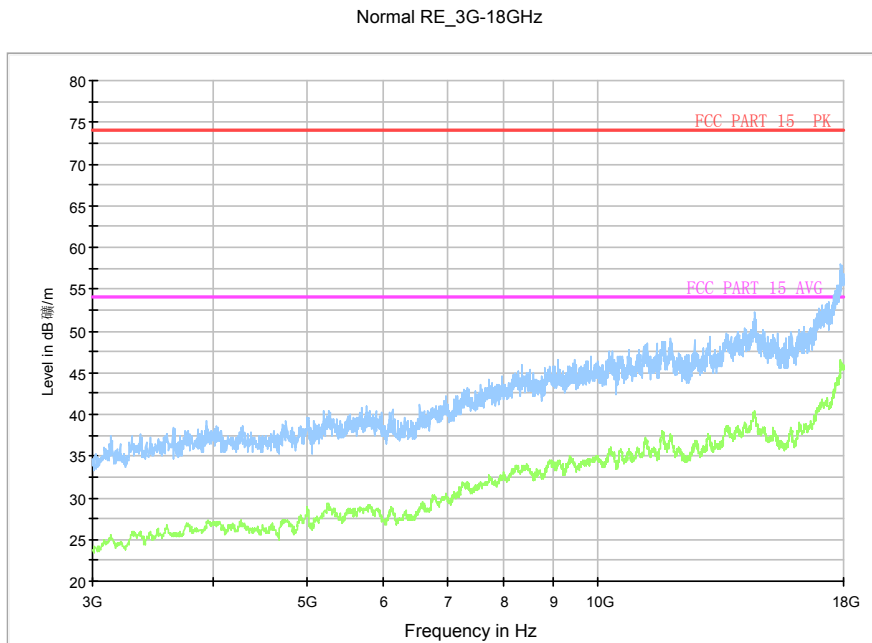


**Fig.A.6.2.31 Transmitter Spurious Emission - Radiated (802.11n-HT20, Ch11, 3 GHz-18 GHz)**

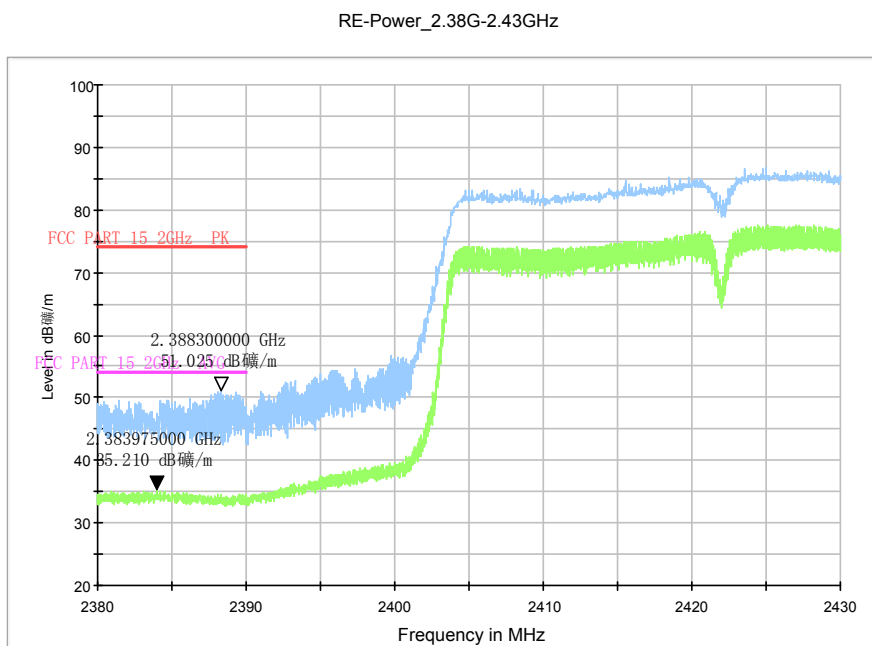


**Fig.A.6.2.32 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.38 GHz - 2.45GHz**



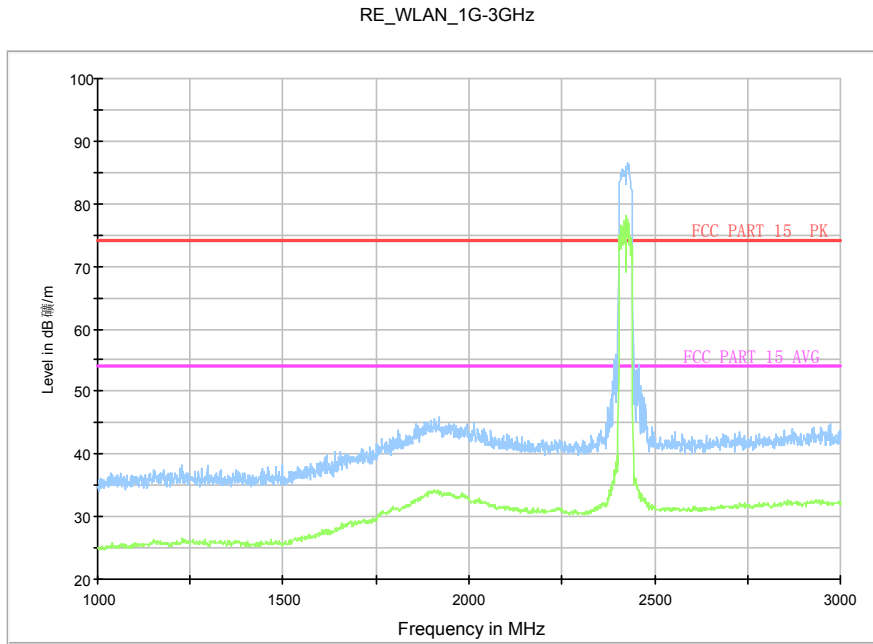


**Fig.A.6.2.33 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 1 GHz-3 GHz)**

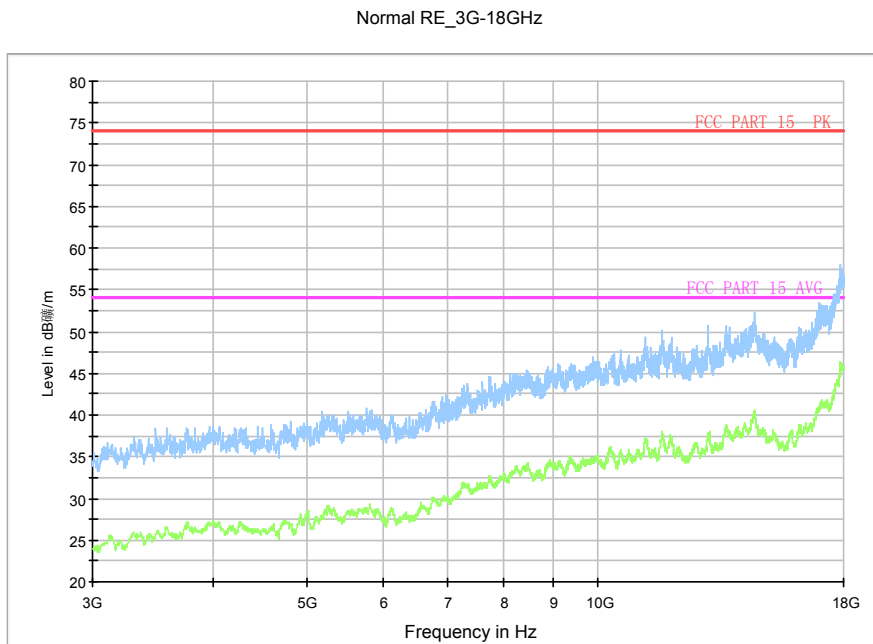


**Fig.A.6.2.34 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch3, 3 GHz-18 GHz)**

Normal RE\_30M-1GHz\_10m

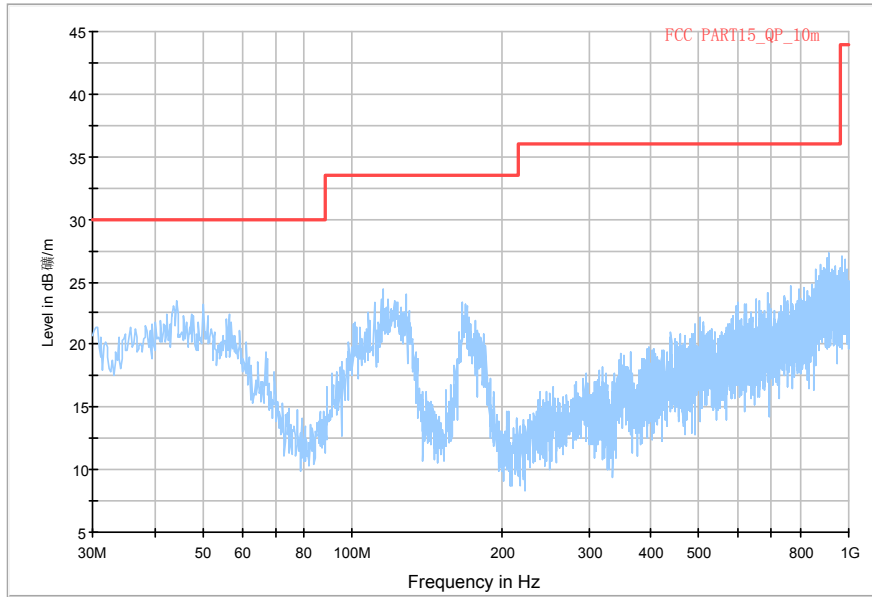


**Fig.A.6.2.35 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 30 MHz-1 GHz)**


RE\_WLAN\_1G-3GHz

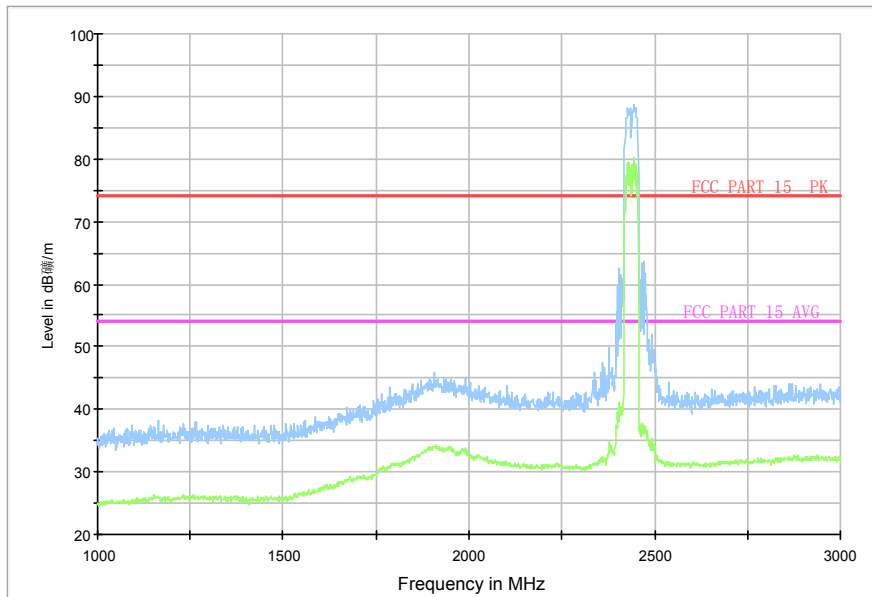


**Fig.A.6.2.36 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 1 GHz-3 GHz)**

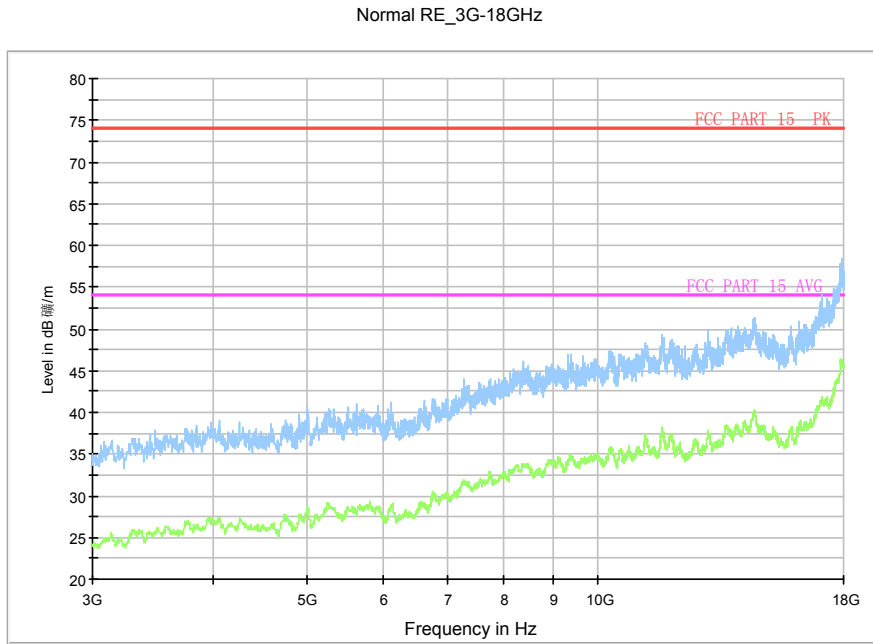


**Fig.A.6.2.37 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 3 GHz-18 GHz)**

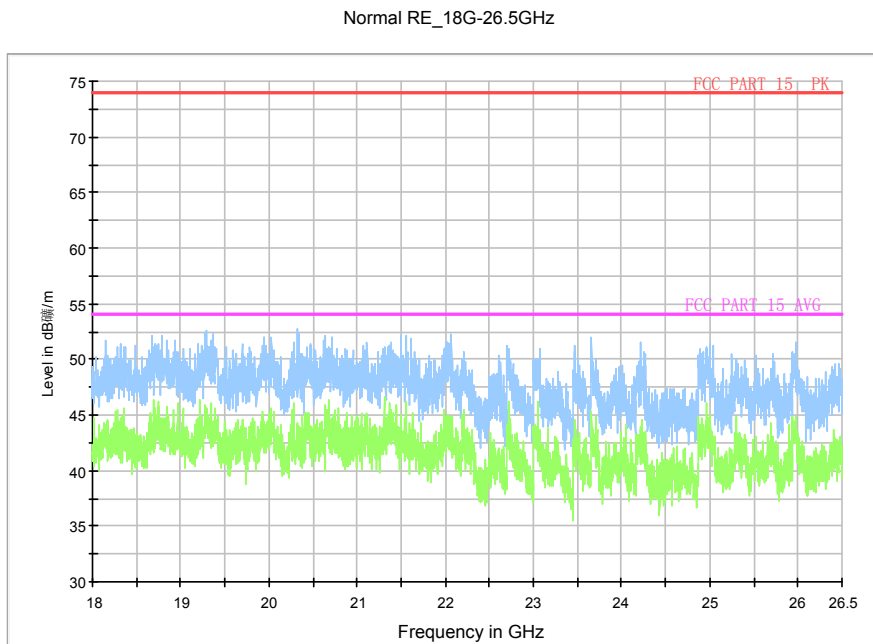

**Fig.A.6.2.38 Transmitter Spurious Emission - Radiated (802.11n-HT40, Ch6, 18GHz – 26.5GHz)**

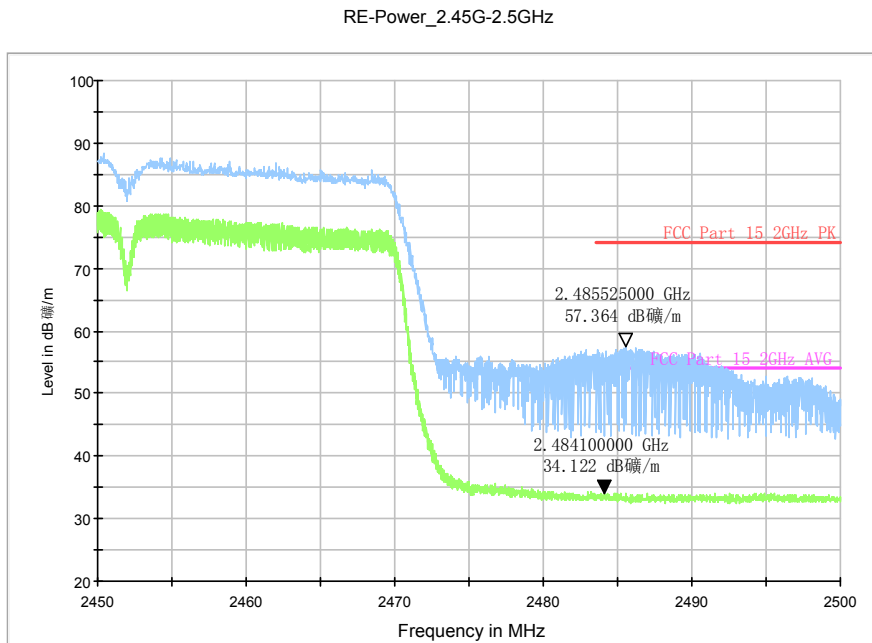


**Fig.A.6.239 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz**

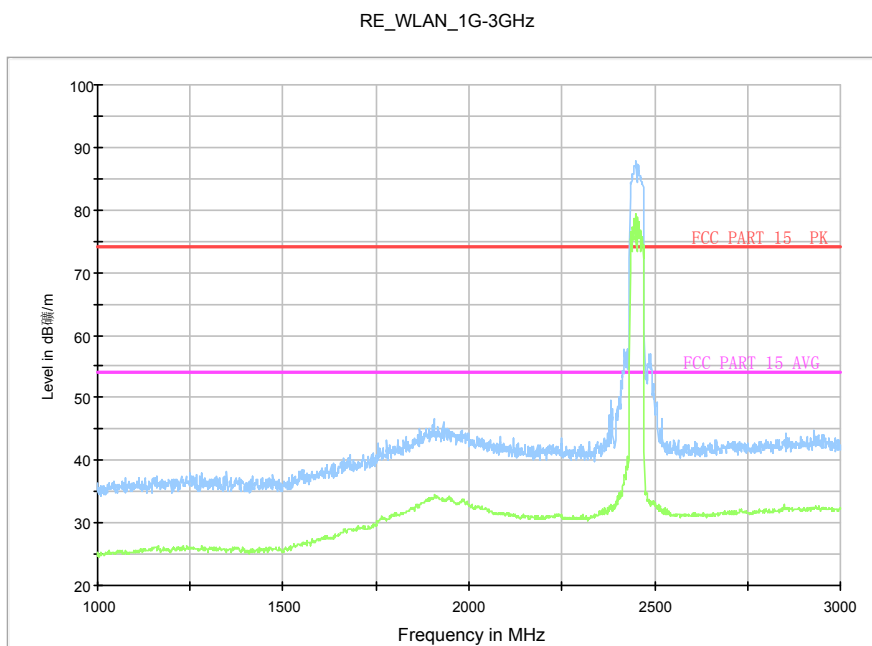

**Fig.A.6.240 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 1 GHz-3 GHz)**

Normal RE\_3G-18GHz

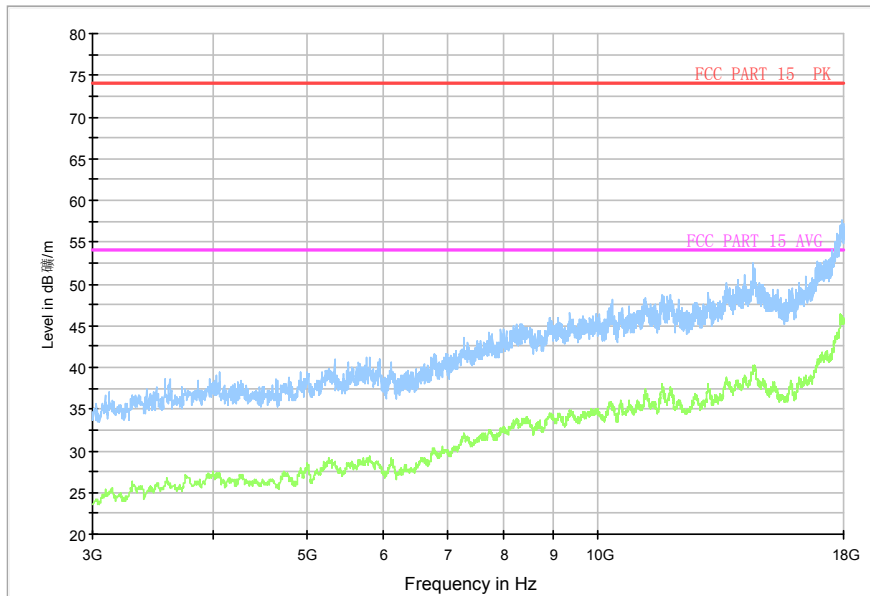

**Fig.A.6.2.41 Transmitter Spurious Emission - Radiated (802.11n-HT40, ch9, 3 GHz-18 GHz)**



### **A.7. AC Power-line Conducted Emission**

**Method of Measurement: See ANSI C63.10-2009-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

**Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)


Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)			Conclusion
		With charger			
		802.11b	Idle		
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	Fig.A.7.3	<b>P</b>
0.5 to 5	56				
5 to 30	60				
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.					

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)			Conclusion
		With charger			
		802.11b	Idle		
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	Fig.A.7.3	<b>P</b>
0.5 to 5	46				
5 to 30	50				
NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.					

**Conclusion: Pass**

**Test graphs as below:**

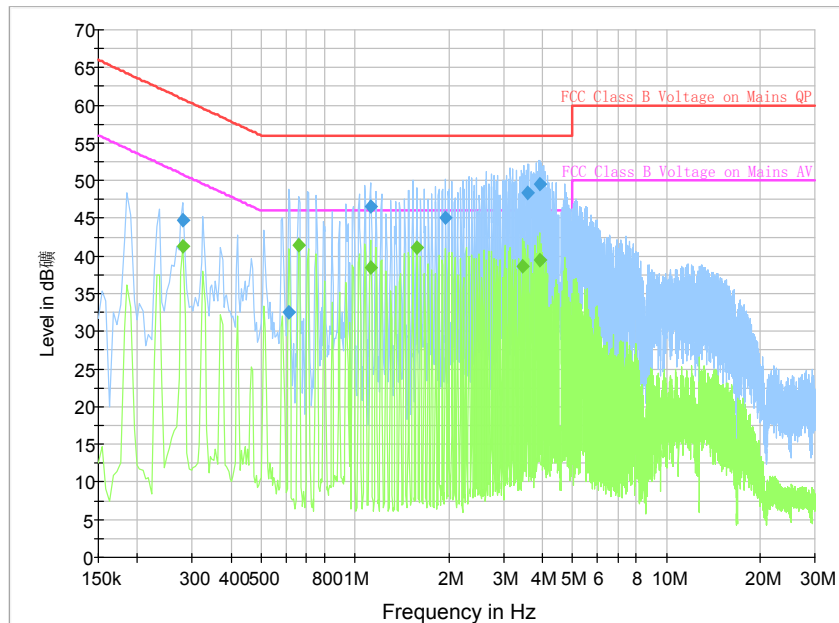

**Fig.A.7.1 AC Powerline Conducted Emission-802.11b**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.280500	44.7	2000.0	9.000	On	N	19.7	16.1	60.8
0.613500	32.5	2000.0	9.000	On	L1	19.8	23.5	56.0
1.122000	46.6	2000.0	9.000	On	L1	19.7	9.4	56.0
1.954500	45.0	2000.0	9.000	On	L1	19.6	11.0	56.0
3.579000	48.4	2000.0	9.000	On	N	19.7	7.6	56.0
3.912000	49.5	2000.0	9.000	On	L1	19.7	6.5	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.280500	41.2	2000.0	9.000	On	N	19.7	9.6	50.8
0.658500	41.5	2000.0	9.000	On	L1	19.8	4.5	46.0
1.122000	38.5	2000.0	9.000	On	L1	19.7	7.5	46.0
1.581000	41.1	2000.0	9.000	On	N	19.7	4.9	46.0
3.444000	38.6	2000.0	9.000	On	L1	19.6	7.4	46.0
3.912000	39.4	2000.0	9.000	On	L1	19.7	6.6	46.0

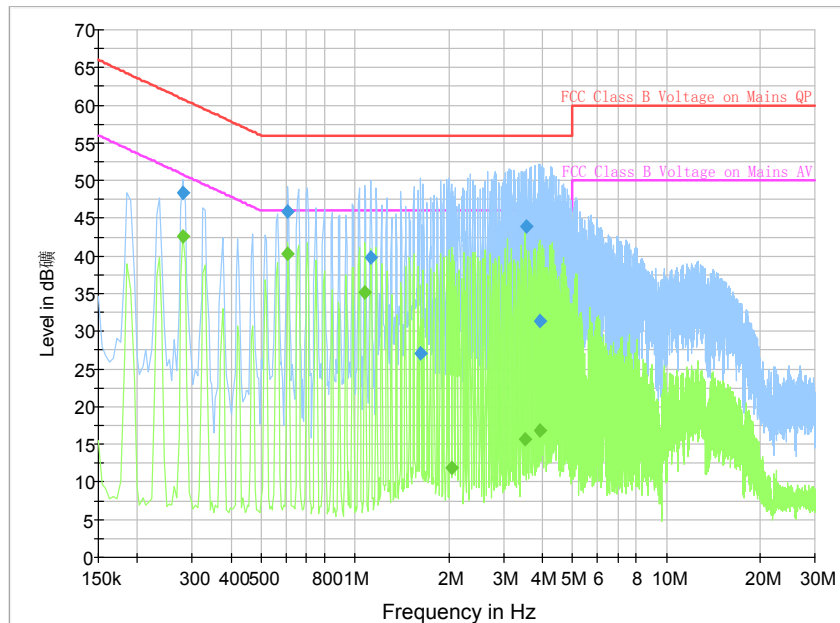

**Fig.A.7.2 AC Powerline Conducted Emission-Idle**


Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.280500	48.4	2000.0	9.000	On	L1	19.7	12.4	60.8
0.609000	45.9	2000.0	9.000	On	L1	19.8	10.1	56.0
1.122000	39.7	2000.0	9.000	On	L1	19.7	16.3	56.0
1.630500	27.1	2000.0	9.000	On	L1	19.7	28.9	56.0
3.565500	44.0	2000.0	9.000	On	L1	19.7	12.0	56.0
3.934500	31.3	2000.0	9.000	On	L1	19.7	24.7	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.280500	42.6	2000.0	9.000	On	L1	19.7	8.2	50.8
0.609000	40.2	2000.0	9.000	On	L1	19.8	5.8	46.0
1.077000	35.2	2000.0	9.000	On	L1	19.7	10.8	46.0
2.035500	11.9	2000.0	9.000	On	N	19.6	34.1	46.0
3.511500	15.7	2000.0	9.000	On	L1	19.6	30.3	46.0
3.934500	16.9	2000.0	9.000	On	L1	19.7	29.1	46.0

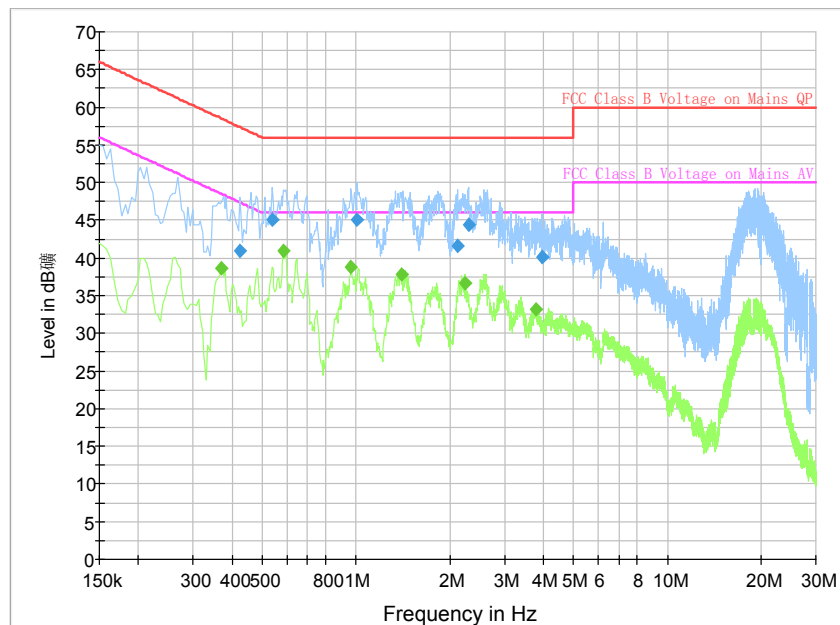

**Fig.A.7.3 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.424500	41.0	2000.0	9.000	On	N	19.8	16.4	57.4
0.537000	45.0	2000.0	9.000	On	L1	19.8	11.0	56.0
1.009500	45.1	2000.0	9.000	On	N	19.7	10.9	56.0
2.121000	41.6	2000.0	9.000	On	N	19.6	14.4	56.0
2.296500	44.4	2000.0	9.000	On	N	19.7	11.6	56.0
3.952500	40.2	2000.0	9.000	On	N	19.7	15.8	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.370500	38.6	2000.0	9.000	On	L1	19.8	9.9	48.5
0.586500	40.9	2000.0	9.000	On	L1	19.8	5.1	46.0
0.964500	38.8	2000.0	9.000	On	L1	19.7	7.2	46.0
1.396500	37.8	2000.0	9.000	On	L1	19.7	8.2	46.0
2.247000	36.7	2000.0	9.000	On	L1	19.6	9.3	46.0
3.795000	33.1	2000.0	9.000	On	L1	19.7	12.9	46.0



## ANNEX B: Accreditation Certificate

 
<b>China National Accreditation Service for Conformity Assessment</b>
<b>LABORATORY ACCREDITATION CERTIFICATE</b>
<b>(No. CNAS L0570 )</b>
<b>Telecommunication Technology Labs,</b> <b>Academy of Telecommunication Research, MIIT</b> <u>No.52, Huayuan North Road, Haidian District, Beijing, China</u> <u>No.51, Xueyuan Road, Haidian District, Beijing, China</u>
<i>to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.</i> <i>The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.</i>
Date of Issue: 2014-10-29 Date of Expiry: 2017-06-19 Date of Initial Accreditation: 1998-07-03

Signed on behalf of China National Accreditation Service for Conformity Assessment
<small>China National Accreditation Service for Conformity Assessment (CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation schemes for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA) and Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).</small>
No.CNAS AL 2 <span style="float: right;">0011149</span>

\*\*\*END OF REPORT\*\*\*