

MEASUREMENT REPORT of *X-Micro WLAN 11g PCMCIA Card (108Mbps)*

Applicant : X-Micro Technology Corp.
EUT : X-Micro WLAN 11g PCMCIA Card (108Mbps)
Model : XWL-11GPAR
FCC ID : RAFXWL-11GPAR

Tested by :

Training Research Co., Ltd.

TEL : 886-2-26935155 FAX : 886-2-26934440

No. 255, Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C.

CERTIFICATION

We here by verify that:

The test data, data evaluation, test procedures and equipment configurations shown in this report were made mainly in accordance with the procedures given in ANSI C63.4 (2003) as a reference. All test were conducted by **Training Research Co., Ltd.**, 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Also, we attest to the accuracy of each.

We further submit that the energy emitted by the sample EUT tested as described in the report is **in compliance with** the technical requirements set forth in the FCC Rules Part 15 Subpart B (Declaration of Conformity) and C Section 15.247.

Applicant : X-Micro Technology Corp.

Applicant address : 12F-3, No. 186, Jian Yi Road, Chung Ho City, Taipei Hsien, Taiwan

FCC ID : RAFXWL-11GPAR

Report No. : C5115060798

Test Date : April 18, 2005

Prepared by:



Jack Tsai

Approved by:



Frank Tsai

Conditions of issue :

- (1) This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.
- (2) This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.
- (3) This test report, measurements made by TRC are traceable to the NIST only Conducted and Radiated Method.



Federal Communications Commission

Declaration of Conformity

for the following equipment:

Product name : X-Micro WLAN 11g PCI Card (108Mbps)
 Trade name : X-Micro
 Model name : XWL-11GCAR

Is herewith confirmed and found to comply with the requirements of CFR 47 part15 Subpart B - Unintentional Radiators regulation. The results of electromagnetic mission evaluation are shown in the report number : C5115060798

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received,
including interference that may cause undesired operation

<i>Manufacturer</i>	<i>USA local representative</i>
Company name: CAMEO COMMUNICATIONS, INC.	To be determined
Computer address: 6F, No.22, Chung Shin Rd., Hsi-Chih, Taipei 221, Taiwan	
ZIP / Postal code 221	
Contact person: Jason Chang	
Title: Wireless Comm. R&D Dept Manager	
Internet e-mail address: jason_chang@mail.cameo.com.tw	
Tel / Fax: 886-2-26499800 / 886-2-26499984	

Tables of Contents

I. GENERAL	6
1.1 Introduction	6
1.2 Description of EUT	6
1.3 Test method	6
1.4 Description of Support Equipment	7
1.5 Configuration of System Under Test	9
1.6 Verify the Frequency and Channel	11
1.7 Test Procedure	12
1.8 Location of the Test Site	12
1.9 General Test Condition	12
II. Section 15.101(a) : Equipment Authorization of Unintentional Radiators	13
III. Section 15.203 : Antenna Requirement.....	14
IV. Section 15.207 : Power Line Conducted Emissions for AC Powered Units	15
4.1 Test Condition & Setup	15
4.2 List of Test Instruments	16
4.3 Test Result of Conducted Emissions	17
Standby mode	17
IEEE 802.11b	18
IEEE 802.11g	19
V. Section 15.247(a) : Technical Description of the EUT	21
VI. Section 15.247(a)(2) : Bandwidth for Direct Sequence System	22
6.1 Test Condition & Setup	22
6.2 Test Instruments Configuration	22
6.3 List of Test Instruments	22
6.4 Test Result of Bandwidth	22
Channel 01	23
Channel 06	24
Channel 11	25

VII. Section 15.247(b) : Power Output	26
7.1 Test Condition & Setup	26
7.2 List of Test Instruments	26
7.3 Test Result	26
VIII. Section 15.247(c) : Spurious Emissions (Radiated)	27
8.1 Test Condition & Setup	27
8.2 List of Test Instruments	29
8.3 Test Result of Spurious Radiated Emissions	30
Standby mode	30
IEEE 802.11b, CH01	32
IEEE 802.11b, CH06	34
IEEE 802.11b, CH11	36
IEEE 802.11g, CH01	38
IEEE 802.11g, CH06	40
IEEE 802.11g, CH11	42
8.4 Test Result of Bandedge	44
IEEE 802.11b	46
IEEE 802.11g	47
IX. Section 15.247(d) : Power Spectral Density	49
9.1 Test Condition & Setup	49
9.2 Test Instruments Configuration	49
9.3 List of Test Instruments	49
9.4 Test Result of Power Spectral Density	49
Channel 01	50
Channel 06	51
Channel 11	52

I . GENERAL

1.1 Introduction

The following measurement report is submitted on behalf of applicant in support that the certification in accordance with Part 2 Subpart J and Part 15 Subpart A, B and C of the Commission's Rules and Regulations.

1.2 Description of EUT

Product Name	:	X-Micro WLAN 11g PCMCIA Card (108Mbps)
Model Name	:	XWL-11GPAR
FCC ID	:	RAFXWL-11GPAR
Frequency Range	:	2.412 GHz ~ 2.462GHz
Support Channel	:	11 Channels
Modulation Skill	:	DBPSK, DQPSK, CCK, OFDM
Power Type	:	Powered by PCMCIA interface of client's device

1.3 Test method

1. Insert the EUT into the PCMCIA bus of the notebook computer.
2. Using the notebook computer and software provided by the manufacturer to control EUT. The software is operated under the Windows to control the EUT in the mode of continuous transmission; the test is performed under the specific conditions.
3. Set different channel and data rate being tested and repeat the procedures above.
 - (a) Radiated for Intentional test:
making EUT to the mode of continuous transmission
 - (b) Conducted and Radiated for Unintentional test:
making EUT to the linking (RX/TX) mode with far support equipments

1.4 Description of Support Equipment


In order to construct the minimum testing, following equipment were used as the support units.

Notebook	:	IBM Think Pad X20
Model No.	:	2662-11T
Serial No.	:	FX-1192200/09
FCC ID	:	N/A, DoC Approved
BSMI	:	3892B565
Adaptor	:	IBM
Model No.	:	PA2450U
Serial No.	:	02K6654
FCC ID	:	N/A, DoC Approved
Power type	:	I/P: 100 ~ 240vac, 50 ~ 60 Hz, 0.5A ~ 1.2A; O/P: 16Vdc, 4.5A
Power cord	:	Non-shielded, 1.80m length, Plastic, with ferrite core
Fax/Modem	:	Aceex
Model No.	:	DM-1414
Serial No.	:	9010582
FCC ID	:	IFAXDM1414
Power type	:	Switching
Power Cord	:	Non-shielded, 1.90m length, Plastic hoods, and no ferrite bead
Data Cable	:	RS-232→Shielded, 1.30m length, Metal hoods , No bead RJ-11Cx2→Non-shielded, 7' length, Plastic hoods, No bead
Printer	:	EPSON
Model No.	:	B241A
Serial No.	:	FAPY155090
FCC ID	:	N/A, DoC Approved
BSMI	:	R33126
Power type	:	Switching adaptor
Power cord	:	Non-shielded, 198cm length, No ferrite core
Data cable	:	Shielded, 1.50m length, No ferrite core

USB Gamepad	: Rockfire
Model No.	: QF-337uv
Serial No.	: 10600545, KR91379759
FCC ID	: None (CE approval)
BSMI	: 3862A574
Power type	: By computer
Data Cable	: Shielded, 1.81m length, Plastic, with ferrite core
Mouse	: HP
Model No.	: M-S34
Serial No.	: LZB90910462
FCC ID	: DZL211029
BSMI	: 4862A011
Power type	: By PC
Power cord	: Non-shielded, 1.88m length, No ferrite core
Notebook	: TWINHEAD
Model No.	: N222S8
Serial No.	: SY3261000988
FCC ID	: N/A, DoC Approved
BSMI	: 71001018
Adaptor	: LISHIN INTERNATIONAL ENTERPRISE CORP.
Model No.	: LSE9802A2060
Serial No.	: A20231065818
BSMI	: 3882B381
Power type	: I/P: 100 ~ 240Vac, 50/ 60 Hz, 1.5A ; O/P: 20Vdc, 3A 60W Max.
Power cord	: Non-shielded, 180cm length, No ferrite core (between adaptor and AC source) Non-shielded, 150cm length, with ferrite core (between NB and adaptor)
WLAN Card	: Gemtek Technology Co., Ltd.
Model No.	: C911003
FCC ID	: MXF-C911003

1.5 Configuration of System Under Test


1.5.1 Conducted Test

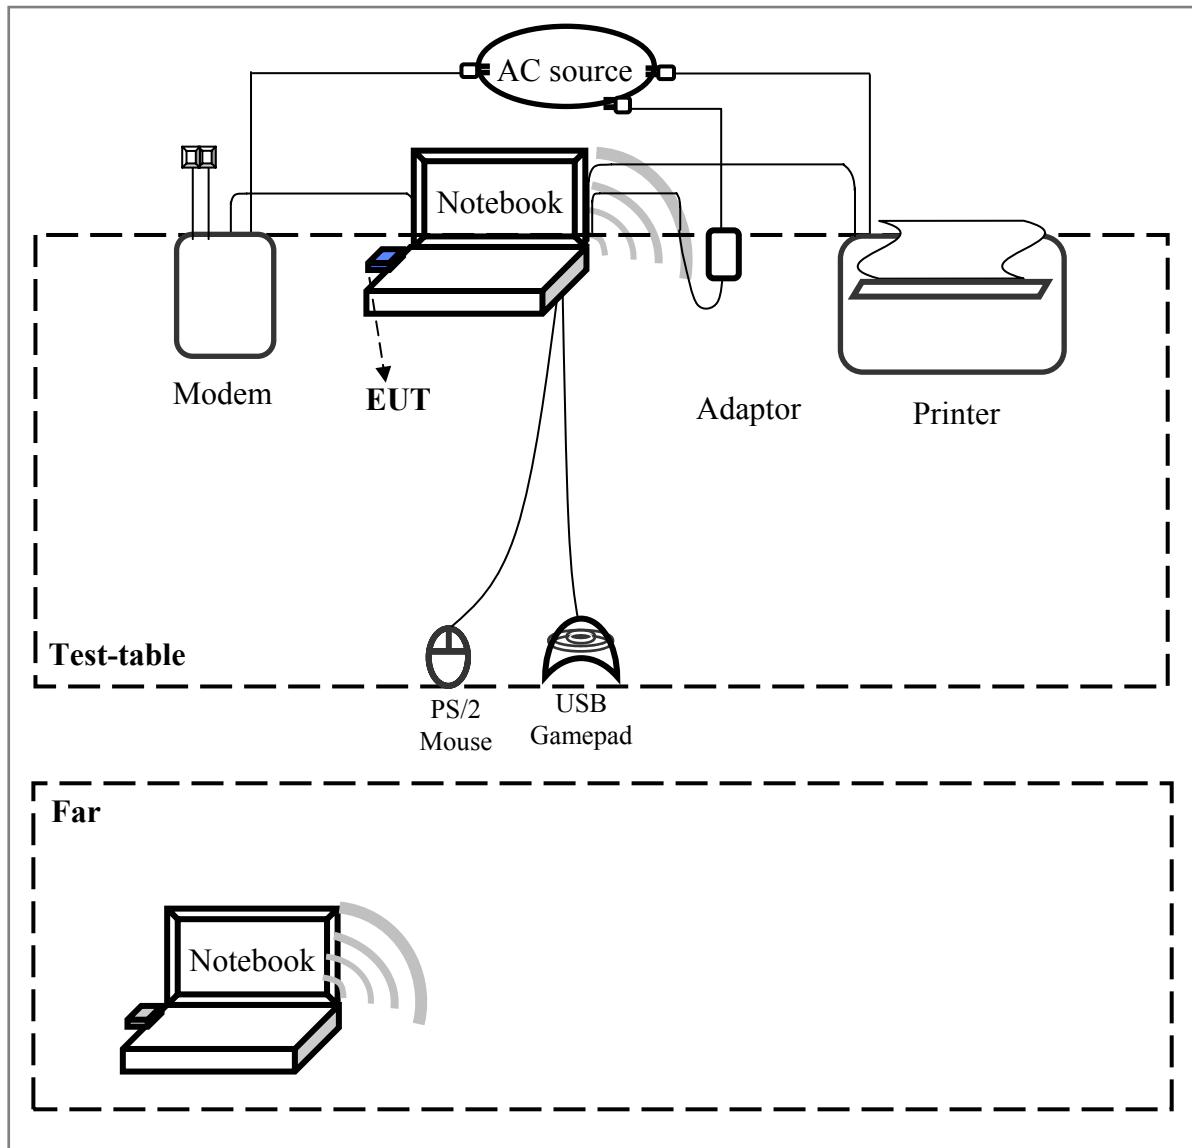

Connections of Computer:

- *Parallel Port --- a printer
- *Serial Port --- an external modem
- *PS/2 Port --- a P/2 mouse
- *USB Port --- a USB gamepad
- *PCMCIA Port --- EUT

1.5.2 Radiated Test

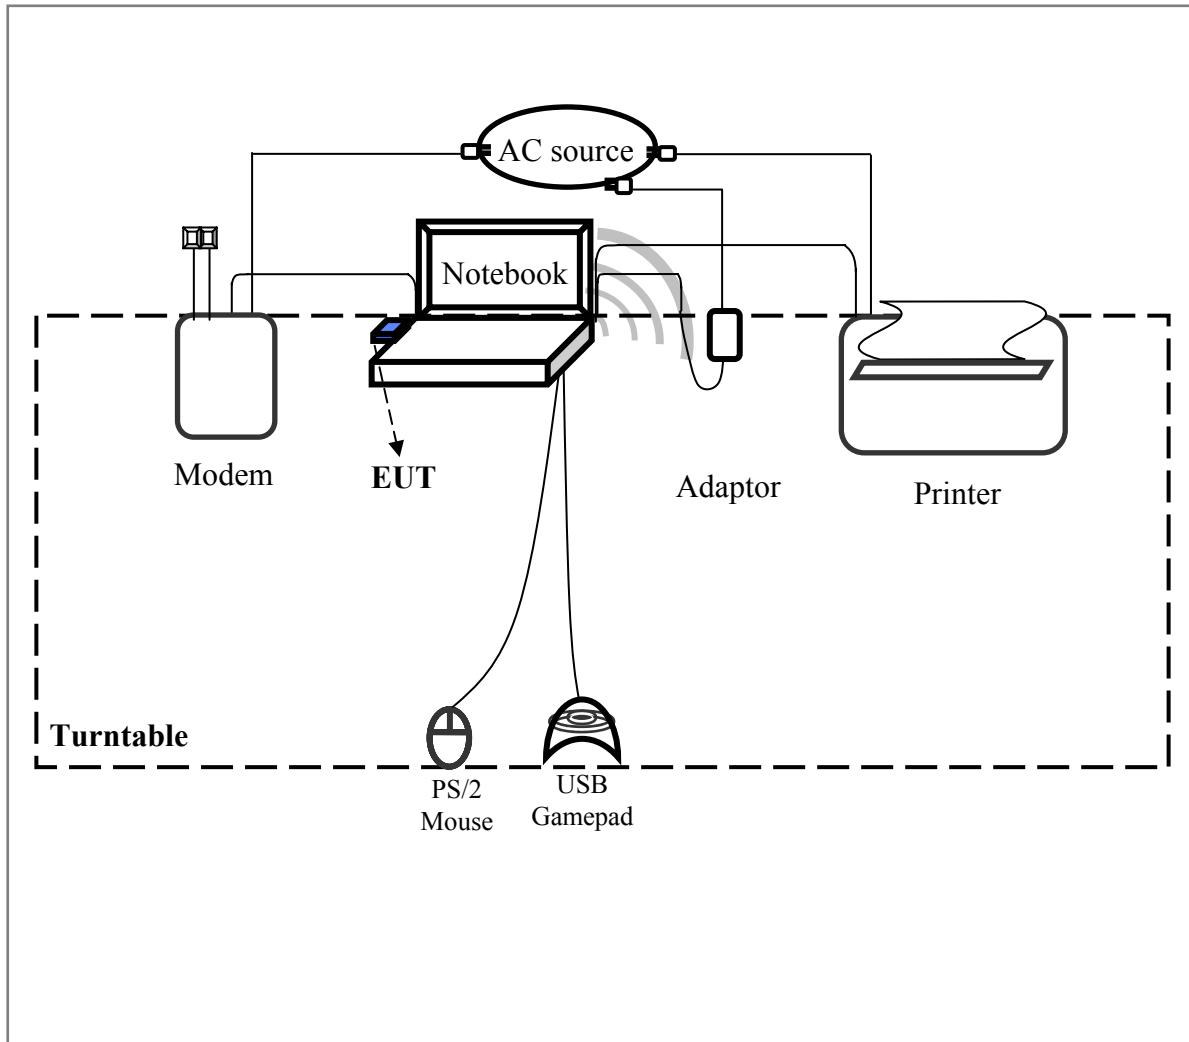

The tests below are carried with the EUT transmitter set at high power in TDD mode. The EUT is forced to select of output power level and channel number by notebook computer.

The setting up procedure was recorded in 1.3 test method.

1.6 Verify the Frequency and Channel

Channel	Frequency (GHz)
1	2.412
2	2.417
3	2.422
4	2.427
5	2.432
6	2.437
7	2.442
8	2.447
9	2.452
10	2.457
11	2.462

Note:

1. This is for confirming that all frequencies are in 2.412GHz to 2.462GHz.
2. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz.
(The locations of these frequencies one near the top, one near the middle and one near the bottom.)
3. After test, the EUT operating frequencies are in 2.412GHz to 2.462GHz. So all the items as followed in testing report are need to test these three frequencies:
Top: Channel – 1; Middle: Channel – 6; Bottom: Channel – 11.

1.7 Test Procedure

All measurements contained in this report were performed mainly according to the techniques described in ANSI C63.4 (2003) and the pre-setup was written on 1.3 test method, the detail setup was written on each test item.

1.8 Location of the Test Site

The radiated emissions measurements required by the rules were performed on the **three-meter, Anechoic Chamber (FCC Registration Number: 93906)** maintained by *Training Research Co., Ltd.* 1F, No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. Complete description and measurement data have been placed on file with the commission. The conducted power line emissions tests and other test items were performed in a anechoic chamber also located at Training Research Co., Ltd.

No. 255 Nanyang Street, Shijr, Taipei Hsien 221, Taiwan, R.O.C. *Training Research Co., Ltd.* is listed by the FCC as a facility available to do measurement work for others on a contract basis.

1.9 General Test Condition

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests were chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

In test, they were set in high power and continuously transmitting mode that controlled by computer. The ch01, ch06 and ch11 of EUT were all tested. The setting up procedure is recorded on 1.3 test method.

II. Section 15.101(a): Equipment authorization of unintentional radiators

The EUT equipped with a PCMCIA interface and should be operated with the computer. It was categorized to *Class B personal computers and peripherals* as cannot be operated stand-alone. The authorization requires **Declaration of Conformity (DoC)** and the items required such as Section15.107 (Conducted limits) and Section15.109 (Radiated emission limits) is same as Section15.207 and 15.247(C).

III. Section 15.203: Antenna requirement

The EUT has an integrated antenna permanently attached on the PCB, which inside the housing. In addition, there is no external antenna or connector employed. The antenna requirement stated in Section 15.203 is inapplicable to this EUT.

The antenna specification list as below:

Antenna Type : Patch Antenna

Antenna Gain : 1.98dBi (Max.)

IV. Section 15.207: Power Line Conducted Emissions for AC Powered Units**4.1 Test Condition & Setup**

The power line conducted emission measurements were performed in an anechoic chamber. The EUT was assembled on a wooden table, which is 80 centimeters high, was placed 40 centimeters from the backwall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and Line Impedance Stabilization Networks (LISNs). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer (or EMI receiver) was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak and average detection mode. The analyzer's 6 dB bandwidth was set to 9KHz. No post-detector video filter was used.

The spectrum was scanned from 150KHz to 30MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.3.

There is a test condition apply in this test item, the test procedure description as <1.3>. Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11).

4.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
LISN (EUT)	LISN-01	TRC	99-05	10/07/05
LISN (Support E.)	LISN-01	TRC	9912-03, 04	11/04/05
Pre-amplifier	15542 ZFL-500	Mini – Circuits	0 0117	05/20/05
6dB Attenuator	MCL BW-S6W2	Mini – Circuits	9915 – Conducted	05/20/05
10dB Attenuator	A5542 VAT010	Mini – Circuits	0215 – Conducted	05/20/05
Coaxial Cable (2 meter)	A30A30-0058-50FS-2M	Jyebao	SMA-08	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	Jyebao	SMA-09	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-01	05/20/05
Coaxial Cable (20 meter)	RG-214/U	Jyebao	NP-02	05/20/05
Auto Switch Box (< 30MHz)	ASB-01	TRC	9904-01	05/20/05

4.3 Test Result of Power Line Conducted Emissions

The following table shows a summary of the highest emissions of power line conducted emissions on the LIVE and NETURAL conductors of the EUT power cord. Show as follows.

Test Conditions: Temperature : 25 °C Humidity : 73 % RH

Test mode: Standby mode

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	238.000	49.03	---	---	63.49	53.49	-4.46
	657.000	41.24	---	---	56.00	46.00	-4.76
	876.000	40.22	---	---	56.00	46.00	-5.78
	1320.000	39.36	---	---	56.00	46.00	-6.64
	2072.000	39.40	---	---	56.00	46.00	-6.60
	3062.000	40.35	---	---	56.00	46.00	-5.65
	7260.000	41.63	---	---	60.00	50.00	-8.37
Line 2	231.000	50.55	---	---	63.69	53.69	-3.14
	657.000	39.40	---	---	56.00	46.00	-6.60
	876.000	42.64	---	---	56.00	46.00	-3.36
	1102.000	40.03	---	---	56.00	46.00	-5.97
	1320.000	42.12	---	---	56.00	46.00	-3.88
	2072.000	40.39	---	---	56.00	46.00	-5.61
	3189.000	39.19	---	---	56.00	46.00	-6.81

NOTE:

- (1) Margin = Peak Amplitude – Limit, The reading amplitudes are all under limit.
- (2) A "+" sign in the margin column means the emission is OVER the Class B Limit, and
"–" sign of means UNDER the Class B limit

Test mode: IEEE 802.11b, Channel 1

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	434.000	42.13	---	---	57.89	47.89	-5.76
	547.000	41.33	---	---	56.00	46.00	-4.67
	767.000	41.07	---	---	56.00	46.00	-4.93
	1208.000	38.46	---	---	56.00	46.00	-7.54
	2072.000	39.33	---	---	56.00	46.00	-6.67
	3413.000	39.52	---	---	56.00	46.00	-6.48
Line 2	252.000	48.20	---	---	63.09	53.09	-4.89
	657.000	39.96	---	---	56.00	46.00	-6.04
	876.000	42.46	---	---	56.00	46.00	-3.54
	1208.000	41.86	---	---	56.00	46.00	-4.14
	1534.000	41.47	---	---	56.00	46.00	-4.53
	1977.000	40.84	---	---	56.00	46.00	-5.16

Test mode: IEEE 802.11b, Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	443.000	41.00	---	---	57.63	47.63	-6.63
	547.000	39.89	---	---	56.00	46.00	-6.11
	767.000	42.67	---	---	56.00	46.00	-3.33
	1208.000	40.26	---	---	56.00	46.00	-5.74
	2094.000	39.61	---	---	56.00	46.00	-6.39
	3062.000	40.60	---	---	56.00	46.00	-5.40
Line 2	547.000	40.93	---	---	56.00	46.00	-5.07
	657.000	41.89	---	---	56.00	46.00	-4.11
	1208.000	42.67	---	---	56.00	46.00	-3.33
	1320.000	40.60	---	---	56.00	46.00	-5.40
	1534.000	42.00	---	---	56.00	46.00	-4.00
	2094.000	41.03	---	---	56.00	46.00	-4.97

Test mode: IEEE 802.11b, Channel 11

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	264.000	49.35	---	---	62.74	52.74	-3.39
	657.000	39.56	---	---	56.00	46.00	-6.44
	1208.000	40.13	---	---	56.00	46.00	-5.87
	1645.000	39.38	---	---	56.00	46.00	-6.62
	2094.000	40.33	---	---	56.00	46.00	-5.67
	2977.000	39.92	---	---	56.00	46.00	-6.08
Line 2	662.000	40.86	---	---	56.00	46.00	-5.14
	1102.000	42.23	---	---	56.00	46.00	-3.77
	1208.000	42.62	---	---	56.00	46.00	-3.38
	1534.000	42.16	---	---	56.00	46.00	-3.84
	2094.000	41.61	---	---	56.00	46.00	-4.39
	2977.000	40.98	---	---	56.00	46.00	-5.02

Test mode: IEEE 802.11g, Channel 1

<i>Power Connected Emissions</i>					<i>Class B</i>		
<i>Conductor</i>	<i>Frequency (KHz)</i>	<i>Peak (dBμV)</i>	<i>QP (dBμV)</i>	<i>Average (dBμV)</i>	<i>QP-limit (dBμV)</i>	<i>AVG-limit (dBμV)</i>	<i>Margin (dB)</i>
Line 1	329.000	45.54	---	---	60.89	50.89	-5.35
	552.000	40.67	---	---	56.00	46.00	-5.33
	1208.000	39.66	---	---	56.00	46.00	-6.34
	2201.000	40.08	---	---	56.00	46.00	-5.92
	2636.000	40.53	---	---	56.00	46.00	-5.47
	3189.000	40.37	---	---	56.00	46.00	-5.63
Line 2	331.000	45.63	---	---	60.83	50.83	-5.20
	1320.000	40.81	---	---	56.00	46.00	-5.19
	1645.000	42.34	---	---	56.00	46.00	-3.66
	2094.000	40.93	---	---	56.00	46.00	-5.07
	2532.000	41.56	---	---	56.00	46.00	-4.44
	2977.000	39.85	---	---	56.00	46.00	-6.15

Test mode: IEEE 802.11g, Channel 6

Power Connected Emissions					Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	552.000	39.99	---	---	56.00	46.00	-6.01
	1208.000	39.05	---	---	56.00	46.00	-6.95
	1645.000	40.01	---	---	56.00	46.00	-5.99
	2201.000	40.24	---	---	56.00	46.00	-5.76
	3062.000	40.26	---	---	56.00	46.00	-5.74
	3936.000	39.31	---	---	56.00	46.00	-6.69
Line 2	547.000	40.42	---	---	56.00	46.00	-5.58
	1534.000	41.75	---	---	56.00	46.00	-4.25
	1766.000	40.72	---	---	56.00	46.00	-5.28
	2094.000	42.64	---	---	56.00	46.00	-3.36
	2532.000	41.10	---	---	56.00	46.00	-4.90
	2977.000	40.65	---	---	56.00	46.00	-5.35

Test mode: IEEE 802.11g, Channel 11

Power Connected Emissions					FCC Class B		
Conductor	Frequency (KHz)	Peak (dBμV)	QP (dBμV)	Average (dBμV)	QP-limit (dBμV)	AVG-limit (dBμV)	Margin (dB)
Line 1	456.000	40.79	---	---	57.26	47.26	-6.47
	1208.000	40.08	---	---	56.00	46.00	-5.92
	1645.000	39.80	---	---	56.00	46.00	-6.20
	2094.000	40.22	---	---	56.00	46.00	-5.78
	2977.000	40.39	---	---	56.00	46.00	-5.61
	3510.000	39.78	---	---	56.00	46.00	-6.22
Line 2	547.000	42.97	---	---	56.00	46.00	-3.03
	1534.000	41.44	---	---	56.00	46.00	-4.56
	2094.000	41.40	---	---	56.00	46.00	-4.60
	2532.000	42.16	---	---	56.00	46.00	-3.84
	2977.000	39.85	---	---	56.00	46.00	-6.15
	3510.000	40.20	---	---	56.00	46.00	-5.80

V. Section 15.247 (a): Technical description of the EUT


Direct Sequence System is a spread spectrum system in which the carrier has been modulated by a high speed spreading code and an information data stream. The high speed code sequence dominates the “modulating function” and is the direct cause of the wide spreading of the transmitted signal. In the operational description demonstrates the operation principles of the Baseband processor employed by the EUT, shows that which is a complete DSSS baseband processor and meets the definition of the direct sequence spread spectrum system.

VI. Section 15.247(a)(2): Bandwidth for Direct Sequence System.

6.1 Test Condition & Setup

The transmitter bandwidth measurements were performed by the contact manner. The EUT was set to transmit continuously, also various channels were investigated to find the maximum occupied bandwidth. The output of the EUT was connected to the spectrum analyzer. The bandwidth of the fundamental frequency is observed by the spectrum analyzer with 100kHz RBW and 100kHz VBW.

6.2 Test Instruments Configuration

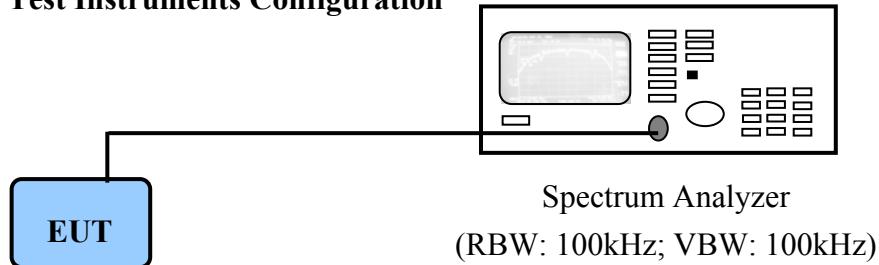

PC to control the EUT at maximal power output and channel number and set antenna kit

6.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05


6.4 Test Result of Bandwidth

Channel	802.11b	802.11g
01	10.40 MHz	16.68 MHz
06	10.36 MHz	16.68 MHz
11	10.36 MHz	16.68 MHz


Note: 1. The data in the above table are summarizing the following attachment spectrum analyzer hard copy. According to the guidance, we'd made the measurement with the spectrum analyzer's resolution bandwidth ($RBW=100kHz$) and set the $span>>RBW$. The results show the measured 6dB bandwidth comply with the minimum 500kHz requirement.
 2. The attachments show these on the following pages.

6dB Bandwidth of Channel 1 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

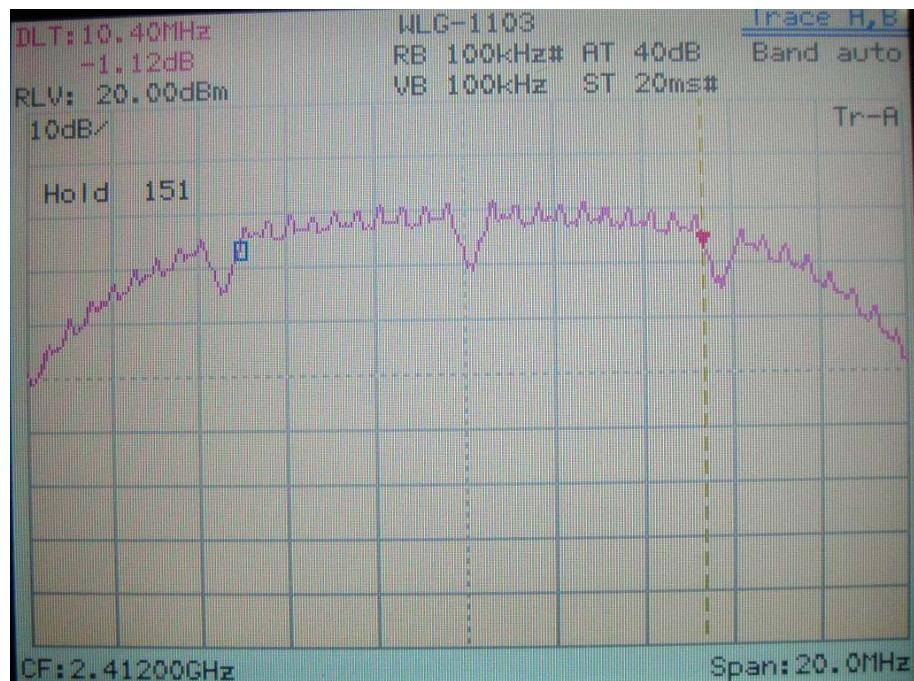


IEEE 802.11g

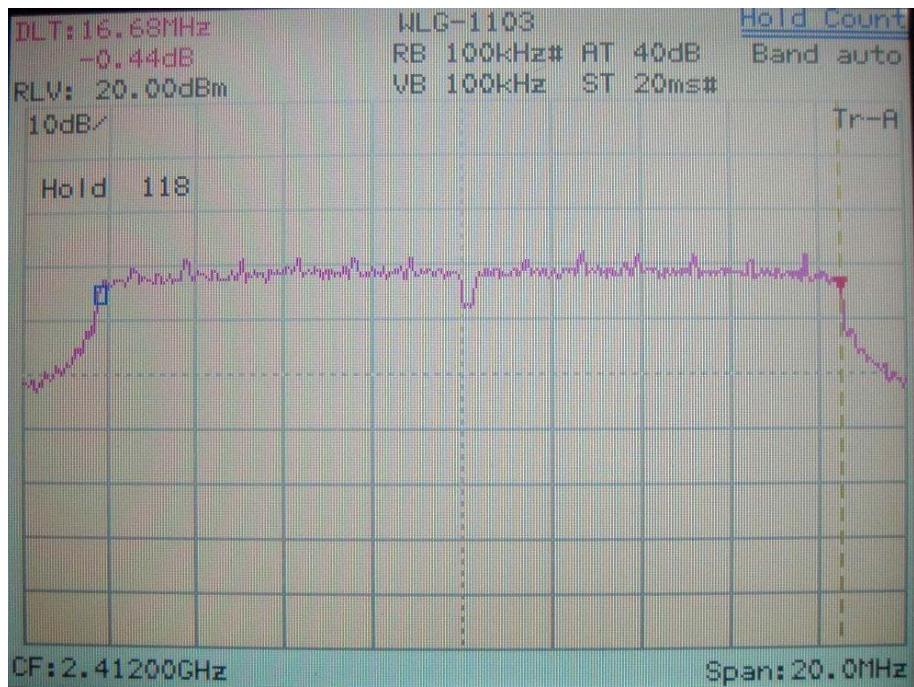



6dB Bandwidth of Channel 6 (The minimum 6dB BW at least 500kHz)

IEEE 802.11b

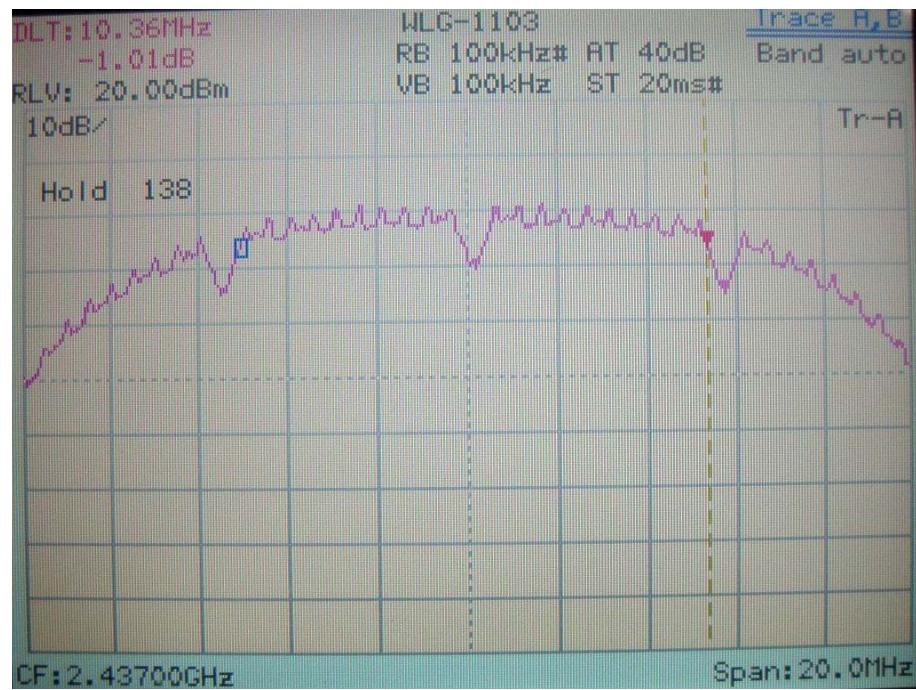


IEEE 802.11g

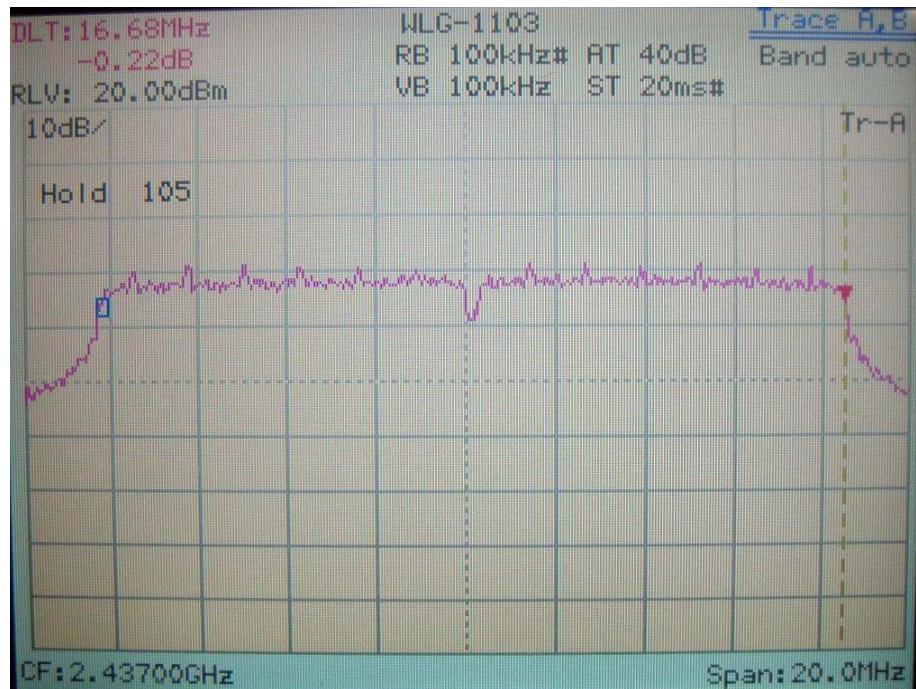

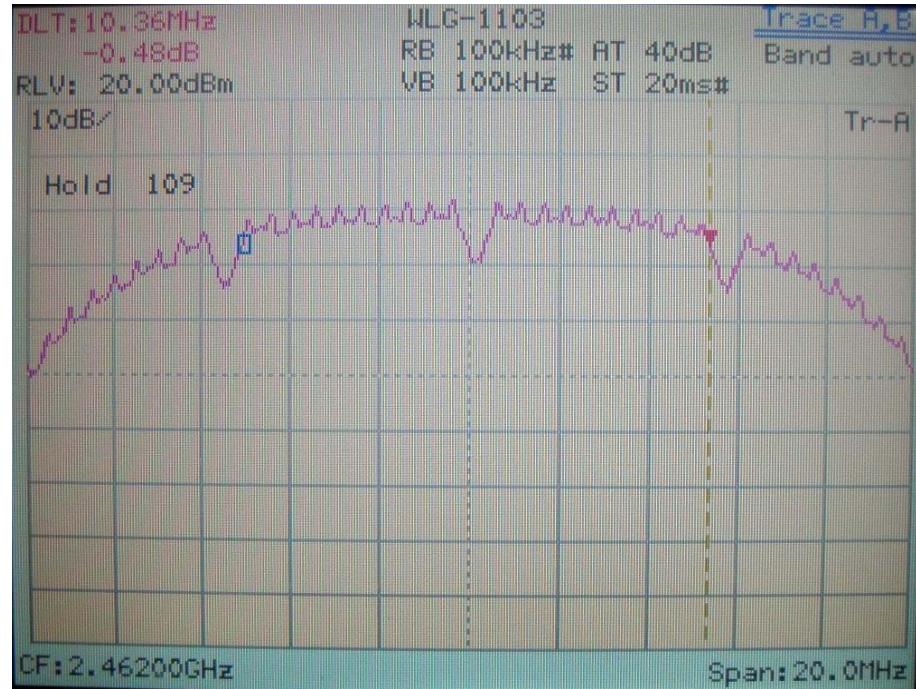6dB Bandwidth of Channel 11 (The minimum 6dB BW at least 500kHz)


IEEE 802.11b

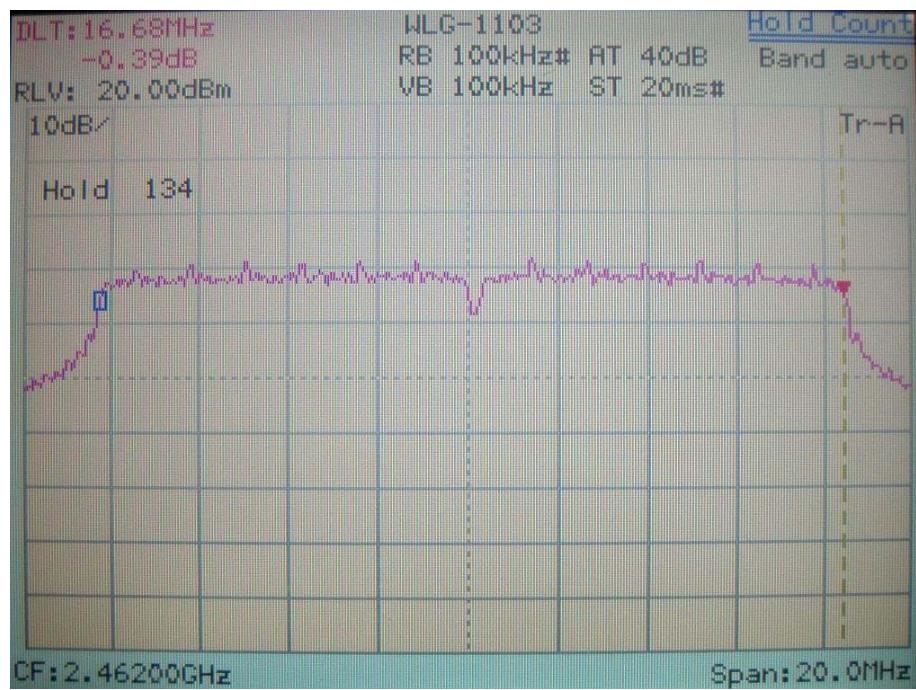

IEEE 802.11g

VII. Section 15.247(b): Power Output

7.1 Test Condition & Setup

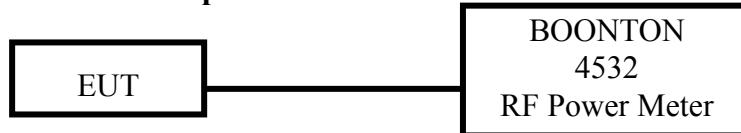

1. The output of the transmitter is connected to the BOONTON RF Power Meter.
2. The calibration is performed before every test. The values of the output power of the EUT will be shown in the dBm directly are the transmitter output peak power. Recording as follows.

7.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Next time
RF Power Meter	4532	BOONTON	117501	07/16/05
Peak Power Sensor	57340	BOONTON	2696	07/16/05

7.3 Test Result

Formula:

$$\text{RF Output of EUT} + |\text{Cable Loss}| = \text{Output Peak Power}$$

Channel	RF Output dBm	Cable Loss dBm	Output Peak Power	
			dBm	mW
802.11b CH01	12.25	1.00	13.25	21.13
802.11b CH06	12.34	1.00	13.34	21.58
802.11b CH11	12.53	1.00	13.53	22.54
802.11g CH01	12.54	1.00	13.54	22.59
802.11g CH06	12.27	1.00	13.27	21.23
802.11g CH11	12.36	1.00	13.36	21.68

VIII. Section 15.247 (C): Spurious Emissions (Radiated)

8.1 Test Condition & Setup

We'd performed the test by the *radiated emission* skill: The EUT was placed in an anechoic chamber, and set the EUT transmitting continuously and scanned at 3-meter distance to determine its emission characteristics. The physical arrangement of the EUT was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude, directivity, and frequency. The exact system configuration, which produced the highest emissions was noted so it could be reproduced later during the final tests. For the measurement above 1GHz, according to the guidance we'd set the spectrum analyzer's 6dB bandwidth RBW to 1MHz.

This was done to ensure that the final measurements would demonstrate the worst-case interference potential of the EUT.

Final radiation measurements were made on a three-meter, anechoic chamber. The EUT system was placed on a nonconductive turntable, which is 0.8 meters height, top surface 1.0 x 1.5 meter.

The spectrum was examined from 30 MHz to 1000 MHz using an Hewlett Packard 85460A EMI Receiver, SCHWARZECK whole range Small Biconical Antenna (Model No.: UBAA9114 & BBVU9135) is used to measure frequency from 30 MHz to 1GHz. The final test is used the HP 85460A spectrum and 8564E spectrum was examined from 1GHz to 25GHz using an Hewlett Packard Spectrum Analyzer, EMCO/HP Horn Antenna (Model 3115 / 84125-80008) for 1G - 25GHz.

At each frequency, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. There are two spectrum analyzers use on this testing, HP 85460A for frequency 30MHz to 1000MHz, and 8564E for frequency 1GHz to 25GHz. No post-detector video filters were used in the test. The spectrum analyzer's 6dB bandwidth was set to 120KHz (spectrum was examined from 30 MHz to 1000 MHz), the spectrum analyzer's 6 dB bandwidth was set to 1 MHz (spectrum was examined from 1GHz to 25GHz) and the analyzer was operated in the maximum hold mode. There is a test condition applies in this test item, the test procedure description as the following:

Three channels were tested, one in the top (CH01), one in the middle (CH06) and the other in bottom (CH11). The setting up procedure is recorded on <1.3>

With the transmitter operating from a AC source and using the internal of EUT, radiates spurious emissions falling within the restricted bands of 15.209 were measured at operating frequencies corresponding to upper, middle and bottom channels in the 2400 ~ 2483.5 MHz band.

The actual field intensity in decibels referenced to 1 microvolt per meter ($\text{dB}\mu\text{V}/\text{m}$) is determined by algebraically adding the measured reading in $\text{dB}\mu\text{V}$, the antenna factor (dB), and cable loss (dB) at the appropriate frequency. Since the EUT was set to transmit continuously, no *duty cycle* is present.

For frequency between 30MHz to 1000MHz

$$\text{FIa} (\text{dB}\mu\text{V}/\text{m}) = \text{FIr} (\text{dB}\mu\text{V}) + \text{Correction Factors}$$

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplitude Gain) + Switching Box Loss

For frequency between 1GHz to 25GHz

$$\text{FIa} (\text{dB}\mu\text{V}/\text{m}) = \text{FIr} (\text{dB}\mu\text{V}) + \text{Correction Factor}$$

FIa : Actual Field Intensity

FIr : Reading of the Field Intensity

Correction Factors = Antenna Factor + (Cable Loss – Amplitude Gain) + Switching Box Loss

8.2 List of Test Instruments

Instrument Name	Model	Brand	Serial No.	Calibration Date
				Next time
EMI Receiver	8546A	HP	3520A00242	08/05/05
RF Filter Section	85460A	HP	3448A00217	08/05/05
Small Biconical Antenna	UBAA9114 & BBVU9135	SCHWARZECK	127	10/11/05
Pre-amplifier	PA1F	TRC	1FAC	05/20/05
Auto Switch Box (>30MHz)	ASB-01	TRC	9904-01	05/20/05
Coaxial Cable (Double shielded, 15 meter)	A30A30-0058-50FS-15M	JYEBAO	SMA-01	05/20/05
Coaxial Cable (1.1 meter)	A30A30-0058-50FS-1M	JYEBAO	SMA-02	05/20/05
Spectrum Analyzer	8564E	HP	3720A00840	08/13/05
Microwave Preamplifier	84125C	HP	US36433002	08/13/05
Horn Antenna	3115	EMCO	9104-3668	12/27/05
Standard Guide Horn Antenna	84125-80008	HP	18-26.5GHz	10/15/05
Standard Guide Horn Antenna	84125-80001	HP	26.5-40GHz	10/15/05
Horn Antenna	1196E (3115)	HP (EMCO)	9704-5178	01/11/06
Pre-amplifier	PA2F	TRC	2F1GZ	06/20/05
Coaxial Cable (3 miter)	A30A30-0058-50FST118	JYEBAO	MSA-05	06/20/05
Coaxial Cable (1 meter)	A30A30-0058-50FST118	JYEBAO	MSA-04	06/20/05

8.3 Test Result of Spurious Radiated Emissions

The highest peak values of radiated emissions from the EUT at various antenna heights, antenna polarizations, EUT orientation, etc. are recorded on the following.

Test Conditions: Temperature : 24 ° C Humidity : 73 % RH

Test mode: Standby mode for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> (dB)	<i>Corrected Amplitude</i> (dB μ V/m)	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
233.09	38.40	1.00	277	-4.07	34.33	46.00	-11.67
262.80	40.32	1.00	107	-4.21	36.11	46.00	-9.89
300.39	41.33	1.00	89	-3.70	37.63	46.00	-8.37
325.24	41.01	1.00	95	-3.22	37.79	46.00	-8.21
390.72	38.11	1.00	298	-1.32	36.79	46.00	-9.21
711.42	23.56	1.00	304	9.77	33.33	46.00	-12.67

Test mode: Standby mode for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> (dB)	<i>Corrected Amplitude</i> (dB μ V/m)	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table ()</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
74.26	27.67	1.00	229	0.84	28.51	40.00	-11.49
133.67	32.77	1.00	250	-2.72	30.05	43.50	-13.45
390.11	33.96	1.00	205	-1.34	32.62	46.00	-13.38
500.45	29.18	1.00	125	2.92	32.10	46.00	-13.90
566.53	27.78	1.00	328	5.56	33.34	46.00	-12.66
650.80	24.75	1.00	124	8.48	33.23	46.00	-12.77

Note:

1. Margin = Amplitude – limit, if margin is minus means under limit.
2. Corrected Amplitude = Reading Amplitude + Correction Factors
3. Correction factor = Antenna factor + (Cable Loss – Amplitude gain) + Switching Box Loss

Test mode: Standby mode for 1GHz to 25GHz [Horizontal]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dBμV	dB/m	dBμV/m	dBμV/m	dB
2034.17	1.00	293	33.24	---	4.49	37.73	---
3854.58	1.00	280	30.74	---	11.82	42.56	---
7835.42	1.00	241	25.91	---	22.17	48.08	---
13020.42	1.00	300	29.57	---	20.64	50.21	---
19685.83	1.00	162	48.84	---	1.79	50.63	---
23967.71	1.00	271	48.16	---	2.95	51.11	---

Test mode: Standby mode for 1GHz to 25GHz [Vertical]

Frequency	Ant. H.	Table	Amplitude	Correction Factor	Corrected Amplitude	Limit	Margin
MHz	m	degree	dBμV	dB/m	dBμV/m	dBμV/m	dB
2707.08	1.00	88	32.08	---	8.19	40.27	---
3720.00	1.00	163	31.24	---	11.28	42.52	---
7183.75	1.00	296	25.40	---	21.29	46.69	---
13020.42	1.00	340	30.57	---	20.64	51.21	---
23719.79	1.00	333	47.33	---	3.25	50.58	---

Note:

1. Margin = Corrected - Limit.
2. The EUT utilizes a *permanently attached antenna*. In addition the spurious RF radiated emissions levels do comply with the *20dBc limit* both at its bandedges and other spurious emissions.
3. As stated in Section 15.35(b), for any frequencies above 1000MHz, radiated limits shown are based upon the use of measurement instrumentation employing an average detector function. As the results of our test, the peak amplitudes are already below the FCC limit. Thus the average amplitudes of the rest are omitted.

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
233.09	38.80	1.00	280	-4.07	34.73	46.00	-11.27
261.59	40.28	1.00	301	-4.22	36.06	46.00	-9.94
300.39	41.19	1.00	98	-3.70	37.49	46.00	-8.51
325.24	40.67	1.00	134	-3.22	37.45	46.00	-8.55
390.72	37.81	1.00	292	-1.32	36.49	46.00	-9.51
500.45	28.65	1.00	104	2.92	31.57	46.00	-14.43

Test mode: IEEE 802.11b CH01 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
74.26	28.35	1.00	266	0.84	29.19	40.00	-10.81
133.67	31.98	1.00	100	-2.72	29.26	43.50	-14.24
234.31	35.58	1.00	53	-4.06	31.52	46.00	-14.48
528.34	28.30	1.00	149	4.10	32.40	46.00	-13.60
585.93	27.31	1.00	117	6.20	33.51	46.00	-12.49
650.80	25.62	1.00	184	8.48	34.10	46.00	-11.90

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>	<i>Limit</i>		<i>Margin</i>		
						<i>Peak / Ave.</i>	<i>Peak / Ave.</i>			
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>			
1607.99	1.00	246	38.49	33.67	14.21	52.70	47.88	73.96	53.96	-6.08
2287.98	1.00	266	45.83	42.50	8.90	54.73	51.40	73.96	53.96	-2.56
2359.37	1.00	269	42.16	---	9.10	51.26	---	73.96	53.96	-2.70
2463.97	1.00	267	44.83	41.17	9.39	54.22	50.56	73.96	53.96	-3.40
2639.58	1.00	303	40.34	---	9.75	50.09	---	73.96	53.96	-3.87
12061.04	1.00	89	38.27	---	9.81	48.08	---	73.96	53.96	-5.88

Test mode: IEEE 802.11b CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>	<i>Limit</i>		<i>Margin</i>		
						<i>Peak / Ave.</i>	<i>Peak / Ave.</i>			
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>			
1587.50	1.00	184	34.33	---	14.53	48.86	---	73.96	53.96	-5.10
2172.92	1.00	350	34.84	---	8.57	43.41	---	73.96	53.96	-10.55
2637.50	1.00	290	36.83	---	9.75	46.58	---	73.96	53.96	-7.38
7233.75	1.00	28	36.61	---	10.07	46.68	---	73.96	53.96	-7.28
9650.42	1.00	163	35.11	---	11.47	46.58	---	73.96	53.96	-7.38
12061.04	1.00	319	37.77	---	9.81	47.58	---	73.96	53.96	-6.38

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
233.09	38.33	1.00	298	-4.07	34.26	46.00	-11.74
260.98	40.28	1.00	122	-4.22	36.06	46.00	-9.94
299.78	41.34	1.00	110	-3.71	37.63	46.00	-8.37
325.24	40.41	1.00	92	-3.22	37.19	46.00	-8.81
390.72	38.09	1.00	283	-1.32	36.77	46.00	-9.23
501.06	27.48	1.00	80	2.94	30.42	46.00	-15.58

Test mode: IEEE 802.11b CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
98.51	28.65	1.00	280	-1.10	27.55	43.50	-15.95
133.06	32.22	1.00	60	-2.70	29.52	43.50	-13.98
233.09	35.60	1.00	30	-4.07	31.53	46.00	-14.47
300.39	33.07	1.00	9	-3.70	29.37	46.00	-16.63
563.50	27.79	1.00	330	5.46	33.25	46.00	-12.75
721.12	24.17	1.00	192	9.93	34.10	46.00	-11.90

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1624.65	1.00	170	38.49	34.50	13.95	52.44	48.45	73.96
2200.00	1.00	223	40.00	---	8.65	48.65	---	73.96
2287.99	1.00	107	44.49	42.83	8.90	53.39	51.73	73.96
2358.33	1.00	107	42.00	---	9.09	51.09	---	73.96
2639.58	1.00	157	42.17	---	9.75	51.92	---	73.96
12187.92	1.00	292	39.10	---	9.74	48.84	---	73.96

Test mode: IEEE 802.11b CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1656.25	1.00	127	35.67	---	13.45	49.12	---	73.96
2285.42	1.00	177	34.83	---	8.89	43.72	---	73.96
2639.58	1.00	240	37.67	---	9.75	47.42	---	73.96
9747.08	1.00	159	36.27	---	11.89	48.16	---	73.96
12187.92	1.00	100	40.27	---	9.74	50.01	---	73.96
24371.46	1.00	47	46.55	---	3.26	49.81	---	73.96

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> (dB)	<i>Corrected Amplitude</i> (dB μ V/m)	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
233.09	38.45	1.00	89	-4.07	34.38	46.00	-11.62
260.98	39.25	1.00	110	-4.22	35.03	46.00	-10.97
300.39	40.69	1.00	111	-3.70	36.99	46.00	-9.01
325.85	39.97	1.00	96	-3.20	36.77	46.00	-9.23
400.42	33.89	1.00	303	-0.98	32.91	46.00	-13.09
500.45	27.30	1.00	126	2.92	30.22	46.00	-15.78

Test mode: IEEE 802.11b CH11 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> (dB)	<i>Corrected Amplitude</i> (dB μ V/m)	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
74.26	27.67	1.00	246	0.84	28.51	40.00	-11.49
133.67	32.63	1.00	99	-2.72	29.91	43.50	-13.59
233.09	36.21	1.00	36	-4.07	32.14	46.00	-13.86
528.34	28.20	1.00	128	4.10	32.30	46.00	-13.70
563.50	27.58	1.00	339	5.46	33.04	46.00	-12.96
665.35	23.99	1.00	152	8.80	32.79	46.00	-13.21

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1641.31	1.00	165	40.16	37.17	13.69	53.85	50.86	73.96
2200.00	1.00	202	40.33	---	8.65	48.98	---	73.96
2257.31	1.00	106	44.66	39.83	8.81	53.47	48.64	73.96
2287.99	1.00	106	45.32	43.00	8.90	54.22	51.90	73.96
2558.33	1.00	130	40.00	---	9.60	49.60	---	73.96
2639.58	1.00	156	40.17	---	9.75	49.92	---	73.96

Test mode: IEEE 802.11b CH11 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1822.92	1.00	203	37.00	---	10.85	47.85	---	73.96
2256.25	1.00	213	35.83	---	8.81	44.64	---	73.96
2639.58	1.00	247	36.84	---	9.75	46.59	---	73.96
9849.79	1.00	22	35.78	---	11.93	47.71	---	73.96
12308.75	1.00	213	37.94	---	9.56	47.50	---	73.96
24619.37	1.00	14	46.31	---	3.01	49.32	---	73.96

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Horizontal]

<i>Radiated Emission</i>				<i>Correction Factors</i> (dB)	<i>Corrected Amplitude</i> (dB μ V/m)	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
233.70	38.71	1.00	312	-4.06	34.65	46.00	-11.35
261.59	40.30	1.00	104	-4.22	36.08	46.00	-9.92
299.78	41.91	1.00	83	-3.71	38.20	46.00	-7.80
325.85	39.65	1.00	98	-3.20	36.45	46.00	-9.55
390.72	36.05	1.00	289	-1.32	34.73	46.00	-11.27
500.45	26.59	1.00	51	2.92	29.51	46.00	-16.49

Test mode: IEEE 802.11g CH01 for 30MHz to 1GHz [Vertical]

<i>Radiated Emission</i>				<i>Correction Factors</i> (dB)	<i>Corrected Amplitude</i> (dB μ V/m)	<i>Class B (3 m)</i>	
<i>Frequency (MHz)</i>	<i>Amplitude (dBμV)</i>	<i>Ant. H. (m)</i>	<i>Table (°)</i>			<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>
74.26	27.77	1.00	280	0.84	28.61	40.00	-11.39
133.67	32.61	1.00	295	-2.72	29.89	43.50	-13.61
233.09	35.32	1.00	21	-4.07	31.25	46.00	-14.75
300.39	33.78	1.00	213	-3.70	30.08	46.00	-15.92
566.53	27.05	1.00	342	5.56	32.61	46.00	-13.39
667.17	24.49	1.00	138	8.84	33.33	46.00	-12.67

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1607.98	1.00	191	38.16	33.50	14.21	52.37	47.71	73.96
2200.00	1.00	226	39.67	---	8.65	48.32	---	53.96
2287.97	1.00	116	43.99	42.50	8.90	52.89	51.40	53.96
2463.99	1.00	131	43.67	41.50	9.39	53.06	50.89	53.96
2552.08	1.00	146	40.83	---	9.59	50.42	---	53.96
2639.58	1.00	146	40.34	---	9.75	50.09	---	53.96

Test mode: IEEE 802.11g CH01 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1614.58	1.00	243	34.84	---	14.10	48.94	---	53.96
2106.25	1.00	301	35.33	---	8.39	43.72	---	-10.24
2637.50	1.00	240	37.50	---	9.75	47.25	---	53.96
9650.42	1.00	151	36.44	---	11.47	47.91	---	-6.05
12061.04	1.00	320	37.77	---	9.81	47.58	---	-6.38
21708.12	1.00	190	46.05	---	2.87	48.92	---	-5.04

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
233.09	38.40	1.00	292	-4.07	34.33	46.00	-11.67
260.98	40.32	1.00	112	-4.22	36.10	46.00	-9.90
300.39	41.36	1.00	90	-3.70	37.66	46.00	-8.34
325.85	39.28	1.00	111	-3.20	36.08	46.00	-9.92
390.72	34.64	1.00	297	-1.32	33.32	46.00	-12.68
499.84	27.20	1.00	69	2.89	30.09	46.00	-15.91

Test mode: IEEE 802.11g CH06 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
74.26	27.79	1.00	259	0.84	28.63	40.00	-11.37
133.06	32.29	1.00	101	-2.70	29.59	43.50	-13.91
234.31	36.07	1.00	36	-4.06	32.01	46.00	-13.99
298.57	33.32	1.00	3	-3.72	29.60	46.00	-16.40
565.32	26.93	1.00	330	5.52	32.45	46.00	-13.55
650.80	25.69	1.00	150	8.48	34.17	46.00	-11.83

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>	
			<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		<i>Peak / Ave.</i>	<i>Peak / Ave.</i>			
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>	<i>dB</i>	
1624.64	1.00	188	39.16	35.00	13.95	53.11	48.95	73.96	53.96	-5.01
2197.92	1.00	203	40.34	---	8.64	48.98	---	73.96	53.96	-4.98
2233.31	1.00	203	43.50	37.50	8.74	52.24	46.24	73.96	53.96	-7.72
2287.99	1.00	101	45.16	42.67	8.90	54.06	51.57	73.96	53.96	-2.39
2399.99	1.00	101	44.16	36.67	9.21	53.37	45.88	73.96	53.96	-8.08
2639.58	1.00	151	42.00	---	9.75	51.75	---	73.96	53.96	-2.21
12187.92	1.00	29	46.17	---	9.74	49.51	---	73.96	53.96	-4.45

Test mode: IEEE 802.11g CH06 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>		<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>	
			<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		<i>Peak / Ave.</i>	<i>Peak / Ave.</i>			
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>		<i>dB/m</i>	<i>dBμV/m</i>		<i>dBμV/m</i>	<i>dB</i>	
1739.58	1.00	226	35.17	---	12.15	47.32	---	73.96	53.96	-6.64
2077.08	1.00	311	34.50	---	8.31	42.81	---	73.96	53.96	-11.15
2639.58	1.00	232	36.00	---	9.75	45.75	---	73.96	53.96	-8.21
9747.08	1.00	161	35.27	---	11.89	47.16	---	73.96	53.96	-6.80
12187.92	1.00	261	40.94	---	9.74	50.68	---	73.96	53.96	-3.28
24371.46	1.00	60	46.22	---	3.26	49.48	---	73.96	53.96	-4.48

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Horizontal]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
233.09	37.95	1.00	271	-4.07	33.88	46.00	-12.12
260.98	38.53	1.00	137	-4.22	34.31	46.00	-11.69
300.39	41.76	1.00	84	-3.70	38.06	46.00	-7.94
325.85	39.28	1.00	113	-3.20	36.08	46.00	-9.92
390.72	36.33	1.00	285	-1.32	35.01	46.00	-10.99
501.06	28.16	1.00	136	2.94	31.10	46.00	-14.90

Test mode: IEEE 802.11g CH11 for 30MHz to 1GHz [Vertical]

Radiated Emission				Correction Factors (dB)	Corrected Amplitude (dB μ V/m)	Class B (3 m)	
Frequency (MHz)	Amplitude (dB μ V)	Ant. H. (m)	Table (°)			Limit (dB μ V/m)	Margin (dB)
74.26	27.88	1.00	266	0.84	28.72	40.00	-11.28
135.49	32.50	1.00	50	-2.76	29.74	43.50	-13.76
233.09	35.34	1.00	18	-4.07	31.27	46.00	-14.73
528.34	28.48	1.00	146	4.10	32.58	46.00	-13.42
565.32	27.63	1.00	325	5.52	33.15	46.00	-12.85
673.23	24.00	1.00	179	8.98	32.98	46.00	-13.02

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Horizontal]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
1641.32	1.00	188	40.32	37.50	13.69	54.01	51.19	73.96
2257.32	1.00	106	44.50	39.67	8.81	53.31	48.48	73.96
2287.99	1.00	118	44.99	42.67	8.90	53.89	51.57	73.96
2358.33	1.00	106	41.84	---	9.09	50.93	---	73.96
2399.98	1.00	118	43.17	35.33	9.21	52.38	44.54	73.96
2637.50	1.00	134	41.00	---	9.75	50.75	---	73.96

Test mode: IEEE 802.11g CH11 for 1GHz to 25GHz [Vertical]

<i>Frequency</i>	<i>Ant. H.</i>	<i>Table</i>	<i>Amplitude</i>	<i>Correction Factor</i>	<i>Corrected Amplitude</i>		<i>Limit</i>	<i>Margin</i>
					<i>Peak / Ave.</i>	<i>Peak / Ave.</i>		
<i>MHz</i>	<i>m</i>	<i>degree</i>	<i>dBμV</i>	<i>dB/m</i>	<i>dBμV/m</i>	<i>dBμV/m</i>	<i>dB</i>	
2256.25	1.00	174	36.16	---	8.81	44.97	---	73.96
2637.50	1.00	258	35.17	---	9.75	44.92	---	73.96
7384.79	1.00	15	35.11	---	10.42	45.53	---	73.96
9849.79	1.00	163	35.44	---	11.93	47.37	---	73.96
12308.75	1.00	305	37.61	---	9.56	47.17	---	73.96
24619.37	1.00	19	46.25	---	3.01	49.26	---	73.96

8.4 Test Result of the Bandedge


If any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either *at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a)*,

We perform this section by the *radiated manner*, the RBW is set to 100kHz and VBW>RBW. We'd made the observation *up to 10th harmonics and the criterion is all the harmonic/spurious emissions must be 20dB below the highest emission level measured.* If the emissions fall in the restricted bands stated in the Part 15.205(a) must also *comply with the radiated emission limits specified in Part 15.209(a).* (*Peak mode: RBW=VBW=1MHz, Average mode: RBW=1MHz; VBW=10Hz*)

The following pages show our observations referring to the channel 1 and 11 respectively.

Test Condition & Setup: same as < 8.1 >

IEEE 802.11b, Channel 1

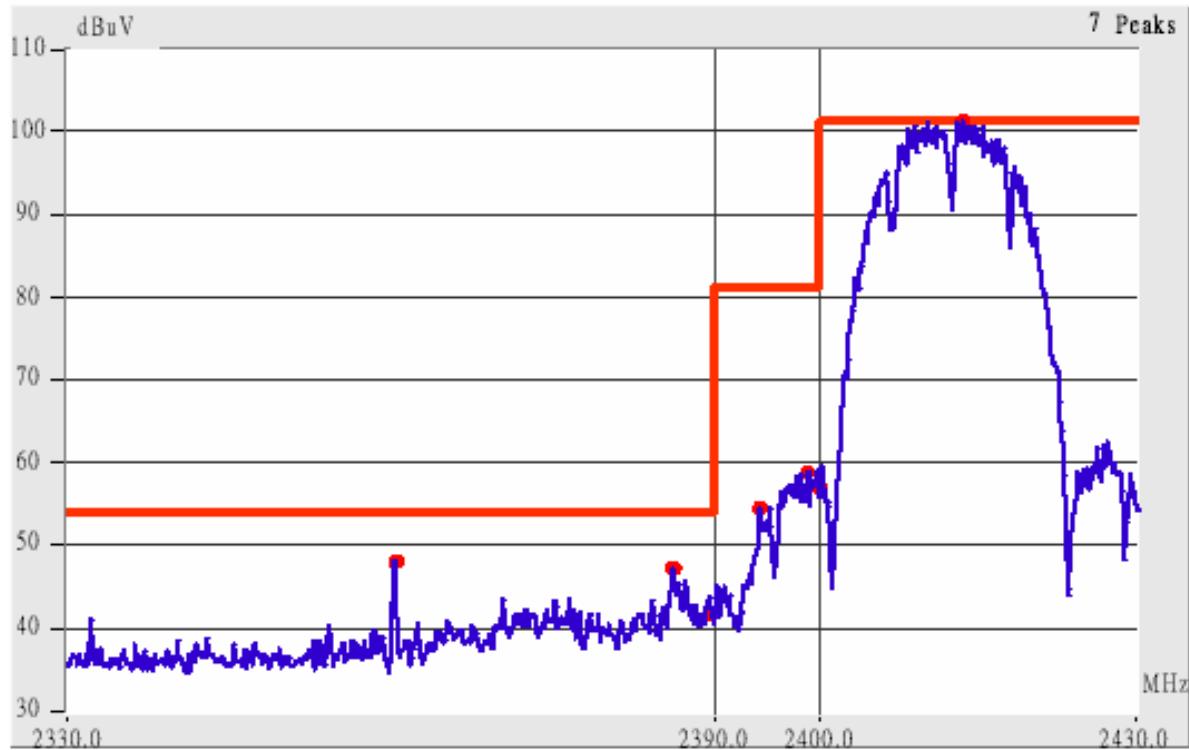


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

1. The lobe left by the fundamental side is already 20dB below the highest emission level.
2. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

Radiated Emission					Corrected Amplitude (dB μ V/m)		Class B (3m)		
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle ($^{\circ}$)	Factors (dB)	Peak	Average	Peak	Ave.	Margin (dB)
2359.97	Hor	1.00	253	9.10	52.76	47.10	73.96	53.96	-6.68
2375.97	Hor	1.00	157	9.14	51.98	41.81	73.96	53.96	-12.15
2387.01	Hor	1.00	157	9.17	53.01	43.50	73.96	53.96	-10.46
2390.56	Hor	1.00	164	9.18	53.35	43.51	73.96	53.96	-10.45
2359.90	Ver	1.00	334	9.10	44.76	---	73.96	53.96	-9.20
2375.45	Ver	1.00	126	9.14	44.47	---	73.96	53.96	-9.49

IEEE 802.11b, Channel 11

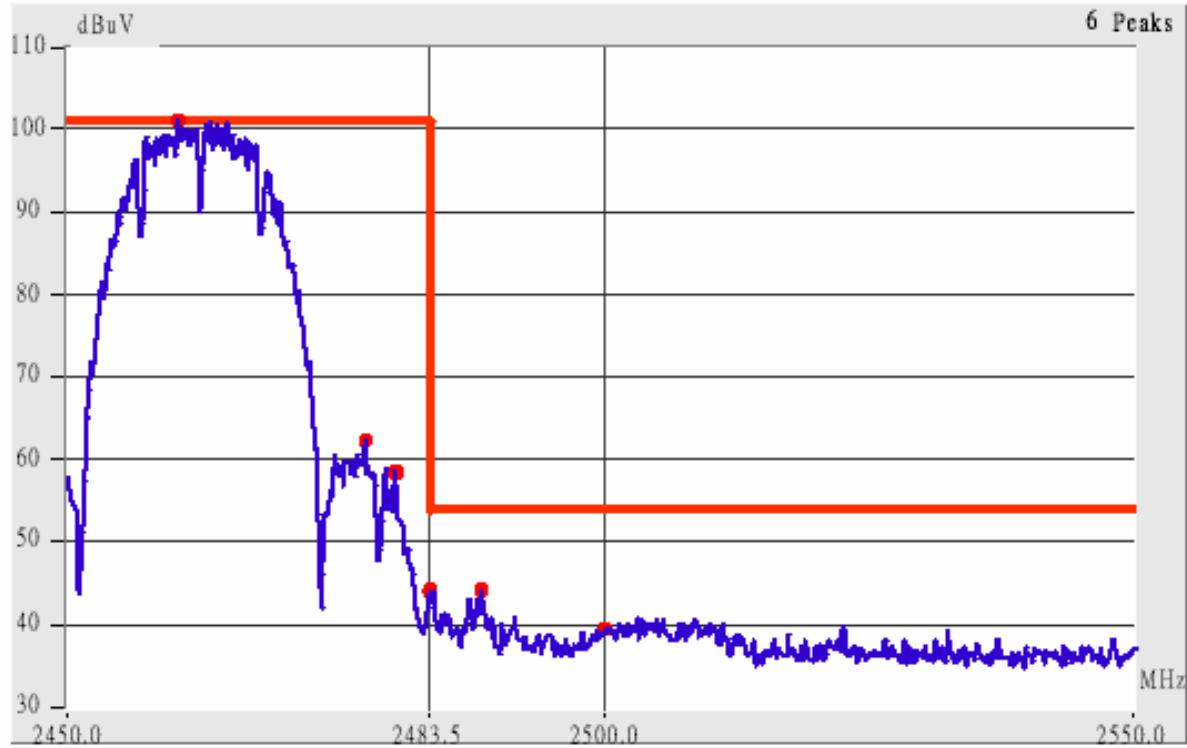


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

3. The lobe right by the fundamental side is already 20dB below the highest emission level.
4. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below

Radiated Emission					Corrected Amplitude		Class B (3m)			
Frequency (MHz)	Ant. P.	Ant. H. (m)	Angle (°)	Factors (dB)	(dB μ V/m)		Limit (dB μ V/m)	Peak	Ave.	Margin (dB)
					Peak	Average				
2483.50	Hor	1.00	206	9.44	52.44	---	73.96	53.96	-1.52	
2487.82	Hor	1.00	210	9.46	52.29	---	73.96	53.96	-1.67	
2500.01	Hor	1.00	218	9.49	47.99	---	73.96	53.96	-5.97	
2504.79	Hor	1.00	212	9.50	51.33	---	73.96	53.96	-2.63	
2490.27	Ver	1.00	309	9.46	44.80	---	73.96	53.96	-9.16	
2508.82	Ver	1.00	299	9.51	46.34	---	73.96	53.96	-7.62	

IEEE 802.11g, Channel 1

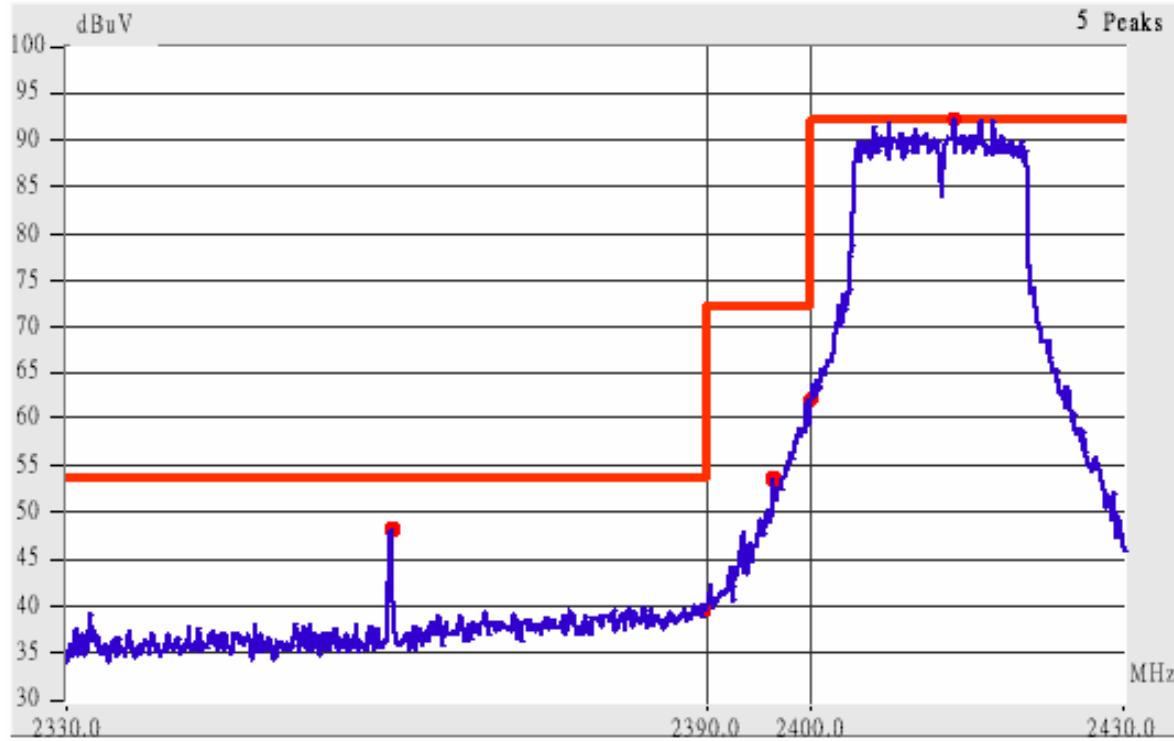


This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 1.

5. The lobe left by the fundamental side is already 20dB below the highest emission level.
6. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below.

<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Angle (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>	
					<i>Peak</i>	<i>Average</i>	<i>Peak</i>		
2360.41	Hor	1.00	241	9.10	52.60	31.43	73.96	53.96	-22.53
2382.05	Hor	1.00	164	9.16	47.66	---	73.96	53.96	-6.30
2390.07	Hor	1.00	222	9.18	45.68	---	73.96	53.96	-8.28
2359.85	Ver	1.00	285	9.10	44.93	---	73.96	53.96	-9.03
2371.28	Ver	1.00	22	9.13	45.13	---	73.96	53.96	-8.83
2390.02	Ver	1.00	111	9.18	42.85	---	73.96	53.96	-11.11

IEEE 802.11g, Channel 11

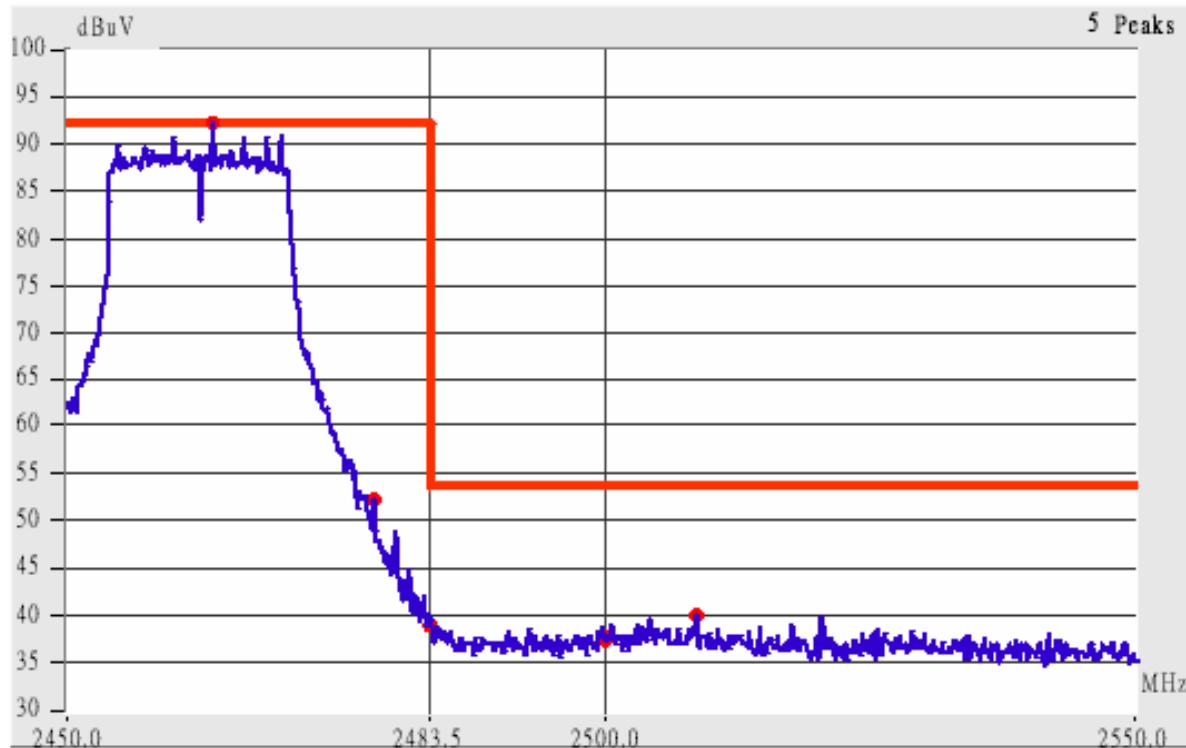

This is the hard copy of our bandedge measurement generated by our bandedge testing program. The plot shown above is the bandedge of channel 11.

7. The lobe right by the fundamental side is already 20dB below the highest emission level.
8. The emissions recorded in the restricted band is do comply with the Part 15.209(a) – as below


<i>Radiated Emission</i>					<i>Corrected Amplitude</i>		<i>Class B (3m)</i>		
<i>Frequency (MHz)</i>	<i>Ant. P.</i>	<i>Ant. H. (m)</i>	<i>Angle (°)</i>	<i>Factors (dB)</i>	<i>(dBμV/m)</i>		<i>Limit (dBμV/m)</i>	<i>Margin (dB)</i>	
					<i>Peak</i>	<i>Average</i>			
2483.50	Hor	1.00	209	9.44	50.61	---	73.96	53.96	-3.35
2486.71	Hor	1.00	216	9.44	49.79	---	73.96	53.96	-4.17
2500.01	Hor	1.00	209	9.49	46.66	---	73.96	53.96	-7.30
2507.53	Hor	1.00	227	9.50	50.50	---	73.96	53.96	-3.46
2497.91	Ver	1.00	178	9.48	44.65	---	73.96	53.96	-9.31
2503.28	Ver	1.00	105	9.50	45.16	---	73.96	53.96	-8.80

IX. Section 15.247(d): Power Spectral Density

9.1 Test Condition & Setup

The tests below are running with the EUT transmitter set at high power in TDD mode. The EUT is needed to force selection of output power level and channel number. While testing, the EUT was set to transmit continuously and to be tested by the contact manner with the spectrum analyzer.

9.2 Test Instruments Configuration

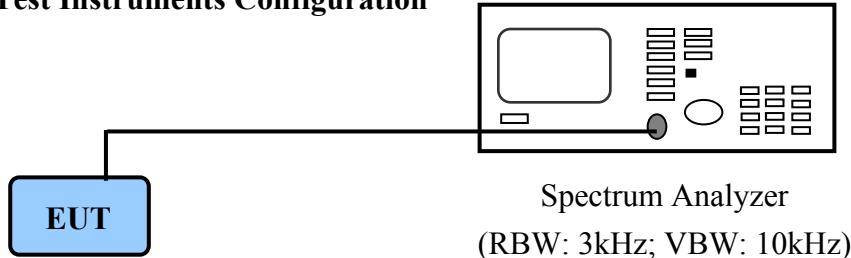

9.3 List of Test Instruments

Instrument Name	Model No.	Brand	Serial No.	Next time
Spectrum Analyzer	MS2665C	ANRITSU	6200175476	11/02/05

9.4 Test Result of Power spectral density

The following table shows a summary of the test results of the Power Spectral Density.


Channel	Ppr (dBm)	Cable Loss (dB)	Ppq (dBm)	Limit (dB)	Margin (dB)
802.11b CH01	-14.35	1.00	-13.35	8.00	-21.35
802.11b CH06	-13.62	1.00	-12.62	8.00	-20.62
802.11b CH11	-13.11	1.00	-12.11	8.00	-20.11
802.11g CH01	-22.51	1.00	-21.51	8.00	-29.51
802.11g CH06	-22.23	1.00	-21.23	8.00	-29.23
802.11g CH11	-22.38	1.00	-21.38	8.00	-29.38

Note:


1. The following pages show the results of spectrum reading.
2. Ppr: spectrum read power density (using peak search mode),
Ppq: actual peak power density in the spread spectrum band.
3. Ppq = Ppr + |Cable Loss|

Power Spectral Density of Channel 01



IEEE 802.11b

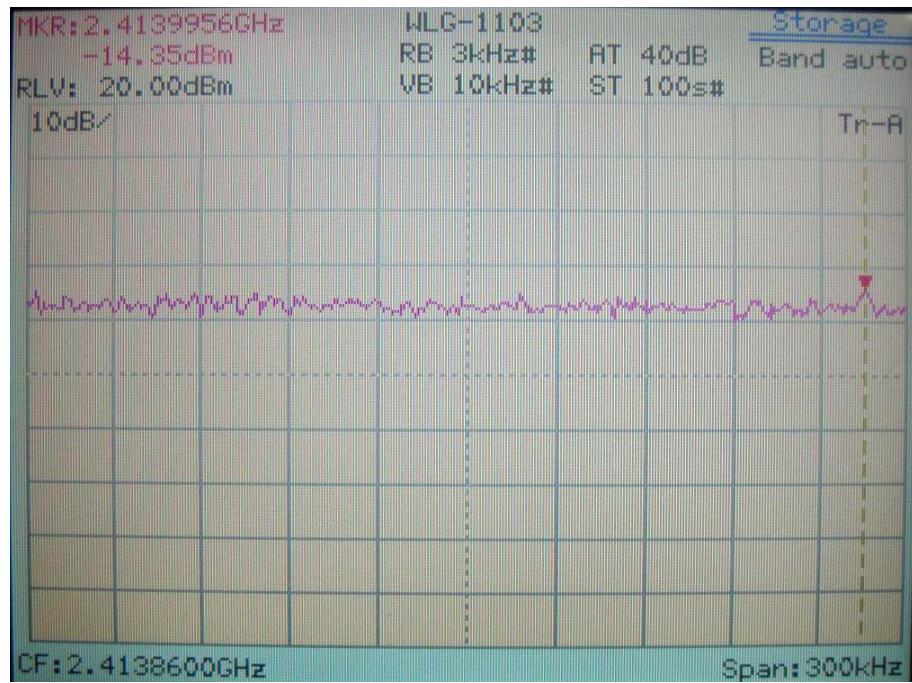

IEEE 802.11g

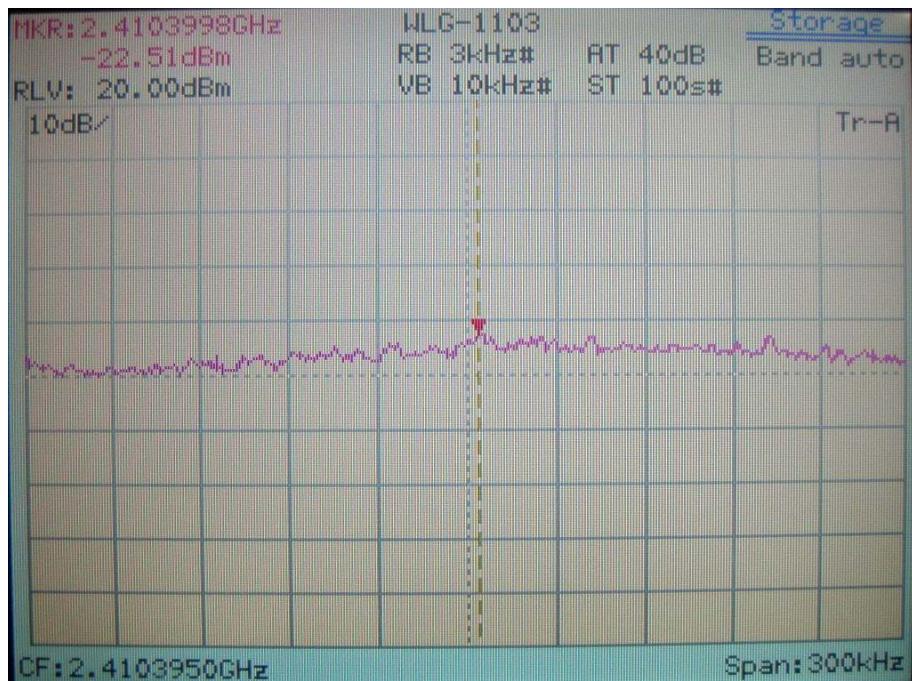


Power Spectral Density of Channel 06

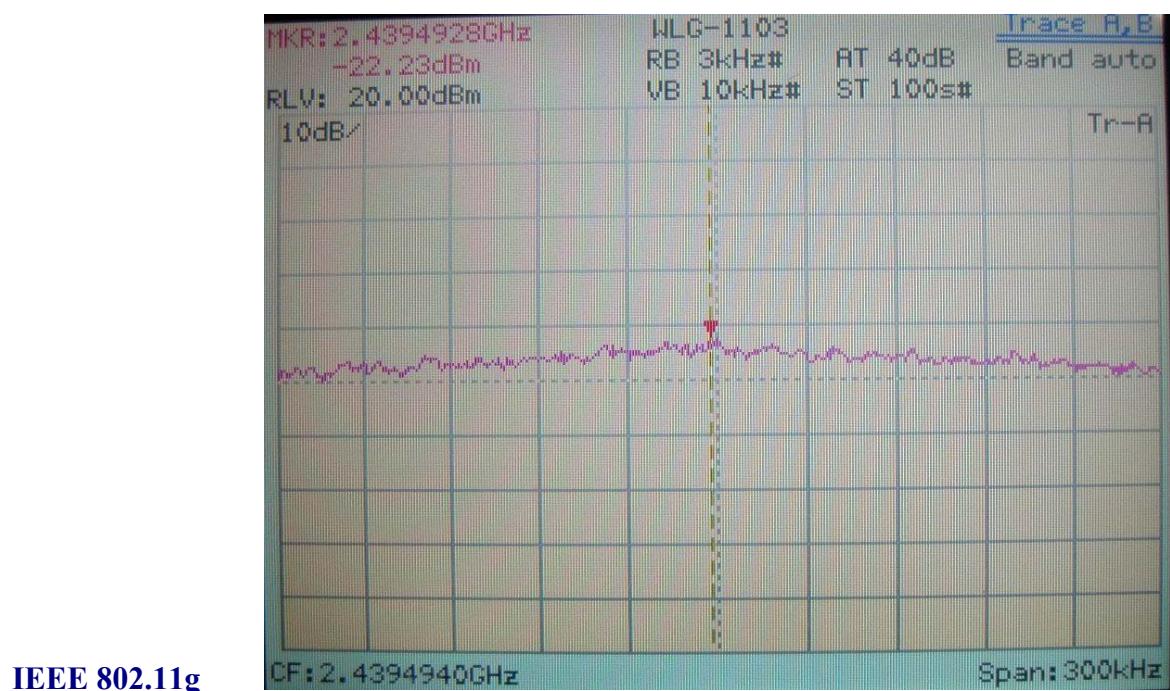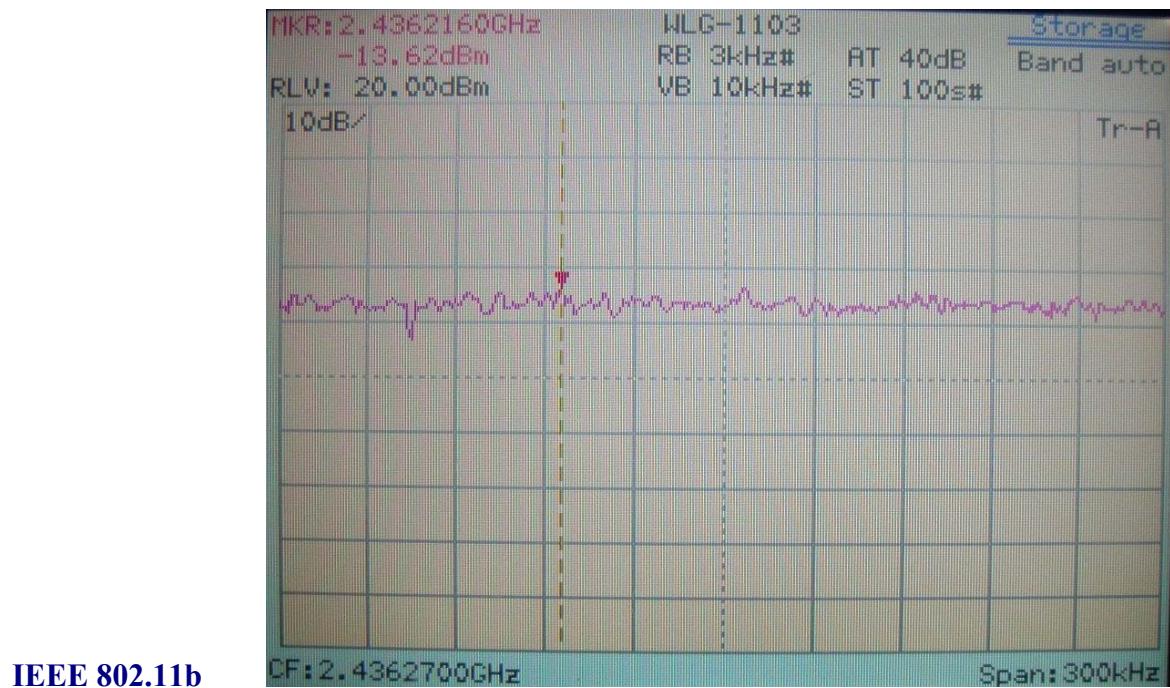

Power Spectral Density of Channel 11

IEEE 802.11b

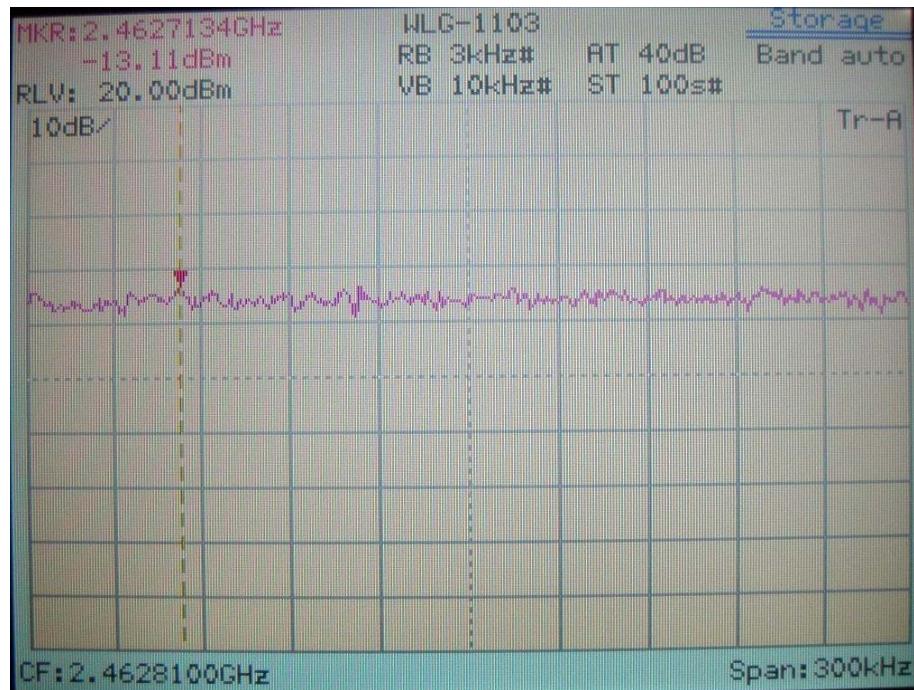

IEEE 802.11g

