



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Arcadyan Technology Corporation
Applicant Address	No.8, Sec.2, Guangfu Rd.,Hsinchu, 30071 Taiwan
FCC ID	RAXHT2000W
Manufacturer's company	Arcadyan Technology Corporation
Manufacturer Address	No.8, Sec.2, Guangfu Rd.,Hsinchu, 30071 Taiwan

Product Name	HT2000W wifi module
Brand Name	Arcadyan
Model No.	WG9115AAC22-HS
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Apr. 08, 2016
Final Test Date	Jun. 16, 2016
Submission Type	Original Equipment

### Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r05 and KDB 662911 D01 v02r01.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	4
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies .....	6
3.5. Table for Test Modes.....	7
3.6. Table for Testing Locations.....	8
3.7. Table for Supporting Units .....	8
3.8. Table for Parameters of Test Software Setting .....	9
3.9. EUT Operation during Test .....	9
3.10. Duty Cycle.....	9
3.11. Test Configurations .....	10
<b>4. TEST RESULT</b> .....	<b>12</b>
4.1. AC Power Line Conducted Emissions Measurement.....	12
4.2. Maximum Conducted Output Power Measurement.....	16
4.3. Power Spectral Density Measurement .....	18
4.4. 6dB Spectrum Bandwidth Measurement .....	27
4.5. Radiated Emissions Measurement .....	34
4.6. Emissions Measurement .....	52
4.7. Antenna Requirements .....	70
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>71</b>
<b>6. MEASUREMENT UNCERTAINTY</b> .....	<b>73</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT</b> .....	<b>A1 ~ A24</b>
<b>APPENDIX B. TEST PHOTOS</b> .....	<b>B1 ~ B4</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR640825-02AA	Rev. 01	Initial issue of report	Sep. 09, 2016



## 1. VERIFICATION OF COMPLIANCE

Product Name : HT2000W wifi module  
Brand Name : Arcadyan  
Model No. : WG9115AAC22-HS  
Applicant : Arcadyan Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 08, 2016 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'. The signature is written over a horizontal line.

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C			
Part	Rule Section	Description of Test	Result
4.1	15.207	AC Power Line Conducted Emissions	Complies
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies
4.3	15.247(e)	Power Spectral Density	Complies
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies
4.5	15.247(d)	Radiated Emissions	Complies
4.6	15.247(d)	Band Edge Emissions	Complies
4.7	15.203	Antenna Requirements	Complies

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Product Type	WLAN (3TX, 3RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n: see the below table
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Bandwidth (99%)	IEEE 802.11b: 10.59 MHz IEEE 802.11g: 15.98 MHz IEEE 802.11n MCS0 (HT20): 17.80 MHz IEEE 802.11n MCS0 (HT40): 36.47 MHz
Maximum Conducted Output Power	IEEE 802.11b: 28.60 dBm IEEE 802.11g: 28.84 dBm IEEE 802.11n MCS0 (HT20): 28.62 dBm IEEE 802.11n MCS0 (HT40): 24.61 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Note: The EUT is a limited module, which only limited to the host (brand: HUGHES / model: HT2000W).

The EUT was installed to the host (brand: HUGHES / model: HT2000W) to perform all the tests.

Items	Description
Beamforming Function	<input type="checkbox"/> With beamforming <input checked="" type="checkbox"/> Without beamforming

**Antenna and Bandwidth**

Antenna	Three (TX)	
Bandwidth Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

**IEEE 11n Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11n (HT20)	3	MCS 0-23
802.11n (HT40)	3	MCS 0-23

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).  
Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

**3.2. Accessories**

N/A

### 3.3. Table for Filed Antenna

Set	Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
						2.4GHz	5GHz
1	1	YAGEO	ANTA0ZZ10511WLAN1	PCB Antenna	I-PEX	3.65	-
	2	YAGEO	ANTA0ZZ10511WLAN2	PCB Antenna	I-PEX	3.69	-
	3	YAGEO	ANTA0ZZ10511WLAN3	PCB Antenna	I-PEX	3.6	-
	4	YAGEO	ANTA0ZZ10511WLAN4	PCB Antenna	I-PEX	-	3.97
	5	YAGEO	ANTA0ZZ10511WLAN5	PCB Antenna	I-PEX	-	3.14
2	6	Airgain	N2420CH-T2M48-G165U	PCB Antenna	I-PEX	3.7	-
	7	Airgain	N2420CH2_A-T2M48-G90U	PCB Antenna	I-PEX	3.7	-
	8	Airgain	N2420CSHN_B-T2M48-G125U	PCB Antenna	I-PEX	3.6	-
	9	Airgain	N5X20B5-T2M48-G45U	PCB Antenna	I-PEX	-	4.4
	10	Airgain	N5X20B3-T2M48-G120U	PCB Antenna	I-PEX	-	4.0

Note: The EUT has two sets of antenna and there are five antennas for each set.

Because Set 1 & Set 2 are the same type antennas, only the higher gain antenna "Set 2" was tested.

**For 2.4GHz function:**

**For IEEE 802.11b/g/n mode (3TX/3RX):**

Chain 1, Chain 2 and Chain 3 can be used as transmitting/receiving antenna.


Chain 1, Chain 2 and Chain 3 could transmit/receive simultaneously.

**For 5GHz function:**

**For IEEE 802.11a/n/ac mode (2TX/2RX):**

Chain 4 and Chain 5 can be used as transmitting/receiving antenna.

Chain 4 and Chain 5 could transmit/receive simultaneously.

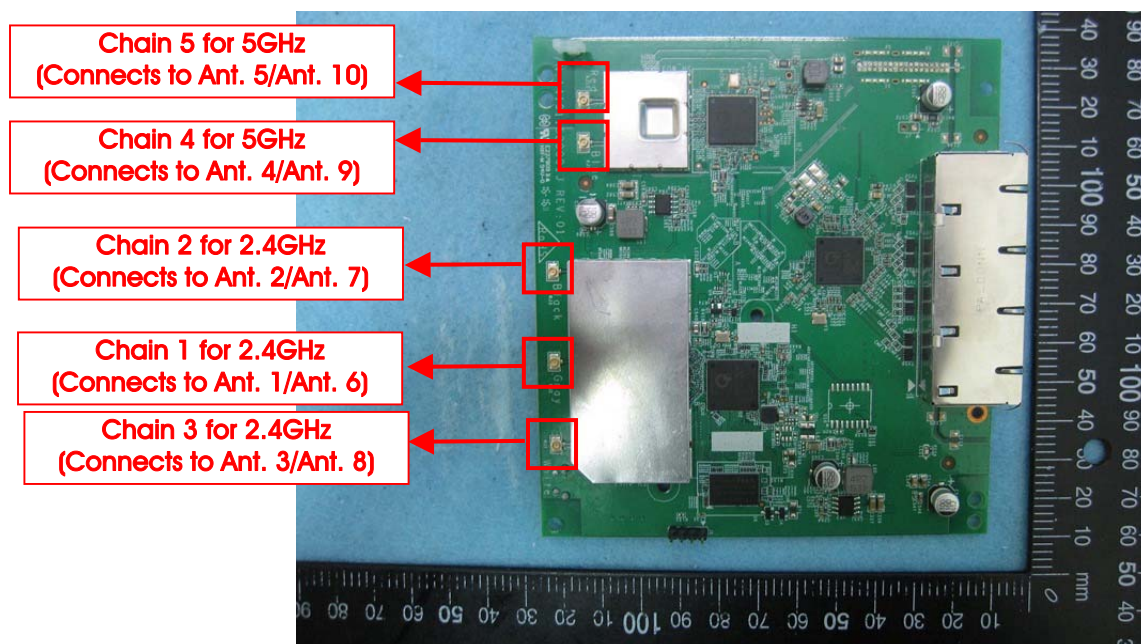



### 3.4. Table for Carrier Frequencies

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Radiated Emissions 9kHz~1GHz	CTX	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3
	11g/BPSK	6 Mbps	1/6/11	1+2+3
	11n HT20	MCS0	1/6/11	1+2+3
	11n HT40	MCS0	3/6/9	1+2+3

Note: The EUT can only use standing position.

The following test modes were performed for all tests:

#### For Conducted Emission test:

Mode 1. CTX - 2.4GHz

Mode 2. CTX - 5GHz

Mode 2 is the worst case, so it was selected to record in this test report.

#### For Radiated Emission test (Below 1GHz):

Mode 1. CTX - 2.4GHz

Mode 2. CTX - 5GHz

Mode 1 is the worst case, so it was selected to record in this test report.

#### For Co-location MPE Test:

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA640825-02AA) test is added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E6430	DoC

For Test Site No: 03CH01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Test Software Version	ART2-GUI Version:2.3					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	23.5	24	23	-	-	-
802.11g	18.5	24	19	-	-	-
802.11n MCS0 HT20	18	24	18.5	-	-	-
802.11n MCS0 HT40	-	-	-	15.5	20	18.5

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	1.000	1.000	100.00	0.00	0.01
802.11g	2.019	2.072	97.44	0.11	0.50
802.11n MCS0 HT20	1.894	1.932	98.03	0.09	0.01
802.11n MCS0 HT40	0.908	0.966	94.00	0.27	1.10


### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

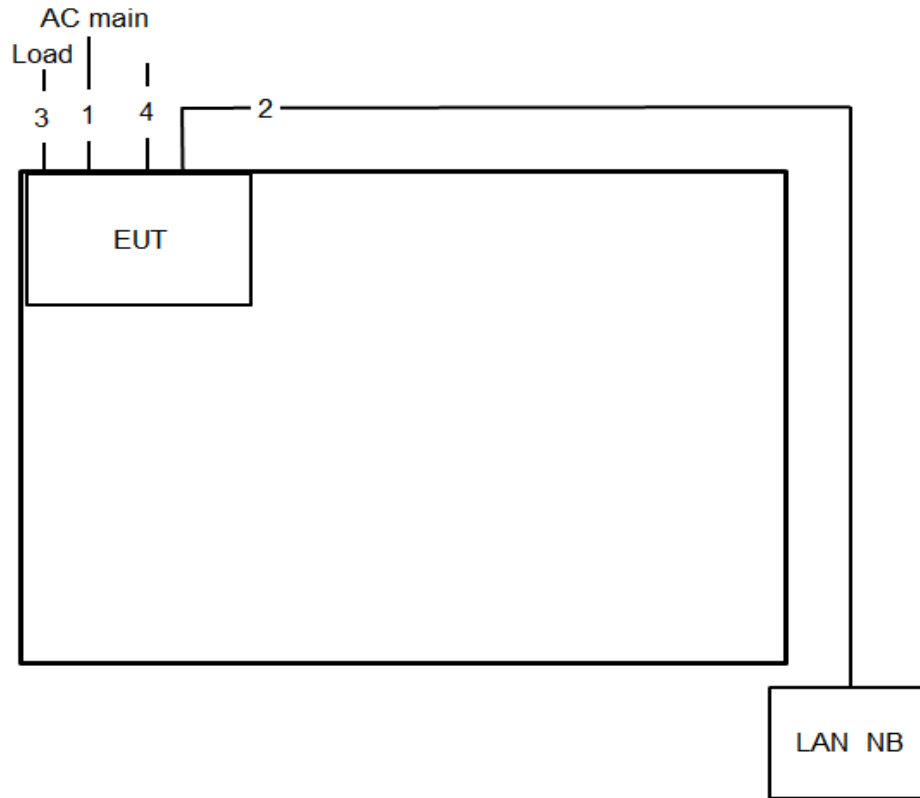

Item	Connection	Shielded	Length
1	Power cable	No	3.2m
2	RJ-45 cable	No	10m
3	RJ-45 cable*3	No	1.5m
4	Coaxial cable	Yes	1.5m

### 3.11.2. Radiation Emissions Test Configuration

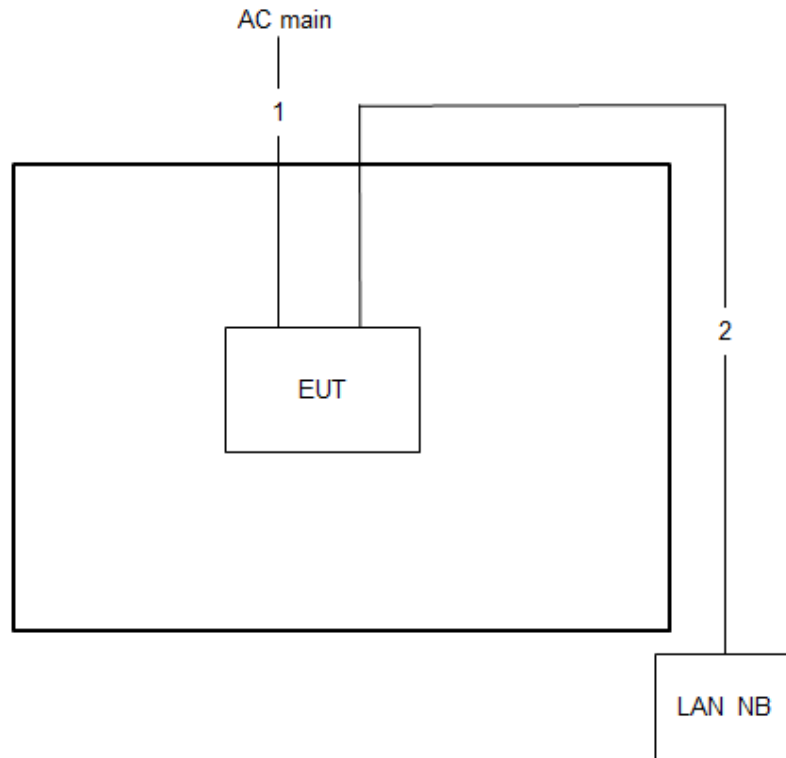

Item	Connection	Shielded	Length
1	Power cable	No	3.2m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

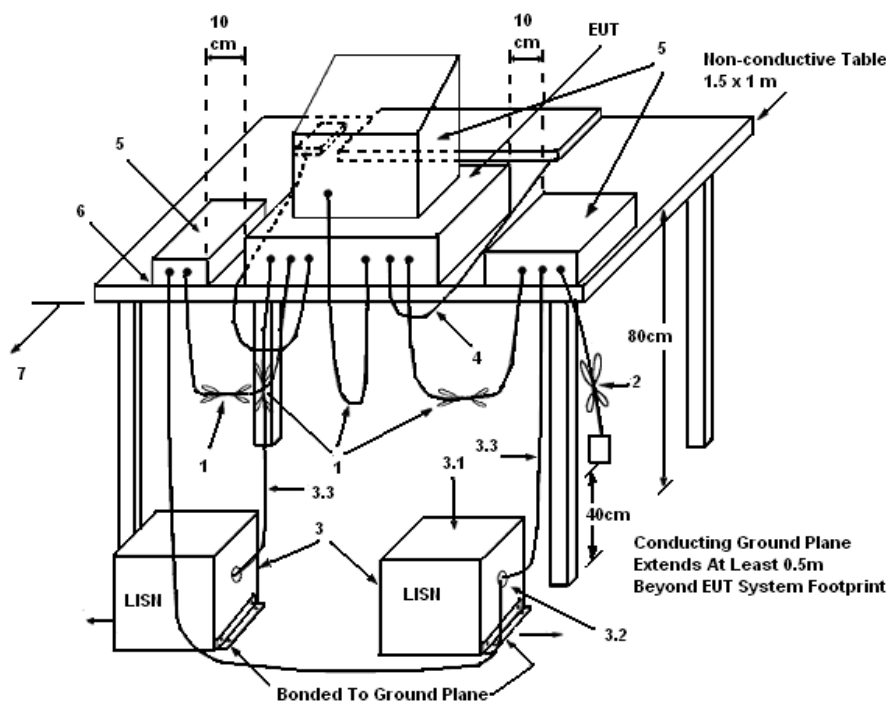

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation

There is no deviation with the original standard.


#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.




#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	56%
Test Engineer	Deven Huang	Phase	Line
Configuration	CTX		

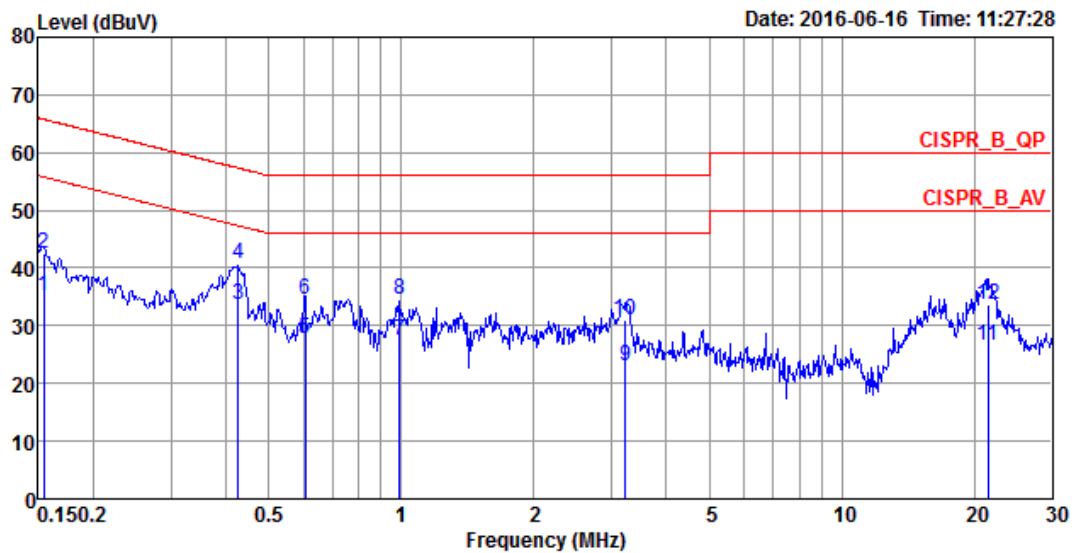

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1540	35.23	-20.55	55.78	25.05	10.02	0.16	LINE	Average
2	0.1540	42.53	-23.25	65.78	32.35	10.02	0.16	LINE	QP
3	0.4260	33.51	-13.82	47.33	23.53	9.92	0.06	LINE	Average
4	0.4260	40.62	-16.71	57.33	30.64	9.92	0.06	LINE	QP
5	0.6043	27.61	-18.39	46.00	17.34	9.93	0.34	LINE	Average
6	0.6043	34.60	-21.40	56.00	24.33	9.93	0.34	LINE	QP
7	0.9891	27.53	-18.47	46.00	16.86	9.94	0.73	LINE	Average
8	0.9891	34.49	-21.51	56.00	23.82	9.94	0.73	LINE	QP
9	3.2239	23.01	-22.99	46.00	12.95	9.98	0.08	LINE	Average
10	3.2239	30.94	-25.06	56.00	20.88	9.98	0.08	LINE	QP
11	21.4860	26.57	-23.43	50.00	15.97	10.35	0.25	LINE	Average
12	21.4860	33.70	-26.30	60.00	23.10	10.35	0.25	LINE	QP

Temperature	23°C	Humidity	56%
Test Engineer	Deven Huang	Phase	Neutral
Configuration	CTX		

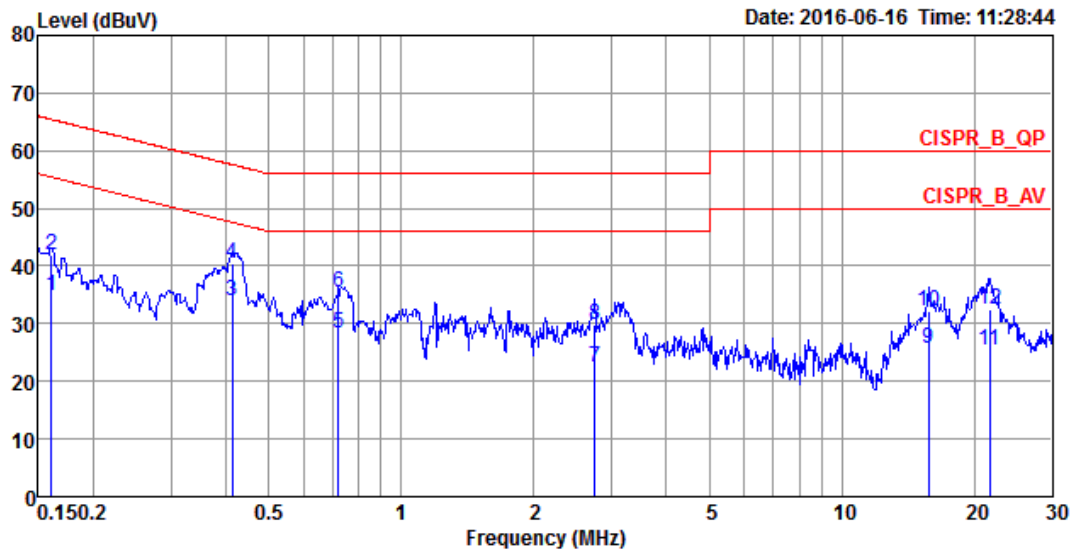

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1607	34.86	-20.57	55.43	24.67	10.02	0.17	NEUTRAL	Average
2	0.1607	41.91	-23.52	65.43	31.72	10.02	0.17	NEUTRAL	QP
3	0.4127	33.84	-13.75	47.59	23.88	9.92	0.04	NEUTRAL	Average
4	0.4127	40.45	-17.14	57.59	30.49	9.92	0.04	NEUTRAL	QP
5	0.7198	28.35	-17.65	46.00	17.94	9.93	0.48	NEUTRAL	Average
6	0.7198	35.52	-20.48	56.00	25.11	9.93	0.48	NEUTRAL	QP
7	2.7502	22.50	-23.50	46.00	12.46	9.97	0.07	NEUTRAL	Average
8	2.7502	29.95	-26.05	56.00	19.91	9.97	0.07	NEUTRAL	QP
9	15.7179	25.78	-24.22	50.00	15.32	10.24	0.22	NEUTRAL	Average
10	15.7179	32.19	-27.81	60.00	21.73	10.24	0.22	NEUTRAL	QP
11	21.7149	25.46	-24.54	50.00	14.86	10.35	0.25	NEUTRAL	Average
12	21.7149	32.42	-27.58	60.00	21.82	10.35	0.25	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r05 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

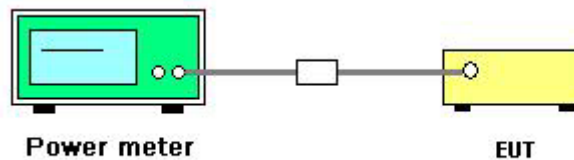

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	24°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Akina Chiu	<b>Test Date</b>	Jun. 01, 2016~Jun. 08, 2016

Mode	Frequency	Conducted Power (dBm)				Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11b	2412 MHz	23.80	24.09	23.59	28.60	30.00	Complies
	2437 MHz	23.97	23.54	23.50	28.45	30.00	Complies
	2462 MHz	22.94	23.41	23.17	27.95	30.00	Complies
802.11g	2412 MHz	19.13	19.71	18.67	23.96	30.00	Complies
	2437 MHz	23.89	24.21	24.10	28.84	30.00	Complies
	2462 MHz	19.47	19.44	19.61	24.28	30.00	Complies
802.11n MCS0 HT20	2412 MHz	18.98	18.62	18.06	23.34	30.00	Complies
	2437 MHz	23.71	23.81	24.02	28.62	30.00	Complies
	2462 MHz	18.31	19.14	18.96	23.59	30.00	Complies
802.11n MCS0 HT40	2422 MHz	16.04	16.72	14.92	20.73	30.00	Complies
	2437 MHz	19.98	20.38	19.04	24.61	30.00	Complies
	2452 MHz	17.77	18.75	17.84	22.91	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

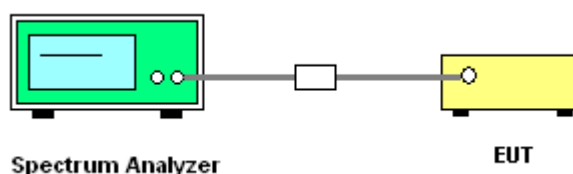

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	56%
Test Engineer	Akina Chiu		


Mode	Frequency	Power Density (dBm/3kHz)				Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Total		
802.11b	2412 MHz	-0.28	1.03	0.09	5.09	5.56	Complies
	2437 MHz	0.62	0.40	-0.09	5.09	5.56	Complies
	2462 MHz	-0.64	-0.98	-0.39	4.11	5.56	Complies
802.11g	2412 MHz	-6.46	-6.34	-6.60	-1.69	5.56	Complies
	2437 MHz	-1.46	-0.72	-1.06	3.70	5.56	Complies
	2462 MHz	-6.72	-6.18	-5.65	-1.39	5.56	Complies
802.11n MCS0 HT20	2412 MHz	-8.34	-6.67	-7.77	-2.77	5.56	Complies
	2437 MHz	-2.24	-2.09	-2.78	2.41	5.56	Complies
	2462 MHz	-8.62	-7.20	-6.85	-2.72	5.56	Complies
802.11n MCS0 HT40	2422 MHz	-12.37	-11.75	-13.67	-7.75	5.56	Complies
	2437 MHz	-7.96	-7.16	-8.95	-3.19	5.56	Complies
	2452 MHz	-11.48	-10.14	-11.45	-6.21	5.56	Complies

Note:  $Directional\ Gain = 10 \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{K=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 8.44\text{dBi} > 6\text{dBi}$ , so Limit =  $8 - (8.44 - 6) = 5.56\text{dBm}/3\text{kHz}$ .

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1**

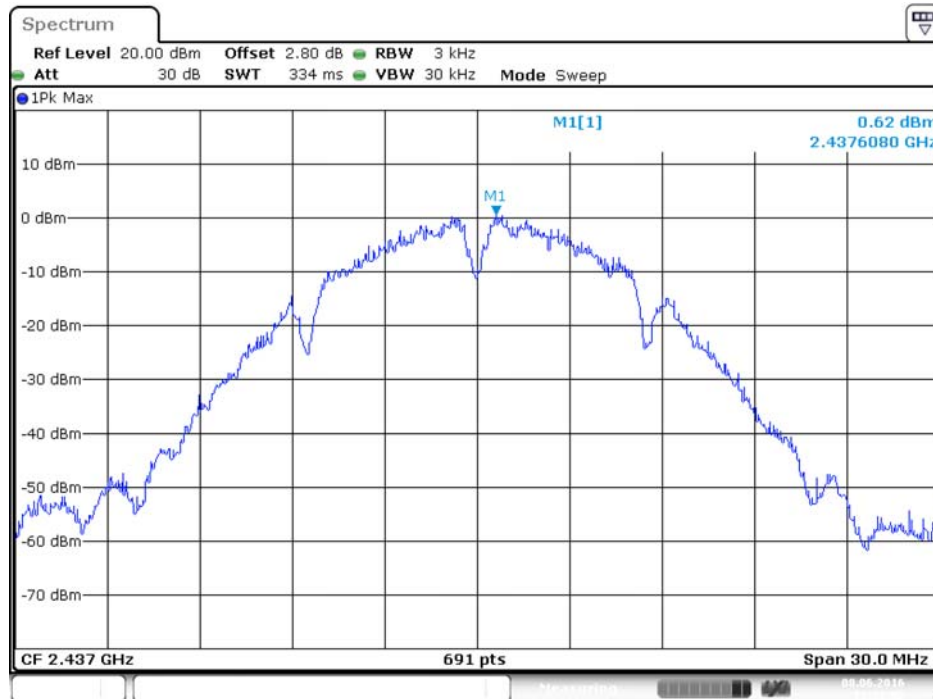

Date: 8 JUN 2016 11:11:03


**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2**

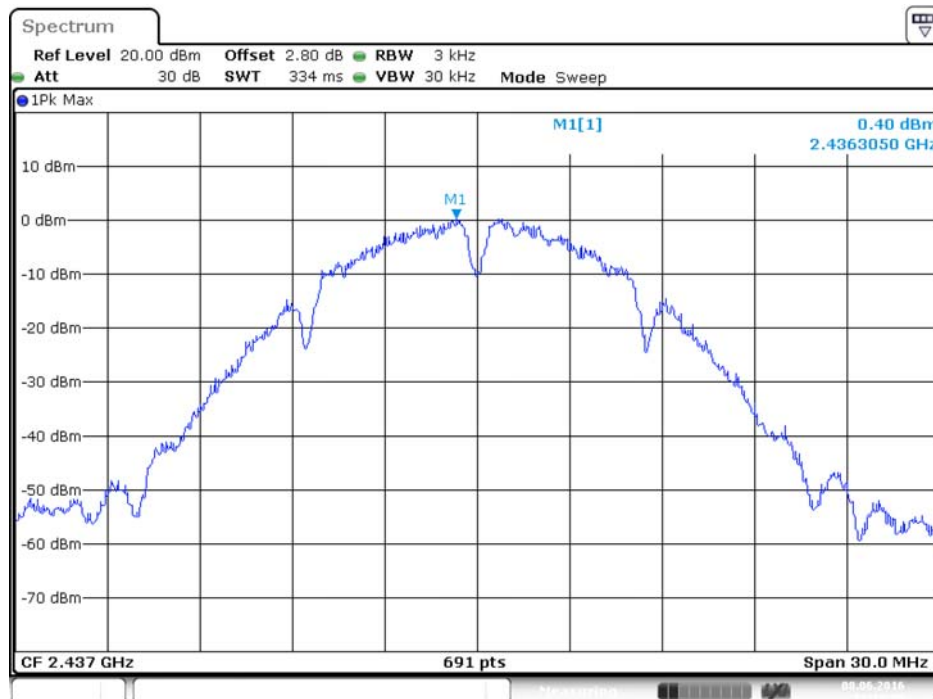


Date: 8 JUN 2016 11:10:27




**Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3**

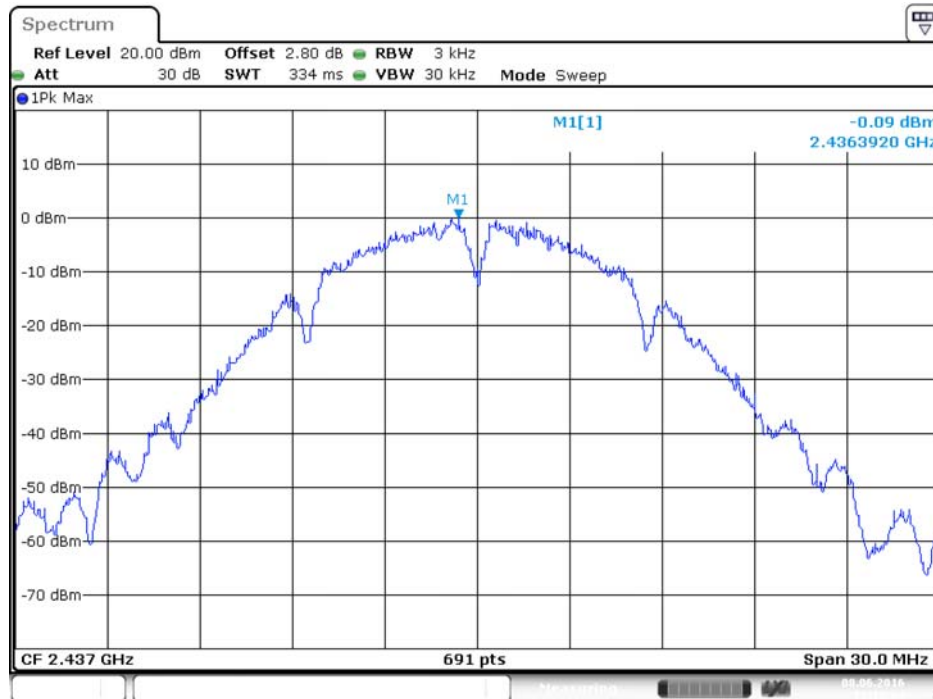


**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1**

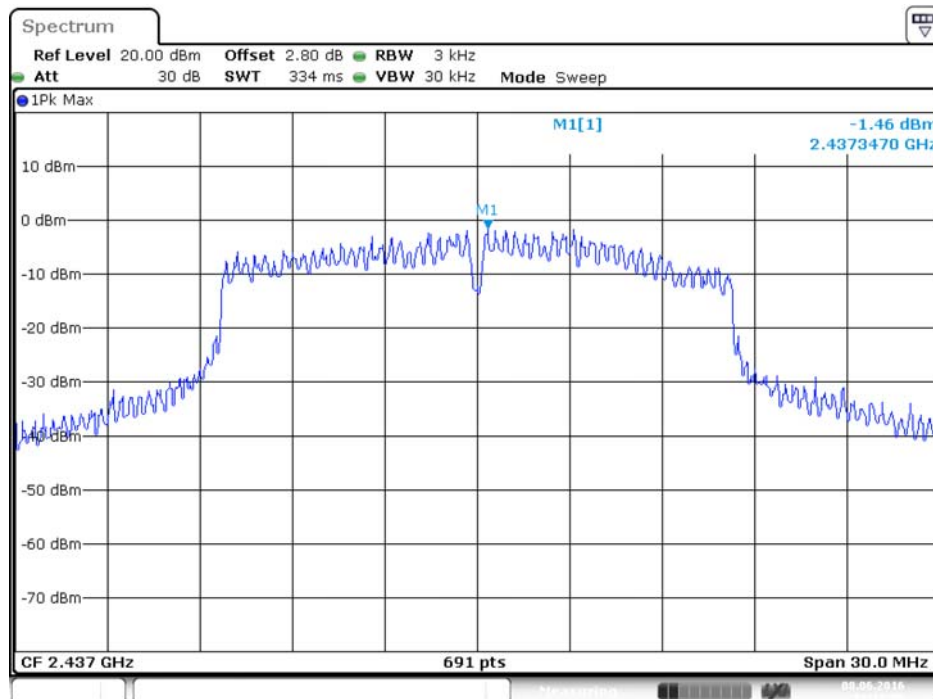


**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2**

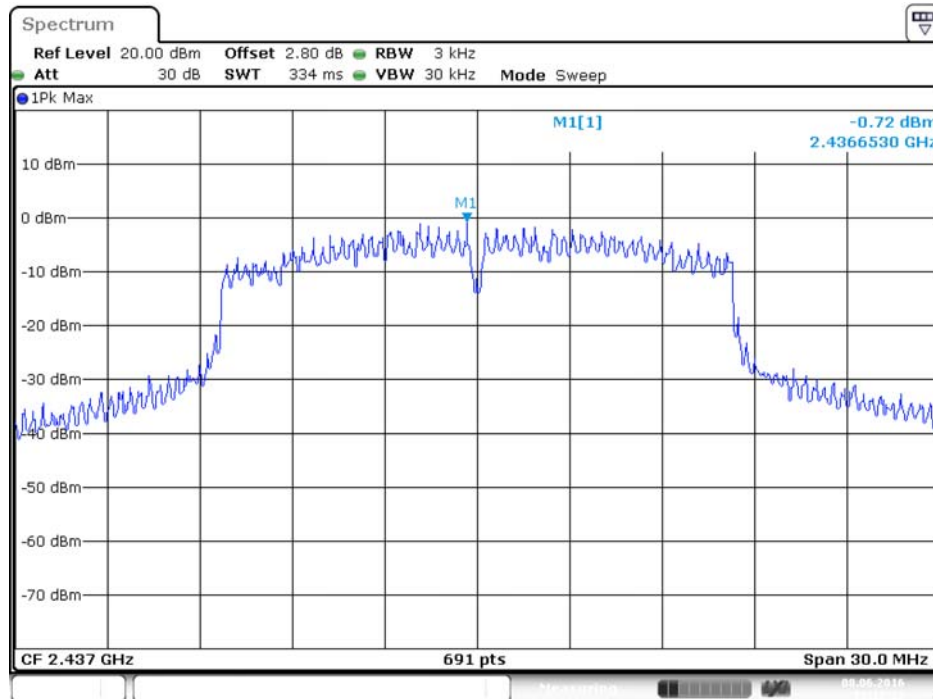

**Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3**

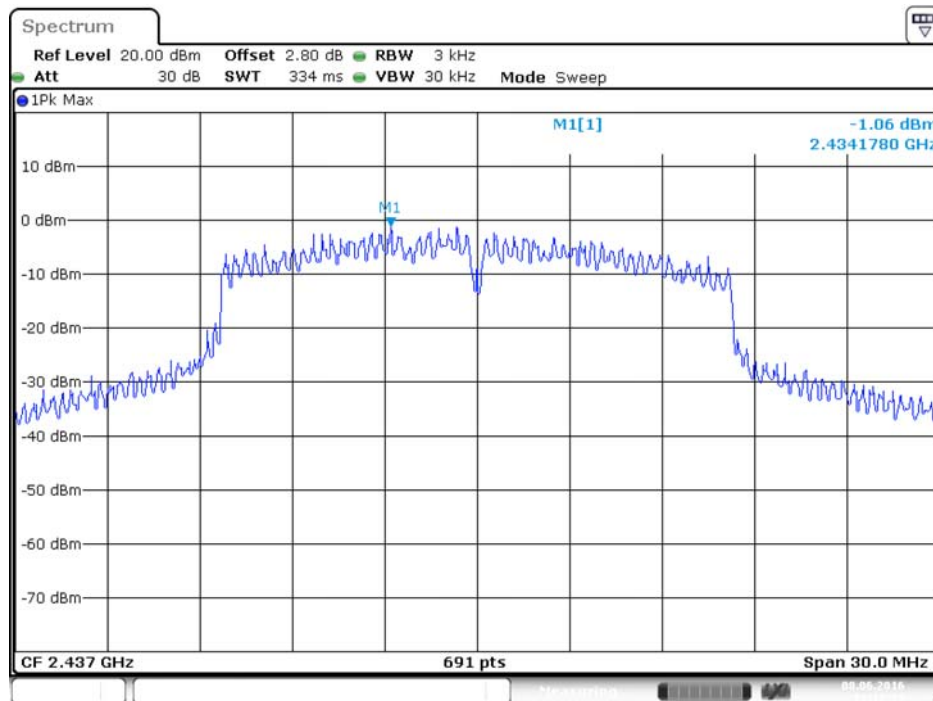


**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1**

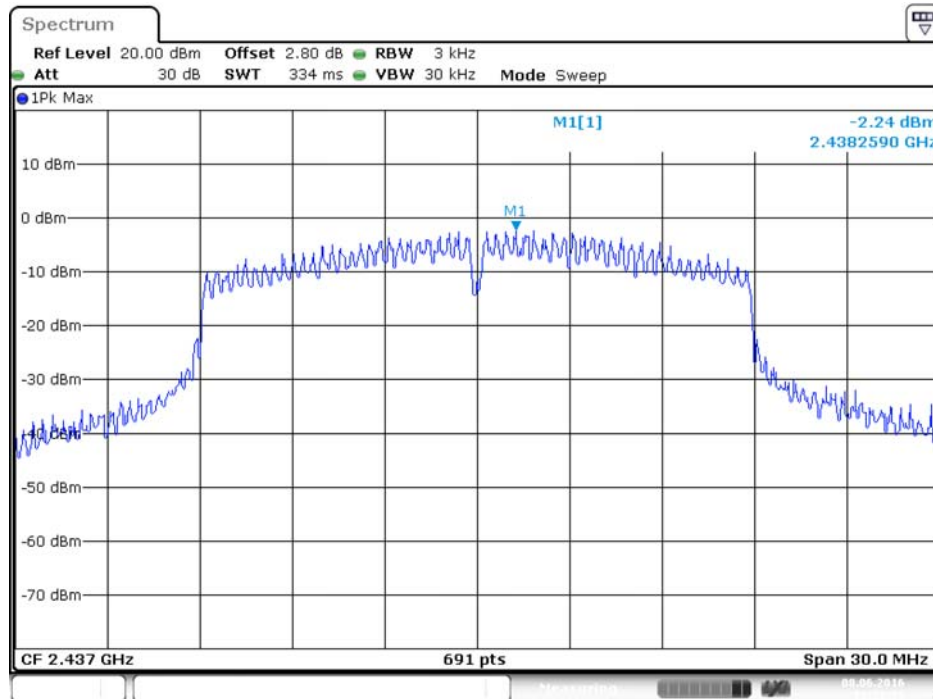


Date: 8 JUN 2016 11:21:52

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 2**

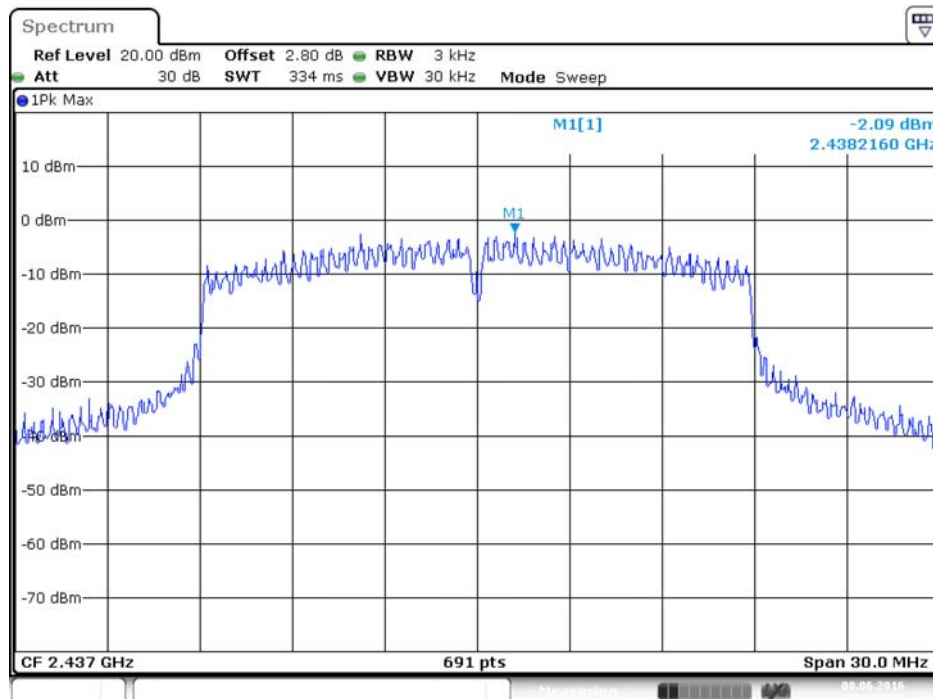


Date: 8 JUN 2016 11:21:36

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 3**

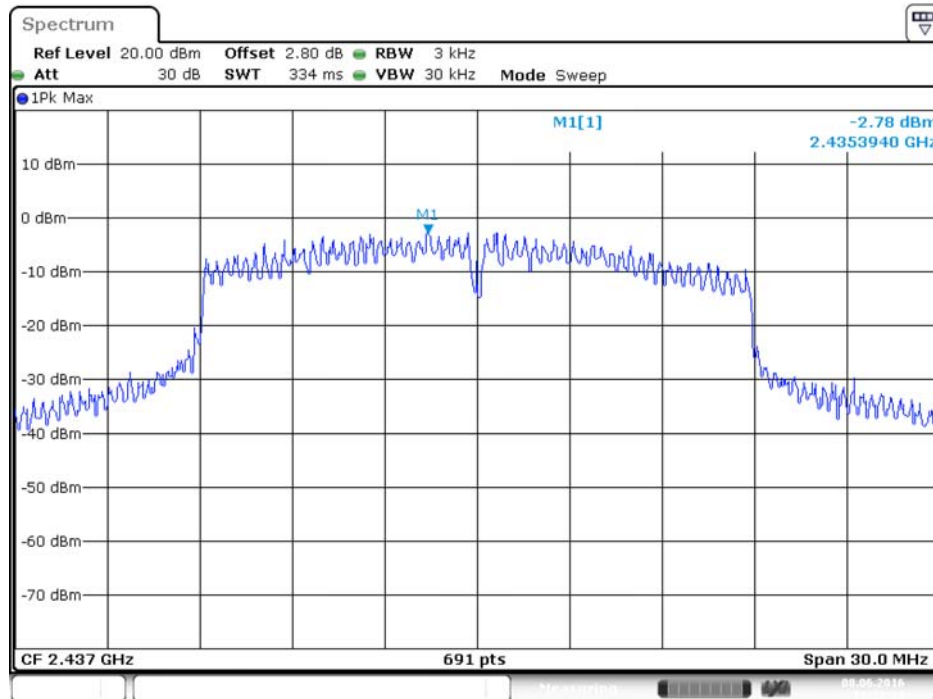


Date: 8 JUN 2016 11:21:18

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1**

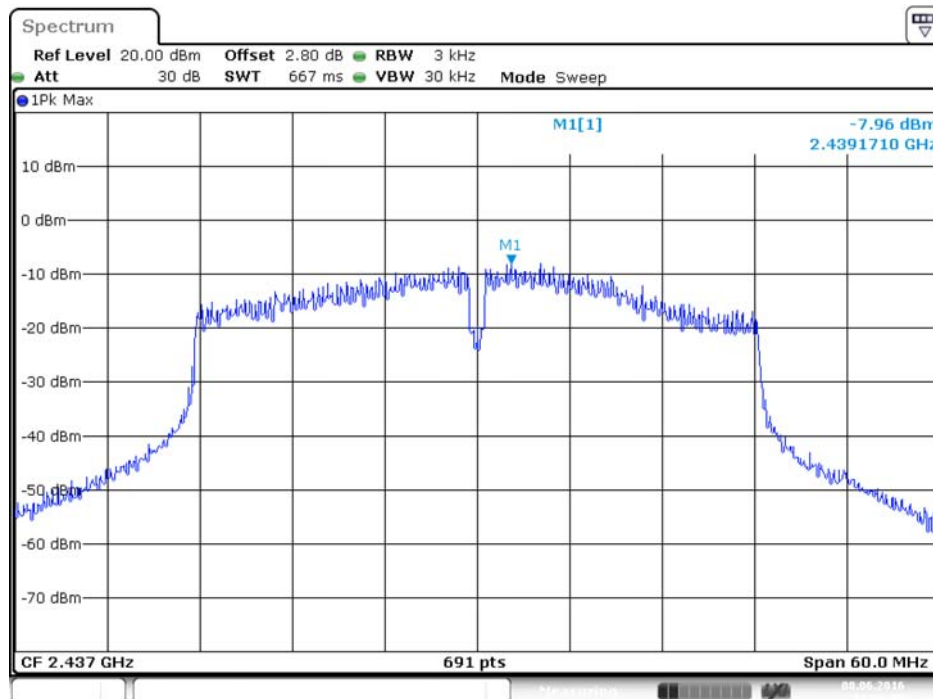


Date: 8 JUN 2016 11:26:09

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 2**

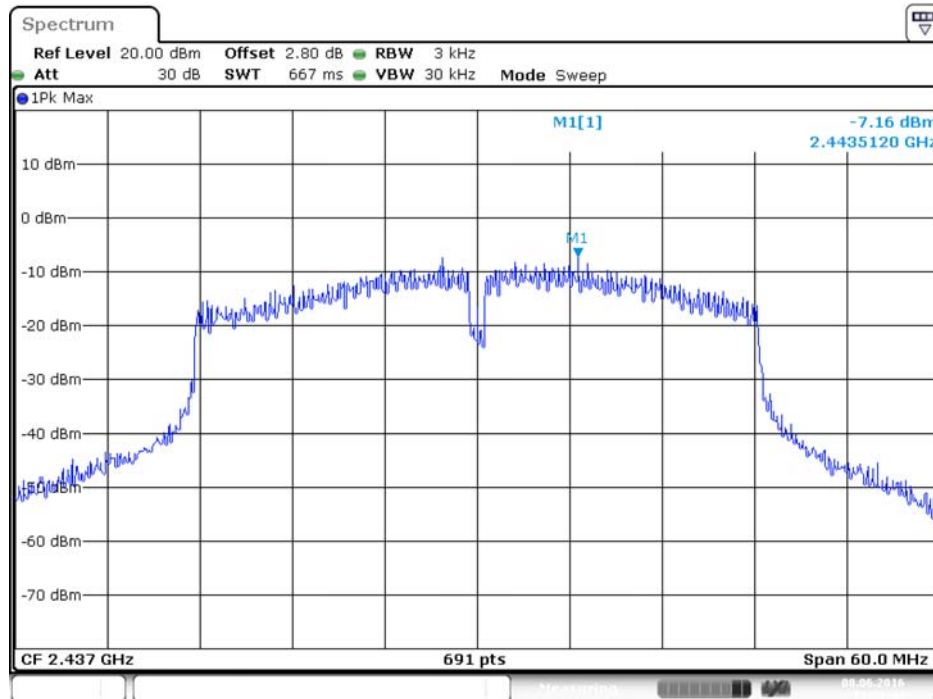

Date: 8 JUN 2016 11:26:45

**Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 3**

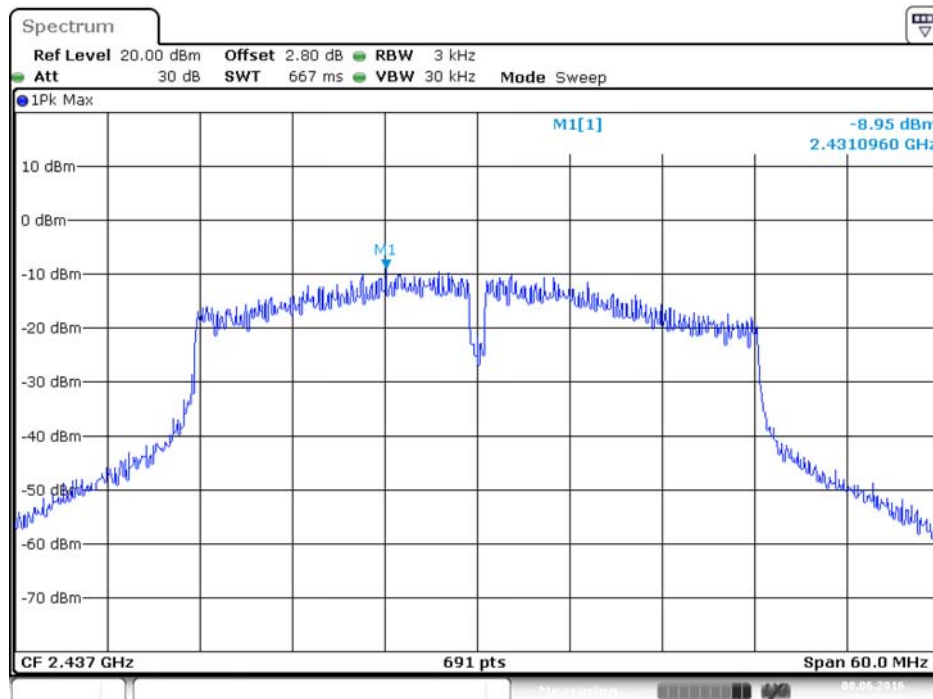

Date: 8 JUN 2016 11:27:48

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth = > 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	23°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Akina Chiu		


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	6.55	10.59	500	Complies
	2437 MHz	6.61	10.51	500	Complies
	2462 MHz	6.03	10.33	500	Complies
802.11g	2412 MHz	13.80	15.63	500	Complies
	2437 MHz	12.52	15.98	500	Complies
	2462 MHz	13.16	15.72	500	Complies
802.11n MCS0 HT20	2412 MHz	16.35	17.63	500	Complies
	2437 MHz	8.12	17.80	500	Complies
	2462 MHz	16.87	17.63	500	Complies
802.11n MCS0 HT40	2422 MHz	30.03	36.47	500	Complies
	2437 MHz	30.15	36.47	500	Complies
	2452 MHz	20.17	36.47	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.




6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1 + Chain 2 + Chain 3

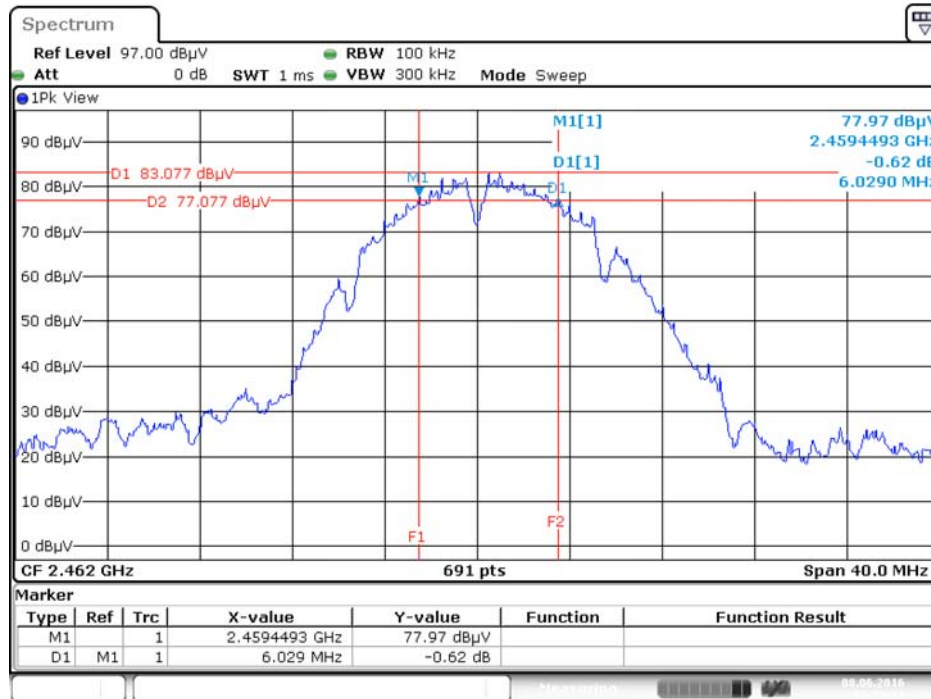


Date: 8 JUN 2016 10:23:32

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3

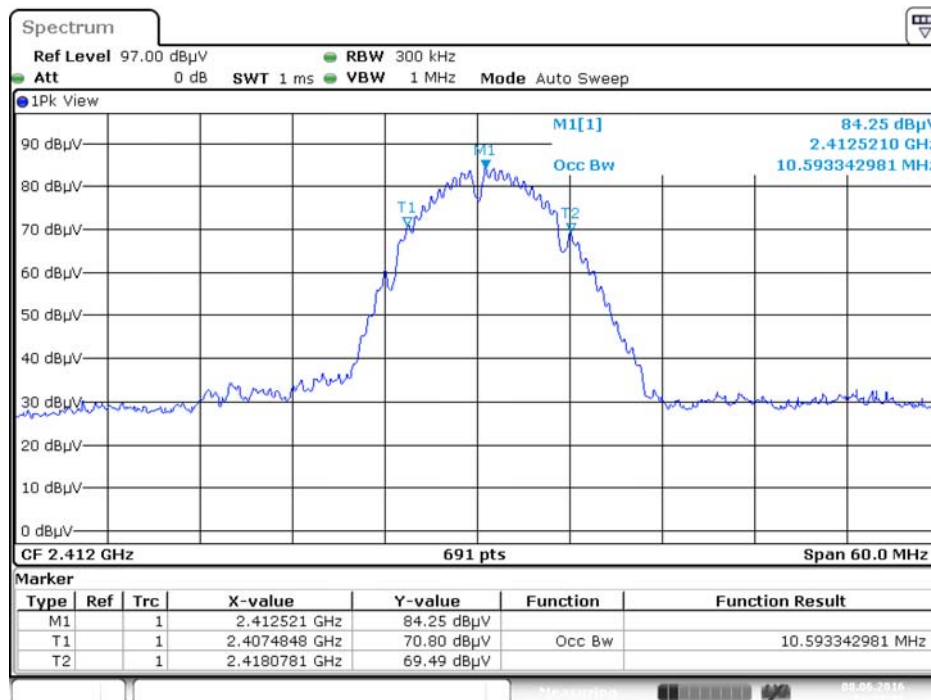

Date: 8 JUN 2016 10:37:16

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3

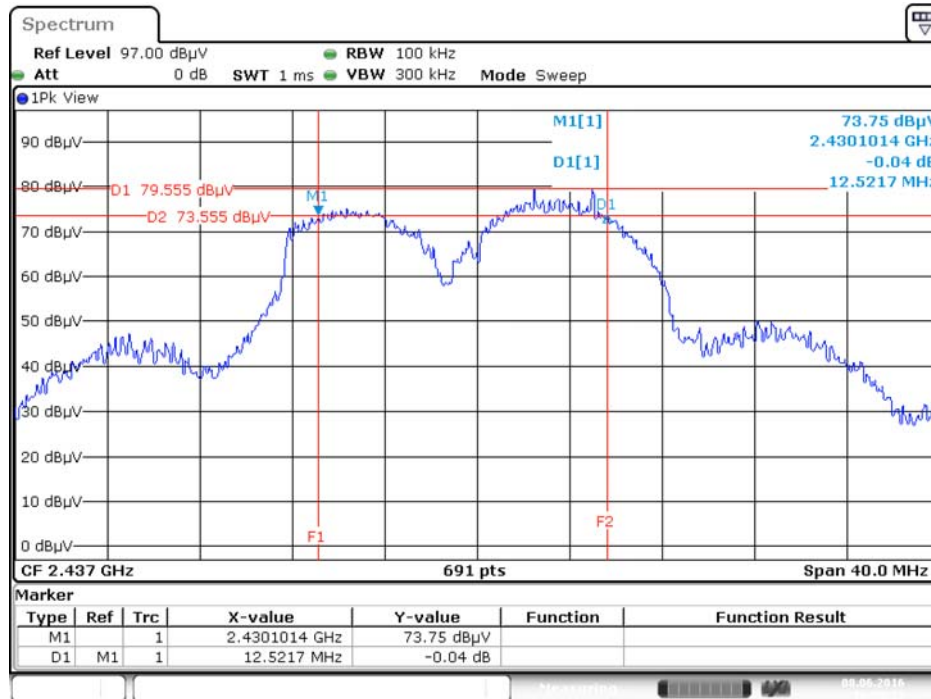


Date: 8 JUN 2016 10:25:28

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3




Date: 8 JUN 2016 10:40:57

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

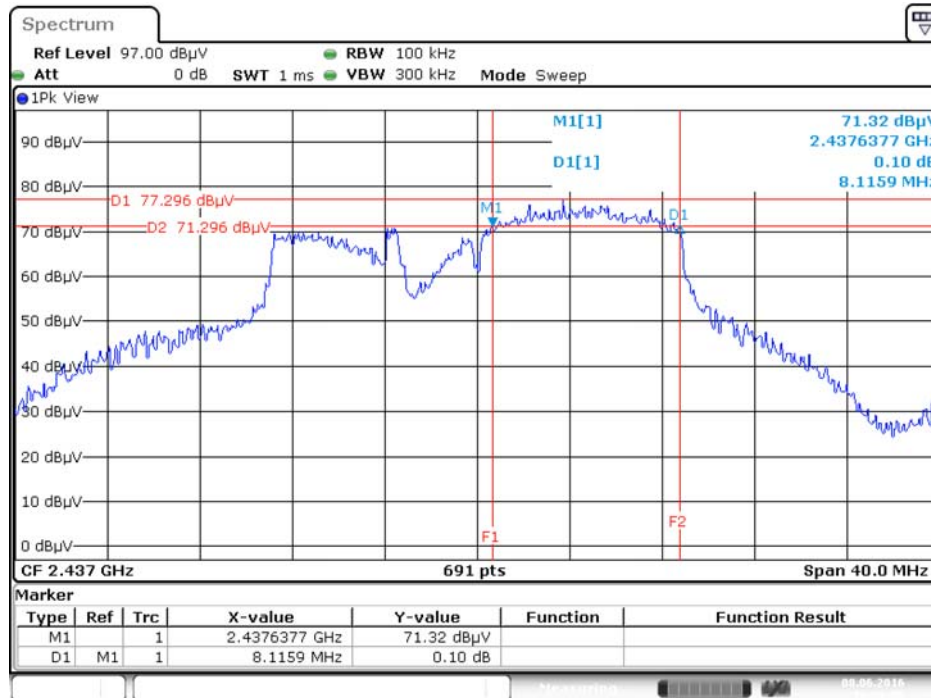


Date: 8 JUN 2016 10:26:56

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

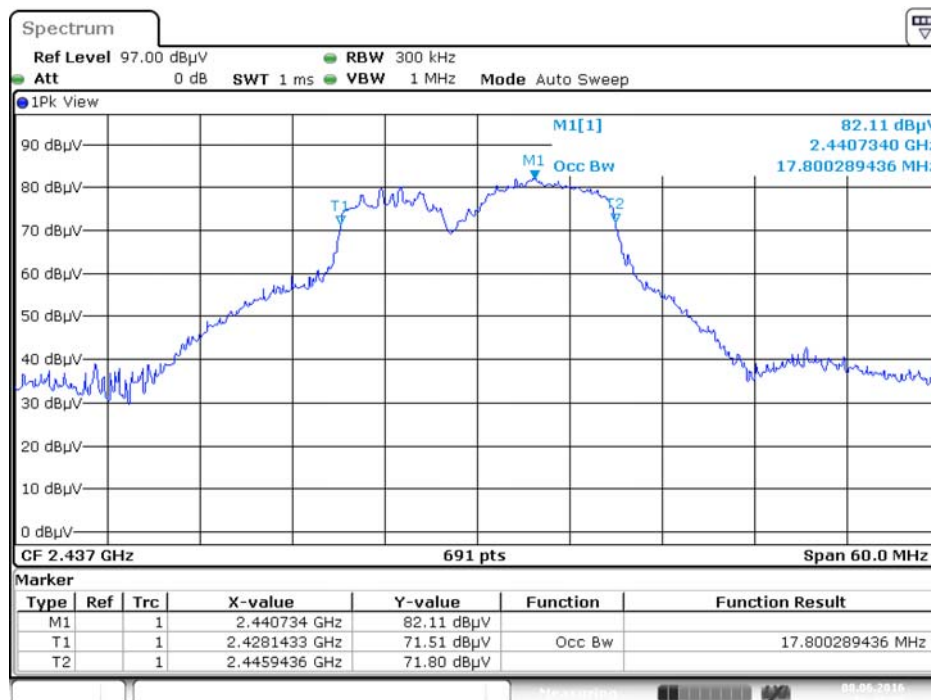


Date: 8 JUN 2016 10:42:35

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2452 MHz / Chain 1 + Chain 2 + Chain 3

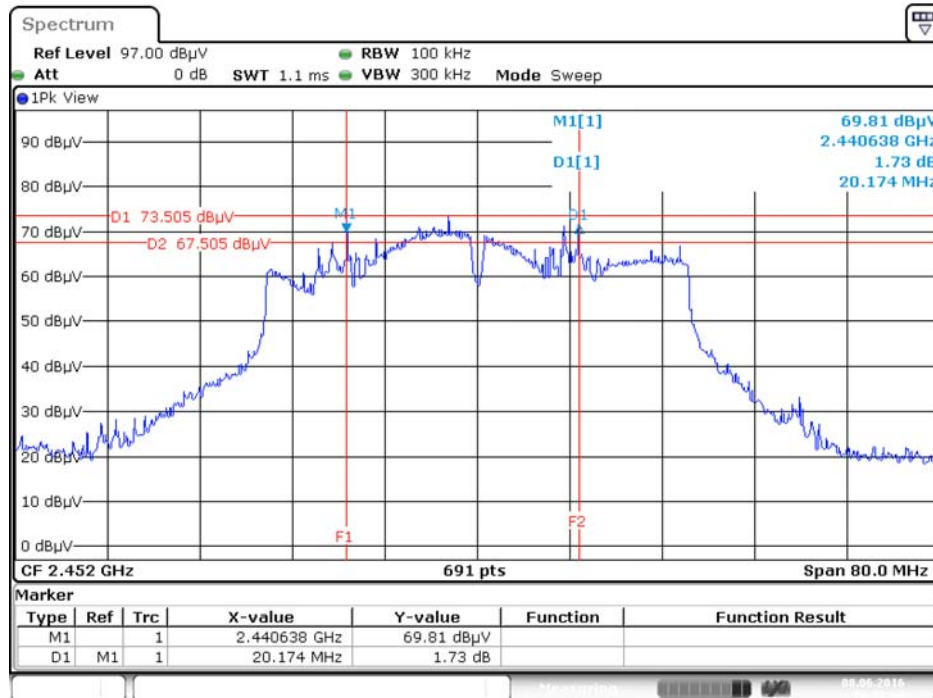

Date: 8 JUN 2016 10:32:34

99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3

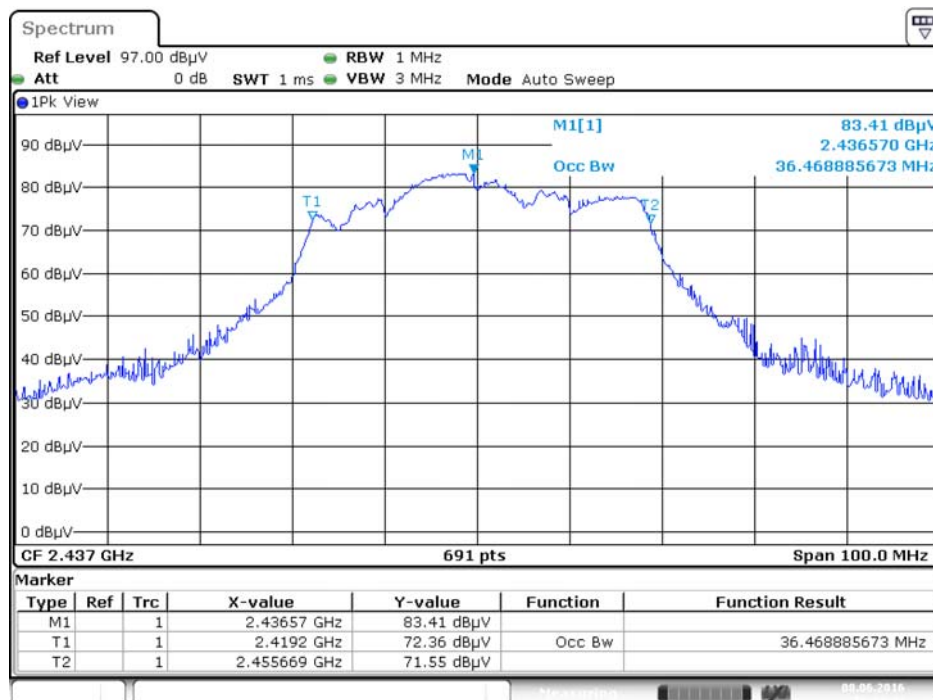

Date: 8 JUN 2016 10:44:43

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

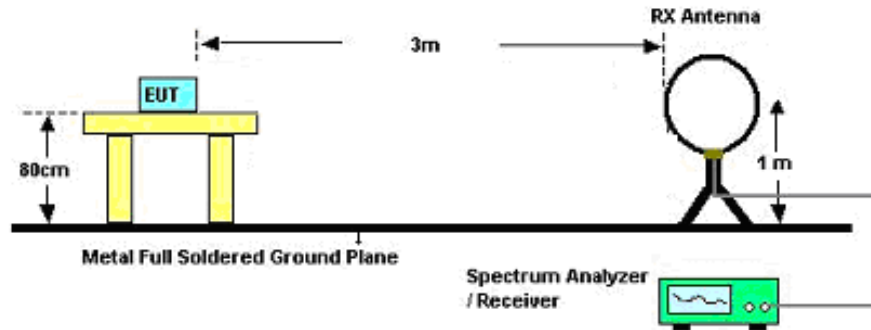

For Radiated Emissions: 30MHz~1GHz

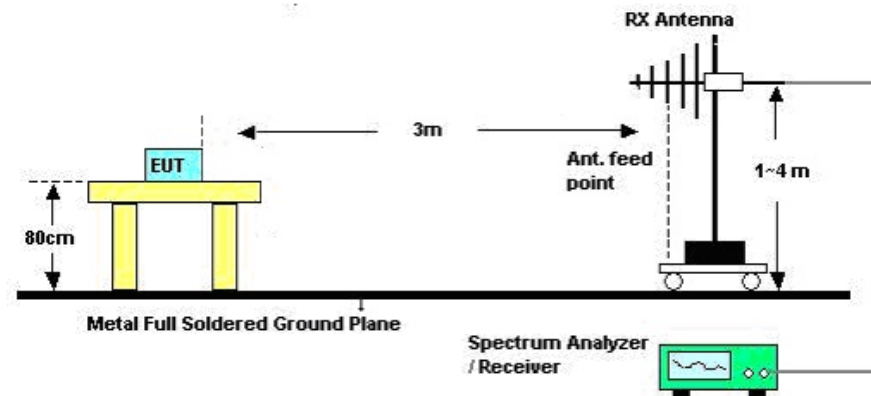

For Radiated Emissions: Above 1GHz

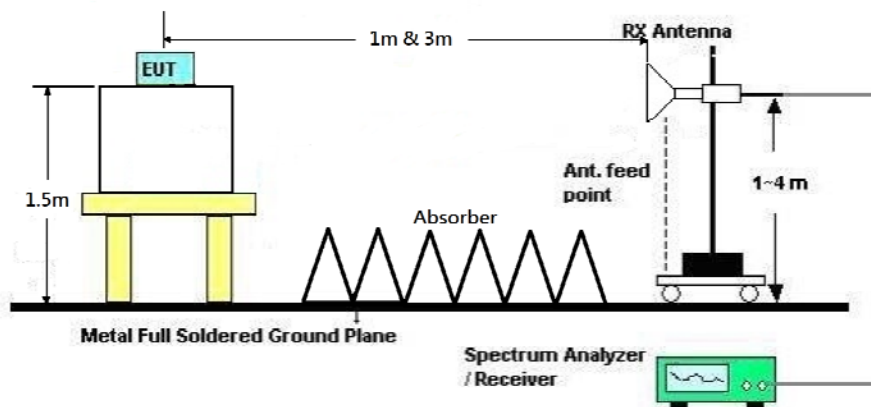

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	54%
Test Engineer	Steven Liang	Configurations	CTX
Test Date	Jun. 14, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.



4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	22°C	Humidity	54%
Test Engineer	Steven Liang	Configurations	CTX

Horizontal

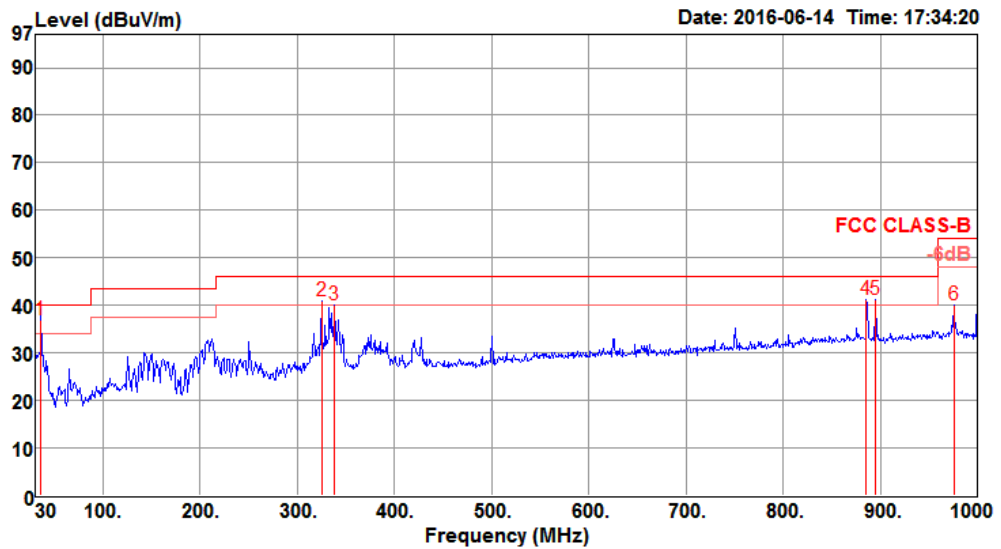

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	35.82	36.81	40.00	-3.19	41.86	1.25	22.18	28.48	119	248 QP	HORIZONTAL
2	324.88	40.96	46.00	-5.04	46.18	2.19	20.35	27.76	100	0 Peak	HORIZONTAL
3	338.46	39.97	46.00	-6.03	44.91	2.22	20.70	27.86	100	0 Peak	HORIZONTAL
4	885.54	41.27	46.00	-4.73	38.45	3.42	27.48	28.08	100	0 Peak	HORIZONTAL
5	895.24	41.29	46.00	-4.71	38.32	3.44	27.55	28.02	100	0 Peak	HORIZONTAL
6	975.75	40.17	54.00	-13.83	36.04	3.70	28.15	27.72	100	0 Peak	HORIZONTAL

**Vertical**

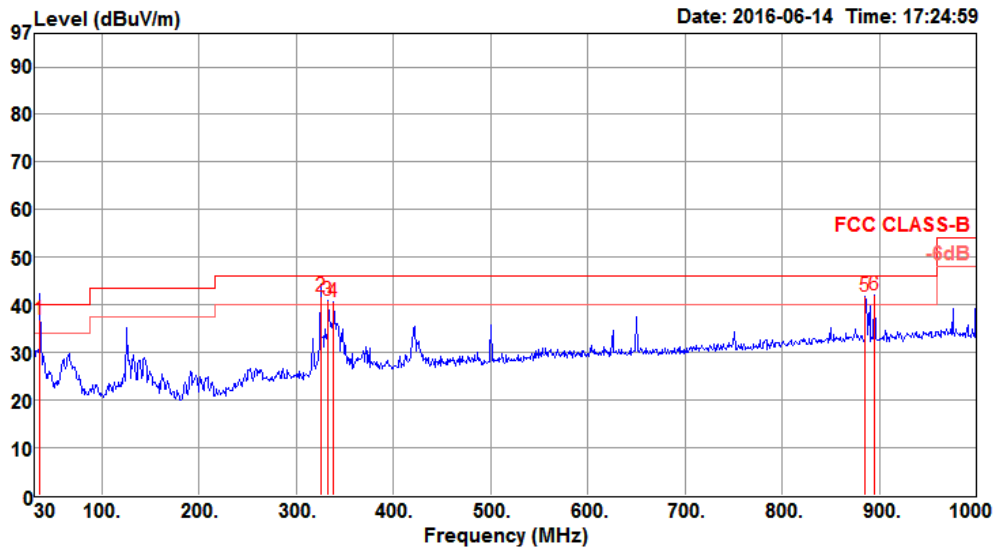

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	35.82	36.96	40.00	-3.04	42.01	1.25	22.18	28.48	102	236	QP VERTICAL
2	324.88	41.68	46.00	-4.32	46.90	2.19	20.35	27.76	171	137	QP VERTICAL
3	332.64	40.86	46.00	-5.14	45.90	2.21	20.56	27.81	300	0	Peak VERTICAL
4	338.46	40.70	46.00	-5.30	45.64	2.22	20.70	27.86	300	0	Peak VERTICAL
5	885.54	41.84	46.00	-4.16	39.02	3.42	27.48	28.08	300	0	Peak VERTICAL
6	895.24	42.12	46.00	-3.88	39.15	3.44	27.55	28.02	300	0	Peak VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 26, 2016		

##### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4820.64	39.74	54.00	-14.26	33.43	7.04	34.17	34.90	182	85	Average	HORIZONTAL
2	4821.20	49.89	74.00	-24.11	43.58	7.04	34.17	34.90	182	85	Peak	HORIZONTAL

##### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.95	37.94	54.00	-16.06	31.63	7.04	34.17	34.90	176	126	Average	VERTICAL
2	4824.12	49.11	74.00	-24.89	42.80	7.04	34.17	34.90	176	126	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 30, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.98	49.31	54.00	-4.69	39.51	10.28	33.23	33.71	160	85	Average	HORIZONTAL
2	4874.08	53.55	74.00	-20.45	43.75	10.28	33.23	33.71	160	85	Peak	HORIZONTAL
3	7311.64	50.85	54.00	-3.15	36.56	12.42	36.09	34.22	203	147	Average	HORIZONTAL
4	7311.90	59.08	74.00	-14.92	44.79	12.42	36.09	34.22	203	147	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.92	51.03	74.00	-22.97	41.23	10.28	33.23	33.71	213	131	Peak	VERTICAL
2	4873.98	47.50	54.00	-6.50	37.70	10.28	33.23	33.71	213	131	Average	VERTICAL
3	7306.75	51.99	74.00	-22.01	37.70	12.42	36.09	34.22	179	332	Peak	VERTICAL
4	7312.41	39.77	54.00	-14.23	25.48	12.42	36.09	34.22	179	332	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 30, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.89	54.35	74.00	-19.65	44.40	10.28	33.35	33.68	193	126	Peak	HORIZONTAL
2	4923.97	50.60	54.00	-3.40	40.65	10.28	33.35	33.68	193	126	Average	HORIZONTAL
3	7386.88	57.03	74.00	-16.97	42.70	12.33	36.27	34.27	196	142	Peak	HORIZONTAL
4	7387.20	50.47	54.00	-3.53	36.14	12.33	36.27	34.27	196	142	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.98	43.20	54.00	-10.80	33.25	10.28	33.35	33.68	177	156	Average	VERTICAL
2	4927.46	54.07	74.00	-19.93	44.12	10.28	33.35	33.68	177	156	Peak	VERTICAL
3	7386.82	56.67	74.00	-17.33	42.34	12.33	36.27	34.27	207	101	Peak	VERTICAL
4	7387.22	47.12	54.00	-6.88	32.79	12.33	36.27	34.27	207	101	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4820.64	35.58	54.00	-18.42	29.27	7.04	34.17	34.90	159	306	Average	HORIZONTAL
2	4829.32	48.14	74.00	-25.86	41.75	7.08	34.21	34.90	159	306	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4825.52	48.08	74.00	-25.92	41.69	7.08	34.21	34.90	155	147	Peak	VERTICAL
2	4829.88	35.27	54.00	-18.73	28.88	7.08	34.21	34.90	155	147	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4868.16	54.68	74.00	-19.32	48.06	7.18	34.34	34.90	160	85	Peak	HORIZONTAL
2	4875.72	41.39	54.00	-12.61	34.77	7.18	34.34	34.90	160	85	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4872.40	36.66	54.00	-17.34	30.04	7.18	34.34	34.90	160	44	Average	VERTICAL
2	4883.80	49.11	74.00	-24.89	42.42	7.21	34.38	34.90	160	44	Peak	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4922.92	48.95	74.00	-25.05	42.11	7.28	34.46	34.90	155	164	Peak	HORIZONTAL
2	4925.52	36.40	54.00	-17.60	29.49	7.31	34.50	34.90	155	164	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4915.08	49.11	74.00	-24.89	42.27	7.28	34.46	34.90	165	223	Peak	VERTICAL
2	4925.40	36.30	54.00	-17.70	29.39	7.31	34.50	34.90	165	223	Average	VERTICAL



<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 1 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4821.76	48.25	74.00	-25.75	41.94	7.04	34.17	34.90	157	301	Peak	HORIZONTAL
2	4830.52	35.31	54.00	-18.69	28.92	7.08	34.21	34.90	157	301	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4818.80	48.10	74.00	-25.90	41.79	7.04	34.17	34.90	153	111	Peak	VERTICAL
2	4821.72	35.22	54.00	-18.78	28.91	7.04	34.17	34.90	153	111	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 6 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4877.92	55.73	74.00	-18.27	49.11	7.18	34.34	34.90	158	83	Peak	HORIZONTAL
2	4879.40	42.32	54.00	-11.68	35.70	7.18	34.34	34.90	158	83	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4871.08	51.41	74.00	-22.59	44.79	7.18	34.34	34.90	176	348	Peak	VERTICAL
2	4871.80	38.27	54.00	-15.73	31.65	7.18	34.34	34.90	176	348	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4925.52	38.18	54.00	-15.82	31.27	7.31	34.50	34.90	158	87	Average	HORIZONTAL
2	4927.72	51.43	74.00	-22.57	44.52	7.31	34.50	34.90	158	87	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4923.56	49.46	74.00	-24.54	42.62	7.28	34.46	34.90	165	231	Peak	VERTICAL
2	4932.88	36.33	54.00	-17.67	29.42	7.31	34.50	34.90	165	231	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 3 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4821.60	48.08	74.00	-25.92	41.77	7.04	34.17	34.90	167	305	Peak	HORIZONTAL
2	4821.64	35.17	54.00	-18.83	28.86	7.04	34.17	34.90	167	305	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4819.16	48.36	74.00	-25.64	42.05	7.04	34.17	34.90	170	134	Peak	VERTICAL
2	4821.96	35.23	54.00	-18.77	28.92	7.04	34.17	34.90	170	134	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 6 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4866.76	36.24	54.00	-17.76	29.71	7.14	34.29	34.90	167	105	Average	HORIZONTAL
2	4878.04	49.02	74.00	-24.98	42.40	7.18	34.34	34.90	167	105	Peak	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4864.16	48.95	74.00	-25.05	42.42	7.14	34.29	34.90	165	248	Peak	VERTICAL
2	4865.60	35.90	54.00	-18.10	29.37	7.14	34.29	34.90	165	248	Average	VERTICAL

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 9 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 27, 2016		

### Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4907.48	48.76	74.00	-25.24	42.00	7.24	34.42	34.90	161	254	Peak	HORIZONTAL
2	4913.40	35.96	54.00	-18.04	29.12	7.28	34.46	34.90	161	254	Average	HORIZONTAL

### Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4912.36	49.16	74.00	-24.84	42.32	7.28	34.46	34.90	164	160	Peak	VERTICAL
2	4912.76	36.10	54.00	-17.90	29.26	7.28	34.46	34.90	164	160	Average	VERTICAL

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1 MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11.0 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

### 4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.



#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 26, 2016~May 30, 2016		

##### Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.44	63.82	74.00	-10.18	29.86	5.65	28.31	0.00	165	143	Peak	HORIZONTAL
2	2388.92	52.97	54.00	-1.03	19.01	5.65	28.31	0.00	165	143	Average	HORIZONTAL
3	2411.36	113.54			79.49	5.69	28.36	0.00	165	143	Average	HORIZONTAL
4	2411.36	117.38			83.33	5.69	28.36	0.00	165	143	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.40	64.52	74.00	-9.48	31.10	4.85	28.57	0.00	142	123	Peak	HORIZONTAL
2	2390.00	50.54	54.00	-3.46	17.12	4.85	28.57	0.00	142	123	Average	HORIZONTAL
3	2437.80	121.82			88.25	4.90	28.67	0.00	142	123	Peak	HORIZONTAL
4	2438.60	116.67			83.10	4.90	28.67	0.00	142	123	Average	HORIZONTAL
5	2483.50	50.09	54.00	-3.91	16.37	4.95	28.77	0.00	142	123	Average	HORIZONTAL
6	2483.80	63.18	74.00	-10.82	29.46	4.95	28.77	0.00	142	123	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2386.04	61.65	74.00	-12.35	27.69	5.65	28.31	0.00	231	120	Peak	HORIZONTAL
2	2386.36	49.31	54.00	-4.69	15.35	5.65	28.31	0.00	231	120	Average	HORIZONTAL
3	2462.64	114.61			80.40	5.77	28.44	0.00	231	120	Average	HORIZONTAL
4	2462.96	118.58			84.37	5.77	28.44	0.00	231	120	Peak	HORIZONTAL
5	2486.36	52.80	54.00	-1.20	18.52	5.80	28.48	0.00	231	120	Average	HORIZONTAL
6	2486.36	63.14	74.00	-10.86	28.86	5.80	28.48	0.00	231	120	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 26, 2016~May 30, 2016		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.96	71.93	74.00	-2.07	37.97	5.65	28.31	0.00	209	127	Peak	HORIZONTAL
2	2390.00	52.86	54.00	-1.14	18.90	5.65	28.31	0.00	209	127	Average	HORIZONTAL
3	2408.80	107.46			73.43	5.68	28.35	0.00	209	127	Average	HORIZONTAL
4	2408.80	116.62			82.59	5.68	28.35	0.00	209	127	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

: H:1.75m U:2.5m												
	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2387.00	64.88	74.00	-9.12	31.46	4.85	28.57	0.00	249	328	Peak	VERTICAL
2	2390.00	52.91	54.00	-1.09	19.49	4.85	28.57	0.00	249	328	Average	VERTICAL
3	2439.00	110.16			76.59	4.90	28.67	0.00	249	328	Average	VERTICAL
4	2439.40	119.08			85.48	4.91	28.69	0.00	249	328	Peak	VERTICAL
5	2483.50	51.23	54.00	-2.77	17.51	4.95	28.77	0.00	249	328	Average	VERTICAL
6	2483.50	62.80	74.00	-11.20	29.08	4.95	28.77	0.00	249	328	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2439.56	111.23			77.08	5.74	28.41	0.00	232	114	Average	HORIZONTAL
2	2440.21	121.83			87.68	5.74	28.41	0.00	232	114	Peak	HORIZONTAL
3	2484.76	52.79	54.00	-1.21	18.51	5.80	28.48	0.00	232	114	Average	HORIZONTAL
4	2485.40	66.68	74.00	-7.32	32.40	5.80	28.48	0.00	232	114	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 30, 2016		

**Channel 1**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.36	67.58	74.00	-6.42	33.62	5.65	28.31	0.00	260	132	Peak	HORIZONTAL
2	2390.00	52.83	54.00	-1.17	18.87	5.65	28.31	0.00	260	132	Average	HORIZONTAL
3	2410.72	104.22			70.19	5.68	28.35	0.00	260	132	Average	HORIZONTAL
4	2410.72	116.06			82.03	5.68	28.35	0.00	260	132	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

**Channel 6**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.24	65.92	74.00	-8.08	31.96	5.65	28.31	0.00	234	123	Peak	HORIZONTAL
2	2390.00	52.76	54.00	-1.24	18.80	5.65	28.31	0.00	234	123	Average	HORIZONTAL
3	2435.40	111.22			77.10	5.73	28.39	0.00	234	123	Average	HORIZONTAL
4	2436.04	122.15			88.03	5.73	28.39	0.00	234	123	Peak	HORIZONTAL
5	2483.50	51.99	54.00	-2.01	17.71	5.80	28.48	0.00	234	123	Average	HORIZONTAL
6	2486.04	66.23	74.00	-7.77	31.95	5.80	28.48	0.00	234	123	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

**Channel 11**

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2460.72	106.11			71.90	5.77	28.44	0.00	249	128	Average	HORIZONTAL
2	2461.04	116.80			82.59	5.77	28.44	0.00	249	128	Peak	HORIZONTAL
3	2483.50	52.93	54.00	-1.07	18.65	5.80	28.48	0.00	249	128	Average	HORIZONTAL
4	2487.00	70.45	74.00	-3.55	36.17	5.80	28.48	0.00	249	128	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

<b>Temperature</b>	22°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Steven Liang	<b>Configurations</b>	IEEE 802.11n MCS0 HT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3
<b>Test Date</b>	May 30, 2016		

### Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.99	66.62	74.00	-7.38	32.66	5.65	28.31	0.00	218	134	Peak	HORIZONTAL
2	2390.00	52.67	54.00	-1.33	18.71	5.65	28.31	0.00	218	134	Average	HORIZONTAL
3	2415.91	98.03			63.98	5.69	28.36	0.00	218	134	Average	HORIZONTAL
4	2418.47	110.04			75.97	5.70	28.37	0.00	218	134	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.60	52.70	54.00	-1.30	18.74	5.65	28.31	0.00	253	127	Average	HORIZONTAL
2	2388.92	65.21	74.00	-8.79	31.25	5.65	28.31	0.00	253	127	Peak	HORIZONTAL
3	2441.17	115.75			81.60	5.74	28.41	0.00	253	127	Peak	HORIZONTAL
4	2444.05	104.06			69.91	5.74	28.41	0.00	253	127	Average	HORIZONTAL
5	2483.50	52.77	54.00	-1.23	18.49	5.80	28.48	0.00	253	127	Average	HORIZONTAL
6	2485.08	69.77	74.00	-4.23	35.49	5.80	28.48	0.00	253	127	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2456.49	111.50			77.31	5.76	28.43	0.00	239	126	Peak	HORIZONTAL
2	2459.69	100.08			65.89	5.76	28.43	0.00	239	126	Average	HORIZONTAL
3	2483.50	52.99	54.00	-1.01	18.71	5.80	28.48	0.00	239	126	Average	HORIZONTAL
4	2488.54	72.33	74.00	-1.67	38.05	5.80	28.48	0.00	239	126	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

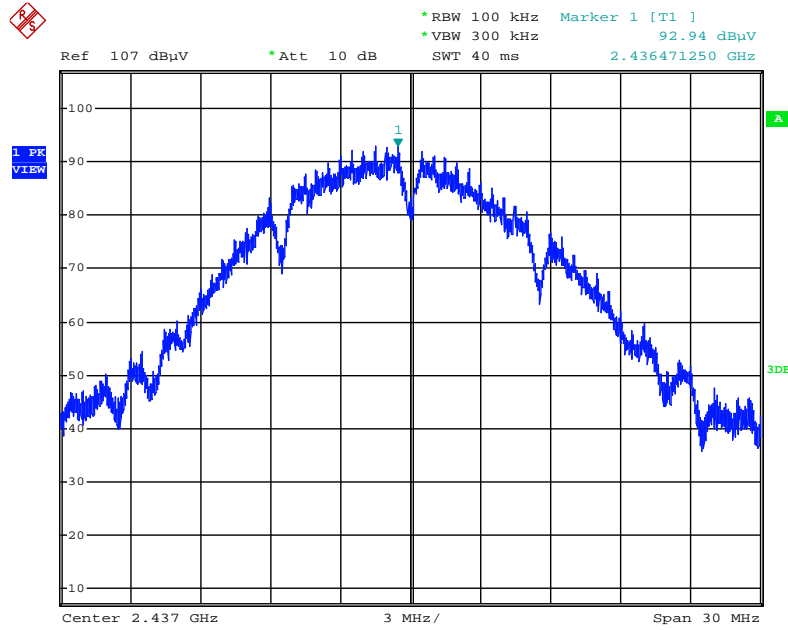


Date: 27.MAY.2016 02:17:18

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

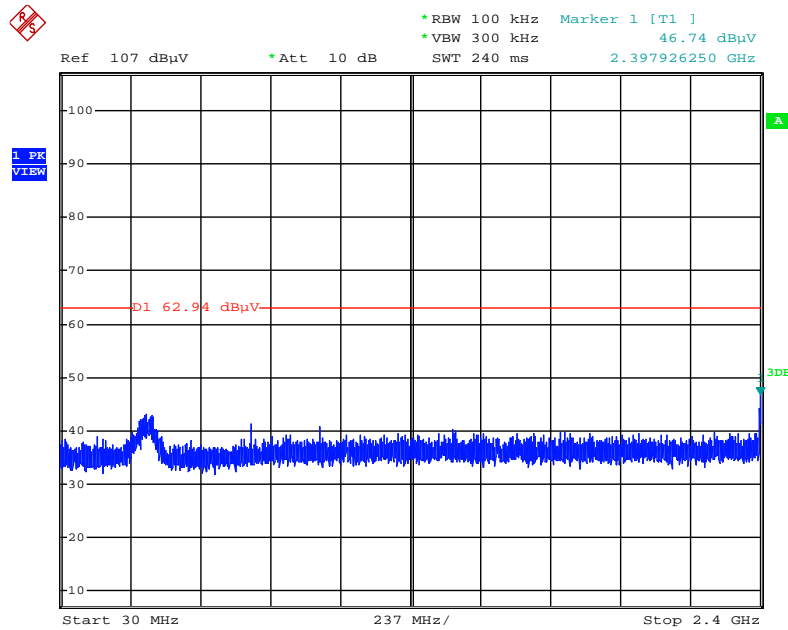


Date: 27.MAY.2016 02:19:11

Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

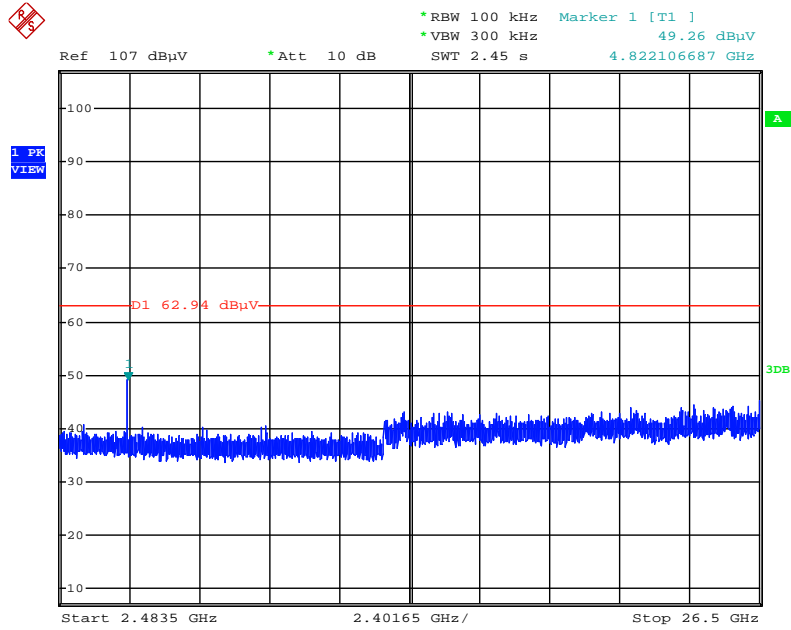


Date: 27.MAY.2016 02:19:39

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

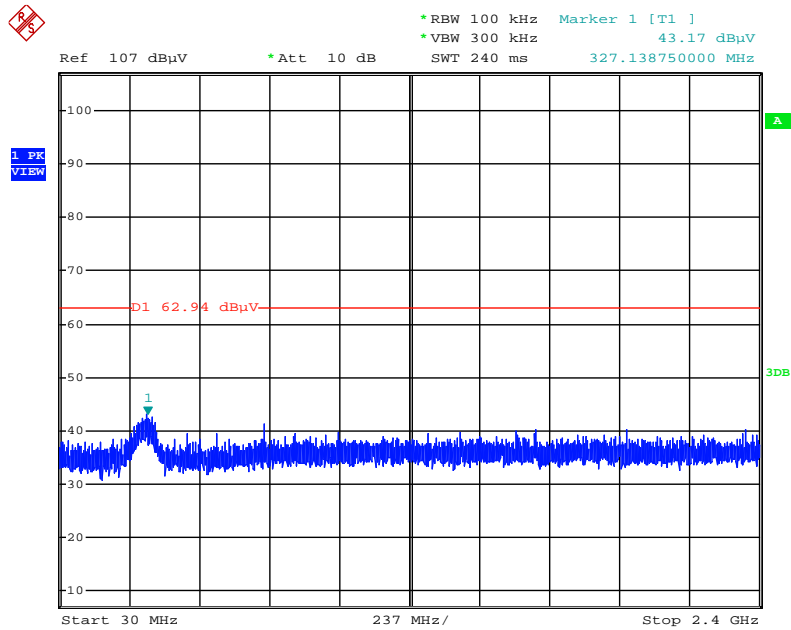


Date: 27.MAY.2016 02:20:37

Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

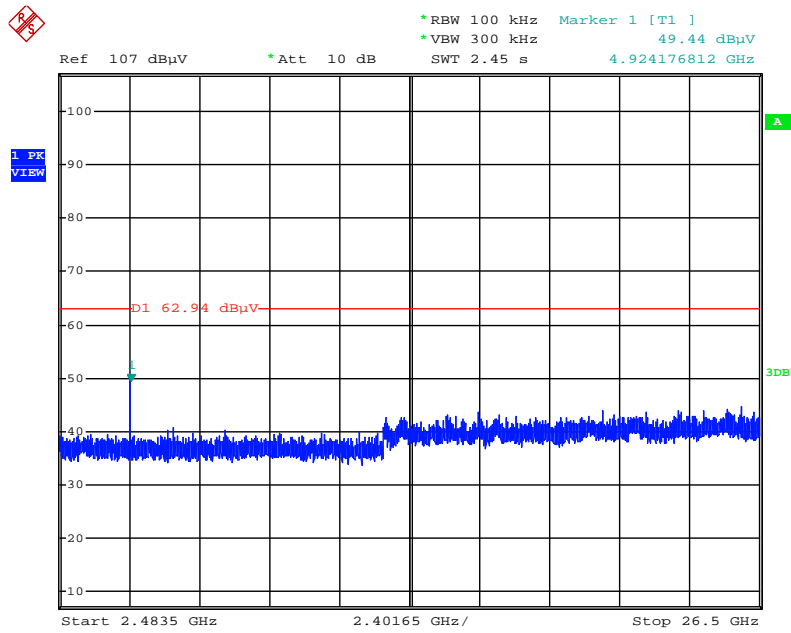


Date: 27.MAY.2016 02:20:18

Plot on Configuration IEEE 802.11g / Reference Level

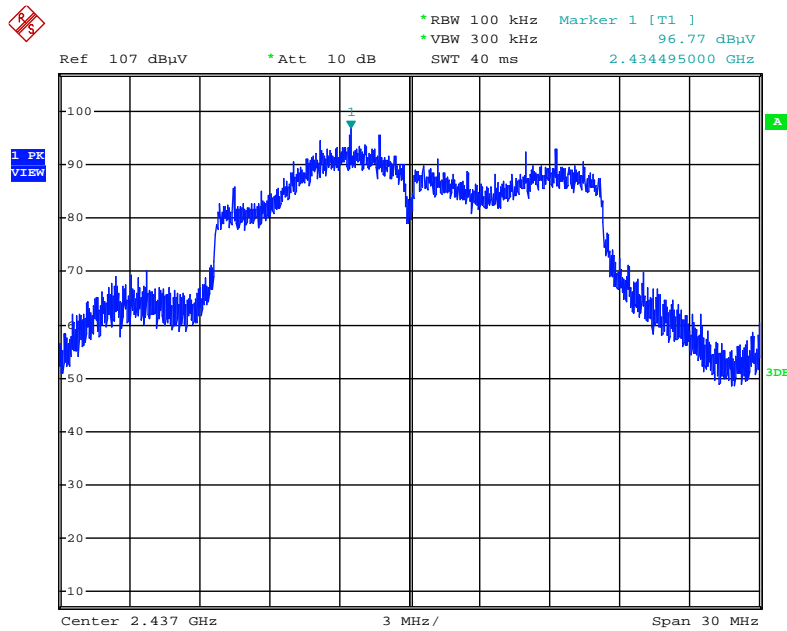

Date: 27.MAY.2016 02:21:48


Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

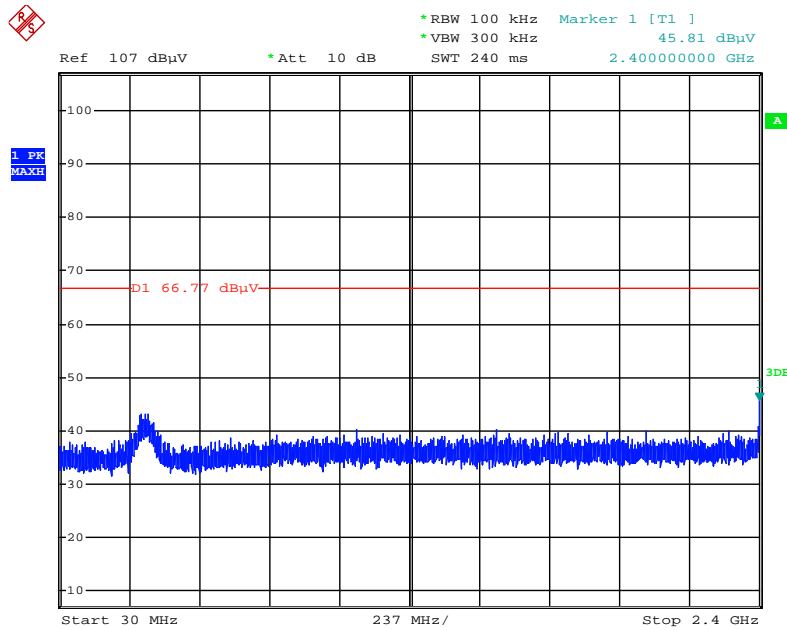

Date: 27.MAY.2016 02:22:48




Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

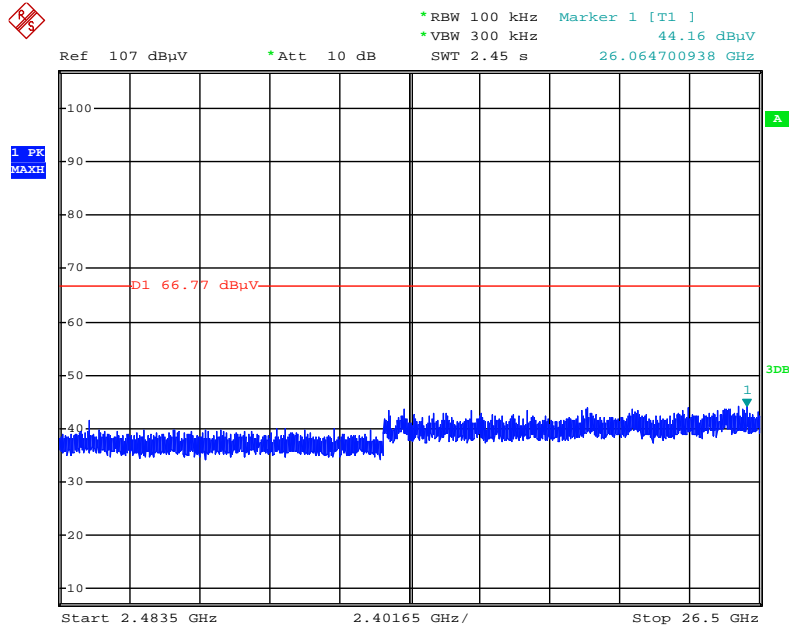


Date: 27.MAY.2016 02:23:17

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

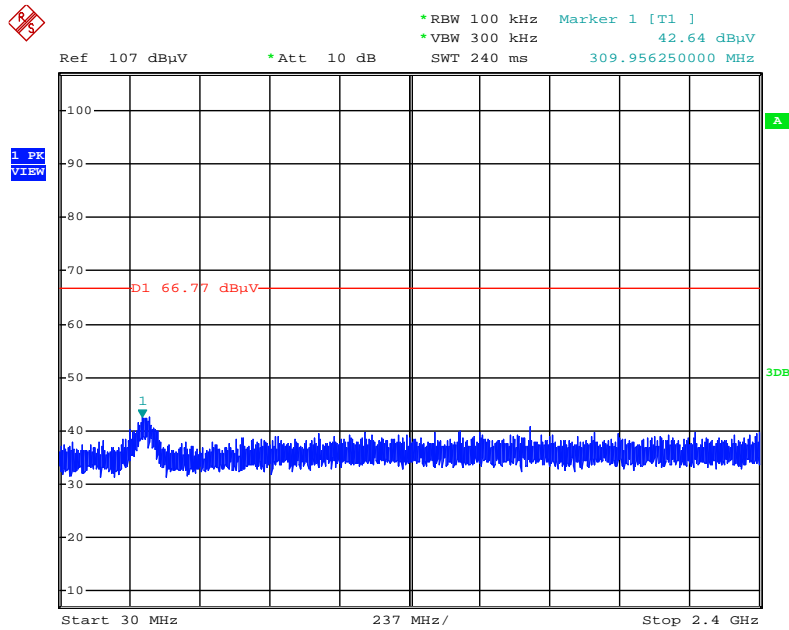


Date: 27.MAY.2016 02:24:29

Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

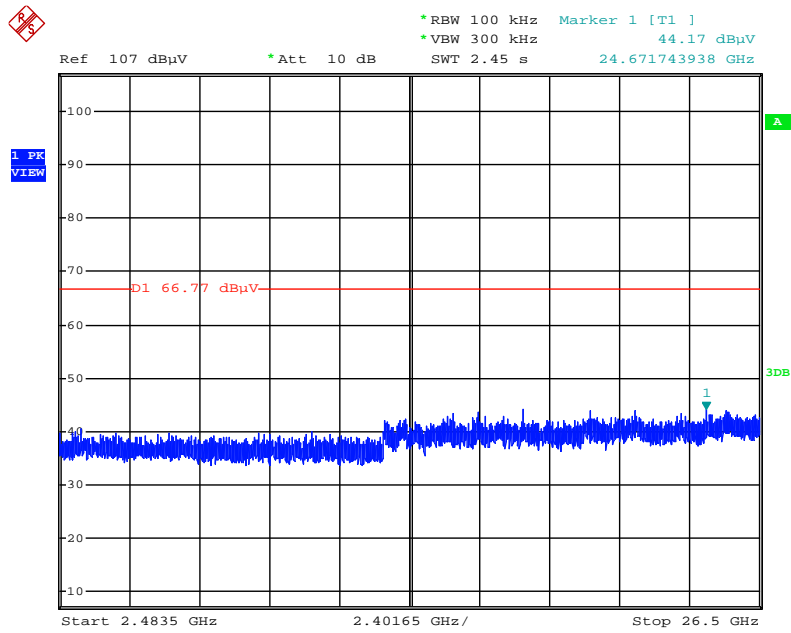


Date: 27.MAY.2016 02:24:11

Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level

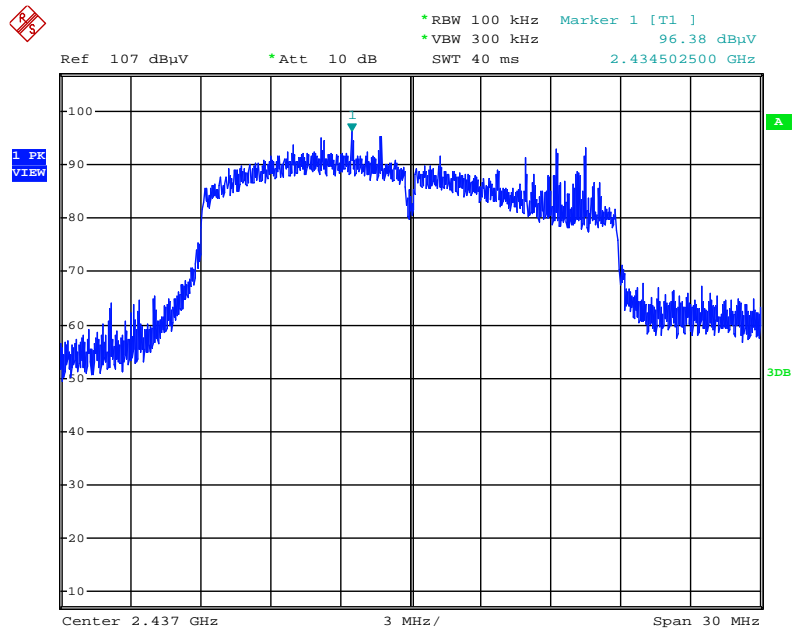


Date: 27.MAY.2016 02:25:45

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

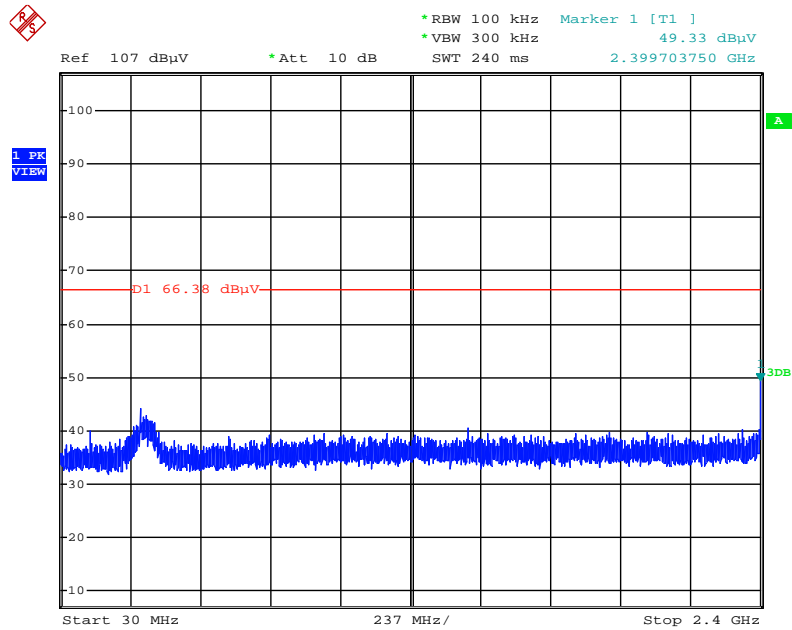


Date: 27.MAY.2016 02:27:01

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~26500MHz (down 30dBc)

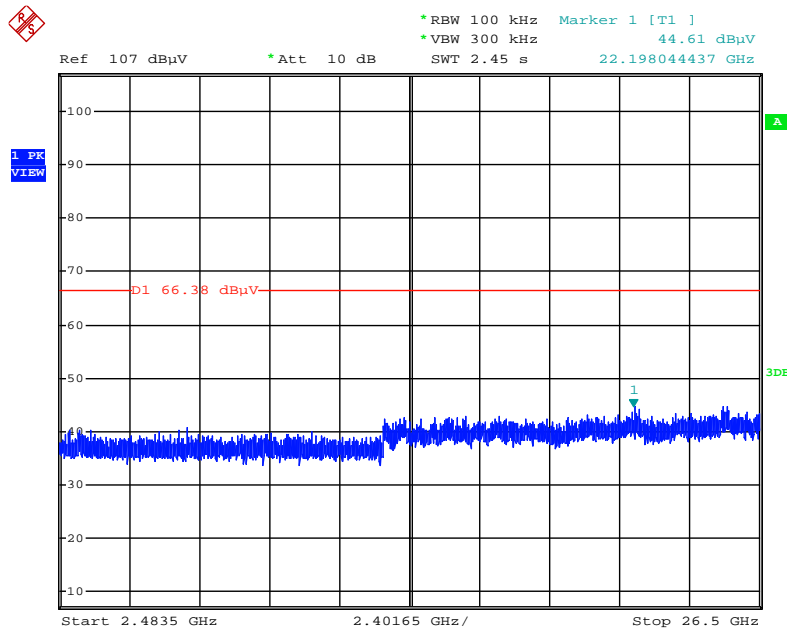


Date: 27.MAY.2016 02:27:31

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

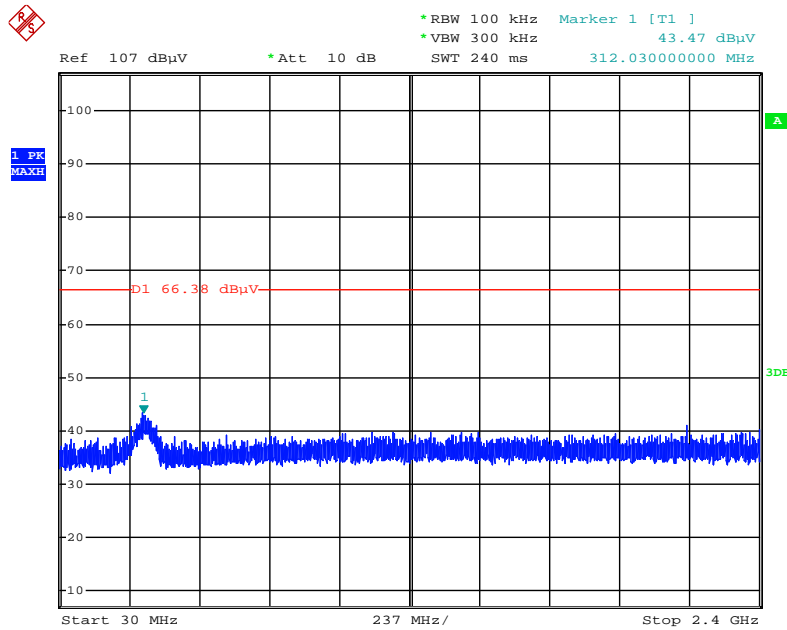


Date: 27.MAY.2016 02:29:53

Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~26500MHz (down 30dBc)

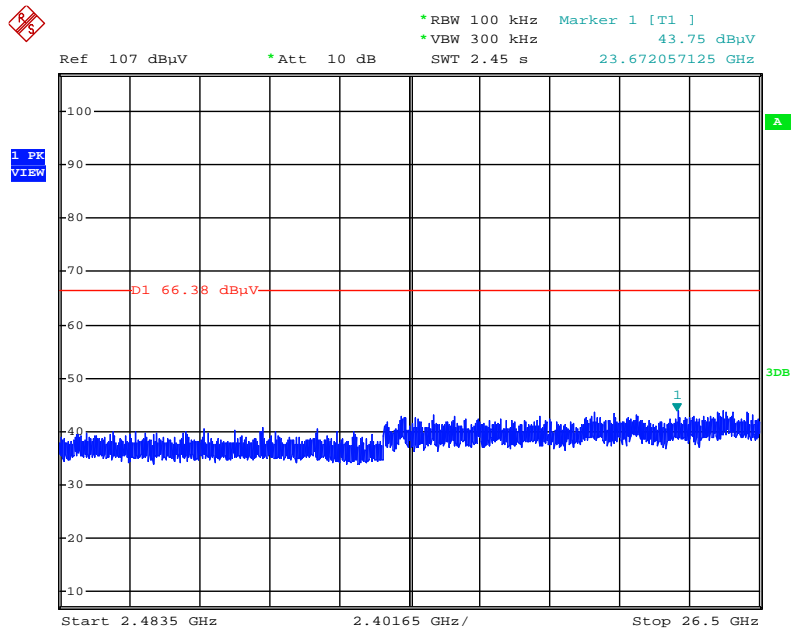


Date: 27.MAY.2016 02:28:16

Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level

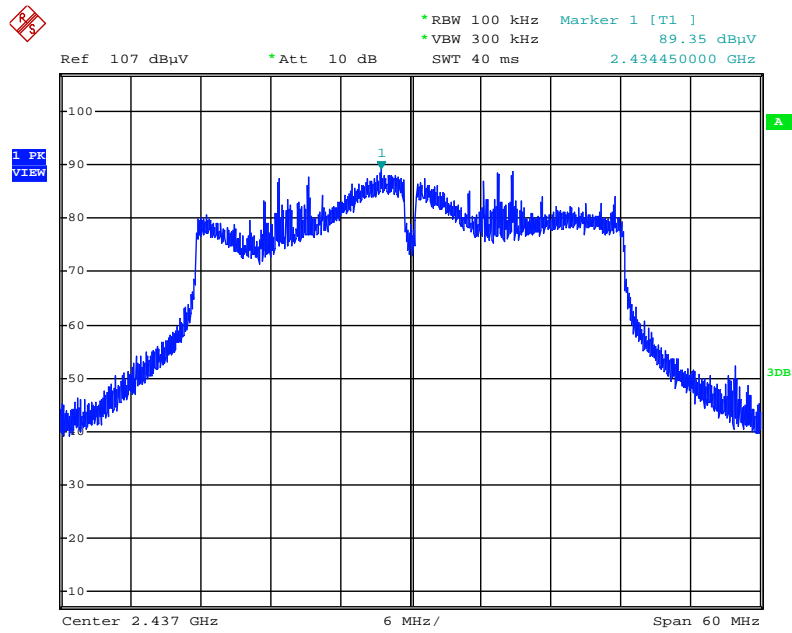

Date: 27.MAY.2016 02:31:18


Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

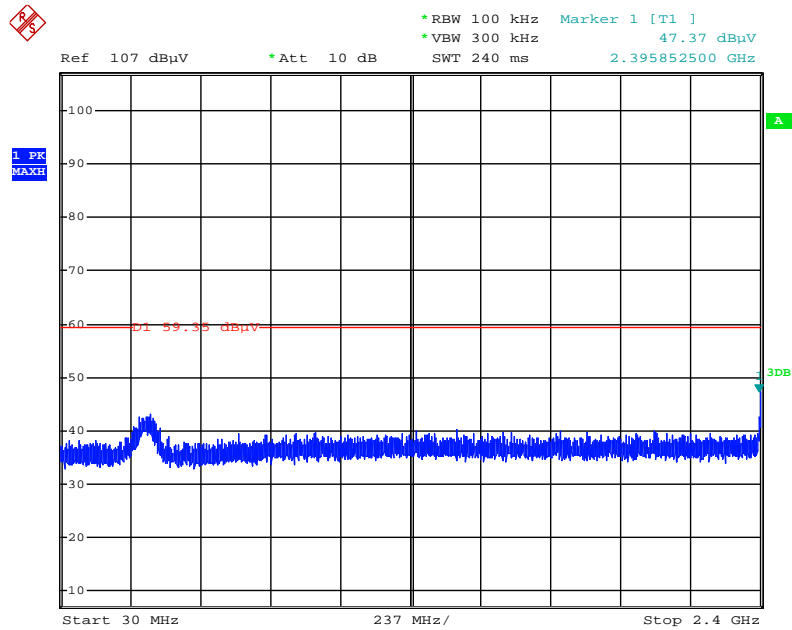

Date: 27.MAY.2016 02:32:41



Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2483.5MHz~26500MHz (down 30dBc)

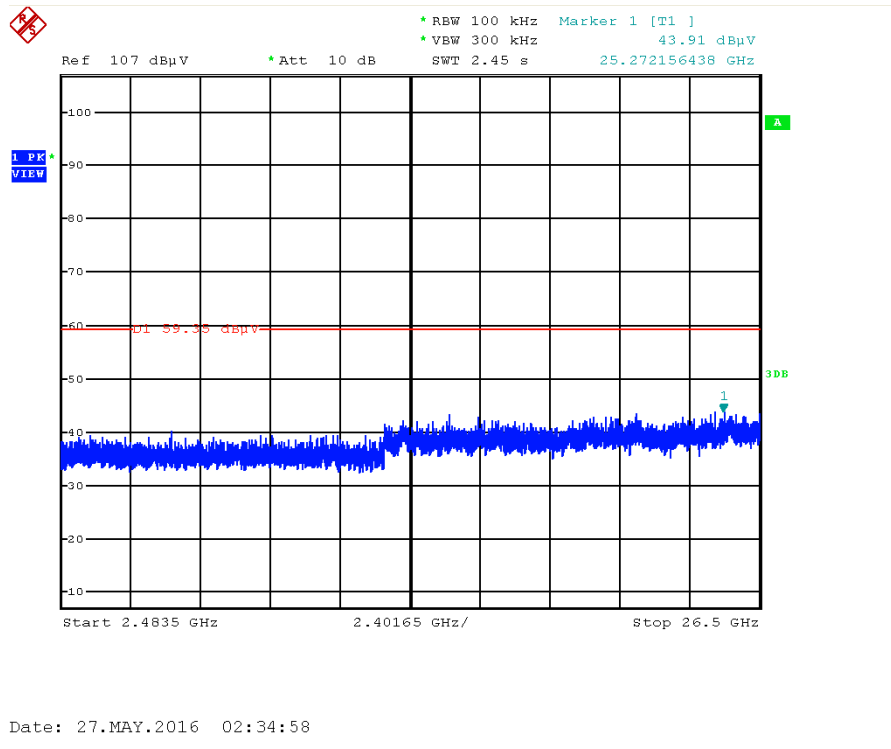



## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 2016	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 24, 2016	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
BILOG ANTENNA	TESEQ	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Test	R&S	ESCS	100355	9kHz ~ 2.75GHz	May 16, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-10-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%