



**FCC ID: RAXWG4005F**  
Issued on Oct. 24, 2005

Report No.: FR582616-01

---

# FCC/ IC TEST REPORT

**CATEGORY** : Mobile  
**PRODUCT NAME** : BARRICADE™ 54Mbps g Wireless Broadband Router  
**FCC ID.** : RAXWG4005F  
**IC ID.** : 4711A-WG4005F  
**FILING TYPE** : Certification  
**BRAND NAME** : SMC  
**MODEL NAME** : SMCWBR14-G2  
**APPLICANT** : **Arcadyan Technology Corporation**  
4F, No. 9, Park Avenue II, Science-based Industrial Park,  
Hsinchu 300, Taiwan, R.O.C.  
**MANUFACTURER** : Same as applicant  
**ISSUED BY** : **SPORTON INTERNATIONAL INC.**  
6F, No. 106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien,  
Taiwan, R.O.C.

## Statements:

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

Certificate or Test Report could not be used by the applicant to claim the product endorsement by CNLA, NVLAP and any agency of U.S. government.

The test equipment used to perform the test is calibrated and traceable to NML/ROC or NIST/USA.



Lab Code: 2000-79-0

---

**SPORTON International Inc.**

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255



## Table of Contents

<b>HISTORY OF THIS TEST REPORT .....</b>	<b>II</b>
<b>CERTIFICATE OF COMPLIANCE.....</b>	<b>III</b>
<b>1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST.....</b>	<b>1</b>
1.1. Applicant .....	1
1.2. Manufacturer .....	1
1.3. Basic Description of Equipment under Test.....	1
1.4. Features of Equipment under Test .....	1
1.5. Antenna Description.....	2
1.6. Table for Carrier Frequencies.....	2
<b>2. TEST CONFIGURATION OF THE EQUIPMENT UNDER TEST .....</b>	<b>3</b>
2.1. Connection Diagram of Test System .....	3
2.2. The Test Mode Description .....	5
2.3. Description of Test Supporting Units .....	5
<b>3. GENERAL INFORMATION OF TEST .....</b>	<b>6</b>
3.1. Test Facility .....	6
3.2. Standards for Methods of Measurement.....	6
3.3. Frequency Range Investigated.....	6
3.4. Test Distance.....	6
3.5. Test Software.....	6
<b>4. LIST OF MEASUREMENTS .....</b>	<b>7</b>
4.1. Summary of the Test Results.....	7
<b>5. TEST RESULT .....</b>	<b>8</b>
5.1. Test of 6dB Spectrum Bandwidth .....	8
5.2. Test of Maximum Peak Conducted Output Power.....	14
5.3. Test of Peak Power Spectral Density .....	15
5.4. Test of Band Edges Emission.....	21
5.5. Test of AC Power Line Conducted Emission .....	26
5.6. Test of Spurious Radiated Emission.....	33
5.7. Antenna Requirements .....	53
5.8. RF Exposure .....	54
<b>6. LIST OF MEASURING EQUIPMENTS USED.....</b>	<b>56</b>
<b>7. COMPANY PROFILE.....</b>	<b>58</b>
7.1. Certificate of Accreditation .....	58
7.2. Test Location .....	58
<b>8. CERTIFICATE OF NVLAP ACCREDITATION.....</b>	<b>59</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT .....</b>	<b>A1 ~ A12</b>





# CERTIFICATE OF COMPLIANCE

with

47 CFR FCC Part 15 Subpart C

IC RSS-210 issue 6

**PRODUCT NAME** : BARRICADE™ 54Mbps g Wireless Broadband Router

**BRAND NAME** : SMC

**MODEL NAME** : SMCWBR14-G2


**APPLICANT** : **Arcadyan Technology Corporation**

4F, No. 9, Park Avenue II, Science-based Industrial Park,  
Hsinchu 300, Taiwan, R.O.C.

**MANUFACTURER** : Same as applicant

I **HEREBY** CERTIFY THAT:

The measurements shown in this test report were made in accordance with the procedures given in ANSI C63.4-2003 and all test are performed according to 47 CFR FCC Part 15 Subpart C and IC RSS-210 issue 6. Testing was carried out on Oct. 20, 2005 at SPORTON International Inc. LAB.



**Wayne Hsu / Supervisor**  
Sporton International Inc.



## 1. General Description of Equipment under Test

### 1.1. Applicant

**Arcadyan Technology Corporation**

4F, No. 9, Park Avenue II, Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C.

### 1.2. Manufacturer

Same as applicant

### 1.3. Basic Description of Equipment under Test

This product is a Wireless Broadband Router with 802.11b/g wireless solution. The technical data has been listed on section " Features of Equipment under Test ".

### 1.4. Features of Equipment under Test

Items	Description
Type of Modulation	DSSS (CCK / DQPSK / DBPSK) OFDM (64QAM / 16QAM / DQPSK / DBPSK)
Number of Channels	11
Frequency Band	2400MHz ~ 2483.5 MHz
Carrier Frequency	See section 1.6 for details
Data Rate	1, 2, 5.5, 11 Mbps – DSSS 6,12,18,24,36,48,54 Mbps – OFDM
99% Occupied Bandwidth	DSSS: 15.60 MHz OFDM: 16.53 MHz
Max. Conducted Output Power	DSSS : 20.10 dBm OFDM : 22.40dBm
Antenna Type	See section 1.5 for details
Test Power Source	Input 120V AC, Output 9V DC
Temperature Range (Operating)	0 ~ 40 °C

Test Mode	MODEL NAME	Input	Output
Adapter 1	480910003CT	120V AC	9V DC
Adapter 2	DV-91A	120V AC	9V DC



### 1.5. Antenna Description

No.	Antenna Type	Gain (dBi)
1	Dipole Antenna	2.00
2	Printed	2.00


### 1.6. Table for Carrier Frequencies

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	05	2432 MHz	09	2452 MHz	-	-
02	2417 MHz	06	2437 MHz	10	2457 MHz	-	-
03	2422 MHz	07	2442 MHz	11	2462 MHz	-	-
04	2427 MHz	08	2447 MHz	-	-	-	-


## 2. Test Configuration of the Equipment under Test

### 2.1. Connection Diagram of Test System

#### AC Power Line Conduction Emissions Test Configuration

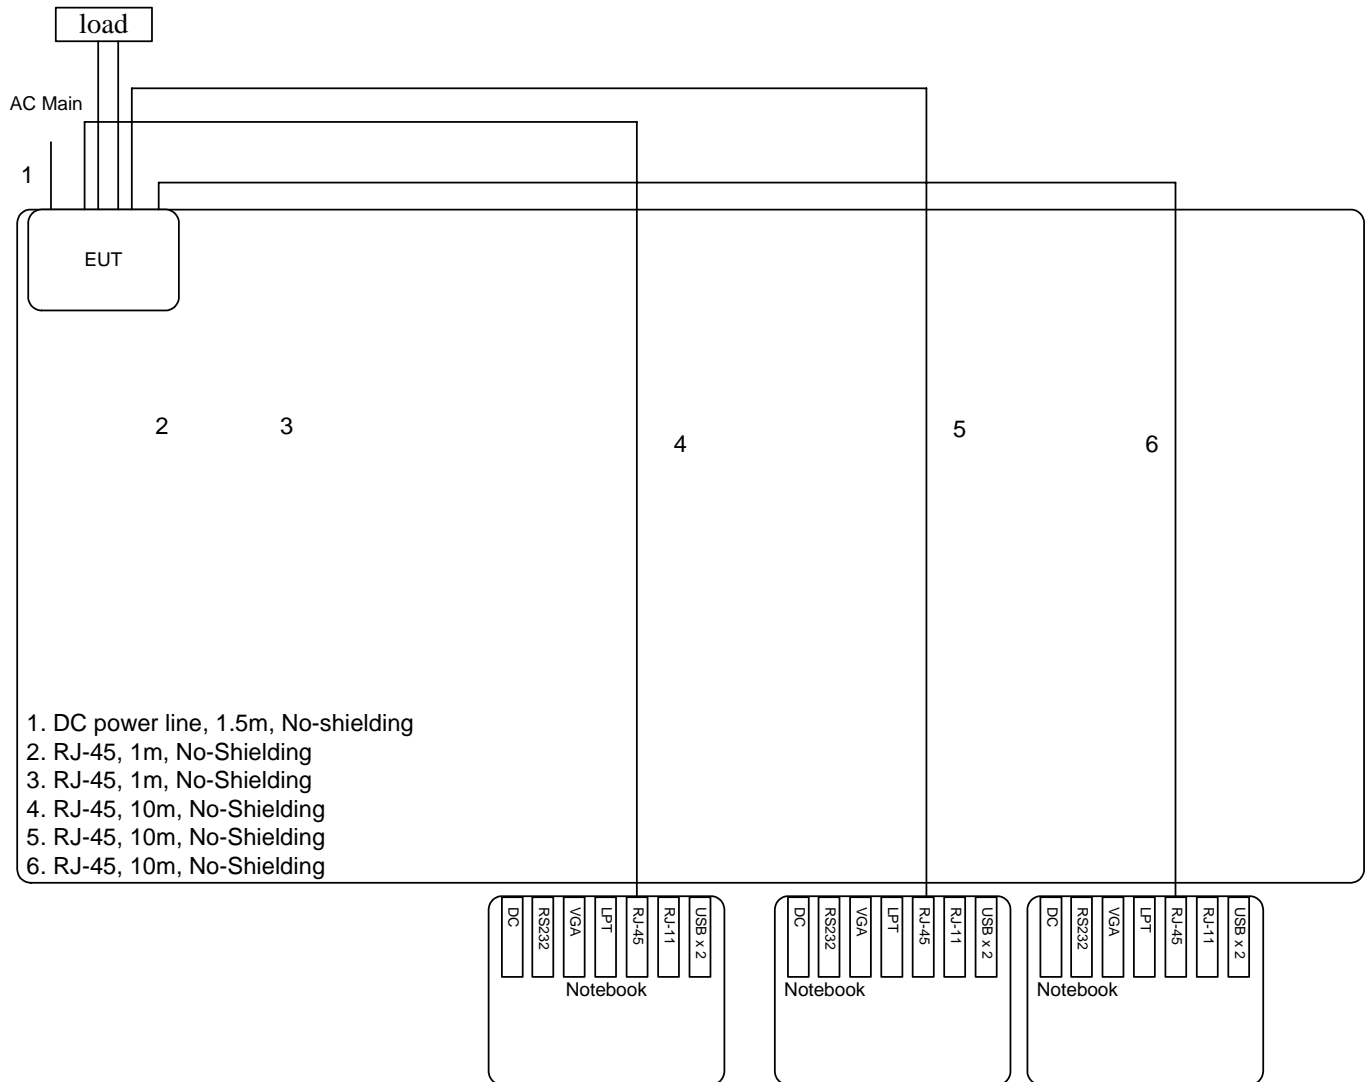

**Radiation Emissions Test Configuration**

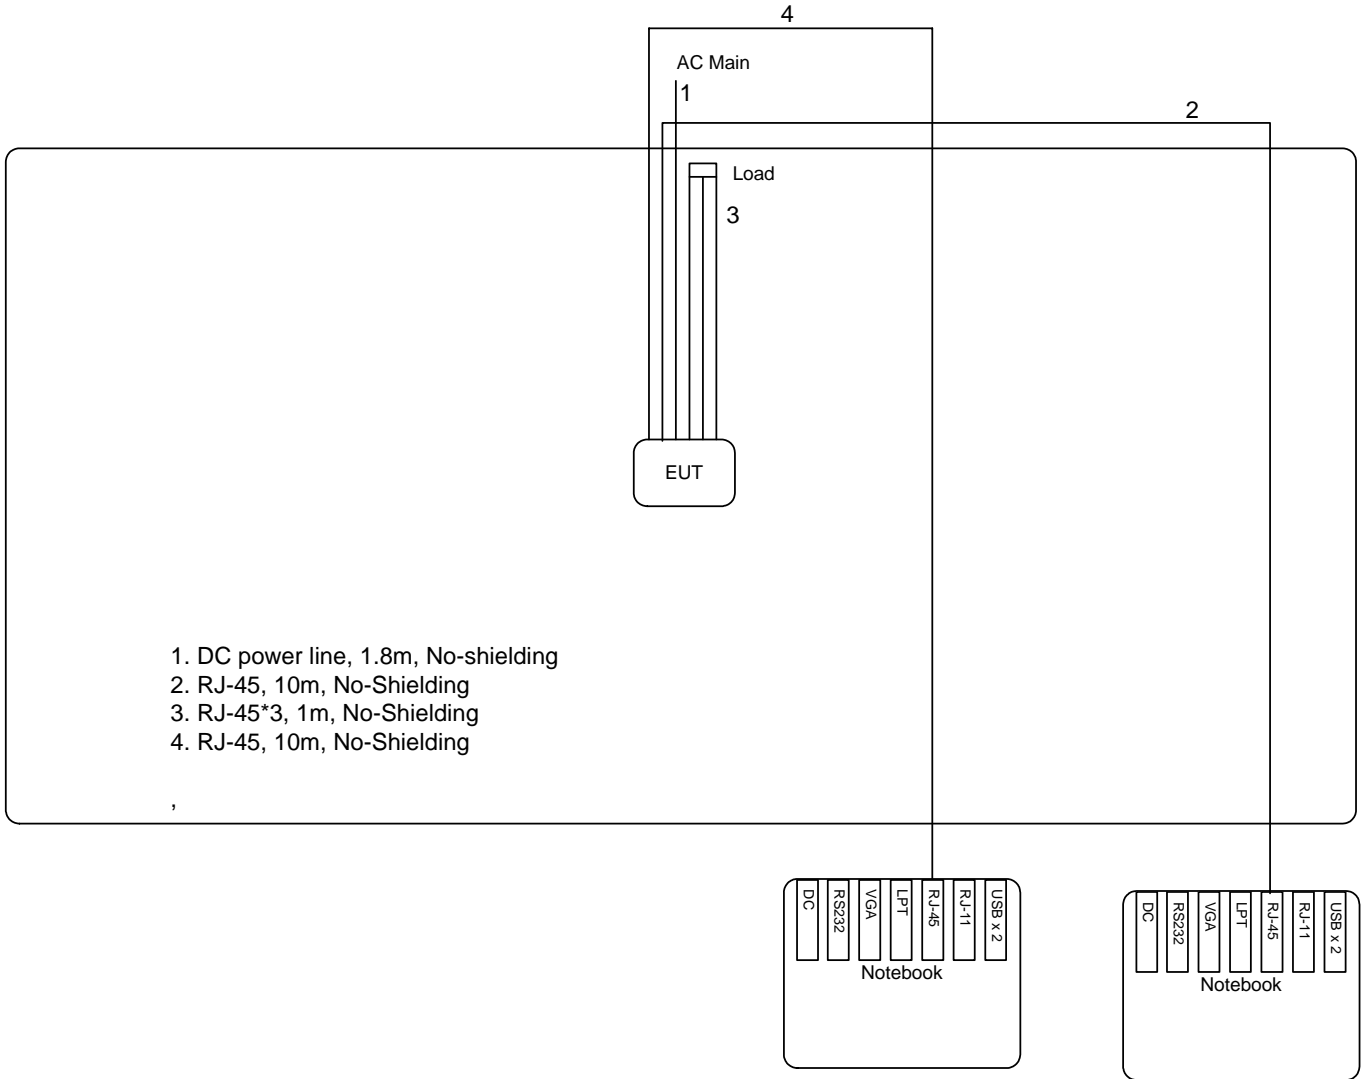





## 2.2. The Test Mode Description

1. For DSSS modulation, CCK (11 Mbps) is the worst case on all test items.
2. For OFDM modulation, BPSK (6 Mbps) is the worst case on all test items.
3. According to ANSI C63.4-2003: If frequency range of EUT is more than 10 MHz, lowest, middle and highest channels of EUT has to be tested.
4. Spurious emission below 1GHz is independent of channel selection and modulation types. So only channel 11 with OFDM modulation was tested.
5. AC conduction emission is independent of channel selection, modulation types and types of antenna. So only channel 11 with OFDM modulation was tested.
6. There are two adapters during the test:  
Mode 1: Adapter: 480910003CT  
Mode 2: Adapter: DV-91A

## 2.3. Description of Test Supporting Units

Support unit	Brand	Model No.	FCC ID
Notebook	DELL	PP01L	DoC



### 3. General Information of Test

#### 3.1. Test Facility

**Test Site Location** : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.  
: TEL 886-3-327-3456  
: FAX 886-3-318-0055

**Test Site No** : 03CH03-HY / TH01-HY / CO01-HY

#### 3.2. Standards for Methods of Measurement

Here is the list of the standards followed in this test report.

**ANSI C63.4-2003**  
**47 CFR FCC Part 15 Subpart C**  
**IC RSS-210 issue 6**

#### 3.3. Frequency Range Investigated

Radiated emission test: from 30 MHz to 10th carrier harmonic.

#### 3.4. Test Distance

The test distance of radiated emission (30MHz~1GHz) test from antenna to EUT is 3 M.  
The test distance of radiated emission (1GHz~10th carrier harmonic) test from antenna to EUT is 3 M.

#### 3.5. Test Software

During testing, Channel & Power Controlling Software: This was provided by the manufacturer and is able to let the test engineer select the operating channel as well as the RF output power. The parameters for channel selection is trying to offer the test engineer the ability to fix the operating channel for testing, both normal data and continuously transmitting modes are allowed, and that for RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**Power Parameter Table**

Test Software Version	ART		
	2412 MHz	2437 MHz	2462 MHz
Frequency			
IEEE 802.11b DSSS	19	19.5	19
IEEE 802.11g OFDM	16	19	16



## 4. List of Measurements

### 4.1. Summary of the Test Results

Applied Standard: 47 CFR FCC Part 15 Subpart C / IC RSS-210 issue 6				
Paragraph	FCC Section	IC Section	Description of Test	Result
5.1	15.247(a)(2)	A8.2	6dB Spectrum Bandwidth	Pass
5.2	15.247(b)(3)	A8.3	Maximum Peak Conducted Output Power	Pass
5.3	15.247(e)	A8.2	Peak Power Spectral Density	Pass
5.4	15.247(d)	A8.5	Band Edges Emission	Pass
5.5	15.207	RSS-Gen 7.2.2	AC Power Line Conducted Emission	Pass
5.6	15.247(d)	A8.5	Spurious Radiated Emission	Pass
5.7	15.203/15.247(b)/(c)	RSS-Gen 7.1.4	Antenna Requirement	Pass
5.8	2.1091	-	Maximum Permissible Exposure	Pass

## 5. Test Result

### 5.1. Test of 6dB Spectrum Bandwidth

#### 5.1.1. Applicable Standard

Section 15.247(a)(2)/ A8.2: For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.1.2. Measuring Instruments

Item 21 of the table is on section 6.


#### 5.1.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : > 6dB Bandwidth
- RB : 100 kHz
- VB : 100 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : Auto

#### 5.1.4. Test Procedures

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz. Trace to Max hold and Detector PK.
3. The spectrum width with level higher than 6dB below the peak level.
4. Repeat above 1~3 points for the lowest, middle and highest channel of the EUT.

#### 5.1.5. Test Setup Layout

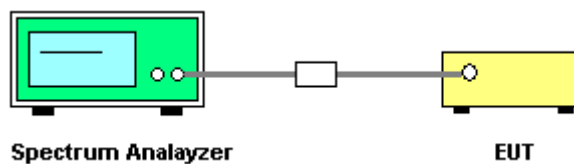

#### 5.1.6. Test Criteria

All test results complied with the requirements of 15.247(a)(2). Measurement Uncertainty is  $1 \times 10^{-5}$ .




5.1.7. Test Result

- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Leo Hung


Modulation Type	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (MHz)
DSSS	01	2412 MHz	10.08	15.60	0.5
DSSS	06	2437 MHz	12.04	15.60	0.5
DSSS	11	2462 MHz	10.12	15.52	0.5
OFDM	01	2412 MHz	16.36	16.48	0.5
OFDM	06	2437 MHz	16.32	16.52	0.5
OFDM	11	2462 MHz	16.36	16.52	0.5

Modulation Type: DSSS (Channel 01) :

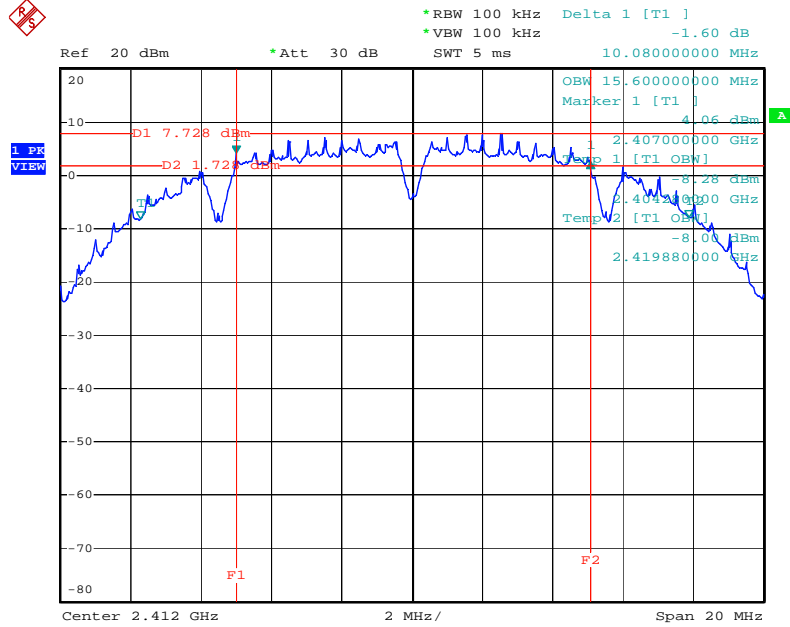

Date: 18.OCT.2005 10:09:20


Modulation Type: DSSS (Channel 06) :

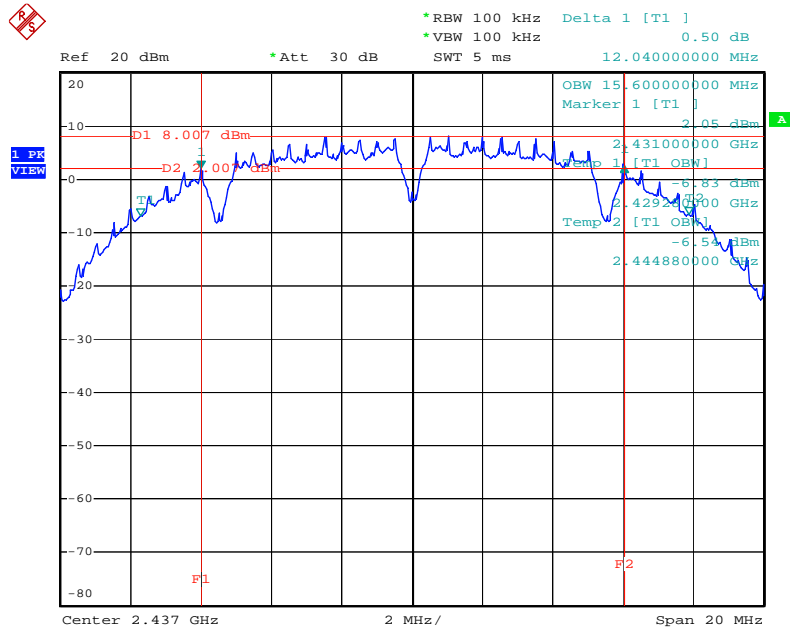

Date: 18.OCT.2005 10:10:31




Modulation Type: DSSS (Channel 11) :

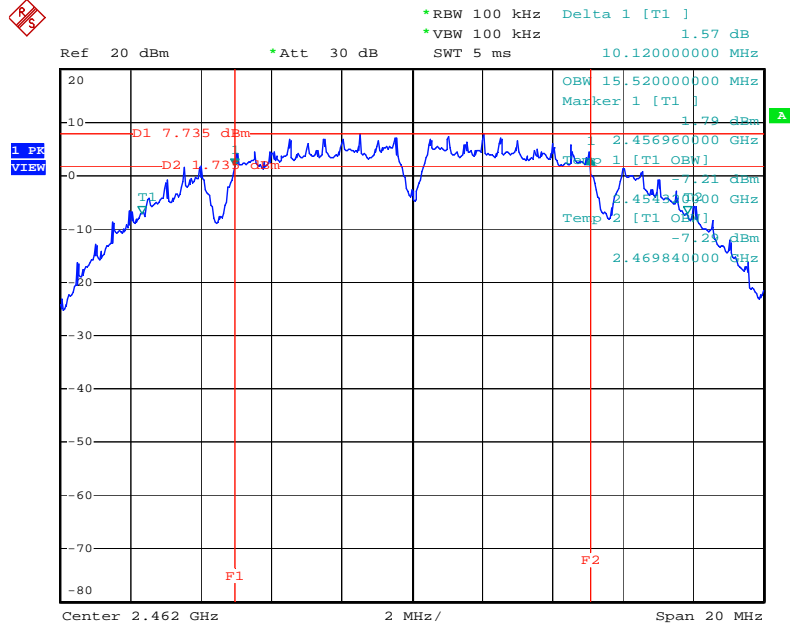

Date: 18.OCT.2005 10:24:46




Modulation Type: OFDM (Channel 01) :

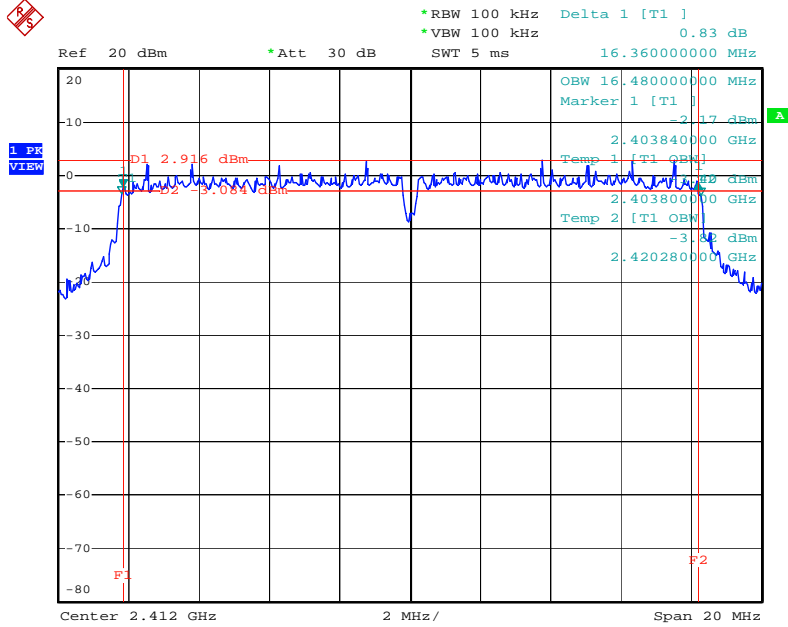

Date: 18.OCT.2005 09:56:51

Modulation Type: OFDM (Channel 06) :

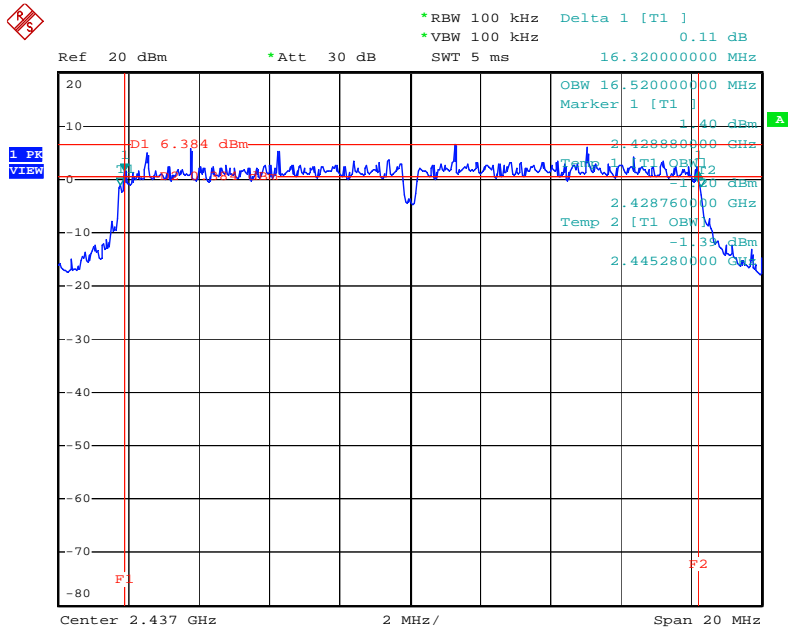


Date: 18.OCT.2005 09:58:45





Modulation Type: OFDM (Channel 11) :

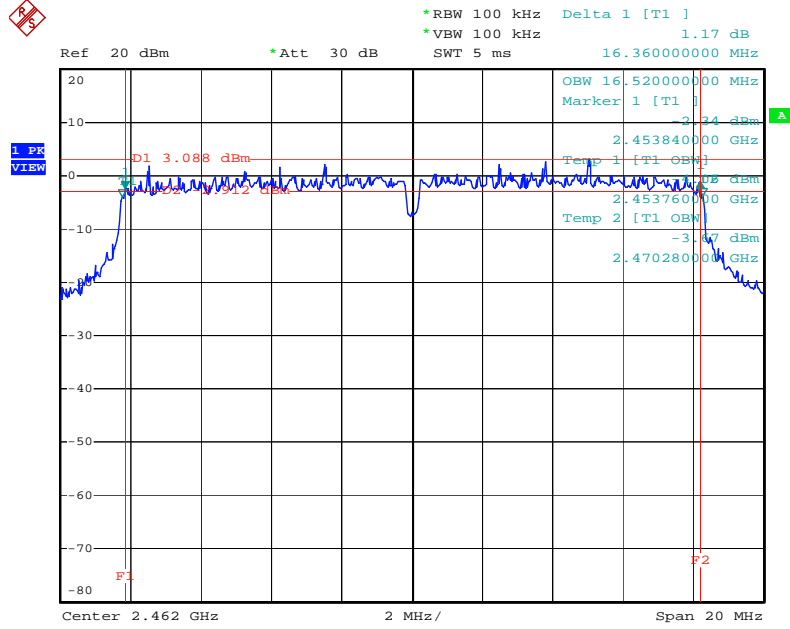

Date: 18.OCT.2005 11:00:35

## 5.2. Test of Maximum Peak Conducted Output Power

### 5.2.1. Applicable Standard

Section 15.247(b)(3)/ A8.3: The maximum peak output power shall not exceed 1 watt (30dBm). Except as shown below, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the above stated values by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### 5.2.2. Measuring Instruments

Item 22, 24 of the table are on section 6.

### 5.2.3. Test Procedures and Test Instruments Setting

1. The transmitter output was connected to the peak power meter through an attenuator.
2. Peak power meter parameter set to auto attenuator and filter is the same as.
3. Repeated the 1 for the middle and highest channel of the EUT.

### 5.2.4. Test Setup Layout

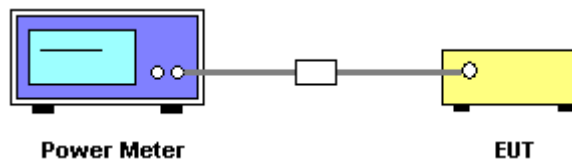

### 5.2.5. Test Criteria

All test results complied with the lowest, requirements of 15.247(b)(3). Measurement Uncertainty is 1.5dB.

### 5.2.6. Test Result of Conducted Power

- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Leo Hung

Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)
DSSS	01	2412 MHz	19.60	30
DSSS	06	2437 MHz	20.10	30
DSSS	11	2462 MHz	19.50	30
OFDM	01	2412 MHz	21.00	30
OFDM	06	2437 MHz	22.40	30
OFDM	11	2462 MHz	20.80	30

### 5.3. Test of Peak Power Spectral Density

#### 5.3.1. Applicable Standard

Section 15.247(e)/ A8.2: For digital modulation systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 5.3.2. Measuring Instruments

Item 21 of the table is on section 6.


#### 5.3.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40
- Attenuation : Auto
- Center Frequency : 2412 MHz / 2437 MHz / 2462 MHz
- Span Frequency : 1.5MHz
- RB : 3 kHz
- VB : 30 kHz
- Detector : Peak
- Trace : Max Hold
- Sweep Time : 500s

#### 5.3.4. Test Procedures

1. The transmitter output is connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum
4. Set the span to 1.5MHz and the sweep time to 500s and record the maximum peak value.
5. Repeated the 1~4 for the middle and lowest, highest channel of the EUT.

#### 5.3.5. Test Setup Layout

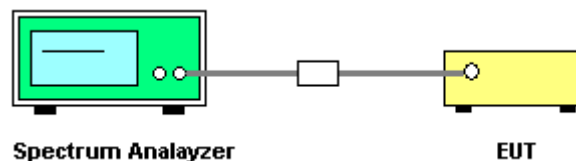

#### 5.3.6. Test Criteria

All test results complied with the requirements of 15.247(e). Measurement Uncertainty is 1.5dB.




5.3.7. Test Result

- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Leo Hung

Modulation Type	Channel No.	Frequency (MHz)	Power Density (dBm)	Limits (dBm)
DSSS	01	2412 MHz	-6.50	8
DSSS	06	2437 MHz	-5.45	8
DSSS	11	2462 MHz	-6.04	8
OFDM	01	2412 MHz	-10.36	8
OFDM	06	2437 MHz	-7.45	8
OFDM	11	2462 MHz	-10.06	8




Modulation Type: DSSS (Channel 01) :

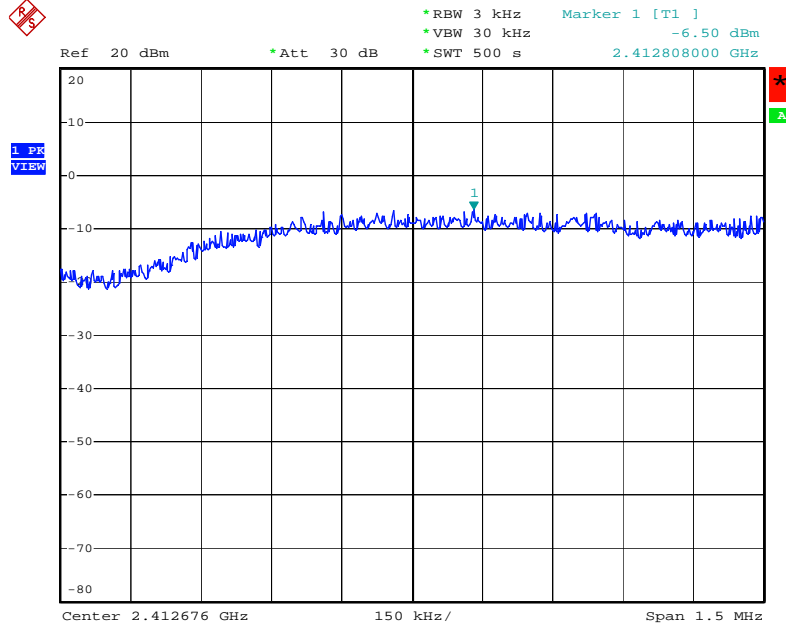

Date: 18.OCT.2005 10:22:48


Modulation Type: DSSS (Channel 06) :

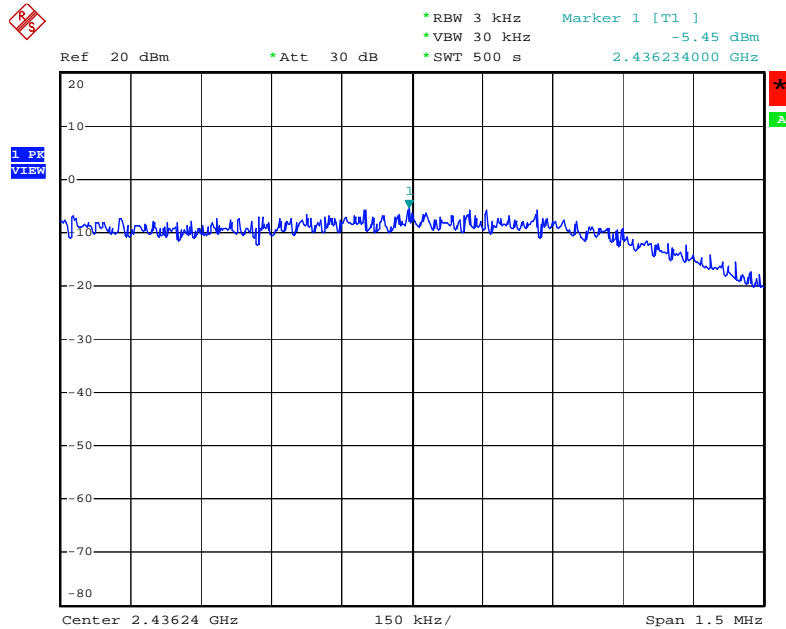

Date: 18.OCT.2005 10:19:19




Modulation Type: DSSS (Channel 11) :

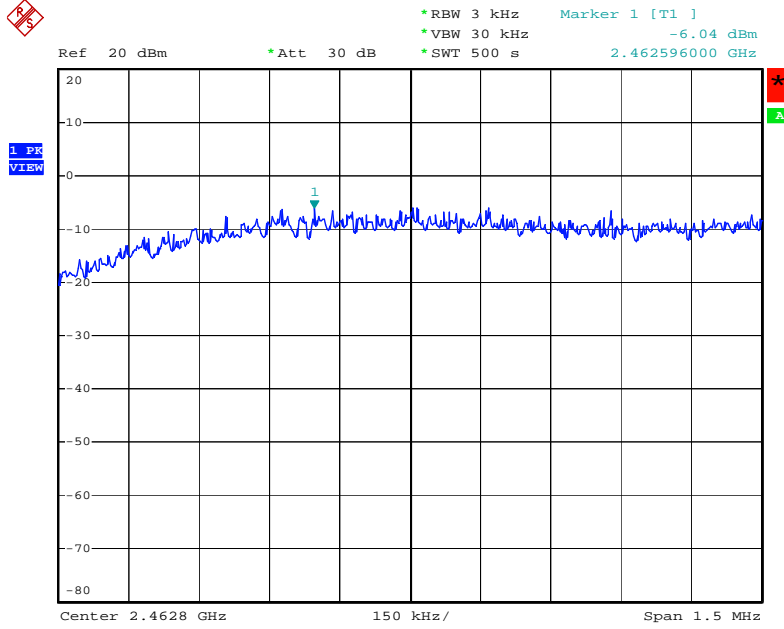

Date: 18.OCT.2005 10:20:28




Modulation Type: OFDM (Channel 01) :

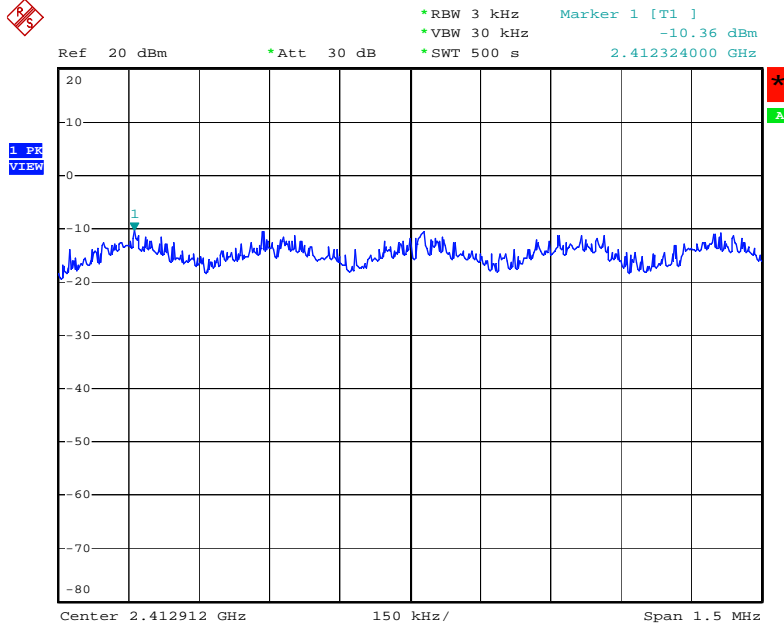

Date: 18.OCT.2005 10:31:24


Modulation Type: OFDM (Channel 06) :

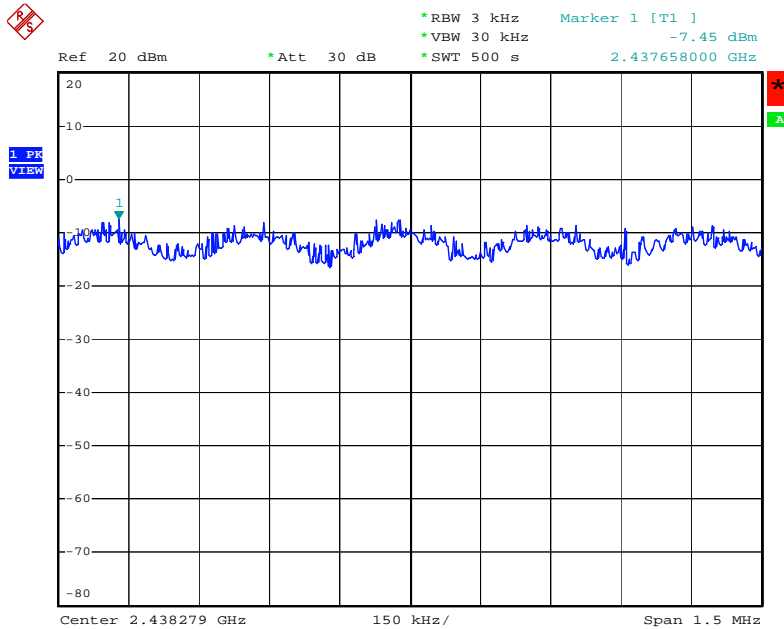

Date: 18.OCT.2005 10:32:37



Modulation Type: OFDM (Channel 11) :

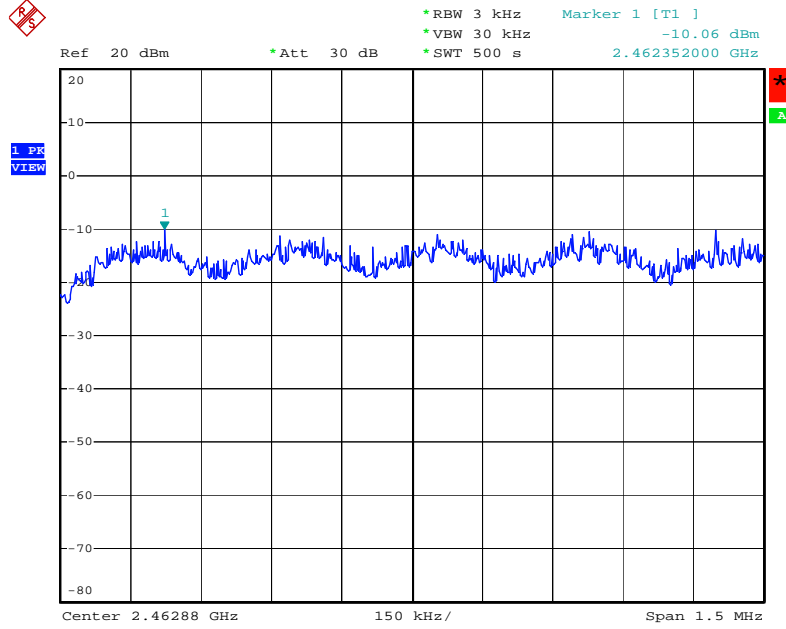

Date: 18.OCT.2005 11:00:49



## 5.4. Test of Band Edges Emission

### 5.4.1. Applicable Standard

Section 15.247(d)/ A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 5.4.2. Measuring Instruments

Item 9~20 of the table is on section 6 for radiated measurement.

Item 21 of the table is on section 6 for conducted measurement.

### 5.4.3. Description of Major Test Instruments Setting

- Spectrum Analyzer : R&S FSP40 (Conducted Measurement)
  - Attenuation : Auto
  - Center Frequency : 2412 MHz / 2462 MHz
  - Span Frequency : 100MHz
  - RB : 100 kHz
  - VB : 100 kHz
  - Detector : Peak
  - Trace : Max Hold
  - Sweep Time : Auto
  
- Spectrum Analyzer : R&S FSP40 (Radiated Measurement)
  - Attenuation : Auto
  - Center Frequency : 2412 MHz / 2462 MHz
  - Span Frequency : 100MHz
  - RB : 1 MHz for PK value / 1 MHz for AV value
  - VB : 1 MHz for PK value / 10 Hz for AV value
  - Detector : Peak
  - Trace : Max Hold
  - Sweep Time : Auto

### 5.4.4. Test Procedures and Test Instruments Setting

#### Conducted Measurement

1. The transmitter is set to the lowest channel.
2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.


4. The lowest band edges emission was measured and recorded.
5. The transmitter set to the highest channel and repeated 2~4.

**Radiated Measurement**


1. Configure the EUT according to ANSI C63.4.
2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For band edge emission in restriction bands, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1 MHz RBW for reading under PK.
6. The transmitter set to the highest channel and repeated 2~5.

5.4.5. Test Setup

**Radiated Method**

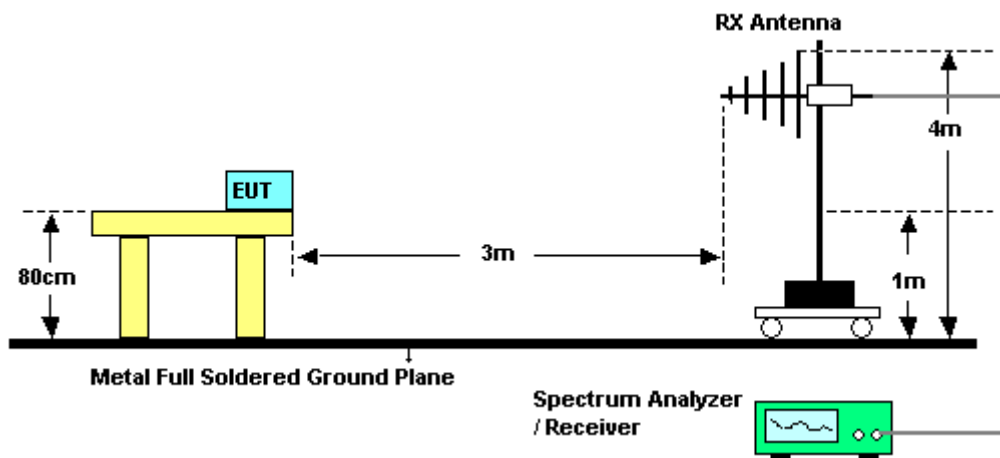

**Conducted Method**

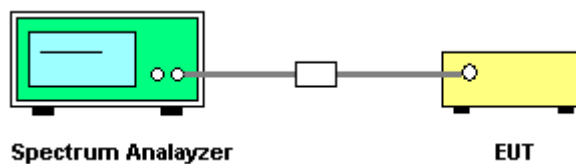

5.4.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is  $1 \times 10^{-5}$ .



5.4.7. Test Result of Radiated Emission

- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Leo Hung

**DSSS / CH1**

	Freq	Level	Over Limit	Limit Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	2386.200	60.19	-13.81	74.00	28.13	2.00	0.00	30.05	VERTICAL	PEAK
2 @	2386.200	53.11	-0.89	54.00	28.13	2.00	0.00	22.98	VERTICAL	AVERAGE
1	2386.400	58.34	-15.66	74.00	28.13	2.00	0.00	28.20	HORIZONTAL	PEAK
2 @	2386.400	51.83	-2.17	54.00	28.13	2.00	0.00	21.69	HORIZONTAL	AVERAGE

**DSSS / CH11**

	Freq	Level	Over Limit	Limit Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
3	2487.900	54.91	-19.09	74.00	28.40	2.04	0.00	24.47	HORIZONTAL	PEAK
4	2487.900	46.74	-7.26	54.00	28.40	2.04	0.00	16.30	HORIZONTAL	AVERAGE
3	2487.700	58.35	-15.65	74.00	28.40	2.04	0.00	27.91	VERTICAL	PEAK
4 @	2487.700	51.10	-2.90	54.00	28.40	2.04	0.00	20.66	VERTICAL	AVERAGE

**OFDM / CH1**

	Freq	Level	Over Limit	Limit Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1 !	2390.000	68.83	-5.17	74.00	28.13	2.00	0.00	38.70	VERTICAL	PEAK
2 @	2390.000	52.04	-1.96	54.00	28.13	2.00	0.00	21.91	VERTICAL	AVERAGE
1 @	2390.000	69.06	-4.94	74.00	28.13	2.00	0.00	38.93	HORIZONTAL	PEAK
2 @	2390.000	49.89	-4.11	54.00	28.13	2.00	0.00	19.76	HORIZONTAL	AVERAGE

**OFDM / CH11**


	Freq	Level	Over Limit	Limit Line	Antenna Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
3	2483.500	64.74	-9.26	74.00	28.36	2.04	0.00	34.34	HORIZONTAL	PEAK
4 !	2483.500	48.70	-5.30	54.00	28.36	2.04	0.00	18.30	HORIZONTAL	AVERAGE
3 !	2483.500	68.03	-5.97	74.00	28.36	2.04	0.00	37.64	VERTICAL	PEAK
4 @	2483.500	52.52	-1.48	54.00	28.36	2.04	0.00	22.12	VERTICAL	AVERAGE

Level\*: The max field strength in the restricted bands.




Test Result of Conducted Emission

Modulation Type: DSSS (Channel 01) :

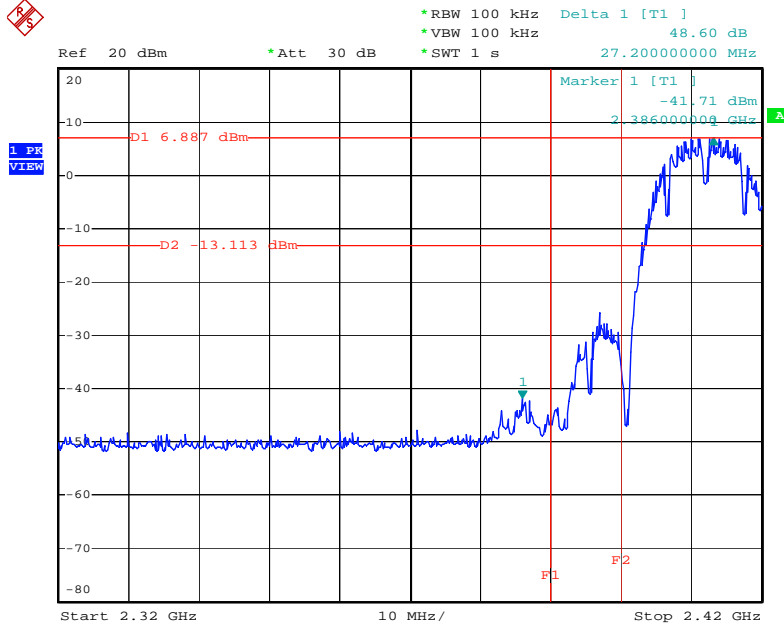


Date: 18.OCT.2005 10:09:52

Modulation Type: DSSS (Channel 11) :

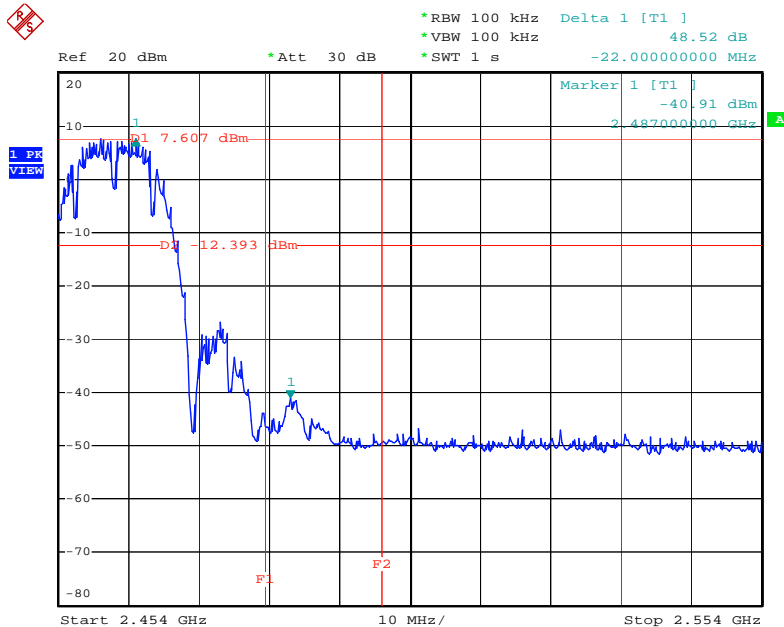


Date: 18.OCT.2005 10:25:08

Modulation Type: OFDM (Channel 01) :

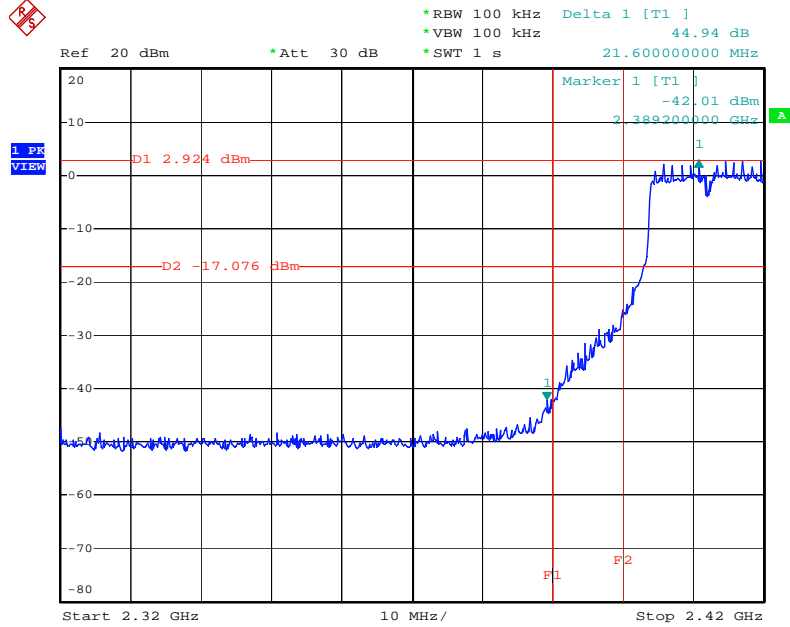

Date: 18.OCT.2005 09:57:23

Modulation Type: OFDM (Channel 11) :

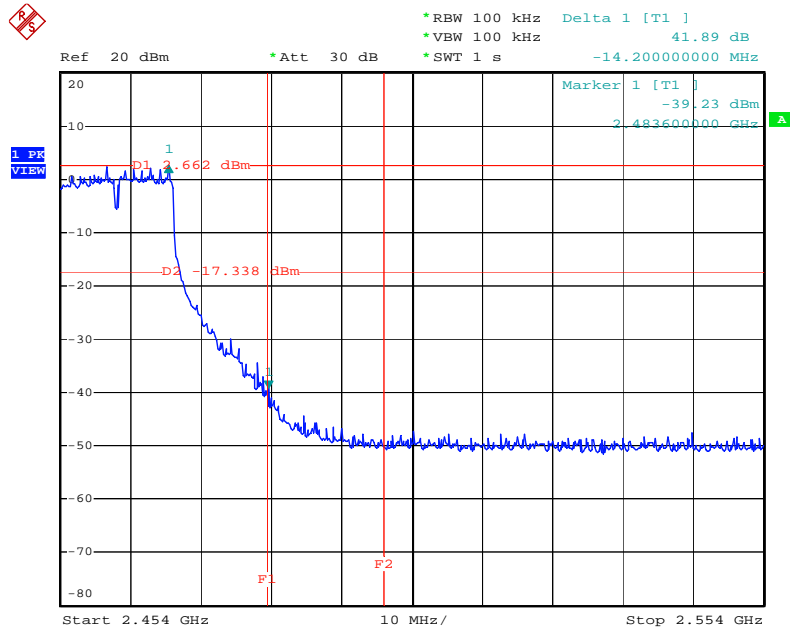

Date: 18.OCT.2005 11:00:57

## 5.5. Test of AC Power Line Conducted Emission

### 5.5.1. Applicable Standard

Section 15.207/RSS-Gen 7.2.2: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

### 5.5.2. Measuring Instruments

Please reference item 1~5 in chapter 6 for the instruments used for testing.


### 5.5.3. Description of Major Test Instruments Setting

- Test Receiver : R&S ESCS 30
- Attenuation : 10 dB
- Start Frequency : 0.15 MHz
- Stop Frequency : 30 MHz
- IF Bandwidth : 9 KHz

### 5.5.4. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/ 50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

5.5.5. Test Setup Layout

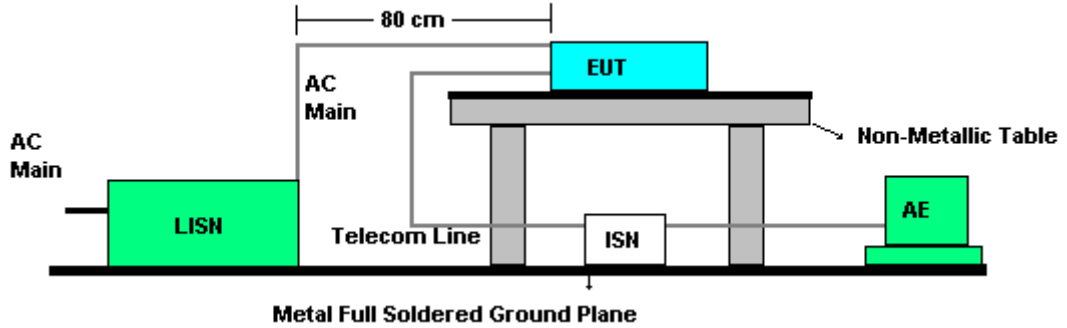


5.5.6. Test Criteria

All test results complied with the requirements of 15.207. Measurement Uncertainty is 2.54dB.

5.5.7. Test Result of Conducted Emission

- Test Mode: Mode 1
- Temperature: 24°C
- Relative Humidity: 67%
- Test Engineer: Stan Peng


**Line to Ground**

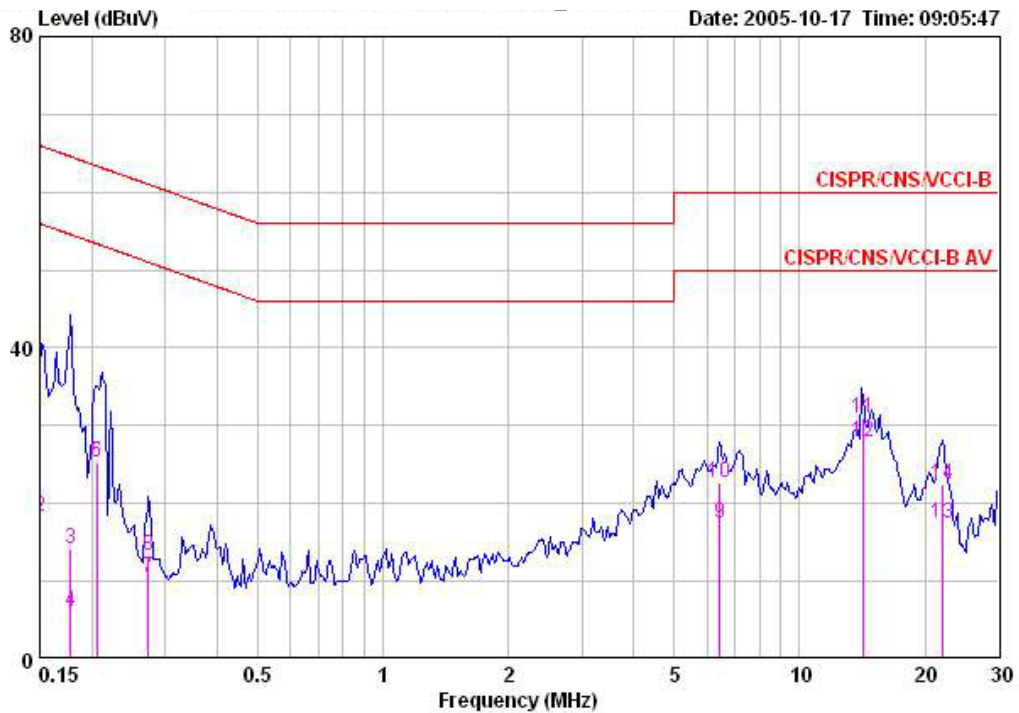

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	28.67	-37.33	66.00	26.47	2.00	0.20	QP
2	0.15000	18.33	-37.67	56.00	16.13	2.00	0.20	AVERAGE
3	0.17772	14.11	-50.48	64.59	12.17	1.74	0.20	QP
4	0.17772	6.05	-48.54	54.59	4.11	1.74	0.20	AVERAGE
5	0.20572	25.20	-38.18	63.38	23.76	1.24	0.20	QP
6	0.20572	25.18	-28.20	53.38	23.74	1.24	0.20	AVERAGE
7	0.27297	10.53	-40.50	51.03	9.46	0.87	0.20	AVERAGE
8	0.27297	13.29	-47.74	61.03	12.22	0.87	0.20	QP
9	6.420	17.55	-32.45	50.00	16.86	0.30	0.39	AVERAGE
10	6.420	22.59	-37.41	60.00	21.90	0.30	0.39	QP
11	14.151	30.98	-29.02	60.00	30.28	0.30	0.40	QP
12	14.151	27.86	-22.14	50.00	27.16	0.30	0.40	AVERAGE
13	22.063	17.40	-32.60	50.00	16.08	0.82	0.50	AVERAGE
14	22.063	22.39	-37.61	60.00	21.07	0.82	0.50	QP




**Neutral to Ground**

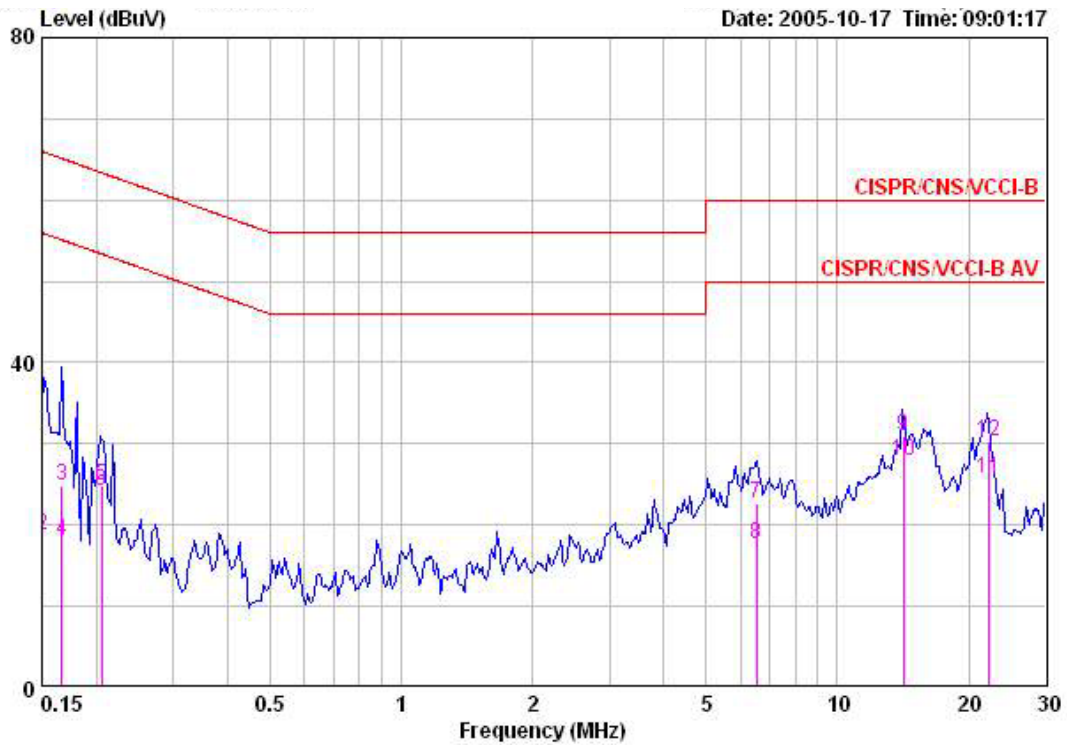

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	26.64	-39.36	66.00	24.54	1.90	0.20	QP
2	0.15000	18.83	-37.17	56.00	16.73	1.90	0.20	AVERAGE
3	0.16677	24.83	-40.29	65.12	22.86	1.77	0.20	QP
4	0.16677	18.00	-37.12	55.12	16.03	1.77	0.20	AVERAGE
5	0.20577	24.92	-38.45	63.37	23.58	1.14	0.20	QP
6	0.20577	24.26	-29.11	53.37	22.92	1.14	0.20	AVERAGE
7	6.523	22.59	-37.41	60.00	21.90	0.29	0.39	QP
8	6.523	17.57	-32.43	50.00	16.88	0.29	0.39	AVERAGE
9	14.152	30.96	-29.04	60.00	30.26	0.30	0.40	QP
10	14.152	27.91	-22.09	50.00	27.21	0.30	0.40	AVERAGE
11	22.217	25.72	-24.28	50.00	24.48	0.74	0.50	AVERAGE
12	22.217	30.22	-29.78	60.00	28.98	0.74	0.50	QP


- Test Mode: Mode 2
- Temperature: 24°C
- Relative Humidity: 67%
- Test Engineer: Stan Peng

**Line to Ground**

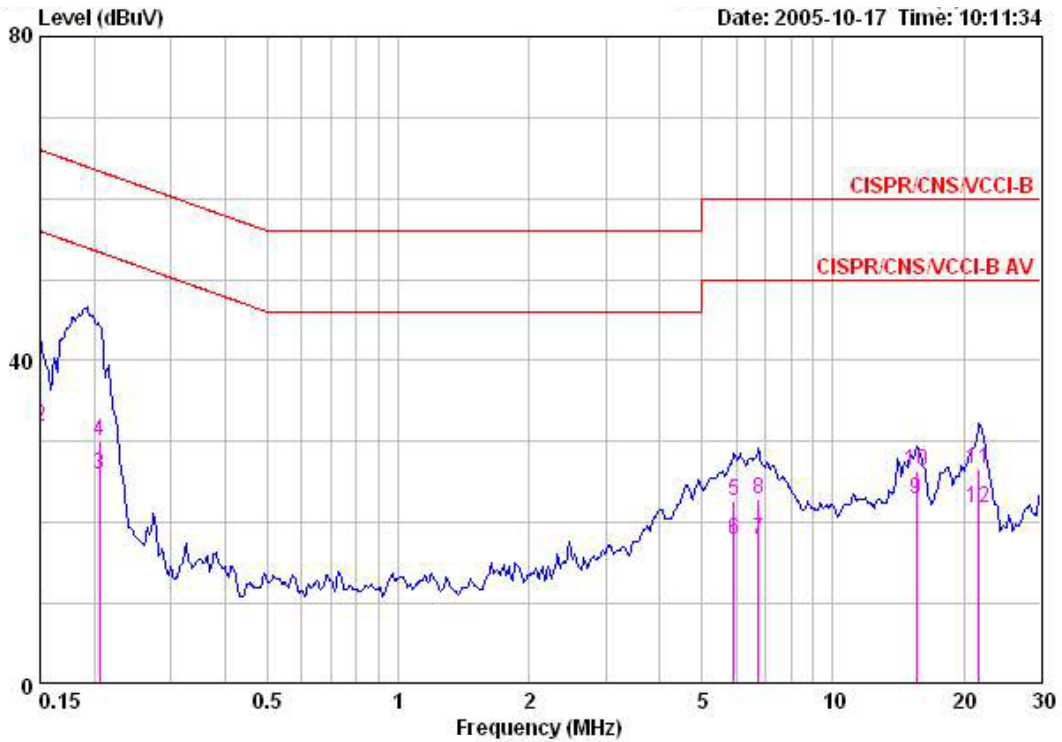

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15000	19.98	-36.02	56.00	17.78	2.00	0.20	AVERAGE
2	0.15000	31.73	-34.27	66.00	29.53	2.00	0.20	QP
3	0.20592	25.85	-27.52	53.37	24.41	1.24	0.20	AVERAGE
4	0.20592	30.04	-33.33	63.37	28.60	1.24	0.20	QP
5	5.929	22.73	-37.27	60.00	22.13	0.30	0.30	QP
6	5.929	17.81	-32.19	50.00	17.21	0.30	0.30	AVERAGE
7	6.733	17.89	-32.11	50.00	17.24	0.30	0.35	AVERAGE
8	6.733	22.91	-37.09	60.00	22.26	0.30	0.35	QP
9	15.558	22.91	-27.09	50.00	22.21	0.30	0.40	AVERAGE
10	15.558	26.29	-33.71	60.00	25.59	0.30	0.40	QP
11	21.722	26.59	-33.41	60.00	25.39	0.70	0.50	QP
12	21.722	21.78	-28.22	50.00	20.58	0.70	0.50	AVERAGE


**Neutral to Ground**

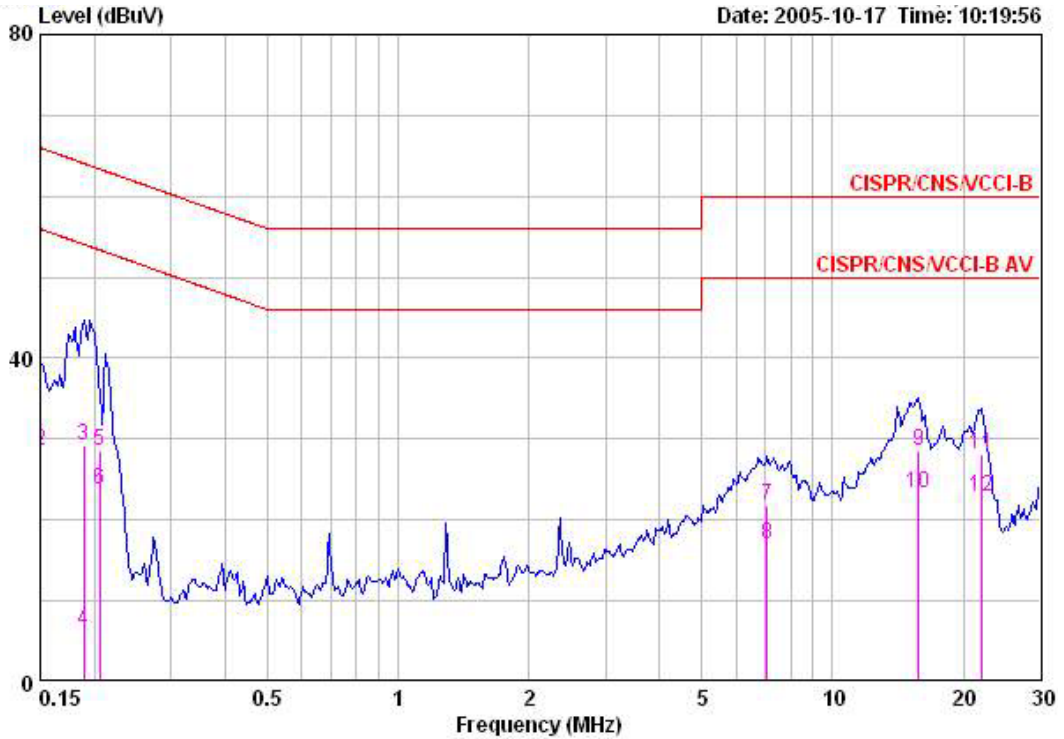


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15000	17.59	-38.41	56.00	15.49	1.90	0.20	AVERAGE
2	0.15000	28.60	-37.40	66.00	26.50	1.90	0.20	QP
3	0.18938	29.27	-34.80	64.06	28.02	1.05	0.20	QP
4	0.18938	6.25	-47.82	54.06	5.00	1.05	0.20	AVERAGE
5	0.20575	28.56	-34.82	63.38	27.22	1.14	0.20	QP
6	0.20575	23.73	-29.65	53.38	22.39	1.14	0.20	AVERAGE
7	7.062	21.77	-38.23	60.00	21.24	0.22	0.32	QP
8	7.062	16.95	-33.05	50.00	16.42	0.22	0.32	AVERAGE
9	15.801	28.46	-31.54	60.00	27.76	0.30	0.40	QP
10	15.801	23.30	-26.70	50.00	22.60	0.30	0.40	AVERAGE
11	21.946	28.05	-31.95	60.00	26.65	0.90	0.50	QP
12	21.946	22.86	-27.14	50.00	21.46	0.90	0.50	AVERAGE

5.5.8. Photographs of Conducted Emission Test Configuration

FRONT VIEW

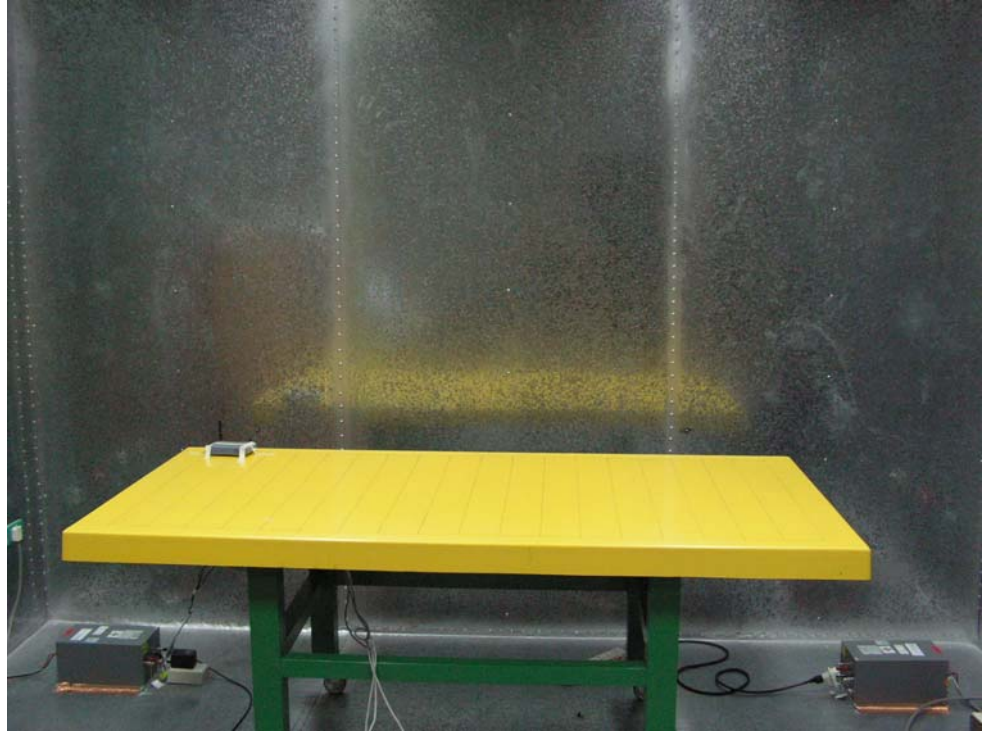

REAR VIEW

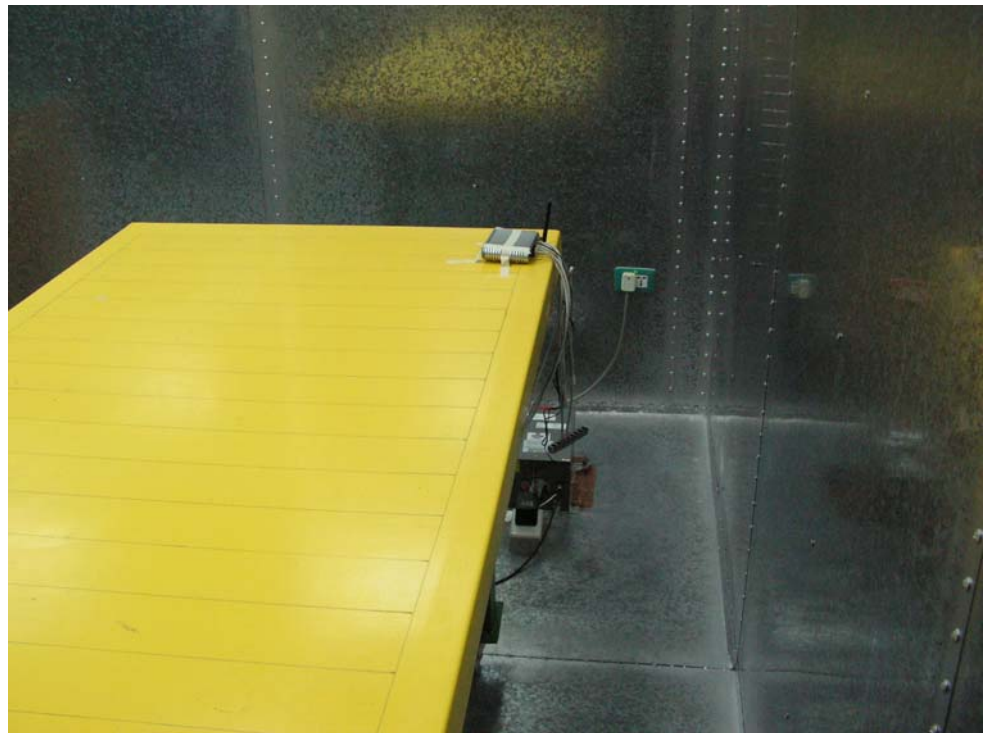

## 5.6. Test of Spurious Radiated Emission

### 5.6.1. Applicable Standard

Section 15.247(d)/ A8.5: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

### 5.6.2. Measuring Instruments

Please reference item 7~20 in chapter 6 for the instruments used for testing.

### 5.6.3. Description of Major Test Instruments Setting


- Spectrum Analyzer : R&S FSP40
  - Attenuation : Auto
  - Start Frequency : 1000 MHz
  - Stop Frequency : 10th carrier harmonic
  - RB / VB : 1 MHz / 1MHz for Peak
  - RB / VB : 1 MHz / 10Hz for Average
  
- Test Receiver : R&S ESCS 30
  - Attenuation : Auto
  - Start Frequency : 30 MHz
  - Stop Frequency : 1000 MHz
  - RB : 120 KHz for QP or PK

### 5.6.4. Test Procedures

1. Configure the EUT according to ANSI C63.4.
2. The EUT was placed on the top of the turntable 0.8 meter above ground.
3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
4. Power on the EUT and all the supporting units.
5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
6. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
7. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
9. For emission above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.

10. If the emission level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz and average method for above the 1GHz. the reported.
11. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB higher than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

#### 5.6.5. Test Setup Layout

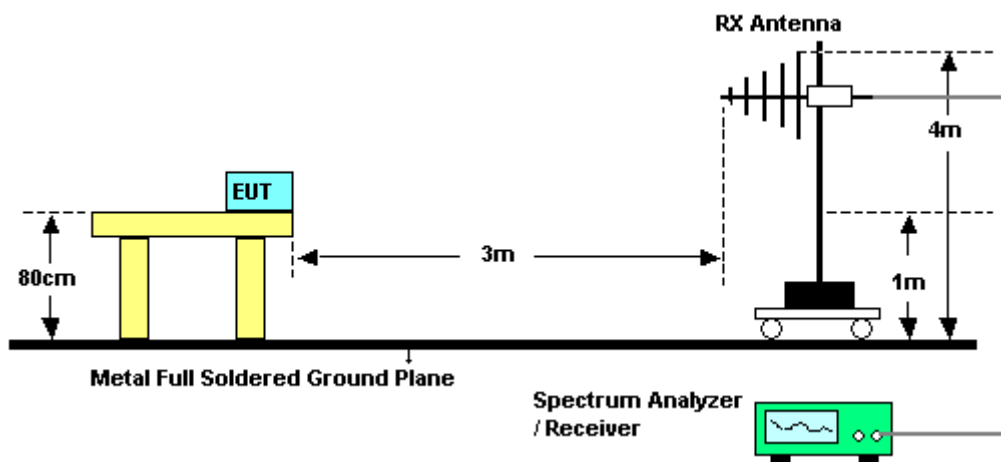


#### 5.6.6. Test Criteria

All test results complied with the requirements of 15.247(d). Measurement Uncertainty is 2.26dB.

5.6.7. Test Results for CH 11 / 2462 MHz (for emission below 1GHz)

- Test Mode: Mode 1
- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

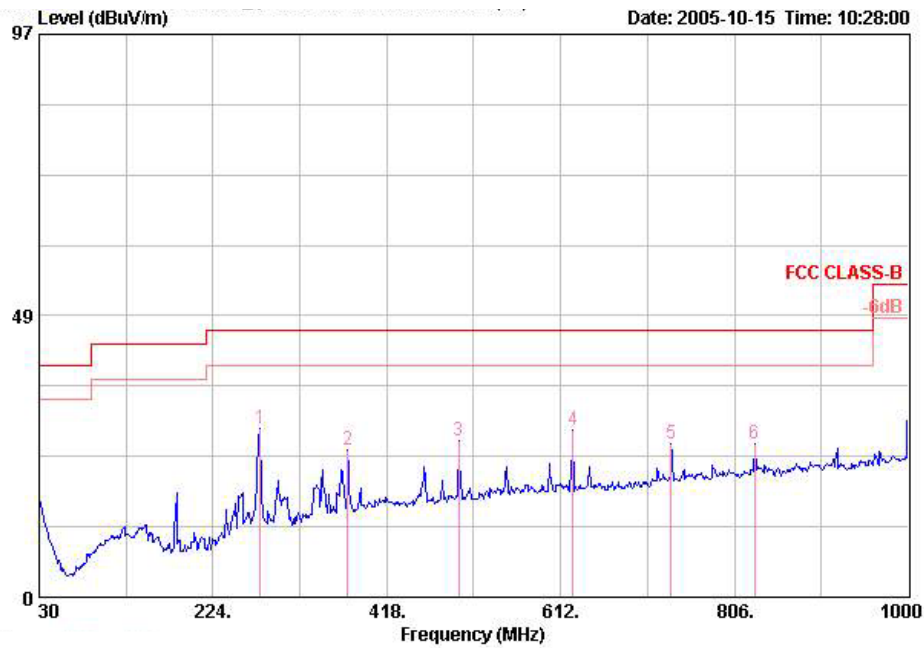

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	Pol/Phase	Remark
1	276.380	29.07	-16.93	46.00	12.50	1.17	30.04	45.44	HORIZONTAL	Peak
2	374.350	25.25	-20.75	46.00	14.95	1.24	30.52	39.58	HORIZONTAL	Peak
3	498.510	26.92	-19.08	46.00	17.36	1.53	30.53	38.56	HORIZONTAL	Peak
4	625.580	28.83	-17.17	46.00	18.75	1.62	30.59	39.05	HORIZONTAL	Peak
5	735.190	26.46	-19.54	46.00	19.86	1.86	30.17	34.91	HORIZONTAL	Peak
6	828.310	26.43	-19.57	46.00	20.28	1.97	30.03	34.20	HORIZONTAL	Peak



**(B) Polarization: Vertical**

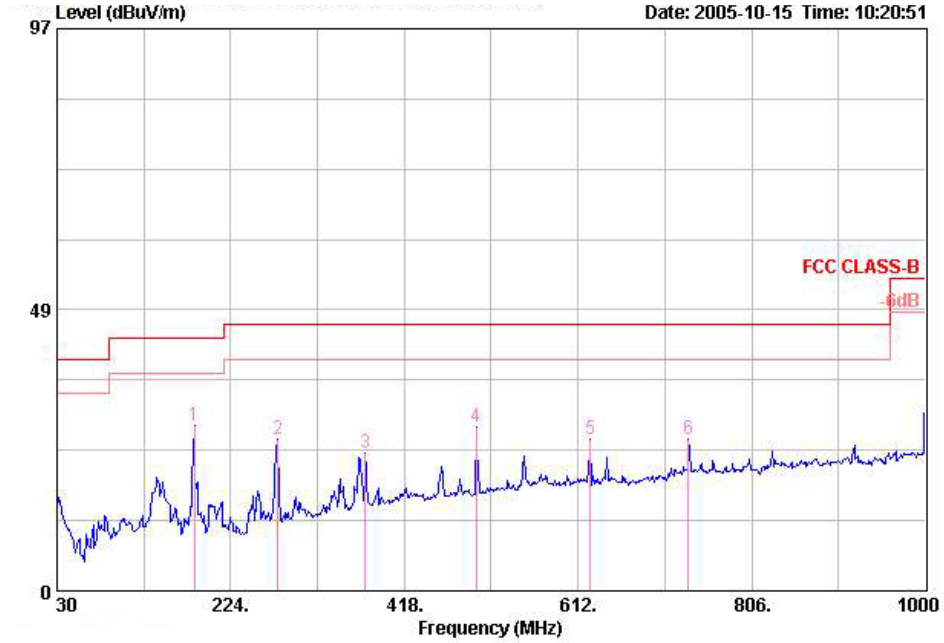

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	Pol/Phase	Remark
1 @	183.260	28.66	-14.84	43.50	8.30	0.92	30.02	49.47	VERTICAL	Peak
2	276.380	26.04	-19.96	46.00	12.50	1.17	30.04	42.41	VERTICAL	Peak
3	374.350	23.91	-22.09	46.00	14.95	1.24	30.52	38.24	VERTICAL	Peak
4	498.510	28.17	-17.83	46.00	17.36	1.53	30.53	39.81	VERTICAL	Peak
5	625.580	26.24	-19.76	46.00	18.75	1.62	30.59	36.46	VERTICAL	Peak
6	735.190	26.08	-19.92	46.00	19.86	1.86	30.17	34.53	VERTICAL	Peak

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level





- Test Mode: Mode 2
- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Ming Ta, Kao


**(A) Polarization: Horizontal**

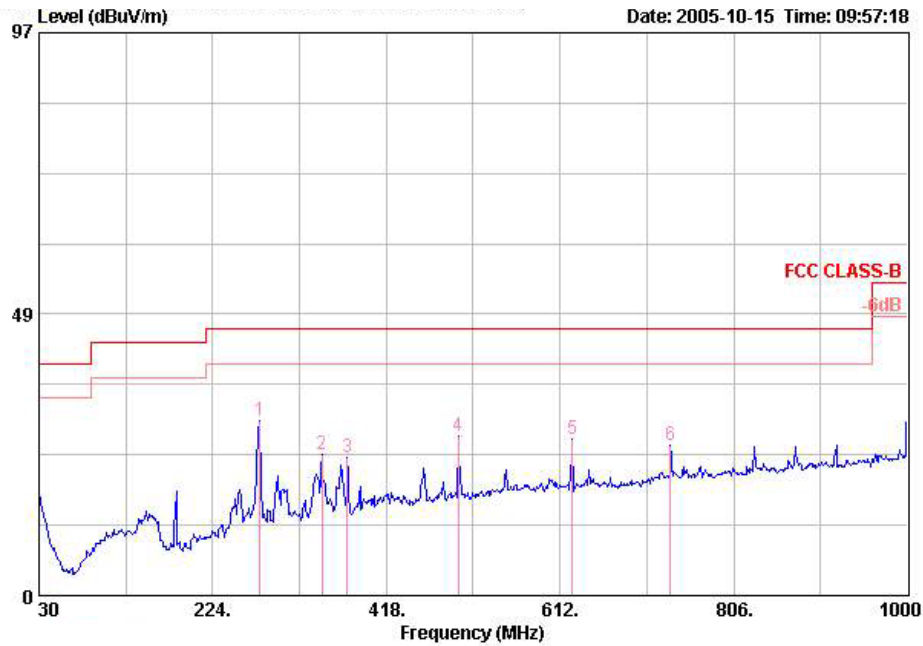

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBUV/m	dB	dBUV/m	dB/m		dB	dB	dBUV		
1	276.380	30.22	-15.78	46.00	12.50	1.17	30.04	46.58	HORIZONTAL	Peak	
2	346.220	24.28	-21.72	46.00	14.28	1.30	30.59	39.30	HORIZONTAL	Peak	
3	374.350	23.86	-22.14	46.00	14.95	1.24	30.52	38.19	HORIZONTAL	Peak	
4	498.510	27.41	-18.59	46.00	17.36	1.53	30.53	39.04	HORIZONTAL	Peak	
5	625.580	26.95	-19.05	46.00	18.75	1.62	30.59	37.18	HORIZONTAL	Peak	
6	735.190	25.83	-20.17	46.00	19.86	1.86	30.17	34.28	HORIZONTAL	Peak	



**(B) Polarization: Vertical**

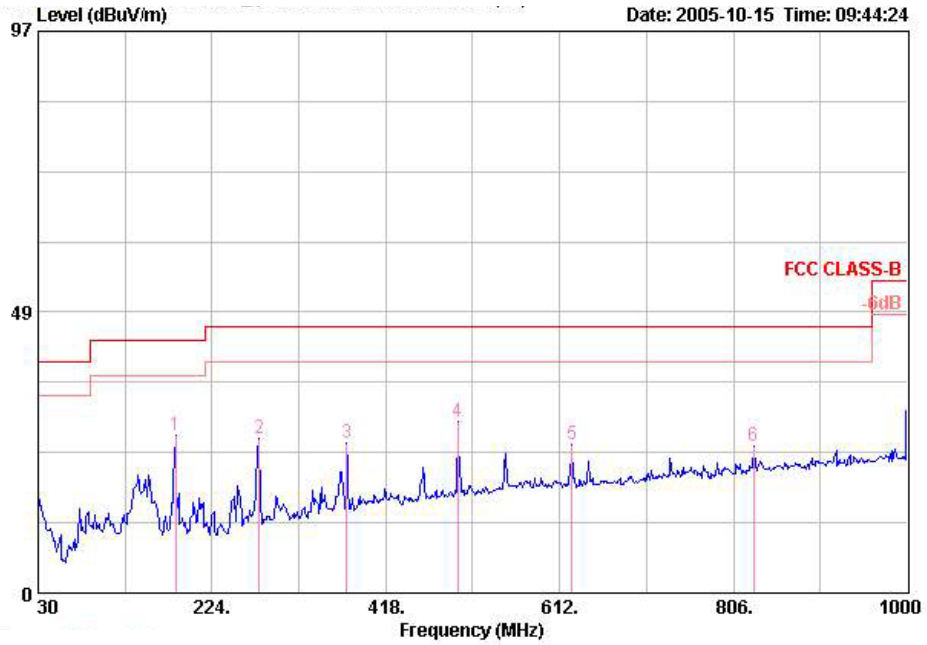

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	183.260	27.30	-16.20	43.50	8.30	0.92	30.02	48.11	VERTICAL	Peak
2	276.380	26.58	-19.42	46.00	12.50	1.17	30.04	42.95	VERTICAL	Peak
3	374.350	25.81	-20.19	46.00	14.95	1.24	30.52	40.14	VERTICAL	Peak
4	498.510	29.49	-16.51	46.00	17.36	1.53	30.53	41.13	VERTICAL	Peak
5	625.580	25.53	-20.47	46.00	18.75	1.62	30.59	35.76	VERTICAL	Peak
6	828.310	25.31	-20.69	46.00	20.28	1.97	30.03	33.09	VERTICAL	Peak

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.6.8. Test Results for CH 01 / 2412 MHz (for emission above 1GHz)

- Modulation Type: DSSS
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

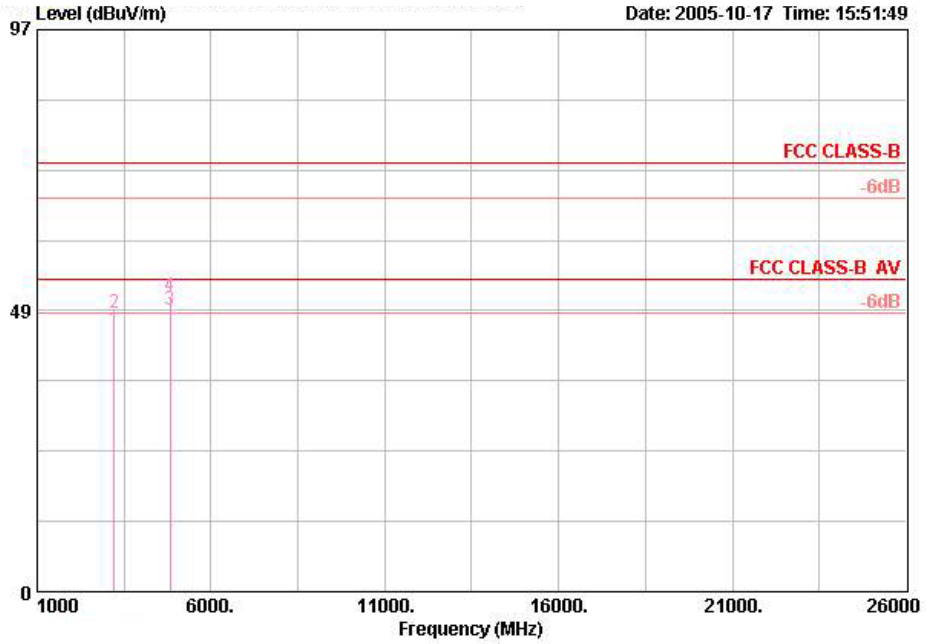

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		
1	3216.000	45.32	-8.68	54.00	30.66		1.97	35.20	47.90	HORIZONTAL	AVERAGE
2	3216.000	48.01	-25.99	74.00	30.66		1.97	35.20	50.58	HORIZONTAL	PEAK
3 !	4824.040	48.54	-5.46	54.00	33.22		3.20	35.10	47.22	HORIZONTAL	AVERAGE
4	4824.040	50.95	-23.05	74.00	33.22		3.20	35.10	49.62	HORIZONTAL	PEAK



**(B) Polarization: Vertical**

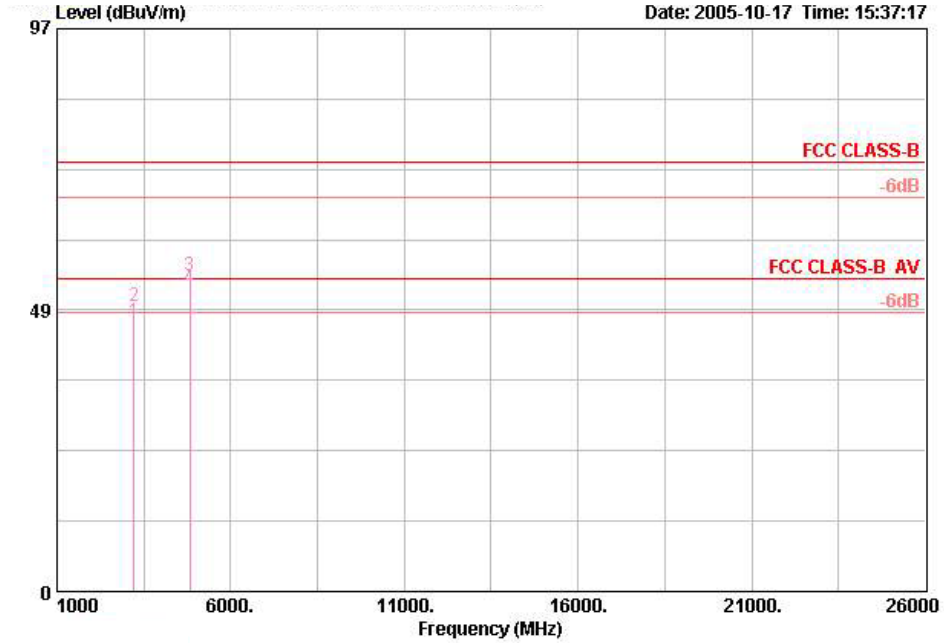

	Freq	Level	Over	Limit	Antenna	Cable	Preamp	Read		Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV	Pol/Phase	
1	3216.000	46.44	-7.56	54.00	30.66	1.97	35.20	49.02	VERTICAL	AVERAGE
2	3216.000	49.21	-24.79	74.00	30.66	1.97	35.20	51.78	VERTICAL	PEAK
3	4824.000	54.33	-19.67	74.00	33.22	3.20	35.10	53.01	VERTICAL	PEAK
4 @	4824.130	52.25	-1.75	54.00	33.22	3.20	35.10	50.92	VERTICAL	AVERAGE

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

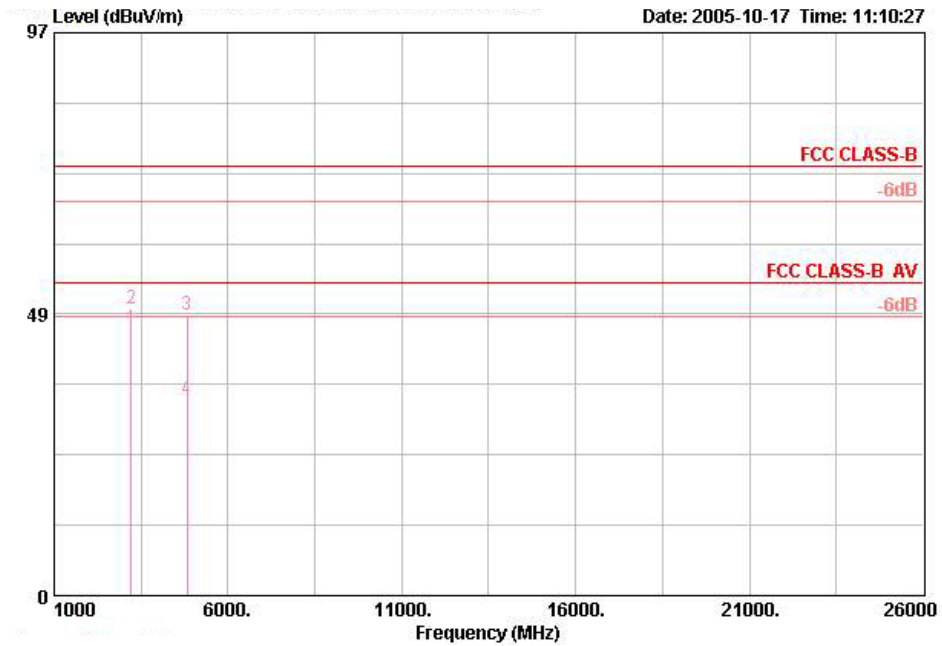

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		
1	3216.020	46.03	-7.97	54.00	30.66		1.97	35.20	48.61	HORIZONTAL	AVERAGE
2	3216.020	49.30	-24.70	74.00	30.66		1.97	35.20	51.88	HORIZONTAL	PEAK
3	4823.820	48.38	-25.62	74.00	33.22		3.20	35.10	47.06	HORIZONTAL	PEAK
4	4824.680	33.95	-20.05	54.00	33.22		3.20	35.10	32.63	HORIZONTAL	AVERAGE



**(B) Polarization: Vertical**

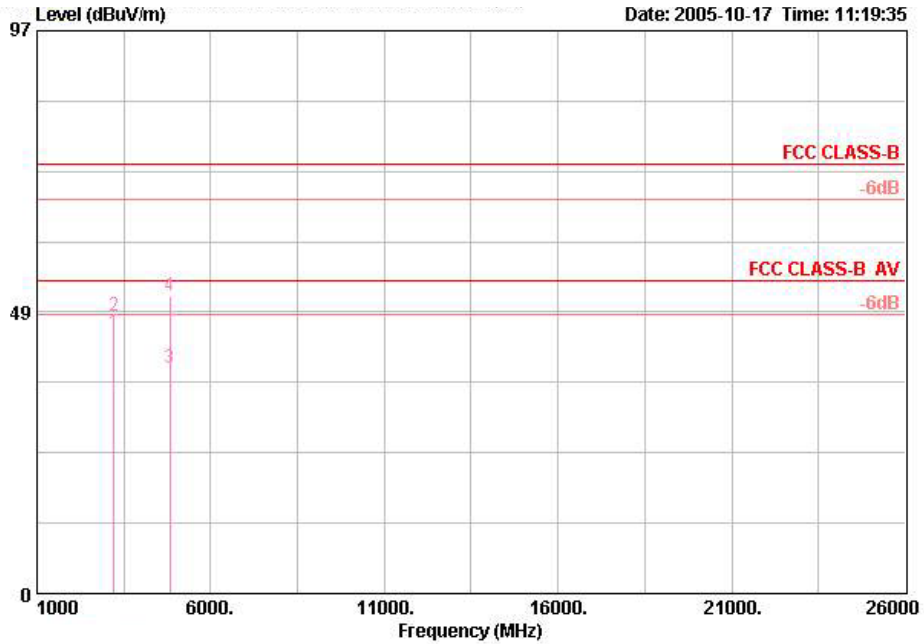

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	3216.020	44.85	-9.15	54.00	30.66	1.97	35.20	47.43	VERTICAL	AVERAGE
2	3216.020	47.97	-26.03	74.00	30.66	1.97	35.20	50.55	VERTICAL	PEAK
3	4822.900	38.86	-15.14	54.00	33.22	3.20	35.10	37.54	VERTICAL	AVERAGE
4	4822.900	51.40	-22.60	74.00	33.22	3.20	35.10	50.08	VERTICAL	PEAK

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.6.9. Test Results for CH 06 / 2437 MHz (for emission above 1GHz)

- Modulation Type: DSSS
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

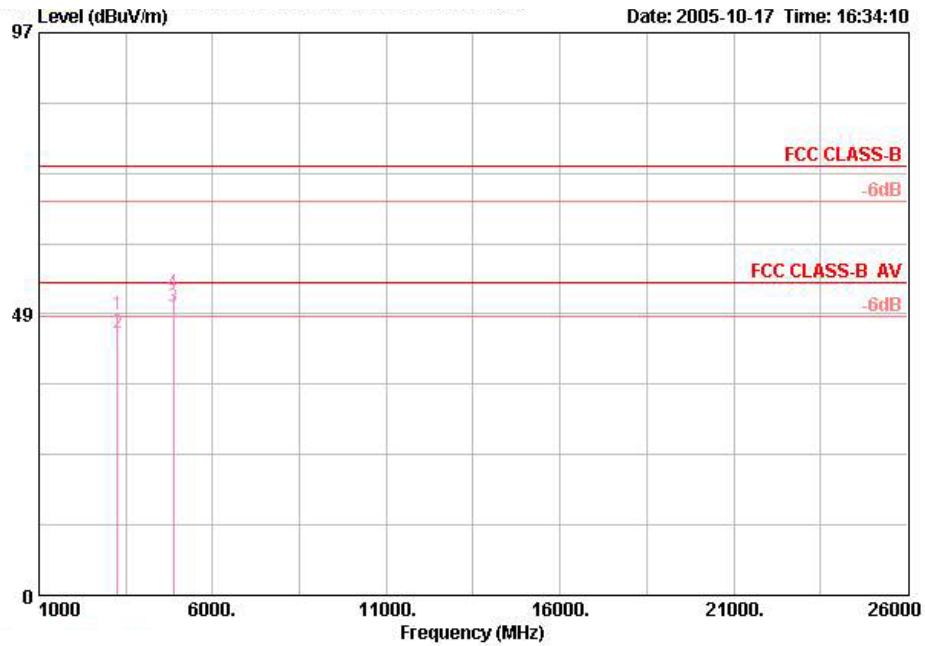

	Freq	Level	Over Limit	Limit	Antenna Line	Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m		dB	dB	dBuV		
1	3249.340	48.44	-25.56	74.00	30.73		2.03	35.20	50.88	HORIZONTAL	PEAK
2	3249.340	45.28	-8.72	54.00	30.73		2.03	35.20	47.72	HORIZONTAL	AVERAGE
3 @	4874.040	49.79	-4.21	54.00	33.33		3.22	35.10	48.34	HORIZONTAL	AVERAGE
4	4874.040	51.98	-22.02	74.00	33.33		3.22	35.10	50.53	HORIZONTAL	PEAK



**(B) Polarization: Vertical**

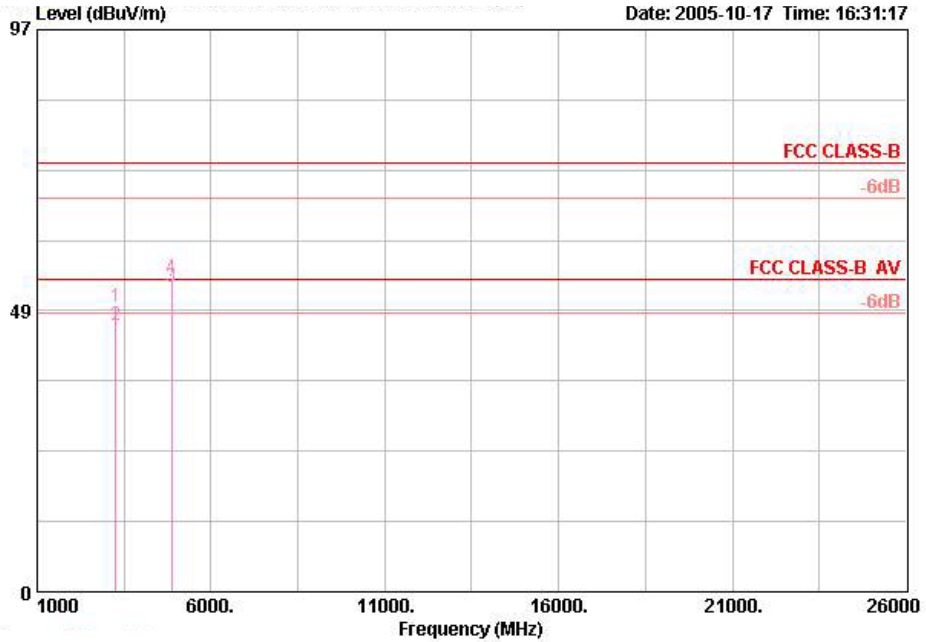

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	3249.170	49.28	-24.72	74.00	30.73	2.03	35.20	51.72	VERTICAL	PEAK
2	3249.170	46.00	-8.00	54.00	30.73	2.03	35.20	48.44	VERTICAL	AVERAGE
3 @	4874.060	52.70	-1.30	54.00	33.33	3.22	35.10	51.24	VERTICAL	AVERAGE
4	4874.060	54.22	-19.78	74.00	33.33	3.22	35.10	52.77	VERTICAL	PEAK

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level





- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

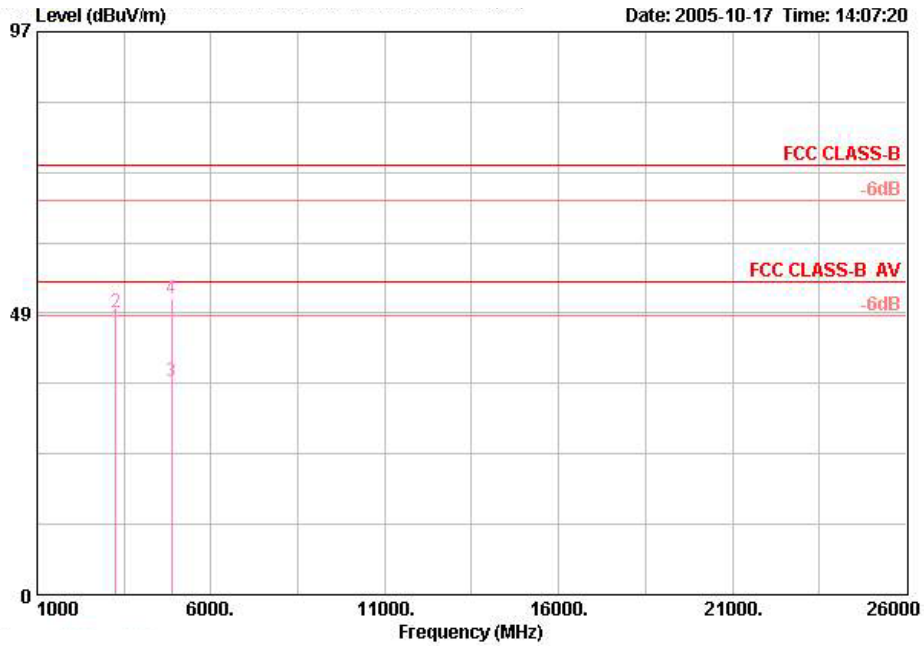

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	3249.360	45.89	-8.11	54.00	30.73	2.03	35.20	48.33	HORIZONTAL AVERAGE	
2	3249.360	48.58	-25.42	74.00	30.73	2.03	35.20	51.01	HORIZONTAL PEAK	
3	4873.940	36.64	-17.36	54.00	33.33	3.22	35.10	35.18	HORIZONTAL AVERAGE	
4	4875.000	51.02	-22.98	74.00	33.33	3.22	35.10	49.57	HORIZONTAL PEAK	



**(B) Polarization: Vertical**

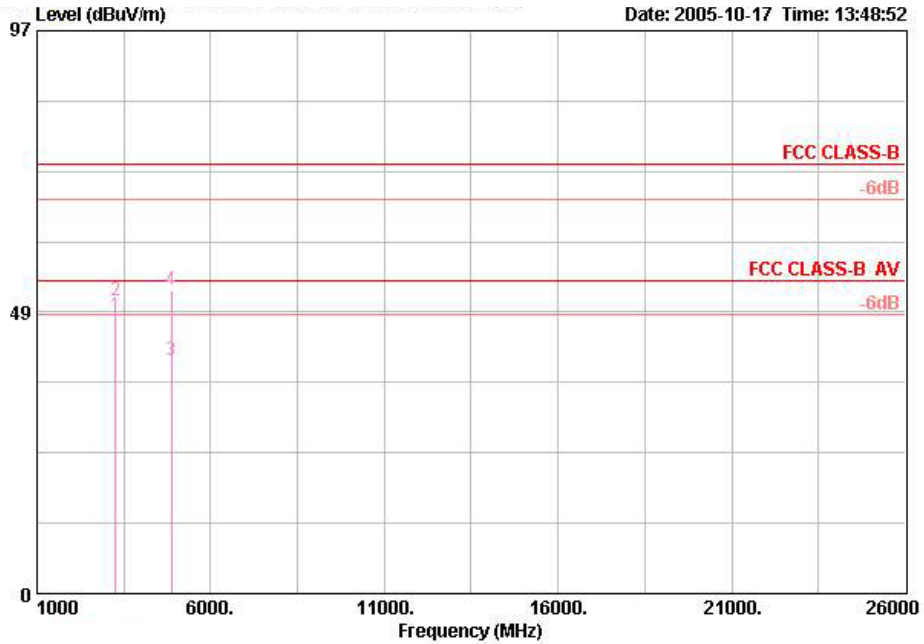

	Freq	Level	Limit	Line	Factor	Preamp	Read	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	Loss	Level		
						Factor	dBuV		
1	3249.290	47.93	-6.07	54.00	30.73	2.03	50.36	VERTICAL	AVERAGE
2	3249.290	50.43	-23.57	74.00	30.73	2.03	52.86	VERTICAL	PEAK
3	4873.590	40.30	-13.70	54.00	33.33	3.22	38.85	VERTICAL	AVERAGE
4	4873.590	52.41	-21.59	74.00	33.33	3.22	50.95	VERTICAL	PEAK

Note:

Emission level (dBUV/m) = 20 log Emission level (uV/m)


Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



5.6.10. Test Results for CH 11 / 2462 MHz (for emission above 1GHz)

- Modulation Type: DSSS
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

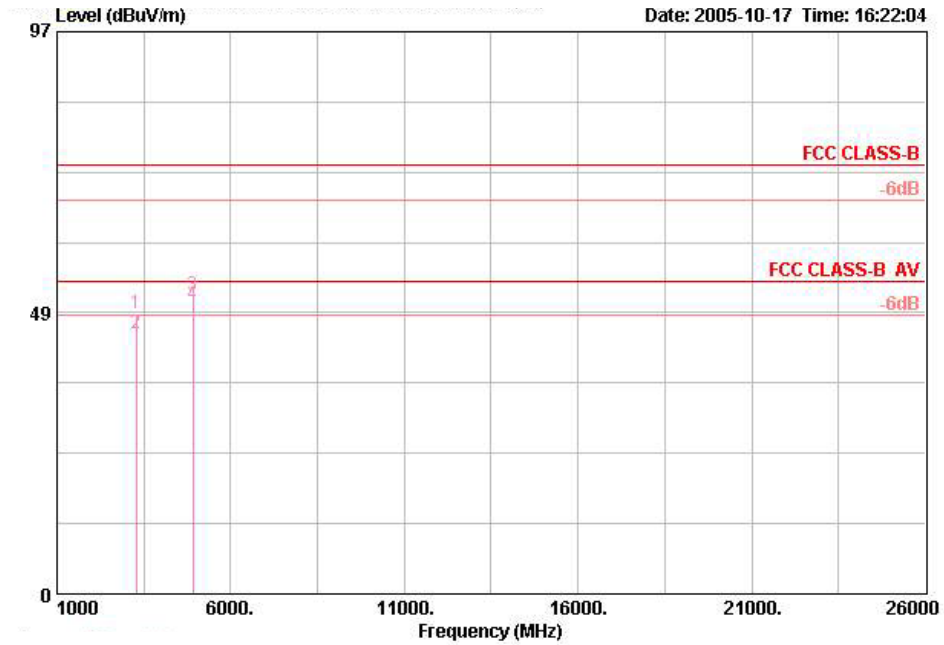

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	3282.200	48.30	-25.70	74.00	30.81	2.10	35.20	50.59	HORIZONTAL	PEAK
2	3282.200	44.80	-9.20	54.00	30.81	2.10	35.20	47.09	HORIZONTAL	AVERAGE
3	4924.020	51.45	-22.55	74.00	33.45	3.25	35.10	49.85	HORIZONTAL	PEAK
4 @	4924.020	50.00	-4.00	54.00	33.45	3.25	35.10	48.40	HORIZONTAL	AVERAGE



**(B) Polarization: Vertical**

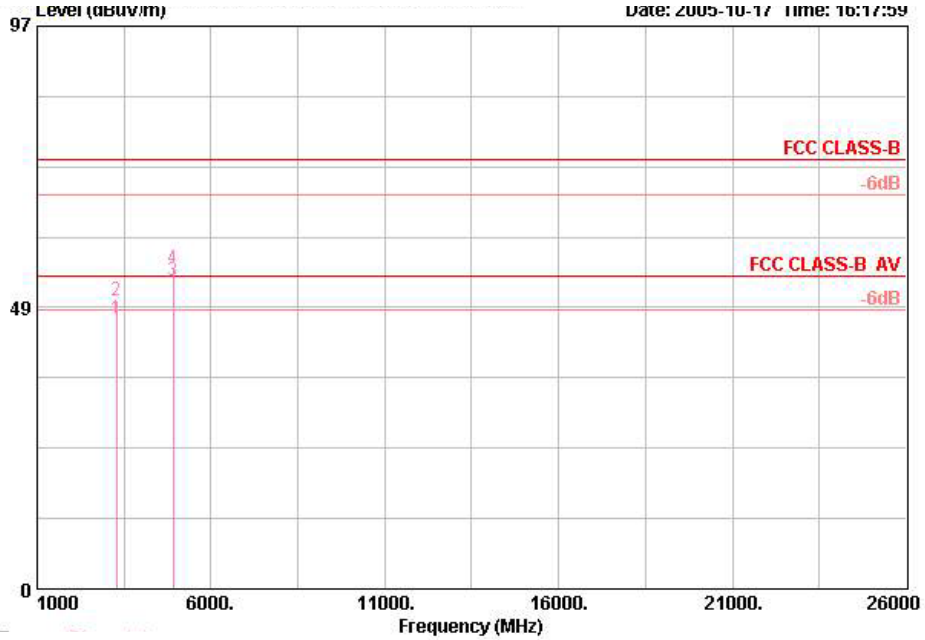

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	3282.140	46.50	-7.50	54.00	30.81	2.10	35.20	48.79	VERTICAL	AVERAGE
2	3282.140	49.60	-24.40	74.00	30.81	2.10	35.20	51.89	VERTICAL	PEAK
3 @	4924.040	53.01	-0.99	54.00	33.45	3.25	35.10	51.42	VERTICAL	AVERAGE
4	4924.040	55.19	-18.81	74.00	33.45	3.25	35.10	53.59	VERTICAL	PEAK

Note:


Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level



- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao


**(A) Polarization: Horizontal**

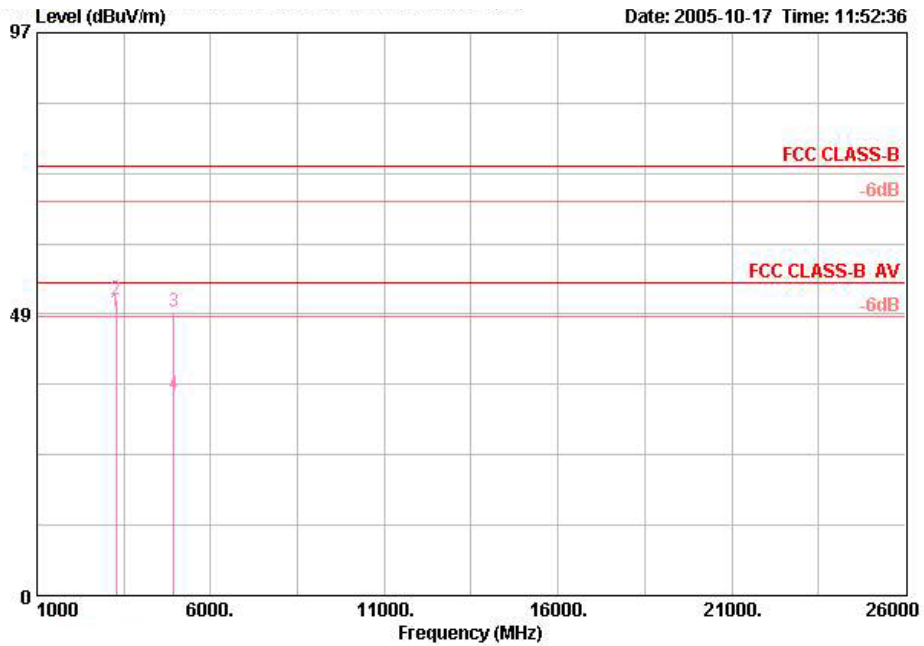

	Freq	Level	Over Limit	Limit	Antenna Line	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1 !	3282.720	48.82	-5.18	54.00	30.81	2.10	35.20	51.11	HORIZONTAL	AVERAGE
2	3282.720	51.08	-22.92	74.00	30.81	2.10	35.20	53.37	HORIZONTAL	PEAK
3	4924.200	48.85	-25.15	74.00	33.45	3.25	35.10	47.25	HORIZONTAL	PEAK
4	4924.200	34.50	-19.50	54.00	33.45	3.25	35.10	32.90	HORIZONTAL	AVERAGE



**(B) Polarization: Vertical**

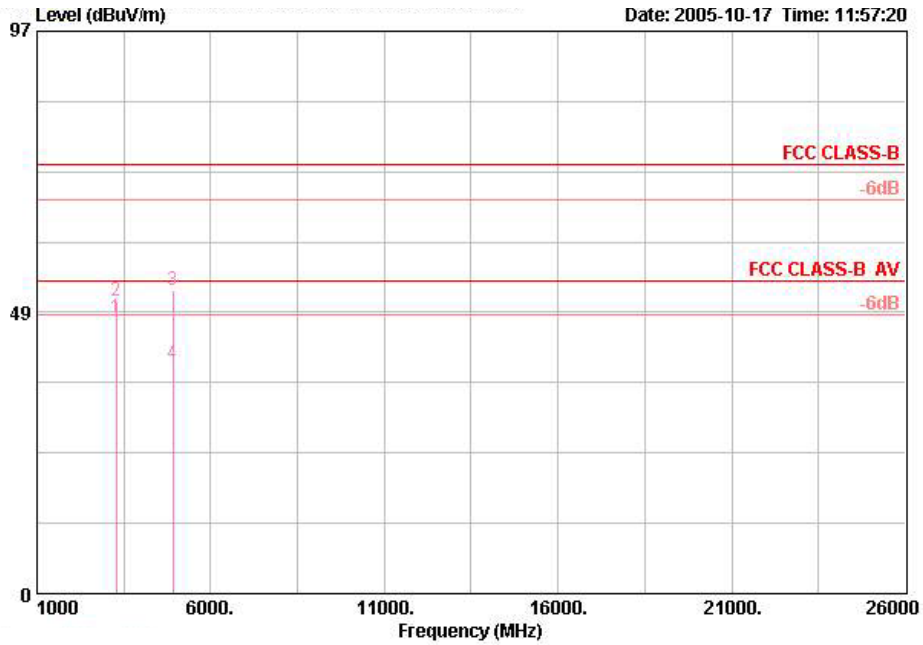

	Freq	Level	Over Limit	Limit	Antenna Line Factor	Cable Loss	Preamp Factor	Read Level	Pol/Phase	Remark
	MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB	dBuV		
1	3282.680	47.57	-6.43	54.00	30.81	2.10	35.20	49.87	VERTICAL	AVERAGE
2	3282.680	50.37	-23.63	74.00	30.81	2.10	35.20	52.66	VERTICAL	PEAK
3	4924.150	52.30	-21.70	74.00	33.45	3.25	35.10	50.70	VERTICAL	PEAK
4	4924.150	39.60	-14.40	54.00	33.45	3.25	35.10	38.00	VERTICAL	AVERAGE

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

5.6.11. Emission Test Configuration

**MODE1**

FRONT VIEW




REAR VIEW



**MODE2**

FRONT VIEW

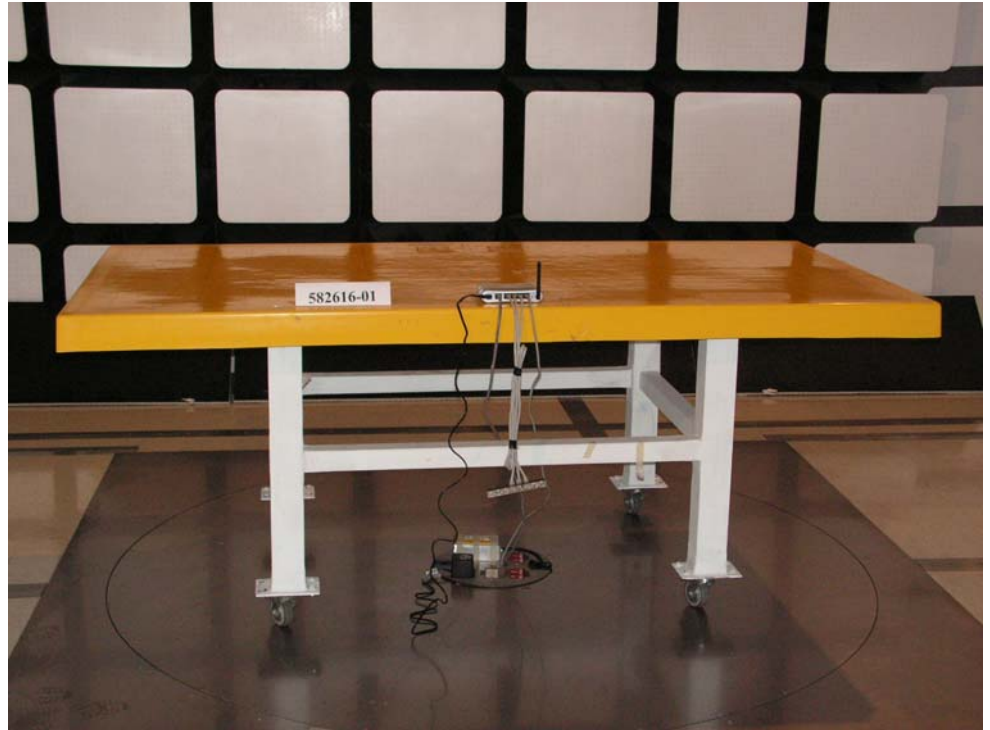

REAR VIEW







## **5.7. Antenna Requirements**

### 5.7.1. Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 5.7.2. Antenna Connected Construction

There is no antenna connector for Dipole and Printed antenna.

### 5.7.3. Antenna Gain

All antennas gain of EUT are less than 6dBi. Therefore peak conducted power limit shall not be degraded any more. Antenna report of manufacturer will have more detail antenna gain or antenna pattern.

### 5.7.4. Test Criteria

All test results complied with the requirements of 15.203/15.247(b)/(c).

## 5.8. RF Exposure

### 5.8.1. Limit For Maximum Permissible Exposure (MPE)

This product can be classified as mobile device, so the 20cm separation distance warning is required. In this section, the power density at 20cm location is calculated to examine if it is lower than the limit.

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S ( minutes )
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F = frequency in MHz

\*Plane-wave equivalent power density

### 5.8.2. MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (mW)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=20cm, as well as the gain of the used antenna, the RF power density can be obtained.

5.8.3. Calculated Result and Limit

- Modulation Type: DSSS
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power ( mW )	Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )
01	2.00	1.58	19.60	91.20	0.0287	1
06	2.00	1.58	20.10	102.33	0.0322	1
11	2.00	1.58	19.50	89.13	0.0280	1

- Modulation Type: OFDM
- Temperature: 25°C
- Relative Humidity: 65%
- Test Engineer: Rush Kao

Channel No.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power ( mW )	Power Density (S) (mW/cm <sup>2</sup> )	Limit of Power Density (S) (mW/cm <sup>2</sup> )
01	2.00	1.58	21.00	125.89	0.0396	1
06	2.00	1.58	22.40	173.78	0.0547	1
11	2.00	1.58	20.80	120.23	0.0378	1

## 6. List of Measuring Equipments Used

Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
1	EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Feb. 19, 2005	Conduction (CO01-HY)
2	LISN	MessTec	NNB-2/16Z	2001/009	9kHz – 30MHz	Apr. 26, 2005	Conduction (CO01-HY)
3	LISN (Support Unit)	MessTec	NNB-2/16Z	2001/004	9kHz – 30MHz	Apr. 20, 2005	Conduction (CO01-HY)
4	EMI Filter	LINDGREN	LRE-2060	1004	< 450Hz	N/A	Conduction (CO01-HY)
5	EMI Filter	LINDGREN	N6006	201052	0 – 60Hz	N/A	Conduction (CO01-HY)
6	RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9kHz – 30MHz	Dec. 23, 2004	Conduction (CO01-HY)
7	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 16, 2005	Radiation (03CH03-HY)
8	Amplifier	SCHAFFNER	CPA9231A	18667	9 kHz - 2 GHz	Jan. 10, 2005	Radiation (03CH03-HY)
9	Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	May 31, 2005	Radiation (03CH03-HY)
10	Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 05, 2004*	Radiation (03CH03-HY)
11	Spectrum Analyzer	R&S	FSP40	100004/040	9 kHz - 40 GHz	Sep. 30, 2005	Radiation (03CH03-HY)
12	Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 24, 2004*	Radiation (03CH03-HY)
13	Biconical Antenna	SCHWARZBECK	VHBB 9124	301	30 MHz - 200 MHz	Jul. 22, 2005	Radiation (03CH03-HY)
14	Log Antenna	SCHWARZBECK	VUSLP 9111	221	200 MHz - 1 GHz	Jul. 22, 2005	Radiation (03CH03-HY)
15	Horn Antenna	EMCO	3115	6741	1 GHz - 18 GHz	Apr. 22, 2005	Radiation (03CH03-HY)
16	Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jun. 09, 2004*	Radiation (03CH03-HY)
17	RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Feb. 22, 2005	Radiation (03CH03-HY)
18	RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec.01, 2004	Radiation (03CH03-HY)
19	Turn Table	HD	DS 420	420/650/00	0 - 360 degree	N/A	Radiation (03CH03-HY)
20	Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)

※ Calibration Interval of instruments listed above is one year.

※ \*Calibration Interval of instruments listed above is two years.



Items	Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
21	Spectrum analyzer	R&S	FSP40	100116	9kHz ~ 40GHz	Jan. 28, 2005	Conducted (TH01-HY)
22	Power meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
23	Power sensor	R&S	NRV-Z55	100049	DC ~ 40GHz	Jul. 06, 2005	Conducted (TH01-HY)
24	Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Apr. 28, 2005	Conducted (TH01-HY)
25	AC power source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Apr. 21, 2005	Conducted (TH01-HY)
26	DC power source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Nov. 28, 2004	Conducted (TH01-HY)
27	Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2005	Conducted (TH01-HY)
28	RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Jan. 01, 2005	Conducted (TH01-HY)
29	RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Jan. 01, 2005	Conducted (TH01-HY)
30	Oscilloscope	Tektronix	TDS1012	CO38515	100MHz / 1GS/s	Apr. 15, 2005	Conducted (TH01-HY)
31	Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Dec. 31, 2004	Conducted (TH01-HY)
32	Data Generator	Tektronix	DG2030	063-2920-50	0.1Hz~400MHz	Jun. 02, 2005	Conducted (TH01-HY)

※ Calibration Interval of instruments listed above is one year.

## 7. Company Profile

SPORTON Lab. was established in 1986 with one shielded room: the first private EMI test facility, offering local manufacturers an alternative EMI test facility apart from ERSO. In 1988, one 3M and 10M/3M open area test site were setup and also obtained official accreditation from FCC, VCCI and NEMKO. In 1993, a Safety laboratory was founded and obtained accreditation from UL of USA, CSA of Canada and TUV (Rhineland & PS) of Germany. In 1995, one EMC lab, including EMI and EMS test facilities was setup. In 1997, SPORTON Group has provided financial expense to relocate the headquarter to Orient Scientific Park in Taipei Hsien to offer more comprehensive, more qualified and better service to local suppliers and manufactures. In 1999, Safety Group and Component Group were setup. In 2001, SPORTON has established 3M/10M chamber in Hwa Ya Technology Park.

### 7.1. Certificate of Accreditation

Taiwan	BSMI, CNLA, DGT
USA	FCC, NVLAP, UL
EU	Nemko, TUV
Japan	VCCI
Canada	Industry Canada

### 7.2. Test Location

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 02-2696-2468 FAX : 02-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 03-327-3456 FAX : 03-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 02-2601-1640 FAX : 02-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 02-2631-4739 FAX : 02-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 02-8227-2020 FAX : 02-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 02-2794-8886 FAX : 02-2794-9777



## 8. Certificate of NVLAP Accreditation

United States Department of Commerce  
National Institute of Standards and Technology

**NVLAP**<sup>®</sup>

---

ISO/IEC 17025:1999  
ISO 9002:1994

**Certificate of Accreditation**



**SPORTON INTERNATIONAL, INC.**  
TAIPEI HSIEN 221  
TAIWAN


*is recognized by the National Voluntary Laboratory Accreditation Program  
for satisfactory compliance with criteria set forth in NIST Handbook 150:2001,  
all requirements of ISO/IEC 17025:1999, and relevant requirements of ISO 9002:1994.  
Accreditation is awarded for specific services, listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**

December 31, 2005

---

*Effective through*


---

  
 For the National Institute of Standards and Technology  
 NVLAP Lab Code: 200079-0

NVLAP-01C (06-01)