

# TEST REPORT

## CERTIFICATE OF CONFORMITY

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Report No.:** RFBCMA-WTW-P23040055

**FCC ID:** RAXWR3210

**Product:** Standalone Router

**Brand:** Hughes

**Model No.:** HL1120W-IDU

**Received Date:** 2023/3/27

**Test Date:** 2023/4/29 ~ 2023/5/29

**Issued Date:** 2023/7/3

**Applicant:** Arcadyan Technology Corporation

**Address:** No.8, Sec.2, Guangfu Rd., Hsinchu City 30071, Taiwan, R.O.C.


**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Hsin Chu Laboratory

**Lab Address:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan

**FCC Registration /** 723255 / TW2022

**Designation Number:**

Approved by:  \_\_\_\_\_, Date: 2023/7/3  
May Chen / Manager

This test report consists of 75 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vito Lung / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## Table of Contents

<b>Release Control Record .....</b>	<b>4</b>
<b>1 Certificate.....</b>	<b>5</b>
<b>2 Summary of Test Results .....</b>	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Supplementary Information .....	6
<b>3 General Information .....</b>	<b>7</b>
3.1 General Description .....	7
3.2 Antenna Description of EUT .....	8
3.3 Channel List.....	9
3.4 Test Mode Applicability and Tested Channel Detail.....	10
3.5 Duty Cycle of Test Signal.....	11
3.6 Test Program Used and Operation Descriptions .....	13
3.7 Connection Diagram of EUT and Peripheral Devices .....	13
3.8 Configuration of Peripheral Devices and Cable Connections .....	15
<b>4 Test Instruments .....</b>	<b>16</b>
4.1 RF Output Power .....	16
4.2 Power Spectral Density .....	16
4.3 6 dB Bandwidth .....	16
4.4 Conducted Out of Band Emissions .....	16
4.5 AC Power Conducted Emissions .....	17
4.6 Unwanted Emissions below 1 GHz .....	17
4.7 Unwanted Emissions above 1 GHz.....	18
<b>5 Limits of Test Items.....</b>	<b>19</b>
5.1 RF Output Power .....	19
5.2 Power Spectral Density .....	19
5.3 6 dB Bandwidth .....	19
5.4 Conducted Out of Band Emissions .....	19
5.5 AC Power Conducted Emissions .....	19
5.6 Unwanted Emissions below 1 GHz .....	20
5.7 Unwanted Emissions above 1 GHz.....	20
<b>6 Test Arrangements.....</b>	<b>21</b>
6.1 RF Output Power .....	21
6.1.1 Test Setup .....	21
6.1.2 Test Procedure.....	21
6.2 Power Spectral Density .....	21
6.2.1 Test Setup .....	21
6.2.2 Test Procedure.....	21
6.3 6 dB Bandwidth .....	22
6.3.1 Test Setup .....	22
6.3.2 Test Procedure.....	22
6.4 Conducted Out of Band Emissions .....	22
6.4.1 Test Setup .....	22
6.4.2 Test Procedure.....	22
6.5 AC Power Conducted Emissions .....	23
6.5.1 Test Setup .....	23
6.5.2 Test Procedure.....	23
6.6 Unwanted Emissions below 1 GHz .....	24
6.6.1 Test Setup .....	24
6.6.2 Test Procedure.....	25
6.7 Unwanted Emissions above 1 GHz.....	26
6.7.1 Test Setup .....	26
6.7.2 Test Procedure.....	26
<b>7 Test Results of Test Item .....</b>	<b>27</b>



7.1	RF Output Power .....	27
7.2	Power Spectral Density .....	30
7.3	6 dB Bandwidth .....	32
7.4	Conducted Out of Band Emissions .....	34
7.5	AC Power Conducted Emissions .....	42
7.6	Unwanted Emissions below 1 GHz .....	44
7.7	Unwanted Emissions above 1 GHz.....	46
<b>8</b>	<b>Pictures of Test Arrangements .....</b>	<b>74</b>
<b>9</b>	<b>Information of the Testing Laboratories .....</b>	<b>75</b>



## Release Control Record

Issue No.	Description	Date Issued
RFBCMA-WTW-P23040055	Original release.	2023/7/3

## 1 Certificate

**Product:** Standalone Router

**Brand:** Hughes

**Test Model:** HL1120W-IDU

**Sample Status:** Engineering sample

**Applicant:** Arcadyan Technology Corporation

**Test Date:** 2023/4/29 ~ 2023/5/29

**Standard:** 47 CFR FCC Part 15, Subpart C (Section 15.247)

**Measurement** ANSI C63.10-2013

**procedure:** KDB 558074 D01 15.247 Meas Guidance v05r02

KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -17.27 dB at 1.72656 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -5.2 dB at 41.69 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -0.3 dB at 2390.00 MHz
15.203	Antenna Requirement	Pass	Antenna connector is ipex(MHF) not a standard connector.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.5 dB
AC Power Conducted Emissions	150 kHz ~ 30 MHz	1.9 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	3.1 dB
	30 MHz ~ 1 GHz	5.1 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 18 GHz	5.1 dB
	18 GHz ~ 40 GHz	5.3 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

### 2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

### 3 General Information

#### 3.1 General Description

Product	Standalone Router
Brand	Hughes
Test Model	HL1120W-IDU
Status of EUT	Engineering sample
Power Supply Rating	12 Vdc from host equipment
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in VHT mode 1024QAM for OFDMA in 11ax mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: Up to 11 Mbps 802.11g: Up to 54 Mbps 802.11n: Up to 300 Mbps VHT: Up to 400 Mbps 802.11ax: Up to 573.5 Mbps
Operating Frequency	2.412 GHz ~ 2.462 GHz
Number of Channel	802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20): 11 802.11n (HT40), VHT40, 802.11ax (HE40): 7
Output Power	<b>CDD Mode:</b> 890.5 mW (29.5 dBm) <b>Beamforming Mode:</b> 761.401 mW (28.82 dBm)

Note:

1. The EUT has below radios as following table:

Radio 1	Radio 2
WLAN (2.4GHz)	WLAN (5GHz)

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4 GHz)	WLAN (5 GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Net Gain (dBi)	Frequency range (GHz)	Antenna Type	Connector Type	Cable Length(mm)
1	0	PSA	RFPCA370706IMAB303	1.86	2.4~2.4835	Dipole	ipex(MHF)	60
2	1	PSA	RFPCA330707IMAB301	1.94	2.4~2.4835	Dipole	ipex(MHF)	70
3	0	PSA	RFPCA220904IM5B301	2.26	5.15~5.85	Dipole	ipex(MHF)	40
4	1	PSA	RFPCA220904IM5B305	2.91	5.15~5.85	Dipole	ipex(MHF)	41

\* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

2. The EUT incorporates a MIMO function:

2.4 GHz Band		
Modulation Mode	TX & RX Configuration	
<b>802.11b</b>	2TX	2RX
<b>802.11g</b>	2TX	2RX
<b>802.11n (HT20)</b>	2TX	2RX
<b>802.11n (HT40)</b>	2TX	2RX
<b>VHT20</b>	2TX	2RX
<b>VHT40</b>	2TX	2RX
<b>802.11ax (HE20)</b>	2TX	2RX
<b>802.11ax (HE40)</b>	2TX	2RX

Note:

- All of modulation mode support beamforming function except 802.11b/g modulation mode.
- The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz), VHT mode for 20MHz (40MHz) and 802.11ax mode for 20MHz (40MHz), therefore the manufacturer will control the power for 802.11n/ac mode is the same as the 802.11ax mode or more lower than it and investigated worst case to representative mode in test report.



### 3.3 Channel List

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20), VHT20, 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40), VHT40, 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

### 3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT's Antenna can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Worst Case:	1. Antenna X-axis/ Y-axis/ Z-axis Worst Condition: Z-Axis

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Signal Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power / Power Spectral Density	11b	CDD	1, 6, 11	DBPSK	1Mb/s
	11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ac (VHT20)	CDD & Beamforming	1, 6, 11	BPSK	MCS0
	802.11ac (VHT40)	CDD & Beamforming	3, 6, 9	BPSK	MCS0
	802.11ax (HE20)	CDD & Beamforming	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD & Beamforming	3, 6, 9	BPSK	MCS0
6 dB Bandwidth / Conducted Out of Band Emissions	11b	CDD	1, 6, 11	DBPSK	1Mb/s
	11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
AC Power Conducted Emissions	11b	CDD	6	BPSK	MCS0
Unwanted Emissions below 1 GHz	11b	CDD	6	BPSK	MCS0
Unwanted Emissions above 1 GHz	11b	CDD	1, 6, 11	DBPSK	1Mb/s
	11g	CDD	1, 6, 11	BPSK	6Mb/s
	802.11ax (HE20)	CDD	1, 6, 11	BPSK	MCS0
	802.11ax (HE40)	CDD	3, 6, 9	BPSK	MCS0
Note: Partial RU (resource unit) reduction mechanisms are not supported.					


### 3.5 Duty Cycle of Test Signal

**802.11b:** Duty cycle = 1.379 ms / 2.098 ms x 100% = 65.7%, duty factor = 10 \* log (1/Duty cycle) = 1.82 dB


**802.11g:** Duty cycle = 1.978 ms / 2.116 ms x 100% = 93.5%, duty factor = 10 \* log (1/Duty cycle) = 0.29 dB

**802.11ax (HE20):** Duty cycle = 5.448 ms / 5.745 ms x 100% = 94.8%, duty factor = 10 \* log (1/Duty cycle) = 0.23 dB


**802.11ax (HE40):** Duty cycle = 5.446 ms / 5.753 ms x 100% = 94.7%, duty factor = 10 \* log (1/Duty cycle) = 0.24 dB

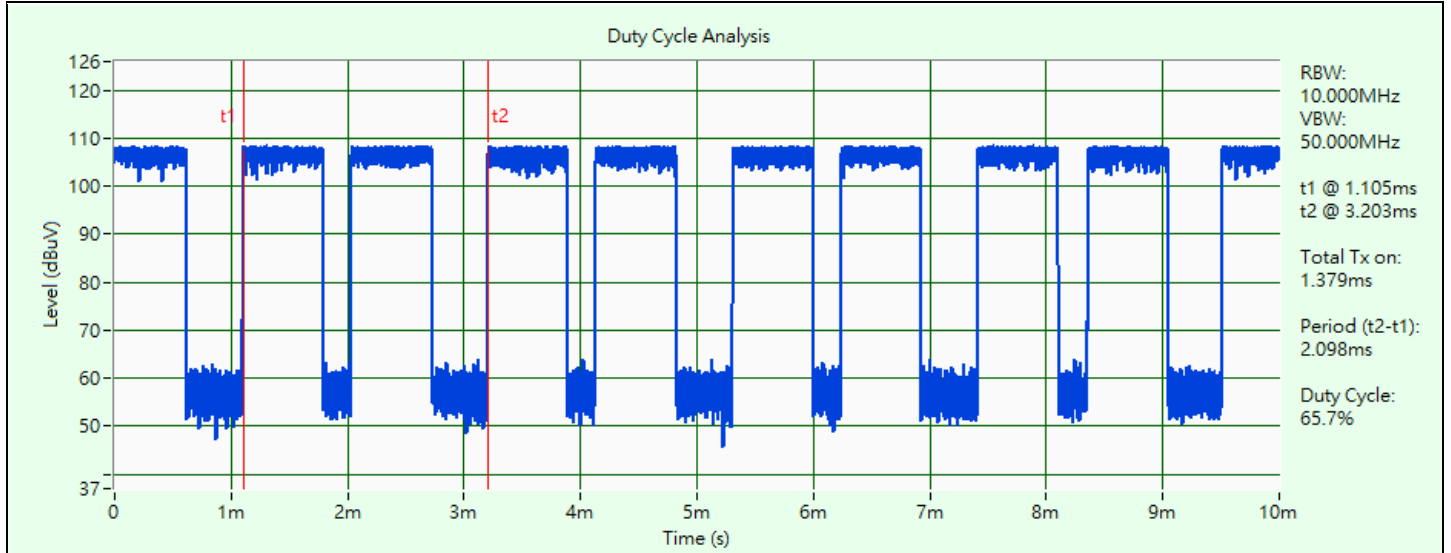


802.11b

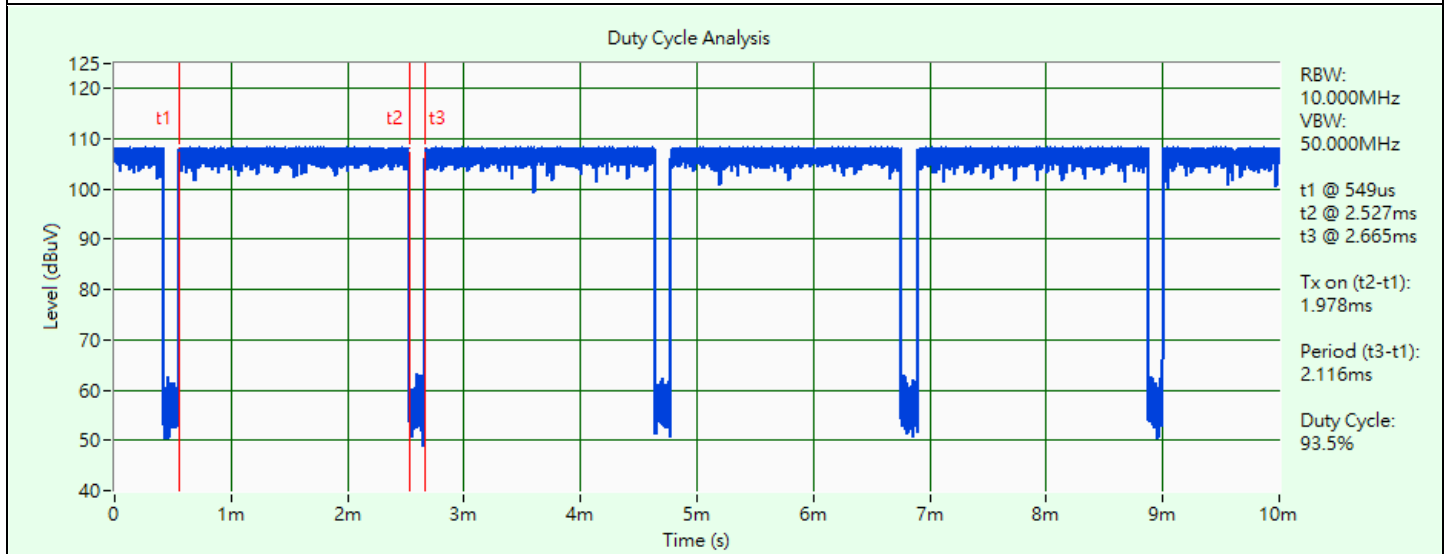

802.11g

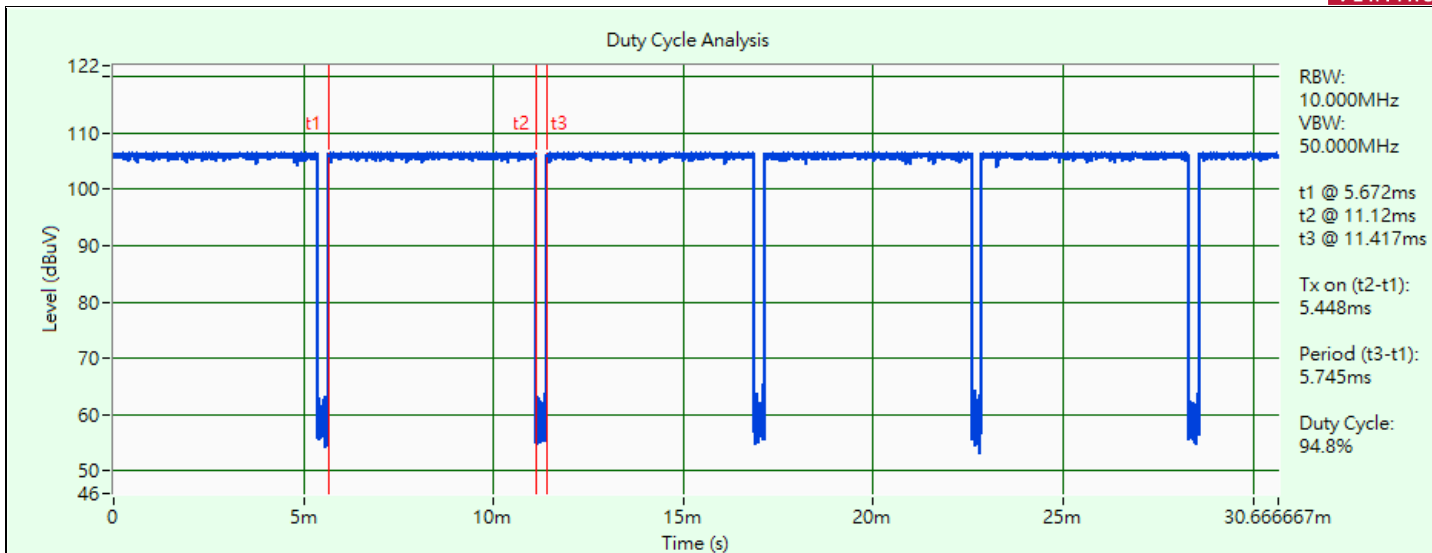

802.11ax (HE20)

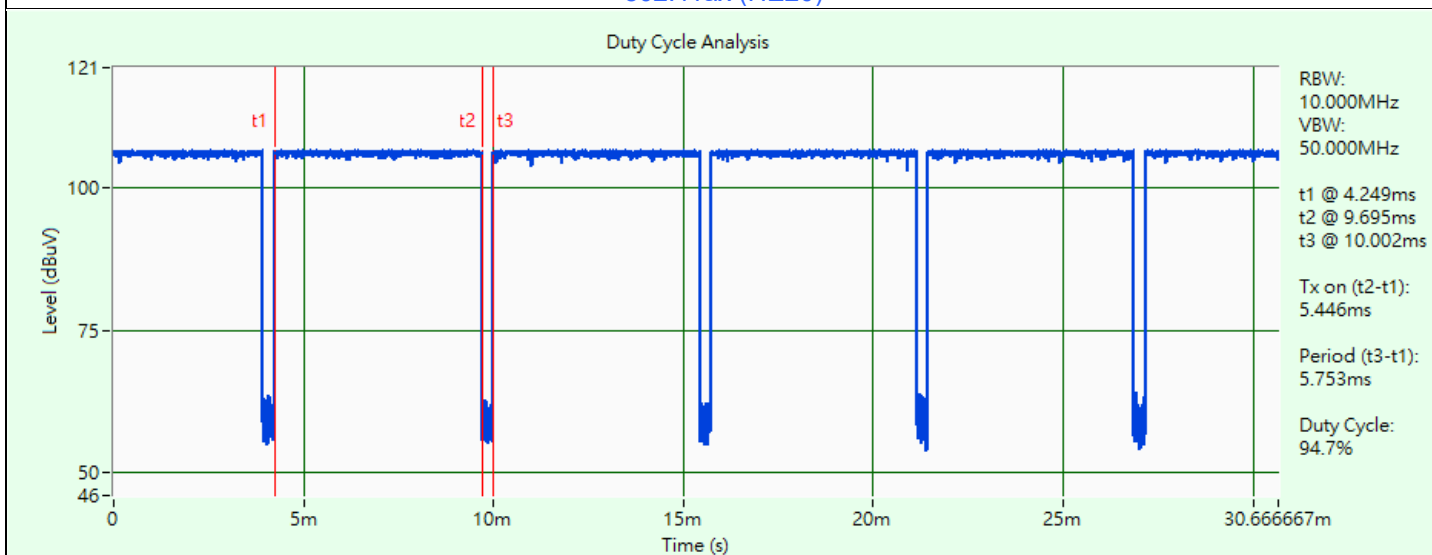


802.11ax (HE40)

### 3.6 Test Program Used and Operation Descriptions


Controlling software (QRCT 4.0.00177.0) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

### 3.7 Connection Diagram of EUT and Peripheral Devices

For AC Power Conducted Emission test

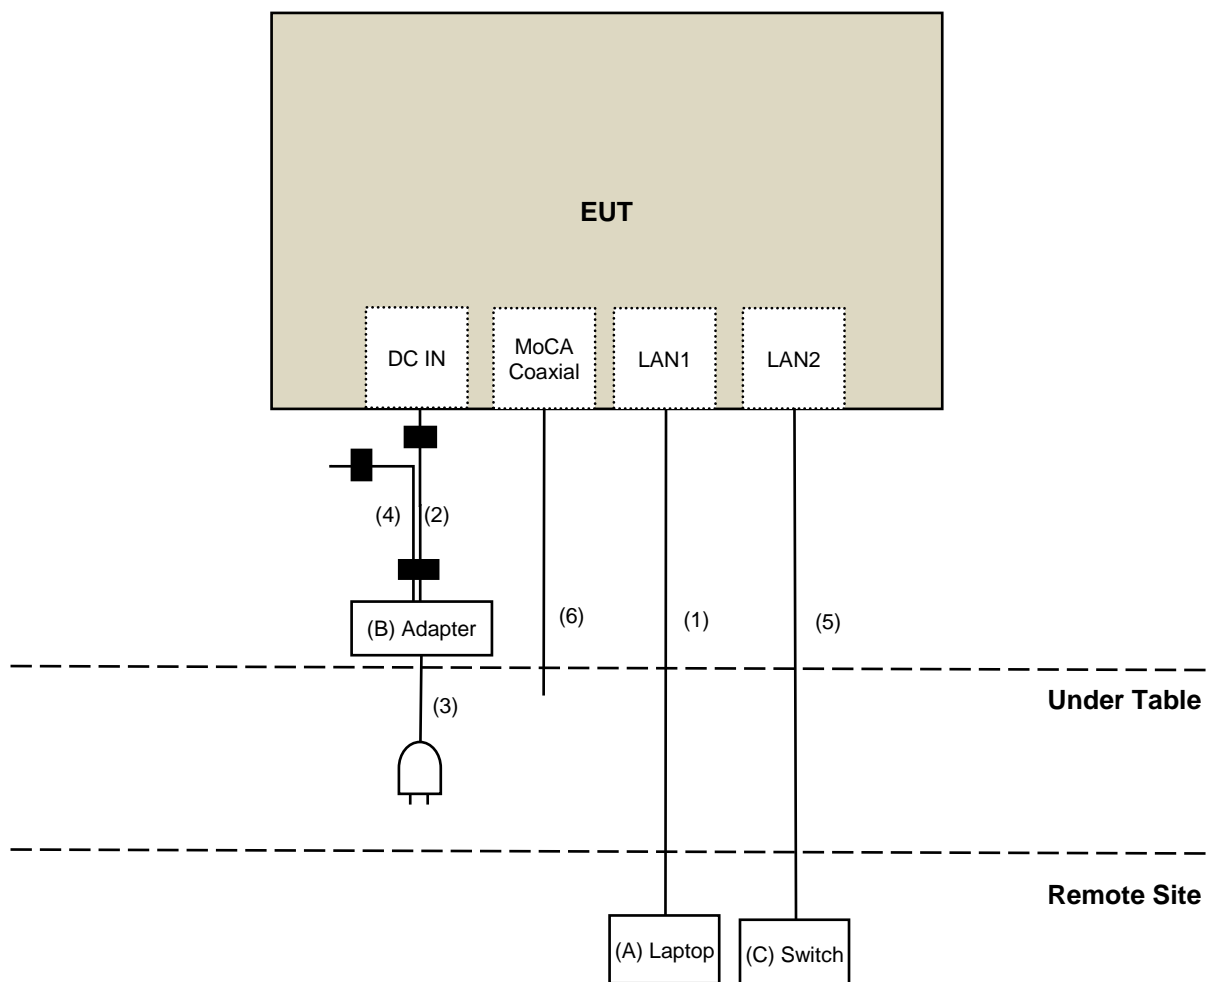

For Unwanted Emission test

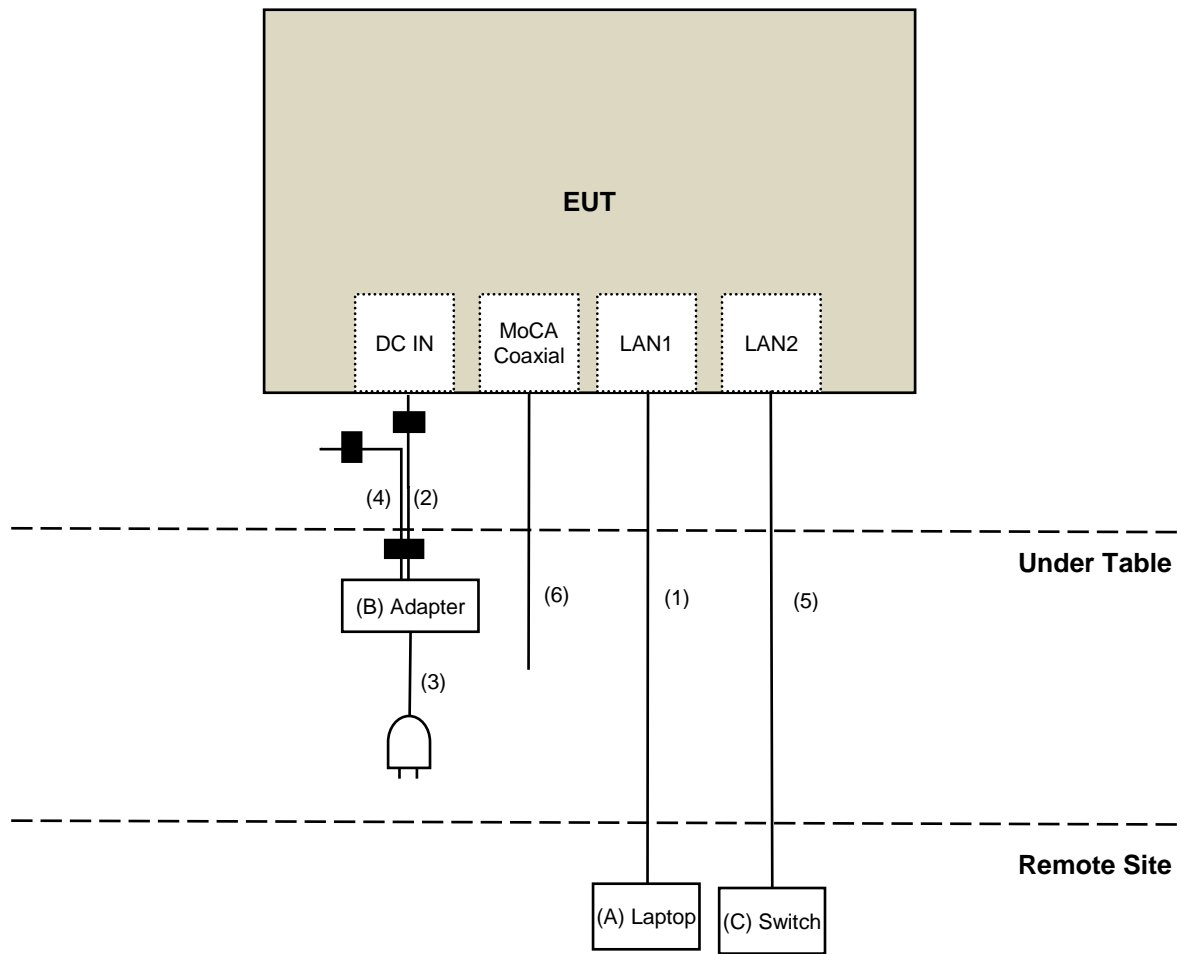

### 3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	N/A	Provided by Lab
B	Adapter	HUGHES	BM500-232A-R	N/A	N/A	Supplied by applicant
C	Switch	D-Link	DGS-1005D	DR8WC92000523	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	RJ-45 Cable	1	10	No	0	Provided by Lab
2	DC Cable	1	1.2	No	2	Supplied by applicant
3	AC Cable	1	1.8	No	0	Supplied by applicant
4	DC Cable	1	1.2	No	2	Supplied by applicant
5	RJ-45 Cable	1	10	No	0	Provided by Lab
6	Coaxial Cable	1	10	Yes	0	Provided by Lab

## 4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2023/3/27	2024/3/26
Power Meter Anritsu	ML2495A	1529002	2022/6/22	2023/6/21
Pulse Power Sensor Anritsu	MA2411B	1726434	2022/6/22	2023/6/21

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/5/15 ~ 2023/5/26

### 4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator WOKEN	MDCS18N-10	MDCS18N-10-01	2023/3/27	2024/3/26
MXA Signal Analyzer Keysight	N9020B	MY60112409	2023/2/18	2024/2/17
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room 2.
2. Tested Date: 2023/5/15 ~ 2023/5/26

### 4.3 6 dB Bandwidth

Refer to section 4.2 to get information of the instruments.

### 4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get information of the instruments.



#### 4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance	N/A	EMC-01	2022/9/27	2023/9/26
EMI Test Receiver R&S	ESCS 30	847124/029	2022/10/14	2023/10/13
Fixed Attenuator STI	STI02-2200-10	005	2022/8/24	2023/8/23
LISN R&S	ESH3-Z5	848773/004	2022/10/18	2023/10/17
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2022/8/24	2023/8/23
Software BVADT	BVADT_Cond_V7.3.7.4	N/A	N/A	N/A

Notes:

1. The test was performed in Conduction 1
2. Tested Date: 2023/5/29

#### 4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-0842	2022/10/24	2023/10/23
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR3	102528	2023/2/10	2024/2/9
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-02	2022/12/28	2023/12/27
Loop Antenna Electro-Metrics	EM-6879	264	2023/2/21	2024/2/20
MXA Signal Analyzer Keysight	N9020B	MY60112410	2023/3/6	2024/3/5
Preamplifier Agilent	8447D	2944A10636	2023/3/12	2024/3/11
Preamplifier EMCI	EMC330N	980538	2023/4/6	2024/4/5
PXA Signal Analyzer KEYSIGHT	N9030B	MY57141948	2022/5/13	2023/5/12
RF Coaxial Cable COMMATE/PEWC	8D	966-5-1	2023/4/6	2024/4/5
		966-5-2	2023/4/6	2024/4/5
		966-5-3	2023/4/6	2024/4/5
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2022/12/19	2023/12/18
		LOOPCAB-002	2022/12/19	2023/12/18
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2023/5/2

#### 4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	N/A	N/A
EMI Test Receiver R&S	ESR3	102528	2023/2/10	2024/2/9
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-1819	2022/11/13	2023/11/12
	BBHA 9170	9170-739	2022/11/13	2023/11/12
MXA Signal Analyzer Keysight	N9020B	MY60112410	2023/3/6	2024/3/5
Preamplifier EMCI	EMC12630SE	980509	2023/4/7	2024/4/6
	EMC184045SE	980387	2022/12/28	2023/12/27
RF Coaxial Cable EMCI	EMC-KM-KM-4000	200214	2023/2/20	2024/2/19
	EMC102-KM-KM-1200	160924	2022/12/28	2023/12/27
	EMC104-SM-SM-1500	180503	2023/4/7	2024/4/6
	EMC104-SM-SM-2000	180501	2023/4/7	2024/4/6
	EMC104-SM-SM-6000	180506	2023/4/7	2024/4/6
Software	ADT_Radiated_V8.7.08	N/A	N/A	N/A

Notes:

1. The test was performed in 966 Chamber No. 5.
2. Tested Date: 2023/4/29

## 5 Limits of Test Items

### 5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for  $N_{ANT} \leq 4$ ;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{ANT}$ ;

Array Gain =  $5 \log(N_{ANT}/N_{SS})$  dB or 3 dB, whichever is less, for 20-MHz channel widths with  $N_{ANT} \geq 5$ .

For power measurements on all other devices: Array Gain =  $10 \log(N_{ANT}/N_{SS})$  dB.

### 5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

### 5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

### 5.4 Conducted Out of Band Emissions

Below 30 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

## 5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

## 5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 6 Test Arrangements

### 6.1 RF Output Power

#### 6.1.1 Test Setup

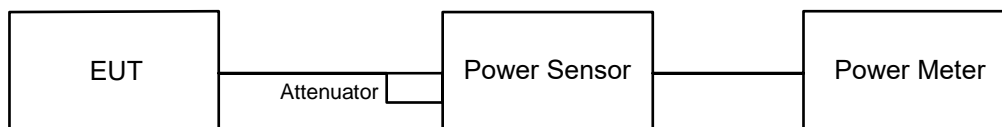


#### 6.1.2 Test Procedure

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 6.2 Power Spectral Density

#### 6.2.1 Test Setup

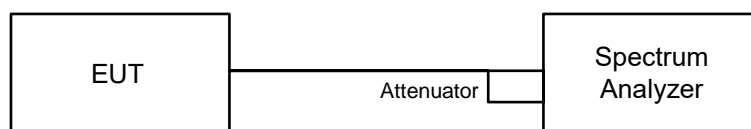


#### 6.2.2 Test Procedure

- a. Measure the duty cycle (x).
- b. Set instrument center frequency to DTS channel center frequency.
- c. Set span to at least 1.5 times the OBW.
- d. Set RBW to: 3 kHz.
- e. Set VBW  $\geq 3 \times$  RBW.
- f. Detector = power averaging (RMS) or sample detector (when RMS not available).
- g. Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- h. Sweep time = auto couple.
- i. Do not use sweep triggering. Allow sweep to "free run".
- j. Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k. Use the peak marker function to determine the maximum amplitude level.
- l. Note: If Duty cycle < 98%, Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

### 6.3 6 dB Bandwidth

#### 6.3.1 Test Setup

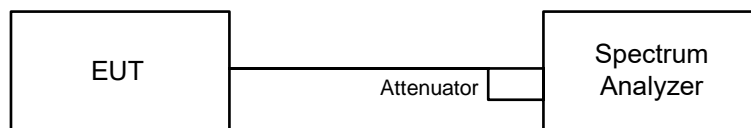


#### 6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.4 Conducted Out of Band Emissions

#### 6.4.1 Test Setup

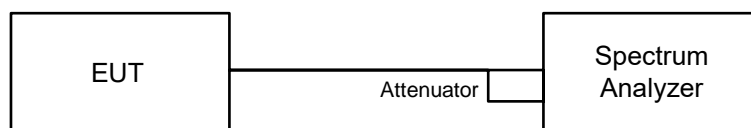

#### 6.4.2 Test Procedure

##### MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

##### MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW  $\geq 300$  kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

## 6.5 AC Power Conducted Emissions

### 6.5.1 Test Setup

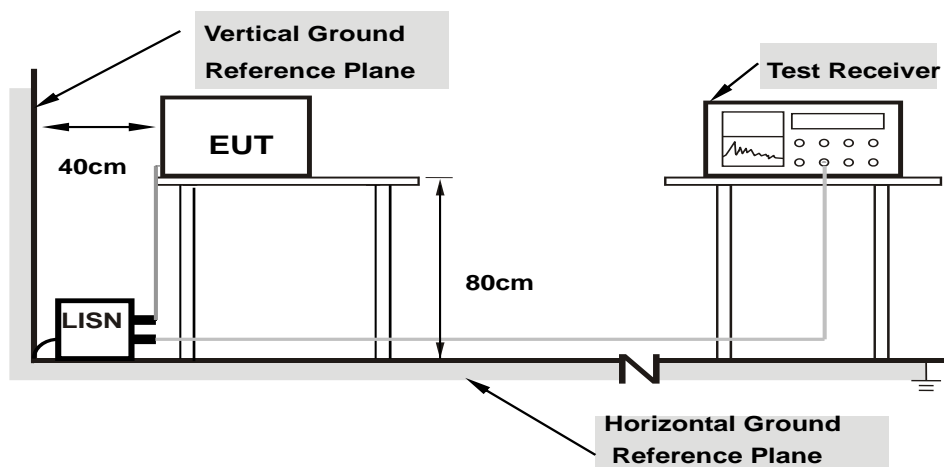

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


## 6.6 Unwanted Emissions below 1 GHz

### 6.6.1 Test Setup

#### For Radiated emission below 30 MHz

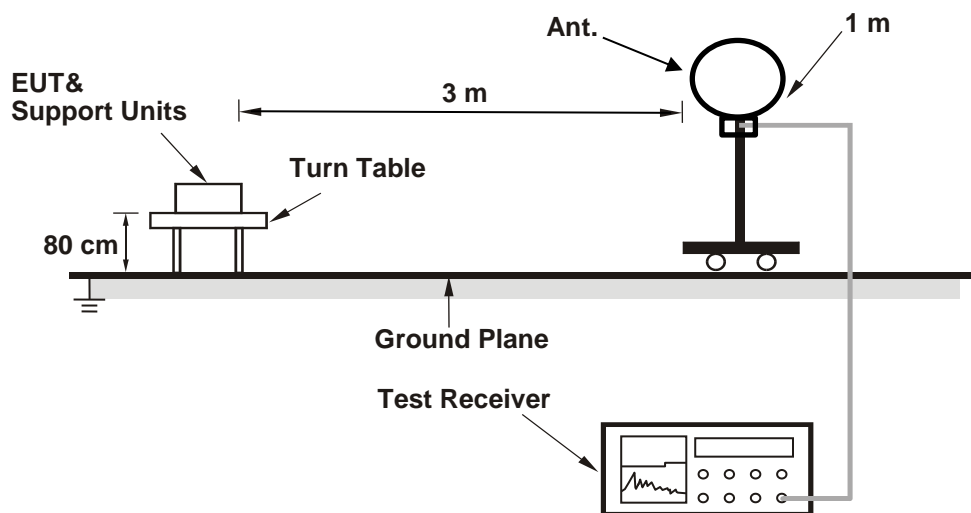

#### For Radiated emission above 30 MHz

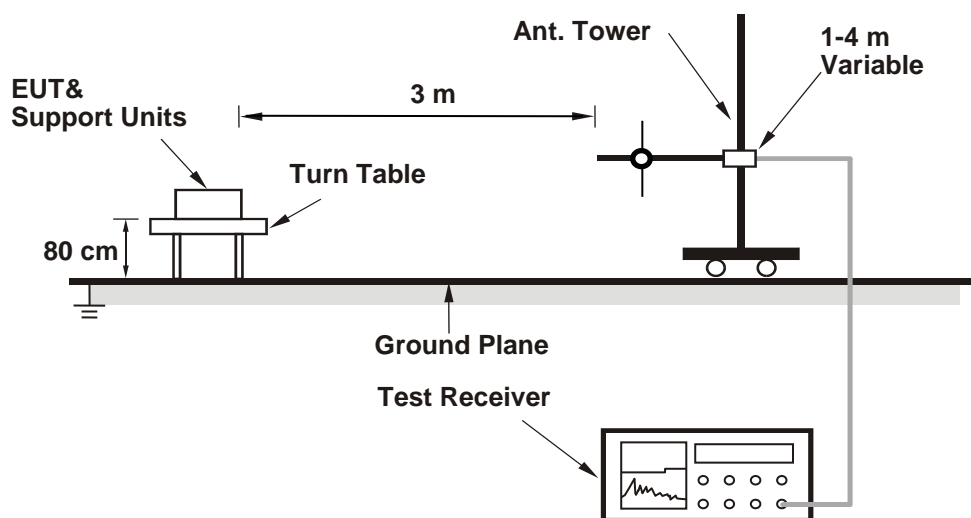

For the actual test configuration, please refer to the attached file (Test Setup Photo).



## 6.6.2 Test Procedure

### For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

### For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

#### Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

## 6.7 Unwanted Emissions above 1 GHz

### 6.7.1 Test Setup

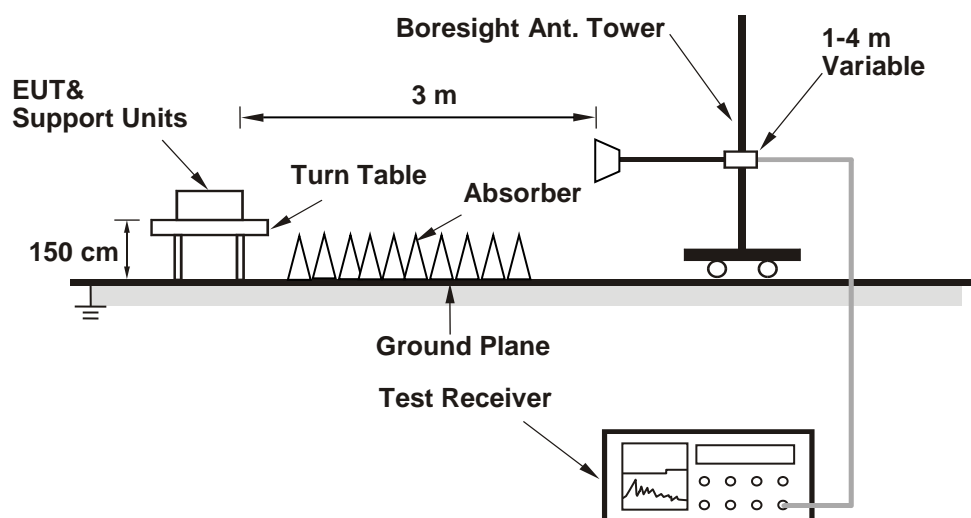

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10 Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

## 7 Test Results of Test Item

### 7.1 RF Output Power

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Louis Yang
--------------	--------	---------------------------	--------------	------------	------------

#### 802.11b CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	23.99	24.27	517.912	27.14	30	Pass
6	2437	26.39	26.58	890.5	29.50	30	Pass
11	2462	22.93	23.29	409.641	26.12	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.94 dBi < 6 dBi, so the output power limit shall not be reduced.

#### 802.11g CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	21.26	21.33	269.491	24.31	30	Pass
6	2437	25.15	25.29	665.406	28.23	30	Pass
11	2462	22.72	22.79	377.176	25.77	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.94 dBi < 6 dBi, so the output power limit shall not be reduced.

#### 802.11ac (VHT20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	20.83	21.03	247.825	23.94	30	Pass
6	2437	25.74	25.80	755.162	28.78	30	Pass
11	2462	21.08	21.22	260.667	24.16	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.94 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.38	16.36	86.702	19.38	30	Pass
6	2437	19.42	19.59	178.49	22.52	30	Pass
9	2452	16.75	17.08	98.366	19.93	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.94 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE20) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	21.08	21.28	262.51	24.19	30	Pass
6	2437	25.98	26.09	802.721	29.05	30	Pass
11	2462	21.33	21.44	275.147	24.40	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.94 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE40) CDD

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.65	16.61	92.052	19.64	30	Pass
6	2437	19.67	19.79	187.963	22.74	30	Pass
9	2452	17.04	17.34	104.783	20.20	30	Pass

Notes:

1. Directional gain is the maximum gain of antennas.
2. The maximum gain is 1.94 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	20.56	20.78	233.437	23.68	30	Pass
6	2437	25.50	25.56	714.563	28.54	30	Pass
11	2462	20.82	21.00	246.674	23.92	30	Pass

Notes:

1. Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. The directional gain is 4.91 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ac (VHT40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.14	16.13	82.135	19.15	30	Pass
6	2437	18.63	18.77	148.281	21.71	30	Pass
9	2452	16.47	16.86	92.89	19.68	30	Pass

Notes:

1. Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. The directional gain is 4.91 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE20) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
1	2412	20.84	21.08	249.572	23.97	30	Pass
6	2437	25.72	25.89	761.401	28.82	30	Pass
11	2462	21.10	21.17	259.743	24.15	30	Pass

Notes:

1. Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. The directional gain is 4.91 dBi < 6 dBi, so the output power limit shall not be reduced.

### 802.11ax (HE40) Beamforming

Chan.	Chan. Freq. (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Power Limit (dBm)	Test Result
		Chain 0	Chain 1				
3	2422	16.42	16.32	86.708	19.38	30	Pass
6	2437	19.43	19.50	176.825	22.48	30	Pass
9	2452	16.79	17.12	99.276	19.97	30	Pass

Notes:

1. Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
2. The directional gain is 4.91 dBi < 6 dBi, so the output power limit shall not be reduced.

## 7.2 Power Spectral Density

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Louis Yang
--------------	--------	---------------------------	--------------	------------	------------

### 802.11b

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1				
1	2412	-8.07	-6.57	1.82	-2.42	8	Pass
6	2437	-5.99	-5.70	1.82	-1.01	8	Pass
11	2462	-7.73	-7.41	1.82	-2.73	8	Pass

#### Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.91 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11g

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1				
1	2412	-13.75	-13.71	0.29	-10.43	8	Pass
6	2437	-9.34	-9.72	0.29	-6.22	8	Pass
11	2462	-14.55	-14.29	0.29	-11.11	8	Pass

#### Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.91 dBi < 6 dBi, so the power density limit shall not be reduced.

### 802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1				
1	2412	-14.98	-15.15	0.23	-11.82	8	Pass
6	2437	-10.12	-10.32	0.23	-6.98	8	Pass
11	2462	-19.44	-19.80	0.23	-16.38	8	Pass

#### Notes:


- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.91 dBi < 6 dBi, so the power density limit shall not be reduced.

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	PSD w/o Duty Factor (dBm/3kHz)		Duty Factor (dB)	Total PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Test Result
		Chain 0	Chain 1				
3	2422	-22.45	-22.62	0.24	-19.29	8	Pass
6	2437	-19.70	-19.51	0.24	-16.36	8	Pass
9	2452	-24.45	-24.39	0.24	-21.17	8	Pass

Notes:

- Method E) 2) b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
- Directional gain =  $10 \log[(10^{\text{Chain0}/20} + 10^{\text{Chain1}/20})^2 / 2]$
- The directional gain is 4.91 dBi < 6 dBi, so the power density limit shall not be reduced.

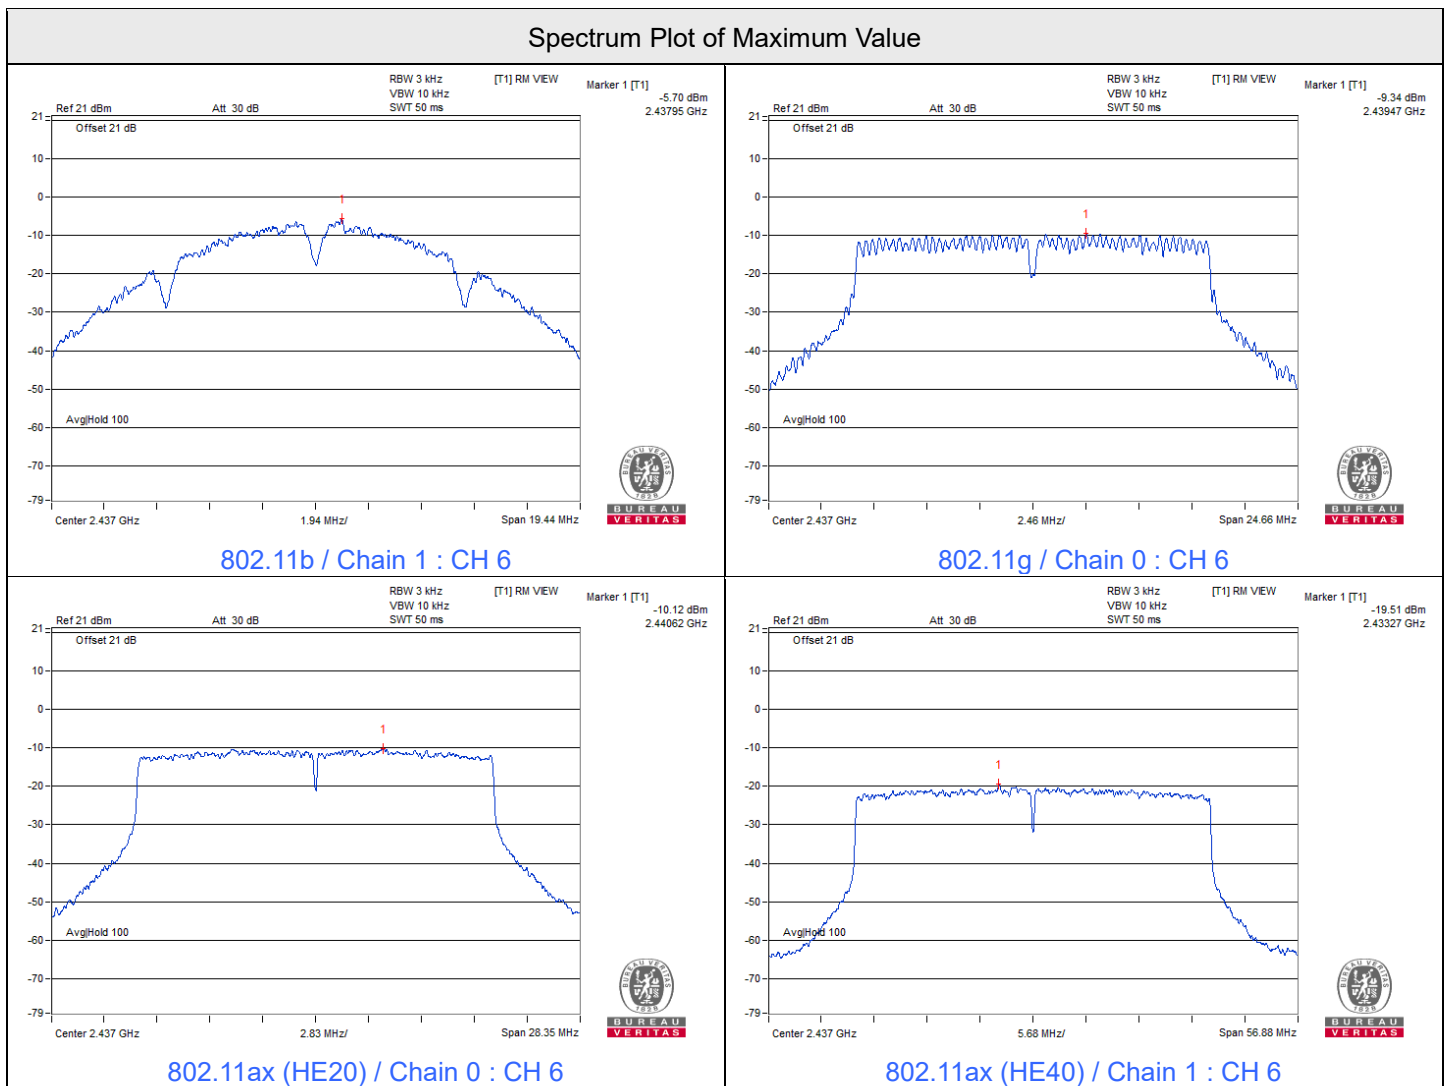

### 7.3 6 dB Bandwidth

Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Louis Yang
--------------	--------	---------------------------	--------------	------------	------------

#### 802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	8.08	8.08	0.5	Pass
6	2437	8.07	8.08	0.5	Pass
11	2462	8.08	8.07	0.5	Pass

#### 802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	15.81	15.95	0.5	Pass
6	2437	16.07	15.90	0.5	Pass
11	2462	15.81	16.07	0.5	Pass

#### 802.11ax (HE20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
1	2412	18.48	18.09	0.5	Pass
6	2437	18.39	18.09	0.5	Pass
11	2462	18.53	18.41	0.5	Pass


#### 802.11ax (HE40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Test Result
		Chain 0	Chain 1		
3	2422	37.85	37.36	0.5	Pass
6	2437	37.75	37.40	0.5	Pass
9	2452	37.91	37.20	0.5	Pass







### Spectrum Plot of Minimum Value

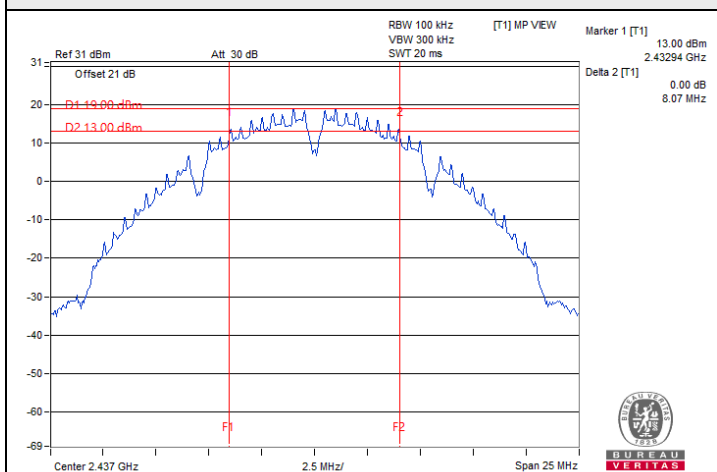


802.11b / Chain 0 : CH 6

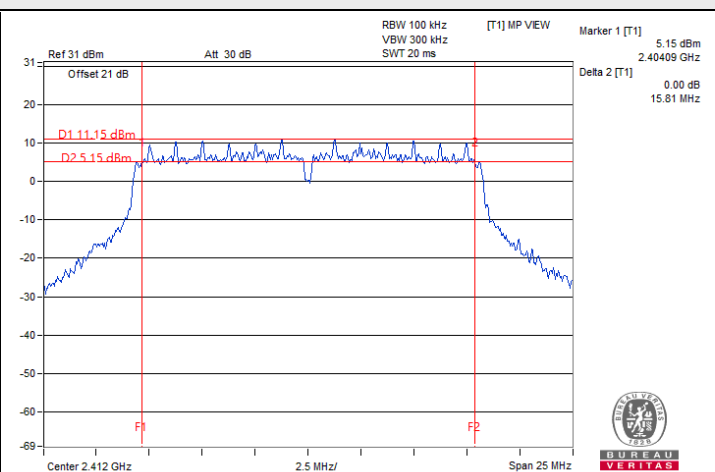

802.11g / Chain 0 : CH 1

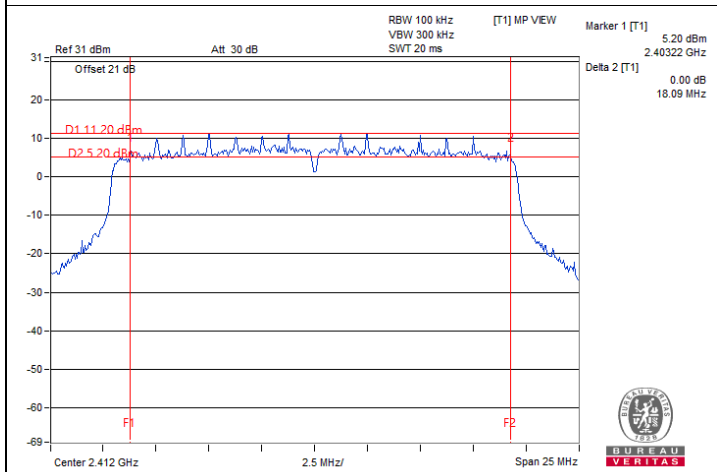

802.11ax (HE20) / Chain 1 : CH 1

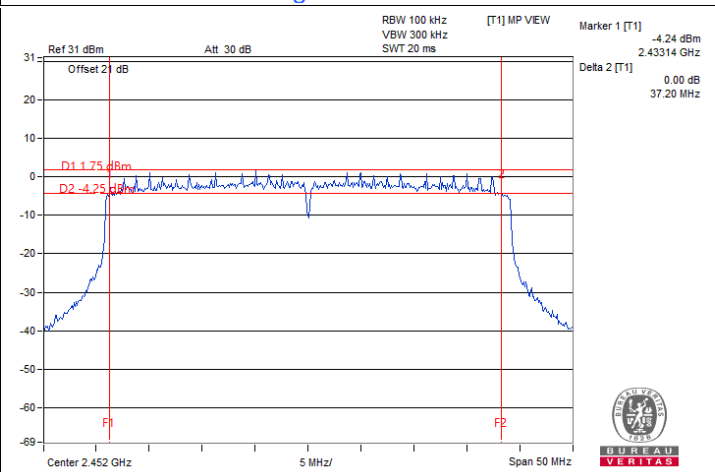






802.11ax (HE40) / Chain 1 : CH 9














### 7.4 Conducted Out of Band Emissions


Input Power:	12 Vdc	Environmental Conditions:	25°C, 60% RH	Tested By:	Louis Yang
--------------	--------	---------------------------	--------------	------------	------------

#### 802.11b

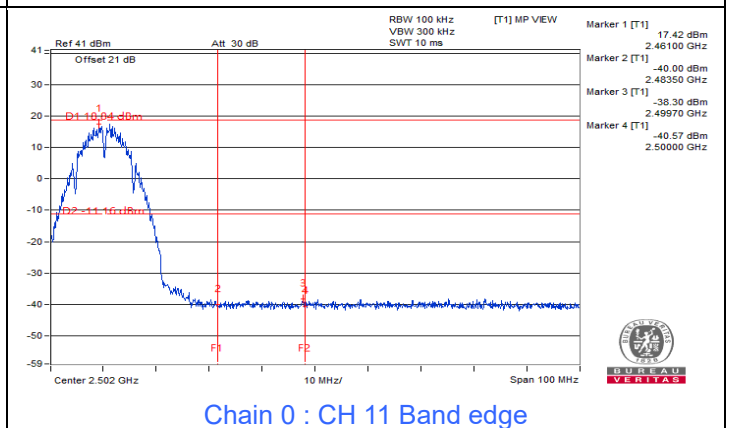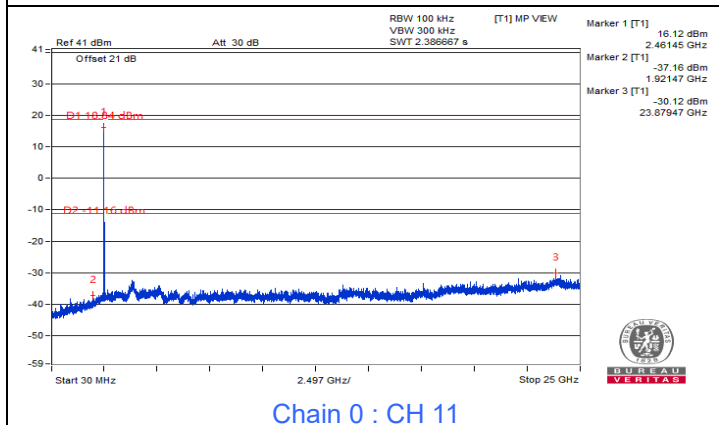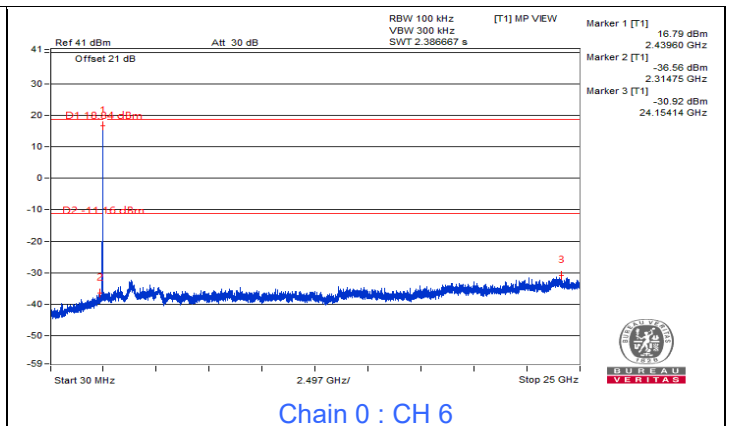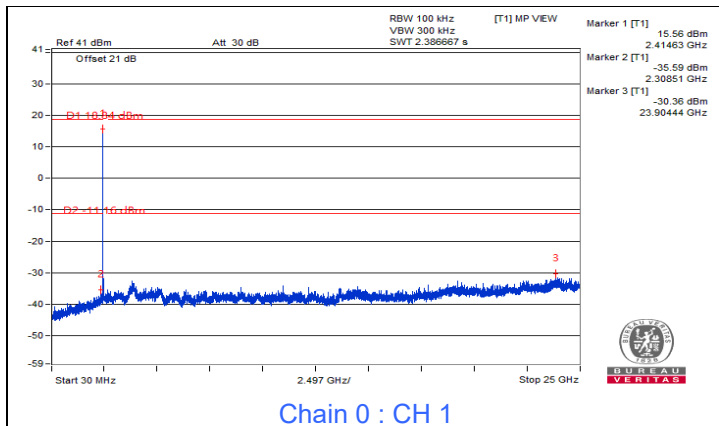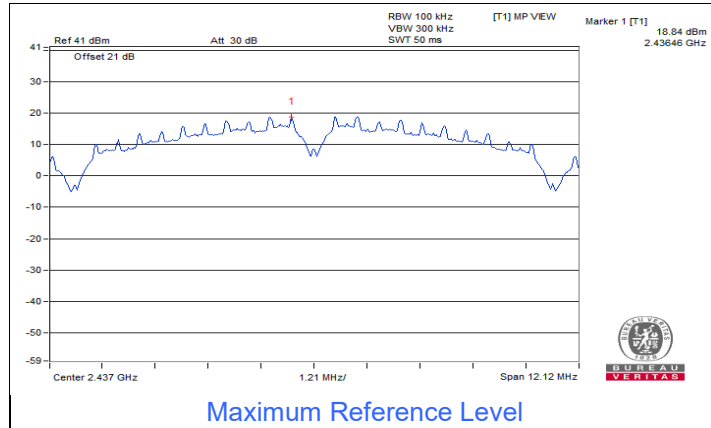


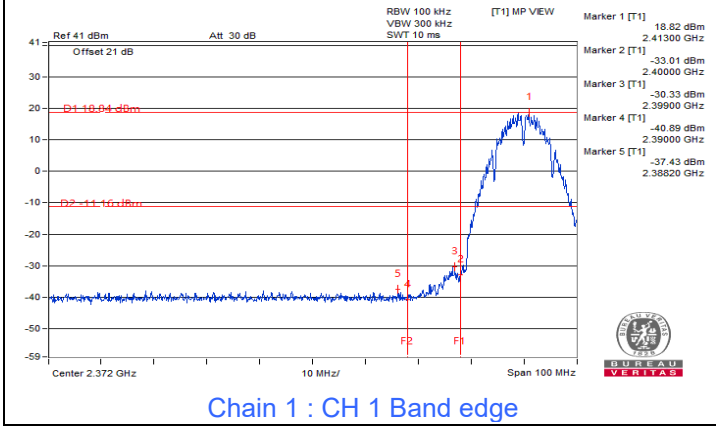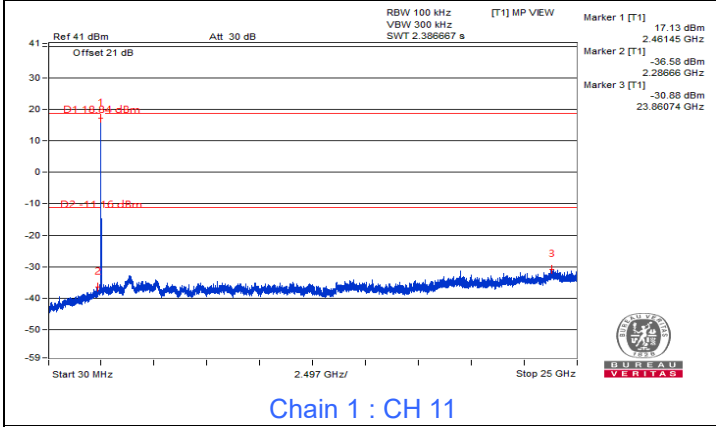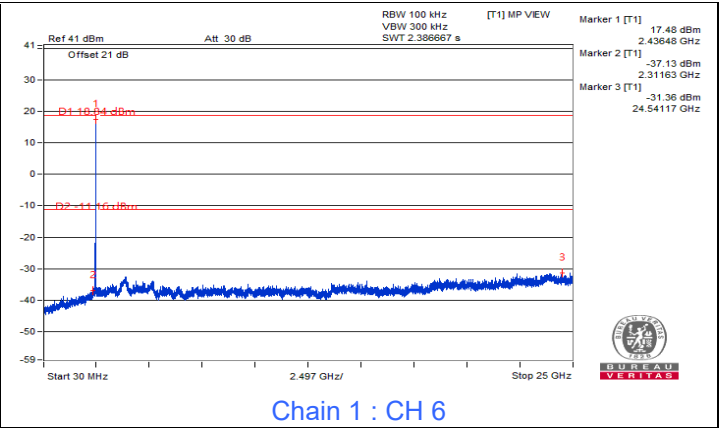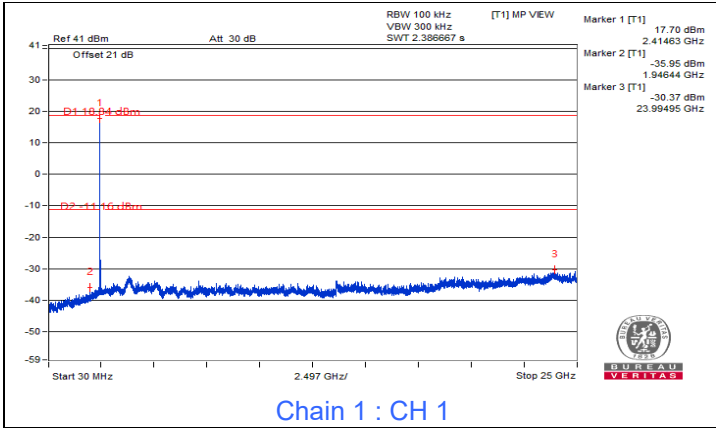

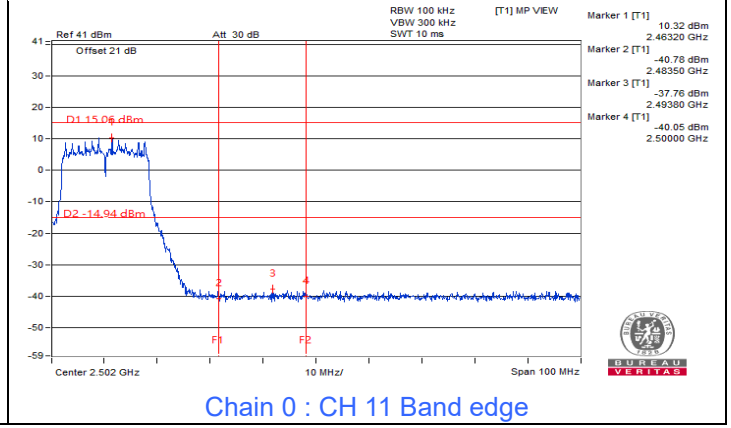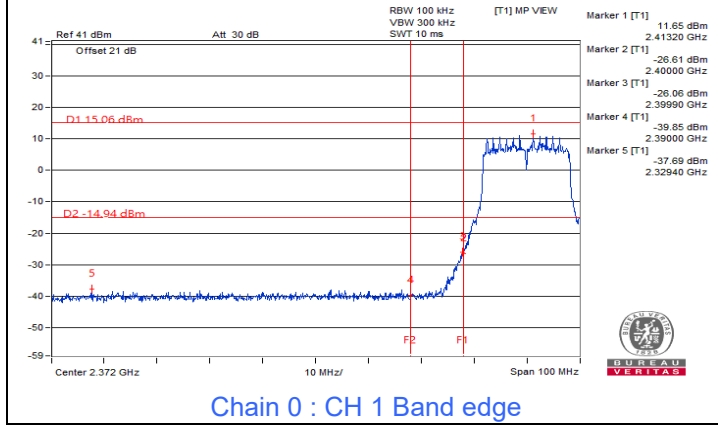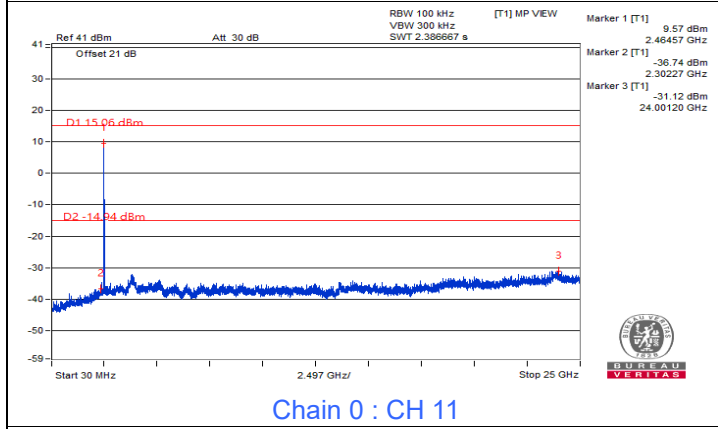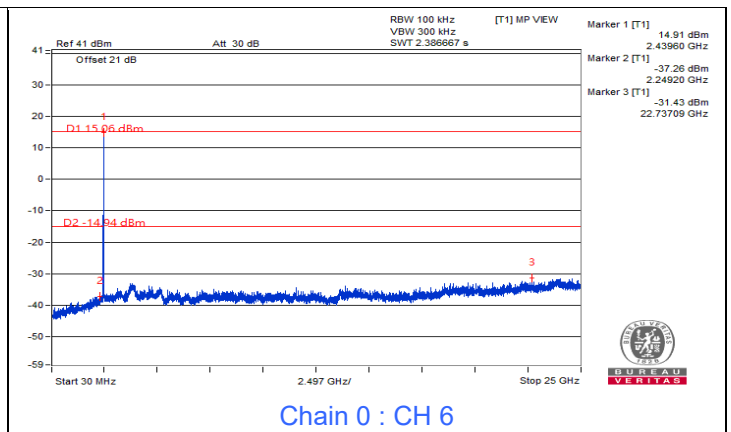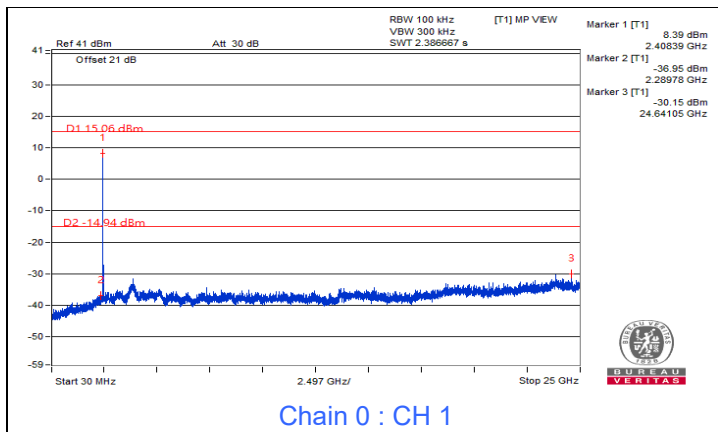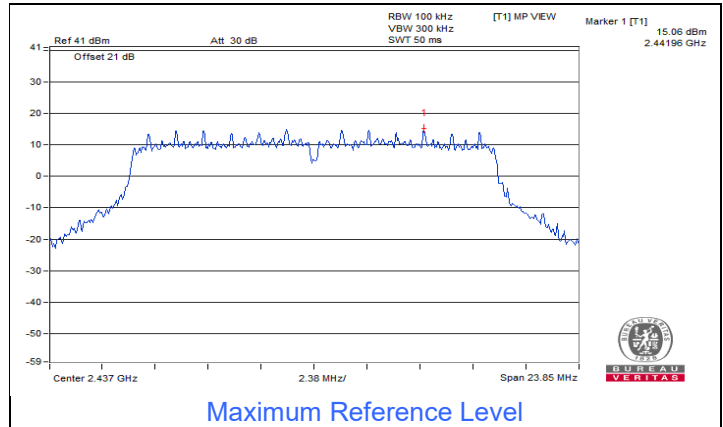


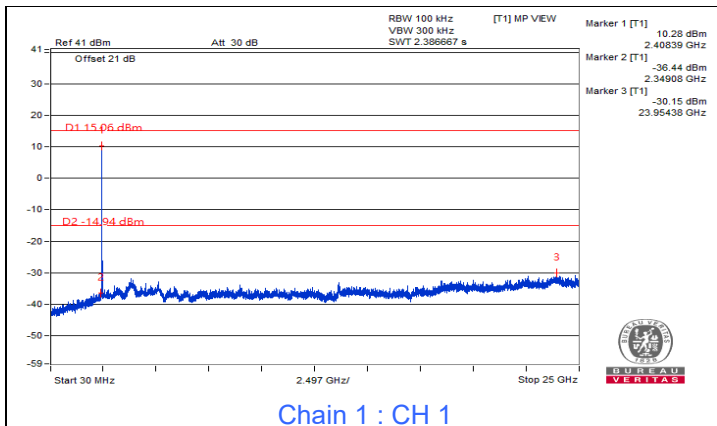


Chain 1 : CH 1

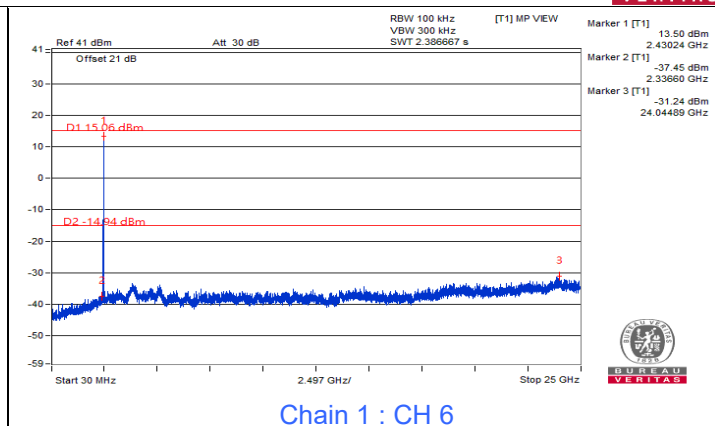


Chain 1 : CH 6

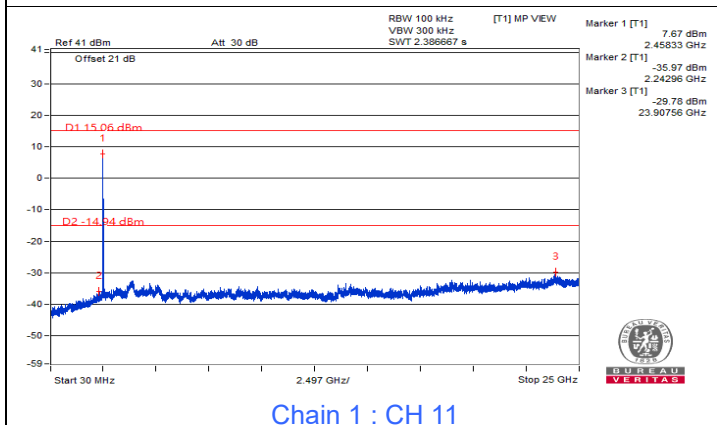

Chain 1 : CH 11





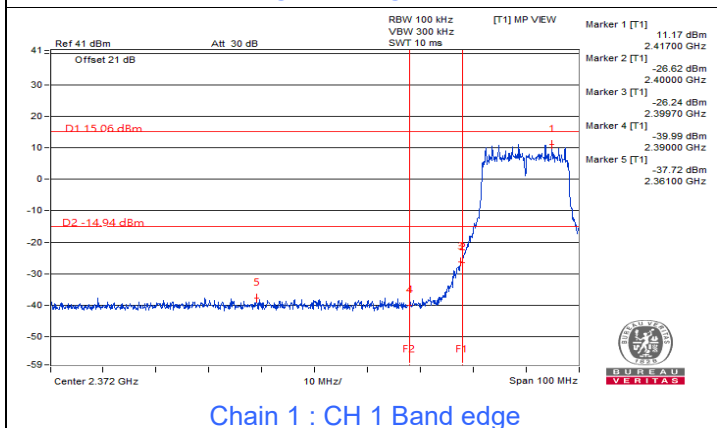


Chain 1 : CH 1 Band edge

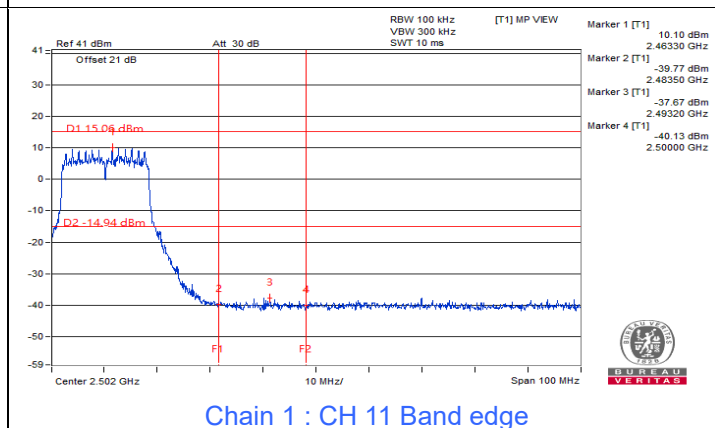


Chain 1 : CH 11 Band edge

802.11ax (HE20)

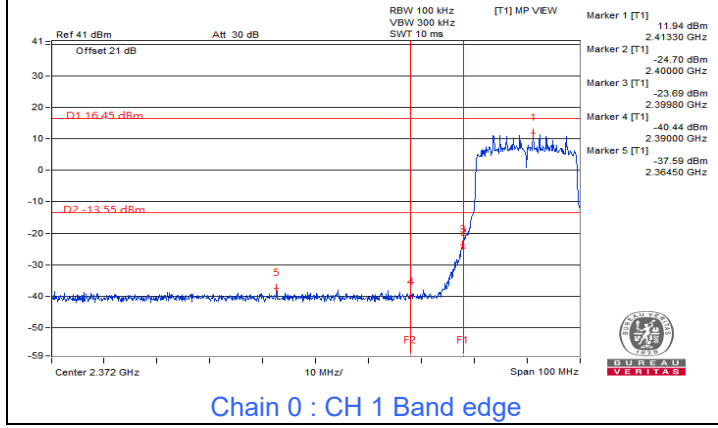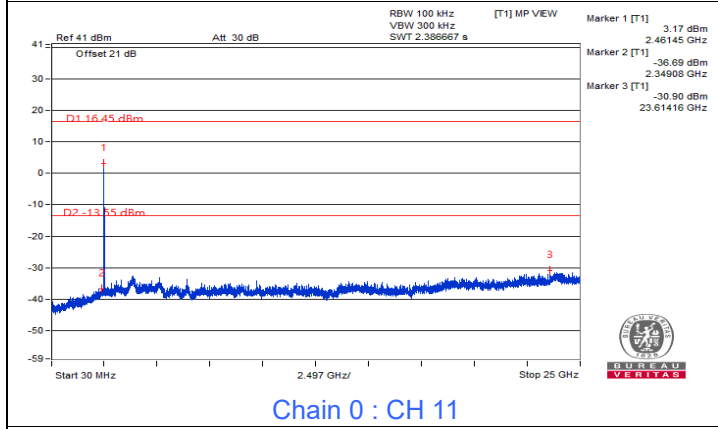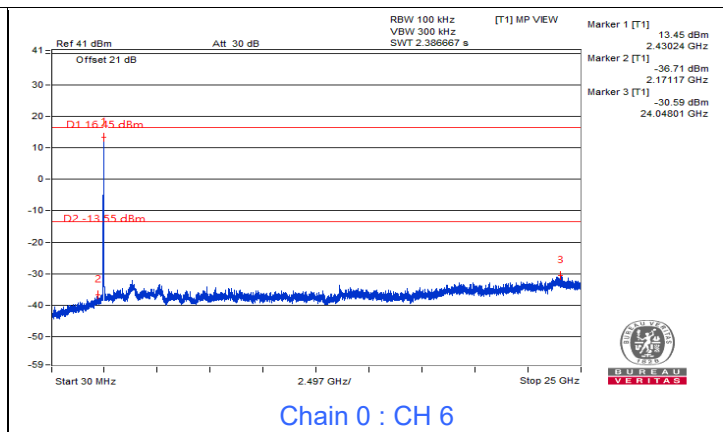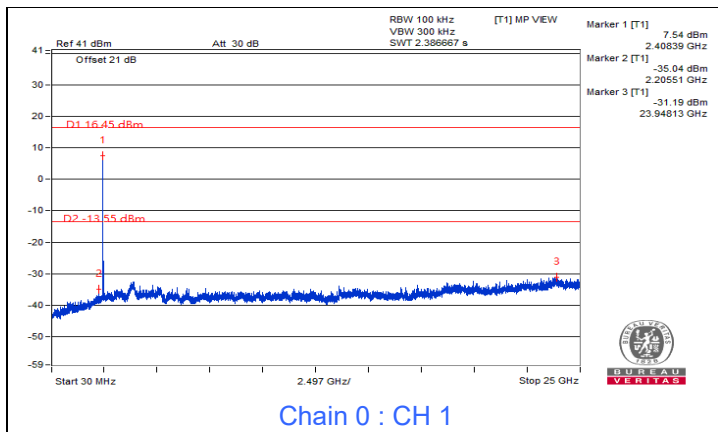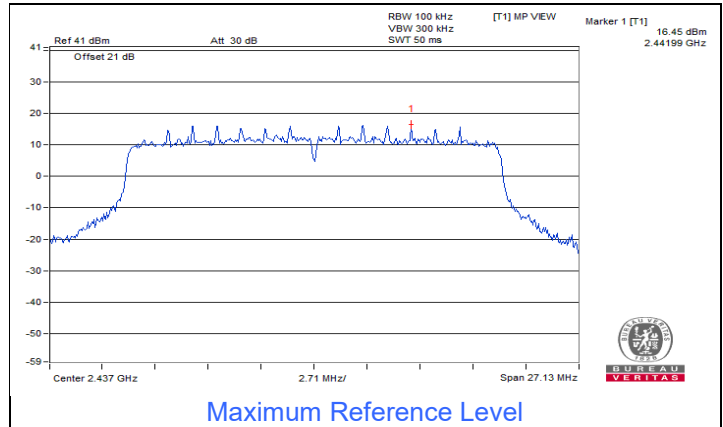





BUREAU VERITAS

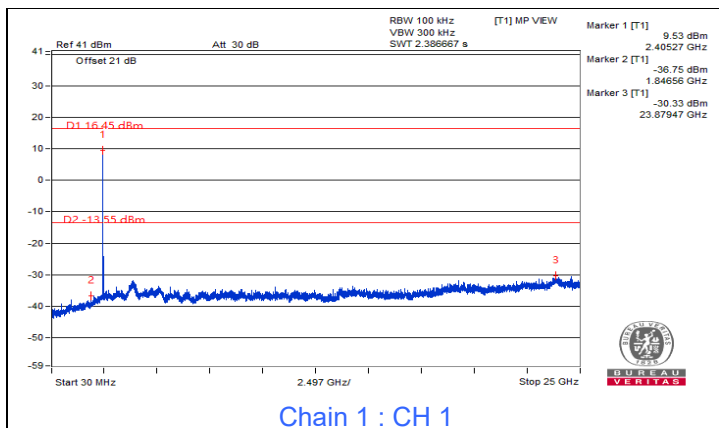


Chain 1 : CH 1

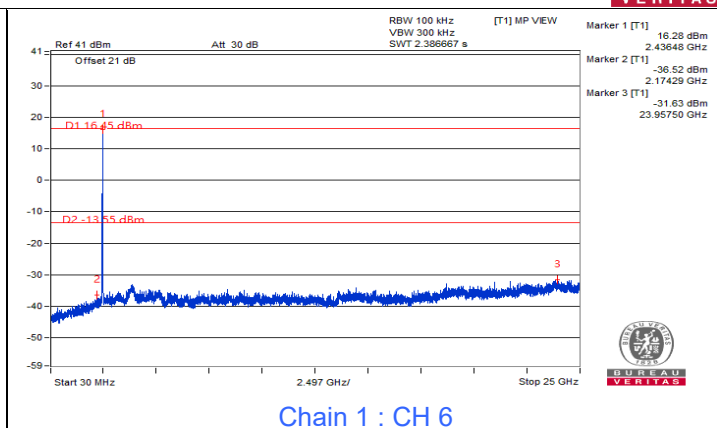


Chain 1 : CH 6

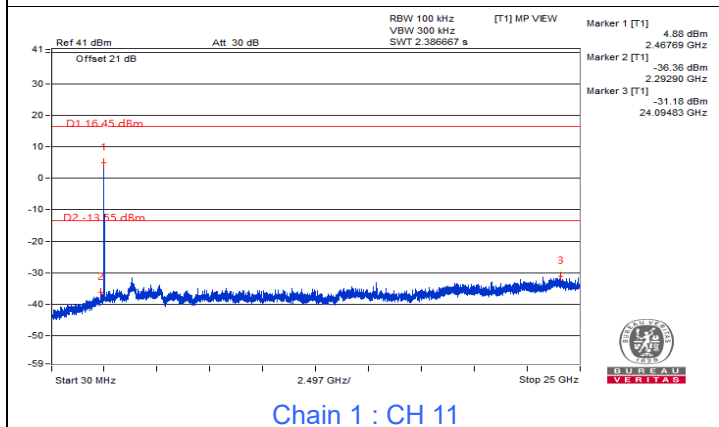

Chain 1 : CH 11






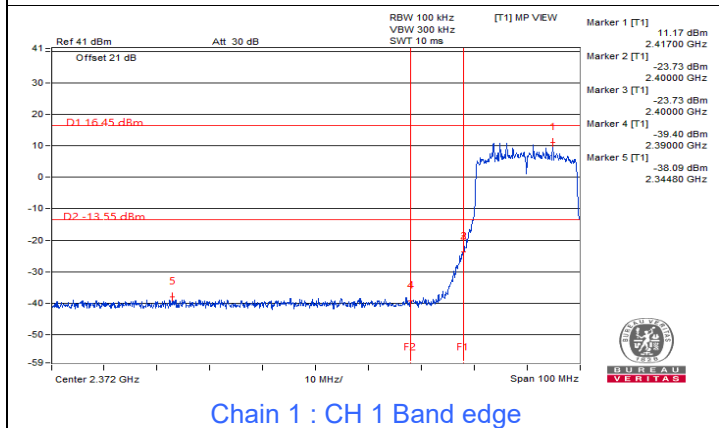


Chain 1 : CH 1 Band edge





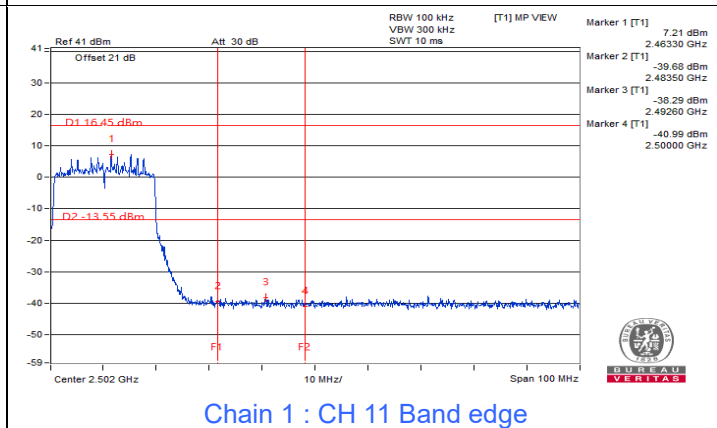


Chain 1 : CH 11 Band edge

802.11ax (HE40)

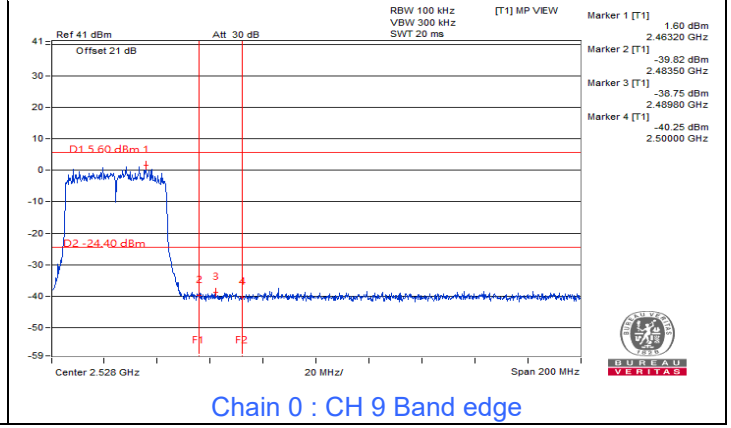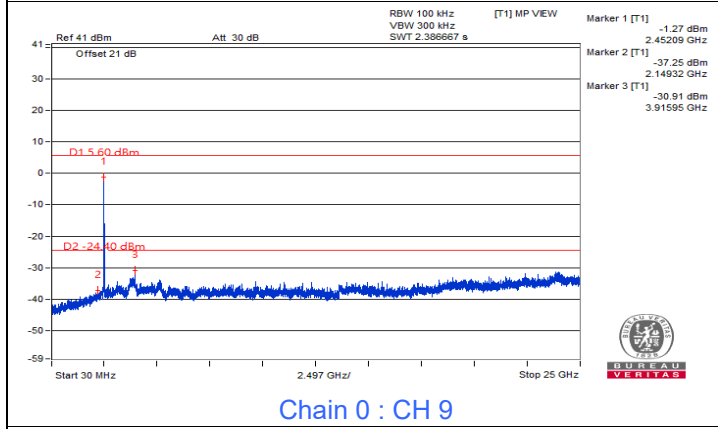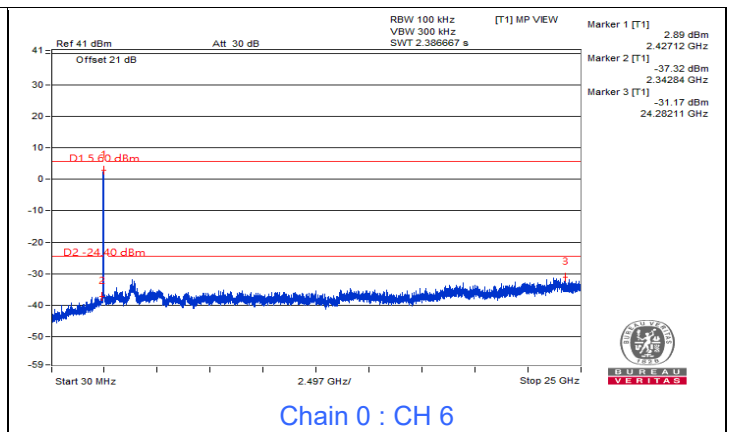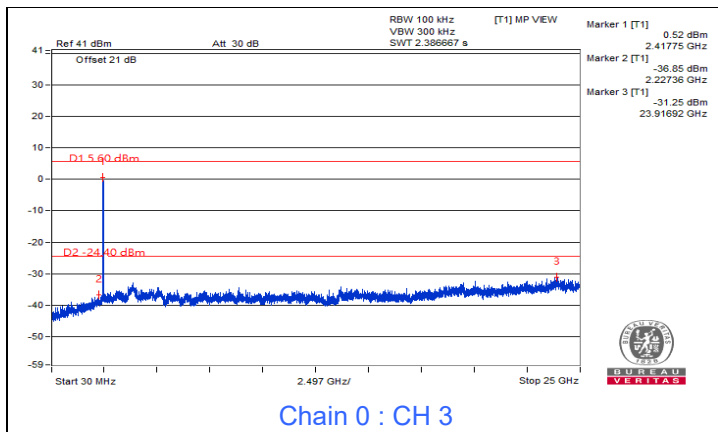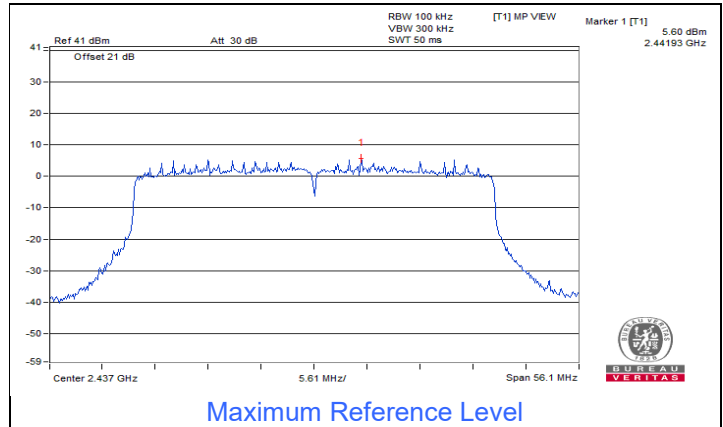



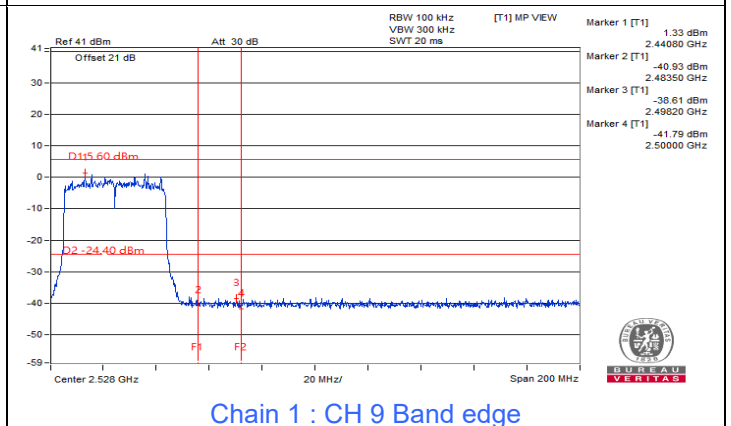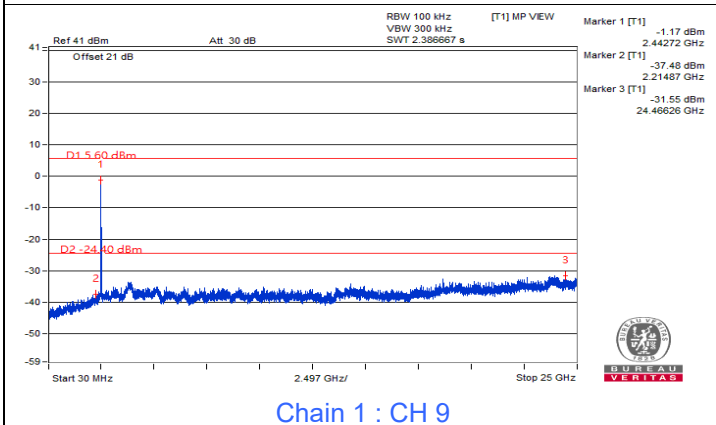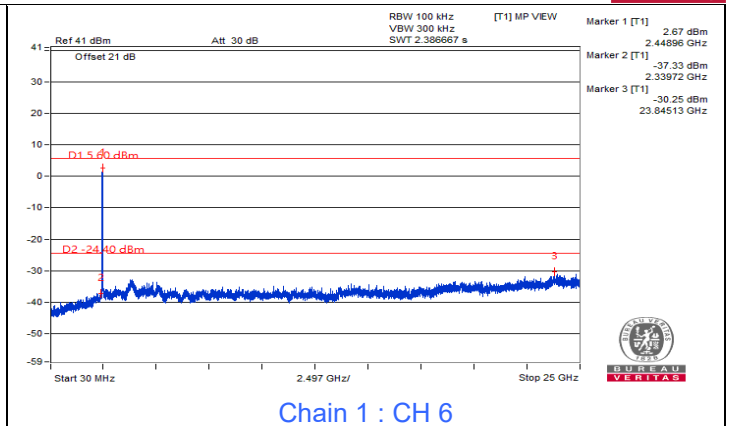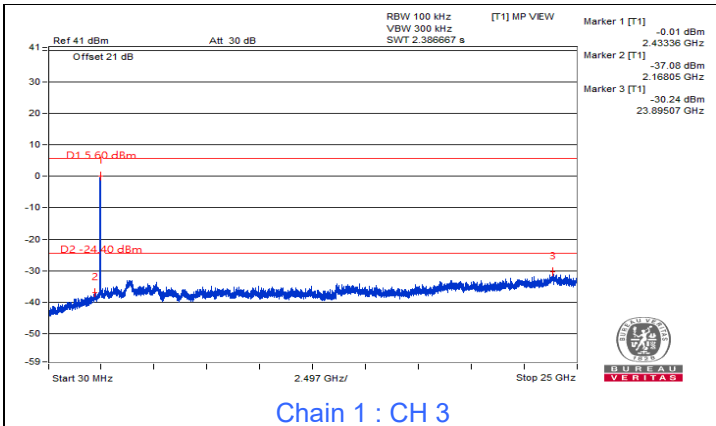


## 7.5 AC Power Conducted Emissions

RF Mode	11b	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60Hz	Environmental Conditions	25°C, 68% RH
Tested By	Tom Yang		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	9.97	25.87	10.89	35.84	20.86	65.58	55.58	-29.74	-34.72
2	0.60703	9.99	24.73	-4.50	34.72	5.49	56.00	46.00	-21.28	-40.51
3	0.96641	10.01	24.85	1.68	34.86	11.69	56.00	46.00	-21.14	-34.31
4	1.80078	10.05	28.06	-2.48	38.11	7.57	56.00	46.00	-17.89	-38.43
5	8.62109	10.41	12.96	-10.41	23.37	0.00	60.00	50.00	-36.63	-50.00
6	20.30469	11.01	15.93	-1.24	26.94	9.77	60.00	50.00	-33.06	-40.23

### Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

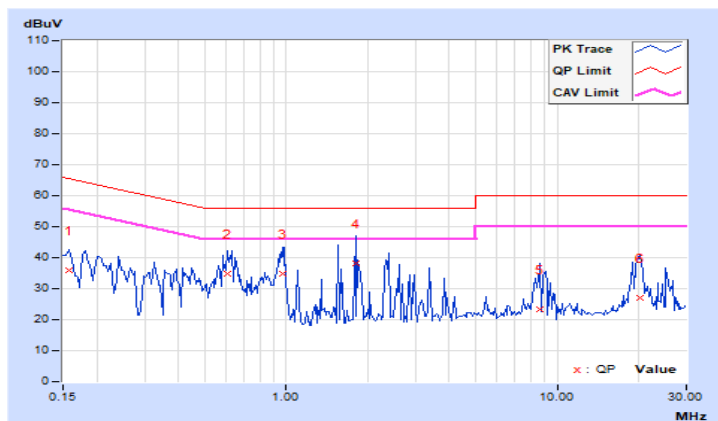


RF Mode	11b	Channel	CH 6 : 2437 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power (System)	120 Vac, 60Hz	Environmental Conditions	25°C, 68% RH
Tested By	Tom Yang		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.01	26.57	10.20	36.58	20.21	65.58	55.58	-29.00	-35.37
2	0.30234	10.03	16.71	-3.74	26.74	6.29	60.18	50.18	-33.44	-43.89
3	0.96641	10.06	25.97	2.98	36.03	13.04	56.00	46.00	-19.97	-32.96
<b>4</b>	<b>1.72656</b>	<b>10.10</b>	<b>28.63</b>	<b>-0.68</b>	<b>38.73</b>	<b>9.42</b>	<b>56.00</b>	<b>46.00</b>	<b>-17.27</b>	<b>-36.58</b>
5	9.16016	10.43	14.08	-8.09	24.51	2.34	60.00	50.00	-35.49	-47.66
6	19.85547	10.80	16.61	0.32	27.41	11.12	60.00	50.00	-32.59	-38.88

**Remarks:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

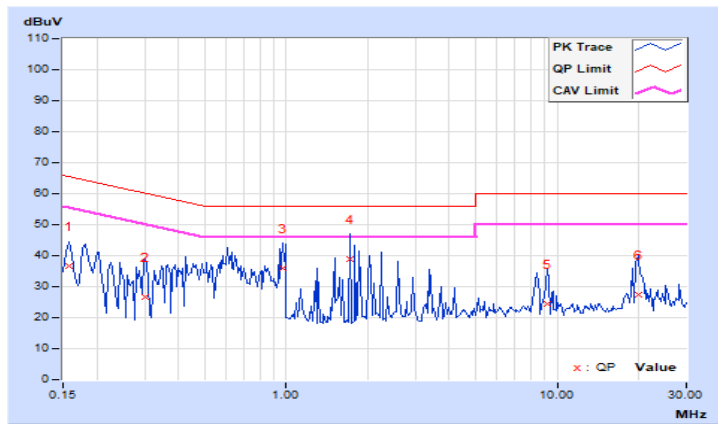

## 7.6 Unwanted Emissions below 1 GHz


RF Mode	11b	Channel	CH 6 : 2437 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	(QP) RB = 120kHz
Input Power (System)	120 Vac, 60Hz	Environmental Conditions	30°C, 76% RH
Tested By	Louis Yang		

### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.93	27.0 QP	40.0	-13.0	2.00 H	292	40.1	-13.1
2	104.50	34.2 QP	43.5	-9.3	2.00 H	74	50.8	-16.6
3	230.36	31.9 QP	46.0	-14.1	1.50 H	299	47.2	-15.3
4	340.46	20.7 QP	46.0	-25.3	1.00 H	1	31.8	-11.1
5	519.58	23.5 QP	46.0	-22.5	2.00 H	107	30.4	-6.9
6	734.98	32.2 QP	46.0	-13.8	2.00 H	22	35.1	-2.9

### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

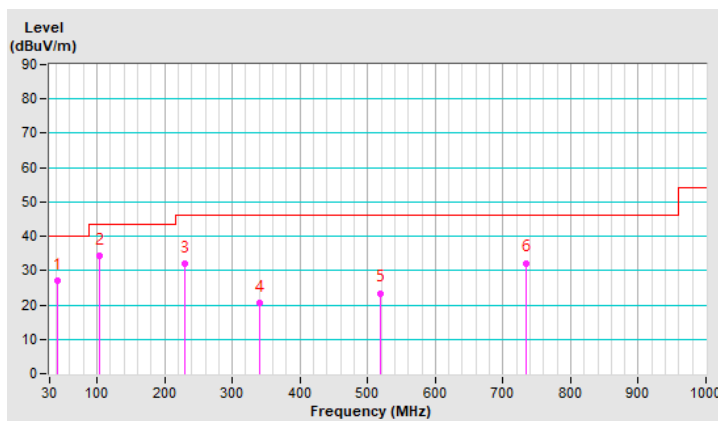


<b>RF Mode</b>	11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	30 MHz ~ 1 GHz	<b>Detector Function &amp; Bandwidth</b>	(QP) RB = 120kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	30°C, 76% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.69	34.8 QP	40.0	-5.2	1.50 V	92	47.9	-13.1
2	108.67	35.8 QP	43.5	-7.7	1.50 V	188	51.8	-16.0
3	160.91	33.1 QP	43.5	-10.4	1.00 V	15	45.8	-12.7
4	270.23	24.3 QP	46.0	-21.7	1.50 V	64	37.5	-13.2
5	428.01	20.7 QP	46.0	-25.3	2.00 V	282	29.4	-8.7
6	736.53	40.5 QP	46.0	-5.5	1.50 V	360	43.4	-2.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The emission levels were very low against the limit of frequency range 9 kHz ~ 30 MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

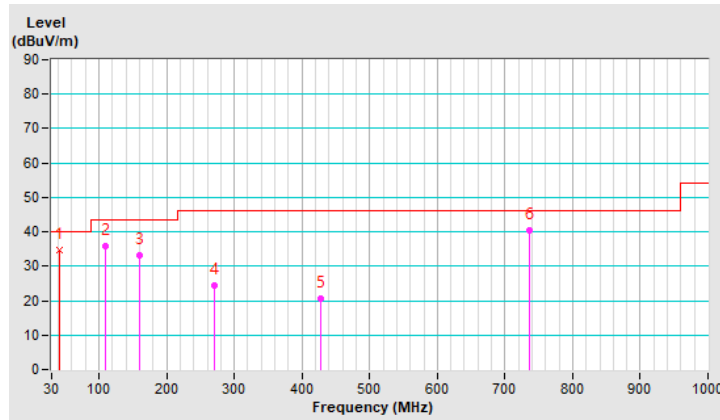


### 7.7 Unwanted Emissions above 1 GHz

<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.6 PK	74.0	-13.4	1.24 H	27	63.3	-2.7
2	2390.00	53.6 AV	54.0	-0.4	1.24 H	27	56.3	-2.7
3	*2412.00	115.9 PK			1.24 H	27	118.6	-2.7
4	*2412.00	109.5 AV			1.24 H	27	112.2	-2.7
5	4824.00	37.4 PK	74.0	-36.6	1.69 H	96	35.9	1.5
6	4824.00	25.2 AV	54.0	-28.8	1.69 H	96	23.7	1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

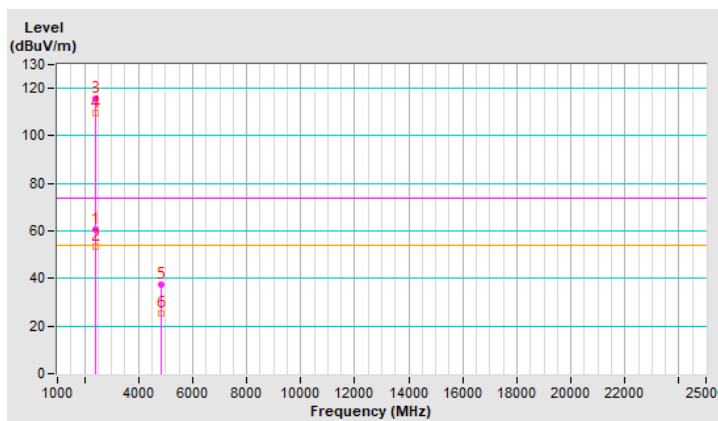


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.43 V	2	60.8	-2.7
2	2390.00	50.8 AV	54.0	-3.2	1.43 V	2	53.5	-2.7
3	*2412.00	111.4 PK			1.43 V	2	114.1	-2.7
4	*2412.00	108.5 AV			1.43 V	2	111.2	-2.7
5	4824.00	38.2 PK	74.0	-35.8	1.55 V	211	36.7	1.5
6	4824.00	25.4 AV	54.0	-28.6	1.55 V	211	23.9	1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

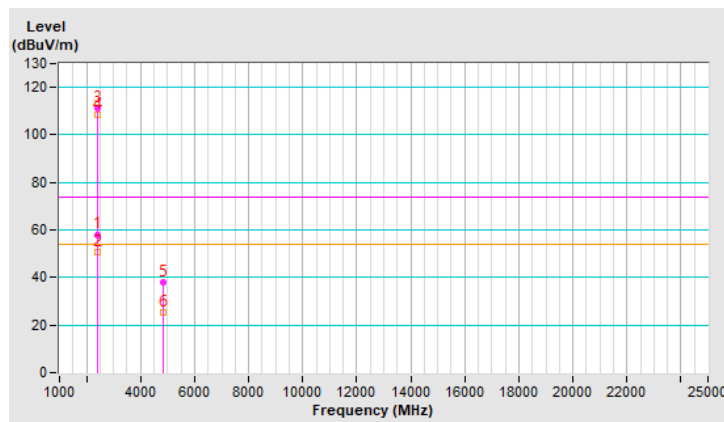


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	3.82 H	39	57.8	-2.7
2	2390.00	44.1 AV	54.0	-9.9	3.82 H	39	46.8	-2.7
3	*2437.00	118.2 PK			3.82 H	39	120.9	-2.7
4	*2437.00	111.9 AV			3.82 H	39	114.6	-2.7
5	2483.50	55.9 PK	74.0	-18.1	3.82 H	39	58.6	-2.7
6	2483.50	44.1 AV	54.0	-9.9	3.82 H	39	46.8	-2.7
7	4874.00	37.6 PK	74.0	-36.4	1.68 H	104	36.1	1.5
8	4874.00	25.5 AV	54.0	-28.5	1.68 H	104	24.0	1.5
9	7311.00	42.4 PK	74.0	-31.6	2.76 H	304	35.2	7.2
10	7311.00	30.3 AV	54.0	-23.7	2.76 H	304	23.1	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

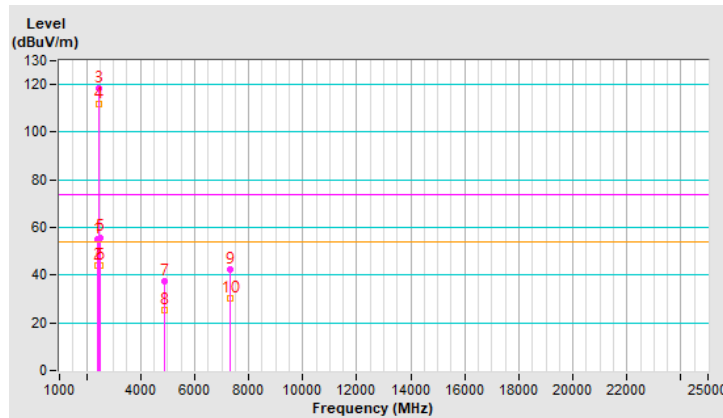




<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	3.76 V	83	57.8	-2.7
2	2390.00	44.0 AV	54.0	-10.0	3.76 V	83	46.7	-2.7
3	*2437.00	119.8 PK			3.76 V	83	122.5	-2.7
4	*2437.00	116.9 AV			3.76 V	83	119.6	-2.7
5	2483.50	55.7 PK	74.0	-18.3	3.76 V	83	58.4	-2.7
6	2483.50	44.1 AV	54.0	-9.9	3.76 V	83	46.8	-2.7
7	4874.00	37.8 PK	74.0	-36.2	1.56 V	198	36.3	1.5
8	4874.00	25.2 AV	54.0	-28.8	1.56 V	198	23.7	1.5
9	7311.00	43.2 PK	74.0	-30.8	2.16 V	288	36.0	7.2
10	7311.00	30.5 AV	54.0	-23.5	2.16 V	288	23.3	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

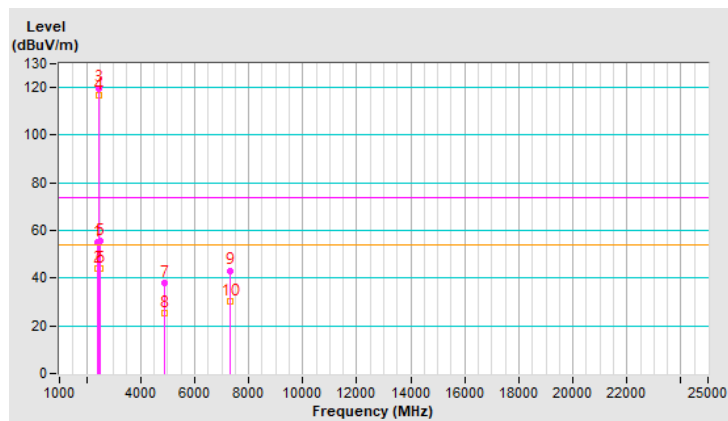


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.7 PK			3.98 H	1	120.4	-2.7
2	*2462.00	114.2 AV			3.98 H	1	116.9	-2.7
3	2483.50	61.0 PK	74.0	-13.0	3.98 H	1	63.7	-2.7
4	2483.50	53.5 AV	54.0	-0.5	3.98 H	1	56.2	-2.7
5	4924.00	37.9 PK	74.0	-36.1	1.66 H	118	36.4	1.5
6	4924.00	25.9 AV	54.0	-28.1	1.66 H	118	24.4	1.5
7	7386.00	42.4 PK	74.0	-31.6	2.75 H	317	35.3	7.1
8	7386.00	30.5 AV	54.0	-23.5	2.75 H	317	23.4	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

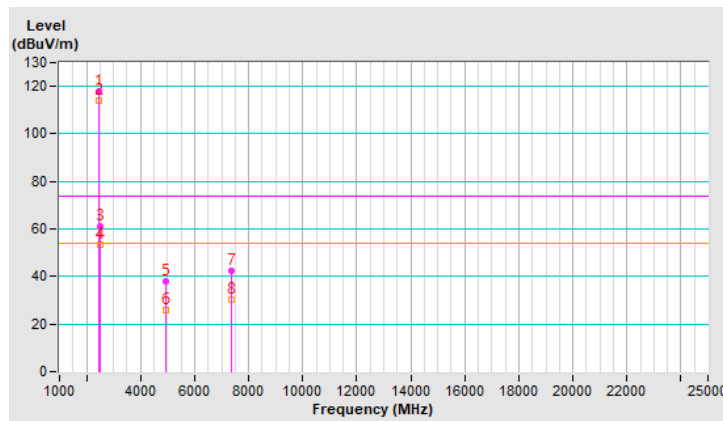


<b>RF Mode</b>	802.11b	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 1 kHz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.46 V	74	115.6	-2.7
2	*2462.00	110.1 AV			1.46 V	74	112.8	-2.7
3	2483.50	59.1 PK	74.0	-14.9	1.46 V	74	61.8	-2.7
4	2483.50	51.9 AV	54.0	-2.1	1.46 V	74	54.6	-2.7
5	4924.00	38.3 PK	74.0	-35.7	1.55 V	206	36.8	1.5
6	4924.00	25.7 AV	54.0	-28.3	1.55 V	206	24.2	1.5
7	7386.00	43.3 PK	74.0	-30.7	2.11 V	283	36.2	7.1
8	7386.00	30.8 AV	54.0	-23.2	2.11 V	283	23.7	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

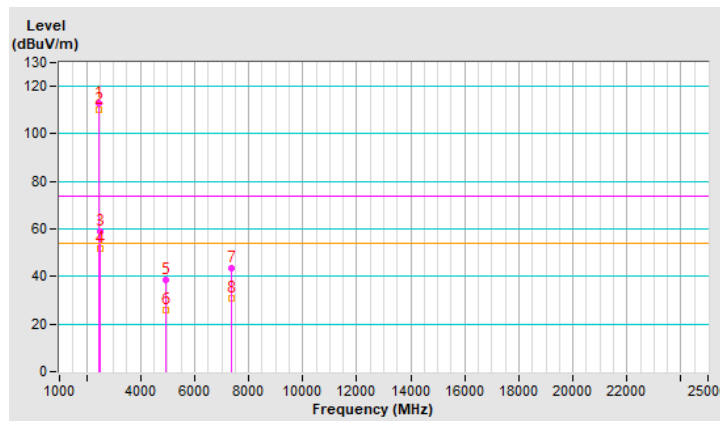


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 510 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.0 PK	74.0	-7.0	3.71 H	1	69.7	-2.7
2	<b>2390.00</b>	<b>53.7 AV</b>	<b>54.0</b>	<b>-0.3</b>	<b>3.71 H</b>	<b>1</b>	<b>56.4</b>	<b>-2.7</b>
3	*2412.00	117.5 PK			3.71 H	1	120.2	-2.7
4	*2412.00	108.3 AV			3.71 H	1	111.0	-2.7
5	4824.00	37.8 PK	74.0	-36.2	1.66 H	108	36.3	1.5
6	4824.00	25.7 AV	54.0	-28.3	1.66 H	108	24.2	1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

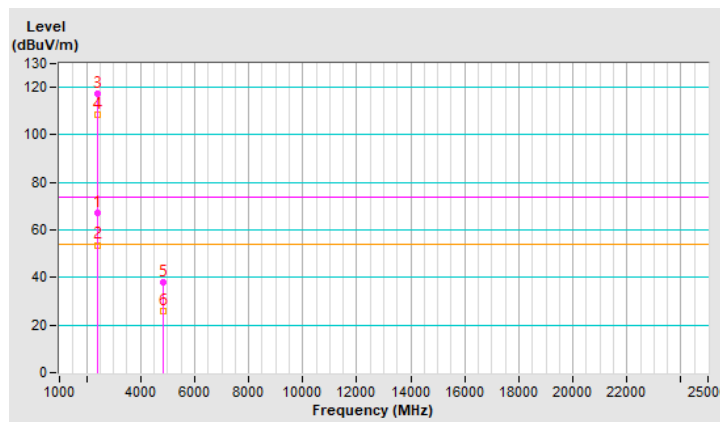


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 510 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.8 PK	74.0	-9.2	3.88 V	86	67.5	-2.7
2	2390.00	52.0 AV	54.0	-2.0	3.88 V	86	54.7	-2.7
3	*2412.00	113.8 PK			3.88 V	67	116.5	-2.7
4	*2412.00	103.9 AV			3.88 V	67	106.6	-2.7
5	4824.00	37.3 PK	74.0	-36.7	1.56 V	202	35.8	1.5
6	4824.00	24.9 AV	54.0	-29.1	1.56 V	202	23.4	1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

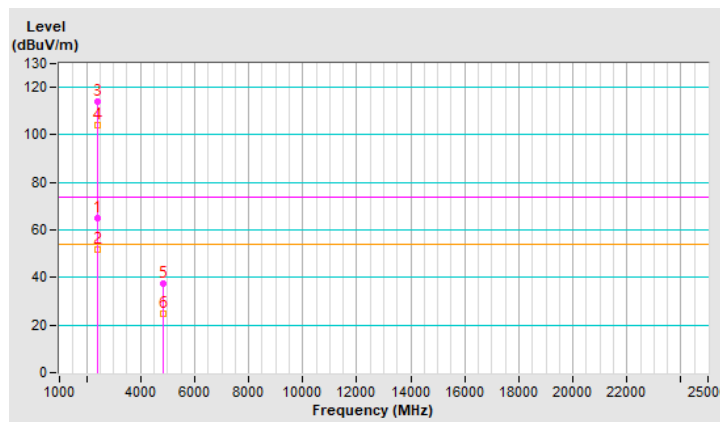


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 510 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	3.66 H	15	74.5	-2.7
2	2390.00	46.2 AV	54.0	-7.8	3.66 H	15	48.9	-2.7
3	*2437.00	119.9 PK			3.66 H	15	122.6	-2.7
4	*2437.00	96.7 AV			3.66 H	15	99.4	-2.7
5	2483.50	69.6 PK	74.0	-4.4	3.66 H	15	72.3	-2.7
6	2483.50	47.2 AV	54.0	-6.8	3.66 H	15	49.9	-2.7
7	4874.00	37.0 PK	74.0	-37.0	1.62 H	113	35.5	1.5
8	4874.00	25.0 AV	54.0	-29.0	1.62 H	113	23.5	1.5
9	7311.00	42.5 PK	74.0	-31.5	2.82 H	296	35.3	7.2
10	7311.00	30.3 AV	54.0	-23.7	2.82 H	296	23.1	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

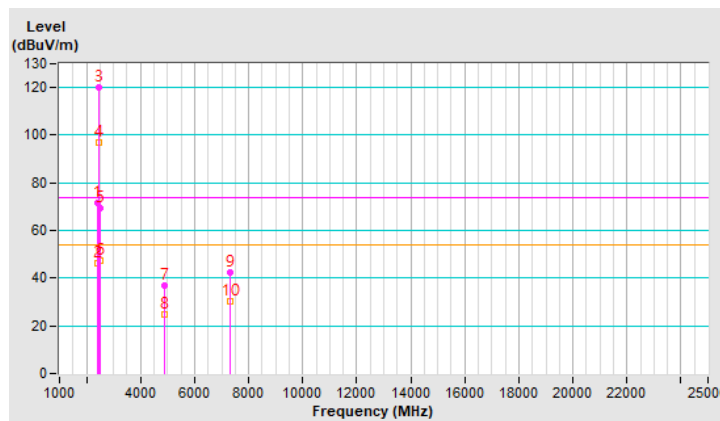


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 510 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	3.78 V	90	74.8	-2.7
2	2390.00	46.5 AV	54.0	-7.5	3.78 V	90	49.2	-2.7
3	*2437.00	120.6 PK			3.78 V	90	123.3	-2.7
4	*2437.00	97.1 AV			3.78 V	90	99.8	-2.7
5	2483.50	69.5 PK	74.0	-4.5	3.78 V	90	72.2	-2.7
6	2483.50	47.1 AV	54.0	-6.9	3.78 V	90	49.8	-2.7
7	4874.00	37.9 PK	74.0	-36.1	1.56 V	212	36.4	1.5
8	4874.00	25.4 AV	54.0	-28.6	1.56 V	212	23.9	1.5
9	7311.00	44.0 PK	74.0	-30.0	2.11 V	283	36.8	7.2
10	7311.00	31.0 AV	54.0	-23.0	2.11 V	283	23.8	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

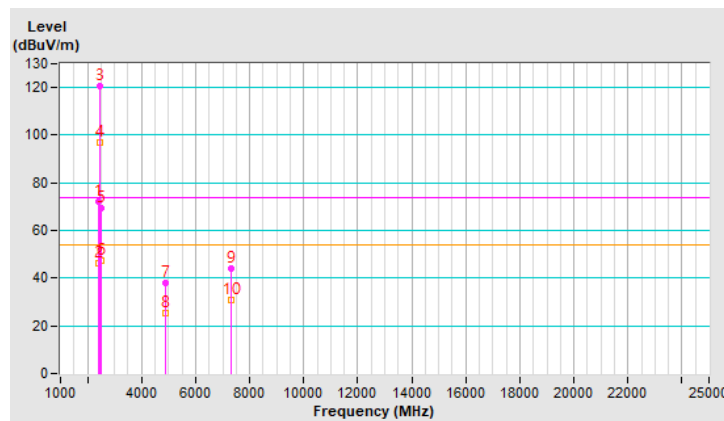


<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 510 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	116.8 PK			3.98 H	2	119.5	-2.7
2	*2462.00	107.7 AV			3.98 H	2	110.4	-2.7
3	2483.50	66.4 PK	74.0	-7.6	3.98 H	2	69.1	-2.7
4	2483.50	53.6 AV	54.0	-0.4	3.98 H	2	56.3	-2.7
5	4924.00	37.6 PK	74.0	-36.4	1.66 H	117	36.1	1.5
6	4924.00	25.4 AV	54.0	-28.6	1.66 H	117	23.9	1.5
7	7386.00	42.5 PK	74.0	-31.5	2.78 H	313	35.4	7.1
8	7386.00	30.6 AV	54.0	-23.4	2.78 H	313	23.5	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

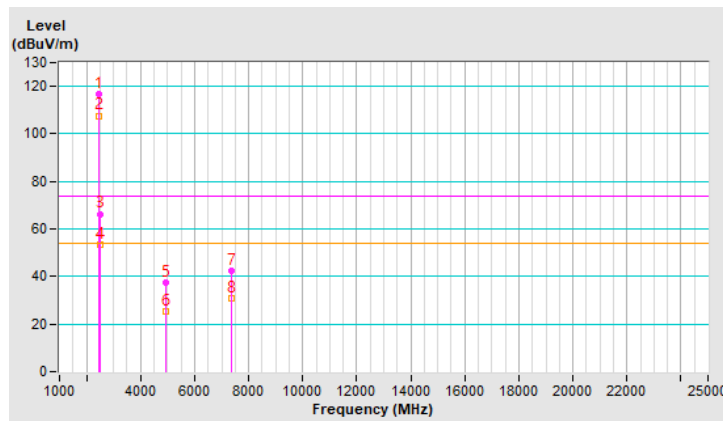




<b>RF Mode</b>	802.11g	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 510 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.5 PK			3.58 V	66	118.2	-2.7
2	*2462.00	105.8 AV			3.58 V	66	108.5	-2.7
3	2483.50	65.3 PK	74.0	-8.7	3.58 V	66	68.0	-2.7
4	2483.50	50.3 AV	54.0	-3.7	3.58 V	66	53.0	-2.7
5	4924.00	38.2 PK	74.0	-35.8	1.59 V	213	36.7	1.5
6	4924.00	25.7 AV	54.0	-28.3	1.59 V	213	24.2	1.5
7	7386.00	42.9 PK	74.0	-31.1	2.22 V	296	35.8	7.1
8	7386.00	30.2 AV	54.0	-23.8	2.22 V	296	23.1	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

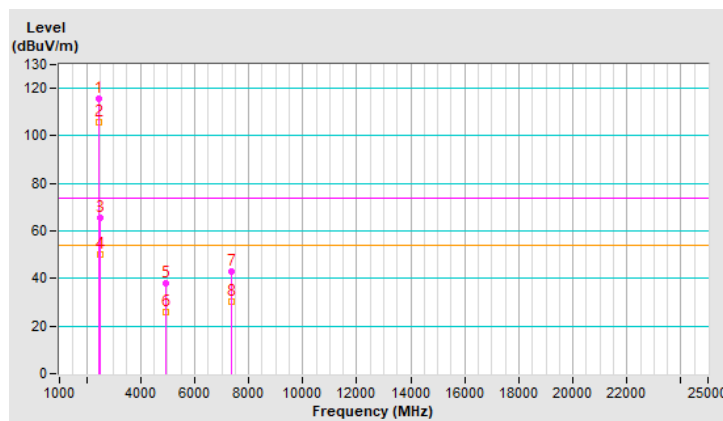


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.5 PK	74.0	-7.5	3.72 H	2	69.2	-2.7
2	2390.00	52.5 AV	54.0	-1.5	3.72 H	2	55.2	-2.7
3	*2412.00	118.8 PK			3.72 H	2	121.5	-2.7
4	*2412.00	106.8 AV			3.72 H	2	109.5	-2.7
5	4824.00	37.3 PK	74.0	-36.7	1.70 H	100	35.8	1.5
6	4824.00	25.4 AV	54.0	-28.6	1.70 H	100	23.9	1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

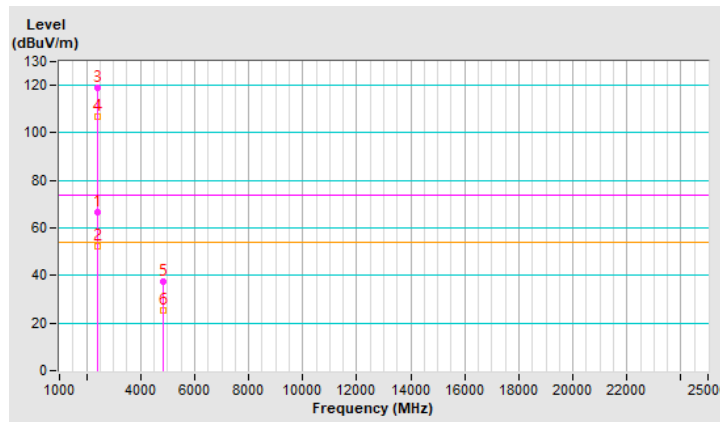


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 1 : 2412 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.6 PK	74.0	-7.4	3.88 V	80	69.3	-2.7
2	<b>2390.00</b>	<b>53.7 AV</b>	<b>54.0</b>	<b>-0.3</b>	<b>3.88 V</b>	<b>80</b>	<b>56.4</b>	<b>-2.7</b>
3	*2412.00	116.0 PK			3.88 V	80	118.7	-2.7
4	*2412.00	103.3 AV			3.88 V	80	106.0	-2.7
5	4824.00	37.1 PK	74.0	-36.9	1.53 V	204	35.6	1.5
6	4824.00	24.8 AV	54.0	-29.2	1.53 V	204	23.3	1.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

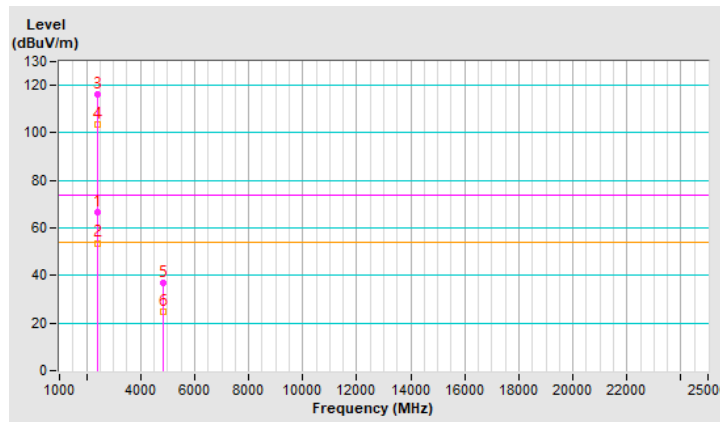


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.0 PK	74.0	-13.0	3.75 H	17	63.7	-2.7
2	2390.00	46.6 AV	54.0	-7.4	3.75 H	17	49.3	-2.7
3	*2437.00	123.6 PK			3.75 H	17	126.3	-2.7
4	*2437.00	111.6 AV			3.75 H	17	114.3	-2.7
5	2483.50	60.7 PK	74.0	-13.3	3.75 H	17	63.4	-2.7
6	2483.50	47.3 AV	54.0	-6.7	3.75 H	17	50.0	-2.7
7	4874.00	37.1 PK	74.0	-36.9	1.68 H	93	35.6	1.5
8	4874.00	25.1 AV	54.0	-28.9	1.68 H	93	23.6	1.5
9	7311.00	42.4 PK	74.0	-31.6	2.80 H	304	35.2	7.2
10	7311.00	30.5 AV	54.0	-23.5	2.80 H	304	23.3	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

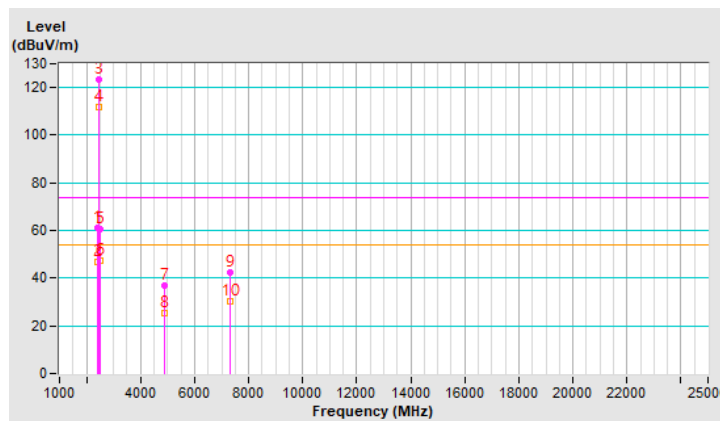


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.3 PK	74.0	-12.7	3.44 V	74	64.0	-2.7
2	2390.00	47.1 AV	54.0	-6.9	3.44 V	74	49.8	-2.7
3	*2437.00	123.8 PK			3.44 V	74	126.5	-2.7
4	*2437.00	111.5 AV			3.44 V	74	114.2	-2.7
5	2483.50	60.5 PK	74.0	-13.5	3.44 V	74	63.2	-2.7
6	2483.50	47.1 AV	54.0	-6.9	3.44 V	74	49.8	-2.7
7	4874.00	37.6 PK	74.0	-36.4	1.56 V	187	36.1	1.5
8	4874.00	25.0 AV	54.0	-29.0	1.56 V	187	23.5	1.5
9	7311.00	42.6 PK	74.0	-31.4	2.12 V	283	35.4	7.2
10	7311.00	30.0 AV	54.0	-24.0	2.12 V	283	22.8	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

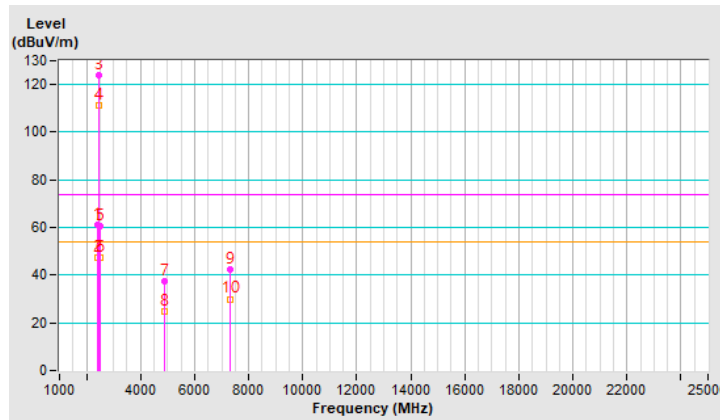


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	115.7 PK			1.25 H	352	118.4	-2.7
2	*2462.00	102.8 AV			1.25 H	352	105.5	-2.7
3	2483.50	64.9 PK	74.0	-9.1	1.25 H	352	67.6	-2.7
4	2483.50	51.6 AV	54.0	-2.4	1.25 H	352	54.3	-2.7
5	4924.00	36.8 PK	74.0	-37.2	1.67 H	113	35.3	1.5
6	4924.00	25.0 AV	54.0	-29.0	1.67 H	113	23.5	1.5
7	7386.00	42.6 PK	74.0	-31.4	2.72 H	302	35.5	7.1
8	7386.00	30.7 AV	54.0	-23.3	2.72 H	302	23.6	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

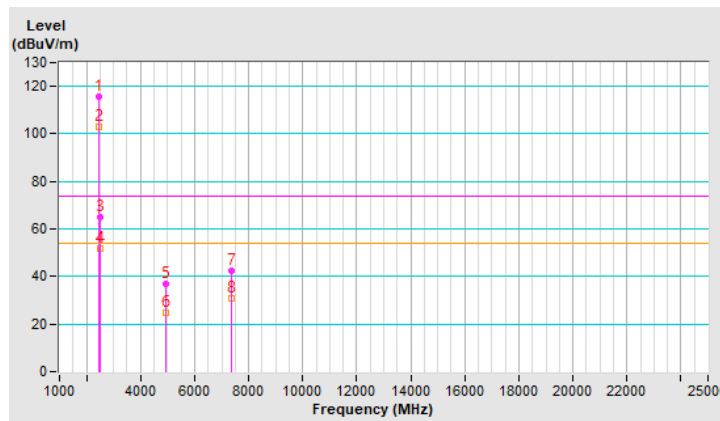


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 11 : 2462 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.0 PK			3.63 V	70	113.7	-2.7
2	*2462.00	99.2 AV			3.63 V	70	101.9	-2.7
3	2483.50	61.0 PK	74.0	-13.0	3.63 V	70	63.7	-2.7
4	2483.50	47.3 AV	54.0	-6.7	3.63 V	70	50.0	-2.7
5	4924.00	37.7 PK	74.0	-36.3	1.57 V	184	36.2	1.5
6	4924.00	25.0 AV	54.0	-29.0	1.57 V	184	23.5	1.5
7	7386.00	42.4 PK	74.0	-31.6	2.18 V	288	35.3	7.1
8	7386.00	29.9 AV	54.0	-24.1	2.18 V	288	22.8	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

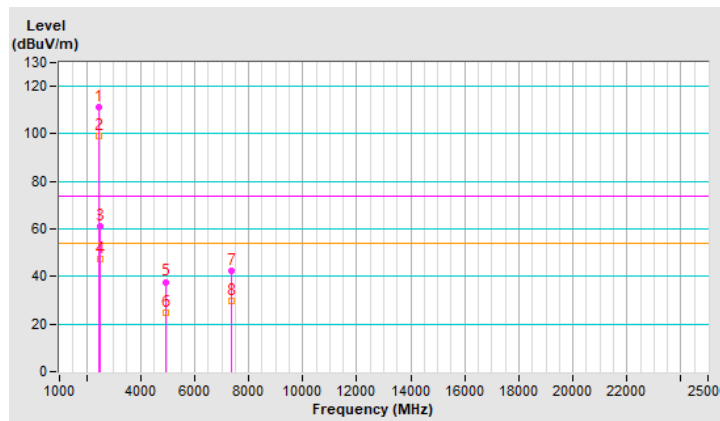


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.05 H	334	70.3	-2.7
2	2390.00	53.5 AV	54.0	-0.5	1.05 H	334	56.2	-2.7
3	*2422.00	113.5 PK			1.05 H	334	116.2	-2.7
4	*2422.00	100.5 AV			1.05 H	334	103.2	-2.7
5	4844.00	37.2 PK	74.0	-36.8	1.65 H	94	35.7	1.5
6	4844.00	25.1 AV	54.0	-28.9	1.65 H	94	23.6	1.5
7	7266.00	42.6 PK	74.0	-31.4	2.80 H	310	35.2	7.4
8	7266.00	30.3 AV	54.0	-23.7	2.80 H	310	22.9	7.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

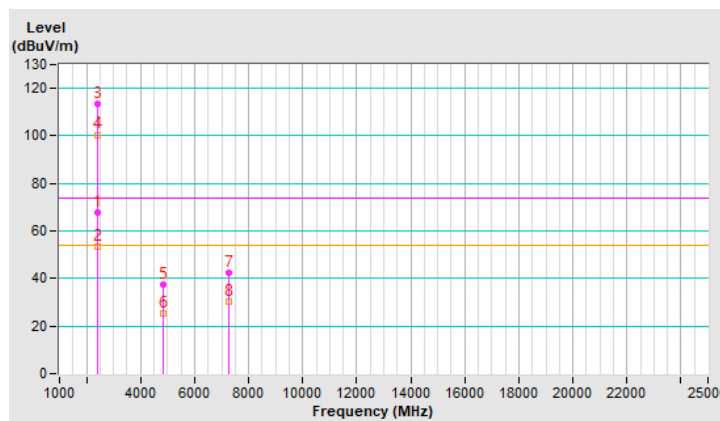




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 3 : 2422 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.8 PK	74.0	-13.2	2.85 V	66	63.5	-2.7
2	2390.00	48.1 AV	54.0	-5.9	2.85 V	66	50.8	-2.7
3	*2422.00	108.1 PK			2.85 V	66	110.8	-2.7
4	*2422.00	96.4 AV			2.85 V	66	99.1	-2.7
5	4844.00	37.9 PK	74.0	-36.1	1.61 V	213	36.4	1.5
6	4844.00	25.5 AV	54.0	-28.5	1.61 V	213	24.0	1.5
7	7266.00	42.9 PK	74.0	-31.1	2.15 V	283	35.5	7.4
8	7266.00	30.4 AV	54.0	-23.6	2.15 V	283	23.0	7.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

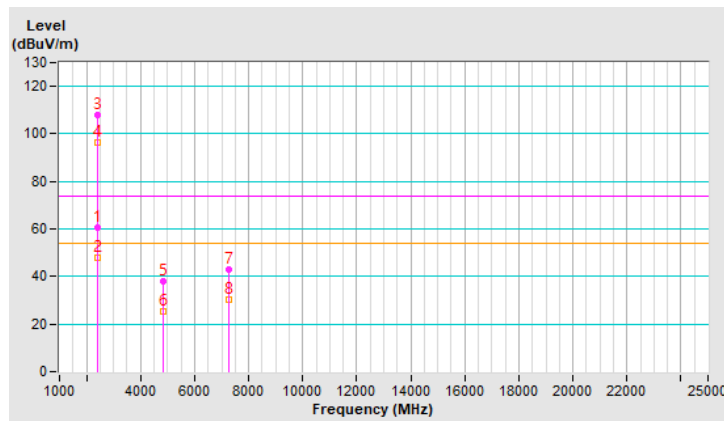


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	1.14 H	326	61.8	-2.7
2	2390.00	45.1 AV	54.0	-8.9	1.14 H	326	47.8	-2.7
3	*2437.00	115.4 PK			1.14 H	326	118.1	-2.7
4	*2437.00	102.0 AV			1.14 H	326	104.7	-2.7
5	2483.50	63.0 PK	74.0	-11.0	1.14 H	326	65.7	-2.7
6	2483.50	51.3 AV	54.0	-2.7	1.14 H	326	54.0	-2.7
7	4874.00	37.8 PK	74.0	-36.2	1.67 H	102	36.3	1.5
8	4874.00	25.9 AV	54.0	-28.1	1.67 H	102	24.4	1.5
9	7311.00	42.6 PK	74.0	-31.4	2.76 H	308	35.4	7.2
10	7311.00	30.3 AV	54.0	-23.7	2.76 H	308	23.1	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

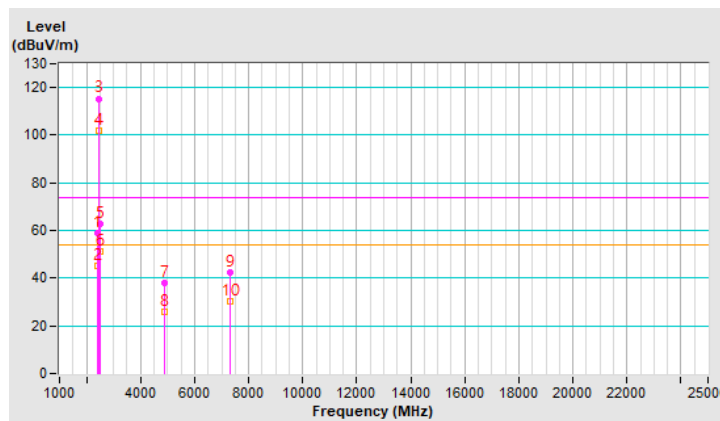


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 6 : 2437 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	3.42 V	94	62.1	-2.7
2	2390.00	45.2 AV	54.0	-8.8	3.42 V	94	47.9	-2.7
3	*2437.00	114.9 PK			3.42 V	94	117.6	-2.7
4	*2437.00	101.7 AV			3.42 V	94	104.4	-2.7
5	2483.50	63.6 PK	74.0	-10.4	3.42 V	94	66.3	-2.7
6	2483.50	51.6 AV	54.0	-2.4	3.42 V	94	54.3	-2.7
7	4874.00	38.2 PK	74.0	-35.8	1.56 V	210	36.7	1.5
8	4874.00	25.4 AV	54.0	-28.6	1.56 V	210	23.9	1.5
9	7311.00	43.5 PK	74.0	-30.5	2.11 V	283	36.3	7.2
10	7311.00	31.0 AV	54.0	-23.0	2.11 V	283	23.8	7.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

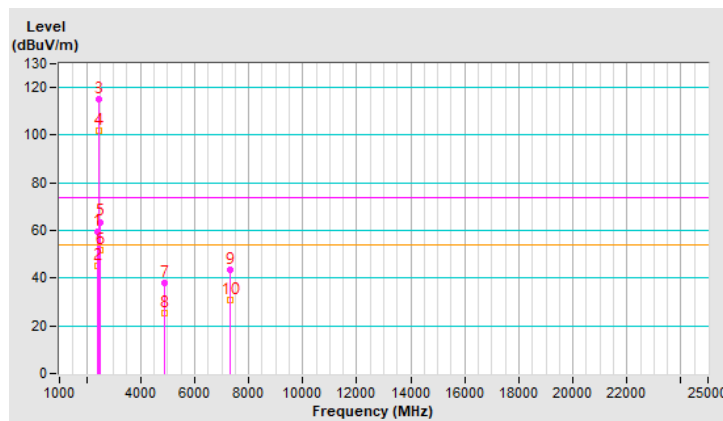


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	112.4 PK			1.26 H	352	115.0	-2.6
2	*2452.00	99.2 AV			1.26 H	352	101.8	-2.6
3	2483.50	65.0 PK	74.0	-9.0	1.26 H	352	67.7	-2.7
4	2483.50	52.9 AV	54.0	-1.1	1.26 H	352	55.6	-2.7
5	4904.00	37.7 PK	74.0	-36.3	1.63 H	98	36.2	1.5
6	4904.00	25.7 AV	54.0	-28.3	1.63 H	98	24.2	1.5
7	7356.00	41.7 PK	74.0	-32.3	2.82 H	319	34.6	7.1
8	7356.00	29.8 AV	54.0	-24.2	2.82 H	319	22.7	7.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

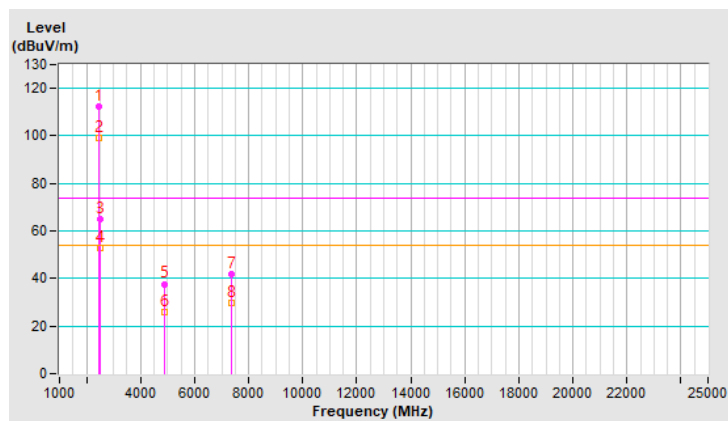


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 9 : 2452 MHz
<b>Frequency Range</b>	1 GHz ~ 25 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 200 Hz
<b>Input Power (System)</b>	120 Vac, 60Hz	<b>Environmental Conditions</b>	28°C, 75% RH
<b>Tested By</b>	Louis Yang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	106.8 PK			3.07 V	74	109.4	-2.6
2	*2452.00	94.7 AV			3.07 V	74	97.3	-2.6
3	2483.50	61.3 PK	74.0	-12.7	3.07 V	74	64.0	-2.7
4	2483.50	49.3 AV	54.0	-4.7	3.07 V	74	52.0	-2.7
5	4904.00	38.0 PK	74.0	-36.0	1.53 V	208	36.5	1.5
6	4904.00	25.1 AV	54.0	-28.9	1.53 V	208	23.6	1.5
7	7356.00	43.1 PK	74.0	-30.9	2.15 V	277	36.0	7.1
8	7356.00	30.2 AV	54.0	-23.8	2.15 V	277	23.1	7.1

**Remarks:**


1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

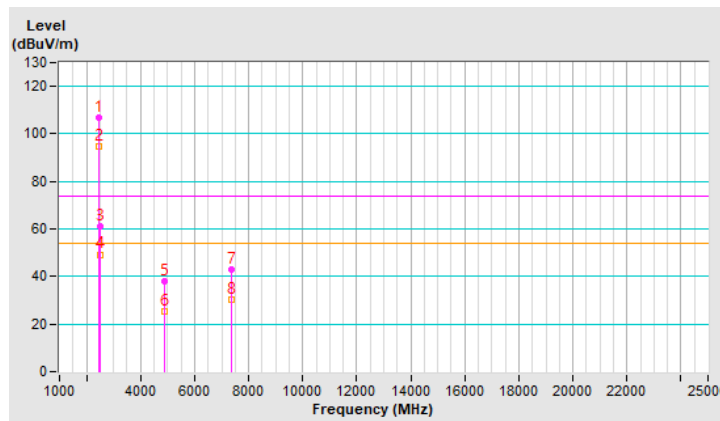




### Plot of Band Edge


#### 802.11b Channel 1

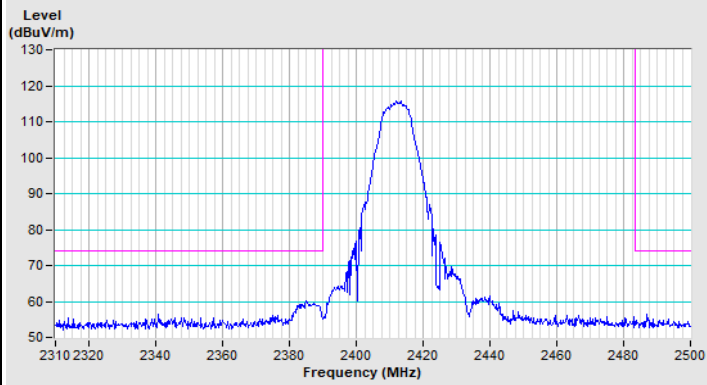


Horizontal (Peak)

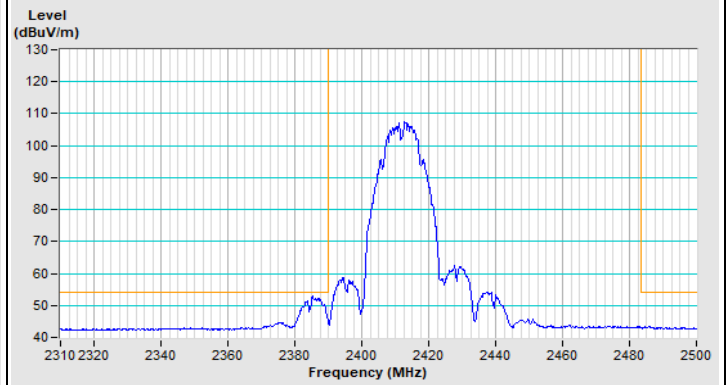

Horizontal (Average)

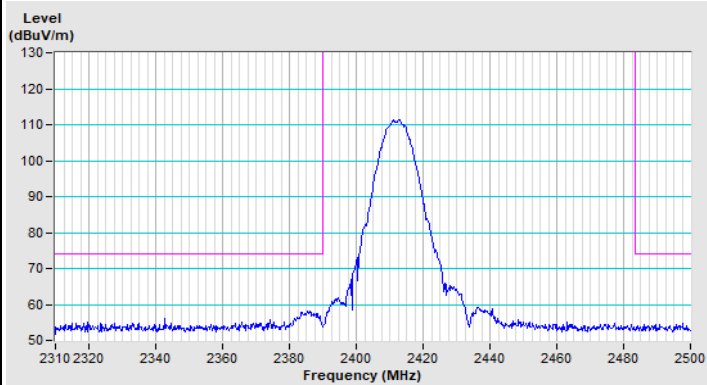


Vertical (Peak)

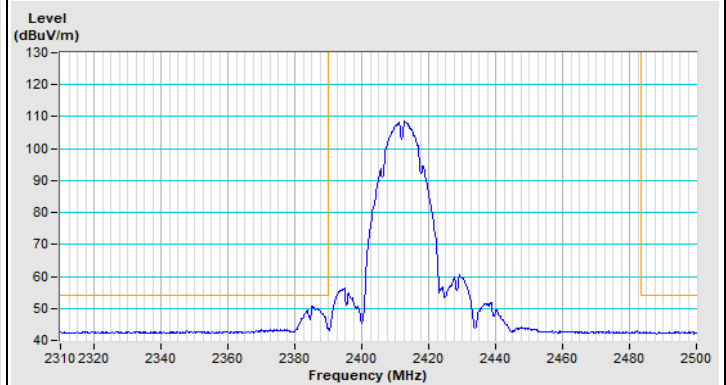


Vertical (Average)


#### 802.11b Channel 11

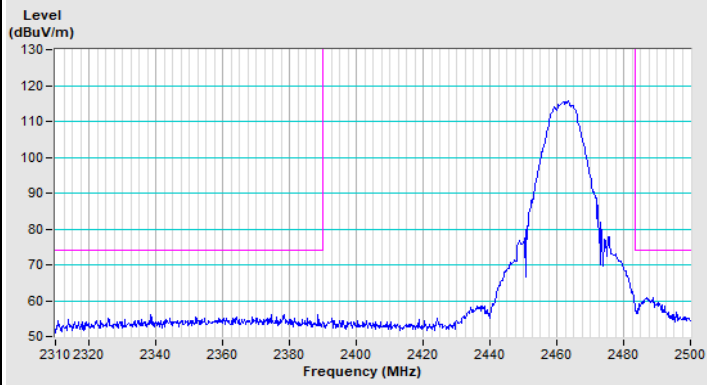


Horizontal (Peak)

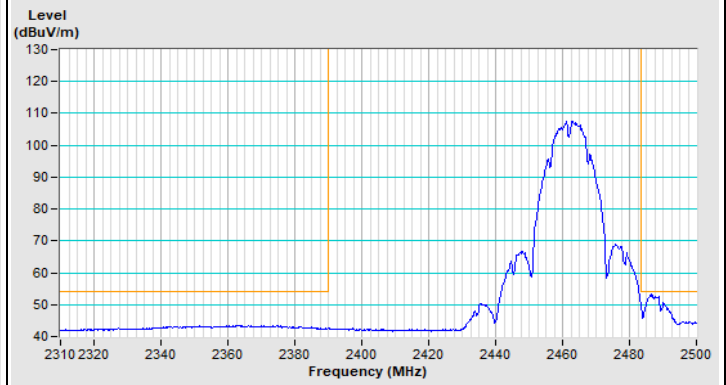

Horizontal (Average)

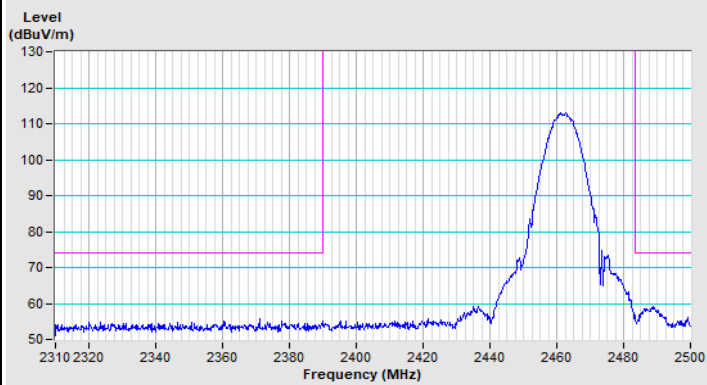


Vertical (Peak)

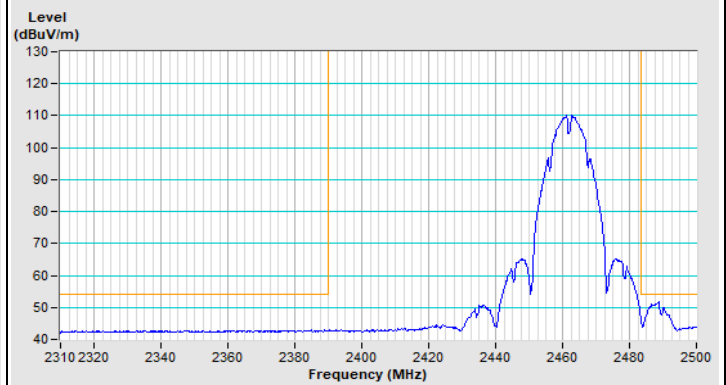


Vertical (Average)


### 802.11g Channel 1

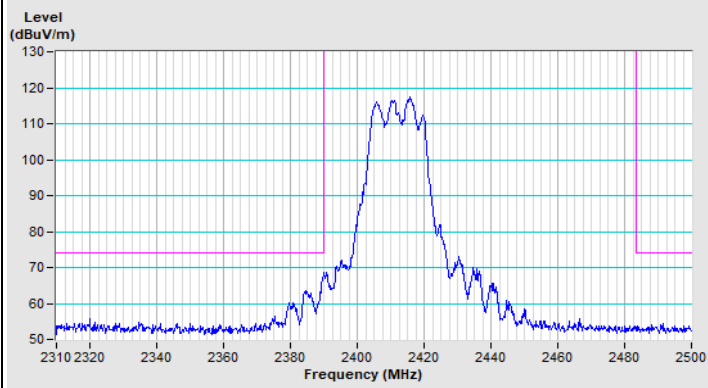


Horizontal (Peak)

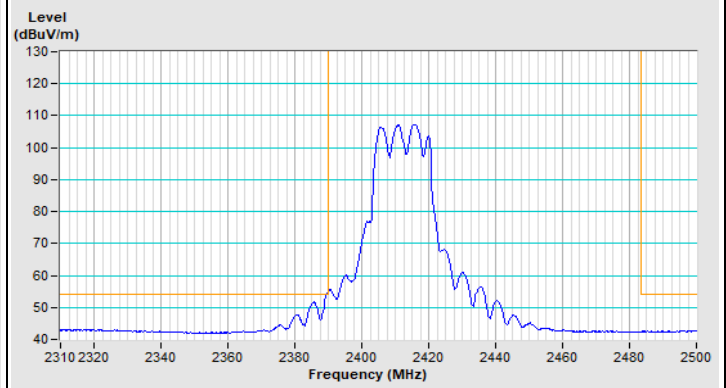

Horizontal (Average)

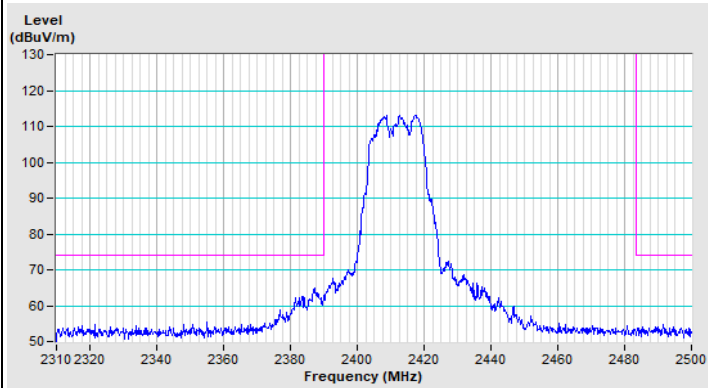


Vertical (Peak)

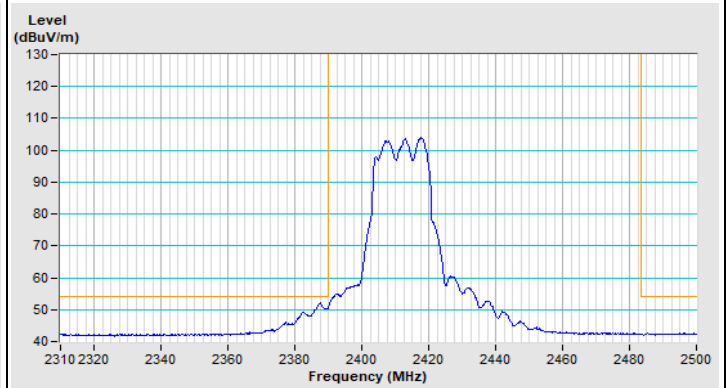


Vertical (Average)


### 802.11g Channel 11

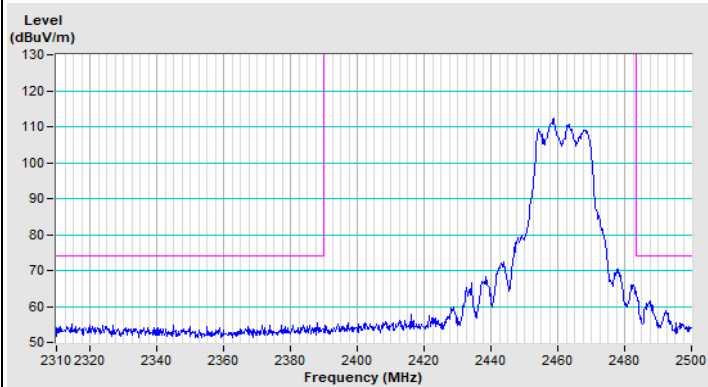


Horizontal (Peak)

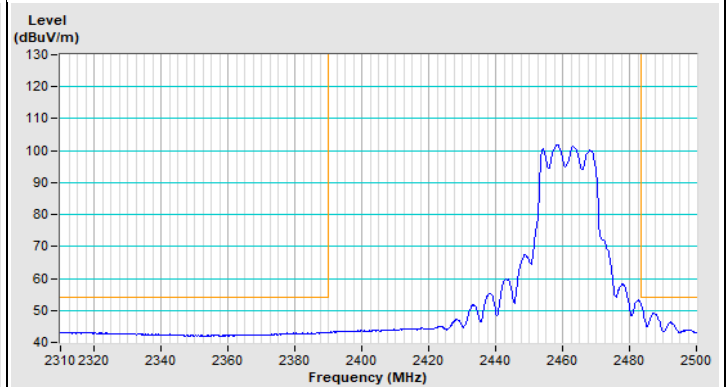

Horizontal (Average)

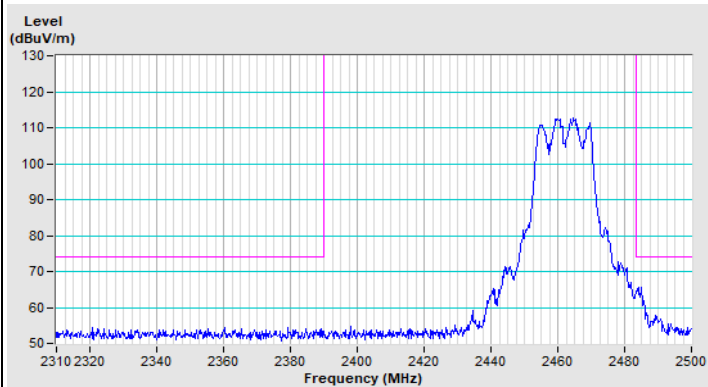


Vertical (Peak)

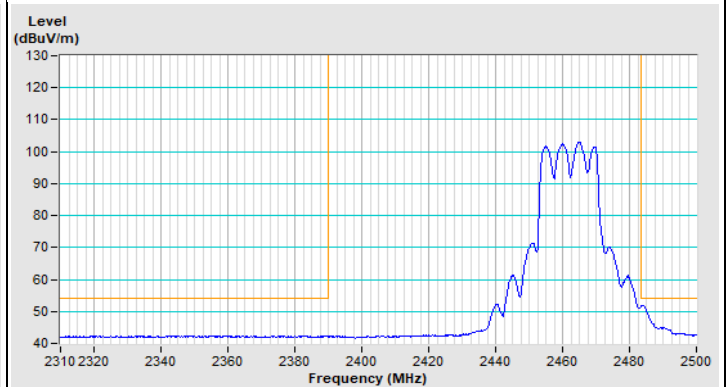


Vertical (Average)


### 802.11ax (HE20) Channel 1

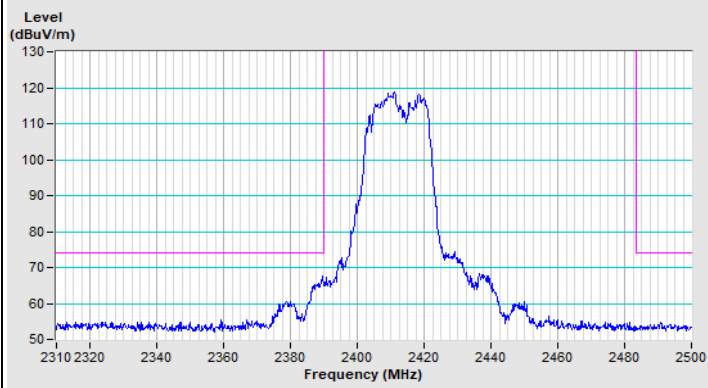


Horizontal (Peak)

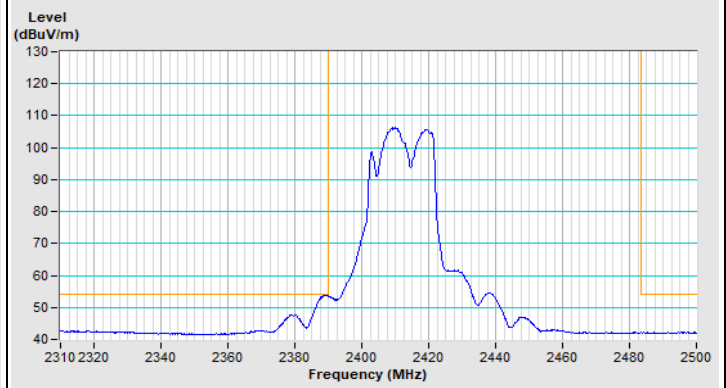

Horizontal (Average)

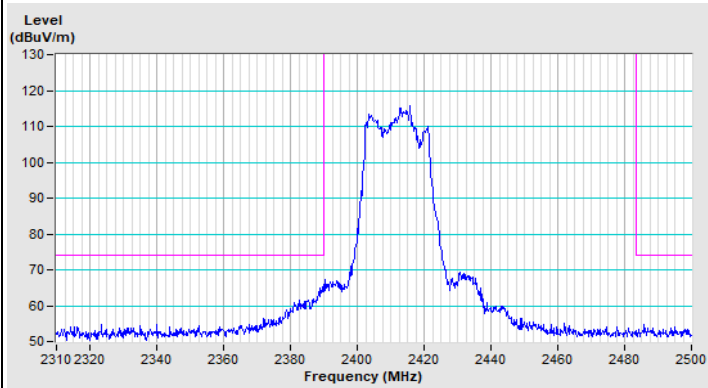


Vertical (Peak)

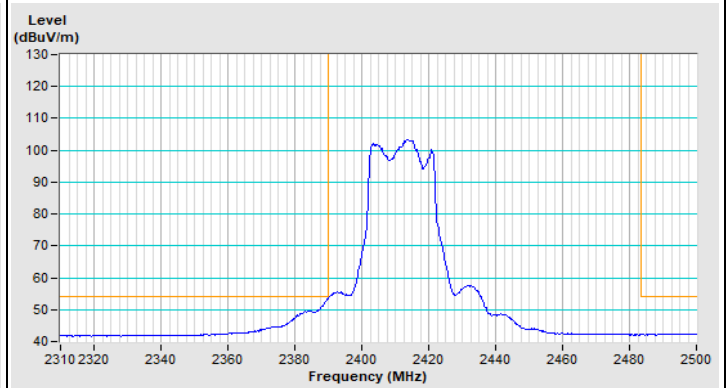


Vertical (Average)


### 802.11ax (HE20) Channel 11

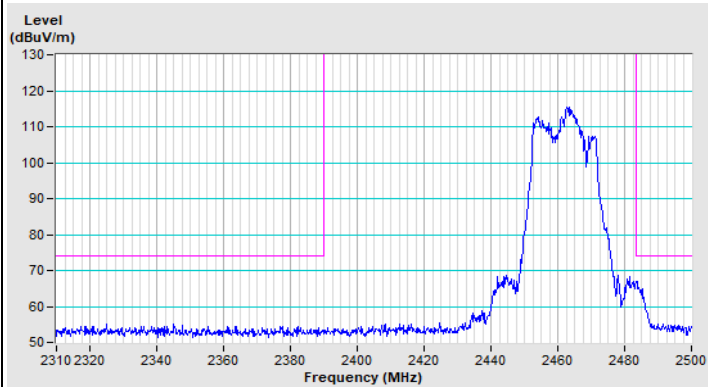


Horizontal (Peak)

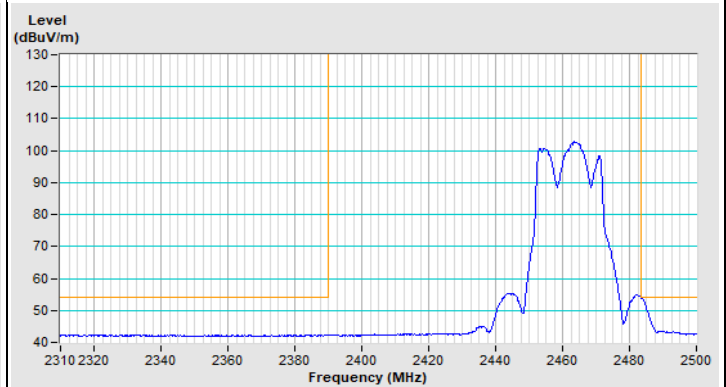

Horizontal (Average)

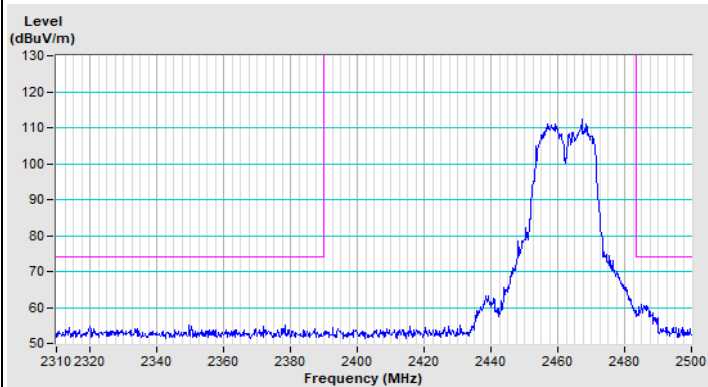


Vertical (Peak)

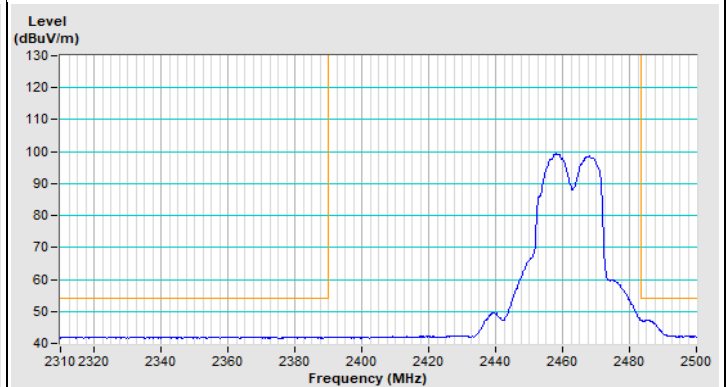


Vertical (Average)




### 802.11ax (HE40) Channel 3

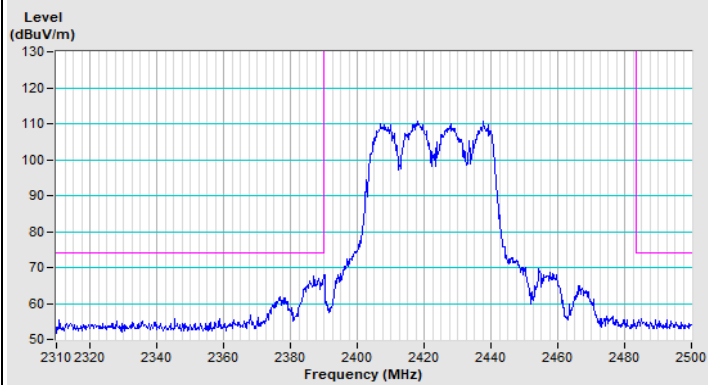


Horizontal (Peak)

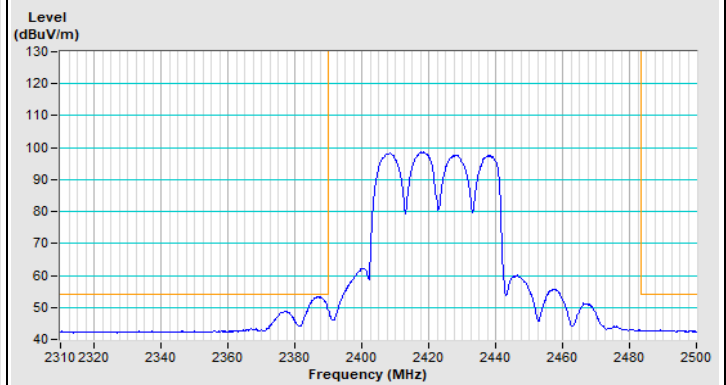

Horizontal (Average)

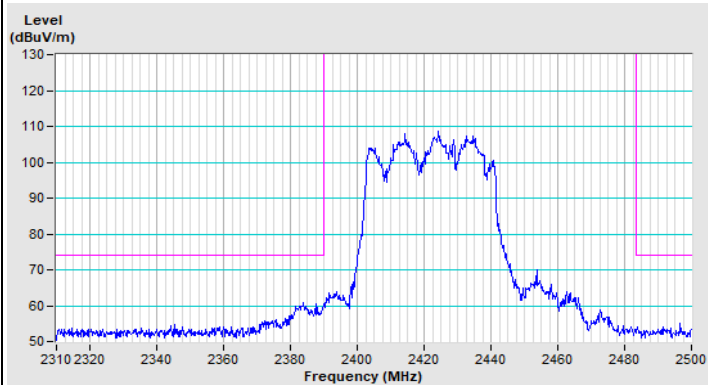


Vertical (Peak)

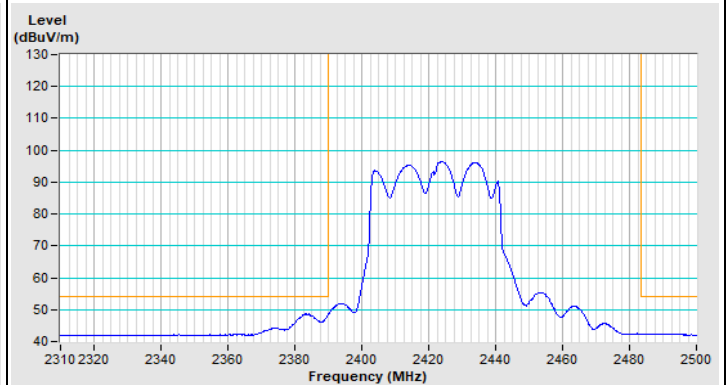


Vertical (Average)


### 802.11ax (HE40) Channel 9

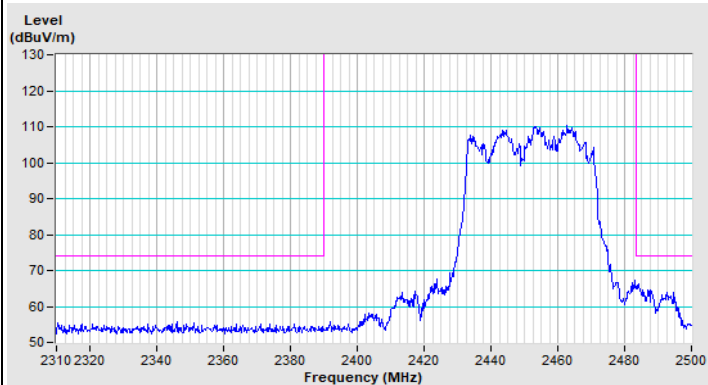


Horizontal (Peak)

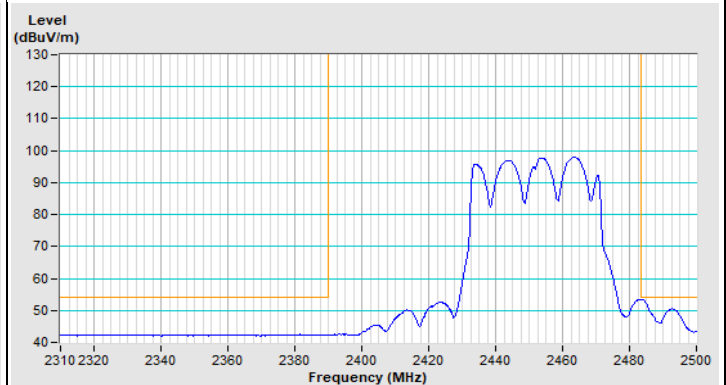

Horizontal (Average)

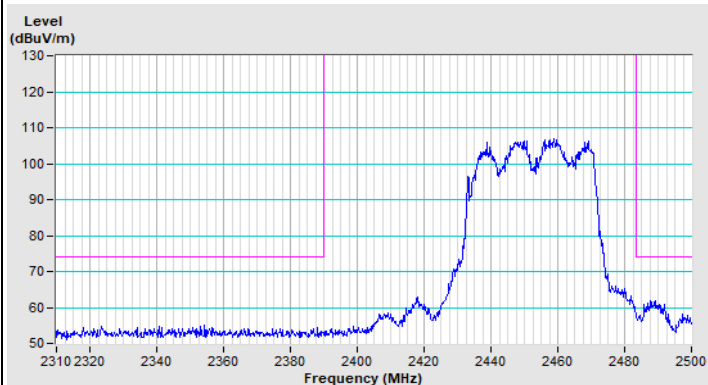

Vertical (Peak)

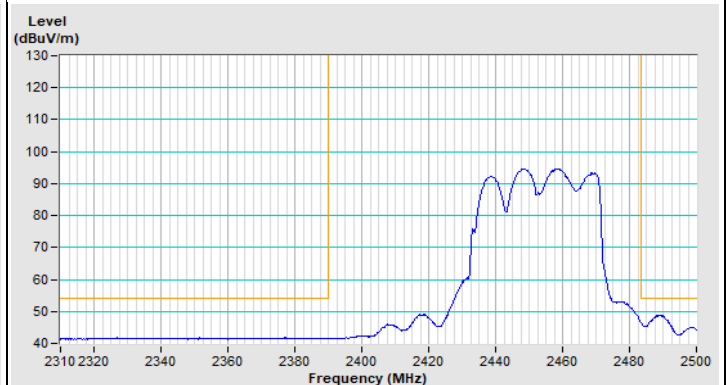

Vertical (Average)

## 8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---