







ISO/IEC17025Accredited Lab.

Report No: FCC 1308102 File reference No: 2013-08-20

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: Tablet PC

Model No: PMID4312, EM544, EM545, M434

Trademark: Emerson, Polaroid

Test Standards: FCC Part 15 Subpart C, Paragraph 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4 and FCC Part 15 Subpart C, Paragraph 15.247 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: August 20, 2013

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District, Shenzhen,CHINA.

Tel (755) 83448688 Fax (755) 83442996

Report No: 1308102 Page 2 of 97

Date: 2013-08-20



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration IC No.: 5205A-02.

Page 3 of 97

Report No: 1308102 Date: 2013-08-20



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	9
3.1	Summary of Test Results	9
3.2	Test Standards.	9
4.0	EUT Modification.	9
5.0	Power Line Conducted Emission Test.	10
5.1	Schematics of the Test.	10
5.2	Test Method and Test Procedure.	10
5.3	Configuration of the EUT	10
5.4	EUT Operating Condition.	11
5.5	Conducted Emission Limit.	11
5.6	Test Result.	11
6.0	Radiated Emission test	14
5.1	Test Method and Test Procedure.	14
6.2	Configuration of the EUT	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	15
7.0	6dB Bandwidth Measurement.	38
8.0	Maximum Peak Output Power	57
9.0	Power Spectral Density Measurement.	60
10.0	Out of Band Measurement.	78
11.0	Antenna Requirement.	89
12.0	FCC ID Label	90
13.0	Photo of Test Setup and EUT View.	91

Date: 2013-08-20



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TECHNOLOGY CONSULTING CO., LTD

Address: 5/F,Block 4, Anhua Industrial Zone.,No.8 TaiRan Rd.CheGongMiao,FuTian District,

Shenzhen, CHINA.

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China

Telephone: 0755-83975295 Fax: 0755-83204874

1.3 Description of EUT

Product: Tablet PC

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District,

Shenzhen, China

Brand Name: Emerson, Polaroid

Model Number: PMID4312

Additional Model Number: EM544, EM545, M434

Type of Modulation IEEE 802.11b : DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20/HT40): OFDM(64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20) : 2412-2462MHz;

IEEE 802.11n HT40: 2422MHz-2452MHz

Channel Spacing IEEE 802.11b/g/n (HT20/40) : 5MHz
Air Data Rate IEEE 802.11b : 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps IEEE 802.11n HT40: 150, 117, 104, 78, 65, 58.5, 52, 39, 26, 19.5, 13, 6 Mbps

Frequency Selection By software

The report refers only to the sample tested and does not apply to the bulk.

Report No: 1308102 Page 5 of 97
Date: 2013-08-20

TIMEWAY TO THE PROPERTY OF THE

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels

IEEE 802.11n HT40: 7 Channels

Antenna: Ceramic Antenna with maximum gain 2.1dBi
Rated input Voltage Input: DC5V, with Li-ion Battery 3.7V, 1400mAh

1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2013-08-16 to 2013-08-19

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty = 4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 97

Report No: 1308102 Date: 2013-08-20



2.0	Test Equipments						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date		
ESPI Test Receiver	ROHDE&SCHWARZ	ESPI 3	100379	2012-08-21	2013-08-20		
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100294	2012-08-21	2013-08-20		
TWO Line-V-NETW	ROHDE&SCHWARZ	EZH3-Z5	100253	2012-08-21	2013-08-20		
Ultra Broadband ANT	ROHDE&SCHWARZ	HL562	100157	2012-08-21	2013-08-20		
ESDV Test Receiver	ROHDE&SCHWARZ	ESDV	100008	2012-08-21	2013-08-20		
Impuls-Begrenzer	ROHDE&SCHWARZ	ESH3-Z2	100281	2012-08-21	2013-08-20		
System Controller	CT	SC100	-				
Printer	EPSON	РНОТО ЕХЗ	CFNH234850				
Computer	IBM	8434	1S8434KCE99BLXL O*	-	-		
Loop Antenna	EMCO	6502	00042960	2012-08-21	2013-08-20		
ESPI Test Receiver	ROHDE&SCHWARZ	ESI26	838786/013	2012-08-21	2013-08-20		
3m OATS			N/A	2012-08-21	2013-08-20		
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170265	2012-08-21	2013-08-20		
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-631	2012-08-21	2013-08-20		
Power meter	Anritsu	ML2487A	6K00003613	2012-08-21	2013-08-20		
Power sensor	Anritsu	MA2491A	32263	2012-08-21	2013-08-20		
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2012-08-21	2013-08-20		
LISN	AFJ	LS16C	10010947251	2012-08-21	2013-08-20		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2012-08-21	2013-08-20		
9*6*6 Anechoic			N/A	2012-08-21	2013-08-20		
EMI Test Receiver	RS	ESCS30	100139	2012-08-21	2013-08-20		
LISN	AFJ	LS16C	10010947251	2012-08-21	2013-08-20		
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2012-08-21	2013-08-20		

Report No: 1308102 Page 7 of 97

Date: 2013-08-20

2.1 **Auxiliary Equipment**

Name	Model No.	Serial No.	Manufacturer	Cable	FCC ID/DOC
TF Card			Kingston		
Earphone					

Report No: 1308102 Page 8 of 97

Date: 2013-08-20



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 11Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 54Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: 65Mbps data rate (worst case) were chosen for full testing

IEEE 802.11n HT40

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Mid	2437
High	2452

IEEE 802.11n HT40 mode: 65Mbps data rate (worst case) was chosen for full testing.

The worst-case data rates are determined according to the description above, based on the investigations by measuring the PSD and average power across all the data rates, bandwidths, modulations and spatial stream modes.



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by Shenzhen Timeway Technology Consulting Co., Ltd


Page 10 of 97

Report No: 1308102 Date: 2013-08-20



5. Power Line Conducted Emission Test

5.1 Schematics of the test

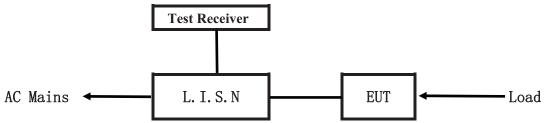


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.4-2003. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.4 –2003.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

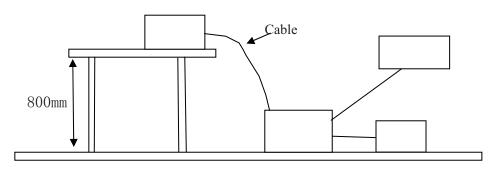

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2003. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Tablet PC	Shenzhen Jingwah Information	PMID4312, EM544,	RBD-M434
Tablet FC	Technology Co., Ltd.	EM545, M434	KDD-191434

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1308102 Page 11 of 97

Date: 2013-08-20



C. Peripherals

Device	Manufacturer	Model	Rating	
Power	SHENZHEN BESTGK	K-A70501500U	Input: 100-240V, 50/60Hz, 0.45A	
Supply	TECHNOLOGY CO LTD		MAX; Output: 5V, 1500mA	

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.4 -2003.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207.

Frequency	Class A Limits (dB µ V)		Class B Limits (dB µ V)	
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0
5.00 ~ 30.00	73.0	60.0	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No: 1308102 Page 12 of 97

Date: 2013-08-20



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting and Charging Battery

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

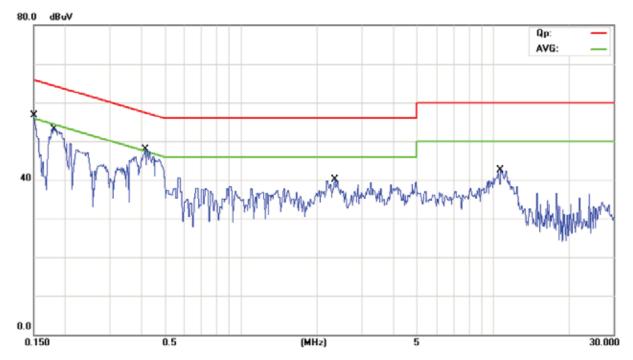

Frequency	Frequency Line		Reading(dBμV)		dBμV)
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.414	Live	43.28	21.28	57.56	47.56
0.178	Live	40.73	1.63	64.57	54.57
0.150	Live	56.69	15.49	66.00	56.00
2.356	Live	34.01	15.01	56.00	46.00
10.687	Live	34.54	12.54	60.00	50.00

Report No: 1308102 Page 13 of 97

Date: 2013-08-20



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep WIFI Transmitting and Charging Battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

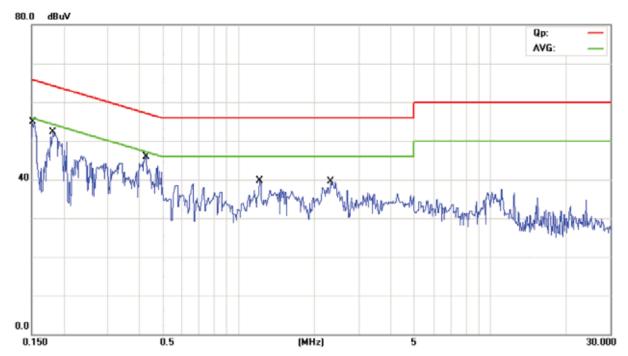

Frequency	Line	Reading(dBμV)	Limit(dBμV)
(MHz)	Line	Quasi-peak	Average	Quasi-peak	Average
0.150	Neutral	54.83	30.53	65.96	55.96
0.182	Neutral	52.30	31.40	64.38	54.38
0.426	Neutral	41.91	22.61	57.32	47.32
2.311	Neutral	39.42	21.42	56.00	46.00
1.220	Neutral	39.77	19.77	56.00	46.00

Date: 2013-08-20



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.4 –2003. The radiated test was performed at Timeway Laboratory. This site is on file with the FCC laboratory division, Registration No.899988
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2003.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup Distance = 3m Computer Pre -Amplifier EUT Turn-table Receiver

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No: 1308102 Page 15 of 97



6.4 Radiated Emission Limit

Date: 2013-08-20

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209

		8 1
Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No: 1308102 Page 16 of 97

Date: 2013-08-20



Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Charging and Keep transmitting

Results: Pass

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
142.770	32.61	Н	43.50
191.342	33.53	Н	43.50
383.788	37.89	Н	46.00
335.190	33.82	Н	46.00
30.00	35.24	V	40.00
43.607	34.53	V	40.00
142.769	35.55	V	43.50
239.940	36.80	V	46.00


Page 17 of 97

Report No: 1308102 Date: 2013-08-20




Test Figure:

Н

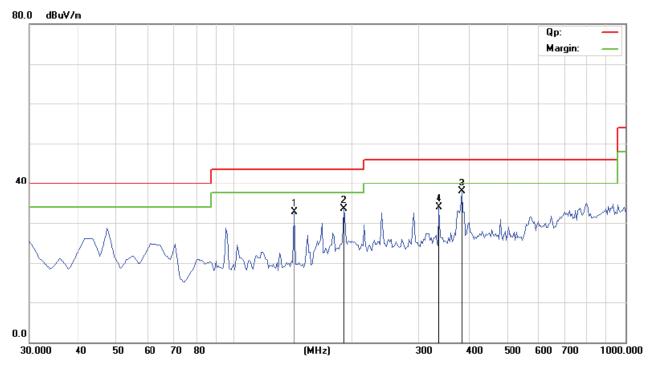

Test Figure:

V

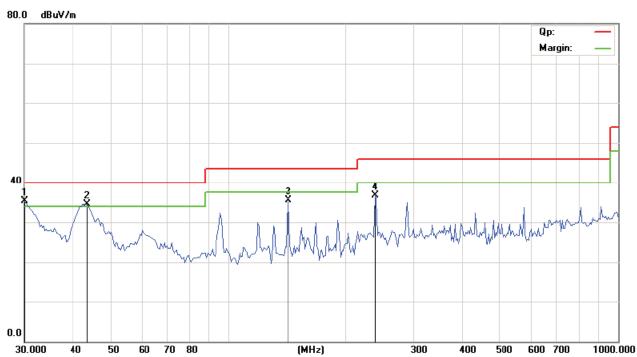

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1308102 Page 18 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH01 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2412.00	92.39 (PK)	Н	F 1 41F
2412.00	92.69 (PK)	V	Fundamental Frequency
4824.00	45.78 (PK)	Н	74(Peak)/ 54(AV)
4824.00	47.32 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16884		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)
24120		П/ V	/4(Peak)/ 34(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

^{2.} Remark "---" means that the emissions level is too low to be measured

^{3.} For 802.11g mode 54Mbps

Date: 2013-08-20



Operation Mode: Transmitting under CH06 for 11g at 54Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	93.47 (PK)	Н	Fundamental Frequency
2437.00	93.40 (PK)	V	Fundamental Frequency
4874.00	45.48 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.32 (PK)	V	74(Peak)/ 54(AV)
7311.00		H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622		H/V	74(Peak)/ 54(AV)
17059		H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode 54 Mbps

Operation Mode: Transmitting under CH11 for 11g at 54Mbps

		-	Ţ.
Frequency (MHz)	Level@3m (dB μ V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2462.00	93.36 (PK)	Н	Fundamental Frequency
2462.00	93.25 (PK)	V	Fundamental Frequency
4924	47.08 (PK)	Н	74(Peak)/ 54(AV)
4924	47.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11g mode at 54 Mbps


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.




Please refer to the following test plots for details:

CH01 for 11g at 54Mbps: Horizontal

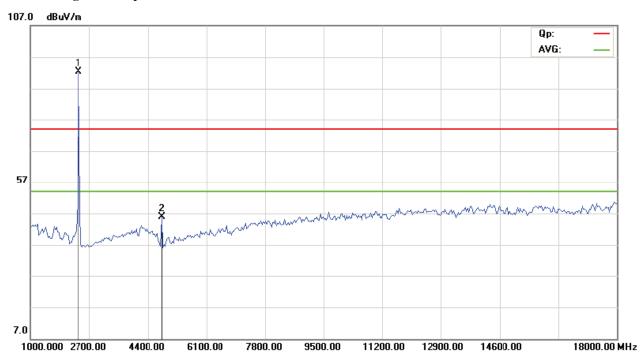

CH01 for 11g at 54Mbps: Vertical

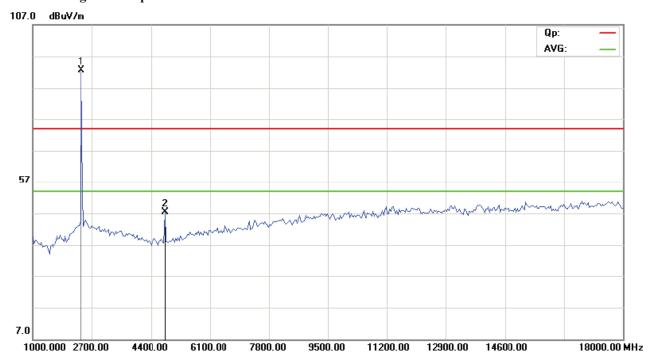

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 21 of 97


Report No: 1308102 Date: 2013-08-20



CH06 for 11g at 54Mbps: Vertical

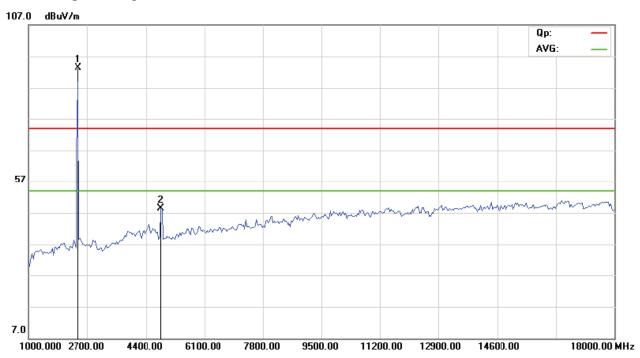


CH06 for 11g at 54Mbps: Horizontal

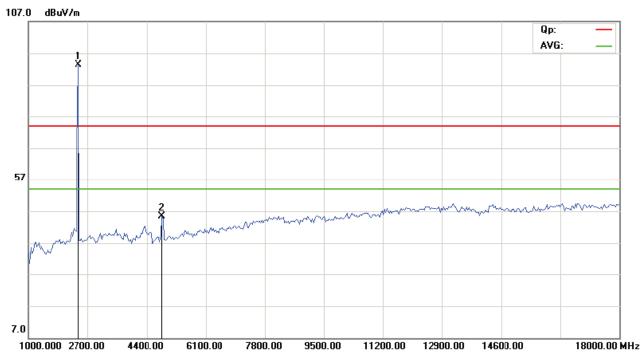




CH11 for 11g at 54Mbps: Vertical

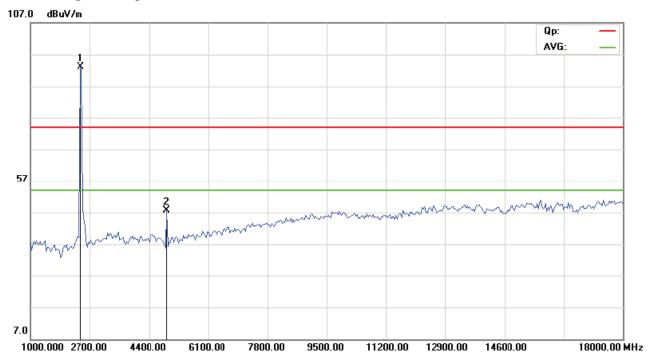

CH11 for 11g at 54Mbps: Horizontal

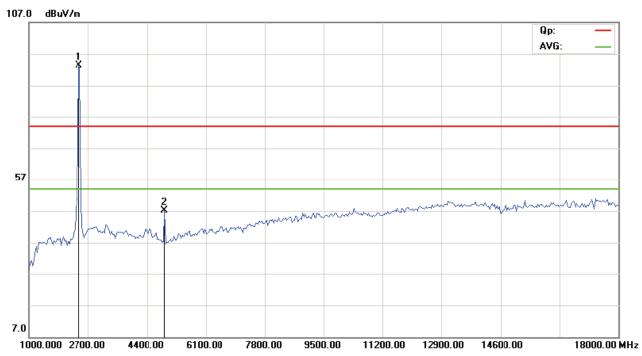

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Report No: 1308102 Page 23 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH01 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03ba V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2412.00	93.76 (PK)	V	F 1 41F
2412.00	93.26 (PK)	Н	Fundamental Frequency
4824.00	47.82 (PK)	Н	74(Peak)/ 54(AV)
4824.00	49.09 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060	-	H/V	74(Peak)/ 54(AV)
14472	-	H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

Operation Mode: Transmitting under CH06 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	93.20 (PK)	Н	E 1
2437.00	93.65 (PK)	V	Fundamental Frequency
4874.00	47.26 (PK)	Н	74(Peak)/ 54(AV)
4874.00	48.00 (PK)	V	74(Peak)/ 54(AV)
7311.00	-	H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185	-	H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	-	H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode 11Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1308102 Page 24 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH11 for 11b at 11Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2462.00	94.24 (PK)	Н	Even domental Engavenery
2462.00	94.41 (PK)	V	Fundamental Frequency
4924	46.79 (PK)	Н	74(Peak)/ 54(AV)
4924	48.63 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310		H/V	74(Peak)/ 54(AV)
14772		H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)


Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11b mode at 11Mbps




Please refer to the following test plots for details:

CH01 for 11b at 11Mbps: Horizontal

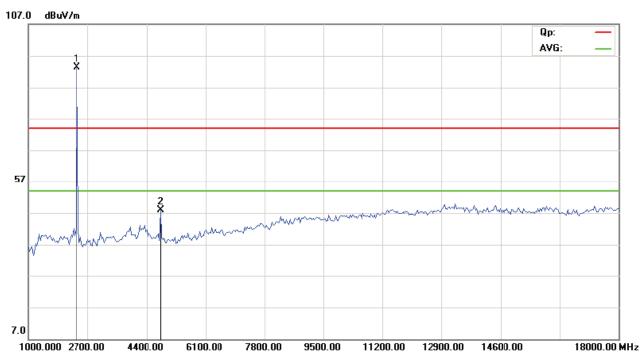

CH01 for 11b at 11Mbps: Vertical

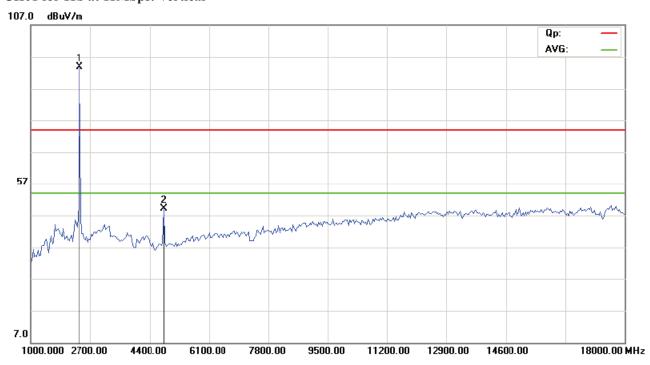


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



CH06 for 11b at 11Mbps: Vertical

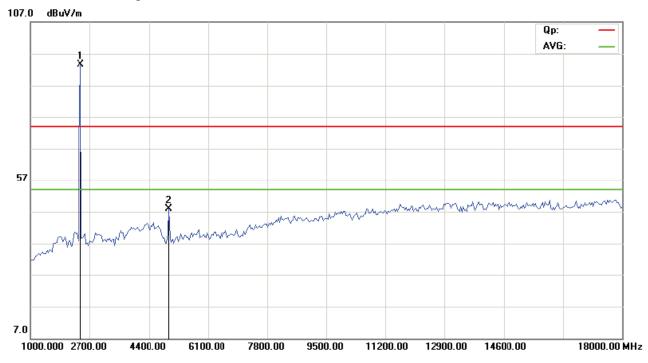

CH06 for 11b at 11Mbps: Horizontal

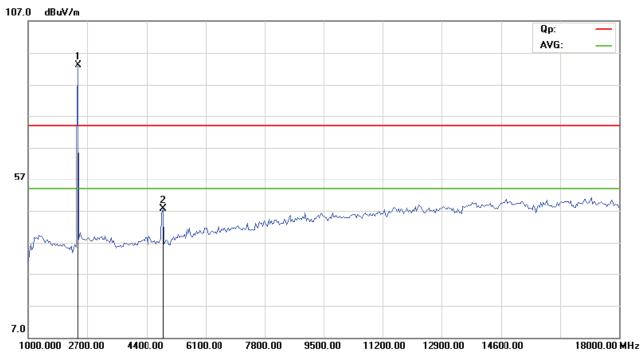


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



CH11 for 11b at 11Mbps: Vertical

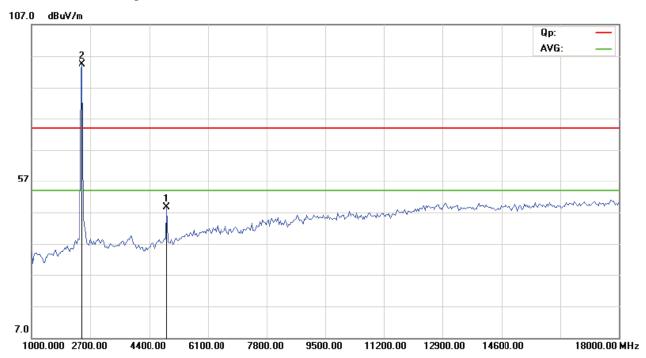

CH11 for 11b at 11Mbps: Horizontal

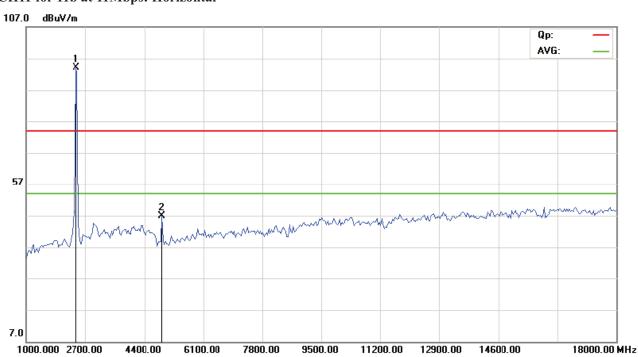

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Report No: 1308102 Page 28 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH01 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2412.00	93.36 (PK)	Н	Fundamental Frequency
2412.00	93.40 (PK)	V	Fundamental Frequency
4824.00	47.36 (PK)	Н	74(Peak)/ 54(AV)
4824.00	50.08 (PK)	V	74(Peak)/ 54(AV)
7236.00		H/V	74(Peak)/ 54(AV)
9648.00		H/V	74(Peak)/ 54(AV)
12060		H/V	74(Peak)/ 54(AV)
14472		H/V	74(Peak)/ 54(AV)
16684		H/V	74(Peak)/ 54(AV)
19296		H/V	74(Peak)/ 54(AV)
21708		H/V	74(Peak)/ 54(AV)
24120		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

Operation Mode: Transmitting under CH06 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
2437.00	94.05 (PK)	Н	F 1 41F
2437.00	94.01 (PK)	V	Fundamental Frequency
4874.00	46.04 (PK)	Н	74(Peak)/ 54(AV)
4874.00	47.54 (PK)	V	74(Peak)/ 54(AV)
7311.00	-	H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185		H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	-	H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No: 1308102 Page 29 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH11 for 11n HT20 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2462.00	93.18 (PK)	Н	Fundamental Frequency
2462.00	93.33 (PK)	V	rundamental Frequency
4924	46.22 (PK)	Н	74(Peak)/ 54(AV)
4924	47.64 (PK)	V	74(Peak)/ 54(AV)
7368		H/V	74(Peak)/ 54(AV)
9848		H/V	74(Peak)/ 54(AV)
12310	-	H/V	74(Peak)/ 54(AV)
14772	-	H/V	74(Peak)/ 54(AV)
17234		H/V	74(Peak)/ 54(AV)
19696		H/V	74(Peak)/ 54(AV)
22158		H/V	74(Peak)/ 54(AV)
24650		H/V	74(Peak)/ 54(AV)


Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT20) mode 65Mbps




Please refer to the following test plots for details:

CH01 for 11n HT20 at 65Mbps: Horizontal

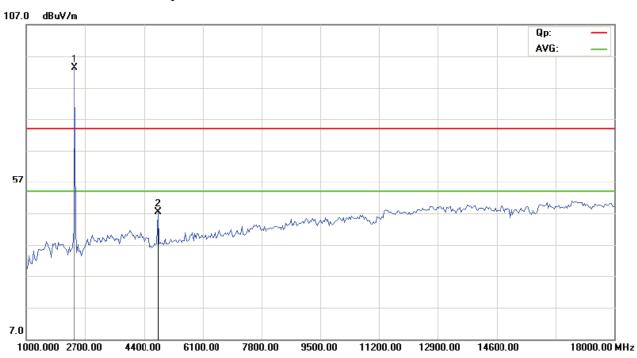

CH01 for 11n HT20 at 65Mbps: Vertical

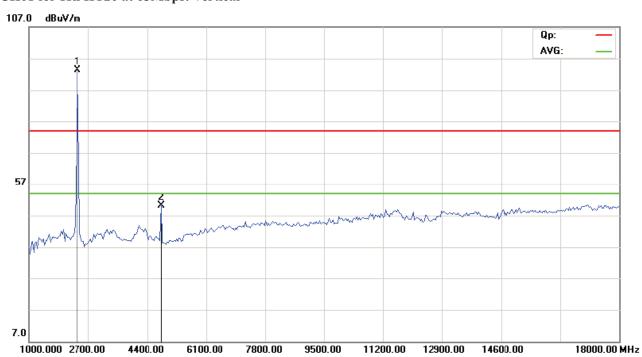


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



CH06 for 11n HT20 at 65Mbps: Vertical

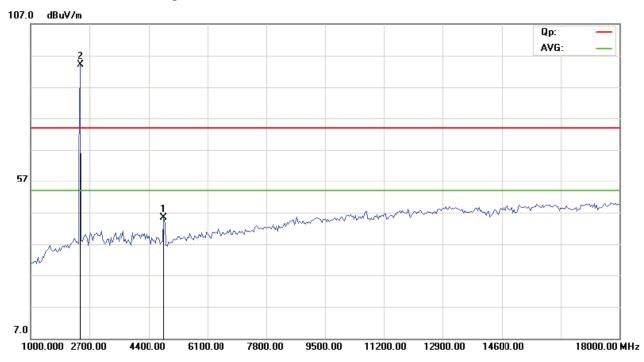

CH06 for 11n HT20 at 65Mbps: Horizontal

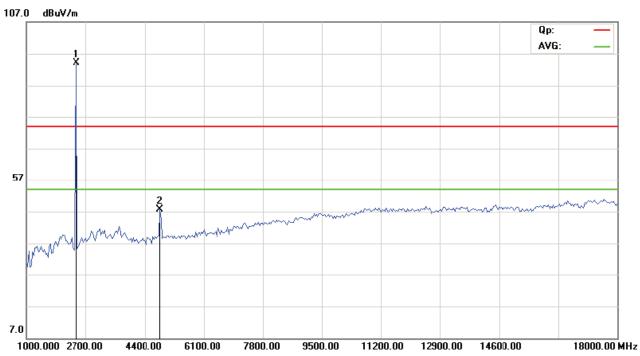


The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.



CH11 for 11n HT20 at 65Mbps: Vertical

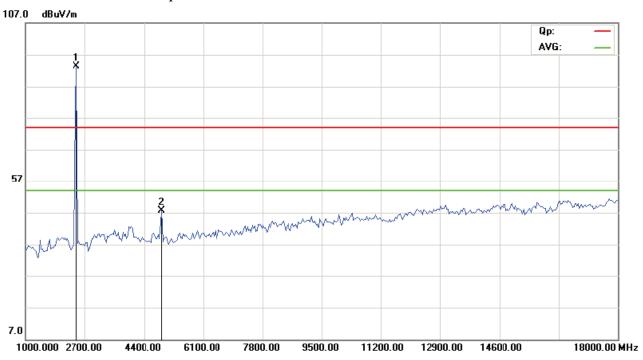

CH11 for 11n HT20 at 65Mbps: Horizontal

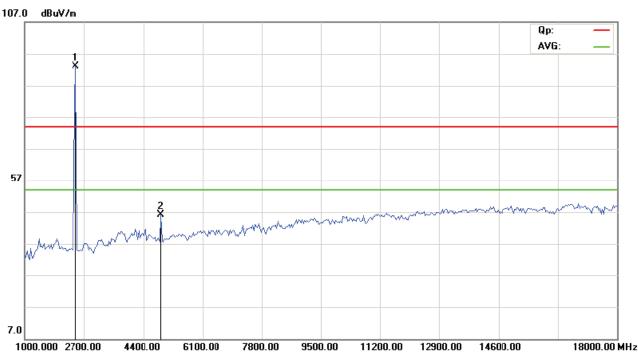

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

Report No: 1308102 Page 33 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH01 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
2422.00	90.96 (PK)	V	F 1
2422.00	90.51 (PK)	Н	Fundamental Frequency
4844.00	(PK)	V	74(Peak)/ 54(AV)
4844.00	(PK)	Н	74(Peak)/ 54(AV)
7266.00	-1	H/V	74(Peak)/ 54(AV)
9688.00	-	H/V	74(Peak)/ 54(AV)
12110	-	H/V	74(Peak)/ 54(AV)
14532		H/V	74(Peak)/ 54(AV)
16954	-1	H/V	74(Peak)/ 54(AV)
19376	-	H/V	74(Peak)/ 54(AV)
21798		H/V	74(Peak)/ 54(AV)
24220		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

Operation Mode: Transmitting under CH04 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \mu V/m)
2437.00	91.22 (PK)	Н	Fundamental Frequency
2437.00	91.15 (PK)	V	
4874.00	(PK)	Н	74(Peak)/ 54(AV)
4874.00	(PK)	V	74(Peak)/ 54(AV)
7311.00	-	H/V	74(Peak)/ 54(AV)
9748.00		H/V	74(Peak)/ 54(AV)
12185	-	H/V	74(Peak)/ 54(AV)
14622	-	H/V	74(Peak)/ 54(AV)
17059	-	H/V	74(Peak)/ 54(AV)
19496		H/V	74(Peak)/ 54(AV)
21933		H/V	74(Peak)/ 54(AV)
24370		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: 1308102 Page 34 of 97

Date: 2013-08-20



Operation Mode: Transmitting under CH7 for 11n HT40 at 65Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
2452.00	91.56 (PK)	Н	Fundamental Frequency
2452.00	91.69 (PK)	V	
4904	(PK)	Н	74(Peak)/ 54(AV)
4904	(PK)	V	74(Peak)/ 54(AV)
7356		H/V	74(Peak)/ 54(AV)
9808		H/V	74(Peak)/ 54(AV)
12260		H/V	74(Peak)/ 54(AV)
14712		H/V	74(Peak)/ 54(AV)
17164		H/V	74(Peak)/ 54(AV)
19616		H/V	74(Peak)/ 54(AV)
22068		H/V	74(Peak)/ 54(AV)
24520		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11n (HT40) mode 65Mbps


18000.00 MHz

Report No: 1308102 Date: 2013-08-20



Please refer to the following test plots for details:

CH01 for 11n HT40 at 65Mbps: Vertical

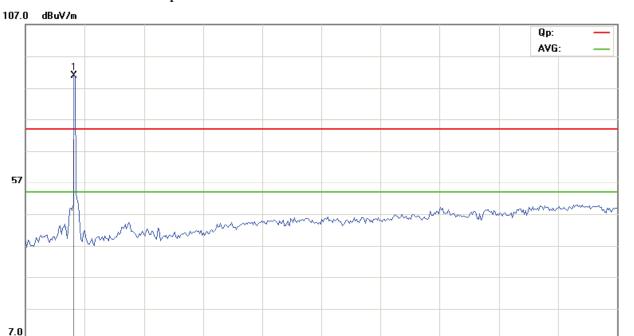

9500.00

11200.00

12900.00

14600.00


CH01 for 11n HT40 at 65Mbps: Horizontal

4400 00

6100.00

7800.00

1000.000 2700.00

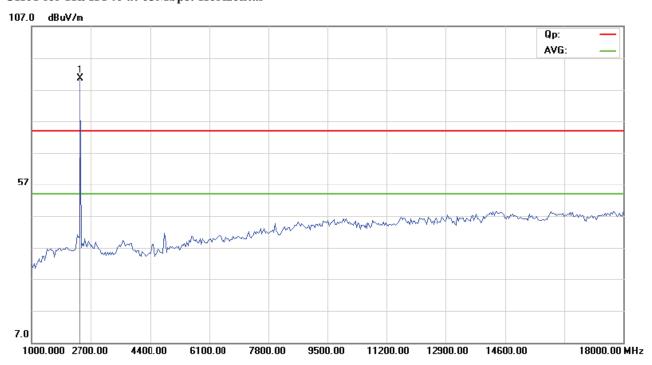


The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.



CH04 for 11n HT40 at 65Mbps: Vertical

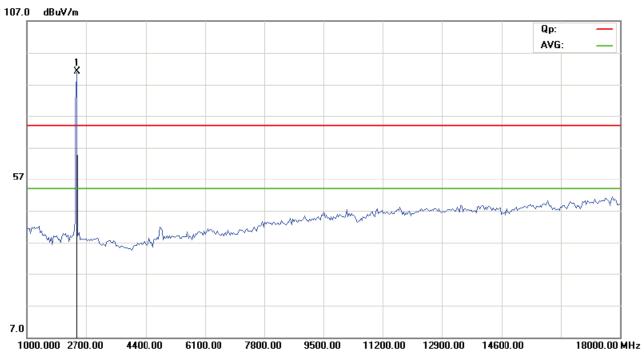

CH04 for 11n HT40 at 65Mbps: Horizontal

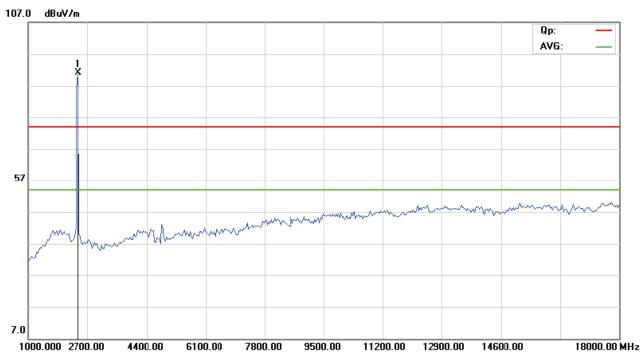

The report refers only to the sample tested and does not apply to the bulk.


This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 37 of 97


Report No: 1308102 Date: 2013-08-20



CH7 for 11n HT40 at 65Mbps: Vertical

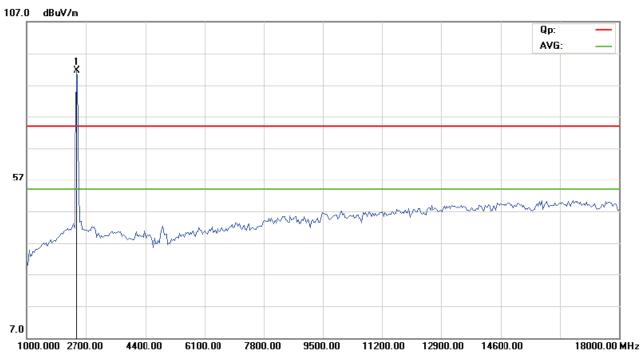

CH7 for 11n HT40 at 65Mbps: Horizontal

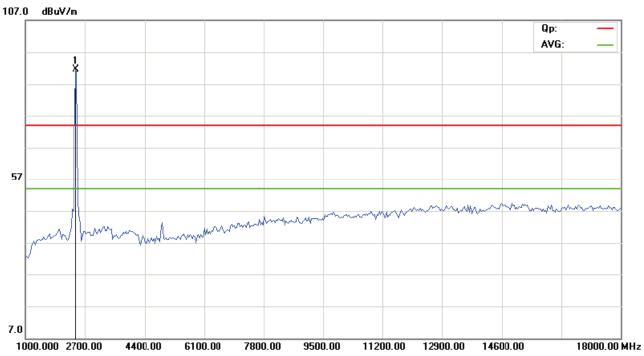

Note: For radiated Emissions from 18-25GHz, it is only the floor noise.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co.,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1308102 Page 38 of 97

Date: 2013-08-20



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No: 1308102 Page 39 of 97

Date: 2013-08-20




6dB Occupied Bandwidth

EUT		Tablet P	С	Model		PMID431	2, EM544, EM545, M434
Mode		802.111)	Input Voltage		AC 120V	
Temperate	ure	24 deg. (C,	Humidity			56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)	Minimum Limit (MHz)		Pass/ Fail
1	2412		1	10.08		0.5	Pass
6		2437	1	10.08		0.5	Pass
11		2462	1	10.14		0.5	Pass
1	2412		11	9.36		0.5	Pass
6	2437		11	9.36		0.5	Pass
11	2462		11	9.42		0.5	Pass

Report No: 1308102 Page 40 of 97

Date: 2013-08-20




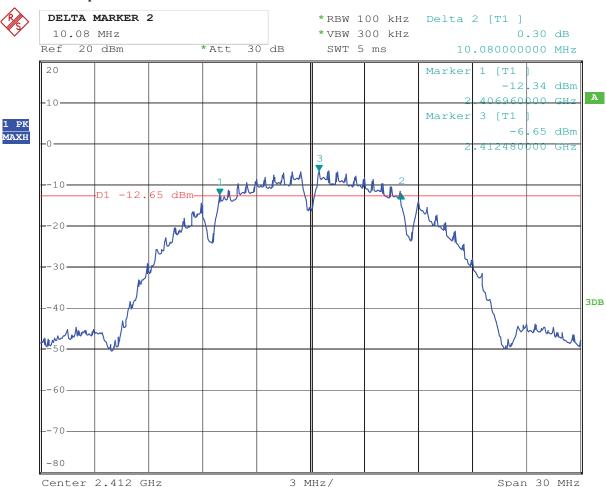

Report No: 1308102 Page 41 of 97

Date: 2013-08-20




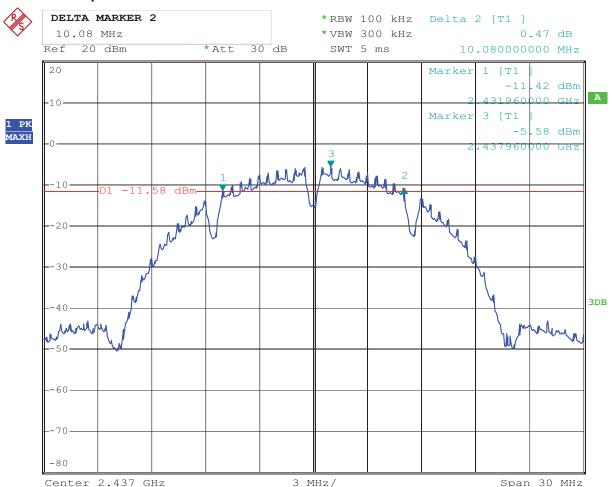

Report No: 1308102 Page 42 of 97

Date: 2013-08-20




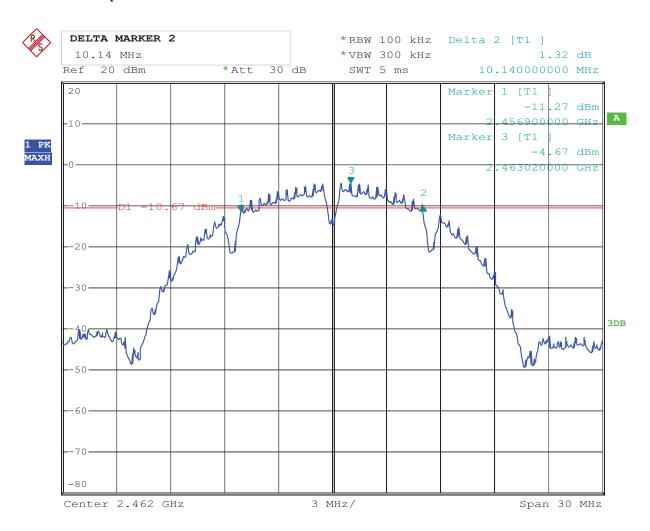

Report No: 1308102 Page 43 of 97

Date: 2013-08-20




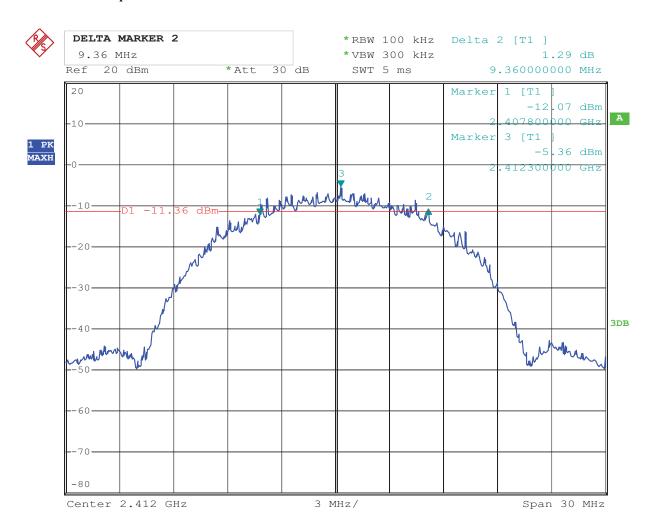

Report No: 1308102 Page 44 of 97

Date: 2013-08-20




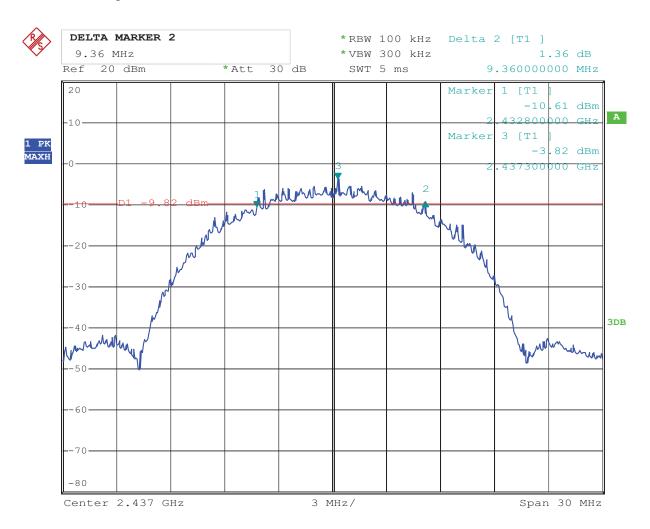

Report No: 1308102 Page 45 of 97

Date: 2013-08-20



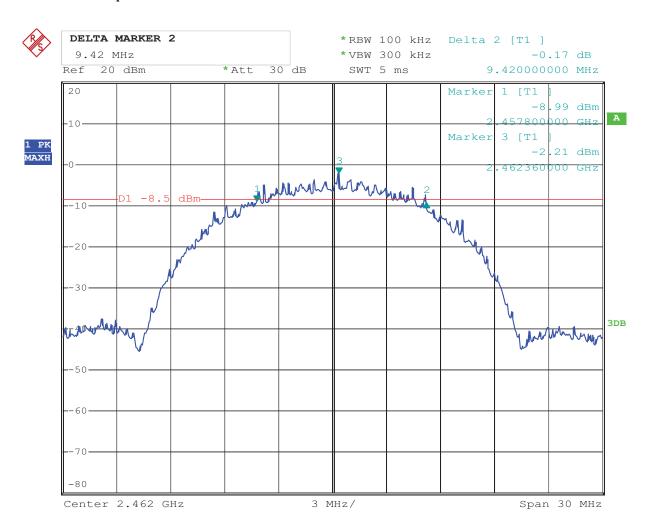

Report No: 1308102 Page 46 of 97

Date: 2013-08-20



6dB Occupied Bandwidth


EUT		Tablet PC	Model		PM	IID4312, EM544, EN	1545, M434
Mode		802.11g	Input Voltage		AC 120V		
Temperat	ure	24 deg. C,	Humidity			56% RH	
Channel		nel Frequency (MHz)	Data Transfer Rate (Mbps)	Baı	6 dB ndwidth MHz)	Minimum Limit (MHz)	Pass/ Fail
1		2412	54		16.44	0.5	Pass
6		2437	54		16.44	0.5	Pass
11	2462		54	-	16.44	0.5	Pass

Report No: 1308102 Page 47 of 97

Date: 2013-08-20




Test Plots:

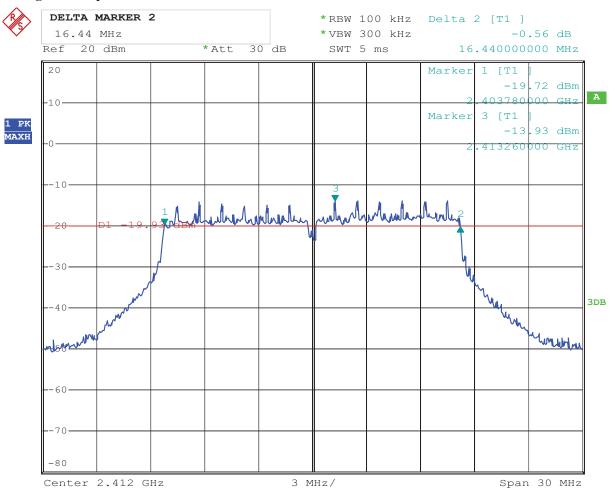

Report No: 1308102 Page 48 of 97

Date: 2013-08-20




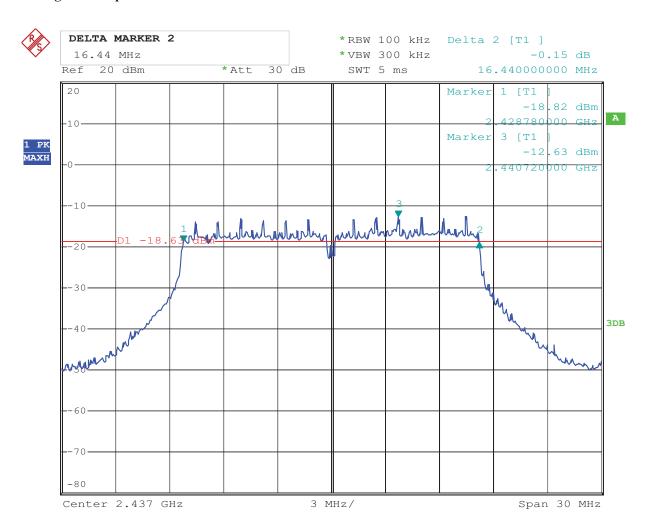

Report No: 1308102 Page 49 of 97

Date: 2013-08-20



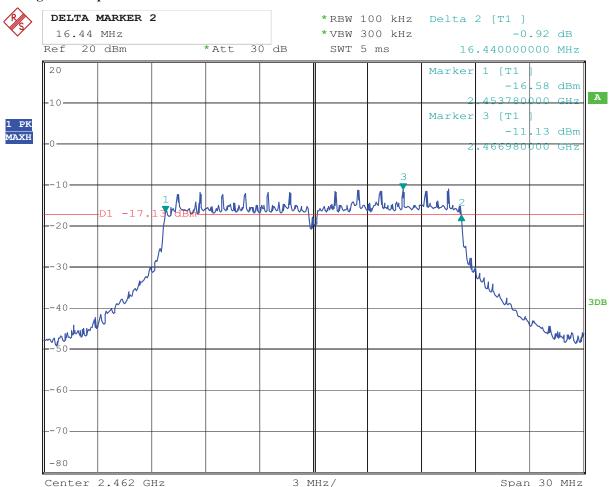

Report No: 1308102 Page 50 of 97

Date: 2013-08-20



6dB Occupied Bandwidth


EUT			Tablet PC		Model		PMID431	2, EM544, EM545, M434
Mode			802.11n		Input Voltage		AC 120V	
Temperati	ıre		24 deg. C,		Humidity	7		56% RH
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)	th Minimum Limit (MHz)		Pass/ Fail
1		2412	HT20	17.58		0.5		Pass
6		2437	HT20	17	17.64		0.5	Pass
11		2462	HT20	17	7.58	0.5		Pass
1		2422	HT40	35	35.46		0.5	Pass
4		2437	HT40	35.66			0.5	Pass
7		2452 HT40 3		35	35.46		0.5	Pass

Report No: 1308102 Page 51 of 97

Date: 2013-08-20




Test Plots:

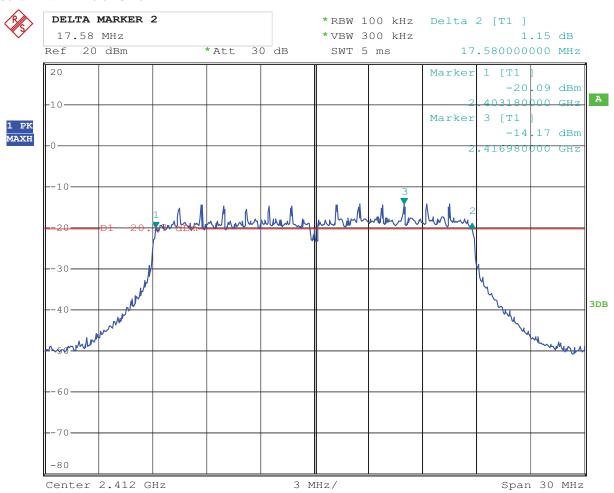

Report No: 1308102 Page 52 of 97

Date: 2013-08-20




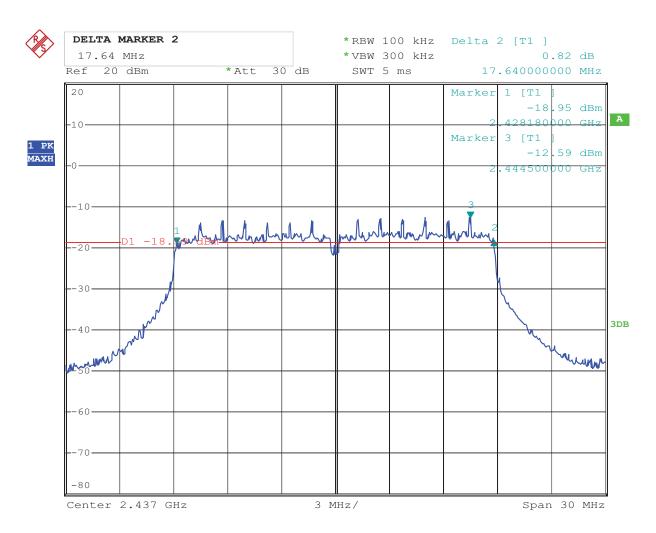

Report No: 1308102 Page 53 of 97

Date: 2013-08-20




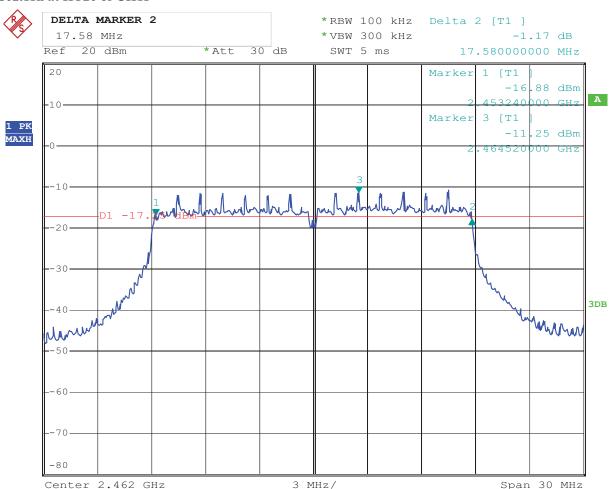

Report No: 1308102 Page 54 of 97

Date: 2013-08-20




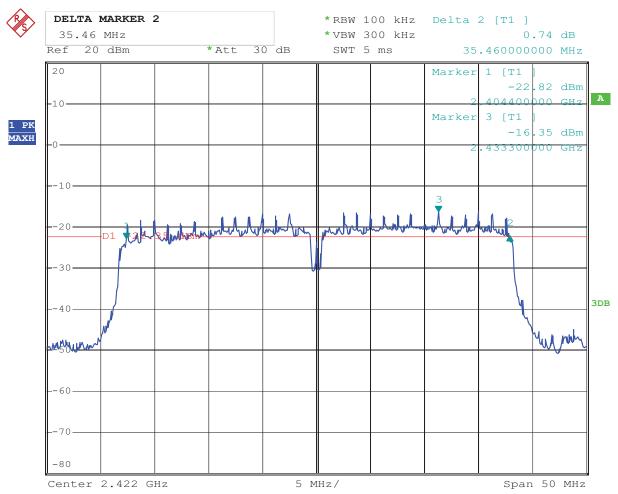

Report No: 1308102 Page 55 of 97

Date: 2013-08-20




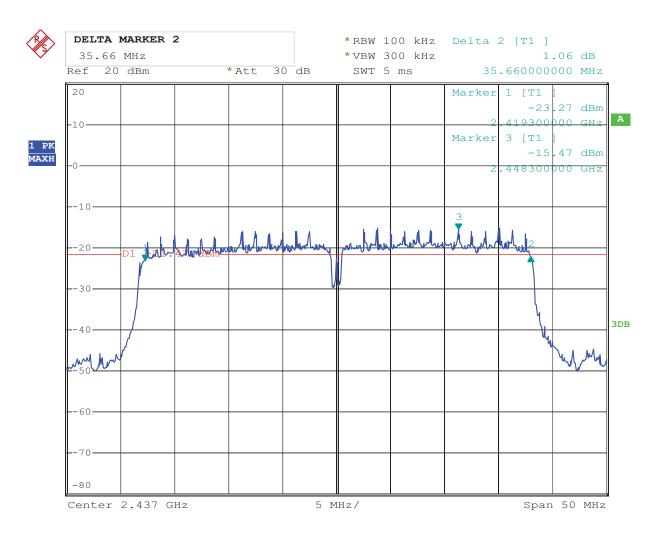

Report No: 1308102 Page 56 of 97

Date: 2013-08-20



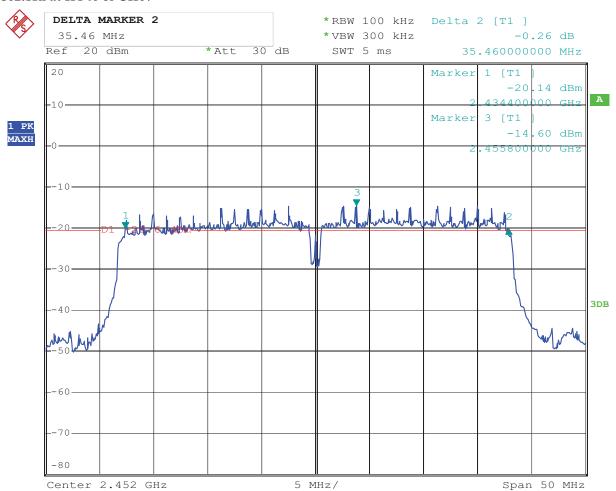


Report No: 1308102 Page 57 of 97



8. Maximum Peak Output Power

8.1 Test Setup

Date: 2013-08-20



8.2 Limits of Maximum Peak Output Power

The Maximum Peak Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the peak power was measured

Report No: 1308102 Date: 2013-08-20



8.4Test Results

EUT	Tablet PC		2	Model		PMID4312, EM544, EM545,	
						M434	
Mode		802.11b		Input Voltag	ge	AC 120V	
Temperat	ure	24 deg. C	·,	Humidity		4	56% RH
Channel	Cha	annel Frequency (MHz)	Peak Power Output (dBm)		Pe	eak Power Limit (dBm)	Pass/ Fail
1		2412		8.60		30	Pass
6		2437		8.79		30	Pass
11		2462		8.56		30	Pass

Note: 1. At finial test to get the worst-case emission at 11Mbps for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT		Tablet PC		Model	PMID431	2, EM544, EM545, M434						
Mode		802.11g		802.11g		802.11g		Input Voltage AC 120V		AC 120V		
Temperati	ure	24 deg. C,		Humidity		56% RH						
Channel	Channel Frequency		y	Peak Power Output	Peak Power Limit	Pass/ Fail						
		(MHz)		(dBm)	(dBm)							
1		2412		2412		2412		2412		6.57	30	Pass
6	2437		2437 6.8		30	Pass						
11	2462			6.73	30	Pass						

Note: 1. At finial test to get the worst-case emission at 54Mbps for CH01, CH06 and CH11

- 2. The result basic equation calculation as follow:

 Peak Power Output = Peak Power Reading + Cable loss + Attenuator
- 3. The test voltage varied from AC102V-138V. The worse case was recorded

Report No: 1308102 Page 59 of 97

Date: 2013-08-20



EUT		Tablet PC		Model	PMID4312	2, EM544, EM545, M434
Mode		802.11n (HT20)		Input Voltage		AC 120V
Temperati	ure	24 deg. C,		Humidity		56% RH
Channel	Cha	hannel Frequency (MHz)		ak Power Output (dBm)	Peak Power Limit (dBm)	Pass/ Fail
1		2412		6.03	30	Pass
6	·	2437		6.25	30	Pass
11	·	2462		6.17	30	Pass

Note: 1. At finial test to get the worst-case emission at 11n HT20 for CH01, CH06 and CH11

The result basic equation calculation as follow:
 Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded

EUT		Tablet PC	,	Model	PMII	D4312, EM544, EM545,
						M434
Mode		802.11n (HT	40)	Input Voltage		AC 120V
Temperati	ure	24 deg. C	,	Humidity		56% RH
Channel	Channel Frequency (MHz)			Peak Power Output (dBm)		Pass/ Fail
1		2422	3.21		30	Pass
4		2437	3.48		30	Pass
7		2452		3.32	30	Pass

Note: 1. At finial test to get the worst-case emission at 11n HT40 for CH01, CH04 and CH07

2. The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss + Attenuator

3. The test voltage varied from AC102V-138V. The worse case was recorded


Report No: 1308102 Page 60 of 97

Date: 2013-08-20



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No: 1308102 Page 61 of 97

Date: 2013-08-20



9.4Test Result

EUT	EUT Tablet PC		Model		PN	PMID4312, EM544, EM545, M434		
Mode	Mode 802.11b 11Mbps		bps Input Voltage		e	AC 120V		
Temperat	ure	24 deg. C,		Humidity	56% RH		6% RH	
Channel	Channel Frequency (MHz)			Final RF Power Level (dBm)		m	Pass/ Fail	
				11Mbps				
1		2412		-15.69	8		Pass	
6		2437 -		-13.99	8		Pass	
11		2462		-12.05	8		Pass	

EUT		Tablet PC	Model		PMID	PMID4312, EM544, EM545,		
						M434		
Mode	Mode 802.11b 1Mbps Input Voltage			AC 120V				
Temperati	ure	24 deg. C,	Humidity			56% RH		
Channel	Cha	annel Frequency (MHz)	Final RF Power Level (dBm)	Maximur (dB		Pass/ Fail		
			1Mbps					
1		2412	-16.96	8		Pass		
6	2437 -16.50		-16.50	8		Pass		
11		2462	-13.92	8		Pass		

Date: 2013-08-20



EUT		Tablet PC	Model		PMID431	2, EM544, EM545,	
					M434		
Mode		802.11g 54Mbps	Input Voltage		AC 120V		
Temperature	;	24 deg. C,	Humidity		56% RH		
	Ch	onnal Fraguency	Final RF	N	Maximum	Pass/ Fail	
Channel	Channel Frequency (MHz)		Power Level		Limit	1 435/ 1 411	
			(dBm)		(dBm)		
			54Mbps				
1		2412	-24.80		8	Pass	
6		2437	-23.20		8	Pass	
11		2462	-21.20		8	Pass	

EUT	EUT Tabi		Model		PMID4312, EM544, EM545, M434		
Mode		802.11n HT20	Input Voltage	е	1	AC 120V	
Temperati	ure	24 deg. C,	Humidity		56% RH		
Channel	Ch	annel Frequency (MHz)	Final RF Power Level (dBm)	Maximum Limit (dBm)		Pass/ Fail	
			HT20				
1		2412	-24.55		8	Pass	
6		2437	-21.82		8	Pass	
11		2462	-19.65		8	Pass	


EUT		Tablet PC	Model	PMID4312, I	EM544, EM545, M434	
Mode	Mode 802.11n H		Input Voltage		AC 120V	
Temperati	ure	24 deg. C,	Humidity	56% RH		
Channel	Channel Frequency (MHz)		Final RF Power Level (dBm)	Maximum Limit (dBm)	Pass/ Fail	
			HT40			
1		2422	-25.50		Pass	
4		2437 -24.66		8	Pass	
7		2452	-23.89	8	Pass	

Report No: 1308102 Page 63 of 97

Date: 2013-08-20




9.5 Photo of Power Spectral Density Measurement

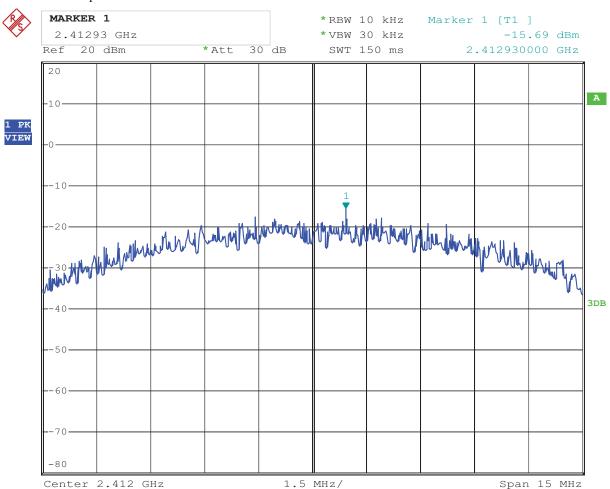

Report No: 1308102 Page 64 of 97

Date: 2013-08-20




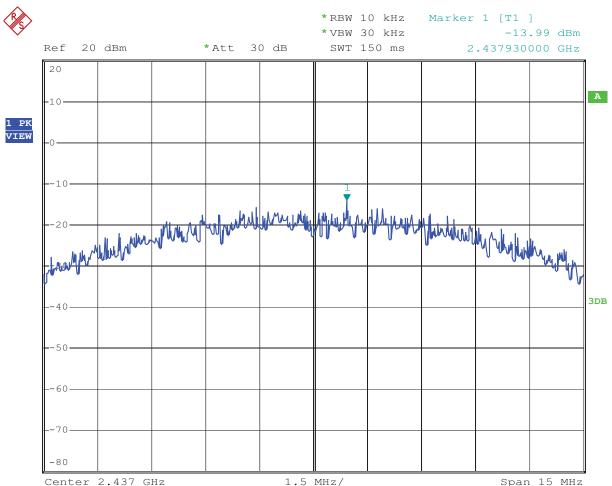

Report No: 1308102 Page 65 of 97

Date: 2013-08-20




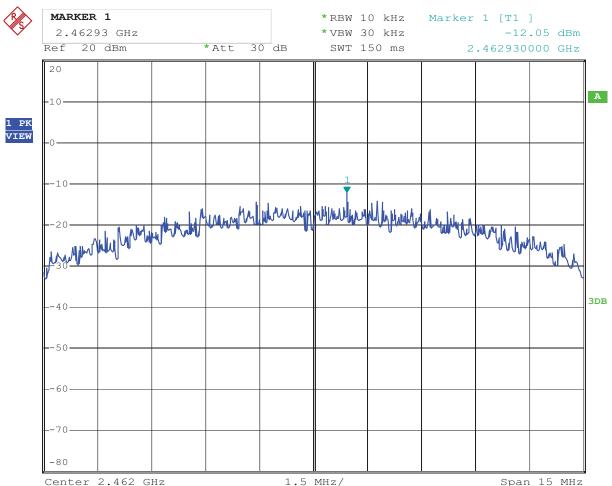

Report No: 1308102 Page 66 of 97

Date: 2013-08-20




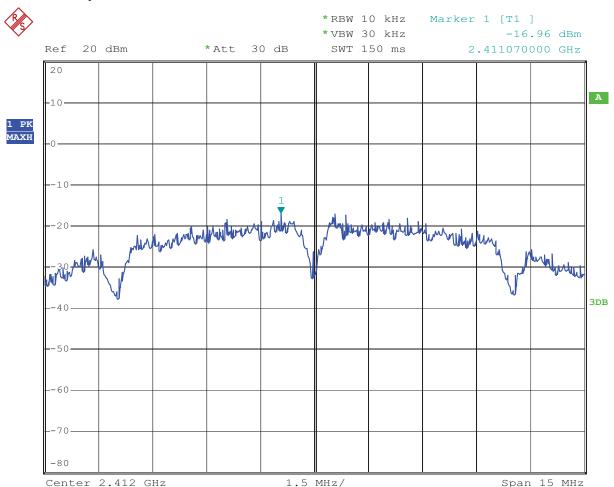

Report No: 1308102 Page 67 of 97

Date: 2013-08-20




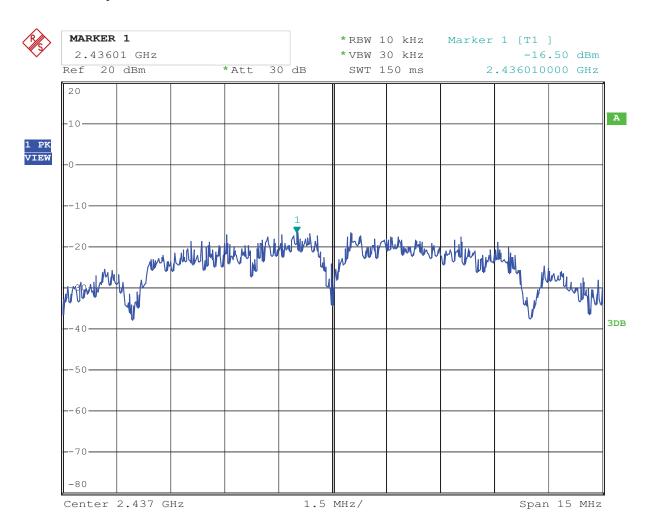

Page 68 of 97

Report No: 1308102 Date: 2013-08-20




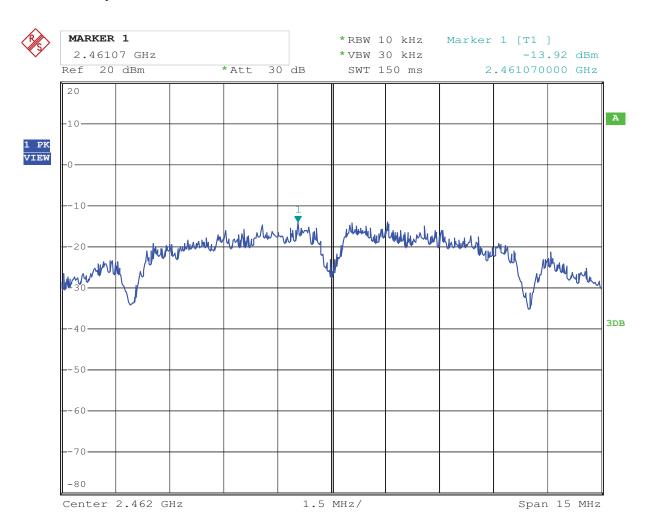

Report No: 1308102 Page 69 of 97

Date: 2013-08-20




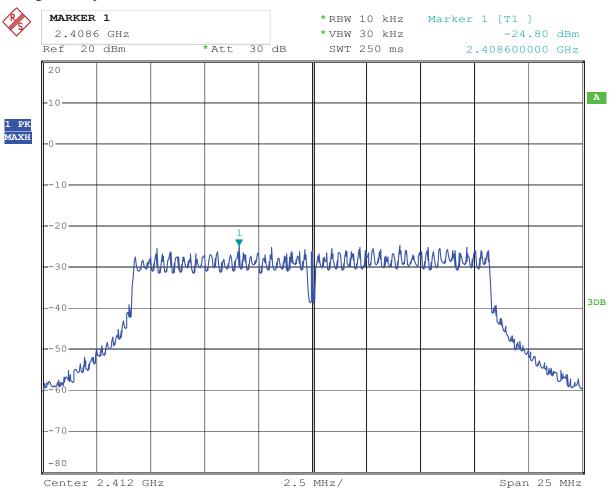

Report No: 1308102 Page 70 of 97

Date: 2013-08-20




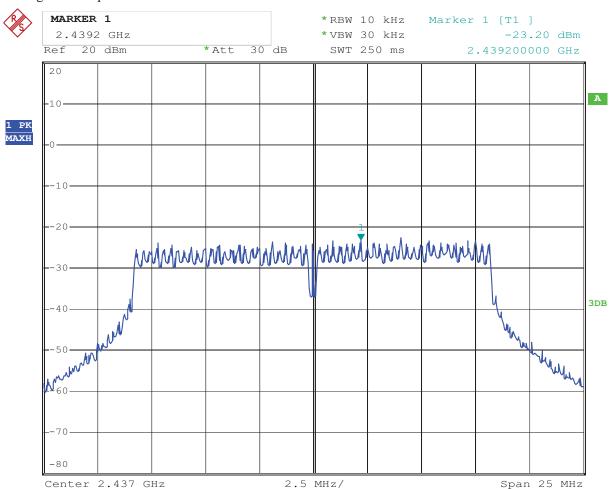

Report No: 1308102 Page 71 of 97

Date: 2013-08-20




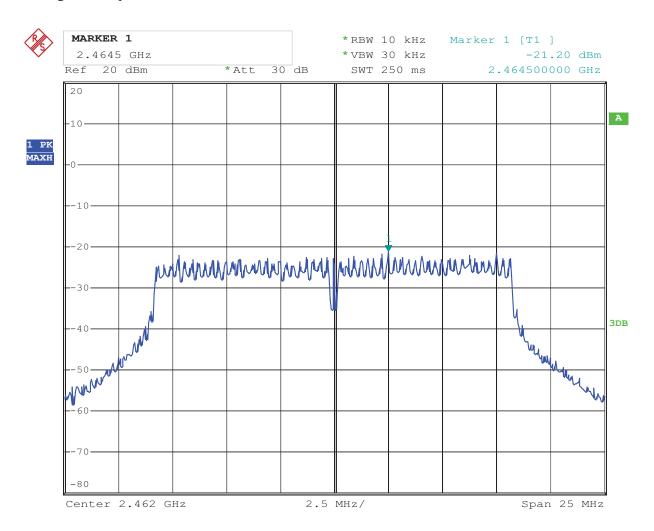

Report No: 1308102 Page 72 of 97

Date: 2013-08-20



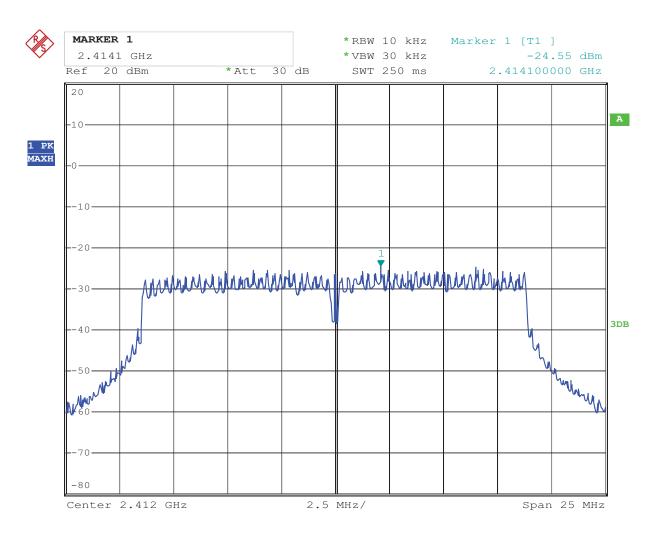


Report No: 1308102 Page 73 of 97

Date: 2013-08-20



11. 802.11n at HT20 of CH06

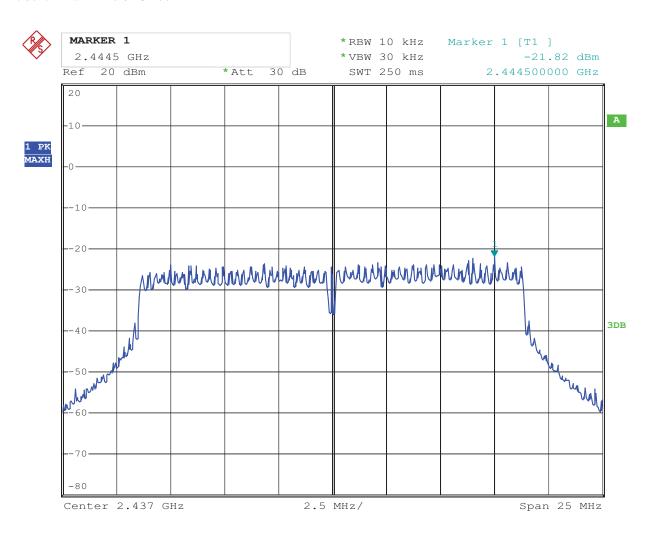


Report No: 1308102 Page 74 of 97

Date: 2013-08-20



12. 802.11n at HT20 of CH11

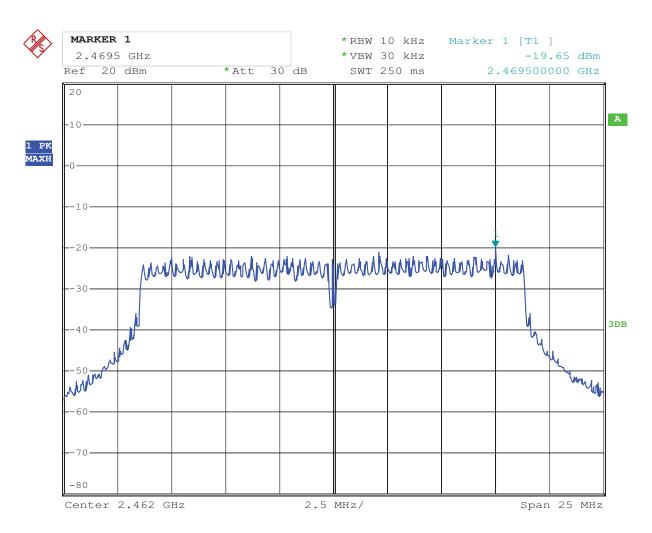


Report No: 1308102 Page 75 of 97

Date: 2013-08-20



13. 802.11n at HT40 of CH01

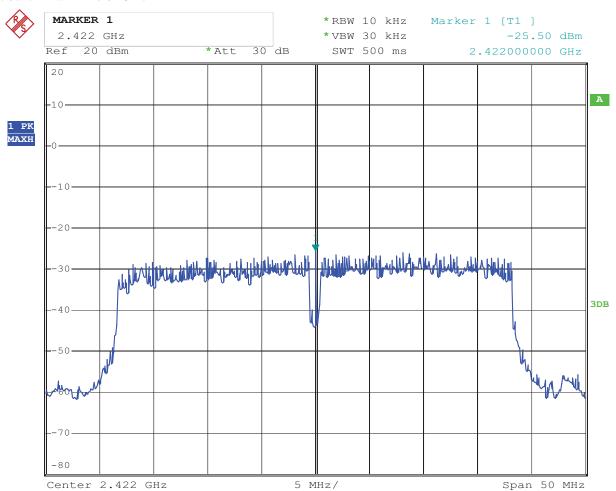


Report No: 1308102 Page 76 of 97

Date: 2013-08-20



14. 802.11n at HT40 of CH04

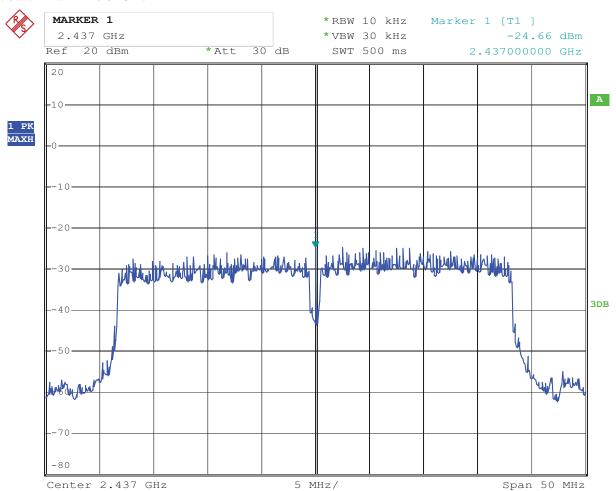


Report No: 1308102 Page 77 of 97

Date: 2013-08-20



15. 802.11n at HT40 of CH07

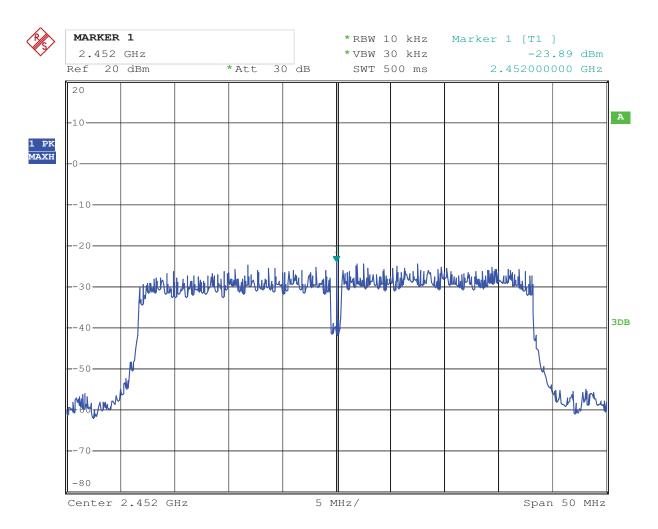


Report No: 1308102 Page 78 of 97

Date: 2013-08-20



10 Out of Band Measurement

10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=VBW=100 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. this is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), after pre-test. It was found that the worse radiated emission was get at the lying position. the worse case was recorded

2. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 79 of 97

Report No: 1308102 Date: 2013-08-20




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge and Restricted band Measurement

D 1 .		11 · P.C	36.11	D) ((D) 1212 E) (514 E) (515) (124
Product:	Ta	ablet PC	Model:	PMID4312, EM544, EM545, M434
Mode	Keeping	g Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass		PK
2400	PK (dBμV/m)	43.60	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)
2390	PK (dBμV/m)	35.49	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

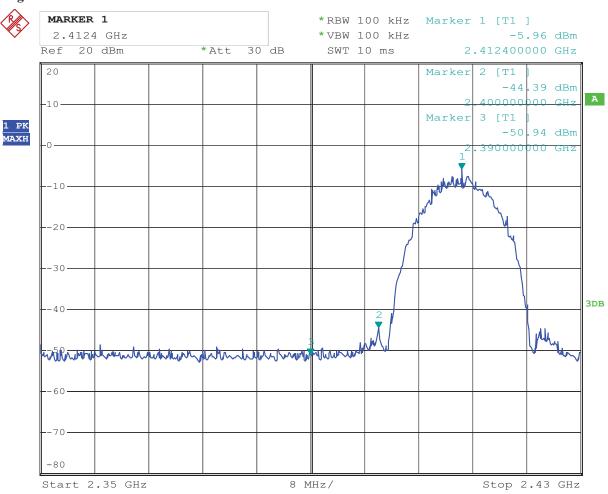

Page 80 of 97

Report No: 1308102 Date: 2013-08-20




CH11 at 11Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	37.22	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

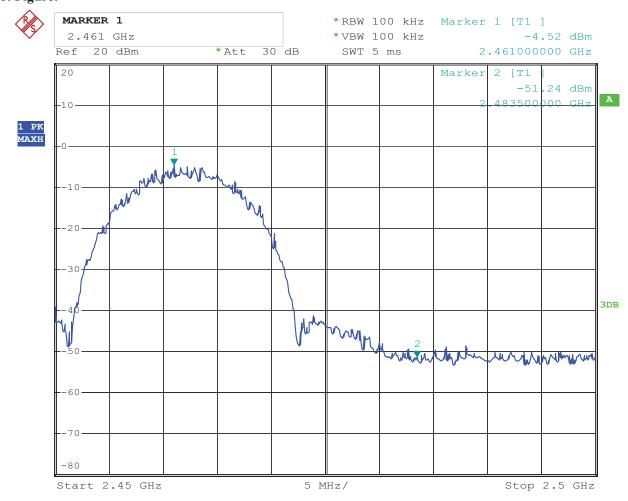

Page 81 of 97

Report No: 1308102 Date: 2013-08-20




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge and Restricted band Measurement

200. Zuna vago una reconstruta cana ristatouranten.						
Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434		
Mode	Keeping Transmitting		Input Voltage	AC 120V		
Temperature	24 deg. C,		Humidity	56% RH		
Test Result:	Pass		Detector	PK		
2400	PK (dBμV/m)	43.13	T ::4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBμV/m)		
2390	PK (dBμV/m)	36.22	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)		Liffill	54(dBμV/m)		

Test Figure:

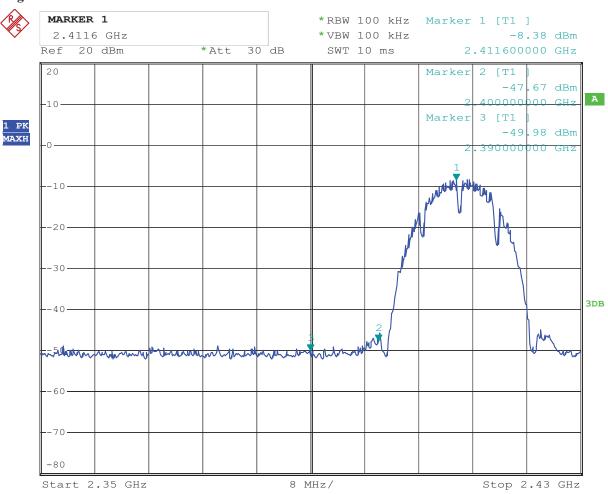

Page 82 of 97

Report No: 1308102 Date: 2013-08-20




CH11 at 1Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	37.65	T ::4	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBμV/m)

Test Figure:

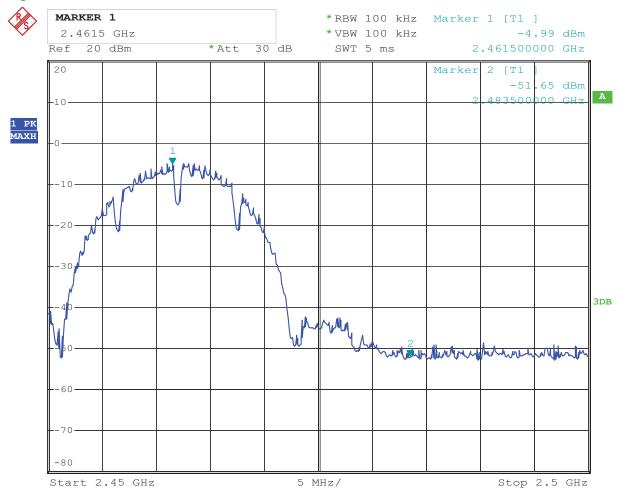

Page 83 of 97

Report No: 1308102 Date: 2013-08-20




For 802.11g mode

CH01 at 54Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434			
Mode	Keeping Transmitting		Input Voltage	AC 120V			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:	Pass		Detector	PK			
2400	PK (dBμV/m)	44.28	T : '/	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	54(dBμV/m)			
2390	PK (dBμV/m)	37.09	Limit	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	54(dBμV/m)			

Test Figure:

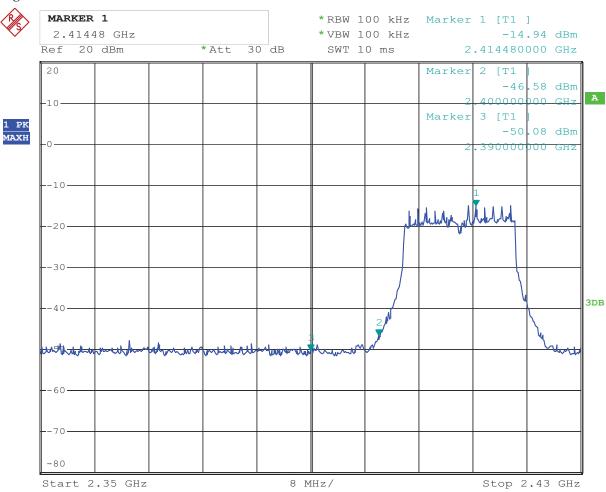

Page 84 of 97

Report No: 1308102 Date: 2013-08-20




CH11 at 54Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Mod	el:	PMID4312, EM544, EM545, M434
Mode	Keeping Transmitting		Input Vo	oltage	AC 120V
Temperature	24 deg. C,		Humi	dity	56% RH
Test Result:	Pass		Detec	ctor	PK
2483.5	PK (dBμV/m) 39.16		T ::4	74(dBμV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

Test Figure:

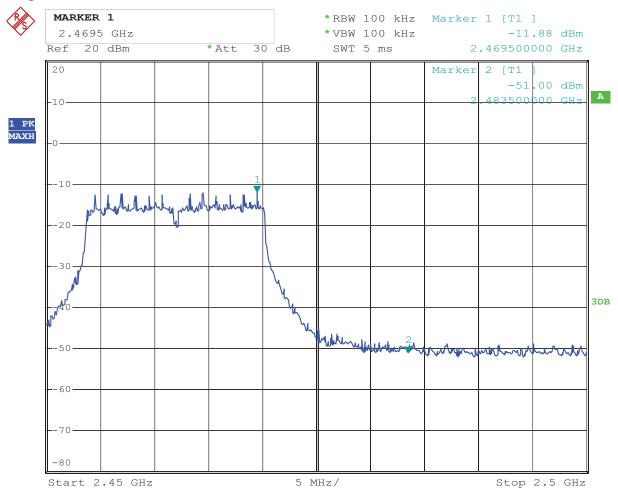

Page 85 of 97

Report No: 1308102 Date: 2013-08-20




For 802.11n (HT20) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434
Mode	Keeping	g Transmitting	Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:		Pass	Detector	PK
2400	PK (dBµV/m)	43.26	Limit	$74(dB\mu V/m)$
	AV (dBμV/m)		Limit	54(dBµV/m)
2390	PK (dBµV/m)	36.78	Limit	74(dBµV/m)
	AV (dBμV/m)		Lillit	54(dBµV/m)

Test Figure:

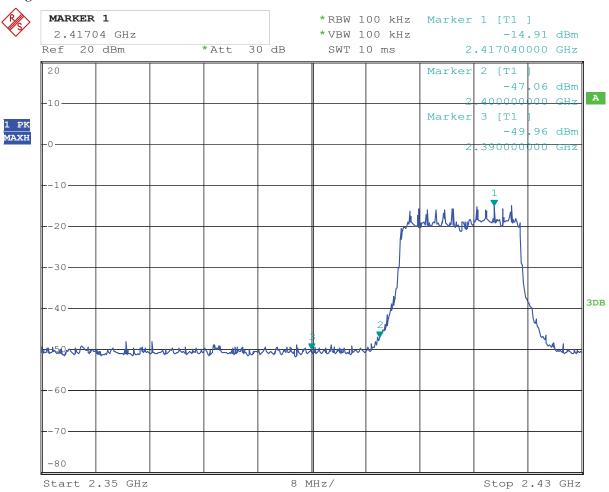

Page 86 of 97

Report No: 1308102 Date: 2013-08-20




CH11 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBμV/m)	39.12	T ::4	74(dBμV/m)
	AV (dBμV/m)		Limit	54(dBµV/m)

Test Figure:

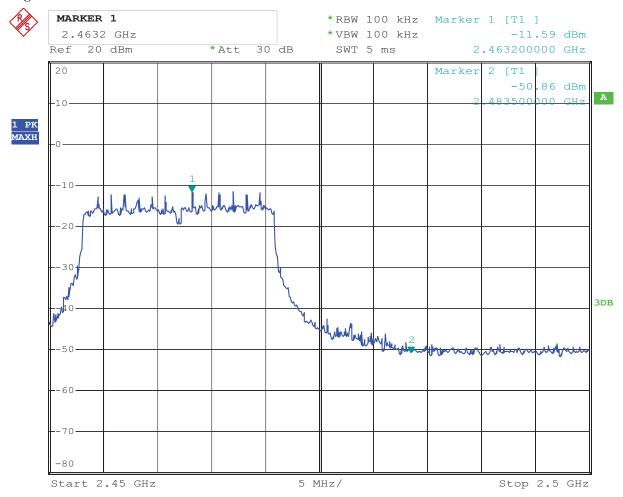

Page 87 of 97

Report No: 1308102 Date: 2013-08-20




For 802.11n (HT40) mode

CH01 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434			
Mode	Keeping	Keeping Transmitting		AC 120V			
Temperature	24 deg. C,		Humidity	56% RH			
Test Result:		Pass	Detector	PK			
2400	PK (dBμV/m)	42.83	T,	$74(dB\mu V/m)$			
	AV (dBμV/m)		Limit	54(dBμV/m)			
2390	PK (dBμV/m)	36.30	Limit	74(dBμV/m)			
	AV (dBμV/m)		Limit	54(dBμV/m)			

Test Figure:

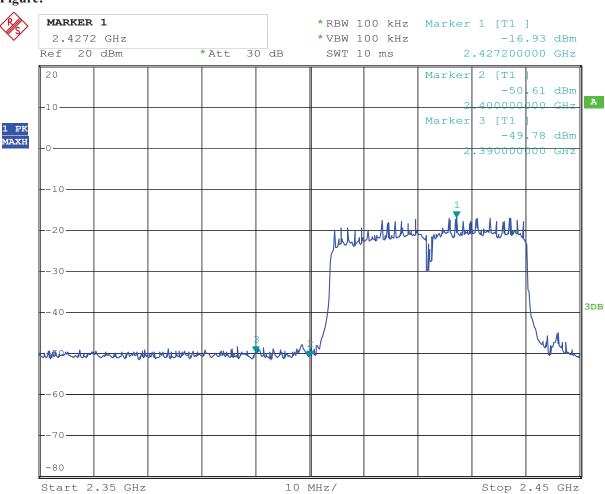

Note: The Max. FS in Restrict Band are measured in conventional method.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Page 88 of 97

Report No: 1308102 Date: 2013-08-20




CH7 at 65Mbps

10.4 Band-edge and Restricted band Measurement

Product:	Tablet PC		Model:	PMID4312, EM544, EM545, M434
Mode	Keeping Transmitting		Input Voltage	AC 120V
Temperature	24 deg. C,		Humidity	56% RH
Test Result:	Pass		Detector	PK
2483.5	PK (dBµV/m)	37.65	T ::4	$74(dB\mu V/m)$
	$AV (dB\mu V/m)$		Limit	54(dBμV/m)

Test Figure:

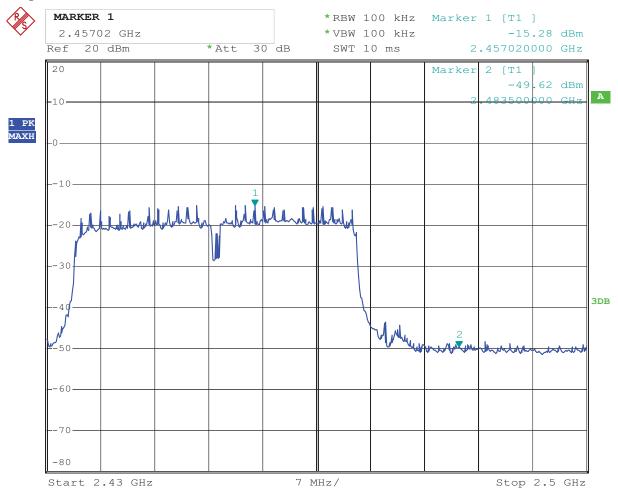

Report No: 1308102 Page 89 of 97
Date: 2013-08-20



11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Ceramic Antenna used. The maximum Gain of the antennas is 2.1dBi.

Report No: 1308102 Page 90 of 97

Date: 2013-08-20




12.0 FCC ID Label

FCC ID: RBD-M434

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

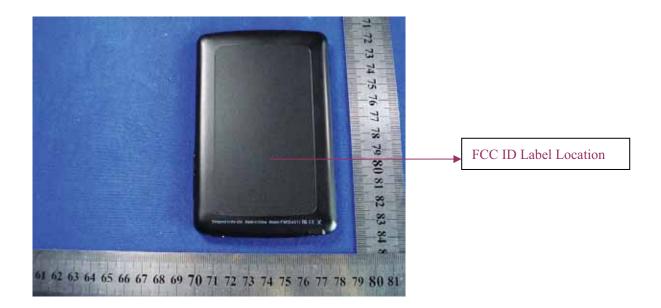

Report No: 1308102 Page 91 of 97

Date: 2013-08-20



13.0 Photo of testing

Conducted Emission Test Setup:



Page 92 of 97

Report No: 1308102 Date: 2013-08-20



Radiated Emission Test Setup:





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

of correspondence with any third party concerning the contents of the report.


In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No: 1308102 Date: 2013-08-20



Photographs - EUT

Outside view

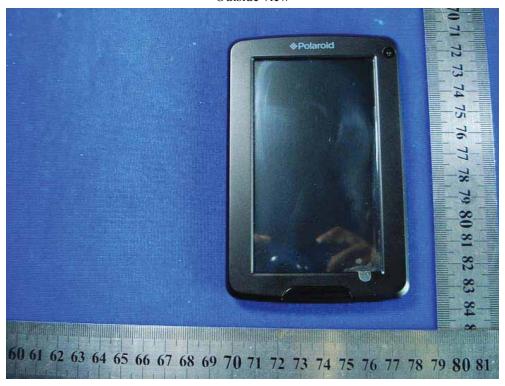

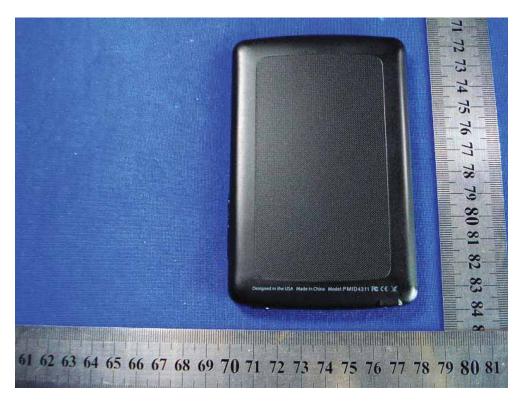

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co.,Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co.,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co.,Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 94 of 97 Report No: 1308102

Date: 2013-08-20



Outside view




Page 95 of 97

Report No: 1308102 Date: 2013-08-20



Inside view

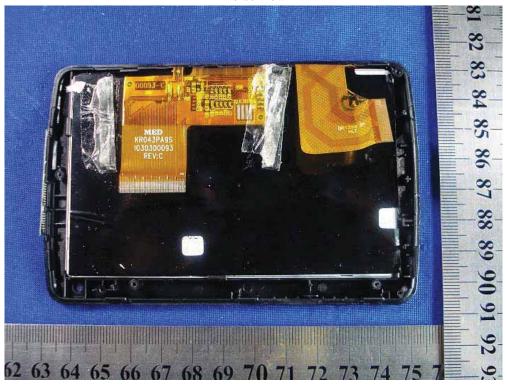



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.


Page 96 of 97

Report No: 1308102 Date: 2013-08-20



Inside view

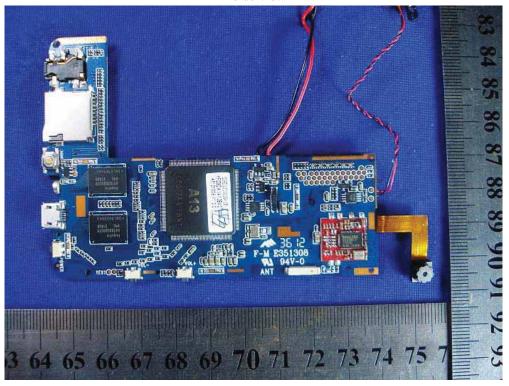

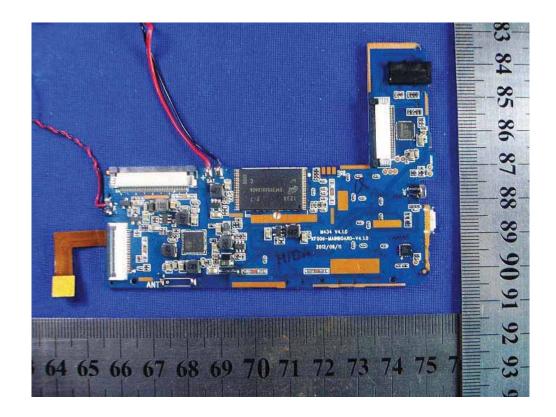

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.


Page 97 of 97

Report No: 1308102 Date: 2013-08-20



Inside view

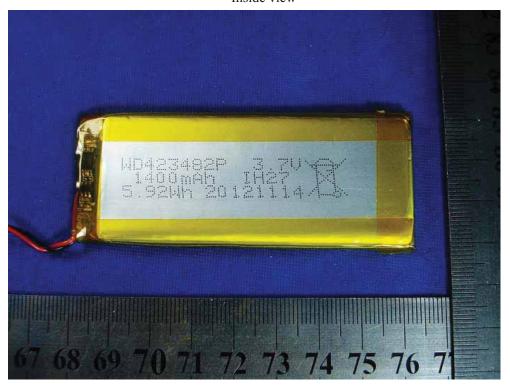

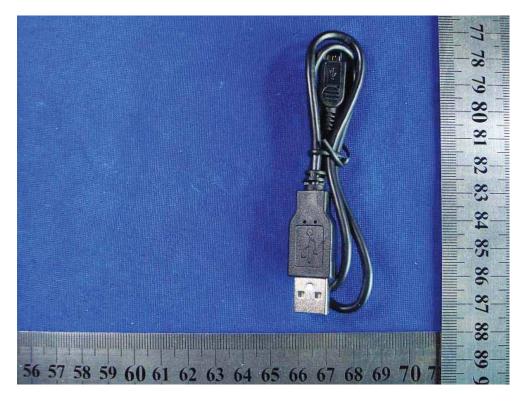

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen Timeway Technology Consulting Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen Timeway Technology Consulting co .,Ltd to his customer. Supplier or others persons directly concerned. Shenzhen Timeway Technology Consulting co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The Shenzhen Timeway Technology Consulting co .,Ltd reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.