




# FCC RF Test Report

**APPLICANT** : Elo Touch Solutions, Inc.  
**EQUIPMENT** : Mobile POS  
**BRAND NAME** : ELO or   
**MODEL NAME** : EMC0600SC  
**FCC ID** : RBWEMC0600C  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Nov. 19, 2021 ~ Dec. 08, 2021

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

*Jason Jia*

Reviewed by: Jason Jia / Supervisor

*Alex Wang*

Approved by: Alex Wang / Manager



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Test Software ..... 7

    1.8 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System ..... 9

    2.4 EUT Operation Test Setup ..... 9

**3 TEST RESULT ..... 10**

    3.1 Maximum Conducted Output Power Measurement ..... 10

    3.2 Power Spectral Density Measurement ..... 11

    3.3 Unwanted Emissions Measurement ..... 13

    3.4 Antenna Requirements ..... 17

**4 LIST OF MEASURING EQUIPMENT ..... 18**

**5 UNCERTAINTY OF EVALUATION ..... 19**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED SPURIOUS EMISSION**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR142804-04E	Rev. 01	Initial issue of report	Jan. 21, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.407(a)	Maximum Conducted Output Power	$\leq 30$ dBm	Pass	-
3.2	15.407(a)	Power Spectral Density	$\leq 30$ dBm/500kHz	Pass	-
3.3	15.407(b)	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 12.02 dB at 45.520 MHz
3.4	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description


## 1.1 Applicant

Elo Touch Solutions, Inc.  
670 N. McCarthy Blvd. Suite 100, Milpitas, CA 95035, United States

## 1.2 Manufacturer

Elo Touch Solutions, Inc.  
670 N. McCarthy Blvd. Suite 100, Milpitas, CA 95035, United States

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile POS
Brand Name	ELO or 
Model Name	EMC0600SC
FCC ID	RBWEMC0600C
IMEI Code	Conducted: NA Radiation: NA
HW Version	A01
SW Version	5.000.009.0100+p
EUT Stage	Production Unit

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for EMC0600SC. The change note could be referred to the Class II permissive change letter which is exhibit separately. Based on the similarity between current and previous project, only the related test cases from original test report (Sporton Report Number FR142804-01F) were verified for the differences.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Channel Frequency Range</b>	5745 MHz ~ 5825 MHz
<b>Maximum Output Power</b>	<b>SISO &lt;Ant.2&gt;</b> <b>&lt;5745 MHz ~ 5825 MHz&gt;</b> 802.11a : 12.19 dBm / 0.0166 W <b>MIMO &lt;Ant.1+2&gt;</b> <b>&lt;5745 MHz ~ 5825 MHz&gt;</b> 802.11n HT20 : 15.22 dBm / 0.0333 W 802.11n HT40 : 14.36 dBm / 0.0273 W 802.11ac VHT20: 13.08 dBm / 0.0203 W 802.11ac VHT40: 13.25 dBm / 0.0211 W 802.11ac VHT80: 13.06 dBm / 0.0202 W
<b>Type of Modulation</b>	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)
<b>Antenna Type / Gain</b>	<Ant. 1> : PIFA Antenna with gain -0.20 dBi <Ant. 2> : PIFA Antenna with gain 2.58 dBi

**Note:** For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to their maximum conducted power.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-KS 03CH05-KS	CN1257	314309



### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 <sup>#</sup>	5775	165	5825

**Note:**

1. The above Frequency and Channel in "\*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "<sup>#</sup>" were 802.11ac VHT80.

### 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.


**MIMO Mode**

Modulation	Data Rate
802.11n HT20	MCS0

Ch. #	U-NII-3 : 5725-5850 MHz	
	802.11n HT20	
H	High	165



## 2.3 Connection Diagram of Test System

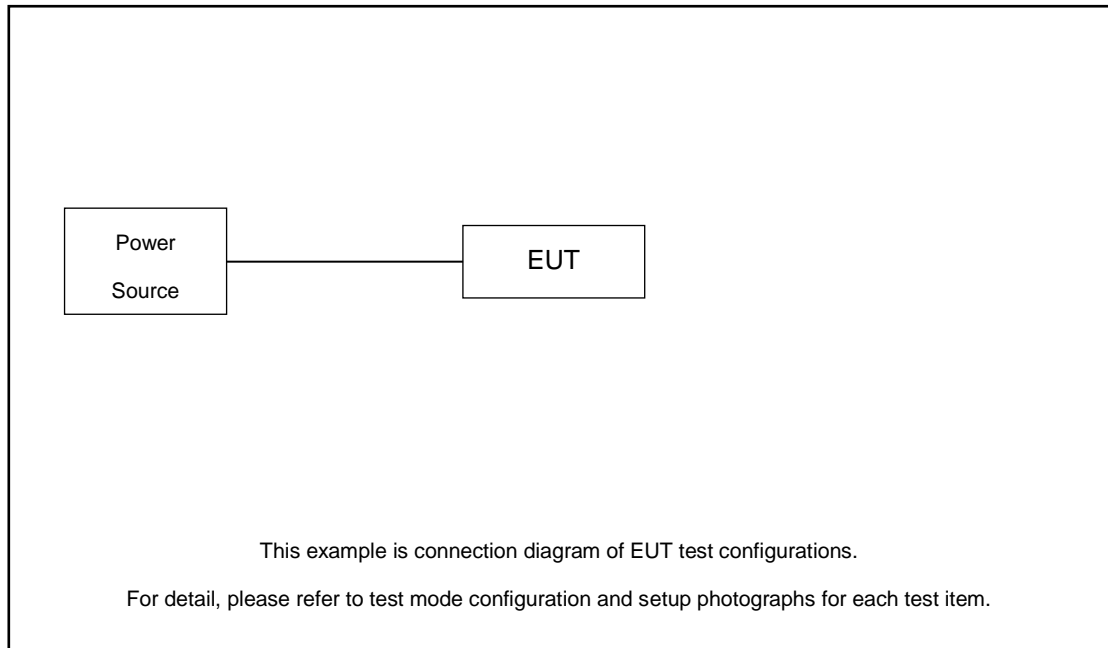

## 2.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

## 3 Test Result

### 3.1 Maximum Conducted Output Power Measurement

#### 3.1.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.1.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

#### 3.1.4 Test Setup

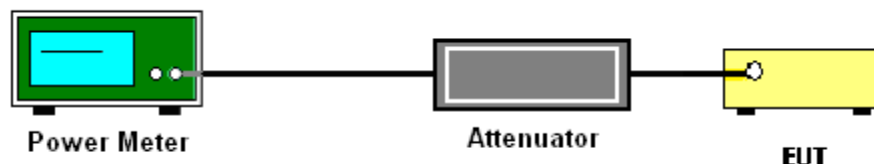

#### 3.1.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



## 3.2 Power Spectral Density Measurement

### 3.2.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

#### # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 300 kHz.
- Set VBW  $\geq$  1 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result.
- Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add  $10 \log(N_{ANT})$  dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity  $10 \log(N_{ANT})$  dB is added to each spectrum value before comparing to the emission limit. The addition of  $10 \log(N_{ANT})$  dB serves to apportion the emission limit among the  $N_{ANT}$  outputs so that each output is permitted to contribute no more than  $1/N_{ANT}^{\text{th}}$  of the PSD limit.

### 3.2.4 Test Setup

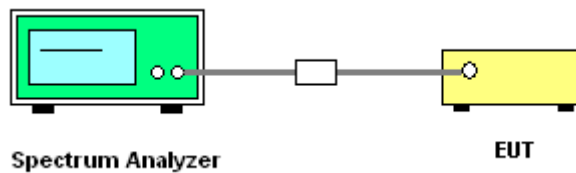

### 3.2.5 Test Result of Power Spectral Density

Please refer to Appendix A.



### 3.3 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.3.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:  
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) -104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E<sub>Meas</sub> is the field strength of the emission at the measurement distance, in dBµV/m

d<sub>Meas</sub> is the measurement distance, in m

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.3.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.3.4 Test Setup


For radiated emissions below 30MHz

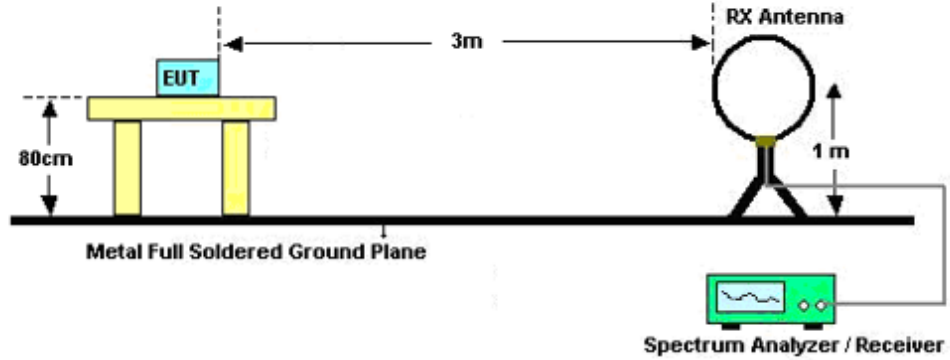

For radiated emissions from 30MHz to 1GHz

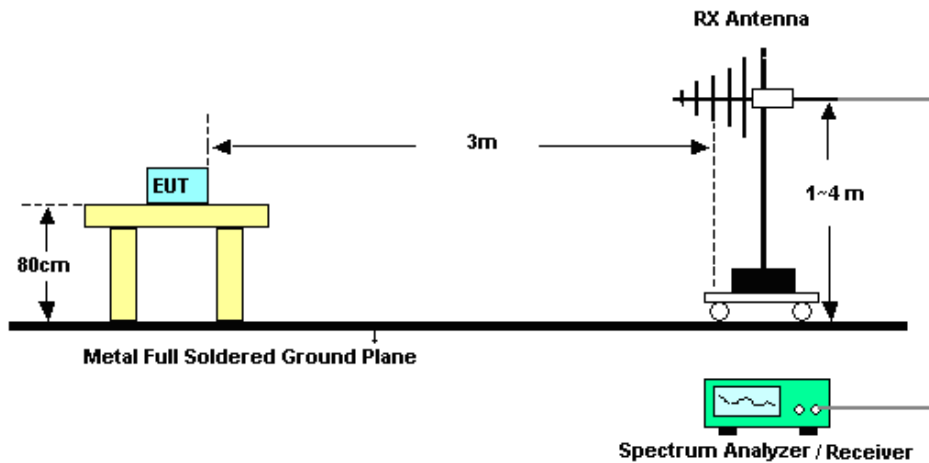

For radiated emissions above 1GHz

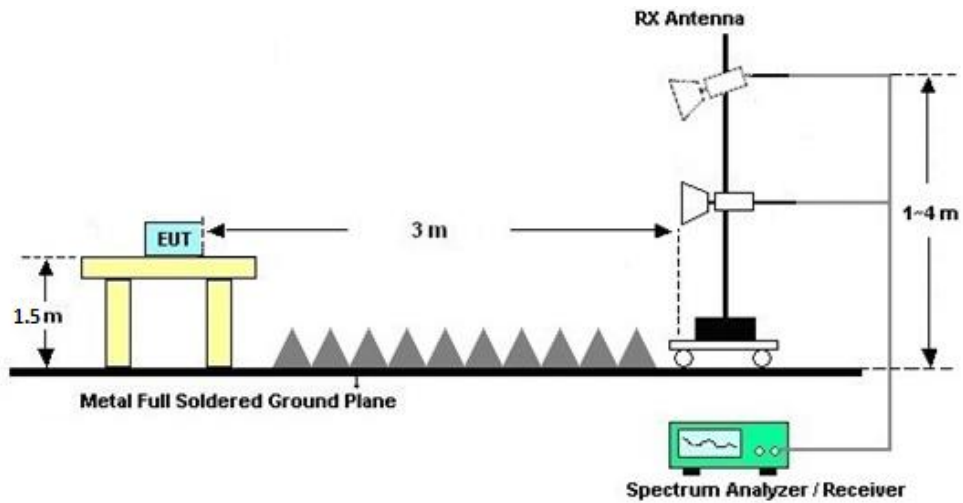

### 3.3.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### 3.3.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

### 3.3.7 Duty Cycle

Please refer to Appendix C.

### 3.3.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.





### 3.4 Antenna Requirements

#### 3.4.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.4.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<b>&lt;CDD Modes&gt;</b>						
			<b>DG for Power (dBi)</b>	<b>DG for PSD (dBi)</b>	<b>Power Limit Reduction (dB)</b>	<b>PSD Limit Reduction (dB)</b>
	<b>Ant. 1 (dBi)</b>	<b>Ant. 2 (dBi)</b>				
<b>Band IV</b>	-0.20	2.58	2.58	4.31	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, ( min = 0 )

PSD Limit Reduction = DG(PSD) – 6dBi, ( min = 0 )



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Nov. 19, 2021	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 07, 2021	Nov. 19, 2021	Jan. 06, 2022	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 07, 2021	Nov. 19, 2021	Jan. 06, 2022	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Dec. 08, 2021	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44G,MAX 30dB	Apr. 13, 2021	Dec. 08, 2021	Apr. 12, 2022	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Dec. 08, 2021	Oct. 29, 2022	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 04, 2021	Dec. 08, 2021	Jun. 03, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 24, 2021	Dec. 08, 2021	Apr. 23, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 06, 2021	Dec. 08, 2021	Jan. 05, 2022	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Apr. 12, 2021	Dec. 08, 2021	Apr. 11, 2022	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 07, 2021	Dec. 08, 2021	Jan. 06, 2022	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz~18Ghz	Oct. 16, 2021	Dec. 08, 2021	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Dec. 08, 2021	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 08, 2021	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 08, 2021	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 08, 2021	NCR	Radiation (03CH05-KS)

NCR: No Calibration Required



## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



## Appendix A. Conducted Test Results

Test Engineer:	HeYong	Temperature:	21~25	°C
Test Date:	2021/11/19	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**Average Power Table**

U-NII-3 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	11.88	12.19		30.00	30.00	-0.20	2.58	Pass
11a	6Mbps	1	157	5785	11.66	11.88		30.00	30.00	-0.20	2.58	Pass
11a	6Mbps	1	165	5825	11.56	11.46		30.00	30.00	-0.20	2.58	Pass

U-NII-3 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HT20	MCS0	2	149	5745	12.05	12.36	15.22	30.00		2.58		Pass
HT20	MCS0	2	157	5785	11.84	12.00	14.93	30.00		2.58		Pass
HT20	MCS0	2	165	5825	11.76	11.60	14.69	30.00		2.58		Pass
HT40	MCS0	2	151	5755	11.24	11.45	14.36	30.00		2.58		Pass
HT40	MCS0	2	159	5795	10.35	11.11	13.76	30.00		2.58		Pass
VHT20	MCS0	2	149	5745	9.93	10.20	13.08	30.00		2.58		Pass
VHT20	MCS0	2	157	5785	9.73	9.85	12.80	30.00		2.58		Pass
VHT20	MCS0	2	165	5825	9.74	9.45	12.61	30.00		2.58		Pass
VHT40	MCS0	2	151	5755	10.20	10.29	13.25	30.00		2.58		Pass
VHT40	MCS0	2	159	5795	9.80	10.06	12.94	30.00		2.58		Pass
VHT80	MCS0	2	155	5775	10.13	9.96	13.06	30.00		2.58		Pass

**TEST RESULTS DATA**  
**Power Spectral Density**

U-NII-3 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	149	5745	2.22	2.22	-0.97	-0.87		30.00	30.00	-0.20	2.58	Pass
11a	6Mbps	1	157	5785	2.22	2.22	-1.45	-0.96		30.00	30.00	-0.20	2.58	Pass
11a	6Mbps	1	165	5825	2.22	2.22	-1.22	-1.33		30.00	30.00	-0.20	2.58	Pass

U-NII-3 MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	10log (500kHz /RBW) Factor (dB)		Average Power Density (dBm/500kHz)			Average PSD Limit (dBm/500kHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HT20	MCS0	2	149	5745	2.22		-1.72	-1.28	1.73	30.00		4.31		Pass
HT20	MCS0	2	157	5785	2.22		-1.95	-1.64	1.37	30.00		4.31		Pass
HT20	MCS0	2	165	5825	2.22		-1.81	-1.75	1.26	30.00		4.31		Pass
HT40	MCS0	2	151	5755	2.22		-5.76	-5.86	-2.75	30.00		4.31		Pass
HT40	MCS0	2	159	5795	2.22		-6.57	-5.85	-2.84	30.00		4.31		Pass
VHT80	MCS0	2	155	5775	2.22		-9.00	-9.28	-5.99	30.00		4.31		Pass

Note: PSD Sum = Max PSD(Ant. 1, Ant. 2) + 10 log (n)



## Appendix B. Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	27~30°C
		Relative Humidity :	41~42%

### UNII 3 - 5725~5850MHz

#### WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n HT20 CH 165 5825MHz		5850.8	58.34	-62.14	120.48	43.65	35.87	12.25	33.43	100	164	P	H
		5873.2	56.06	-49.74	105.8	41.38	35.89	12.28	33.49	100	164	P	H
		5900.4	56.44	-30.02	86.46	41.81	35.88	12.29	33.54	100	164	P	H
		5944.8	55.37	-12.93	68.3	40.77	35.86	12.34	33.6	100	164	P	H
		5824	105.77	-	-	91.01	35.84	12.24	33.32	100	164	P	H
		5824	98.32	-	-	83.56	35.84	12.24	33.32	100	164	A	H
		5850.8	54.8	-65.68	120.48	40.11	35.87	12.25	33.43	306	249	P	V
		5858.4	55.6	-54.35	109.95	40.87	35.9	12.26	33.43	306	249	P	V
		5903.2	54.93	-29.46	84.39	40.3	35.88	12.29	33.54	306	249	P	V
		5952.8	55.3	-13	68.3	40.76	35.86	12.34	33.66	306	249	P	V
		5824	100.17	-	-	85.41	35.84	12.24	33.32	306	249	P	V
	5824	93.15	-	-	78.39	35.84	12.24	33.32	306	249	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





UNII 3 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

Table with 14 columns: WIFI Ant. 1+2, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include 802.11n HT20 and CH 165 5825MHz.

Remark table with 2 rows: 1. No other spurious found. 2. All results are PASS against Peak and Average limit line.



UNII 3 5725~5850MHz

Emission below 1GHz

WIFI 802.11n20 (LF @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1+2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11n20 LF		45.52	27.23	-12.77	40	42.2	16.92	1.03	32.92	-	-	P	H
		119.24	27.55	-15.95	43.5	40.89	17.87	1.65	32.86	-	-	P	H
		230.79	26.15	-19.85	46	38.72	18.21	2.32	33.1	-	-	P	H
		388.9	25.78	-20.22	46	33.17	22.42	3.01	32.82	-	-	P	H
		561.56	25.91	-20.09	46	29.06	25.81	3.62	32.58	-	-	P	H
		831.22	31.68	-14.32	46	32.75	27.09	4.4	32.56	-	-	P	H
		45.52	27.98	-12.02	40	42.95	16.92	1.03	32.92	-	-	P	V
		131.85	26.82	-16.68	43.5	40.2	17.72	1.74	32.84	-	-	P	V
		230.79	26.2	-19.8	46	38.77	18.21	2.32	33.1	-	-	P	V
		391.81	25.77	-20.23	46	33.07	22.5	3.02	32.82	-	-	P	V
		617.82	25.69	-20.31	46	28.83	25.64	3.79	32.57	-	-	P	V
		831.22	29.66	-16.34	46	30.73	27.09	4.4	32.56	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

**Both peak and average measured complies with the limit line, so test result is “PASS”.**



## Appendix C. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1+2	802.11n HT20	98.21	-	-	10Hz

### 802.11n HT20

