

# TEST REPORT

**Product Name** : TWS Bluetooth earphones  
**Brand Mark** : N/A  
**Model No.** : In2016L  
**FCC ID** : RDR-IN2016L  
**Report Number** : BLA-EMC-202004-A0301  
**Date of Sample Receipt** : 2020/4/1  
**Date of Test** : 2020/4/1 to 2020/4/22  
**Date of Issue** : 2020/4/22  
**Test Standard** : 47 CFR Part 15, Subpart C 15.247  
**Test Result** : Pass

Prepared for:

**Dongguan Hele Electronics Co.,Ltd**

Dalingya Industrial Zone, Daojiao Town, Dongguan City, Guangdong, China

Prepared by:

**BlueAsia of Technical Services(Shenzhen) Co.,Ltd.**

**IOT Test Centre of BlueAsia**

**No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China**

**TEL: +86-755-28682673**

**FAX: +86-755-28682673**

Compiled by:

*Jason*

Review by:

*Sweet. Liang*

Approved by:

*Jamen Li*

Date:

2020/4/22



**REPORT REVISE RECORD**

Version No.	Date	Description
00	2020/4/22	Original

BlueAsia

## TABLE OF CONTENTS

<b>1</b>	<b>TEST SUMMARY .....</b>	<b>6</b>
<b>2</b>	<b>GENERAL INFORMATION .....</b>	<b>7</b>
<b>3</b>	<b>GENERAL DESCRIPTION OF E.U.T. ....</b>	<b>7</b>
<b>4</b>	<b>TEST ENVIRONMENT .....</b>	<b>8</b>
<b>5</b>	<b>TEST MODE .....</b>	<b>8</b>
<b>6</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>8</b>
<b>7</b>	<b>DESCRIPTION OF SUPPORT UNIT.....</b>	<b>9</b>
<b>8</b>	<b>LABORATORY LOCATION.....</b>	<b>9</b>
<b>9</b>	<b>TEST INSTRUMENTS LIST .....</b>	<b>10</b>
	<b>RADIATED SPURIOUS EMISSIONS .....</b>	<b>14</b>
	LIMITS.....	14
	BLOCK DIAGRAM OF TEST SETUP.....	15
	PROCEDURE .....	15
	TEST DATA .....	17
	<b>ANTENNA REQUIREMENT.....</b>	<b>22</b>
	CONCLUSION.....	22
	<b>HOPPING CHANNEL NUMBER.....</b>	<b>23</b>
	LIMITS.....	23
	BLOCK DIAGRAM OF TEST SETUP.....	23
	TEST DATA .....	23
	<b>CARRIER FREQUENCIES SEPARATION .....</b>	<b>24</b>
	LIMITS.....	24
	BLOCK DIAGRAM OF TEST SETUP.....	24
	TEST DATA .....	24
	<b>20DB BANDWIDTH .....</b>	<b>25</b>
	BLOCK DIAGRAM OF TEST SETUP.....	25
	TEST DATA .....	25
	<b>CONDUCTED PEAK OUTPUT POWER .....</b>	<b>26</b>
	LIMITS.....	26

BLOCK DIAGRAM OF TEST SETUP .....	26
TEST DATA .....	27
<b>CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ) .....</b>	<b>28</b>
LIMITS.....	28
BLOCK DIAGRAM OF TEST SETUP .....	28
PROCEDURE .....	28
TEST DATA .....	30
<b>RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS .....</b>	<b>32</b>
LIMITS.....	32
BLOCK DIAGRAM OF TEST SETUP .....	33
PROCEDURE .....	33
TEST DATA .....	35
<b>CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>36</b>
LIMITS.....	36
BLOCK DIAGRAM OF TEST SETUP .....	36
TEST DATA .....	37
<b>CONDUCTED BAND EDGES MEASUREMENT .....</b>	<b>38</b>
LIMITS.....	38
BLOCK DIAGRAM OF TEST SETUP .....	38
TEST DATA .....	39
<b>DWELL TIME.....</b>	<b>40</b>
LIMITS.....	40
BLOCK DIAGRAM OF TEST SETUP .....	40
TEST DATA .....	41
<b>10 APPENDIX.....</b>	<b>42</b>
10.1 APPENDIX: 20DBEMISSION BANDWIDTH.....	42
<i>Test Result</i> .....	42
<i>Test Graphs</i> .....	43
10.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER .....	47
<i>Test Result</i> .....	47
<i>Test Graphs</i> .....	48
10.3 APPENDIX: CARRIER FREQUENCY SEPARATION .....	52
<i>Test Result</i> .....	52

	<i>Test Graphs</i> .....	53
10.4	APPENDIX: TIME OF OCCUPANCY.....	55
	<i>Test Result</i> .....	55
	<i>Test Graphs</i> .....	56
10.5	APPENDIX: NUMBER OF HOPPING CHANNELS.....	59
	<i>Test Result</i> .....	59
	<i>Test Graphs</i> .....	60
10.6	APPENDIX: BAND EDGE MEASUREMENTS.....	62
	<i>Test Result</i> .....	62
	<i>Test Graphs</i> .....	63
10.7	APPENDIX: CONDUCTED SPURIOUS EMISSION.....	68
	<i>Test Result</i> .....	68
	<i>Test Graphs</i> .....	69
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>		<b>80</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>		<b>82</b>

BlueAsia

## 1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.9	47 CFR Part 15, Subpart C 15.215	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(1)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6	47 CFR Part 15, Subpart C 15.247(d)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass

Remark: The above tests are all tested with left ear headphones

## 2 GENERAL INFORMATION

<b>Applicant</b>	Dongguan Hele Electronics Co.,Ltd
<b>Address</b>	Dalingya Industrial Zone,Daojiao Town,Dongguan City,Guangdong,China
<b>Manufacturer</b>	Dongguan Hele Electronics Co.,Ltd
<b>Address</b>	Dalingya Industrial Zone,Daojiao Town,Dongguan City,Guangdong,China
<b>Factory</b>	Dongguan Hele Electronics Co.,Ltd
<b>Address</b>	Dalingya Industrial Zone,Daojiao Town,Dongguan City,Guangdong,China
<b>Product Name</b>	TWS Bluetooth earphones
<b>Test Model No.</b>	In2016L

## 3 GENERAL DESCRIPTION OF E.U.T.

<b>Hardware Version</b>	V5.0
<b>Software Version</b>	V5.0
<b>Operation Frequency:</b>	2402MHz-2480MHz
<b>Modulation Type:</b>	GFSK, pi/4DQPSK, 8DPSK
<b>Channel Spacing:</b>	1MHz
<b>Number of Channels:</b>	79
<b>Antenna Type:</b>	Chip Antenna
<b>Antenna Gain:</b>	2.5dBi

#### 4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.7V

#### 5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping or no hopping mode)
Remark: Full battery is used during all test except ac conducted emission, DH1, DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned only worse case is reported. Non hopping mode is worse case of Radiated emission test.	

#### 6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission	±4.34dB
Radiated Emission	±4.24dB
Radiated Emission	±4.68dB
AC Power Line Conducted Emission	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB



## 7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

## 8 LABORATORY LOCATION

All tests were performed at:  
BlueAsia of Technical Services(Shenzhen) Co., Ltd.  
IOT Test Centre of BlueAsia  
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen,China  
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673  
No tests were sub-contracted.

## 9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	5/7/2019	5/6/2020
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2020
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

### Test Equipment Of Antenna Requirement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
-----------	--------------	-------	-----	----------	---------

### Test Equipment Of Hopping Channel Number

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

<b>Test Equipment Of Carrier Frequencies Separation</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

<b>Test Equipment Of 20dB Bandwidth</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

<b>Test Equipment Of Conducted Peak Output Power</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

<b>Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal.Date</b>	<b>Cal.Due</b>
Shield room	SKET	833	N/A	6/10/2018	6/9/2021

Receiver	R&S	ESPI3	101082	5/7/2019	5/7/2020
LISN	R&S	ENV216	3560.6550.15	7/4/2019	7/3/2020
LISN	AT	AT166-2	AKK1806000003	12/18/2019	12/17/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

**Test Equipment Of Radiated Emissions which fall in the restricted bands**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	5/7/2019	5/6/2020
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	12/18/2019	12/17/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	12/18/2019	12/17/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2020
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

**Test Equipment Of Conducted Spurious Emissions**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020

Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

**Test Equipment Of Conducted Band Edges Measurement**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

**Test Equipment Of Dwell Time**

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/18/2019	12/17/2020
Signal Generator	Agilent	N5182A	MY49060650	12/18/2019	12/17/2020
Signal Generator	Agilent	E8257D	MY44320250	5/7/2019	5/6/2020

### RADIATED SPURIOUS EMISSIONS


<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.4,6.5,6.6
<b>Test Mode (Pre-Scan)</b>	TX mode (above 1GHz);TX mode (Below 1GHz)
<b>Test Mode (Final Test)</b>	TX mode (above 1GHz);TX mode (Below 1GHz)
<b>Tester</b>	Eason
<b>Temperature</b>	23℃
<b>Humidity</b>	57%

### LIMITS

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

### BLOCK DIAGRAM OF TEST SETUP

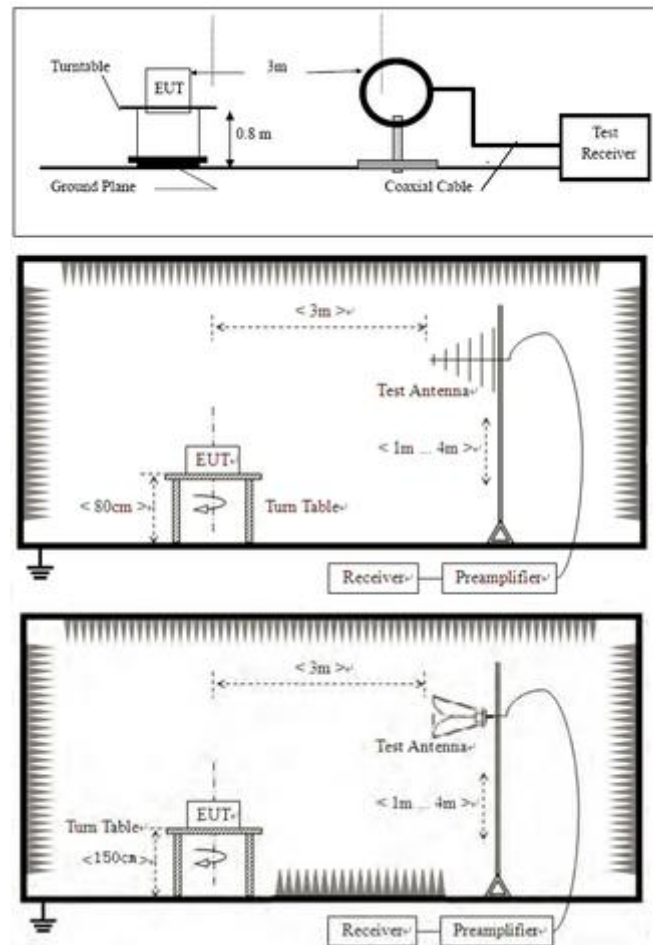

### PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.



**TEST DATA**

[TestMode: TX mode (Below 1GHz)]; [Polarity: Horizontal]  
Power: AC120V/60Hz

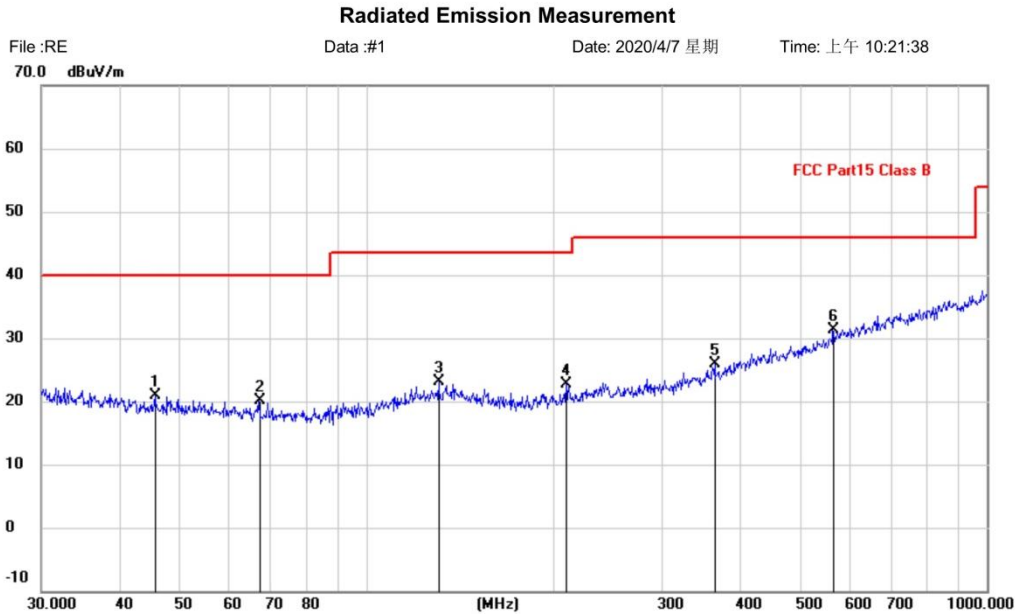

Site	Polarization: <b>Horizontal</b>	Temperature:
Limit: FCC Part15 Class B	Power:	Humidity: %
EUT: TWS Bluetooth earphones	Distance: 3m	
M/N: In2016		
Mode: BT mode		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		45.6948	-3.43	24.40	20.97	40.00	-19.03	QP		
2		67.2022	-1.73	21.80	20.07	40.00	-19.93	QP		
3		130.8369	0.16	23.02	23.18	43.50	-20.32	QP		
4		210.0482	1.87	20.79	22.66	43.50	-20.84	QP		
5		364.2595	-0.03	25.89	25.86	46.00	-20.14	QP		
6	*	564.6389	0.77	30.44	31.21	46.00	-14.79	QP		


\*:Maximum data    x:Over limit    !:over margin

⟨Reference Only

**Test Result: Pass**

[TestMode: TX mode (Below 1GHz)]; [Polarity: Vertical]

Power: AC120V/60Hz

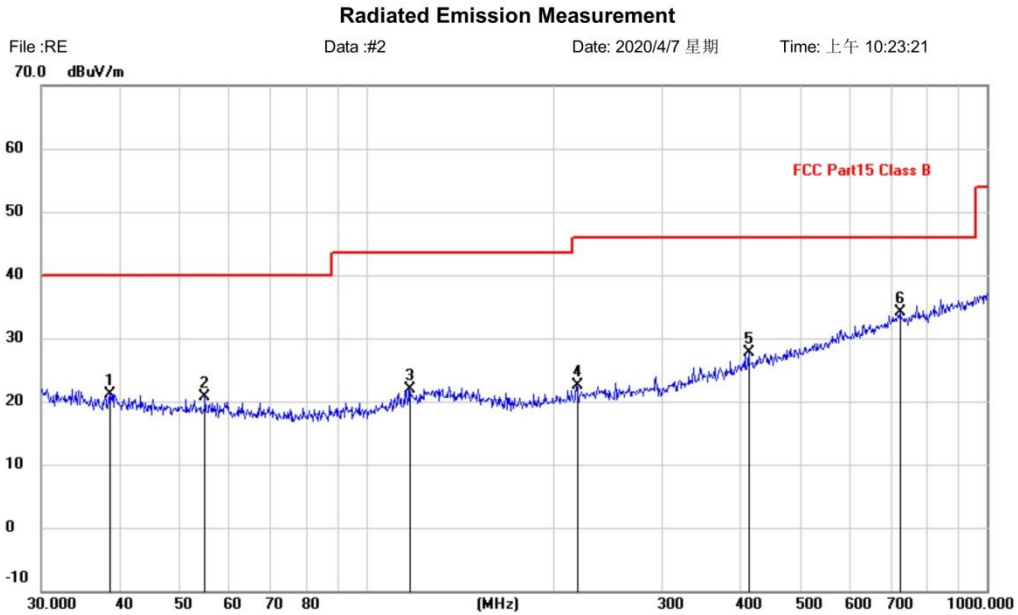

Site	Polarization: <b>Vertical</b>	Temperature:
Limit: FCC Part15 Class B	Power:	Humidity: %
EUT: TWS Bluetooth earphones	Distance: 3m	
M/N: In2016		
Mode: BT mode		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		38.6160	-2.84	23.99	21.15	40.00	-18.85	QP		
2		55.0274	-3.31	23.93	20.62	40.00	-19.38	QP		
3		117.3603	-0.55	22.43	21.88	43.50	-21.62	QP		
4		218.3085	0.98	21.43	22.41	46.00	-23.59	QP		
5		413.2706	0.49	27.30	27.79	46.00	-18.21	QP		
6	*	724.2611	1.06	33.11	34.17	46.00	-11.83	QP		

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

[Test Mode: 8DPSK (above 1GHz)]

Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

Test channel:lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	50.46	2.38	52.84	74	-21.16	Vertical
7206.00	48.84	2.17	51.01	74	-22.99	Vertical
9608.00	48.06	2.06	50.12	74	-23.88	Vertical
12010.00	*			74		Vertical
14412.00	*			74		Vertical
4804.00	54.67	2.38	57.05	74	-16.95	Horizontal
7206.00	52.36	2.17	54.53	74	-19.47	Horizontal
9608.00	48.54	2.06	50.60	74	-23.40	Horizontal
12010.00	*			74		Horizontal
14412.00	*			74		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	43.36	2.38	45.74	54	-8.26	Vertical
7206.00	44.15	2.17	46.32	54	-7.68	Vertical
9608.00	43.02	2.06	45.08	54	-8.92	Vertical
12010.00	*			54		Vertical
14412.00	*			54		Vertical
4804.00	47.93	2.38	50.31	54	-3.69	Horizontal
7206.00	42.36	2.17	44.53	54	-9.47	Horizontal
9608.00	45.02	2.06	47.08	54	-6.92	Horizontal
12010.00	*			54		Horizontal
14412.00	*			54		Horizontal

Test channel:Middle

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	48.09	0.17	48.26	74	-25.74	Vertical

7323.00	46.36	1.43	47.79	74	-26.21	Vertical
9764.00	45.84	1.26	47.1	74	-26.9	Vertical
12205.00	*			74		Vertical
14646.00	*			74		Vertical
4882.00	50.61	0.17	50.78	74	-23.22	Horizontal
7323.00	47.74	1.43	49.17	74	-24.83	Horizontal
9764.00	46.66	1.26	47.92	74	-26.08	Horizontal
12205.00	*			74		Horizontal
14646.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	37.58	0.17	37.75	54	-16.25	Vertical
7323.00	35.24	1.43	36.67	54	-17.33	Vertical
9764.00	34.71	1.26	35.97	54	-18.03	Vertical
12205.00	*			54		Vertical
14646.00	*			54		Vertical
4882.00	38.25	0.17	38.42	54	-15.58	Horizontal
7323.00	35.56	1.43	36.99	54	-17.01	Horizontal
9764.00	34.19	1.26	35.45	54	-18.55	Horizontal
12205.00	*			54		Horizontal
14646.00	*			54		Horizontal
Test channel: Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	47.3	1.04	48.34	74	-25.66	Vertical
7440.00	45.69	2.59	48.28	74	-25.72	Vertical
9920.00	45.43	2.74	48.17	74	-25.83	Vertical
12400.00	*			74		Vertical
14880.00	*			74		Vertical
4960.00	50.93	1.04	51.97	74	-22.03	Horizontal
7440.00	48.81	2.59	51.4	74	-22.6	Horizontal
9920.00	46.53	2.74	49.27	74	-24.73	Horizontal
12400.00	*			74		Horizontal
14880.00	*			74		Horizontal

Average value:						
Frequency (MHz)	Read Level (dBUV)	Correct factor	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
4960.00	35.53	1.04	36.57	54	-17.43	Vertical
7440.00	34.25	2.59	36.84	54	-17.16	Vertical
9920.00	33.49	2.74	36.23	54	-17.77	Vertical
12400.00	*			54		Vertical
14880.00	*			54		Vertical
4960.00	32.48	1.04	33.52	54	-20.48	Horizontal
7440.00	33.25	2.59	35.84	54	-18.16	Horizontal
9920.00	31.77	2.74	34.51	54	-19.49	Horizontal
12400.00	*			54		Horizontal
14880.00	*			54		Horizontal
<b>Test Result: Pass</b>						

Blue Asia

## ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


## CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2.5dBi.

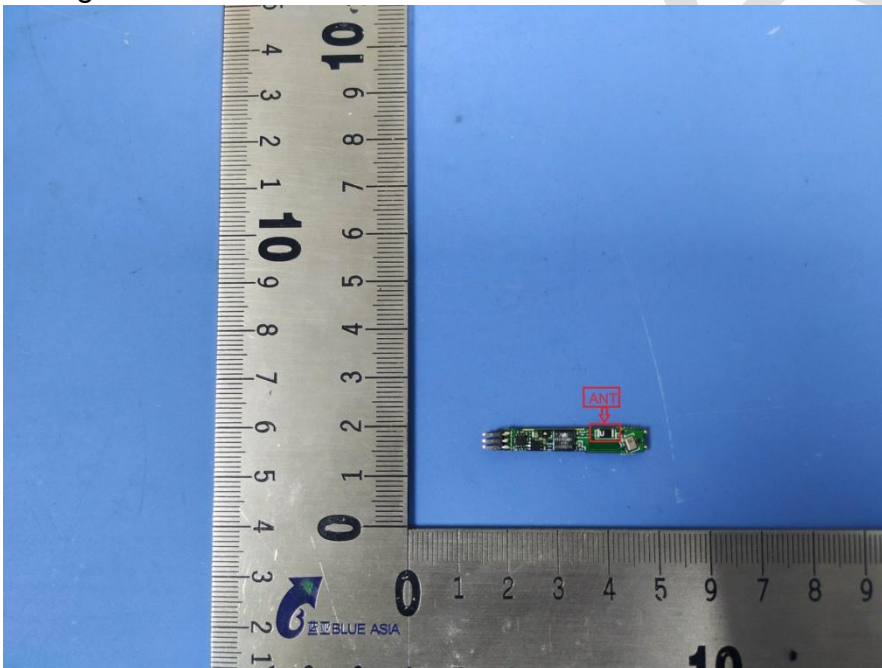


### HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	55%

### LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

### BLOCK DIAGRAM OF TEST SETUP

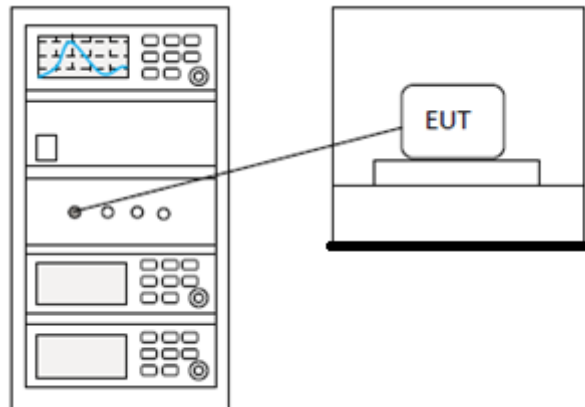

### TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**


### CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	55%

### LIMITS

<b>Limit:</b>	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

### BLOCK DIAGRAM OF TEST SETUP

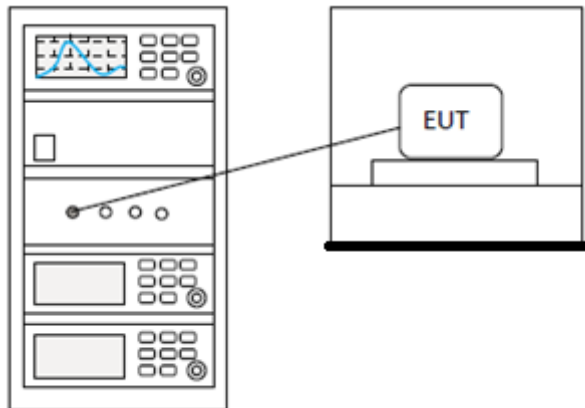

### TEST DATA


<b>Pass: Please Refer To Appendix: Appendix1 For Details</b>
--



### 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.9
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	55%

### BLOCK DIAGRAM OF TEST SETUP

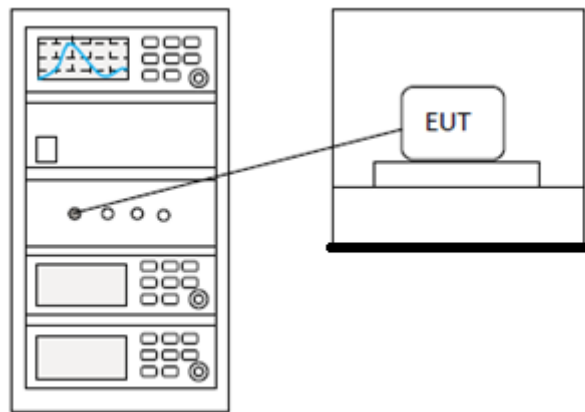

### TEST DATA

**Pass: Please Refer To Appendix: Appendix1 For Details**


### CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	55%

### LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for $\geq 50$ hopping channels
	0.25 for $25 \leq$ hopping channels $< 50$
	1 for digital modulation
2400-2483.5	1 for $\geq 75$ non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

### BLOCK DIAGRAM OF TEST SETUP

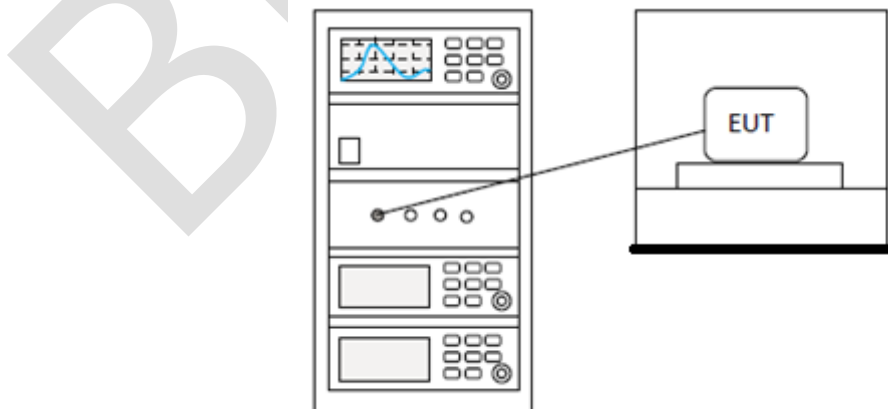

**TEST DATA**

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia

### CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	25°C
Humidity	57%

#### LIMITS

Frequency of emission(MHz)	Conducted limit(dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

#### BLOCK DIAGRAM OF TEST SETUP

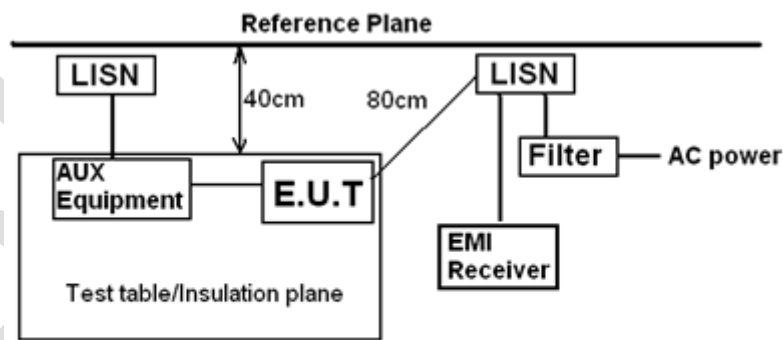

Remark  
 E.U.T: Equipment Under Test  
 LISN: Line Impedance Stabilization Network  
 Test table height=0.8m

#### PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50 $\mu$ H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

BlueAsia

**TEST DATA**

[TestMode: TX]; [Line: Line]  
Power: AC120V/60Hz

**Conducted Emission Measurement**

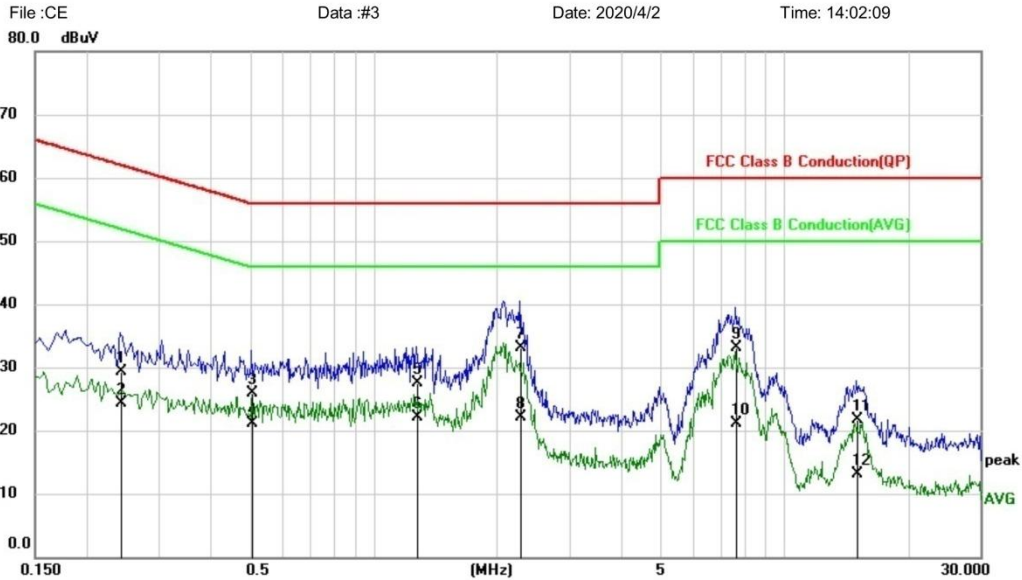

Site: \_\_\_\_\_ Phase: **L1** Temperature: 26  
 Limit: FCC Class B Conduction(QP) Power: \_\_\_\_\_ Humidity: 60 %  
 EUT: TWS Bluetooth earphones  
 M/N: In2016  
 Mode: BT mode  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2420	19.27	9.94	29.21	62.03	-32.82	QP	
2		0.2420	14.34	9.94	24.28	52.03	-27.75	AVG	
3		0.5060	16.24	9.73	25.97	56.00	-30.03	QP	
4		0.5060	11.42	9.73	21.15	46.00	-24.85	AVG	
5		1.2740	17.63	9.82	27.45	56.00	-28.55	QP	
6		1.2740	12.29	9.82	22.11	46.00	-23.89	AVG	
7	*	2.2740	23.27	9.81	33.08	56.00	-22.92	QP	
8		2.2740	12.32	9.81	22.13	46.00	-23.87	AVG	
9		7.6300	23.21	9.86	33.07	60.00	-26.93	QP	
10		7.6300	11.28	9.86	21.14	50.00	-28.86	AVG	
11		15.0420	11.64	9.98	21.62	60.00	-38.38	QP	
12		15.0420	3.21	9.98	13.19	50.00	-36.81	AVG	


\*:Maximum data x:Over limit !:over margin

(Reference Only)

**Test Result: Pass**

[TestMode: TX]; [Line: Nutral]

Power: AC120V/60Hz

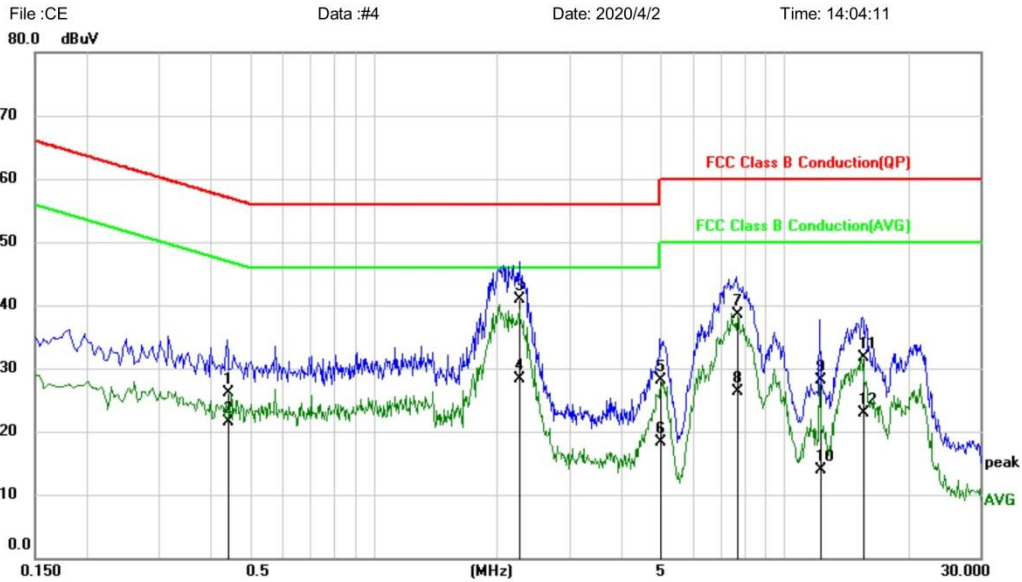**Conducted Emission Measurement**


Site:      Phase: **N**      Temperature: 26  
 Limit: FCC Class B Conduction(QP)      Power:      Humidity: 60 %  
 EUT: TWS Bluetooth earphones  
 M/N: In2016  
 Mode: BT mode  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.4420	16.43	9.70	26.13	57.02	-30.89	QP	
2		0.4420	11.71	9.70	21.41	47.02	-25.61	AVG	
3	*	2.2700	30.99	9.86	40.85	56.00	-15.15	QP	
4		2.2700	18.54	9.86	28.40	46.00	-17.60	AVG	
5		4.9860	18.24	9.91	28.15	56.00	-27.85	QP	
6		4.9860	8.42	9.91	18.33	46.00	-27.67	AVG	
7		7.6780	28.61	9.86	38.47	60.00	-21.53	QP	
8		7.6780	16.43	9.86	26.29	50.00	-23.71	AVG	
9		12.1980	18.21	9.99	28.20	60.00	-31.80	QP	
10		12.1980	4.01	9.99	14.00	50.00	-36.00	AVG	
11		15.5220	21.73	10.00	31.73	60.00	-28.27	QP	
12		15.5220	12.92	10.00	22.92	50.00	-27.08	AVG	

\*:Maximum data    x:Over limit    !:over margin

(Reference Only)

**Test Result: Pass**

**RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS**

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 6.10.5
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Eason
<b>Temperature</b>	23°C
<b>Humidity</b>	58%


**LIMITS**

<b>Frequency(MHz)</b>	<b>Field strength(microvolts/meter)</b>	<b>Measurement distance(meters)</b>
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.



### BLOCK DIAGRAM OF TEST SETUP

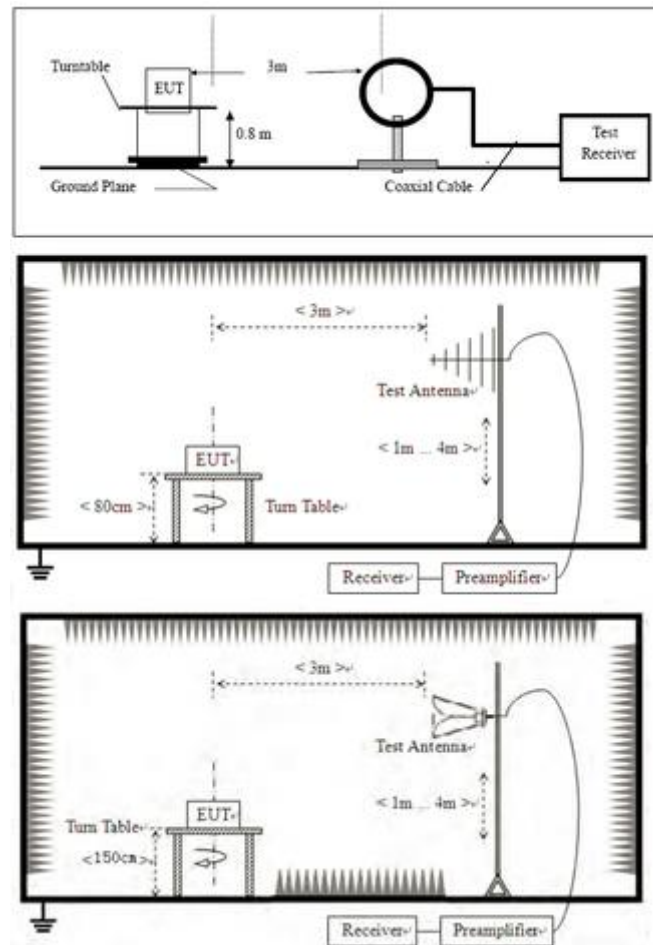

### PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1:  $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

**TEST DATA**

[TestMode: 8DPSK]

Remark: During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

Test channel:lowest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	46.89	-4.2	42.69	74	-31.31	Horizontal
2390	48.89	-3.88	45.01	74	-28.99	Horizontal
2310	50.53	-4.49	46.04	74	-27.96	Vertical
2390	47.63	-4.21	43.42	74	-30.58	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	33.91	-4.2	29.71	54	-24.29	Horizontal
2390	35.54	-3.88	31.66	54	-22.34	Horizontal
2310	37.32	-4.49	32.83	54	-21.17	Vertical
2390	34.8	-4.21	30.59	54	-23.41	Vertical

Test channel:Highest

Peak value:

Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	57.37	-3.38	53.99	74	-20.01	Horizontal
2500	47.14	-3.3	43.84	74	-30.16	Horizontal
2483.5	52.45	-3.77	48.68	74	-25.32	Vertical
2500	48.35	-3.7	44.65	74	-29.35	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	43.61	-3.38	40.23	54	-13.77	Horizontal
2500	34.87	-3.3	31.57	54	-22.43	Horizontal
2483.5	37.06	-3.77	33.29	54	-20.71	Vertical
2500	35.55	-3.7	31.85	54	-22.15	Vertical

**Test Result: Pass**


### CONDUCTED SPURIOUS EMISSIONS

<b>Test Standard</b>	47 CFR Part 15, Subpart C 15.247
<b>Test Method</b>	ANSI C63.10 (2013) Section 7.8.8
<b>Test Mode (Pre-Scan)</b>	TX
<b>Test Mode (Final Test)</b>	TX
<b>Tester</b>	Eason
<b>Temperature</b>	24°C
<b>Humidity</b>	56%

### LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### BLOCK DIAGRAM OF TEST SETUP

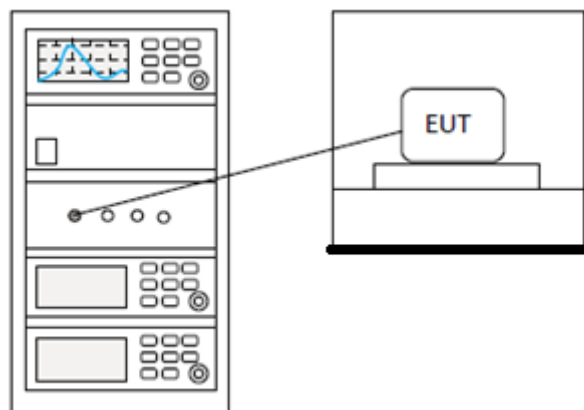

**TEST DATA**

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


### CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	55%

### LIMITS

<b>Limit:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

### BLOCK DIAGRAM OF TEST SETUP

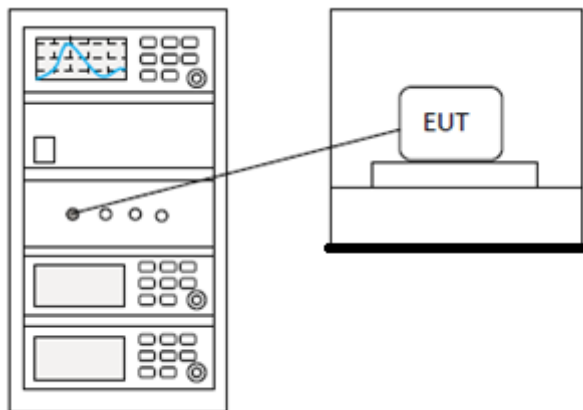

**TEST DATA**

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia


### DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Eason
Temperature	24°C
Humidity	55%

### LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

### BLOCK DIAGRAM OF TEST SETUP

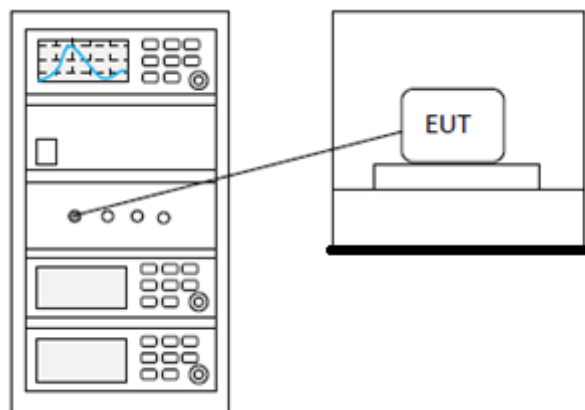



**TEST DATA**

**Pass: Please Refer To Appendix: Appendix1 For Details**

BlueAsia

## 10 APPENDIX

### Appendix1

#### 10.1 APPENDIX: 20DBEMISSION BANDWIDTH

##### Test Result


TestMode	Antenna	Channel	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	1.116	2401.463	2402.579	---	PASS
		2441	1.119	2440.463	2441.582	---	PASS
		2480	1.116	2479.466	2480.582	---	PASS
2DH1	Ant1	2402	1.428	2401.289	2402.717	---	PASS
		2441	1.419	2440.298	2441.717	---	PASS
		2480	1.419	2479.298	2480.717	---	PASS
3DH1	Ant1	2402	1.401	2401.328	2402.729	---	PASS
		2441	1.407	2440.322	2441.729	---	PASS
		2480	1.404	2479.325	2480.729	---	PASS

### Test Graphs







2DH1\_Ant1\_2402

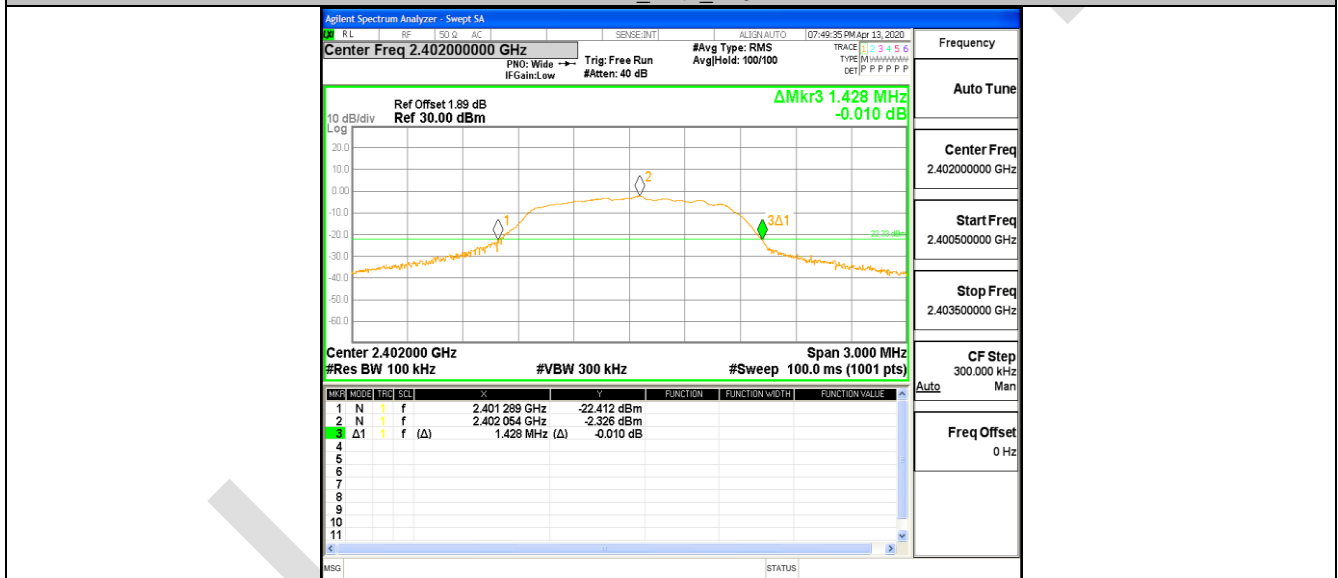


2DH1\_Ant1\_2441

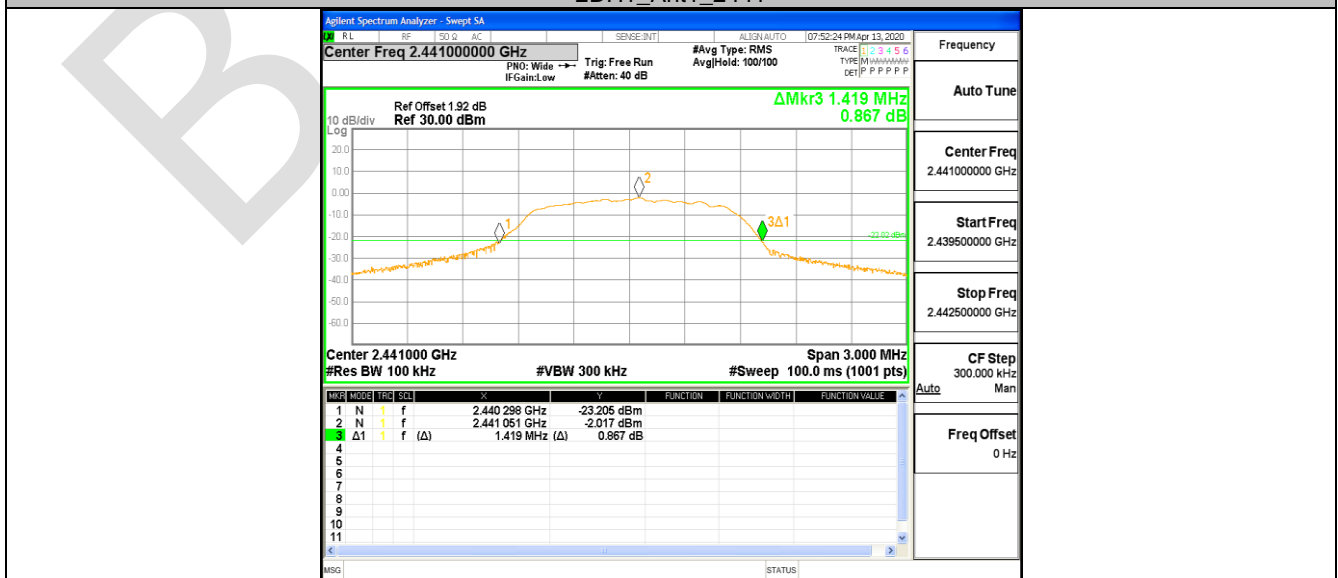


2DH1\_Ant1\_2480

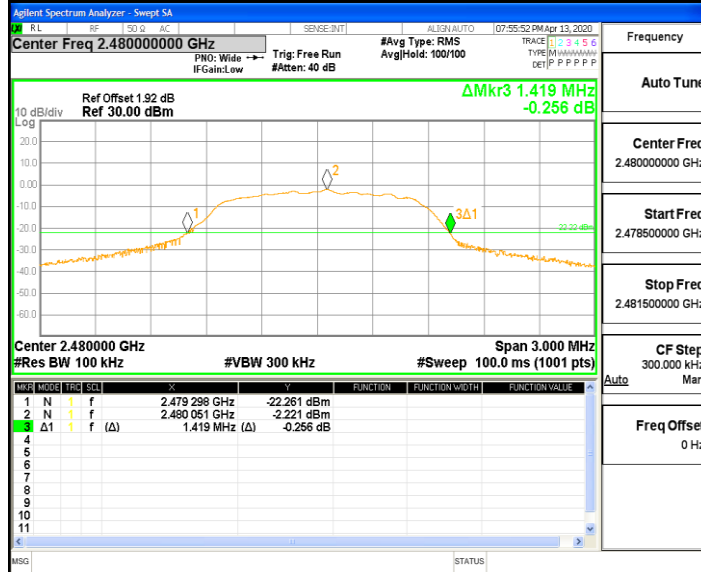


3DH1\_Ant1\_2402

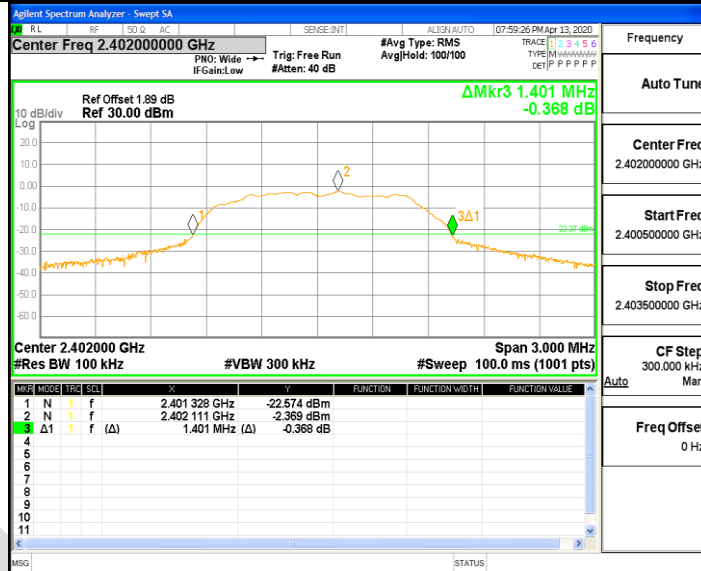

3DH1\_Ant1\_2441

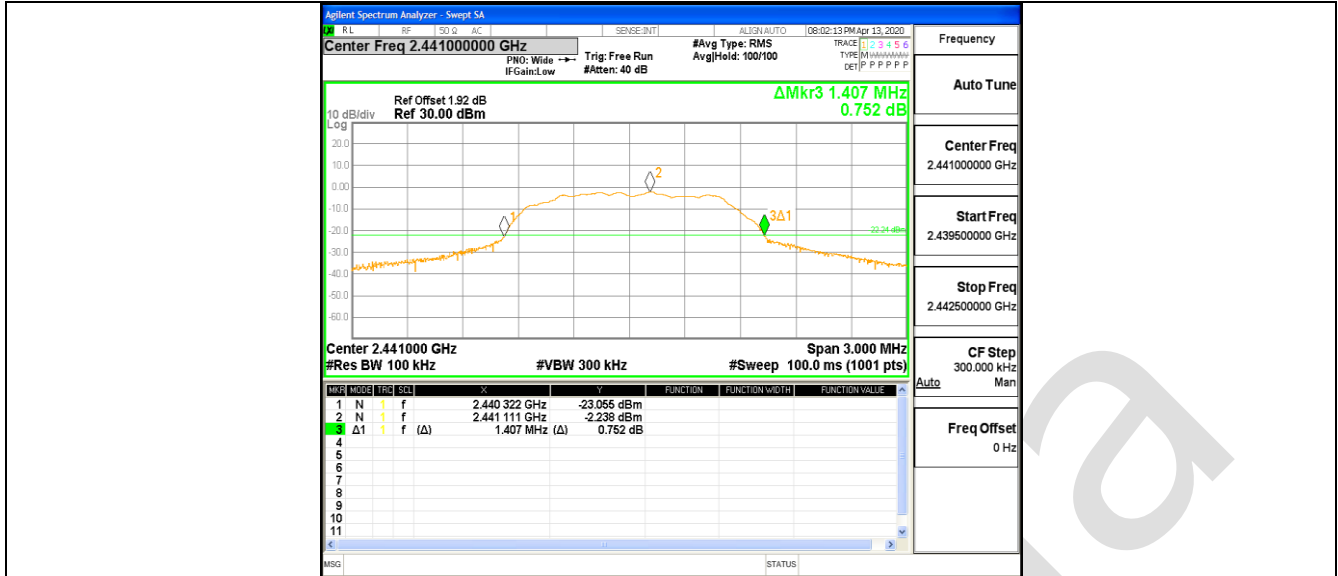

3DH1\_Ant1\_2480

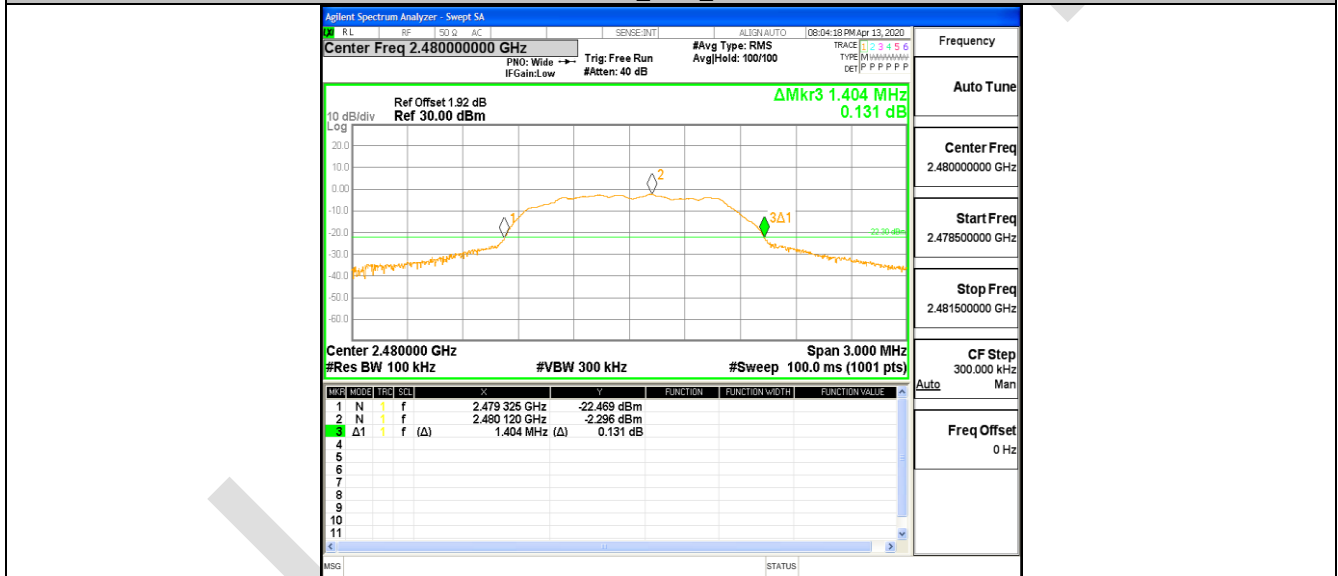


## 10.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER

### Test Result


TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	-0.41	<=20.97	PASS
		2441	-0.09	<=20.97	PASS
		2480	-0.24	<=20.97	PASS
2DH1	Ant1	2402	1.82	<=20.97	PASS
		2441	2.03	<=20.97	PASS
		2480	1.9	<=20.97	PASS
3DH1	Ant1	2402	2.12	<=20.97	PASS
		2441	2.3	<=20.97	PASS
		2480	2.18	<=20.97	PASS

BlueAsia


### Test Graphs

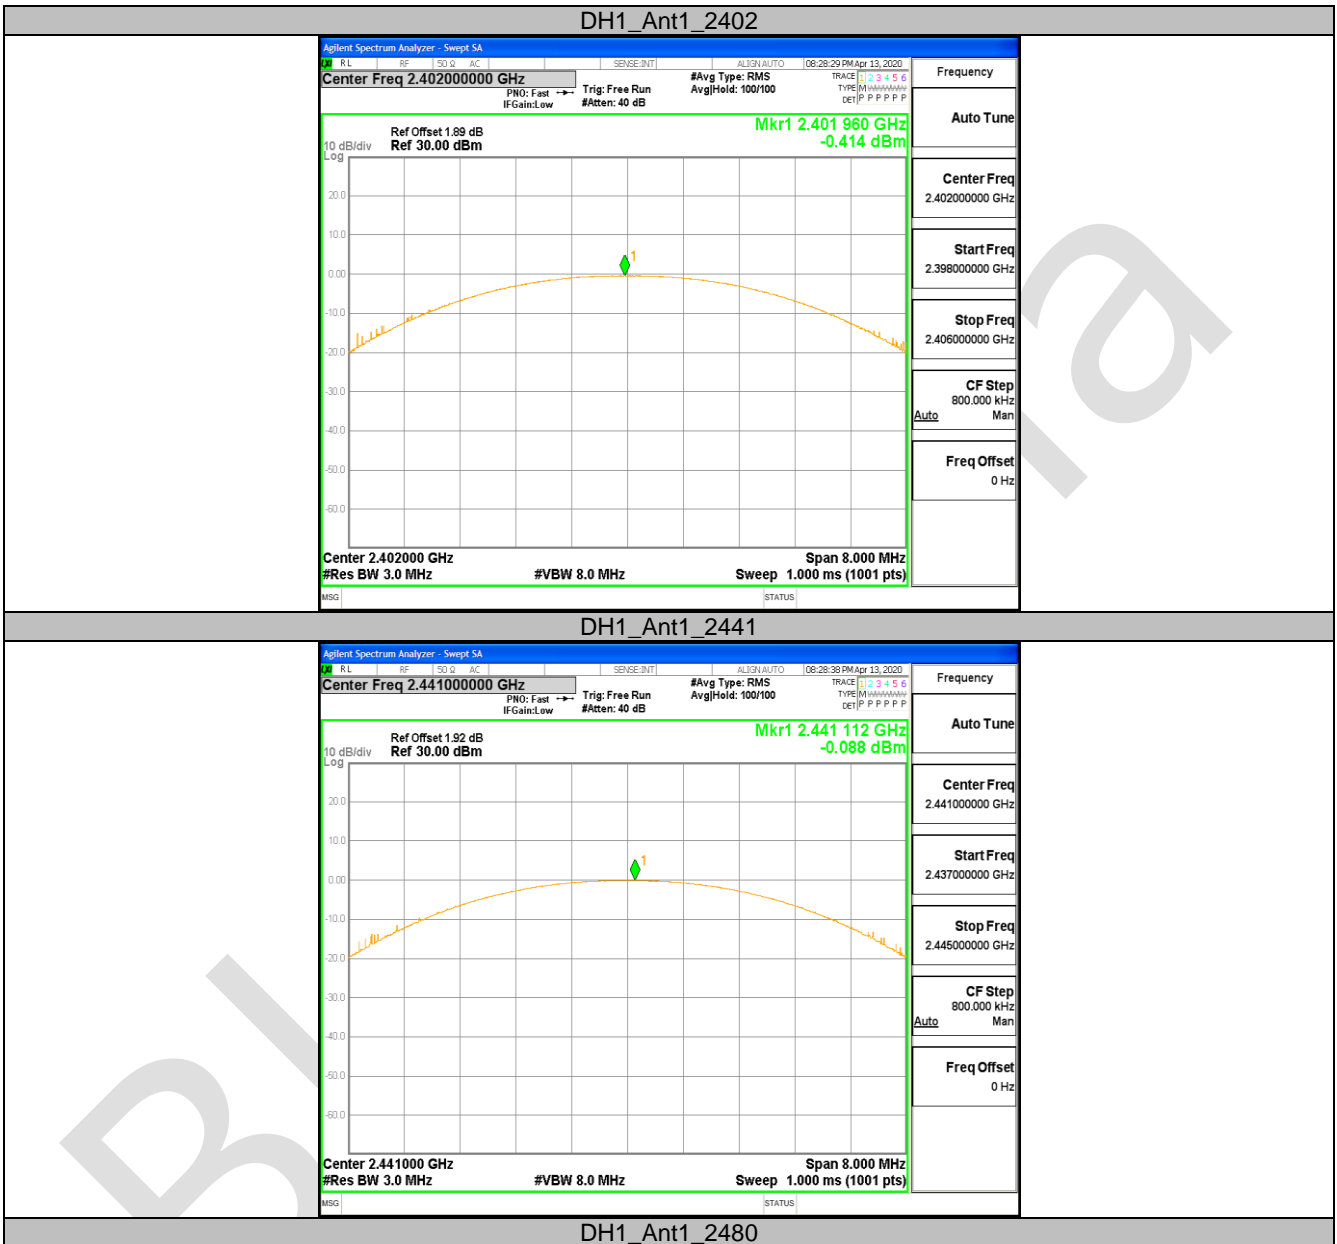




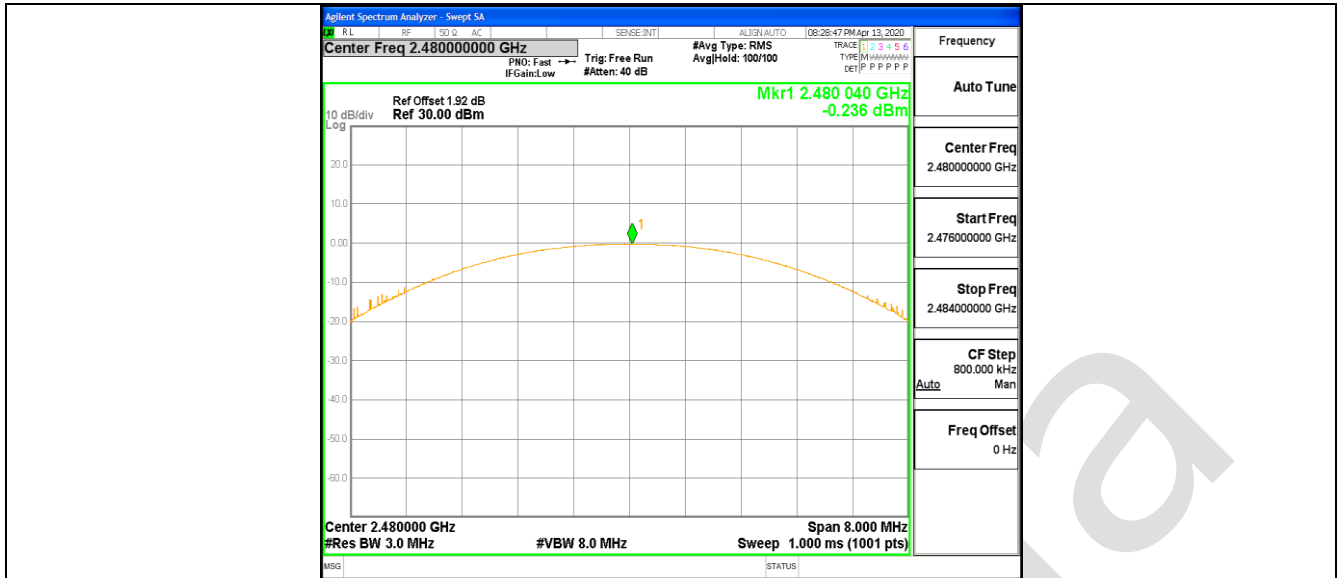


2DH1\_Ant1\_2402

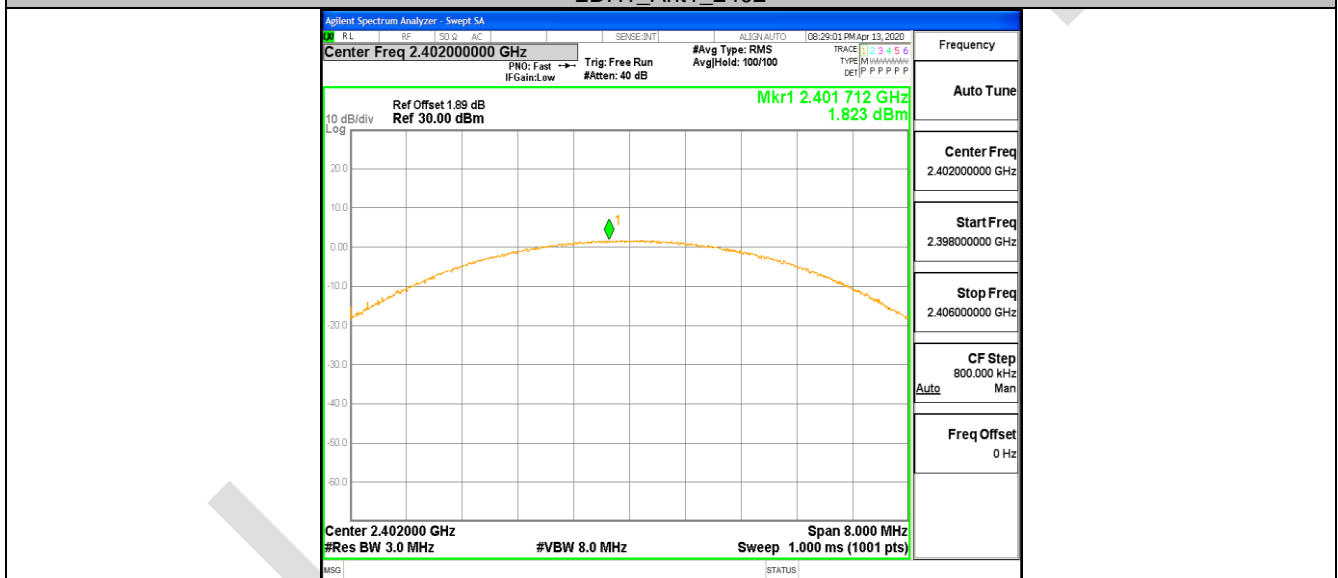


2DH1\_Ant1\_2441

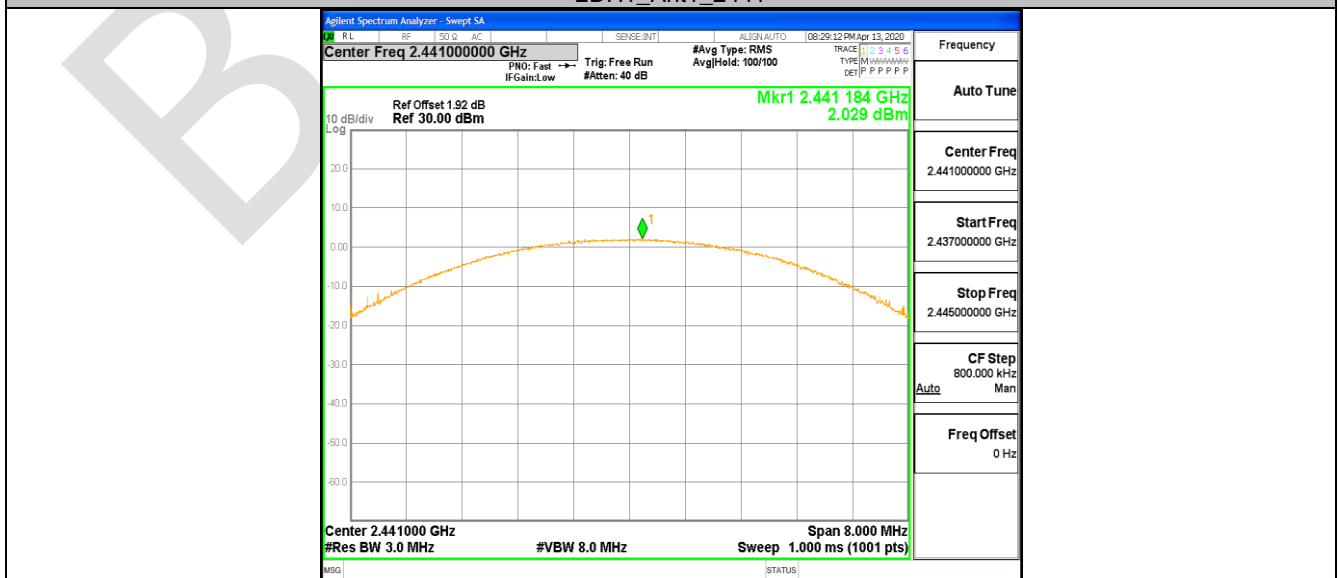

2DH1\_Ant1\_2480

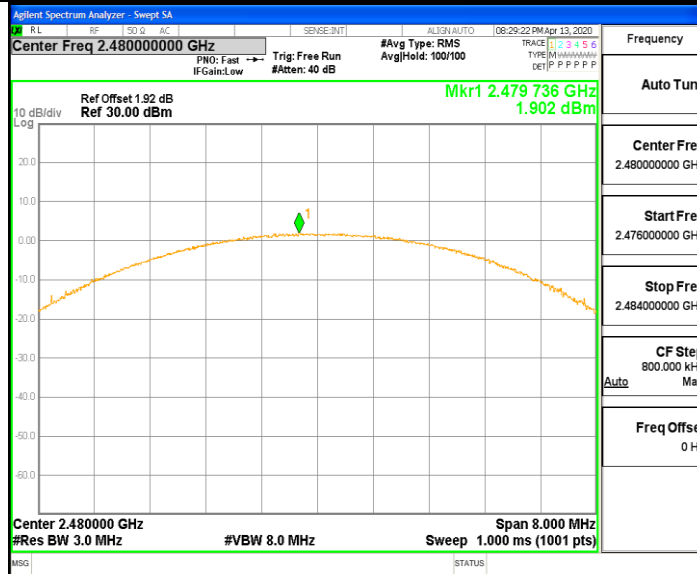

3DH1\_Ant1\_2402

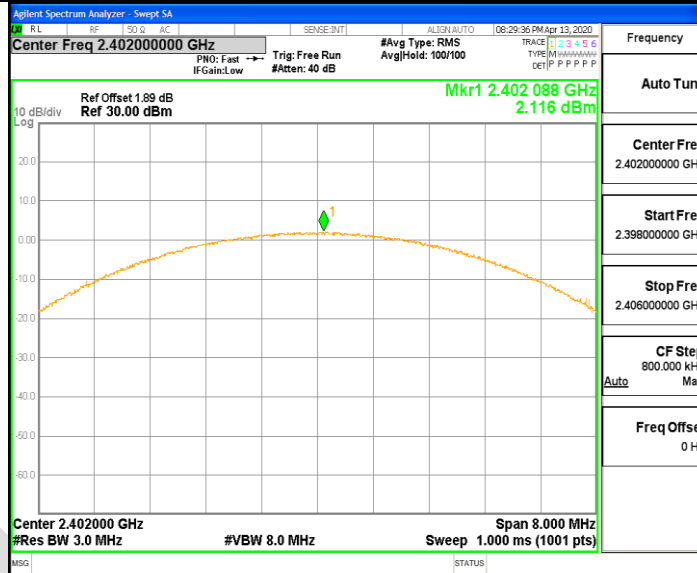

3DH1\_Ant1\_2441