



Date: 2009-07-14
No.: 60.850.9.015.01F

TEST REPORT

Applicant: STL International Ltd.
Tung Kong Industrial Zone, Liu Mei Village,
Yuen Zhou, Bolou
China

Description of Samples: Model name: Digital Camera (Transmitter)
Brand name: Drift
Model no.: X170
FCCID: RF7-X170

Date Samples Received: 2009-06-23

Date Tested: 2009-06-23 to 2009-07-09

Investigation Requested: FCC Part 15 Subpart C, Section 15.231

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----
Checked by:

Approved by:-

Prudence Poon
Project Manager
Telecom department

Victor Kwan
Manager
Telecom department

CONTENT:

Cover		Page 1 of 23
Content		Page 2 of 23
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 23
1.2	Applicant Details	Page 3 of 23
1.3	Equipment Under Test [EUT]	Page 4 of 23
1.4	Related Submittal(s) Grants	Page 4 of 23
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 5 of 23
2.2	Test Standards and Results Summary	Page 5 of 23
<u>3.0</u>	<u>Test Methodology</u>	
3.1	Radiated Emission	Page 6 of 23
3.2	Field Strength Calculation	Page 6 of 23
3.3	Conducted Emission	Page 6 of 23
<u>4.0</u>	<u>Test Results</u>	
4.1	Radiated Emission of Fundamental Frequency	Page 7-8 of 23
4.2	Spurious Radiated Emission	Page 9-15 of 23
4.3	Conducted Emission	Page 16 of 23
4.4	Bandwidth Measurement	Page 17-18 of 23
4.5	Average Factor	Page 19-22 of 23
<u>5.0</u>	<u>List of Measurement Equipments</u>	Page 23 of 23
<u>Appendix A</u>		
Photos of Test Setup		
<u>Appendix B</u>		
External EUT Photos		
<u>Appendix C</u>		
Internal EUT Photos		

1.0 **General Details**

1.1 **Test Laboratory**

Hong Kong Productivity Council
HKPC Building, 78 Tat Chee Avenue, Kowloon Tong,
Hong Kong

Registration Number: 90656

1.2 **Applicant Details** **Applicant**

STL International Limited

Tung Kong Industrial Zone, Liu Mei Village,
Yuen Zhou, Bolou, China

Manufacturer

STL International Limited

Tung Kong Industrial Zone, Liu Mei Village,
Yuen Zhou, Bolou, China.

1.3 Equipment Under Test [EUT]


Description of EUT

Model Name:	Digital Camera (Transmitter)
Brand Name:	Drift
Model Number:	X170
FCCID:	RF7-X170
Rating:	3.0Vd.c. (1 x “ CR2032” size battery)
Antenna Type:	Integral
Operated Frequency:	433.9MHz
No. of Channel:	1
Accessories and Auxiliary Equipment:	None
EUT Exercising Software:	None

General Operation of EUT

The Equipment Under Test (EUT) is a transmitter operated at 433.9MHz to control the receiver for capturing the action color video and audio.

This transmitter is manually operated, once press the button of EUT, it transmits signal for less than one seconds, then it will automatic off the transmission no matter the user continuously press the button. The below graph shows the transmit signal between two times press of button by the the user. So this EUT will automatically deactivate the transmitter within not more than 5 seconds of being released, also cease transmission within 5 seconds after activation.

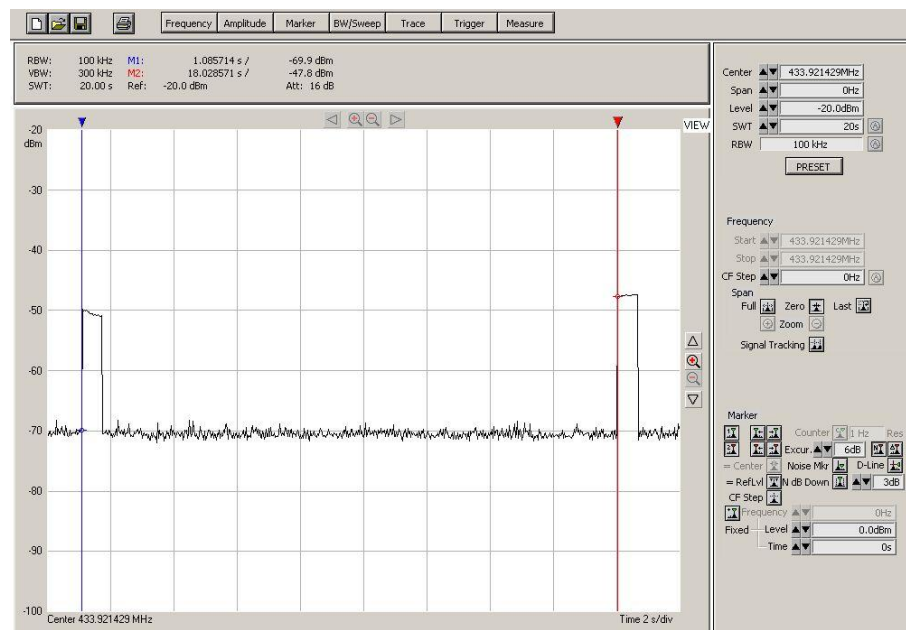

1.4 Related Submittal(s) Grants

This is a single application for certification of the transmitter.

2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2008 and ANSI C63.4: 2003 for FCC Verification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Failed	N/A
Radiated Emission of Carrier Frequency	FCC 47CFR 15.231	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Emission, 30MHz to 4.5GHz	FCC 47CFR 15.231	ANSI C63.4:2003	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emission on AC, 0.15MHz to 30MHz	FCC 47CFR 15.207	ANSI C63.4:2003	Class B	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Bandwidth Measurement	FCC 47CFR 15.231	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

*On a standard emission test site with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 90656.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$\begin{aligned} \text{FS} &= \text{R} + \text{System Factor} \\ \text{System Factor} &= \text{AF} + \text{CF} + \text{FA} - \text{PA} \end{aligned}$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The EUT was placed on a non-metallic table 0.8m above the horizontal metal reference plane and 0.4m from a vertical ground plane which is connected to the horizontal metal ground plane. Meanwhile, the AC main of EUT was connected to the distance of 0.8m line impedance stabilization network (LISN) during measurement.


Initial measurements were performed in quasi-peak and average detection modes by the test receiver, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

4.0 Test Results

4.1 Radiated Emission of Fundamental Frequency

Test Requirement:	FCC part 15 section 15.231(b)
Test Method:	ANSI C63.4:2003
Test Date:	2009-07-09
Mode of Operation:	Transmitting mode.
Detector Function:	Peak
Measurement BW:	100 kHz

Test Setup:

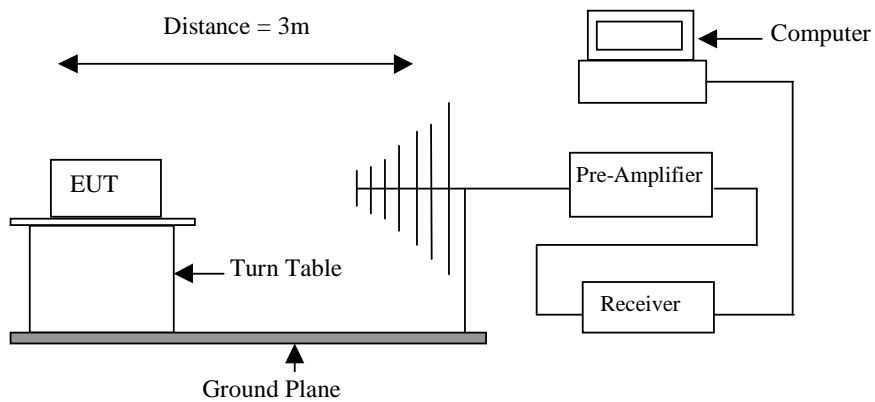

Results: PASS

Radiated Emissions									
Value	Emissions Frequency MHz	E-Field Polarity	Reading dB μ V/m	System Factor dB	Field Strength at 3m dB μ V/m	Average Factor dB	Net Field Strength at 3m dB μ V/m	Limit dB μ V/m	Delta to Limit dB μ V/m
PK	433.912	V	46.58	17.62	64.20	0.00	64.20	100.82	-36.62
AV	433.912	V	46.58	17.62	64.20	-3.86	60.34	80.82	-20.48
PK	433.912	H	64.68	17.62	82.30	0.00	82.30	100.82	-18.52
AV	433.912	H	64.68	17.62	82.30	-3.86	78.44	80.82	-2.38

Remark:

-Calculated measurement uncertainty: ± 5.0 dB

-Refer to section 4.5 for average factor calculation.

Limits for Fundamental Frequency: [Section 15.231(b)]:


Fundamental Frequency [MHz]	Field Strength of Fundamental [μ V/m]	Field Strength of Fundamental [dB μ V/m]
433.912	10996.3478	80.82

Compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR peak detector.

4.2 Spurious Radiated Emission

Test Requirement:	FCC part 15 section 15.231(b)
Test Method:	ANSI C63.4:2003
Test Date:	2009-07-09
Mode of Operation:	Transmitting mode.
Detector Function:	Peak
Measurement BW:	100 kHz

Test Setup:

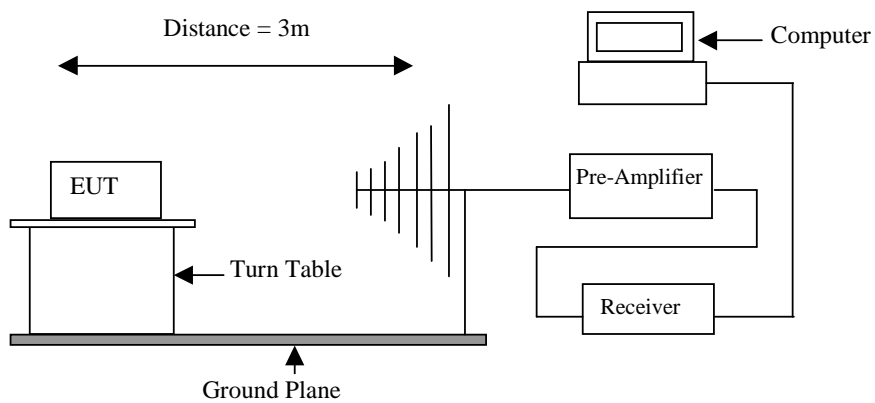

Results: PASS

Value	Emissions Frequency MHz	E-Field Polarity	Reading dB μ V/m	System Factor dB	Field strength at 3m dB μ V/m	Average Factor dB	Net Field Strength at 3m dB μ V/m	Limit dB μ V/m	Delta to Limit dB μ V/m
AV	867.83	V	7.19	24.01	31.20	-3.86	27.34	60.82	-33.48
AV	*1301.76	V	48.51	-7.61	40.90	-3.86	37.04	54.00	-16.96
AV	867.83	H	23.29	24.01	47.30	-3.86	43.44	60.82	-17.38
AV	*1301.57	H	48.31	-7.61	40.70	-3.86	36.84	54.00	-17.16

Note: No further spurious emissions found between 30 MHz and lowest internal used/generated frequency.

Remark (*) : Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).

Remark:

-Calculated measurement uncertainty: ± 5.0 dB.

-Refer to section 4.5 for average factor calculation.

Limits for Radiated Emission [Section 15.231(b)]:

Fundamental Frequency [MHz]	Field Strength of Spurious Emission [μ V/m]	Field Strength of Spurious Emission [dB μ V/m]
433.912	1099.6347	60.82

Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in section 15.209, whichever permits a higher field strength.

Limit for Radiated Emission Falling in Restricted Bands [Section 15.209]:



Frequency (MHz)	Field Strength [μ V/m]	Field Strength [dB μ V/m]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

- Result data graph is attached at the next pages for reference.



Vertical

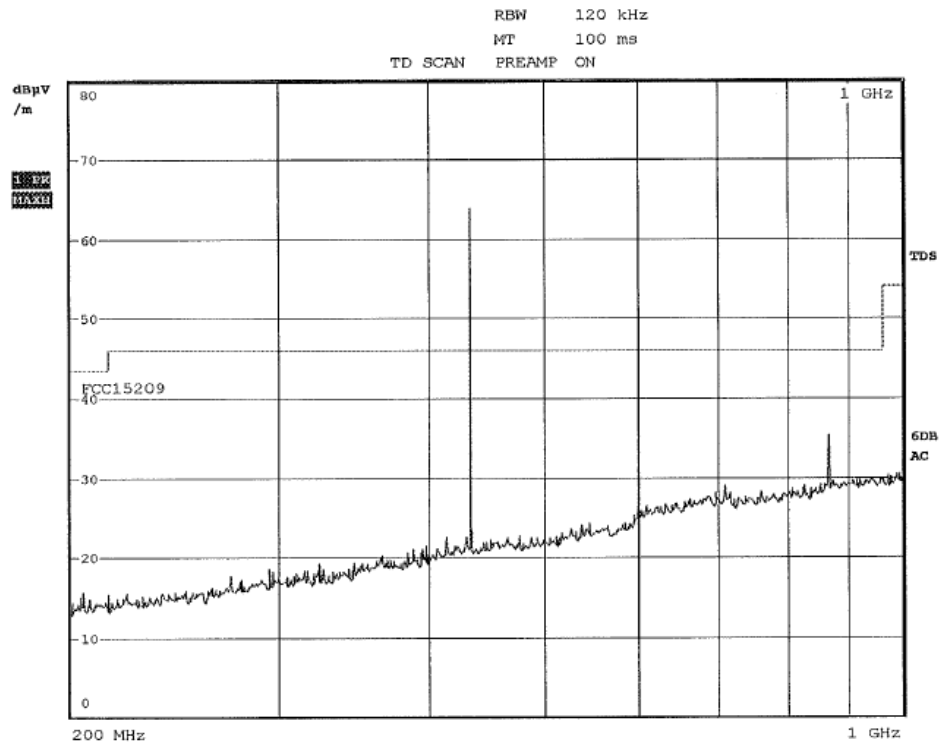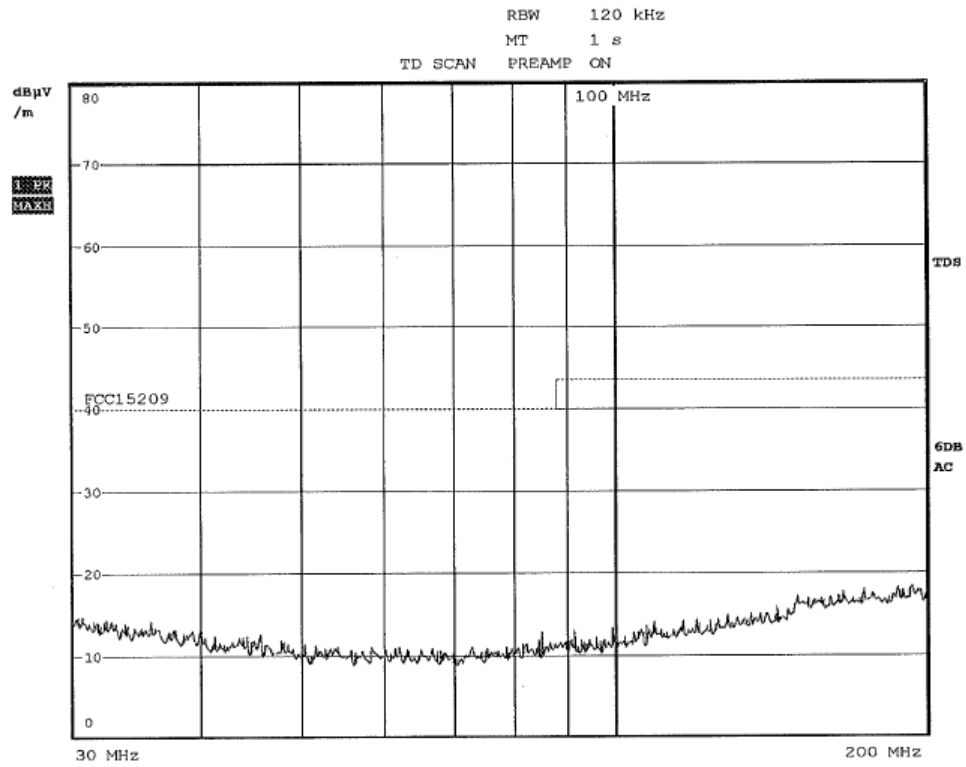


Vertical

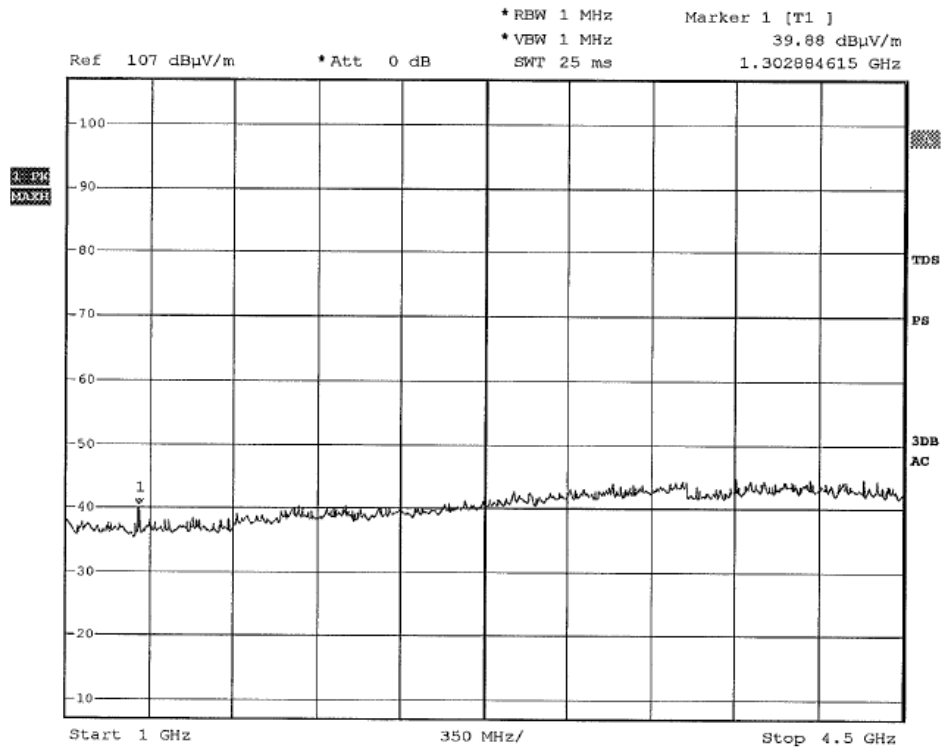

Horizontal

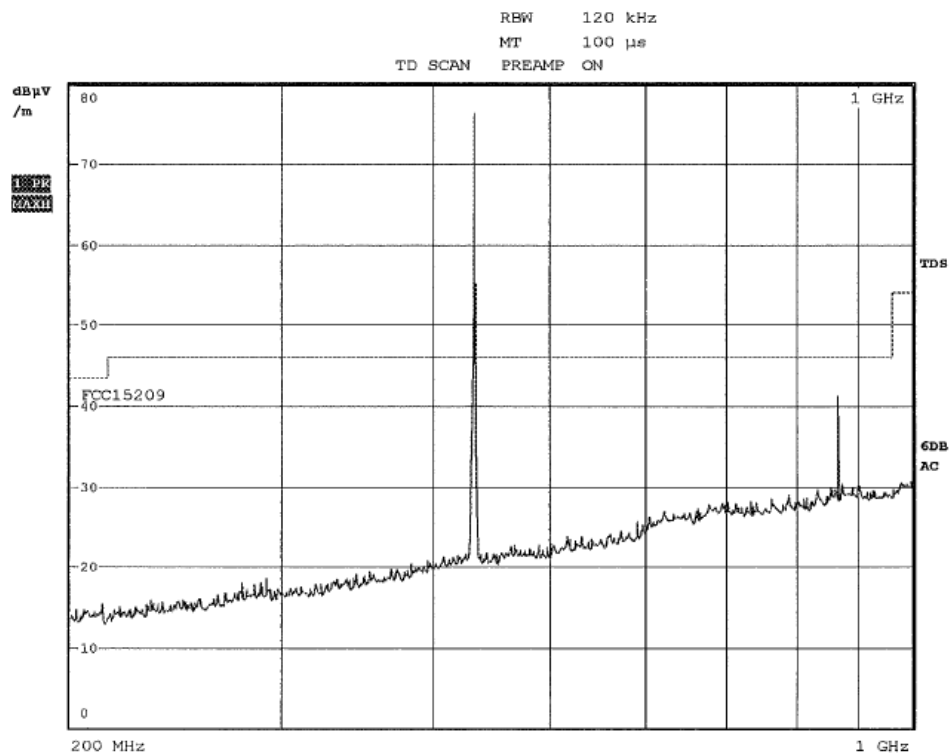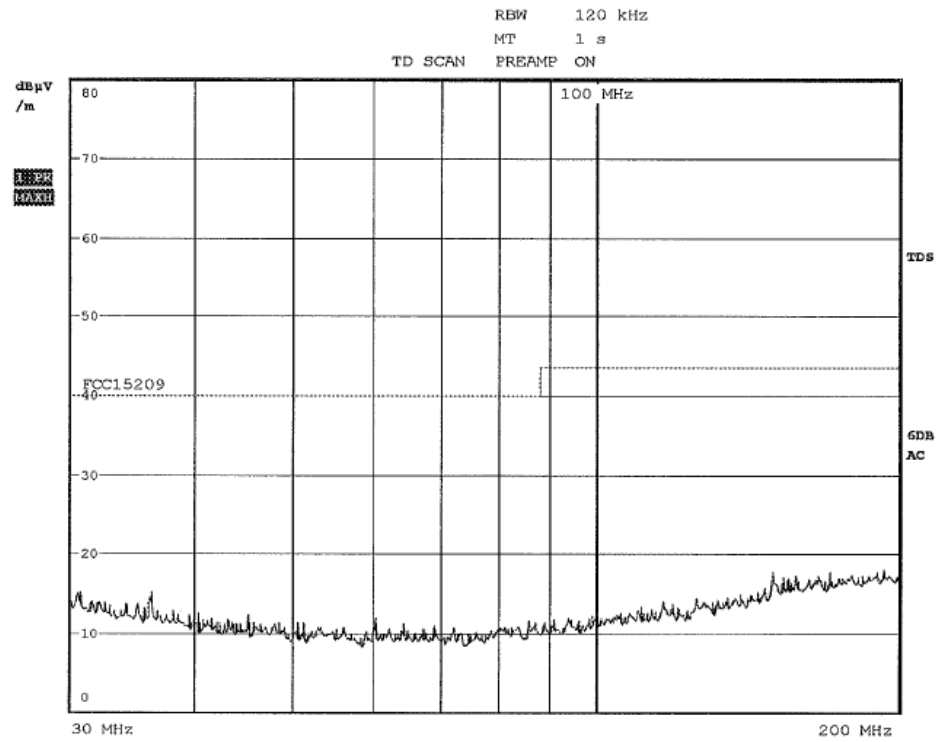

Horizontal

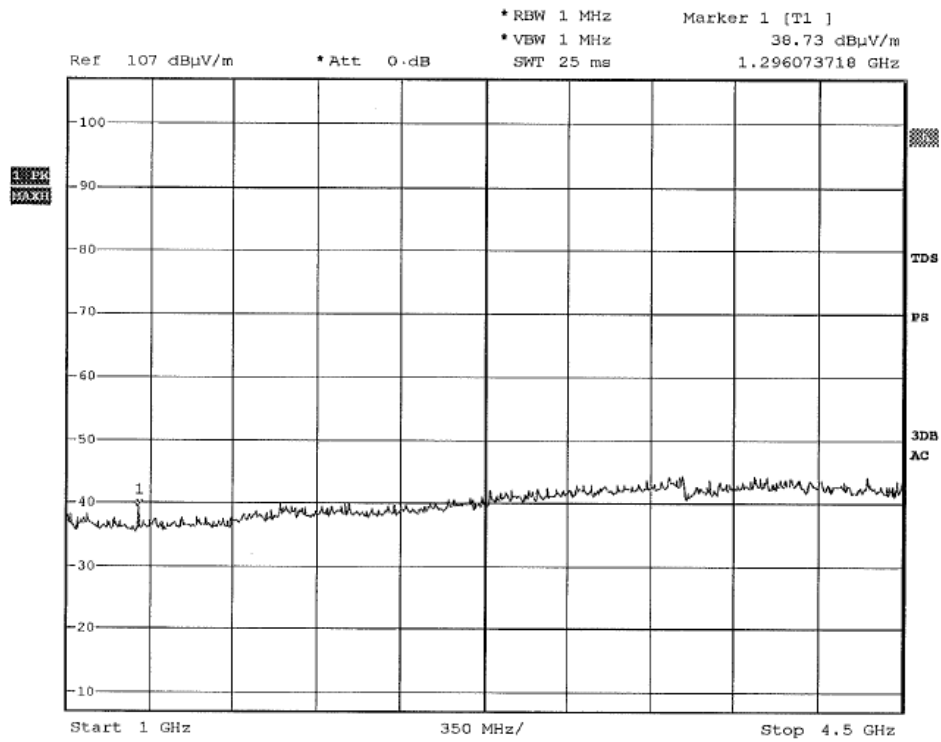

4.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC part 15 Section 15.207 Class B
Test Method: ANSI C63.4:2003
Test Date: ---
Mode of Operation: ---

Results: N/A

Note : This testing is not applicable for the battery operated EUT.

Limits for Conducted Emission [Section 15.207]:

Frequency Range [MHz]	Quasi-Peak Limit [dB μ V]	Average Limit [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

4.4 Bandwidth Measurement

Test Requirement:	FCC part 15 section 15.231 (c)
Test Method:	ANSI C63.4:2003
Test Date:	2009-07-09
Mode of Operation:	Transmitting mode.
Detector Function:	Peak



Results: PASS

Refer to the data graph, the 20dB points at lower edge and at higher edge are 433.834MHz and 433.971MHz, so that is 65.714kHz and 71.429kHz respectively apart from the centre modulated carrier, the bandwidth of the emission is 0.0316% of the centre frequency. Therefore, the EUT meets the requirement of section 15.231(c).

Limit for Bandwidth [Section 15.231 (c)]

The bandwidth of the emission shall be no wider than 0.25% if the center frequency for devices operating above 70MHz and below 900MHz.

Test Result: Result data graph is shown at the next pages for reference.

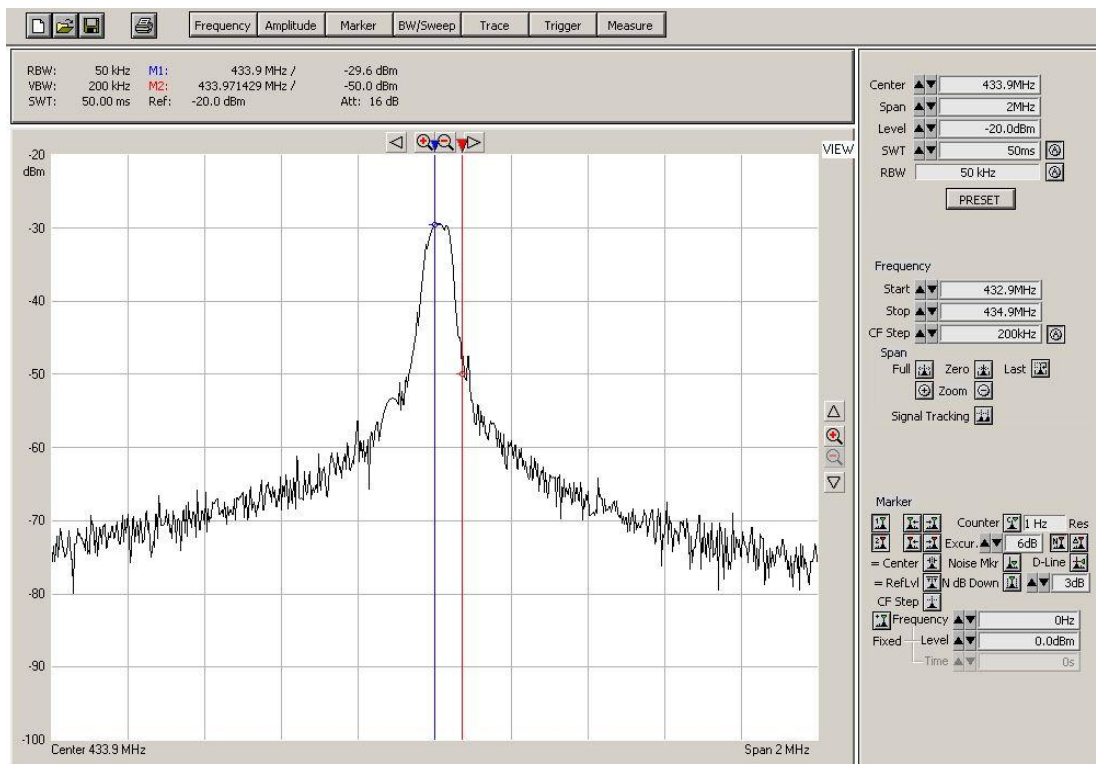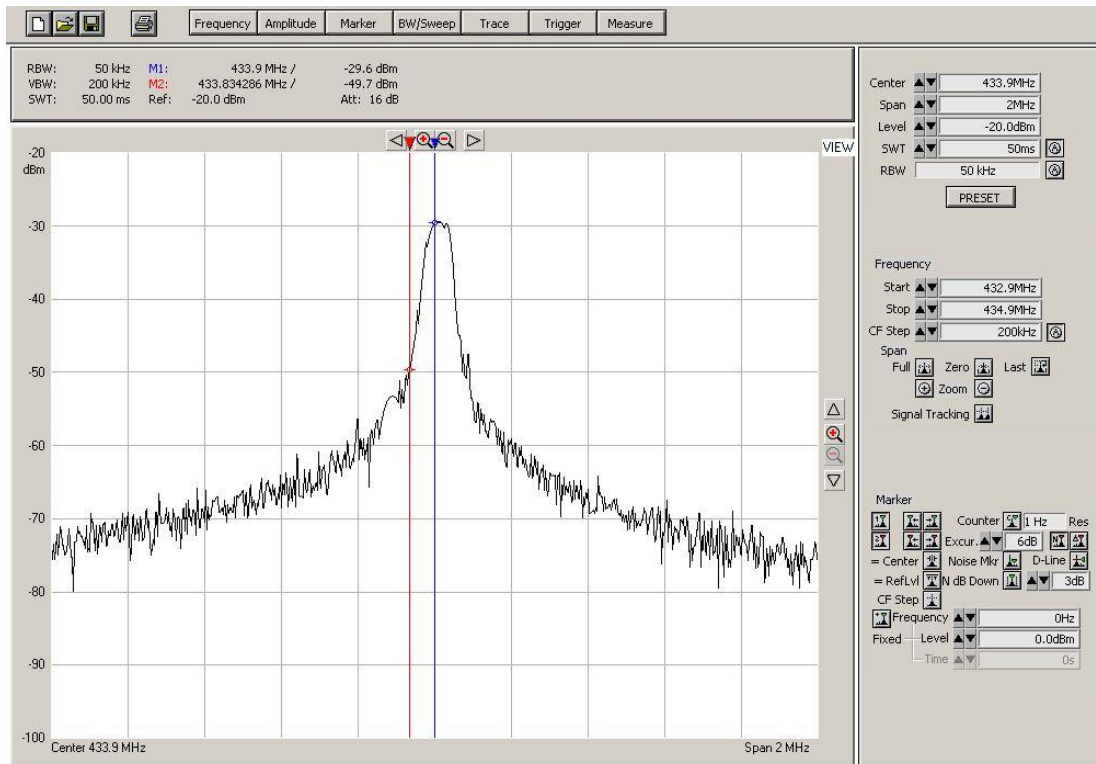

4.5 Average Factor

Average factor in dB = $20 \log (\text{duty cycle})$

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the specification for output field strengths in accordance with the FCC rules specify measurements with an average detector.

The duty cycle is the total signal on time per one transmission.



The duration of one cycle = 625.714ms



Effective period of the cycle per 100ms = $(2 \times 9\text{ms} + 10 \times 3.357\text{ms} + 11 \times 1.143\text{ms}) / 100\text{ms}$
= 64.143ms / 100ms


Duty cycle = 0.64143

Therefore, the averaging factor is $20 \log (0.64143)$
= -3.86dB

Refer to the following graph for the detail.

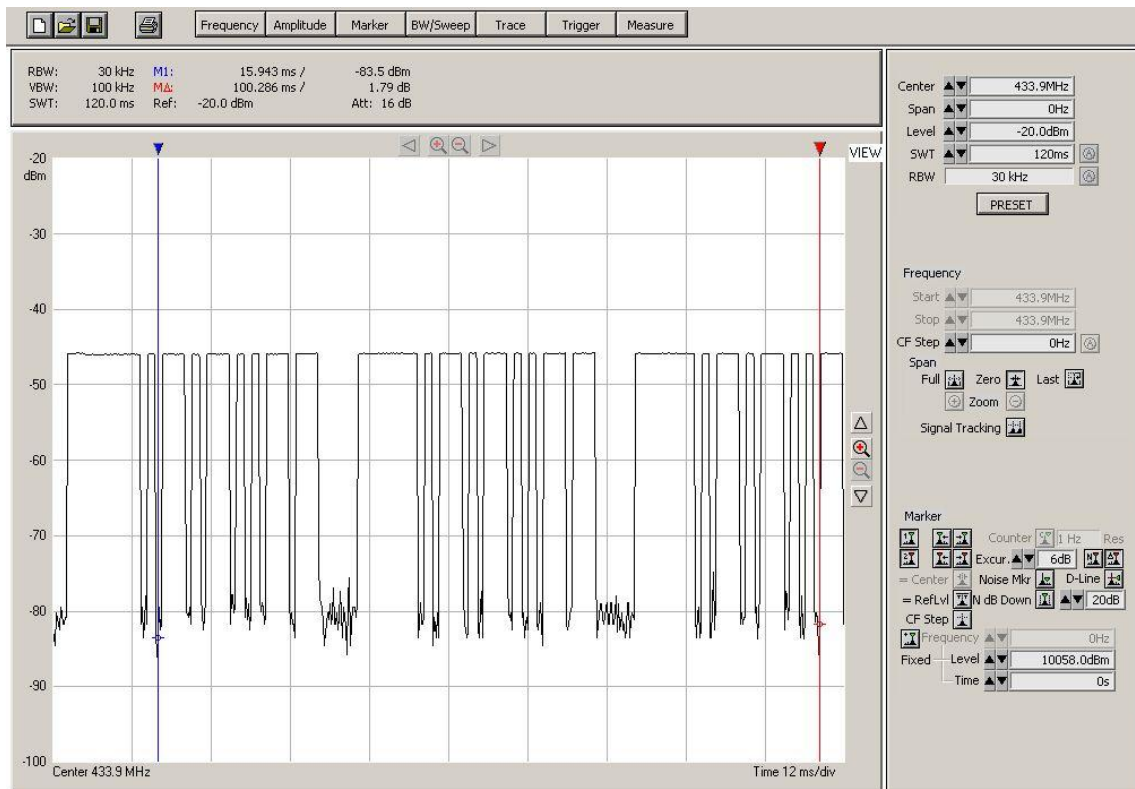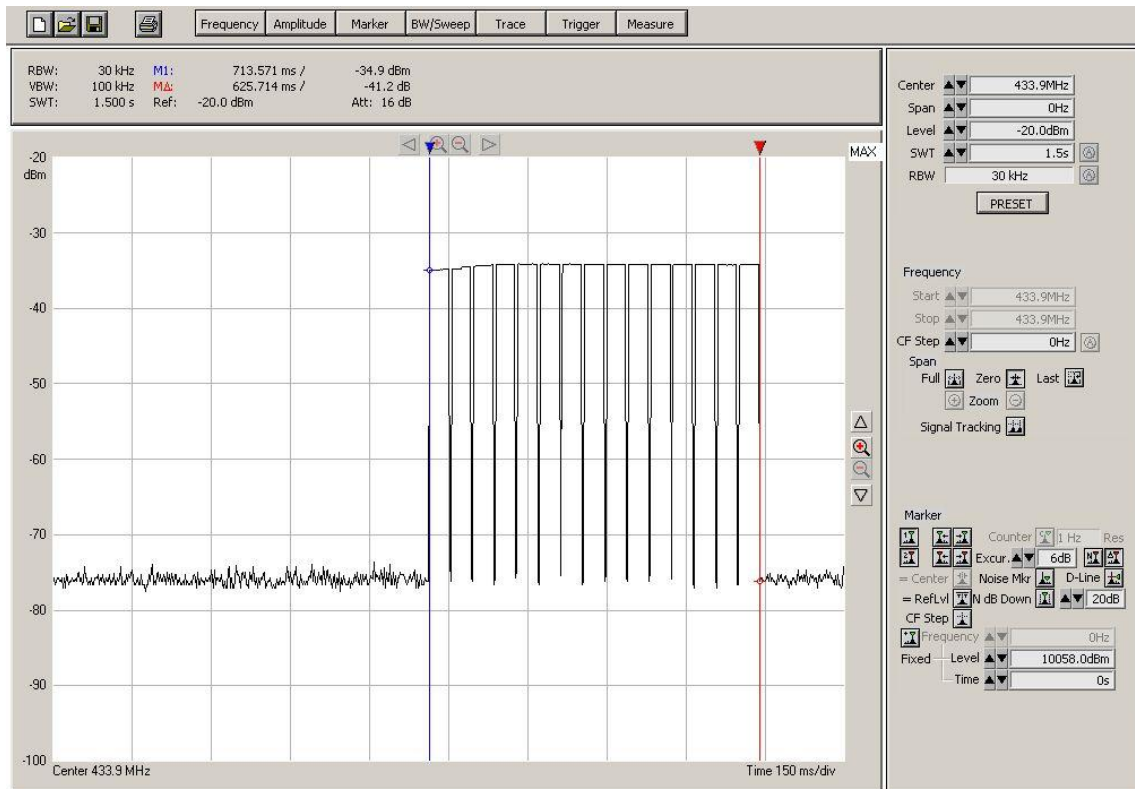

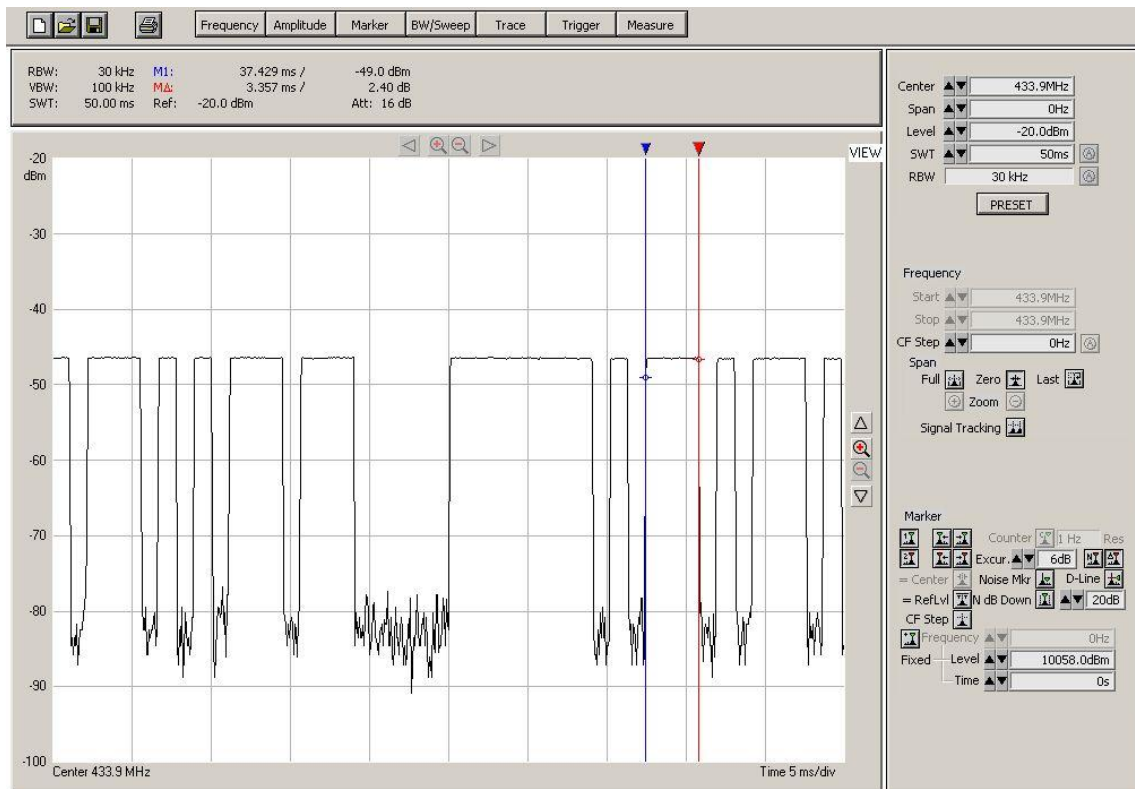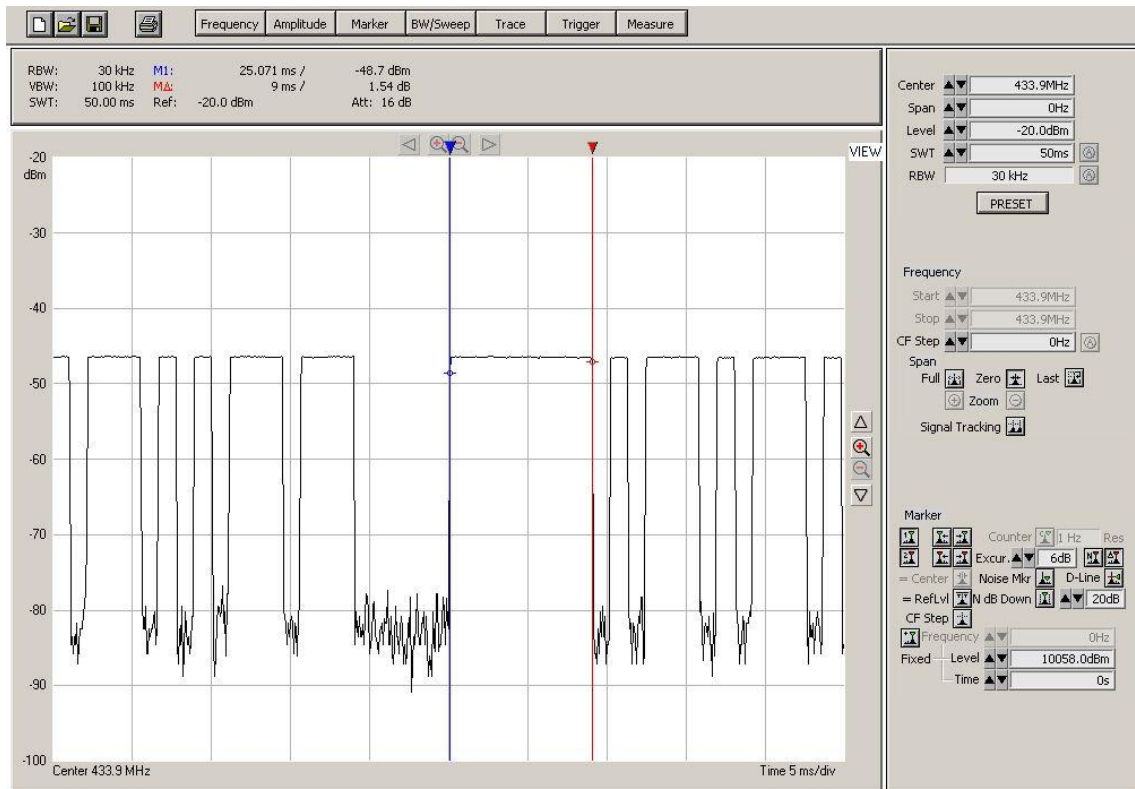

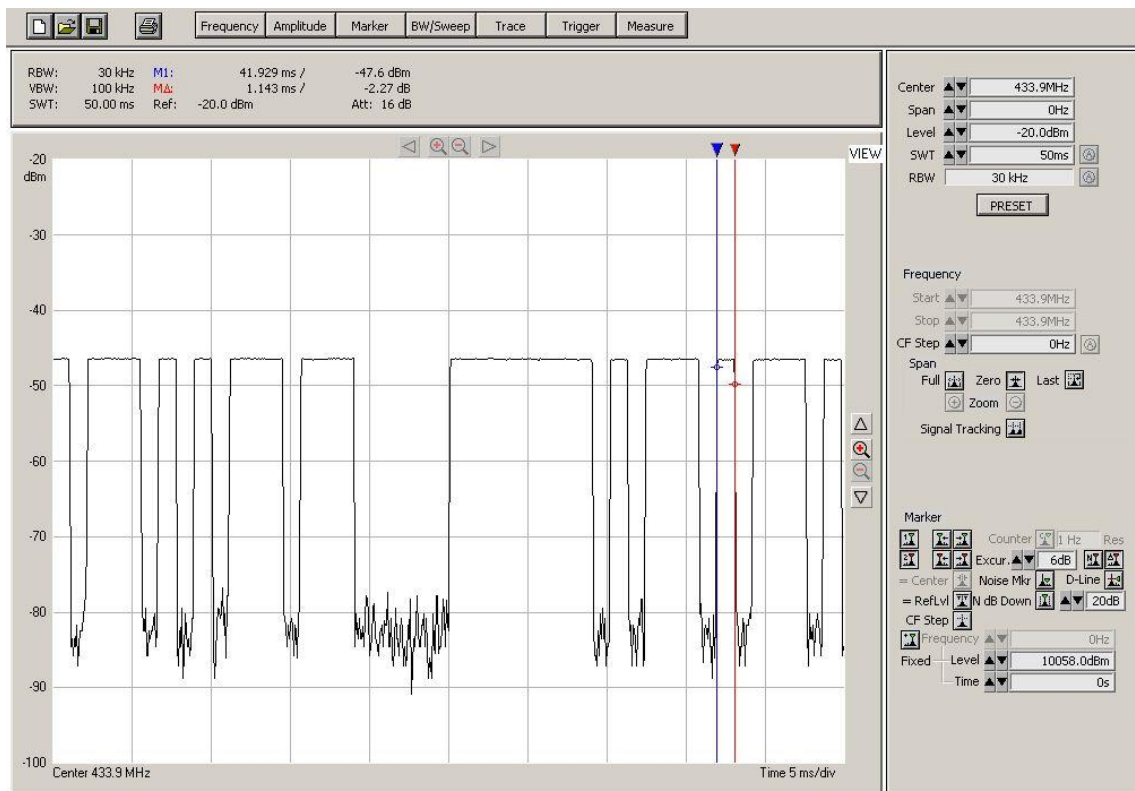

5.0 List of Measurement Equipment

Radiated Emission and Bandwidth Measurement

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	CAL DUE
EMC209	Semi-anechoic chamber	Frankonia	Nil	Nil	28-May-09	28-May-10
EMC567	Test Receiver	R & S	ESU26	100050	06-Aug-08	06-Aug-09
EMC577	Bi-conical Antenna	R & S	HK116	100242	22-May-08	22-May-10
EMC039	Log Periodic Antenna	R & S	HL223	841516/020	21-May-08	21-May-10
EMC406	Coaxial cable 50ohm	Rosenberger	RTK081-05S-05S-10m	LA2-001-10M/002	15-May-09	15-May-10
EMC185	Horn antenna	EMCO	3115	9002-3351	27-Feb-08	27-Feb-10
EMC138	Loop antenna	Chase	LLA6142	1019	07-Jun-09	07-Jun-10
EMC556	Spectrum Analyzer	R & S	FSP30	100416	08-Jun-09	08-Jun-10
60/2-74-05-042	Spectrum Analyzer	R & S	Nil	101335	07-Apr-09	07-Apr-11

Remarks:

CM Corrective Maintenance
N/A Not Applicable or Not Available
TBD To Be Determined