


<b>FCC TEST REPORT</b> <b>FCC 47 CFR Part 15C</b> <b>Industry Canada RSS-210</b> <b>Digital transmission systems operating within the 2400 – 2483.5 MHz band</b>	
<b>Report Reference No.</b> .....	G0M-1406-3915-TFC247BL-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address.....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="display: flex; justify-content: center; align-items: center;">   </div> <p style="text-align: center; font-size: small;">A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Leica Geosystems AG
Address.....	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
<b>Test specification:</b>	
Standard .....	47 CFR Part 15C KDB Publication No. 558074 RSS-210, Issue 8, 2010-12 RSS-Gen, Issue 4, 2014-11 ANSI C63.4:2009
Test scope.....	complete Radio compliance test
<b>Equipment under test (EUT):</b>	
Product description	Field Controller Win EC7
Model No.	CS20 CDMA Disto
Additional Model(s)	None
Brand Name(s)	Leica Geosystems
Hardware version	V5.0
Firmware / Software version	1.0
	FCC-ID: RFD-CSNGC      IC: 3177A-CSNGC
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**

- neither assessed nor tested .....: N/N
- required by standard but not appl. to test object.....: N/A
- required by standard but not tested.....: N/T
- not required by standard for the test object .....: N/R
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**


Test Lab Temperature.....: 20 – 23 °C


Test Lab Humidity .....: 32 – 38 %

Date of receipt of test item .....: 2014-09-22

Date (s) of performance of tests .....: 2014-11-25 – 2015-01-26

Compiled by .....: Christian Weber

Tested by (+ signature).....: Christian Weber  
 (Responsible for Test) 

Approved by (+ signature) .....: Toralf Jahn 

Date of issue .....: 2015-04-21

Total number of pages .....: 88

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

---

## Version History

Version	Issue Date	Remarks	Revised by
01	2015-04-21	Initial Release	

---

## REPORT INDEX

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment External	6
1.2	Photos – Equipment internal	7
1.3	Photos – Test setup	9
1.4	Supporting Equipment Used During Testing	10
1.5	Test Modes	11
1.6	Test Equipment Used During Testing	12
1.7	Sample emission level calculation	14
<b>2</b>	<b>RESULT SUMMARY</b>	<b>15</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>16</b>
3.1	Test Conditions and Results – Occupied Bandwidth	16
3.2	Test Conditions and Results – 6 dB Bandwidth	20
3.3	Test Conditions and Results – Maximum peak conducted power	24
3.4	Test Conditions and Results – Power spectral density	25
3.5	Test Conditions and Results – AC power line conducted emissions	26
3.6	Test Conditions and Results – Band edge compliance	29
3.7	Test Conditions and Results – Conducted spurious emissions	32
3.8	Test Conditions and Results – Transmitter radiated emissions	36
3.9	Test Conditions and Results – Receiver radiated emissions	39
ANNEX A	Transmitter radiated spurious emissions	41
ANNEX B	Receiver radiated spurious emissions	81

## 1 Equipment (Test item) Description

<b>Description</b>	Field Controller Win EC7	
<b>Model</b>	CS20 CDMA Disto	
<b>Additional Model(s)</b>	None	
<b>Brand Name(s)</b>	Leica Geosystems	
<b>Serial number</b>	None	
<b>Hardware version</b>	V5.0	
<b>Software / Firmware version</b>	1.0	
<b>FCC-ID</b>	RFD-CSNGC	
<b>IC</b>	3177A-CSNGC	
<b>Equipment type</b>	End product	
<b>Radio type</b>	Transceiver	
<b>Radio technology</b>	Bluetooth 4.0 Low Energy	
<b>Operating frequency range</b>	2402 - 2480 MHz	
<b>Assigned frequency band</b>	2400 - 2483.5 MHz	
<b>Main test frequencies</b>	F <sub>LOW</sub>	2402 MHz
	F <sub>MID</sub>	2442 MHz
	F <sub>HIGH</sub>	2480 MHz
<b>Spreading</b>	Frequency Hopping	
<b>Modulations</b>	GFSK	
<b>Number of channels</b>	40	
<b>Channel spacing</b>	2MHz	
<b>Number of antennas</b>	1	
<b>Antenna</b>	Type	integrated
	Model	W3008C
	Manufacturer	Pulse
	Gain	2.2 dBi (customer declaration)
<b>Manufacturer</b>	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	
<b>Power supply</b>	V <sub>NOM</sub>	11.1 VDC
<b>AC/DC-Adaptor</b>	Model	AEL40US15
	Vendor	XP Power
	Input	100 - 240 V AC
	Output	15 V DC

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laptop	Lenovo	T540p	Test mode software
<p><b>*Note:</b> Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p>				

**1.5 Test Modes**

Mode #	Description	
Transmit	General conditions:	EUT powered by laboratory power supply.
	Radio conditions:	Mode = standalone transmit Spreading = Hopping stopped (single hopping channel) Modulation = GFSK Data rate = 1 Mbps Bandwidth = 2 MHz Duty cycle = 100 % Power level = 15 (Test mode setting)
Receive	General conditions:	EUT powered by laboratory power supply
	Radio conditions:	Mode = standalone receive (scan mode) Spreading = On Modulation = GFSK
AC-Powerline	General conditions:	EUT powered by dedicated AC/DC adaptor
	Radio conditions:	Mode = Transmit Spreading = On

**1.6 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Occupied Bandwidth</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

<b>6dB Bandwidth</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

<b>Maximum peak conducted power</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

<b>Power spectral density</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

<b>Band edge compliance</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

<b>Conducted spurious emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2014-02	2015-02

<b>Radiated spurious emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2014-03	2015-03
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2013-02	2016-02



AC powerline conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2012-10	2014-10
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:


$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	RSS-Gen 6.6	N/R	Informational only
FCC § 15.247(a)(2) IC RSS-210 § A8.2	6dB Bandwidth	KDB Publication No. 558074	PASS	
FCC § 15.247(b)(3) IC RSS-210 § A8.4	Maximum peak conducted power	KDB Publication No. 558074	PASS	
FCC § 15.247(e) IC RSS-210 § A8.2	Power spectral density	KDB Publication No. 558074	PASS	
47 CFR 15.207 RSS-Gen 8.8	AC power line conducted emissions	KDB Publication No. 558074 / ANSI C63.4	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Band edge compliance	KDB Publication No. 558074	PASS	
FCC § 15.247(d) IC RSS-210 § A8.5	Conducted spurious emissions	KDB Publication No. 558074	PASS	
FCC § 15.247(d) FCC § 15.209 IC RSS-210 A8.5 IC RSS-Gen 4.9 IC RSS-Gen 7.2.5	Transmitter radiated spurious emissions	KDB Publication No. 558074 / ANSI C 63.4	PASS	
IC RSS-Gen 7.1	Receiver radiated spurious emissions	ANSI C 63.4	PASS	
<b>Remarks:</b>				

### 3 Test Conditions and Results


#### 3.1 Test Conditions and Results – Occupied Bandwidth

Occupied Bandwidth acc. to IC RSS-Gen		Verdict: PASS	
Test according to measurement reference	Reference Method		
	RSS-Gen 4.6.1		
Test frequency range	Tested frequencies		
	$F_{LOW} / F_{MID} / F_{HIGH}$		
<b>Limits</b>			
None (Informational only)			
<b>Test setup</b>			
			
<b>Test procedure</b>			
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1 % of span</li> <li>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function</li> </ol>			
<b>Test results</b>			
Channel	Frequency [MHz]	Mode	Occupied Bandwidth [kHz]
$F_{LOW}$	2402	Transmit	1023
$F_{MID}$	2442	Transmit	1053
$F_{HIGH}$	2480	Transmit	1043
Comments:			

**Occupied Bandwidth – F<sub>Low</sub>**
**Occupied Bandwidth acc. to RSS-Gen**

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BT-LE, 2402 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used  
 Note 2: conducted measurement

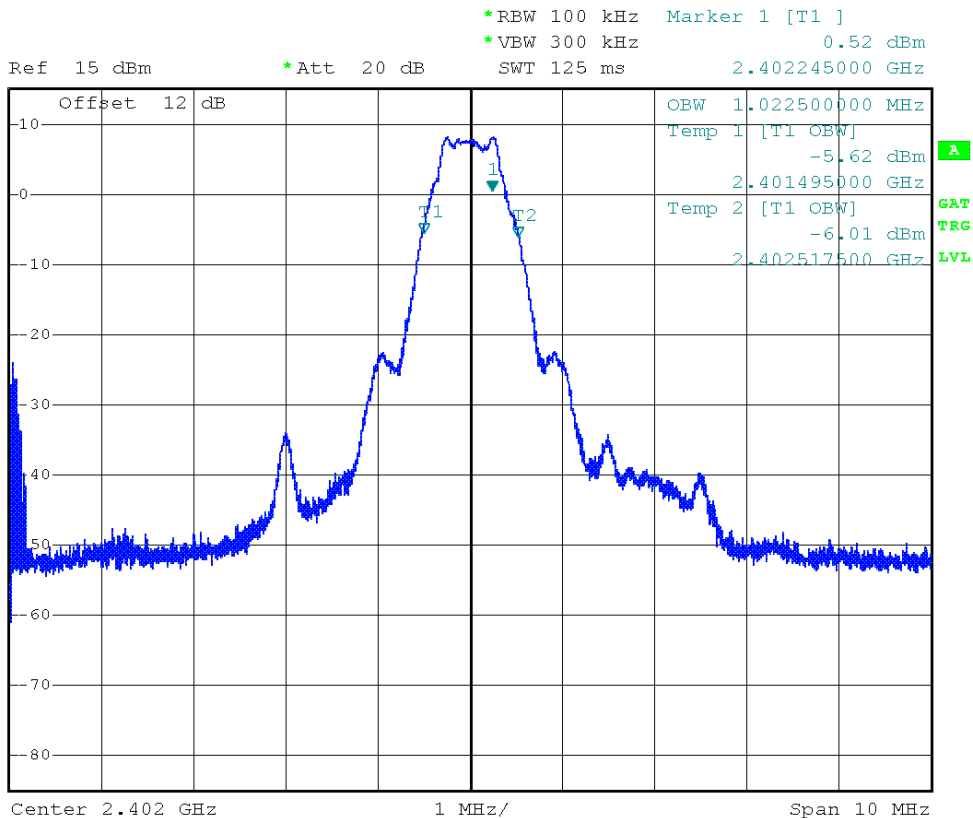


Date: 26.JAN.2015 13:11:59

**Occupied Bandwidth – F<sub>MID</sub>**
**Occupied Bandwidth acc. to RSS-Gen**

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BT-LE, 2440 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used  
 Note 2: conducted measurement

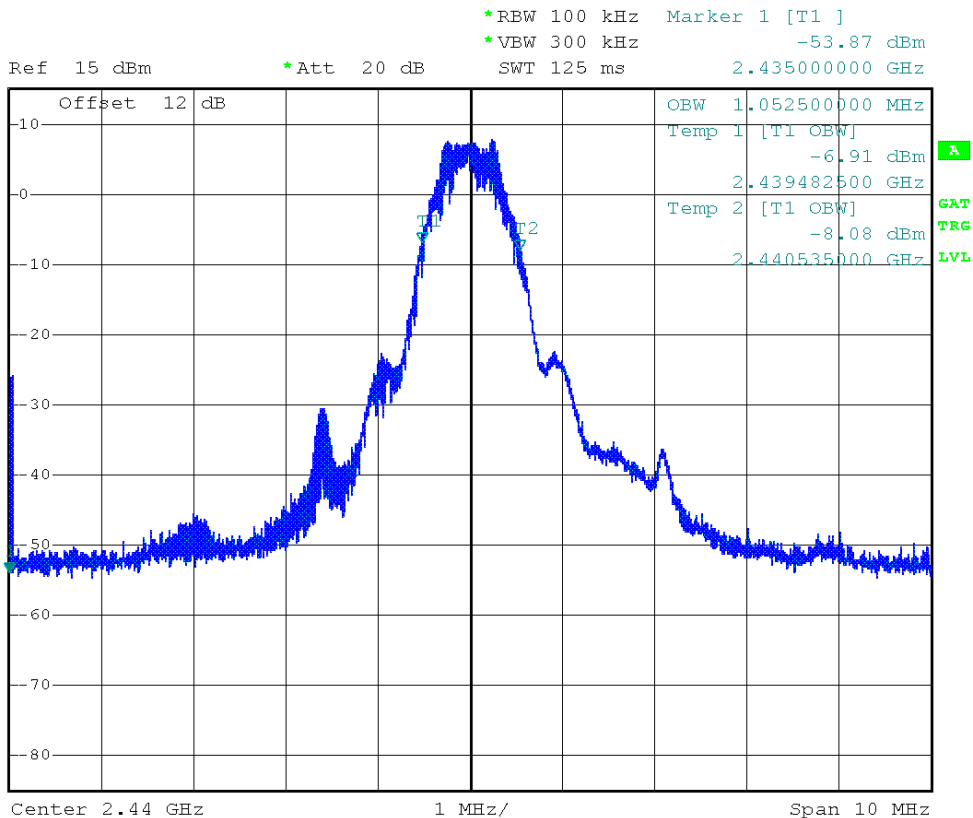

Date: 26.JAN.2015 13:13:58

Test Report No.: G0M-1406-3915-TFC247BL-V01

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany


**Occupied Bandwidth – F<sub>HIGH</sub>**
**Occupied Bandwidth acc. to RSS-Gen**

Project Number: G0M-1406-3915


Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BT-LE, 2480 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: A spectrum analyzer with an integrated 99% power bandwidth function is used  
 Note 2: conducted measurement



\*RBW 100 kHz Marker 1 [T1 ]  
 \*VBW 300 kHz -56.78 dBm  
 Ref 15 dBm \*Att 20 dB SWT 125 ms 2.475000000 GHz

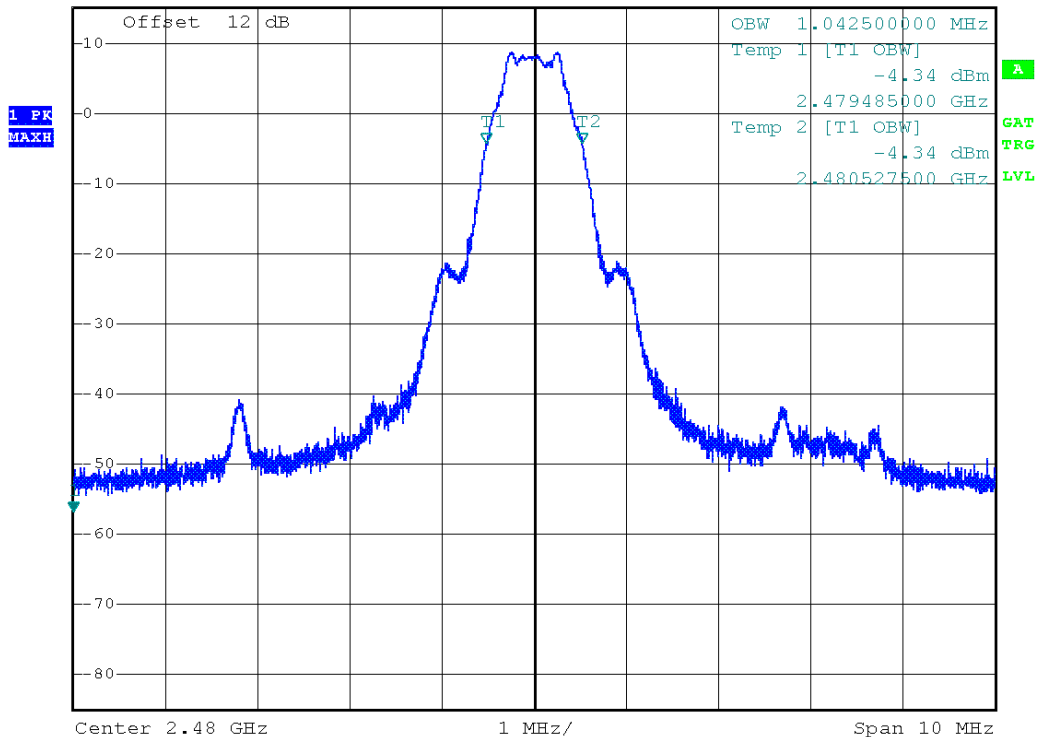

## 3.2 Test Conditions and Results – 6 dB Bandwidth

6dB Bandwidth acc. to FCC 15.247 / IC RSS-210				Verdict: PASS	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(a)(2) / IC RSS-210 A8.2				
Test according to measurement reference	Reference Method				
	FCC KDB Publication No. 558074				
Test frequency range	Tested frequencies				
	$F_{LOW} / F_{MID} / F_{HIGH}$				
<b>Limits</b>					
Limit					
$\geq 500\text{kHz}$					
<b>Test setup</b>					
					
<b>Test procedure</b>					
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Detector set to peak and max hold and RBW is set to 100 kHz</li> <li>4. Envelope peak value of emission spectrum is selected</li> <li>5. Marker on envelope of spectrum is set to level of -6 dB to the left of the peak</li> <li>6. Marker on envelope of spectrum is set to level of -6 dB to the right of the peak</li> <li>7. 6 dB Bandwidth is determined by marker frequency separation</li> </ol>					
<b>Test results</b>					
Channel	Frequency [MHz]	Mode	6 dB Bandwidth [kHz]	Limit [kHz]	Result
$F_{LOW}$	2402	Transmit	697.2	500	PASS
$F_{MID}$	2442	Transmit	688.8	500	PASS
$F_{HIGH}$	2480	Transmit	710.4	500	PASS
Comments:					




6 dB Bandwidth – F<sub>Low</sub>

**Minimum 6 dB Bandwidth acc. to FCC 15.247**

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2402 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: Procedure 8.1 DTS (558074 D01 Meas Guidance)  
 Note 2: Minimum 6 dB Bandwidth conducted

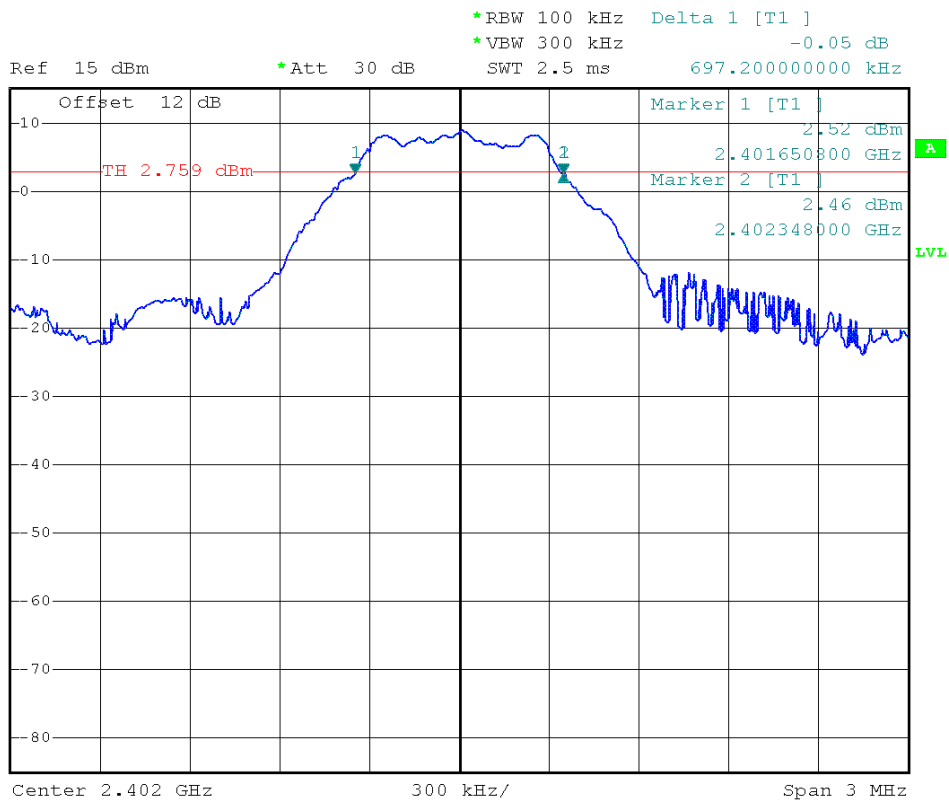


Comment: 6 dB bandwidth: 697.2 KHz > 500 KHz; verdict: PASS  
 Date: 26.JAN.2015 13:17:30

**6 dB Bandwidth – F<sub>MID</sub>**
**Minimum 6 dB Bandwidth acc. to FCC 15.247**

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2440 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: Procedure 8.1 DTS (558074 D01 Meas Guidance)  
 Note 2: Minimum 6 dB Bandwidth conducted

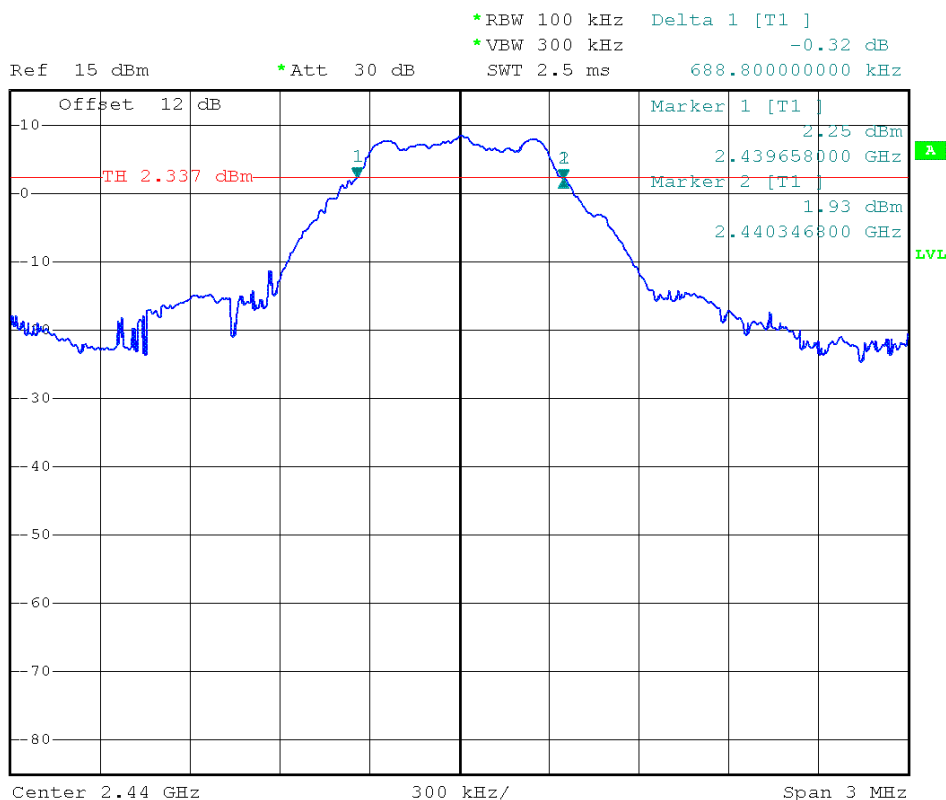


Comment: 6 dB bandwidth: 688.8 KHz > 500 KHz; verdict: PASS  
 Date: 26.JAN.2015 13:18:41

**6 dB Bandwidth – F<sub>HIGH</sub>**
**Minimum 6 dB Bandwidth acc. to FCC 15.247**


Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2480 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: Procedure 8.1 DTS (558074 D01 Meas Guidance)  
 Note 2: Minimum 6 dB Bandwidth conducted

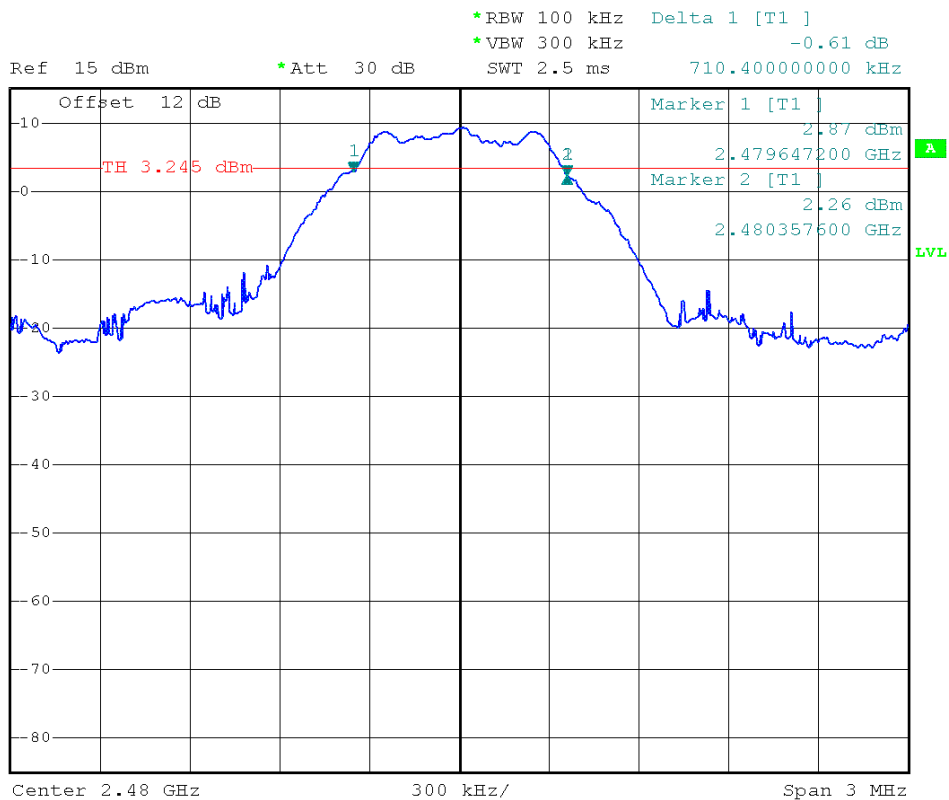


Comment: 6 dB bandwidth: 710.4 KHz > 500 KHz; verdict: PASS  
 Date: 26.JAN.2015 13:19:52

**3.3 Test Conditions and Results – Maximum peak conducted power**

<b>Maximum peak conducted power acc. to FCC 15.247 / IC RSS-210</b>				<b>Verdict: PASS</b>			
EUT requirement rule parts and clause		Reference					
		FCC 15.247(b)(3) / IC RSS-210 A8.4					
Test according to measurement reference		Reference Method					
		FCC KDB Publication No. 558074					
Test frequency range		Tested frequencies					
		$F_{LOW} / F_{MID} / F_{HIGH}$					
Measurement mode		Peak					
Maximum antenna gain		2.2 dBi $\Rightarrow$ Limit correction = 0 dB					
<b>Limits</b>							
1 W (30 dBm)							
The conducted output power limit specified above is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in the table, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.							
<b>Test setup</b>							
							
<b>Test procedure</b>							
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Center frequency set to test channel center frequency</li> <li>3. Span set to twice the 20 dB bandwidth and detector to peak and max hold</li> <li>4. Resolution bandwidth is set to 3 MHz</li> <li>5. Peak conducted power is determined from peak of spectrum envelope</li> </ol>							
<b>Test results</b>							
Channel	Frequency [MHz]	Voltage	Mode	Peak power [dbm]	Peak power [W]	Limit [dBm]	Margin [dB]
$F_{LOW}$	2402	$V_{nom}$	Transmit	9.3	0.009	30	-20.70
$F_{MID}$	2442	$V_{nom}$	Transmit	8.7	0.007	30	-21.30
$F_{HIGH}$	2480	$V_{nom}$	Transmit	9.5	0.009	30	-20.50
Comment:							

3.4 Test Conditions and Results – Power spectral density

Power spectral density acc. to FCC 15.247 / IC RSS-210				Verdict: PASS		
EUT requirement rule parts and clause	Reference					
	FCC 15.247(e) / IC RSS-210 A8.2					
Test according to measurement reference	Reference Method					
	FCC KDB Publication No. 558074					
Test frequency range	Tested frequencies					
	$F_{LOW} / F_{MID} / F_{HIGH}$					
Measurement mode	Peak					
<b>Limits</b>						
8 dBm / 3 kHz						
<b>Test setup</b>						
						
<b>Test procedure</b>						
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Center frequency set to test channel center frequency</li> <li>3. Span is set large enough to capture maximum emissions in passband, RBW is set to 3kHz</li> <li>4. Peak power density is determined from peak emission of envelope</li> </ol>						
<b>Test results</b>						
Channel	Frequency [MHz]	Test mode	Peak frequency [MHz]	Peak power density [dBm]	Limit [dBm/3kHz]	Margin [dB]
$F_{LOW}$	2402	Transmit	2401.97	-0.86	8.0	-08.86
$F_{MID}$	2442	Transmit	2440.00	-0.93	8.0	-08.93
$F_{HIGH}$	2480	Transmit	2479.90	-0.55	8.0	-08.55
Comments: Measurement was performed with RBW = 10 kHz						

**3.5 Test Conditions and Results – AC power line conducted emissions**


<b>Power line conducted emissions acc. FCC 47 CFR 15.207 / IC RSS-Gen</b>		<b>Verdict: PASS</b>		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Points of Application	Application Interface			
AC Mains	LISN			
EUT test mode	AC power line			
<b>Limits and results</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

**Conducted Emissions**
**EMI voltage test in the ac-mains according to FCC Part 15b**

Project number: G0M-1406-3915

Manufacturer: Leica Geosystems AG  
 EUT Name: Feld Controller  
 Model: CS20 CDMA Disto  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Zunke  
 Test Conditions: Tnom: 25°C, Unom: 10.8VDC via AC/DC Adapter  
 LISN: ESH2-Z5 N  
 Mode: CS20 CDMA Disto, charging, WLAN link to AP, BT link to Laptop, GSM900 link to CMU, LR-BT link to TS15 with RH16  
 Test Date: 2014-08-07  
 Note:

Index 32

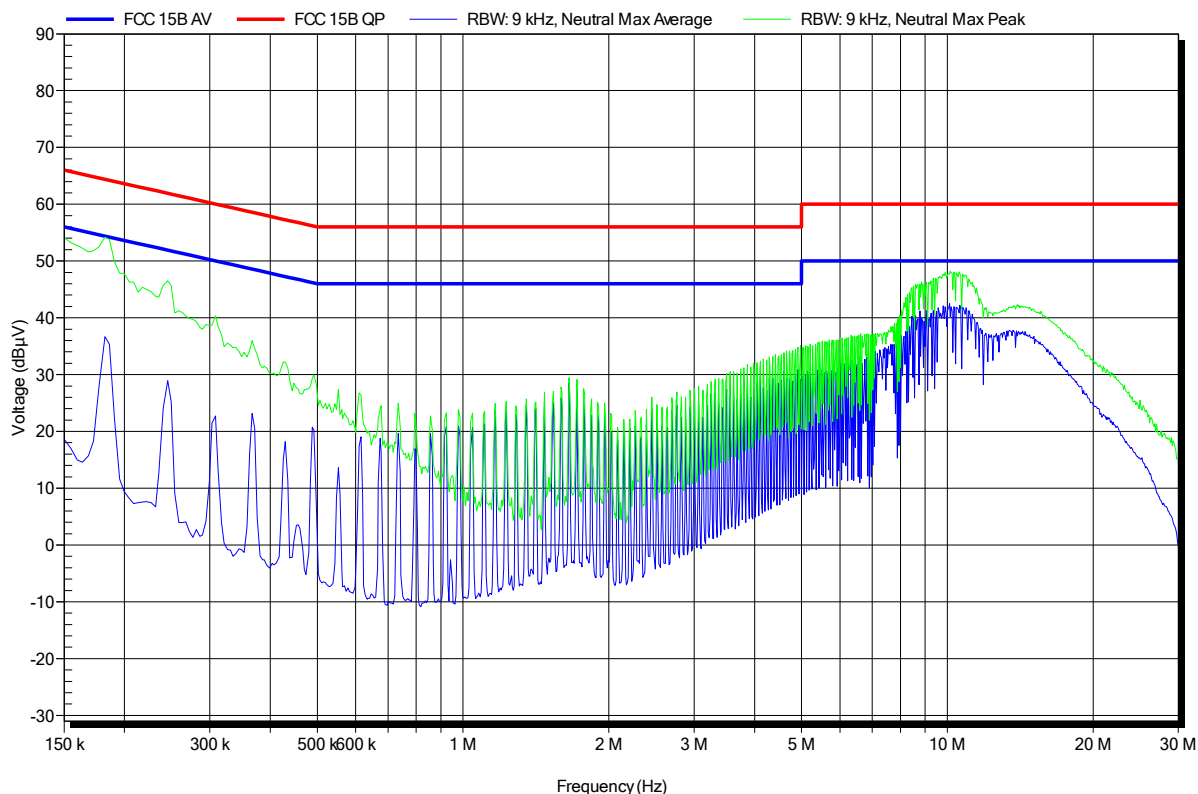


**Conducted Emissions**
**EMI voltage test in the ac-mains according to FCC Part 15b**

Project number: G0M-1406-3915


Manufacturer: Leica Geosystems AG  
 EUT Name: Feld Controller  
 Model: CS20 CDMA Disto  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Zunke  
 Test Conditions: Tnom: 25°C, Unom: 10.8VDC via AC/DC Adapter  
 LISN: ESH2-Z5 L  
 Mode: CS20 CDMA Disto, charging, WLAN link to AP, BT link to Laptop, GSM900 link to CMU, LR-BT link to TS15 with RH16  
 Test Date: 2014-08-07  
 Note:

Index 31

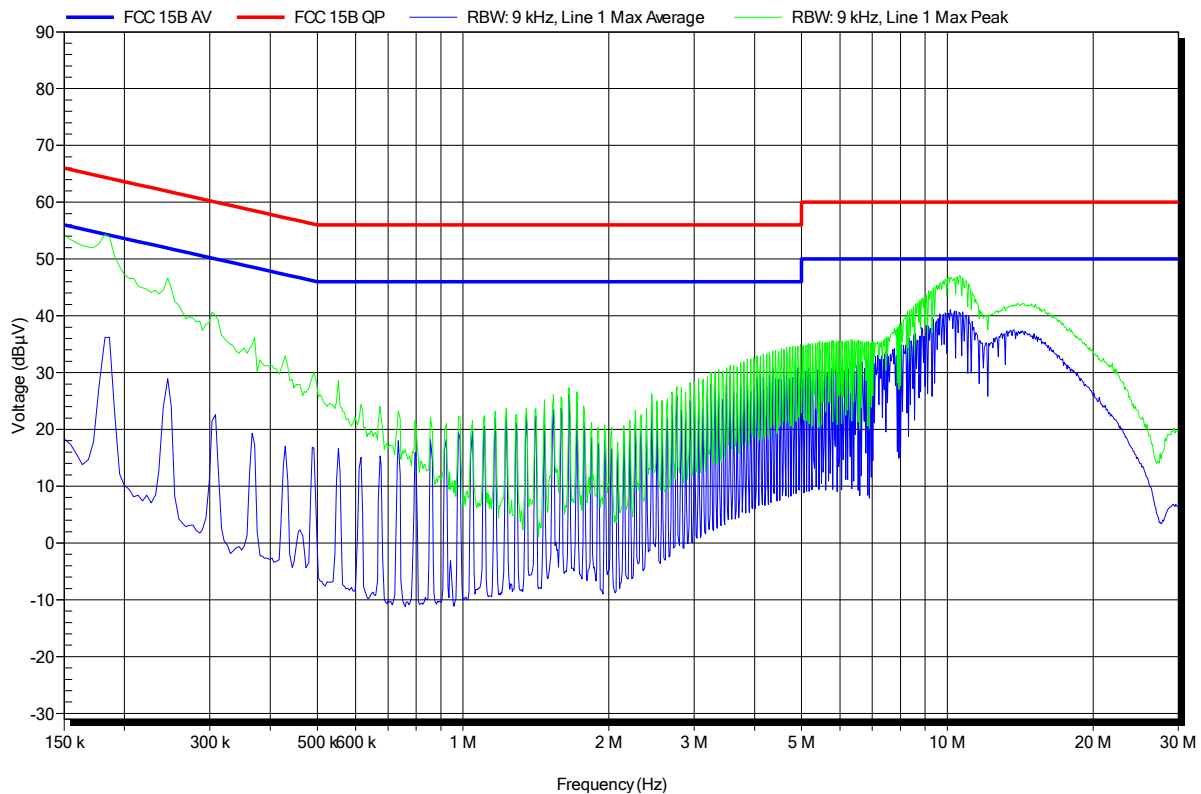



**3.6 Test Conditions and Results – Band edge compliance**


<b>Band-edge compliance acc. to FCC 15.247 / IC RSS-210</b>				<b>Verdict: PASS</b>	
EUT requirement rule parts and clause	Reference				
	FCC 15.247(d) / IC RSS-210 A8.5				
Test according to measurement reference	Reference Method				
	FCC KDB Publication No. 558074				
Test frequency range	Tested frequencies				
	$F_{LOW} / F_{HIGH}$				
Measurement mode	Peak				
<b>Limits</b>					
Limit			Condition		
$\leq -20$ dB / 100 kHz			Peak power measurement detector = Peak		
$\leq -30$ dB / 100 kHz			Peak power measurement detector = RMS		
<b>Test setup</b>					
 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>					
<b>Test procedure</b>					
<ol style="list-style-type: none"> <li>EUT set to test mode (Communication tester is used if needed)</li> <li>Span set around lower band edge and detector is set to peak and max hold</li> <li>Resolution bandwidth is set to 100 kHz</li> <li>Markers are set to peak emission levels within frequency band and outside frequency band</li> <li>Band edge attenuation is determined from level difference</li> </ol>					
<b>Test results</b>					
Channel	Frequency [MHz]	Mode	Level [dBc]	Limit [dBc]	Margin [dB]
$F_{LOW}$	2402	Transmit	-24.21	-20	-04.21
$F_{HIGH}$	2480	Transmit	-31.63	-20	-11.63
Comments:					

**Band-edge compliance - F<sub>LOW</sub>**

**Band-edge compliance acc. to FCC 15.247**

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, GFSK, 2402 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: 20 dB down method (558074 D01 Meas Guidance)  
 Note 2: lower Band-edge, conducted measurement

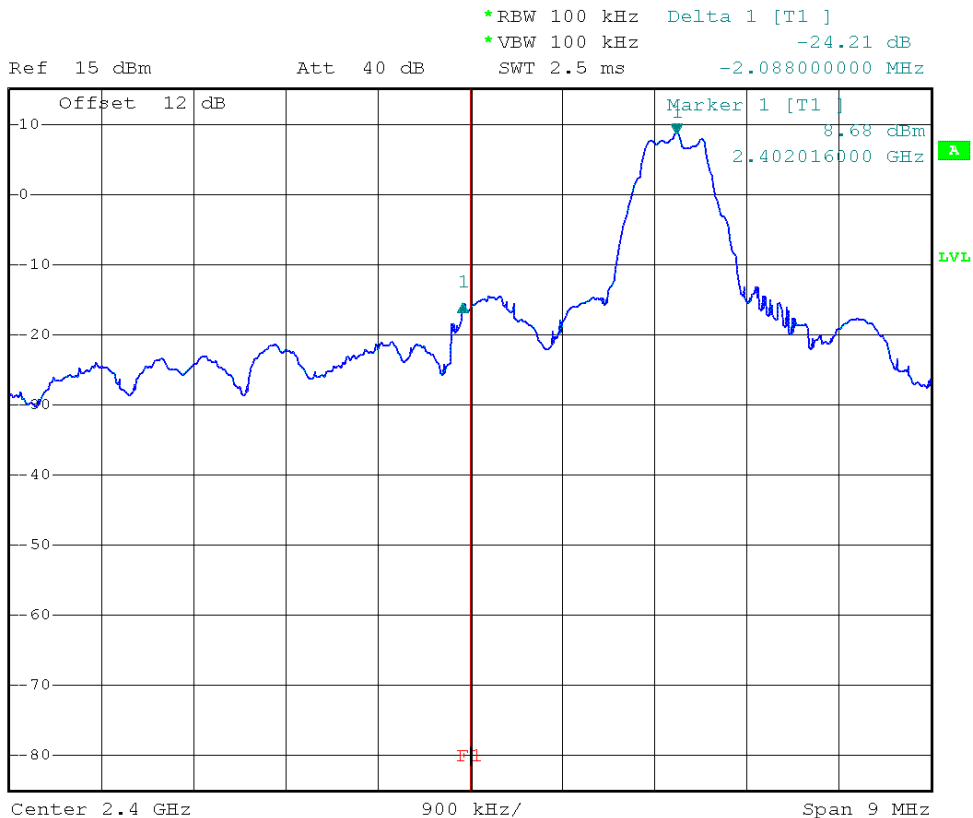

Date: 26.JAN.2015 13:41:05

**Band-edge compliance – F<sub>HIGH</sub>**
**Band-edge compliance acc. to FCC 15.247**


Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, GFSK, 2480 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: 20 dB down method (558074 D01 Meas Guidance)  
 Note 2: upper Band-edge, conducted measurement



Date: 26.JAN.2015 13:49:04

**3.7 Test Conditions and Results – Conducted spurious emissions**



<b>Conducted spurious emissions acc. to FCC 15.247 / IC RSS-210</b>				<b>Verdict: PASS</b>			
EUT requirement rule parts and clause		Reference					
		FCC 15.247(d) / IC RSS-210 A8.5					
Test according to measurement reference		Reference Method					
		FCC KDB Publication No. 558074					
Test frequency range		Tested frequencies					
		10 MHz – 10 <sup>th</sup> Harmonic					
Measurement mode		Peak					
<b>Limits</b>							
Limit				Condition			
≤ -20 dB / 100 kHz				Peak power measurement detector = Peak			
≤ -30 dB /100 kHz				Peak power measurement detector = RMS			
<b>Test setup</b>							
							
<b>Test procedure</b>							
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span it set according to measurement range</li> <li>3. Resolution bandwidth is set to 100 kHz and detector to peak and max hold</li> <li>4. Markers are set to peak emission levels within frequency band</li> <li>5. Emission level is determined by second marker on emission peak</li> <li>6. Attenuation is determined from level difference</li> </ol>							
<b>Test results</b>							
Channel	Frequency [MHz]	Mode	Emission [MHz]	Emission Level [dbm]	Peak power [dBm]	Limit [dBm]	Margin [dB]
F <sub>LOW</sub>	2402	Transmit	4805	-36.34	8.0	-12.0	-24.34
F <sub>MID</sub>	2440	Transmit	4889	-36.91	7.5	-12.5	-24.41
F <sub>HIGH</sub>	2480	Transmit	4959	-37.21	7.8	-12.2	-25.01
Comments:							

Conducted spurious emissions – F<sub>Low</sub>

**Spurious Emissions acc. to FCC 15.247**

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2402 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)  
 Note 2: conducted measurement

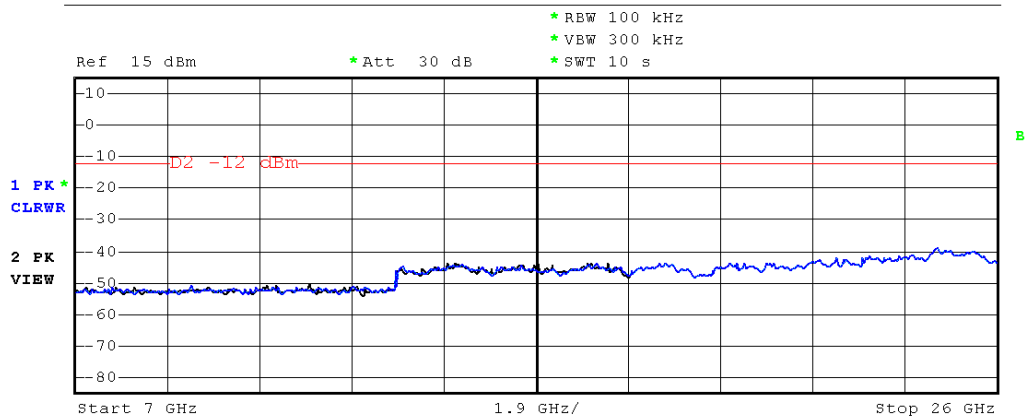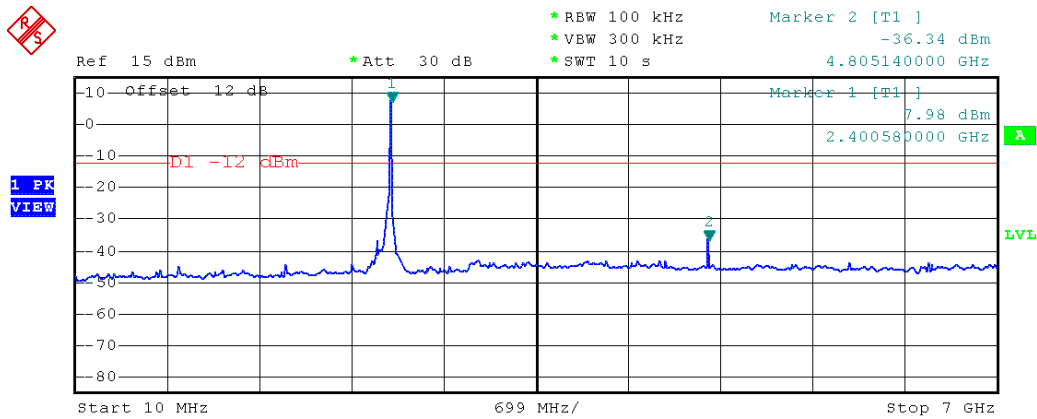



Date: 26.JAN.2015 13:51:56

Conducted spurious emissions – F<sub>MID</sub>

Spurious Emissions acc. to FCC 15.247

Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2440 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)  
 Note 2: conducted measurement

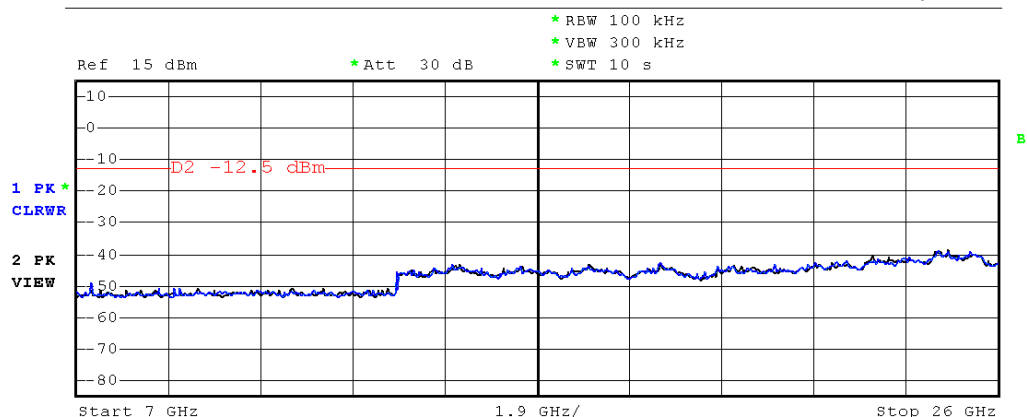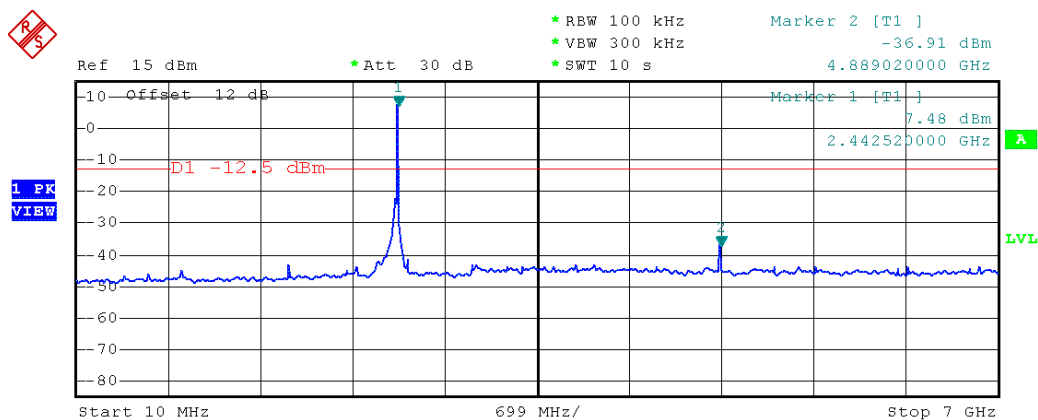



Date: 26.JAN.2015 13:54:58

Conducted spurious emissions – F<sub>HIGH</sub>

Spurious Emissions acc. to FCC 15.247


Project Number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20 CDMA DISTO  
 Test Site: Eurofins Product Service GmbH  
 Operator: Christian Weber  
 Test Conditions: Tnom / Vnom  
 Mode: Tx, BTLE, 2480 MHz, modulated  
 Test Date: 2015-01-26  
 Verdict: NONE (INFORMATION ONLY)  
 Note 1: Spurious in non-restricted frequency bands (558074 D01 Meas Guidance)  
 Note 2: conducted measurement

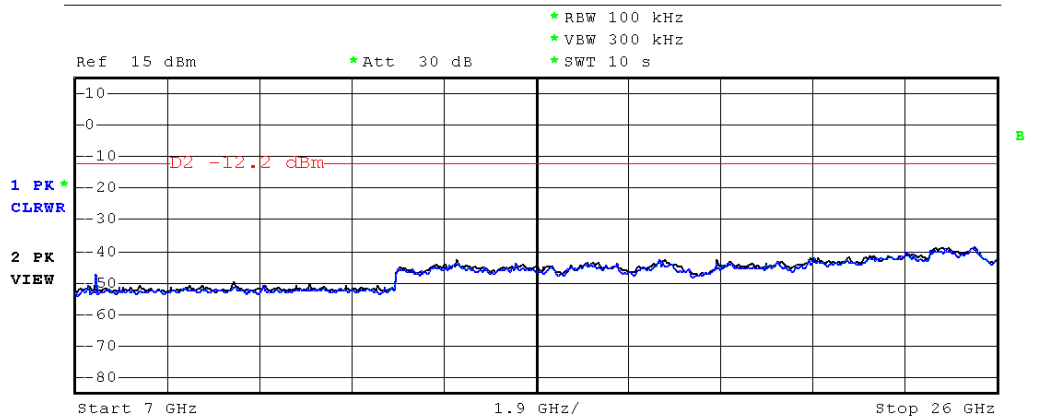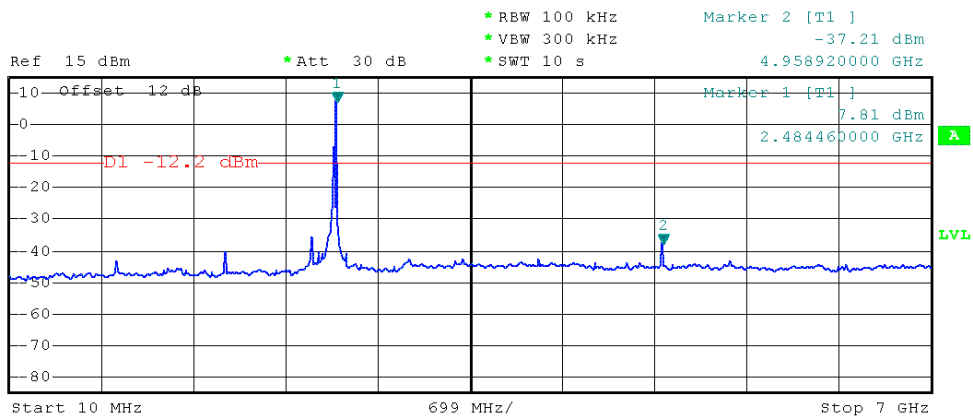

Date: 26.JAN.2015 14:00:18

3.8 Test Conditions and Results – Transmitter radiated emissions

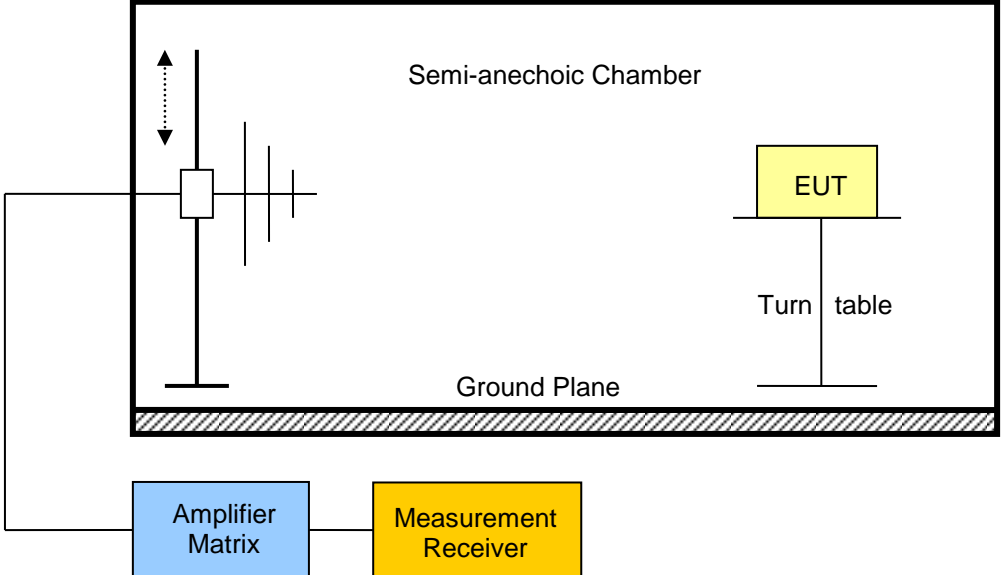Transmitter radiated emissions acc. to FCC 47 CFR 15.247 / IC RSS-210				Verdict: PASS	
Test according referenced standards		Reference Method			
		FCC 15.247(d) / IC RSS-210 A8.5			
Test according to measurement reference		Reference Method			
		FCC KDB Publication No. 558074 / ANSI C63.4			
Test frequency range		Tested frequencies			
		30 MHz – 10 <sup>th</sup> Harmonic			
Limits					
Frequency range [MHz]	Detector	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Limit Distance [m]	
30 – 88	Quasi-Peak	100	40	3	
88 – 216	Quasi-Peak	150	43.5	3	
216 – 960	Quasi-Peak	200	46	3	
960 – 1000	Quasi-Peak	500	54	3	
> 1000	Average	500	54	3	
<p>Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).</p> <p>When average radiated emission measurements are specified, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.</p>					
Test setup					
 <p>The diagram illustrates the test setup. A Semi-anechoic Chamber is shown with a Ground Plane at the bottom. Inside the chamber, an Amplifier Matrix is connected to a Measurement Receiver. The Equipment Under Test (EUT) is placed on a Turn table within the chamber. A vertical antenna is positioned to the left of the chamber, connected to the Amplifier Matrix. The chamber walls are indicated by a hatched pattern at the bottom and sides.</p>					



Test procedure									
1. EUT set to test mode (Communication tester is used if needed) 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz 4. Markers are set to peak emission levels within restricted bands									
Test results									
Channel	Frequency [MHz]	Mode	Emission [MHz]	Level [db $\mu$ V/m]	Det.	Pol.	Limit [db $\mu$ V/m]	Limit dist. [m]*	Margin [dB]
F <sub>LOW</sub>	2402	Transmit	608	28.37	pk	ver	46.00	3	-17.63
F <sub>LOW</sub>	2402	Transmit	608	26.75	pk	hor	46.00	3	-19.25
F <sub>LOW</sub>	2402	Transmit	2377	56.48	pk	hor	74.00	3	-17.52
F <sub>LOW</sub>	2402	Transmit	2377	32.77	RMS	hor	54.00	3	-21.23
F <sub>LOW</sub>	2402	Transmit	2385	53.74	pk	ver	74.00	3	-20.26
F <sub>LOW</sub>	2402	Transmit	2385	34.41	RMS	ver	54.00	3	-19.59
F <sub>LOW</sub>	2402	Transmit	2385	57.12	pk	hor	74.00	3	-16.88
F <sub>LOW</sub>	2402	Transmit	2385	37.34	RMS	hor	54.00	3	-16.66
F <sub>LOW</sub>	2402	Transmit	2400	78.49	pk	ver	95.00	3	-16.51
F <sub>LOW</sub>	2402	Transmit	2400	79.54	pk	hor	95.00	3	-15.46
F <sub>LOW</sub>	2402	Transmit	4800	48.02	pk	ver	74.00	3	-25.98
F <sub>MID</sub>	2440	Transmit	2384	55.41	pk	ver	74.00	3	-18.59
F <sub>MID</sub>	2440	Transmit	2384	34.94	RMS	ver	54.00	3	-19.06
F <sub>MID</sub>	2440	Transmit	2384	54.71	pk	hor	74.00	3	-19.29
F <sub>MID</sub>	2440	Transmit	2384	34.41	RMS	hor	54.00	3	-19.59
F <sub>MID</sub>	2440	Transmit	2490.7	49.47	pk	hor	74.00	3	-24.53
F <sub>MID</sub>	2440	Transmit	2490.7	29.24	RMS	hor	54.00	3	-24.76
F <sub>MID</sub>	2440	Transmit	2490.8	50.85	pk	ver	74.00	3	-23.15
F <sub>MID</sub>	2440	Transmit	2490.8	29.47	RMS	ver	54.00	3	-24.53
F <sub>HIGH</sub>	2480	Transmit	2384	54.17	pk	ver	74.00	3	-19.83
F <sub>HIGH</sub>	2480	Transmit	2384	33.50	RMS	ver	54.00	3	-20.50
F <sub>HIGH</sub>	2480	Transmit	2384	55.67	pk	hor	74.00	3	-18.33
F <sub>HIGH</sub>	2480	Transmit	2384	35.17	RMS	hor	54.00	3	-18.83
F <sub>HIGH</sub>	2480	Transmit	2483.5	57.70	pk	ver	74.00	3	-16.30
F <sub>HIGH</sub>	2480	Transmit	2483.5	50.24	RMS	ver	54.00	3	-03.76
F <sub>HIGH</sub>	2480	Transmit	2483.5	56.51	pk	hor	74.00	3	-17.49
F <sub>HIGH</sub>	2480	Transmit	2483.5	47.43	RMS	hor	54.00	3	-06.57
F <sub>HIGH</sub>	2480	Transmit	2483.8	54.39	pk	ver	74.00	3	-19.61
F <sub>HIGH</sub>	2480	Transmit	2483.8	45.88	RMS	ver	54.00	3	-08.12


Test Report No.: G0M-1406-3915-TFC247BL-V01

 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

F <sub>HIGH</sub>	2480	Transmit	2483.9	54.82	pk	hor	74.00	3	-19.18
F <sub>HIGH</sub>	2480	Transmit	2483.9	41.56	RMS	hor	54.00	3	-12.44
F <sub>HIGH</sub>	2480	Transmit	2484.2	53.76	pk	hor	74.00	3	-20.24
F <sub>HIGH</sub>	2480	Transmit	2484.2	37.91	RMS	hor	54.00	3	-16.09
F <sub>HIGH</sub>	2480	Transmit	2503	55.88	pk	ver	95.00	3	-39.12
F <sub>HIGH</sub>	2480	Transmit	2503	55.34	pk	hor	95.00	3	-39.66

Comments: \* Physical distance between EUT and measurement antenna.

**3.9 Test Conditions and Results – Receiver radiated emissions**

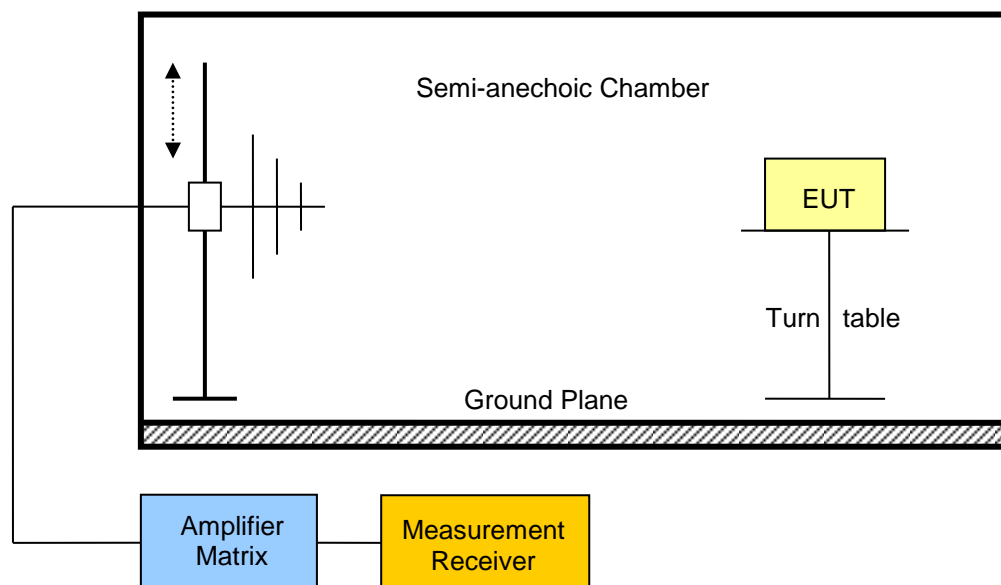Receiver radiated emissions acc. to IC RSS-210				Verdict: PASS
Test according referenced standards	Reference Method			
	IC RSS-210 A8.5			
Test according to measurement reference	Reference Method			
	ANSI C63.4			
Test frequency range	Tested frequencies			
	30 MHz – 3 <sup>th</sup> Harmonic			
EUT test mode	Receive			
Limits				
Frequency range [MHz]	Detector	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Limit Distance [m]
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
216 – 960	Quasi-Peak	200	46	3
960 – 1000	Quasi-Peak	500	54	3
> 1000	Average	500	54	3
Test setup				
 <p>The diagram illustrates the test setup within a Semi-anechoic Chamber. The chamber sits on a Ground Plane. Inside, an EUT (Equipment Under Test) is mounted on a Turn table. A probe antenna is positioned above the chamber, connected to an Amplifier Matrix and a Measurement Receiver located outside the chamber.</p>				

**Test procedure**

1. EUT set to receive mode (Communication tester is used if needed)
2. Span it set according to measurement range
3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz
4. Markers are set to peak emission levels

**Test results**

Channel	Frequency [MHz]	Emission [MHz]	Emission Level [dB $\mu$ V/m]	Det.	Limit [dB $\mu$ V/m]	Margin [dB]
F <sub>MID</sub>	2440	176.54	34.66	pk	43.5	-8.84
F <sub>MID</sub>	2440	416	36.03	pk	46	-9.97
F <sub>MID</sub>	2440	768	35.22	pk	46	-10.78

**Comments:**

\* Physical distance between EUT and measurement antenna.

\*\* Emission level corresponds to ambient noise floor


## ANNEX A Transmitter radiated spurious emissions

### Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3 m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical; worst case

Index 46

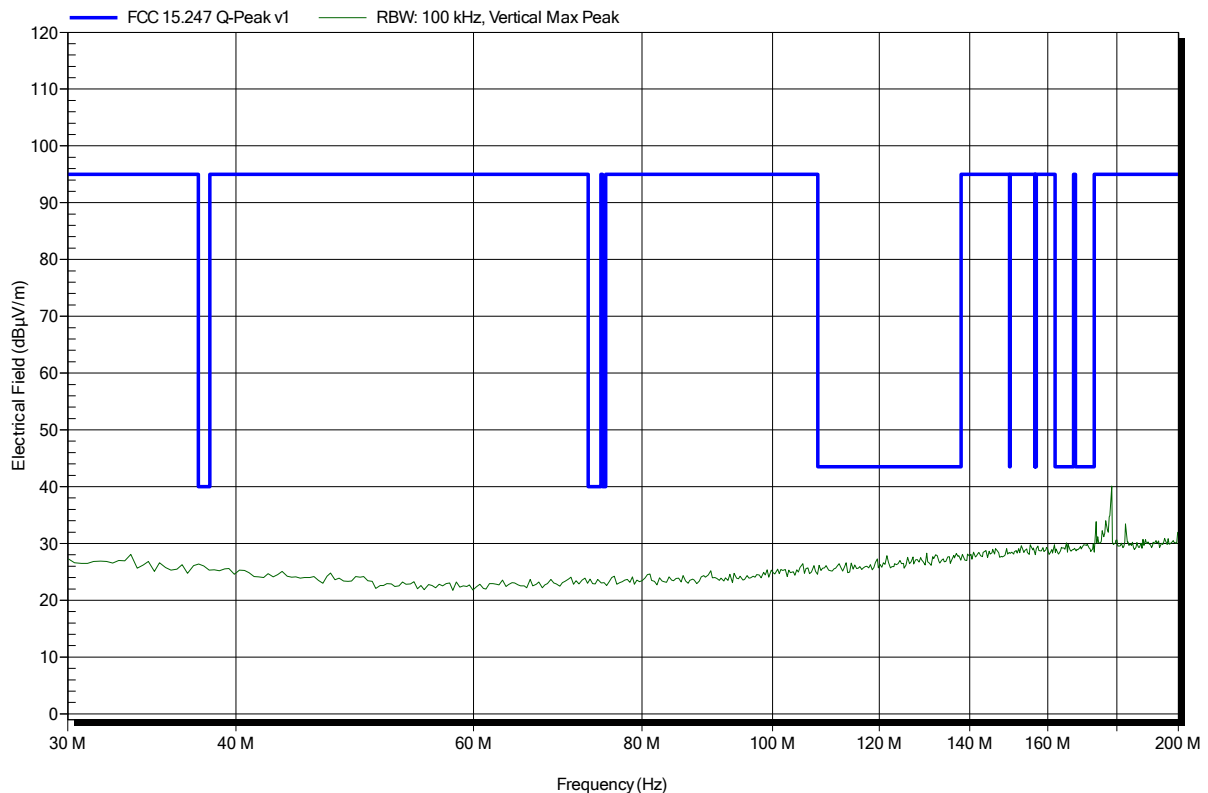


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical; worst case

Index 47

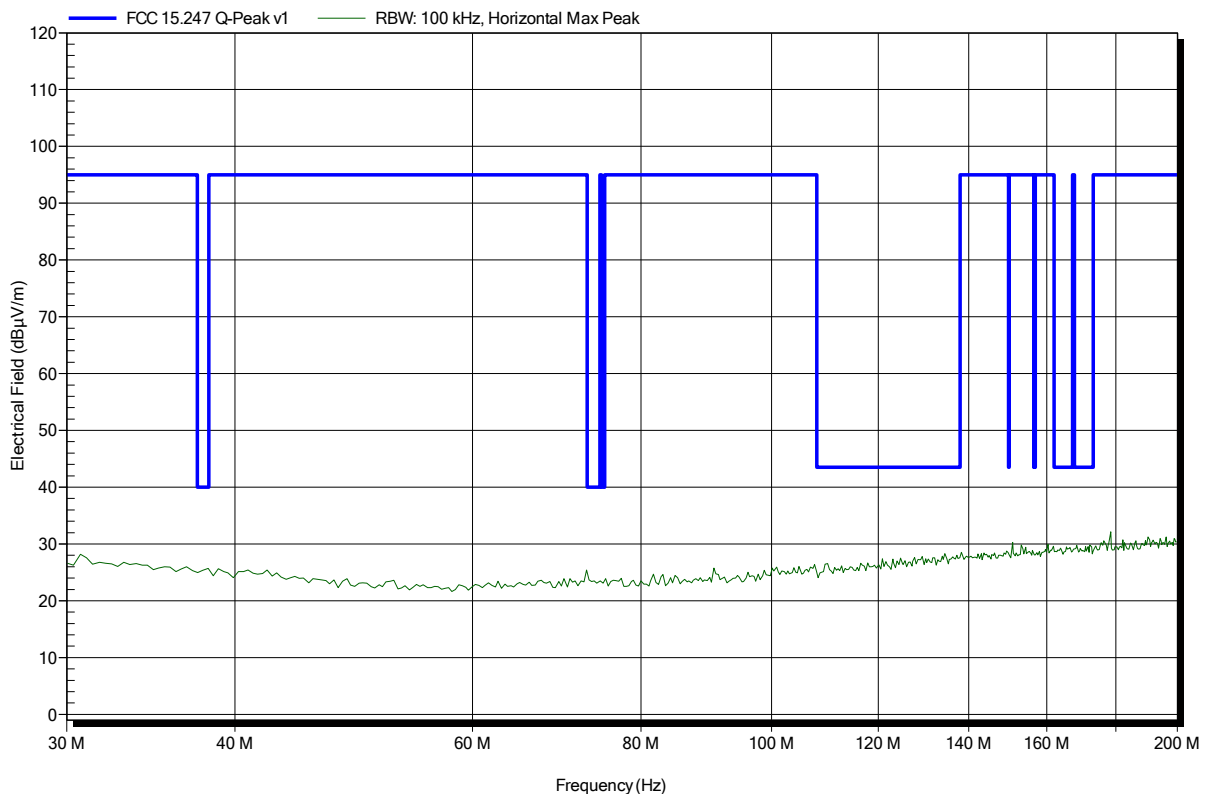


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; worst case

Index 44

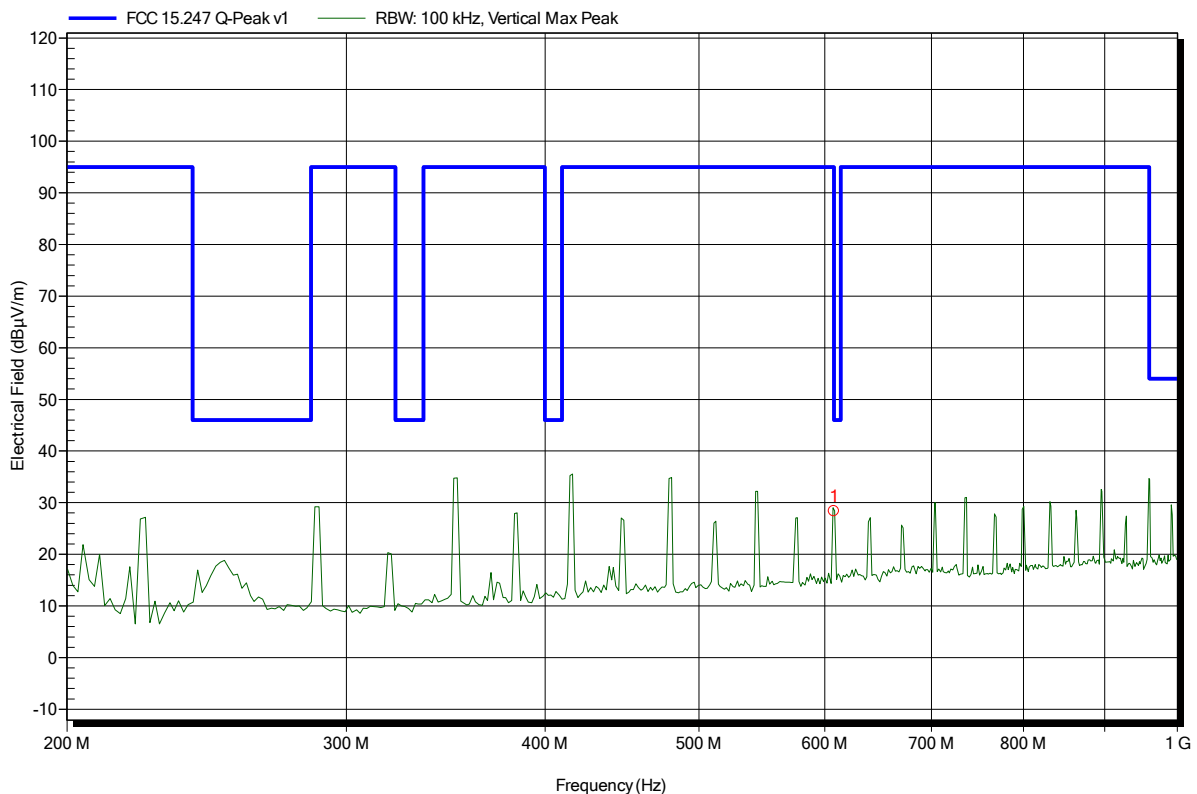


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
608 MHz	28.37 dBµV/m	46 dBµV/m	-17.63 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; worst case

Index 45

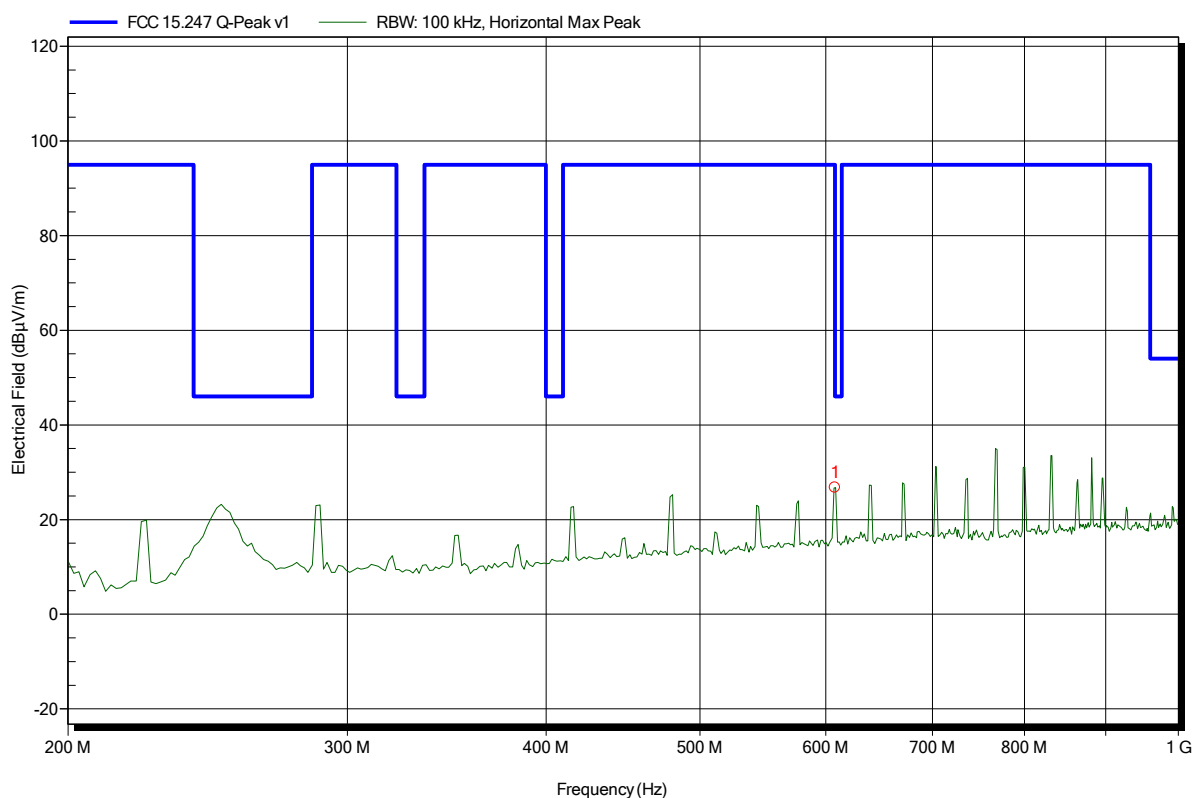

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
608 MHz	26.75 dBµV/m	46 dBµV/m	-19.25 dB	Pass




**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 7

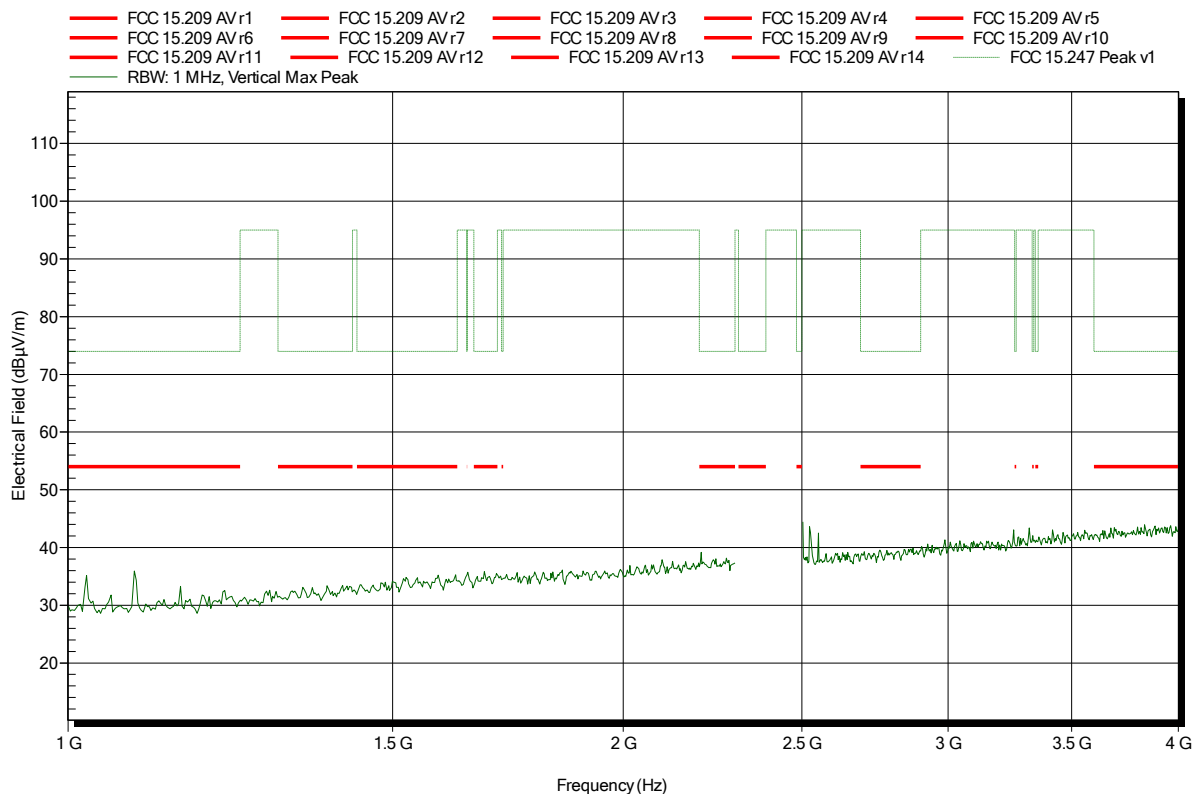


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 4

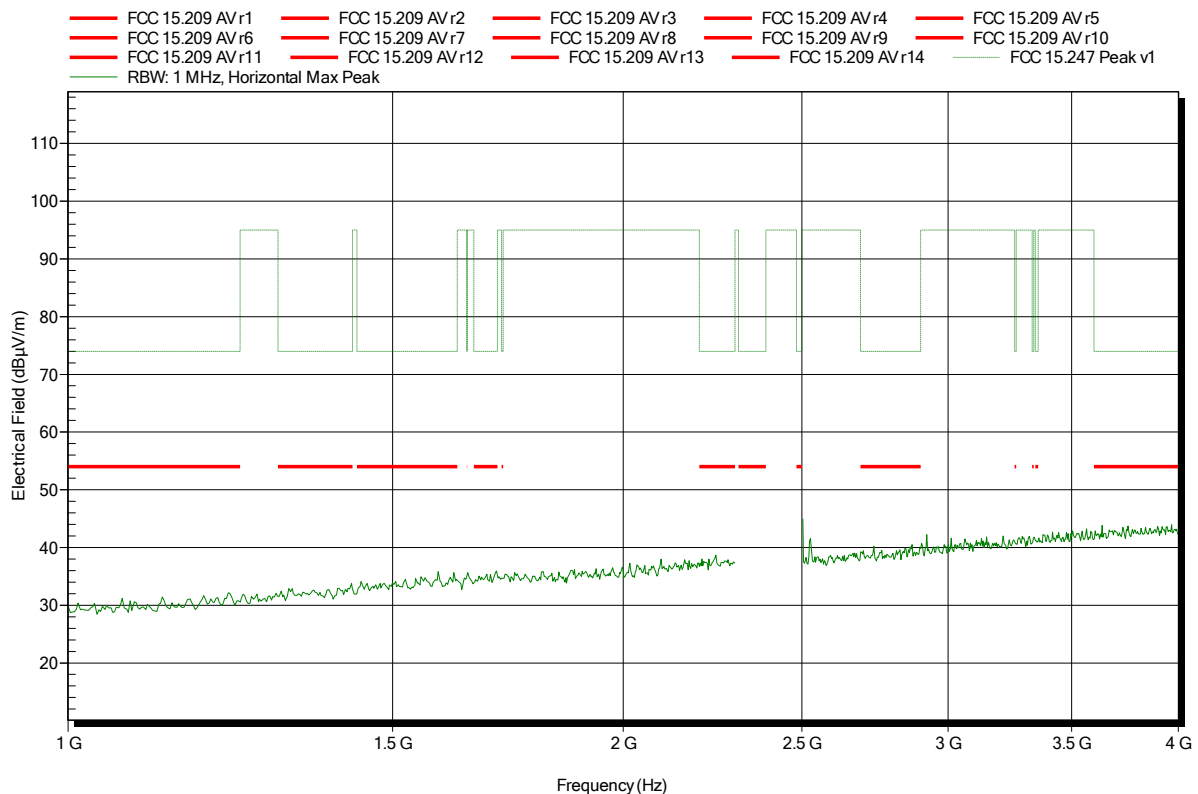


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; lower bandedge

Index 8

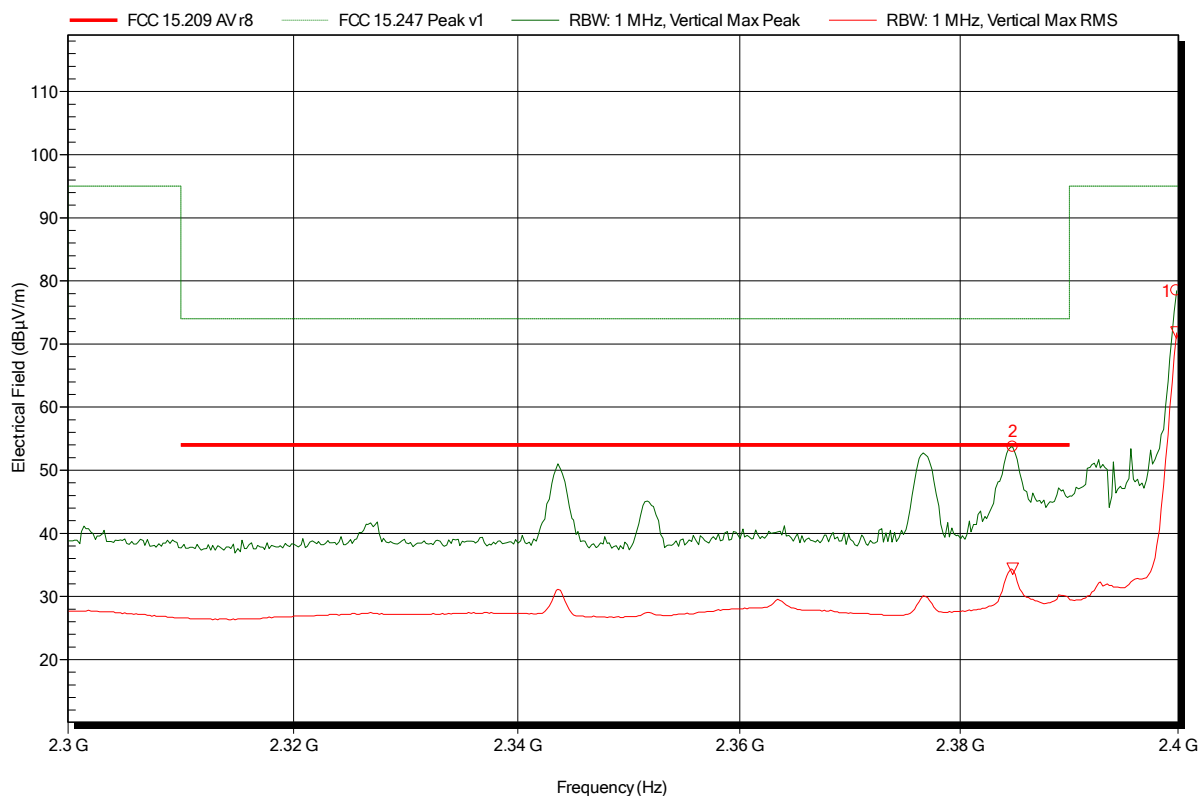

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.385 GHz	53.74 dBµV/m	74 dBµV/m	-20.26 dB	Pass
2.4 GHz	78.49 dBµV/m	95 dBµV/m	-16.51 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.385 GHz	34.41 dBµV/m	54 dBµV/m	-19.59 dB	Pass
2.4 GHz	71.82 dBµV/m			

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; lower bandedge

Index 5

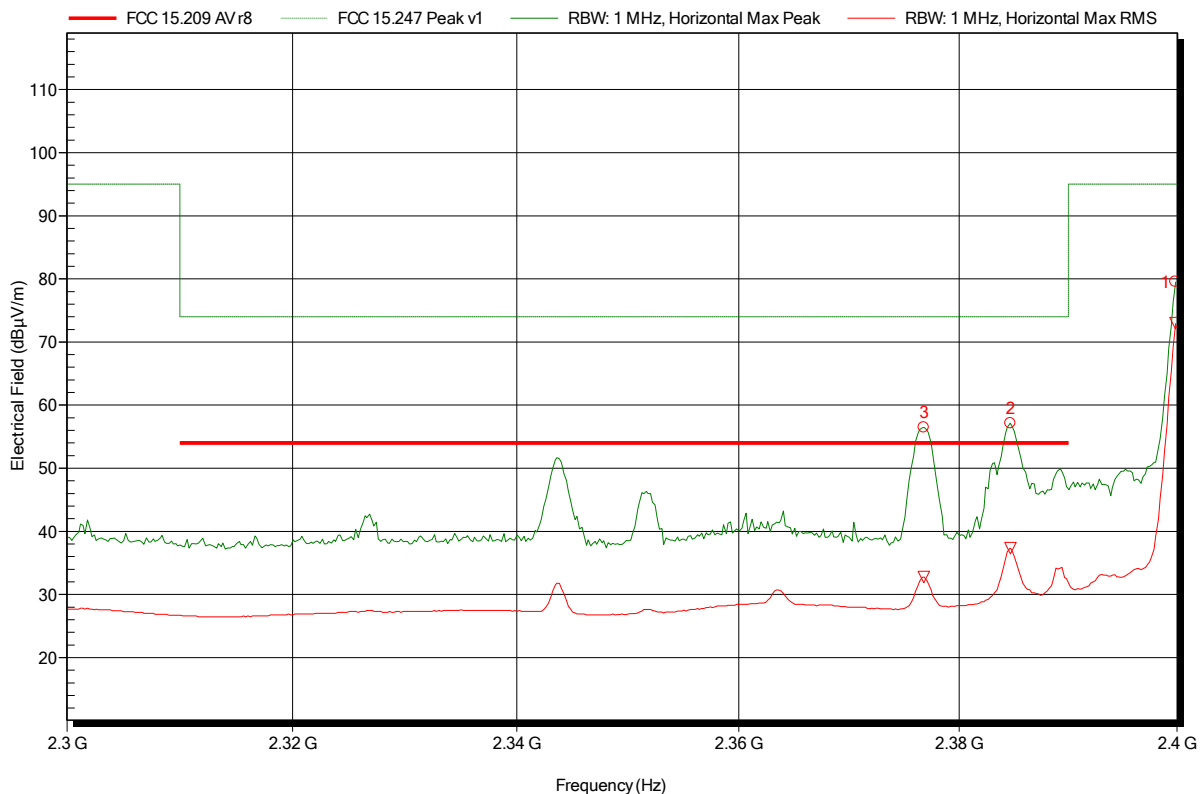

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.377 GHz	56.48 dBµV/m	74 dBµV/m	-17.52 dB	Pass
2.385 GHz	57.12 dBµV/m	74 dBµV/m	-16.88 dB	Pass
2.4 GHz	79.54 dBµV/m	95 dBµV/m	-15.46 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.377 GHz	32.77 dBµV/m	54 dBµV/m	-21.23 dB	Pass
2.385 GHz	37.34 dBµV/m	54 dBµV/m	-16.66 dB	Pass
2.4 GHz	73.01 dBµV/m			

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical; upper bandedge

Index 9

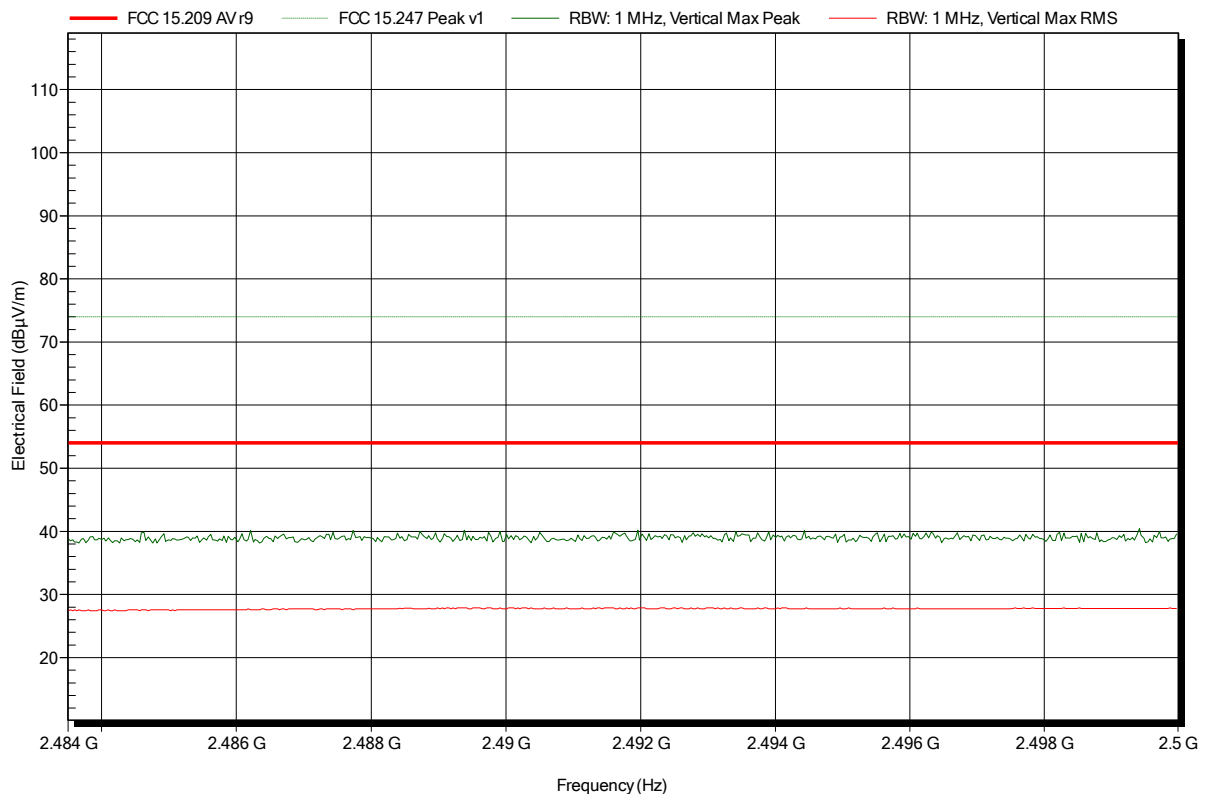


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	3 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical; upper bandedge

Index 6

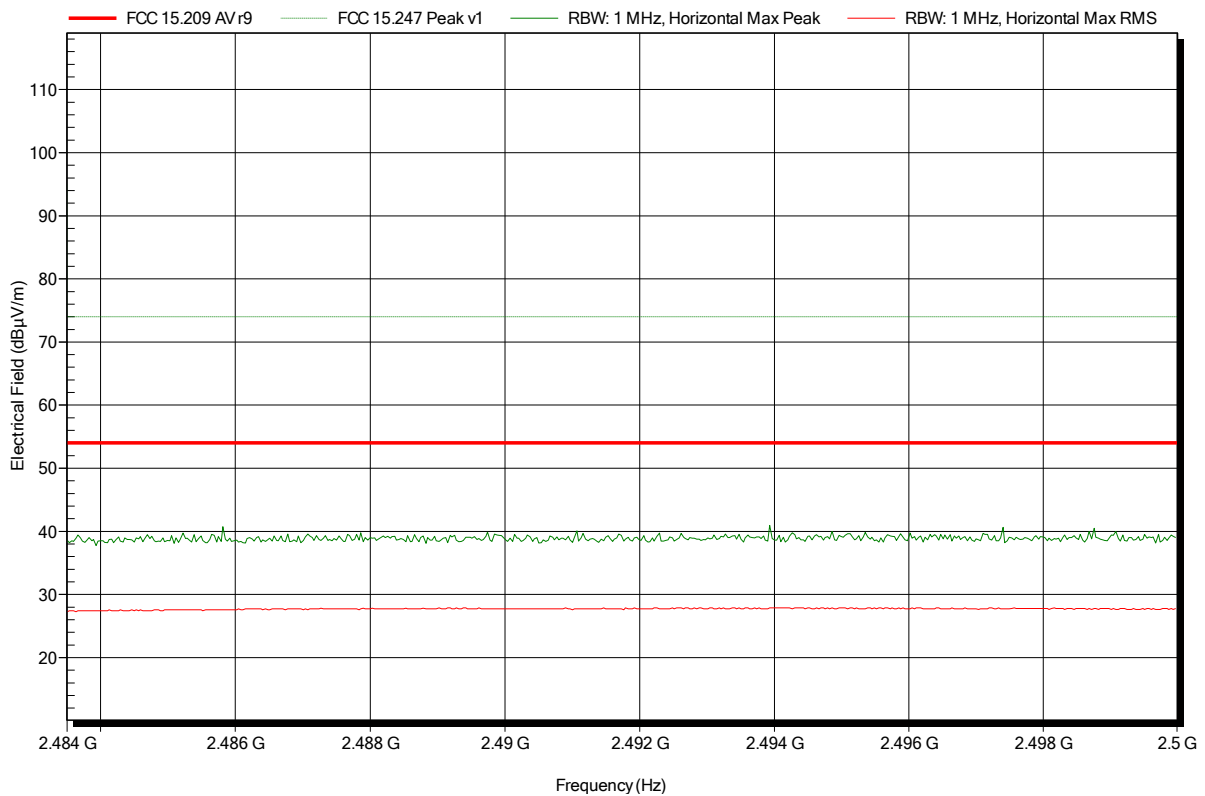


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 15

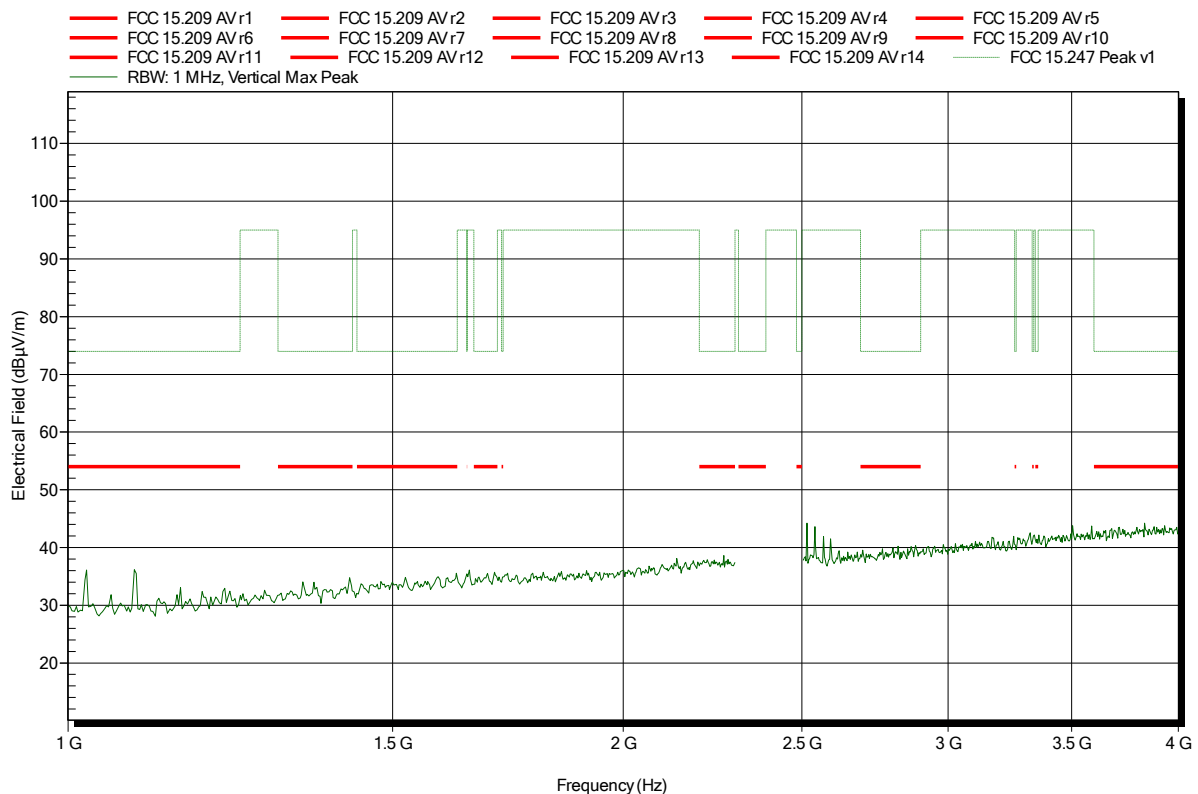


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 12

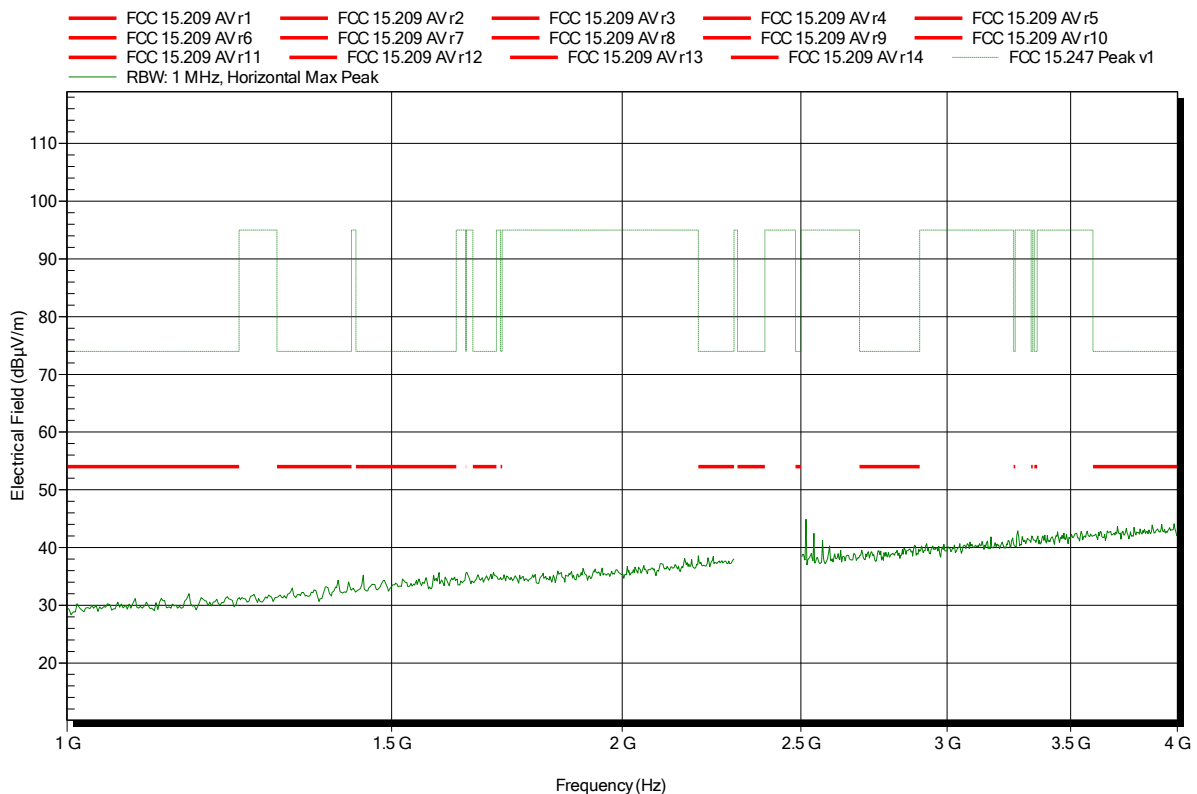




**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; lower bandedge

Index 16

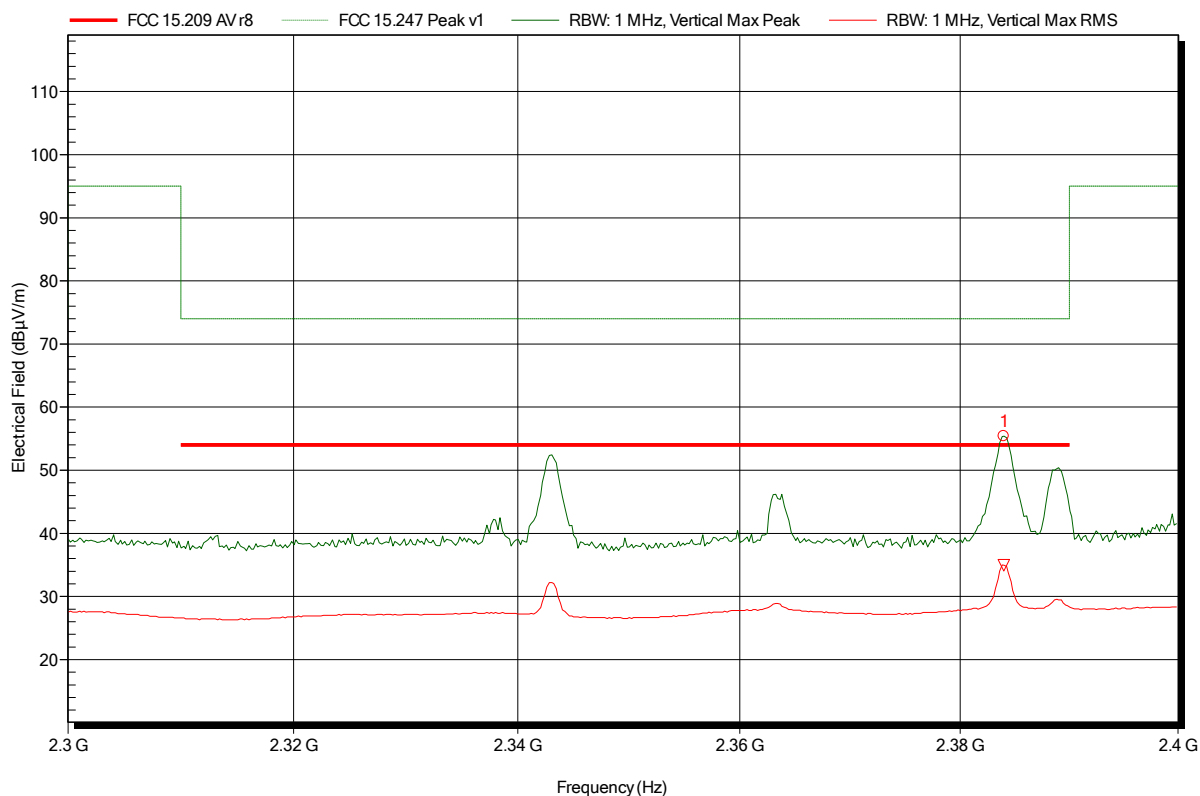


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.384 GHz	55.41 dBµV/m	74 dBµV/m	-18.59 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.384 GHz	34.94 dBµV/m	54 dBµV/m	-19.06 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; lower bandedge

Index 13

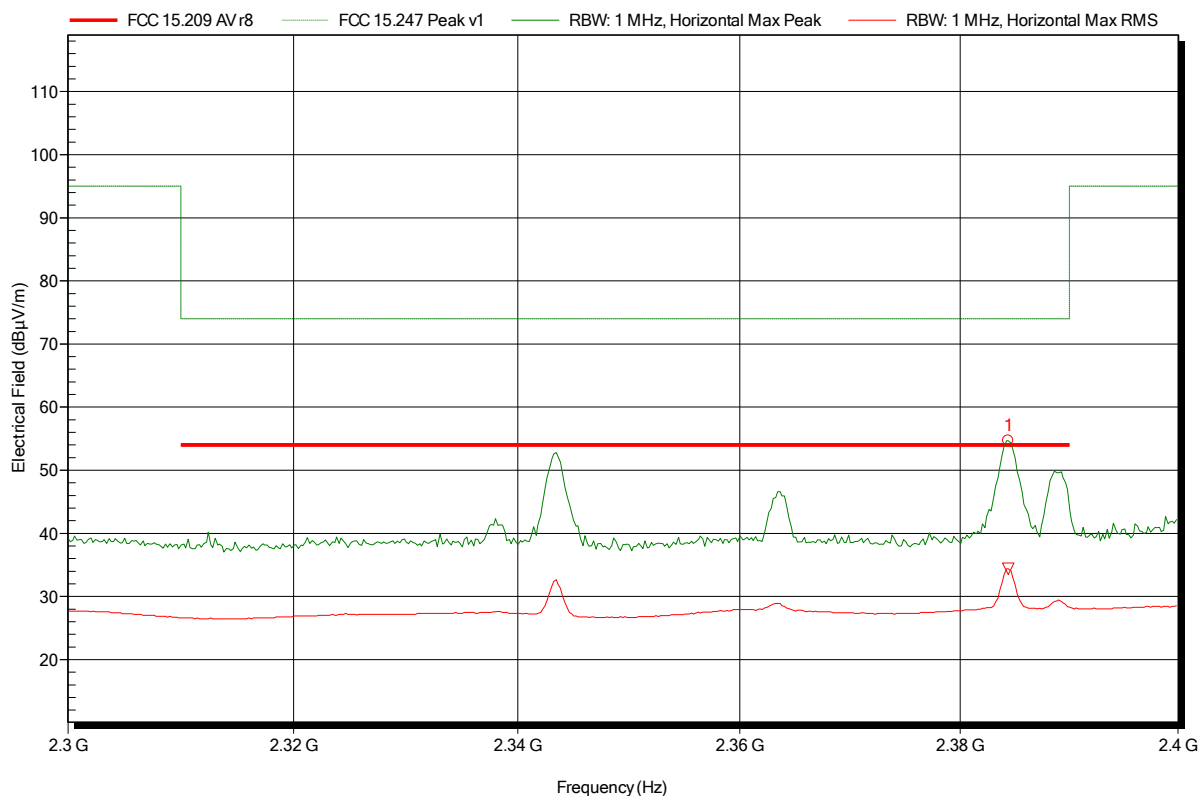

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.384 GHz	54.71 dBµV/m	74 dBµV/m	-19.29 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.384 GHz	34.41 dBµV/m	54 dBµV/m	-19.59 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; upper bandedge

Index 17

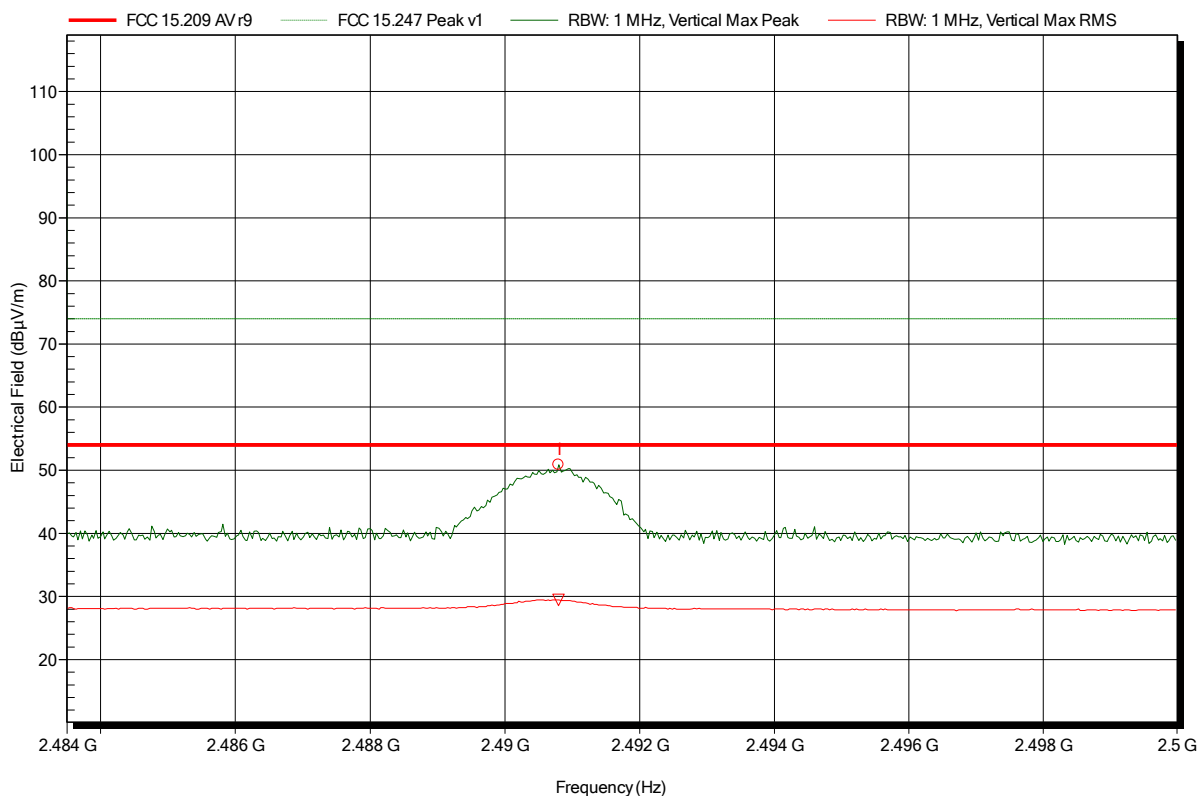


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4908 GHz	50.85 dBµV/m	74 dBµV/m	-23.15 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4908 GHz	29.47 dBµV/m	54 dBµV/m	-24.53 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; upper bandedge

Index 14

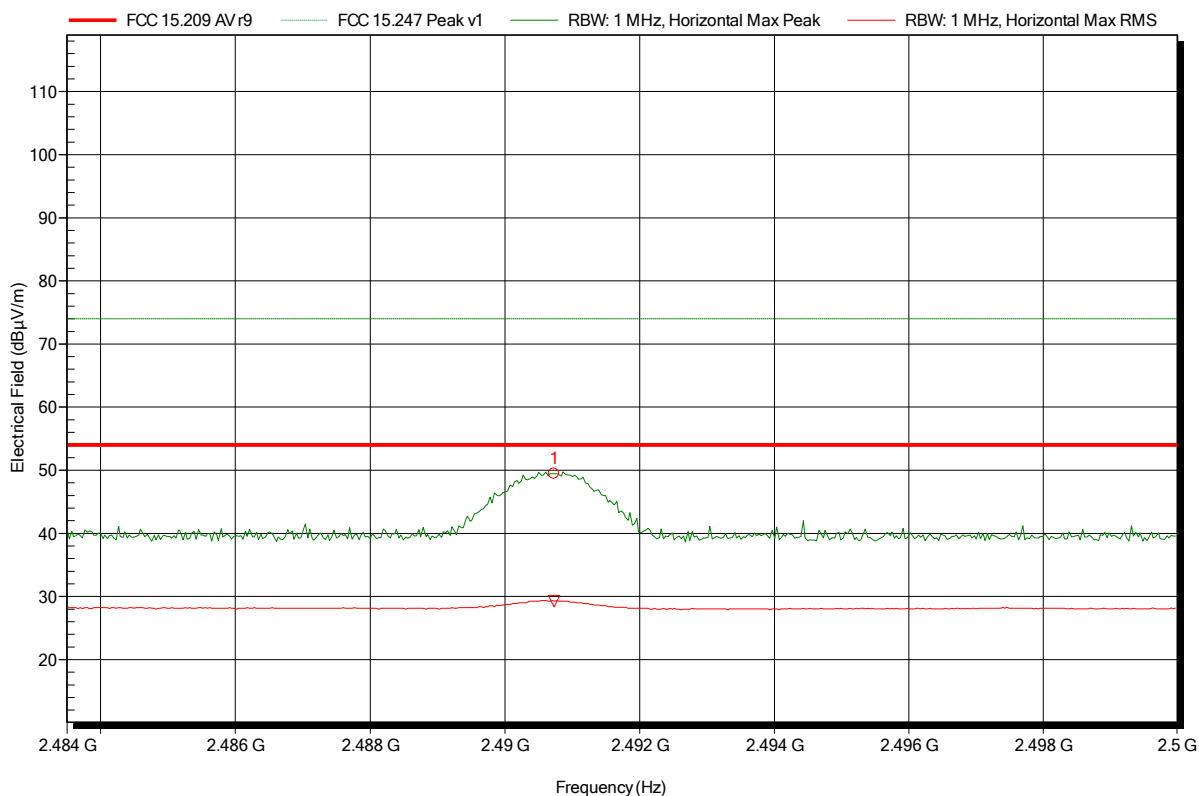


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4907 GHz	49.47 dBµV/m	74 dBµV/m	-24.53 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4907 GHz	29.24 dBµV/m	54 dBµV/m	-24.76 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 23

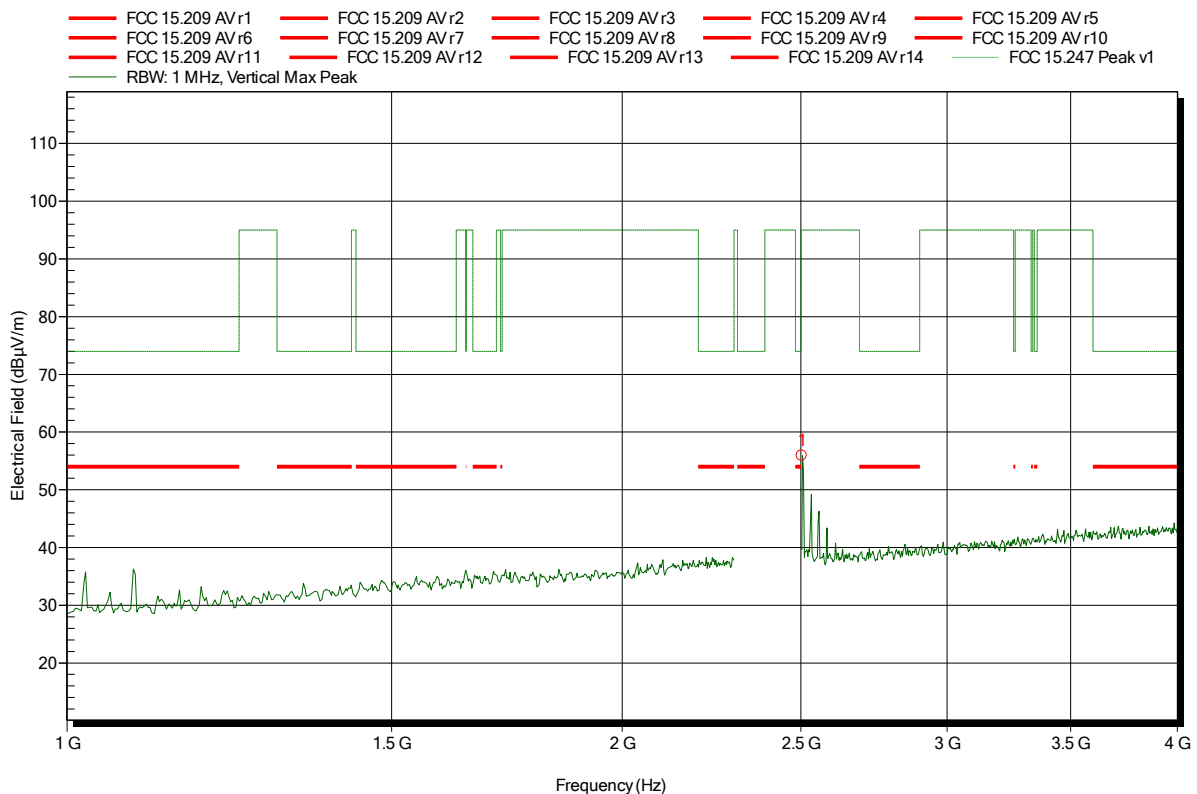


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.503 GHz	55.88 dBµV/m	95 dBµV/m	-39.12 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 20

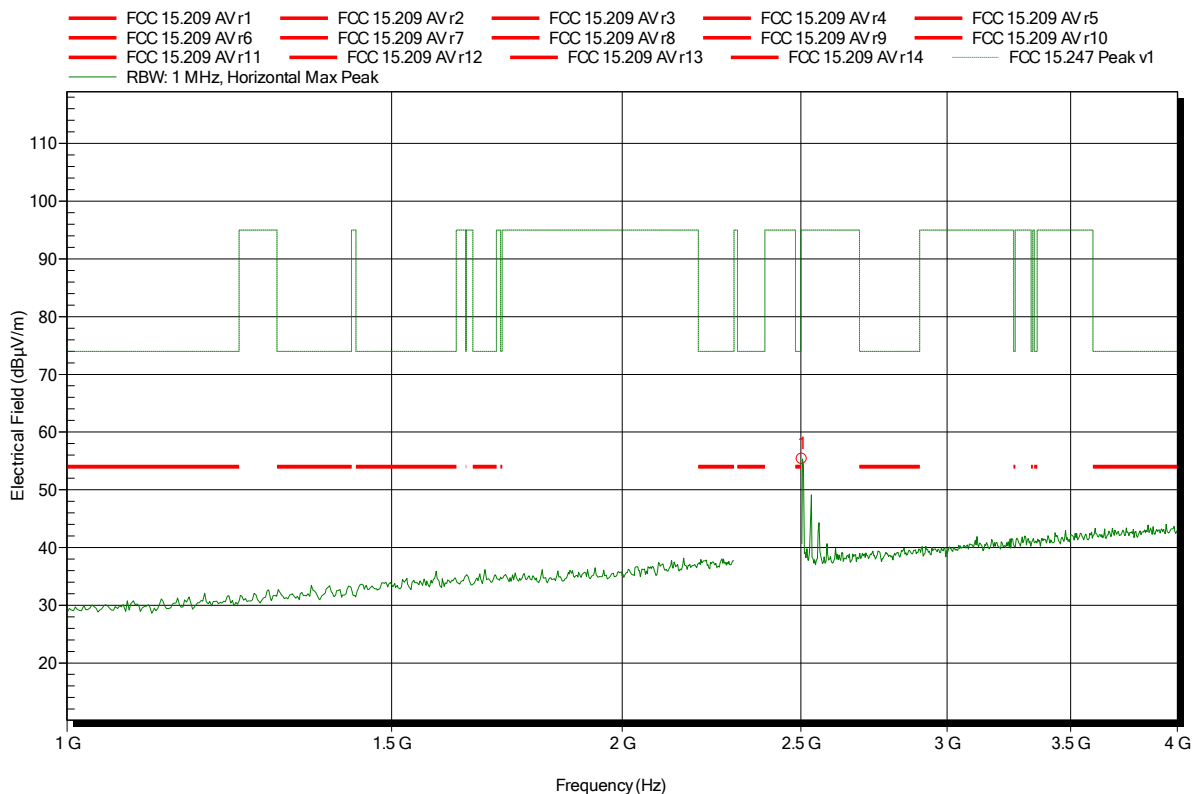


Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.503 GHz	55.34 dBµV/m	95 dBµV/m	-39.66 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; lower bandedge

Index 24

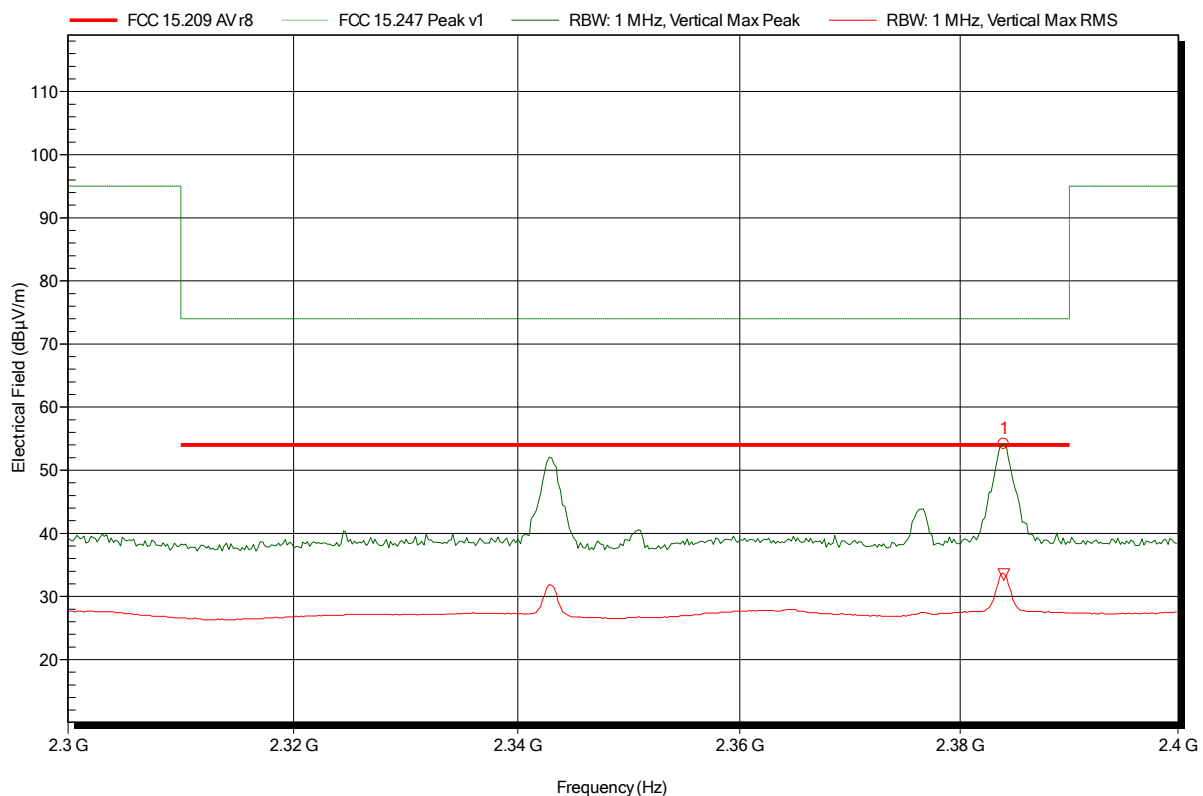

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.384 GHz	54.17 dBµV/m	74 dBµV/m	-19.83 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.384 GHz	33.5 dBµV/m	54 dBµV/m	-20.5 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; lower bandedge

Index 21

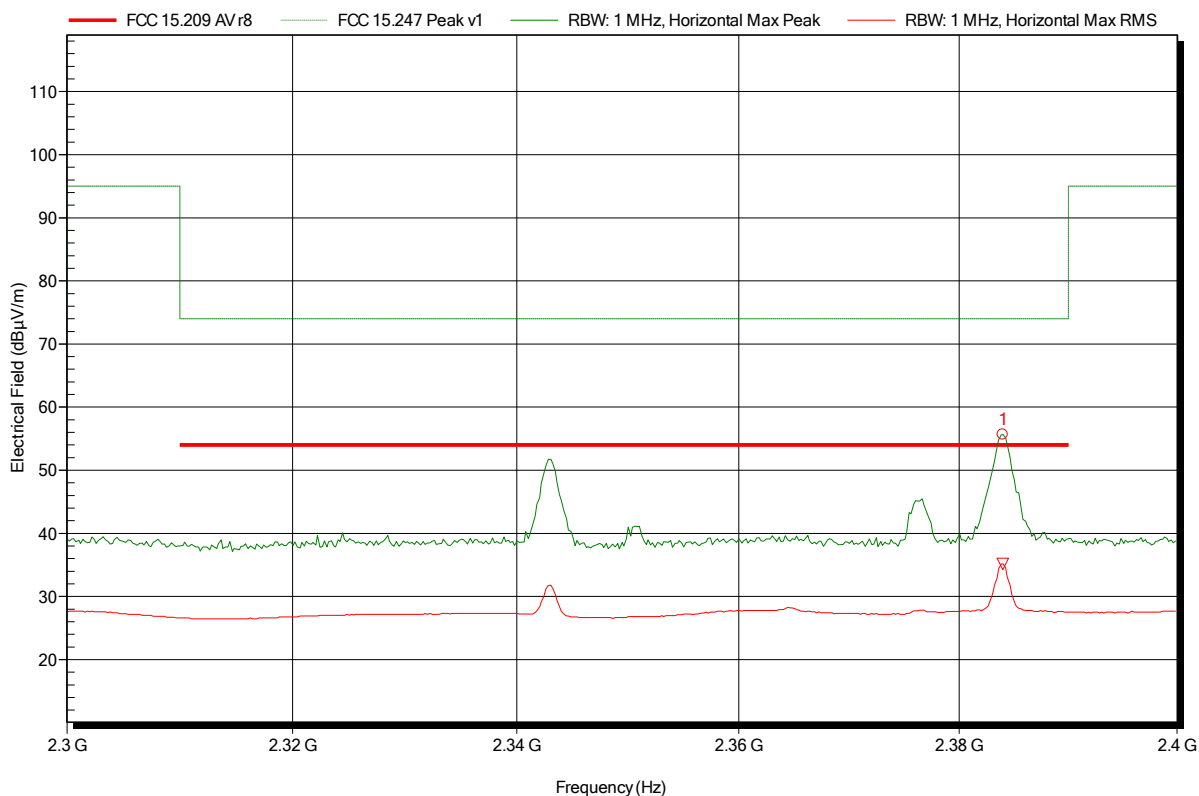

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.384 GHz	55.67 dBµV/m	74 dBµV/m	-18.33 dB	Pass
Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.384 GHz	35.17 dBµV/m	54 dBµV/m	-18.83 dB	Pass




**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; upper bandedge

Index 25

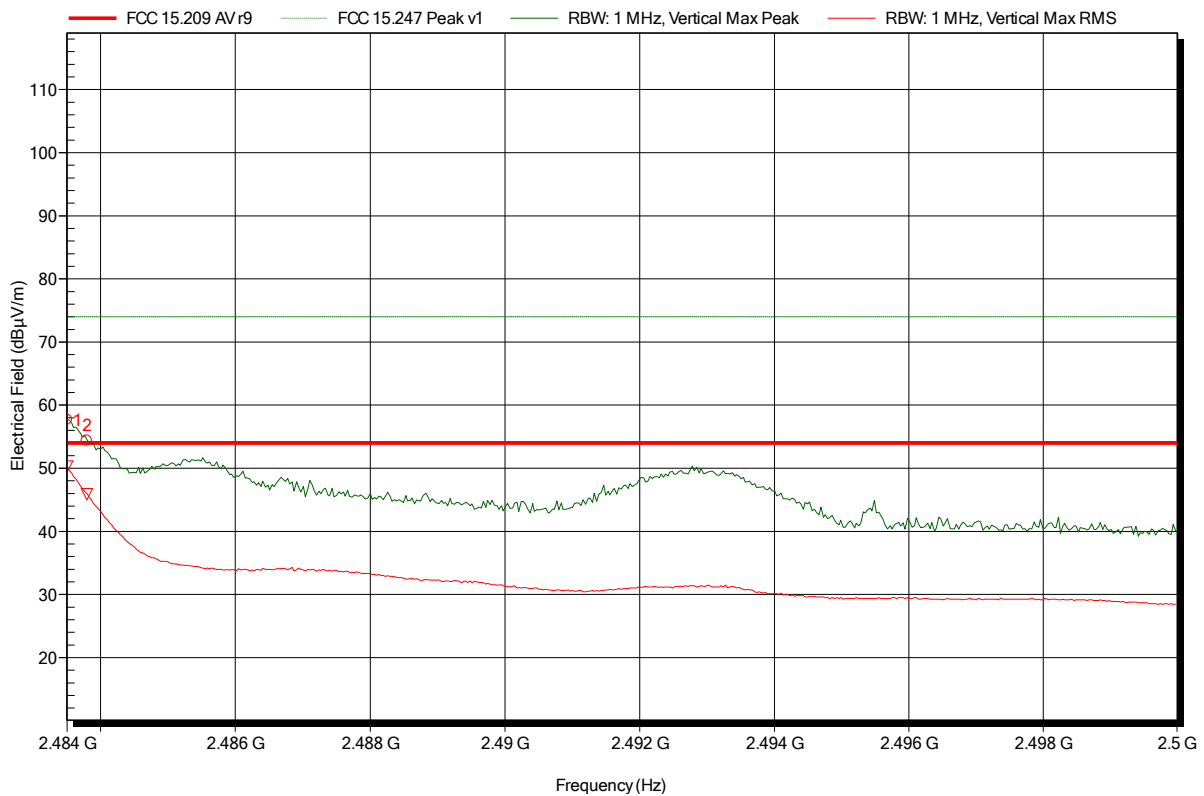

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	57.7 dBµV/m	74 dBµV/m	-16.3 dB	Pass
2.4838 GHz	54.39 dBµV/m	74 dBµV/m	-19.61 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	50.24 dBµV/m	54 dBµV/m	-3.76 dB	Pass
2.4838 GHz	45.88 dBµV/m	54 dBµV/m	-8.12 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 3 m converted to 3m  
 Mode: TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical; upper bandedge

Index 22

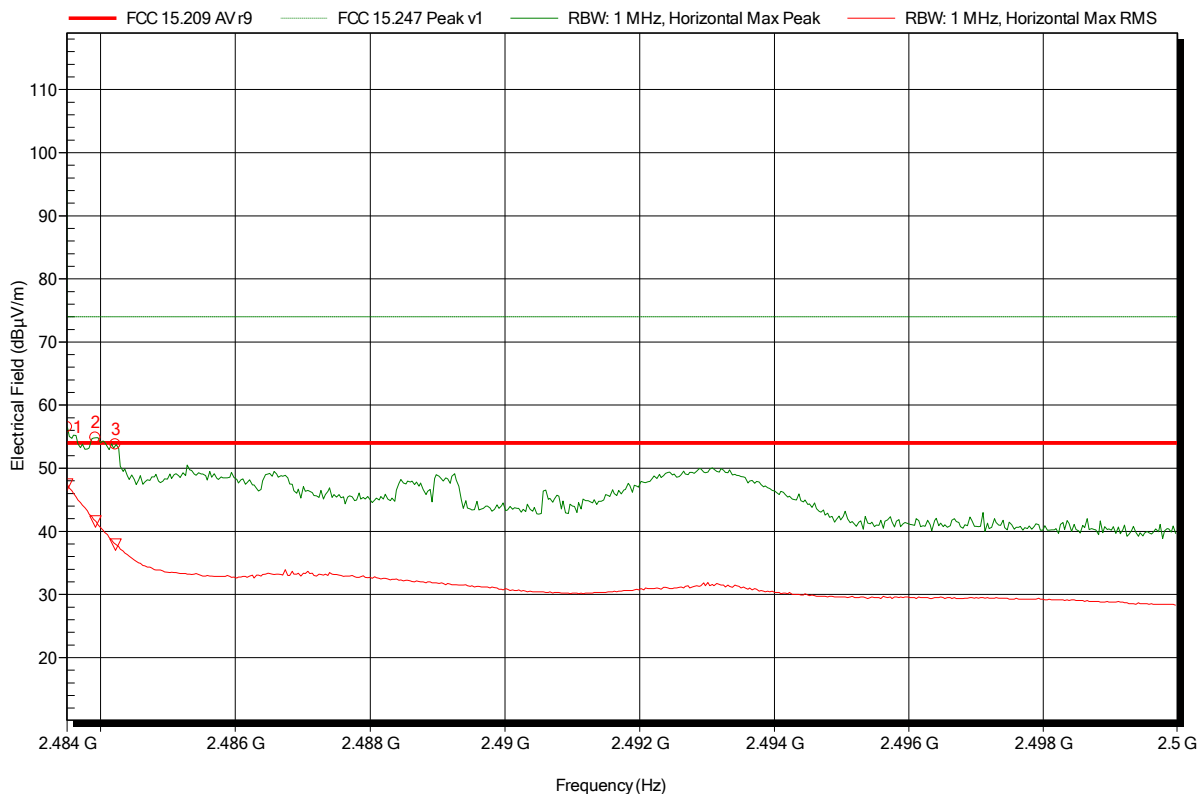

Frequency	Peak	Peak Limit	Peak Difference	Peak Status
2.4835 GHz	56.51 dBµV/m	74 dBµV/m	-17.49 dB	Pass
2.4839 GHz	54.82 dBµV/m	74 dBµV/m	-19.18 dB	Pass
2.4842 GHz	53.76 dBµV/m	74 dBµV/m	-20.24 dB	Pass


Frequency	RMS	RMS Limit	RMS Difference	RMS Status
2.4835 GHz	47.43 dBµV/m	54 dBµV/m	-6.57 dB	Pass
2.4839 GHz	41.56 dBµV/m	54 dBµV/m	-12.44 dB	Pass
2.4842 GHz	37.91 dBµV/m	54 dBµV/m	-16.09 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Vertical  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 38

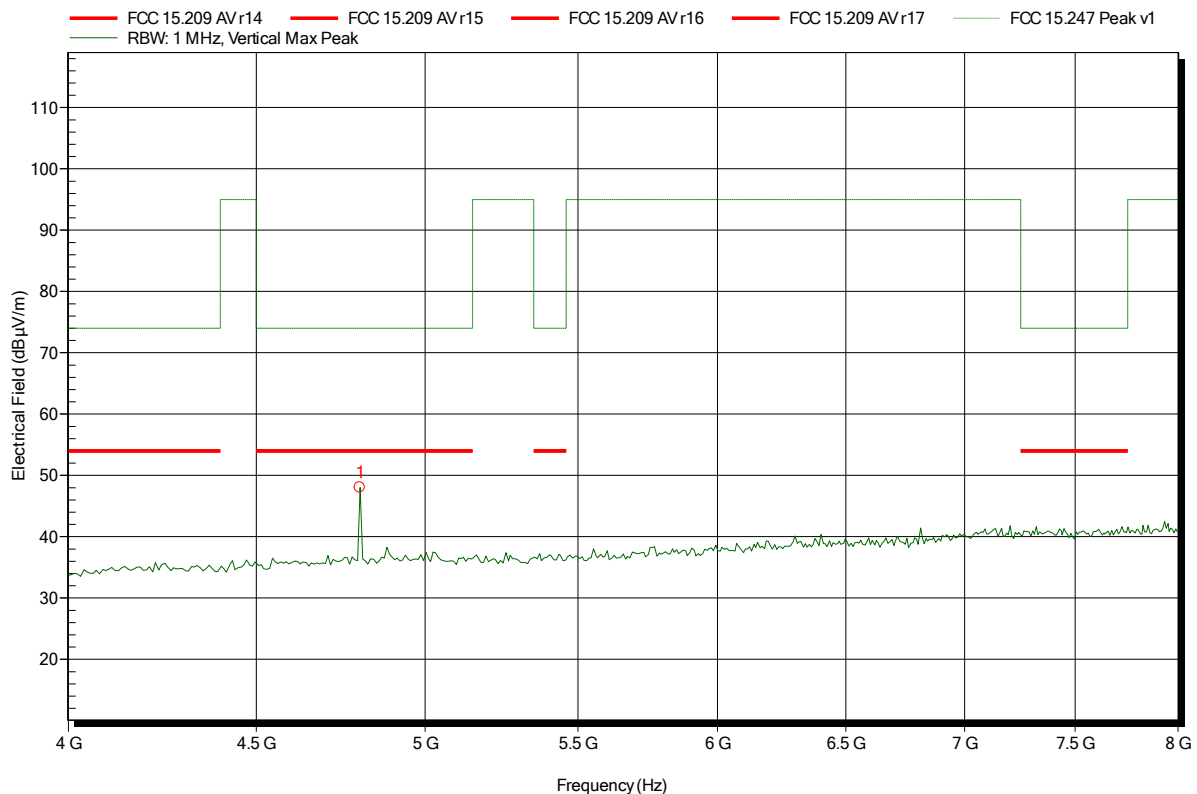


Frequency	Peak	Peak Limit	Peak Difference	Status
4.8 GHz	48.02 dBµV/m	74 dBµV/m	-25.98 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 43

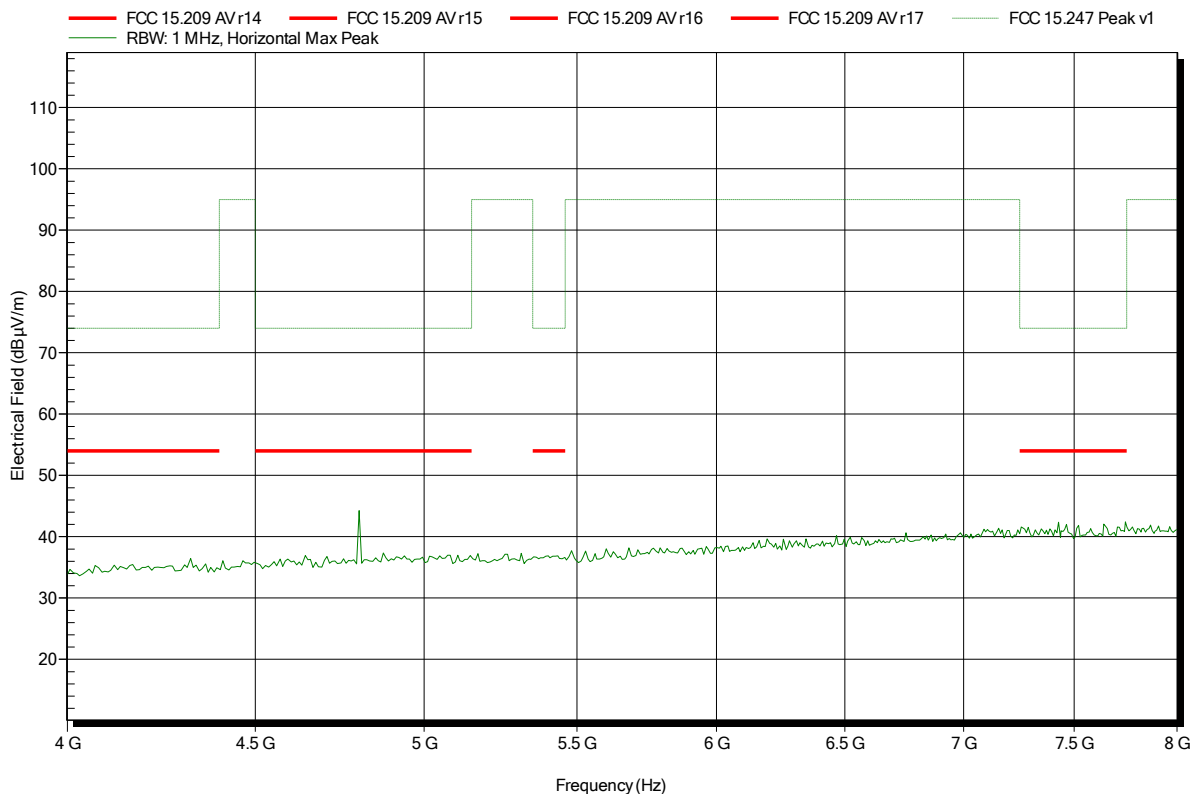


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 37

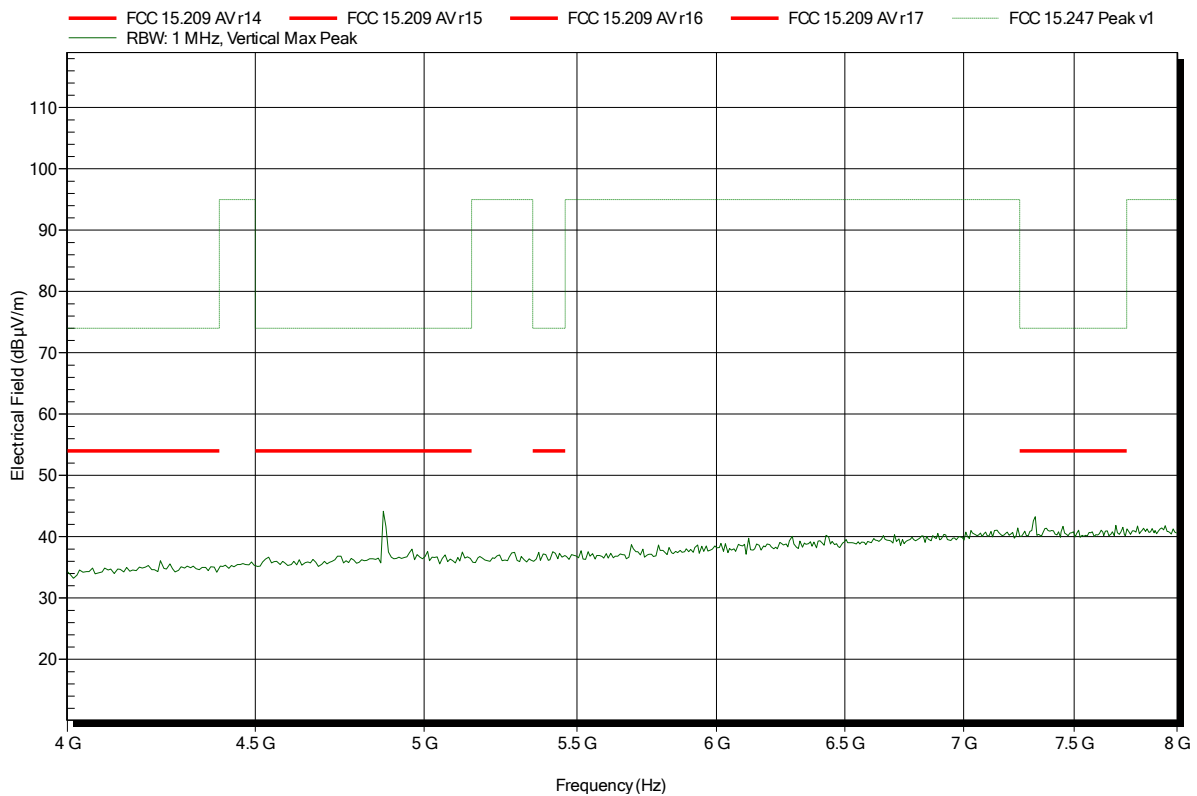


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 32

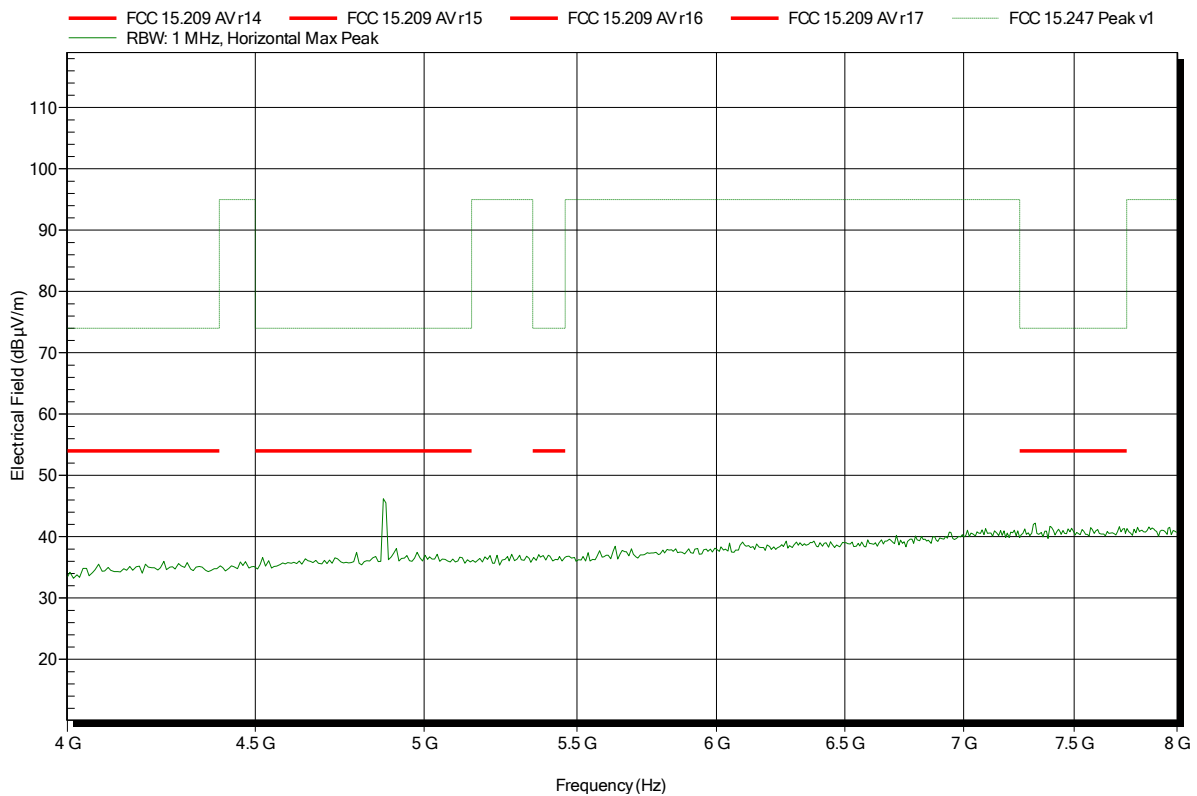


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 26

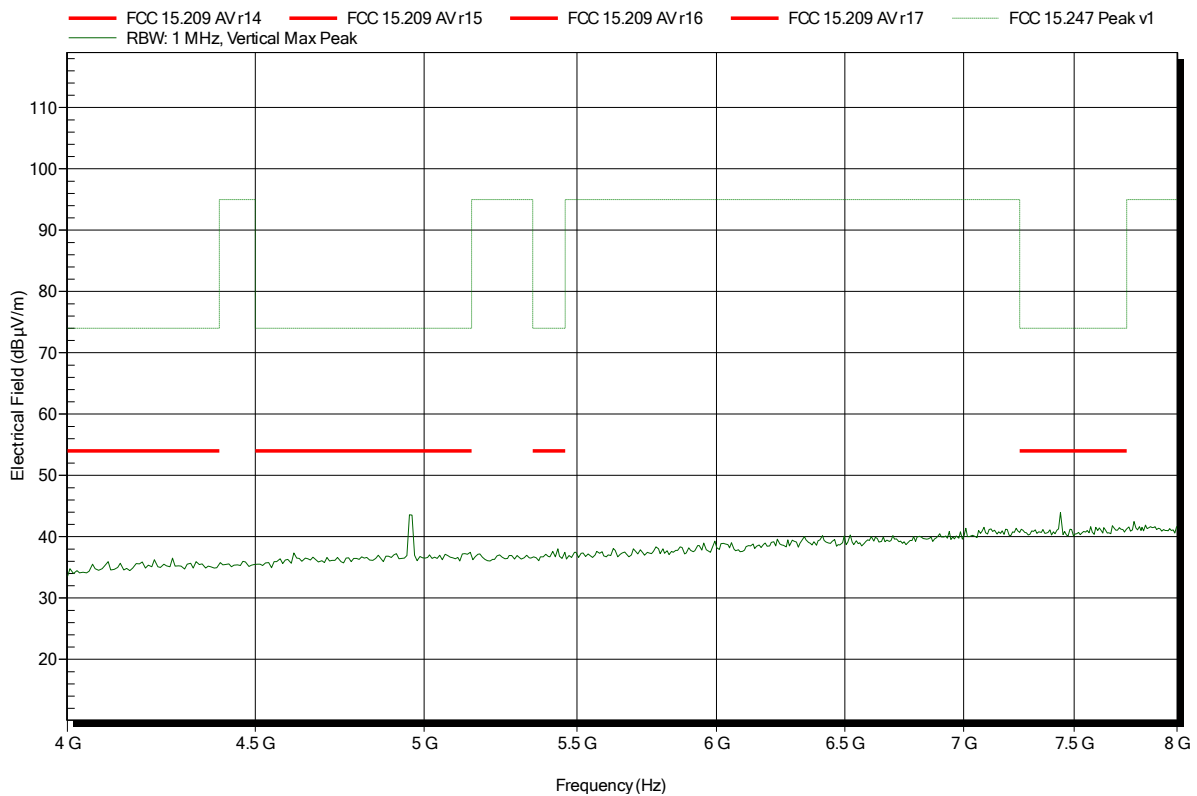


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 31

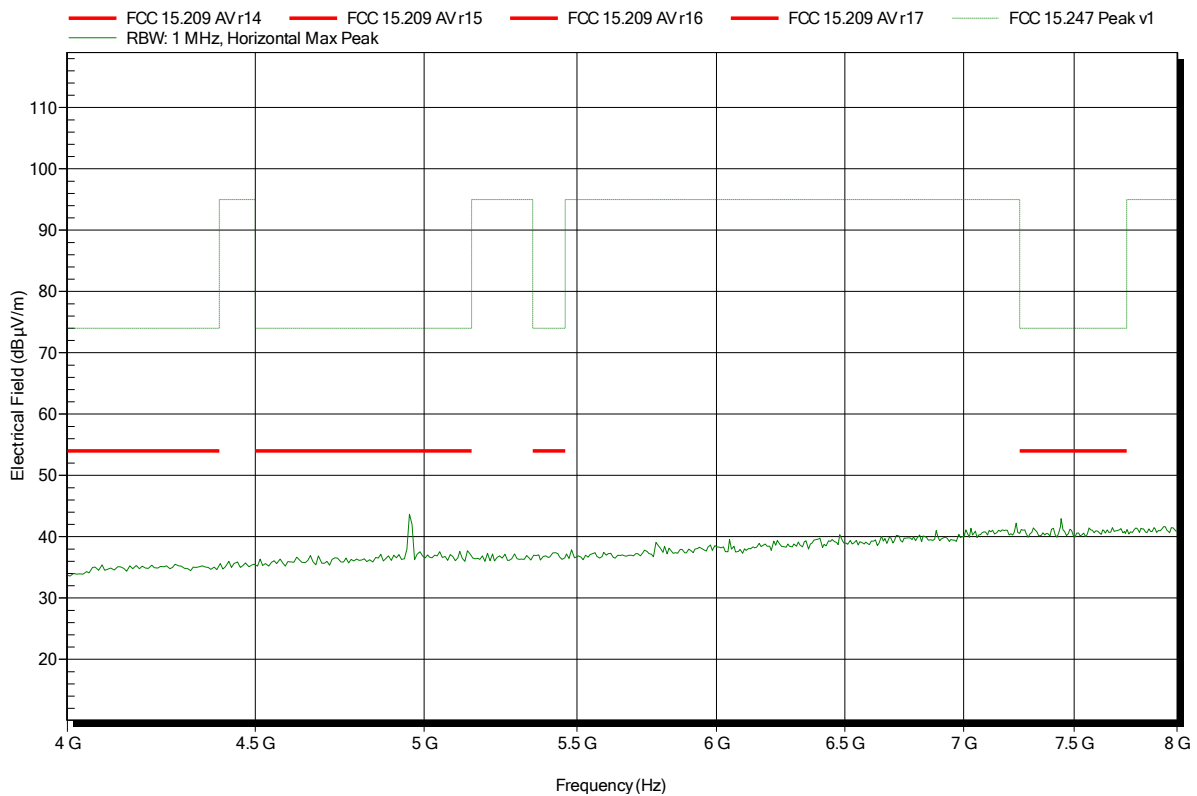




**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 39

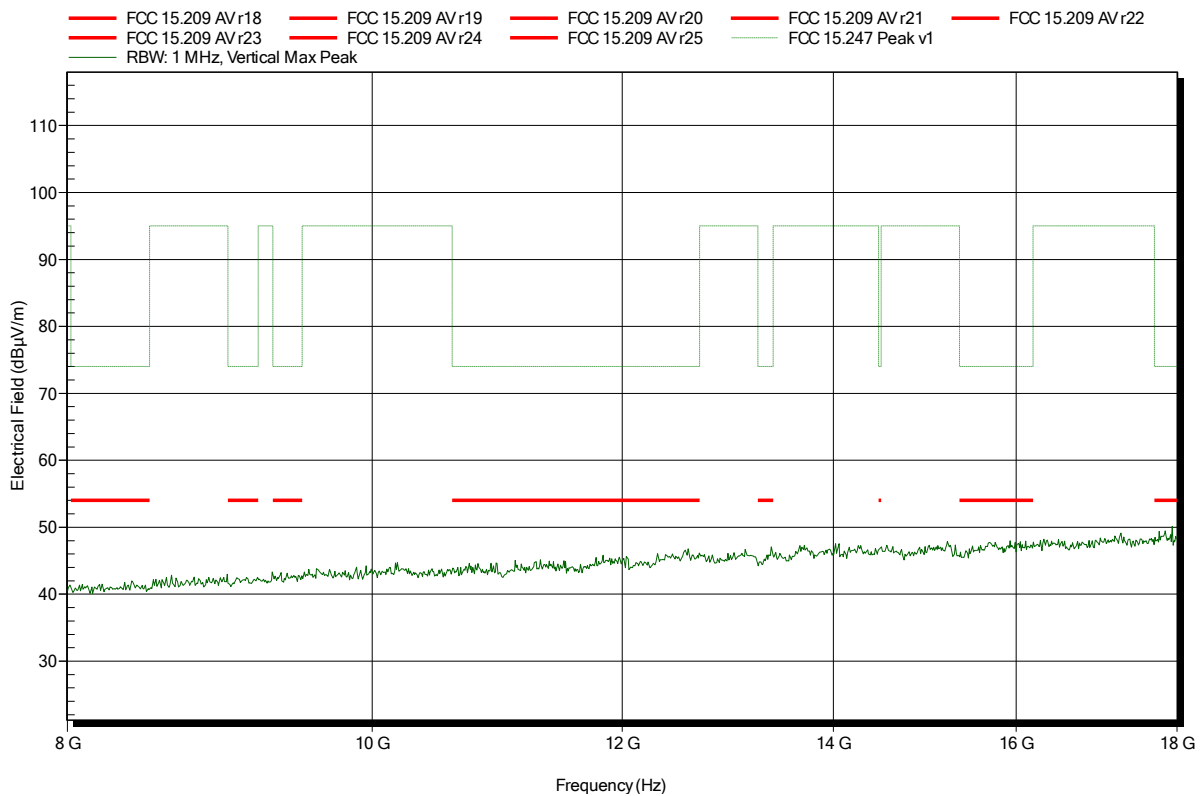


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 42

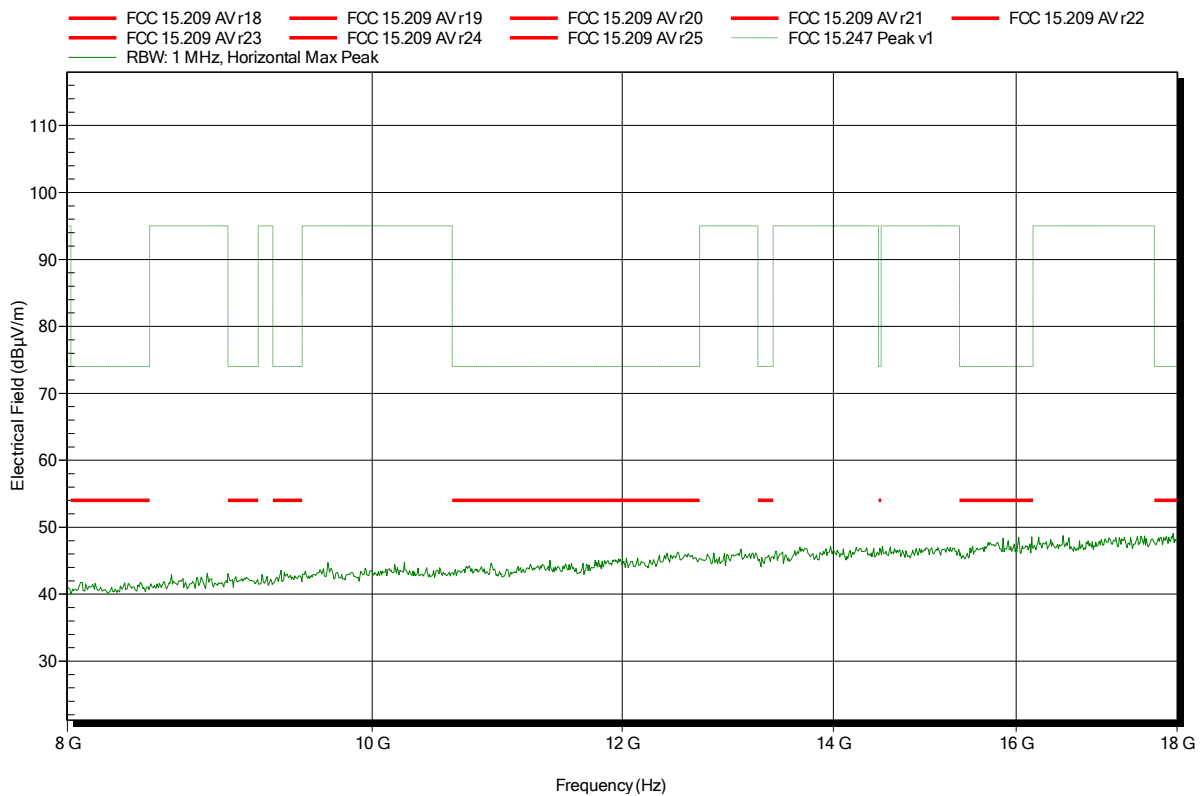


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 36

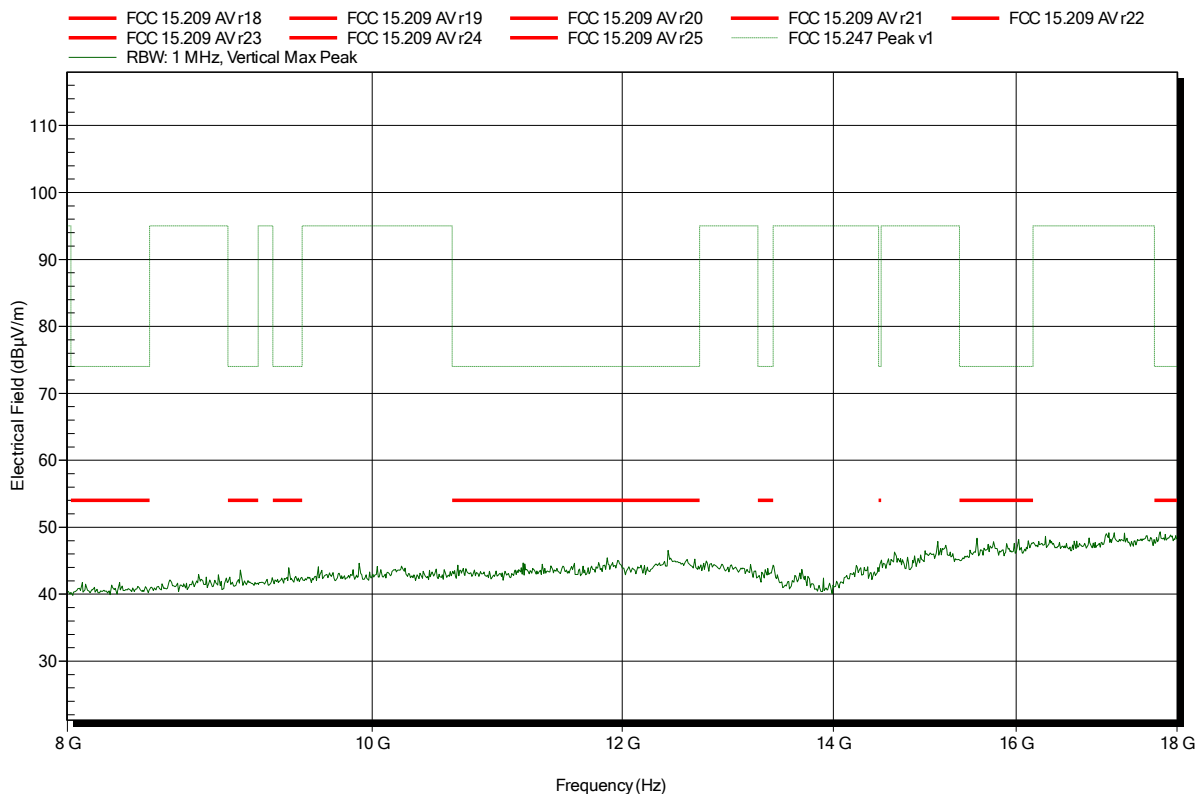


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1 V DC  
 Antenna: Rohde & Schwarz HL 025, Horizontal  
 Measurement distance: 1 m converted to 3m  
 Mode: TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK  
 Test Date: 2014-11-26  
 Note: EUT vertical

Index 33

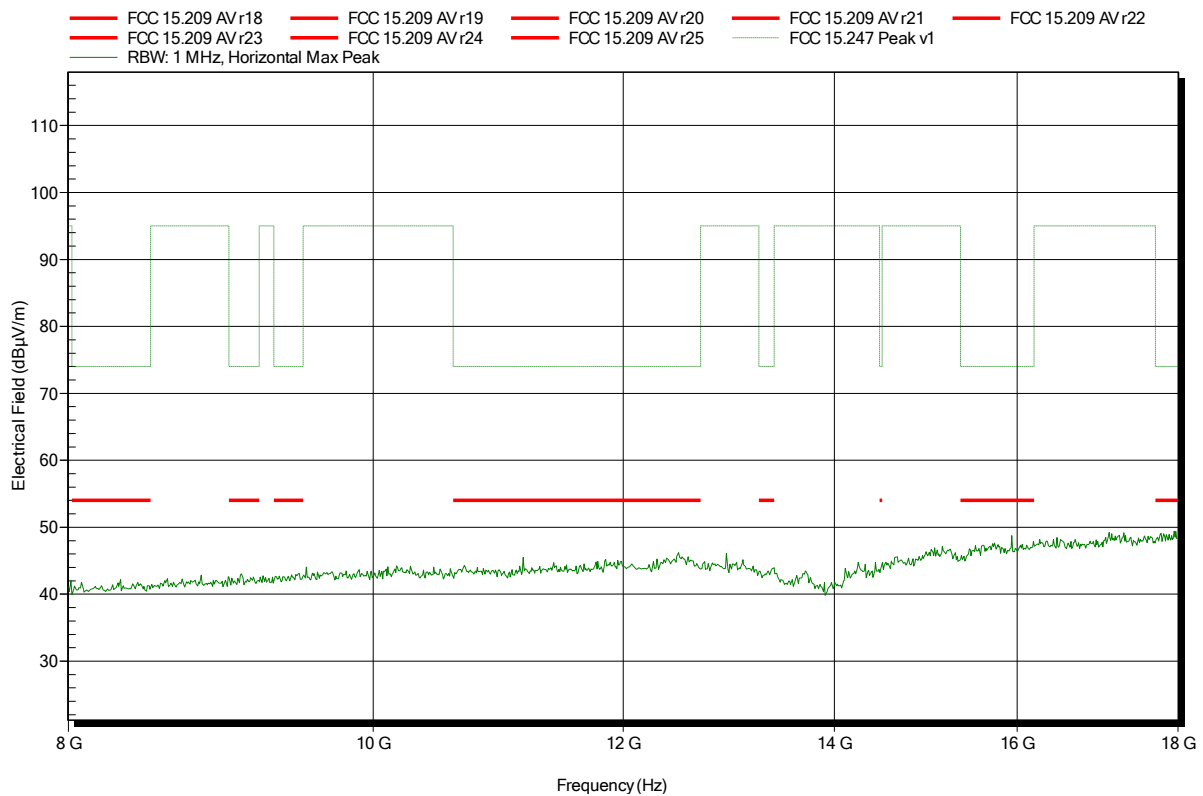


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 27

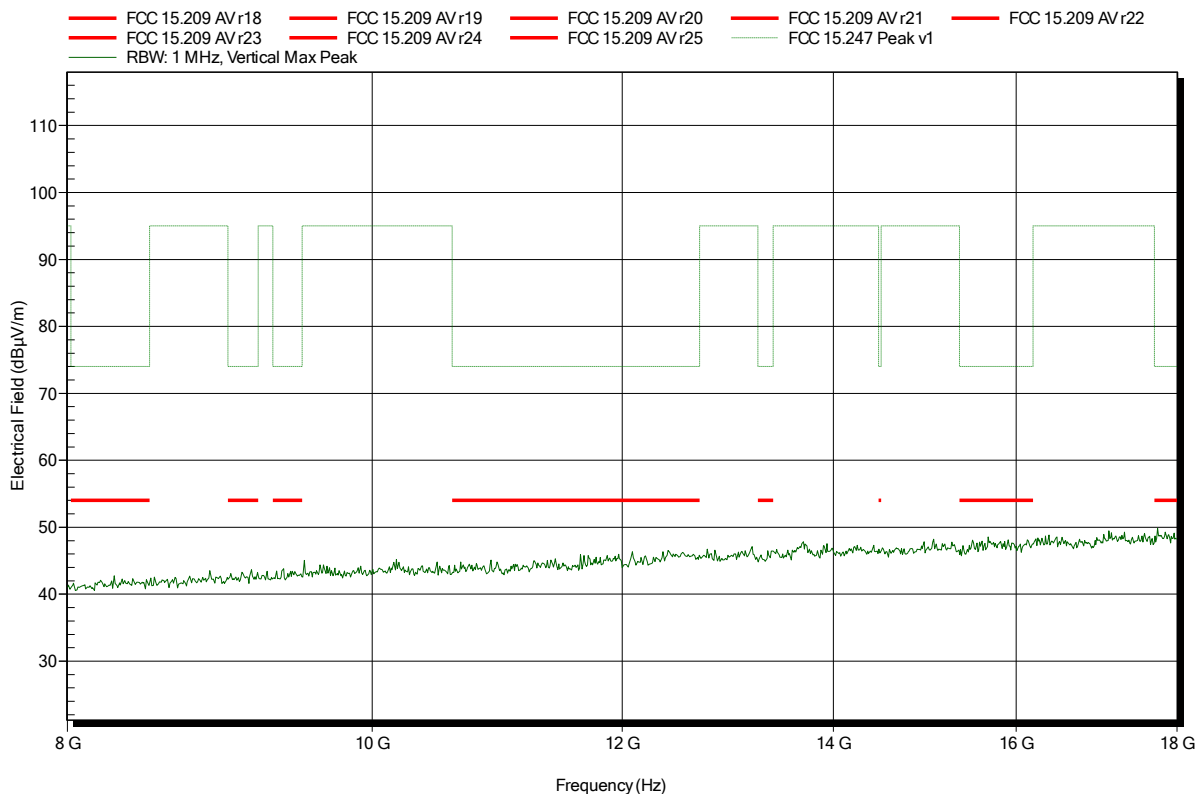


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 30

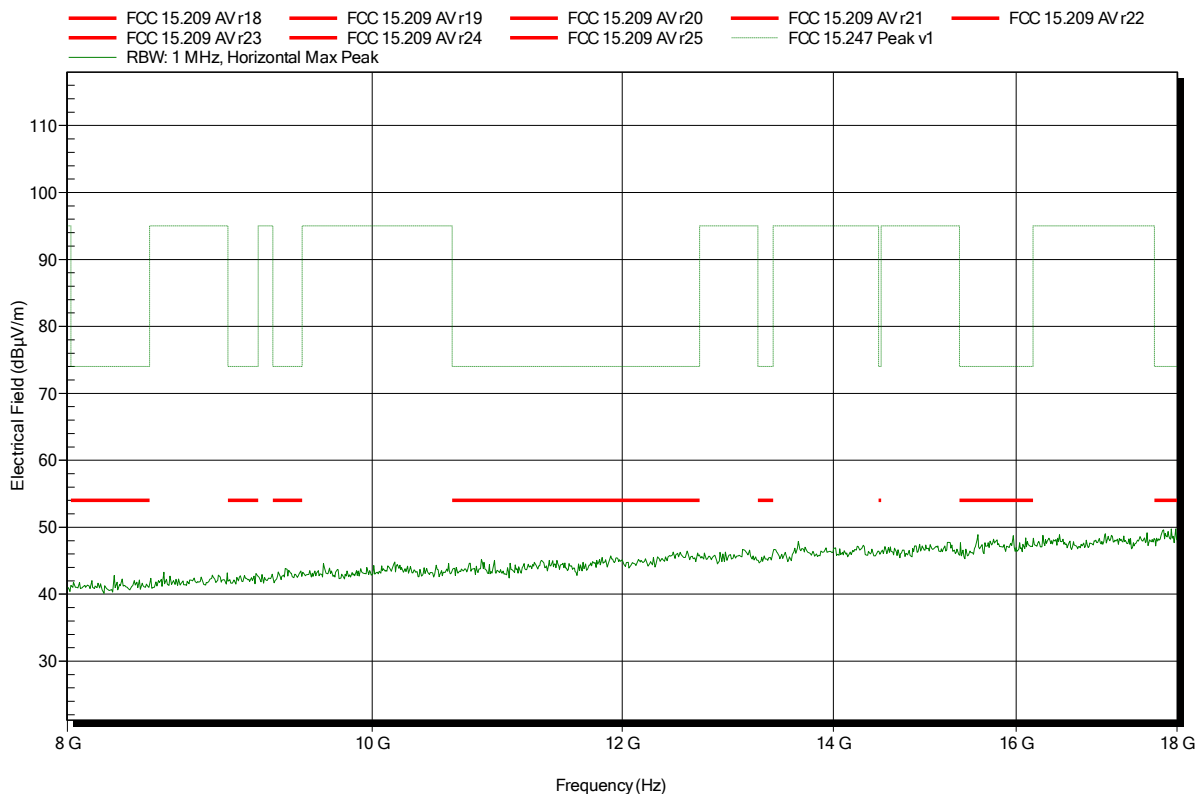


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 40

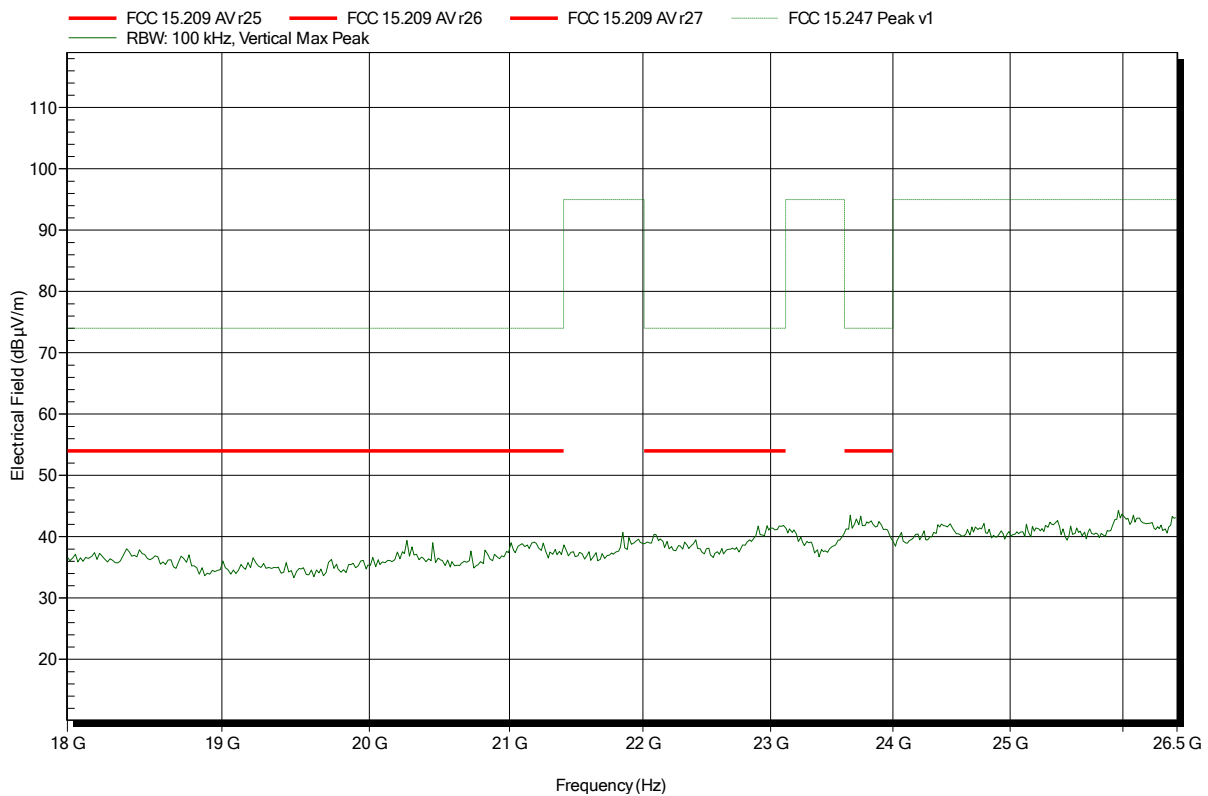


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 0; 2402 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 41

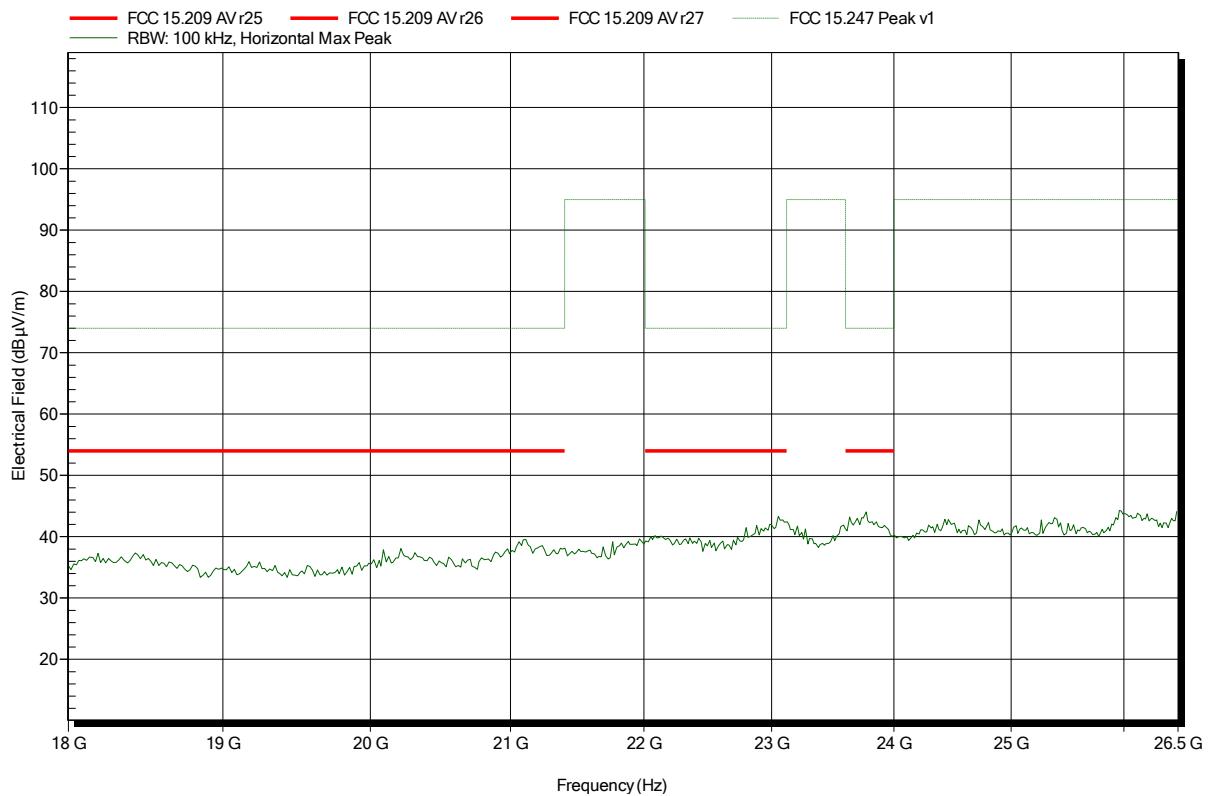




**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 35

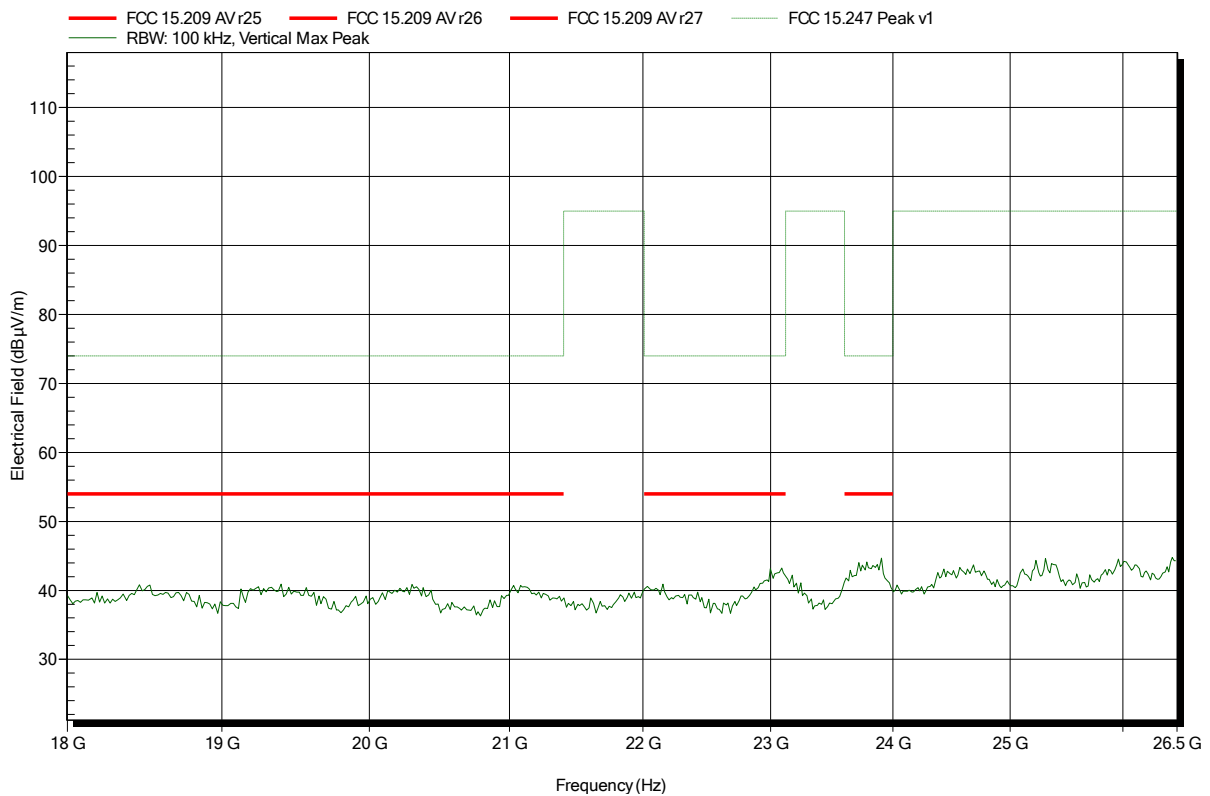


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 19; 2440 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 34

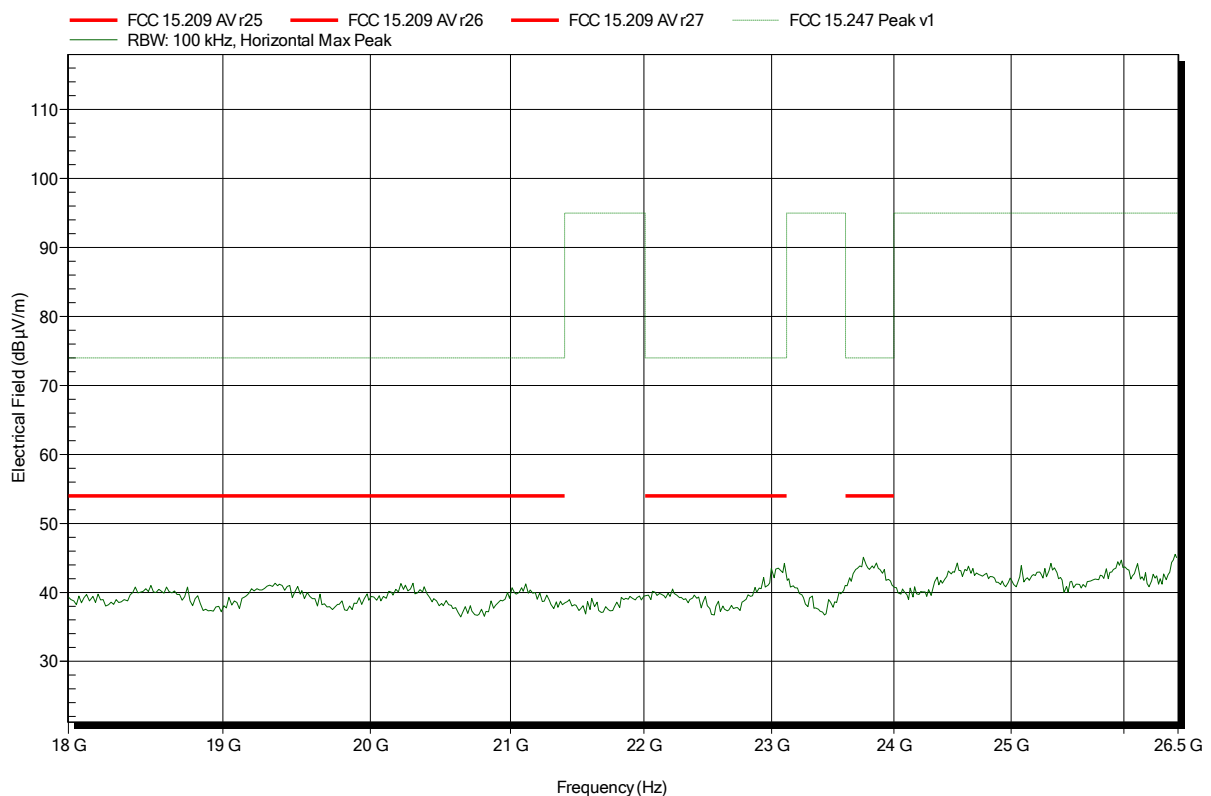


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 28

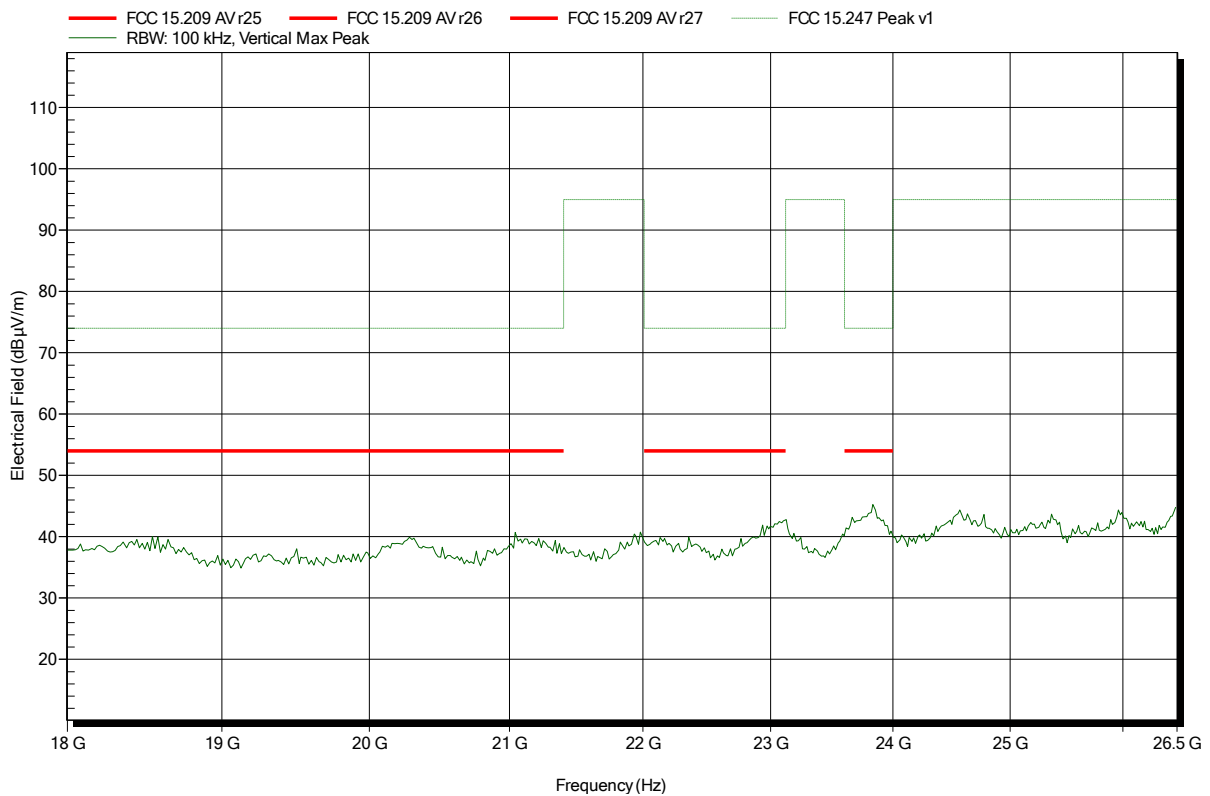


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1 V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	1 m converted to 3m
Mode:	TX; BT-BLE; CH: 39; 2480 MHz; TX-Testmode; GFSK
Test Date:	2014-11-26
Note:	EUT vertical

Index 29

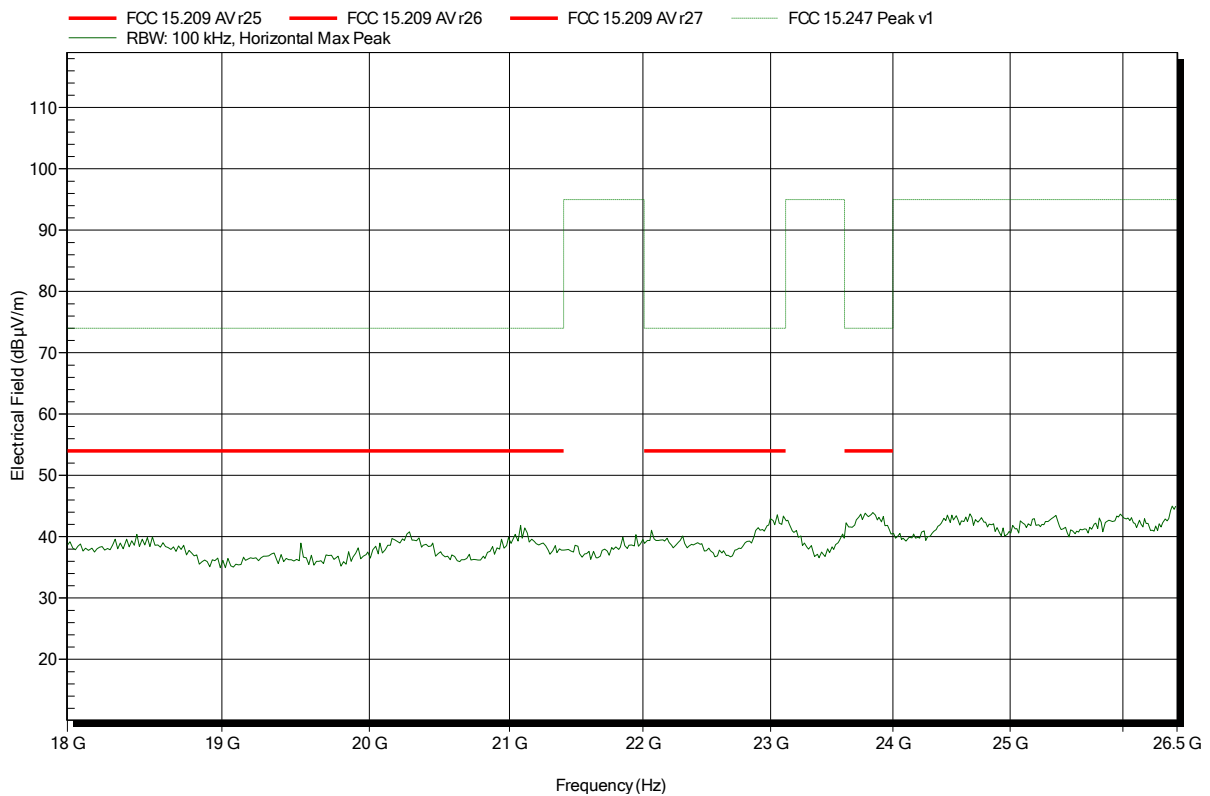


## ANNEX B Receiver radiated spurious emissions

### Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1V DC  
 Antenna: Rohde & Schwarz HK 116, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT-BLE; CH: 19; RX -Test-Mode  
 Test Date: 2014-11-25  
 Note: EUT vertical

Index 67

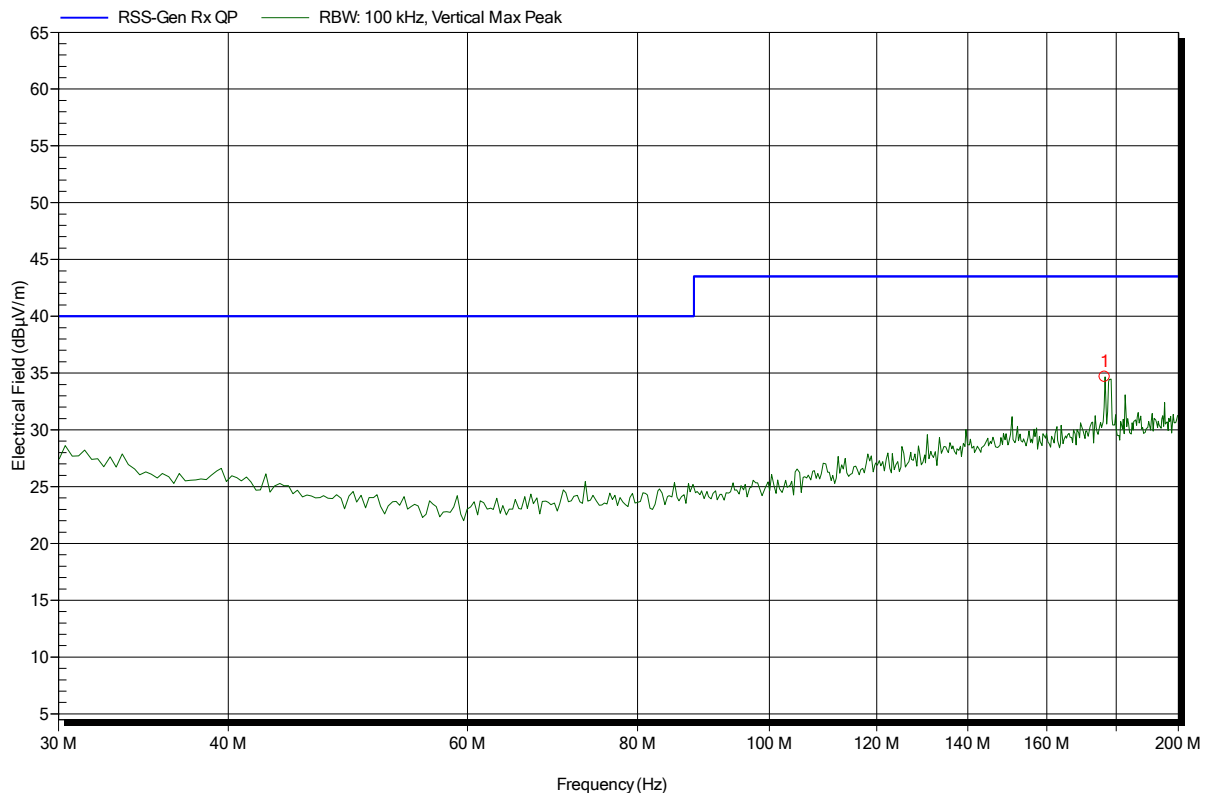


Frequency	Peak	Peak Limit	Peak Difference	Status
176.54 MHz	34.66 dBµV/m	43.5 dBµV/m	-8.84 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1V DC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3 m
Mode:	RX; BT-BLE; CH: 19; RX -Test-Mode
Test Date:	2014-11-25
Note:	EUT vertical

Index 68

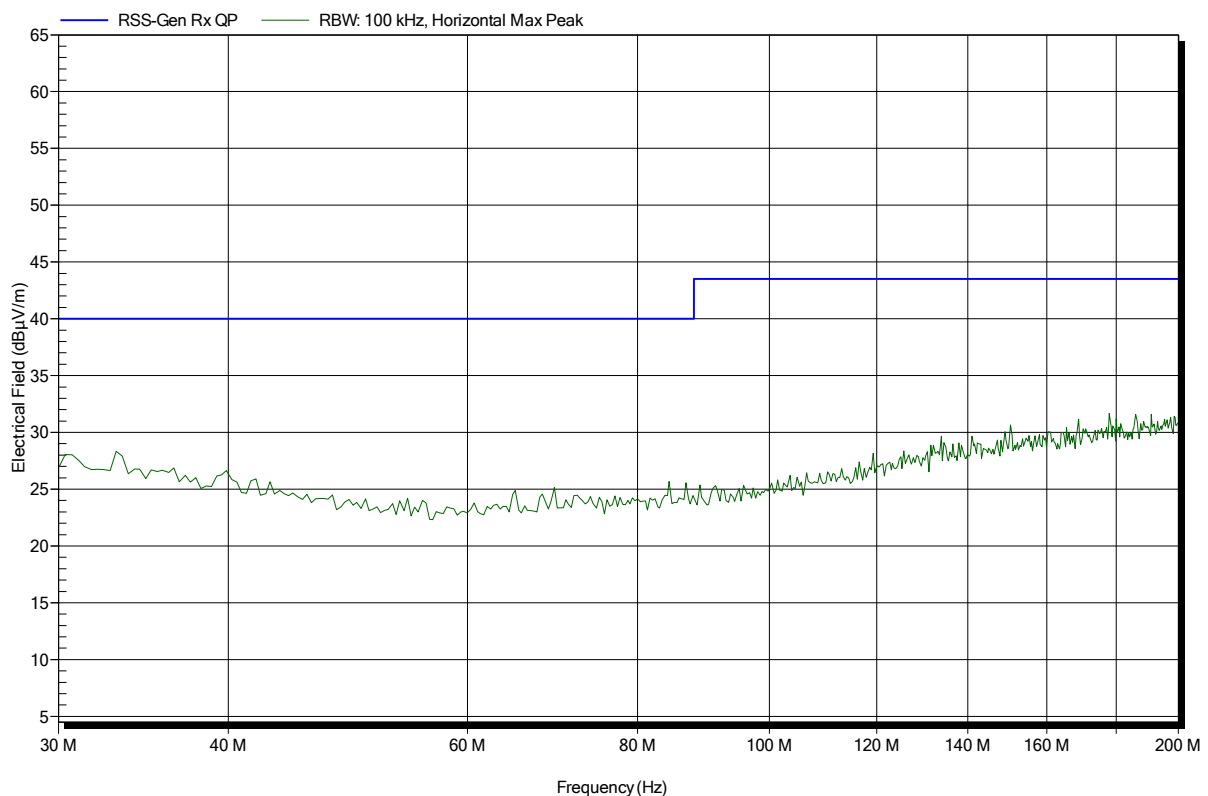


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1V DC  
 Antenna: Rohde & Schwarz HL 223, Vertical  
 Measurement distance: 3 m  
 Mode: RX; BT-BLE; CH: 19; RX -Test-Mode  
 Test Date: 2014-11-25  
 Note: EUT vertical

Index 65

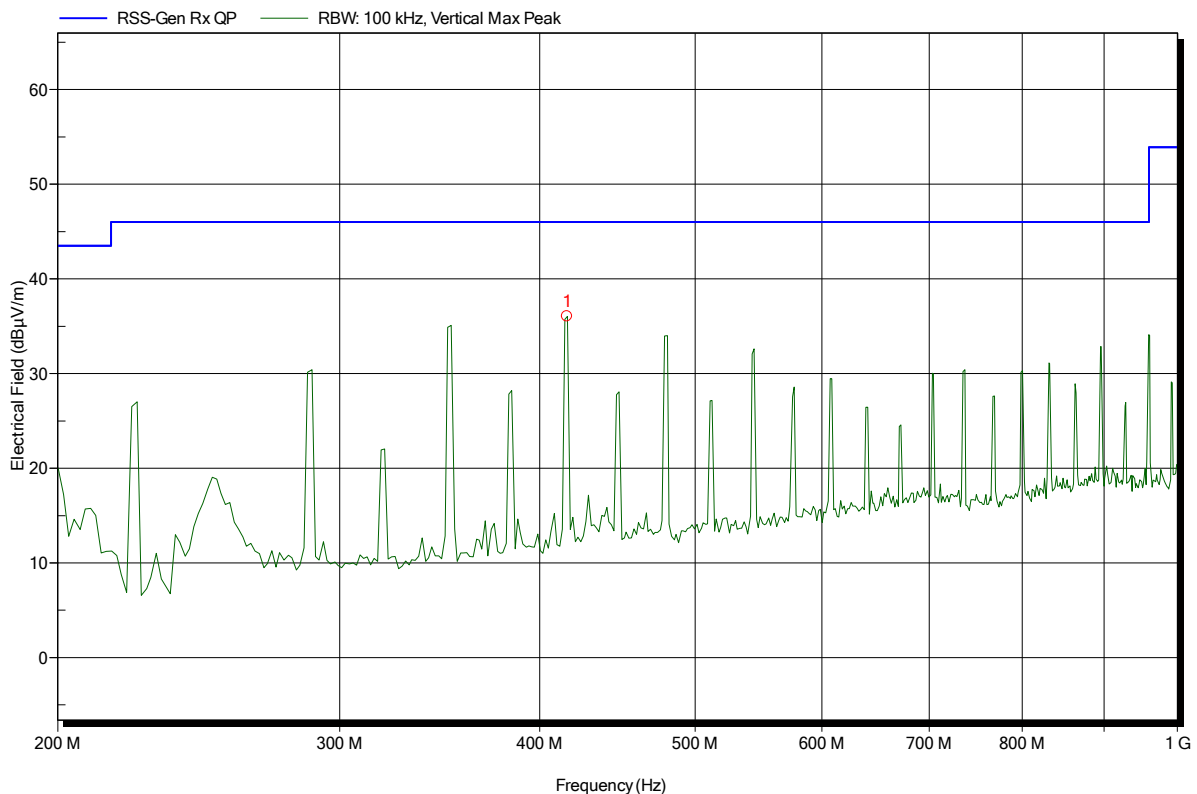


Frequency	Peak	Peak Limit	Peak Difference	Status
416 MHz	36.03 dBµV/m	46 dBµV/m	-9.97 dB	Pass

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant: Leica Geosystems AG  
 EUT Name: Field Controller Win EC7  
 Model: CS20  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions: Tnom: 24°C, Vnom: 11.1V DC  
 Antenna: Rohde & Schwarz HL 223, Horizontal  
 Measurement distance: 3 m  
 Mode: RX; BT-BLE; CH: 19; RX -Test-Mode  
 Test Date: 2014-11-25  
 Note: EUT vertical

Index 66

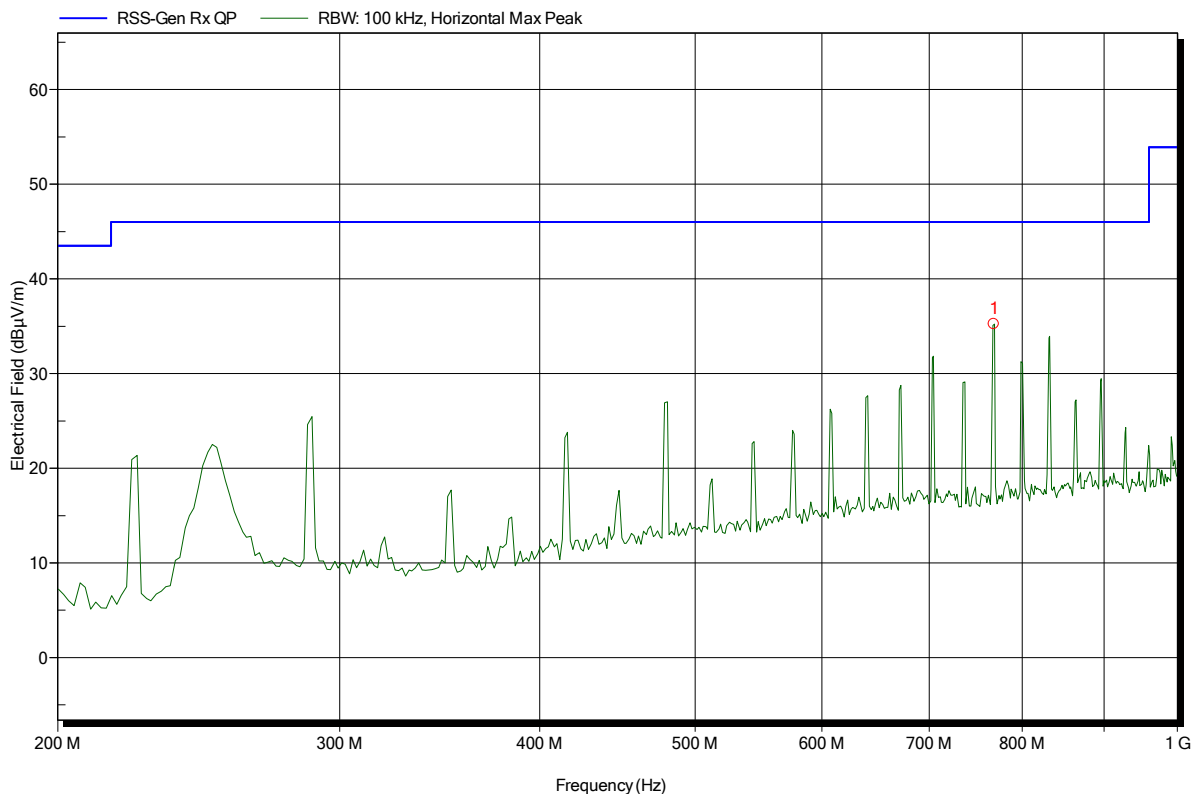

Frequency	Peak	Peak Limit	Peak Difference	Status
768 MHz	35.22 dBµV/m	46 dBµV/m	-10.78 dB	Pass




**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m
Mode:	RX; BT-BLE; CH: 19; RX -Test-Mode
Test Date:	2014-11-25
Note:	EUT vertical

Index 63

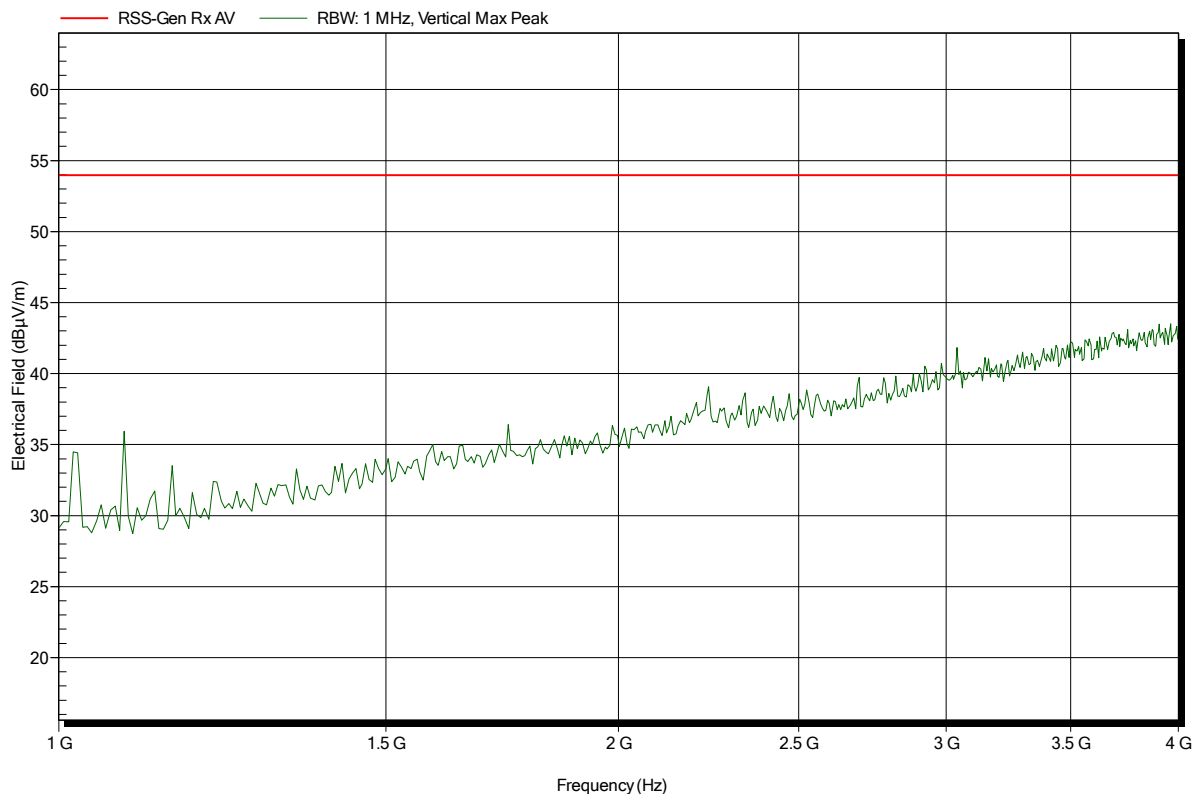


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	3 m
Mode:	RX; BT-BLE; CH: 19; RX -Test-Mode
Test Date:	2014-11-25
Note:	EUT vertical

Index 61

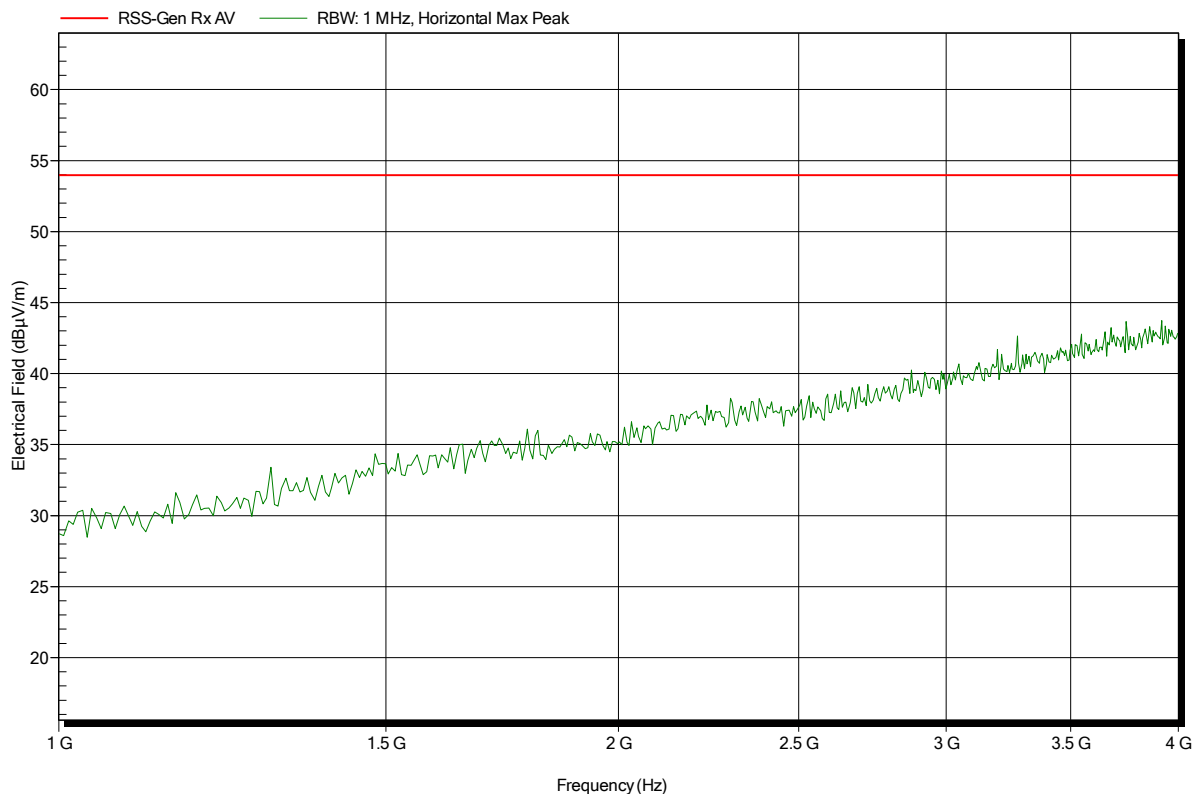


**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1V DC
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3 m
Mode:	RX; BT-BLE; CH: 19; RX -Test-Mode
Test Date:	2014-11-25
Note:	EUT vertical

Index 64

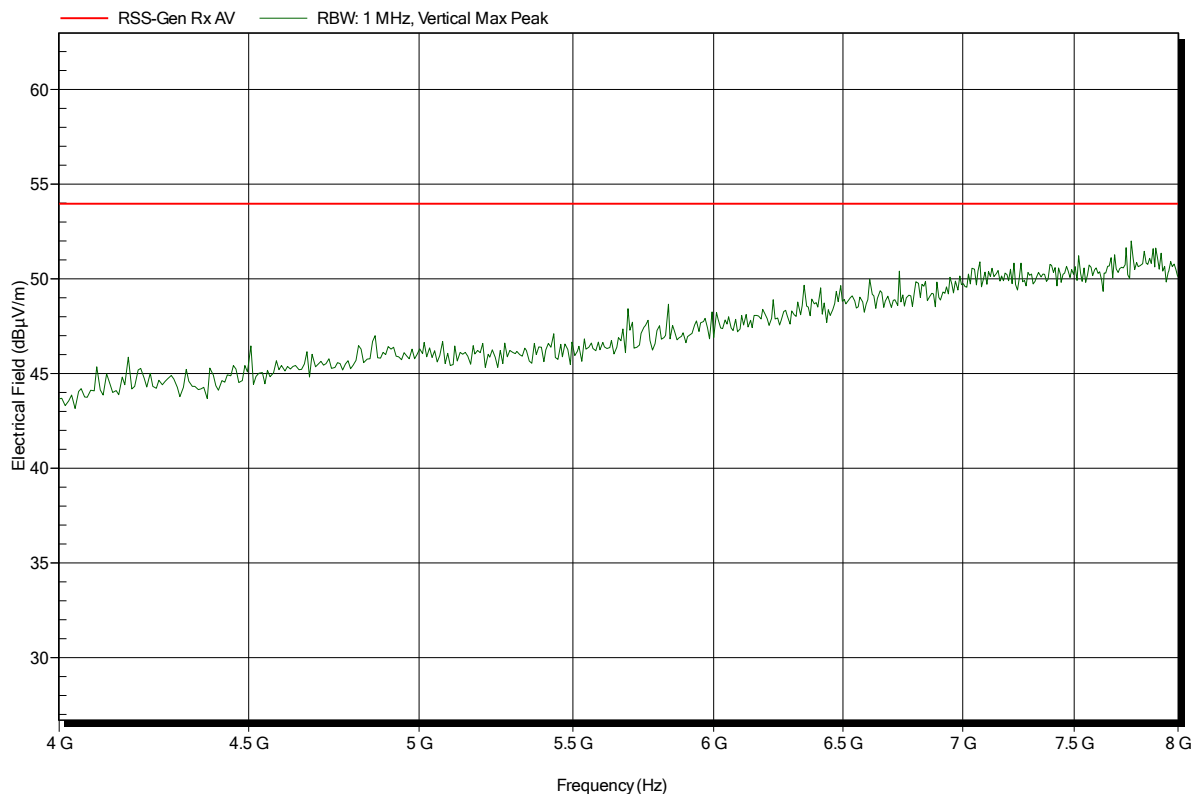

**Spurious emissions according to FCC part 15 Subpart C § 15.247, IC RSS-210**

Project number: G0M-1406-3915

Applicant:	Leica Geosystems AG
EUT Name:	Field Controller Win EC7
Model:	CS20
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pudell
Test Conditions:	Tnom: 24°C, Vnom: 11.1V DC
Antenna:	Rohde & Schwarz HL 025, Horizontal
Measurement distance:	3 m
Mode:	RX; BT-BLE; CH: 19; RX -Test-Mode
Test Date:	2014-11-25
Note:	EUT vertical

Index 62

