



<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B</b> <b>Industry Canada ICES-003</b> <b>Electromagnetic compatibility - Unintentional radiators</b>	
<b>Report Reference No.</b> .....	G0M-1601-5313-EF0115B-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01            FCC Filed Test Laboratory, Reg.-No.: 96970            IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Leica Geosystems AG
Address .....	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
<b>Test specification:</b>	
Standard.....	47 CFR Part 15 Subpart B ICES-003, Issue 5:2012 ANSI C63.4:2014
<b>Equipment under test (EUT):</b>	
Product description	LR-BT Class 1 Bluetooth Device
Model No.	CTR35
Additional Models	None
Hardware version	Not specified
Firmware / Software version	5.3.1
IDs	FCC-ID: RFD-CTR35                      IC: 3177A-CTR35
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**


- not applicable to test object .....: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)


**Testing:**

Date of receipt of test item .....: 2016-03-07

Date (s) of performance of tests .....: 2016-03-18 - 2016-03-21

Compiled by .....: Alexander Meili

Tested by (+ signature).....: Jens Marquardt 

Approved by (+ signature) .....: Marcus Klein 

Head of Lab

Date of issue .....: 2016-04-18

Total number of pages .....: 24

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revised by
V01	2016-04-19	Initial Release	

---

## REPORT INDEX

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	8
1.3	Photos – Test setup	9
1.4	Supporting Equipment Used During Testing	10
1.5	Input / Output Ports	10
1.6	Operating Modes and Configurations	11
1.7	Test Equipment Used During Testing	12
1.8	Sample emission level calculation	13
<b>2</b>	<b>RESULT SUMMARY</b>	<b>14</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>15</b>
3.1	Test Conditions and Results – Radiated emissions	15
3.2	Test Conditions and Results – AC power line conducted emissions	21

## 1 Equipment (Test item) Description

<b>Description</b>	LR-BT Class 1 Bluetooth Device	
<b>Model</b>	CTR35	
<b>Additional Models</b>	None	
<b>Serial number</b>	Not specified	
<b>Hardware version</b>	Not specified	
<b>Software / Firmware version</b>	5.3.1	
<b>FCC-ID</b>	RFD-CTR35	
<b>IC</b>	3177A-CTR35	
<b>Power supply</b>	5 VDC	
<b>Radio module</b>	Type	Bluetooth Classic
	Model	OBS421i
	Manufacturer	Ublox AG
	SW Version	5.3.1
	FCC-ID	PVH0946
	IC	5325A-0946
<b>Manufacturer</b>	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	
<b>Highest emission frequency</b>	108 MHz - 500 MHz (up to 2 GHz)	
<b>Device classification</b>	Class B	
<b>Equipment type</b>	Tabletop	
<b>Number of tested samples</b>	1	

**1.4 Supporting Equipment Used During Testing**

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	Total Station	Leica	RH17	SN: 3100016
AE	Tablet	Panasonic	FZ-G1FAA1LE3	SN: 5GTCA86628
AE	AC/DC Adapter	Panasonic	CF-AA64B3C M1	Adapter for Tablet

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

**1.5 Input / Output Ports**

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	USB	I/O	n/a	no	Standard USB Type A Male

**\*Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port

**1.6 Operating Modes and Configurations**

Mode #	Description
1	Measuring and video

Configuration #	EUT Configuration
1	Device is attached to Panasonic tablet and connected to total station. Total station is measuring a fix distance. Video transfer is active.

**1.7 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
LISN	Schwarzbeck	NSLK 8128	EF00975	2015-12	2016-12
EMI Test Receiver	R&S	ESU26	EF00887	2016-01	2017-01
Pulse Limiter	R&S	ESH3-Z2	EF01063	2015-05	2016-05

<b>Radiated emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
TRILOG Broadband Antenna	Schwarzbeck	VULB 9162	EF00978	2015-10	2016-10
EMI Test Receiver	R&S	ESU26	EF00887	2016-01	2017-01



## 1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
<b>Remarks:</b>				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003		Verdict: PASS				
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	22 °C				
Relative Humidity	30 to 60 %	33 %				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	<500 MHz					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 2 GHz					
Operating mode	1					
Configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB $\mu$ V/m]	Result	Average [dB $\mu$ V/m]	Result	Peak [dB $\mu$ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.  
The measurement procedure is as follows:

## Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
  - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
  - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
  - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.


## Final measurement:

- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

**Spurious emissions under normal conditions according to FCC 47 CFR 15.107 / ICES-003**

Project number: G0M-1601-5313  
 Applicant: Leica Geosystems  
 EUT Name: LR-BT Class1 Bluetooth Device  
 Model: CTR35  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Meili  
 Test Conditions: Tnom: 22°C, Unom: 5VDC USB  
 Antenna: Schwarzbeck VULB 9162, Horizontal  
 Measurement distance: 3m  
 Mode: Connected, measuring  
 Test Date: 2016-03-18  
 Note:


Index 5

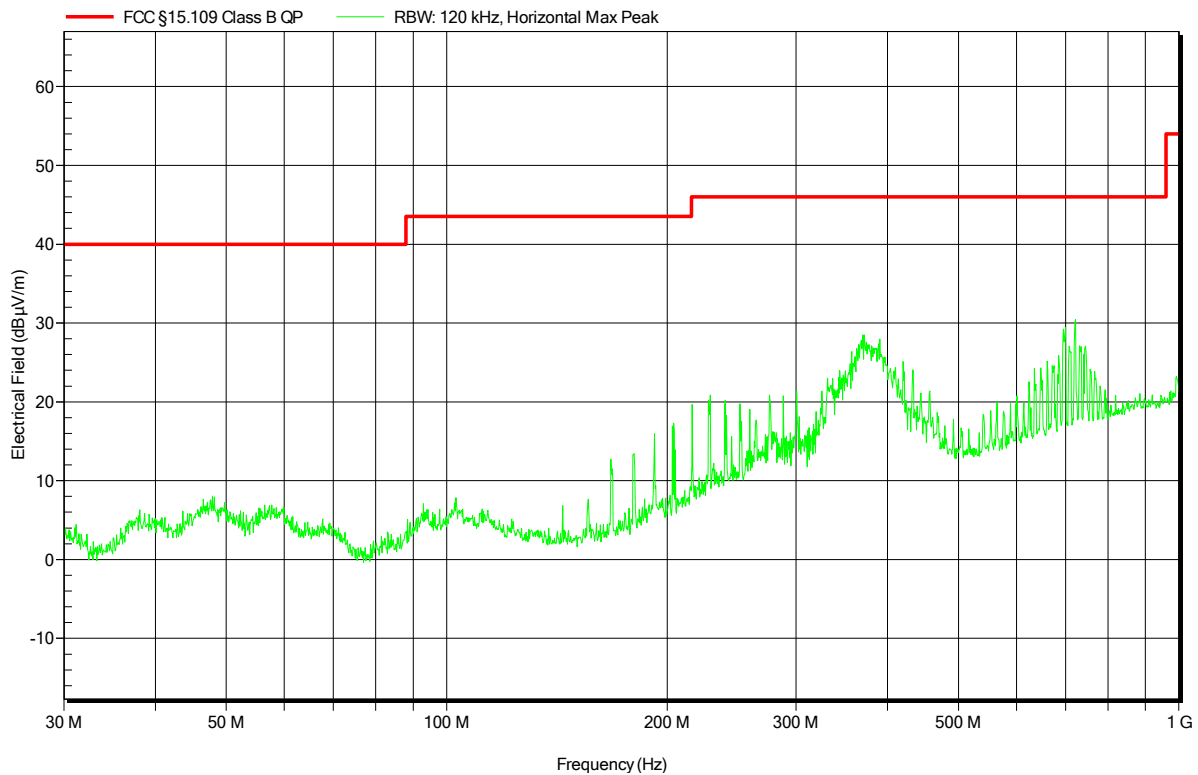

**Spurious emissions under normal conditions according to FCC 47 CFR 15.107 / ICES-003**

Project number: G0M-1601-5313  
 Applicant: Leica Geosystems  
 EUT Name: LR-BT Class1 Bluetooth Device  
 Model: CTR35  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Meili  
 Test Conditions: Tnom: 22°C, Unom: 5VDC USB  
 Antenna: Schwarzbeck VULB 9162, Vertical  
 Measurement distance: 3m  
 Mode: Connected, measuring  
 Test Date: 2016-03-18  
 Note:


Index 6

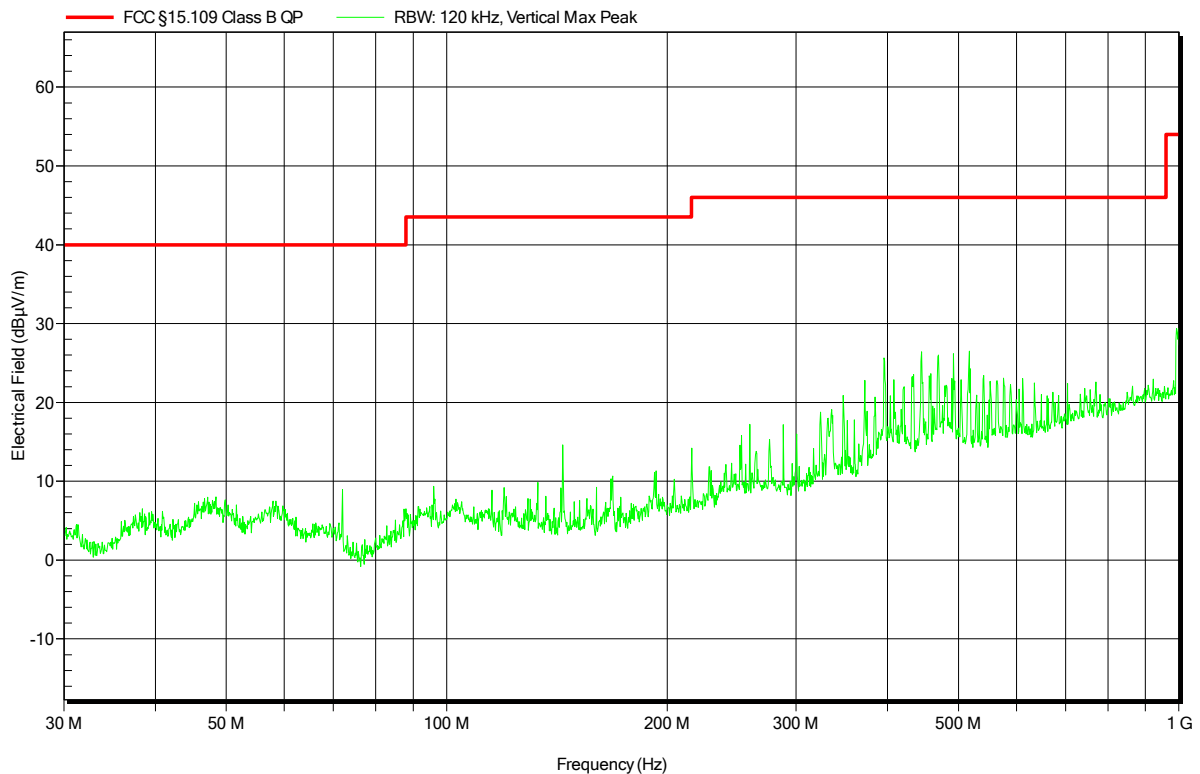

**Spurious emissions under normal conditions according to FCC 47 CFR 15.107 / ICES-003**

Project number: G0M-1601-5313  
 Applicant: Leica Geosystems  
 EUT Name: LR-BT Class1 Bluetooth Device  
 Model: CTR35  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Meili  
 Test Conditions: Tnom: 22°C, Unom: 5VDC USB  
 Antenna: Schwarzbeck VULB 9162, Vertical  
 Measurement distance: 3m  
 Mode: Connected, measuring  
 Test Date: 2016-03-18  
 Note:


Index 7

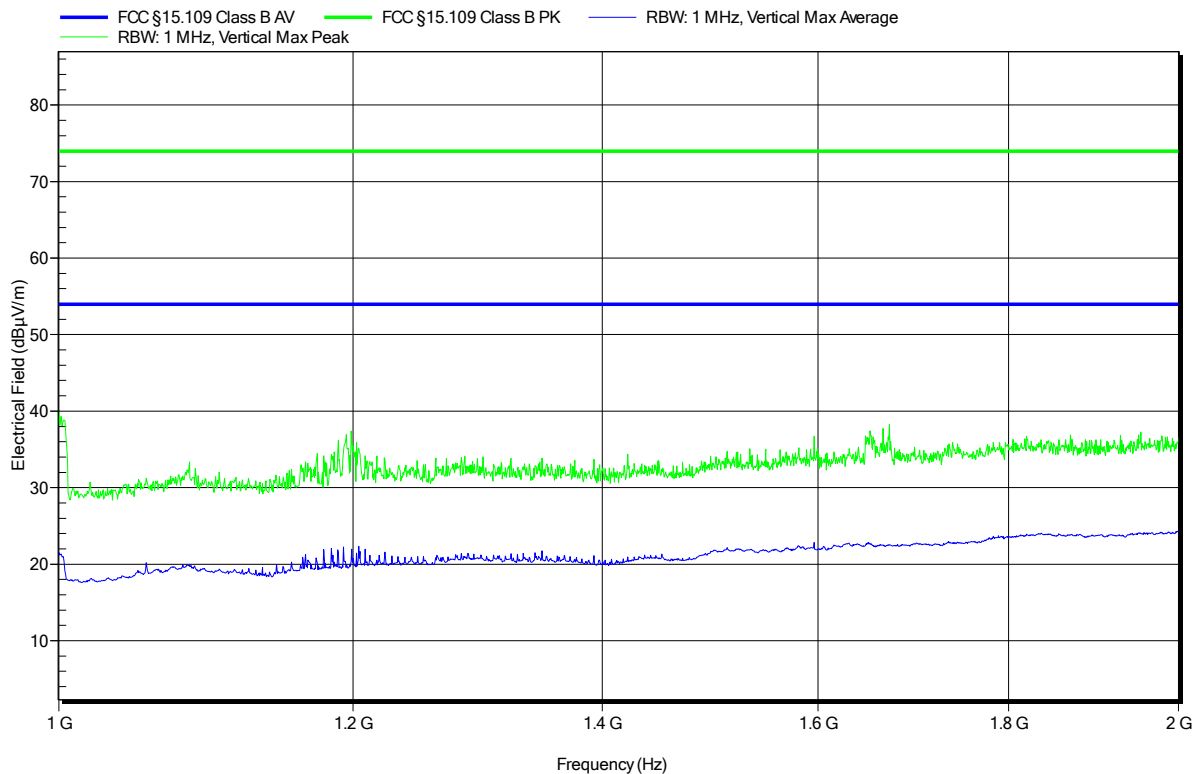

**Spurious emissions under normal conditions according to FCC 47 CFR 15.107 / ICES-003**

Project number: G0M-1601-5313  
 Applicant: Leica Geosystems  
 EUT Name: LR-BT Class1 Bluetooth Device  
 Model: CTR35  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Meili  
 Test Conditions: Tnom: 22°C, Unom: 5VDC USB  
 Antenna: Schwarzbeck VULB 9162, Horizontal  
 Measurement distance: 3m  
 Mode: Connected, measuring  
 Test Date: 2016-03-18  
 Note:

Index 8

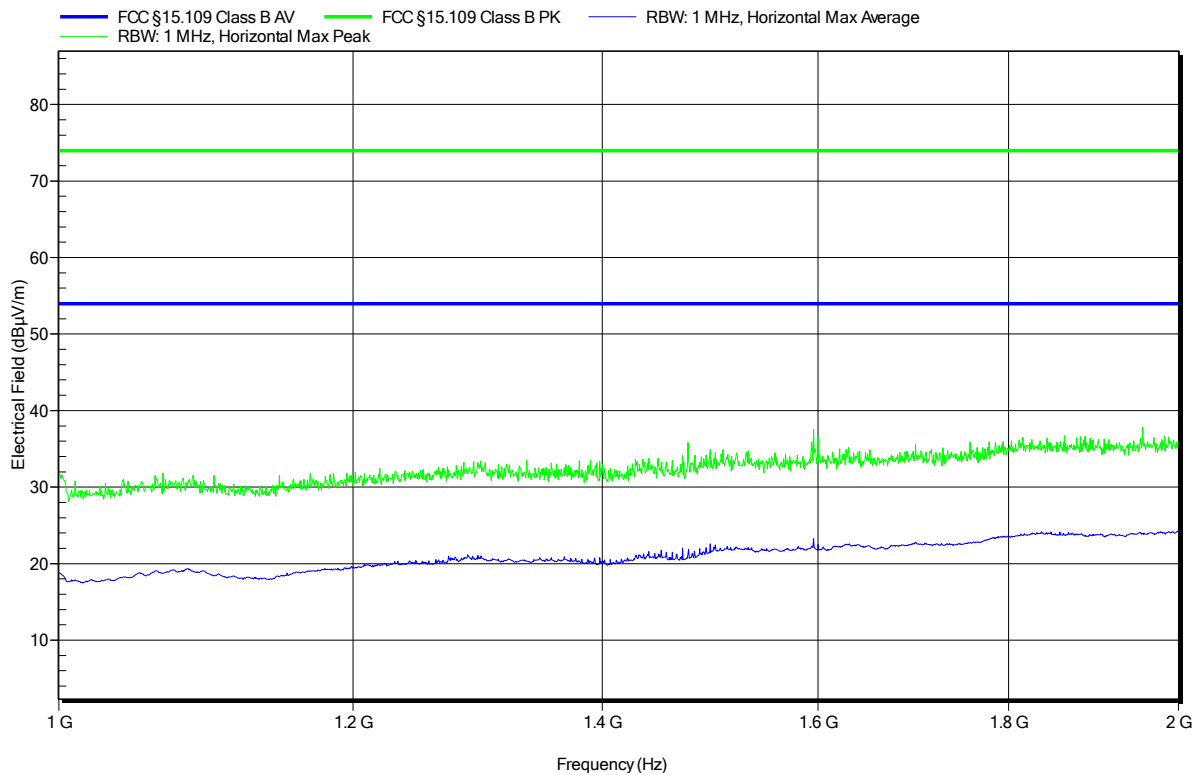



**3.2 Test Conditions and Results – AC power line conducted emissions**

<b>Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003</b>		<b>Verdict: PASS</b>		
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	22 °C		
Relative Humidity	30 to 60 %	33 %		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode	1			
Configuration	1			
<b>Limits and results Class B</b>				
Frequency [MHz]	Quasi-Peak [dB $\mu$ V]	Result	Average [dB $\mu$ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.  
The measurement procedure is as follows:

## Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

**Test Procedure:**


## Final measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

**EMI voltage test in the ac-mains according to FCC 47 CFR 15.107 / ICES-003**

Project number: G0M-1601-5313  
 Applicant: Leica Geosystems  
 EUT Name: LR-BT Class1 Bluetooth Device  
 Model: CTR35  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Meili  
 Test Conditions: Tnom: 22°C, Unom: 5VDC USB via AC/DC-Adapter from Tablet  
 LISN: Schwarzbeck NSLK 8128 (N)  
 Mode: Connected, measuring, charging  
 Test Date: 2016-03-21  
 Note:

Index 9

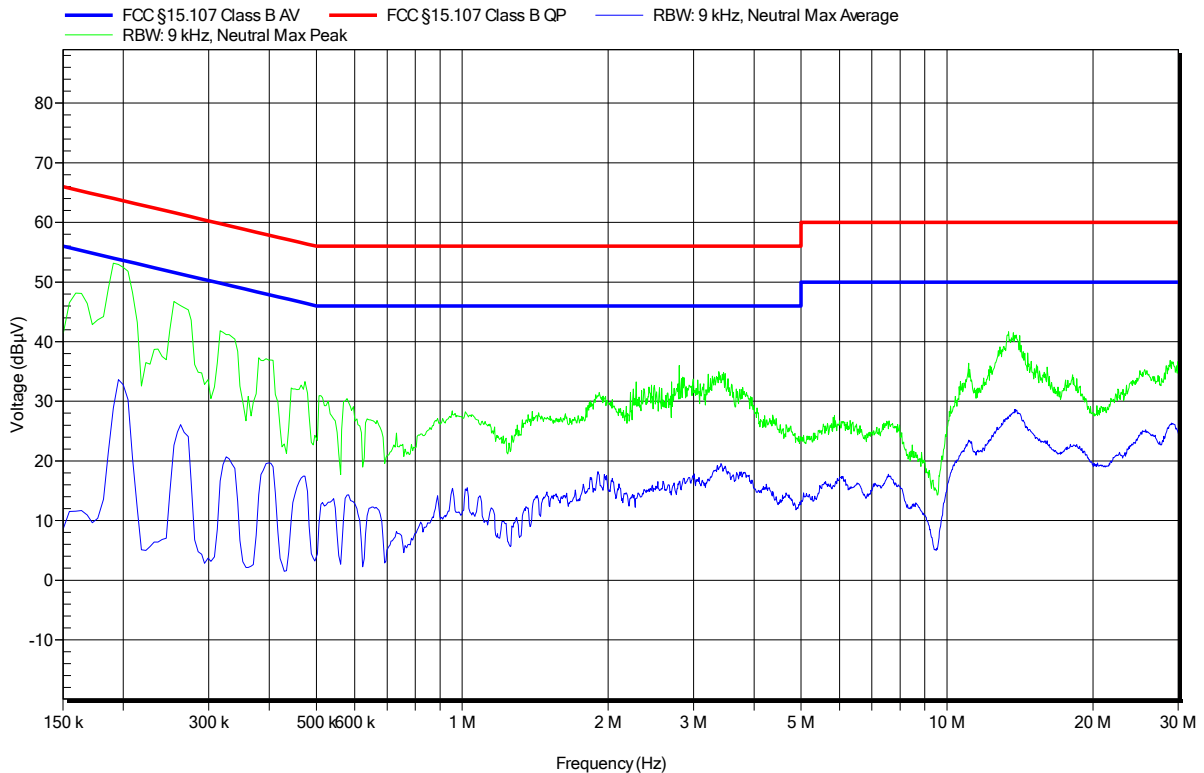

**EMI voltage test in the ac-mains according to FCC 47 CFR 15.107 / ICES-003**

Project number: G0M-1601-5313  
 Applicant: Leica Geosystems  
 EUT Name: LR-BT Class1 Bluetooth Device  
 Model: CTR35  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Meili  
 Test Conditions: Tnom: 22°C, Unom: 5VDC USB via AC/DC-Adapter from Tablet  
 LISN: Schwarzbeck NSLK 8128 (L)  
 Mode: Connected, measuring, charging  
 Test Date: 2016-03-21  
 Note:

Index 10

