



<b>SAR TEST REPORT</b> <b>FCC 47 CFR Part 2.1093</b> <b>Industry Canada RSS-102</b> <b>RF-Exposure evaluation of portable equipment</b>	
<b>Report Reference No.</b> .....	G0M-1601-5313-TFC093SR-V02
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="display: flex; justify-content: center; align-items: center;">   </div> <p style="text-align: center; margin-top: 5px;">                     A2LA Accredited Testing Laboratory, Certificate No.: 1983.01                      FCC Filed Test Laboratory, Reg.-No.: 96970                      IC OATS Filing assigned code: 3470A                 </p>
<b>Applicant's name</b> .....	Leica Geosystems AG
Address .....	Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND
<b>Test specification:</b>	
Standard.....	FCC 47 CFR Part 2 §2.1093 447498 D01 General RF Exposure Guidance v05r02 IEEE Std. 1528 - 2013 IC RSS-102 Issue 5
Non-standard test method.....	None
Test scope.....	complete Radio compliance test
<b>Equipment under test (EUT):</b>	
Product description	LR-BT Class 1 Bluetooth Device
Model No.	CTR35
Additional Model(s)	None
Brand Name(s)	Leica Geosystems AG
Hardware version	None
Firmware / Software version	5.3.1
Contains	FCC-ID: RFD-CTR35 <span style="float: right;">IC: 3177A-CTR35</span>
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**

- neither assessed nor tested ..... : N/N
- required by standard but not appl. to test object ..... : N/A
- required by standard but not tested ..... : N/T
- not required by standard for the test object ..... : N/R
- test object does meet the requirement ..... : P (Pass)
- test object does not meet the requirement ..... : F (Fail)

**Testing:**

Test Lab Temperature ..... : 20 – 23 °C

Test Lab Humidity ..... : 32 – 38 %

Date of receipt of test item ..... : 2016-03-07

Date (s) of performance of tests ..... : 2016-03-14

Compiled by ..... : Wilfried Treffke

Tested by (+ signature) ..... : Wilfried Treffke  
 (Responsible for Test) .....

Approved by (+ signature) ..... : Christian Weber  
 (Head of Lab) .....

Date of issue ..... : 2016-04-04

Total number of pages ..... : 82

*W. Treffke* .....

*C. Weber* .....

**General remarks:**

**The test results presented in this report relate only to the object tested.**  
**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revised by
01	2016-03-31	Initial Release	
02	2016-04-04	Signatures corrected	C. Weber

**REPORT INDEX**

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>6</b>
1.1	Equipment photos	7
1.2	Equipment setup photos	10
1.3	Reference Documents	14
1.4	Supporting Equipment Used During Testing	15
1.5	Supported standalone operating modes	16
1.6	Conducted Power Values	17
1.7	Standalone Operational Mode Test Exclusion for FCC	18
1.8	Standalone Operational Mode Exemption limits for IC	19
1.9	Supported concurrent (multi-transmitter) operating modes	20
1.10	Supported use cases	21
1.11	Radio Test Modes	22
1.12	Test Positions	23
1.13	Test Equipment Used During Testing	24
<b>2</b>	<b>RESULT SUMMARY</b>	<b>25</b>
<b>3</b>	<b>DEFINITIONS</b>	<b>26</b>
3.1	Controlled Exposure	26
3.2	Uncontrolled Exposure	26
3.3	Localized SAR	26
<b>4</b>	<b>LOCALIZED SAR MEASUREMENT EQUIPMENT</b>	<b>27</b>
4.1	Complete SAR DASYS5 Measurement System	27
4.2	Robot Arm	29
4.3	Data Acquisition Electronics	29
4.4	Isotropic E-Field Probe $\leq 3$ GHz	30
4.5	Isotropic E-Field Probe $\leq 6$ GHz	31
4.6	Test phantom and positioner	32
4.7	System Validation Dipoles	33
<b>5</b>	<b>SINGLE-BAND SAR MEASUREMENT</b>	<b>34</b>
5.1	General measurement description	34
5.2	SAR measurement description	34
5.3	Reference lines and points for Handsets	35
5.4	Test positions relative to the Head	36
5.5	Test positions relative to the human body	37

5.6	Measurement Uncertainty	38
<b>6</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>41</b>
6.1	Recipes for Tissue Simulating Liquids	41
6.2	Test Conditions and Results – Tissue Validation	42
6.3	Test Conditions and Results – System Validation	45
6.4	Test Conditions and Results – Standalone SAR Measurement	47
ANNEX A	Calibration Documents	49
ANNEX B	System Validation Reports	71
ANNEX C	SAR Measurement Reports	73

## 1 Equipment (Test item) Description

<b>Description</b>	LR-BT Class 1 Bluetooth Device	
<b>Model</b>	CTR35	
<b>Additional Model(s)</b>	None	
<b>Brand Name(s)</b>	Leica Geosystems AG	
<b>Serial number</b>	None	
<b>Hardware version</b>	None	
<b>Software / Firmware version</b>	5.3.1	
<b>Contains FCC-ID</b>	RFD-CTR35	
<b>Contains IC</b>	3177A-CTR35	
<b>Equipment type</b>	End product	
<b>Prototype or production unit</b>	Identical Prototype	
<b>Device category</b>	Handset	
<b>Environment</b>	General public	
<b>Radio technologies</b>	Bluetooth 2.1 + EDR	
<b>Operating frequency ranges</b>	2.4 GHz : 2402 – 2480 MHz	
<b>Modulations</b>	GFSK / $\pi/4$ -DQPSK / 8-DPSK	
<b>Antenna</b>	Type	integrated
	Model	FR05S1N0102
	Manufacturer	Fractus SA
	Gain	1.7 dBi
<b>Power supply</b>	V <sub>NOM</sub>	5V DC (USB)
<b>AC/DC-Adaptor for Tablet</b>	Model	CF-AA6413CJ2
	Vendor	Panasonic
	Input	100-240V AC / 50-60 Hz
	Output	16V DC
<b>Accessories</b>	Tablet Panasonics CS35	
<b>Manufacturer</b>	Leica Geosystems AG Heinrich Wild Strasse 9435 Heerbrugg SWITZERLAND	

### 1.3 Reference Documents

Document
KDB Publication 447498 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
KDB Publication 648474 : SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas
KDB Publication 648474 : Review and Approval Policies for SAR Evaluation of Handsets with Multiple Transmitters and Antennas
KDB Publication 865664 : SAR measurement procedures for devices operating between 100 MHz to 6 GHz
KDB Publication 941225: SAR Measurement Procedures for 3G Devices
KDB Publication 941225: 3GPP R6 HSPA and R7 HSPA+ SAR Guidance
KDB Publication 941225: Recommended SAR Test Reduction Procedures for GSM/GPRS/EDGE
KDB Publication 941225: SAR Test Consideration for LTE Handsets and Data Modems
KDB Publication 447498 : SAR Measurement Procedures for USB Dongle Transmitters
KDB Publication 248227 : SAR Measurement Procedures for 802.11 a/b/g Transmitters
KDB Publication 450824 : SAR Probe Calibration and System Verification considerations for measurements from 150 MHz to 3 GHz

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
SIM	Communication tester	Rohde & Schwarz	CBT	Signaling

**\*Note:** Use the following abbreviations:  
SIM : Simulator (Not Subjected to Test)



### 1.5 Supported standalone operating modes

Mode	Modulation	Frequency range	Duty cycle
Bluetooth	GFSK / $\pi/4$ -DQPSK / 8-DPSK	2402 – 2480 MHz	78%

## 1.6 Conducted Power Values

According to KDB 447498 D01 v05r02 the conducted power values of all operating modes have been measured in order to determine the worst case source-based averaged power values. The measurements were performed for all operating modes.

### Bluetooth

<b>Bluetooth BR+EDR – Average Output Power</b>			
Frequency [MHz]	Source-base time-average power [dBm]		
	BR (GFSK)	EDR (PI/4-DQPSK)	EDR (8-DPSK)
	DH5	2-DH5	3-DH5
2402	9.4	5.0	4.5
2441	9.6	4.9	4.3
2480	9.8	5.1	4.6
<b>Date, Operator:</b>	22.03.2016 , M. Handrik		

The Source based average Power includes the Tune up tolerance of 0 dB.

### 1.7 Standalone Operational Mode Test Exclusion for FCC

According to KDB 447498 D01 v05r02 for standalone SAR evaluation the test exclusion power condition is given by

$$\frac{\text{max Power, mW}}{\text{test distance, mm}} \cdot \sqrt{f_{\text{GHz}}} \leq 3.0$$

for test separation distance  $\leq 50\text{mm}$ . For test separation distances  $> 50\text{mm}$ , the SAR test exclusion threshold is:

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot \frac{f[\text{MHz}]}{150},$$

$$100 \text{ MHz} < f < 1500 \text{ MHz}$$

$$P_{TH}[\text{mW}] = \text{Power allowed at numeric threshold for } 50\text{mm} + (\text{test distance, mm} - 50\text{mm}) \cdot 10,$$

$$1500 \text{ MHz} < f < 6 \text{ GHz}$$

<b>SAR Test Exclusion</b>															
Mode	P [mW]	Ant.	Reg.	EUT Edge											
				Top		Left		Right		Bottom		Back		Front	
				Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]
USB Bluetooth Dongle direct: DH5; 2480 MHz	9.55	BT	FCC	5	<b>10</b>	5	<b>10</b>	15	29			5	<b>10</b>	5	<b>10</b>
USB Bluetooth Dongle + Tablet PC: DH5; 2480 MHz	9.55	BT	FCC	5	<b>10</b>							5	<b>10</b>	5	<b>10</b>
Comments: All bold Threshold values are above the limit and have to be measured															
<b>Date, Operator:</b>		22.03.2016 , M. Handrik													

1.8 Standalone Operational Mode Exemption limits for IC

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

SAR Test Exclusion															
Mode	P [mW]	Ant.	Reg.	EUT Edge											
				Top		Left		Right		Bottom		Back		Front	
				Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]	Antenna distance to user [mm]	SAR Test Exclusion Threshold [mW]
USB Bluetooth Dongle direct: DH5; 2480 MHz	9.55	BT	IC	5	<b>3.9</b>	5	<b>3.9</b>	15	17.8			5	<b>3.9</b>	5	<b>3.9</b>
USB Bluetooth Dongle + Tablet PC: DH5; 2480 MHz	9.55	BT	IC	5	<b>3.9</b>							5	<b>3.9</b>	5	<b>3.9</b>
Comments: All bold Threshold values are above the limit and have to be measured															
<b>Date, Operator:</b>		22.03.2016 , M. Handrik													

### 1.9 Supported concurrent (multi-transmitter) operating modes

Unknown, no multi-transmitter evaluation

**1.10 Supported use cases**

<b>Use case</b>	<b>Distance to human body</b>	<b>corresponding test configuration</b>
EUT placed at human body with USB cable	0 mm (worst case)	body-worn device
EUT placed at human body with Tablet	0 mm (worst case)	body-worn device

**1.11 Radio Test Modes**

Mode	Settings
Bluetooth	Mode = DH5 Modulation = GFSK Duty cycle = 78% Data rate = 1 Mbps Power level = maximum Antenna = integrated

### 1.12 Test Positions

Position	Description
FRONT-0MM	EUT front side directly touching the phantom.
BACK-0MM	EUT rear side directly touching the phantom.
TOP-0MM	EUT top side directly touching the phantom.
LEFT-0MM	EUT left side directly touching the phantom.



### 1.13 Test Equipment Used During Testing

SAR Measurement					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Stäubli Robot	Stäubli	RX90B L	EF00271	functional test	functional test
Stäubli Robot Controller	Stäubli	CS7MB	EF00272	functional test	functional test
DASY 5 Measurement Server	Schmid & Partner		EF00273	functional test	functional test
Control Pendant	Stäubli		EF00274	functional test	functional test
Dell Computer	Schmid & Partner	Intel	EF00275	functional test	functional test
Data Acquisition Electronics	Schmid & Partner	DAE3V1	EF00276	2015-09	2016-09
Dosimetric E-Field Probe	Schmid & Partner	ET3DV6	EF00279	2015-09	2016-09
Dosimetric E-Field Probe	Schmid & Partner	EX3DV4	EF00826	2015-10	2016-10
System Validation Kit	Schmid & Partner	D300V3	EF00299	2015-09	2018-09
System Validation Kit	Schmid & Partner	D450V3	EF00300	2015-09	2018-09
System Validation Kit	Schmid & Partner	D900V2	EF00281	2015-09	2018-09
System Validation Kit	Schmid & Partner	D1800V2	EF00282	2015-09	2018-09
System Validation Kit	Schmid & Partner	D1900V2	EF00283	2015-09	2018-09
System Validation Kit	Schmid & Partner	D2450V2	EF00284	2015-09	2018-09
System Validation Kit	Schmid & Partner	D5GHZV2	EF00827	2015-10	2018-10
Flat phantom	Schmid & Partner	V 4.4	EF00328	no calibration required	no calibration required
Oval flat phantom	Schmid & Partner	ELI 4	EF00289	functional test	functional test
Mounting Device	Schmid & Partner	V 3.1	EF00287	functional test	functional test
Millivoltmeter	Rohde & Schwarz	URV 5	EF00126	2013-08	2016-08
Power sensor	Rohde & Schwarz	NRV-Z2	EF00125	2015-09	2017-09
RF signal generator	Rohde & Schwarz	SMP 02	EF00165	2015-05	2017-05
Insertion unit	Rohde & Schwarz	URV5-Z4	EF00322	2015-10	2016-10
Directional Coupler	HP	HP 87300B	EF00288	functional test	functional test
Radio Communication Tester	Rohde & Schwarz	CMD65	EF00625	ICO (initial calibration only)	ICO (initial calibration only)
Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	EF00304	2015-05	2016-05
Network Analyzer 300 kHz to 3 GHz	Agilent	8752C	EF00140	2015-06	2016-06
Dielectric Probe Kit	Agilent	85070C	EF00291	functional test	functional test
Dielectric Probe Kit	SPEAG	DAK-3.5	EF00945	2015-09	2016-09
DAK Measurement Software	SPEAG	DAKS	EF00965	-	-
Thermometer	LKM electronic GmbH	DTM3000	EF00967	2015-10	2016-10

## 2 Result Summary

447498 D01 General RF Exposure Guidance, RSS-102					
Product Specific Standard Section	Requirement – Test	Reference Method	Maximum SAR [W/kg]	Result	Remarks
447498 D01 General RF Exposure Guidance RSS-102 Section 3	Single-band conformity	KDB Publication 447498 KDB Publication 865664		PASS	
447498 D01 General RF Exposure Guidance RSS-102 Section 3	Multi-band conformity	KDB Publication 447498 KDB Publication 865664	N/A	N/R	No concurrent transmission modes
<b>Remarks:</b>					

### 3 Definitions

The specific absorption rate (SAR) is defined as the time derivative of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dV$ ) of a given density ( $\rho_t$ ), expressed in watts per kilogram (W/kg)

$$\text{SAR} = d/dt (dW/dm) = d/dt (dW/\rho_t dV) = \sigma/\rho_t |E_t|^2$$

where

$$dW/dt = \int_V E \cdot J \, dV = \int_V \sigma E^2 \, dV$$

#### 3.1 Controlled Exposure

The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity. Warning labels placed on low-power consumer devices such as cellular telephones are not considered sufficient to allow the device to be considered under the occupational/controlled category and the general population/uncontrolled exposure limits apply to these devices.

#### 3.2 Uncontrolled Exposure

In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means. Awareness of the potential for RF exposure in a workplace or similar environment can be provided through specific training as part of a RF safety program. If appropriate, warning signs and labels can also be used to establish such awareness by providing prominent information on the risk of potential exposure and instructions on the risk of potential exposure and instructions on methods to minimize such exposure risks.

#### 3.3 Localized SAR


Compliance with the localized SAR limits is demonstrated using the head and trunk limit because this SAR limit is only half the limbs limit value. The values are obtained by SAR measurements according to EN 62209-2.

## 4 Localized SAR Measurement Equipment


The measurements were performed with Dasy5 automated near-field scanning system comprised of high precision robot, robot controller, computer, e-field probe, probe alignment unit, phantoms, non-conductive phone positioned and software extension.

### 4.1 Complete SAR DASY5 Measurement System

Measurements are performed using the DASY5 automated assessment system made by Schmid & Partner Engineering AG (SPEAG) in Zurich, Switzerland.

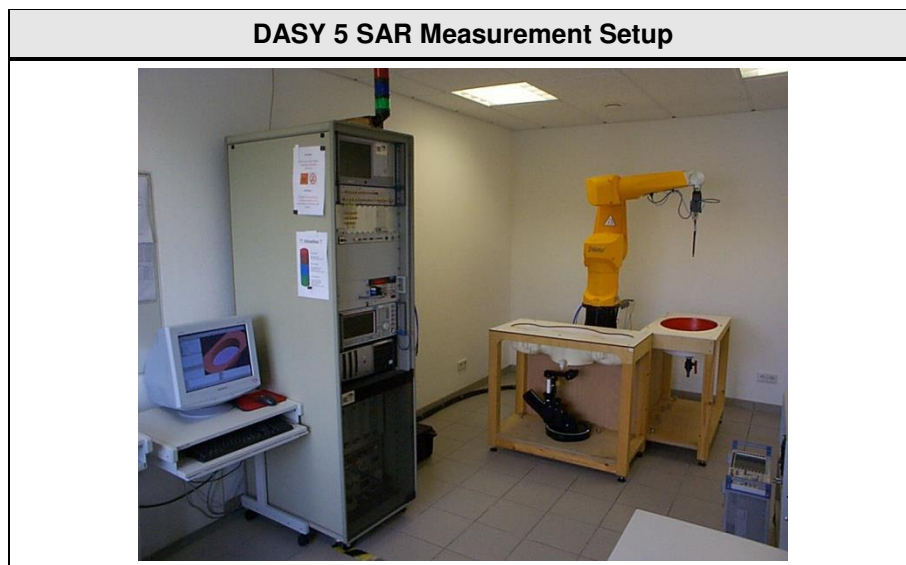

The following Diagram show the elements involved in the measurement setup.

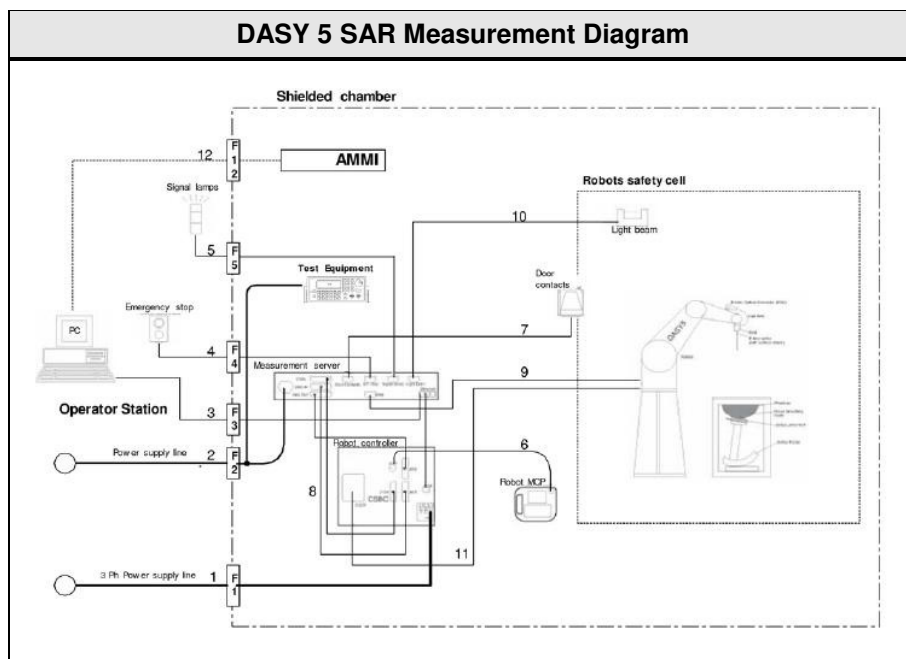

The DASY5 system for performing compliance tests consists of the following items:


<b>DASY5 SAR Measurement System</b>	
Device	Description:
RX90BL	A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software.
Probe Alignment Unit	A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
Teach Pendant	The Manual Control Pendant (MCP), also called the manual teach pendant, is the user interface to the robot. In DASY, it is used for certain installation and teach procedures
Signal Lamps	External warning lamp which indicates when the robot arm is powered-on and if the robot is under software control or in manual mode (controlled with the teach pendant).
DAE	The data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
E-Field Probes	Isotropic E-Field probe optimized and calibrated for E-field measurements in free space.
EOC	The electro-optical converter (EOC) performs the conversion between optical and electrical signals
Measurement Server	The functions of the measurement server is to perform the time critical task such as signal filtering, surveillance of the robot operation, fast movement interrupts.
Control Computer	A computer operating Windows 2000 or Windows NT with DASY 4 Software.
Control Software	DASY4 and SEMCAD post processing Software
SAM Twin Phantom	The SAM twin phantom enabling testing left-hand and right-hand usage.
Flat Phantom	Flat Phantom (only for body-mounted transceivers operating below 800 MHz).
Tissue simulating liquid	Tissue simulating liquid mixed according to the given recipes.
Device Holder	The device holder for handheld mobile phones.
System Validation Dipoles	System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2 Robot Arm

The DASY5 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France).

The RX robot series have many features that are important for our application:


- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

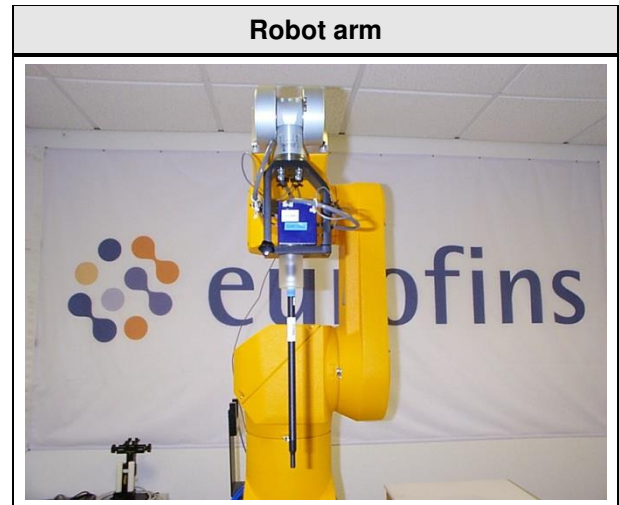

#### 4.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

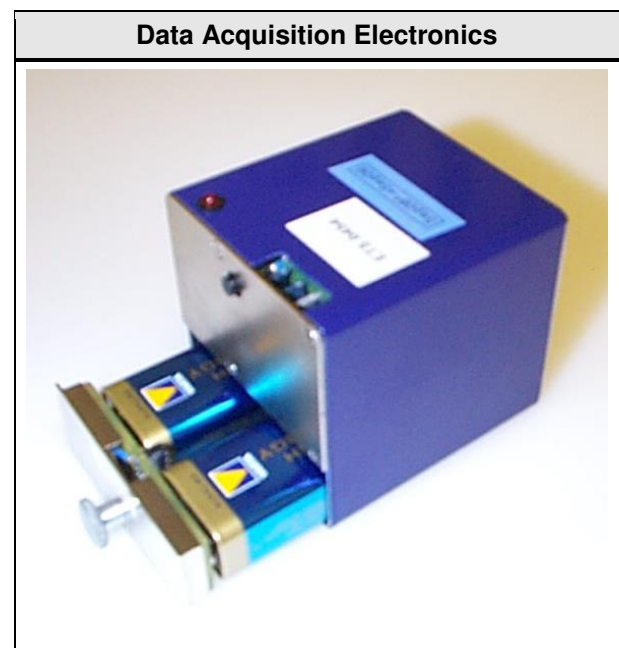

#### 4.4 Isotropic E-Field Probe $\leq 3$ GHz

##### Probe Specifications

##### **Construction:**

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

##### **Calibration:**

In air from 10 MHz to 2.5 GHz,  
In brain and muscle simulating tissue at  
Frequencies of 835MHz, 900MHz, 1800MHz,  
1900 MHz and 2450 MHz

##### **Frequency:**

10MHz to > 3GHz,  
Linearity  $\pm 0.2$ dB (30MHz to 3GHz)

##### **Directivity:**

$\pm 0.2$ dB in HSL (rotation around probe axis)  
 $\pm 0.4$ dB in HSL (rotation normal to probe axis)

##### **Dynamic Range:**

$5\mu$ W/g to > 100mW/g

##### **Linearity:**

$\pm 0.2$ dB

##### **Dimensions:**

Overall Length: 330mm (Tip: 16mm),  
Tip Diameter: 6.8mm (Body: 12mm),  
Distance from probe tip to dipole centers: 2.7mm

##### **Application:**

General dosimetry up to 3 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms



#### 4.5 Isotropic E-Field Probe $\leq 6$ GHz

##### Probe Specifications

##### **Construction:**

One dipole parallel, two dipoles normal to probe axis built-in shielding against static charges.

##### **Calibration:**

In air from 10 MHz to 6 GHz,  
In brain and muscle simulating tissue at  
Frequencies of 5200, 5500, 5800

##### **Frequency:**

10MHz to 6GHz,  
Linearity  $\pm 0.2$ dB (30MHz to 6GHz)

##### **Directivity:**

$\pm 0.3$ dB in HSL (rotation around probe axis)  
 $\pm 0.5$ dB in tissue material (rotation normal to probe axis)

##### **Dynamic Range:**

$10\mu\text{W/g}$  to  $> 100\text{mW/g}$

##### **Linearity:**

$\pm 0.2$ dB

##### **Dimensions:**

Overall Length: 337mm (Tip: 20mm),  
Tip Diameter: 2.5mm (Body: 12mm),  
Distance from probe tip to dipole centers: 1mm

##### **Application:**

General dosimetry up to 6 GHz  
Compliance tests of mobile phones  
Fast automatic scanning in arbitrary phantoms






#### 4.6 Test phantom and positioner


The positioner and test phantoms are manufactured by SPEAG. The test phantoms are used for all tests i.e. for both validation testing and device testing. The positioner and test phantom conforms to the requirements of EN 62209 and IEEE 1528.

The SPEAG device holder was used to position the test device in all tests whilst a tripod was used to position the validation dipoles in the test arch.

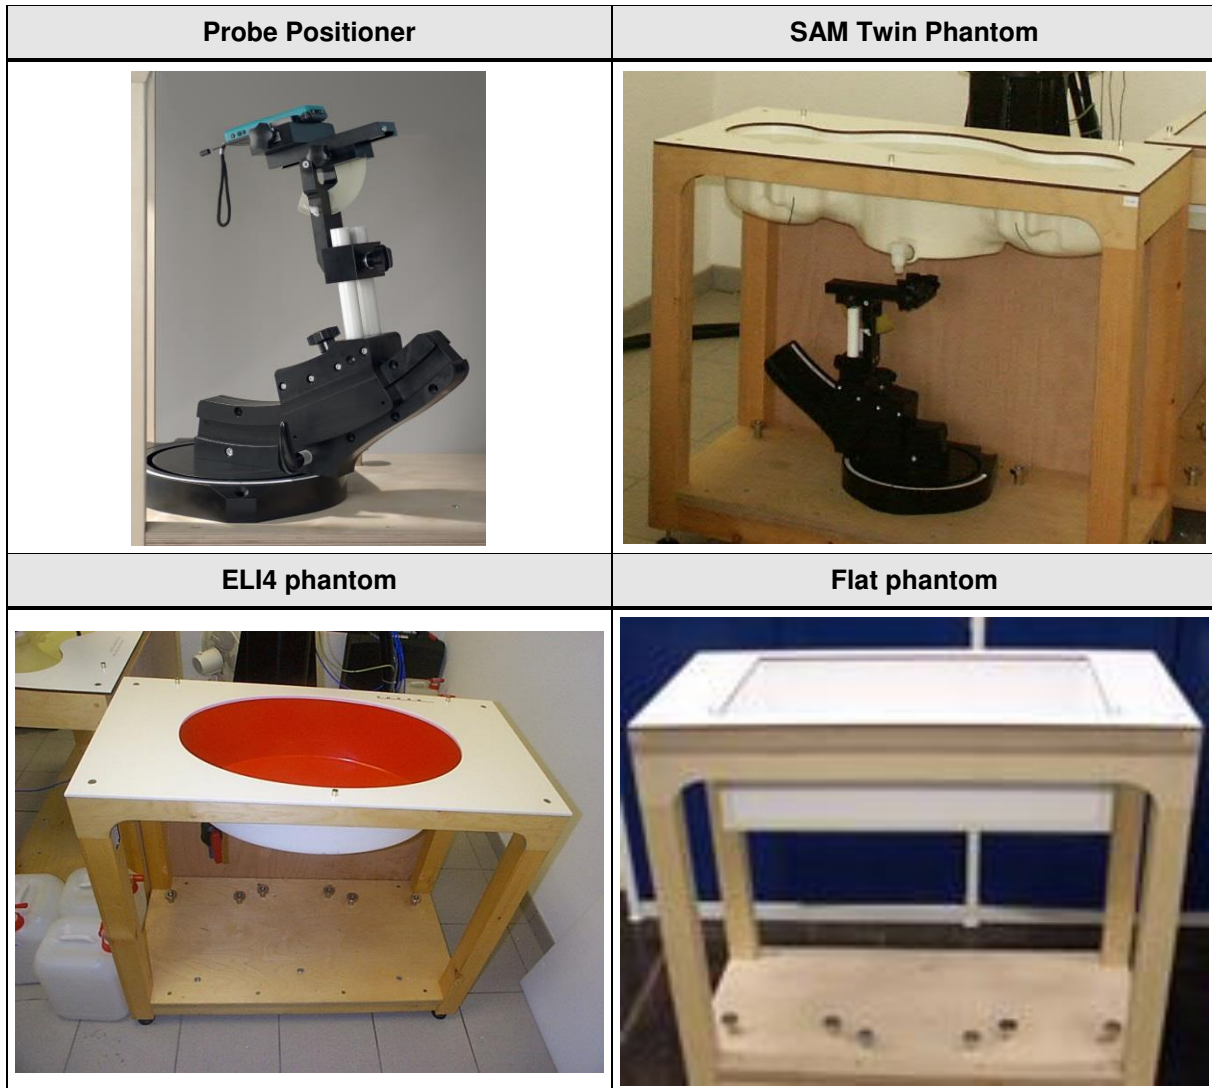

#### 4.7 System Validation Dipoles

A set of calibration dipoles (D2450V2) is included as a part of the SAR measurement setup. These are used for the validation of the test setup after its installation and prior to the EUT measurements. The calibration dipole is placed in the position normally occupied by the EUT. All calibration dipoles have the same height which allows an exact fitting below the center point of the test phantom. The dipole center is 10mm below the surface of the test phantom.

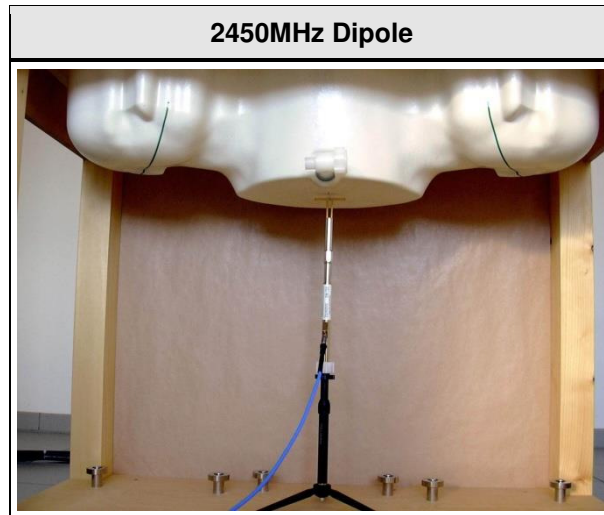

## 5 Single-band SAR Measurement

After successful completion of the tissue and system verification the SAR values of the EUT are measured according to the following description.

### 5.1 General measurement description

The measurement is performed for each frequency band of the device. If the width of the transmit frequency band exceeds 1% of its center frequency, then the channels at the lowest and highest frequencies should also be tested. Furthermore, if the width of the transmit band exceeds 10% of its center frequency the following formula is used to determine the number of channels:

$$N_C = 2 \cdot \text{roundup}[10 \cdot (f_{\text{high}} - f_{\text{low}}) / f_c] + 1$$

First the device is tested on the center channel of each frequency band used by the device. An operation mode and configuration with maximum transmit power is established. If battery operated equipment is used, the batteries are fully charged.

SAR measurements are performed using the steps outlined in the next section for all relevant operational modes, EUT configurations and measurement positions.

For the condition (position, configuration, operational mode) that provides the highest spatial-average SAR value on the center channel, the other channels are also tested.

Additionally all other conditions where the spatial-average SAR value is within 3dB of the SAR limit are also tested on all determined test frequencies.

### 5.2 SAR measurement description

First the local SAR value at a test point within 10mm or less in normal direction from the inner surface of the phantom is measured. This SAR value is used to determine the measurement drift during SAR measurement.

Next an area scan is performed over an area larger than the projection of the EUT with antenna on the surface of the phantom with a spatial grid step of 10mm.

From the scanned SAR distribution the position of maximum SAR value is identified as well as any local SAR maxima within 2dB of the maximum value that are not within the zoom scan volume. (The additional peaks are only measured when the primary peak is within 2dB of the SAR limit.)



The zoom-scan volume constructed on the peak SAR position is scanned with a grid step of 5mm. The measured data are extracted and the local SAR value for each measurement point is calculated. The measured values are interpolated over a fine-mesh within the scan volume and the average SAR value over 10g mass is calculated.

At the end of the measurement the reference point measured at the beginning of the measurement is measured again and from the difference the drift is calculated.

### 5.3 Reference lines and points for Handsets


For all measurement positions of the EUT, the EUT has to be placed in a specific orientation with respect to the phantom. The orientation of the EUT relative to the phantom is defined by reference lines and points.

According to IEEE 1528, the reference lines and points shall be positioned at the EUT as shown in the following figure.

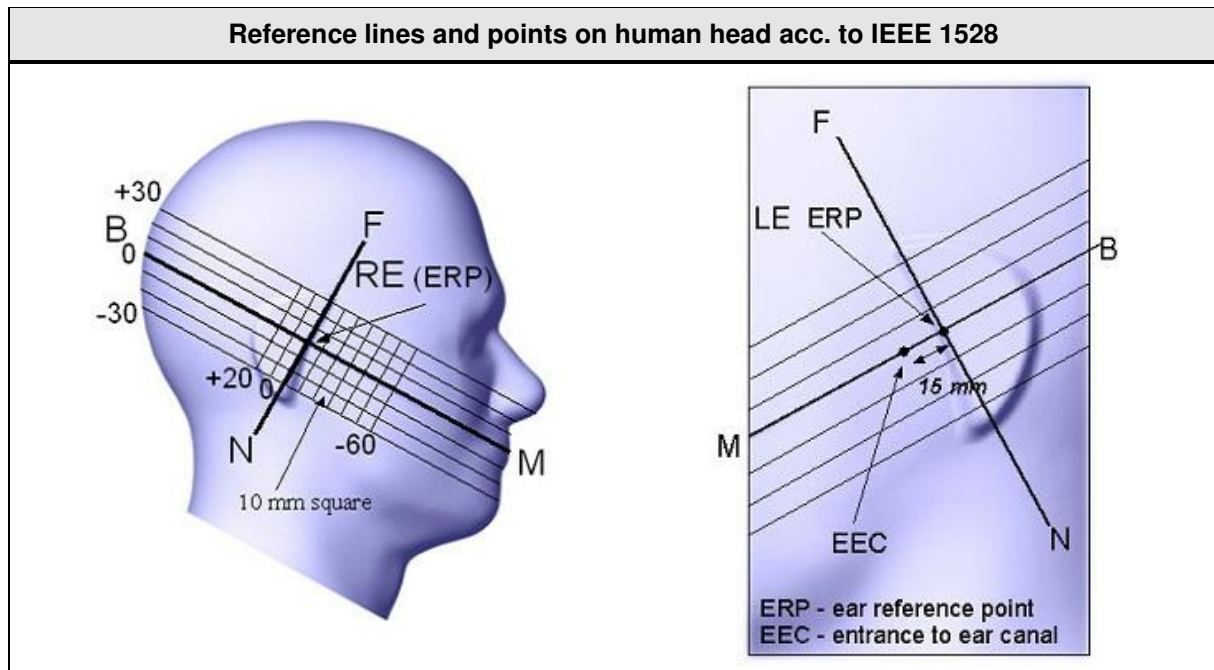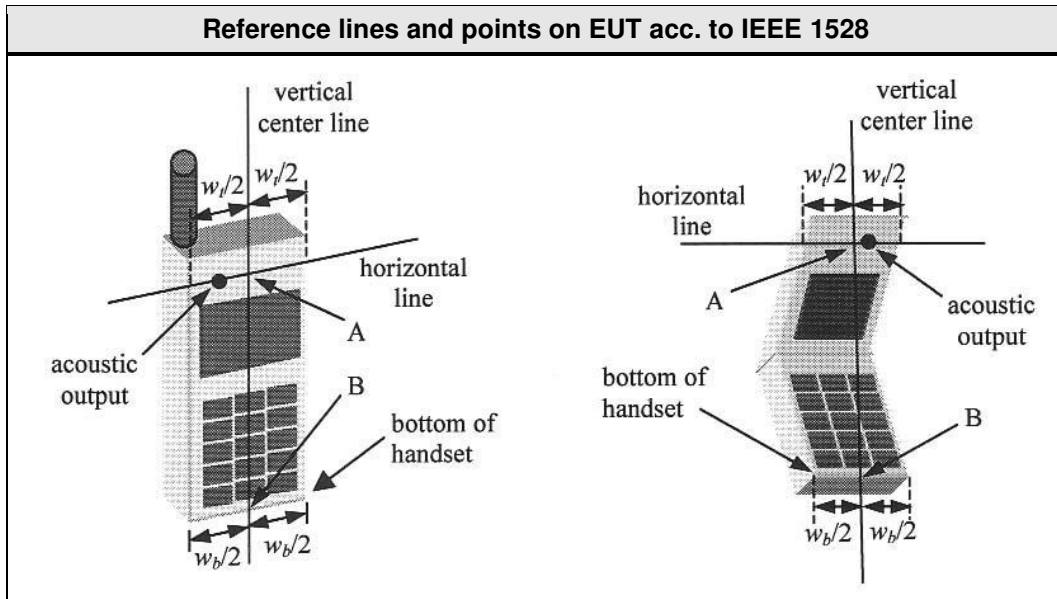

## 5.4 Test positions relative to the Head


### Cheek position

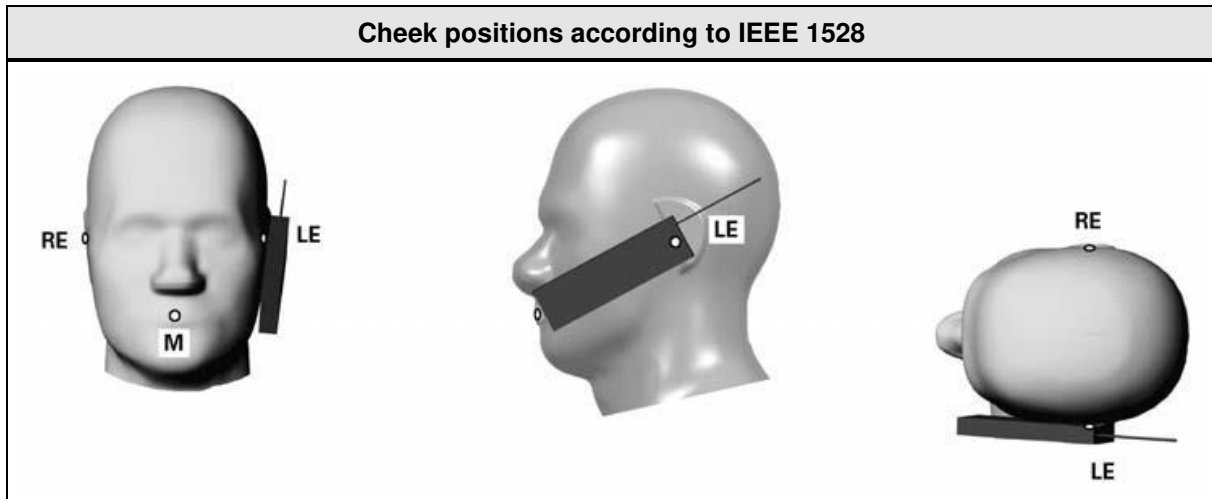

The handset is positioned close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom. Next the handset is translated towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.

While the handset is maintained in this plane, it is rotated around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane. Then it is rotated around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. While the vertical centerline is maintained in the Reference Plane, point A is kept on the line passing through RE and LE, and the handset is maintained in contact with the pinna, the handset is rotated about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek.


### Tilt position

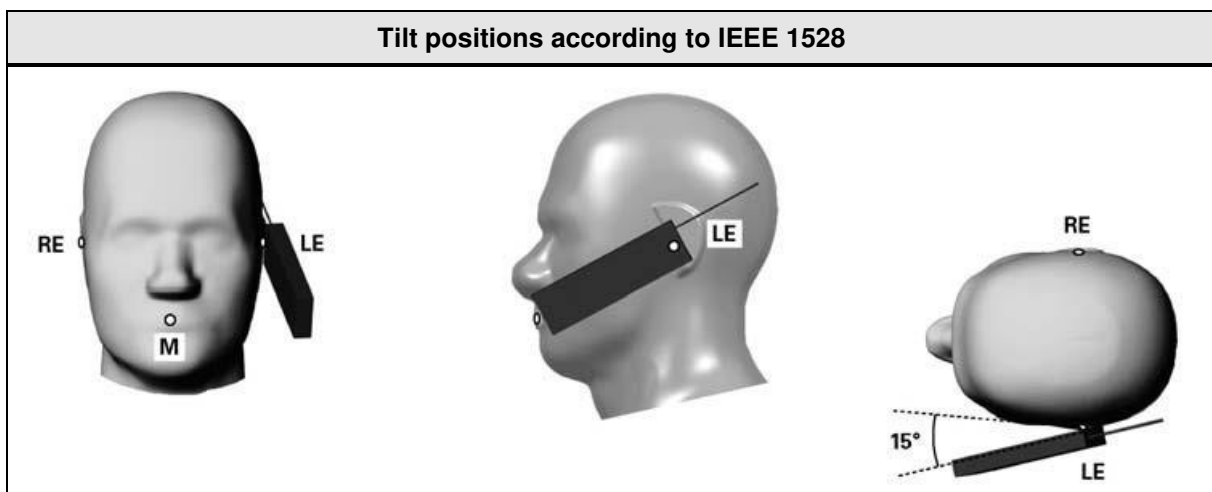

First the EUT is placed in the cheek position. Next the handset is moved away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°. Then the handset is rotated around the horizontal line by 15°.

The handset is moved towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head

### 5.5 Test positions relative to the human body

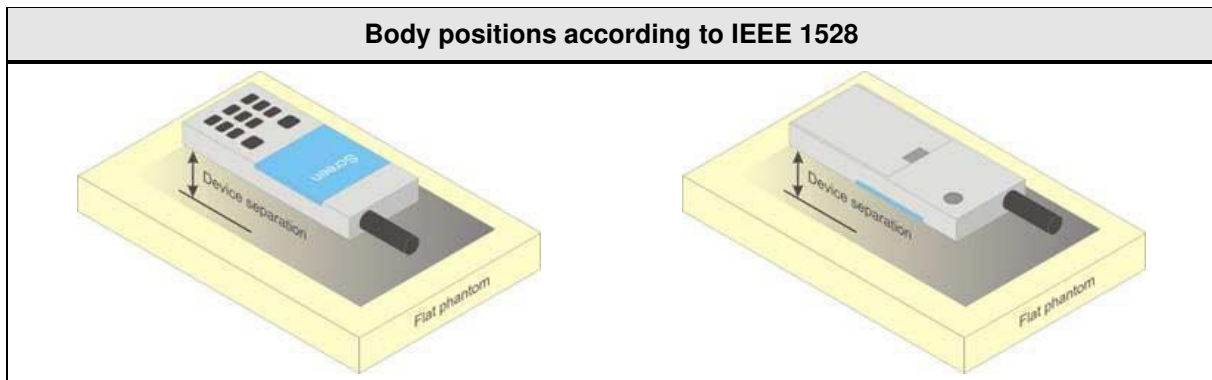

In body worn configuration the device is positioned parallel to the phantom surface with either top or bottom side of the EUT facing against the phantom.

The separation distance of the EUT is selected according to the use case of the EUT (e.g. with belt clip or holster).

## 5.6 Measurement Uncertainty

Measurement Uncertainty according to IEEE 1528							
Error Description	Uncertainty Value	Probability Distribution	Div.	c <sub>i</sub> (1g)	c <sub>i</sub> (10g)	Std. Unc. 1g	Std. Unc. 10g
<b>Measurement System</b>							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
<b>Test Sample Related</b>							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
<b>Phantom and Setup Related</b>							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±12.8%	±12.7%
<b>Expanded Standard Uncertainty</b>						<b>±25.6%</b>	<b>±25.4%</b>

Measurement Uncertainty according to EN 62209-1							
Error Description	Uncertainty Value	Probability Distribution	Div.	c <sub>i</sub> (1g)	c <sub>i</sub> (10g)	Std. Unc. 1g	Std. Unc. 10g
<b>Measurement System</b>							
Probe Calibration	±6.0%	N	1	1	1	±6.0%	±6.0%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Boundary effects	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.4%	R	$\sqrt{3}$	1	1	±0.2%	±0.2%
Probe Positioning	±2.9%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Max. SAR Evaluation	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
<b>Test Sample Related</b>							
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0.0%	±0.0%
<b>Phantom and Setup Related</b>							
Phantom Uncertainty	±6.1%	R	$\sqrt{3}$	1	1	±3.5%	±3.5%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.6%	±0.7%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±11.4%	±11.3%
<b>Expanded Standard Uncertainty</b>						<b>±22.9%</b>	<b>±22.7%</b>



Measurement Uncertainty according to EN 62209-2							
Error Description	Uncertainty Value	Probability Distribution	Div.	c <sub>i</sub> (1g)	c <sub>i</sub> (10g)	Std. Unc. 1g	Std. Unc. 10g
<b>Measurement System</b>							
Probe Calibration	±6.55%	N	1	1	1	±6.55%	±6.55%
Axial Isotropy	±4.7%	R	$\sqrt{3}$	0.7	0.7	±1.9%	±1.9%
Hemispherical Isotropy	±9.6%	R	$\sqrt{3}$	0.7	0.7	±3.9%	±3.9%
Linearity	±4.7%	R	$\sqrt{3}$	1	1	±2.7%	±2.7%
Modulation Response	±2.4%	R	$\sqrt{3}$	1	1	±1.4%	±1.4%
System Detection Limits	±1.0%	R	$\sqrt{3}$	1	1	±0.6%	±0.6%
Boundary effects	±2.0%	R	$\sqrt{3}$	1	1	±1.2%	±1.2%
Readout Electronics	±0.3%	N	1	1	1	±0.3%	±0.3%
Response Time	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Integration Time	±2.6%	R	$\sqrt{3}$	1	1	±1.5%	±1.5%
RF Ambient Noise	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
RF Ambient Reflections	±3.0%	R	$\sqrt{3}$	1	1	±1.7%	±1.7%
Probe Positioner	±0.8%	R	$\sqrt{3}$	1	1	±0.5%	±0.5%
Probe Positioning	±6.7%	R	$\sqrt{3}$	1	1	±3.9%	±3.9%
Post processing	±4.0%	R	$\sqrt{3}$	1	1	±2.3%	±2.3%
<b>Test Sample Related</b>							
Device Holder	±3.6%	N	1	1	1	±3.6%	±3.6%
Test Sample Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0%	±0%
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9%	±2.9%
<b>Phantom and Setup Related</b>							
Phantom Uncertainty	±7.9%	R	$\sqrt{3}$	1	1	±4.6%	±4.6%
SAR correction	±1.9%	R	$\sqrt{3}$	1	0.84	±1.1%	±0.9%
Liquid conductivity (measured)	±2.5%	N	1	0.78	0.71	±2.0%	±1.8%
Liquid permittivity (measured)	±2.5%	N	1	0.26	0.26	±0.1%	±0.1%
Temperature uncertainty - Conductivity	±5.2%	R	$\sqrt{3}$	0.78	0.71	±2.3%	±2.1%
Temperature uncertainty - Permittivity	±0.8%	R	$\sqrt{3}$	0.23	0.26	±0.1%	±0.1%
Combined Standard Uncertainty						±12.8%	±12.7%
<b>Expanded Standard Uncertainty</b>						<b>±25.6%</b>	<b>±25.4%</b>

## 6 Test Conditions and Results

### 6.1 Recipes for Tissue Simulating Liquids

Body Tissue Simulating Liquids					
Ingredient	M 450-B weight (%)	M 900-B weight (%)	M 1800-B weight (%)	M 1950-A weight (%)	M 2450-B weight (%)
Water	46.21	50.75	70.17	69.79	68.64
Sugar	51.17	48.21			
Cellulose	0.18				
Salt	2.34		0.39	0.2	
Preventol	0.08	0.1			
DGBE			29.44	30	31.37
Head Tissue Simulating Liquids					
Ingredient	HSL 450-A weight (%)	HSL 900-B weight (%)	HSL 1800-F weight (%)	HSL 1950-B weight (%)	HSL 2450-B weight (%)
Water	38.91	40.29	55.24	55.41	55
Sugar	56.93	57.9			
Cellulose	0.25	0.24			
Salt	3.79	1.38	0.31	0.08	
Preventol	0.12	0.18			
DGBE			44.45	44.51	45

Water: deionized water, resistivity  $\geq 16 \text{ M}\Omega$

Sugar: refined white sugar

Salt: pure NaCl

Cellulose: Hydroxyethyl-cellulose

Preservative: Preventol D-7


DGBE: Diethylenglycol-monobuthyl ether

The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., IEEE 1528-2003, IEC 62209-1)

The HBBL3-6GHz and MBBL 3-6 GHz liquids are direct from Speag.

## 6.2 Test Conditions and Results – Tissue Validation

Tissue Validation acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102					Verdict: PASS
Test according to measurement reference		Reference Method			
		865664 D01 SAR Measurement 100 MHz to 6 GHz			
Target Values					
Frequency [MHz]	Head		Body		Permitted tolerance [%]
	Relative dielectric constant $\epsilon_r$	Conductivity $\sigma$ [S/m]	Relative dielectric constant $\epsilon_r$	Conductivity $\sigma$ [S/m]	
150	52.3	0.76	61.9	0.80	$\leq \pm 5$
300	45.3	0.87	58.2	0.92	$\leq \pm 5$
450	43.5	0.87	56.7	0.94	$\leq \pm 5$
835	41.5	0.90	55.2	0.97	$\leq \pm 5$
900	41.5	0.97	55.0	1.05	$\leq \pm 5$
915	41.5	0.98	55.0	1.06	$\leq \pm 5$
1450	40.5	1.20	54.0	1.30	$\leq \pm 5$
1610	40.3	1.29	53.8	1.40	$\leq \pm 5$
1800 – 2000	40.0	1.40	53.3	1.52	$\leq \pm 5$
2450	39.2	1.80	52.7	1.95	$\leq \pm 5$
3000	38.5	2.40	52.0	2.73	$\leq \pm 5$
5200	36.0	4.66	49.0	5.30	$\leq \pm 5$
5500	35.6	4.96	48.6	5.65	$\leq \pm 5$
5800	35.3	5.27	48.2	6.00	$\leq \pm 5$

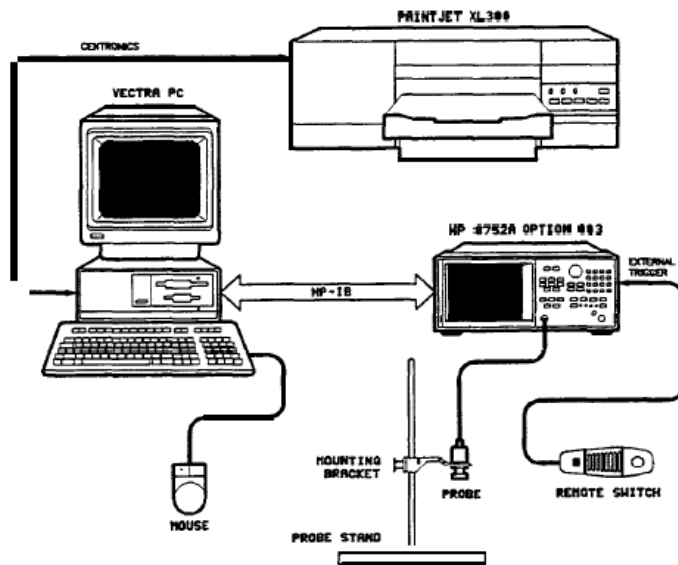**Test setup**

**Test procedure**

1. The dielectric probe kit is calibrated using the standards air, short circuit and deionized water
2. The tissue simulating liquid is measured using the dielectric probe
3. Target values are compared to the measurement values and deviations are determined

TISSUE VALIDATION									
Room Temperature [°C]					22				
Tissue	Freq. [MHz]	Measured $\epsilon_r$	Target $\epsilon_r$ *	$\Delta \epsilon_r$ [%] **	Measured $\sigma$ [S/m]	Target $\sigma$ [S/m] *	$\Delta \sigma$ [%] **	Operator	Date
MSL-2450	2450	50.47	52.70	-04.23	2.01	1.95	03.08	M. Handrik	22.03.2016
MSL-2450	2402	50.57	52.76	-04.15	1.94	1.90	02.11	M. Handrik	22.03.2016
MSL-2450	2441	50.51	52.71	-04.17	1.99	1.94	02.58	M. Handrik	22.03.2016
MSL-2450	2480	50.34	52.66	-04.41	2.05	1.99	03.02	M. Handrik	22.03.2016

\* The target tissue dielectric properties of the corresponding basic SAR measurement standard apply  
 \*\* The deviation has to be 5% or lower


6.3 Test Conditions and Results – System Validation

**System Validation acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102** **Verdict: PASS**

Test according to measurement reference	Reference Method	
	865664 D01 SAR Measurement 100 MHz to 6 GHz / IEEE 1528	
Test frequency range	Tested frequencies	
	2450 MHz , 5200 MHz	
Test mode	unmodulated CW	
<b>Target Values</b>		
Frequency [MHz]	Target SAR value [W/kg (1g)]	Permitted tolerance [%]
2450	13.2 @ 250mW	≤ ±10
5200	7.42 @ 100mW	≤ ±10

The target reference values are taken from the calibration sheets (see annex)

**Test setup**

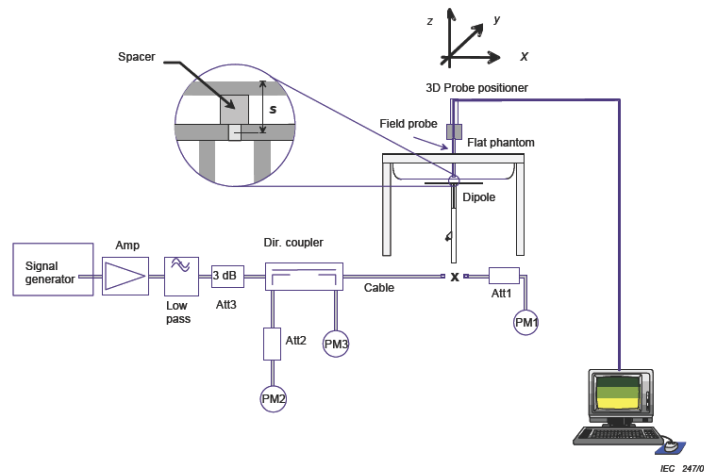

**Test procedure**

1. The dipole antenna input power is set to 250mW
2. The reference dipole is positioned under the phantom
3. With the dipole antenna powered the SAR value is measured
4. The measured SAR values are compared to the target SAR values

<b>SYSTEM VALIDATION – 1g</b>									
Room Temperature [°C]					22				
TSL	Validation Dipole	Measurement Phantom	Validation Frequency [MHz]	Input Power [mW]	Measured SAR (1g) [W/kg]	Target SAR (1g) [W/kg] *	$\Delta$ SAR (1g) [%] **	Operator	Date
MSL-2450	D2450V2	SAM Twin	2450	250 mW	13.7	12.5	09.60	M. Handrik	22.03.2016
* See calibration documents of system validation dipole ** The deviation has to be 10% or lower									

**6.4 Test Conditions and Results – Standalone SAR Measurement**

<b>Standalone SAR acc. to 865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102</b>		<b>Verdict: PASS</b>
Test according to measurement reference	Reference Method	
	865664 D01 SAR Measurement 100 MHz to 6 GHz / IC RSS-102 Issue 5	
Room temperature	22.0 – 22.6 °C	
Liquid depth	15.5 cm	
Environment	general public	
<b>Limits</b>		
Region	Occupational SAR values [W/kg]	General public SAR values [W/kg]
Whole body average SAR	0.4	0.08
Localized SAR (Head and trunk) SAR averaging mass = 1g	8	1.6
Localized SAR (Limbs) SAR averaging mass = 10g	20	4



SINGLE TRANSMITTER SAR EVALUATION – 1g											
Room Temperature [°C]						22					
Mode	Position	TSL	Phant.	Ch.	Freq. [MHz]	Power Drift [dB]	Measured SAR (1g) [W/kg]	Power Scaling Factor*	Reported SAR (1g) [W/kg]**	Operator	Date
USB Bluetooth Dongle direct with USB cable	FRONT	MSL-2450	SAM Twin	78	2480	0.15	0.238	1.0	<b>0.238</b>	M. Handrik	22.03.2016
USB Bluetooth Dongle direct with USB cable	LEFT	MSL-2450	SAM Twin	78	2480	-0.08	0.100	1.0	0.100	M. Handrik	22.03.2016
USB Bluetooth Dongle direct with USB cable	RIGHT	MSL-2450	SAM Twin	78	2480	0.17	0.046	1.0	0.046	M. Handrik	22.03.2016
USB Bluetooth Dongle direct with USB cable	BACK	MSL-2450	SAM Twin	78	2480	-0.08	0.092	1.0	0.092	M. Handrik	22.03.2016
USB Bluetooth Dongle direct with USB cable	TOP	MSL-2450	SAM Twin	78	2480	-0.10	0.026	1.0	0.026	M. Handrik	22.03.2016
USB Bluetooth Dongle with Tablet	FRONT	MSL-2450	SAM Twin	78	2480	-0.06	0.026	1.0	0.026	M. Handrik	22.03.2016
USB Bluetooth Dongle with Tablet	BACK	MSL-2450	SAM Twin	78	2480	0.08	0.040	1.0	<b>0.040</b>	M. Handrik	22.03.2016
USB Bluetooth Dongle with Tablet	TOP	MSL-2450	SAM Twin	78	2480	-0.08	0.025	1.0	0.025	M. Handrik	22.03.2016

\* Scaling factor = Max. conducted power (including tune up tolerance) / measured conducted power  
 \*\* Reported SAR = Measured SAR \* Scaling Factor

SAR measurements were started with the highest power channel of the transmission band under investigation. Other measurement channels were omitted when the SAR value of the highest power channel was below 0.8 W/kg according to KDB 447498 D01 v05r02.

According to KDB 865664 D02 v01r01 only the SAR plots for the highest SAR results for each EUT configuration and operating condition are given in the “SAR Results” part of the report.

**ANNEX A Calibration Documents**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **Eurofins**

Certificate No: **EX3-3893\_Oct15**

## CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3893**

Calibration procedure(s): **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **October 22, 2015 (Additional Conversion Factors)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-15 (No. 217-02128)	Mar-16
Power sensor E4412A	MY41498087	01-Apr-15 (No. 217-02128)	Mar-16
Reference 3 dB Attenuator	SN: S5054 (3c)	01-Apr-15 (No. 217-02129)	Mar-16
Reference 20 dB Attenuator	SN: S5277 (20x)	01-Apr-15 (No. 217-02132)	Mar-16
Reference 30 dB Attenuator	SN: S5129 (30b)	01-Apr-15 (No. 217-02133)	Mar-16
Reference Probe ES3DV2	SN: 3013	30-Dec-14 (No. ES3-3013_Dec14)	Dec-15
DAE4	SN: 660	14-Jan-15 (No. DAE4-660_Jan15)	Jan-16
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Apr-13)	In house check: Apr-16
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-15)	In house check: Oct-16

Calibrated by:	Name <b>Claudio Leubler</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	

Issued: October 23, 2015

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

SN:3893

## Additional Conversion Factors

Manufactured: October 9, 2012  
Calibrated: October 22, 2015

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

# DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

## Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu V/(V/m)^2$ ) <sup>A</sup>	0.56	0.42	0.33	± 10.1 %
DCP (mV) <sup>B</sup>	99.4	100.6	97.2	

## Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	153.8	±3.0 %
		Y	0.0	0.0	1.0		144.5	
		Z	0.0	0.0	1.0		142.5	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
2450	39.2	1.80	7.47	7.47	7.47	0.24	0.96	± 12.0 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4- SN:3893

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
2450	52.7	1.95	7.60	7.60	7.60	0.27	0.80	± 12.0 %


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



# Conversion Factor Assessment

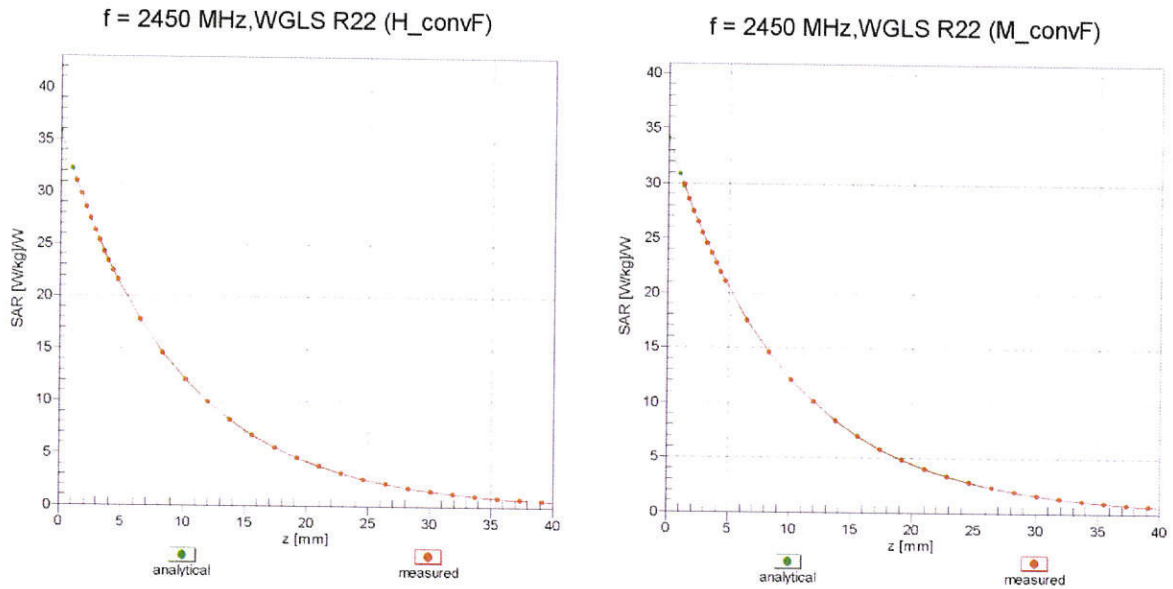

## Deviation from Isotropy in Liquid Error ( $\phi, \vartheta$ ), f = 900 MHz

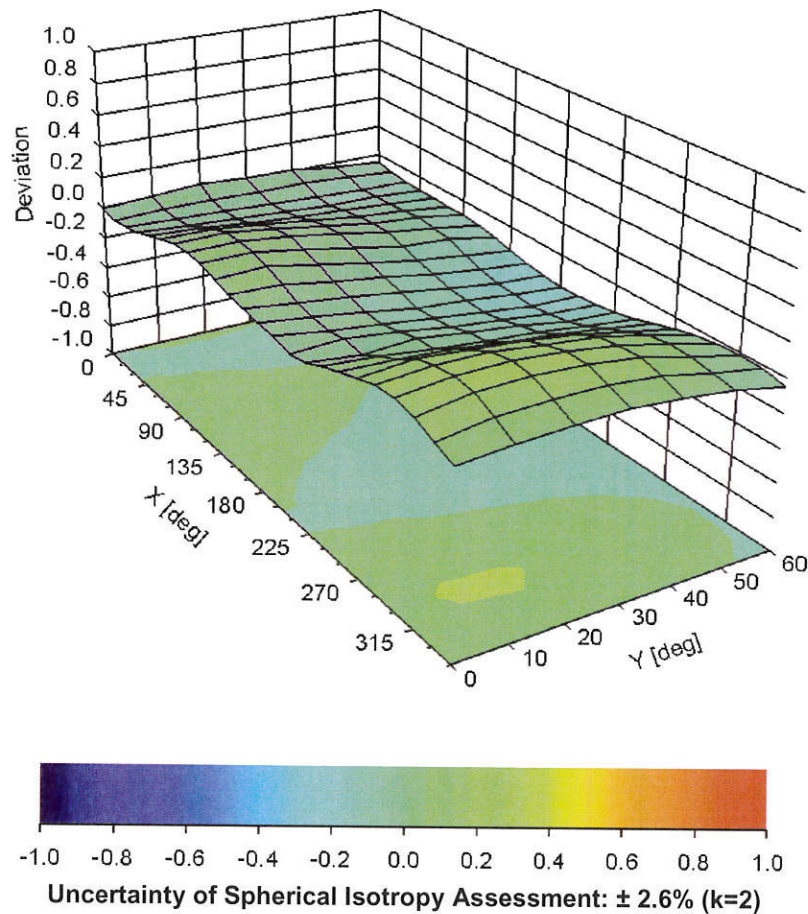

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3893

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-22.1
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm