

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : Network Attached Storage

Model No. : NAS-101RW

FCC ID : RFHNAS-101RW

Filing Type : Certification

Applicant : **ICP Electronic Inc.**
3F, No. 22, Chung-Hsing Rd., Hsi Chih,
Taipei Hsien, 221, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	2
2. Test Configuration of Equipment under Test.....	3
2.1. Test Manner	3
2.2. Description of Test System	3
2.3. Connection Diagram of Test System	5
3. Test Software	6
4. General Information of Test.....	7
4.1. Test Voltage	7
4.2. Standard for Methods of Measurement.....	7
4.3. Test in Compliance with	7
4.4. Frequency Range Investigated	7
4.5. Test Distance	7
5. Report of Measurements and Examinations	8
5.1. List of Measurements and Examinations	8
5.2. 6dB Bandwidth	9
5.3. Peak Output Power	12
5.4. Power Spectral Density	13
5.5. Test of Conducted Emission	16
5.6. Test of Radiated Emission	20
5.7. Band Edges Measurement.....	34
5.8. Antenna Requirements	36
5.9. RF Exposure	37
6. EMI Suppression Component List.....	39
7. Antenna Factor & Cable Loss	40
8. List of Measuring Equipments Used	41
9. Uncertainty of Test Site	42

History of this test report

Original Report Issue Date: Aug. 22, 2003

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : Network Attached Storage

Model No. : NAS-101RW

FCC ID : RFHNAS-101RW

Filing Type : Certification

Applicant : **ICP Electronic Inc.**
3F, No. 22, Chung-Hsing Rd., Hsi Chih,
Taipei Hsien, 221, Taiwan, R.O.C.

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Aug. 20, 2003 at **SPORTON International Inc.** LAB.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

SPORTON International Inc.

TEL : 886-2-2696-2468

FAX : 886-2-2696-2255

FCC ID : RFHNAS-101RW

Page No. : 1 of 42

Issued Date : Aug. 22, 2003

1. General Description of Equipment under Test

1.1. Applicant

ICP Electronic Inc.
 3F, No. 22, Chung-Hsing Rd., Hsi Chih,
 Taipei Hsien, 221, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1

1.3. Basic Description of Equipment under Test

Equipment : Network Attached Storage
 Model No. : NAS-101RW
 FCC ID. : RFHNAS-101RW
 Trade Name : ICP, iEi
 TP Cable x 5 : Shielded, 2m
 Power Supply Type : Switching
 AC Power Cord : Non-Shielded, 1.8m, 3pin
 DC Power Cable : Non-Shielded, 2m, 2pin

1.4. Feature of Equipment under Test

Product Feature & Specification	
1. Host/Radio Interface	DSSS
2. Type of Modulation	BPSK/QPSK/CCK
3. Number of Channels	11
4. Frequency Band	2.4G~2.4835GHz
5. Bandwidth of each channel	11MHz
6. Type of Antenna Connector (Ex: SMA, TNC, MCX, MMCX, UFC.....etc)	I-PEX MHF
7. Antenna Type / Class and Gain	Type: PCB/ Class: / Gain: 1dBi
8. Power Rating (DC/AC, Voltage)	UMEC / UP0451E-12P Input: 100~240V, 47-63Hz, 1.0A Output: +12VDC, 3.75A, 45W
9. Basic function of product	Data Transmitter

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with notebook and peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included COMPAQ Notebook, VIEWSONIC Monitor, LOGITECH PS/2 Keyboard, LOGITECH USB Mouse, EPSON Printer and EUT for EMI test.
- c. For EMI test, vertical polarity of RF antenna generates worse case, so the following test modes were tested with vertical:
 - Mode 1: CH01 (2412MHz)
 - Mode 2: CH06 (2437MHz)
 - Mode 3: CH11 (2462MHz)
- d. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Description of Test System

Support Unit 1. -- Notebook (COMPAQ)

FCC ID	: N/A
Model No.	: PRESARIO 1500
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0127
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (VIEWSONIC)

FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0051
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – PS/2 Keyboard (LOGITECH)

FCC ID : N/A
Model No. : Y-SJ17
Serial No. : SP0054
Data Cable : Shielded, 360 degree via metal backshells, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 4. – USB Mouse (LOGITECH)

FCC ID : N/A
Model No. : M-BE58
Serial No. : SP0041
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 5. -- Printer (EPSON)

FCC ID : N/A
Model No. : STYLUS COLOR 680
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 1.35m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System

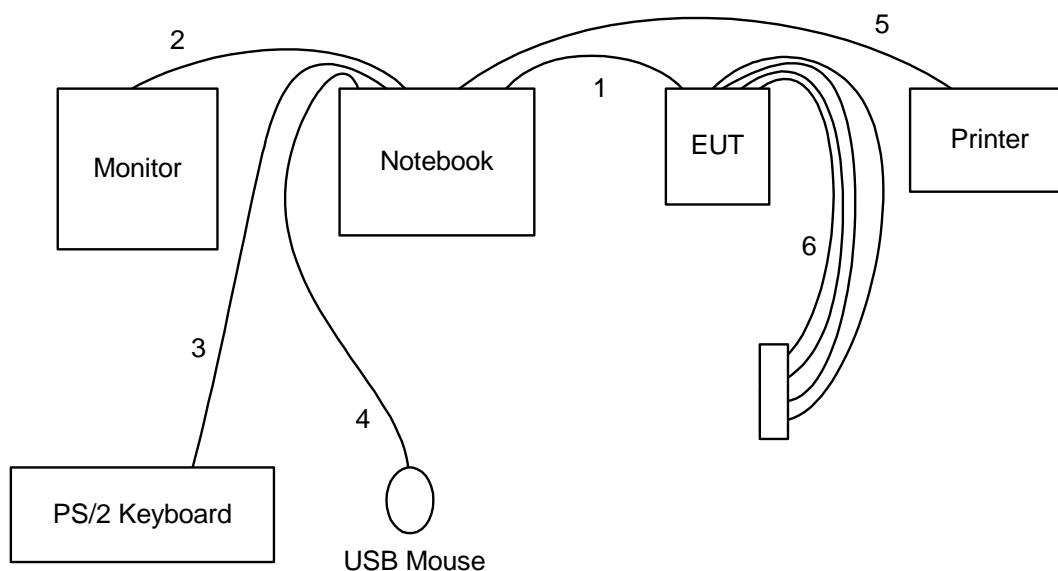

1. The TP cable is connected from the Notebook to the EUT.
2. The I/O cable is connected from the Notebook to the support unit 2.
3. The I/O cable is connected from the Notebook to the support unit 3.
4. The I/O cable is connected from the Notebook to the support unit 4.
5. The I/O cable is connected from the Notebook to the support unit 5.
6. These are loop-back TP cables.

3. Test Software

An executive programs, EMCTEST.EXE under WIN XP, which generate a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- f. Repeat the steps from c to e.

At the same time, "Ping.exe" was executed to link with the EUT to receive and transmit data by TP cable.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001 for conducted power line test and radiated emission test,
FCC 97-114 for test of 6dB Bandwidth
FCC 97-114 for test of Maximum Peak Output Power
FCC 97-114 for test of 100kHz Bandwidth of Frequency Band Edges
FCC 97-114 for test of Power Spectral Density

4.3. Test in Compliance with

FCC Part 15, Subpart C, 15.247

4.4. Frequency Range Investigated

- a. Conduction: from 150 kHz to 30 MHz
- b. Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.207	Conducted Emission	Pass
<u>15.247(a)(2)</u>	6dB Bandwidth	Pass
<u>15.247(b)</u>	Maximum Peak Output Power	Pass
15.209	Radiated Emission	Pass
<u>15.247(c)</u>	100kHz Bandwidth of Frequency Band Edges	Pass
<u>15.247(d)</u>	Power Spectral Density	Pass
<u>15.203</u>	Antenna Requirement	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass

5.2. 6dB Bandwidth


5.2.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.2.3. Test Setup Layout :

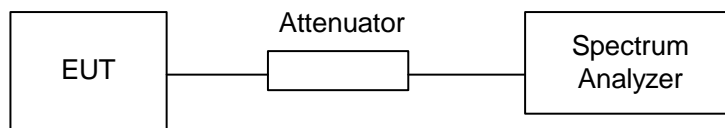


5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature: 27 °C
- Relative Humidity: 62%


Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
01	2412	11.00	0.5	1
06	2437	11.00	0.5	2
11	2462	11.00	0.5	3

Plot1(Channel 01) :

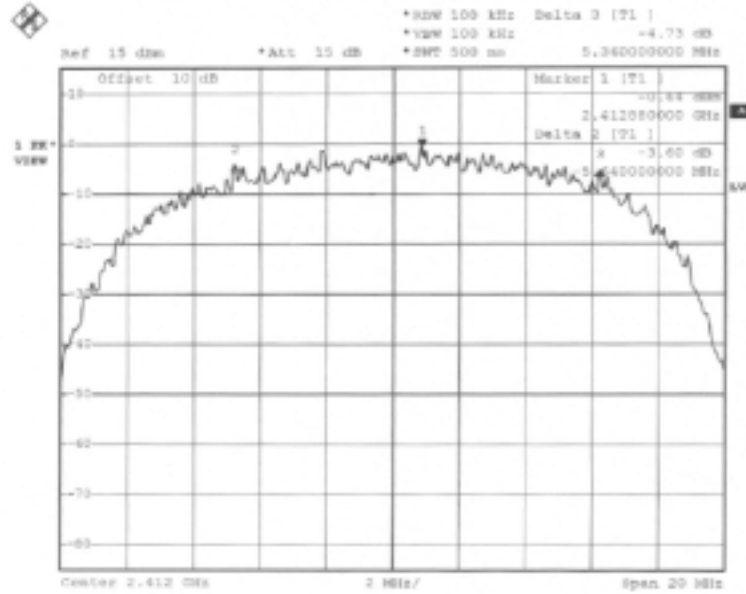


Date: 15.AUG.2003 14:40:39

Plot2(Channel 06) :

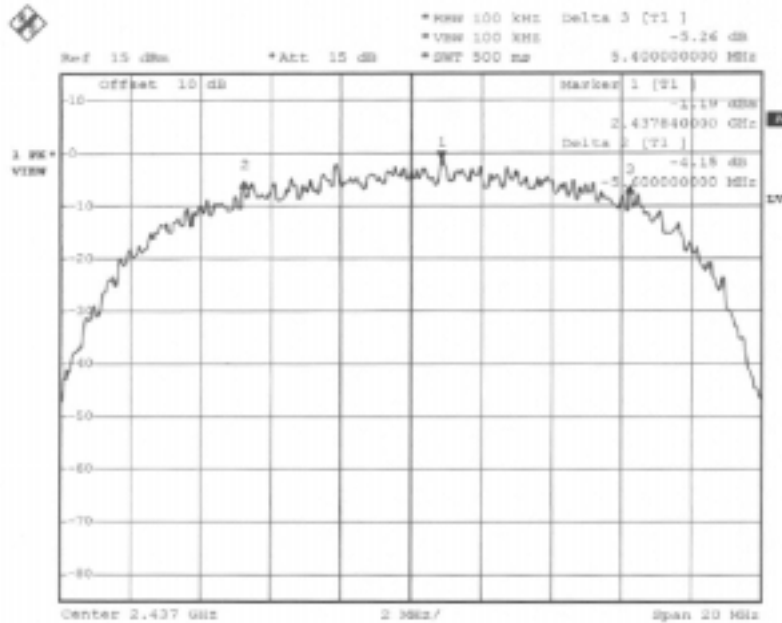

Date: 15.AUG.2003 15:01:32

Plot3(Channel 11) :

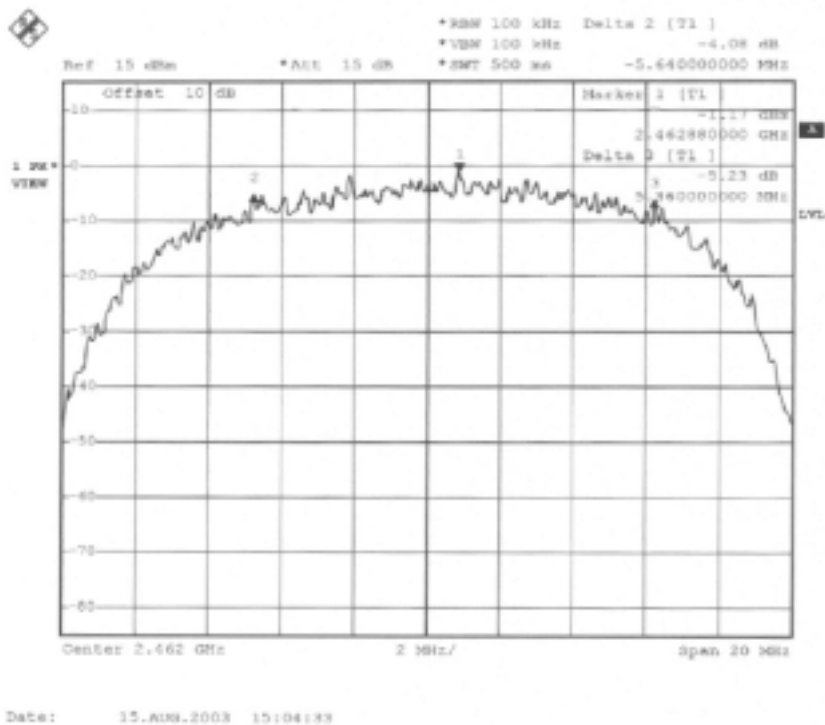

Comments : 6dB Emission bandwidth>500kHz

5.3. Peak Output Power


5.3.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.3.2. Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

5.3.3. Test Setup Layout :

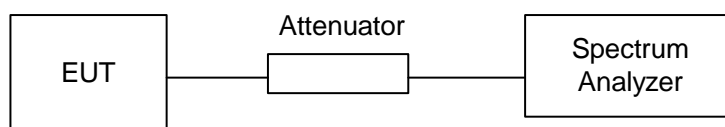

5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 27°C
- Relative Humidity: 62 %

Channel	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (mW)	Limits (Watt/dBm)
01	2412	9.11	8.14704284	1W/30 dBm
06	2437	8.44	6.982324041	1W/30 dBm
11	2462	8.44	6.982324041	1W/30 dBm

- Comments : Maximum Peak Output Power < 30dBm (1Watt)

5.4. Power Spectral Density


5.4.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

5.4.3. Test Setup Layout :

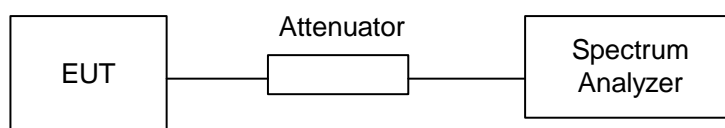


5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 27°C
- Relative Humidity: 62 %


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
01	2412	-14.49	8	1
06	2437	-14.68	8	2
11	2462	-14.89	8	3

Plot1(Channel 01):

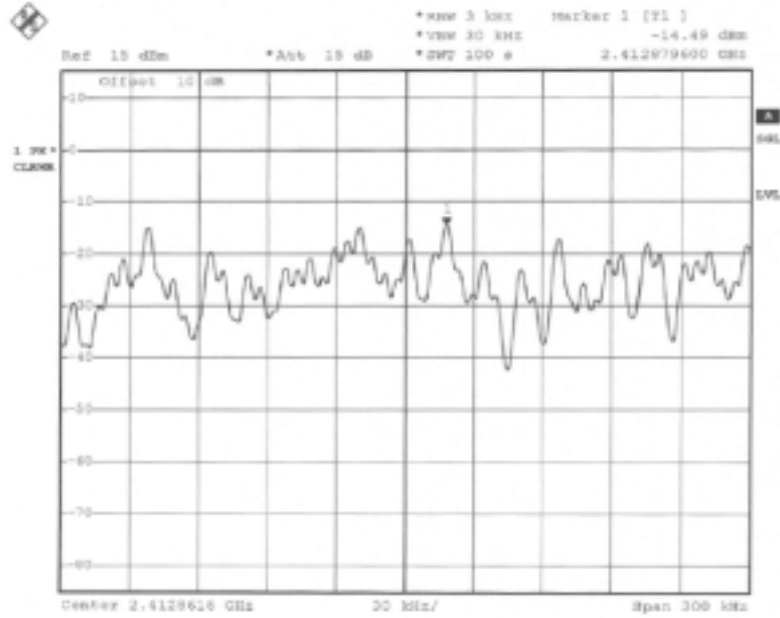

Date: 15.AUG.2003 14:51:35

Plot2(Channel 06):

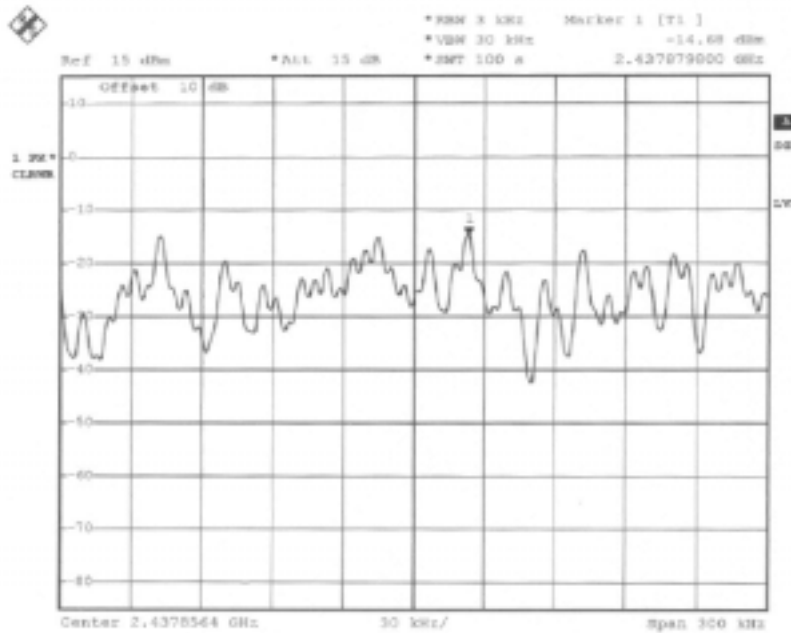

Date: 15.AUG.2003 15:00:40

5.5. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.5.1. Major Measuring Instruments :

● Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.5.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.5.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 25.9°C
- Relative Humidity: 60 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : 802.11BAP
 Power : 110V/60Hz
 Model :
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.215	45.38	-17.64	63.02	45.23	0.10	0.05	QP
2	0.215	37.75	-15.27	53.02	37.60	0.10	0.05	Average
3	0.286	28.82	-21.83	50.65	28.64	0.10	0.08	Average
4	0.286	35.63	-25.02	60.65	35.45	0.10	0.08	QP
5	0.428	34.99	-22.31	57.30	34.77	0.10	0.12	QP
6	0.428	32.88	-14.42	47.30	32.66	0.10	0.12	Average
7	3.789	35.69	-20.31	56.00	35.44	0.10	0.15	QP
8	3.789	31.23	-14.77	46.00	30.98	0.10	0.15	Average
9	3.997	32.10	-13.90	46.00	31.85	0.10	0.15	Average
10	3.997	36.99	-19.01	56.00	36.74	0.10	0.15	QP
11	4.353	31.41	-14.59	46.00	31.14	0.11	0.16	Average
12	4.353	37.83	-18.17	56.00	37.56	0.11	0.16	QP

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : 802.11BAP
 Power : 110V/60Hz
 Model :
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	37.74	-28.20	65.94	37.60	0.10	0.04	QP
2	0.151	25.51	-30.43	55.94	25.37	0.10	0.04	Average
3	0.214	43.94	-19.11	63.05	43.79	0.10	0.05	QP
4	0.214	35.85	-17.20	53.05	35.70	0.10	0.05	Average
5	0.286	27.66	-22.99	50.65	27.48	0.10	0.08	Average
6	0.286	35.07	-25.58	60.65	34.89	0.10	0.08	QP
7	0.431	33.21	-24.03	57.24	32.99	0.10	0.12	QP
8	0.431	30.98	-16.26	47.24	30.76	0.10	0.12	Average
9	3.230	28.54	-17.46	46.00	28.23	0.17	0.14	Average
10	3.230	32.92	-23.08	56.00	32.61	0.17	0.14	QP
11	4.017	31.80	-14.20	46.00	31.45	0.20	0.15	Average
12	4.017	38.14	-17.86	56.00	37.79	0.20	0.15	QP

Test Engineer : 
 John Huang

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 25.9°C
- Relative Humidity: 60 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : 802.11BAP
 Power : 110V/60Hz
 Model :
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	45.24	-20.76	66.00	45.10	0.10	0.04	QP
2	0.150	33.03	-22.97	56.00	32.89	0.10	0.04	Average
3	0.216	43.59	-19.38	62.97	43.44	0.10	0.05	QP
4	0.216	34.03	-18.94	52.97	33.88	0.10	0.05	Average
5	0.289	34.99	-25.57	60.56	34.81	0.10	0.08	QP
6	0.289	27.89	-22.67	50.56	27.71	0.10	0.08	Average
7	0.433	33.11	-14.08	47.19	32.90	0.10	0.11	Average
8	0.433	34.32	-22.87	57.19	34.11	0.10	0.11	QP
9	3.768	37.07	-18.93	56.00	36.82	0.10	0.15	QP
10	3.768	32.24	-13.76	46.00	31.99	0.10	0.15	Average
11	4.340	35.10	-20.90	56.00	34.83	0.11	0.16	QP
12	4.340	32.39	-13.61	46.00	32.12	0.11	0.16	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : 802.11BAP
 Power : 110V/60Hz
 Model :
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.151	27.60	-28.35	55.95	27.46	0.10	0.04	Average
2	0.151	38.66	-27.29	65.95	38.52	0.10	0.04	QP
3	0.214	34.93	-18.12	53.05	34.78	0.10	0.05	Average
4	0.214	43.05	-20.00	63.05	42.90	0.10	0.05	QP
5	0.285	25.58	-25.09	50.67	25.40	0.10	0.08	Average
6	0.285	32.53	-28.14	60.67	32.35	0.10	0.08	QP
7	0.429	32.27	-24.99	57.26	32.05	0.10	0.12	QP
8	0.429	30.45	-16.81	47.26	30.23	0.10	0.12	Average
9	0.506	27.31	-18.69	46.00	27.11	0.10	0.10	Average
10	0.506	29.55	-26.45	56.00	29.35	0.10	0.10	QP
11	4.030	31.81	-14.19	46.00	31.46	0.20	0.15	Average
12	4.030	38.41	-17.59	56.00	38.06	0.20	0.15	QP

Test Engineer : 
 John Huang

- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- Temperature: 25.9°C
- Relative Humidity: 60 %


The test was passed at the minimum margin that marked by the frame in the following table

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 LINE
 EUT : 802.11BAP
 Power : 110V/60Hz
 Model :
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	46.39	-19.61	66.00	46.25	0.10	0.04	QP
2	0.150	38.90	-22.10	56.00	38.76	0.10	0.04	Average
3	0.217	43.41	-19.52	62.93	43.26	0.10	0.05	QP
4	0.217	35.70	-17.23	52.93	35.55	0.10	0.05	Average
5	0.435	34.68	-22.48	57.16	34.47	0.10	0.11	QP
6	0.435	33.51	-13.65	47.16	33.30	0.10	0.11	Average
7	3.196	33.96	-22.04	56.00	33.72	0.10	0.14	QP
8	3.196	27.34	-18.66	46.00	27.10	0.10	0.14	Average
9	3.632	30.91	-15.09	46.00	30.67	0.10	0.14	Average
10	3.632	34.71	-21.29	56.00	34.47	0.10	0.14	QP
11	4.574	37.52	-18.48	56.00	37.24	0.11	0.17	QP
12	4.574	30.17	-15.83	46.00	29.89	0.11	0.17	Average

Site : C001-HY
 Condition : CNS/VCCI/CISPR-B 2003 2001/008 NEUTRAL
 EUT : 802.11BAP
 Power : 110V/60Hz
 Model :
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	45.72	-20.28	66.00	45.58	0.10	0.04	QP
2	0.150	35.40	-20.60	56.00	35.26	0.10	0.04	Average
3	0.217	41.76	-21.17	62.93	41.61	0.10	0.05	QP
4	0.217	31.90	-21.03	52.93	31.75	0.10	0.05	Average
5	0.291	33.79	-26.71	60.50	33.61	0.10	0.08	QP
6	0.291	30.85	-19.65	50.50	30.67	0.10	0.08	Average
7	3.275	30.00	-16.00	46.00	29.69	0.17	0.14	Average
8	3.275	33.41	-22.59	56.00	33.10	0.17	0.14	QP
9	4.076	35.85	-10.15	46.00	35.50	0.20	0.15	Average
10	4.076	37.78	-18.22	56.00	37.43	0.20	0.15	QP
11	4.363	38.39	-17.61	56.00	38.03	0.20	0.16	QP
12	4.363	30.03	-15.97	46.00	29.67	0.20	0.16	Average

Test Engineer : 
 John Huang

5.6. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.6.1. Major Measuring Instruments

- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz

- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz


- Spectrum analyzer (R&S FSEK30)
 - Attenuation 10 dB
 - Start Frequency 1 GHz
 - Stop Frequency 25 GHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 20 Hz to 40 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.6.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Typical Test Setup Layout of Radiated Emission

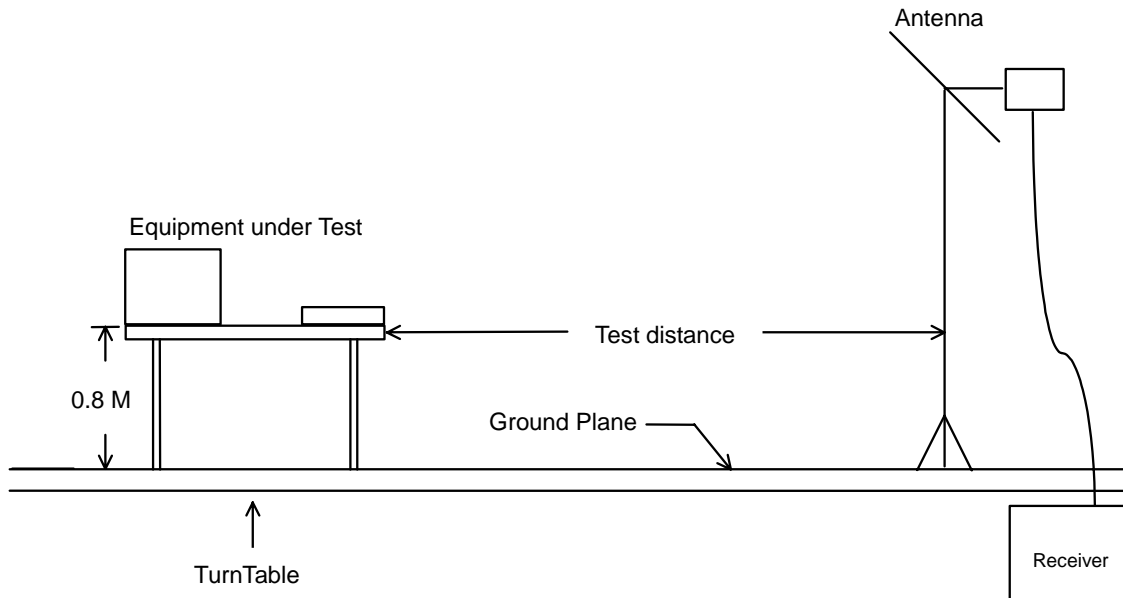

5.6.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 62 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH01 2412MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	143.130	35.70	-7.80	43.50	50.47	9.99	2.07	26.83	Peak	---	---
2	233.580	39.61	-6.39	46.00	53.33	10.37	2.51	26.60	Peak	---	---
3	250.050	39.08	-6.12	46.00	52.53	11.34	2.61	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH01 2412MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	374.200	40.97	-5.03	46.00	50.69	13.82	3.50	27.04	Peak	---	---
2	433.000	41.44	-4.56	46.00	50.16	15.10	3.54	27.36	Peak	---	---
3	934.200	40.49	-5.51	46.00	42.91	19.53	5.75	27.70	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH01 2412MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	40.530	30.36	-9.64	40.00	45.78	10.55	1.13	27.10	Peak	---	---
2	293.580	36.52	-9.48	46.00	50.24	10.37	2.51	26.60	Peak	---	---
3	250.050	35.51	-10.49	46.00	48.16	11.34	2.61	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH01 2412MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	624.100	34.41	-11.59	46.00	40.53	17.46	4.42	28.00	Peak	---	---
2	750.100	36.78	-9.22	46.00	41.43	18.40	4.95	28.00	Peak	---	---
3	934.200	35.60	-10.40	46.00	38.02	19.53	5.75	27.70	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH01 2412MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	42.56	-31.44	74.00	41.51	24.10	3.92	26.97	Peak	---	---
2	1000.000	31.34	-22.66	54.00	30.29	24.10	3.92	26.97	Average	---	---
3	1062.000	42.44	-31.56	74.00	41.12	24.27	4.03	26.98	Peak	---	---
4	1062.000	31.97	-22.03	54.00	30.65	24.27	4.03	26.98	Average	---	---
5	1198.000	41.82	-32.18	74.00	39.97	24.60	4.24	26.99	Peak	---	---
6	1198.000	33.09	-20.91	54.00	31.24	24.60	4.24	26.99	Average	---	---
7	2036.000	46.83	-27.17	74.00	40.73	27.48	5.73	27.11	Peak	---	---
8	2036.000	36.35	-17.65	54.00	30.25	27.48	5.73	27.11	Average	---	---
1	4046.000	57.20	-16.80	74.00	42.73	32.58	9.31	27.42	Peak	---	---
2	4046.000	50.84	-3.16	54.00	36.37	32.58	9.31	27.42	Average	100	102

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH01 2412MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1062.000	43.61	-30.39	74.00	42.29	24.27	4.03	26.98	Peak	---	---
2	1062.000	31.54	-22.46	54.00	30.22	24.27	4.03	26.98	Average	---	---
3	1132.000	41.86	-32.14	74.00	40.27	24.44	4.14	26.99	Peak	---	---
4	1132.000	32.16	-21.84	54.00	30.57	24.44	4.14	26.99	Average	---	---
5	1198.000	43.61	-30.39	74.00	41.76	24.60	4.24	26.99	Peak	---	---
6	1198.000	31.90	-22.10	54.00	30.05	24.60	4.24	26.99	Average	---	---
7	1732.000	46.17	-27.83	74.00	41.77	26.31	5.16	27.07	Peak	---	---
8	1732.000	37.00	-17.00	54.00	32.60	26.31	5.16	27.07	Average	---	---
9	2036.000	49.75	-24.25	74.00	43.65	27.48	5.73	27.11	Peak	---	---
10	2036.000	39.55	-14.45	54.00	33.45	27.48	5.73	27.11	Average	---	---
1	4076.000	57.20	-16.80	74.00	42.79	32.56	9.28	27.43	Peak	---	---
2	4076.000	50.77	-3.23	54.00	36.36	32.56	9.28	27.43	Average	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (dB)	Margin	Detect Mode
2412.000	H	28.24	6.22	64.13	-	-	98.59	85015.87	Peak
2412.000	H	28.24	6.22	54.12	-	-	88.58	26853.44	AV
2414.000	V	28.25	6.23	76.11	-	-	110.59	338454.27	Peak
2414.000	V	28.25	6.23	65.48	-	-	99.96	99540.54	AV
4824.000	V/H						-		AV/Peak
7236.000	V/H						-		AV/Peak
9648.000	V/H						-		AV/Peak
12060.000	V/H						-		AV/Peak
14472.000	V/H						-		AV/Peak
16884.000	V/H						-		AV/Peak
19296.000	V/H						-		AV/Peak
21708.000	V/H						-		AV/Peak
24120.000	V/H						-		AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer: Steve
Steve Chen

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 62 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH06 2437MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	85.890	35.57	-4.43	40.00	53.22	7.80	1.58	27.03	Peak	---	---
2	233.580	38.22	-7.78	46.00	51.94	10.37	2.51	26.60	Peak	---	---
3	250.050	34.22	-11.78	46.00	46.87	11.34	2.61	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH06 2437MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	365.800	37.76	-8.24	46.00	47.73	13.53	3.49	26.99	Peak	---	---
2	466.600	37.69	-8.31	46.00	46.02	15.86	3.64	27.53	Peak	---	---
3	934.200	41.01	-4.99	46.00	43.43	19.53	5.75	27.70	Peak	---	---

Site : 03CH03-NY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH06 2437MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	40.530	29.74	-10.26	40.00	45.16	10.55	1.13	27.10	Peak	---	---
2	86.970	31.34	-8.66	40.00	48.73	8.10	1.54	27.03	Peak	---	---
3	233.580	34.53	-11.47	46.00	48.25	10.37	2.51	26.60	Peak	---	---

Site : 03CH03-NY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH06 2437MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	466.600	34.68	-11.32	46.00	43.01	15.56	3.64	27.53	Peak	---	---
2	624.100	36.35	-9.65	46.00	42.47	17.46	4.42	28.00	Peak	---	---
3	934.200	35.90	-10.10	46.00	38.32	19.53	5.75	27.70	Peak	---	---

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH06 2437MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	42.92	-31.08	74.00	41.07	24.10	3.92	26.97	Peak	---	---
2	1000.000	29.33	-24.67	54.00	28.28	24.10	3.92	26.97	Average	---	---
3	1062.000	42.31	-31.69	74.00	40.99	24.27	4.03	26.98	Peak	---	---
4	1062.000	30.10	-23.90	54.00	28.78	24.27	4.03	26.98	Average	---	---
5	1332.000	42.17	-31.83	74.00	39.80	24.93	4.45	27.01	Peak	---	---
6	1332.000	32.00	-22.00	54.00	29.63	24.93	4.45	27.01	Average	---	---
7	2062.000	47.67	-26.33	74.00	41.49	27.53	5.76	27.11	Peak	---	---
8	2062.000	36.84	-17.16	54.00	30.66	27.53	5.76	27.11	Average	---	---
9	2220.000	46.07	-27.93	74.00	39.37	27.86	5.97	27.13	Peak	---	---
10	2220.000	36.01	-17.19	54.00	30.11	27.86	5.97	27.13	Average	---	---
1	3990.000	57.06	-16.94	74.00	42.52	32.60	9.34	27.40	Peak	---	---
2	3990.000	50.82	-3.18	54.00	36.28	32.60	9.34	27.40	Average	100	106

Site : 03CH03-HY
 Condition : 3a HORN-ANT-6741 VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH06 2437MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamplifier Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1062.000	42.01	-31.19	74.00	41.49	24.27	4.03	26.98	Peak	---	---
2	1062.000	30.49	-23.51	54.00	29.17	24.27	4.03	26.98	Average	---	---
3	1132.000	41.81	-32.19	74.00	40.22	24.44	4.14	26.99	Peak	---	---
4	1132.000	31.75	-22.25	54.00	30.16	24.44	4.14	26.99	Average	---	---
5	1198.000	43.77	-30.23	74.00	41.92	24.60	4.24	26.99	Peak	---	---
6	1198.000	32.13	-21.87	54.00	30.28	24.60	4.24	26.99	Average	---	---
7	1844.000	47.65	-26.35	74.00	42.57	26.78	5.38	27.08	Peak	---	---
8	1844.000	36.16	-17.84	54.00	31.08	26.78	5.38	27.08	Average	---	---
1	3812.000	57.15	-16.85	74.00	43.51	32.11	8.90	27.37	Peak	---	---
2	3812.000	50.78	-3.22	54.00	37.14	32.11	8.90	27.37	Average	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Reading Loss (dB)	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2436.000	H	28.29	6.26	62.88	-	-	97.43	74387.51		Peak
2436.000	H	28.29	6.26	53.90	-	-	88.45	26454.53		AV
2438.000	V	28.30	6.26	53.24	-	-	87.80	24547.09		AV
2438.000	V	28.30	6.26	62.84	-	-	97.40	74131.02		Peak
4874.000	V/H						-			AV/Peak
7311.000	V/H						-			AV/Peak
9748.000	V/H						-			AV/Peak
12185.000	V/H						-			AV/Peak
14622.000	V/H						-			AV/Peak
17059.000	V/H						-			AV/Peak
19496.000	V/H						-			AV/Peak
21933.000	V/H						-			AV/Peak
24370.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer: Steve Chen
Steve Chen

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 27 °C
- Relative Humidity: 62 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Probe Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following table

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH11 2462MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	85.620	36.17	-3.83	40.00	53.91	7.70	1.59	27.03	Peak	---	---
2	124.770	31.54	-11.96	43.50	46.33	10.25	1.86	26.90	Peak	---	---
3	233.580	35.93	-10.07	46.00	49.65	10.37	2.51	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH11 2462MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	365.800	39.46	-6.54	46.00	49.43	13.53	3.49	26.99	Peak	---	---
2	399.400	38.49	-7.51	46.00	47.58	14.60	3.51	27.20	Peak	---	---
3	598.900	27.44	-18.56	46.00	33.94	17.28	4.22	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH11 2462MHz
 : F381305

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	85.620	32.02	-7.98	40.00	49.76	7.70	1.59	27.03	Peak	---	---
2	124.770	30.07	-13.43	43.50	44.86	10.25	1.86	26.90	Peak	---	---
3	224.940	19.46	-26.54	46.00	34.01	9.60	2.45	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH11 2462MHz
 : F381305

	Freq	Level	Over	Limit	Read	Probe	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	466.600	35.19	-10.81	46.00	43.52	15.56	3.64	27.53	Peak	---	---
2	624.100	35.56	-10.44	46.00	41.68	17.46	4.42	28.00	Peak	---	---
3	750.100	33.75	-12.25	46.00	38.40	18.40	4.95	28.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 HORIZONTAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH11 2462MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	42.05	-31.95	74.00	41.00	24.10	3.92	26.97	Peak	---	---
2	1000.000	30.92	-23.08	54.00	29.87	24.10	3.92	26.97	Average	---	---
3	1062.000	42.62	-31.38	74.00	41.30	24.27	4.03	26.98	Peak	---	---
4	1062.000	30.69	-23.31	54.00	29.37	24.27	4.03	26.98	Average	---	---
5	2086.000	48.87	-25.13	74.00	42.60	27.58	5.80	27.11	Peak	---	---
6	2086.000	39.85	-14.15	54.00	39.58	27.58	5.80	27.11	Average	---	---
1	4006.000	56.95	-17.05	74.00	42.41	32.59	9.35	27.40	Peak	---	---
2 !	4006.000	50.46	-3.54	54.00	35.92	32.59	9.35	27.40	Average	400	95

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : 802.11B AP
 Power : 110V/60Hz
 MODEL :
 MEMO : TX CH11 2462MHz
 : F381305

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	1000.000	41.51	-32.49	74.00	40.46	24.10	3.92	26.97	Peak	---	---
2	1000.000	31.13	-22.87	54.00	30.08	24.10	3.92	26.97	Average	---	---
3	1062.000	42.39	-31.61	74.00	41.07	24.27	4.03	26.98	Peak	---	---
4	1062.000	31.91	-22.09	54.00	30.59	24.27	4.03	26.98	Average	---	---
5	1132.000	41.43	-32.57	74.00	39.84	24.44	4.14	26.99	Peak	---	---
6	1132.000	31.72	-22.28	54.00	30.13	24.44	4.14	26.99	Average	---	---
7	1198.000	42.94	-31.06	74.00	41.09	24.60	4.24	26.99	Peak	---	---
8	1198.000	32.44	-21.56	54.00	30.59	24.60	4.24	26.99	Average	---	---
9	2086.000	52.06	-21.94	74.00	45.79	27.58	5.80	27.11	Peak	---	---
10 !	2086.000	49.75	-4.25	54.00	43.48	27.58	5.80	27.11	Average	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)	Emission (dBuV/m) (uV/m)	Level (dB)	Margin (dB)	Detect Mode	
2462.000	H	28.35	6.29	60.99	-	-	95.63	60464.44	Peak	
2462.000	H	28.35	6.29	53.06	-	-	87.70	24266.10	AV	
2462.000	V	28.35	6.29	60.61	-	-	95.25	57876.20	AV	
2462.000	V	28.35	6.29	73.19	-	-	107.83	246320.18	Peak	
4924.000	V	33.27	9.12	14.78	74.00	5011.87	57.17	721.94	-16.83	Peak
4924.000	V	33.27	9.12	8.33	54.00	501.19	50.72	343.56	-3.28	AV
4924.000	H						-			AV/Peak
7386.000	V/H						-			AV/Peak
9848.000	V/H						-			AV/Peak
12310.000	V/H						-			AV/Peak
14772.000	V/H						-			AV/Peak
17234.000	V/H						-			AV/Peak
19696.000	V/H						-			AV/Peak
22158.000	V/H						-			AV/Peak
24620.000	V/H						-			AV/Peak

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above,

Test Engineer: Steve
Steve Chen

5.7. Band Edges Measurement

5.7.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

- Test Result in lower band (Channel 1) : **PASS**
- Test Result in higher band(Channel 11) : **PASS**

5.7.4. Note on Band edge Emission


The band edge emission plot on page 38. shows 48.41dB delta between carrier maximum power and local maximum emission in the restricted band (2.484GHz).

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
H	95.63	47.22	74.00	-26.78	Peak
H	87.70	39.29	54.00	-14.71	Average
V	107.83	59.42	74.00	-14.58	Peak
V	97.25	48.84	54.00	-5.16	Average

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.


The spectrum analyzer plots are attached as below :

Plot1 (Channel 01) :

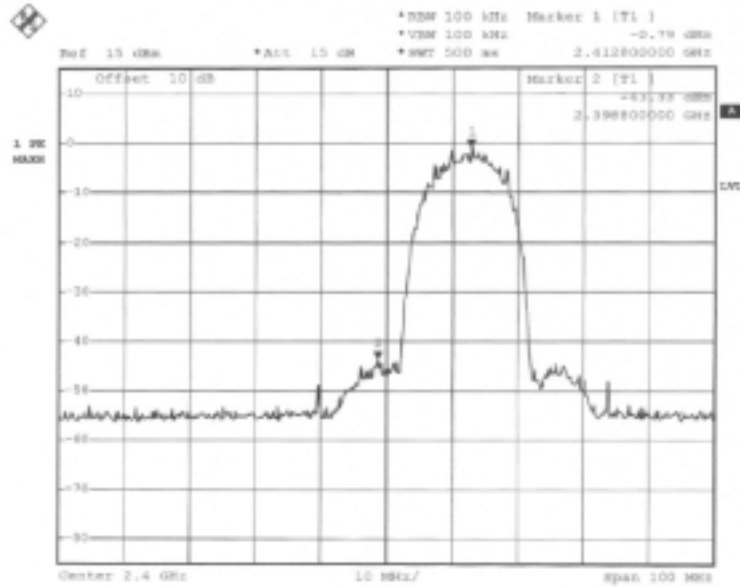

Date: 15.AUG.2003 14:42:01

Plot2 (Channel 11) :

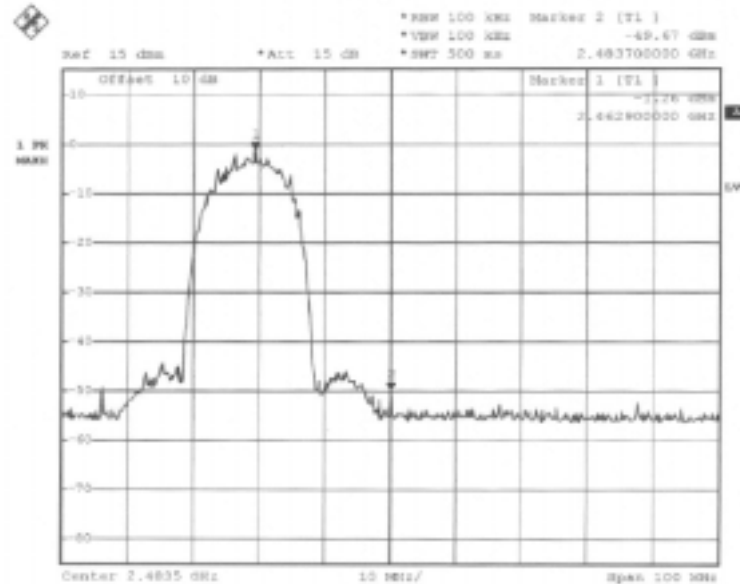

Date: 15.AUG.2003 15:05:37

Comments : All emissions in any 100kHz bandwidth outside the band edge are attenuated more then 20dB from the carrier.

5.8. Antenna Requirements

The EUT use a undetachable antenna via U.FL external connector. It is considered meet antenna requirement of FCC.

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connected Construction

The maximum Gain antenna used in this product is dipole antenna. The antenna connector type is U.FL. The coaxial cable of the antenna is fixed to the antenna.

5.9. RF Exposure

FCC Rules and Regulations Part 1.1307,1.1310,2.1091,2.1093:

RF Exposure Compliance

5.9.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

*Plane-wave equivalent power density

5.9.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

- E = Electric field (V/m)
- P = Peak output power (mW)
- G = Antenna numeric gain (numeric)
- d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 1.0 mW/cm². We can change the formula to:

$$d = \sqrt{\frac{30 \times P \times G}{3770}}$$

Channel NO.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (W)	Calculated RF Exposure Separation Distance (m)	Minimum RF Exposure Separation Distance (m)
Channel 1	1.00	1.26	9.11	0.0081	0.0090	0.20
Channel 6	1.00	1.26	8.44	0.0070	0.0084	0.20
Channel 11	1.00	1.26	8.44	0.0070	0.0084	0.20

5.9.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

6. EMI Suppression Component List

1. Added five gaskets on internal alumina case to contact coating of top case.
(As the Internal photo No.2)

2. Added an alumina foil to contact antenna cable and internal alumina case.
(As the Internal photo No.2)

3. Added alumina foils to contact upper and lower cases.
(As the Internal photo No.3, 4)

4. Added a gasket on HAD to contact internal alumina case.
(As the Internal photo No.5)

5. Added a gasket to contact upper and lower cases.
(As the Internal photo No.6)

6. Added alumina foils to contact connectors and metal case.
(As the Internal photo No.8)

7. Added a core on DC output cable of power supply.
(As the External photo No.3)

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.04	2000	27.40	5.66
40	11.11	1.09	3000	30.00	7.20
45	10.59	1.24	4000	32.60	9.36
50	6.47	1.43	5000	33.40	9.16
55	5.83	1.39	6000	34.20	10.70
60	5.18	1.59	7000	35.30	12.16
65	4.81	1.41	8000	36.90	13.12
70	4.43	1.43	9000	38.10	13.81
75	5.10	1.55	10000	39.00	14.83
80	5.91	1.56	11000	38.60	15.83
85	7.33	1.62	12000	39.50	17.11
90	8.74	1.41	13000	39.30	17.62
95	9.05	1.81	14000	41.60	18.37
100	9.36	1.68	15000	40.60	19.10
110	9.65	1.73	16000	37.20	19.72
120	9.97	1.79	17000	40.20	21.98
130	10.51	1.93	18000	48.90	21.22
140	10.32	2.06	19000	37.60	23.90
150	9.42	2.09	20000	37.30	24.07
160	8.09	2.12	21000	37.00	25.49
170	7.43	2.12	22000	38.00	24.92
180	7.60	2.12	23000	38.70	25.60
190	7.43	2.21	24000	38.60	25.70
200	7.26	2.29	25000	38.90	26.54
220	9.11	2.42			
240	10.88	2.54			
260	11.75	2.66			
280	11.55	2.76			
300	11.36	2.85			
320	12.03	3.10			
340	12.69	3.36			
360	13.33	3.49			
380	14.00	3.50			
400	14.63	3.51			
450	15.33	3.55			
500	16.03	3.81			
550	16.65	4.05			
600	17.29	4.23			
650	17.64	4.63			
700	18.00	4.74			
750	18.39	4.95			
800	18.79	5.06			
850	19.10	5.18			
900	19.42	5.40			
950	19.58	5.91			
1000	19.75	5.58			

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100132	9 KHz – 2.75 GHz	Jun. 12, 2003	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM013	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSEK30	100189	20Hz~40GHz	Aug. 04, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz –1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz –2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	NSP2650-NF	805858	100MHz~26.5GHz	Jul. 10, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted

Calibration Interval of instruments listed above is one year.

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m
Antenna factor calibration	normal(k=2)	±1
cable loss calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
Antenna Directivity	rectangular	±3
Antenna Factor V.S. Height	rectangular	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25
site imperfection	rectangular	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54
combined standard uncertainty Ue(y)	normal	±2.7
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±5.4

$U = \{((1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\} = 2.2$ for 10m test distance

$U = \{((1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\} = 2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty Ue(y)	normal	±1.66
Measuring uncertainty for a level of confidence of 95% U=2Ue(y)	normal (k=2)	±3.32

$U = \{(0.3/2)^2 + (2^2+1.5^2+0.2^2)/3+(0.2)^2/2\} = 1.66$