

# FCC TEST REPORT

**Product Name:** 52" Tempt  
**Trade Mark:** Progress Lighting  
**Model No.:** P2578  
**Report Number:** 171211001EMC-1  
**Test Standards:** FCC 47 CFR Part 15 Subpart B  
**FCC ID:** RGB-P2578R  
**Test Result:** PASS  
**Date of Issue:** December 15, 2017

Prepared for:

**King of Fans, Inc.**  
**1951 N.W. 22nd Street, Fort Lauderdale, FL33311, USA**

Prepared by:

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**  
**16/F, Block A, Building 6, Baoneng Science and Technology Park,**  
**Qingxiang Road No.1, Longhua New District, Shenzhen, China**  
**TEL: +86-755-2823 0888**  
**FAX: +86-755-2823 0886**

Tested by: Eric Yu  
 Eric Yu  
 Engineer

Reviewed by: Kevin Liang  
 Kevin Liang  
 Senior Engineer

Approved by: Jim Long  
 Jim Long  
 Technical Deputy Manager

Date: December 15, 2017



**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

**Version**

Version No.	Date	Description
V1.0	December 15, 2017	Original



## CONTENTS

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 DESCRIPTION OF SUPPORT UNITS	4
1.4 TEST LOCATION	4
1.5 TEST FACILITY	4
1.6 DEVIATION FROM STANDARDS	5
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	5
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	5
1.9 MEASUREMENT UNCERTAINTY	5
<b>2. TEST SUMMARY</b>	<b>6</b>
<b>3. EQUIPMENT LIST</b>	<b>7</b>
<b>4. TEST CONFIGURATION</b>	<b>8</b>
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	8
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	8
4.1.2 RECORD OF NORMAL ENVIRONMENT	8
4.2 TEST MODES	8
4.3 TEST SETUP	8
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	8
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	9
4.4 SYSTEM TEST CONFIGURATION	9
<b>5. REFERENCE DOCUMENTS FOR TESTING</b>	<b>10</b>
<b>6. EMC REQUIREMENTS SPECIFICATION</b>	<b>10</b>
6.1 RADIATED EMISSION	10
6.2 CONDUCTED EMISSION	15
<b>APPENDIX 1 PHOTOGRAPHS OF TEST SETUP</b>	<b>18</b>
<b>APPENDIX 2 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b>	<b>21</b>
EUT EXTERNAL PHOTOS	21
EUT INTERNAL PHOTOS	22

# 1. GENERAL INFORMATION

## 1.1 CLIENT INFORMATION

<b>Applicant:</b>	King of Fans, Inc.
<b>Address of Applicant:</b>	1951 N.W. 22nd Street, Fort Lauderdale, FL33311, USA
<b>Manufacturer:</b>	Chienluen Industries (zhongshan) Ltd.
<b>Address of Manufacturer:</b>	Da Che Industrial Area, Nanlang Town, Zhongshan, Guangdong China 528451

## 1.2 EUT INFORMATION

### 1.2.1 General Description of EUT

<b>Product Name:</b>	52" Tempt
<b>Model No.:</b>	P2578
<b>Add. Model No.:</b>	N/A
<b>Trade Mark:</b>	Progress Lighting
<b>DUT Stage:</b>	Identical Prototype
<b>Power Supply:</b>	AC 120V/60Hz
<b>Classification of digital devices:</b>	Class B
<b>Receiver Frequency:</b>	303.835 MHz
<b>Software Version:</b>	N/A
<b>Hardware Version:</b>	N/A
<b>Sample Received Date:</b>	December 11, 2017
<b>Sample Tested Date:</b>	December 11, 2017 to December 14, 2017

### 1.2.2 Description of Accessories

None

## 1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested independently

## 1.4 TEST LOCATION

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

## 1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

**CNAS-Lab Code: L9069**

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

**IC-Registration No.: 21600-1**

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 21600-1.

**A2LA-Lab Certificate No.: 4312.01**

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

**FCC Accredited Lab.**

Designation Number: CN1194  
 Test Firm Registration Number: 259480

**1.6 DEVIATION FROM STANDARDS**

None.

**1.7 ABNORMALITIES FROM STANDARD CONDITIONS**

None.

**1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER**

None.

**1.9 MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

**2. TEST SUMMARY**

<b>FCC 47 CFR Part 15 Subpart B Test Cases</b>			
<b>Test Item</b>	<b>Test Requirement</b>	<b>Test Method</b>	<b>Result</b>
Conducted Emission	FCC 47 CFR Part 15.107	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109	ANSI C63.4-2014	PASS



### 3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 20, 2015	Dec. 19, 2018
<input type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	Dec. 22, 2016	Dec. 22, 2017
<input type="checkbox"/>	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Dec. 22, 2016	Dec. 22, 2017
<input type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	Jun. 24, 2015	Jun. 23, 2018
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Jul. 24, 2015	Jul. 23, 2018
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	Dec. 22, 2016	Dec. 22, 2017
<input type="checkbox"/>	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	Dec. 30, 2016	Dec. 30, 2017
<input type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3117	00164202	Jul. 24, 2015	Jul. 23, 2018
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	Dec. 30, 2016	Dec. 30, 2017
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
<input checked="" type="checkbox"/>	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	LISN	R&S	ESH2-Z5	860014/024	Dec. 22, 2016	Dec. 22, 2017
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

## 4. TEST CONFIGURATION

### 4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

#### 4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	AC 120V/60Hz	20 to 75
<b>Remark:</b>			
1) NV: Normal Voltage; NT: Normal Temperature			

#### 4.1.2 Record of Normal Environment


Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (Kpa)	Tested by
Conducted Emission	25.6	46	100.32	Andy Lin
Radiated Emission	22.6	56	100.32	Terence Chen

## 4.2 TEST MODES


Test Item	EMI Test Modes
Radiated Emission	Receiving Mode
Conducted Emission	Receiving Mode

## 4.3 TEST SETUP


### 4.3.1 For Radiated Emissions test setup

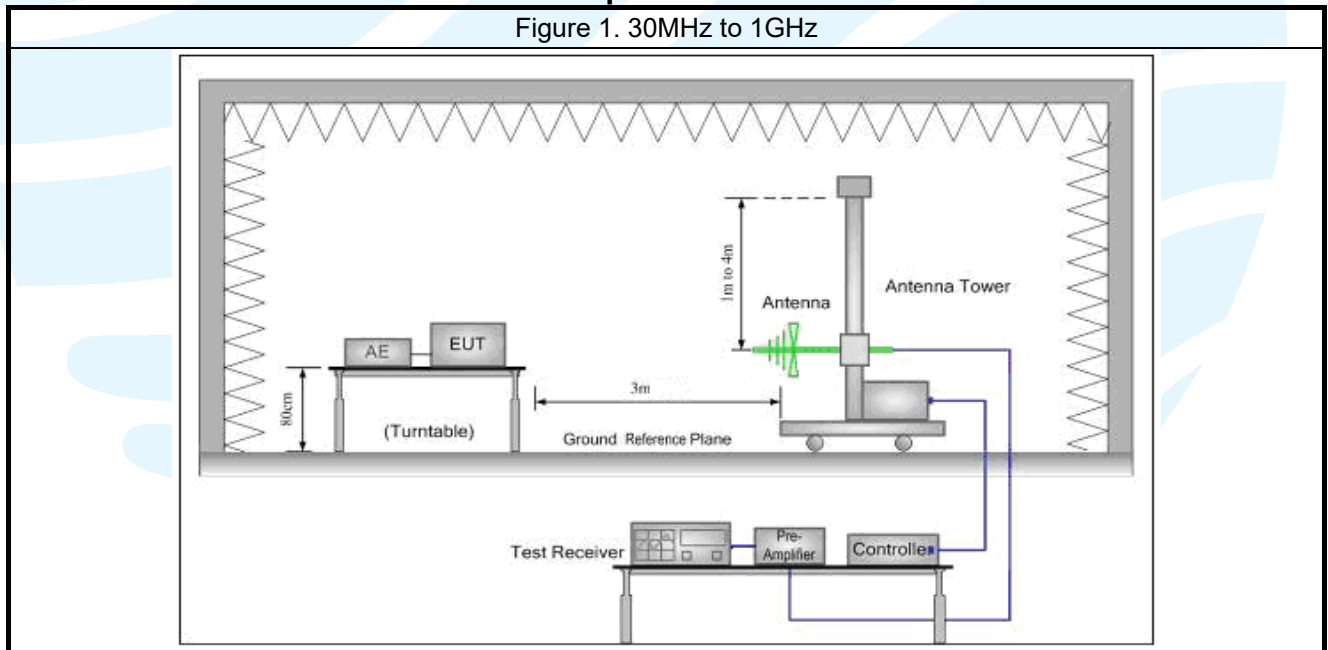



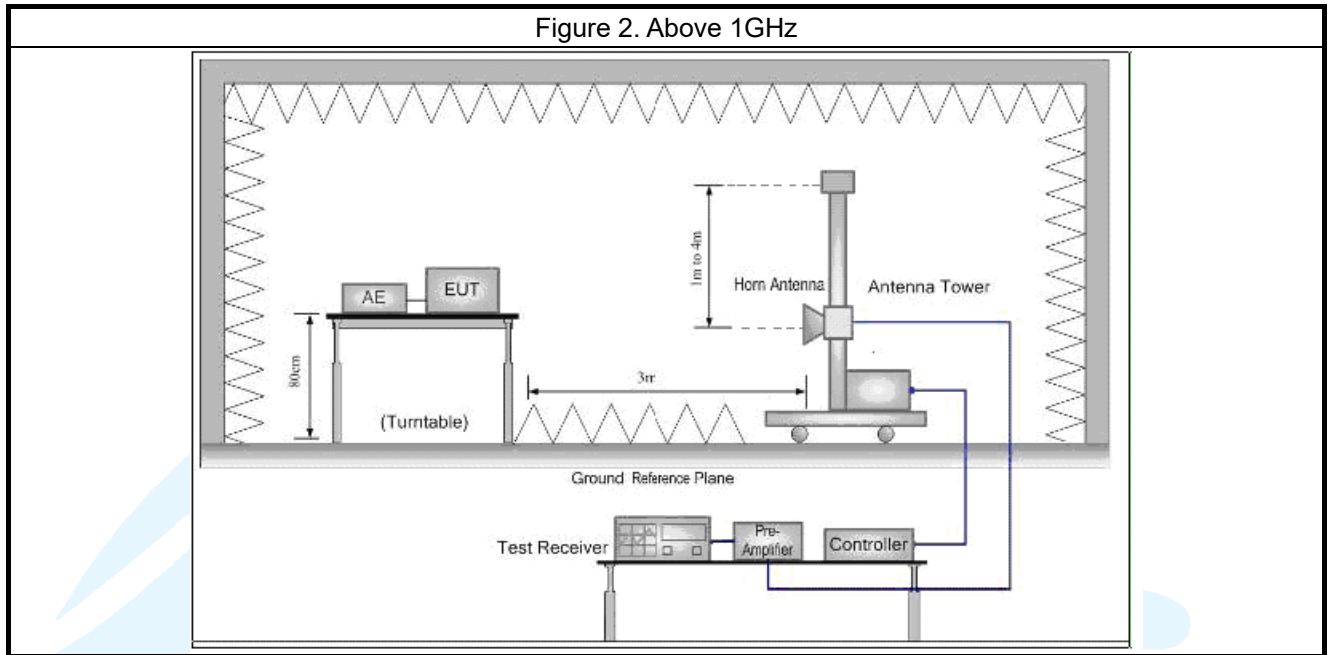

**4.3.2 For Conducted Emissions test setup**

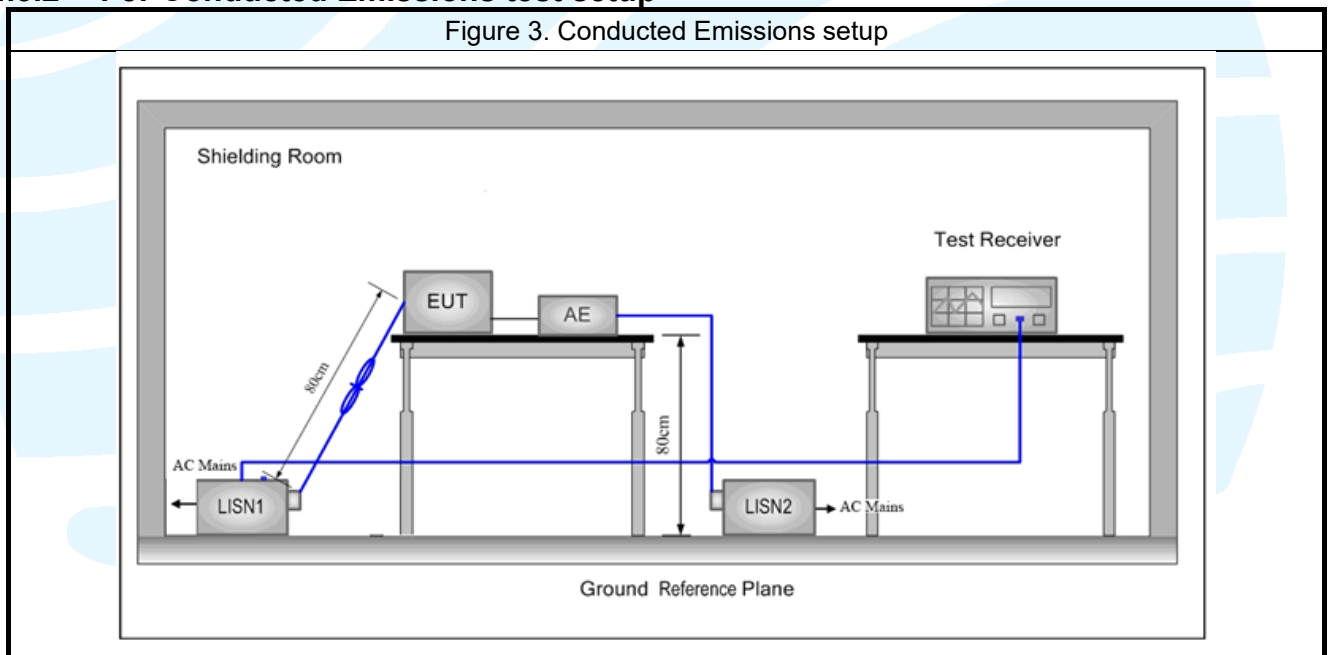

**4.4 SYSTEM TEST CONFIGURATION**

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the fifth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

## 5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## 6. EMC REQUIREMENTS SPECIFICATION

### 6.1 RADIATED EMISSION

**Test Requirement:** FCC 47 CFR Part 15.109

**Test Method:** ANSI C63.4-2014

**Receiver Setup:**

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

**Measured frequency range**

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

**Limits:**

Limits for Class B devices

Frequency (MHz)	limits at 3m (dBµV/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

**Note:** 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

**Remark:**

- The lower limit shall apply at the transition frequencies.
- Emission level (dBµV/m) = 20 log Emission level (µV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

**Test Setup:** Refer to section 4.3.1 for details.

**Test Procedures:**

- From 30 MHz to 1GHz test procedure as below:

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230888

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.


2. Above 1GHz test procedure as below:


- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

**Equipment Used:** Refer to section 3 for details.


**Test Result:** Pass

**The measurement data as follows:**

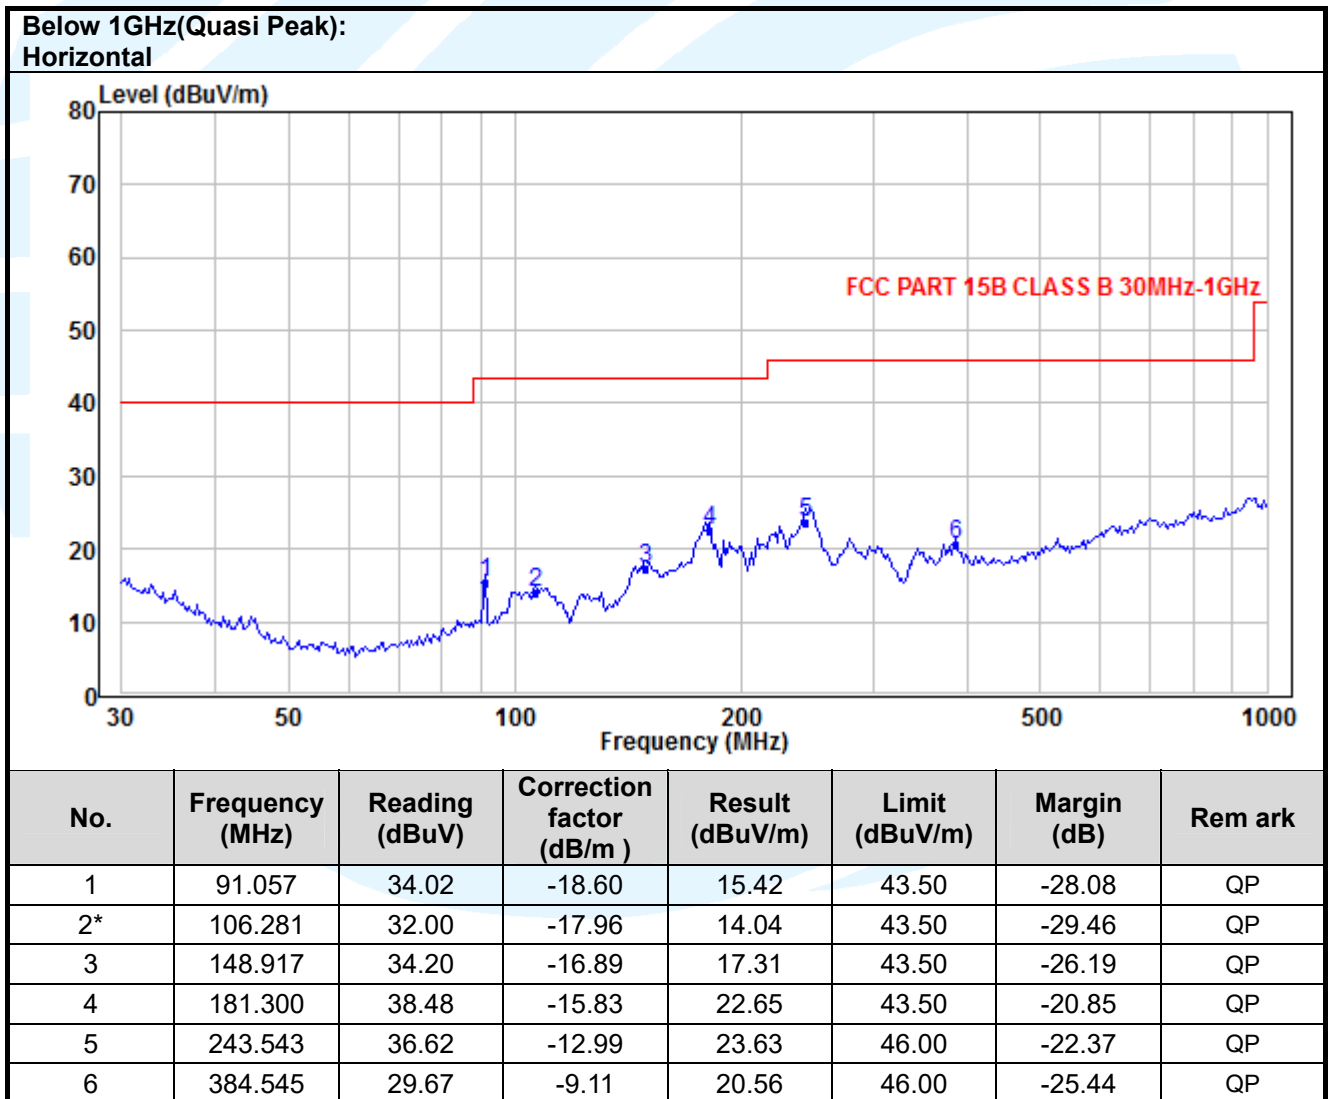


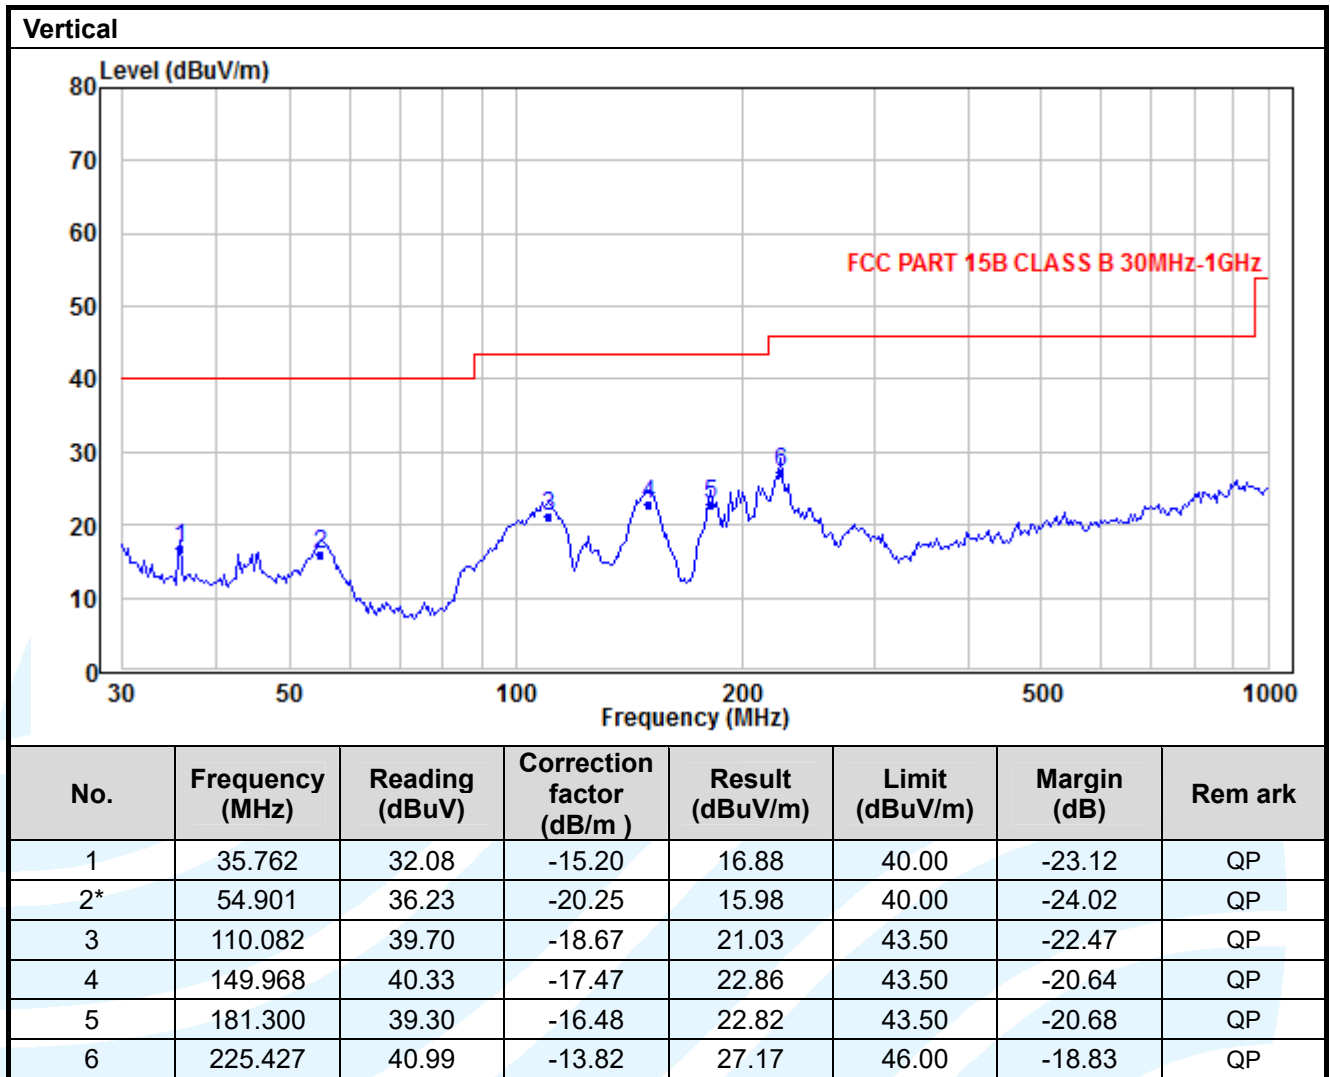

**Above 1GHz(Peak & Average)  
Horizontal**

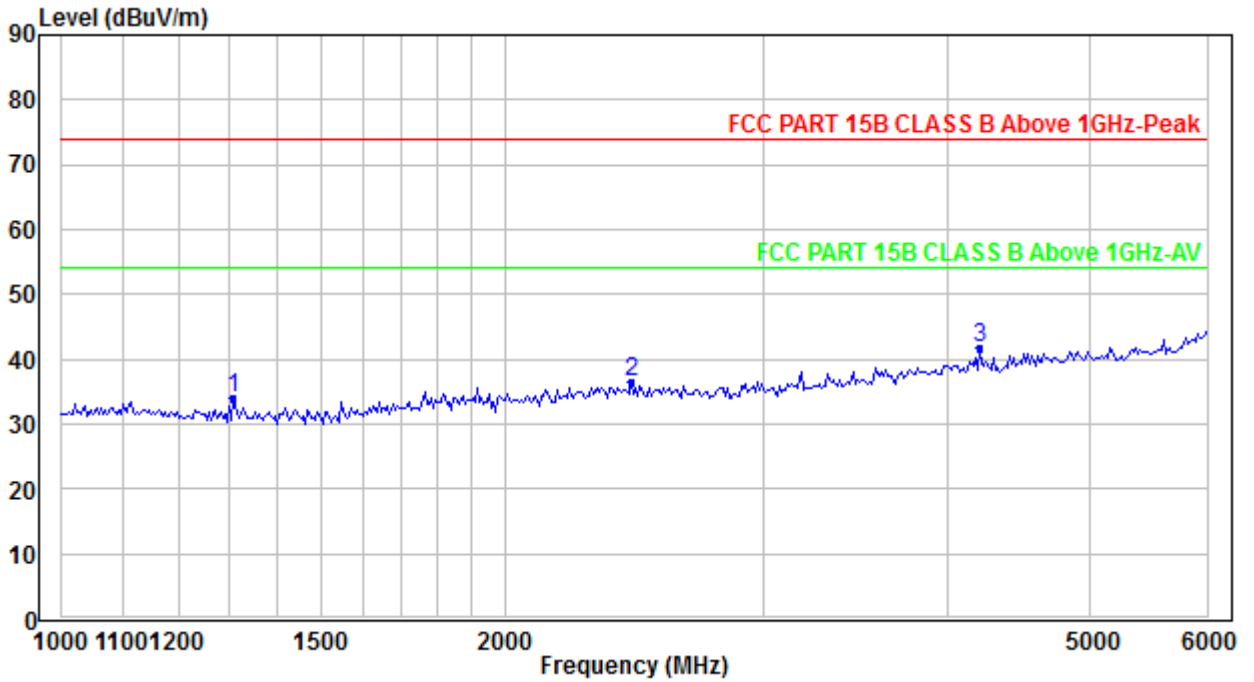

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	1309.051	47.21	-13.28	33.93	74.00	-40.07	Peak
2	2436.332	45.35	-8.88	36.47	74.00	-37.53	Peak
3	4205.024	46.03	-4.24	41.79	74.00	-32.21	Peak

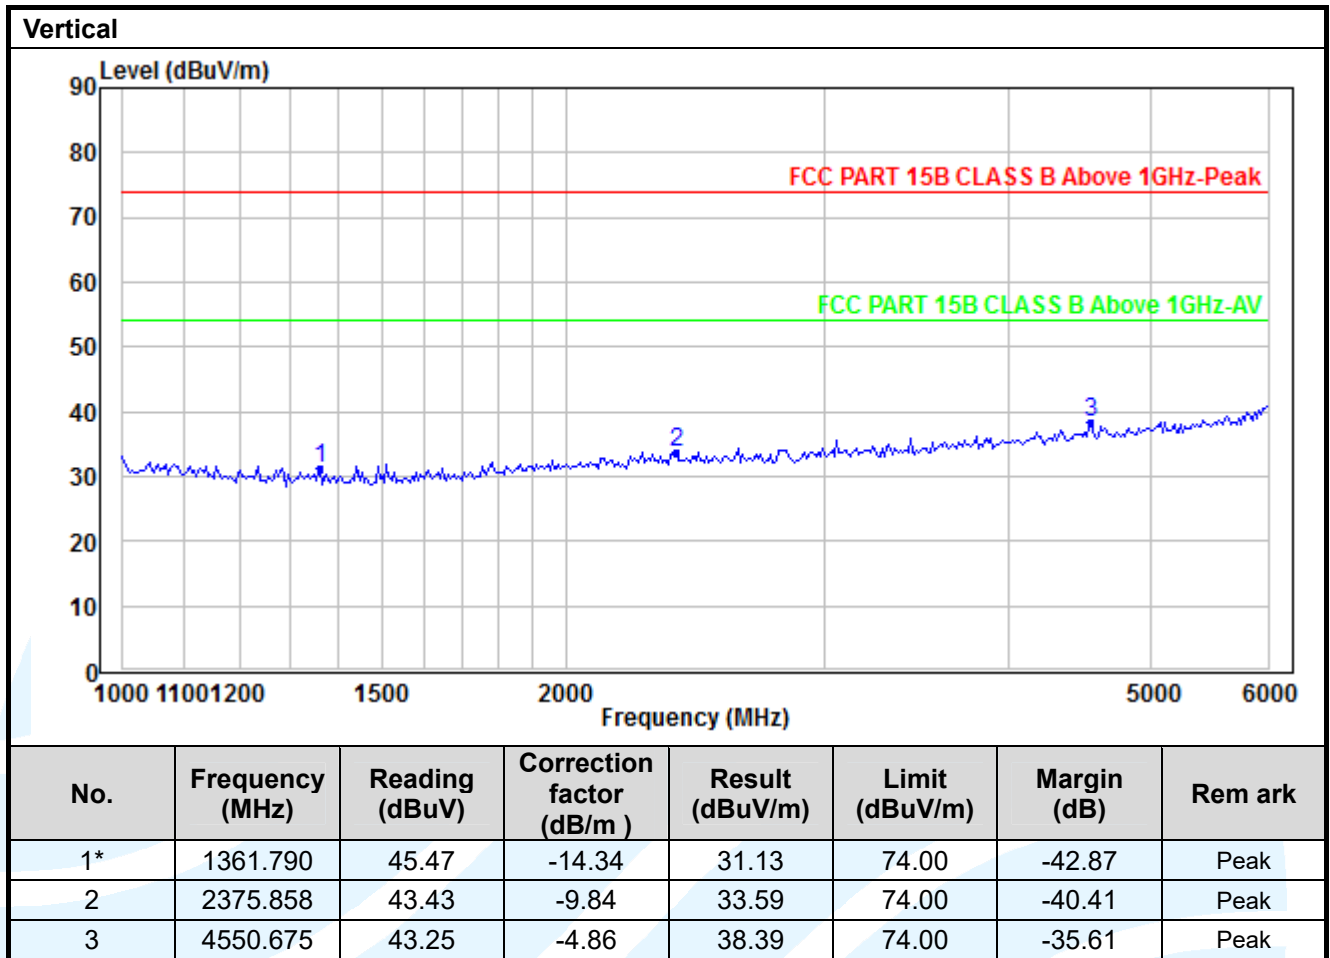

Remark:

Margin= Result-Limit

As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 6.2 CONDUCTED EMISSION

**Test Requirement:** FCC 47 CFR Part 15.107

**Test Method:** ANSI C63.4-2014

**Limits:**

Limits for Class B devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

**Remark:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

**Test Setup:** Refer to section 4.3.2 for details.

**Test Procedures:**


- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass


The measurement data as follows:

Quasi Peak and Average:

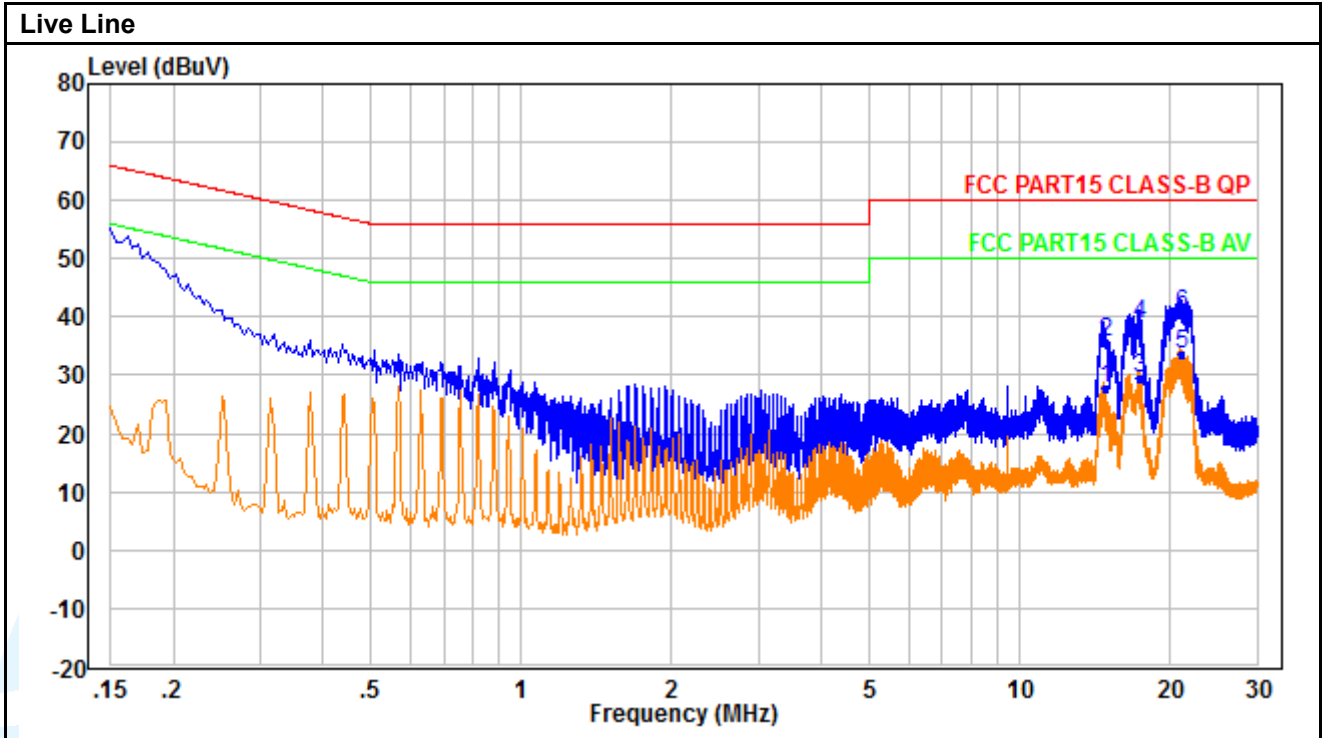

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14.869	15.90	11.80	27.70	50.00	-22.30	Average
2*	14.869	23.90	11.80	35.70	60.00	-24.30	QP
3	17.397	17.30	12.40	29.70	50.00	-20.30	Average
4	17.397	26.30	12.40	38.70	60.00	-21.30	QP
5	21.221	20.70	12.90	33.60	50.00	-16.40	Average
6	21.221	27.70	12.90	40.60	60.00	-19.40	QP



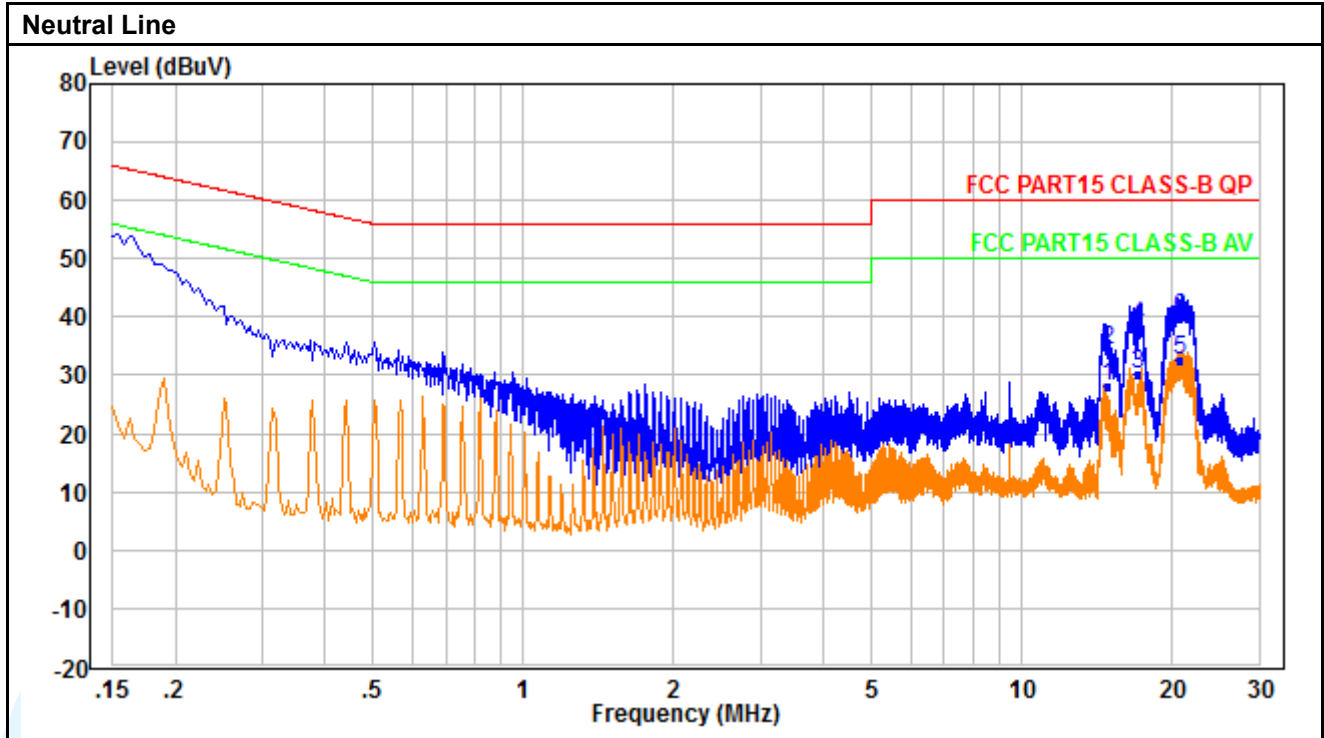


No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14.869	16.40	11.90	28.30	50.00	-21.70	Average
2*	14.869	22.40	11.90	34.30	60.00	-25.70	QP
3	17.117	17.90	12.40	30.30	50.00	-19.70	Average
4	17.117	25.90	12.40	38.30	60.00	-21.70	QP
5	20.773	19.90	12.80	32.70	50.00	-17.30	Average
6	20.773	26.90	12.80	39.70	60.00	-20.30	QP

Remark:


Margin=Result-Limit

An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP


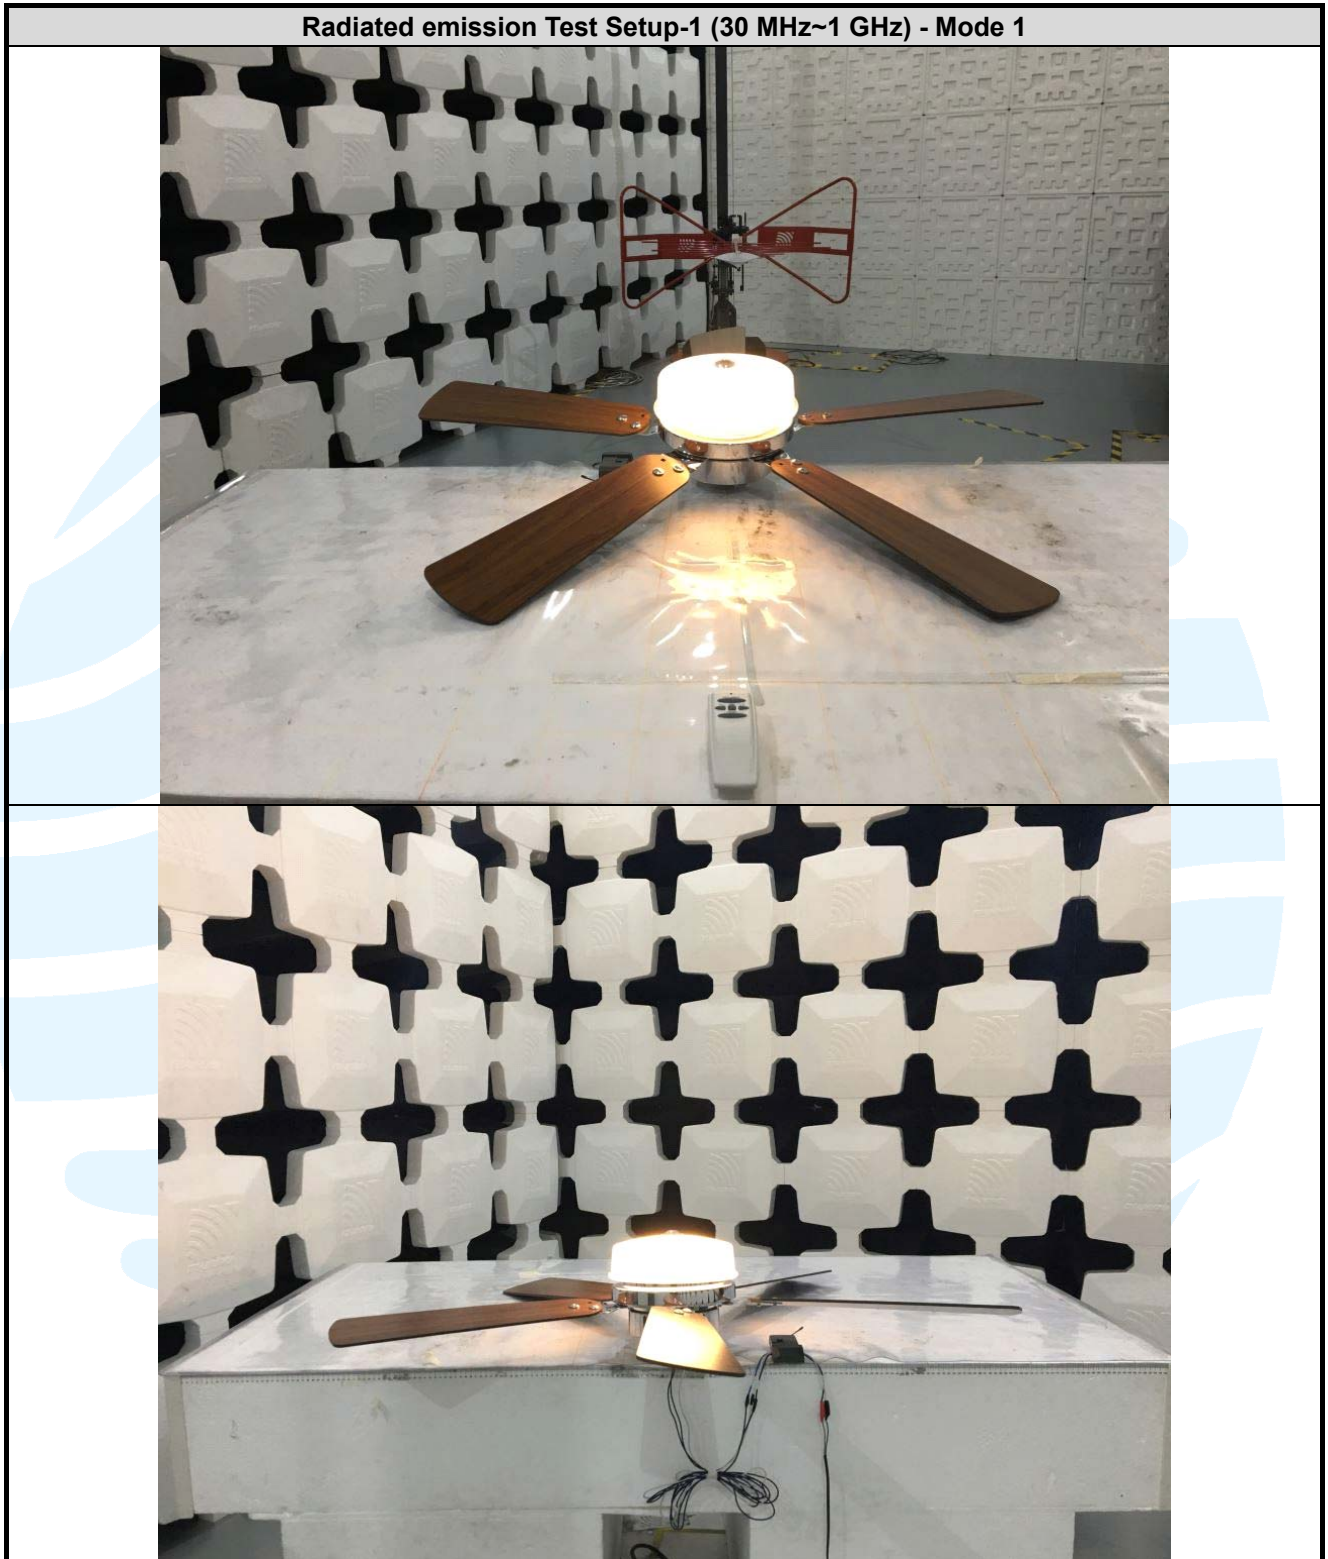




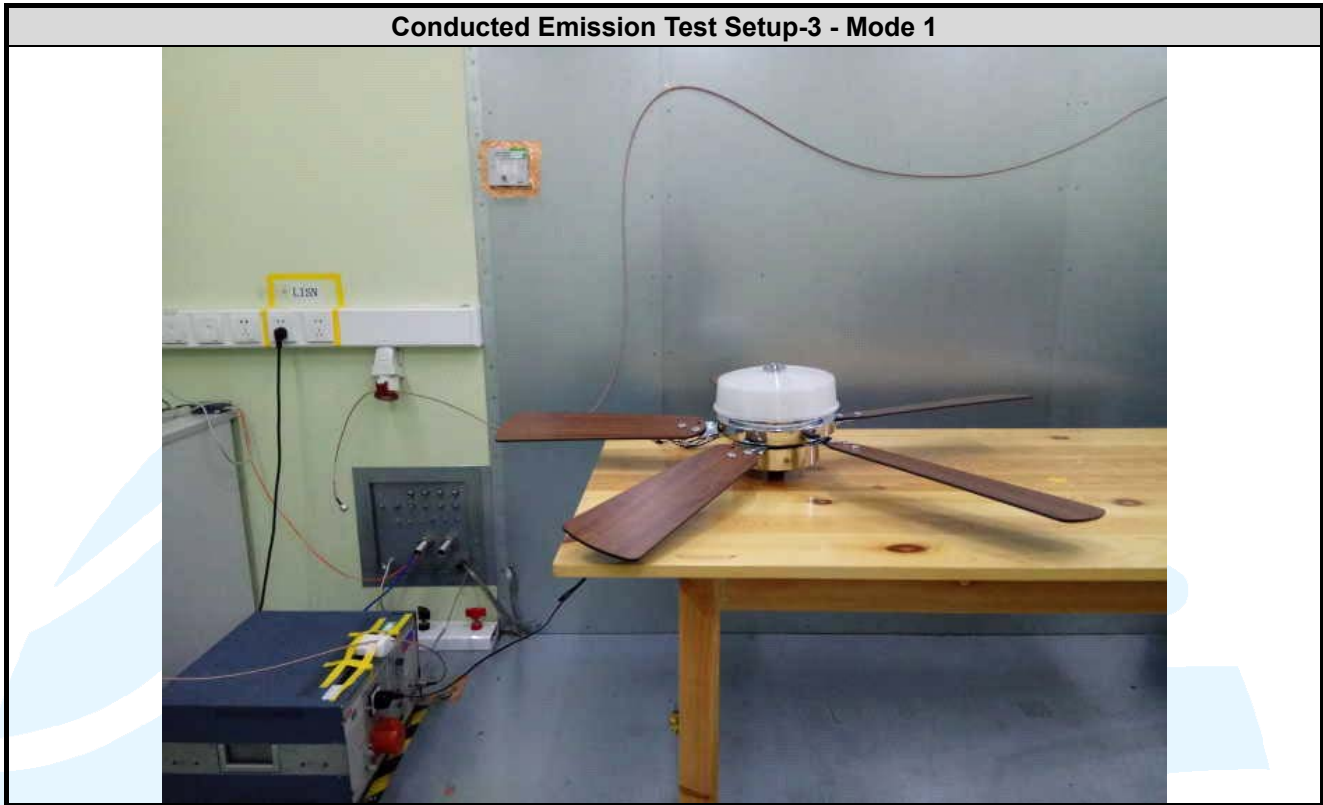


APPENDIX 2 PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS

EUT EXTERNAL PHOTOS

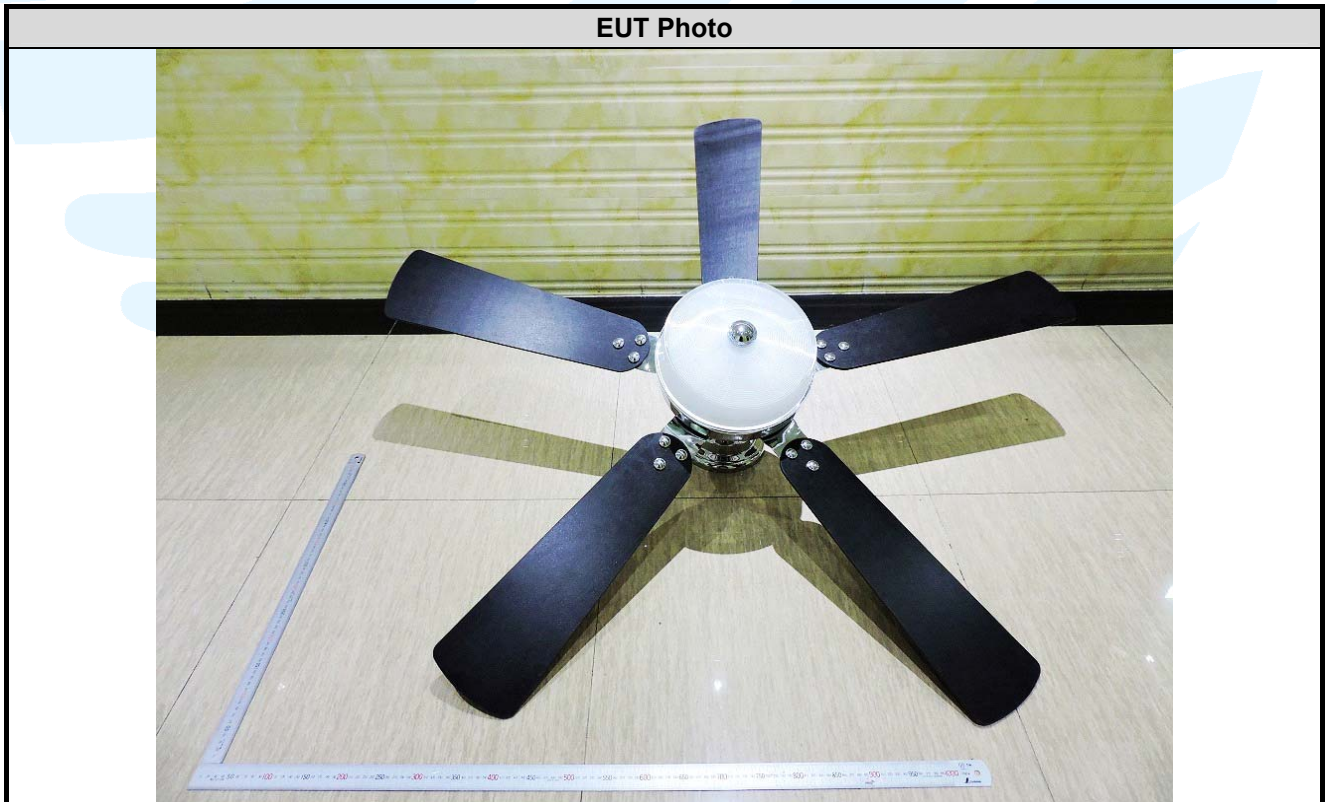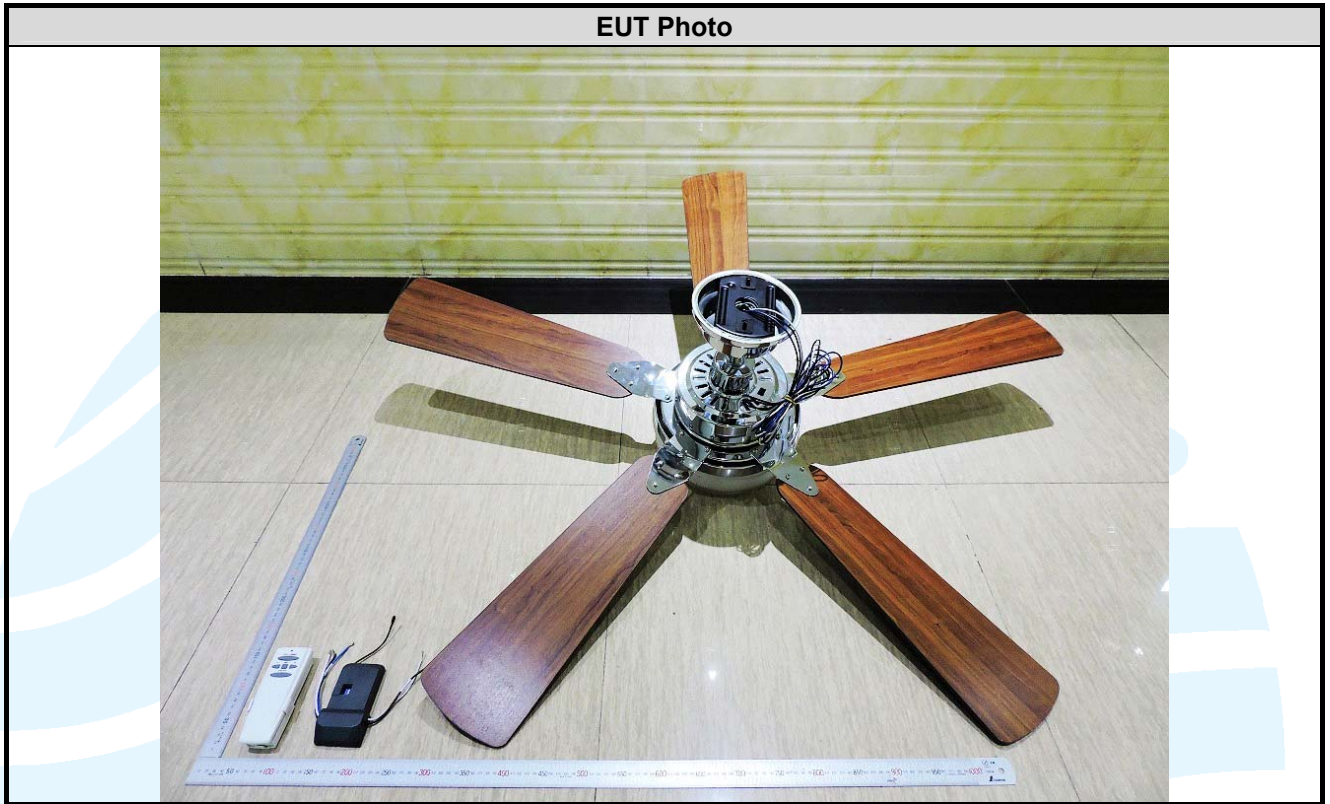

EUT INTERNAL PHOTOS

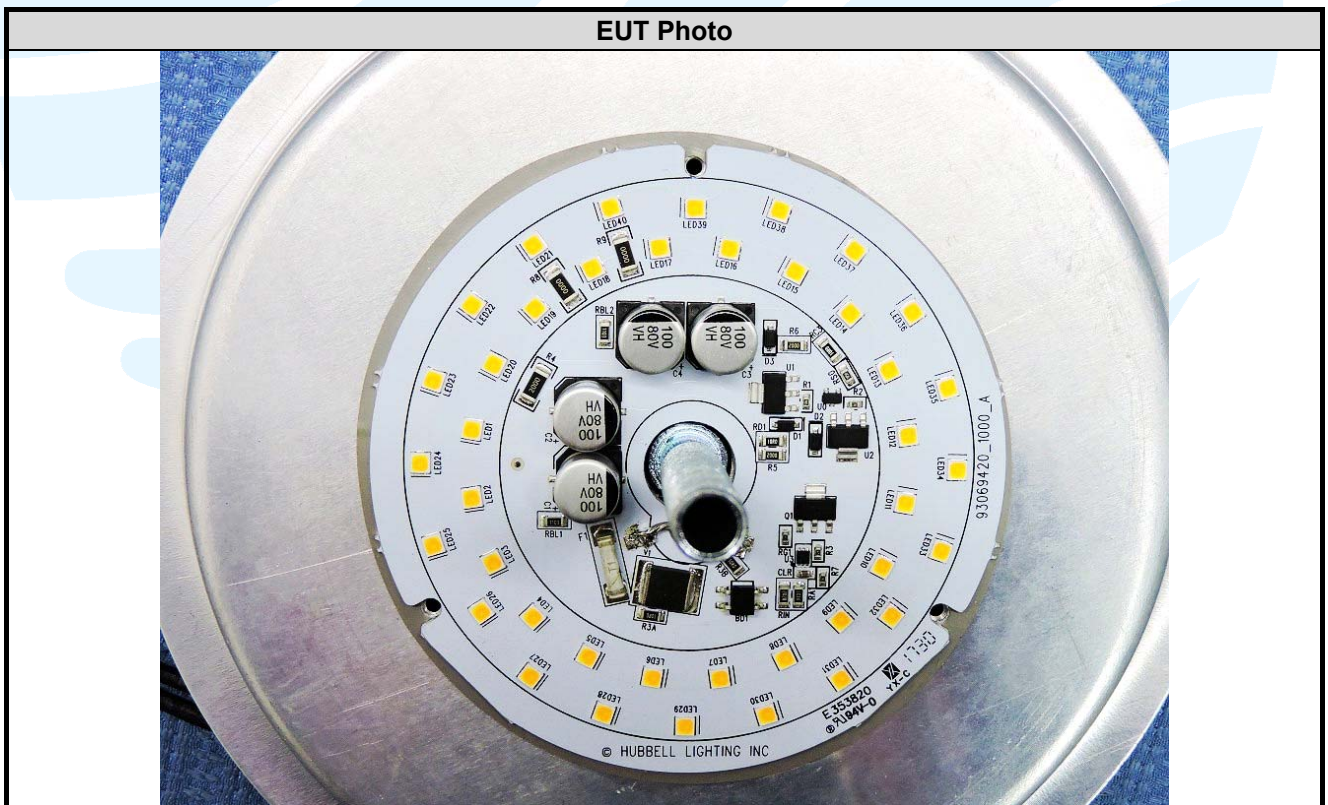


EUT Photo




EUT Photo




EUT Photo

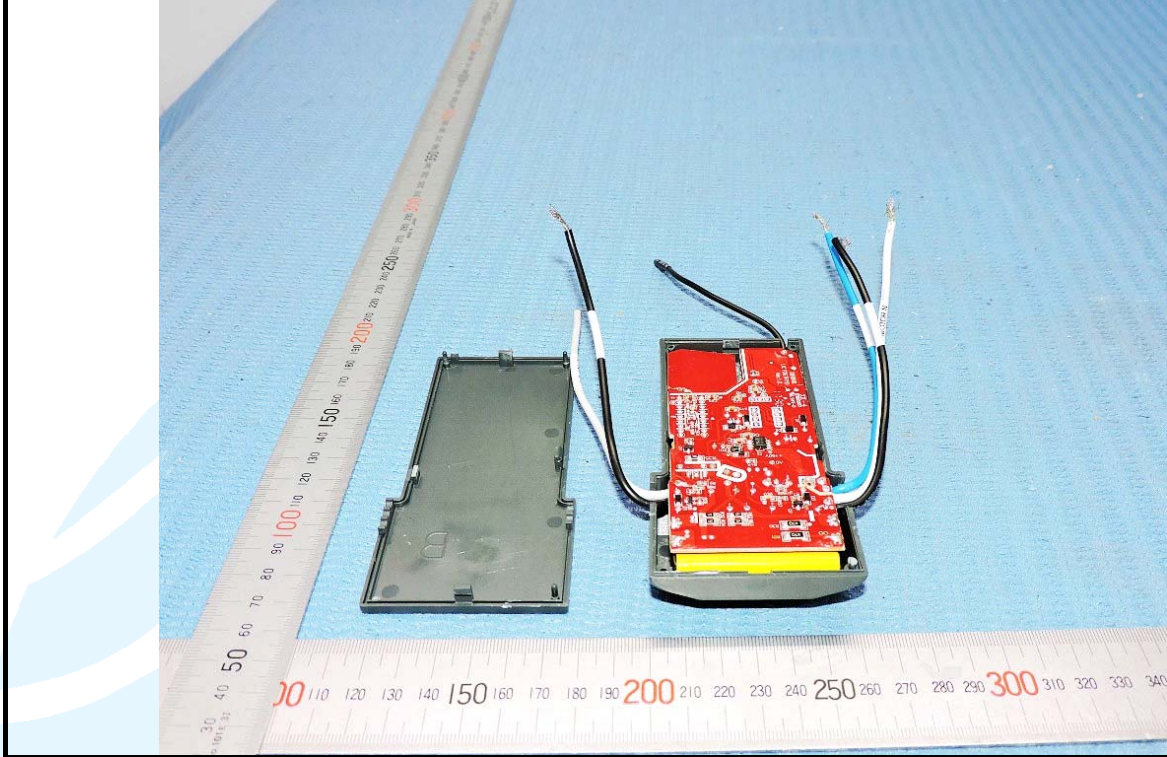

EUT Photo

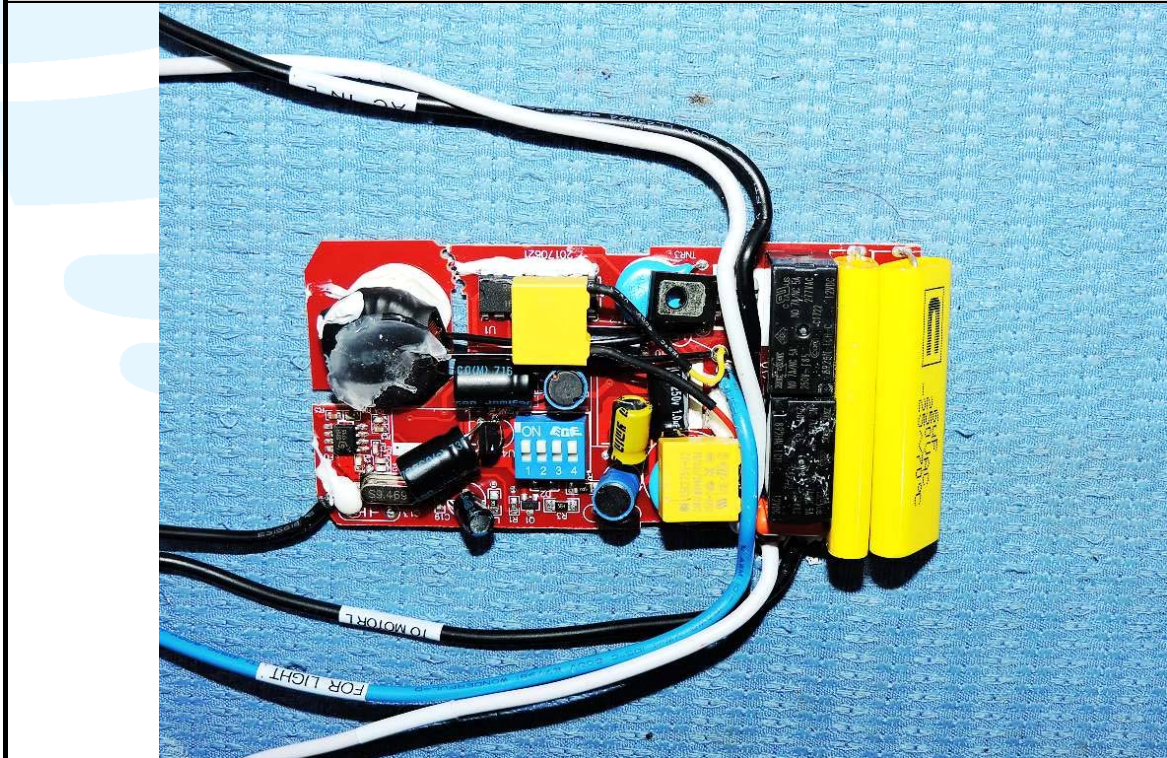



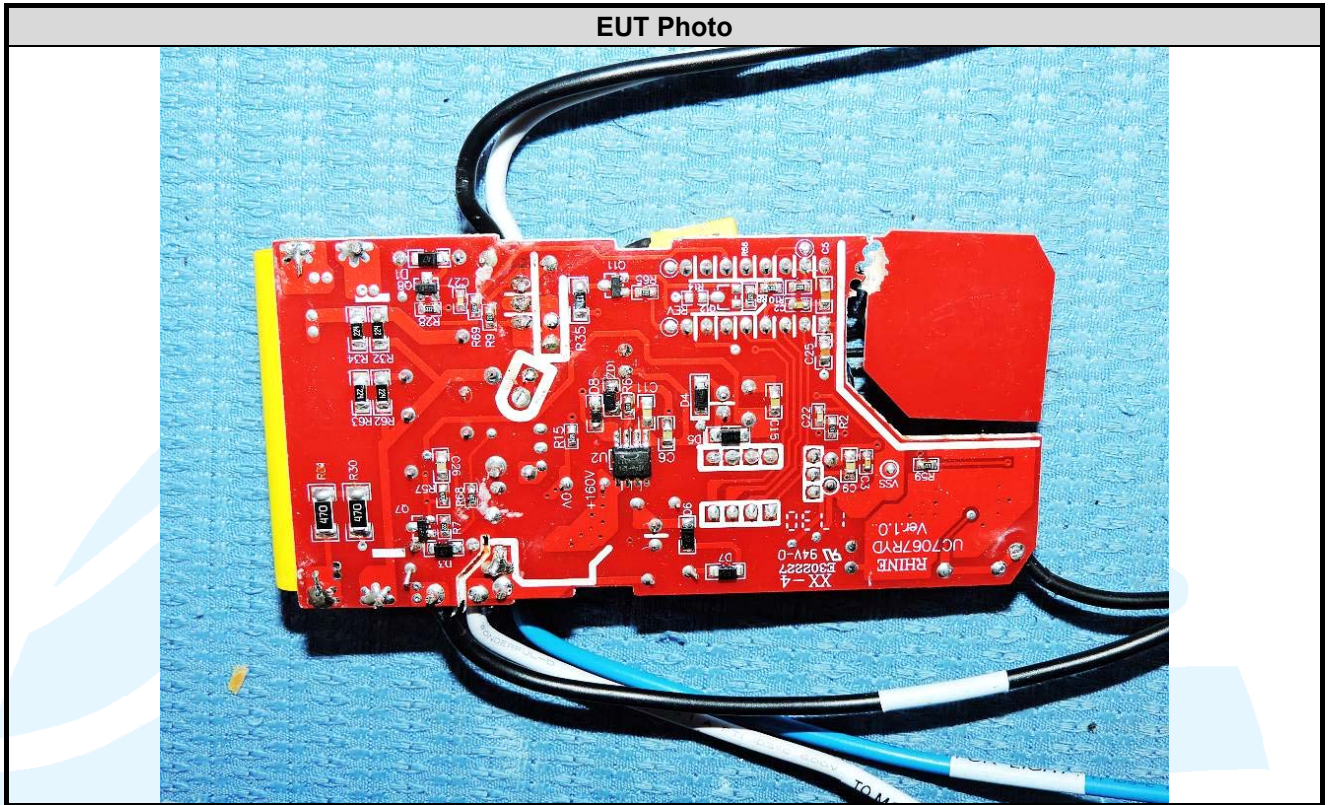

\*\*\*\*\* End of Report \*\*\*\*\*

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.