



## SGS-CSTC Standards Technical Services Ltd.

No.198 Kezhu Road, Science Town Economic& Technology  
Development District Guangzhou, China 510663

Telephone: +86 (0) 20 82155555

Fax: +86 (0) 20 82075059

Email: [sgs\\_internet\\_operations@sgs.com](mailto:sgs_internet_operations@sgs.com)

**FEDERAL COMMUNICATIONS COMMISSION**

Registration number: 282399

Report No.: GLEMR070501390RFF

Page: 1 of 39

FCC ID: RIIBTC-88A

# TEST REPORT

**Application No. :** GLEMR070501390RF  
**Applicant:** UNIFAT TECHNOLOGY LTD  
**FCC ID:** RIIBTC-88A  
**Fundamental Carrier Frequency :** 2.402GHz to 2.480GHz  
**Equipment Under Test (EUT):**  
**Name:** Professional Bluetooth Handsfree Car Kit  
**Model No.:** BTC88A  
**Standards:** FCC PART 15, SUBPART C: 2006 (Section 15.247);  
FCC PART 15, SUBPART B: 2006.  
**Date of Receipt:** 21 May 2007  
**Date of Test:** 21 May to 1 June 2007  
**Date of Issue:** 1 June 2007

**Test Result :**

**PASS \***

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 2 of this report for further details.

Authorized Signature:

Stephen Guo  
Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



## 2 Test Summary

For Bluetooth Function:			
Test	Test Requirement	Standard Paragraph	Result
Maximum Peak Output Power	FCC PART 15 :2006	Section 15.247(b)(1)	PASS
Conducted Emission	FCC PART 15 :2006	Section 15.207 &15.107	N/A
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2006	Section 15.209 &15.247(d)	PASS
Radiated Spurious Emission (30MHz to 25GHz)	FCC PART 15 :2006	Section 15.209 &15.247(d) &15.109	PASS
Band Edges Measurement	FCC PART 15 :2006	Section 15.247 (d) &15.205	PASS
Hopping Channel Number	FCC PART 15 :2006	Section 15.247(a)(1)(iii)	PASS
Carrier Frequencies Separated	FCC PART 15 :2006	Section 15.247(a)(1)	PASS
Dwell Time	FCC PART 15 :2006	Section 15.247(a)(1)(iii)	PASS
Antenna Requirement	FCC PART 15 :2006	Section 15.247 (c)	PASS



### 3 Contents

	Page
<b>1 COVER PAGE .....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS .....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>4</b>
4.1 CLIENT INFORMATION.....	4
4.2 GENERAL DESCRIPTION OF E.U.T. ....	4
4.3 DESCRIPTION OF SUPPORT UNITS .....	4
4.4 STANDARDS APPLICABLE FOR TESTING.....	4
4.5 TEST LOCATION.....	4
4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	4
4.7 TEST FACILITY .....	5
<b>5 EQUIPMENTS USED DURING TEST.....</b>	<b>6</b>
<b>6 TEST RESULTS .....</b>	<b>7</b>
6.1 E.U.T. OPERATION .....	7
6.2 MAXIMUM PEAK OUTPUT POWER .....	7
6.3 CONDUCTED EMISSIONS MAINS TERMINALS, 150kHz TO 30MHz.....	10
6.4 CONDUCTED SPURIOUS EMISSIONS.....	10
6.5 RADIATED SPURIOUS EMISSIONS.....	18
6.5.1 <i>Radiated Emissions which fall in the restricted bands</i> .....	24
6.6 BAND EDGES REQUIREMENT .....	27
6.6.1 <i>100 kHz Bandwidth Outside the Frequency Band</i> .....	27
6.7 HOPPING CHANNEL NUMBER.....	28
6.8 OCCUPIED BANDWIDTH .....	29
6.9 CARRIER FREQUENCIES SEPARATED .....	31
6.10 DWELL TIME .....	34
6.11 ANTENNA REQUIREMENT.....	39
6.11.1 <i>Standard Applicable</i> .....	39
6.11.2 <i>Antenna Construction</i> .....	39



## **4 General Information**

### **4.1 Client Information**

Applicant: UNIFAT TECHNOLOGY LTD  
Address: 7/F,SUI HONG INDUSTRIAL BLDG,547-549 CASTLE PEAK ROAD,  
KWAI CHUNG, N.T., HONG KONG

### **4.2 General Description of E.U.T.**

Name: Professional Bluetooth Handsfree Car Kit  
Model No.: BTC88A  
Number of Channels 79 Channels  
Channel Separation 1 MHz  
Type of Modulation FHSS (Frequency Hopping Spread Spectrum)  
Dwell time Per channel is less than 0.4S.  
Antenna Type Integral  
Power Supply: 12V DC

### **4.3 Description of Support Units**

The EUT has been tested independently or connecting with Bluetooth cell phone (SonyEriession K618i).

### **4.4 Standards Applicable for Testing**

The customer requested FCC tests for the EUT.  
The standard used was FCC PART 15, SUBPART C: 2006 (Section 15.247);  
FCC PART 15, SUBPART B: 2006.

### **4.5 Test Location**

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

### **4.6 Other Information Requested by the Customer**

None.



#### **4.7 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS L0167**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC – Registration No.: 282399**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP's accreditation, SGS-CSTC is an authorized test laboratory for the DoC process.

- **Industry Canada (IC)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620B-1.

Date of Registration: Jan 15, 2007. Valid until Jan 15, 2009

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460 and C-2584 respectively.

This certificate is valid until September 14.2009

## 5 Equipments Used during Test

RE in Chamber/OATS						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	06-03-2007	06-03-2008
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	05-12-2006	05-12-2007
N/A	EMI Test Software	Audix	E3	N/A	N/A	N/A
EMC0514	Coaxial cable	SGS	N/A	N/A	04-12-2006	04-12-2007
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	31-10-2006	31-10-2007
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	31-07-2006	31-07-2007
EMC0517	Horn Antenna	Rohde & Schwarz	HF906	100095	29-07-2006	29-07-2007
EMC0040	Spectrum Analyzer	Rohde & Schwarz	FSP30	100324	05-12-2006	05-12-2007
EMC0520	0.1-1300 MHz Pre-Amplifier	HP	8447D OPT 010	2944A06252	06-03-2007	06-03-2008
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	06-03-2007	06-03-2008
EMC0523	Active Loop Antenna	EMCO	6502	00042963	09-08-2006	09-08-2008
EMC0530	10m Semi- Anechoic Chamber	ETS	N/A	N/A	22-08-2006	22-08-2007

General used equipment						
No:	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
EMC0050- EMC0053	Temperature, & Humidity	ZHENGZHOU BO YANG	WSB	N/A	05-12-2006	05-12-2007
EMC0054	Temperature, & Humidity	Shenzhen Tai Kong	THG-1	N/A	04-01-2007	04-01-2008
EMC0006	DMM	Fluke	73	70681569	27-09-2006	27-09-2007
EMC0007	DMM	Fluke	73	70671122	27-09-2006	27-09-2007

## 6 Test Results

### 6.1 E.U.T. Operation

Input voltage: 12V DC

Type of antenna: Integral

Operating Environment:

Temperature: 20.0 -25.0 °C

Humidity: 38-48 % RH

Atmospheric Pressure: 992 -1006 mbar

EUT Operation: Test the EUT as a product which has frequency hopping system. The total hopping channels are 79 channels (0 to 78 channels), the fundamental frequencies are from 2.402GHz to 2.480GHz.

Test the EUT to transmit and receive data at lowest (**Channel 0: 2.402GHz**), middle (**Channel 39: 2.441GHz**), and highest channel (**Channel 78: 2.480GHz**), frequencies individually for the compliance test.

### 6.2 Maximum Peak Output Power

Test Requirement: FCC Part15 C

Test Method: Base on ANSI 63.4.

Test Date: 22 May 2007


Test Limit:

Regulation 15.247 (b)(1)For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

The non-overlapping hopping channels of EUT over 75, the result refer to the result "Hopping channel number" of this document. So 1 watt limit applies.

Test mode: Test in transmitting mode: Channel 0, Channel 39, Channel 78.

Test Configuration:

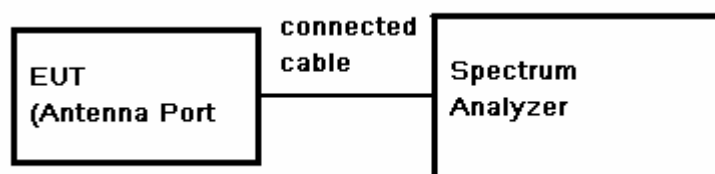

**Test Procedure:**


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz, VBW = 3 MHz, Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

**Test Result:**

Test Channel	Fundamental Frequency (GHz)	Reading Power (dBm)	Cable Loss (dB)	Output Power (dBm)	Limit (dBm)	Margin (dB)
0	2.402	2.01	0.20	2.21	30	27.79
39	2.441	2.09	0.20	2.29	30	27.71
78	2.480	3.49	0.20	3.69	30	26.31

**TEST RESULTS:** The unit does meet the FCC requirements.

**Channel 0:**

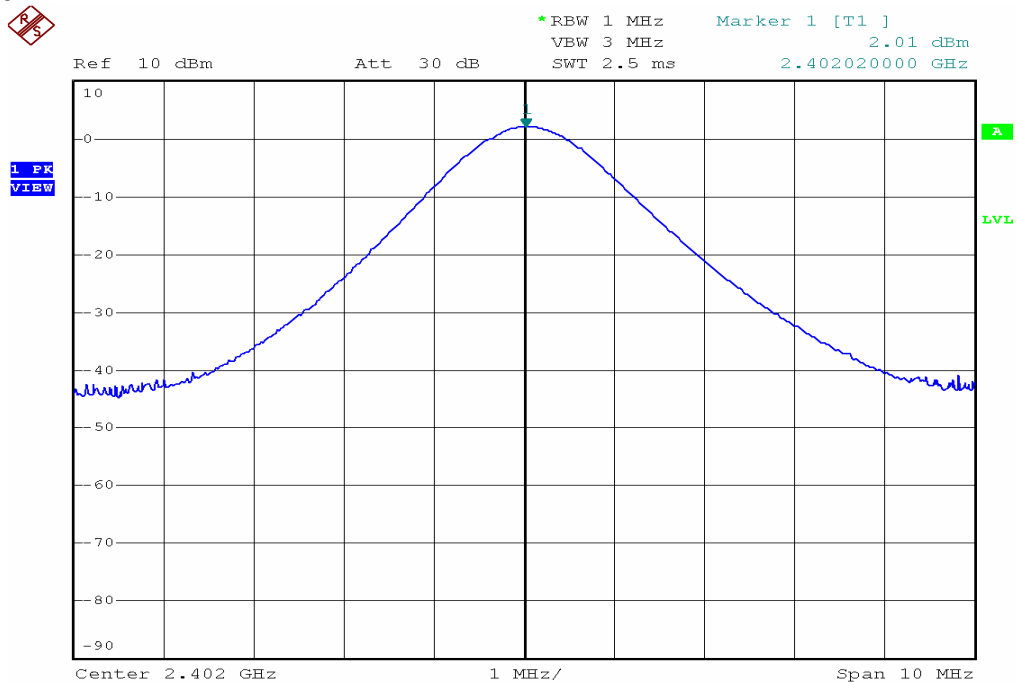

Date: 22.MAY.2007 16:17:02






**SGS-CSTC Standards  
Technical Services Ltd.**

Report No.: GLEMR070501390RFF


Page: 9 of 39

**Channel 39:**

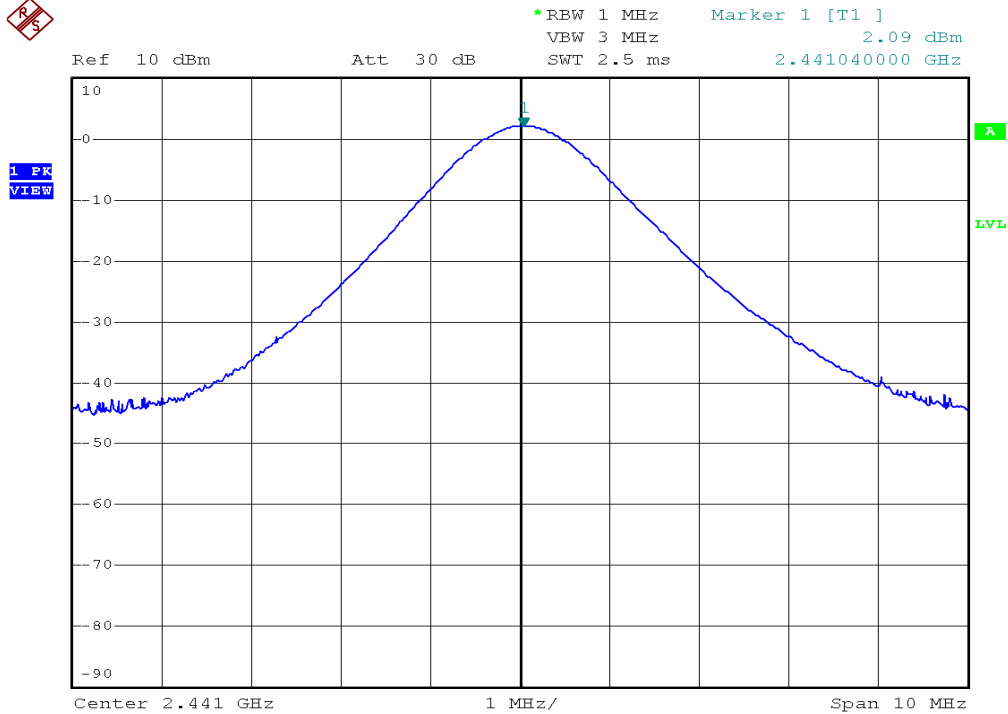

Date: 22.MAY.2007 16:16:39

**Channel 78:**

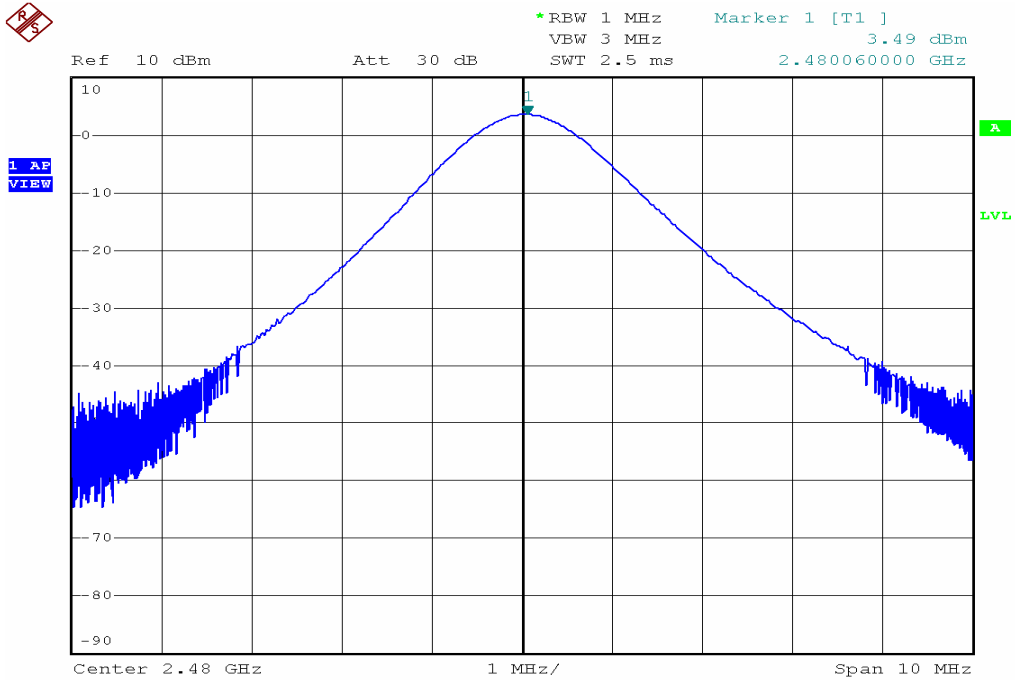

Date: 22.MAY.2007 16:16:07



### **6.3 Conducted Emissions Mains Terminals, 150kHz to 30MHz**

Test Requirement: N/A

Remark: Measurements are not required for devices which only employ battery power for operation and which do not operate from the AC power lines.  
The equipment is designed for vehicular use.

### **6.4 Conducted Spurious Emissions**

Test Requirement: FCC Part 15 C

Test Method: Based on FCC Part15 C Section 15.247:

Test Date: 22 May 2007.

Test requirements: (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz, VBW  $\geq$  RBW , Sweep = auto; Detector Function = Peak (Max. hold).

**Test result: Pass**




Lowest Channel (channel 0): 30M to 1GHz

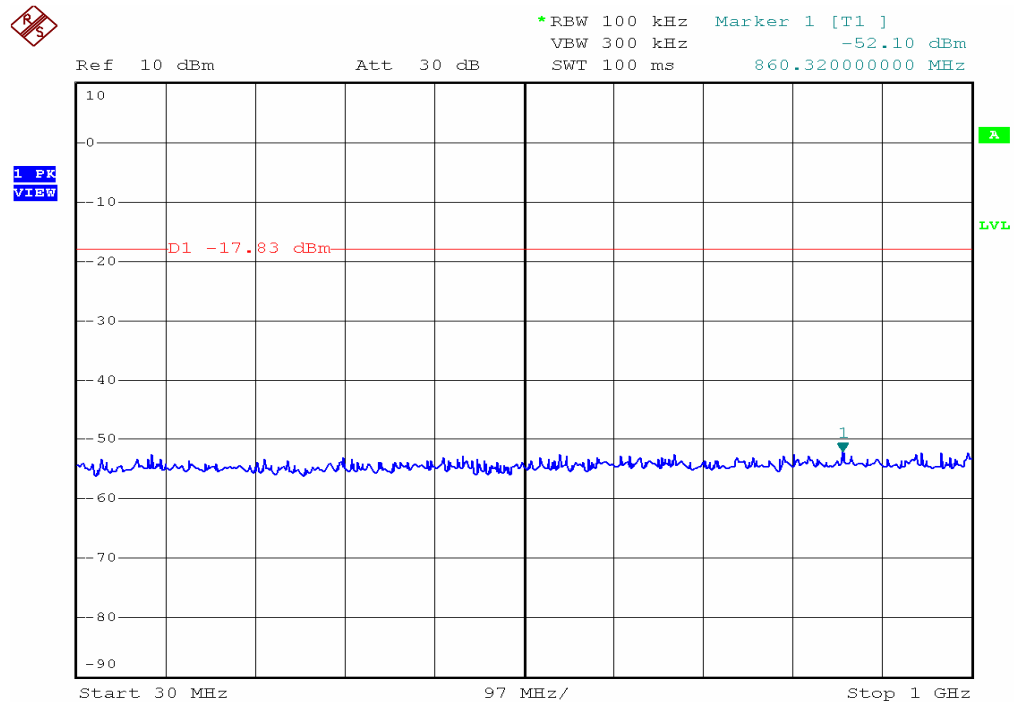

Date: 22.MAY.2007 16:19:15




1G to 5GHz

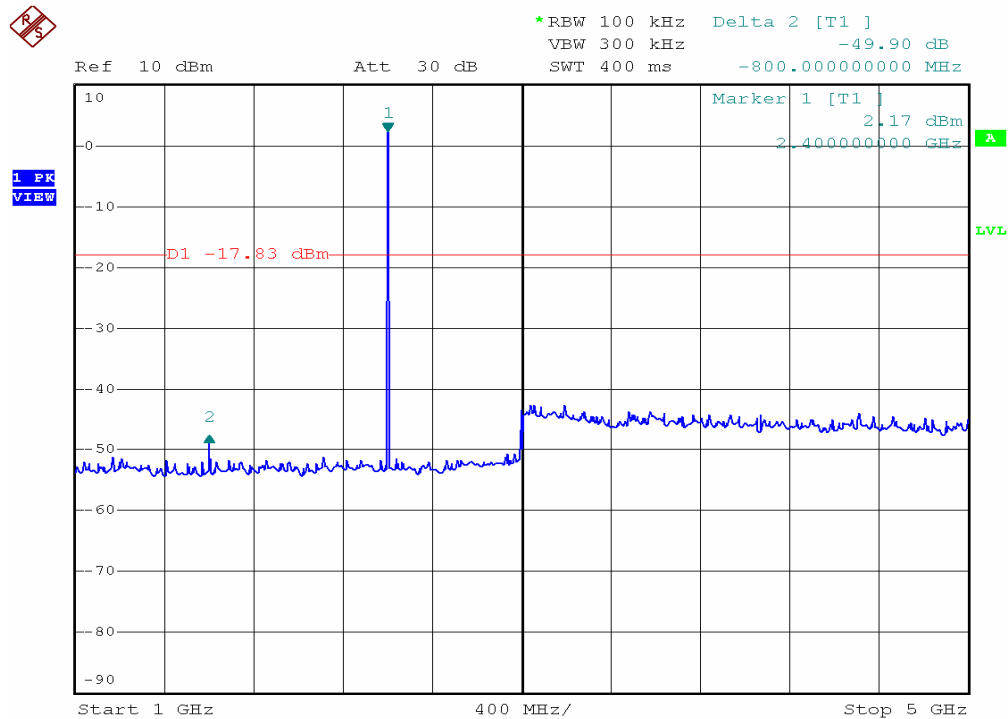

Date: 22.MAY.2007 16:18:09




5G to 25GHz

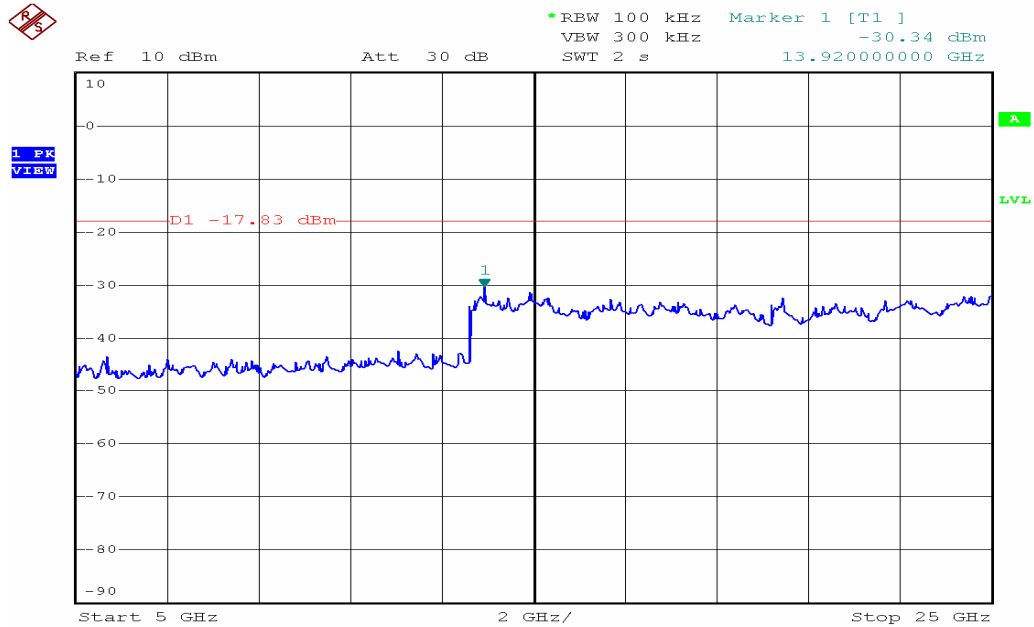

Date: 22.MAY.2007 16:18:40




Medium Channel (channel 39): 30M to 1GHz

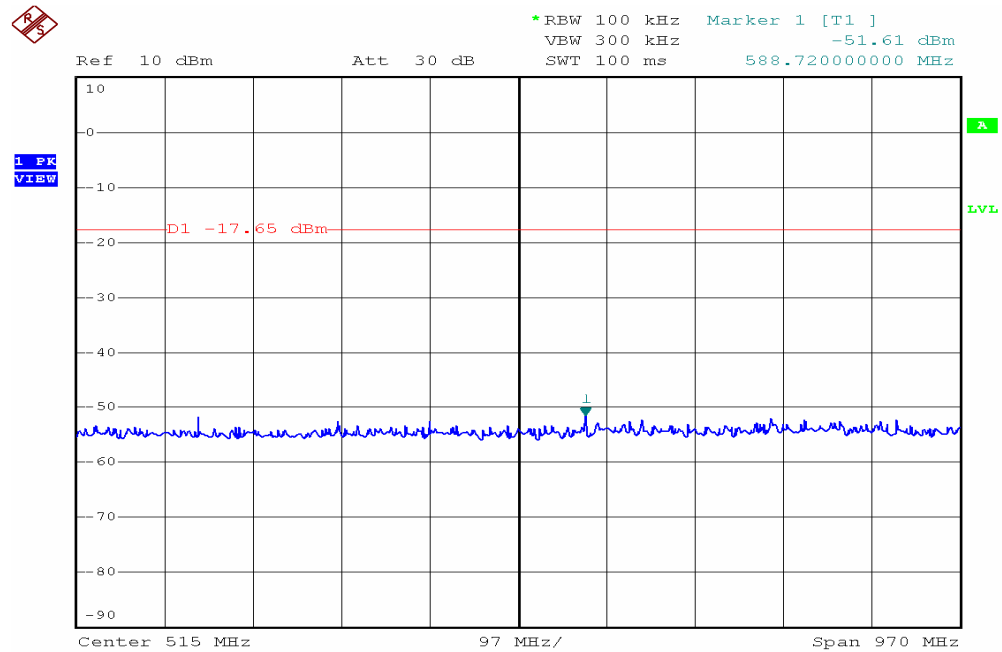

Date: 22.MAY.2007 16:21:58




1G to 5GHz

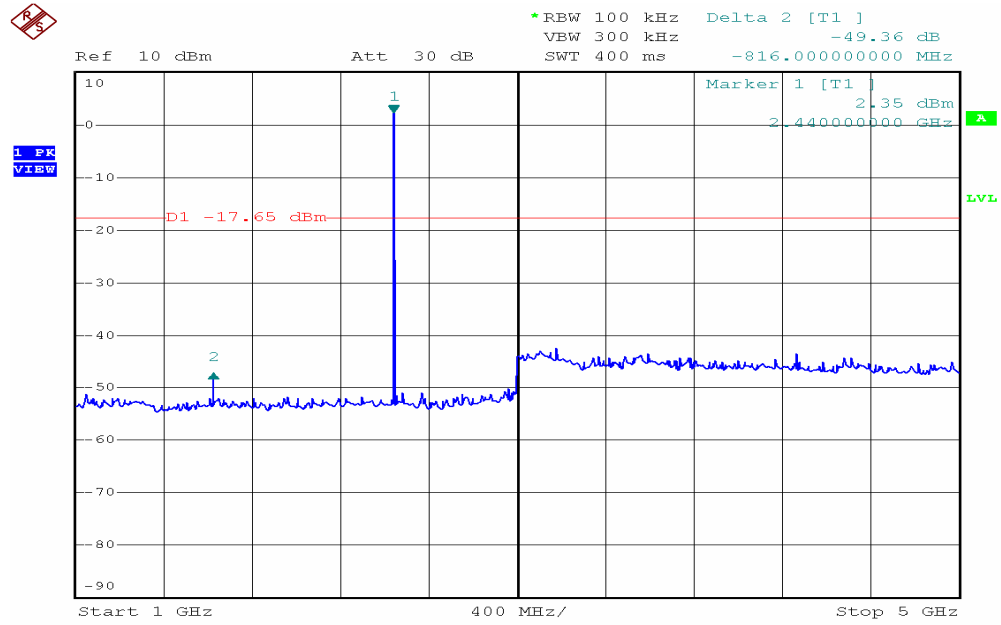

Date: 22.MAY.2007 16:20:20


5G to 25GHz

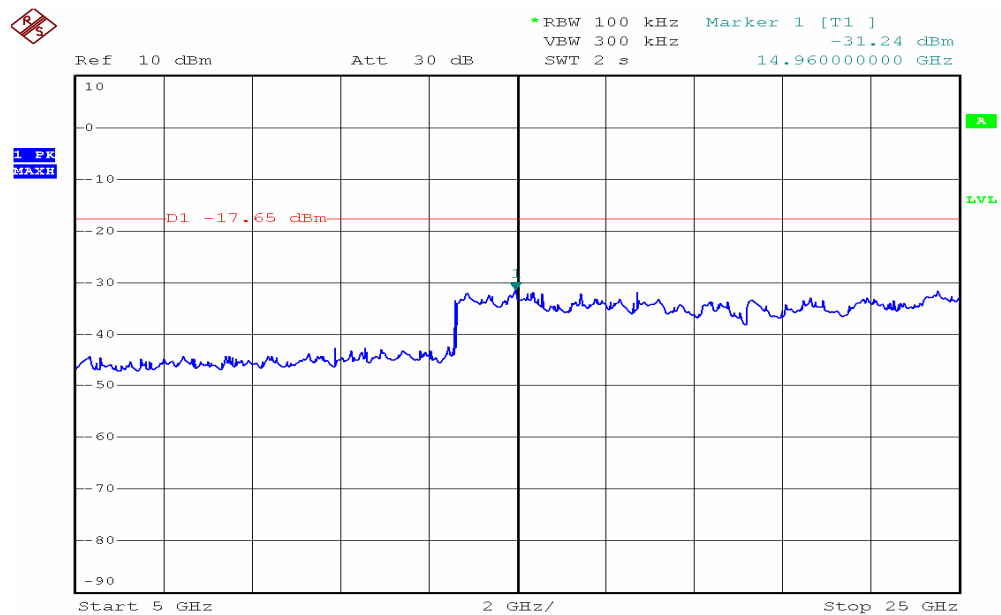

Date: 22.MAY.2007 16:20:52



Highest Channel (channel 78): 30M to 1GHz

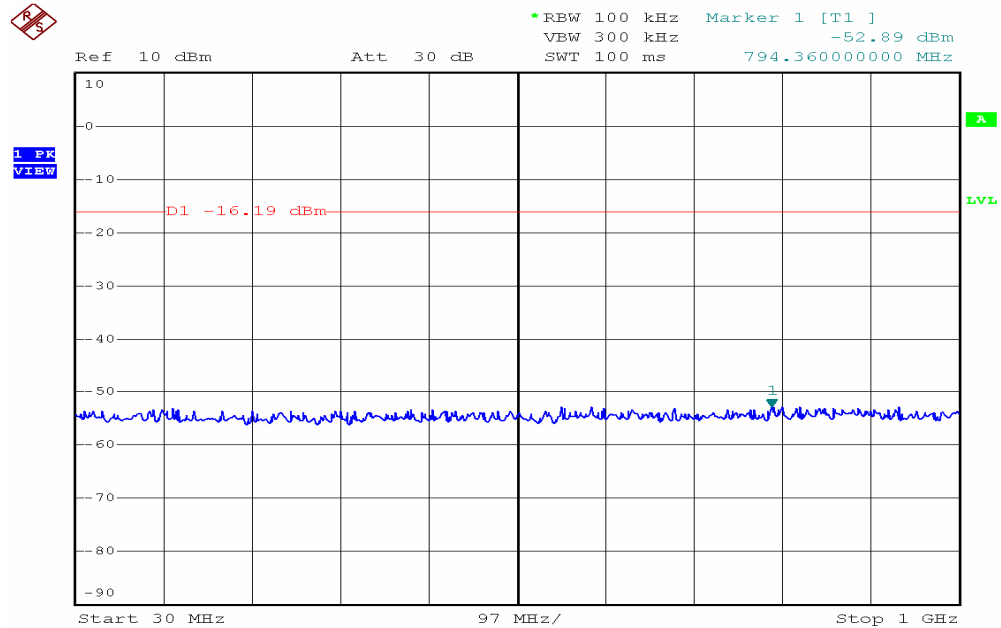


Date: 22.MAY.2007 16:24:00






### 1G to 5GHz

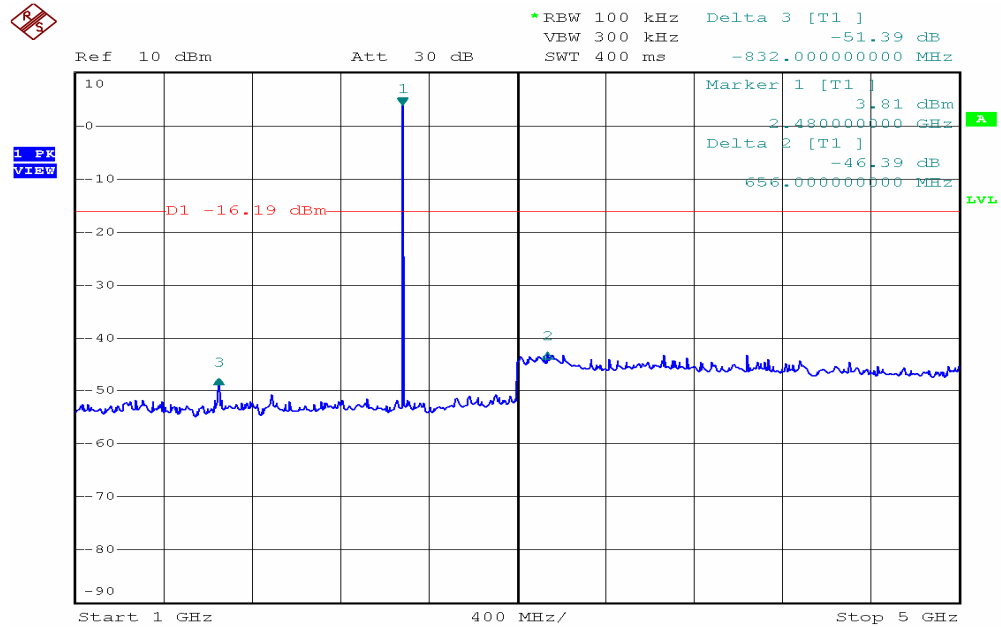

Date: 22.MAY.2007 16:23:02

### 5G to 25GHz

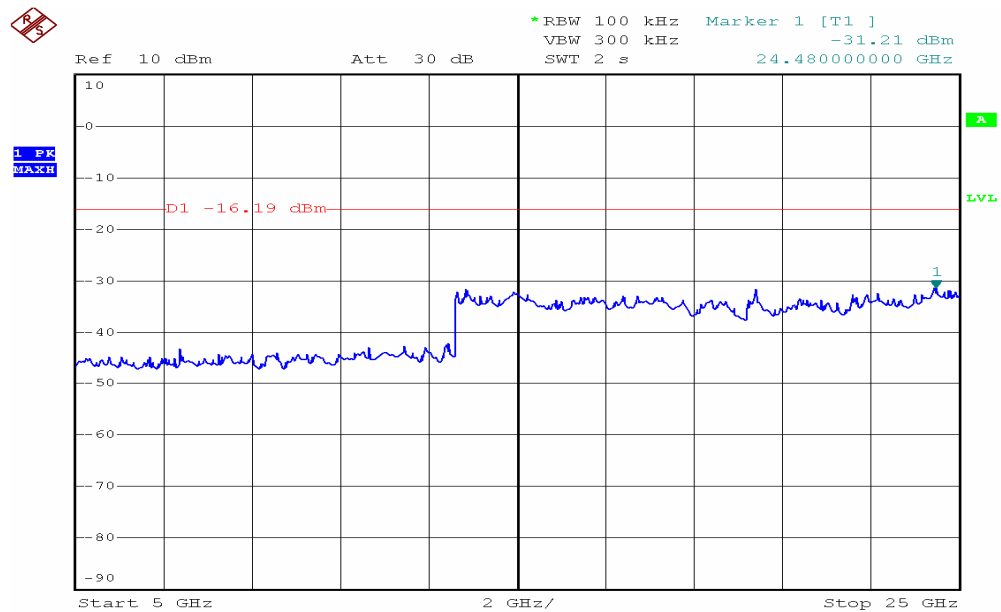



Date: 22.MAY.2007 16:23:33

## 6.5 Radiated Spurious Emissions

Test Requirement:	FCC 15.247(d) & 15.209 & 15.109
Test Method:	ANSI C63.4 section 8 & 13
Test Date:	22 May 2007
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber and OATS) Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz), 1 MHz resolution bandwidth and Peak and Average-Peak detector apply (1000 MHz – 25GHz). Receive antenna scan height 1 m - 4 m, polarization Vertical / Horizontal
15.209 & 15.109 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz
15.247(d) limit:	(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

### Test Configuration:

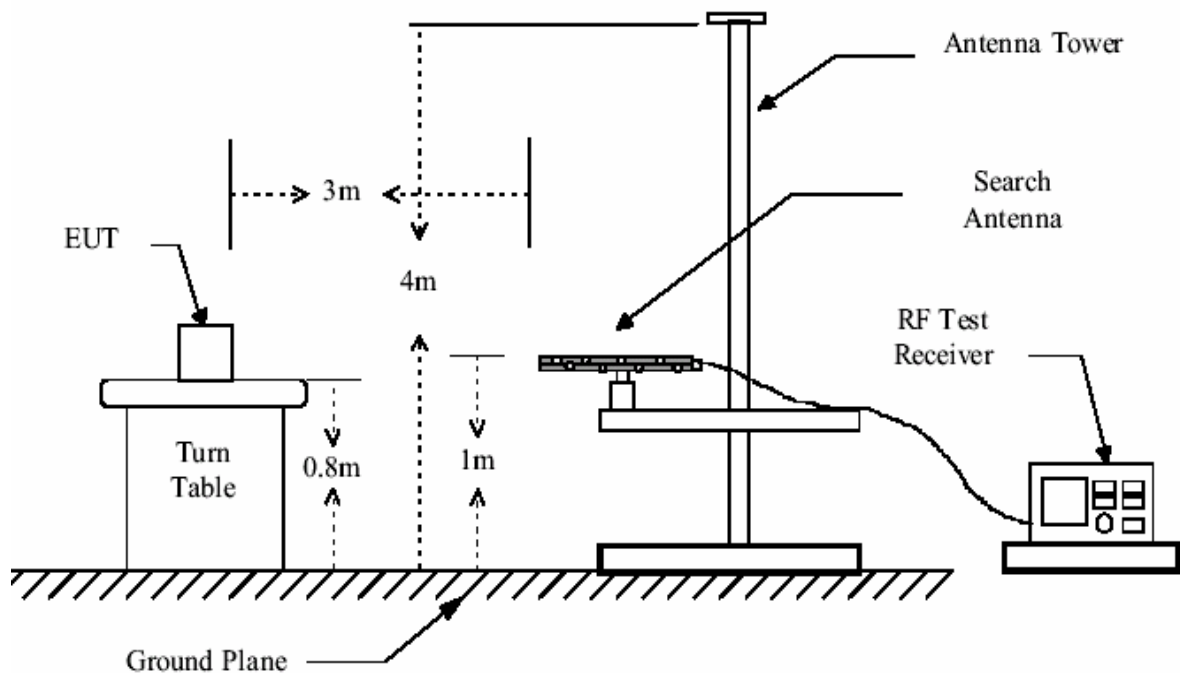

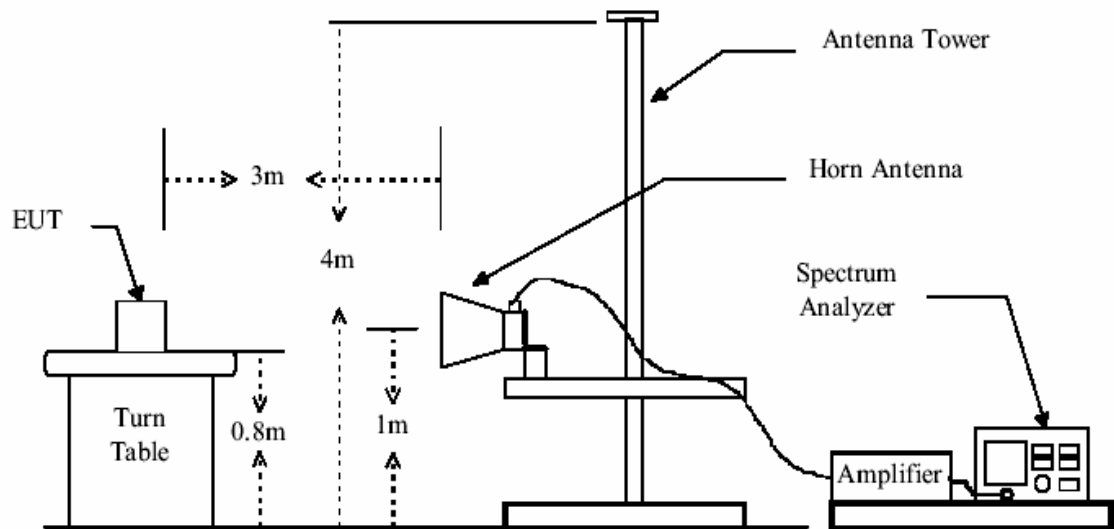



**Test Procedure:** The procedure used was ANSI Standard C63.4-2001. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Peramplifier Factor.

The following test results were performed on the EUT.

**Transmitter:**

**Test in Channel 0 in transmitting status-** Vertical polarization

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
237.580	32.0	46.0	14.0
334.580	37.0	46.0	9.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

**Peak Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804.000	52.0	74.0	22.0

**Average Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804.000	42.0	54.0	12.0

Remark: No other radiation has been found.



**Test in Channel 0 in transmitting status- Horizontal polarization**

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
94.990	31.8	43.5	11.7

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

**Peak Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804.000	53.3	74.0	20.7

**Average Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804.000	41.5	54.0	12.5

Remark: No other radiation has been found.

**Test in Channel 39 in transmitting status- Vertical polarization**

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
237.580	35.5	46.0	10.5

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

**Peak Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.000	52.0	74.0	22.0

**Average Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.000	43.3	54.0	10.7



**Test in Channel 39 in transmitting status- Horizontal polarization**

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
95.992	34.6	43.5	8.9

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

**Peak Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.000	54.3	74.0	19.7

**Average Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882.020	43.0	54.0	11.0

Remark: No other radiation has been found.

**Test in Channel 78 in transmitting status- Vertical polarization**

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
236.980	36.0	46.0	10.0

1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

**Peak Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960.000	54.0	74.0	20.0

**Average Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960.000	43.8	54.0	10.2

**Test in Channel 78 in transmitting status- Horizontal polarization**

30MHz~1GHz Spurious Emissions ,Quasi-Peak Measurement

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
99.980	34.2	43.5	9.3



1~25 GHz Harmonics & Spurious Emissions, Peak & Average Measurement

**Peak Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960.000	53.8	74.0	20.2

**Average Measurement**

Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960.000	40.3	54.0	13.7

Remark: No other radiation has been found.

**Receiver:**

30MHz~25 GHz Harmonics & Spurious Emissions


**None of radiation has been found in receiving mode.**

**TEST RESULTS: The unit does meet the FCC requirements.**

### 6.5.1 Radiated Emissions which fall in the restricted bands

Test Requirement:	Section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	Base on ANSI 63.4.
Test Date:	1 June 2007
Measurement Distance:	3m (Semi-Anechoic Chamber)
Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz
Detector:	Peak for pre-scan , 120kHz resolution bandwidth within 1GHz, 1MHz resolution bandwidth above 1GHz

### Test Configuration:

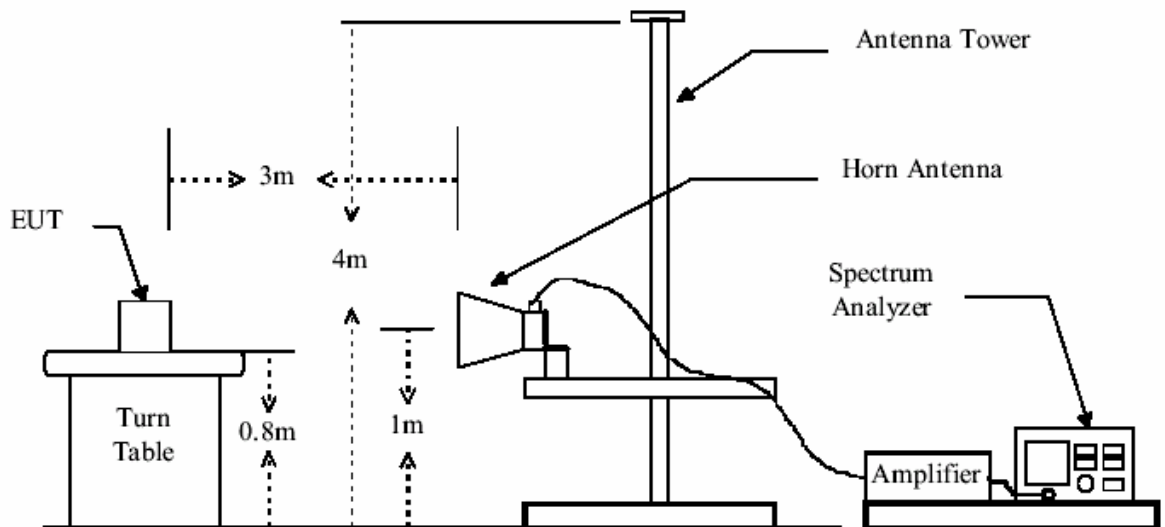





**Test Procedure:** The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

**Test Result:**

**1. Channel 0 ( 2.402GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	51.5	38.0	74.0	54.0	22.5	16.0
2483.500	52.2	39.0	74.0	54.0	21.8	15.0

**2. Channel 39 ( 2.441GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	51.8	38.0	74.0	54.0	22.2	16.0
2483.500	53.0	39.2	74.0	54.0	21.0	14.8

**3. Channel 79 ( 2.480GHz)**

Test Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	
					Peak	AV
2390.000	51.0	38.9	74.0	54.0	23.0	15.1
2483.500	51.8	39.5	74.0	54.0	22.2	14.5

**The unit does meet the FCC requirements.**



Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			



## **6.6 Band Edges Requirement**

Test Requirement:	FCC Part 15 C
Test Method:	Based on ANSI 63.4 Operation within the band 2400 – 2483.5 MHz
Test Date:	22 May 2007
Requirements:	Section 15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### **6.6.1 100 kHz Bandwidth Outside the Frequency Band**

Method of Measurement:	Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.
------------------------	---

#### **Test Result:**

The Lower Edge 2.4000GHz: the value is -36.86dB that is attenuated more than 20dB.

The Upper Edge 2.4835GHz: the value is -45.70dB that is attenuated more than 20dB.

**The unit does meet the FCC requirements.**

## 6.7 Hopping Channel Number

Test Requirement: FCC Part15 C

Test Method: Based on FCC Part15 C Section 15.247

Test Date: 22 May 2007


Requirements: Regulation 15.247 (a) (1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz, VBW = 300KHz, Sweep = auto; Detector Function = Peak.
3. Set the spectrum analyzer: start frequency = 2400MHz, stop frequency = 2483.5MHz. Record the max. hold reading graph.

**Test result:** Total channels are 79 channels, channel 0 to channel 78.

It also comply with the demand of frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. The Maximum peak conducted output power limit apply 1 watt according to regulation 15.247 (b)(1).

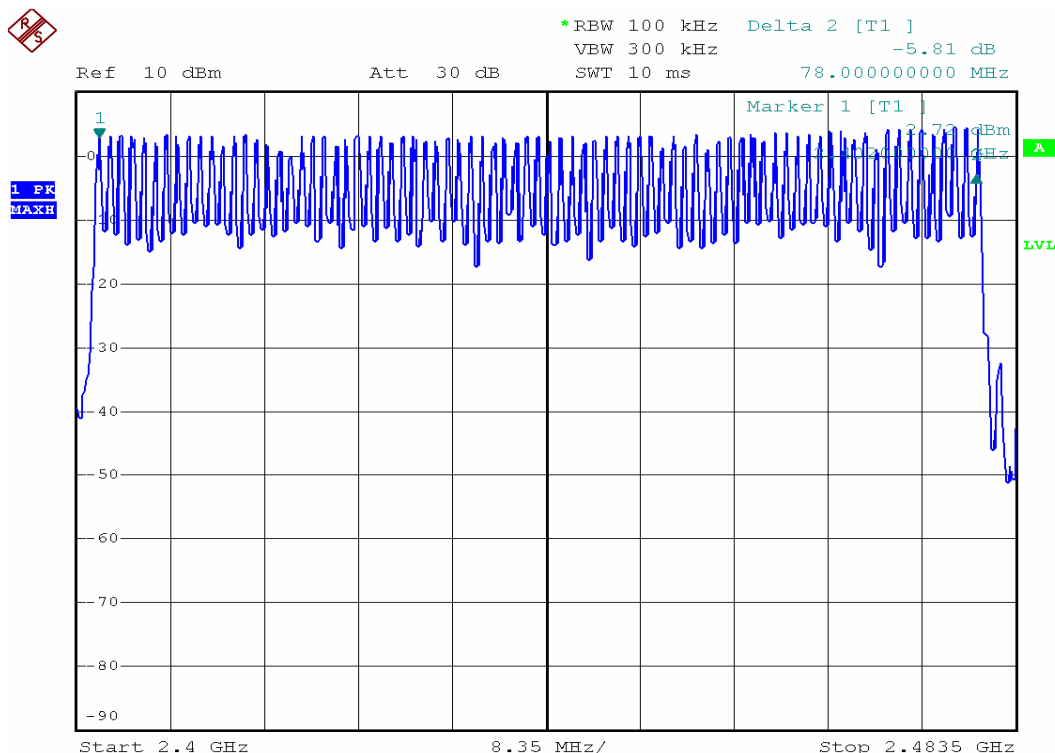

Date: 22.MAY.2007 16:48:31






**SGS-CSTC Standards  
Technical Services Ltd.**

Report No.: GLEMR070501390RFF


Page: 30 of 39

Channel 39:

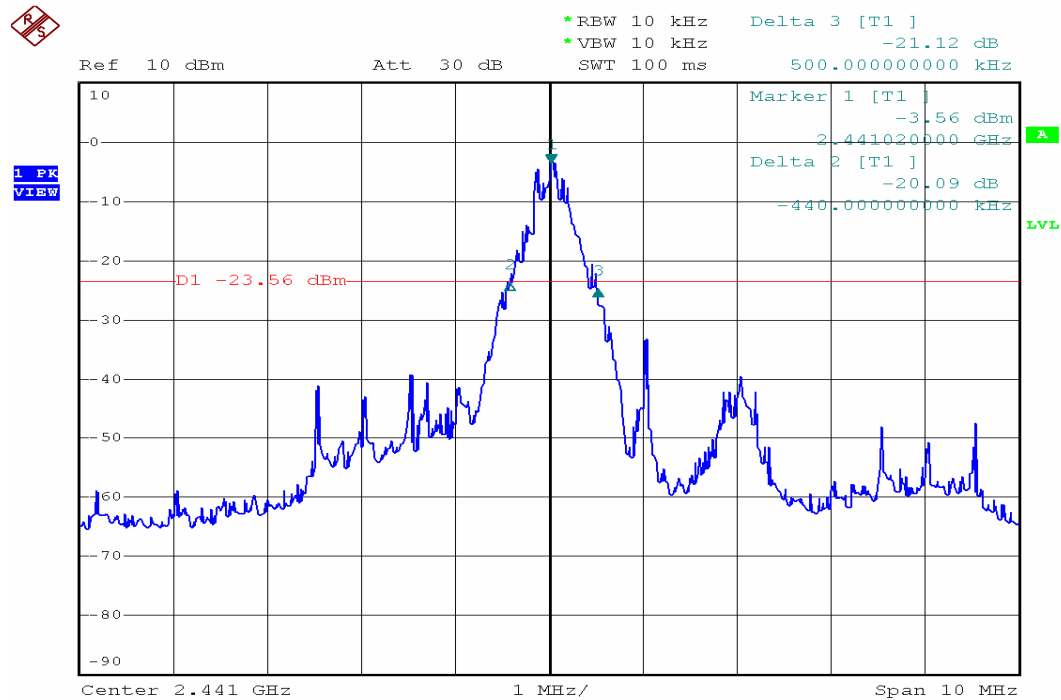

Date: 22.MAY.2007 16:33:47

Channel 78:

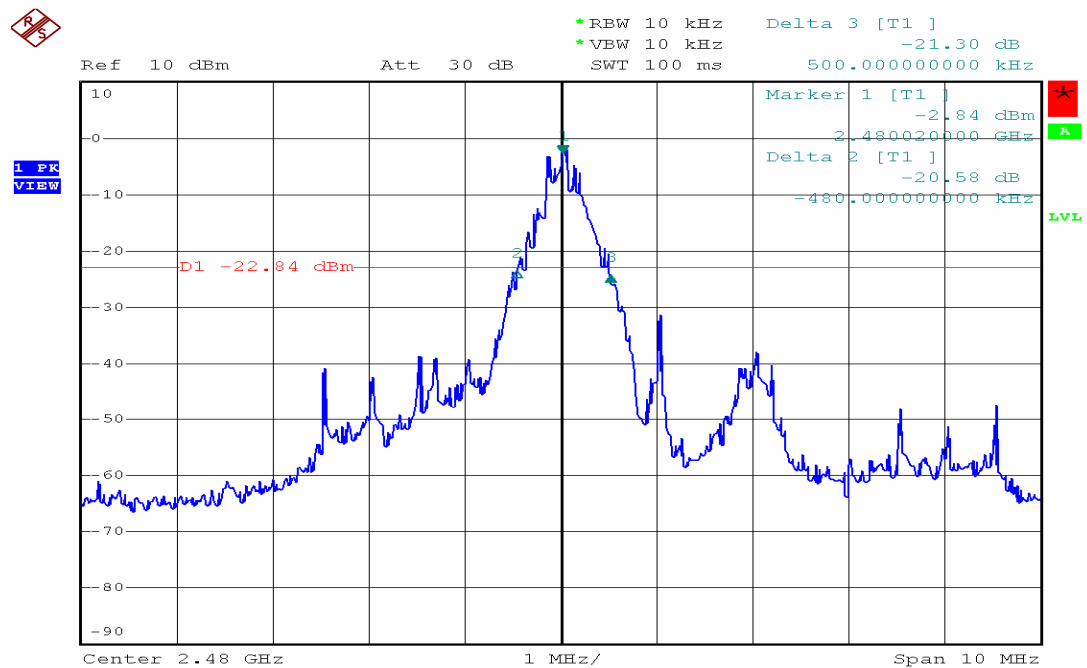

Date: 22.MAY.2007 16:36:25

## 6.9 Carrier Frequencies Separated

Test Requirement: FCC Part 15 C  
 Test Method: Based on FCC Part15 C Section 15.247:  
 Test Date: 22 May 2007  
 Test requirements: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span (set 100KHz), VBW  $\geq$  RBW (set 300KHz), Span = 10MHz, Sweep = auto; Detector Function = Peak (Max. hold).
3. Mark the peak frequency and -20dB.

### Test result:

Test Channel	Carrier Frequencies Separated	Limit	Verdict
Lower Channels (channel 0 and channel 1)	1.032MHz	>20dBm Occupied bandwidth	Pass
Middle Channels (channel 39 and channel 40)	0.972MHz		Pass
Middle Channels (channel 38 and channel 39)	1.044MHz		Pass
Upper Channels (channel 77 and channel 78)	0.996MHz		Pass




**SGS-CSTC Standards  
Technical Services Ltd.**

Report No.: GLEMR070501390RFF


Page: 32 of 39

Channel 0:

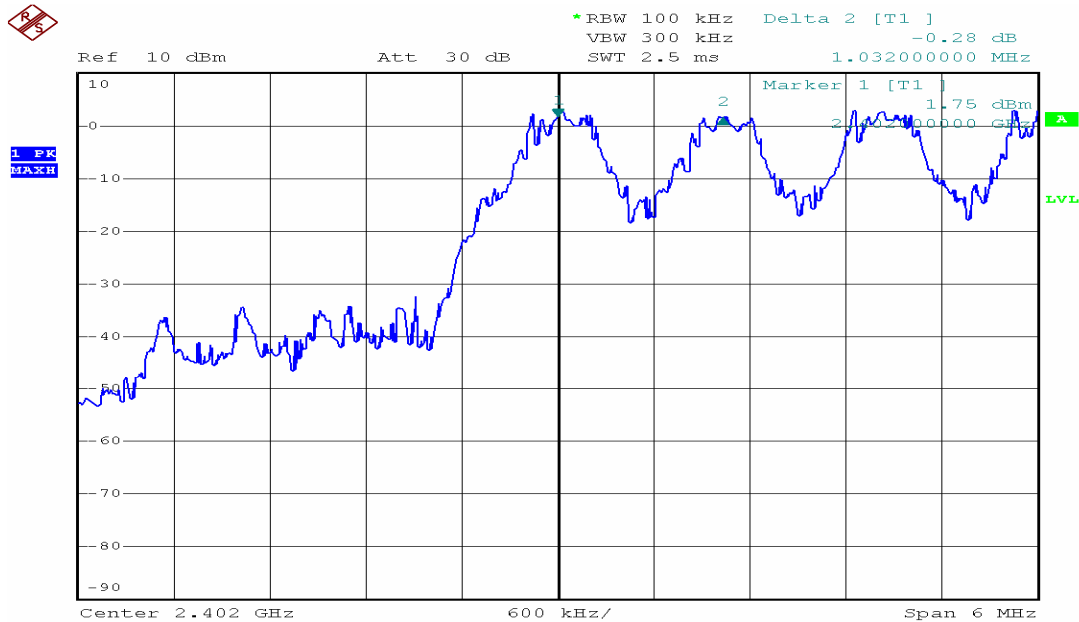

Date: 22.MAY.2007 16:49:41

Channel 39:

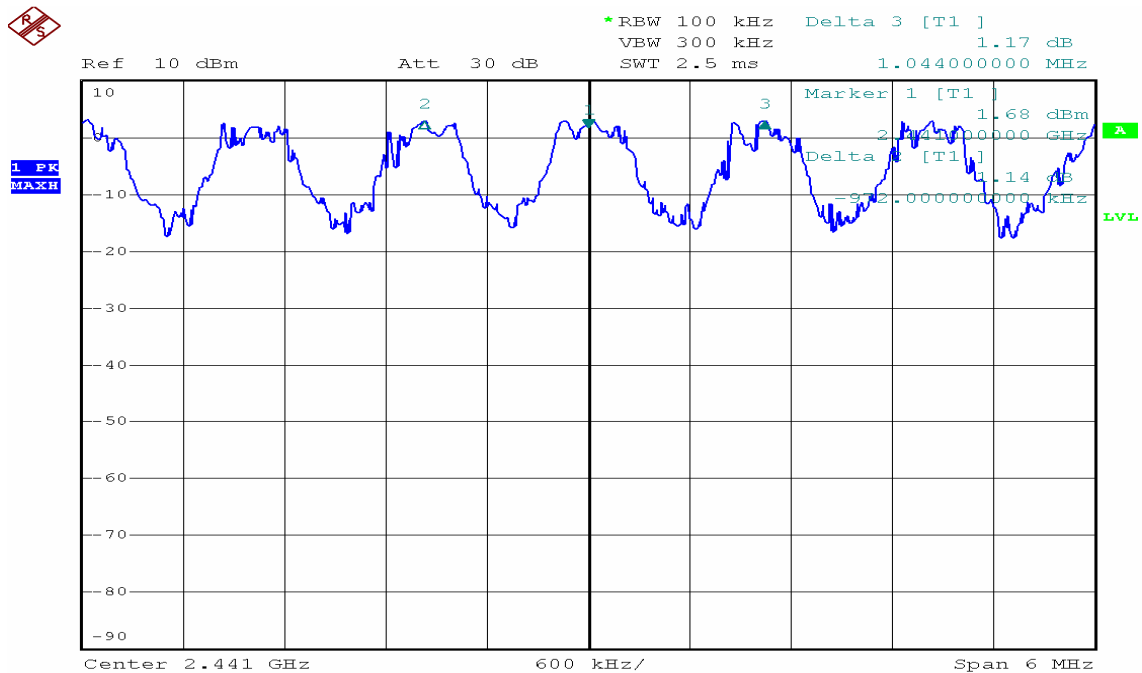


Date: 22.MAY.2007 16:50:50





Channel 78:

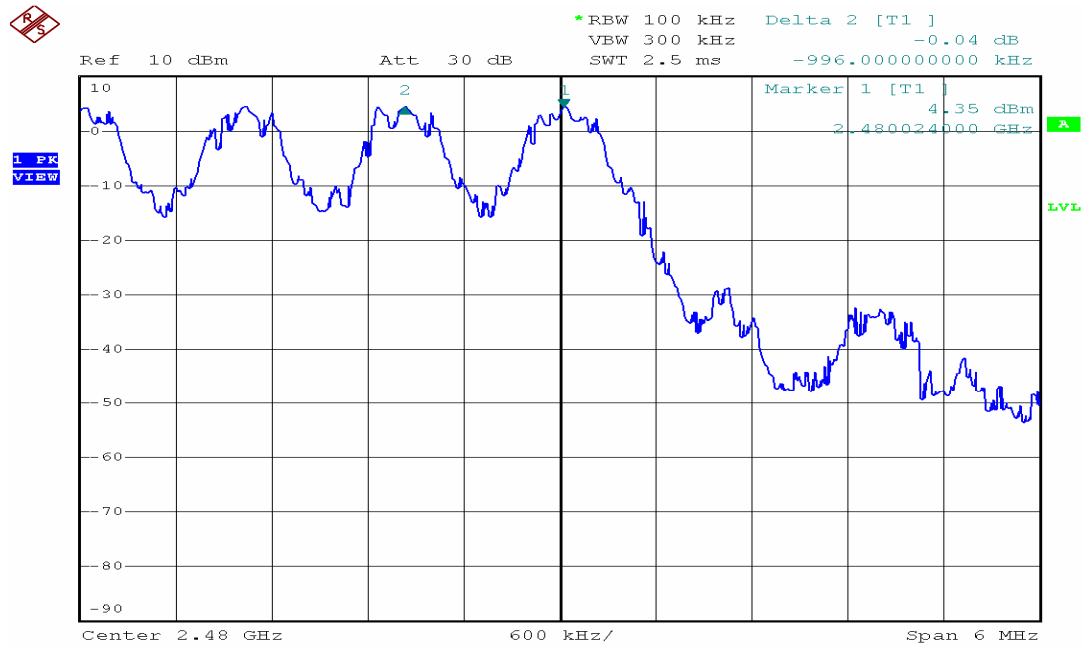

Date: 22.MAY.2007 16:51:45



## 6.10 Dwell Time

Test Requirement:	FCC Part 15 C
Test Method:	Based on FCC Part15 C Section 15.247:
Test Date:	22 May 2007
Test requirements:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set RBW of spectrum analyzer to 1MHz and VBW of spectrum analyzer to 1MHz, Set the test channel frequency span to 0.

### Test Result:

The test period:  $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

#### 1. **Channel 0:** 2.402GHz

DH1 time slot =  $0.400 \text{ (ms)} \times (1600/(2 \times 79)) \times 31.6 = 129.215 \text{ ms}$

DH3 time slot =  $1.644 \text{ (ms)} \times (1600/(4 \times 79)) \times 31.6 = 265.539 \text{ ms}$

DH5 time slot =  $2.919 \text{ (ms)} \times (1600/(6 \times 79)) \times 31.6 = 314.318 \text{ ms}$

#### 2. **Channel 39:** 2.441GHz

DH1 time slot =  $0.392 \text{ (ms)} \times (1600/(2 \times 79)) \times 31.6 = 126.632 \text{ ms}$

DH3 time slot =  $1.656 \text{ (ms)} \times (1600/(4 \times 79)) \times 31.6 = 267.477 \text{ ms}$

DH5 time slot =  $2.919 \text{ (ms)} \times (1600/(6 \times 79)) \times 31.6 = 314.318 \text{ ms}$

#### 3. **Channel 78:** 2.4835GHz

DH1 time slot =  $0.392 \text{ (ms)} \times (1600/(2 \times 79)) \times 31.6 = 126.632 \text{ ms}$

DH3 time slot =  $1.656 \text{ (ms)} \times (1600/(4 \times 79)) \times 31.6 = 235.998 \text{ ms}$

DH5 time slot =  $2.898 \text{ (ms)} \times (1600/(6 \times 79)) \times 31.6 = 312.567 \text{ ms}$

The results are not be greater than 0.4 seconds.


**The unit does meet the FCC requirements.**

Please refer the graph as below:




1. Lowest channel (2.402 GHz):

(1). DH1

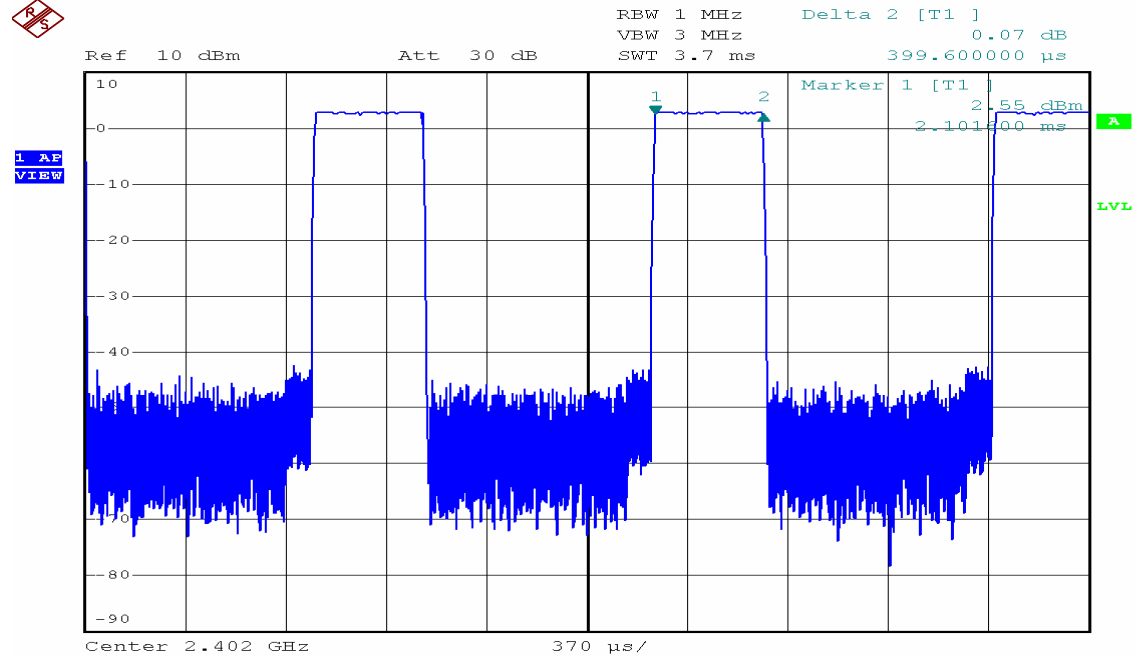

Date: 22.MAY.2007 16:38:49

(2) DH3:

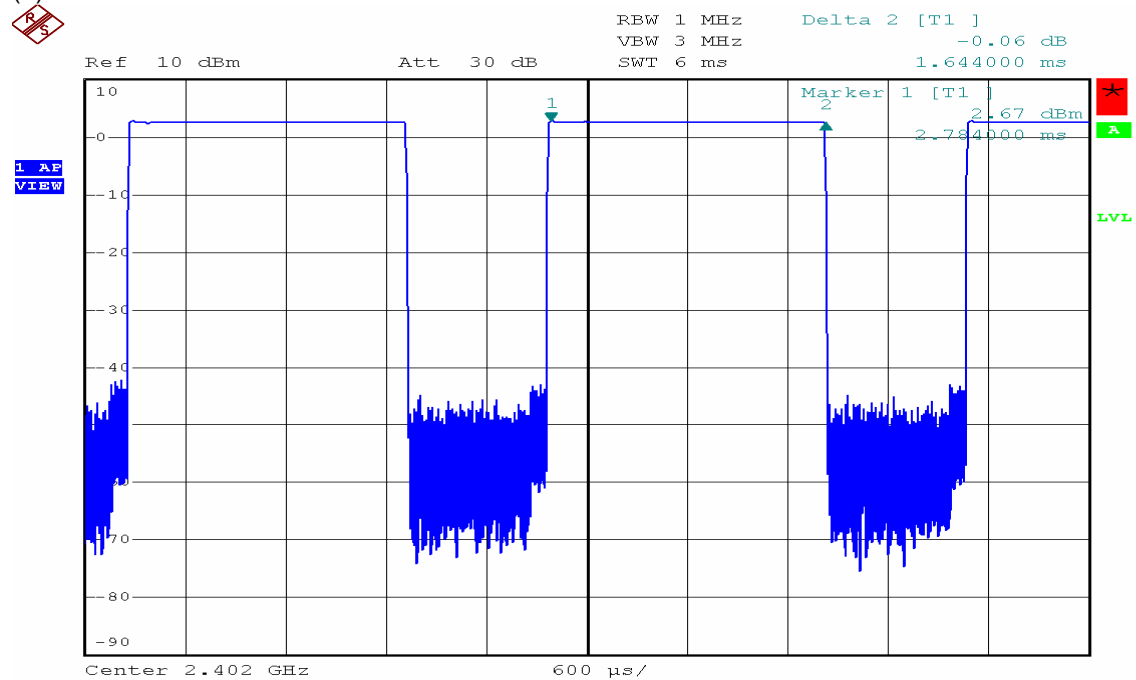


Date: 22.MAY.2007 16:42:55



1. Lowest channel (2.402 GHz):


(3). DH5:

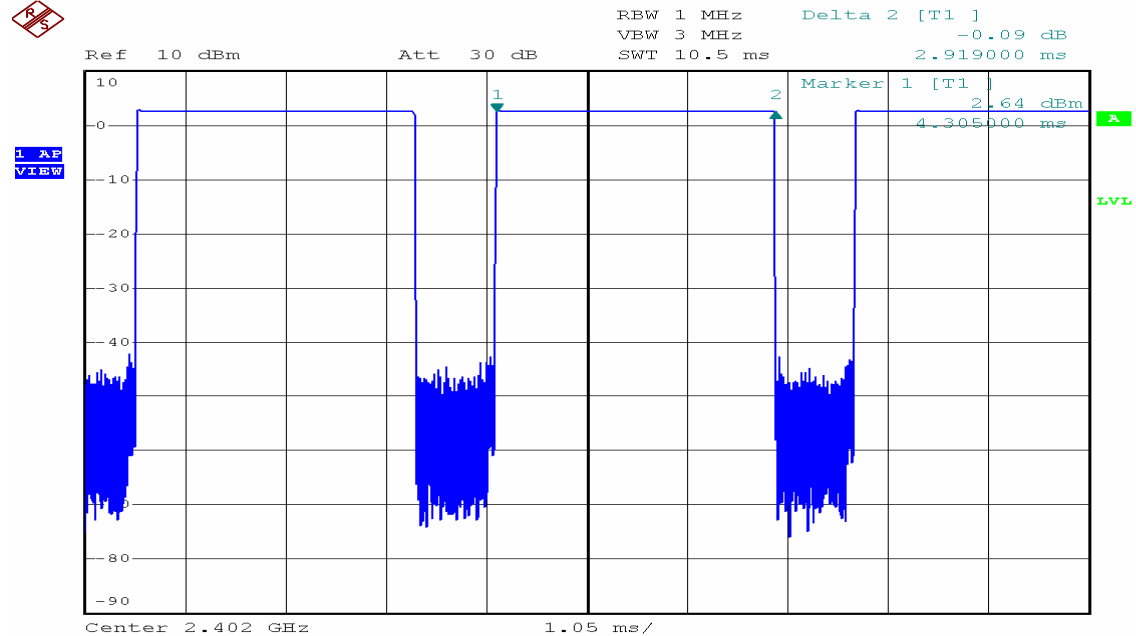

Date: 22.MAY.2007 16:43:56

2. Middle Channel (2.441GHz)

(1) DH1

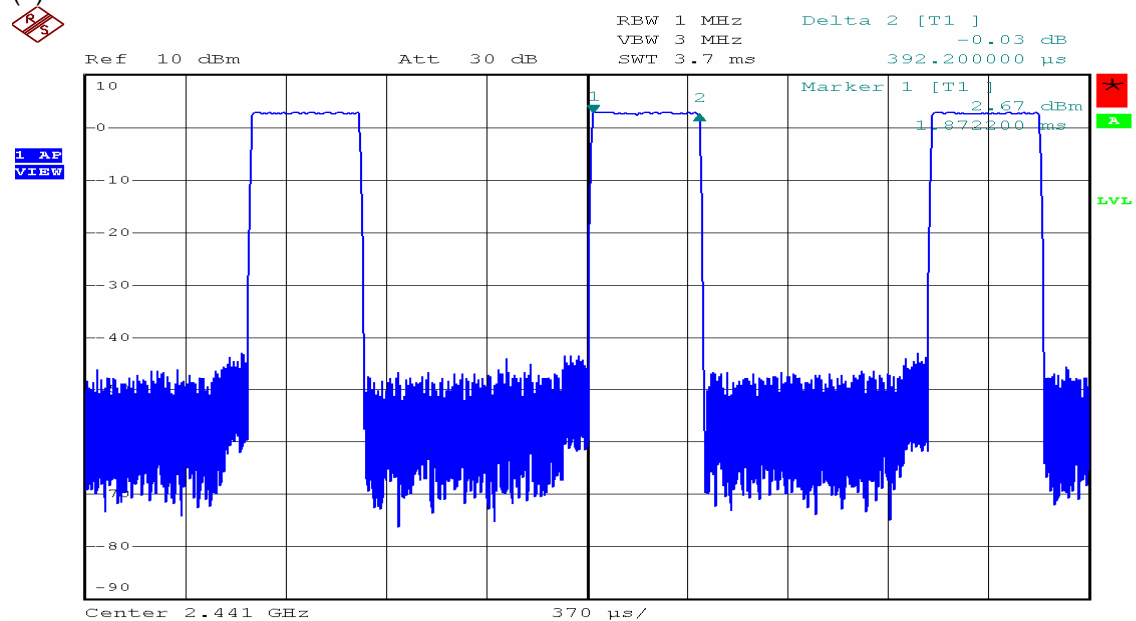


Date: 22.MAY.2007 16:39:30




## 2. Middle Channel (2.441GHz)

### (2) DH3

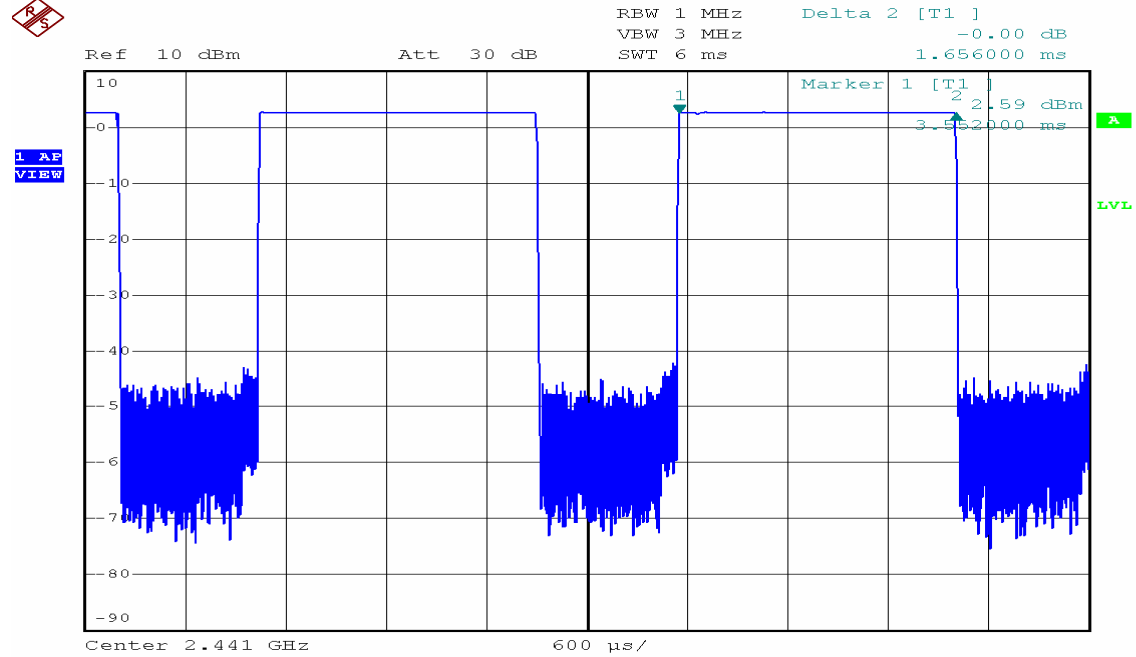

Date: 22.MAY.2007 16:42:08

### (3) DH5

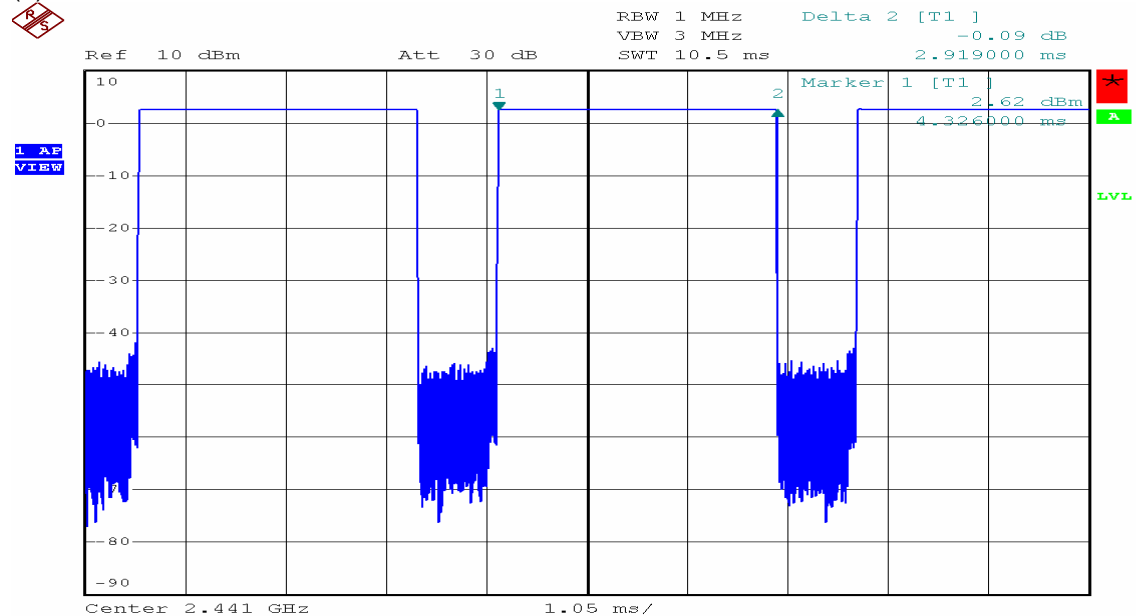


Date: 22.MAY.2007 16:44:30




### 3. Highest channel (2.480GHz)

#### (1). DH1

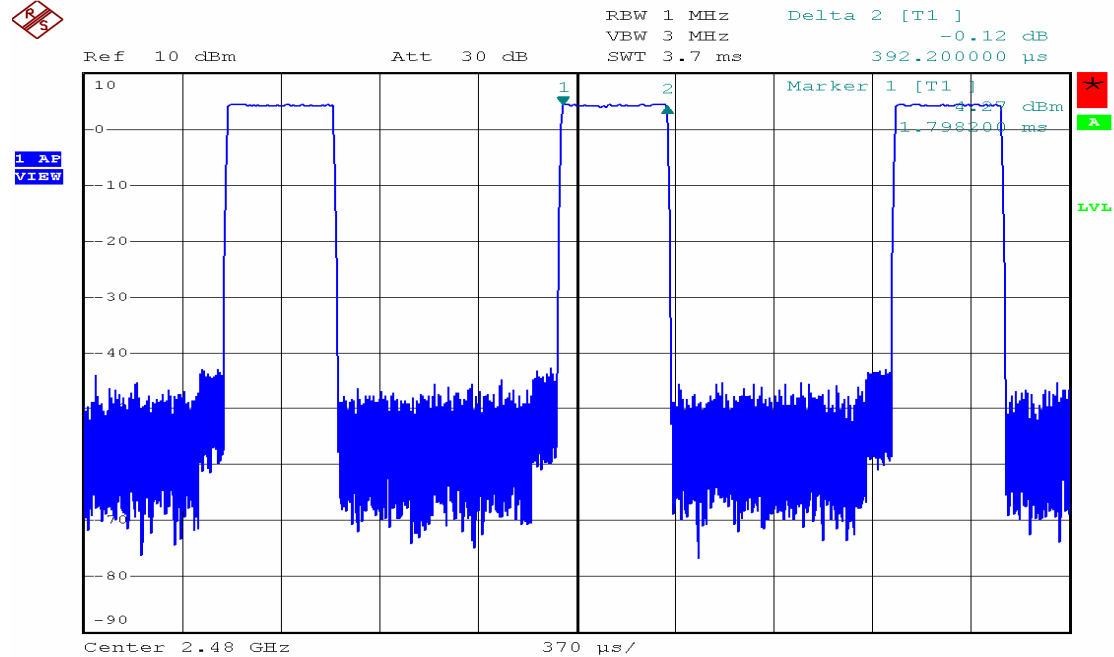

Date: 22.MAY.2007 16:40:15

#### (2). DH3

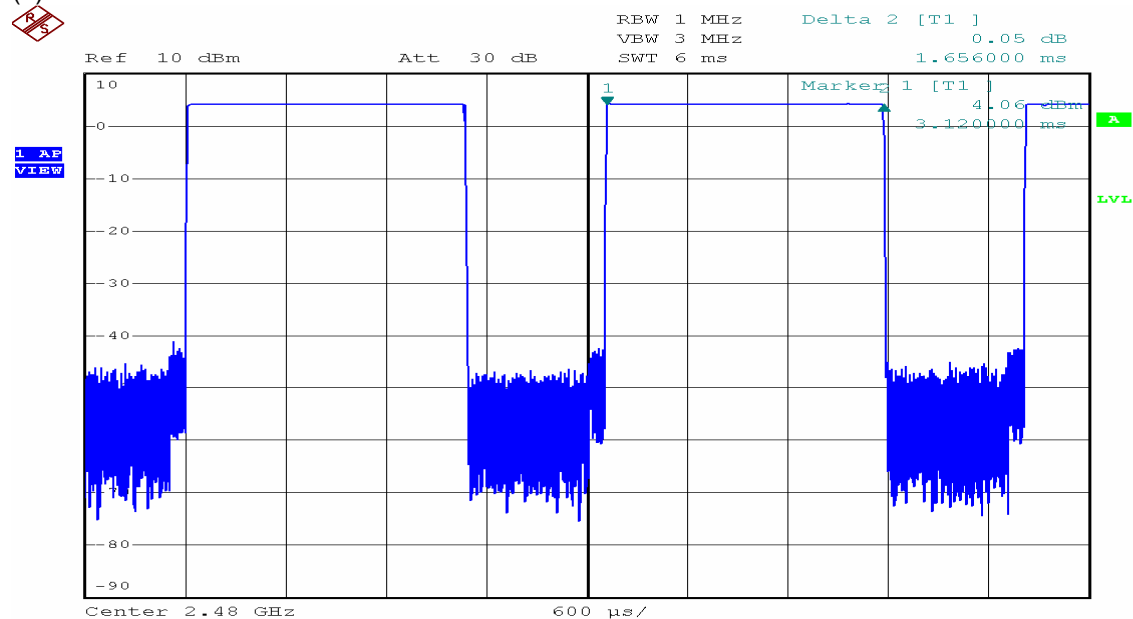


Date: 22.MAY.2007 16:41:18



### 3. Highest channel (2.480GHz)

#### (3). DH5

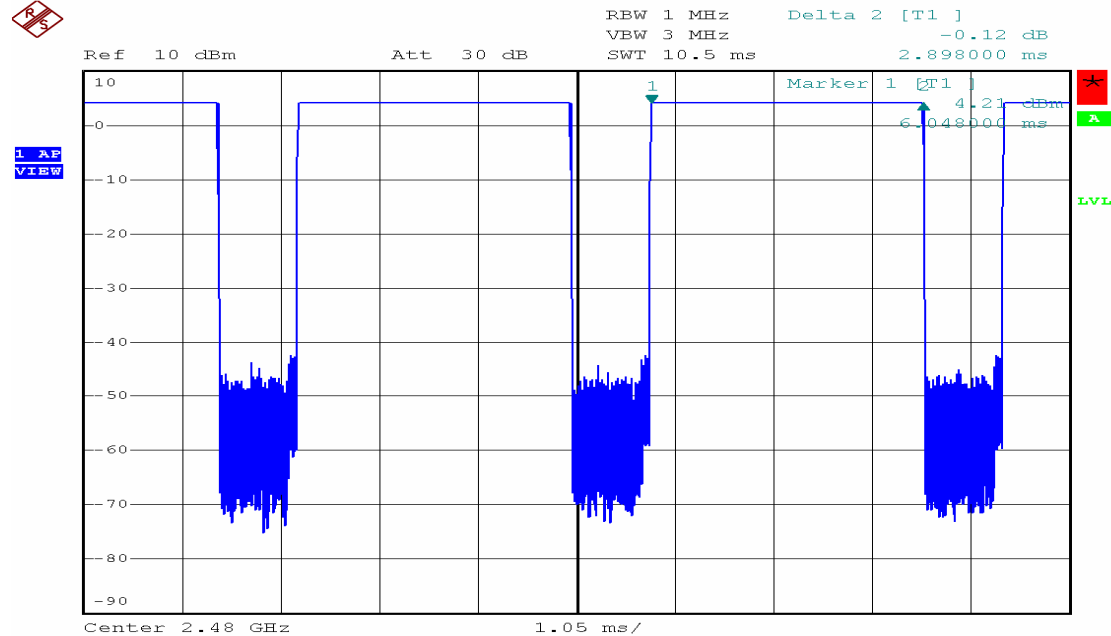

Date: 22.MAY.2007 16:45:07

## 6.11 Antenna Requirement

### 6.11.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Regulation 15.247(c) (1)(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### 6.11.2 Antenna Construction

The antenna is integrated on the main PCB and no consideration of replacement.