



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: sgs_internet_operations@sgs.com

Report No.: SZEMO10060344101
Page: 1 of 66


FCC REPORT

Application No: SZEMO100603441RF
Applicant: Unifat Technology Limited
Product Name: Bluetooth speakerphone with TTS
Operation Frequency: 2.402GHz to 2.480GHz
FCC ID: RIIIBTS28V05
Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
Date of Receipt: 2010-06-12
Date of Test: 2010-06-30 to 2010-08-16
Date of Issue: 2010-08-17

| | |
|----------------------|---------------|
| Test Result : | PASS * |
|----------------------|---------------|

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

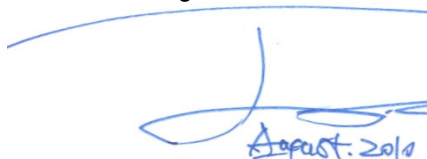

August 2010

Jack Zhang
Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Contents

| | Page |
|-------------------------------------------------------------------|----------|
| | 1 |
| 2 CONTENTS | 2 |
| 3 TEST SUMMARY | 3 |
| 4 GENERAL INFORMATION | 4 |
| 4.1 CLIENT INFORMATION | 4 |
| 4.2 GENERAL DESCRIPTION OF E.U.T. | 4 |
| 4.3 E.U.T OPERATION MODE | 6 |
| 4.4 TEST FACILITY | 7 |
| 4.5 TEST LOCATION | 7 |
| 4.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER | 7 |
| 4.7 TEST INSTRUMENTS LIST | 8 |
| 5 TEST RESULTS AND MEASUREMENT DATA | 9 |
| 5.1 ANTENNA REQUIREMENT: | 9 |
| 5.2 CONDUCTED PEAK OUTPUT POWER | 10 |
| 5.3 20dB OCCUPY BANDWIDTH | 17 |
| 5.4 CARRIER FREQUENCIES SEPARATION | 23 |
| 5.5 HOPPING CHANNEL NUMBER | 30 |
| 5.6 DWELL TIME | 33 |
| 5.7 BAND EDGE | 39 |
| 5.8 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS | 46 |
| 5.9 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 56 |
| 5.10 RADIATED EMISSION | 57 |
| 5.10.1 Radiated emission below 1GHz | 59 |
| 5.10.2 Transmitter emission above 1GHz | 60 |
| 5.10.3 Band Edge and Restricted band (Radiated measurement) | 63-66 |



3 Test Summary

| Test Item | Section in CFR 47 | Result |
|-----------------------------------------|--------------------------------------------------|--------|
| Antenna Requirement | 15.203/15.247 (c) | Passed |
| Conducted Peak Output Power | 15.247 (b)(1) | Passed |
| 20dB Occupied Bandwidth | 15.247 (a)(1) | Passed |
| Carrier Frequencies Separation | 15.247 (a)(1) | Passed |
| Hopping Channel Number | 15.247 (b) | Passed |
| Dwell Time | 15.247 (a)(1) | Passed |
| Pseudorandom Frequency Hopping Sequence | 15.247(b)(4)&TCB Exclusion List (7 July 2002) | Passed |
| Radiated Emission | 15.205/15.209 | Passed |
| Band Edge | 15.247(d) | Passed |

Remark: Passed: The EUT complies with the essential requirements in the standard.

Failed: The EUT does not comply with the essential requirements in the standard.

4 General Information

4.1 Client Information

| | |
|-----------------------|---------------------------------------------------------------------------------|
| Applicant: | Unifat Technology Limited |
| Address of Applicant: | 7/F., SUI HONG IND. BLDG., 547-549 CASTLE PEAK RD., KWAI CHUNG, N.T., Hong Kong |
| Factory: | DONGGUAN EASYFAT ELECTRONIC MFY. SIMA CHANG PING |
| Address of Factory: | Sheima Sheung, Shueng Ping Chang, Dongguan, People's Republic of China |

4.2 General Description of E.U.T.

| | |
|----------------------|-------------------------------------------------------|
| Product Name: | Bluetooth speakerphone with TTS |
| Trade Name: | N/A |
| Item No.: | BTS28VB05 |
| Operation Frequency: | 2402MHz~2480MHz |
| Channel numbers: | 79 |
| Channel separation: | 1MHz |
| Modulation type: | GFSK, Pi/4QPSK, 8DPSK |
| Antenna Type: | Integral |
| Antenna gain: | 3dBi |
| Power supply: | Model: SAC Input: DC 12-24V Output: DC 5V 650mA |
| Battery: | 3.7V 650mAh (recharge) |



| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402MHz | 21 | 2422MHz | 41 | 2442MHz | 61 | 2462MHz |
| 2 | 2403MHz | 22 | 2423MHz | 42 | 2443MHz | 62 | 2463MHz |
| 3 | 2404MHz | 23 | 2424MHz | 43 | 2444MHz | 63 | 2464MHz |
| 4 | 2405MHz | 24 | 2425MHz | 44 | 2445MHz | 64 | 2465MHz |
| 5 | 2406MHz | 25 | 2426MHz | 45 | 2446MHz | 65 | 2466MHz |
| 6 | 2407MHz | 26 | 2427MHz | 46 | 2447MHz | 66 | 2467MHz |
| 7 | 2408MHz | 27 | 2428MHz | 47 | 2448MHz | 67 | 2468MHz |
| 8 | 2409MHz | 28 | 2429MHz | 48 | 2449MHz | 68 | 2469MHz |
| 9 | 2410MHz | 29 | 2430MHz | 49 | 2450MHz | 69 | 2470MHz |
| 10 | 2411MHz | 30 | 2431MHz | 50 | 2451MHz | 70 | 2471MHz |
| 11 | 2412MHz | 31 | 2432MHz | 51 | 2452MHz | 71 | 2472MHz |
| 12 | 2413MHz | 32 | 2433MHz | 52 | 2453MHz | 72 | 2473MHz |
| 13 | 2414MHz | 33 | 2434MHz | 53 | 2454MHz | 73 | 2474MHz |
| 14 | 2415MHz | 34 | 2435MHz | 54 | 2455MHz | 74 | 2475MHz |
| 15 | 2416MHz | 35 | 2436MHz | 55 | 2456MHz | 75 | 2476MHz |
| 16 | 2417MHz | 36 | 2437MHz | 56 | 2457MHz | 76 | 2477MHz |
| 17 | 2418MHz | 37 | 2438MHz | 57 | 2458MHz | 77 | 2478MHz |
| 18 | 2419MHz | 38 | 2439MHz | 58 | 2459MHz | 78 | 2479MHz |
| 19 | 2420MHz | 39 | 2440MHz | 59 | 2460MHz | 79 | 2480MHz |
| 20 | 2421MHz | 40 | 2441MHz | 60 | 2461MHz | | |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel | Frequency |
|---------------------|-----------|
| The lowest channel | 2402MHz |
| The middle channel | 2441MHz |
| The Highest channel | 2480MHz |



4.3 E.U.T Operation mode

| | |
|-------------------------------|----------------------------------------------------------------------------------------------------|
| Operating Environment: | |
| Temperature: | 24.0 °C |
| Humidity: | 52 % RH |
| Atmospheric Pressure: | 1008 mbar |
| Test mode: | |
| Charge mode: | Keep the DC adapter charging to EUT |
| Charge+ Bluetooth mode: | Keep the EUT communicating with other Bluetooth device, at the same time, DC adapter charge to EUT |
| Bluetooth mode: | Keep the EUT communicating with other Bluetooth device |
| Transmitting mode: | Keep the EUT in transmitting mode with modulation. |



4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

No tests were sub-contracted.

4.6 Other Information Requested by the Customer

None.


**4.7 Test Instruments list**

| RE in Chamber | | | | | | |
|----------------------|-----------------------------------|------------------------------------------|-----------------------------|----------------------|----------------------------------|--------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (yyyy-mm-dd) | Cal.Due date (yyyy-mm-dd) |
| 1 | 3m Semi-Anechoic Chamber | ETS-LINDGREN | N/A | SEL0017 | 2010-06-17 | 2011-06-17 |
| 2 | EMI Test Receiver | Rohde & Schwarz | ESIB26 | SEL0023 | 2009-11-05 | 2010-11-05 |
| 3 | EMI Test software | AUDIX | E3 | SEL0050 | N/A | N/A |
| 4 | Coaxial cable | SGS | N/A | SEL0028 | 2008-06-18 | 2011-06-18 |
| 5 | BiConiLog Antenna (26-3000MHz) | ETS-LINDGREN | 3142C | SEL0015 | 2009-11-05 | 2010-11-05 |
| 6 | Double-ridged horn (1-18GHz) | ETS-LINDGREN | 3117 | SEL0006 | 2009-11-10 | 2010-11-10 |
| 7 | Horn Antenna (18-26GHz) | ETS-LINDGREN | 3160 | SEL0076 | 2009-11-10 | 2010-11-10 |
| 8 | Pre-amplifier (0.1-1300MHz) | Agilent Technologies | 8447D | SEL0053 | 2010-06-02 | 2011-06-02 |
| 9 | Pre-Amplifier (0.1-26.5GHz) | Compliance Directions Systems Inc. | PAP-0126 | SEL0168 | 2009-12-18 | 2010-12-18 |
| 10 | Pre-amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | SEL0080 | 2010-06-04 | 2011-06-04 |
| 11 | Band filter | Amindeon | 82346 | SEL0094 | 2010-06-02 | 2011-06-02 |


| RF conducted | | | | | | |
|---------------------|-----------------------|---------------------|------------------|----------------------|----------------------------------|--------------------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (yyyy-mm-dd) | Cal.Due date (yyyy-mm-dd) |
| 1 | Spectrum Analyzer | Rohde & Schwarz | FSP 30 | SEL0154 | 2009-10-22 | 2010-10-22 |
| 2 | Coaxial cable | SGS | N/A | SEL0028 | 2008-06-18 | 2011-06-18 |

5 Test results and Measurement Data

5.1 Antenna requirement:
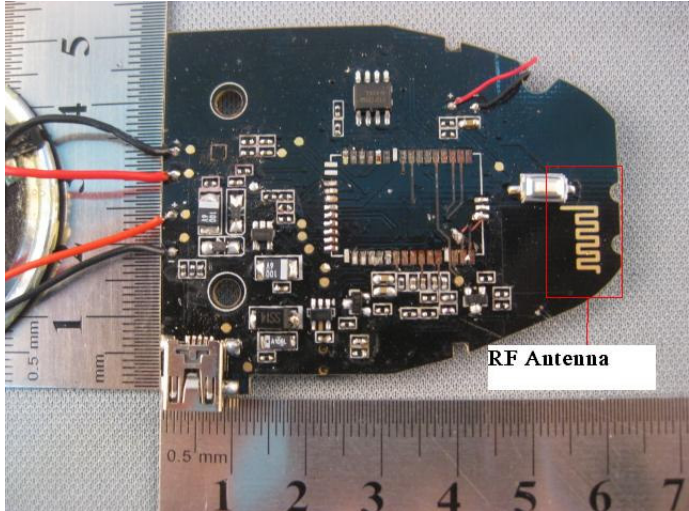
| | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 /247(c) |
| <p>15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p>15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p> | |
| E.U.T Antenna: |  |
| <p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.</p> | |

5.2 Conducted Peak Output Power
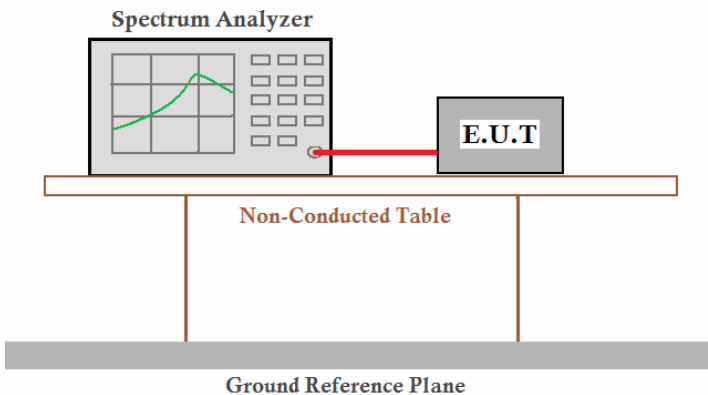
| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(1) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Limit: | 30dBm |
| Test setup: |  <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p> |
| Test Instruments: | Refer to section 4.7 for details |
| Test state: | Non-hopping transmitting with all kinds of modulation. |
| Test results: | Passed |


**Measurement Data**

| GFSK mode | | | |
|---------------|-------------------------|-------------|--------|
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 5.87 | 30.00 | Pass |
| Middle | 5.35 | 30.00 | Pass |
| Highest | 4.08 | 30.00 | Pass |
| Pi/4QPSK mode | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 4.08 | 30.00 | Pass |
| Middle | 3.84 | 30.00 | Pass |
| Highest | 3.15 | 30.00 | Pass |
| 8DPSK mode | | | |
| Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest | 4.62 | 30.00 | Pass |
| Middle | 4.34 | 30.00 | Pass |
| Highest | 3.56 | 30.00 | Pass |

Test plot as follows:




| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

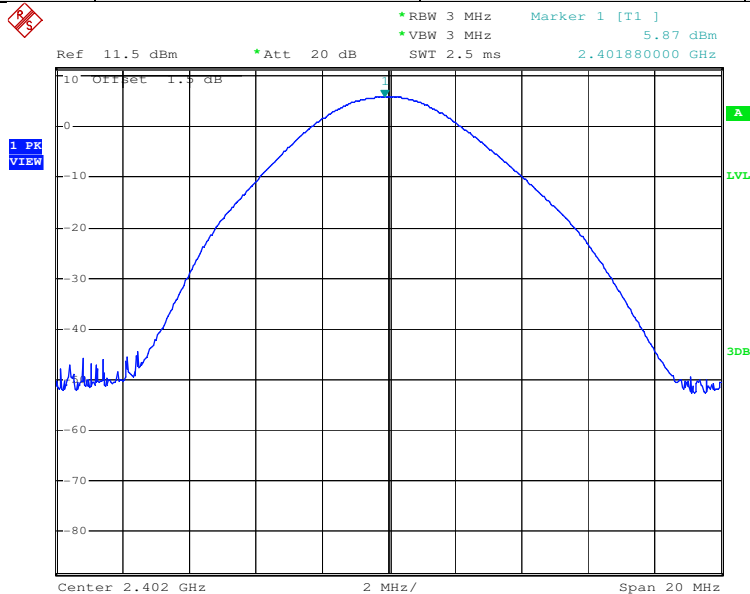

Date: 7.JUL.2010 10:08:24


| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

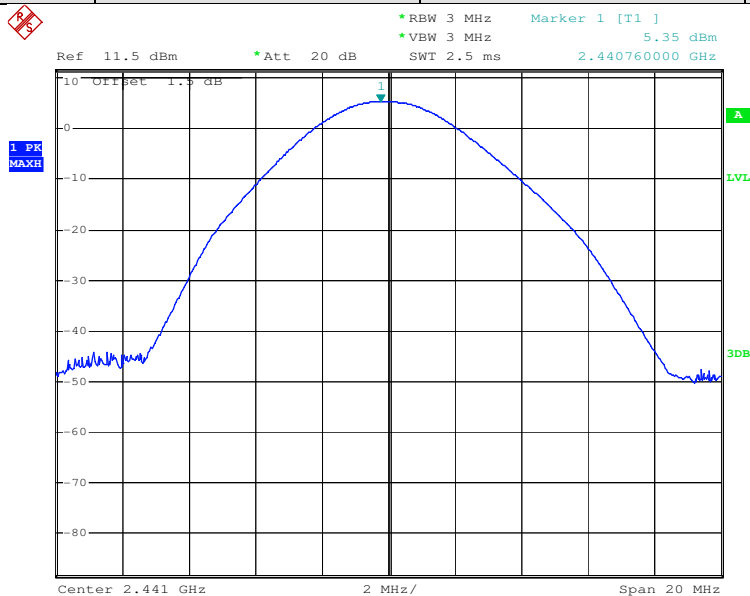

Date: 7.JUL.2010 10:42:45




| | | | |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

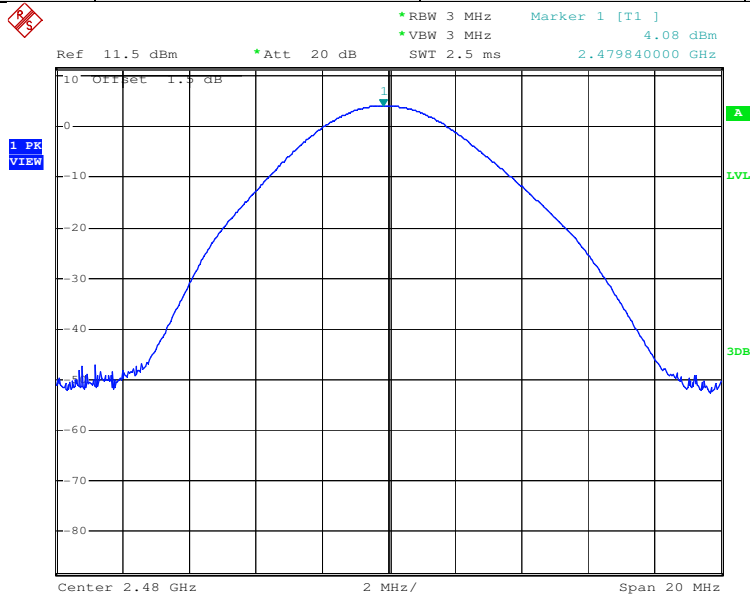

Date: 8.JUL.2010 10:00:43


| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Lowest |
|------------|----------|---------------|--------|

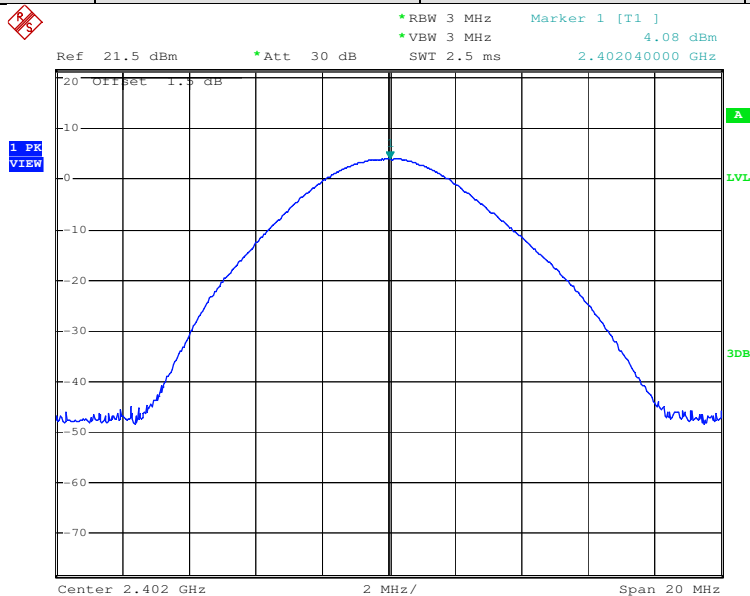

Date: 9.JUL.2010 09:32:17




| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Middle |
|------------|----------|---------------|--------|

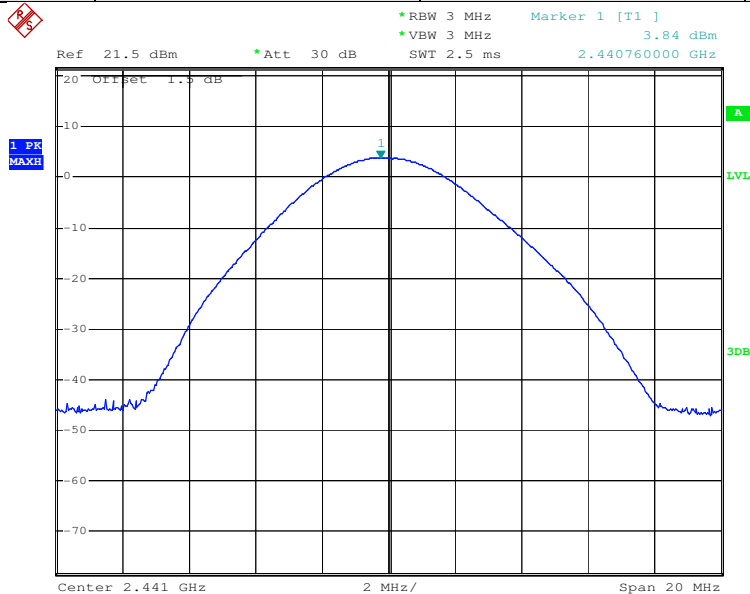

Date: 9.JUL.2010 10:07:33


| | | | |
|------------|----------|---------------|---------|
| Test mode: | Pi/4QPSK | Test channel: | Highest |
|------------|----------|---------------|---------|

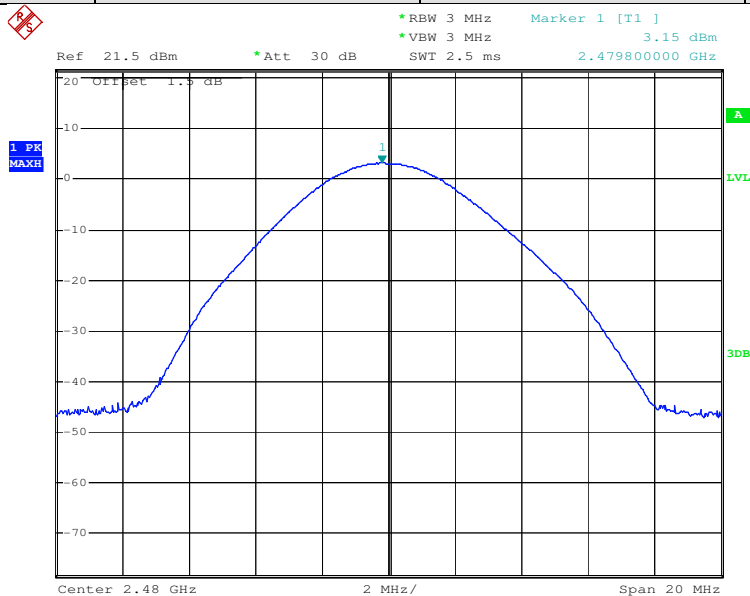

Date: 9.JUL.2010 09:58:29




| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Lowest |
|------------|-------|---------------|--------|

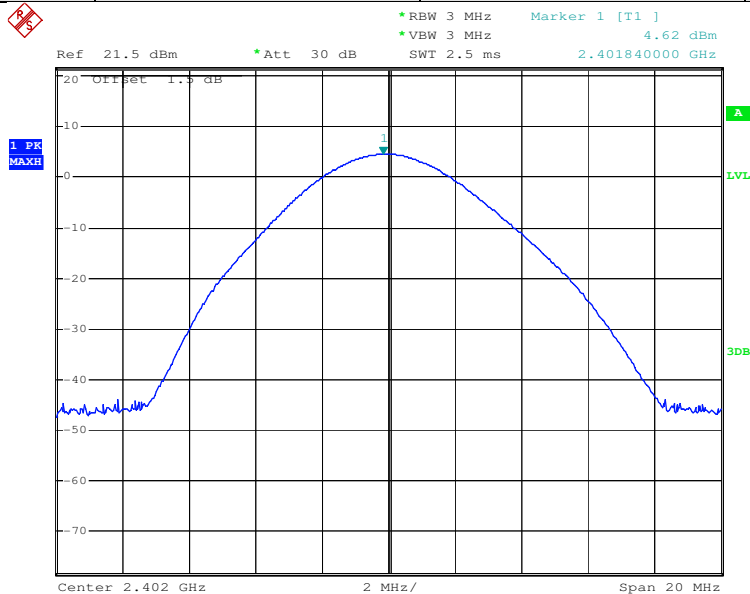

Date: 9.JUL.2010 12:33:16


| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Middle |
|------------|-------|---------------|--------|

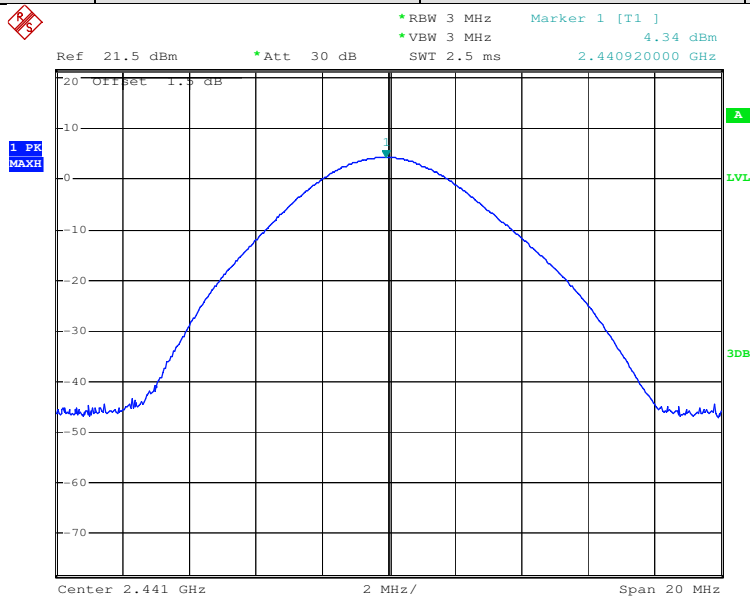

Date: 9.JUL.2010 14:13:27




| | | | |
|------------|-------|---------------|---------|
| Test mode: | 8DPSK | Test channel: | Highest |
|------------|-------|---------------|---------|

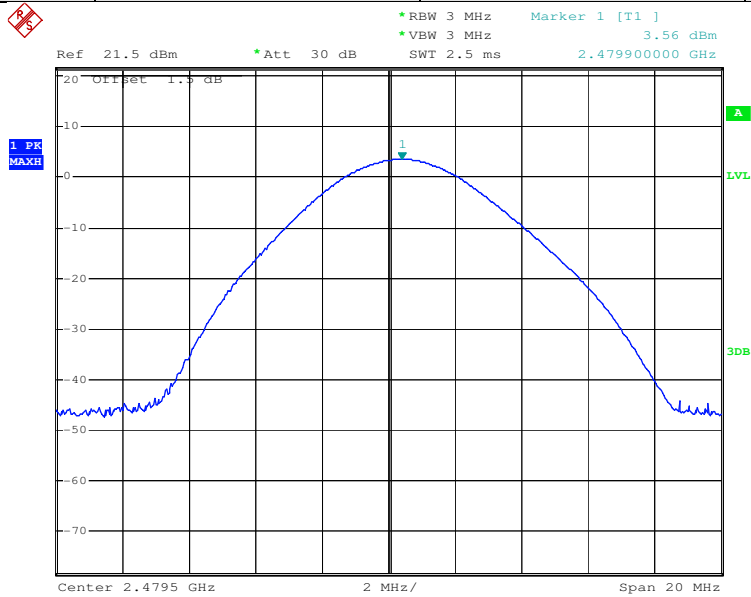

Date: 9.JUL.2010 14:12:39

5.3 20dB Occupy Bandwidth

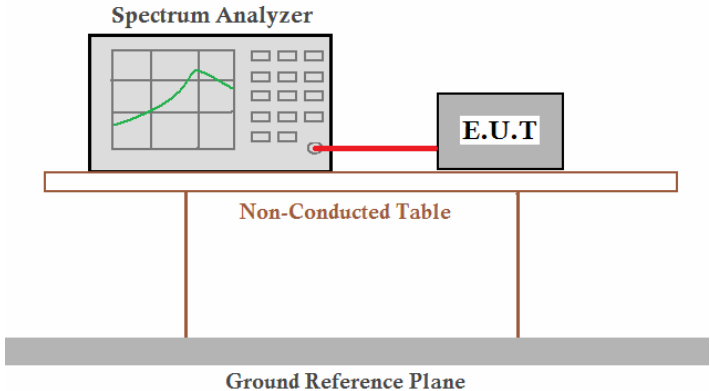
| | |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Limit: | NA |
| Test setup: |  |
| Test Instruments: | Refer to section 4.7 for details |
| Test state: | Non-hopping transmitting with all kind of modulation. |
| Test results: | Passed |

Measurement Data

| Test channel | 20dB Occupy Bandwidth (KHz) | | |
|--------------|-----------------------------|----------|-------|
| | GFSK | Pi/4QPSK | 8DPSK |
| Lowest | 1100 | 1360 | 1344 |
| Middle | 1092 | 1372 | 1348 |
| Highest | 1096 | 1348 | 1348 |


Test plot as follows:

| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

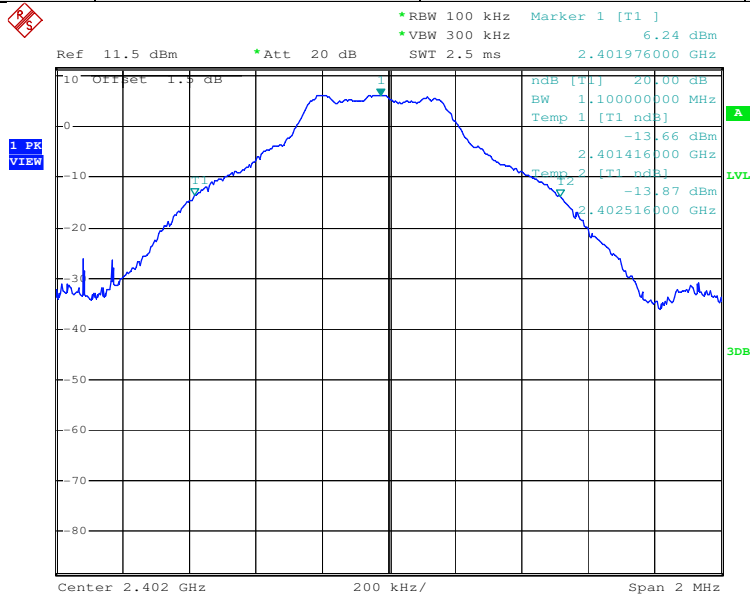

Date: 7.JUL.2010 10:09:02

| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

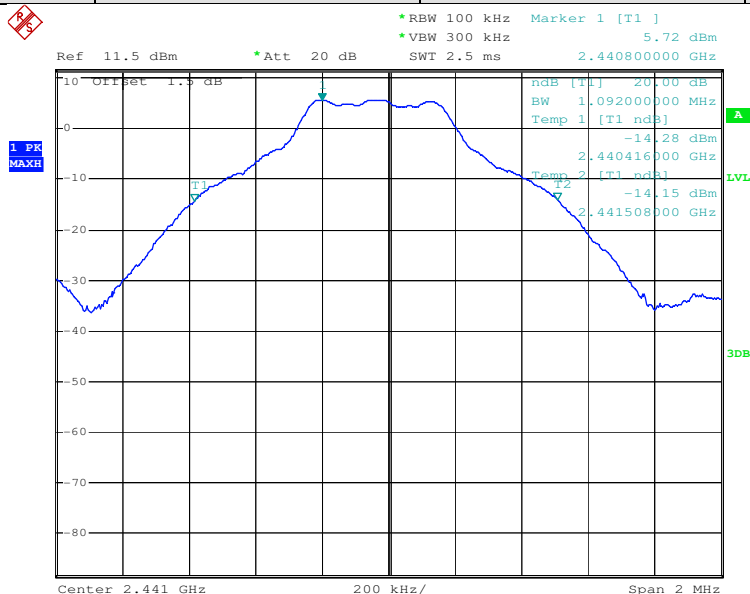


Date: 7.JUL.2010 10:43:22

*This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




| | | | |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

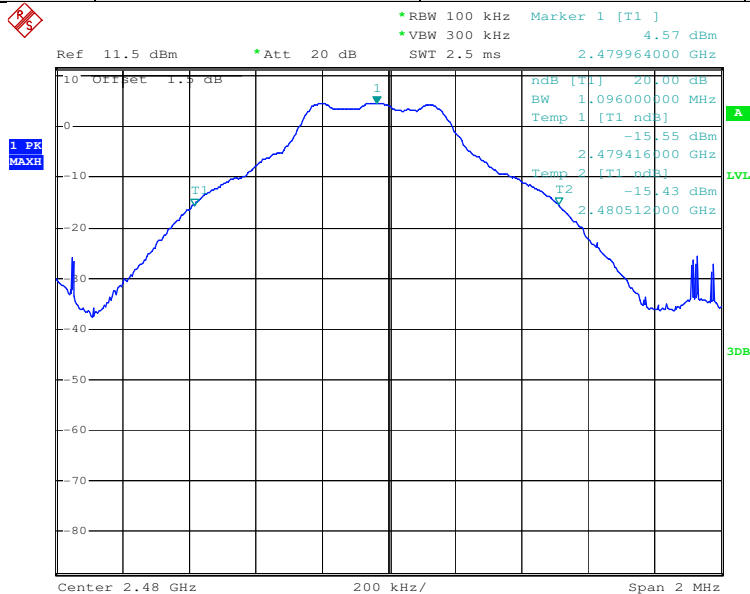

Date: 8.JUL.2010 10:15:38


| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Lowest |
|------------|----------|---------------|--------|

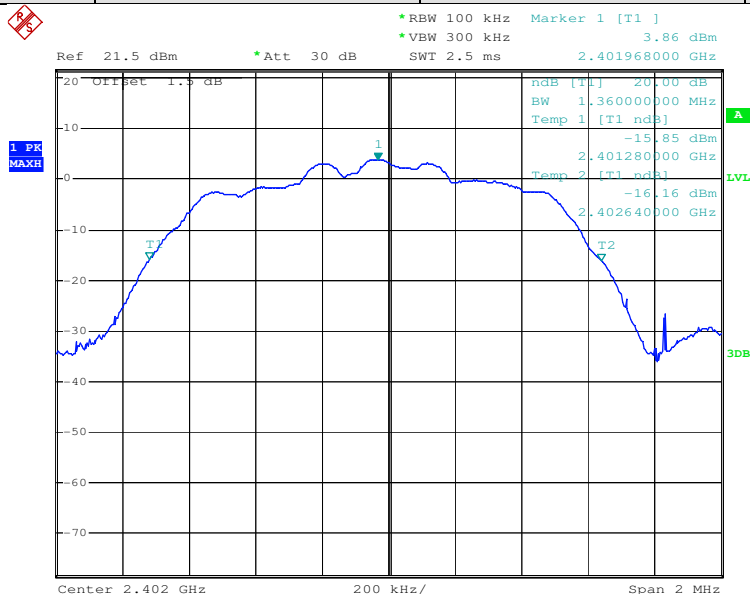

Date: 9.JUL.2010 09:32:49




| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Middle |
|------------|----------|---------------|--------|

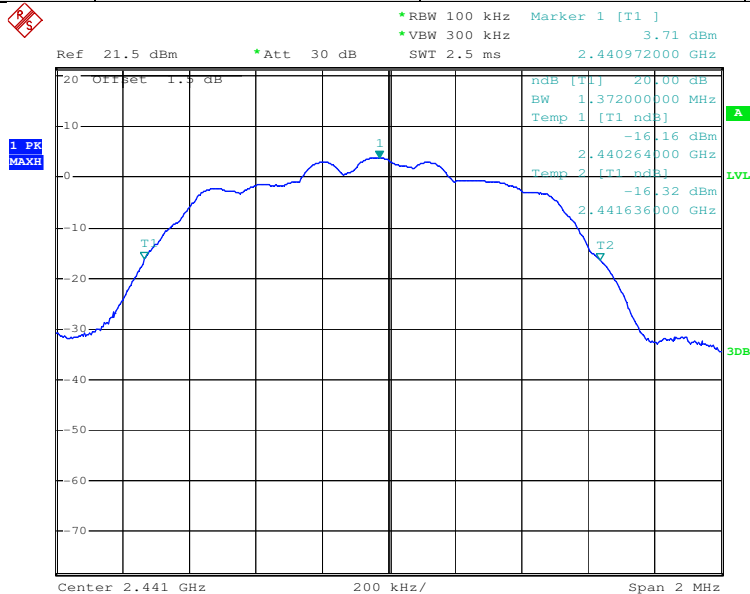

Date: 9.JUL.2010 10:03:04


| | | | |
|------------|----------|---------------|---------|
| Test mode: | Pi/4QPSK | Test channel: | Highest |
|------------|----------|---------------|---------|

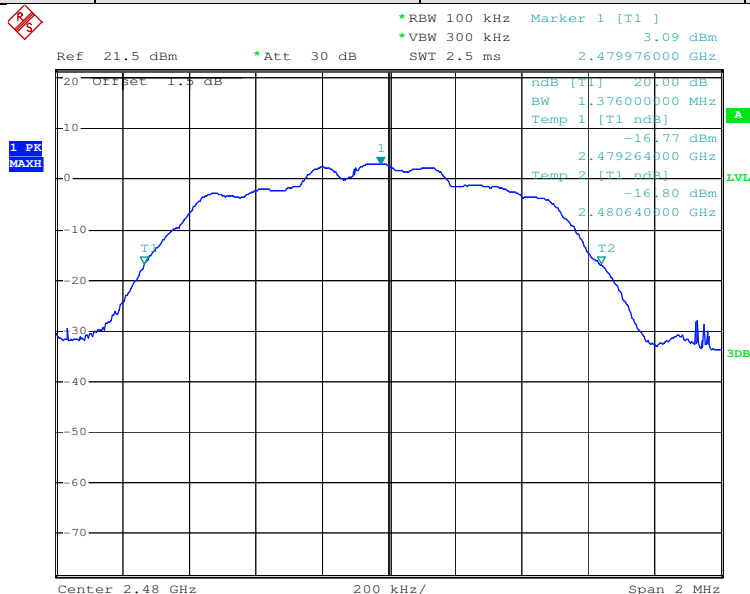

Date: 9.JUL.2010 09:49:53




| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Lowest |
|------------|-------|---------------|--------|

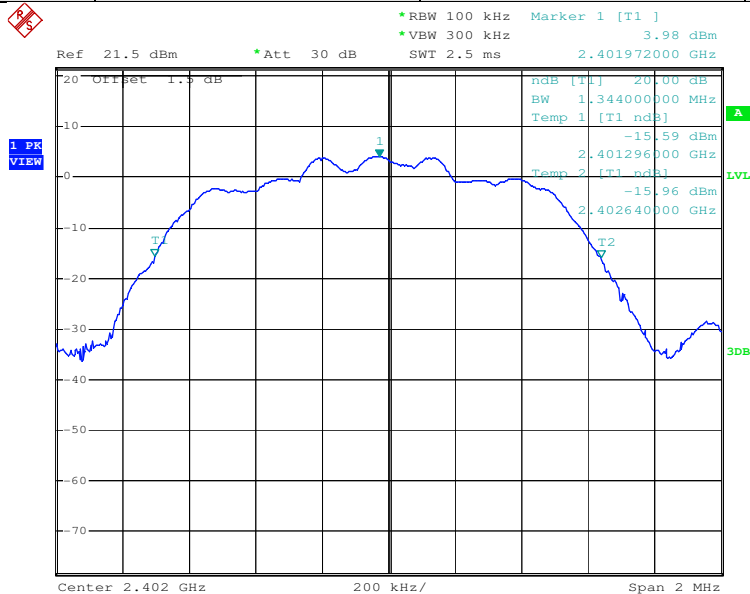

Date: 9.JUL.2010 12:34:16


| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Middle |
|------------|-------|---------------|--------|

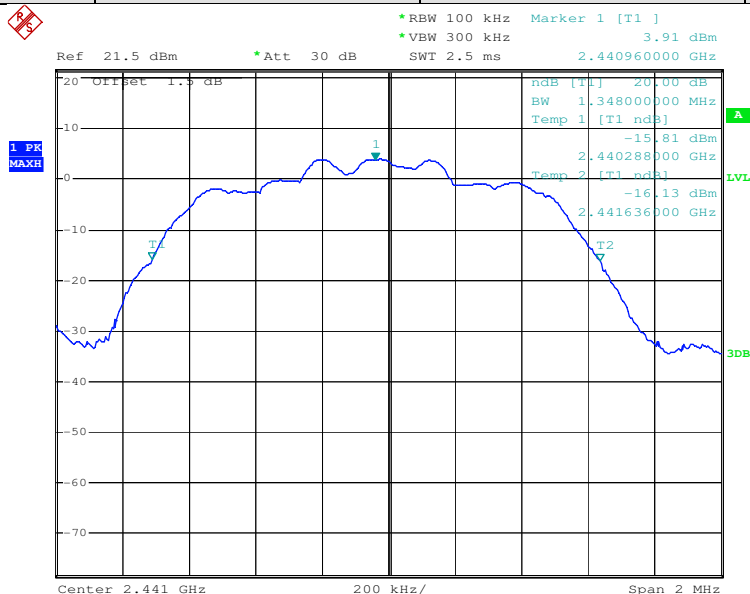

Date: 9.JUL.2010 14:21:23




| | | | |
|------------|-------|---------------|---------|
| Test mode: | 8DPSK | Test channel: | Highest |
|------------|-------|---------------|---------|

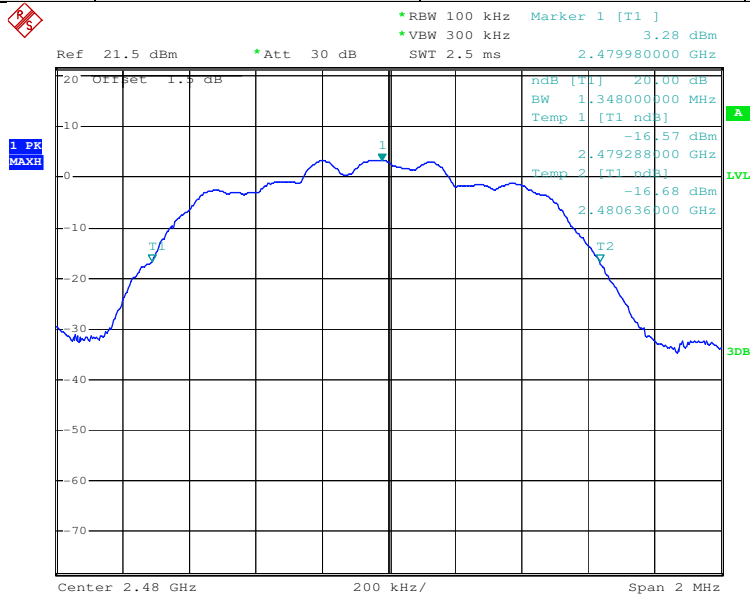

Date: 9.JUL.2010 14:07:41

5.4 Carrier Frequencies Separation
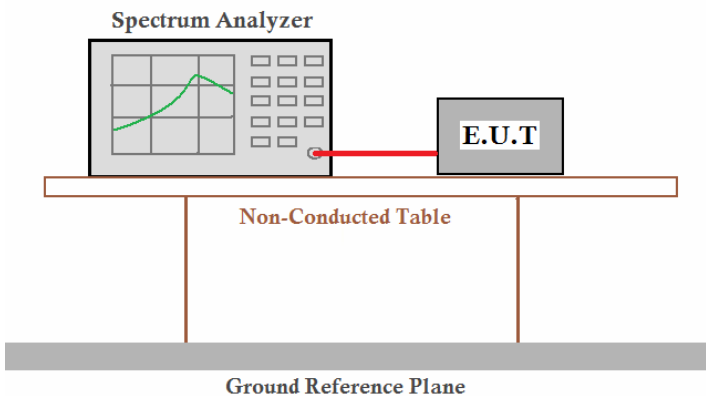
| | |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Test state: | Hopping transmitting with all kind of modulation. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 4.7 for details |
| Limit: | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater) |
| Test results: | Passed |

**Measurement Data**

| GFSK mode | | | |
|---------------|--------------------------------------|-------------|--------|
| Test channel | Carrier Frequencies Separation (KHz) | Limit (KHz) | Result |
| Lowest | 1000 | 917.3 | Pass |
| Middle | 1004 | 917.3 | Pass |
| Highest | 1004 | 917.3 | Pass |
| Pi/4QPSK mode | | | |
| Test channel | Carrier Frequencies Separation (KHz) | Limit (KHz) | Result |
| Lowest | 1004 | 917.3 | Pass |
| Middle | 1000 | 917.3 | Pass |
| Highest | 1000 | 917.3 | Pass |
| 8DPSK mode | | | |
| Test channel | Carrier Frequencies Separation (KHz) | Limit (KHz) | Result |
| Lowest | 1000 | 917.3 | Pass |
| Middle | 1004 | 917.3 | Pass |
| Highest | 1000 | 917.3 | Pass |


Note: According to section 5.4,

| Mode | 20dB bandwidth (KHz) (worse case) | Limit (KHz) (Carrier Frequencies Separation) |
|----------|--------------------------------------|-------------------------------------------------|
| GFSK | 1100 | 733.3 |
| PI/4QPSK | 1376 | 917.3 |
| 8DPSK | 1348 | 898.7 |

Test plot as follows:




| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

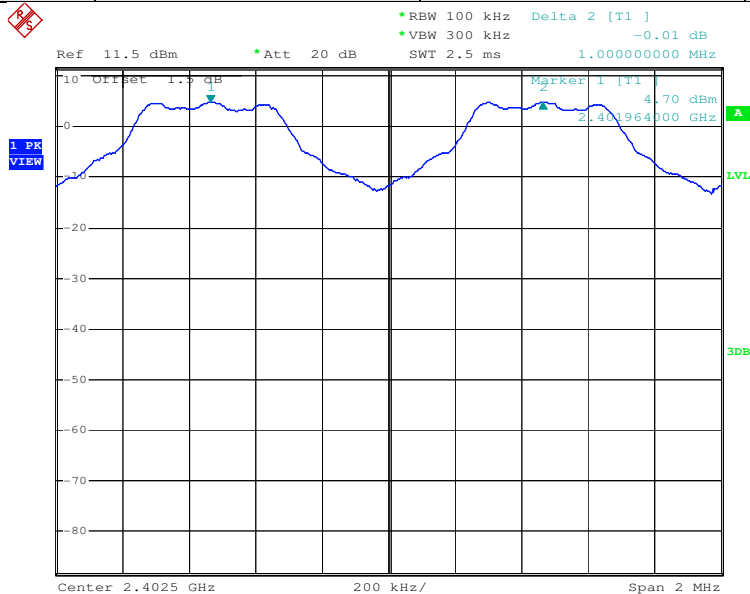

Date: 7.JUL.2010 10:21:21


| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

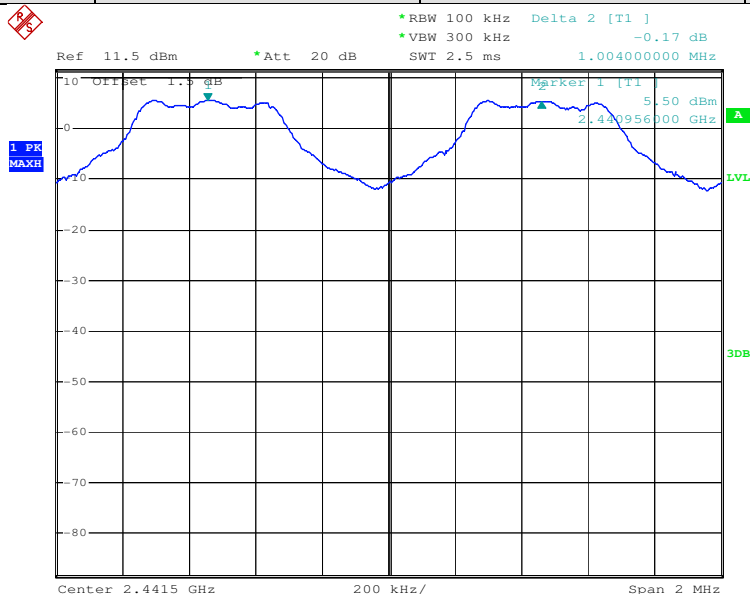

Date: 8.JUL.2010 09:56:34




| | | | |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

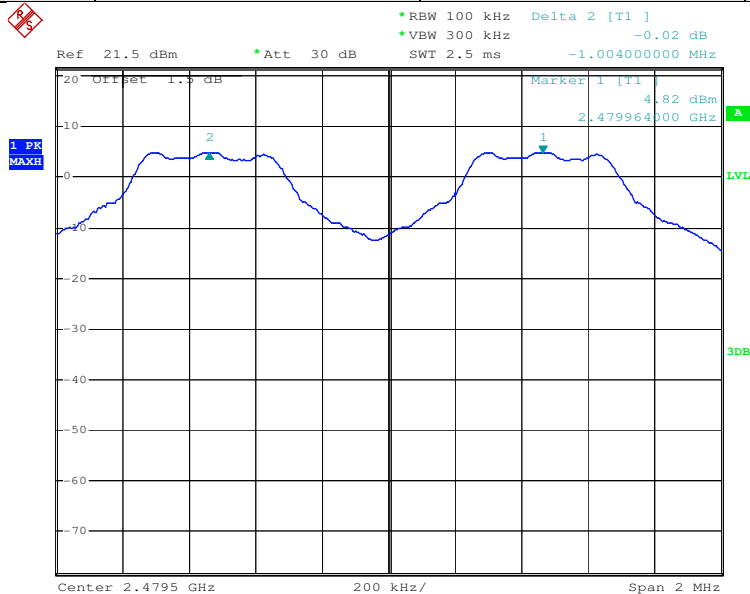

Date: 9.JUL.2010 09:24:28


| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Lowest |
|------------|----------|---------------|--------|

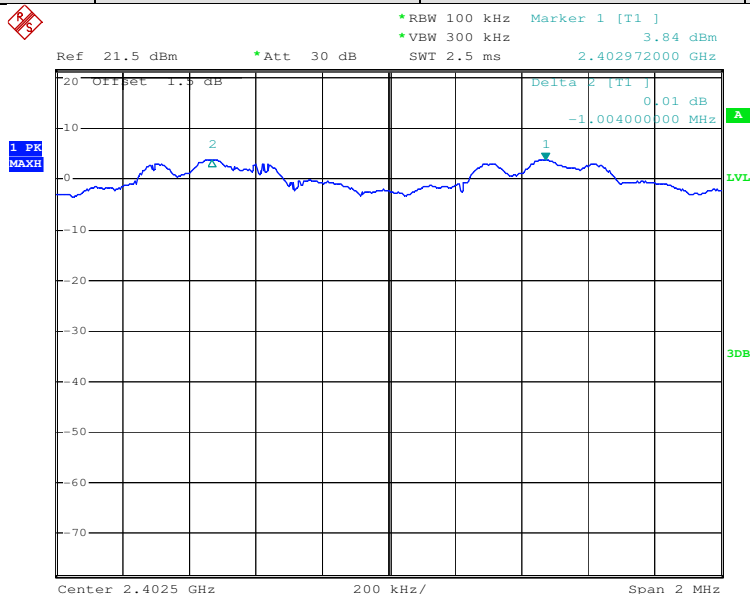

Date: 9.JUL.2010 09:38:16




| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Middle |
|------------|----------|---------------|--------|

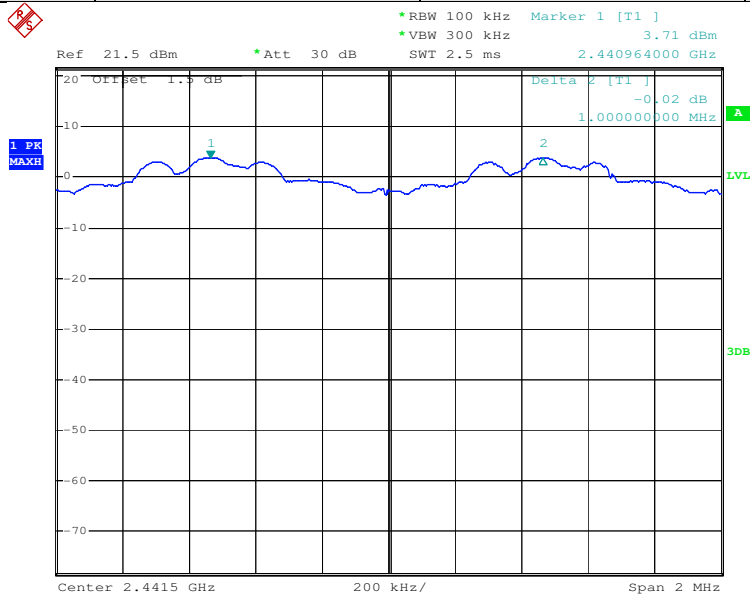

Date: 9.JUL.2010 10:01:49


| | | | |
|------------|----------|---------------|---------|
| Test mode: | Pi/4QPSK | Test channel: | Highest |
|------------|----------|---------------|---------|

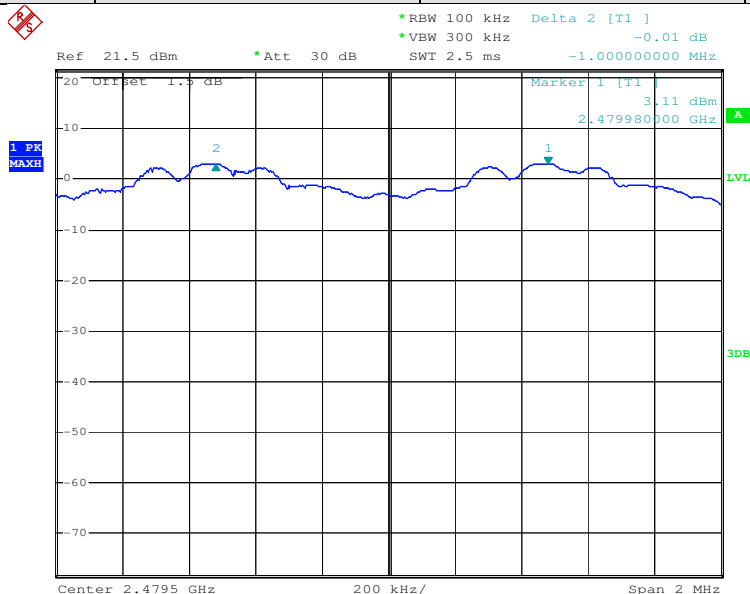

Date: 9.JUL.2010 09:59:42




| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Lowest |
|------------|-------|---------------|--------|

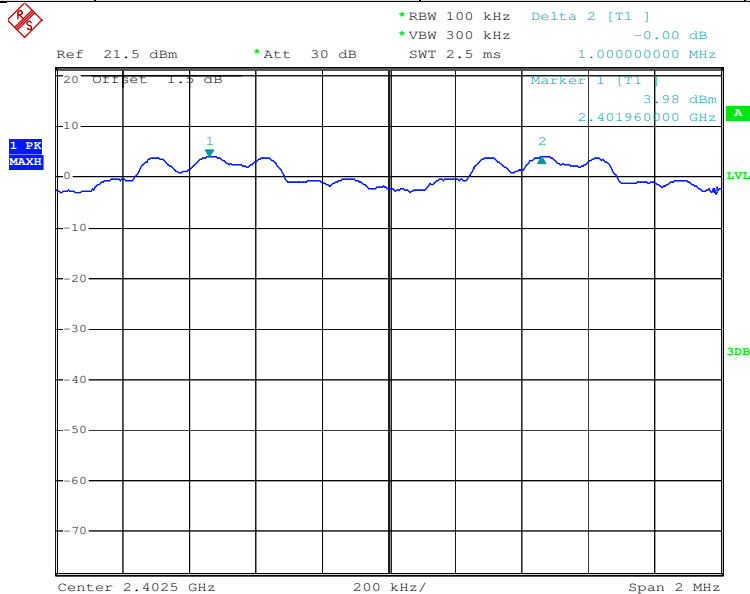

Date: 9.JUL.2010 12:37:34


| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Middle |
|------------|-------|---------------|--------|

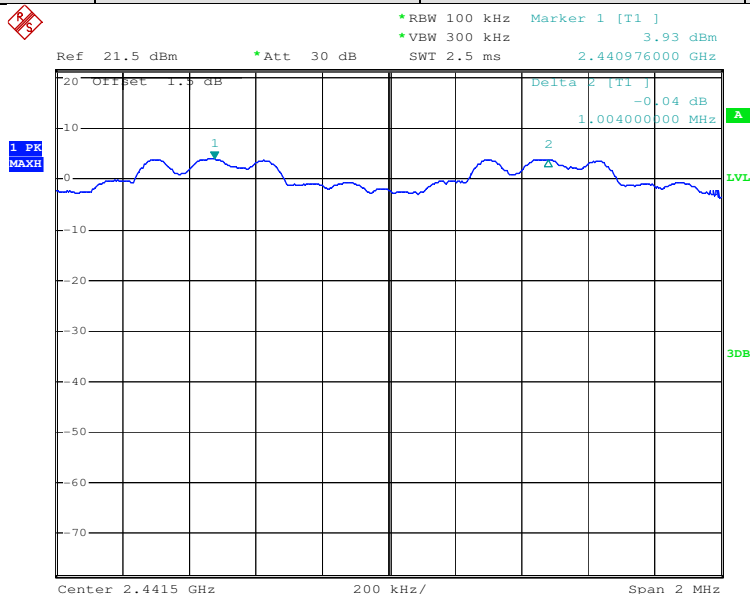

Date: 9.JUL.2010 14:23:16




| | | | |
|------------|-------|---------------|---------|
| Test mode: | 8DPSK | Test channel: | Highest |
|------------|-------|---------------|---------|

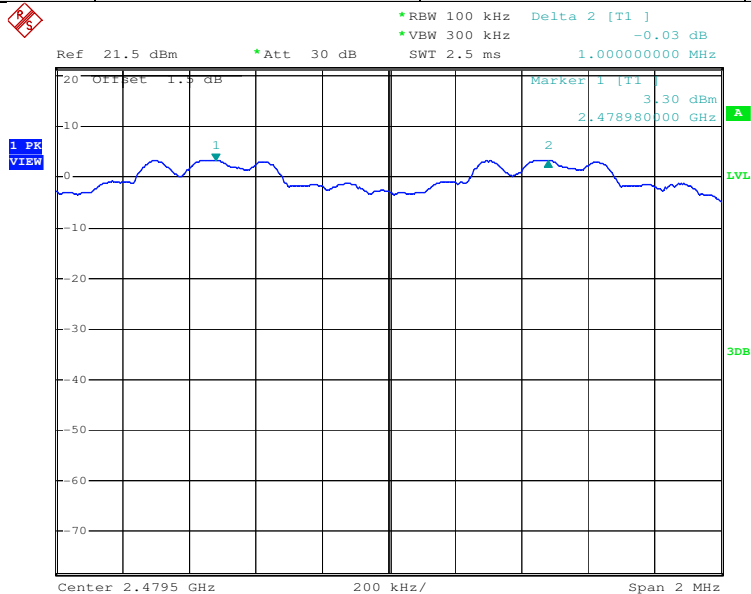

Date: 9.JUL.2010 14:12:12


5.5 Hopping Channel Number
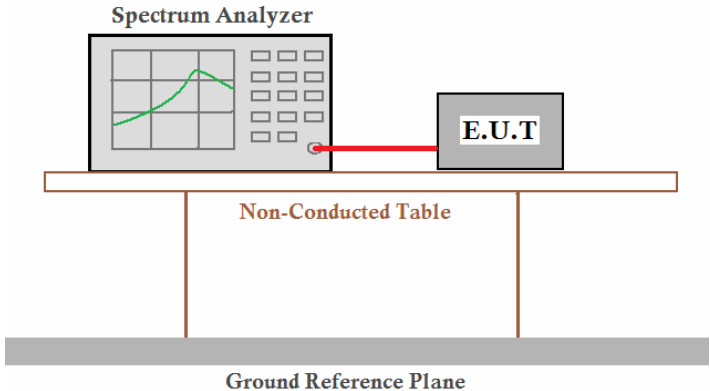
| | |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (b) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Limit: | 75channels |
| Test setup: |  |
| Test Instruments: | Refer to section 4.7 for details |
| Test state: | Hopping transmitting with all kind of modulation. |
| Test results: | Passed |


Measurement Data

| Mode | Hopping channel numbers | Limit |
|----------|-------------------------|-------|
| GFSK | 79 | 75 |
| Pi/4QPSK | 79 | 75 |
| 8DPSK | 79 | 75 |


Test plot as follows

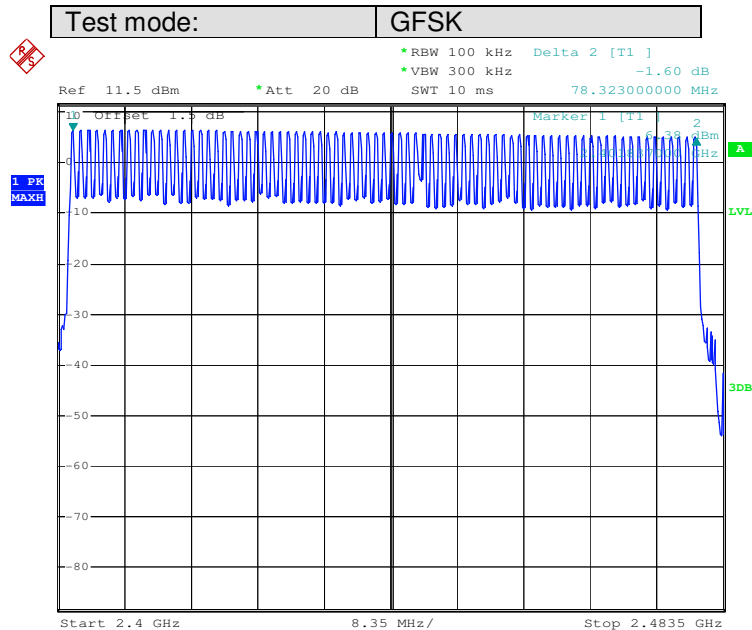

Date: 7.JUL.2010 10:36:24

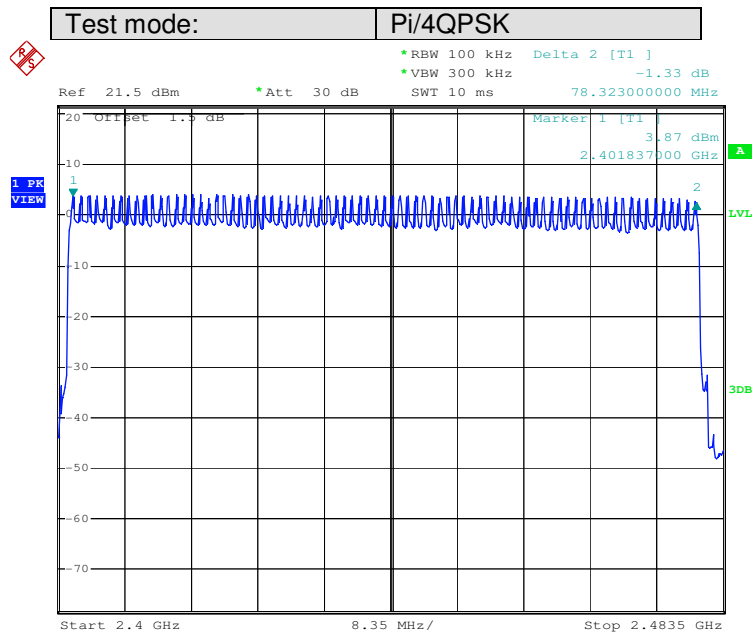


Date: 9.JUL.2010 10:23:15

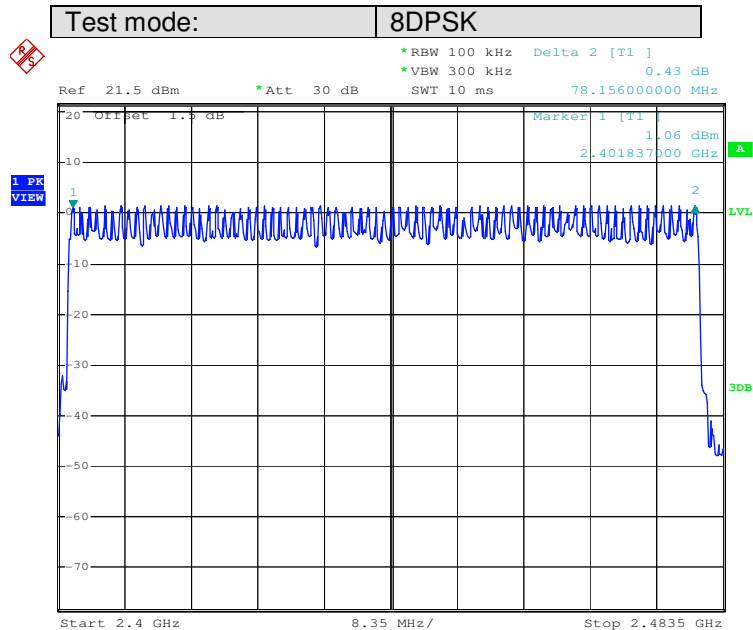

Date: 9.JUL.2010 14:51:14

5.6 Dwell Time
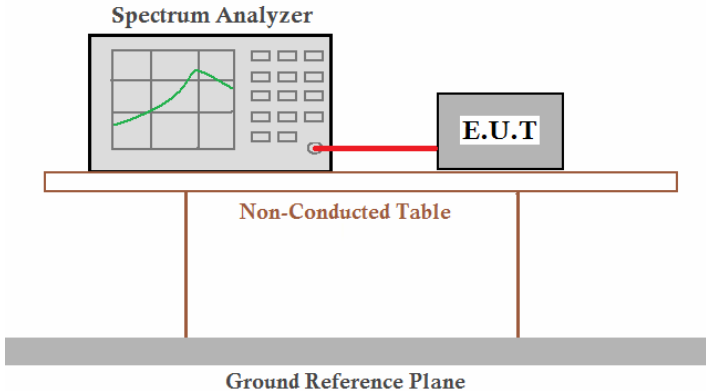
| | |
|-------------------|------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Limit: | 0.4 Second |
| Test setup: |  |
| Test Instruments: | Refer to section 4.7 for details |
| Test state: | Hopping transmitting with all kind of modulation. |
| Test results: | Passed |

Measurement Data

| Mode | Packet | Dwell time (second) | Limit (second) |
|----------|--------|---------------------|----------------|
| GFSK | DH1 | 172.8 | 0.4 |
| | DH3 | 288.0 | 0.4 |
| | DH5 | 328.5 | 0.4 |
| Pi/4QPSK | 2-DH1 | 174.4 | 0.4 |
| | 2-DH3 | 289.6 | 0.4 |
| | 2-DH5 | 199.7 | 0.4 |
| 8DPSK | 3-DH1 | 172.8 | 0.4 |
| | 3-DH3 | 291.2 | 0.4 |
| | 3-DH5 | 328.5 | 0.4 |

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as blow

DH1 time slot = $0.54(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 172.8 \text{ ms}$


DH3 time slot = $1.80(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 288.0 \text{ ms}$

DH5 time slot = $3.08(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 328.5 \text{ ms}$




Test plot as follows

| | | | |
|------------|------|--------------|-----|
| Test mode: | GFSK | Test Packet: | DH1 |
|------------|------|--------------|-----|

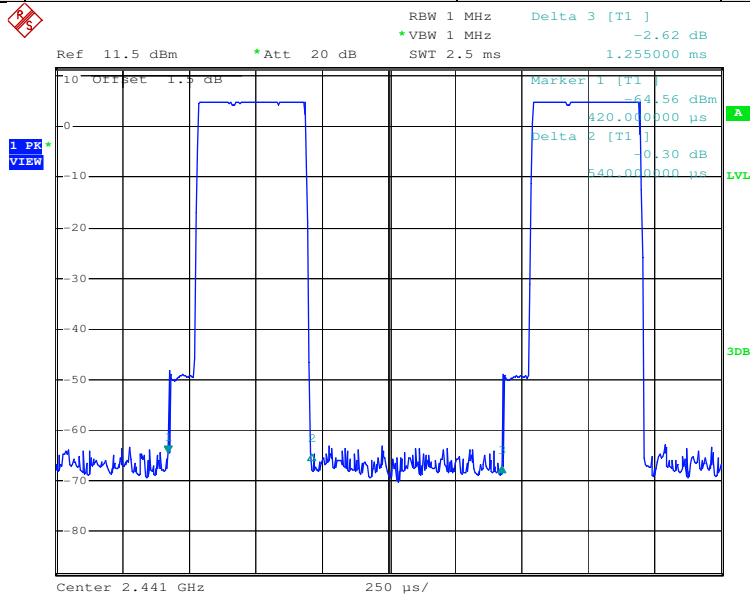

Date: 8.JUL.2010 09:57:38


| | | | |
|------------|------|--------------|-----|
| Test mode: | GFSK | Test Packet: | DH3 |
|------------|------|--------------|-----|

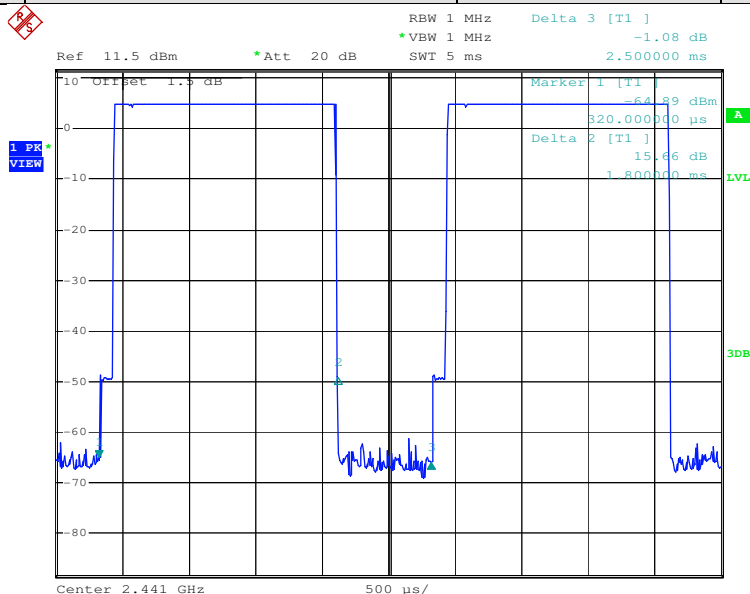

Date: 8.JUL.2010 09:58:23




| | | | |
|------------|------|--------------|-----|
| Test mode: | GFSK | Test Packet: | DH5 |
|------------|------|--------------|-----|

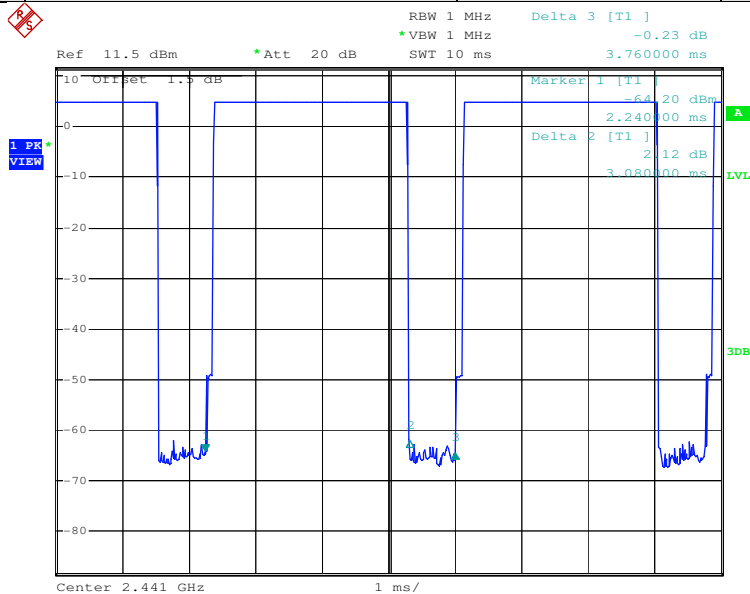

Date: 8.JUL.2010 09:59:06


| | | | |
|------------|----------|--------------|-------|
| Test mode: | Pi/4QPSK | Test Packet: | 2-DH1 |
|------------|----------|--------------|-------|

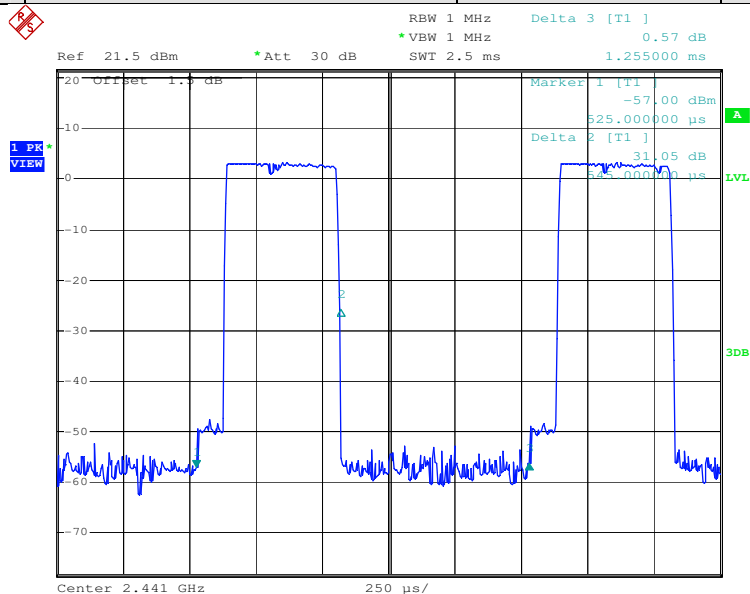

Date: 9.JUL.2010 10:10:59




| | | | |
|------------|----------|--------------|-------|
| Test mode: | Pi/4QPSK | Test Packet: | 2-DH3 |
|------------|----------|--------------|-------|

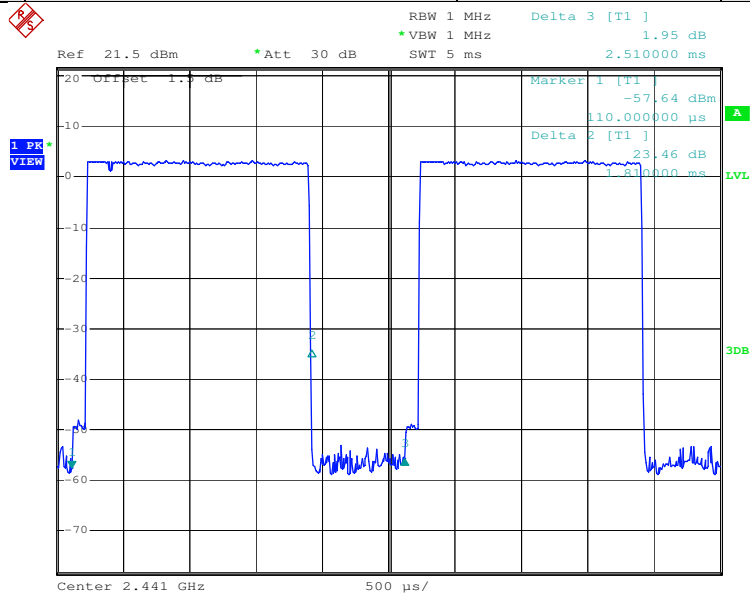

Date: 9.JUL.2010 10:11:59


| | | | |
|------------|----------|--------------|-------|
| Test mode: | Pi/4QPSK | Test Packet: | 2-DH5 |
|------------|----------|--------------|-------|

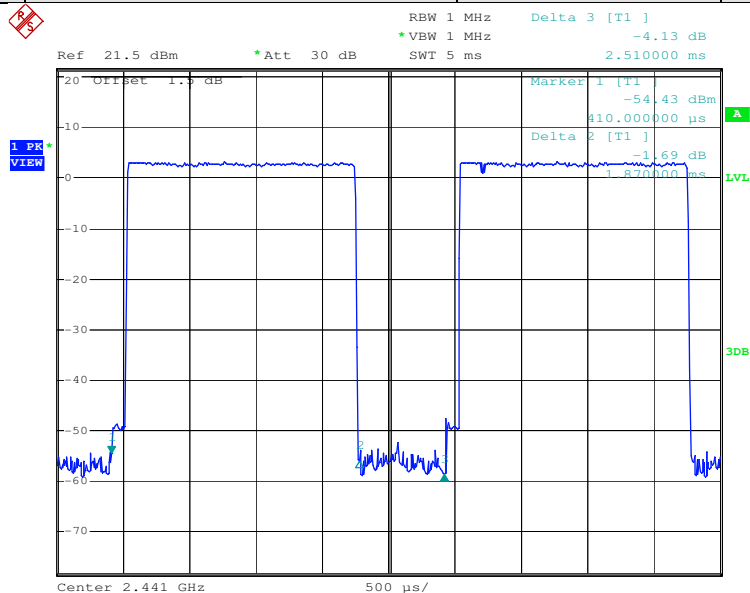

Date: 9.JUL.2010 10:14:54




| | | | |
|------------|-------|--------------|-------|
| Test mode: | 8DPSK | Test Packet: | 3-DH1 |
|------------|-------|--------------|-------|

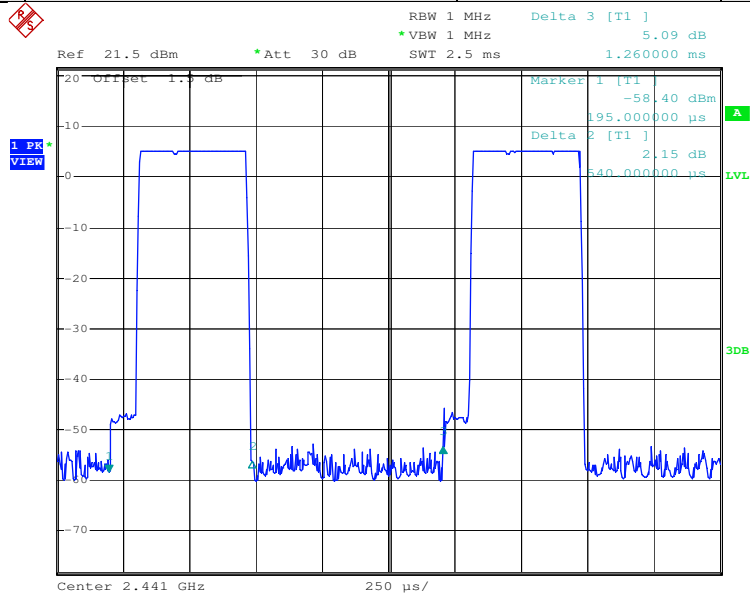

Date: 9.JUL.2010 14:45:16


| | | | |
|------------|-------|--------------|-------|
| Test mode: | 8DPSK | Test Packet: | 3-DH3 |
|------------|-------|--------------|-------|

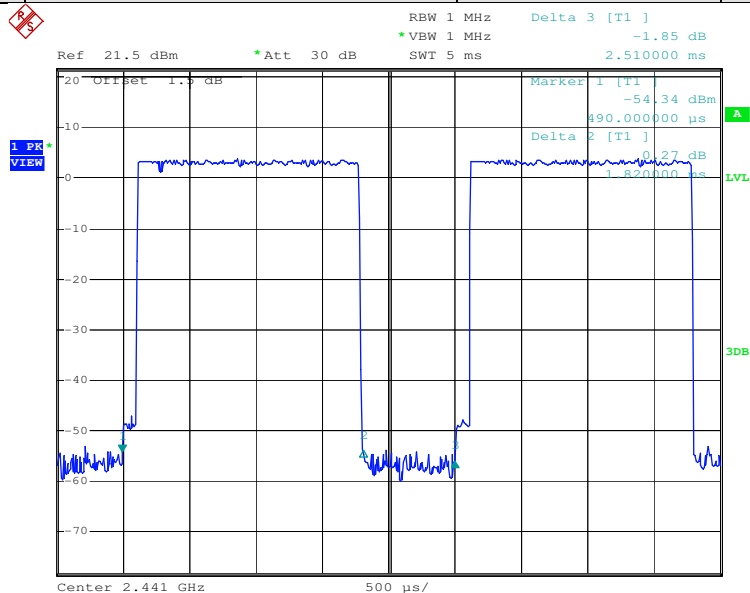

Date: 9.JUL.2010 14:46:03




| | | | |
|------------|-------|--------------|-------|
| Test mode: | 8DPSK | Test Packet: | 3-DH5 |
|------------|-------|--------------|-------|

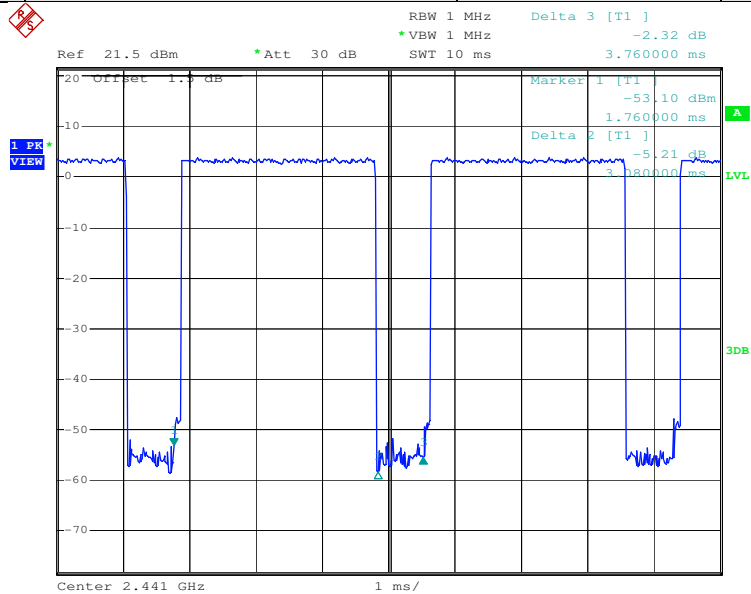

Date: 9.JUL.2010 14:46:43

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


5.7 Band Edge
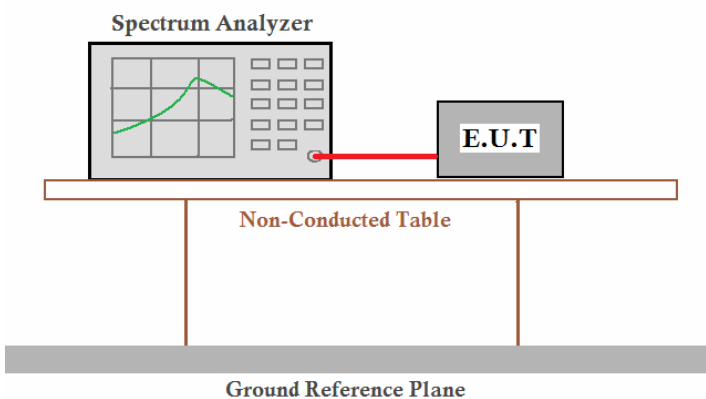
| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup: |  <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p> |
| Test Instruments: | Refer to section 4.7 for details |
| Test state: | Hopping transmitting with all kinds of modulation. |
| Test results: | Passed |


Test plot as follows:



| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

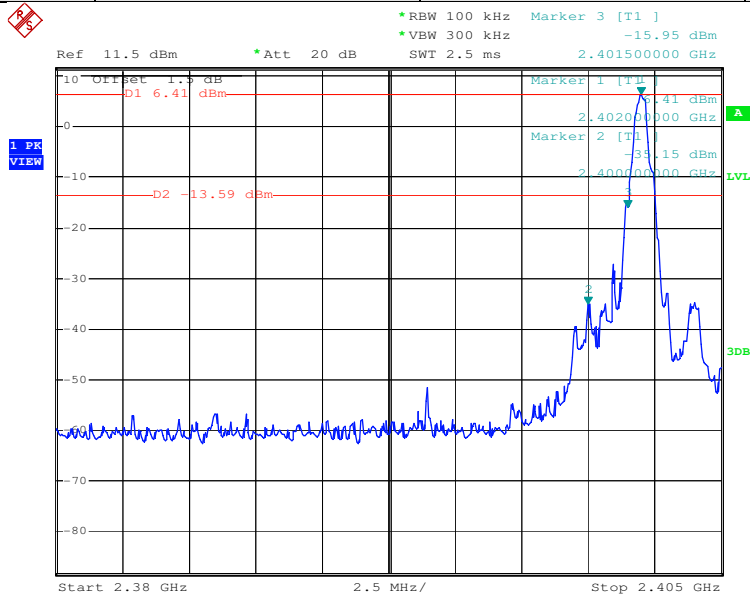


Date: 7.JUL.2010 10:14:29

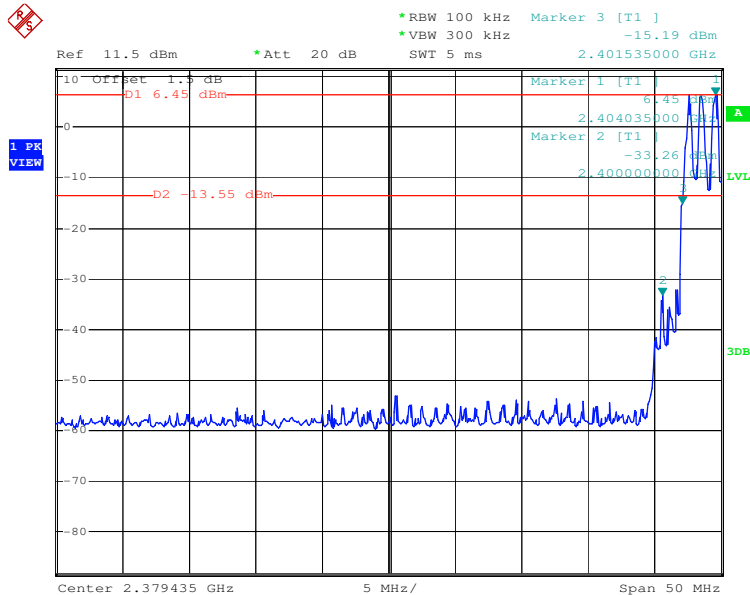


Date: 7.JUL.2010 10:40:17



| | | | |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

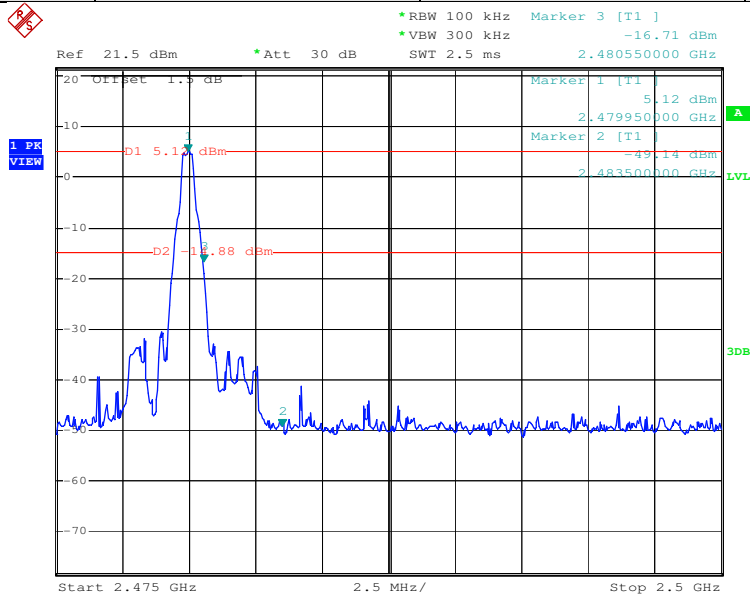


Date: 9.JUL.2010 09:22:57

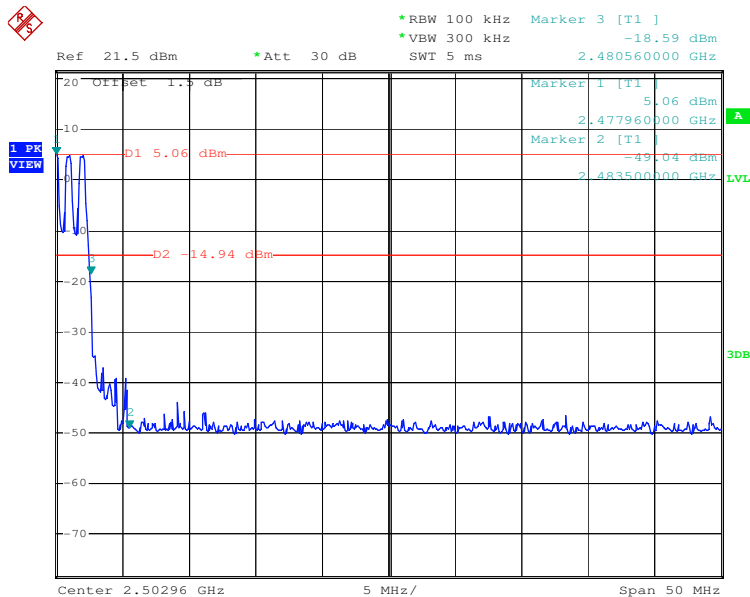


Date: 9.JUL.2010 09:29:25



| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Lowest |
|------------|----------|---------------|--------|

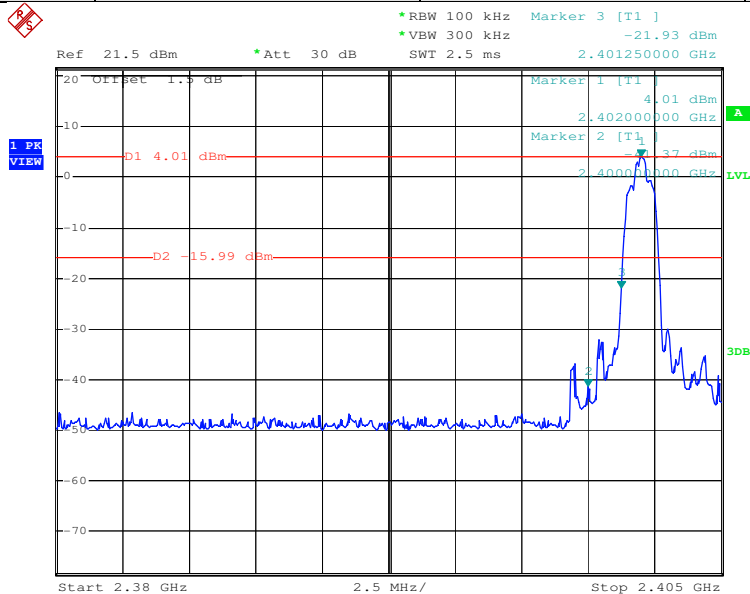


Date: 9.JUL.2010 09:34:41

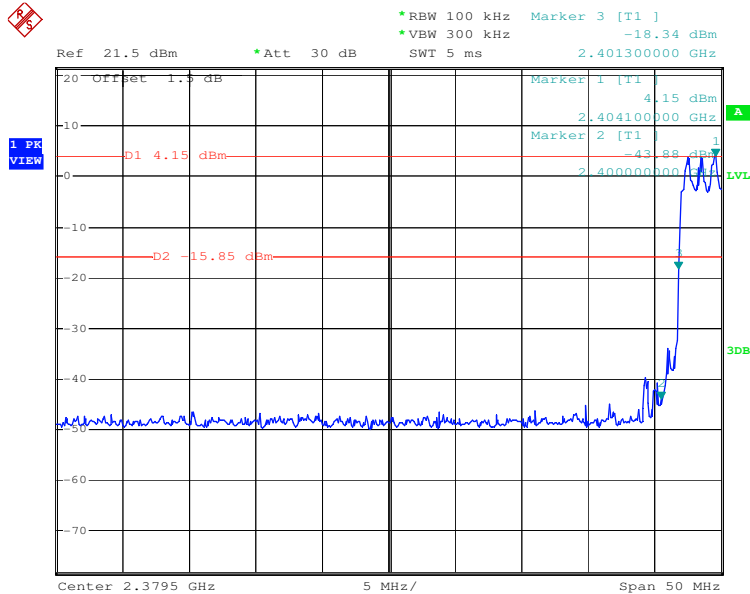


Date: 9.JUL.2010 09:39:51



| | | | |
|------------|----------|---------------|---------|
| Test mode: | Pi/4QPSK | Test channel: | Highest |
|------------|----------|---------------|---------|

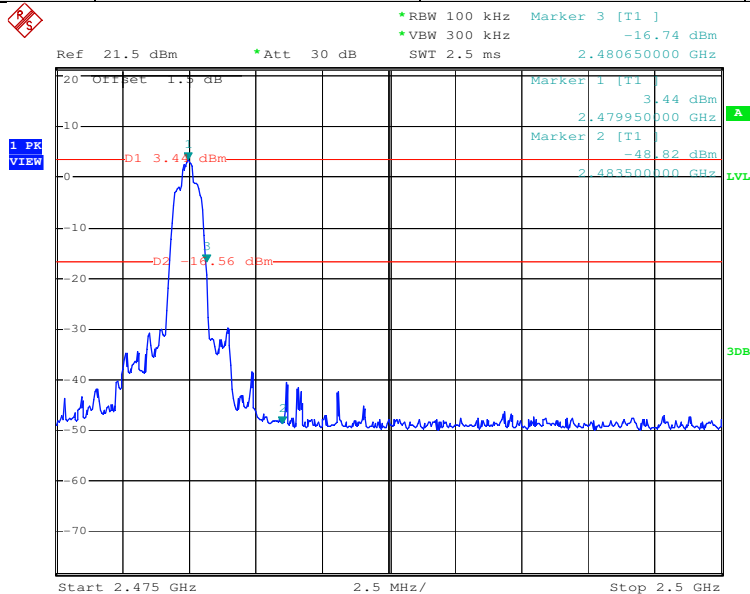


Date: 9.JUL.2010 09:43:16

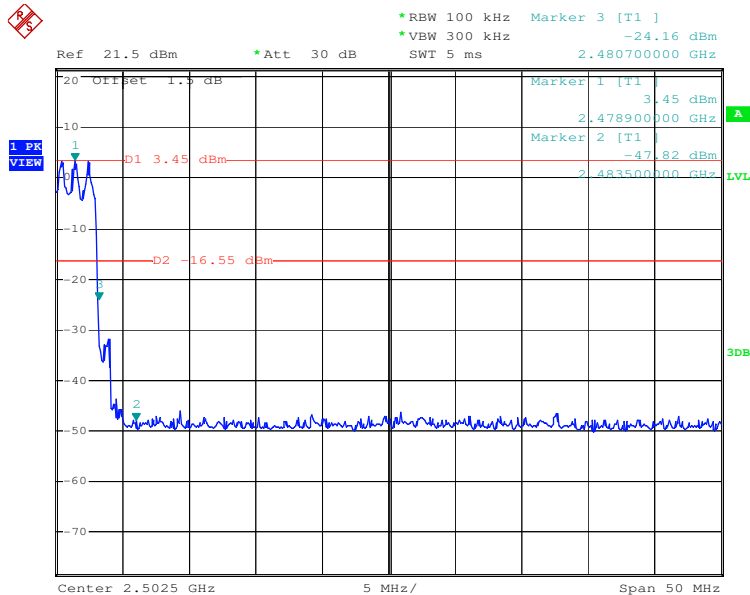


Date: 9.JUL.2010 09:41:49



| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Lowest |
|------------|-------|---------------|--------|

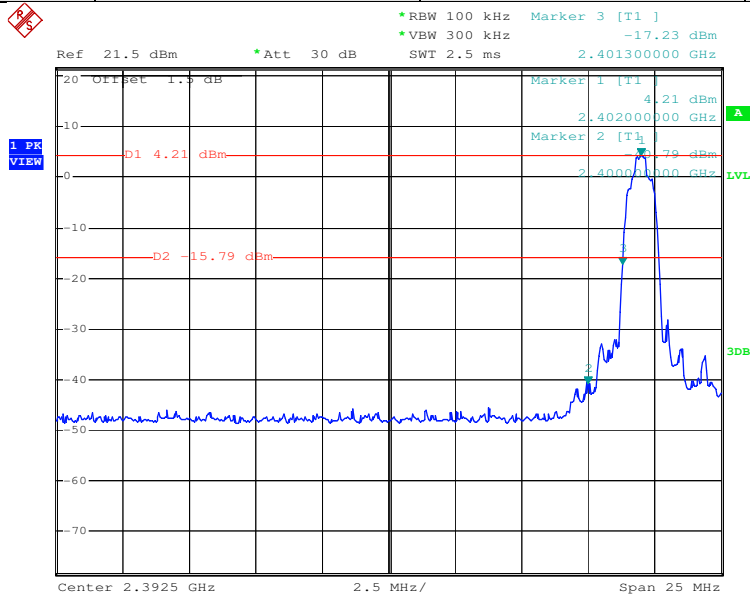


Date: 9.JUL.2010 12:43:26

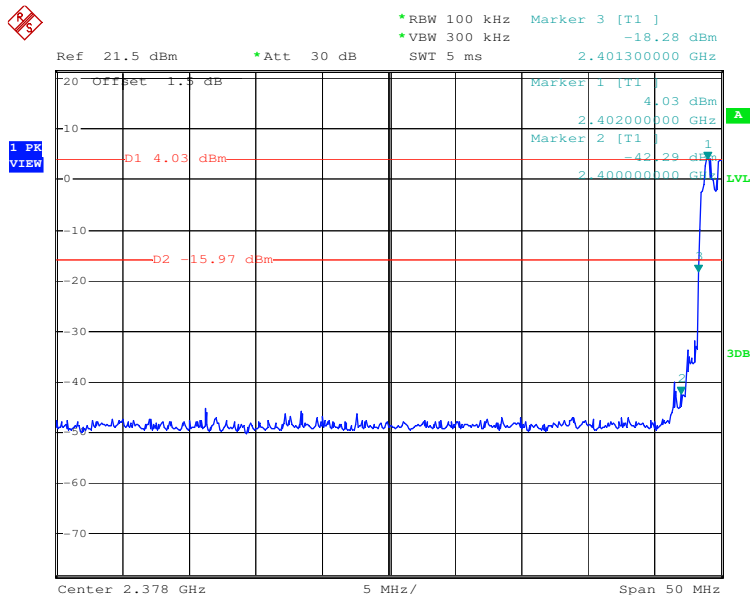


Date: 9.JUL.2010 14:05:43



| | | | |
|------------|-------|---------------|---------|
| Test mode: | 8DPSK | Test channel: | Highest |
|------------|-------|---------------|---------|

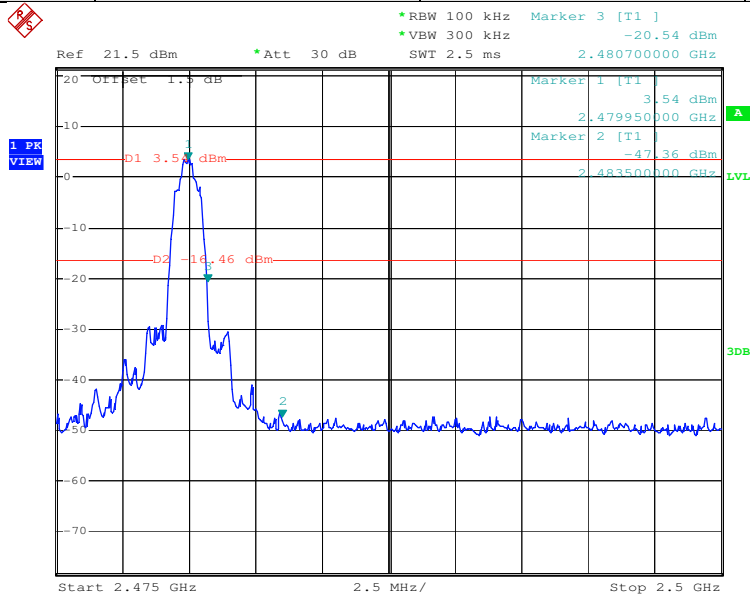


Date: 9.JUL.2010 14:09:01

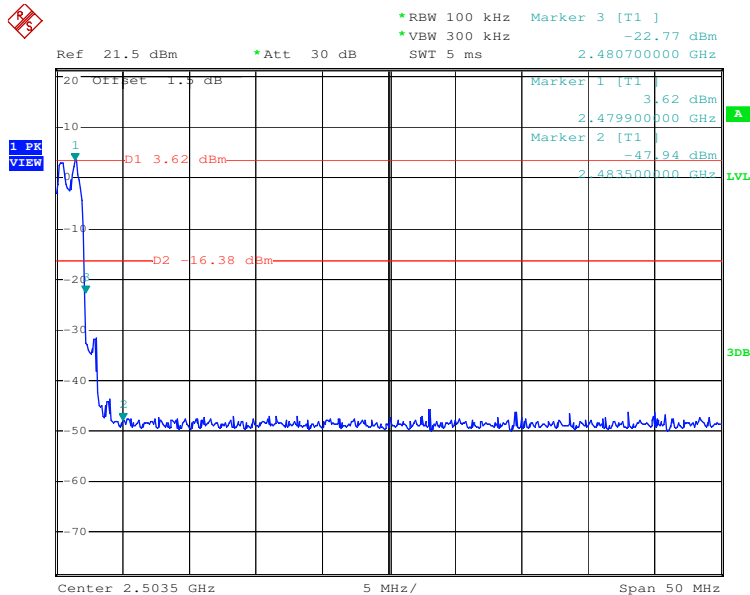


Date: 9.JUL.2010 14:07:15

5.8 RF Antenna Conducted spurious emissions

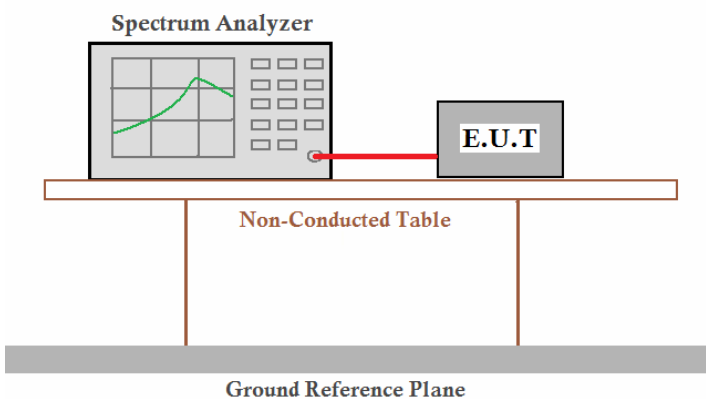
| | |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | ANSI C63.4:2003 and KDB DA00-705 |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup: |  <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p> |
| Test Instruments: | Refer to section 4.7 for details |
| Test results: | Passed |



| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Lowest |
|------------|------|---------------|--------|

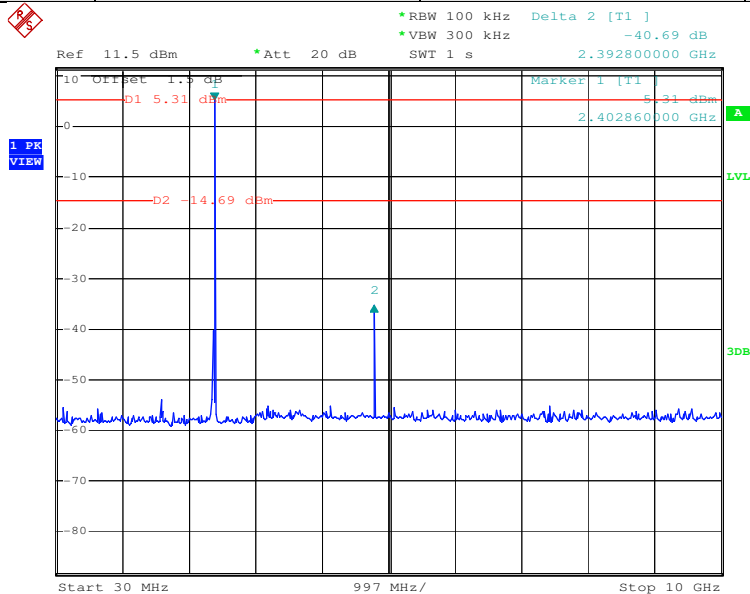


Date: 7.JUL.2010 10:18:38

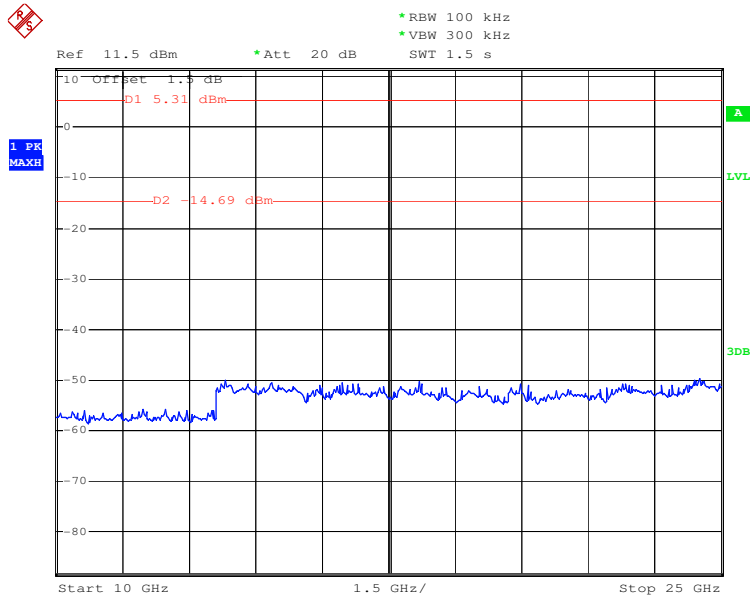


Date: 7.JUL.2010 10:19:03

| | | | |
|------------|------|---------------|--------|
| Test mode: | GFSK | Test channel: | Middle |
|------------|------|---------------|--------|

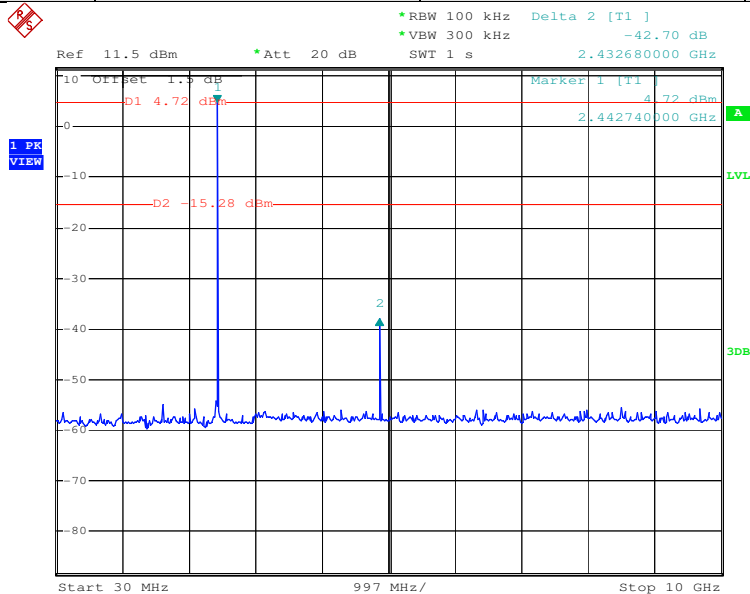

Date: 8.JUL.2010 09:54:41

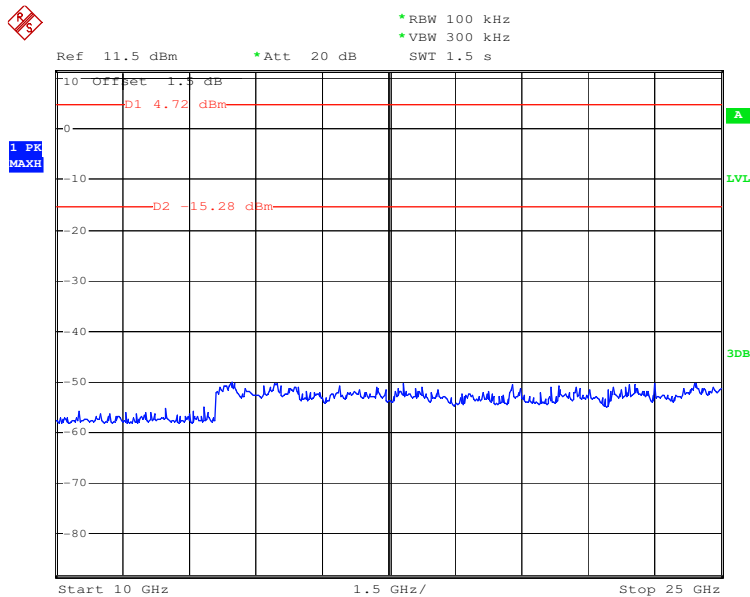


Date: 8.JUL.2010 09:55:02


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



| | | | |
|------------|------|---------------|---------|
| Test mode: | GFSK | Test channel: | Highest |
|------------|------|---------------|---------|

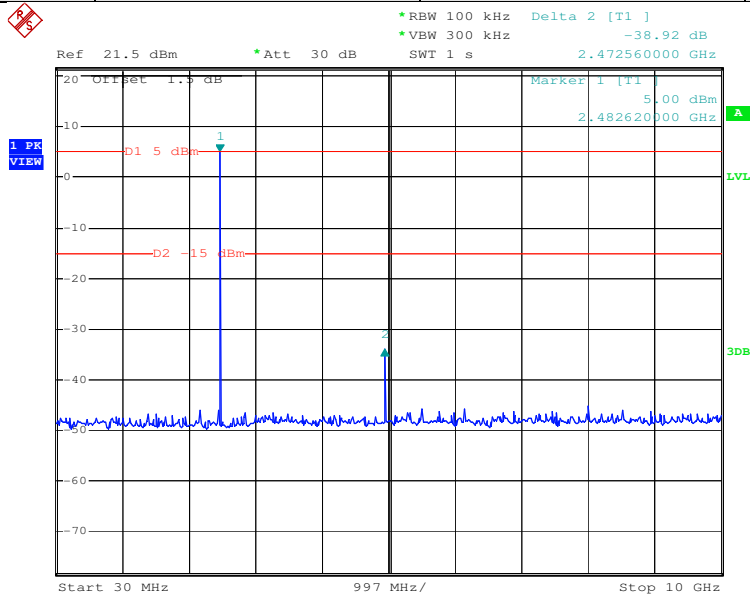


Date: 9.JUL.2010 09:21:16

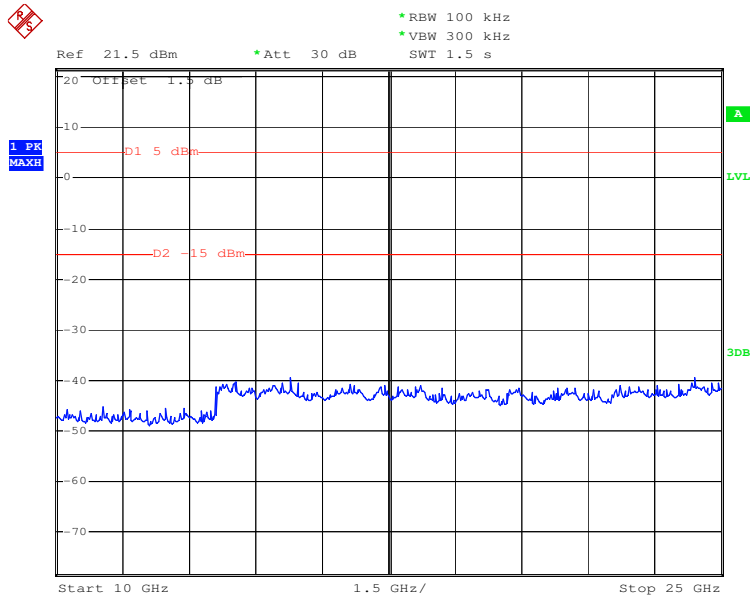


Date: 9.JUL.2010 09:21:38



| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Lowest |
|------------|----------|---------------|--------|

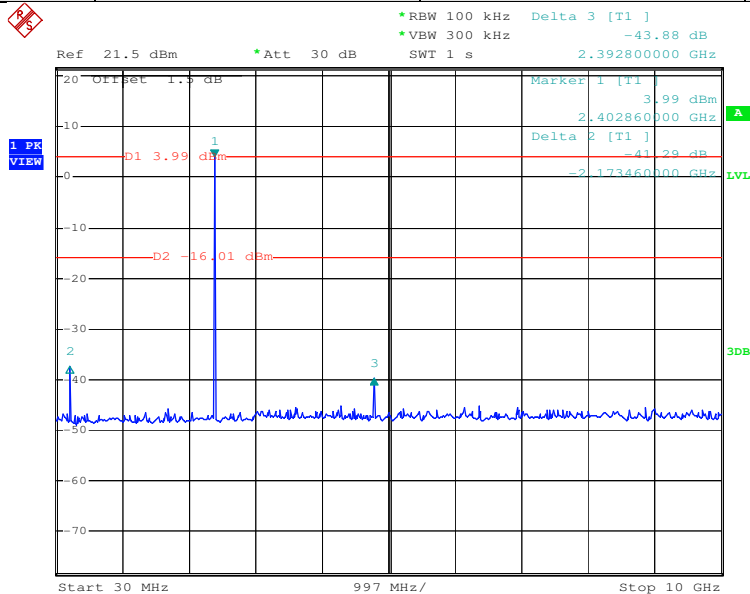


Date: 9.JUL.2010 09:36:26

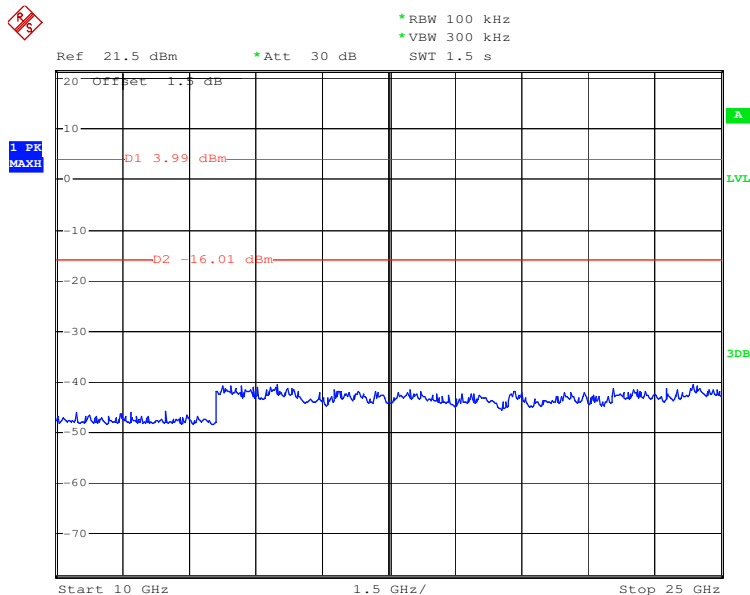


Date: 9.JUL.2010 09:36:54



| | | | |
|------------|----------|---------------|--------|
| Test mode: | Pi/4QPSK | Test channel: | Middle |
|------------|----------|---------------|--------|

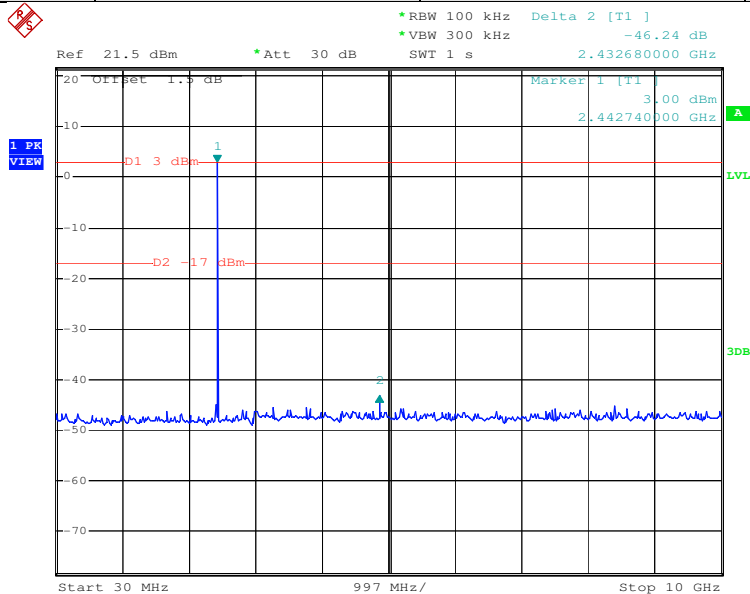


Date: 9.JUL.2010 10:09:11

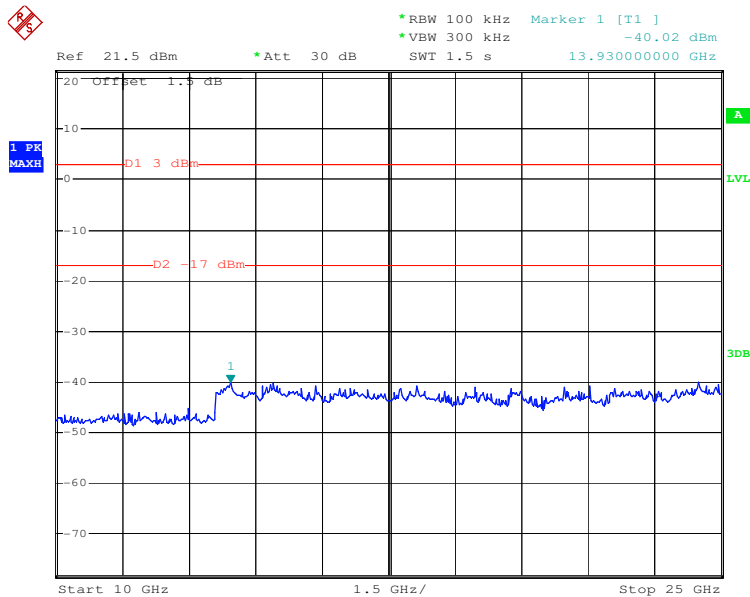


Date: 9.JUL.2010 10:09:34



| | | | |
|------------|----------|---------------|---------|
| Test mode: | Pi/4QPSK | Test channel: | Highest |
|------------|----------|---------------|---------|

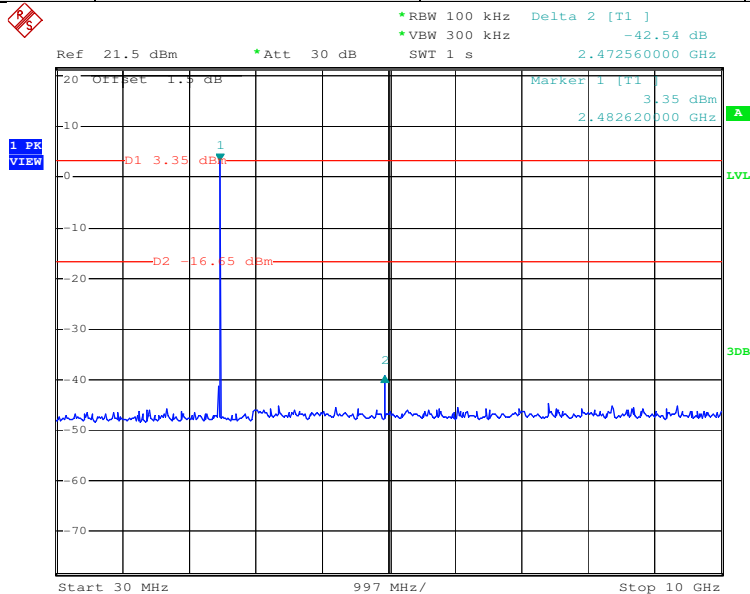


Date: 9.JUL.2010 09:45:41

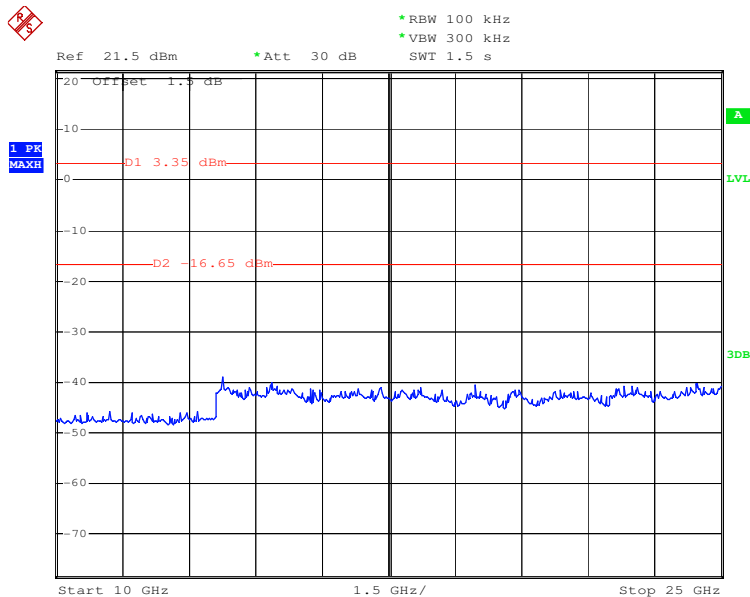


Date: 9.JUL.2010 09:46:23



| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Lowest |
|------------|-------|---------------|--------|

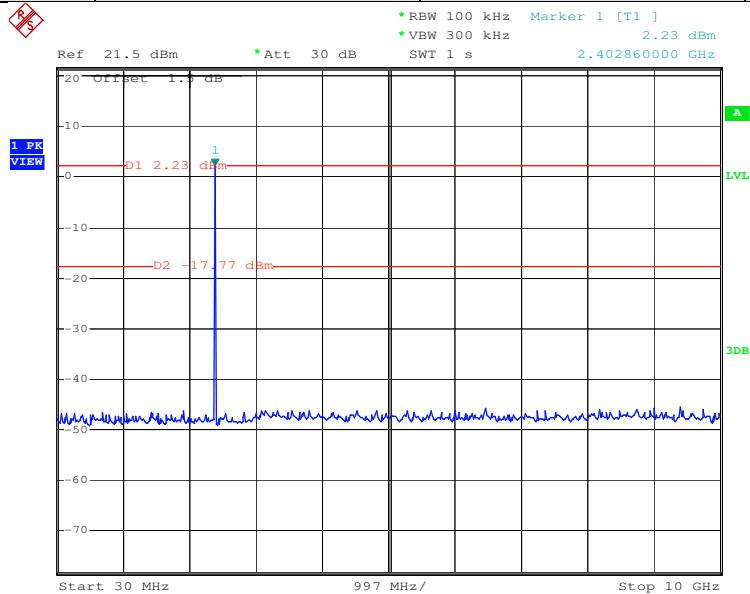


Date: 9.JUL.2010 14:03:27

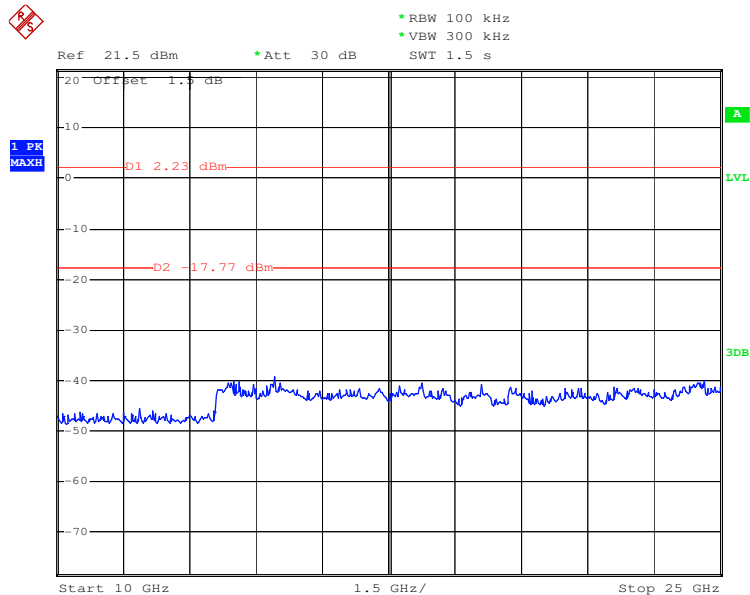


Date: 9.JUL.2010 14:03:58



| | | | |
|------------|-------|---------------|--------|
| Test mode: | 8DPSK | Test channel: | Middle |
|------------|-------|---------------|--------|

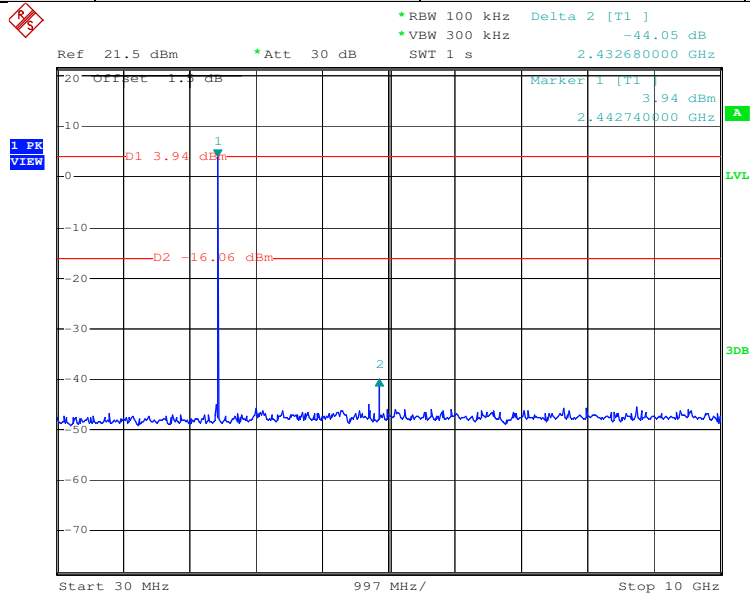

Date: 9.JUL.2010 14:28:24

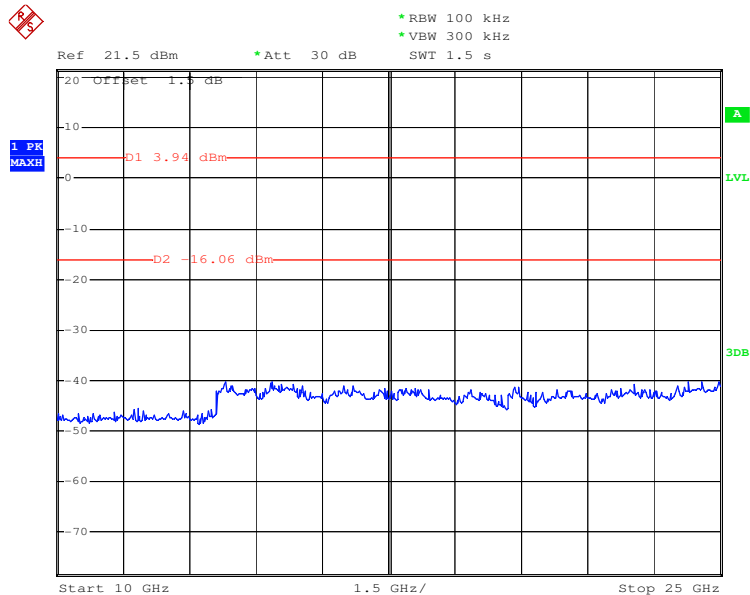


Date: 9.JUL.2010 14:28:48


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



| | | | |
|------------|-------|---------------|---------|
| Test mode: | 8DPSK | Test channel: | Highest |
|------------|-------|---------------|---------|

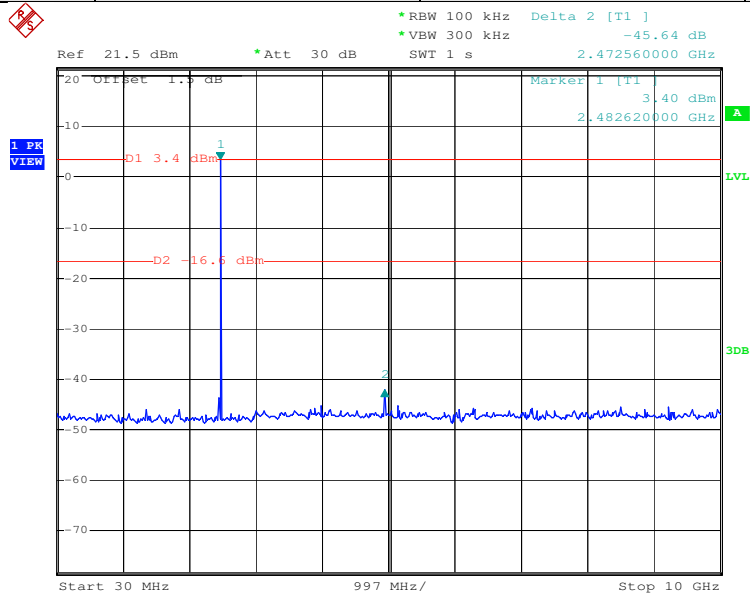

Date: 9.JUL.2010 14:10:37

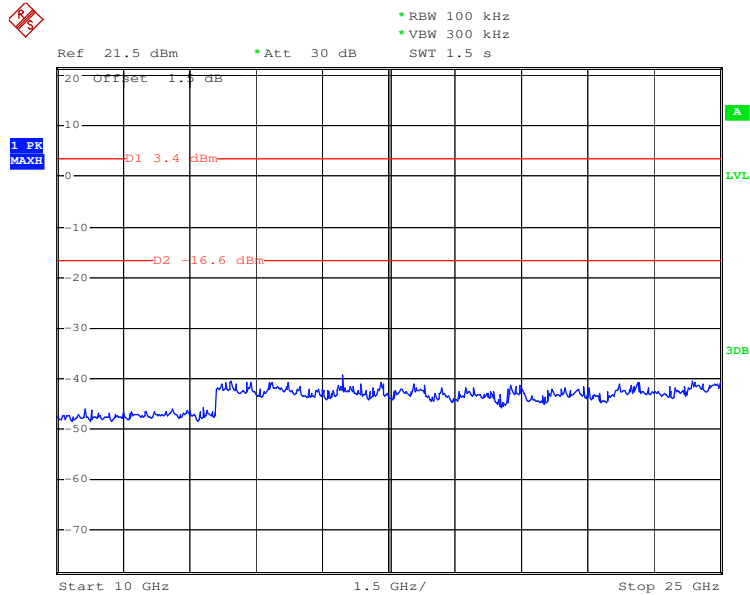



Date: 9.JUL.2010 14:11:00

5.9 Pseudorandom Frequency Hopping Sequence

| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) requirement: |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| <p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> | |
| EUT Pseudorandom Frequency Hopping Sequence | |
| <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="300 974 1356 1124" data-label="Diagram"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="276 1227 1273 1375" data-label="Diagram"> </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> | |

5.10 Radiated Emission

| | | | | | |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------|--------|------------------|
| Test Requirement: | FCC Part15 C Section 15.209 and 15.205 | | | | |
| Test Method: | ANSI C63.4: 2003 | | | | |
| Test Frequency Range: | 30MHz to 25GHz | | | | |
| Test site: | Measurement Distance: 3m (Semi-Anechoic Chamber) | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 100KHz | 300KHz | Quasi-peak Value |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| | | Peak | 1MHz | 10Hz | Average Value |
| Limit: | Frequency | | Limit (dBuV/m @3m) | | Remark |
| | 30MHz-88MHz | | 40.0 | | Quasi-peak Value |
| | 88MHz-216MHz | | 43.5 | | Quasi-peak Value |
| | 216MHz-960MHz | | 46.0 | | Quasi-peak Value |
| | 960MHz-1GHz | | 54.0 | | Quasi-peak Value |
| | Above 1GHz | | 54.0 | | Average Value |
| | | | 74.0 | | Peak Value |
| Test Procedure: | a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. | | | | |
| | b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. | | | | |
| | c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. | | | | |
| | d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. | | | | |
| | e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. | | | | |
| | f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | |
| | g. The radiation measurements are performed in X, Y, Z axis positioning. And the worst case is in X axis. Only the worst case is shown in the report. | | | | |
| Test Instruments: | Refer to section 4.7 for details | | | | |
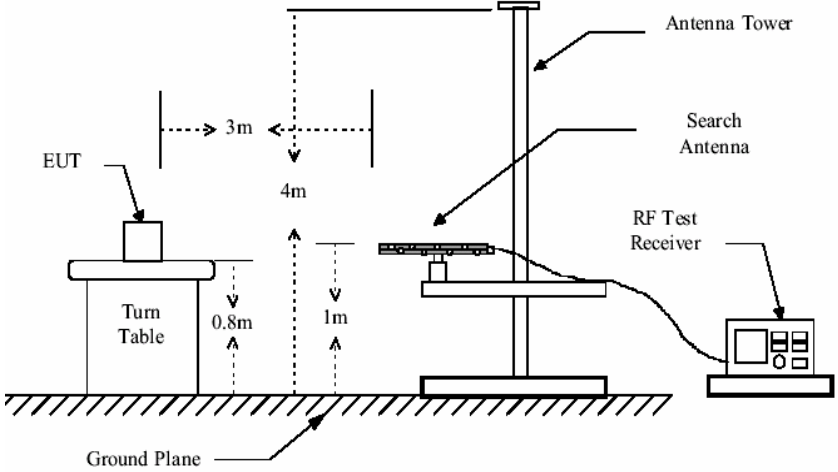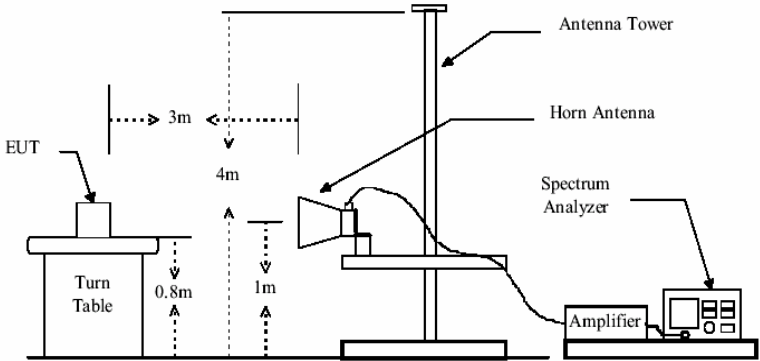
| | |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test mode: | <p>Non-hopping transmitting with modulation.</p> <ol style="list-style-type: none"> 1. Pre-scan the EUT in GFSK, Pi/4QPSK and 8DPSK modes and find out the worst case is GFSK mode. 2. Test the EUT in Bluetooth mode, charge mode, charge+ Bluetooth mode <p>Pre-scan were performed on the EUT on Bluetooth, charge mode, charge+ Bluetooth mode, and then found the Bluetooth mode was the worst case mode.</p> <p>Only the worst case mode was shown below.</p> |
| Test results: | Passed |
| Test setup: | <p>Below 1GHz</p>  <p>Above 1GHz</p>  |

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

**5.10.1 Radiated emission below 1GHz****Bluetooth mode**

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamplifier Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-----------------|-----------------------|--------------------------|-------------------|----------------|---------------------|-----------------|--------------|
| 31.940 | 0.60 | 14.43 | 28.17 | 28.99 | 15.85 | 40.00 | -24.15 | Vertical |
| 75.590 | 0.97 | 7.37 | 28.00 | 31.39 | 11.73 | 40.00 | -28.27 | Vertical |
| 222.060 | 1.53 | 11.34 | 27.04 | 34.25 | 20.08 | 46.00 | -25.92 | Vertical |
| 541.190 | 2.64 | 18.78 | 27.67 | 30.41 | 24.16 | 46.00 | -21.84 | Vertical |
| 699.300 | 2.90 | 21.60 | 27.28 | 30.74 | 27.96 | 46.00 | -18.04 | Vertical |
| 886.510 | 3.55 | 23.09 | 26.50 | 29.34 | 29.48 | 46.00 | -16.52 | Vertical |
| 32.910 | 0.60 | 13.84 | 28.16 | 27.22 | 13.50 | 40.00 | -26.50 | Horizontal |
| 74.620 | 0.94 | 7.28 | 28.00 | 27.56 | 7.78 | 40.00 | -32.22 | Horizontal |
| 148.340 | 1.31 | 8.86 | 27.47 | 29.51 | 12.21 | 43.50 | -31.29 | Horizontal |
| 350.100 | 2.06 | 15.40 | 27.09 | 28.96 | 19.33 | 46.00 | -26.67 | Horizontal |
| 634.310 | 2.77 | 20.54 | 27.49 | 29.62 | 25.44 | 46.00 | -20.56 | Horizontal |
| 925.310 | 3.63 | 23.30 | 26.43 | 30.23 | 30.73 | 46.00 | -15.27 | Horizontal |

Remark: the data above is tested with QP detector mode.

**5.10.2 Transmitter emission above 1GHz**

| | | | | | |
|------------------|------|---------------|--------|---------|------|
| Worse case mode: | GFSK | Test channel: | Lowest | Remark: | Peak |
|------------------|------|---------------|--------|---------|------|

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-----------------|-----------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|
| 2330 | 6.05 | 29.79 | 39.67 | 45.28 | 41.45 | 74.00 | -32.55 | Vertical |
| 2988 | 6.65 | 31.88 | 39.01 | 48.58 | 48.10 | 74.00 | -25.90 | Vertical |
| 4780 | 9.55 | 34.21 | 41.48 | 50.31 | 52.59 | 74.00 | -21.41 | Vertical |
| 7202 | 13.38 | 37.23 | 40.98 | 46.20 | 55.83 | 74.00 | -18.17 | Vertical |
| 9610 | 13.39 | 37.99 | 37.56 | 41.61 | 55.43 | 74.00 | -18.57 | Vertical |
| 12004 | 16.45 | 39.10 | 39.09 | 43.26 | 59.72 | 74.00 | -14.28 | Vertical |
| 2316 | 6.00 | 29.74 | 39.83 | 45.39 | 41.30 | 74.00 | -32.70 | Horizontal |
| 3674 | 7.71 | 32.74 | 39.70 | 46.28 | 47.03 | 74.00 | -26.97 | Horizontal |
| 4780 | 9.55 | 34.21 | 41.48 | 54.87 | 57.15 | 74.00 | -16.85 | Horizontal |
| 7230 | 13.30 | 37.24 | 40.88 | 44.35 | 54.01 | 74.00 | -19.99 | Horizontal |
| 9610 | 13.39 | 37.99 | 37.56 | 41.89 | 55.71 | 74.00 | -18.29 | Horizontal |
| 12004 | 16.45 | 39.10 | 39.09 | 43.58 | 60.04 | 74.00 | -13.96 | Horizontal |

| | | | | | |
|------------------|------|---------------|--------|---------|---------|
| Worse case mode: | GFSK | Test channel: | Lowest | Remark: | Average |
|------------------|------|---------------|--------|---------|---------|

| Frequency (MHz) | Cable loss (dB) | Antenna factors (dB/m) | Preamp factor (dB) | Reading Level (dBuV) | Emission Level (dBuV/m) | Limit (dBuV/m) | Over limit | polarization |
|-----------------|-----------------|------------------------|--------------------|----------------------|-------------------------|----------------|------------|--------------|
| 2330 | 6.05 | 29.79 | 39.67 | 34.35 | 30.52 | 54.00 | -23.48 | Vertical |
| 2988 | 6.65 | 31.88 | 39.01 | 31.58 | 31.10 | 54.00 | -22.90 | Vertical |
| 4780 | 9.55 | 34.21 | 41.48 | 37.28 | 39.56 | 54.00 | -14.44 | Vertical |
| 7202 | 13.38 | 37.23 | 40.98 | 25.20 | 34.83 | 54.00 | -19.17 | Vertical |
| 9610 | 13.39 | 37.99 | 37.56 | 27.76 | 41.58 | 54.00 | -12.42 | Vertical |
| 12004 | 16.45 | 39.10 | 39.09 | 29.84 | 46.30 | 54.00 | -7.70 | Vertical |
| 2316 | 6.00 | 29.74 | 39.83 | 29.39 | 25.30 | 54.00 | -28.70 | Horizontal |
| 3674 | 7.71 | 32.74 | 39.70 | 33.31 | 34.06 | 54.00 | -19.94 | Horizontal |
| 4780 | 9.55 | 34.21 | 41.48 | 35.87 | 38.15 | 54.00 | -15.85 | Horizontal |
| 7230 | 13.30 | 37.24 | 40.88 | 29.85 | 39.51 | 54.00 | -14.49 | Horizontal |
| 9610 | 13.39 | 37.99 | 37.56 | 25.89 | 39.71 | 54.00 | -14.29 | Horizontal |
| 12004 | 16.45 | 39.10 | 39.09 | 27.41 | 43.87 | 54.00 | -10.13 | Horizontal |



| | | | | | |
|------------------|------|---------------|--------|---------|------|
| Worse case mode: | GFSK | Test channel: | Middle | Remark: | Peak |
|------------------|------|---------------|--------|---------|------|

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-----------------|-----------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|
| 1476 | 4.68 | 27.06 | 39.57 | 51.22 | 43.39 | 74.00 | -30.61 | Vertical |
| 3450 | 7.24 | 32.48 | 39.60 | 46.49 | 46.61 | 74.00 | -27.39 | Vertical |
| 4850 | 11.47 | 34.30 | 41.59 | 54.31 | 58.49 | 74.00 | -15.51 | Vertical |
| 7314 | 12.99 | 37.30 | 40.50 | 45.69 | 55.48 | 74.00 | -18.52 | Vertical |
| 9778 | 13.99 | 38.04 | 38.01 | 42.16 | 56.18 | 74.00 | -17.82 | Vertical |
| 12228 | 17.95 | 39.23 | 39.30 | 42.80 | 60.68 | 74.00 | -13.32 | Vertical |
| 1602 | 5.13 | 27.44 | 38.81 | 51.10 | 44.86 | 74.00 | -29.14 | Horizontal |
| 3058 | 7.23 | 31.98 | 39.59 | 46.22 | 45.84 | 74.00 | -28.16 | Horizontal |
| 4850 | 11.47 | 34.30 | 41.59 | 55.45 | 59.63 | 74.00 | -14.37 | Horizontal |
| 7314 | 12.99 | 37.30 | 40.50 | 46.55 | 56.34 | 74.00 | -17.66 | Horizontal |
| 9778 | 13.99 | 38.04 | 38.01 | 42.05 | 56.07 | 74.00 | -17.93 | Horizontal |
| 12004 | 16.45 | 39.10 | 39.09 | 42.76 | 59.22 | 74.00 | -14.78 | Horizontal |

| | | | | | |
|------------------|------|---------------|--------|---------|---------|
| Worse case mode: | GFSK | Test channel: | Middle | Remark: | Average |
|------------------|------|---------------|--------|---------|---------|

| Frequency (MHz) | Cable loss (dB) | Antenna factors (dB/m) | Preamp factor (dB) | Reading Level (dBμV) | Emission Level (dBμV/m) | Limit (dBμV/m) | Over limit | polarization |
|-----------------|-----------------|------------------------|--------------------|----------------------|-------------------------|----------------|------------|--------------|
| 1476 | 4.68 | 27.06 | 39.57 | 40.33 | 32.50 | 54.00 | -21.50 | Vertical |
| 3450 | 7.24 | 32.48 | 39.60 | 35.49 | 35.61 | 54.00 | -18.39 | Vertical |
| 4850 | 11.47 | 34.30 | 41.59 | 40.24 | 44.42 | 54.00 | -9.58 | Vertical |
| 7314 | 12.99 | 37.30 | 40.50 | 32.64 | 42.43 | 54.00 | -11.57 | Vertical |
| 9778 | 13.99 | 38.04 | 38.01 | 29.06 | 43.08 | 54.00 | -10.92 | Vertical |
| 12228 | 17.95 | 39.23 | 39.30 | 29.81 | 47.69 | 54.00 | -6.31 | Vertical |
| 1602 | 5.13 | 27.44 | 38.81 | 35.10 | 28.86 | 54.00 | -25.14 | Horizontal |
| 3058 | 7.23 | 31.98 | 39.59 | 32.27 | 31.89 | 54.00 | -22.11 | Horizontal |
| 4850 | 11.47 | 34.30 | 41.59 | 37.57 | 41.75 | 54.00 | -12.25 | Horizontal |
| 7314 | 12.99 | 37.30 | 40.50 | 32.90 | 42.69 | 54.00 | -11.31 | Horizontal |
| 9778 | 13.99 | 38.04 | 38.01 | 28.78 | 42.80 | 54.00 | -11.20 | Horizontal |
| 12004 | 16.45 | 39.10 | 39.09 | 39.25 | 55.71 | 54.00 | 1.71 | Horizontal |



| | | | | | |
|------------------|------|---------------|---------|---------|------|
| Worse case mode: | GFSK | Test channel: | Highest | Remark: | Peak |
|------------------|------|---------------|---------|---------|------|

| Frequency (MHz) | Cable Loss (dB) | Antenna Factor (dB/m) | Preamp Factor (dB) | Read Level (dBuV) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | polarization |
|-----------------|-----------------|-----------------------|--------------------|-------------------|----------------|---------------------|-----------------|--------------|
| 1966 | 5.39 | 28.42 | 39.08 | 46.51 | 41.24 | 74.00 | -32.76 | Vertical |
| 3450 | 7.24 | 32.48 | 39.60 | 46.57 | 46.69 | 74.00 | -27.31 | Vertical |
| 4948 | 10.51 | 34.43 | 40.96 | 49.88 | 53.86 | 74.00 | -20.14 | Vertical |
| 7440 | 12.72 | 37.37 | 40.01 | 45.06 | 55.14 | 74.00 | -18.86 | Vertical |
| 9932 | 14.24 | 38.08 | 37.78 | 42.41 | 56.95 | 74.00 | -17.05 | Vertical |
| 12438 | 17.51 | 39.37 | 39.52 | 42.95 | 60.31 | 74.00 | -13.69 | Vertical |
| 1546 | 4.93 | 27.28 | 39.33 | 47.77 | 40.65 | 74.00 | -33.35 | Horizontal |
| 3338 | 7.02 | 32.34 | 39.39 | 46.74 | 46.71 | 74.00 | -27.29 | Horizontal |
| 4948 | 10.51 | 34.43 | 40.96 | 50.84 | 54.82 | 74.00 | -19.18 | Horizontal |
| 7440 | 12.72 | 37.37 | 40.01 | 45.03 | 55.11 | 74.00 | -18.89 | Horizontal |
| 9932 | 14.24 | 38.08 | 37.78 | 42.59 | 57.13 | 74.00 | -16.87 | Horizontal |
| 12410 | 17.55 | 39.34 | 39.48 | 43.67 | 61.08 | 74.00 | -12.92 | Horizontal |

| | | | | | |
|------------------|------|---------------|---------|---------|---------|
| Worse case mode: | GFSK | Test channel: | Highest | Remark: | Average |
|------------------|------|---------------|---------|---------|---------|

| Frequency (MHz) | Cable loss (dB) | Antenna factors (dB/m) | Preamp factor (dB) | Reading Level (dBμV) | Emission Level (dBμV/m) | Limit (dBμV/m) | Over limit | polarization |
|-----------------|-----------------|------------------------|--------------------|----------------------|-------------------------|----------------|------------|--------------|
| 1966 | 5.39 | 28.42 | 39.08 | 36.24 | 30.97 | 54.00 | -23.03 | Vertical |
| 3450 | 7.24 | 32.48 | 39.60 | 37.57 | 37.69 | 54.00 | -16.31 | Vertical |
| 4948 | 10.51 | 34.43 | 40.96 | 38.88 | 42.86 | 54.00 | -11.14 | Vertical |
| 7440 | 12.72 | 37.37 | 40.01 | 31.54 | 41.62 | 54.00 | -12.38 | Vertical |
| 9932 | 14.24 | 38.08 | 37.78 | 28.52 | 43.06 | 54.00 | -10.94 | Vertical |
| 12438 | 17.51 | 39.37 | 39.52 | 28.95 | 46.31 | 54.00 | -7.69 | Vertical |
| 1546 | 4.93 | 27.28 | 39.33 | 37.65 | 30.53 | 54.00 | -23.47 | Horizontal |
| 3338 | 7.02 | 32.34 | 39.39 | 36.74 | 36.71 | 54.00 | -17.29 | Horizontal |
| 4948 | 10.51 | 34.43 | 40.96 | 38.91 | 42.89 | 54.00 | -11.11 | Horizontal |
| 7440 | 12.72 | 37.37 | 40.01 | 33.13 | 43.21 | 54.00 | -10.79 | Horizontal |
| 9932 | 14.24 | 38.08 | 37.78 | 39.41 | 53.95 | 54.00 | -0.05 | Horizontal |
| 12410 | 17.55 | 39.34 | 39.48 | 29.97 | 47.38 | 54.00 | -6.62 | Horizontal |

Remark: The disturbance above 13GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




5.10.3 Band Edge and Restricted band (Radiated measurement)

| | | | | | |
|------------|------|---------------|--------|---------------|----------|
| Test mode: | GFSK | Test channel: | Lowest | Polarization: | Vertical |
|------------|------|---------------|--------|---------------|----------|

Data: 36

Level (dBuV/m)

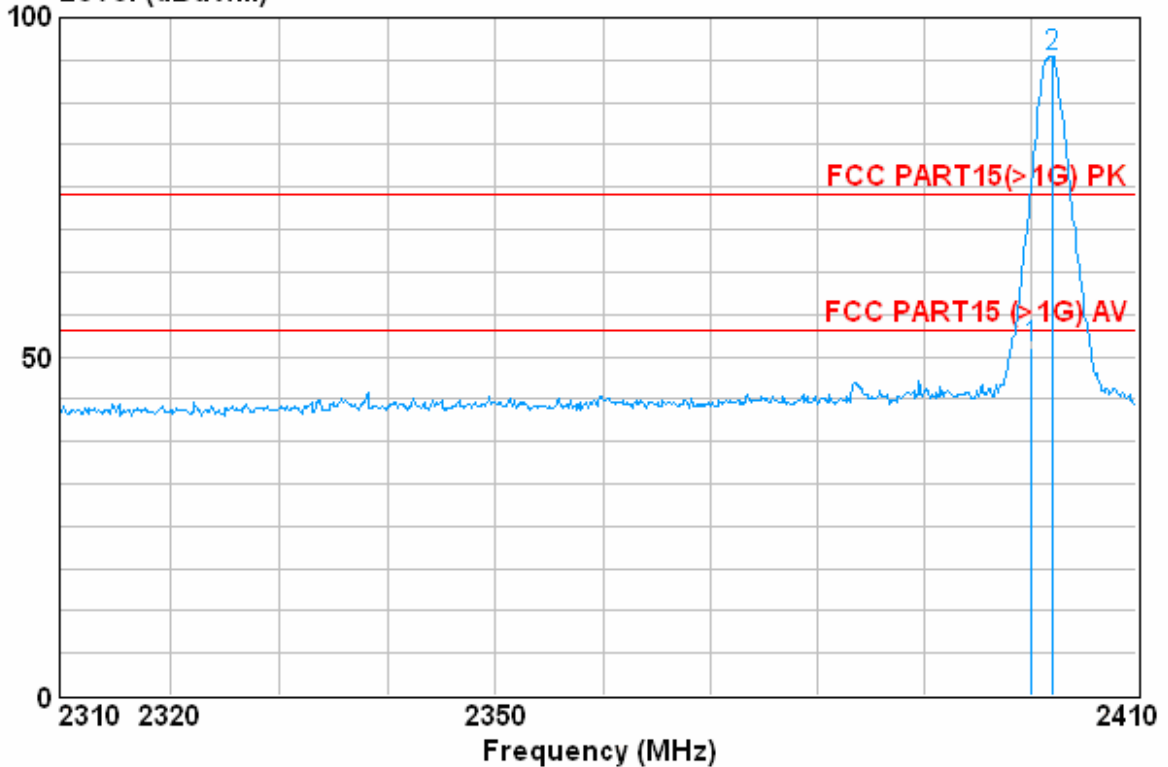


| | | CableAntenna | | Preamp | Read | | Limit | Over |
|-----|----------|--------------|--------|--------|-------|--------|--------|--------|
| | Freq | Loss | Factor | Factor | Level | Level | Line | Limit |
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | dBuV/m | dB |
| 1 | 2400.000 | 6.34 | 30.03 | 38.87 | 53.80 | 51.30 | 79.50 | -28.20 |
| 2 @ | 2402.000 | 6.34 | 30.03 | 38.87 | 96.78 | 94.28 | 79.50 | 14.78 |



| | | | | | |
|------------|------|---------------|--------|---------------|------------|
| Test mode: | GFSK | Test channel: | Lowest | Polarization: | Horizontal |
|------------|------|---------------|--------|---------------|------------|

Data: 33

Level (dBuV/m)

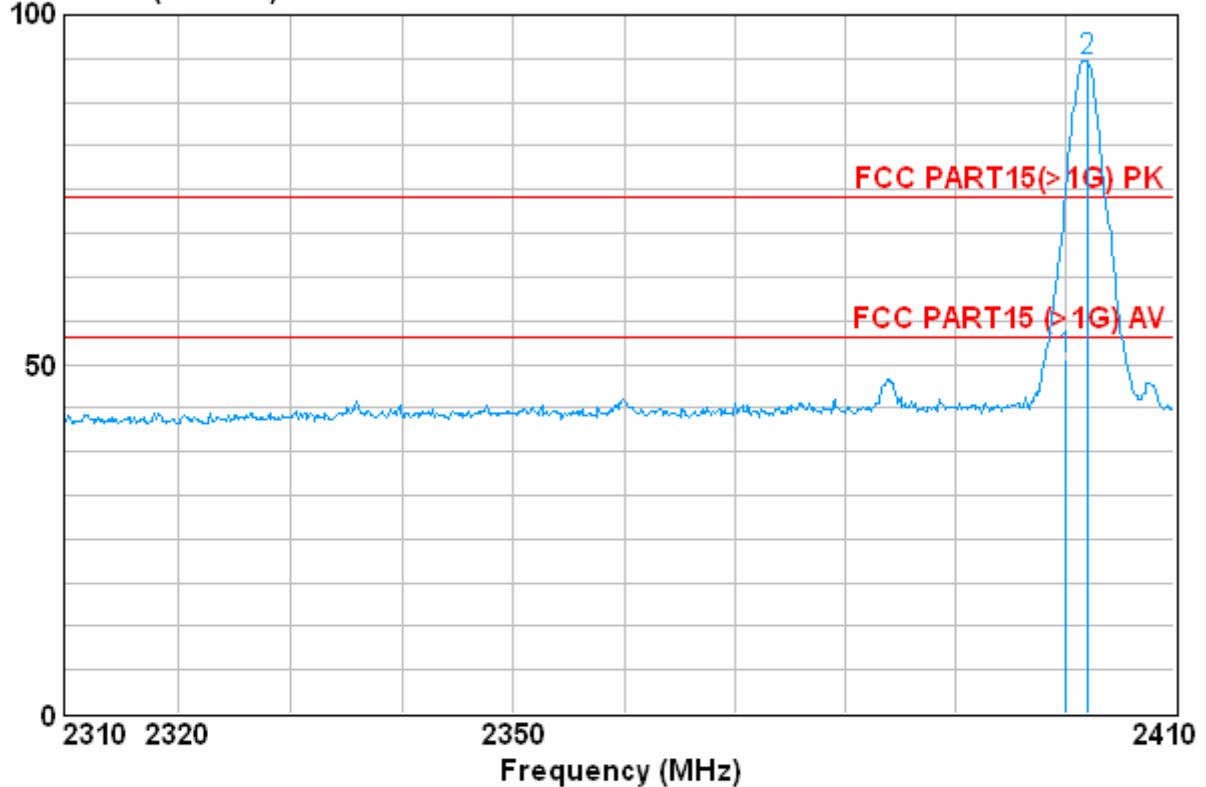


| | Freq | CableAntenna Loss | Preamp Factor | Read Factor | Level | Limit | Over |
|-----|----------|----------------------|------------------|----------------|-------|--------|--------------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | Limit |
| 1 | 2400.000 | 6.34 | 30.03 | 38.87 | 53.21 | 50.71 | 79.50 -28.79 |
| 2 @ | 2402.000 | 6.34 | 30.03 | 38.87 | 96.01 | 93.51 | 79.50 14.01 |



| | | | | | |
|------------|------|---------------|---------|---------------|----------|
| Test mode: | GFSK | Test channel: | Highest | Polarization: | Vertical |
|------------|------|---------------|---------|---------------|----------|

Data: 41

Level (dBuV/m)

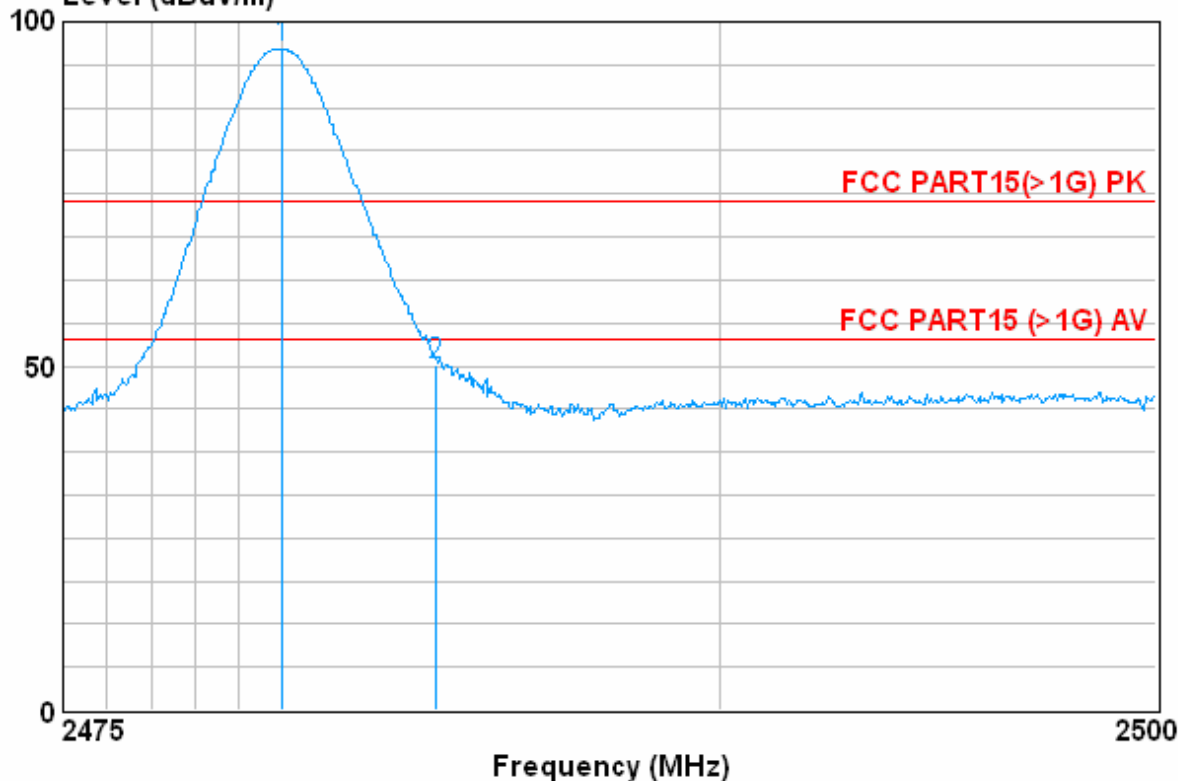


| | CableAntenna | Preamp | Read | Limit | Over |
|--------------|--------------|--------|--------|-------|--------|
| Freq | Loss | Factor | Factor | Level | Limit |
| MHz | dB | dB/m | dB | dBuV | dBuV/m |
| 1 @ 2480.000 | 6.45 | 30.30 | 39.72 | 99.10 | 96.13 |
| 2 2483.500 | 6.22 | 30.32 | 39.53 | 53.08 | 50.09 |



| | | | | | |
|------------|------|---------------|---------|---------------|------------|
| Test mode: | GFSK | Test channel: | Highest | Polarization: | Horizontal |
|------------|------|---------------|---------|---------------|------------|

Data: 42

Level (dBuV/m)

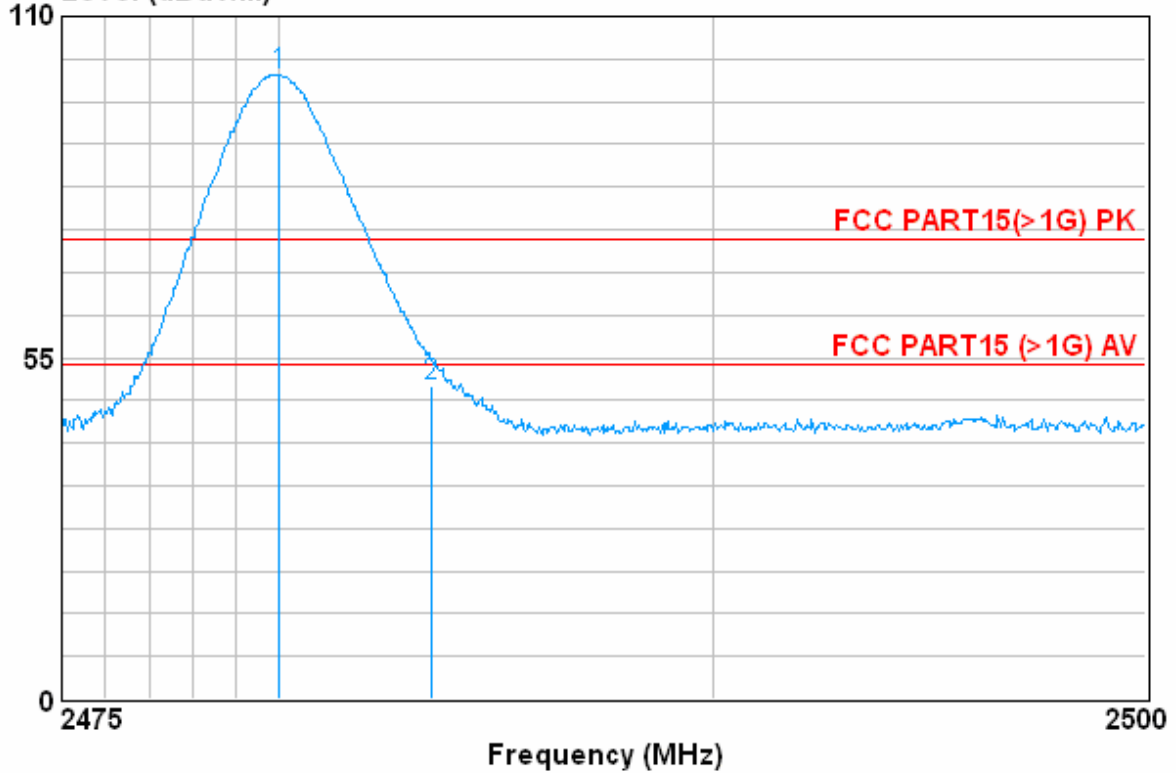

| | Freq | CableAntenna Loss | Antenna Factor | Preamp Factor | Read Level | Limit | Over |
|-----|----------|----------------------|-------------------|------------------|---------------|--------|--------------|
| | MHz | dB | dB/m | dB | dBuV | dBuV/m | Limit |
| | | | | | | | dB |
| 1 @ | 2480.000 | 6.45 | 30.30 | 39.72 | 103.49 | 100.51 | 74.00 26.51 |
| 2 | 2483.500 | 6.22 | 30.32 | 39.53 | 53.30 | 50.31 | 74.00 -23.69 |