



No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: sgs_internet_operations@sgs.com

Report No.: SZEM120100001801

Page : 1 of 65

FCC REPORT

Application No: SZEM1201000018RF
Applicant: Unifat Technology Ltd
Manufacturer: DONGGUAN EASYFAT ELECTRONIC MFY. SIMA CHANG PING
Factory: DONGGUAN EASYFAT ELECTRONIC MFY. SIMA CHANG PING
Product Name: Rearview camera mirror with Bluetooth
Operation Frequency: 2402MHz to 2480MHz
FCC ID: RIIMCR28V01
Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2010
Date of Receipt: 2012-01-05
Date of Test: 2012-01-17 to 2012-03-23
Date of Issue: 2012-03-27

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang

EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



2 Contents

	Page
1 COVER PAGE	1
2 CONTENTS	2
3 TEST SUMMARY	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 GENERAL DESCRIPTION OF E.U.T.	4
4.3 E.U.T OPERATION MODE	6
4.4 DESCRIPTION OF SUPPORT UNITS	6
4.5 TEST FACILITY	6
4.6 TEST LOCATION	6
4.7 OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
4.8 TEST INSTRUMENTS LIST	7
5 TEST RESULTS AND MEASUREMENT DATA	8
5.1 ANTENNA REQUIREMENT:	8
5.2 CONDUCTED PEAK OUTPUT POWER	9
5.3 20dB OCCUPY BANDWIDTH	15
5.4 CARRIER FREQUENCIES SEPARATION	21
5.5 HOPPING CHANNEL NUMBER	28
5.6 DWELL TIME	31
5.7 BAND EDGE	37
5.8 RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	44
5.9 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	50
5.10 RADIATED EMISSION	51
5.10.1 Radiated emission below 1GHz	53
5.10.2 Transmitter emission above 1GHz	55
5.10.3 Band edge (Radiated Emission)	58-65

3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List (7 July 2002)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.





4 General Information

4.1 Client Information

Applicant:	Unifat Technology Ltd
Address of Applicant:	7/F, Sui Hong Ind. Bldg, 547-549 Castie Peak Rd, Kwai Chung, N.T, H.K.
Manufacturer:	DONGGUAN EASYFAT ELECTRONIC MFY.SIMA CHANG PING
Address of Manufacturer:	Sheima Sheung, Shueng ping chang, Dongguan, People's Republic of China
Factory:	DONGGUAN EASYFAT ELECTRONIC MFY.SIMA CHANG PING
Address of Factory:	Sheima Sheung, Shueng ping chang, Dongguan, People's Republic of China

4.2 General Description of E.U.T.

Product Name:	Rearview camera mirror with Bluetooth
Model No.:	MCR28A, MCR28B, MCR18A, VCM43, VCM35 MCR18B, BT53355F-1, BT53328F-1 Only the model No. MCR28A was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models, only different on model number and color.
Trade Mark:	AXIA
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Channel Spacing:	1MHz
Channel Numbers:	79
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type:	Integral
Antenna Gain:	2.0dBi
EUT Power Supply:	DC adapter: 12/24V for Bluetooth DC: 5V for Camera
DC Line:	>3m
Signal Line:	>3m
Vehicle Charge Line:	>3m



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel for testing see below:

Channel	Frequency
Lowest channel	2402MHz
Middle channel	2441MHz
Highest channel	2480MHz



4.3 E.U.T Operation Mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1015mbar
Test mode:	
Transmitting:	The EUT transmitted the continuous modulation test signal at the specific channel(s).

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**
CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.
- **VCCI**
The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.
- **FCC – Registration No.: 556682**
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab
No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057
Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594
No tests were sub-contracted.

4.7 Other Information Requested by the Customer

None.



4.8 Test Instruments List


RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2012-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2012-05-26
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2012-05-29
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2012-10-29
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2012-10-29
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2012-10-29
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2012-05-26
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2012-10-26
11	Band filter	Amindeon	82346	SEL0094	2012-05-26

RF conducted					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2012-10-23
2	Coaxial cable	SGS	N/A	SEL0028	2012-05-29


General used equipment					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0102 to SEL0103	2012-10-27
2	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	SEL0101	2012-10-27
3	Barometer	ChangChun	DYM3	SEL0088	2012-05-18

5 Test results and Measurement Data

5.1 Antenna requirement:

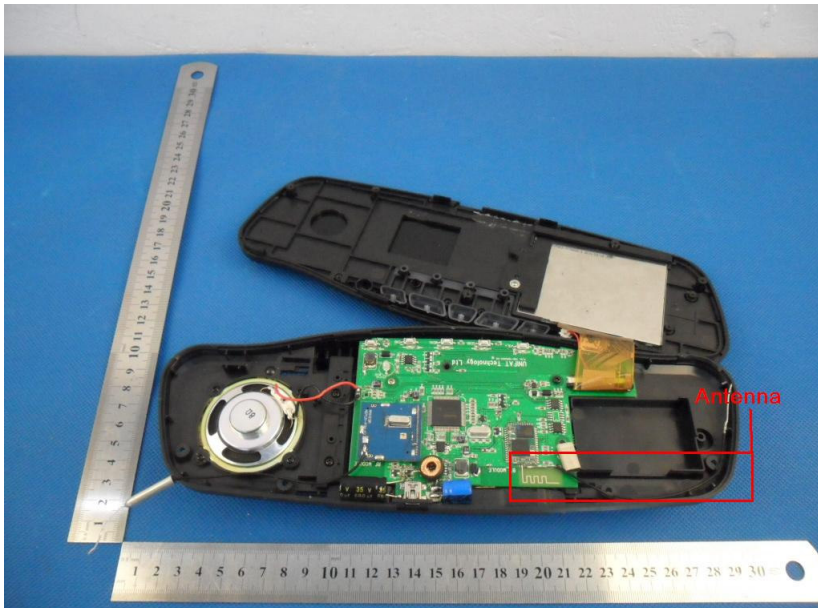Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p>15.203 requirement: <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p>15.247(c) (1)(i) requirement: <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
E.U.T Antenna:	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best gain of the antenna is 2.0dBi.</p>	
	

5.2 Conducted Peak Output Power

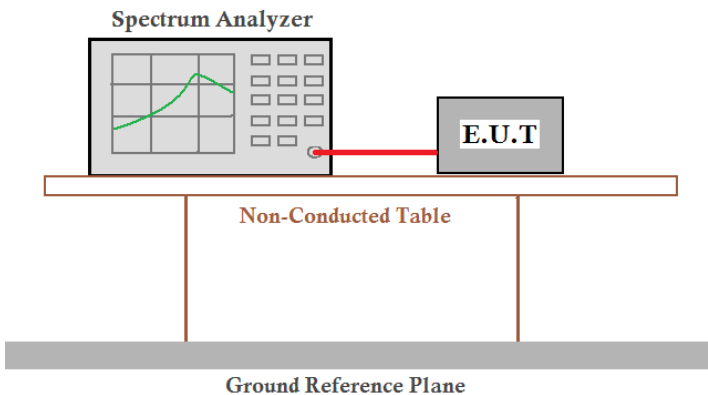Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2009
Limit:	30dBm
Test Setup:	 <p><i>Remark:</i> Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</p>
Test Instruments:	Refer to section 4.8 for details.
Test State:	Non-hopping transmitting with all kinds of modulation.
Test Results:	Pass


Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.44	30.00	Pass
Middle	2.56	30.00	Pass
Highest	2.51	30.00	Pass
$\pi/4$ DQPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.82	30.00	Pass
Middle	1.65	30.00	Pass
Highest	1.32	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.07	30.00	Pass
Middle	1.92	30.00	Pass
Highest	1.67	30.00	Pass




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

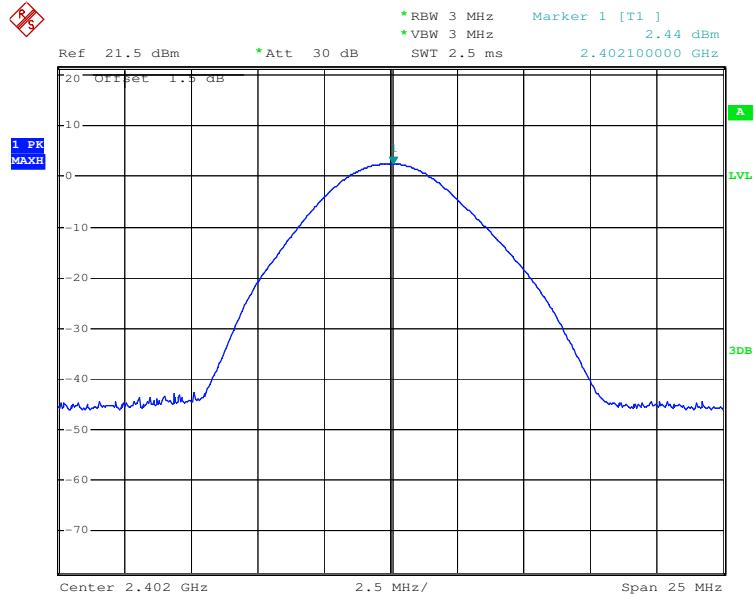


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

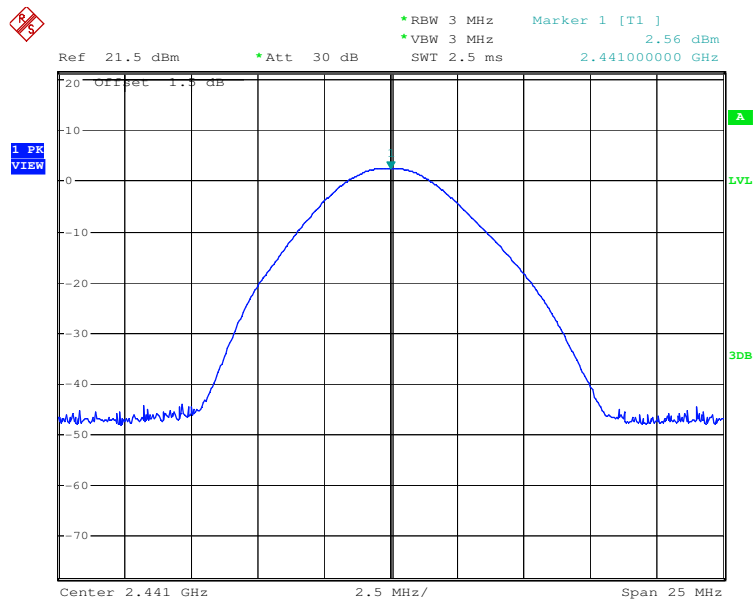


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

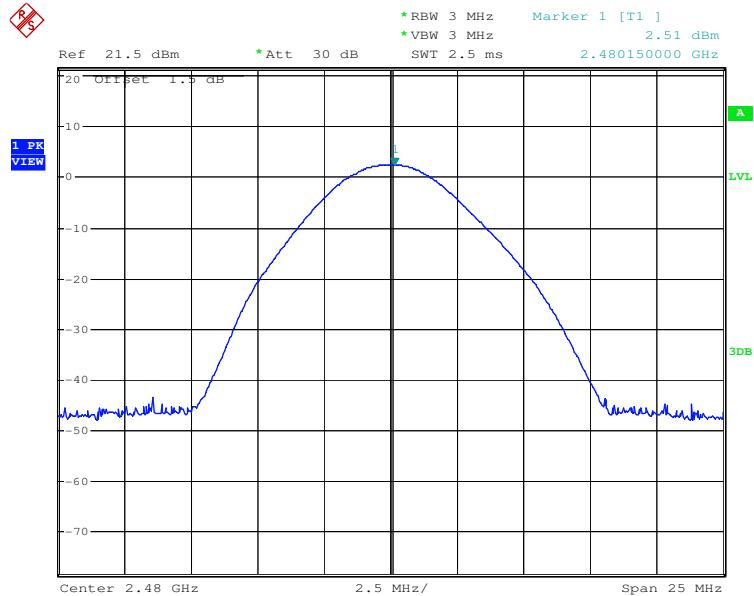


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

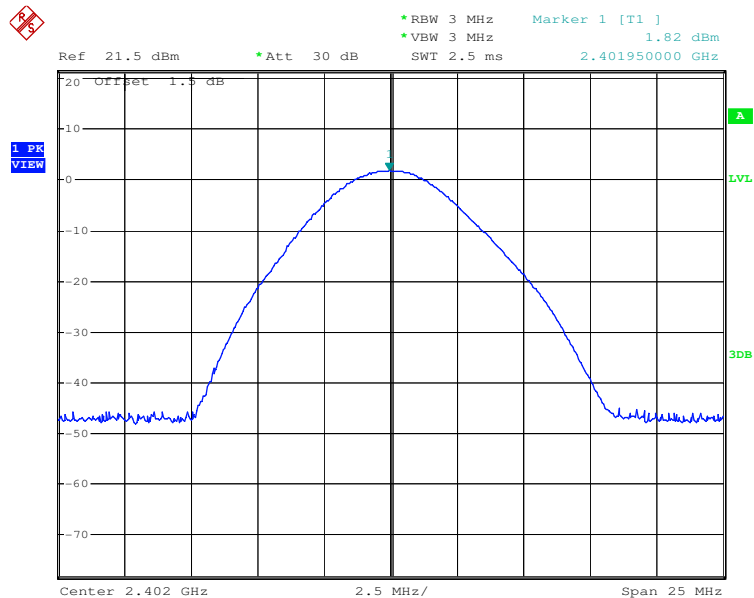




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

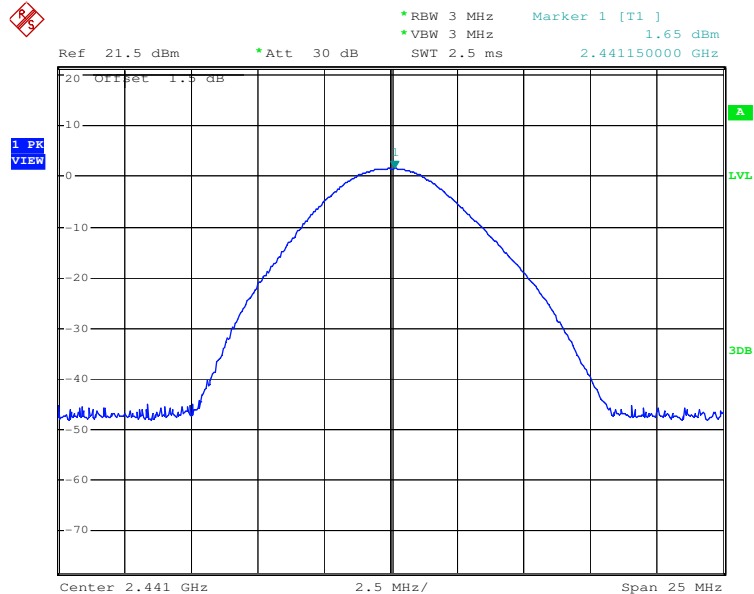


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

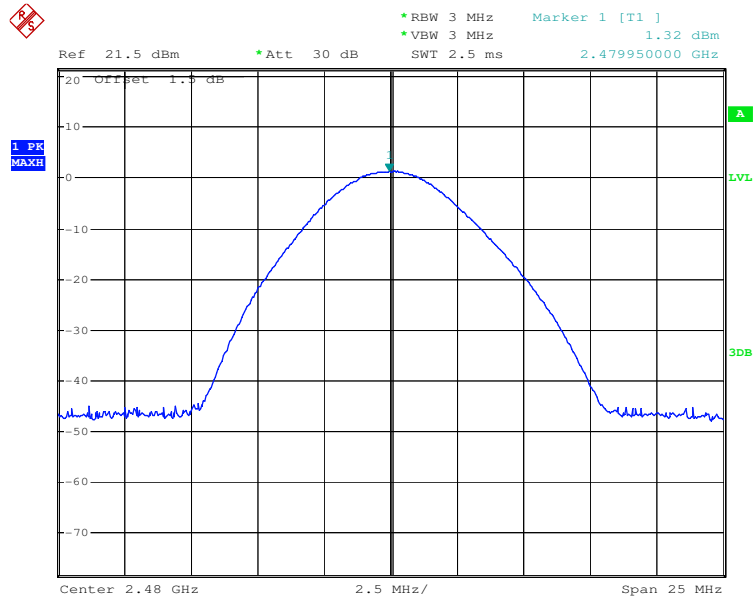




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

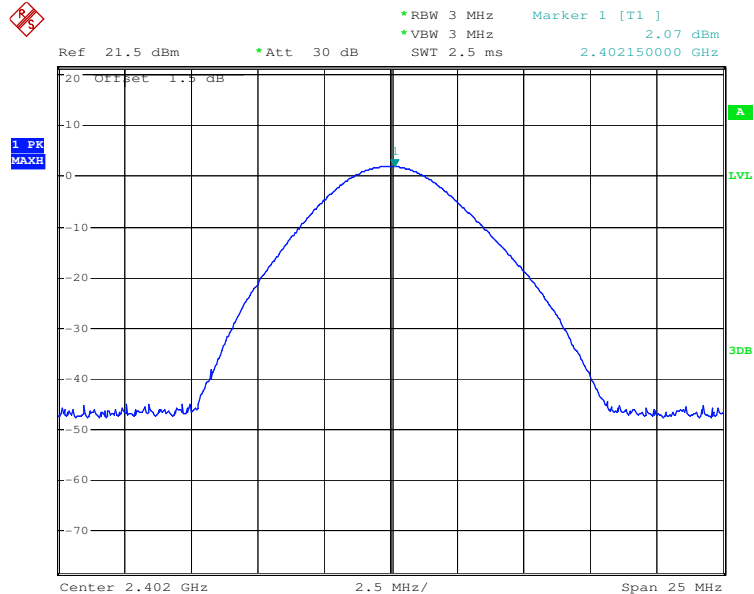


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

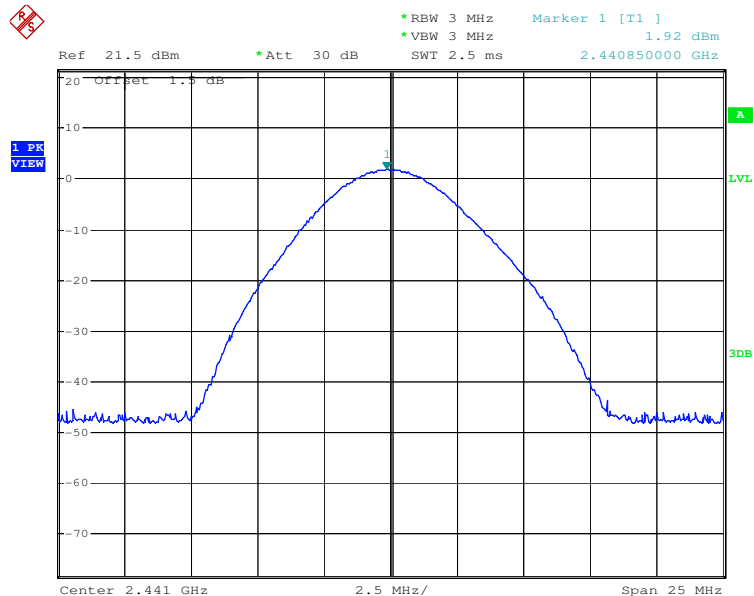




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

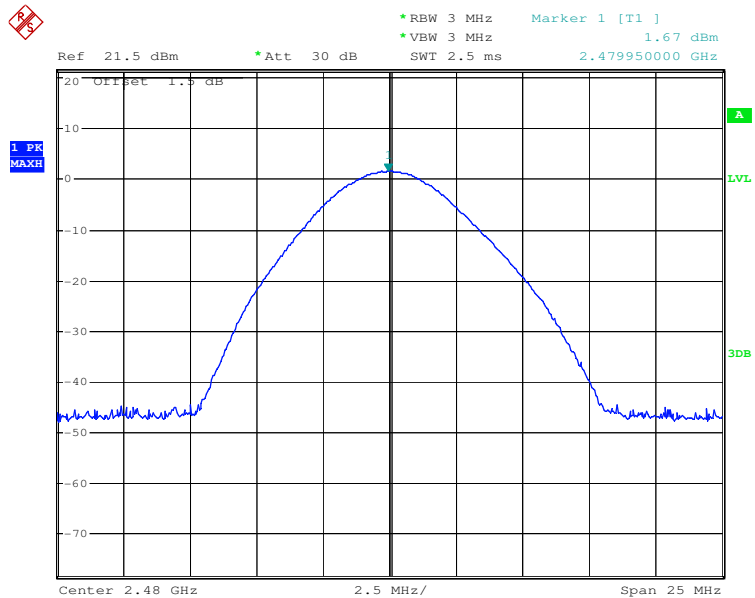

“This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company’s findings at the time of its intervention only and within the limits of Client’s instructions, if any. The Company’s sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.”

5.3 20dB Occupy Bandwidth

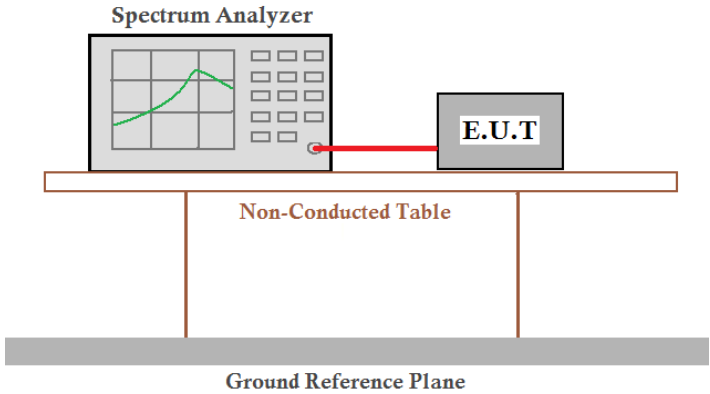Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	NA
Test Setup:	
Test Instruments:	Refer to section 4.8 for details.
Test State:	Non-hopping transmitting with all kinds of modulation.


Measurement Data

Test channel	20dB Occupy Bandwidth (kHz)		
	GFSK	$\pi/4$ DQPSK	8DPSK
Lowest	792	1206	1200
Middle	792	1212	1206
Highest	786	1200	1206




Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

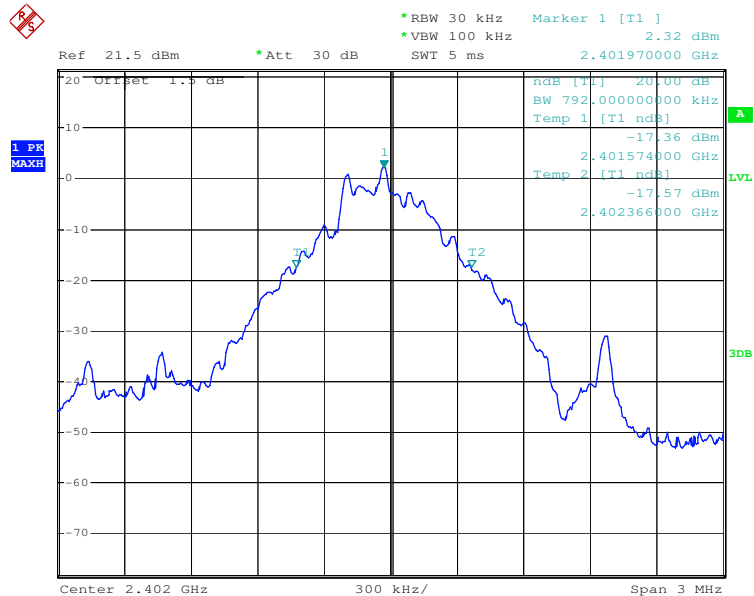


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

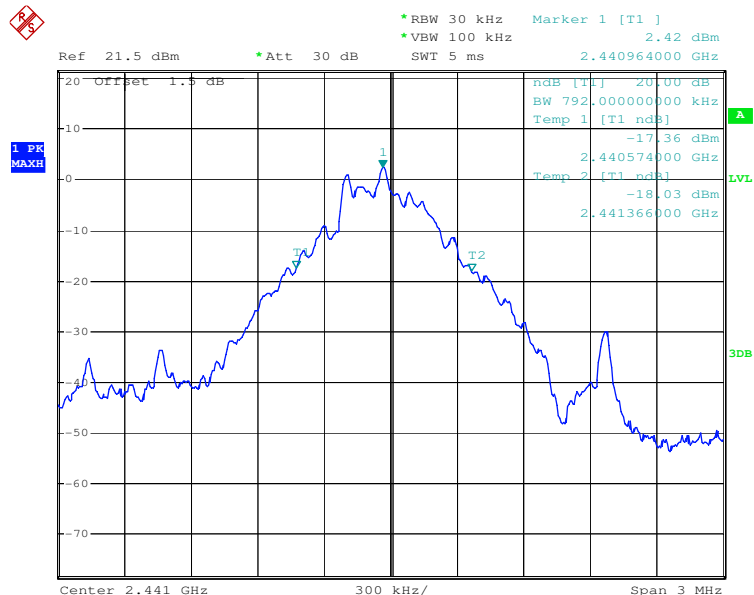


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

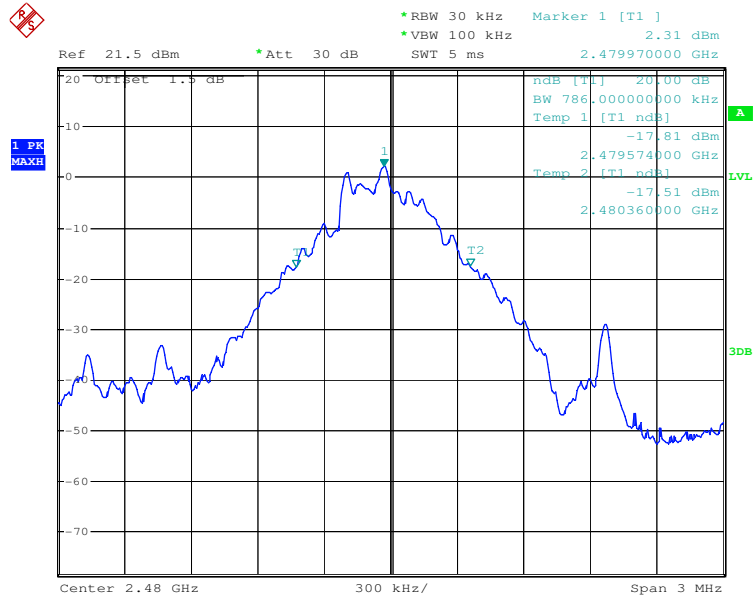


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

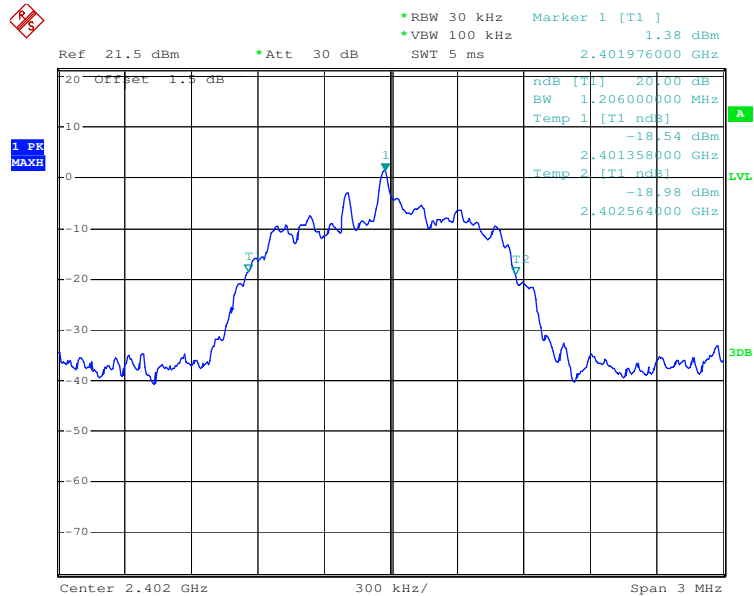




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

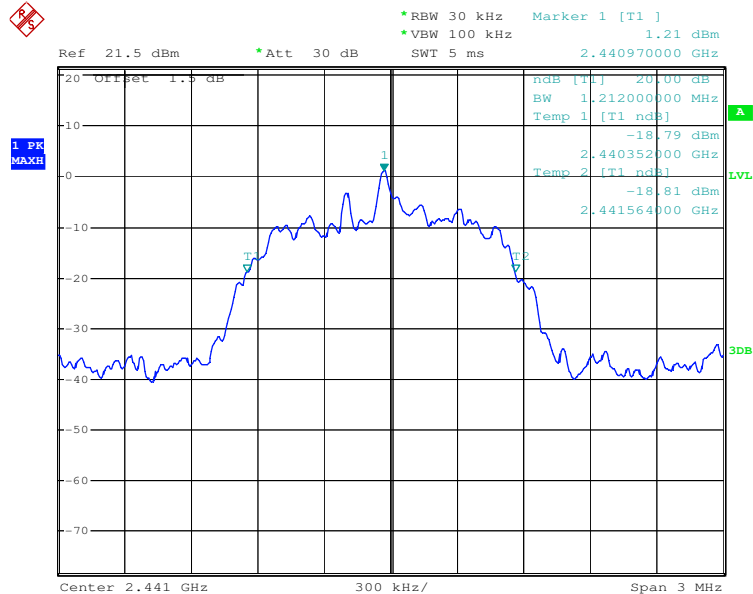


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

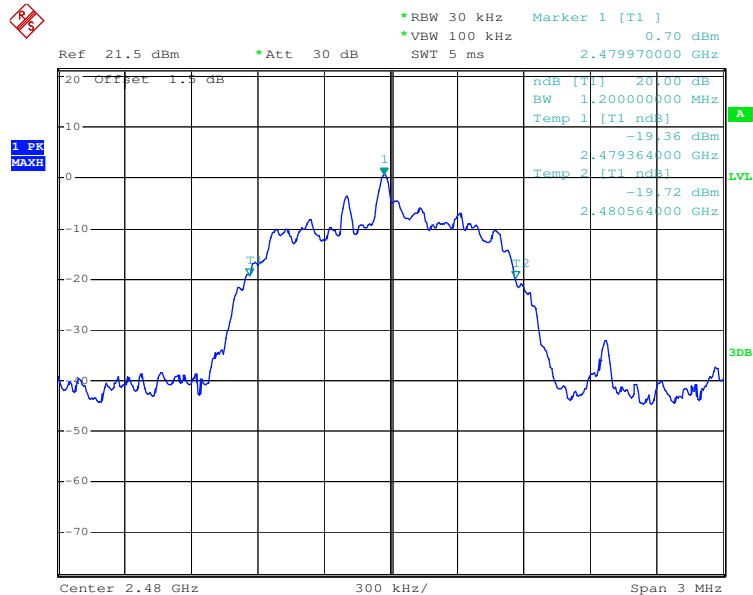




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

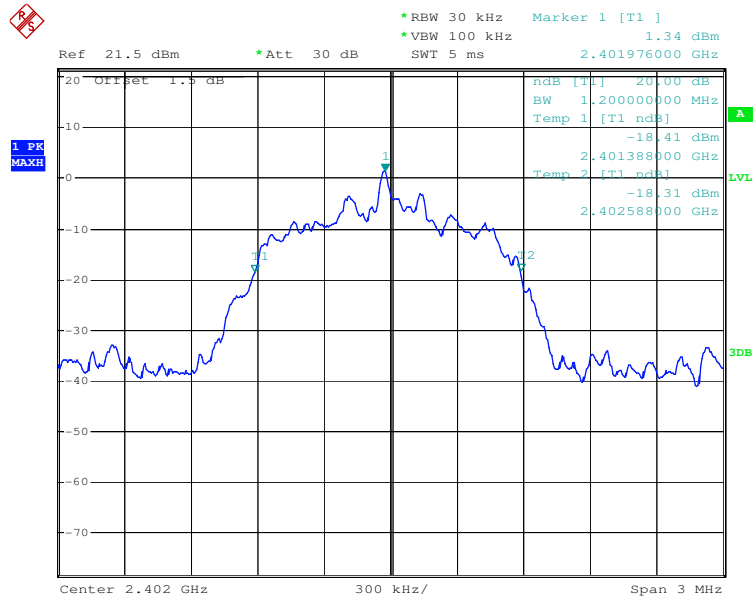


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

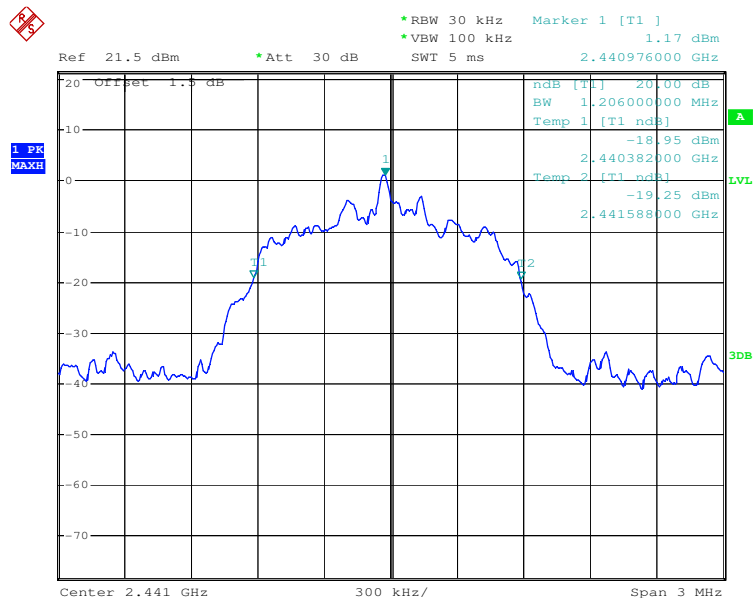




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

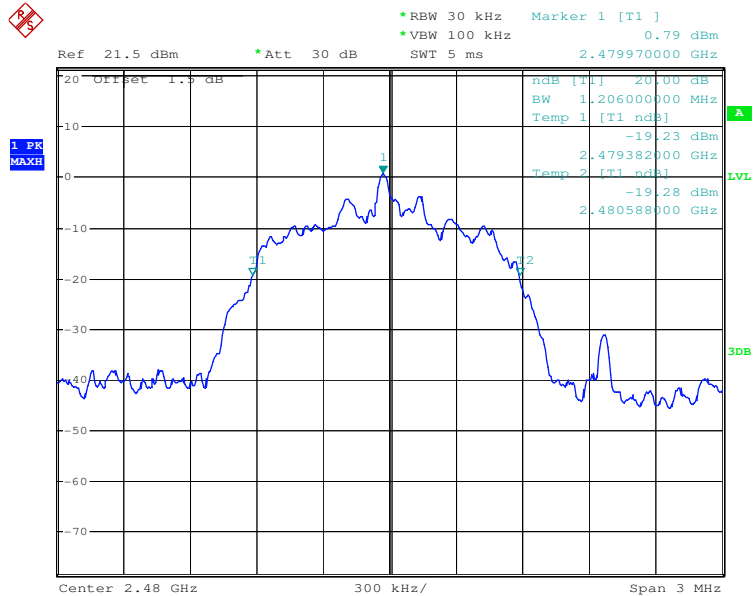

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.4 Carrier Frequencies Separation

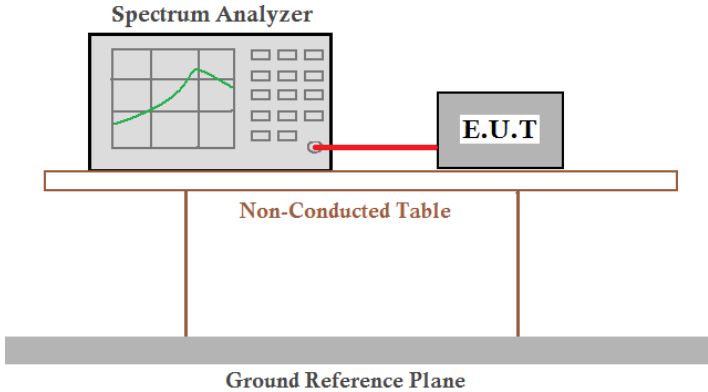Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Test State:	Hopping transmitting with all kind of modulation.
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 4.8 for details.
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test Results:	Pass

**Measurement Data**


GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥ 808	Pass
Middle	1000	≥ 808	Pass
Highest	1000	≥ 808	Pass
$\pi/4$ DQPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥ 808	Pass
Middle	1000	≥ 808	Pass
Highest	1000	≥ 808	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	≥ 808	Pass
Middle	1004	≥ 808	Pass
Highest	1000	≥ 808	Pass

Note: According to section 5.3,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	792	528
$\pi/4$ DQPSK	1212	808
8DPSK	1206	804

Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

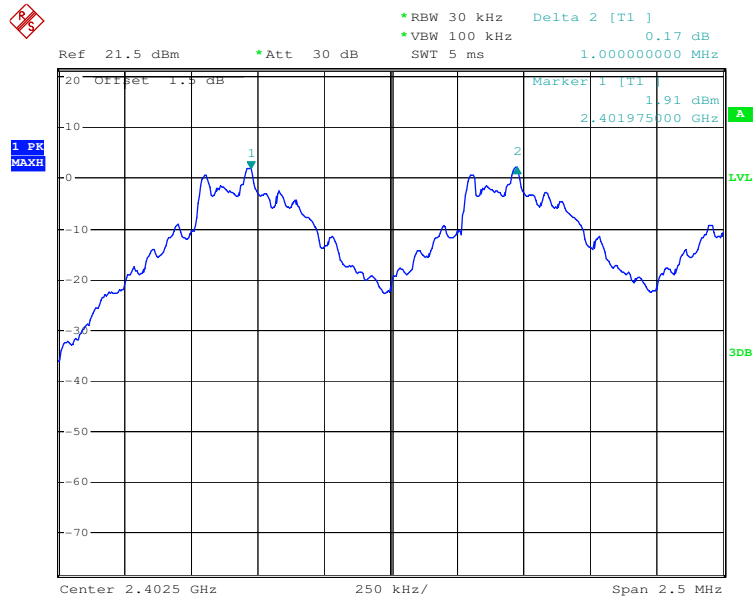


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

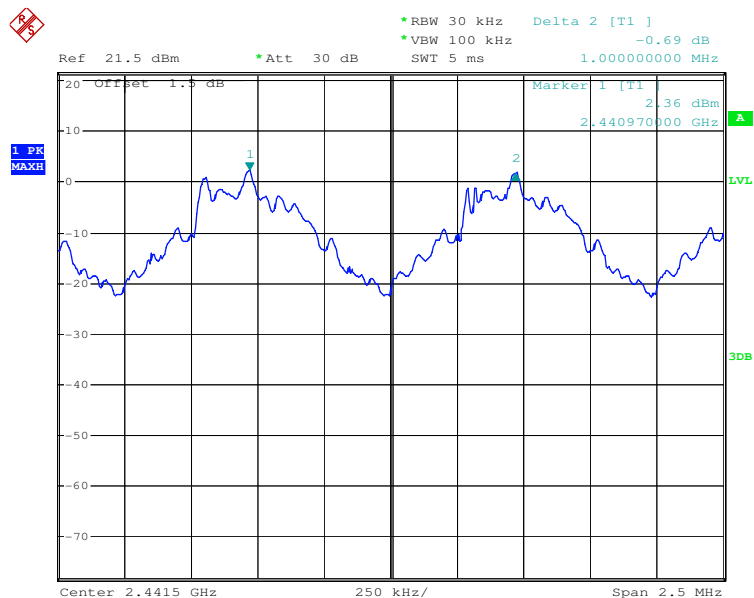


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

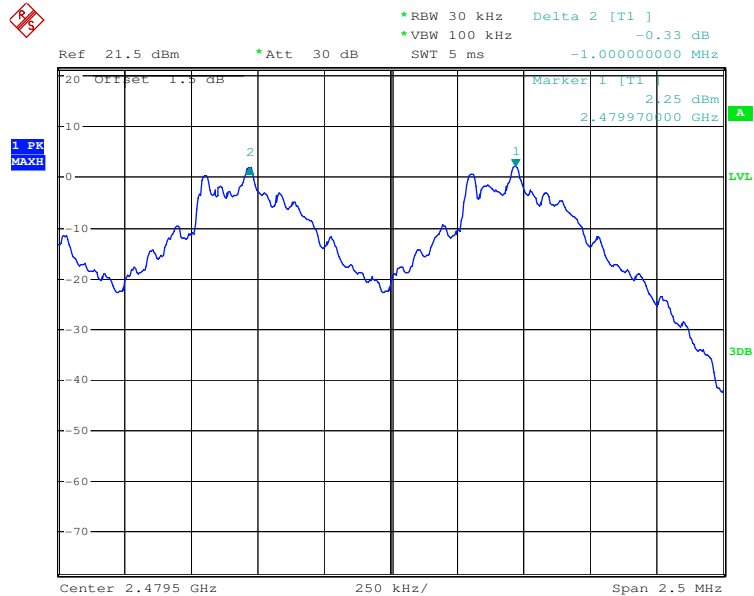


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

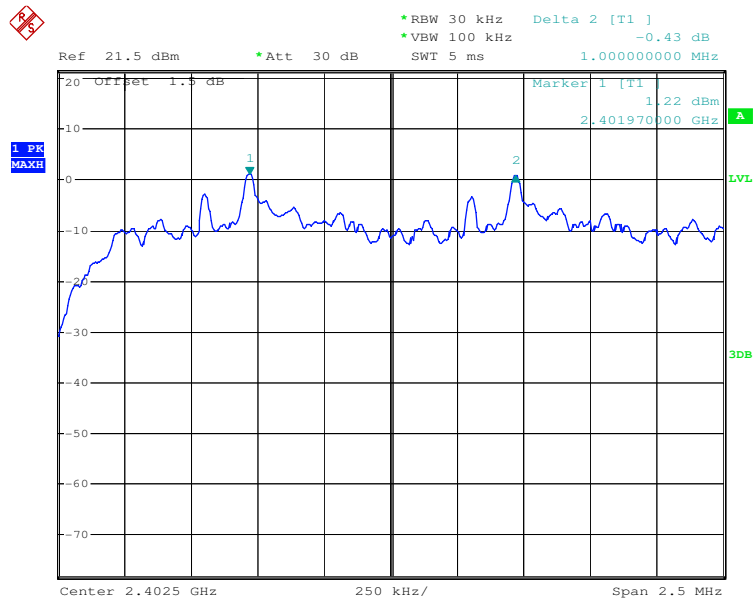




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

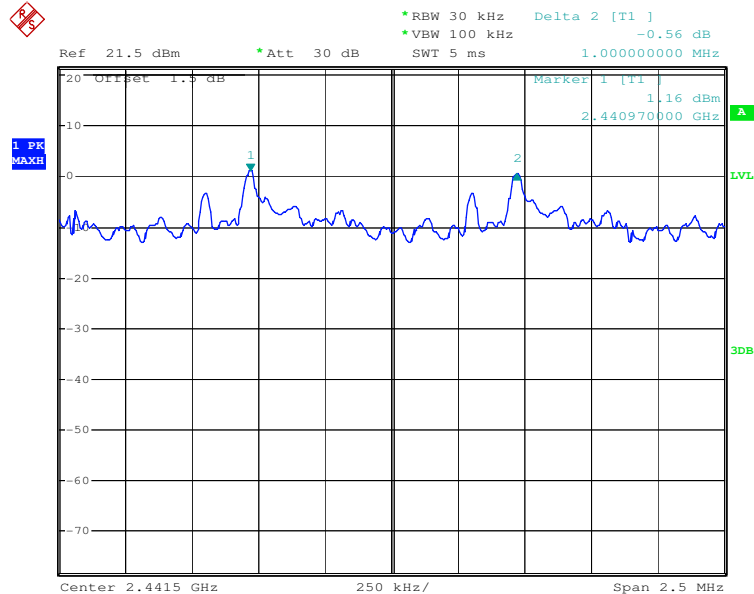


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

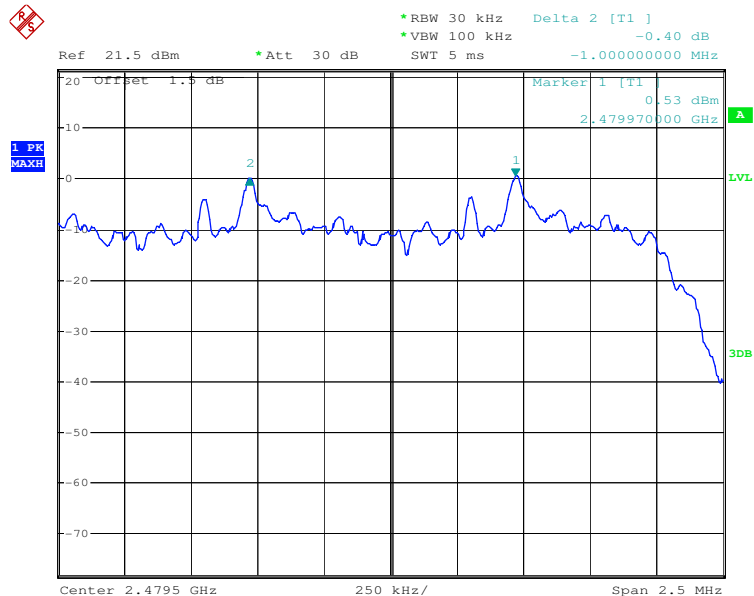




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

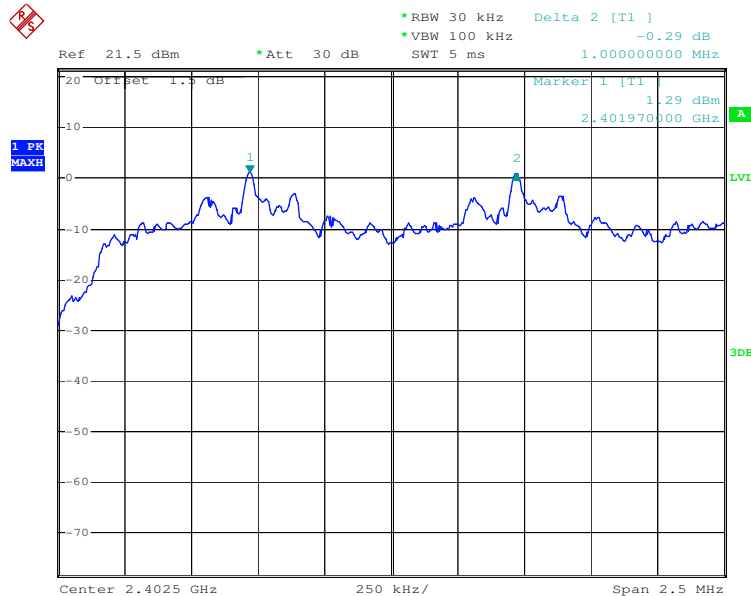


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

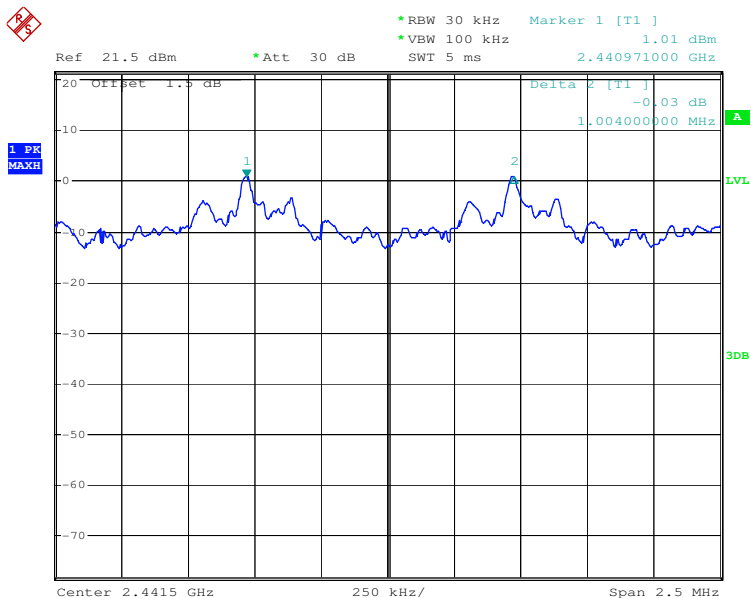




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

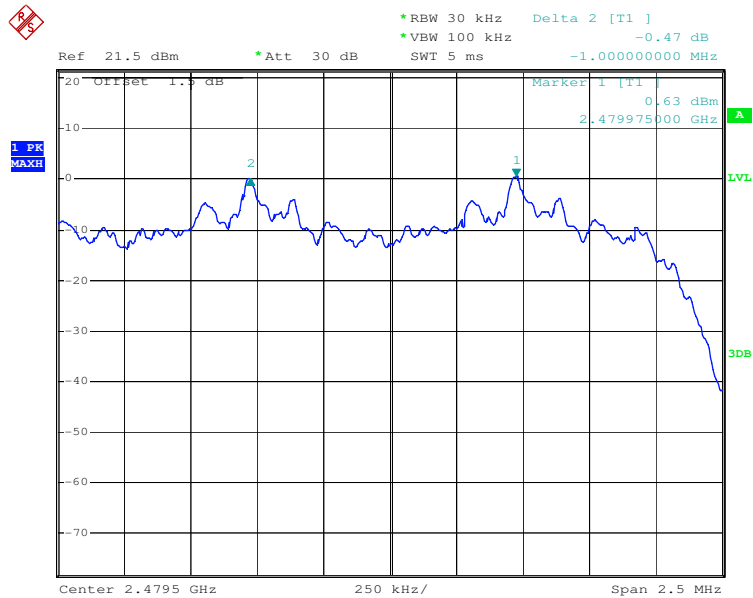

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.5 Hopping Channel Number

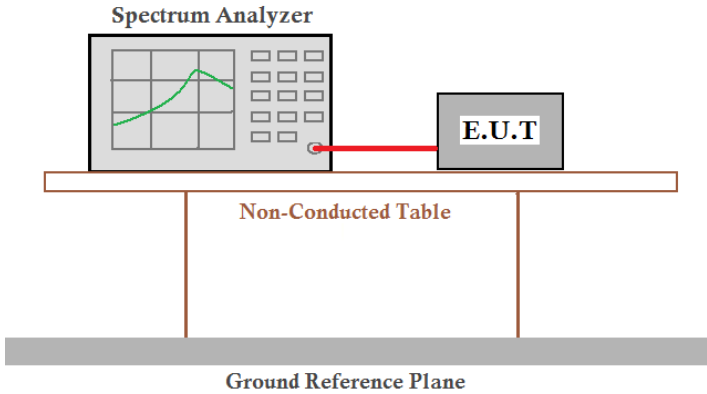Test Requirement:	FCC Part15 C Section 15.247 (b)
Test Method:	ANSI C63.10:2009
Requirement:	≥ 75 channels
Test Setup:	
Test Instruments:	Refer to section 4.8 for details.
Test State:	Hopping transmitting with all kind of modulation.
Test Results:	Pass


Measurement Data

Mode	Hopping channel	Requirement
GFSK	79	≥ 75
$\pi/4$ DQPSK	79	≥ 75
8DPSK	79	≥ 75




Test plot as follows

Test mode:	GFSK	
------------	------	--

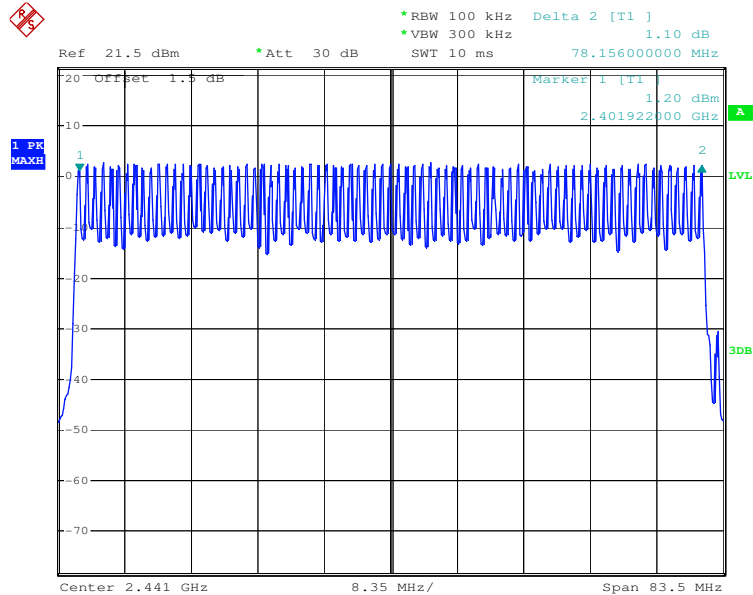


Test mode:	$\pi/4$ DQPSK	
------------	---------------	--

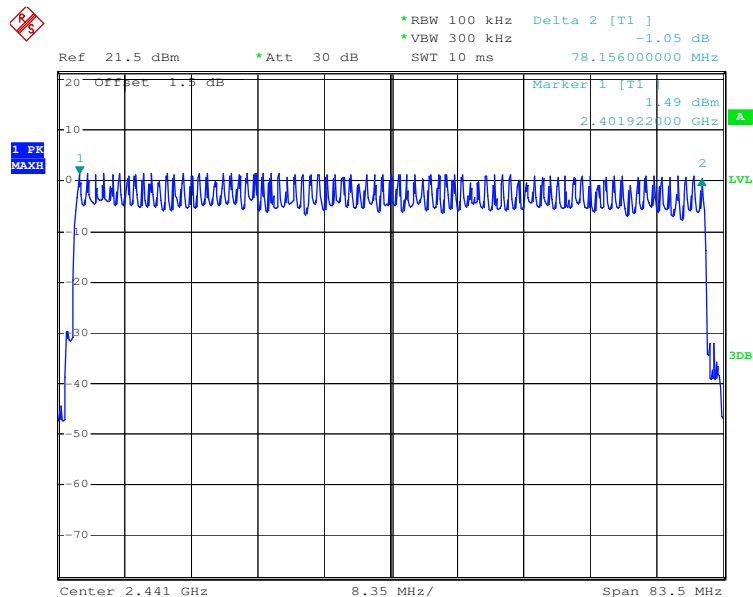




Test mode:	8DPSK	
------------	-------	--

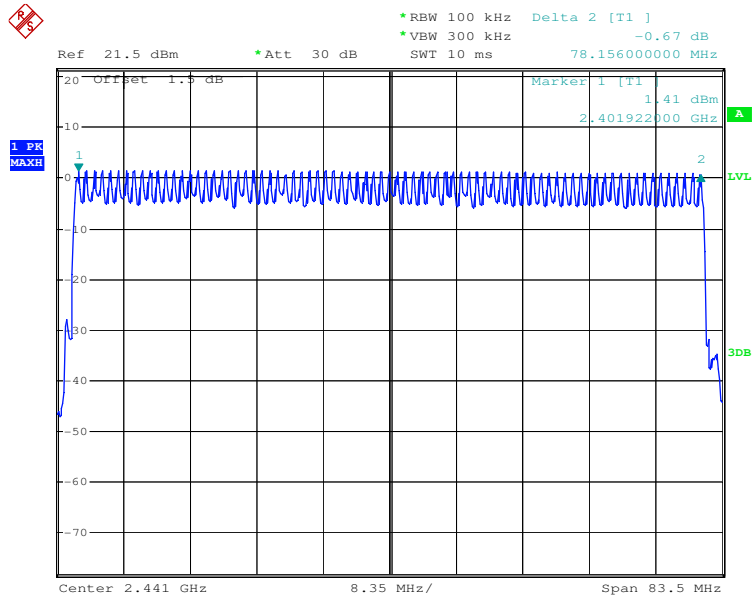

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

5.6 Dwell Time

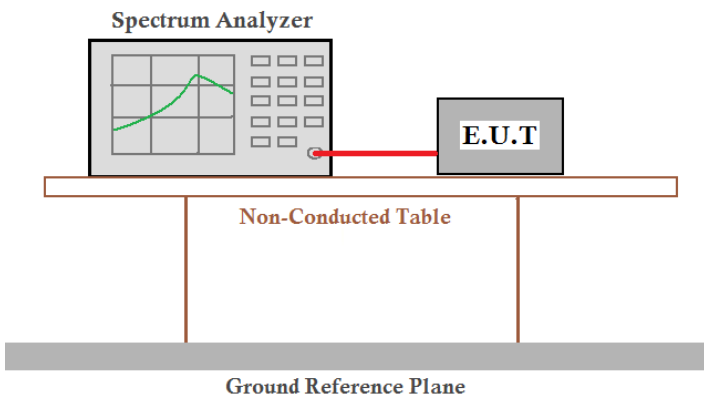Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2009
Limit:	≤ 0.4 Second
Test Setup:	
Test Instruments:	Refer to section 4.8 for details.
Test State:	Hopping transmitting with all kind of modulation.
Test Results:	Pass

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.1616	≤ 0.4
	DH3	0.2856	≤ 0.4
	DH5	0.3227	≤ 0.4
$\pi/4$ DQPSK	2-DH1	0.1664	≤ 0.4
	2-DH3	0.2848	≤ 0.4
	2-DH5	0.1963	≤ 0.4
8DPSK	3-DH1	0.1696	≤ 0.4
	3-DH3	0.2832	≤ 0.4
	3-DH5	0.3232	≤ 0.4

Test Result:

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below,

DH1 time slot = $0.505(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 161.6\text{ms}$


DH3 time slot = $1.785(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 285.6\text{ms}$

DH5 time slot = $3.025(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 322.7\text{ms}$




Test plot as follows

Test mode:	GFSK	Test Packet:	DH1
------------	------	--------------	-----

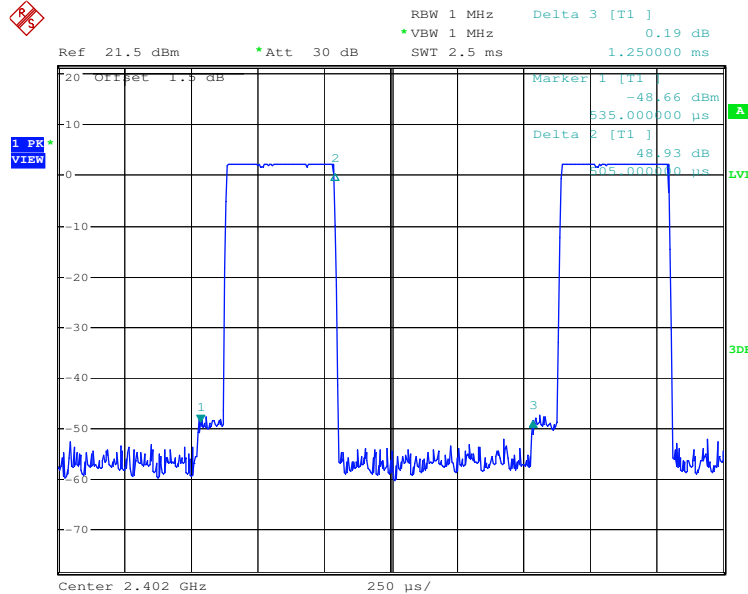


Test mode:	GFSK	Test Packet:	DH3
------------	------	--------------	-----

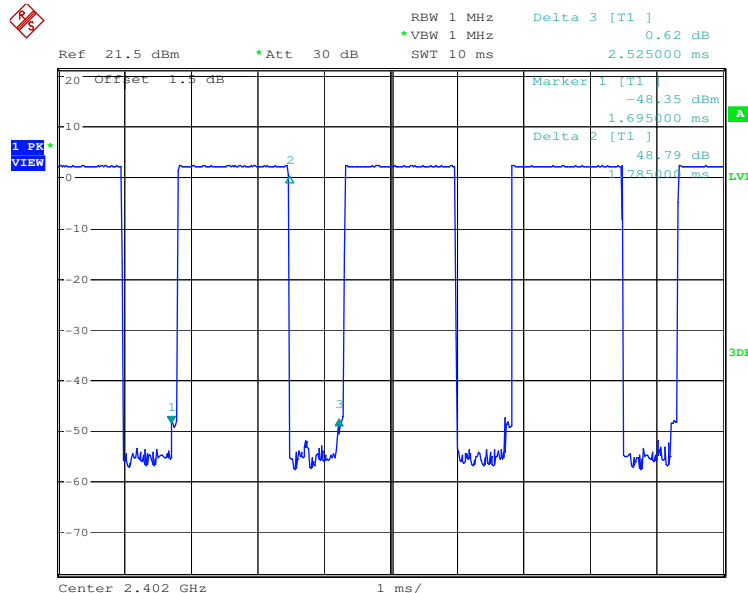




Test mode:	GFSK	Test Packet:	DH5
------------	------	--------------	-----

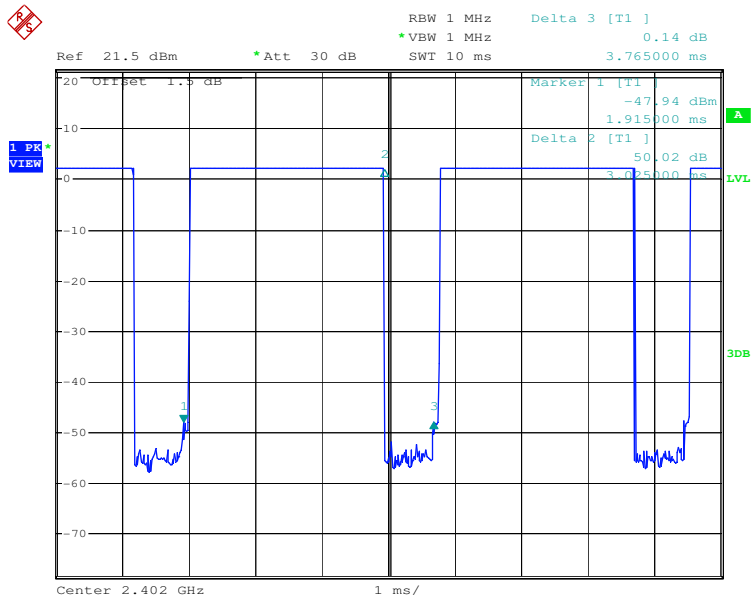


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH1
------------	---------------	--------------	-------

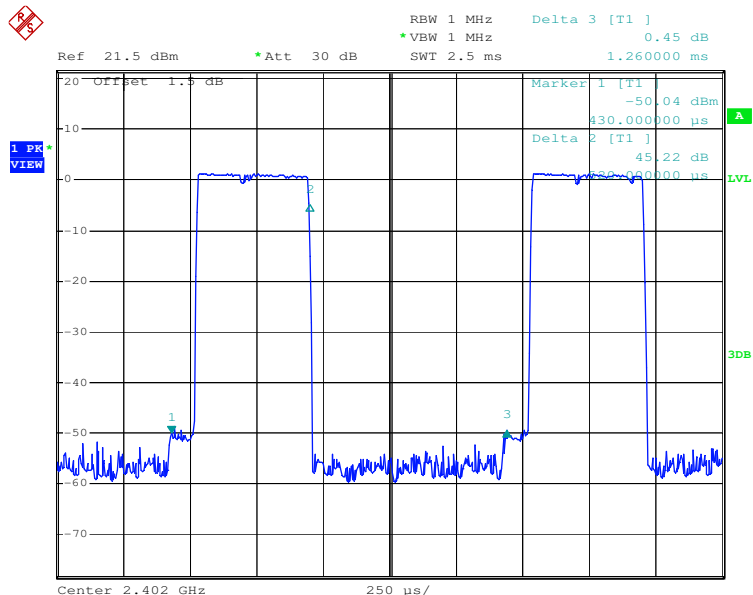




Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH3
------------	---------------	--------------	-------

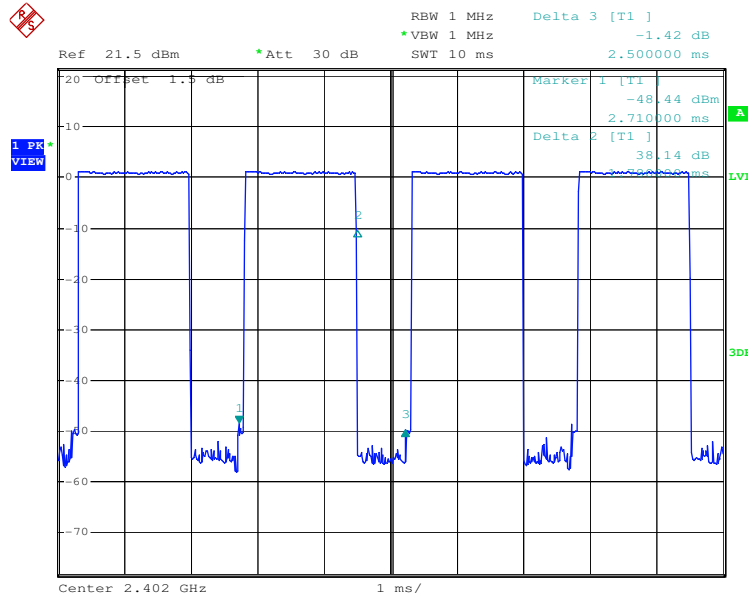


Test mode:	$\pi/4$ DQPSK	Test Packet:	2-DH5
------------	---------------	--------------	-------

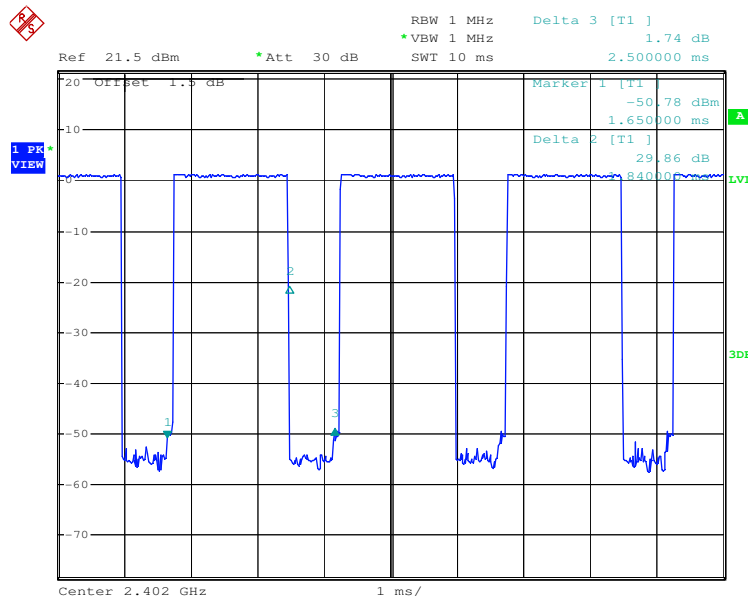




Test mode:	8DPSK	Test Packet:	3-DH1
------------	-------	--------------	-------

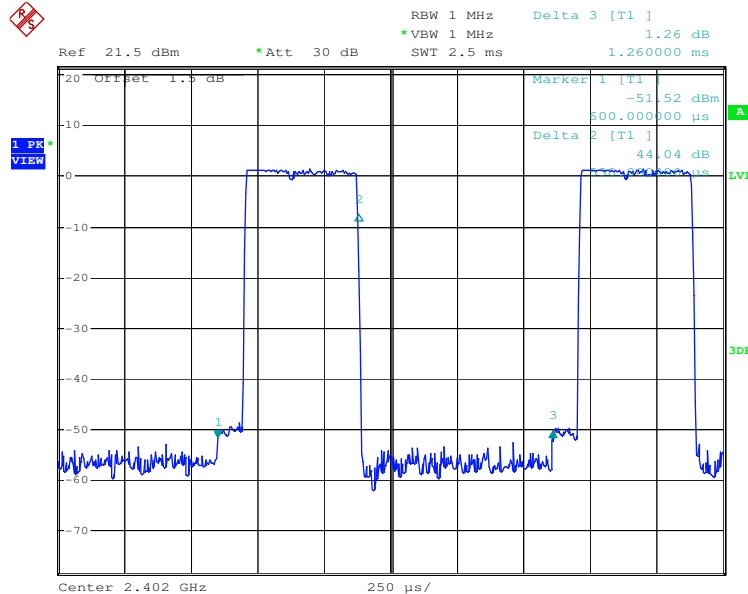


Test mode:	8DPSK	Test Packet:	3-DH3
------------	-------	--------------	-------

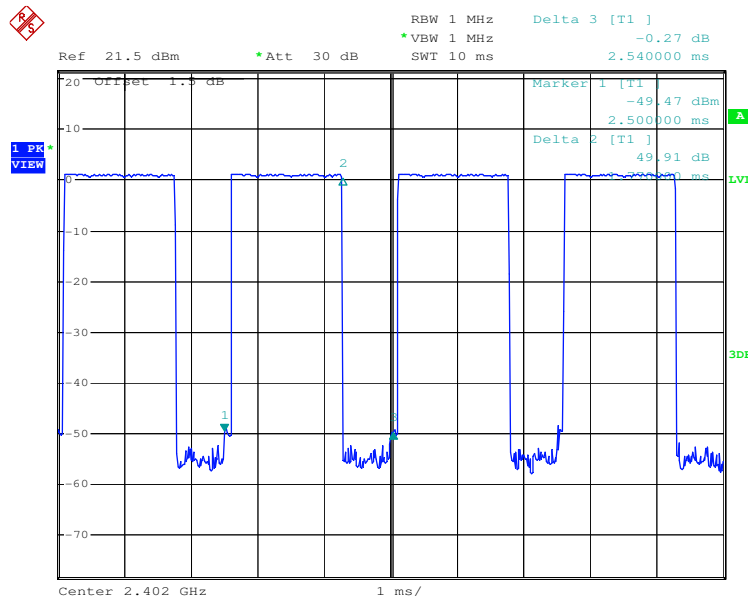




Test mode:	8DPSK	Test Packet:	3-DH5
------------	-------	--------------	-------

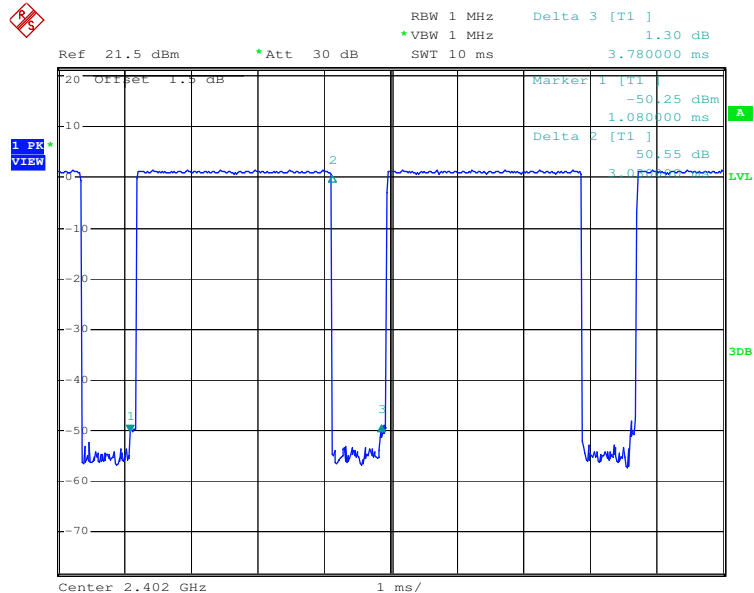



5.7 Band Edge

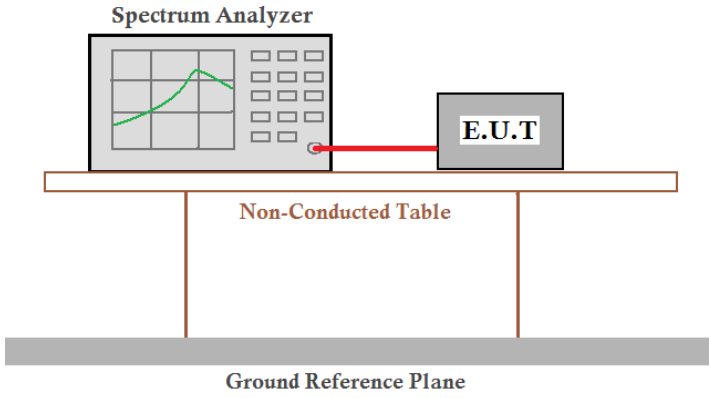Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Setup:	 <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details.
Test Results:	Pass





Test plot as follows:

Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

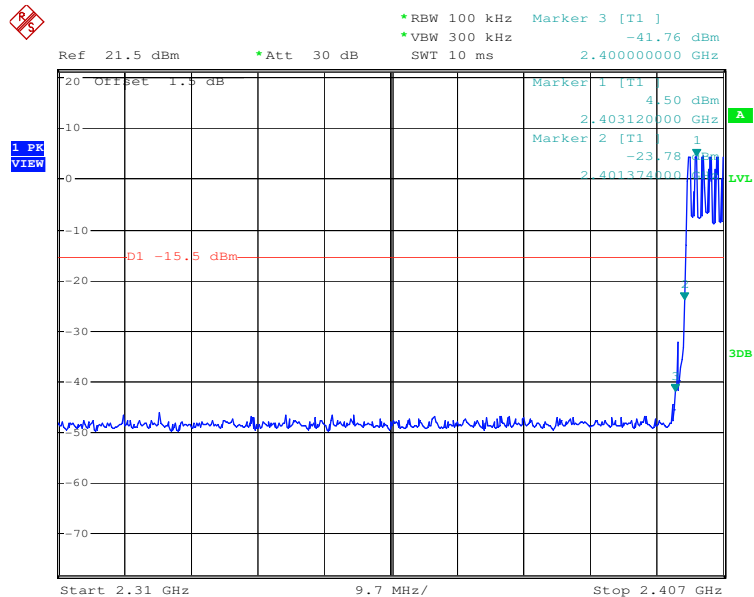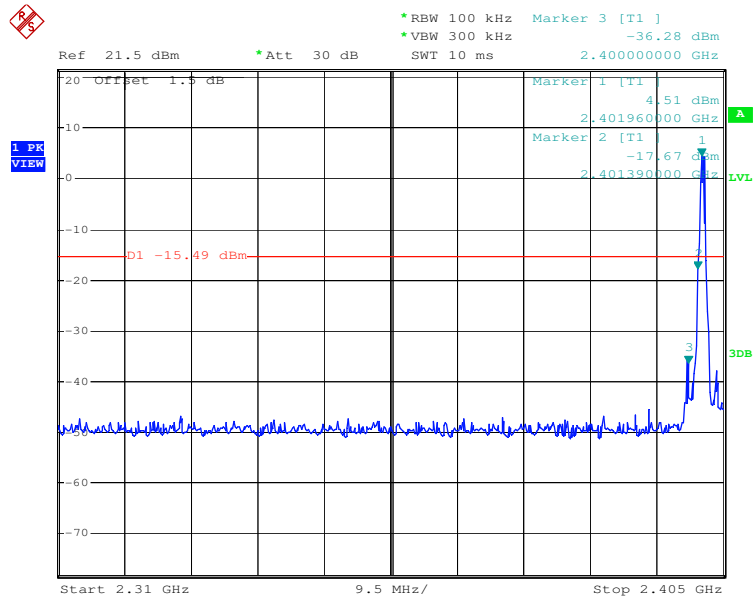





Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

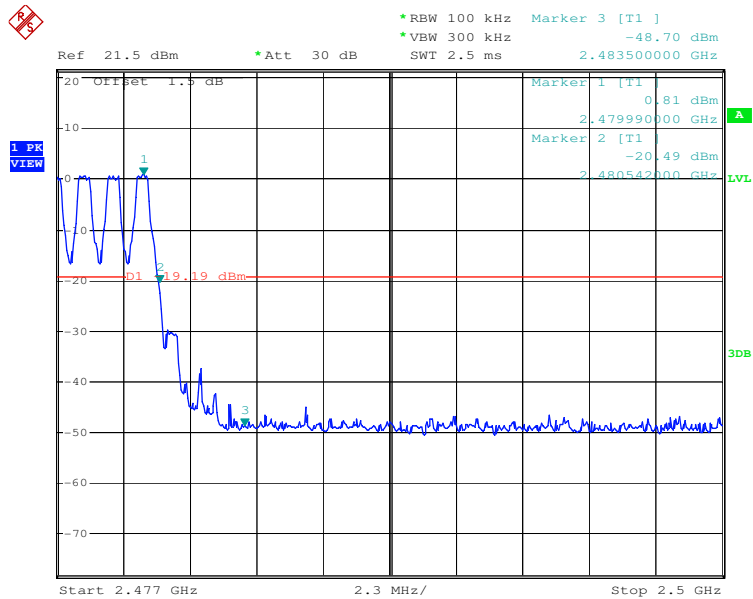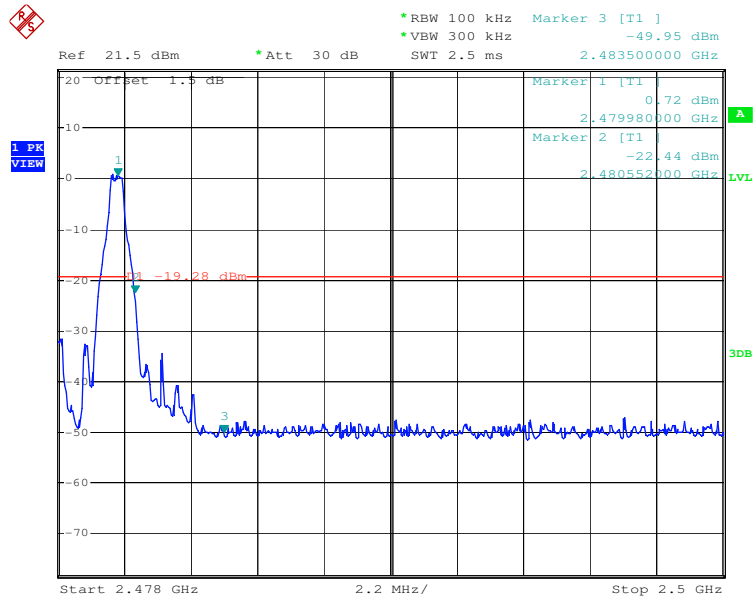

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

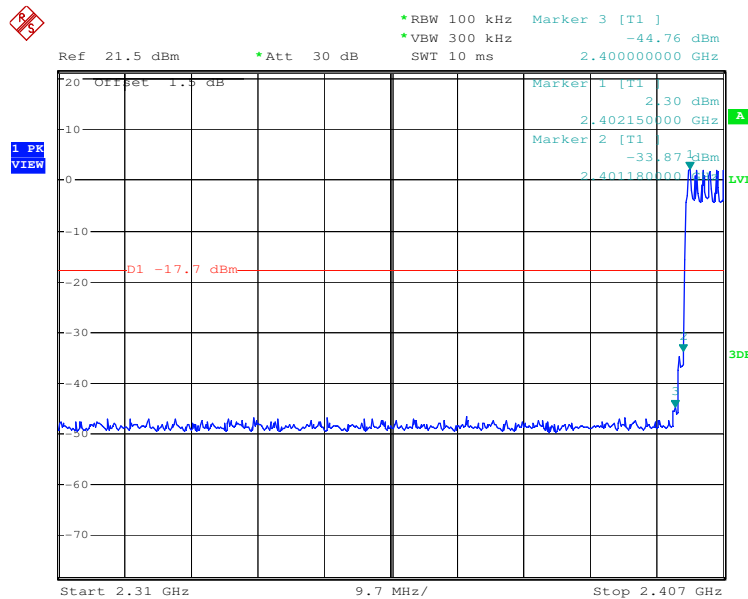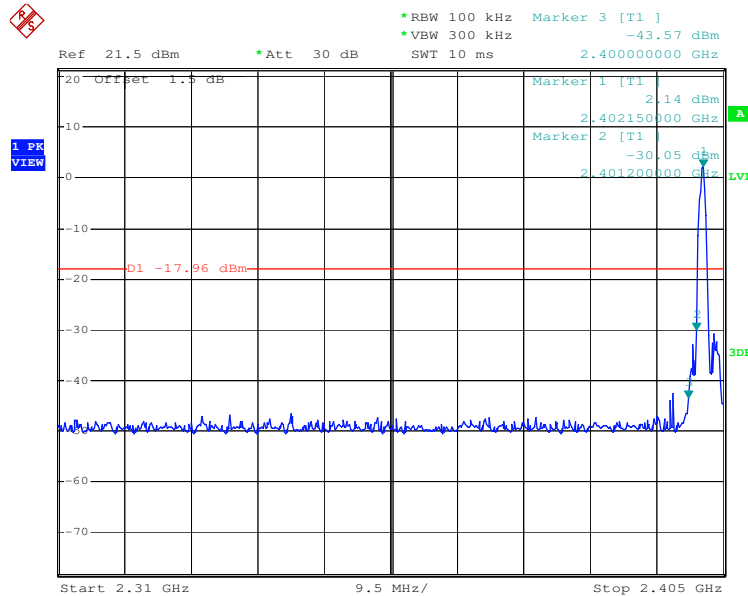





Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

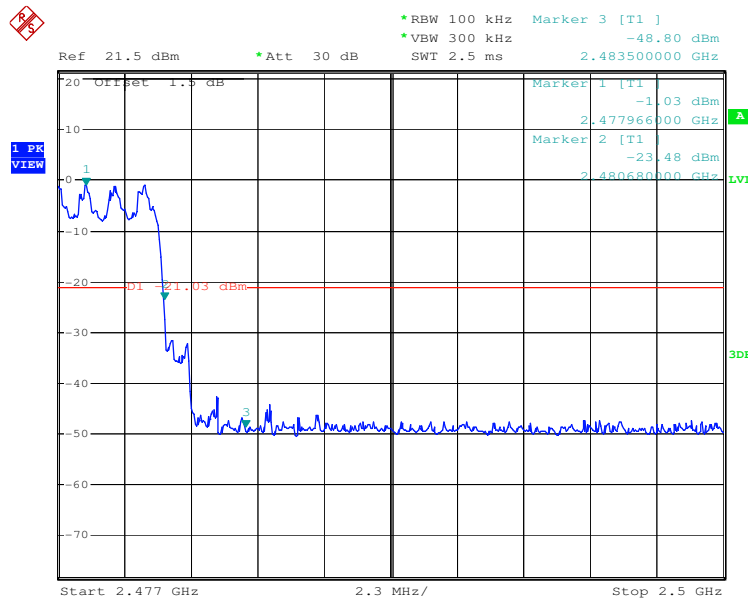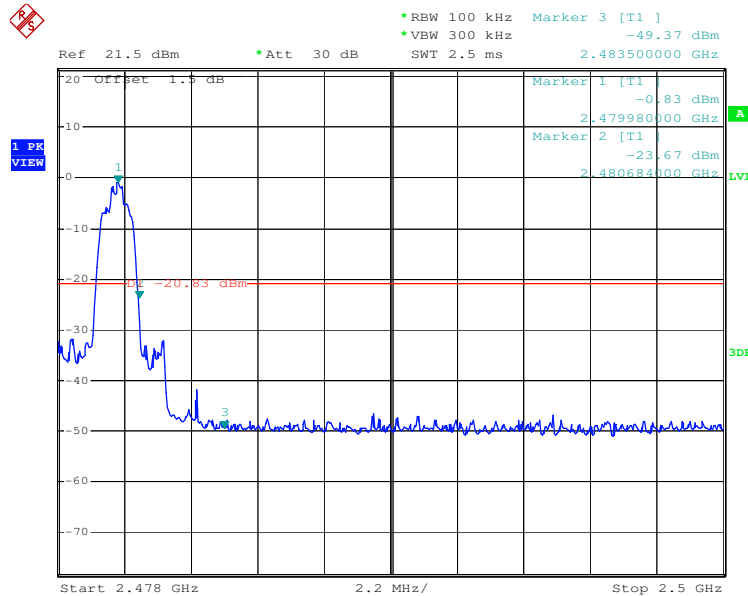





Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

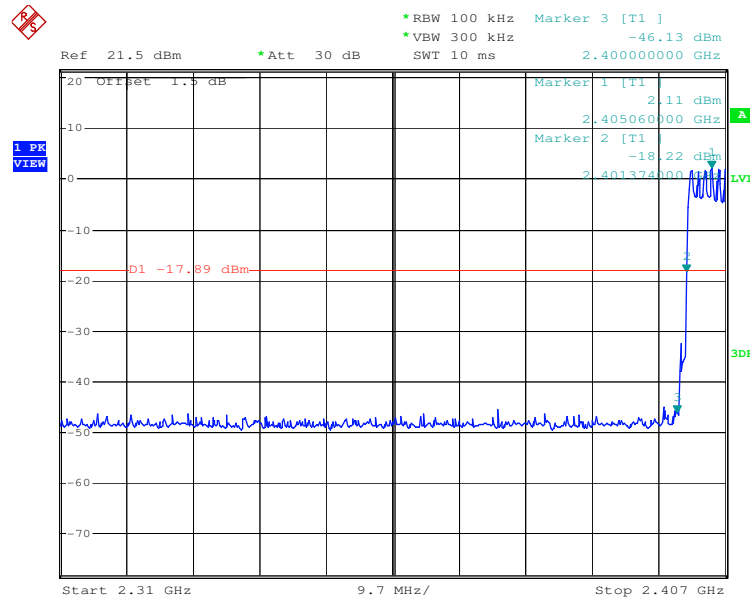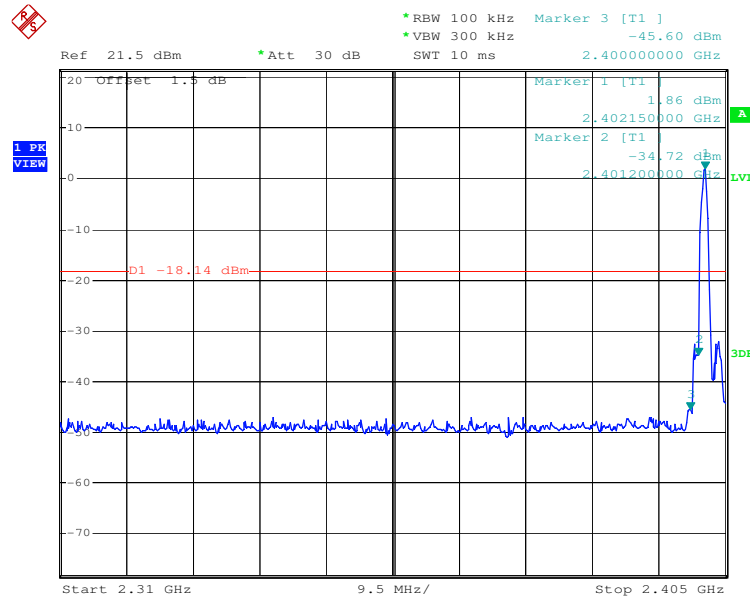




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

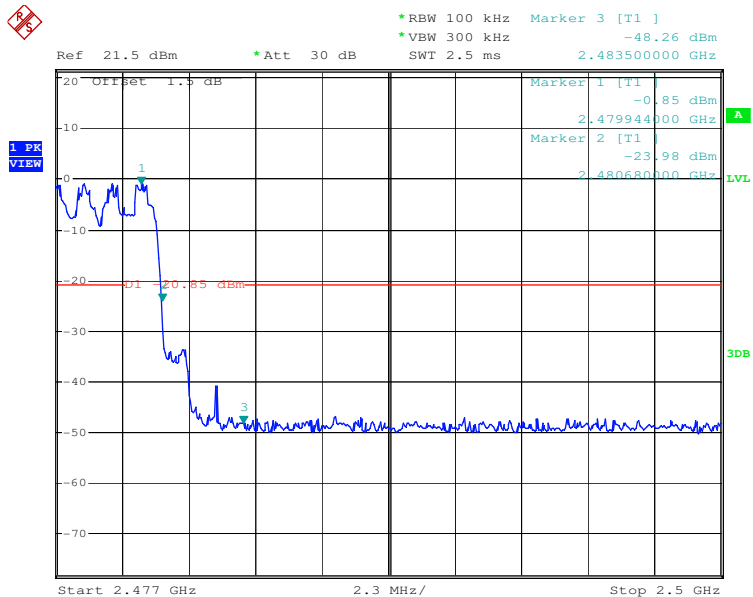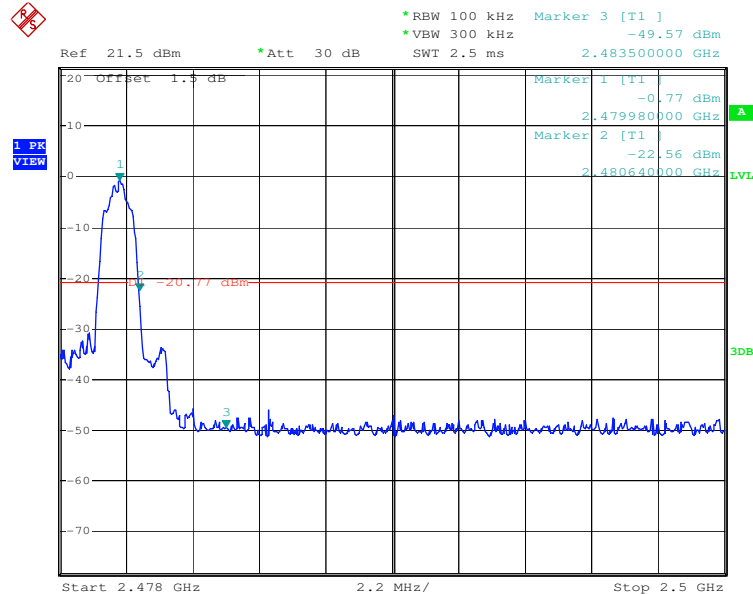


5.8 RF Antenna Conducted spurious emissions

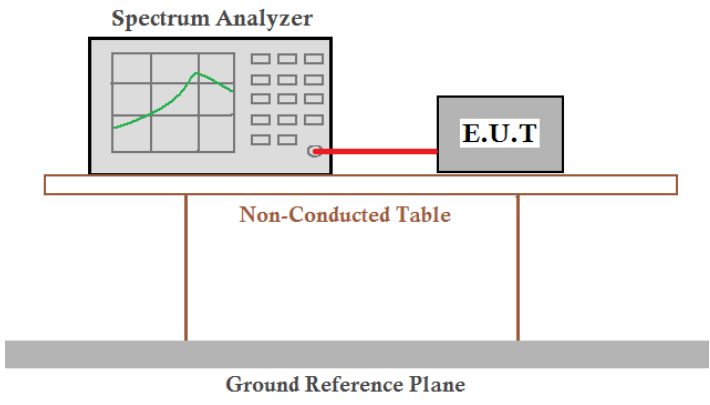
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2009
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Setup:	 <p><i>Remark:</i> <i>Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.</i></p>
Test Instruments:	Refer to section 4.8 for details.
Test Results:	Pass



Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

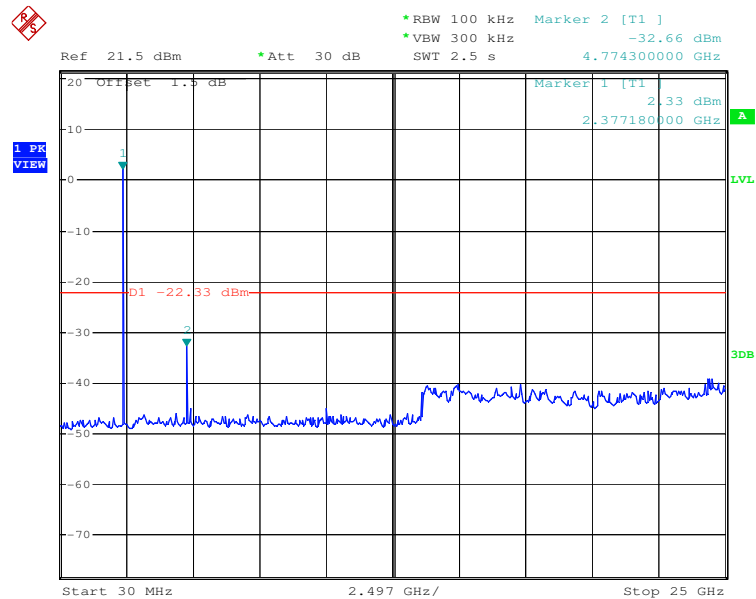


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

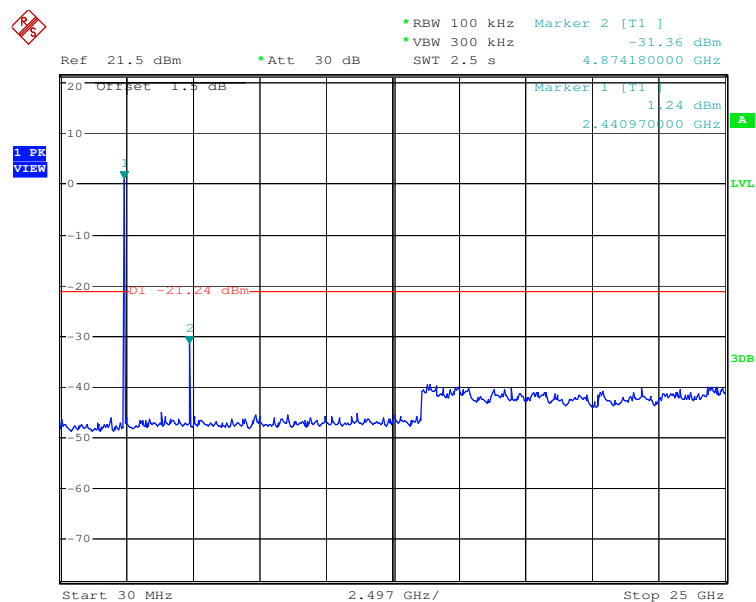




Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

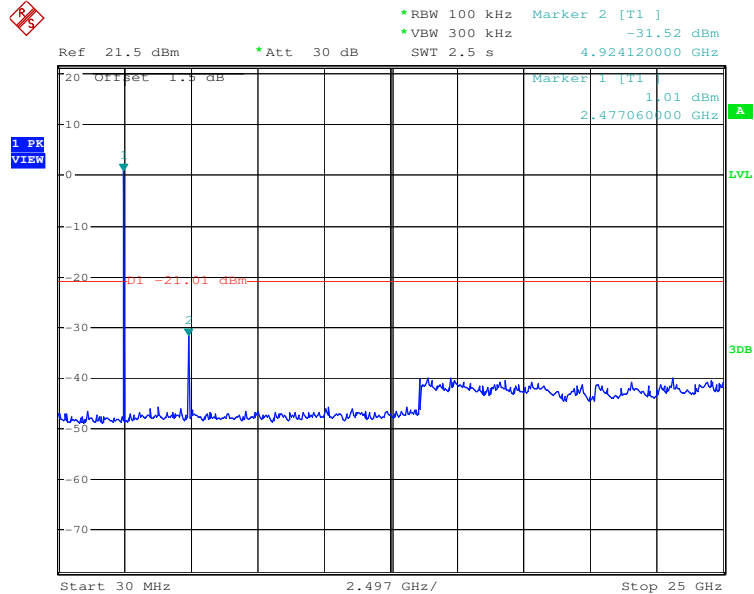


Test mode:	$\pi/4$ DQPSK	Test channel:	Lowest
------------	---------------	---------------	--------

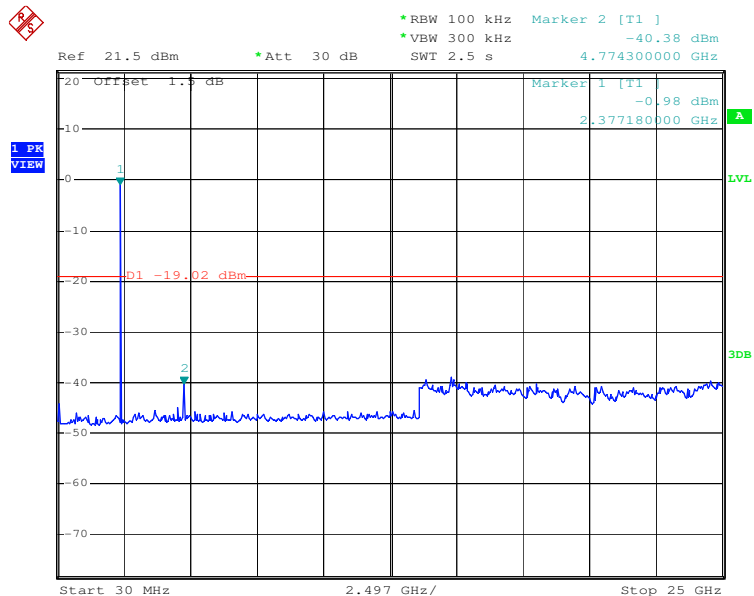




Test mode:	$\pi/4$ DQPSK	Test channel:	Middle
------------	---------------	---------------	--------

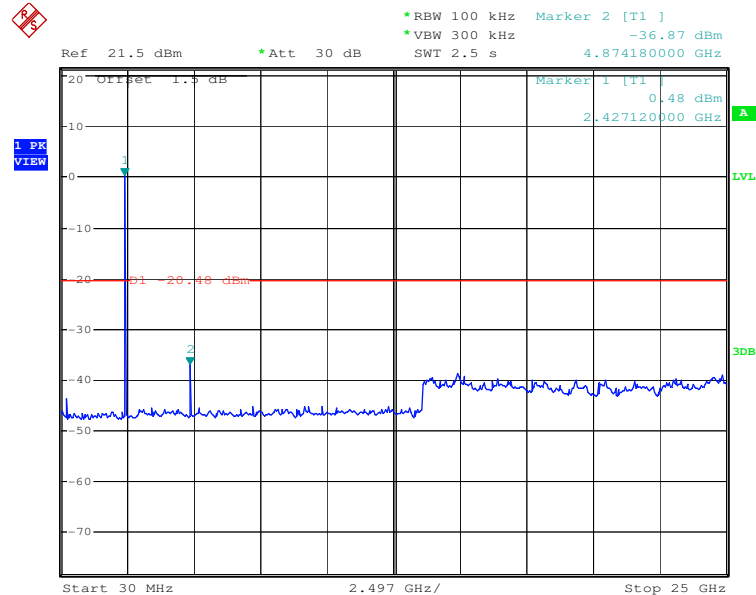


Test mode:	$\pi/4$ DQPSK	Test channel:	Highest
------------	---------------	---------------	---------

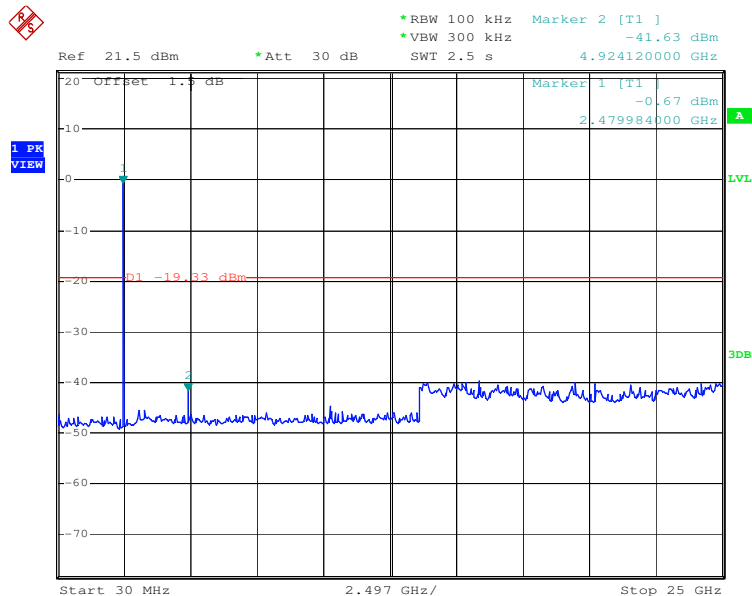




Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

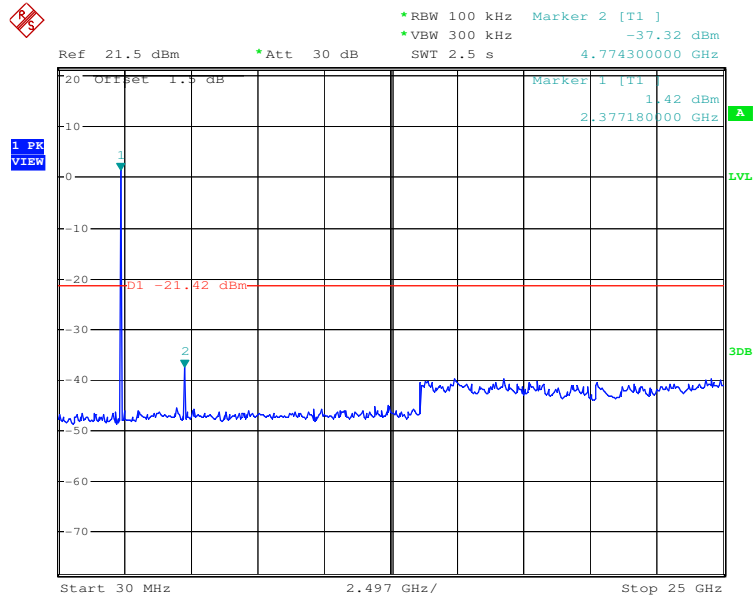


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------


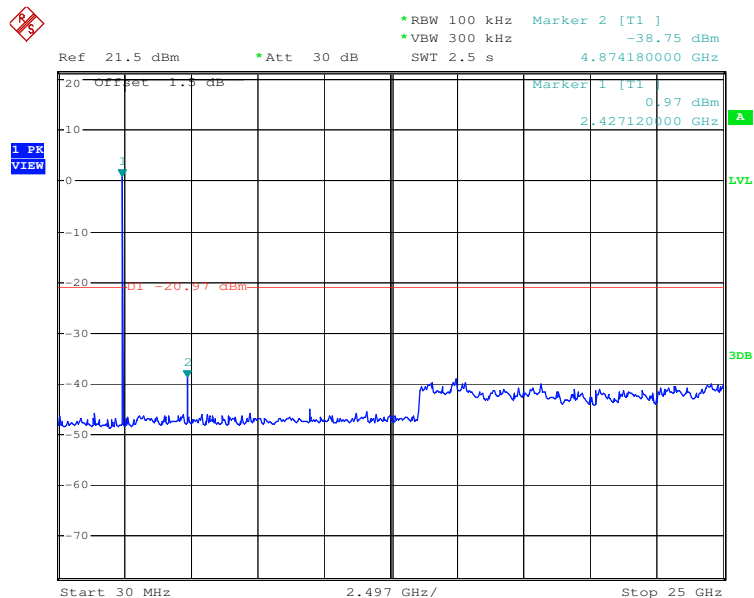




Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------


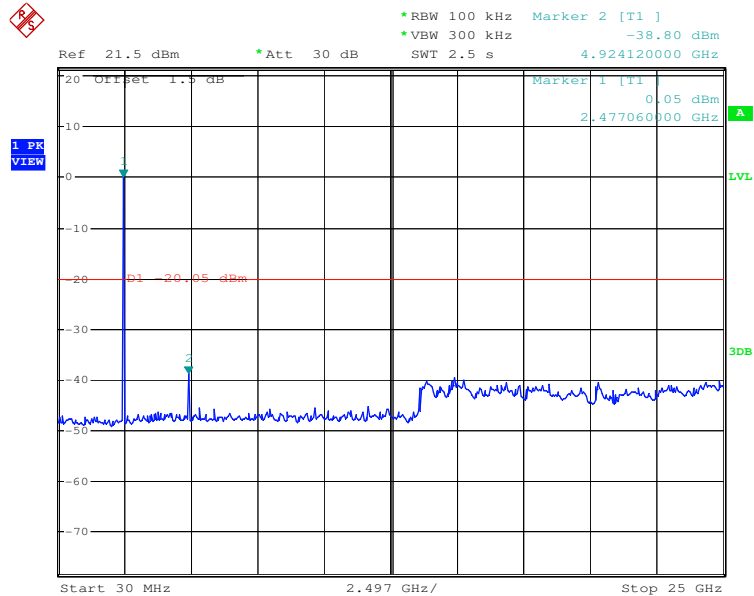


5.9 Pseudorandom Frequency Hopping Sequence

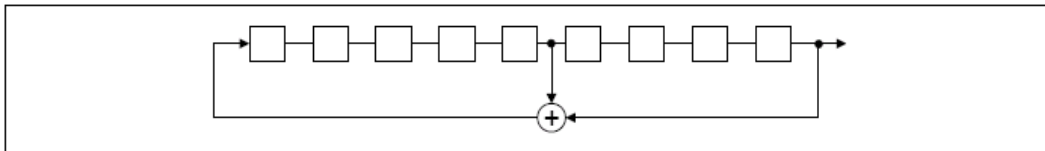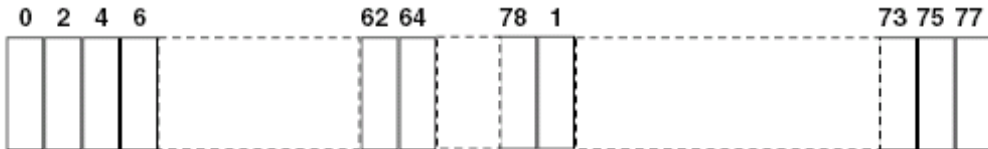Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="282 981 1332 1131" data-label="Diagram">  </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="276 1234 1268 1382" data-label="Diagram">  </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	


**5.10 Radiated Emission**

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																																					
Test Method:	ANSI C63.10: 2009																																					
Test Frequency Range:	30MHz to 25GHz																																					
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																																					
Receiver Setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value														
	Frequency	Detector	RBW	VBW	Remark																																	
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																																	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																																	
Peak		1MHz	10Hz	Average Value																																		
Limit:	<table><tr><td colspan="2">Frequency</td><td colspan="2">Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td colspan="2">30MHz-88MHz</td><td colspan="2">40.0</td><td>Quasi-peak Value</td></tr><tr><td colspan="2">88MHz-216MHz</td><td colspan="2">43.5</td><td>Quasi-peak Value</td></tr><tr><td colspan="2">216MHz-960MHz</td><td colspan="2">46.0</td><td>Quasi-peak Value</td></tr><tr><td colspan="2">960MHz-1GHz</td><td colspan="2">54.0</td><td>Quasi-peak Value</td></tr><tr><td colspan="2" rowspan="2">Above 1GHz</td><td colspan="2">54.0</td><td>Average Value</td></tr><tr><td colspan="2">74.0</td><td>Peak Value</td></tr></table>					Frequency		Limit (dBuV/m @3m)		Remark	30MHz-88MHz		40.0		Quasi-peak Value	88MHz-216MHz		43.5		Quasi-peak Value	216MHz-960MHz		46.0		Quasi-peak Value	960MHz-1GHz		54.0		Quasi-peak Value	Above 1GHz		54.0		Average Value	74.0		Peak Value
	Frequency		Limit (dBuV/m @3m)		Remark																																	
	30MHz-88MHz		40.0		Quasi-peak Value																																	
	88MHz-216MHz		43.5		Quasi-peak Value																																	
	216MHz-960MHz		46.0		Quasi-peak Value																																	
	960MHz-1GHz		54.0		Quasi-peak Value																																	
	Above 1GHz		54.0		Average Value																																	
74.0			Peak Value																																			
Test Procedure:	<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.</p>																																					
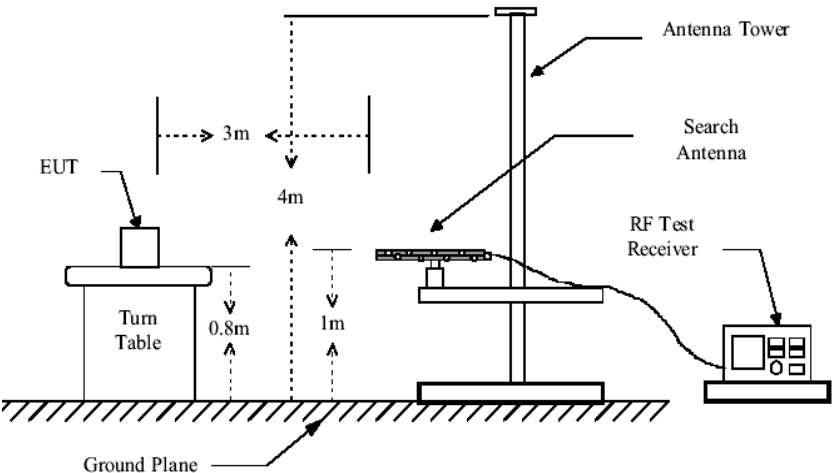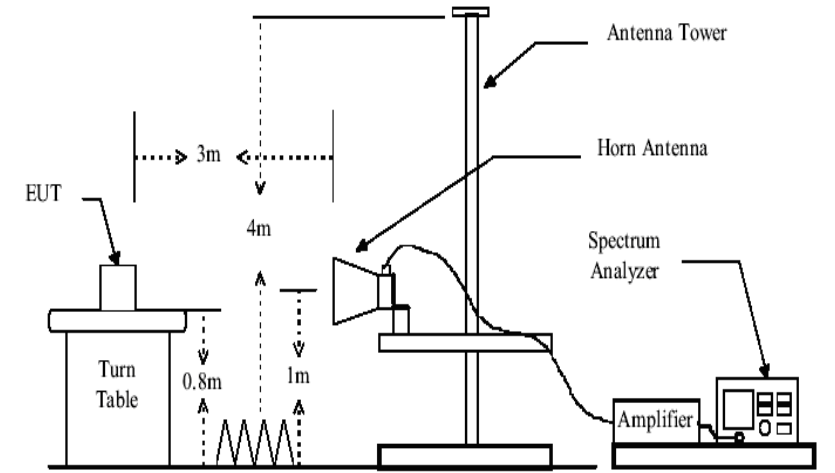
<p>Test Setup:</p>	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
<p>Test Instruments:</p>	<p>Refer to section 4.8 for details.</p>
<p>Test Mode:</p>	<p>Non-hopping transmitting with modulation.</p> <ol style="list-style-type: none"> 1. Pre-scan the EUT in GFSK, $\pi/4$DQPSK and 8DPSK modes and find out the worst case is GFSK mode. 2. Pre-scan the EUT in Transmitting mode and Bluetooth simultaneous transmitting with internal RF module, find out the worst case is Bluetooth simultaneous transmitting with internal RF module.
<p>Test Results:</p>	<p>Pass</p>

5.10.1 Radiated emission below 1GHz

Vertical

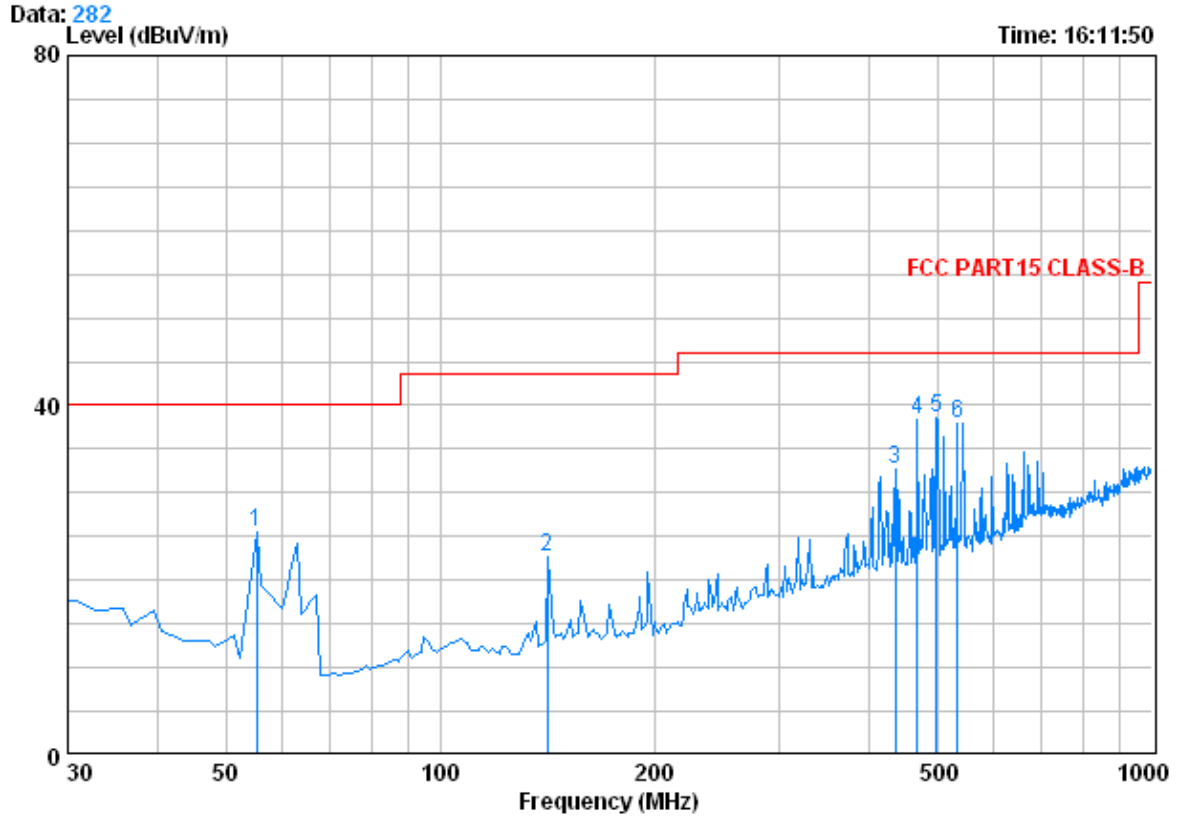


		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	55.220	0.80	7.56	27.28	44.39	25.47	40.00	-14.53
2	141.550	1.30	8.24	26.95	40.02	22.62	43.50	-20.88
3	436.430	2.35	16.62	27.35	41.09	32.71	46.00	-13.29
4	467.470	2.48	17.54	27.54	45.79	38.28	46.00	-7.72
5 @	498.510	2.59	17.80	27.70	45.86	38.55	46.00	-7.45
6	532.460	2.63	18.62	27.65	44.35	37.96	46.00	-8.04





Horizontal

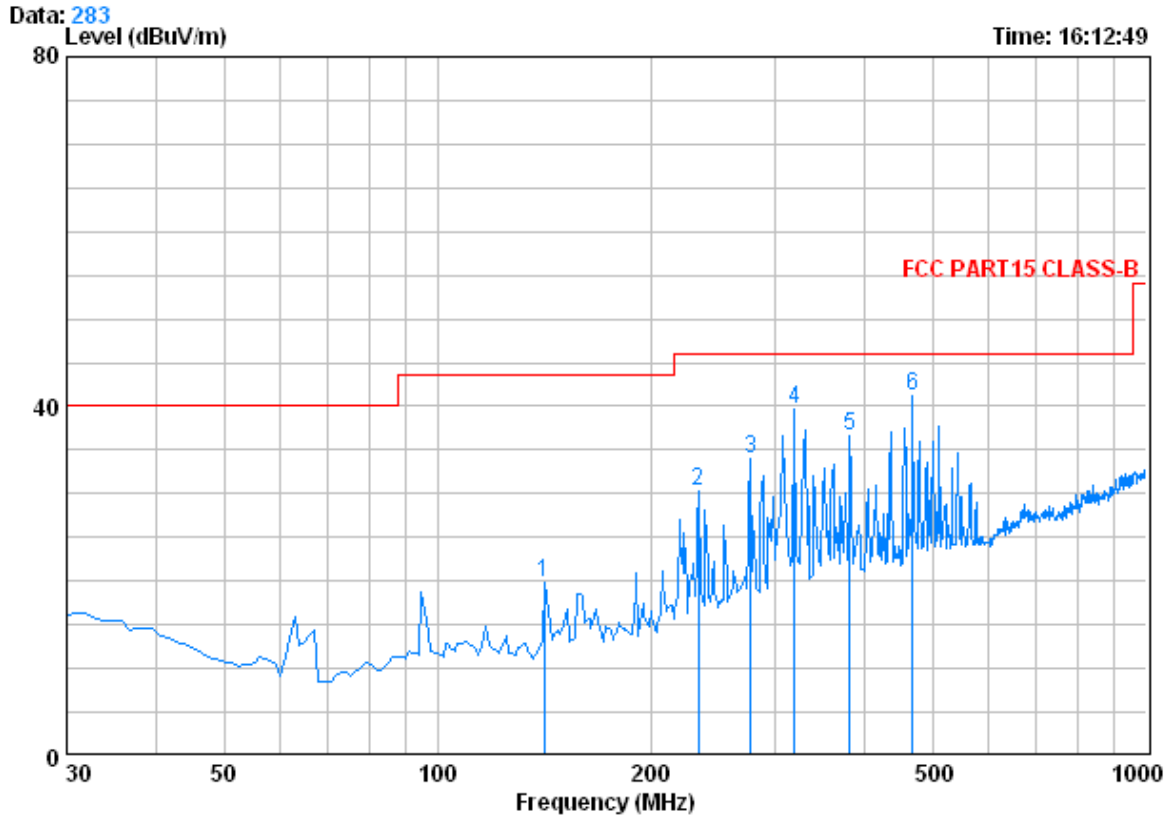

	Freq	Cable	Antenna	Preamp	Read	Limit	Over
		Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1	141.550	1.30	8.24	26.95	37.25	19.85	43.50 -23.65
2	233.700	1.59	11.79	26.58	43.49	30.29	46.00 -15.71
3	276.380	1.80	12.85	26.46	45.81	34.00	46.00 -12.00
4 @	319.060	1.96	14.59	26.54	49.65	39.66	46.00 -6.34
5	382.110	2.15	16.08	27.01	45.45	36.67	46.00 -9.33
6 @	467.470	2.48	17.54	27.54	48.70	41.18	46.00 -4.82

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



5.10.2 Transmitter emission above 1GHz

Worst case mode:		GFSK		Test channel:		Lowest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1468.696	3.88	28.07	39.34	53.10	45.71	74.00	-28.29	Vertical	
3143.979	5.27	33.34	40.41	48.74	46.94	74.00	-27.06	Vertical	
4128.280	6.61	34.17	41.14	48.53	48.17	74.00	-25.83	Vertical	
4804.000	7.44	34.70	41.63	53.97	54.48	74.00	-19.52	Vertical	
5850.919	7.91	35.45	41.06	49.75	52.05	74.00	-21.95	Vertical	
7547.013	9.14	36.00	39.57	49.44	55.01	74.00	-18.99	Vertical	
1468.696	3.88	28.07	39.34	54.32	46.93	74.00	-27.07	Horizontal	
3376.244	5.60	33.25	40.58	47.26	45.53	74.00	-28.47	Horizontal	
4804.000	7.44	34.70	41.63	54.80	55.31	74.00	-18.69	Horizontal	
6109.670	8.01	35.84	40.83	49.52	52.54	74.00	-21.46	Horizontal	
7800.936	9.27	36.00	39.36	48.40	54.31	74.00	-19.69	Horizontal	
10999.950	10.56	38.50	37.86	46.41	57.61	74.00	-16.39	Horizontal	

Worst case mode:		GFSK		Test channel:		Lowest		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1468.696	3.88	28.07	39.34	48.55	41.16	54.00	-12.84	Vertical	
3143.979	5.27	33.34	40.41	43.59	41.79	54.00	-12.21	Vertical	
4128.280	6.61	34.17	41.14	42.86	42.50	54.00	-11.50	Vertical	
4804.000	7.44	34.70	41.63	49.86	50.37	54.00	-3.63	Vertical	
5850.919	7.91	35.45	41.06	41.66	43.96	54.00	-10.04	Vertical	
7547.013	9.14	36.00	39.57	43.52	49.09	54.00	-4.91	Vertical	
1468.696	3.88	28.07	39.34	48.24	40.85	54.00	-13.15	Horizontal	
3376.244	5.60	33.25	40.58	42.58	40.85	54.00	-13.15	Horizontal	
4804.000	7.44	34.70	41.63	50.37	50.88	54.00	-3.12	Horizontal	
6109.670	8.01	35.84	40.83	46.52	49.54	54.00	-4.46	Horizontal	
7800.936	9.27	36.00	39.36	43.68	49.59	54.00	-4.41	Horizontal	
10999.950	10.56	38.50	37.86	38.75	49.95	54.00	-4.05	Horizontal	



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120100001801

Page : 56 of 65

Worst case mode:		GFSK		Test channel:		Middle		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1395.796	3.81	27.91	39.31	53.09	45.50	74.00	-28.50	Vertical	
2135.217	4.43	32.05	39.67	46.66	43.47	74.00	-30.53	Vertical	
4181.159	6.68	34.31	41.16	48.32	48.15	74.00	-25.85	Vertical	
4882.000	7.48	34.59	41.68	57.09	57.48	74.00	-16.52	Vertical	
6299.178	8.08	36.06	40.66	49.73	53.21	74.00	-20.79	Vertical	
9370.083	9.65	37.03	37.99	46.87	55.56	74.00	-18.44	Vertical	
1468.696	3.88	28.07	39.34	56.07	48.68	74.00	-25.32	Horizontal	
1953.211	4.31	31.43	39.55	50.52	46.71	74.00	-27.29	Horizontal	
4882.000	7.48	34.59	41.68	56.61	57.00	74.00	-17.00	Horizontal	
5791.646	7.89	35.37	41.10	49.09	51.25	74.00	-22.75	Horizontal	
7920.996	9.30	36.00	39.26	47.99	54.03	74.00	-19.97	Horizontal	
10641.890	10.30	38.36	37.71	45.72	56.67	74.00	-17.33	Horizontal	

Worst case mode:		GFSK		Test channel:		Middle		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1395.796	3.81	27.91	39.31	48.96	41.37	54.00	-12.63	Vertical	
2135.217	4.43	32.05	39.67	42.19	39.00	54.00	-15.00	Vertical	
4181.159	6.68	34.31	41.16	40.75	40.58	54.00	-13.42	Vertical	
4882.000	7.48	34.59	41.68	50.48	50.87	54.00	-3.13	Vertical	
6299.178	8.08	36.06	40.66	42.77	46.25	54.00	-7.75	Vertical	
9370.083	9.65	37.03	37.99	40.86	49.55	54.00	-4.45	Vertical	
1468.696	3.88	28.07	39.34	50.27	42.88	54.00	-11.12	Horizontal	
1953.211	4.31	31.43	39.55	46.85	43.04	54.00	-10.96	Horizontal	
4882.000	7.48	34.59	41.68	50.16	50.55	54.00	-3.45	Horizontal	
5791.646	7.89	35.37	41.10	44.61	46.77	54.00	-7.23	Horizontal	
7920.996	9.30	36.00	39.26	42.82	48.86	54.00	-5.14	Horizontal	
10641.890	10.30	38.36	37.71	37.52	48.47	54.00	-5.53	Horizontal	

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120100001801
Page : 57 of 65

Worst case mode:		GFSK		Test channel:		Highest		Remark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1468.696	3.88	28.07	39.34	52.54	45.15	74.00	-28.85	Vertical	
3049.394	5.12	33.38	40.34	49.04	47.20	74.00	-26.80	Vertical	
3672.110	6.00	33.41	40.80	48.96	47.57	74.00	-26.43	Vertical	
4960.000	7.53	34.46	41.74	55.53	55.78	74.00	-18.22	Vertical	
6363.645	8.10	36.14	40.61	48.92	52.55	74.00	-21.45	Vertical	
7547.013	9.14	36.00	39.57	49.02	54.59	74.00	-19.41	Vertical	
1406.496	3.81	27.94	39.31	52.55	44.99	74.00	-29.01	Horizontal	
2118.973	4.42	32.02	39.65	50.25	47.04	74.00	-26.96	Horizontal	
4278.055	6.81	34.59	41.25	49.00	49.15	74.00	-24.85	Horizontal	
4960.000	7.53	34.46	41.74	56.49	56.74	74.00	-17.26	Horizontal	
5791.646	7.89	35.37	41.10	50.34	52.50	74.00	-21.50	Horizontal	
6903.705	8.37	35.90	40.13	49.68	53.82	74.00	-20.18	Horizontal	

Worst case mode:		GFSK		Test channel:		Highest		Remark:	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Emission Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Antenna polarization	
1468.696	3.88	28.07	39.34	48.35	40.96	54.00	-13.04	Vertical	
3049.394	5.12	33.38	40.34	43.65	41.81	54.00	-12.19	Vertical	
3672.110	6.00	33.41	40.80	45.76	44.37	54.00	-9.63	Vertical	
4960.000	7.53	34.46	41.74	50.25	50.50	54.00	-3.50	Vertical	
6363.645	8.10	36.14	40.61	43.58	47.21	54.00	-6.79	Vertical	
7547.013	9.14	36.00	39.57	43.75	49.32	54.00	-4.68	Vertical	
1406.496	3.81	27.94	39.31	48.37	40.81	54.00	-13.19	Horizontal	
2118.973	4.42	32.02	39.65	47.35	44.14	54.00	-9.86	Horizontal	
4278.055	6.81	34.59	41.25	45.32	45.47	54.00	-8.53	Horizontal	
4960.000	7.53	34.46	41.74	50.33	50.58	54.00	-3.42	Horizontal	
5791.646	7.89	35.37	41.10	45.73	47.89	54.00	-6.11	Horizontal	
6903.705	8.37	35.90	40.13	43.57	47.71	54.00	-6.29	Horizontal	


Remark: The disturbance above 11GHz was very low (>20dB below the limit), and the above harmonics were the highest point could be found when testing, so only the above harmonics have been displayed.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



5.10.3 Band edge (Radiated Emission)

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Vertical
------------	--------------	---------------	--------	---------	------	----------

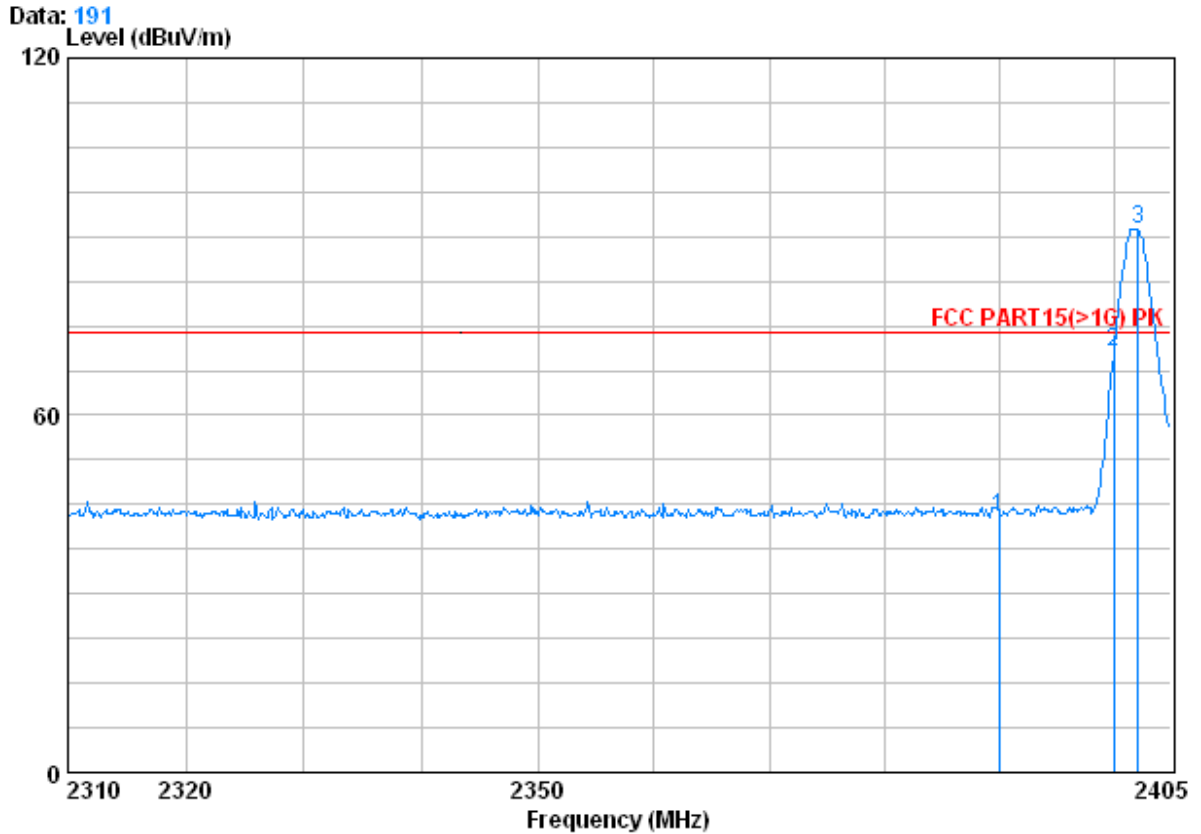

Condition : FCC PART15(>1G) PK 3m VERTICAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2402 bandedge

	Freq	Cable Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	47.04	42.68	74.00	-31.32
2	2400.000	2.98	32.51	39.86	75.08	70.72	74.00	-3.28
3 @	2402.150	2.98	32.51	39.86	95.56	91.19	74.00	17.19




SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM120100001801

Page : 59 of 65

Test mode:	Transmitting	Test channel:	Lowest	Remark:	Peak	Horizontal
------------	--------------	---------------	--------	---------	------	------------

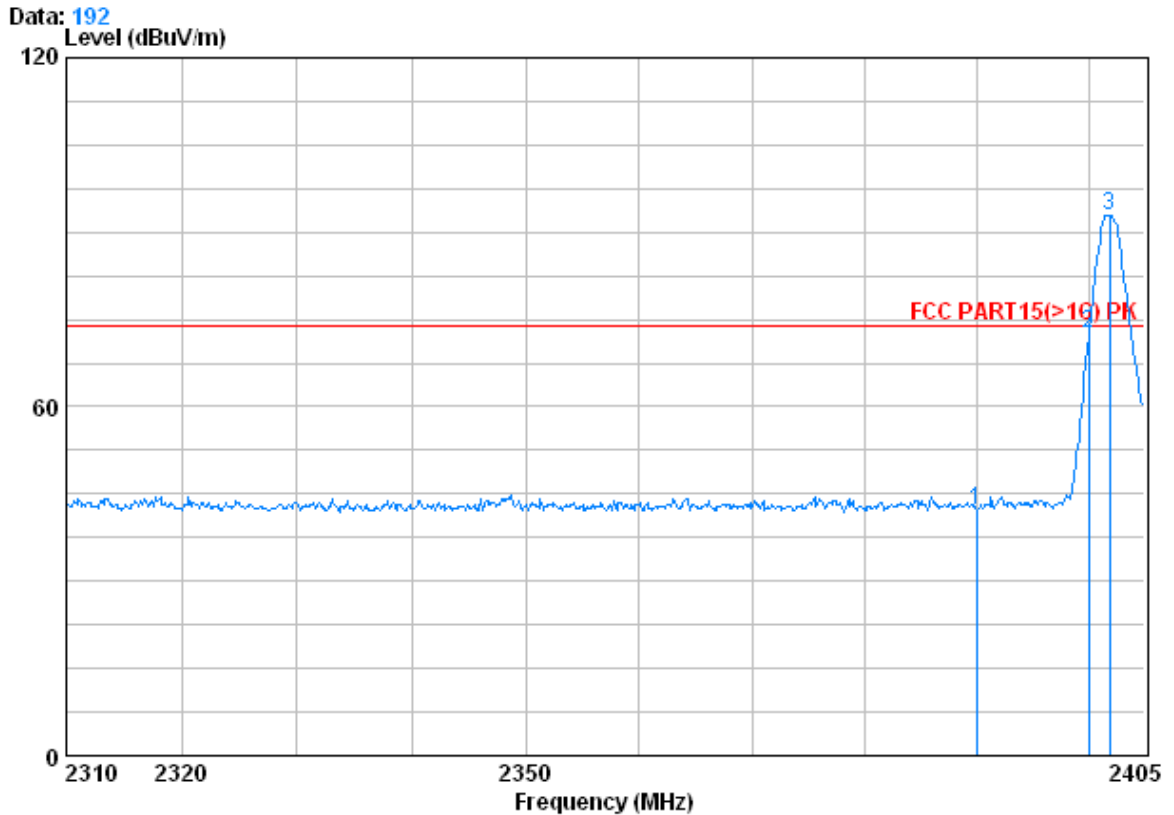


Condition : FCC PART15(>1G) PK 3m HORIZONTAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2402 bandedge

		CableAntenna		Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	46.55	42.20	74.00	-31.80
2	2400.000	2.98	32.51	39.86	76.79	72.43	74.00	-1.57
3 @	2401.865	2.98	32.51	39.86	97.22	92.85	74.00	18.85

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Vertical
------------	--------------	---------------	--------	---------	---------	----------

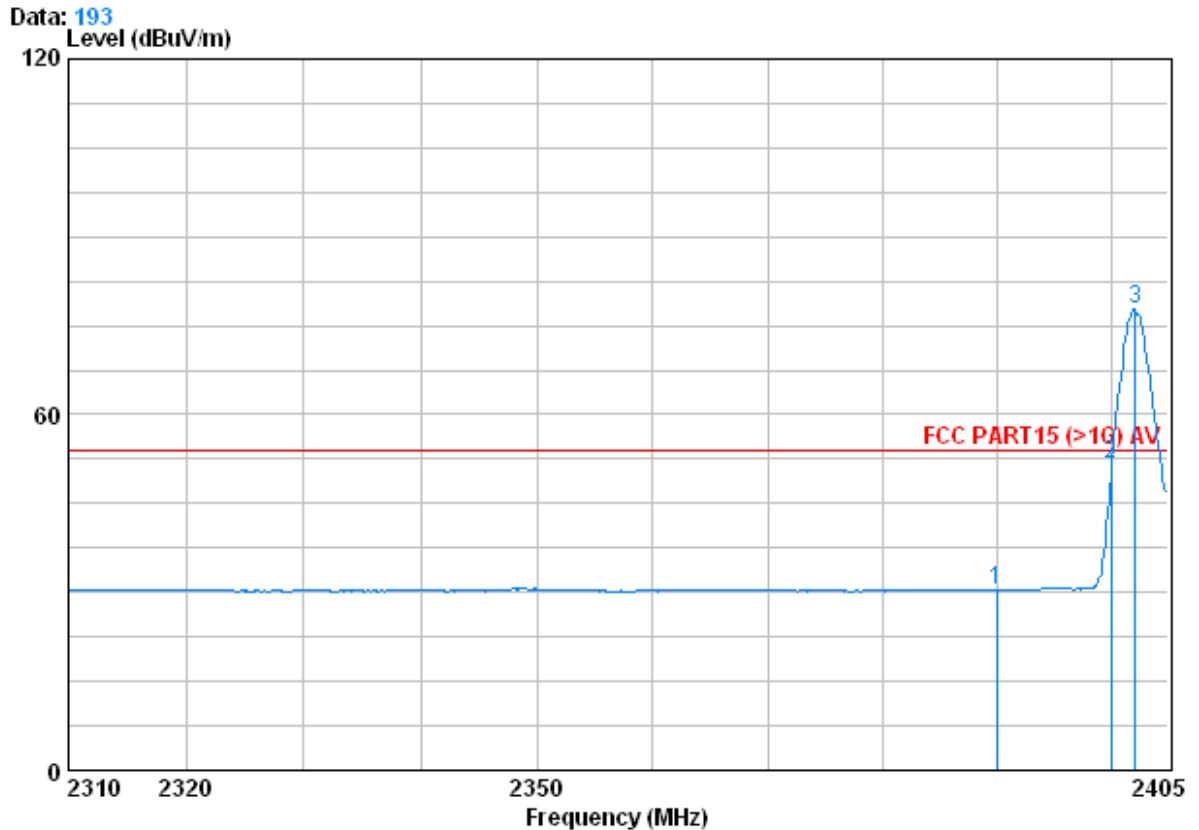


Condition : FCC PART15 (>1G) AV 3m VERTICAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2402 bandedge

	Freq	Cable	Antenna	Preamp	Read		Limit	Over
		Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	34.74	30.39	54.00	-23.61
2	2400.000	2.98	32.51	39.86	55.98	51.61	54.00	-2.39
3 0	2402.150	2.98	32.51	39.86	82.23	77.87	54.00	23.87



Test mode:	Transmitting	Test channel:	Lowest	Remark:	Average	Horizontal
------------	--------------	---------------	--------	---------	---------	------------

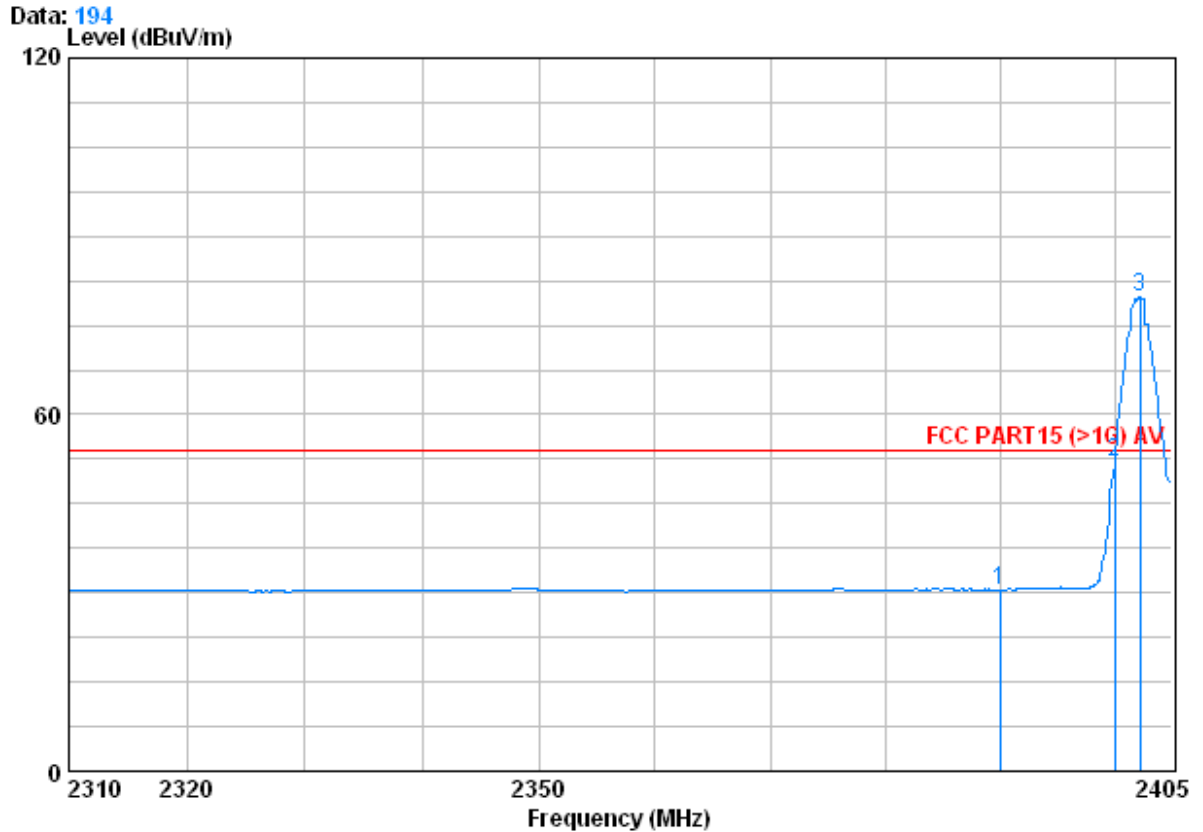


Condition : FCC PART15 (>1G) AV 3m HORIZONTAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2402 bandedge

	Freq	CableAntenna Loss	Antenna Factor	Preamplifier Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	2.98	32.51	39.85	34.88	30.52	54.00	-23.48
2	2400.000	2.98	32.51	39.86	56.44	52.07	54.00	-1.93
3	2402.245	2.98	32.51	39.86	84.18	79.81	54.00	25.81



Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Vertical
------------	--------------	---------------	---------	---------	------	----------

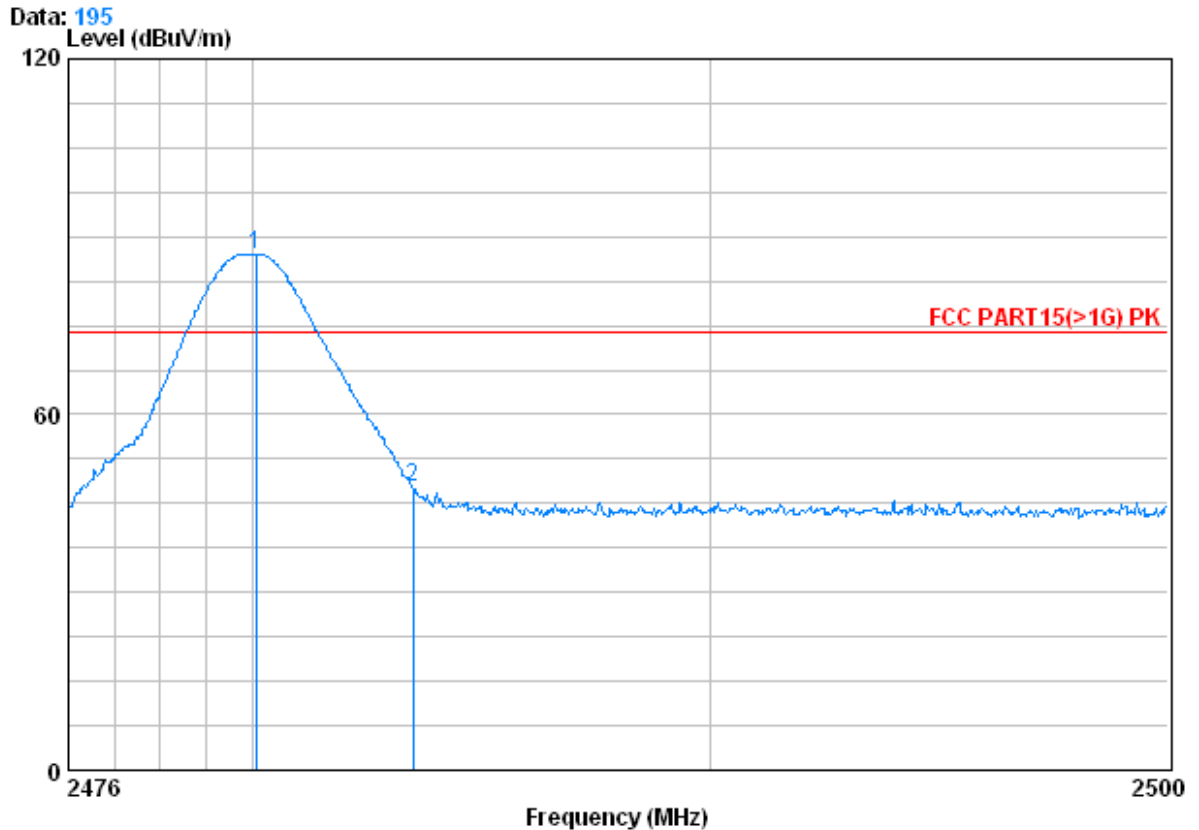


Condition : FCC PART15(>1G) PK 3m VERTICAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2480 bandedge

		Cable	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.080	3.03	32.67	39.92	91.27	87.05	74.00	13.05
2	2483.500	3.03	32.67	39.92	51.95	47.73	74.00	-26.27



Test mode:	Transmitting	Test channel:	Highest	Remark:	Peak	Horizontal
------------	--------------	---------------	---------	---------	------	------------

Data: 196
Level (dBuV/m)

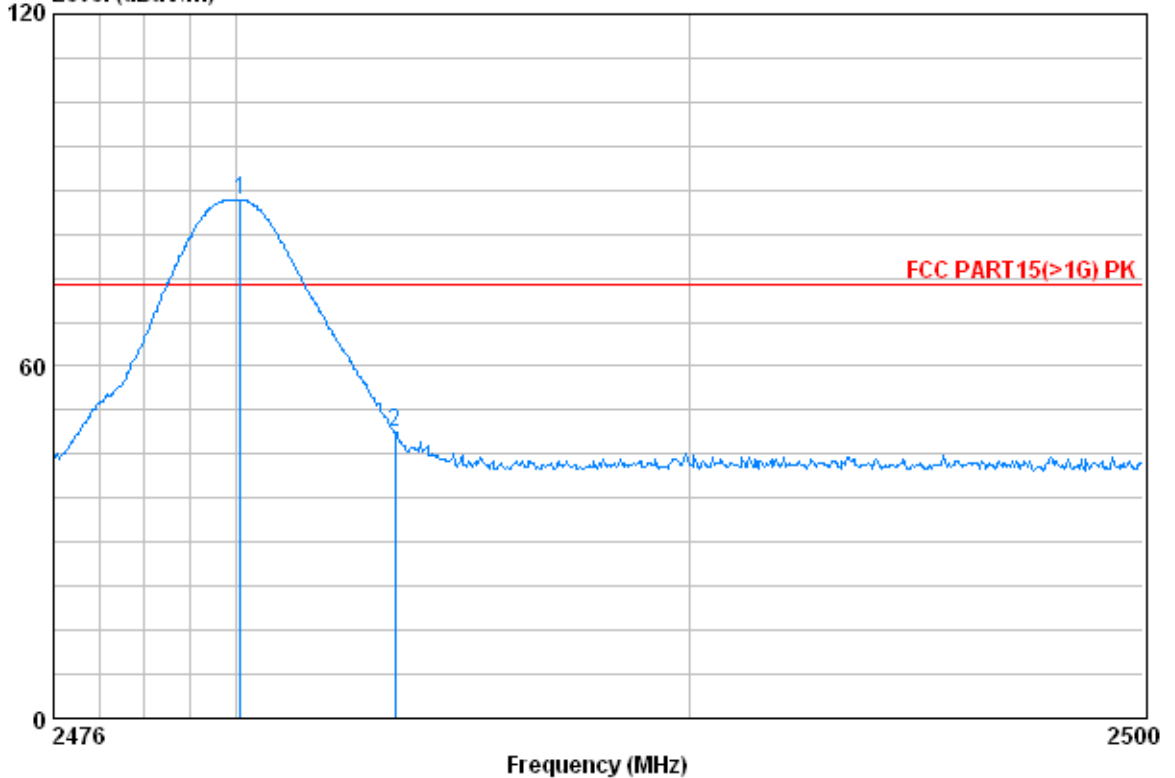

Condition : FCC PART15(>1G) PK 3m HORIZONTAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2480 bandedge

	Freq	CableAntenna Loss	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1 X	2480.104	3.03	32.67	39.92	92.51	88.29	74.00 14.29
2	2483.500	3.03	32.67	39.92	53.10	48.88	74.00 -25.12






Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Vertical
------------	--------------	---------------	---------	---------	---------	----------

Data: 198

Level (dBuV/m)

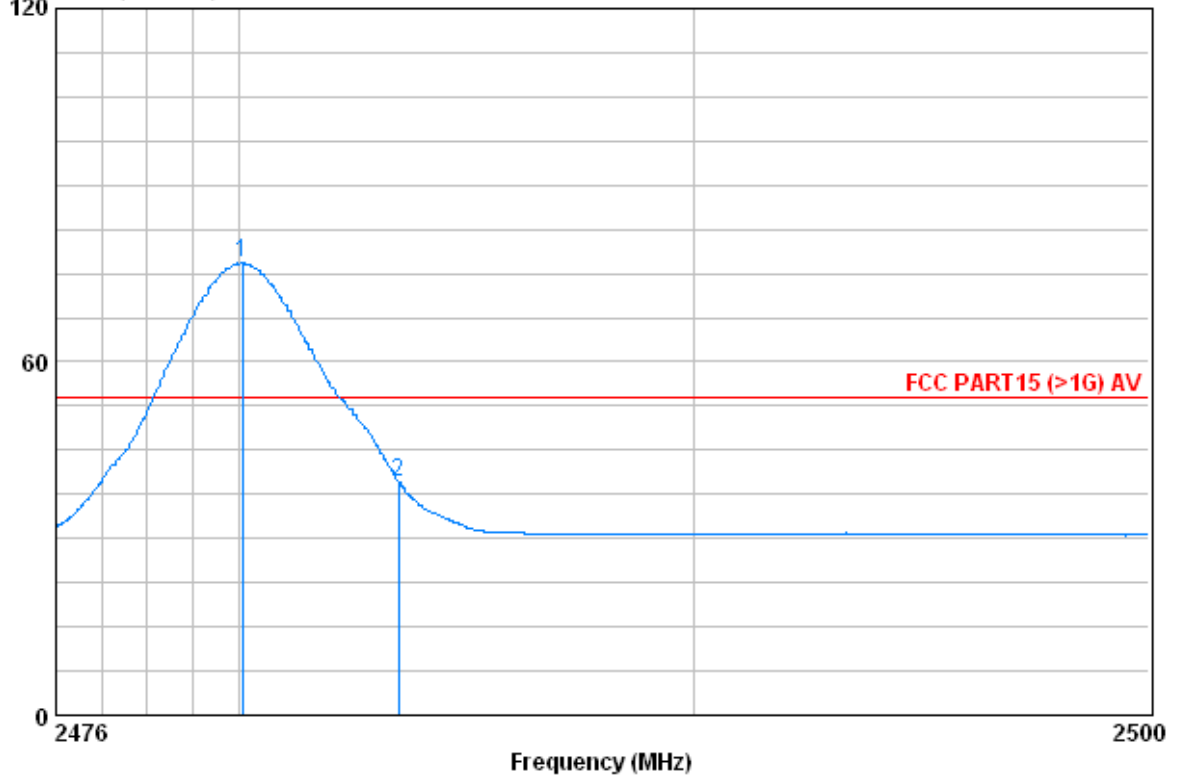


Condition : FCC PART15 (>1G) AV 3m VERTICAL
 EUT : Rearview camera mirror with Bluetooth
 Job No. : 0018RF
 Mode : 2480 bandedge

	Freq	Cable	Antenna	Preamplifier	Read	Limit	Over
	MHz	Loss	Factor	Factor	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dB
1 @	2480.080	3.03	32.67	39.92	81.04	76.82	54.00 22.82
2	2483.500	3.03	32.67	39.92	43.94	39.72	54.00 -14.28



Test mode:	Transmitting	Test channel:	Highest	Remark:	Average	Horizontal
------------	--------------	---------------	---------	---------	---------	------------

Data: 197
Level (dBuV/m)

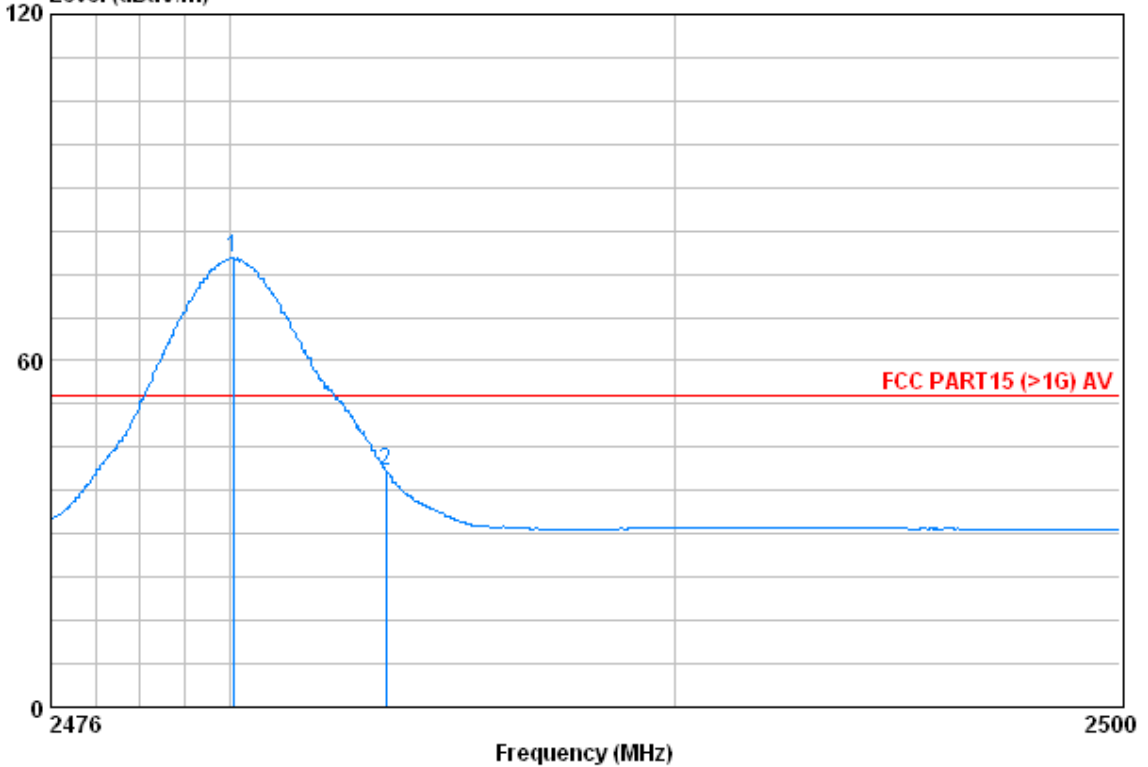

Condition : FCC PART15 (>1G) AV 3m HORIZONTAL
EUT : Rearview camera mirror with Bluetooth
Job No. : 0018RF
Mode : 2480 bandedge

	Freq	CableAntenna Loss	Antenna Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 @	2480.080	3.03	32.67	39.92	82.05	77.83	54.00	23.83
2	2483.500	3.03	32.67	39.92	45.11	40.89	54.00	-13.11