

Test Report
for
FCC Part 15 Subpart B & C

of

Product Name

Wireless 802.11g MiniPCI Card

Model

WM1260

(Brand: CastleNet)

Applied by:

CastleNet Technology Inc.
16F, No. 957, Chung-Cheng Rd.,
Chung-Ho City ,Taip
Taiwan R. O. C.

Test Performed by:

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: ISL-04LR034FC

Issue Date: 2004/12/08

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

- 1. General 1
 - 1.1 Certification of Accuracy of Test Data..... 1
- 2. Test Results Summary.....2
- 3. Description of Equipment Under Test (EUT).....3
- 4. TEST RESULTS (802.11b).....4
 - 4.1 Powerline Conducted Emissions [Section 15.207] 4
 - 4.1.1 EUT Configuration..... 4
 - 4.1.2 Test Procedure 4
 - 4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)4
 - 4.1.4 Test Data: 5
 - 4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 7
 - 4.2.1 Test Procedure 7
 - 4.2.2 Test Setup 7
 - 4.2.3 Test Data: 7
 - 4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 10
 - 4.3.1 Test Procedure 10
 - 4.3.2 Test Setup 10
 - 4.3.3 Test Data..... 10
 - 4.4 Radiated Emission Measurement [Section [15.247(c)(4)] 11
 - 4.4.1 EUT Configuration..... 11
 - 4.4.2 Test Procedure 11
 - 4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)11
 - 4.4.4 Test Data (30MHz – 1GHz): 12
 - 4.4.5 Test Data (1GHz – 25 GHz) 13
 - 4.5 Band Edge Measurement 16
 - 4.5.1 Test Procedure (Conducted)..... 16
 - 4.5.2 Test Setup (Conducted)..... 16
 - 4.5.3 Test Data: 16
 - 4.5.4 Test Procedure (Radiated) 18
 - 4.5.5 Test Setup (Radiated) 18
 - 4.5.6 Test Data..... 19
 - 4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 22
 - 4.7 DSSS Peak Power Spectral Density [Section 15.247(d)] 23
 - 4.7.1 Test Procedure 23
 - 4.7.2 Test Setup 23
 - 4.7.3 Test Data..... 23
- 5. TEST RESULTS (802.11g)26
 - 5.1 Powerline Conducted Emissions [Section 15.207] 26
 - 5.1.1 EUT Configuration..... 26
 - 5.1.2 Test Procedure 26
 - 5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)26

5.1.4 Test Data: 27

5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 29

5.2.1 Test Procedure 29

5.2.2 Test Setup 29

5.2.3 Test Data: 29

5.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 32

5.3.1 Test Procedure 32

5.3.2 Test Setup 32

5.3.3 Test Data..... 32

5.4 Radiated Emission Measurement [Section [15.247(c)(4)] 33

5.4.1 EUT Configuration..... 33

5.4.2 Test Procedure 33

5.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)33

5.4.4 Test Data (30MHz – 1GHz): 34

5.4.5 Test Data (1GHz – 25 GHz) 35

5.5 Band Edge Measurement 38

5.5.1 Test Procedure (Conducted)..... 38

5.5.2 Test Setup (Conducted)..... 38

5.5.3 Test Data: 38

5.5.4 Test Procedure (Radiated) 40

5.5.5 Test Setup (Radiated) 40

5.5.6 Test Data..... 41

5.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 44

5.7 DSSS Peak Power Spectral Density [Section 15.247(d)] 45

5.7.1 Test Procedure 45

5.7.2 Test Setup 45

5.7.3 Test Data..... 45

6. Appendix 48

6.1 Appendix A: Measurement Procedure for Power line Conducted Emissions 48

6.2 Appendix B: Test Procedure for Radiated Emissions..... 49

6.3 Appendix C: Test Equipment..... 50

6.3.1 Test Equipment List..... 50

6.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data..... 50

6.4 Appendix D: Layout of EUT and Support Equipment..... 51

6.4.1 General Conducted Test Configuration 51

6.4.2 General Radiation Test Configuration..... 52

6.5 Appendix E: Description of Support Equipment 53

6.5.1 Description of Support Equipment 53

6.5.2 Software for Controlling Support Unit 54

6.5.3 I/O Cable Condition of EUT and Support Units 55

6.6 Appendix F: Accuracy of Measurement..... 56

6.7 Appendix G: Photographs of EUT Configuration Test Set Up 58

6.8 Appendix H: Antenna Spec..... 61

1. General

1.1 Certification of Accuracy of Test Data

Standards: CFR 47 Part 15 Subpart B Class B
CFR 47 Part 15 Subpart C (Section 15.247)

Test Procedure: ANSI C63.4:2003

Equipment Tested: Wireless 802.11g MiniPCI Card

Model: WM1260

Applied by: CastleNet Technology Inc.

Sample received Date: 2004/11/18

Final test Date : 2004/12/16

Test Result PASS

Test Site: Chamber 02, Conduction 02

Temperature Refer to each site test data

Humidity: Refer to each site test data

Test Engineer: Jerry Chiou

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature



Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 64 pages, including 1 cover page, 2 contents page, and 61 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

2. Test Results Summary

The 802.11b functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	MPE report attached
15.247 (d)	Power Spectral Density	Pass	

The 802.11g functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	MPE report attached
15.247 (d)	Power Spectral Density	Pass	

3. Description of Equipment Under Test (EUT)

Description: Wireless 802.11g MiniPCI Card
 Model No.: WM1260
 FCC ID: RK9-WM1260
 Brand: CastleNet
 Frequency Range 802.11b/g: 2400~2483.5 MHz
 Support channel: 802.11b/g 11 Channels

Modulation Skill:
 802.11b DBPSK(1Mbps), DQPSK(2Mbps),
 CCK(5.5/11Mbps)
 802.11g OFDM (6M - 54Mbps)

Antennas Type:
 Antenna 1: Dipole made by ADVANCED-CONNECTEK INC.
 Antenna 2: Dipole made by WIESON TECHNOLOGIES CO.,LTD.

Antenna Connected: The antenna is connected to the RF connector of the WLAN adapter.

Antenna peak Gain:
 Antenna 1: Main (p/n:ADA3I-3K52203) 1 dBi
 Aux (p/n:ADA3I-3K52202) 1 dBi
 Antenna 2: Main (p/n:Y111Q139-002) 2.24 dBi
 Aux (p/n: Y111Q139-001) 2.24 dBi

WLAN Power Type : 3.3V DC from the EUT

The channel and the operation frequency of 802.11b and 802.11g is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

During the test, the EUT was tested as a modular device of a notebook PC using a PCMCIA extender board to extend the EUT outside the notebook PC enclosure.

There are two antennas in the EUT:

Antenna 1,2 are Dipole type in Hirose connector.

All antennas have been tested, only the worst data of WM1260 using Antenna 2 was shown in this test report.

4. TEST RESULTS (802.11b)

4.1 Powerline Conducted Emissions [Section 15.207]

4.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

4.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

4.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range	150 KHz--30MHz
Detector Function	Quasi-Peak/Average
Bandwidth (RBW)	9KHz

4.1.4 Test Data:

Power Line Conducted Emissions (Hot) Channel 1, 6, 11


Operator:JerryChiou

Temperature(C):24

10:27:16AM,Thursday,December02,2004

Humidity(%):50

Frequency MHz	LISNLoss (dB)	CableLoss (dB)	QPCorrt. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorrt. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.47278	0.11	0.07	36.87	56.78	-19.91	33.65	46.78	-13.13
0.55171	0.13	0.07	39.24	56.00	-16.76	38.18	46.00	-7.82
0.63058	0.14	0.07	38.35	56.00	-17.65	37.06	46.00	-8.94
0.78663	0.16	0.07	40.37	56.00	-15.63	39.54	46.00	-6.46
0.94563	0.19	0.07	39.58	56.00	-16.42	38.88	46.00	-7.12
1.88973	0.21	0.09	40.72	56.00	-15.28	38.34	46.00	-7.66
2.04892	0.20	0.09	41.22	56.00	-14.78	40.22	46.00	-5.78
2.20735	0.20	0.10	40.97	56.00	-15.03	39.24	46.00	-6.76
2.28586	0.20	0.10	41.23	56.00	-14.77	39.86	46.00	-6.14
2.44391	0.20	0.10	41.03	56.00	-14.97	39.88	46.00	-6.12

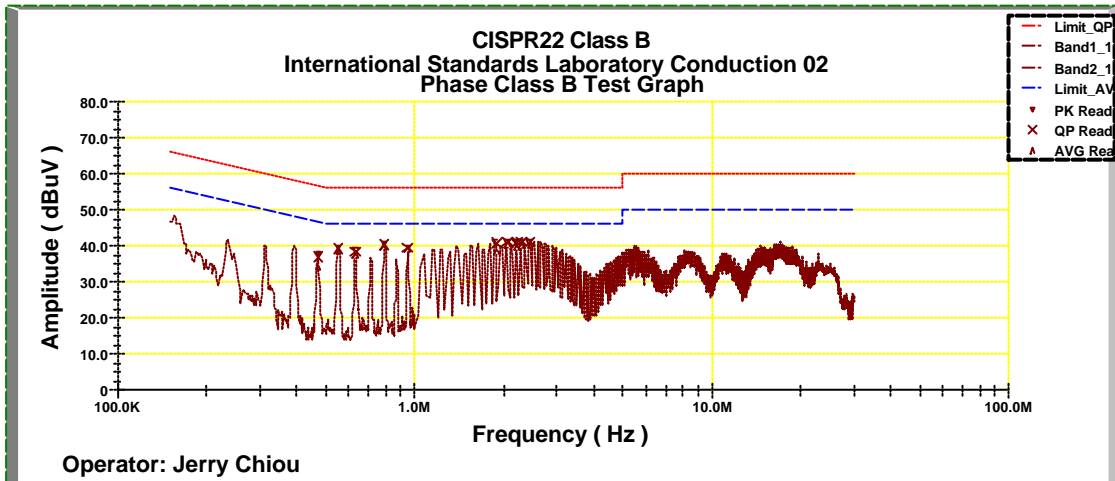

Power Line Conducted Emissions (Neutral) Channel 1, 6, 11


Operator: Jerry Chiou

Temperature(C): 24

10:16:37AM, Thursday, December 02, 2004

Humidity(%): 50

Frequency	LISN Loss	Cable Loss	QP Correct.	QP Limit	QP Margin	AVE Correct.	AVE Limit	AVE Margin
MHz	(dB)	(dB)	Amp. (dBuV)	(dBuV)	(dB)	Amp. (dBuV)	(dBuV)	(dB)
0.23261	0.10	0.06	38.31	63.64	-25.33	36.49	53.64	-17.15
0.46693	0.11	0.07	35.25	56.94	-21.70	31.89	46.94	-15.06
0.62408	0.14	0.07	34.04	56.00	-21.96	32.66	46.00	-13.34
0.70110	0.15	0.07	33.60	56.00	-22.40	31.68	46.00	-14.32
0.85798	0.18	0.07	34.23	56.00	-21.77	33.27	46.00	-12.73
2.30771	0.20	0.10	20.82	56.00	-35.18	14.75	46.00	-31.25
2.42207	0.20	0.10	38.62	56.00	-17.38	36.72	46.00	-9.28
2.48265	0.20	0.10	20.16	56.00	-35.84	13.42	46.00	-32.58
2.64294	0.20	0.11	20.59	56.00	-35.41	13.63	46.00	-32.37
2.73781	0.20	0.11	38.87	56.00	-17.13	36.77	46.00	-9.23

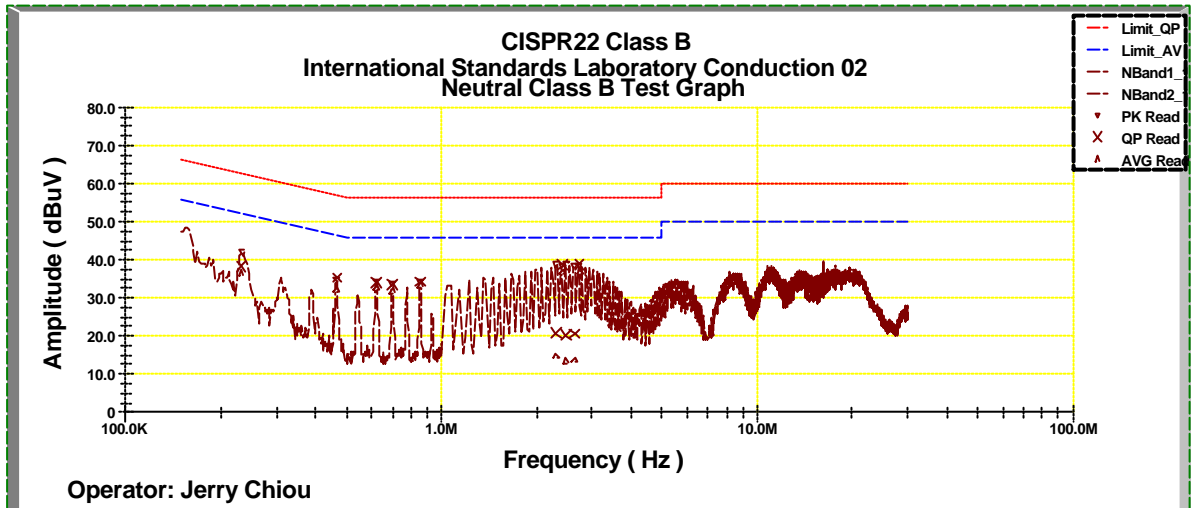

* NOTE: During the test, the EMI receiver was set to Max. Hold then switch the EUT Channel between 1, 6, 11 to get the maximum reading of all these channels.
 Margin = Amplitude + Insertion Loss - Limit
 A margin of -8dB means that the emission is 8dB below the limit

4.2 Bandwidth for DSSS [Section 15.247 (a)(2)]

4.2.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode	Spectrum analyzer
Detector function	Peak mode
RBW	100KHz
VBW	100KHz

4.2.2 Test Setup



4.2.3 Test Data:

6dB Bandwidth


Temp. (deg. C): 25

Test Engr: Jerry Chiou


Humidity (%): 50

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	15.72	0.5	Pass
6	2437	16.44	0.5	Pass
11	2462	16.52	0.5	Pass

Channel 1:

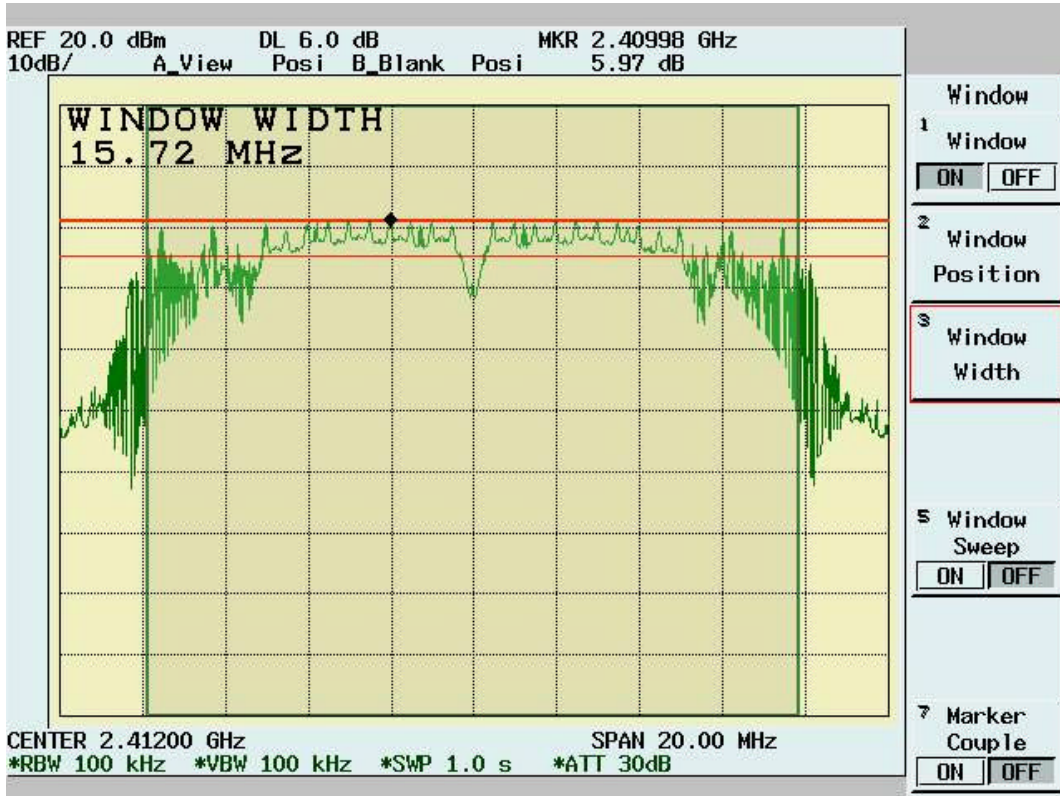

Channel 6:

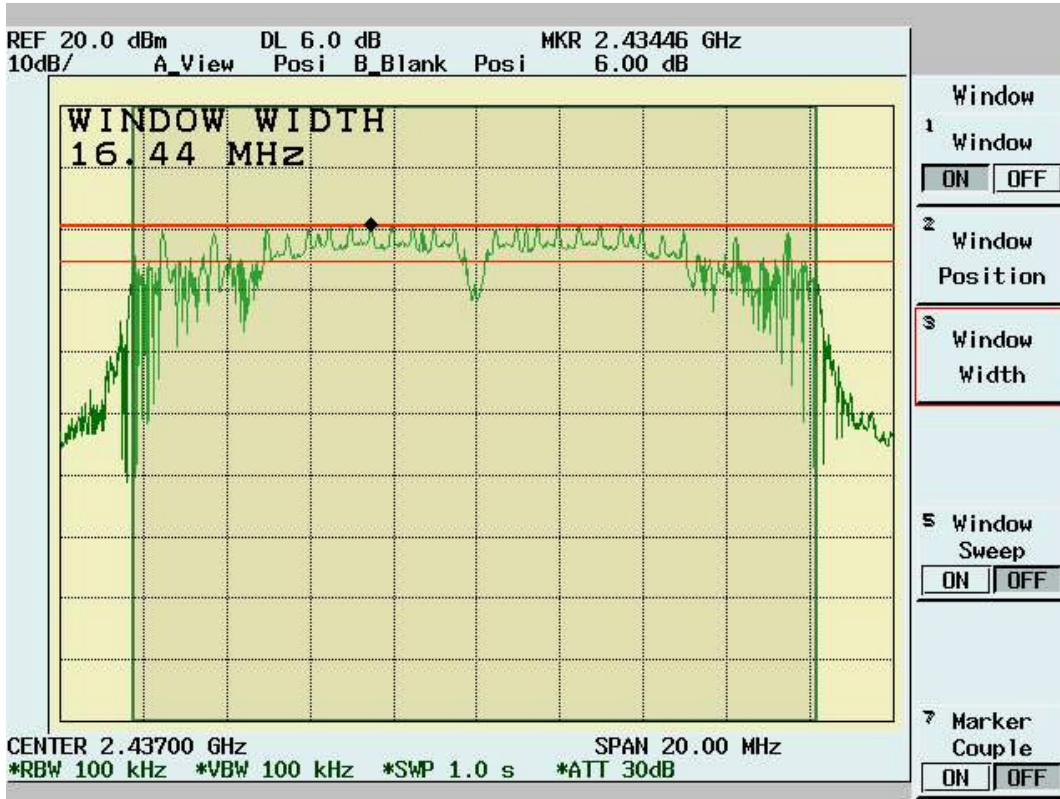

Channel 11:



4.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.3.1 Test Procedure

The Transmitter output of EUT was connected to the peak power analyzer.

4.3.2 Test Setup



4.3.3 Test Data

Maximum Peak Output Power

Temp. (deg. C): 25

Test Engr: Jerry Chiou

Humidity (%): 50

Channel	Frequency (Mhz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	15.843	1.1	49.47	16.943	30	Pass
6	2437	15.093	1.1	41.62	16.193	30	Pass
11	2462	14.406	1.1	35.53	15.506	30	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

4.4 Radiated Emission Measurement [Section [15.247(c)(4)]

4.4.1 EUT Configuration

The equipment under test was set up on the 10 meter chamber with measurement distance of 3 meters. The EUT was placed on a non-conductive table 80cm above ground.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

4.4.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. We found the maximum readings by varying the height of antenna and then rotating the turntable. Both polarization of antenna, horizontal and vertical, are measured.

30M to 1GHz: The highest emissions between 30 MHz to 1000 MHz were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in quasi-peak mode to determine the precise amplitude of the emissions. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission.

1GHz – 25GHz: The highest emissions were also analyzed in details by operating the spectrum analyzer and/or EMI receiver in peak mode to determine the precise amplitude of the emission. While doing so, the interconnecting cables and major parts of the system were moved around, the antenna height was varied between one and four meters, its polarization was varied between vertical and horizontal, and the turntable was slowly rotated, to maximize the emission. During test the EMI receiver and spectrum was setup according to *EMI Receiver/Spectrum Analyzer Configuration*.

For the test of 2nd to 10th harmonics frequencies , the equipment setup was also refer to *EMI Receiver/Spectrum Analyzer Configuration*. The frequencies were tested using Peak mode first, if the test data is higher than the emissions limit, an additional measurement using Average mode will be performed and the average reading will be compared to the limit and record in test report.

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range Tested:	30MHz~1000MHz
Detector Function:	Quasi-Peak Mode
Resolution Bandwidth (RBW):	120KHz
Video Bandwidth (VBW)	1MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Peak Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	3MHz

Frequency Range Tested:	1GHz – 25 GHz
Detector Function:	Average Mode
Resolution Bandwidth (RBW):	1MHz
Video Bandwidth (VBW)	10 Hz

4.4.4 Test Data (30MHz – 1GHz):

30M – 1GHz Open Field Radiated Emissions (Horizontal) Channel 1, 6, 11

Operator:JerryChiou
 Temperature(C):22
 Humidity(%):55

03:44:15PM,Monday,November29,2004

Frequency	RxAmp.	AntFact	CableLoss	PreAmpGain	Corrct.Emi.	Limit	Margin	Ant.Pos.	TablePos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
433.52	22.31	16.17	4.84	0.00	43.32	46.00	-2.68	197.00	9.00
631.4	15.53	18.96	6.15	0.00	40.64	46.00	-5.36	145.00	155.00
697.36	13.22	19.00	6.52	0.00	38.74	46.00	-7.26	100.00	23.00
719.67	9.51	19.43	6.75	0.00	35.69	46.00	-10.31	100.00	23.00
764.29	11.29	20.10	6.95	0.00	38.34	46.00	-7.66	100.00	23.00
791.45	12.81	20.10	7.14	0.00	40.05	46.00	-5.95	100.00	23.00

30M – 1GHz Open Field Radiated Emissions (Vertical) Channel 1, 6, 11

Operator:JerryChiou
 Temperature(C):22
 Humidity(%):55

03:46:15PM,Monday,November29,2004

Frequency	RxAmp.	AntFact	CableLoss	PreAmpGain	Corrct.Emi.	Limit	Margin	Ant.Pos.	TablePos.
MHz	(dBuV)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg)
35.82	13.50	14.64	1.02	0.00	29.16	40.00	-10.84	152.00	304.00
299.66	24.05	13.59	3.72	0.00	41.36	46.00	-4.64	197.00	22.00
366.59	19.73	14.83	4.33	0.00	38.90	46.00	-7.10	197.00	88.00
433.52	21.76	16.17	4.84	0.00	42.76	46.00	-3.24	197.00	22.00
498.51	18.70	17.46	5.29	0.00	41.45	46.00	-4.55	197.00	6.00
564.47	13.20	18.83	5.69	0.00	37.72	46.00	-8.28	152.00	41.00
632.37	9.57	18.96	6.15	0.00	34.68	46.00	-11.32	103.00	88.00
749.74	7.73	20.09	6.93	0.00	34.76	46.00	-11.24	152.00	57.00
764.29	6.48	20.10	6.95	0.00	33.54	46.00	-12.46	197.00	22.00
791.45	5.63	20.10	7.14	0.00	32.87	46.00	-13.13	197.00	22.00

NOTE:

During the Pre-test, the EUT has been tested for Channel 1, 6, 11 transmit from Main and Aux antenna respectively to get all the critical emission frequencies. In the final test all the critical emission frequencies has been tested and the test data are listed above.

Margin = Corrected Amplitude – Limit
 Corrected Amplitude = Radiated Amplitude + Antenna Correction Factor + Cable Loss - Pre-Amplifier Gain
 A margin of -8dB means that the emission is 8dB below the limit

All frequencies from 30MHz to 1GHz have been tested

4.4.5 Test Data (1GHz – 25 GHz) .

1GHz~ 25 GHz (Horizontal), Channel 1: 2412 MHz

Operator:JerryChiou

RBW:1MHz
Humidity(%):37
Temperature(C):21

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1971.53	45.50pk	30.76	2.58	35.30	43.54pk	54.00av	-10.46	100	45
2281.22	45.86pk	30.94	1.74	35.43	43.12pk	54.00av	-10.88	101	131
2338.66	45.41pk	30.93	1.57	35.45	42.46pk	54.00av	-11.54	101	149
6730.77	30.28pk	37.65	3.26	38.14	33.05pk	54.00av	-20.95	101	157

1GHz~ 25 GHz (Vertical), Channel 1: 2412 MHz

Operator:JerryChiou

RBW:1MHz
Humidity(%):37
Temperature(C):21

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1986.51	46.09pk	30.89	2.59	35.31	44.26pk	54.00av	-9.74	100	44
2048.95	45.42pk	30.99	2.45	35.33	43.53pk	54.00av	-10.47	100	58
2278.72	45.47pk	30.94	1.75	35.43	42.74pk	54.00av	-11.26	101	131
6573.43	31.04pk	36.80	3.36	38.74	32.45pk	54.00av	-21.55	101	185
12604.4	31.62pk	41.68	3.67	36.34	40.62pk	54.00av	-13.38	101	244

Note:

- ⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡ “ * ”: Fundamental Frequency
- ⚡ “***”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡ “ pk” : peak mode
- ⚡ “ av” : average mode
- ⚡ “ --- “: No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡ Margin=Corrected Amplitude – Limit
- ⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal) , Channel 6 : 2437 MHz

Operator:JerryChiou

RBW:1MHz
Humidity(%):37
Temperature(C):21

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1996.5	44.79pk	30.97	2.60	35.31	43.05pk	54.00av	-10.95	100	43
2066.43	44.91pk	30.99	2.40	35.34	42.95pk	54.00av	-11.05	100	64
2371.13	45.77pk	30.93	1.47	35.47	42.69pk	54.00av	-11.31	101	160
12322.7	31.54pk	41.91	3.68	36.95	40.18pk	54.00av	-13.82	100	170

1GHz~ 25 GHz (Vertical), Channel 6 : 2437 MHz

Operator:JerryChiou

RBW:1MHz
Humidity(%):37
Temperature(C):21

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2008.99	46.18pk	31.00	2.57	35.31	44.44pk	54.00av	-9.56	100	46
2068.93	45.40pk	30.99	2.39	35.34	43.44pk	54.00av	-10.56	100	65
2308.69	45.86pk	30.94	1.66	35.44	43.02pk	54.00av	-10.98	101	140
2595.9	45.34pk	30.94	1.38	35.49	42.17pk	54.00av	-11.83	102	230
12178.8	32.53pk	42.09	3.66	37.38	40.90pk	54.00av	-13.10	100	132

Note:

- ⚡⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡⚡ “ * ”: Fundamental Frequency
- ⚡⚡ “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡⚡ “ pk” : peak mode
- ⚡⚡ “av”: average mode
- ⚡⚡ “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡⚡ Margin=Corrected Amplitude – Limit
- ⚡⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

1GHz~ 25 GHz (Horizontal), Channel 11: 2462 MHz

Operator:JerryChiou

RBW:1MHz
Humidity(%):37
Temperature(C):21

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2226.27	45.91pk	30.95	1.91	35.41	43.37pk	54.00av	-10.63	101	114
2608.39	45.59pk	30.94	1.38	35.49	42.43pk	54.00av	-11.57	102	234
2665.83	45.60pk	30.97	1.39	35.47	42.49pk	54.00av	-11.51	102	252
4947.55	29.06pk	35.40	2.16	39.22	27.40pk	54.00av	-26.60	100	5
12526.5	31.17pk	41.69	3.68	36.40	40.15pk	54.00av	-13.85	101	223

1GHz~ 25 GHz (Vertical), Channel 11 : 2462 MHz

Operator:JerryChiou

RBW:1MHz
Humidity(%):37
Temperature(C):21

Frequency	Rx_R.	Ant_F.	Cab_L.	PreAmpl	Emission	Limit	Margin	A.Tower	T.Table
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
2011.49	45.29pk	31.00	2.56	35.31	43.54pk	54.00av	-10.46	100	47
2096.4	45.36pk	30.98	2.31	35.35	43.30pk	54.00av	-10.70	100	73
2408.59	45.05pk	30.92	1.53	35.48	42.01pk	54.00av	-11.99	101	171
12538.5	31.16pk	41.69	3.68	36.39	40.15pk	54.00av	-13.85	101	227

Note:

- ⚡⚡ According to ANSI C63.4-2001 8.3.1.2 Notes(1):Where limits are specified by agencies for both average and peak (or quasi-peak) detection , if the peak (or quasi-peak) measured value complies with the average limit , it is unnecessary to perform an average measurement.
- ⚡⚡ “ * ”: Fundamental Frequency
- ⚡⚡ “**”: Not in the restricted band, Limit level=Fundamental Emission-20dB
- ⚡⚡ “ pk”: peak mode
- ⚡⚡ “av”: average mode
- ⚡⚡ “---“: No meter reading data due to the emission level is smaller than spectrum noise level.
- ⚡⚡ The Spectrum noise level+Correction Factor < Limit - 6 dB
- ⚡⚡ Margin=Corrected Amplitude – Limit
- ⚡⚡ Corrected Amplitude=Radiated Amplitude+Antenna Correction Factor+Cable Loss-Pre-Amplifier Gain
- ⚡⚡ A margin of -8dB means that the emission is 8dB below the limit.

All frequencies from 1GHz to 25 GHz have been tested.

4.5 Band Edge Measurement

4.5.1 Test Procedure (Conducted)

1. The transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN: 100MHz
 RBW: 100KHz
 VBW: 100KHz
 Center frequency: 2.4GHz, 2.4835GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed
3. Find the next peak frequency outside the operation frequency band

4.5.2 Test Setup (Conducted)



4.5.3 Test Data:


Table: Band Edge measurement (Conducted)

Temp. (deg. C): 25
 Humidity (%): 50
 Test Engr: Jerry Chiou


Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: >20dB (dB)	Pass/Fail
1	2408.9	108.6	---	---
Outside band	2398.8	76.59	32.01	Pass
11	2458.4	107.34	---	---
Outside band	2472.6	77.23	30.11	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.

Band Edge Conducted measurement

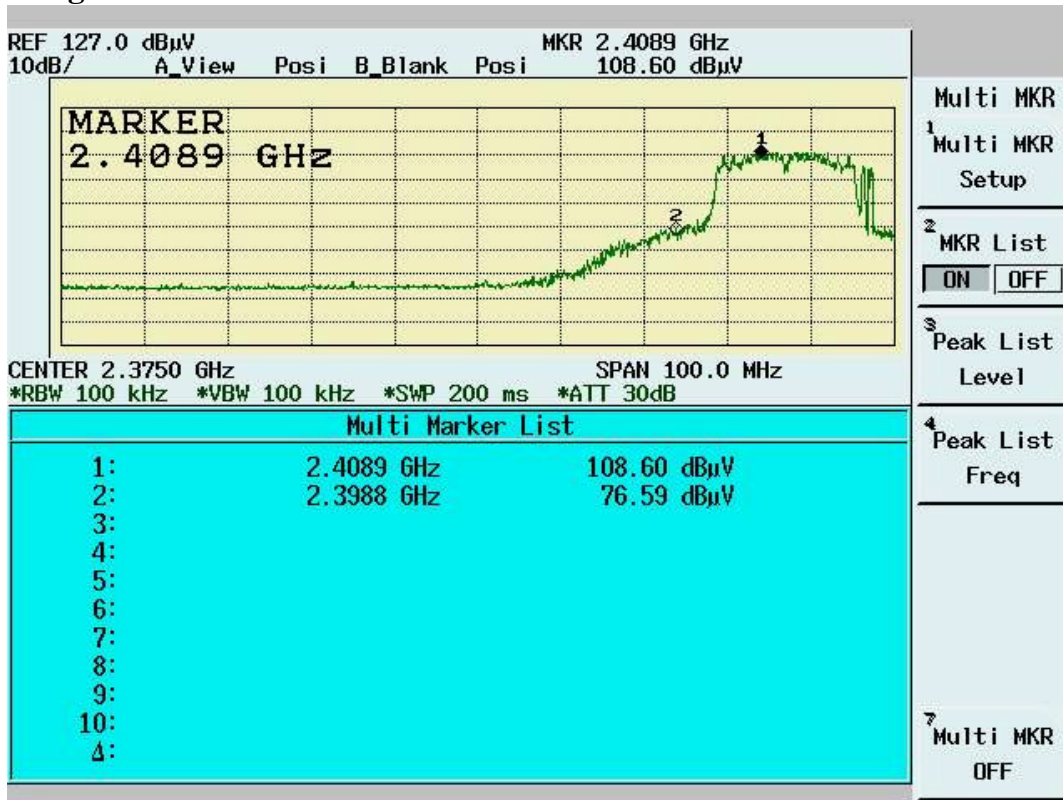

Band Edge Conducted Measurement

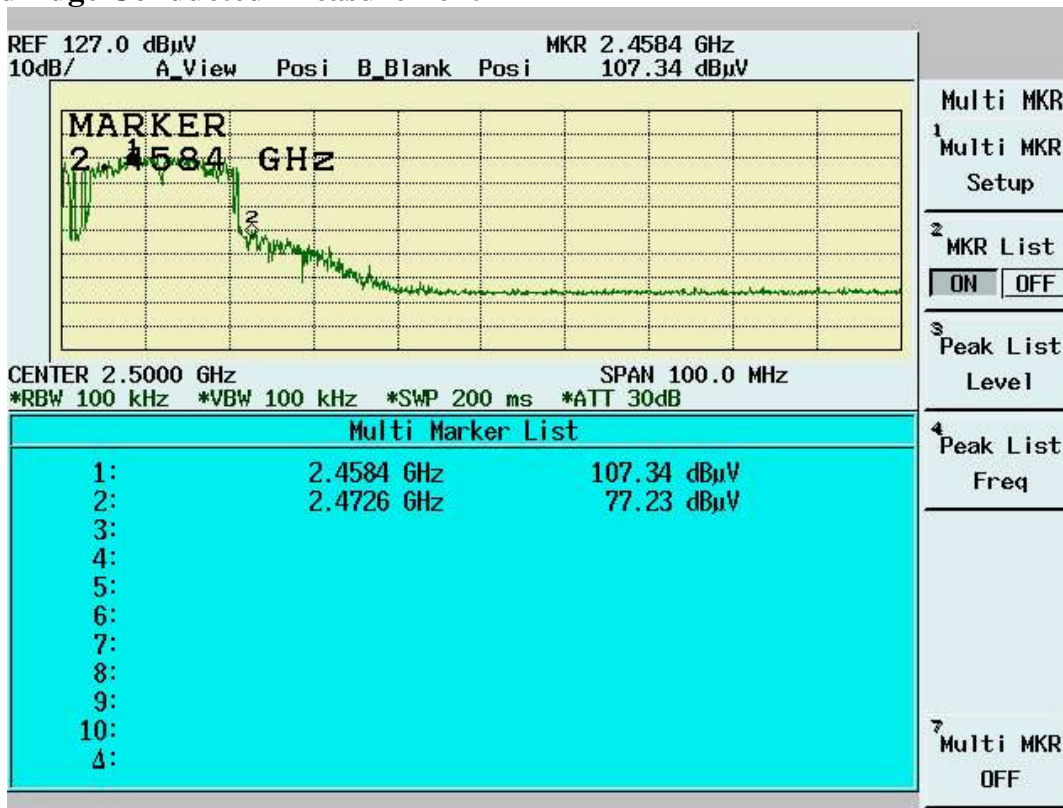

4.5.4 Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as Radiated Emission Measurement.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz
VBW: 10Hz
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

4.5.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

4.5.6 Test Data

Table Band Edge measurement (Radiated)

Temp. (deg. C): 25

Test Engr: Jerry Chiou


Humidity (%): 50

Description	Frequency (MHz)	Spectrum Reading (dBuV)	Correction Factor (dB/m)	Emission Level (dBuV/m)	dBc (Limit: > 20dBc)	Limit (dBuV/m)	Equip. Setup VBW	Pass or Fail
Channel_1 (average mode)	2409.3	66.07	35.48	101.55	---	---	10Hz	---
Channel_1 (peak mode)	2410.2	74.41	35.48	109.89	---	---	1MHz	---
Outside band (peak mode)	2395.7	48.13	35.48	83.61	26.28	---	1MHz	Pass
Channel_11 (average mode)	2464.2	65.15	35.5	100.65	---	---	10Hz	---
Channel_11 (peak mode)	2467.2	74.34	35.5	109.84	---	---	1MHz	---
Outside band (peak mode)	2472.9	48.63	35.51	84.14	25.7	---	1MHz	Pass
Channel_1 Restricted band (peak mode)	2389	35.09	35.47	70.56	---	74	1MHz	Pass
Restricted band (average mode)	2375.9	8.84	35.47	44.31	---	54	10Hz	Pass
Channel_11 Restricted band (peak mode)	2483.9	37.24	35.51	72.75	---	74	1MHz	Pass
Restricted band (average mode)	2483.5	8.94	35.51	44.45	---	54	10Hz	Pass


Note:

- ☞ The Spectrum plot of emission level measurement in Restricted band is attached.
- ☞ Emission Level=Spectrum Reading+Correction Factor
- ☞ Correction Factor=Antenna Factor+cable loss–amplifier gain
- ☞ Both Horizontal and Vertical polarizaion have been tested and the worst data is listed above.


Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 1)

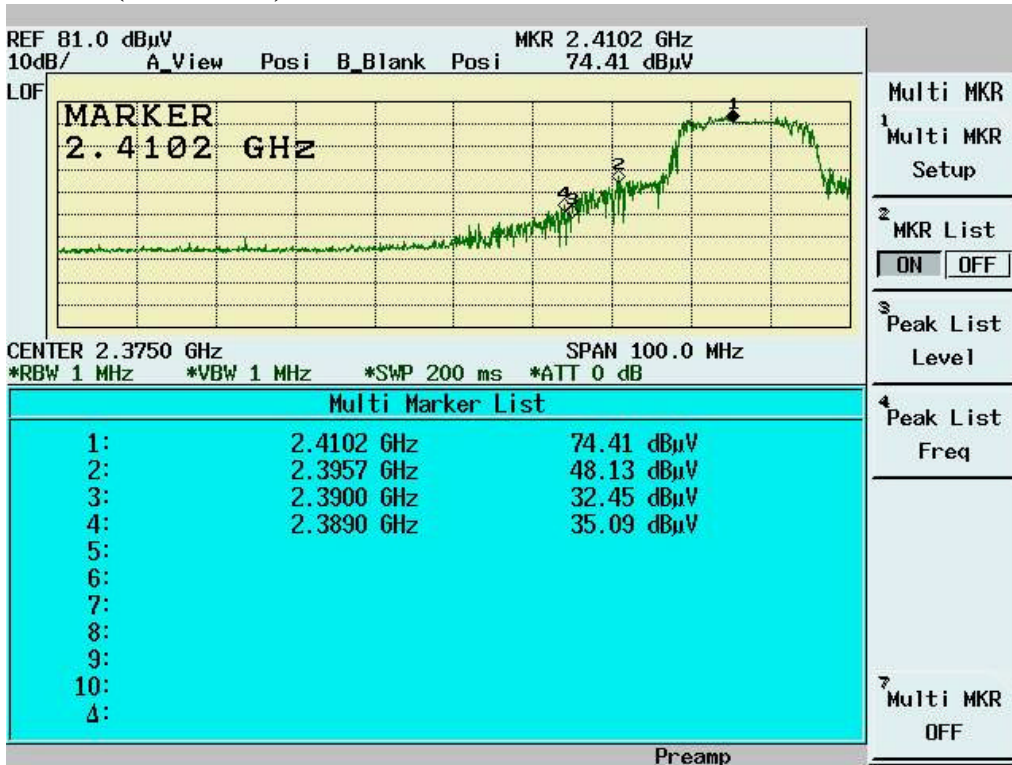


Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 1)

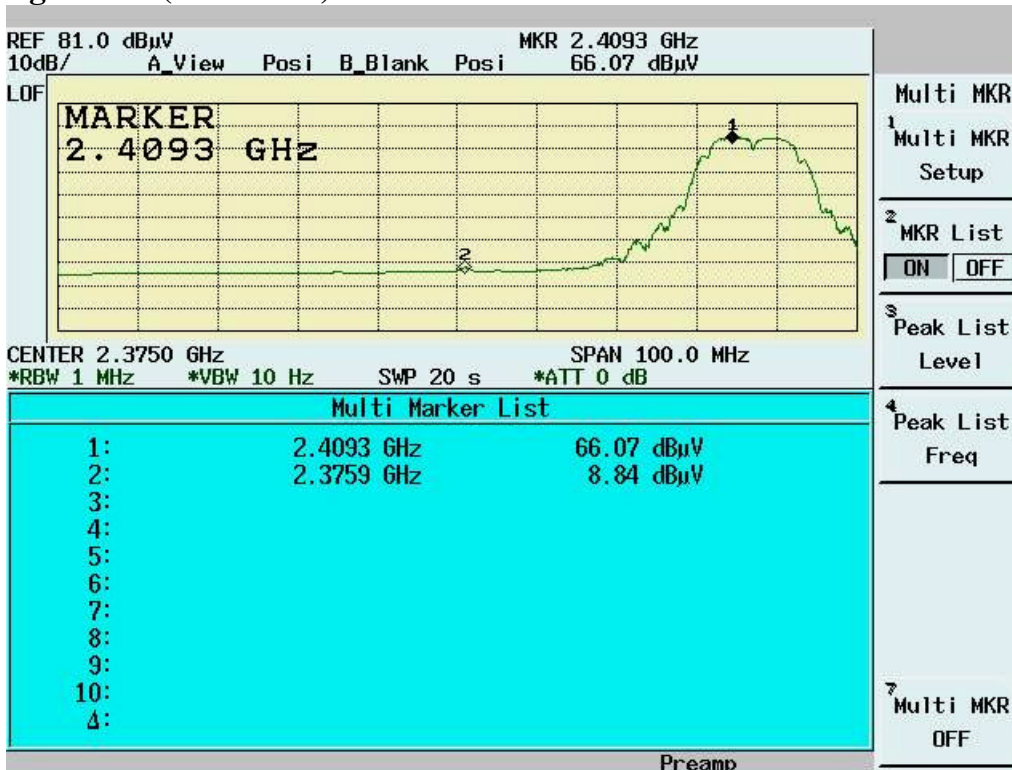

Band Edge measurement for radiated emission in Restricted Band(Radiated) Peak Mode (Channel 11)

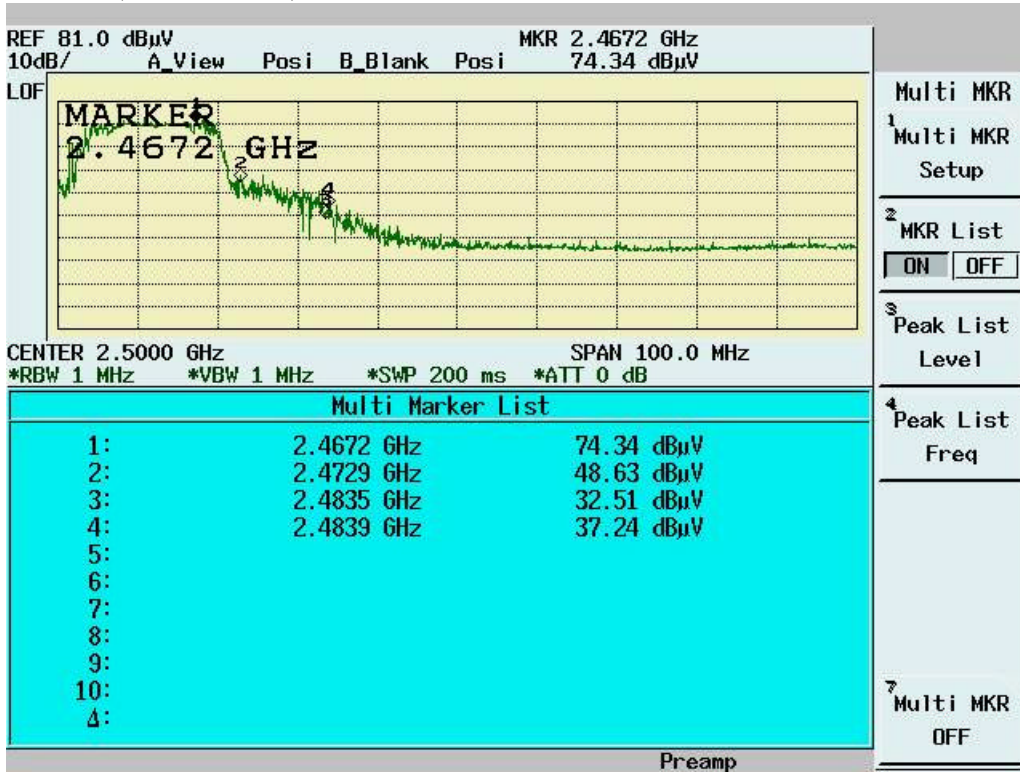

Band Edge measurement for radiated emission in Restricted Band(Radiated) Average Mode (Channel 11)

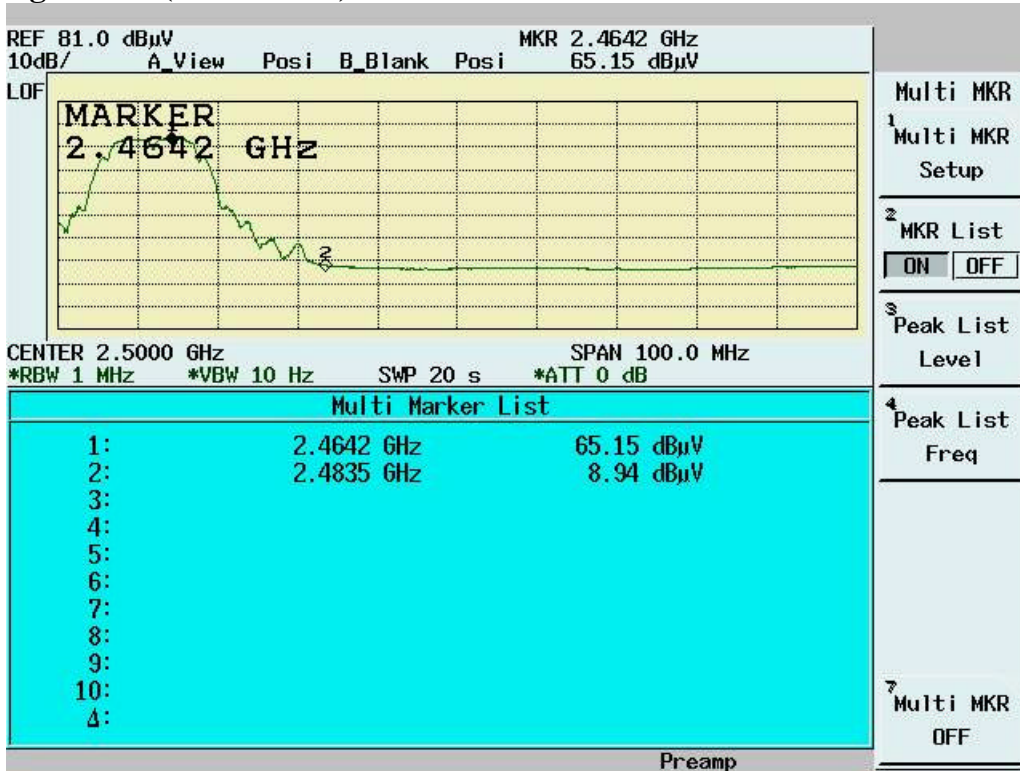

4.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

See MPE report

4.7 DSSS Peak Power Spectral Density [Section 15.247(d)]

4.7.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
 Equipment mode: Spectrum analyzer
 Detector function: Peak mode
 SPAN:1.5MHz
 RBW: 3KHz
 VBW: 30KHz
 Center frequency: fundamental frequency tested.
 Sweep time= 500 sec.
2. Using Peak Search to read the peak power after Maximum Hold function is completed.

4.7.2 Test Setup



4.7.3 Test Data

Maximum Peak Output Power Density

Temp. (deg. C): 25


Test Engr: Jerry Chiou

Humidity (%): 50


Chennel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-10.69	1.1	-9.59	8	Pass
6	2437	-11.73	1.1	-10.63	8	Pass
11	2462	-11.58	1.1	-10.48	8	Pass

Note: Two RF output(MAIN & AUX) have been test,the worse data shown above.


Channel 1

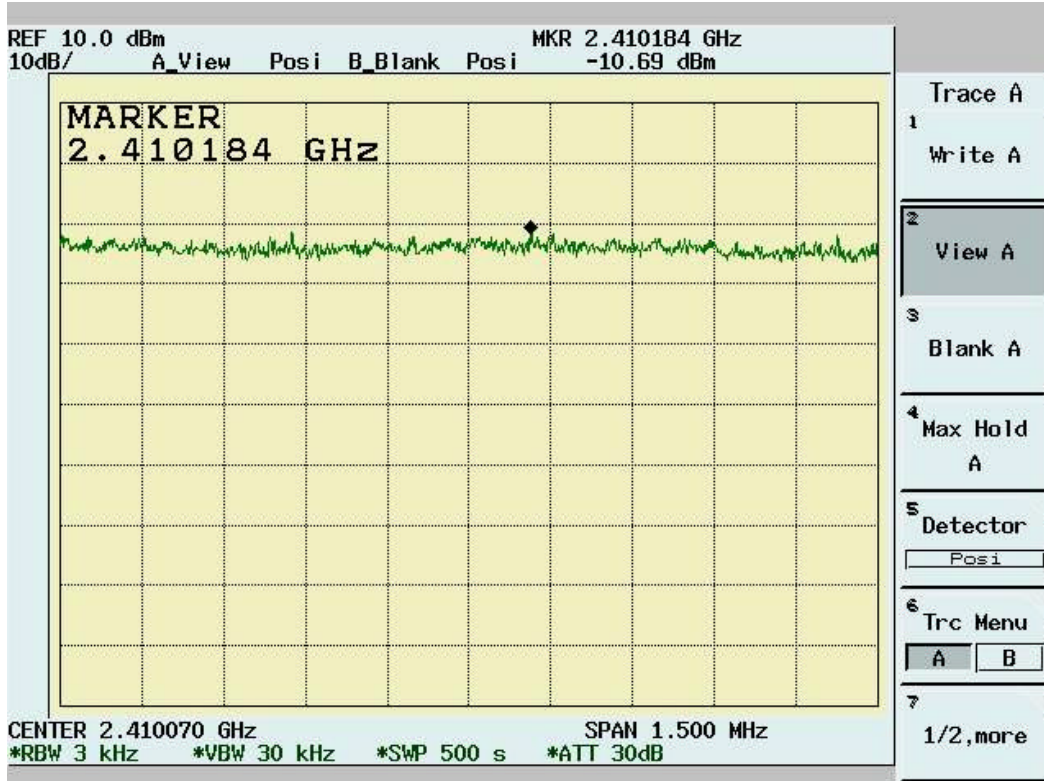

Channel 6

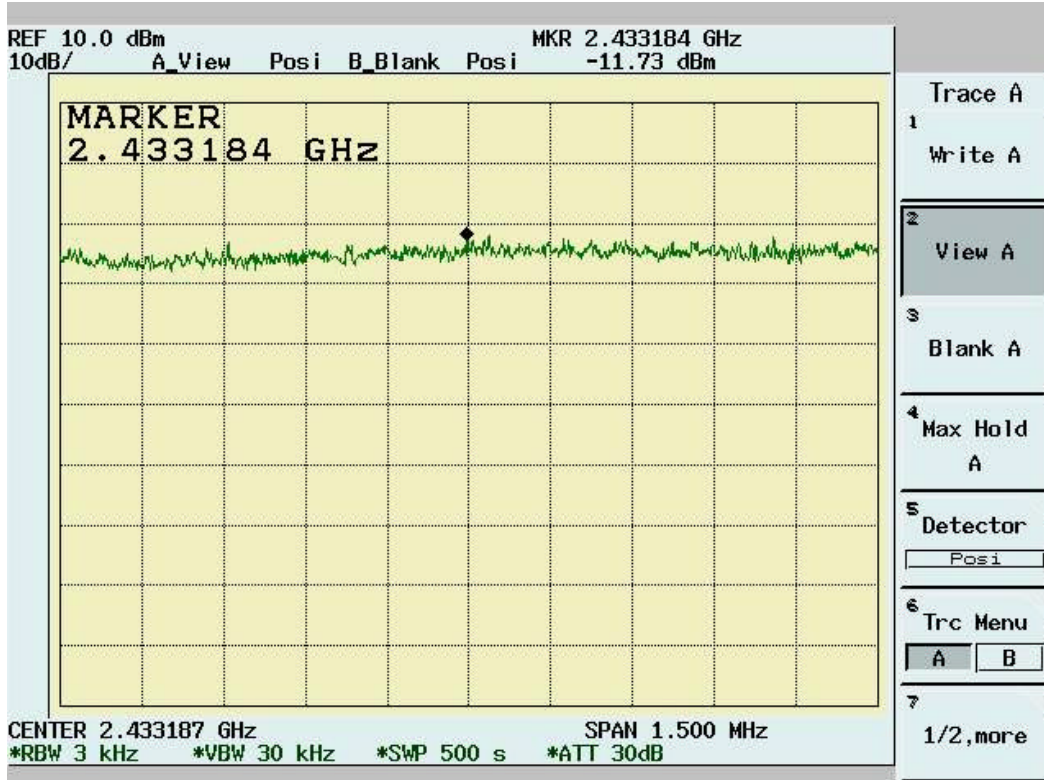

Channel 11

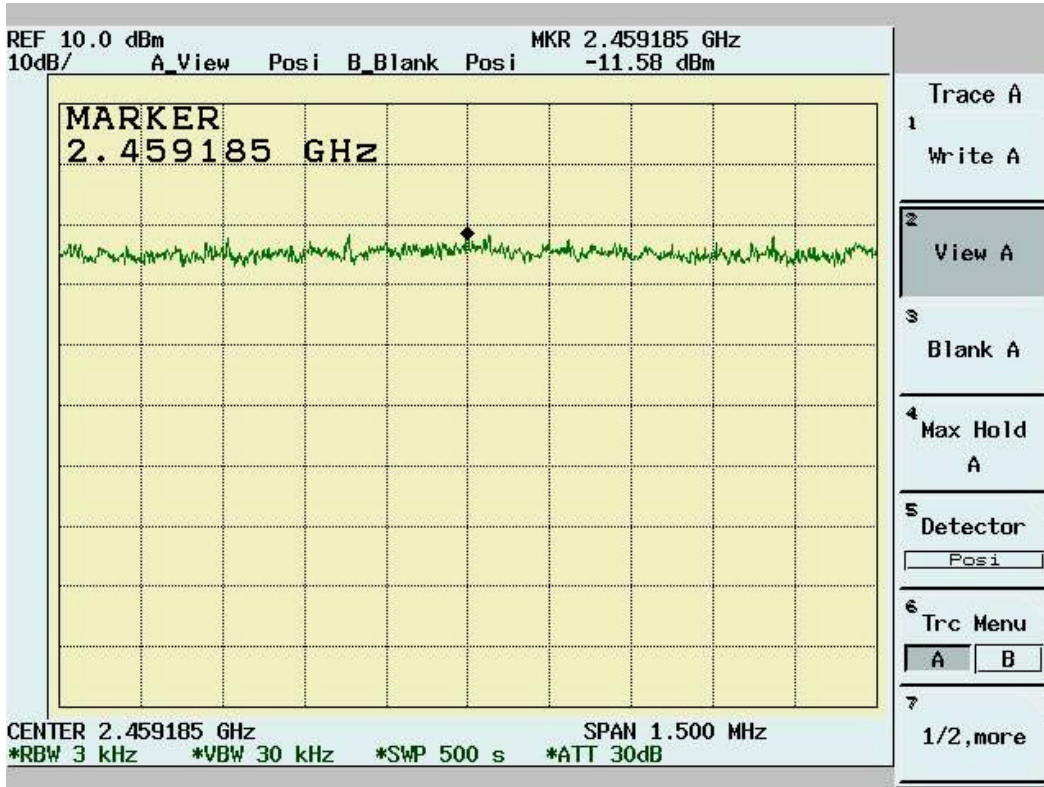

5. TEST RESULTS (802.11g)

5.1 Powerline Conducted Emissions [Section 15.207]

5.1.1 EUT Configuration

The conducted emission test setups are in accordance with Figs 9, 10(a) and 10(b) of ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996.

The EUT was set up on the non-conductive table that is 1.0 by 1.5 meter, 80cm above ground. The wall of the shielded room was located 40cm to the rear of the EUT.

Power to the EUT was provided through the LISN. The impedance vs. frequency characteristic of the LISN is complied with the limit shown on the figure 1 of ANSI C63.4-2001.

Both lines (neutral and hot) were connected to the LISN in series at testing. A coaxial-type connector which provides one 50 ohms terminating impedance was provided for connecting the test instrument. The excess length of the power cord was folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length.

Any changes made to the configuration, or modifications made to the EUT, during testing are noted in the following test record.

If the EUT is a Personal Computer or a peripheral of personal computer, and the personal computer has an auxiliary AC outlet which can be used for providing power to an external monitor, then all measurements will be made with the monitor power from first the computer-mounted AC outlet and then a floor-mounted AC outlet.

5.1.2 Test Procedure

The system was set up as described above, with the EMI diagnostic software running. The main power line conducted EMI tests were run on the hot and neutral conductors of the power cord and the results were recorded. The effect of varying the position of the interface cables has been investigated to find the configuration that produces maximum emission.

At the frequencies where the peak values of the emissions were higher than 6dB below the applicable limits, the emissions were also measured with the quasi-peak detectors. At the frequencies where the quasi-peak values of the emissions were higher than 6dB below the applicable average limits, the emissions were also measured with the average detectors.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)

Frequency Range	150 KHz--30MHz
Detector Function	Quasi-Peak/Average
Bandwidth (RBW)	9KHz

5.1.4 Test Data:

Power Line Conducted Emissions (Hot) Channel 1, 6, 11

Operator: Jerry Chiou

Temperature(C):24

10:39:47AM,Thursday,December02,2004

Humidity(%):50

Frequency MHz	LISNLoss (dB)	CableLoss (dB)	QPCorrt. Amp.(dBuV)	QPLimit (dBuV)	QPMargin (dB)	AVECorrt. Amp.(dBuV)	AVELimit (dBuV)	AVEMargin (dB)
0.55258	0.13	0.07	38.89	56.00	-17.11	38.18	46.00	-7.82
0.63296	0.14	0.07	38.69	56.00	-17.31	37.54	46.00	-8.46
0.71098	0.15	0.07	36.06	56.00	-19.94	34.80	46.00	-11.20
0.79110	0.17	0.07	40.85	56.00	-15.15	40.08	46.00	-5.92
0.94890	0.19	0.07	39.81	56.00	-16.19	38.90	46.00	-7.10
2.05649	0.20	0.09	41.35	56.00	-14.65	40.42	46.00	-5.58
2.21478	0.20	0.10	41.29	56.00	-14.71	39.25	46.00	-6.75
2.29223	0.20	0.10	41.40	56.00	-14.60	40.08	46.00	-5.92
2.45233	0.20	0.10	41.33	56.00	-14.67	39.91	46.00	-6.09
2.53188	0.20	0.10	41.56	56.00	-14.44	39.83	46.00	-6.17

