

Produkte
Products

Prüfbericht - Nr.: 14018370 001			Seite 1 von 14		
<i>Test Report No.:</i>			<i>Page 1 of 14</i>		
Auftraggeber: <i>Client:</i>		i. Tech Dynamic Ltd. 5/F., Harbourfront Landmark 11 Wan Hoi Street Hung Hom, Kowloon Hong Kong			
Gegenstand der Prüfung: Wideband Transmission System - Bluetooth Headset <i>Test Item:</i>					
Bezeichnung: <i>Identification:</i>		i. Tech i. VoicePRO (C51-B08005-XX)		Serien-Nr.: <i>Serial No.:</i> Engineering sample	
Wareneingangs-Nr.: <i>Receipt No.:</i>		080319035-1		Eingangsdatum: 19.03.2008 <i>Date of Receipt:</i>	
Prüfört: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. 9th Floor, Oriental News Building, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong			
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C ANSI C63.4-2003 CISPR 22:1997			
Prüfergebnis: <i>Test Result:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .			
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Hong Kong Ltd. 9th Floor, Oriental News Building, 7 Wang Tai Road, Kowloon Bay, Kowloon, Hong Kong			
geprüft/ tested by:			kontrolliert/ reviewed by:		
11.04.2008 Steve Mung Project Engineer 			11.04.2008 Thomas Berns Manager 		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges: FCCID: RKIC51-B08005-XX <i>Other Aspects</i>					
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet					
Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	3
Manufacturers declarations	3
Product function and intended use.....	4
Submitted documents.....	4
Special accessories and auxiliary equipment	4
List of Test and Measurement Instruments.....	5
Result FCC Part 15 – Subpart C	6
Subclause 15.203 – Antenna Information	Pass..... 6
Subclause 15.204 – Antenna Information	Pass..... 6
Subclause 15.207 – Disturbance Voltage on AC Mains.....	Pass..... 6
Subclause 15.247 (a)(1) – Carrier Frequency Separation.....	Pass..... 7
Subclause 15.247 (a)(1)(iii) – Number of hopping channels	Pass..... 7
Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)	Pass..... 8
Subclause 15.247 (a) – 20 dB Bandwidth.....	Pass..... 8
Subclause 15.247 (a) – Hopping Sequence	Pass..... 9
Subclause 15.247 (a) – Equal Hopping Frequency Use.....	Pass..... 10
Subclause 15.247 (a) – Receiver Input Bandwidth.....	Pass..... 11
Subclause 15.247 (a) – Receiver Hopping Capability	Pass..... 11
Subclause 15.247 (b)(1) – Peak Output Power	Pass..... 11
Subclause 15.247 (d) – Band edge compliance of conducted emissions	Pass..... 12
Subclause 15.205 – Band edge compliance of radiated emissions	Pass..... 12
Subclause 15.247 (d) – Spurious Conducted Emissions	Pass..... 13
Subclause 15.247 (c) – Spurious Radiated Emissions	Pass..... 13
Appendix 1 – Test protocols	21 pages
Appendix 2 – Test setup	3 pages
Appendix 3 – Photo documentation	4 pages
Appendix 4 – Product documentation	25 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK; Pi/4 DQPSK; 8 DPSK
Number of channels	79
Channel separation	1 MHz
Type of antenna	Integral Antenna
Antenna gain (dBi)	1.2
Power level	fix
Type of equipment	stand alone, plug-in radio device
Connection to public utility power line	No
Nominal voltage	V_{nor} : 3.7 V
Independent Operation Modes	Page scan Inquiry scan Connection state - ACL Link Connection state - SCO Link

Product function and intended use

The test item is a Bluetooth Headset based on the Bluetooth technology.

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, 79 RF channels spaced 1 MHz apart are defined.

The channel is represented by a pseudo-random hopping sequence through the 79 channels. The channel is divided into time slots, with a nominal slot length of 625 μ s, where each slot corresponds to different RF hop frequencies. The nominal hop rate is 1600 hops/s. The symbol rate on the channel is 1 Ms/s.

Submitted documents

Circuit Diagram
Block Diagram
Bill of material
User manual

Special accessories and auxiliary equipment

The product has been tested together with the following standard adaptors:

Model No.	:	SPS-02C5-0.5CitUSB	SPS-02C5-0.5EitUSB	SPS-02C5-0.5UitUSB
Rated Voltage	:	AC 90-264V	AC 90-264V	AC 90-264V
Frequency	:	47Hz to 63Hz	47Hz to 63Hz	47Hz to 63Hz
Rated Current	:	0.2A	0.2A	0.2A
Rated Output	:	DC 5V, 500mA	DC 5V, 500mA	DC 5V, 500mA

Model No.	:	SPS-02C5-0.5USitUSB
Rated Voltage	:	AC 90-264V
Frequency	:	47Hz to 63Hz
Rated Current	:	0.2A
Rated Output	:	DC 5V, 500mA

List of Test and Measurement Instruments

	Equipment used	Manufacturer	Model No.	S/N	Due Date
☒	Semi-anechoic Chamber	Frankonia	Nil	Nil	28-May-08
☒	Test Receiver	R & S	ESU26	100050	06-Aug-08
☒	Bi-conical Antenna	R & S	HK116	841489/015	08-Mar-09
☒	Log Periodic Antenna	R & S	HL223	841516/017	28-Feb-09
☒	Coaxial cable 50ohm	Rosenberger	RTK081-05S-05S-10m	LA2-001-10M / 002	15-May-08
☒	Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	3950M00241	01-Oct-08
☒	High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	9829213	31-Oct-08
☒	Bass Pass Filter (2.4GHz)	Micro-Tronic	BRM130 26	1	31-Oct-08
☒	Horn Antenna	EMCO	3115	9002-3351	27-Feb-10
☒	Spectrum Analyser	R & S	FSP 30	100416	08-Jun-08
☒	Active Loop Antenna	EMCO	6502	9107-2651	20-Dec-09
☒	Test Receiver	R & S	ESCS 30	100201	14-Dec-08
☒	Artificial Mains Network	R & S	ESH3-Z5	100230	10-Dec-08
☒	Pulse Limiter	R & S	ESH3-Z2	100161	10-Dec-08

Result FCC Part 15 – Subpart C

Subclause 15.203 – Antenna Information		Pass
Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Result:	Permanent attached antenna	
Verdict:	Pass	

Subclause 15.204 – Antenna Information		Pass
Requirement:	Provide information for every antenna proposed for the use with the EUT	
Result:	a) Antenna type: Permanent attached antenna b) Manufacturer and model no: N.A. c) Gain with reference to an isotropic radiator: 1.2 dBi	
Verdict:	Pass	

Subclause 15.207 – Disturbance Voltage on AC Mains						Pass
Test Port: AC mains input port of the charger Applied voltage: 100VAC Applicable only to equipment designed to be connected to the public utility power line. 1) Mode of operation: Charging (Test adaptor: SPS-02C5-0.5CitUSB, SPS-02C5-0.5EitUSB, SPS-02C5-0.5UitUSB, SPS-02C5-0.5USitUSB)						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBµV	Average dBµV	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 – 0,5	-	-	-	66 - 56	56 - 46	Pass
	-	-	-	66 - 56	56 - 46	Pass
> 0,5 - 5	-	-	-	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBµV	Average dBµV	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 – 0,5	-	-	-	66 - 56	56 - 46	Pass
> 0,5 - 5	-	-	-	56	46	Pass
> 5 - 30	-	-	-	60	50	Pass

Results: The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1, page 2-3.

Subclause 15.247 (a)(1) – Carrier Frequency Separation
Pass

Requirement: Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

Test Specification : FCC Part 15 Subpart A – Subclause 15.31
 Mode of operation : Tx mode (hopping on), GFSK
 Port of testing : Temporary antenna port
 Detector : Peak
 RBW/VBW : 100 kHz / 300 kHz
 Supply voltage : 3.7VDC from DC power supply
 Temperature : 23°C
 Humidity : 50%

Results: The centre frequencies of the hopping channels are separated by more than the $2/3 \times 20\text{dB}$ bandwidth. For test Results plots refer to Appendix 1, page 4.

Verdict: Pass

Subclause 15.247 (a)(1)(iii) – Number of hopping channels
Pass

Requirement: Frequency hopping systems operating in the 2400MHz-2483.5MHz bands shall use at least 15 hopping frequencies.

Test Specification : FCC Part 15 Subpart A – Subclause 15.31
 Mode of operation : Tx mode (hopping on), GFSK
 Port of testing : Temporary antenna port
 Detector : Peak
 RBW/VBW : 1 MHz / 3 MHz
 Supply voltage : 3.7VDC from DC power supply
 Temperature : 23°C
 Humidity : 50%

Results: The total number of hopping frequencies is more than 15. For test Results plots refer to Appendix 1, page 5.

Verdict: Pass

Subclause 15.247 (a)(1)(iii) – Time of Occupancy (Dwell Time)		Pass
Requirement:	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (hopping on), DH5 packet Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Results: Time period calculation = $0.4 \times 79 = 31.6\text{s}$ Dwell time = $64 \times 2.904 \times 10^{-3} = 185.85 \times 10^{-3}$ $\leq 400 \times 10^{-3} \text{ s}$		
For test protocols please refer to Appendix 1, page 6.		
Verdict:	Pass	


Subclause 15.247 (a) – 20 dB Bandwidth		Pass	
Requirement:	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.		
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), (8DPSK) Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 30 kHz / 100 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%			
Results: For test protocols refer to Appendix 1, page 7-8.			
Frequency (MHz)	20 dB left (MHz)	20 dB right (MHz)	20dB bandwidth (MHz)
2402	0.648	0.618	1.266
2441	0.666	0.606	1.272
2480	0.684	0.594	1.278

Subclause 15.247 (a) – Hopping Sequence
Pass

Requirement: The hopping sequence is generated and provided with an example.

Hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master. The X input determines the phase in the 32-hop segment, whereas Y1 and Y2 selects between master-to-slave and slave-to-master transmission. The inputs A to D determine the ordering within the segment, the inputs E and F determine the mapping onto the hop frequencies.

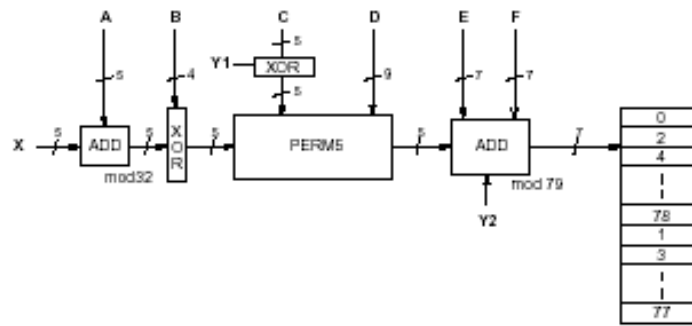

www.tuv.com

Example data:

Hop sequence {k} for CONNECTION STATE:

CLK start: 0x0000010

ULAP: 0x00000000

#ticks: 00 02 | 04 06 | 08 0a | 0c 0e | 10 12 | 14 16 | 18 1a | 1c 1e |

```

0x0000010: 08 66 | 10 70 | 12 19 | 14 23 | 16 01 | 18 05 | 20 33 | 22 37 |
0x0000030: 24 03 | 26 07 | 28 35 | 30 39 | 32 72 | 34 76 | 36 25 | 38 29 |
0x0000050: 40 74 | 42 78 | 44 27 | 46 31 | 48 09 | 50 13 | 52 41 | 54 45 |
0x0000070: 56 11 | 58 15 | 60 43 | 62 47 | 32 17 | 36 19 | 34 49 | 38 51 |
0x0000090: 40 21 | 44 23 | 42 53 | 46 55 | 48 33 | 52 35 | 50 65 | 54 67 |
0x00000b0: 56 37 | 60 39 | 58 69 | 62 71 | 64 25 | 68 27 | 66 57 | 70 59 |
0x00000d0: 72 29 | 76 31 | 74 61 | 78 63 | 01 41 | 05 43 | 03 73 | 07 75 |
0x00000f0: 09 45 | 13 47 | 11 77 | 15 00 | 64 49 | 66 53 | 68 02 | 70 06 |
0x0000110: 01 51 | 03 55 | 05 04 | 07 08 | 72 57 | 74 61 | 76 10 | 78 14 |
0x0000130: 09 59 | 11 63 | 13 12 | 15 16 | 17 65 | 19 69 | 21 18 | 23 22 |
0x0000150: 33 67 | 35 71 | 37 20 | 39 24 | 25 73 | 27 77 | 29 26 | 31 30 |
0x0000170: 41 75 | 43 00 | 45 28 | 47 32 | 17 02 | 21 04 | 19 34 | 23 36 |
0x0000190: 33 06 | 37 08 | 35 38 | 39 40 | 25 10 | 29 12 | 27 42 | 31 44 |
0x00001b0: 41 14 | 45 16 | 43 46 | 47 48 | 49 18 | 53 20 | 51 50 | 55 52 |
0x00001d0: 65 22 | 69 24 | 67 54 | 71 56 | 57 26 | 61 28 | 59 58 | 63 60 |
0x00001f0: 73 30 | 77 32 | 75 62 | 00 64 | 49 34 | 51 42 | 57 66 | 59 74 |
0x0000210: 53 36 | 55 44 | 61 68 | 63 76 | 65 50 | 67 58 | 73 03 | 75 11 |
0x0000230: 69 52 | 71 60 | 77 05 | 00 13 | 02 38 | 04 46 | 10 70 | 12 78 |
0x0000250: 06 40 | 08 48 | 14 72 | 16 01 | 18 54 | 20 62 | 26 07 | 28 15 |
0x0000270: 22 56 | 24 64 | 30 09 | 32 17 | 02 66 | 06 74 | 10 19 | 14 27 |
0x0000290: 04 70 | 08 78 | 12 23 | 16 31 | 18 03 | 22 11 | 26 35 | 30 43 |
0x00002b0: 20 07 | 24 15 | 28 39 | 32 47 | 34 68 | 38 76 | 42 21 | 46 29 |
0x00002d0: 36 72 | 40 01 | 44 25 | 48 33 | 50 05 | 54 13 | 58 37 | 62 45 |
0x00002f0: 52 09 | 56 17 | 60 41 | 64 49 | 34 19 | 36 35 | 50 51 | 52 67 |
0x0000310: 38 21 | 40 37 | 54 53 | 56 69 | 42 27 | 44 43 | 58 59 | 60 75 |
0x0000330: 46 29 | 48 45 | 62 61 | 64 77 | 66 23 | 68 39 | 03 55 | 05 71 |
0x0000350: 70 25 | 72 41 | 07 57 | 09 73 | 74 31 | 76 47 | 11 63 | 13 00 |
0x0000370: 78 33 | 01 49 | 15 65 | 17 02 | 66 51 | 70 67 | 03 04 | 07 20 |
0x0000390: 68 55 | 72 71 | 05 08 | 09 24 | 74 59 | 78 75 | 11 12 | 15 28 |
0x00003b0: 76 63 | 01 00 | 13 16 | 17 32 | 19 53 | 23 69 | 35 06 | 39 22 |
0x00003d0: 21 57 | 25 73 | 37 10 | 41 26 | 27 61 | 31 77 | 43 14 | 47 30 |
0x00003f0: 29 65 | 33 02 | 45 18 | 49 34 | 19 04 | 21 08 | 23 20 | 25 24 |

```

Subclause 15.247 (a) – Equal Hopping Frequency Use

Pass

Requirement: Each of the transmitter's hopping channels is used equally on average.

Equal hopping frequency use

The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.

Subclause 15.247 (a) – Receiver Input Bandwidth		Pass
Requirement:	The associated receiver(s) complies with the requirement that its input bandwidth matches the bandwidth of the transmitted signal.	
Receiver input bandwidth		
The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1 MHz. The receiver bandwidth was verified during Bluetooth RF conformance testing.		

Subclause 15.247 (a) – Receiver Hopping Capability		Pass
Requirement:	The associated receiver has the ability to shift frequencies in synchronisation with the transmitted signals.	
Receiver hopping Capability		
The EUT complies with the Bluetooth RF specifications. For details refer to the Bluetooth standard.		

Subclause 15.247 (b)(1) – Peak Output Power				Pass	
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz) Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 3 MHz / 10 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%					
Requirement:		For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 Watt. For all other frequency hopping systems in the 2400 – 2483.5 MHz band: 0.125 Watts.			
Results:		For test protocols please refer to Appendix 1, page 9-13.			
GFSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	3.58	3.52	7.10	1 / 30.0	Pass
2441	2.91	3.65	6.56	1 / 30.0	Pass
2480	2.97	3.60	6.57	1 / 30.0	Pass
Pi/4 DQPSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	2.88	3.52	6.40	1 / 30.0	Pass
2441	1.47	3.65	5.12	1 / 30.0	Pass

2480	1.32	3.60	4.92	1 / 30.0	Pass
8 DPSK Modulation					
Frequency (MHz)	Maximum peak output power (dBm)	Cable attenuation (dB)	Output power (dBm)	Limit (W/dBm)	Verdict
2402	3.03	3.52	6.55	1 / 30.0	Pass
2441	1.63	3.65	5.28	1 / 30.0	Pass
2480	1.63	3.60	5.23	1 / 30.0	Pass

Subclause 15.247 (d) – Band edge compliance of conducted emissions		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Results:	There is no peak found outside any 100 kHz bandwidth of the operating frequency band. For test protocols refer to Appendix 1, page 14-15.	

Subclause 15.205 – Band edge compliance of radiated emissions		Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 1 MHz / 3 MHz Supply voltage : 3.7VDC from DC power supply Temperature : 23°C Humidity : 50%		
Requirement:	Radiated emissions which fall in the restricted bands, as defined in 15.205 (a), must also comply with the radiated emission limits specified in 15.209(a).	
Results:	There is no peak found in the restricted bands. For test protocols refer to Appendix 1, page 16-19.	

Subclause 15.247 (d) – Spurious Conducted Emissions					Pass
Test Specification : FCC Part 15 Subpart A – Subclause 15.31 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), 8DPSK Port of testing : Temporary antenna port Detector : Peak RBW/VBW : 100 kHz / 300 kHz Supply voltage : 3.7VDC from DC power supply Temperature : 23 °C Humidity : 50 %					
Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: There is no peak found outside any 100kHz bandwidth of the operating frequency band in the three transmit frequency. All three transmit frequency modes comply with the limit stated in subclause 15.247(d). For test protocols refer to Appendix 1, page 20-21.					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	-	-	-	-	Pass
2441	-	-	-	-	Pass
2480	3300	-47.69	1.77	-49.46	Pass

Subclause 15.247 (c) – Spurious Radiated Emissions					Pass
Test Specification : ANSI C63.4 – 2003 Mode of operation : Tx mode (2402MHz, 2441MHz, 2480MHz), 8DPSK Port of testing : Enclosure Detector : Peak RBW/VBW : 100 kHz / 300 kHz for f < 1 GHz 1 MHz / 3 MHz for f > 1 GHz Supply voltage : internal batteries has been activated Temperature : 23°C Humidity : 50%					
Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).					
Results: All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.					
Tx frequency 2402MHz Vertical Polarization					
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m			
1602.067	46.46	74.0 / P			

1602.067	43.97	54.0 / A
4006.073	55.25	74.0 / P
4006.073	37.55	54.0 / A
4804.150	72.44	74.0 / P
4804.150	42.91	54.0 / A
Tx frequency 2402MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1602.067	52.13	74.0 / P
1602.067	50.92	54.0 / A
4006.282	56.11	74.0 / P
4006.282	37.88	54.0 / A
4804.134	71.10	74.0 / P
4804.134	42.89	54.0 / A
Tx frequency 2441MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1626.730	46.86	74.0 / P
1626.730	44.55	54.0 / A
4882.179	69.40	74.0 / P
4882.179	38.65	54.0 / A
Tx frequency 2441MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1626.746	50.69	74.0 / P
1626.746	49.15	54.0 / A
4881.794	65.65	74.0 / P
4881.794	41.61	54.0 / A
Tx frequency 2480MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1652.772	48.33	74.0 / P
1652.772	46.44	54.0 / A
4960.144	64.73	74.0 / P
4960.144	39.60	54.0 / A
Tx frequency 2480MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
1652.772	53.26	74.0 / P
1652.772	52.17	54.0 / A
4960.128	67.12	74.0 / P
4960.128	39.49	54.0 / A