

15, rue de la Claie
Z.I. Angers-Beaucouzé
49070 BEAUCOUZÉ
Tél. 02 41 73 26 27
Fax 02 41 73 26 40
e-mail : atlantique@emitech.fr
R.C.S. ANGERS 95 B 543
SIRET 344 545 645 00055

RA-05-24486-1/A Ed. 0

FCC CERTIFICATION RADIO Measurement Technical Report

**standard to apply:
FCC Part 15.247**

**Equipment under test:
HANDSFREE CAR KIT FOR BLUETOOTH
PHONE WITH GPS AND GSM OPTIONS
model: CK3500**


**FCC ID :
RKXCK3500**

**Company:
PARROT**

DISTRIBUTION: Mr GUERRAB

Company: PARROT

Number of pages: 25 including 4 annexes

| Ed. | Date | Modified pages | Editing | | Verification Approval | |
|-----|-----------|-------------------|-------------|------|--------------------------|---|
| | | | Name | Visa | Name | Visa |
| 0 | 22-Nov-05 | Creation | L. BERTHAUD | LB | P. BONNENFANT |  |

Duplication of this test report is only permitted for an integral photographic facsimile. It includes the number of pages referenced here above.

This document is the result of testing a specimen or a sample of the product submitted. It does not imply an assessment of the conformity of the whole manufactured products of the tested sample.

PRODUCT: **HANDSFREE CAR KIT FOR BLUETOOTH PHONE
WITH GPS AND GSM OPTIONS**

Reference / model: CK3500

Serial number: 00001001

MANUFACTURER: Not communicated

COMPANY SUBMITTING THE PRODUCT:

Company: PARROT

Address: 174, quai de Jemmapes
75010 PARIS
FRANCE

Responsible: Mr GUERRAB

DATES OF TEST: 19 November 2005

TESTING LOCATION: EMITECH ATLANTIQUE laboratory at ANGERS (49) FRANCE
EMITECH ATLANTIQUE open area test site in LA POUEZE (49)
FRANCE

Registration Number by FCC: 101696/FRN: 0006 6490 08

TESTED BY: L. BERTHAUD

CONTENTS

| TITLE | PAGE |
|--|-------------|
| 1. INTRODUCTION..... | 4 |
| 2. PRODUCT DESCRIPTION | 4 |
| 3. NORMATIVE REFERENCE..... | 4 |
| 4. TEST METHODOLOGY | 5 |
| 5. ADD ATTACHMENTS FILES | 5 |
| 6. TESTS AND CONCLUSIONS | 6 |
| 7. PEAK OUTPUT POWER..... | 7 |
| 8. PEAK POWER DENSITY..... | 9 |
| 9. RADIATED EMISSION TRANSMITTER..... | 11 |
| ANNEX 1: CHANNEL SEPARATION..... | 13 |
| ANNEX 2: TIMING HOPPING AND TIMING BY CHANNEL | 16 |
| ANNEX 3: PHOTOS OF THE EQUIPMENT UNDER TEST | 22 |
| ANNEX 4: OPEN AREA TEST SITE, TEST SET UP | 24 |

1.INTRODUCTION

This document presents the result of RADIO test carried out on the following equipment: HANDSFREE CAR KIT FOR BLUETOOTH PHONE WITH GPS AND GSM OPTIONS, model: CK3500 in accordance with normative reference.

2.PRODUCT DESCRIPTION

ITU Emission code: 1M00F7E

Class: B (residential environment)

Utilization: handsfree car kit for Bluetooth phone

Antenna type: incorporated antenna

Operating frequency range: from 2400 MHz to 2483.5 MHz

Number of channels: 79

Channel spacing: 1 MHz

Frequency generation: ☐ SAW Resonator ☐ Crystal ☒ Synthetiser

Modulation: Frequency Hopping Spread Spectrum
☐ Amplitude ☐ Digital ☒ Frequency ☐ Phase

Power source: 12 Vd.c.

Power level, frequency range and channels characteristics are not user adjustable.

The details pictures of the product and the circuit boards are joined with this file.

3.NORMATIVE REFERENCE

The standards and testing methods related throughout this report are those listed below. They are applied on the whole test report even though the extensions (version, date and amendment) are not repeated.

FCC Part 15 (2005) Code of Federal Regulations
Title 47 - Telecommunication
Chapter 1 - Federal Communications Commission
Part 15 - Radio frequency devices
Subpart C - Intentional Radiators

4.TEST METHODOLOGY

Radio performance tests procedures given in part 15:

- Paragraph 33: frequency range of radiated measurements
- Paragraph 35: measurement detector functions and bandwidths
- Paragraph 205: restricted bands of operation
- Paragraph 207: conducted limits
- Paragraph 209: radiated emission limits; general requirements
- Paragraph 247: operation within the bands 2400-2483.5 MHz

5.ADD ATTACHMENTS FILES

- “Synoptic “***
- “Block diagram “***
- “External photos and Product labeling “***
- “Assembly of components “***
- “Internal photos “***
- “Layout pcb “***
- “Bil of materials “***
- “Schematics “***
- “Product description “***
- “User guide “***

6.TESTS AND CONCLUSIONS

| Test procedure | Description of test | Criteria respected ? | | | | Comment |
|-----------------|--|----------------------|----|-----|-----|---------------|
| | | Yes | No | NAp | NAs | |
| FCC Part 15.205 | RESTRICTED BANDS OF OPERATION | X | | | | |
| FCC Part 15.207 | CONDUCTED LIMITS | | | X | | Note 4 |
| FCC Part 15.209 | RADIATED EMISSION LIMITS; general requirements | X | | | | Note 5 |
| FCC Part 15.247 | OPERATION WITHIN THE BAND 2400-2483.5 MHz | | | | | |
| FCC Part 15.247 | (a) (1) <i>hopping mode</i> | X | | | | Note 1 |
| FCC Part 15.247 | (a) (1) (iii) <i>hopping timing</i> | X | | | | Note 2 |
| FCC Part 15.247 | (b) (1) <i>max output power</i> | X | | | | Note 6 |
| FCC Part 15.247 | (c) <i>operation with directional antenna</i> | | | X | | Note 3 |
| FCC Part 15.247 | (d) <i>intentional radiator</i> | X | | | | |
| FCC Part 15.247 | (e) <i>peak power spectral density</i> | X | | | | Notes 6 and 9 |
| FCC Part 15.247 | (f) <i>hybrid system</i> | | | X | | |
| FCC Part 15.247 | (g) | X | | | | Note 7 |
| FCC Part 15.247 | (h) | X | | | | |
| FCC Part 15.247 | (i) <i>RF exposure compliance</i> | X | | | | Note 8 |

NAp: Not Applicable

NAs: Not Asked

Note 1: see annex 1, the frequency hopping system have hopping channel carrier frequencies separated by 1 MHz. The system hop to channel frequencies from a pseudo randomly ordered list of hopping frequencies. Each frequency is used equally on the average by the transmitter, and separated by a minimum of 20 dB bandwidth of the hopping channel.

Note 2: the frequency hopping system use more than 15 channels.

The timing by channel is 423 μ s (see annex 2).

During 79 channels \times 0.4 s (part 15) = 31.6 s, any channel is used 320 times, then

$320 \times 423 \mu$ s = 135 ms, thus the average time of occupancy on any channel is less than 400 ms within a period of 0.4 s multiplied by the number of hopping channels employed, in normal operating mode.

Note 3: the antenna gain is less than 6 dBi.

Note 4: battery source power.

Note 5: see FCC part 15.247 (d).

Note 6: conducted measurement is not possible (integral antenna), so we used the substitution method in open field.

Note 7: speech application.

Note 8: this type of equipment uses less than 0.5 W of output power with a high signal transmitting duty factor (section 3 from Oet and 65c).

Note 9: for information only.

Conclusion:

The sample of HANDSFREE CAR KIT FOR BLUETOOTH PHONE WITH GPS AND GSM OPTIONS, model: CK3500 submitted to the tests complies with the regulations of the standard FCC Part 15 in accordance with the limits or criteria defined in this report.

7. PEAK OUTPUT POWER

Standard: FCC Part 15

Test procedure: paragraph 15.247

Test equipment:

| TYPE | BRAND | EMITECH NUMBER |
|---------------------------------|-----------------|-------------------|
| Spectrum analyzer FSP 40 | Rohde & Schwarz | 4088 |
| Diode detector OD20004A | Omniyig | 2469 |
| Oscilloscope THS 720 | Tektronix | 0940 |
| Antenna RGA60 | Electrometrics | 1938 |
| Antenna RGA60 | Electrometrics | 1204 |
| Open site | EMITECH | 1274 |
| Radio frequency generator SME06 | Rohde & Schwarz | 1669 |
| High pass filter HPM11630 | Micro-tronics | 1673 |
| Low-noise amplifier 1 to 18 GHz | ALC | 2648 |
| Power source E3610A | Hewlett Packard | 4195 |
| Power meter 8541B | Gigatronics | 3479 |
| Power sensor 80401A | Gigatronics | 3182 |

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

We use for this measure outdoor test site, by substitution method. The measuring distance between the equipment and the test antenna is 3 m. The antenna have been oriented in the two polarizations, we have recorded only highest level.

In first the spectrum analyzer is replaced by a diode detector which is connected to the vertical channel of an oscilloscope.

The equipment under test is substituted by a signal generator with a calibrated double ridged guide antenna, and its level adjusted such that the deviation of the Y-trace of the oscilloscope reaches the level obtained with the E.U.T.

The output power level of the signal generator is measured with a calibrated RF power meter.

Then a measurement of the electro-magnetic field is realized, with a resolution bandwidth and video bandwidth adjusted at 1 MHz. The antenna has been oriented in the two polarizations. We have recorded only highest level.

Distance of antenna: 3 meters

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment is blocked in continuous transmission, at the highest output power which the transmitter is intended to operate (hopping mode).

The equipment is fitted with an internal antenna, without connector.

Results:

Ambient temperature (°C): 19.5

Relative humidity (%): 54

Polarization of test antenna: vertical (height: 102 cm)

Position of equipment: use position (azimuth: 246 degrees)

Sample N° 1

| | | Peak Output Power radiated at these frequencies (W): from 2402 MHz to 2480 MHz | Limits (W) |
|-------------------------------|------------------------------|---|-----------------------|
| Normal test conditions | Nominal power source (V): 12 | 5.7×10^{-4} | 1* |

* the frequency hopping systems use at least 75 hopping channel.

Sample n° 1 Channel 1 (2402 MHz)

| | | Level dBμV | Cable loss dB | Antenna factor dB | Electro-magnetic field (dBμV/m): |
|-------------------------------|------------------------------|-------------------|----------------------|--------------------------|---|
| Normal test conditions | Nominal power source (V): 12 | 61.28 | 4.75 | 27.71 | 93.74 |

Sample n° 1 Channel 40 (2441 MHz)

| | | Level dBμV | Cable loss dB | Antenna factor dB | Electro-magnetic field (dBμV/m): |
|-------------------------------|------------------------------|-------------------|----------------------|--------------------------|---|
| Normal test conditions | Nominal power source (V): 12 | 60.82 | 4.75 | 27.71 | 93.28 |

Sample n° 1 Channel 79 (2480 MHz)

| | | Level dBμV | Cable loss dB | Antenna factor dB | Electro-magnetic field (dBμV/m): |
|-------------------------------|------------------------------|-------------------|----------------------|--------------------------|---|
| Normal test conditions | Nominal power source (V): 12 | 64.73 | 4.75 | 27.71 | 97.19 |

Test conclusion:

RESPECTED STANDARD

8. PEAK POWER DENSITY

Standard: FCC Part 15

Test procedure: paragraph 15.247

Test equipment used:

| TYPE | MANUFACTURER | EMITECH NUMBER |
|--------------------------------|-----------------|-------------------|
| Spectrum analyzer FSP 40 | Rohde & Schwarz | 4088 |
| Open site | Emitech | 1274 |
| Radiofrequency generator SME06 | Rohde & Schwarz | 1669 |
| Antenna RGA-60 | Electrometrics | 1938 |
| Antenna RGA-60 | Electrometrics | 1204 |
| Power source E3610A | Hewlett Packard | 4195 |
| Power meter 8541B | Gigatronics | 3479 |
| Power sensor 80401A | Gigatronics | 3182 |

Measured condition:

We used the same method of the peak output power, but the oscilloscope and the diode is replaced by a spectrum analyser used in combination with an RF power meter.

Resolution bandwidth: 3 kHz

Video bandwidth: 10 kHz

Test operating condition of the equipment:

The equipment is blocked in continuous transmission mode, at the highest output power level which the transmitter is intended to operate.

The equipment is fitted with internal antenna, without connector.

Results:

Ambient temperature (°C): 19.5

Relative humidity (%): 54

Power source (V): 12 Vd.c.

Sample n° 1 Channel 1

| | |
|-------------------------------|--|
| | Peak power density at frequency: 2402 MHz |
| Normal test conditions | -15.9 dBm |
| Limits | +8 dBm |

Sample n° 1 Channel 40

| | |
|-------------------------------|--|
| | Peak power density at frequency: 2441 MHz |
| Normal test conditions | -15.95 dBm |
| Limits | +8 dBm |

Sample n° 1 Channel 79

| | |
|-------------------------------|--|
| | Peak power density at frequency: 2480 MHz |
| Normal test conditions | -12.78 dBm |
| Limits | +8 dBm |

Test conclusion:

RESPECTED STANDARD

9.RADIATED EMISSION TRANSMITTER

Standard: FCC Part 15

Test procedure: paragraph 15.205
 paragraph 15.209
 paragraph 15.247

Test equipment:

| TYPE | BRAND | EMITECH NUMBER |
|---------------------------------|-----------------|-------------------|
| Test receiver ESH3 | Rohde & Schwarz | 1058 |
| Test receiver ESVS 10 | Rohde & Schwarz | 1219 |
| Spectrum analyzer FSP 40 | Rohde & Schwarz | 4088 |
| Loop antenna | EMCO | 1406 |
| Biconical antenna HP 11966C | Hewlett Packard | 728 |
| Log periodic antenna HL 223 | Rohde & Schwarz | 1999 |
| Open site | Emitech | 1274 |
| Antenna RGA-60 | Electrometrics | 1204 |
| Low-noise amplifier 2 to 18 GHz | Microwave DB | 1922 |
| High pass filter HP12/3200-5AA | Filtek | |
| Antenna WR42 | IMC | 1939 |
| Power source E3610A | Hewlett Packard | 4195 |

Test set up:

The system is tested in an open area test site (OATS).

The test unit is placed on a rotating table, 0.8 m from a ground plane. Zero degree azimuth corresponds to the front of the equipment under test.

Frequency range: from 9 kHz to harmonic 10 ($F_{\text{carrier}} \leq 10 \text{ GHz}$)

Detection mode: Quasi-peak ($F < 1 \text{ GHz}$)
 Average ($F > 1 \text{ GHz}$)

Bandwidth: 120 kHz ($F < 1 \text{ GHz}$) or 100 kHz, following 15.205 or 15.247
 1 MHz ($F > 1 \text{ GHz}$) or 100 kHz, following 15.205 or 15.247

Distance of antenna: between 30 m and 3 m according the frequencies and the limits.

Antenna height: 1 to 4 meters

Antenna polarization: vertical and horizontal

Equipment under test operating condition:

The equipment is blocked in continuous transmission mode, modulated by internal data signal.

Results:

Ambient temperature (°C): 17.5

Relative humidity (%): 46

Power source: 12 Vd.c.

The polarity column refers to the antenna polarity at which the maximum emissions level is measured.

| FREQUENCIES (MHz) | Antenna height (cm) | Azimuth (degree) | resolution bandwidth (kHz) | Polarization H: Horizontal V: Vertical | Field strength (dBμV/m) | Limits (dBμV/m) | Margin (dB) |
|----------------------|------------------------|---------------------|----------------------------------|--|----------------------------|--------------------|----------------|
| 91.44 | 373 | 161 | 120 | H | 58.5 | 77.19* | 18.69 |
| 96.01 | 356 | 83 | 120 | H | 50.1 | 77.19* | 27.09 |
| 106.57 | 186 | 186 | 120 | H | 50.3 | 77.19* | 26.89 |
| 155.42 | 211 | 111 | 120 | H | 55.4 | 77.19* | 21.79 |
| 491.97 | 400 | 149 | 120 | H | 29.6 | 77.19* | 47.59 |
| 559.28 | 263 | 30 | 120 | H | 43.6 | 77.19* | 33.59 |
| 783.19 | 156 | 0 | 120 | H | 45.6 | 77.19* | 31.59 |
| 4882 | 235 | 0 | 1000 | V | 53.36 | 54.0** | 0.64 |
| 7323 | 253 | 17 | 1000 | V | 53.82 | 54.0** | 0.18 |

* limit corresponding at 20 dB below the highest level produced by the intentional radiator, in the assigned band.

** restricted bands of operation in 15.205, this limit corresponding at the 15.209 section.


Applicable limits: 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the power produced by the equipment, in 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating. In addition radiated emissions which fall in the restricted band, as defined in section 15.205 (c), must also comply with the radiated emission limits specified in section 15.209 (a).

TEST CONCLUSION:


RESPECTED STANDARD

□□□ End of report, 4 annexes to be forwarded □□□


ANNEX 1: CHANNEL SEPARATION

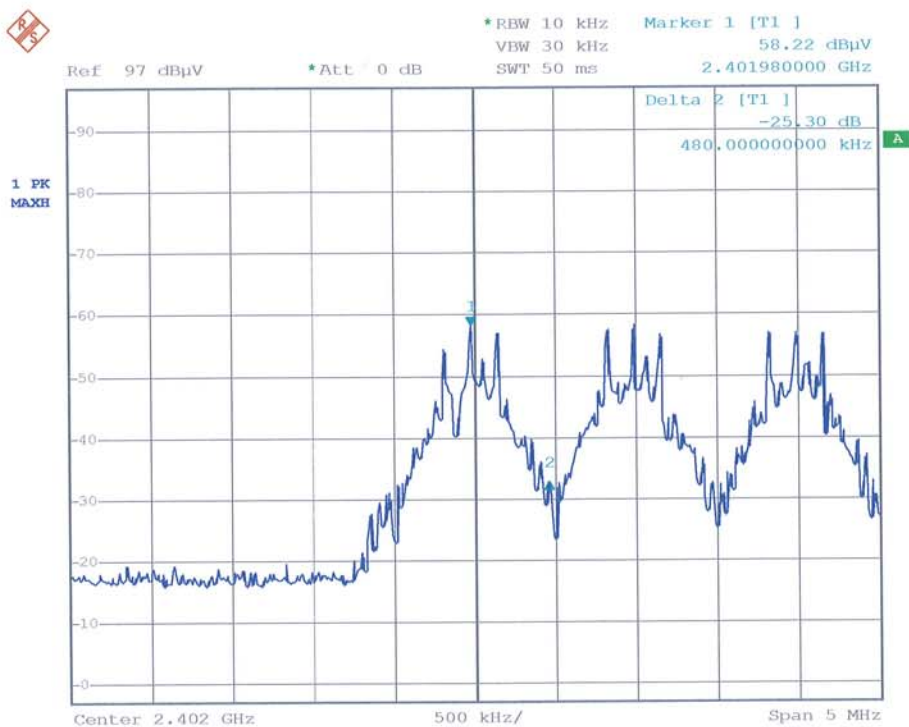


Date: 18.NOV.2005 15:11:17

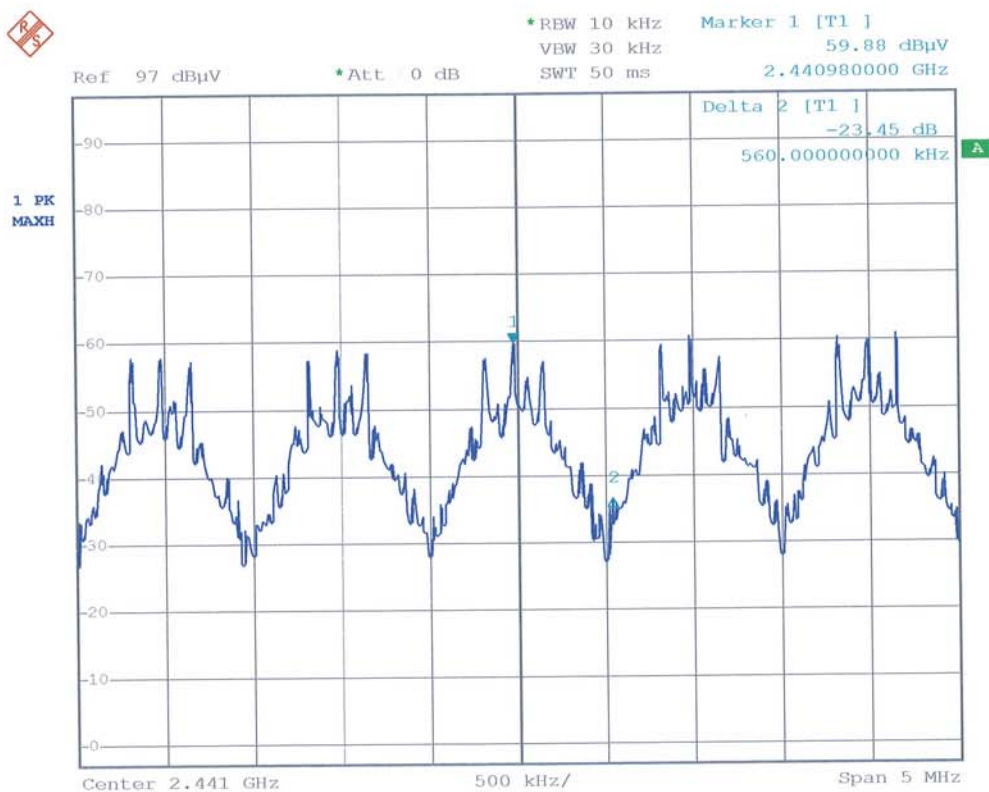


Date: 18.NOV.2005 15:07:13

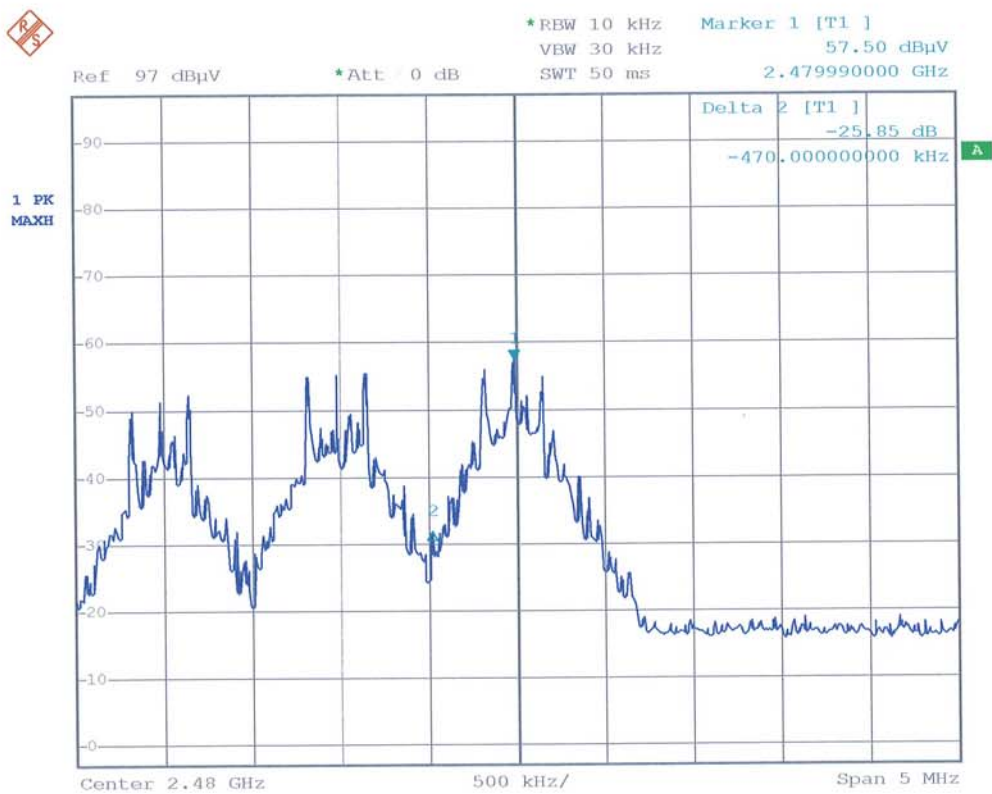


ANNEX 2: TIMING HOPPING AND TIMING BY CHANNEL

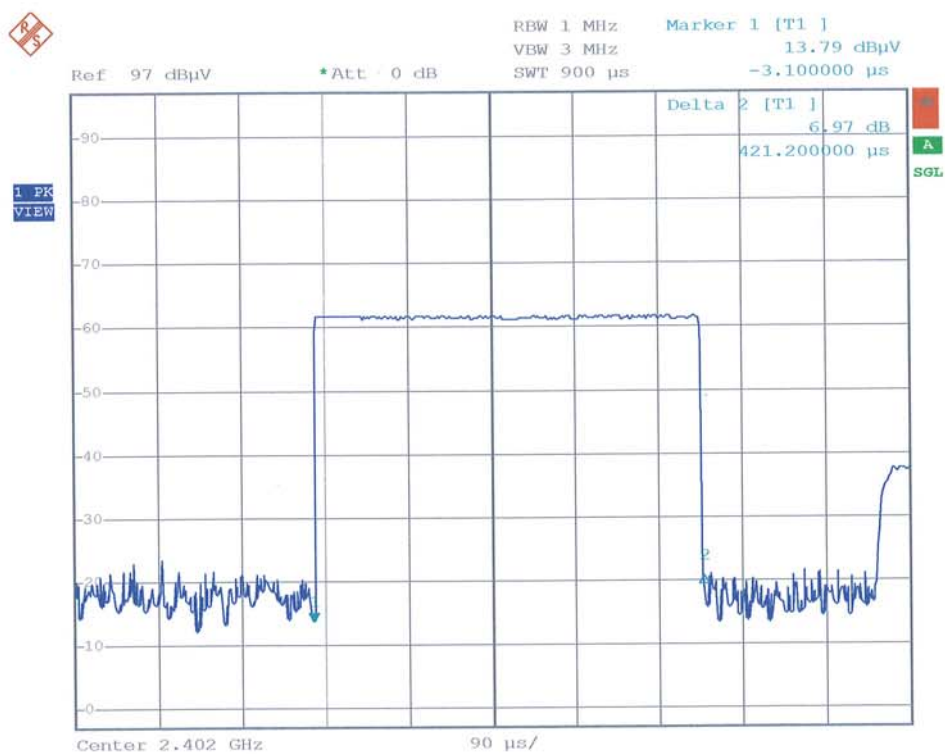


Date: 18.NOV.2005 15:16:51

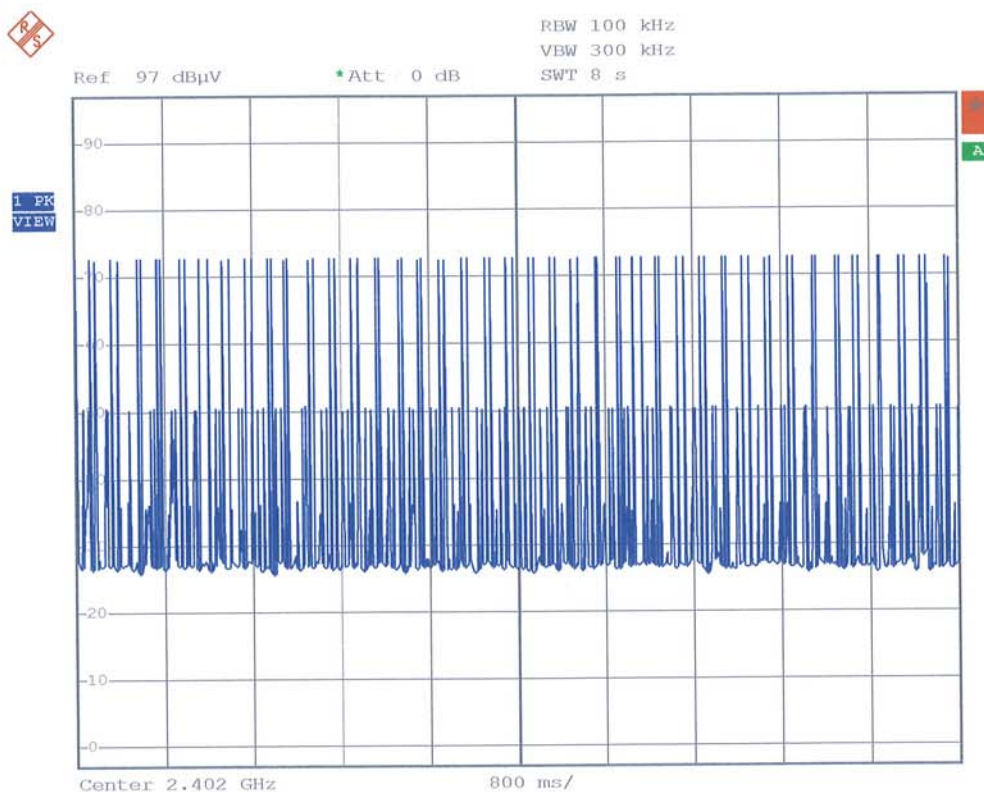


Date: 18.NOV.2005 15:27:50

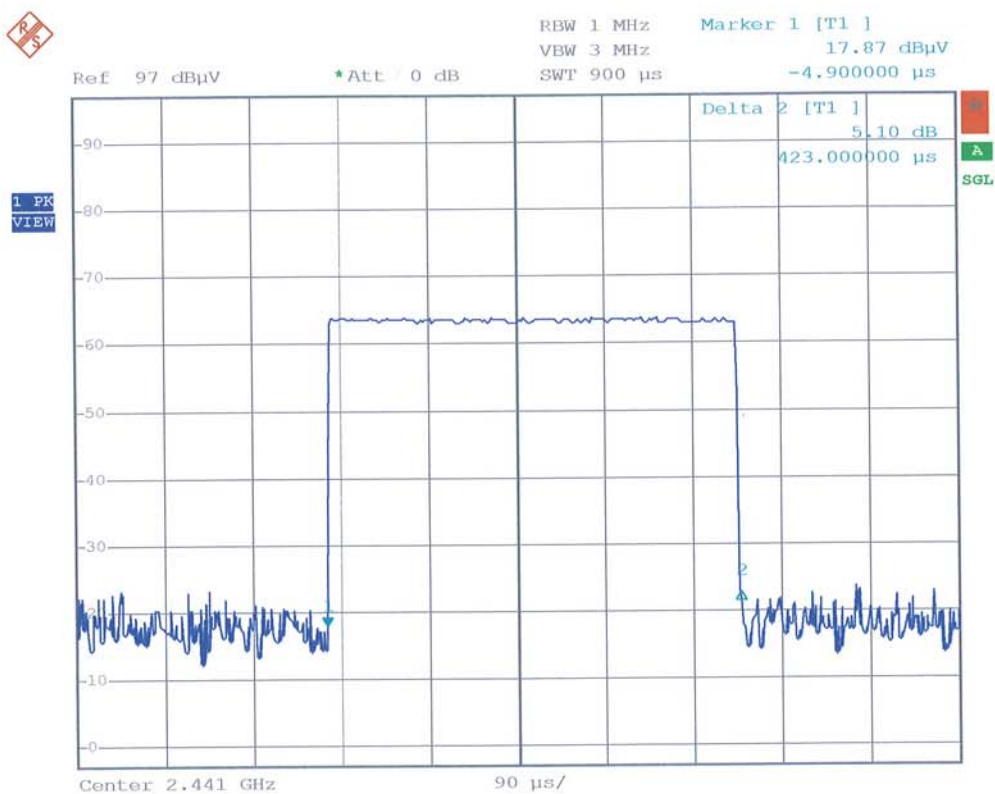


Date: 18.NOV.2005 15:18:53

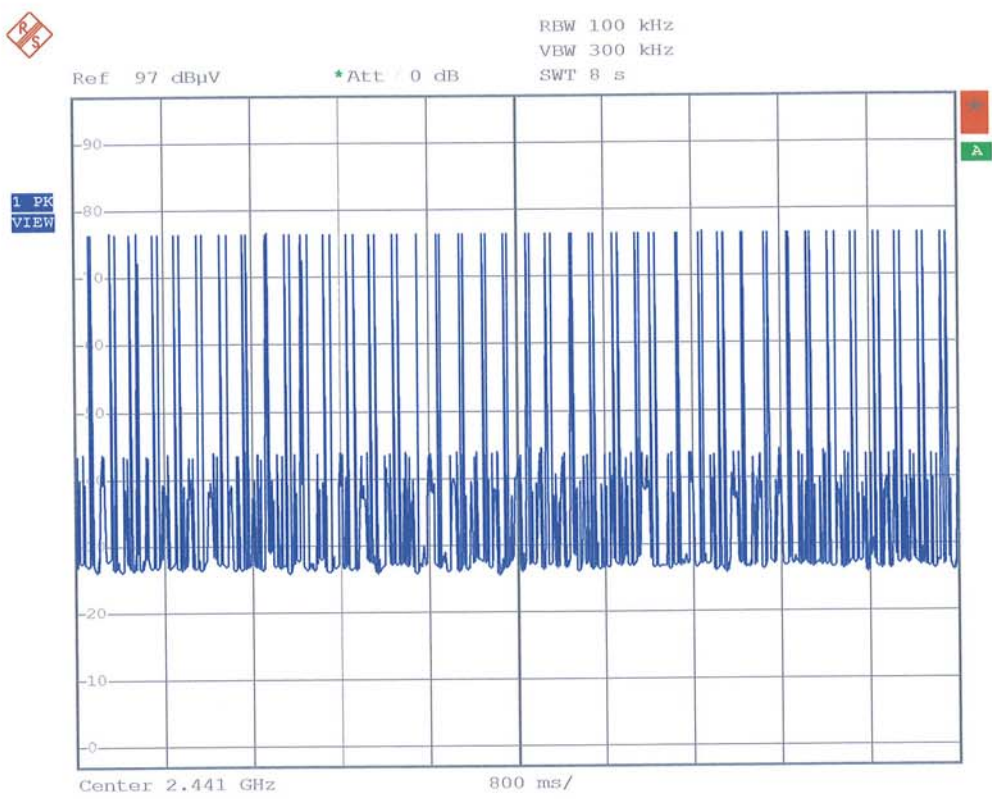

Date: 18.NOV.2005 15:26:06

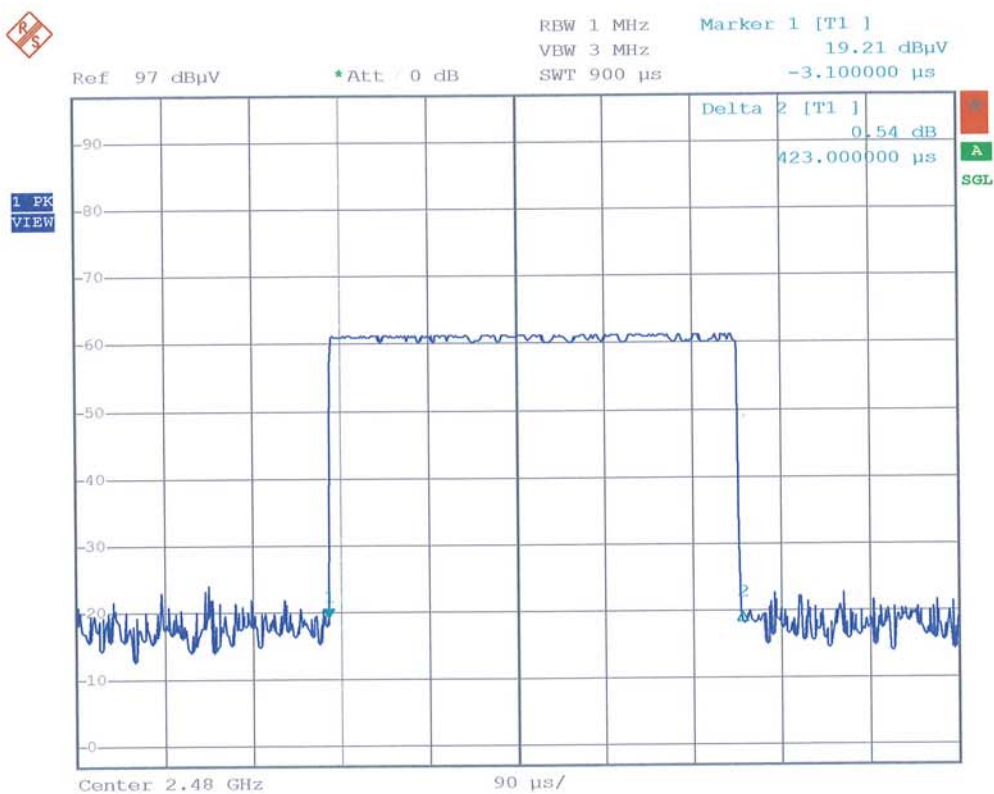

Date: 18.NOV.2005 15:20:46

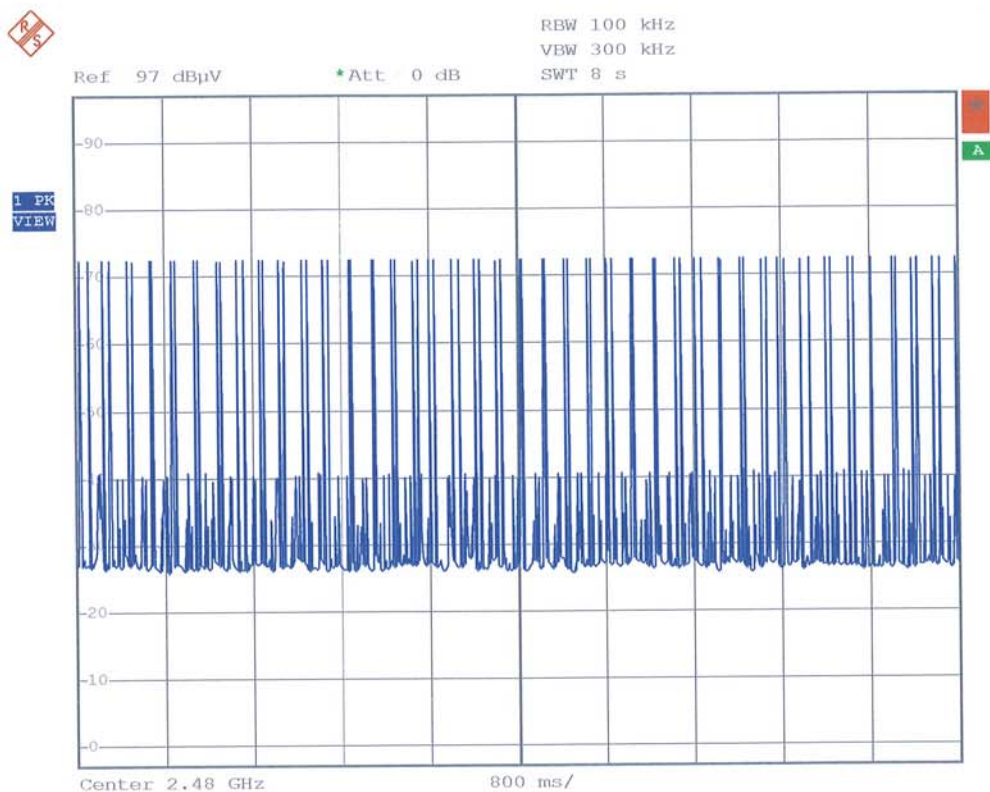

Date: 18.NOV.2005 15:29:31

ANNEX 3: PHOTOS OF THE EQUIPMENT UNDER TEST

GENERAL VIEW



Printed circuit board: face 1



Printed circuit board: face 2



ANNEX 4: OPEN AREA TEST SITE, TEST SET UP

OPEN AREA TEST SITE



TEST SET UP