



Inter**Lab**[®]

FCC Measurement/Technical Report on Bluetooth - WLAN transceiver Mirror Photo frame GRANDE SPECCHIO

Report Reference: MDE_PARRO_0913_FCCd

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany
email: info@7Layers.de



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Chairman - Dr. Hans-Jürgen Meckelburg
René Schildknecht
Dr. Hermann Buitkamp
Wilfried Klassmann

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385



Table of Contents

0 Summary	3
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
1 Administrative Data	5
1.1 Testing Laboratory	5
1.2 Project Data	5
1.3 Applicant Data	5
1.4 Manufacturer Data	5
2 Product labelling	6
2.1 FCC ID label	6
2.2 Location of the label on the EUT	6
3 Test object Data	7
3.1 General EUT Description	7
3.2 EUT Main components	8
3.3 Ancillary Equipment	8
3.4 EUT Setups	8
3.5 Operating Modes	8
4 Test Results	9
4.1 Spurious radiated emissions	9
4.2 Band edge compliance	13
5 Test Equipment	15
6 Photo Report	19
7 Setup Drawings	21
8 Annex measurement plots	22
8.1 Band edge compliance	22



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum and Digital Device / Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 (10-1-08 Edition).

The following parts and subparts are applicable to the results in this test report.

- Part 2, Subpart J - Equipment Authorization Procedures, Certification
- Part 15, Subpart C - Intentional Radiators

Note:

-

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.

0.2 Measurement Summary

FCC Part 15, Subpart C		§15.35, §15.205, §15.209	
Spurious radiated emissions			
The measurement was performed according to ANSI C63.4			
OP-Mode	Setup	Port	2003 Final Result
op-mode 3	Setup_01	Enclosure	passed
op-mode 4	Setup_01	Enclosure	passed
FCC Part 15, Subpart C		§15.35, §15.205, §15.209	
Band edge compliance			
The measurement was performed according to ANSI C63.4			
OP-Mode	Setup	Port	2003 Final Result
op-mode 1	Setup_01	Enclosure	passed
op-mode 2	Setup_01	Enclosure	passed

The purpose of the test case and operating mode selection is evaluating of co-location effects.

This Test Report replaces the Test Report with the reference "MDE_PARRO_0913_FCCa"



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

Responsible for
Accreditation Scope:



Responsible
for Test Report:





1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
- Deutscher Akkreditierungs Rat DAR-Registration no. DAT-P-192/99-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz

Report Template Version: 2009-03-18

1.2 Project Data

Responsible for testing and report: Carsten Steinröder
Date of Test(s): 2009-09-28
Date of Report: 2009-10-27

1.3 Applicant Data

Company Name: PARROT S.A.
Address: 174 quai Jemmapes
75010 Paris
France
Contact Person: Mr. Ludovic Legeay

1.4 Manufacturer Data

Company Name: please see applicant data
Address:
Contact Person:



2 Product labelling

2.1 FCC ID label

At the time of the report there was no FCC label available.

2.2 Location of the label on the EUT

see above

3 Test object Data

3.1 General EUT Description

Equipment under Test	Bluetooth and Wlan transceiver
Type Designation:	Mirror Photo frame GRANDE SPECCHIO
Kind of Device: (optional)	Wi-Fi and Bluetooth wireless digital photo frame
Voltage Type:	AC
Voltage level:	115 V

General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, the Bluetooth technology defines 79 RF channels spaced 1 MHz (2402 - 2480 MHz). The actual RF channel is chosen from a pseudo-random hopping sequence through the 79 channels. A channel is occupied for a defined amount of time slots, with a nominal slot length of 625 μ s. The maximum dwell time on one channel is defined by the packet type and is 0.625 ms for DH1 packets, 1.875 ms for DH3 and 3.125 ms for DH5. The nominal hop rate is 1600 hops/s for DH1, 1600/3 for DH3 and 1600/5 for DH5. All frequencies are equally used. The maximum nominal average time of occupancy is 0.4 s within a period of 79*0.4 seconds.

WLAN Transceiver operating in the 2.4 GHz ISM band using Direct Sequence Spread Spectrum (DSSS) Modulation. The EUT supports the modes 802.11b (maximum data rate 11 Mbps), 802.11g (maximum data rate 54 Mbps)

The EUT provides the following ports:

Ports

Enclosure
AC Port (power line)

The main components of the EUT are listed and described in Chapter 3.2



3.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: CX120b01)	Bluetooth transceiver	Mirror Photo frame GRANDE SPECCHIO	-	HW01	BETA 3	2009-09-04

Remark: EUT A is equipped with an integral antenna.

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	HW Status	SW Status	Serial no.	FCC ID
AE 1	AC/DC adapter	-	-	-	-	-

3.4 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_01	EUT A + AE 1	setup for radiated measurements

3.5 Operating Modes

This chapter describes the operating modes of the EUTs used for testing. For WLAN only the mode 802.11b was chosen as worst case.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	EUT transmits on 2402 MHz (Bluetooth) and on 2412 MHz (WLAN, 802.11b)	Bluetooth: Loopback mode, max output power WLAN: local TX mode, max output power
op-mode 2	EUT transmits on 2480 MHz (Bluetooth) and on 2462 MHz (WLAN, 802.11b)	Bluetooth: Loopback mode, max output power WLAN: local TX mode, max output power
op-mode 3	EUT transmits on 2402 MHz (Bluetooth) and on 2462 MHz (WLAN, 802.11b)	Bluetooth: Loopback mode, max output power WLAN: local TX mode, max output power
op-mode 3	EUT transmits on 2480 MHz (Bluetooth) and on 2412 MHz (WLAN, 802.11b)	Bluetooth: Loopback mode, max output power WLAN: local TX mode, max output power

4 Test Results

4.1 Spurious radiated emissions

Standard FCC Part 15, 10-1-08 Edition
Subpart C

The test was performed according to: ANSI C 63.4, 2003

4.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s
- Turntable angle range: -180 to 180 °

- Turntable step size: 90 °
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180 °
- Turntable step size: 45 °
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45 °
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved.

This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5 ° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5 ° to +22.5 ° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz, 25–40 GHz) are used, the steps 2–4 are omitted. Step 1 was performed only at one height of the receiving antenna.

EMI receiver settings:

- Detector: Peak, Average
- RBW = VBW = 100 kHz

4.1.2 Test Requirements / Limits

FCC §15.205 (b)

“Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in § 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in § 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in § 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in § 15.35 apply to these measurements.”

FCC §15.209 (a)

“Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:”

FCC §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

FCC §15.35(b)

“..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. ...”

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$



4.1.3 Test Protocol

Temperature: 25 °C
 Air Pressure: 1014 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 3	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 4	Setup_01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

4.1.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 5	passed
	op-mode 6	passed



4.2 Band edge compliance

Standard FCC Part 15, 10-1-08 Edition
Subpart C

The test was performed according to: ANSI C 63.4, 2003

4.2.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was placed inside FAC (fully anechoic chamber) to perform the measurements. The radiated emissions measurements were made in a typical installation configuration.

The measurement was carried out with a spectrum analyser, cable and horn antenna in a distance of 1 m using peak and average detector.

The measurement was performed at the lowest and highest band edges of the used ISM band:

- 2400.0 MHz
- 2483.5 MHz

4.2.2 Test Requirements / Limits

For the measurement at the band edges the limit is specified in §15.209.

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

“In the emission table above, the tighter limit applies at the band edges.”

FCC §15.35(b)

“..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit. ...”

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

4.2.3 Test Protocol

4.2.3.1 Lower band edge

Temperature: 25 °C
 Air Pressure: 1014 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 1	Setup_01	Enclosure

Frequency MHz	Corrected value dBμV/m	Limit dBμV/m	Delta to limit dB
2400.00	48.03	74	25.97

Remark: Please see annex for the measurement plot.

4.2.3.2 Higher band edge

Op. Mode	Setup	Port
op-mode 2	Setup_01	Enclosure

Frequency MHz	Corrected value dBμV/m	Limit dBμV/m	Delta to limit dB
2483.50	47.20	74	26.80

Remark: Please see annex for the measurement plot.

4.2.4 Test result: Band edge compliance

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed



5 Test Equipment

Test Equipment Details

List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2		
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	FCC renewal	2006/12/19	2009/12/19
	IC renewal	2009/01/21	2011/01/20
	FCC renewal	2009/01/07	2011/01/06

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2009/01/07 2011/01/06
	ANSI C64.3 NSA		2009/01/21 2011/01/20
Controller Innco 2000	CO 2000	CO2000/328/12470 406/L	Innco innovative constructions GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita



Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P		HD GmbH
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/10/27 2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/16 2012/04/15
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/28 2012/04/27
Dreheinheit	DE 325		HD GmbH
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2009/05/18 2009/11/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/05/27 2012/05/26

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/07 2011/10/06
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH

Test Equipment Digital Signalling Devices

Lab ID: **Lab 2**
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	1153.9000.35	100302	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/04/28 2011/04/27
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2008/10/07 2010/10/06
Digital Radio Test Set	6103E	2359	Racal Instruments, Ltd.
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/12/01 2011/11/30
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2008/10/28 2011/10/27



Test Equipment Emission measurement devices

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Personal Computer	Dell		Dell
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2007/12/05 2010/12/04
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2007/12/06 2009/12/05

6 Photo Report



Photo 1: Test setup for radiated measurements

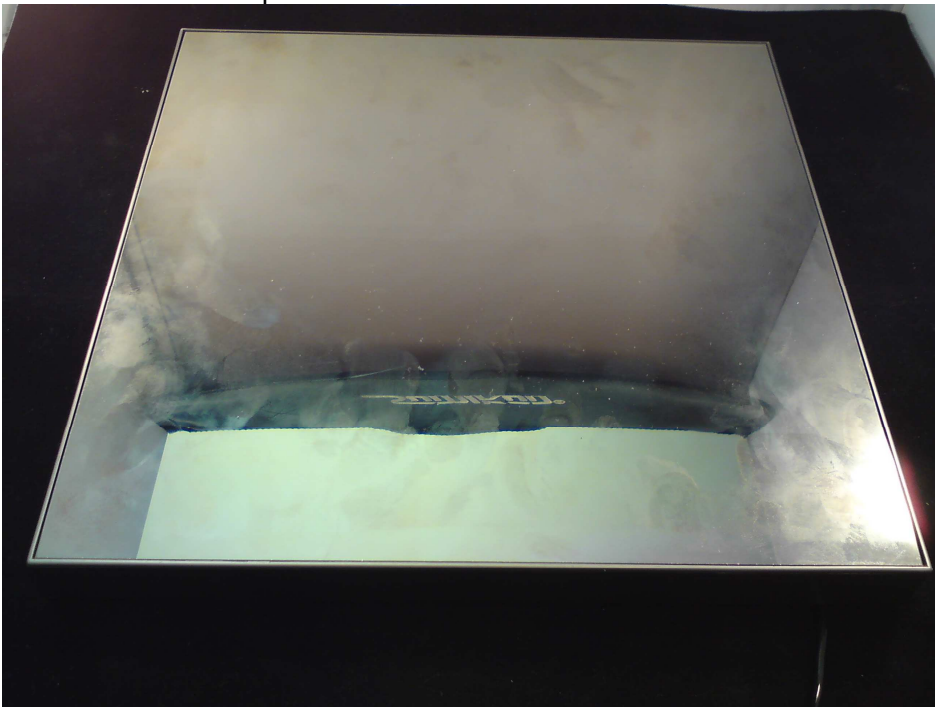


Photo 2: EUT (front side)


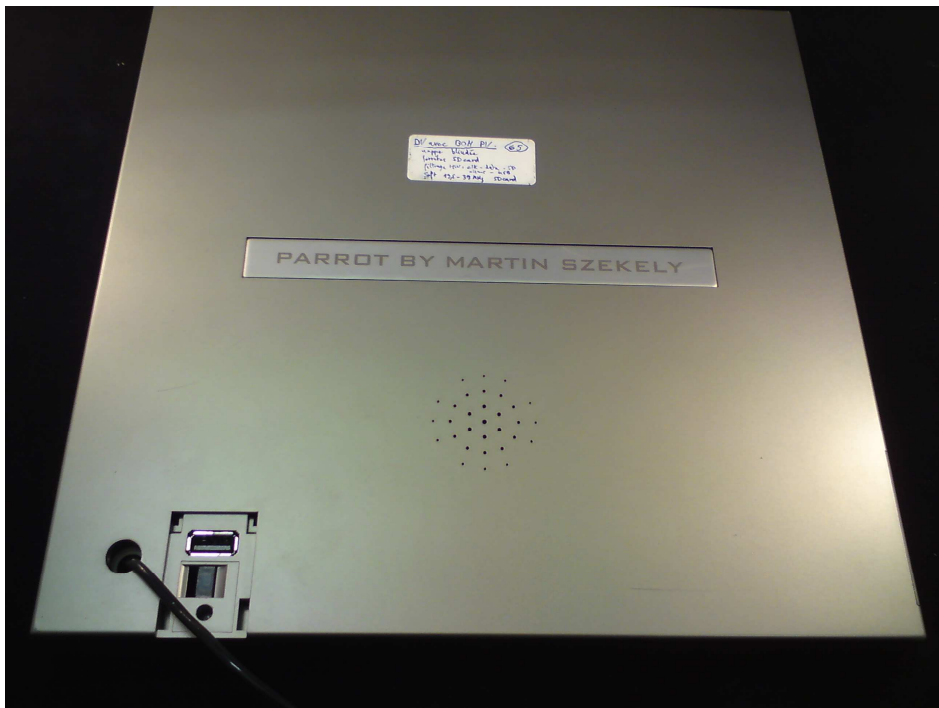


Photo 3: EUT (rear side)



Photo 4: AC adapter

7 Setup Drawings

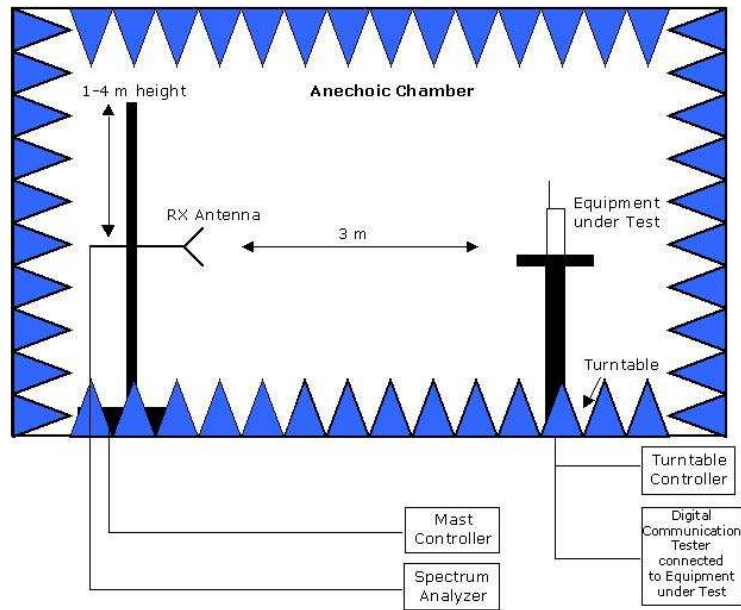

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.


Drawing 1: Setup in the anechoic chamber.

8 Annex measurement plots

8.1 Band edge compliance

Op. Mode


op-mode 1

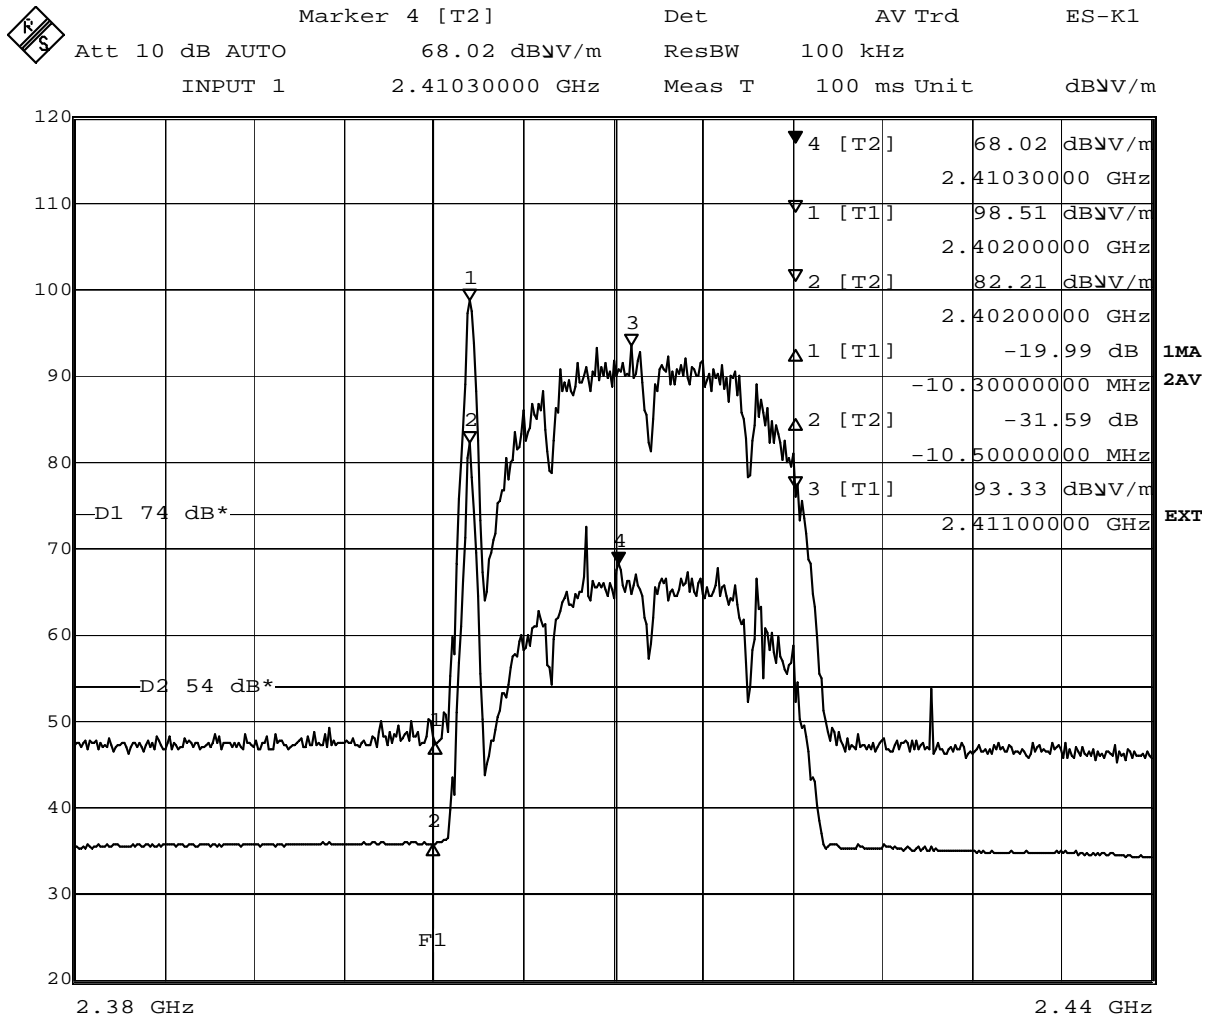


Date: 29.SEP.2009 11:34:09

Op. Mode

op-mode 2

	Att 10 dB AUTO	Marker 1 [T1]	Det	AV Trd	ES-K1
	INPUT 1	2.48000000 GHz	100.03 dBV/m	ResBW 100 kHz	
			Meas T	100 ms Unit	dBV/m

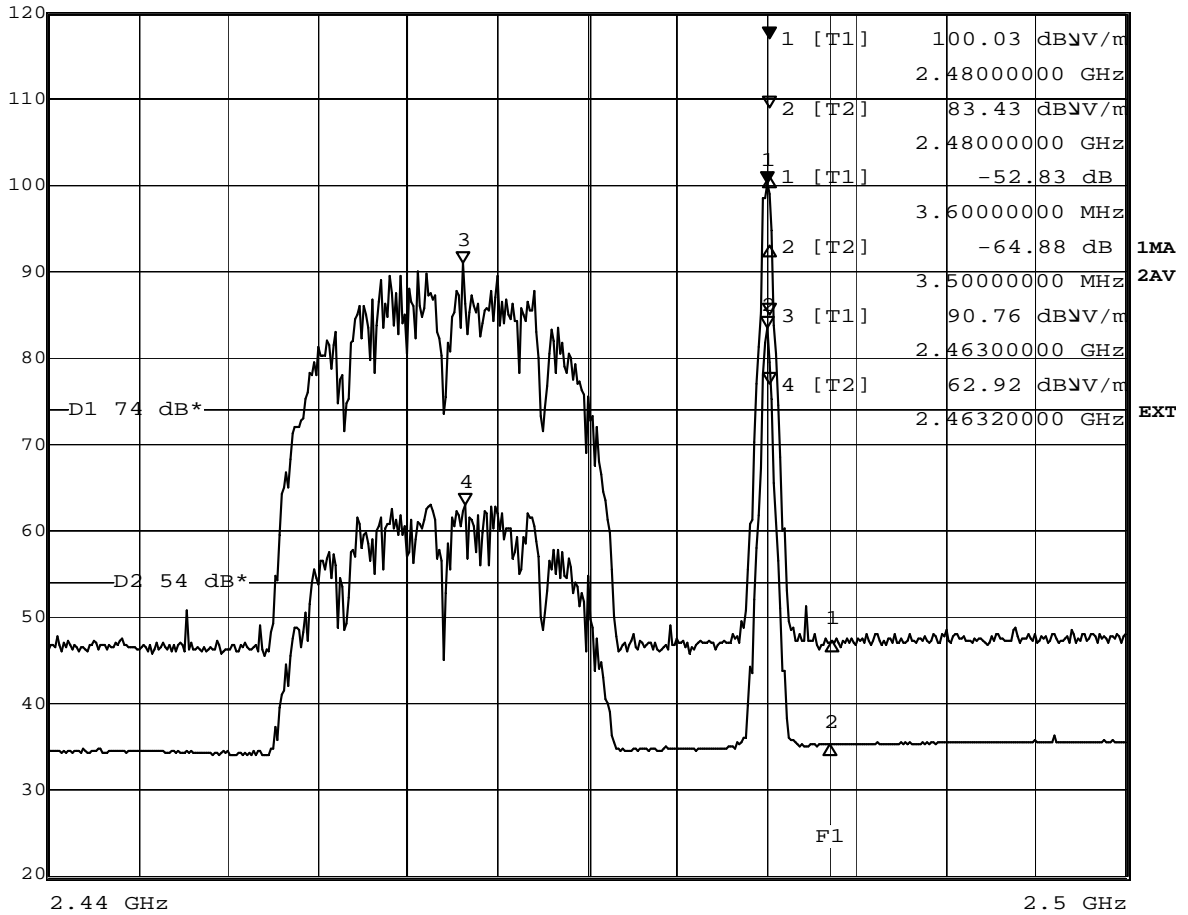

Date: 29.SEP.2009 11:03:29