



InterLab[®]
Final Report on
Parrot ZIKMU SOLO
FCC-ID: RKXSOLO

Report Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Date: October 11, 2012

Test Laboratory:

7Layers AG
Borsigstr. 11
40880 Ratingen
Germany



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Ralf Mertens
Vorstand • Board:
Dr. H.-J. Meckelburg

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

1 Administrative Data

1.1 Project Data

Project Responsible: Imad Hjije
Date Of Test Report: 2012/10/11
Date of first test: 2012/06/20
Date of last test: 2012/07/23

1.2 Applicant Data

Company Name: Parrot S.A.
Street: 174 quai de Jemmapes
City: 75010 Paris
Country: France
Contact Person: Mr. Cherif Si ahmed
Function: Qualification
Phone: +33 (0) 1 48 03 60 60
Fax: +33 (0) 1 48 03 74 00
E-Mail: cherif.siahmed@parrot.com

1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

7 layers DE

Company Name : 7 layers AG
Street : Borsigstrasse 11
City : 40880 Ratingen
Country : Germany
Contact Person : Mr. Michael Albert
Phone : +49 2102 749 201
Fax : +49 2102 749 444
E Mail : michael.albert@7Layers.de

Laboratory Details

<i>Lab ID</i>	<i>Identification</i>	<i>Responsible</i>	<i>Accreditation Info</i>
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkKS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkKS-Registration no. D-PL-12140-01-01

1.4 Signature of the Testing Responsible



Carsten Steinröder
responsible for tests performed in: Lab 1, Lab 2, Lab 3

1.5 Signature of the Accreditation Responsible



Accreditation scope responsible person
responsible for Lab 1, Lab 2, Lab 3

2 Test Object Data

2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

OUT: Parrot ZIKMU SOLO
FCC-ID: RKXSOLO

Manufacturer:

Company Name: Jabil Circuit (Guangzhou) Ltd.
Street: 128 Juncheng Road GETDD
City: Guangzhou
Country: P.R.CHINA

Contact Person:

Fax: Laura Luo
E-Mail: + 86 20 82 26 62 08
laura_luo@jabil.com

Parameter List:

<i>Parameter name</i>	<i>Value</i>
Parameter for Scope FCC_v2:	
AC Power Supply	120 V AC / 60 Hz
Antenna Gain	-0.4 (dBi)
highest channel (BT)	2480 (MHz)
lowest channel (BT)	2402 (MHz)
mid channel (BT)	2441 (MHz)



2.2 Detailed Description of OUT Samples

Sample : a01

<i>OUT Identifier</i>	Parrot ZIKMU SOLO		
<i>Sample Description</i>	FCC-ID: RKXSOLO		
<i>HW Status</i>	conducted sample		
<i>SW Status</i>	02		
	0105	<i>Low Temp.</i>	0 °C
		<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	120 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>
Parameter for Scope FCC_v2	
Antenna Gain	-0.40 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)

Sample : b01

<i>OUT Identifier</i>	Parrot ZIKMU SOLO		
<i>Sample Description</i>	FCC-ID: RKXSOLO		
<i>HW Status</i>	radiated sample		
<i>SW Status</i>	02		
	0105	<i>Low Temp.</i>	0 °C
		<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	120 V	<i>Normal Temp.</i>	+20 °C

Parameter List:

<i>Parameter Description</i>	<i>Value</i>
Parameter for Scope FCC_v2	
Antenna Gain	-0.40 (dBi)
Frequency_high	2480 (MHz)
Frequency_low	2402 (MHz)
Frequency_mid	2441 (MHz)



2.3 OUT Features

**Features for OUT: Parrot ZIKMU SOLO
FCC-ID: RKXSOLO**

<i>Designation</i>	<i>Description</i>	<i>Allowed Values</i>	<i>Supported Value(s)</i>
Features for scope: FCC_v2			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
Iant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
SRD	EUT is a short range device		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wb	EUT supports WLAN in mode b in the band 2400 MHz - 2483.5 MHz		
Wg	EUT supports WLAN in mode g in the band 2400 MHz - 2483.5 MHz		
WLAN	EUT supports WLAN channels 2412 MHz - 2462 MHz.		

2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE AUX4	CHERRY RS 6000 USB ON	G 0000273 2P28			Keyboard
AE AUX3	LG L17NB-4	509WAHS1W521			TFT Display
AE AUX5	Logitech M-BB48 P/N: 830311	LZC90505478			Mouse
AE AUX1	PTM91E-02800TGR	87060248H		WinXP Prof. Ger.	Laptop Toshiba Tecra M9
AE AUX2	Toshiba PA-1750-08	PK10000AC00- A05-085Q-15727			AC/DC adapter for Laptop

2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
A01 (conducted setup)			
Sample: a01	conducted sample		
B01 (radiated setup)			
Sample: b01	radiated sample		
B01_15b (Computer peripheral setup)			
Sample: b01	radiated sample	AE AUX4	Keyboard
		AE AUX3	TFT Display
		AE AUX5	Mouse
		AE AUX1	Laptop Toshiba Tecra M9
		AE AUX2	AC/DC adapter for Laptop

3 Results

3.1 General

Documentation of tested devices:

Available at the test laboratory.

Interpretation of the test results:

The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.

In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.

In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

Note:

1) The laboratory environmental conditions are available and recorded in the Interlab System.

2) The OUT was connected to a Laptop via Ethernet connection to set the test modes.
The OUT could be set into Bluetooth Test Modes by using a terminal program. The specific test modes could be set and controlled by the signalling unit "CBT" by Rohde&Schwarz over the air.

3) This test report replaces the previous report "MDE_PARRO_1222_FCCa".



3.2 List of the Applicable Body

(Body for Scope: FCC_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

3.3 List of Test Specification

Test Specification: **FCC part 2 and 15**
Version 10-1-11 Edition
Title: PART 2 - GENERAL RULES AND REGULATIONS
PART 15 - RADIO FREQUENCY DEVICES



3.4 Summary

<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
15c.1 Conducted emissions (AC power line) §15.207				
15c.1; Mode = transmit	Passed	2012/07/23	Lab 1	B01_15b
15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209				
15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low	Passed	2012/06/20	Lab 2	B01
15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/20	Lab 2	B01
	footnote: 4			
15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/20	Lab 2	B01
	footnote: 4			
15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid	Passed	2012/06/20	Lab 2	B01
15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/20	Lab 2	B01
	footnote: 4			
15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/20	Lab 2	B01
	footnote: 4			
15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest	Passed	2012/06/20	Lab 2	B01
15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/20	Lab 2	B01
	footnote: 4			
15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/20	Lab 2	B01
	footnote: 4			
15c.3 Occupied bandwidth §15.247 (a) (1)				
15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01



<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
15c.4 Peak power output §15.247 (b) (1)				
15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.5 Spurious RF conducted emissions §15.247 (d)				
15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
	footnote: 3			
15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
	footnote: 3			
15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
	footnote: 3			
15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
	footnote: 3			
15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
	footnote: 3			
15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
	footnote: 3			



<i>Test Case Identifier / Name</i> <i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab</i> <i>Ref.</i>	<i>Setup</i>
15c.6 Band edge compliance §15.247 (d)				
15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted	Passed	2012/06/27	Lab 3	A01
15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted	Passed	2012/06/27	Lab 3	A01
15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted	Passed	2012/06/27	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted	Passed	2012/06/27	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated	Passed	2012/06/20	Lab 2	B01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted	Passed	2012/06/27	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated	Passed	2012/06/20	Lab 2	B01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted	Passed	2012/06/27	Lab 3	A01
15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated	Passed	2012/06/20	Lab 2	B01
15c.7 Dwell time §15.247 (a) (1) (iii)				
15c.7; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.7; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/28	Lab 3	A01
15c.7; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/28	Lab 3	A01
15c.8 Channel separation §15.247 (a) (1)				
15c.8; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.8; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.8; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)				
15c.9; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation	Passed	2012/06/27	Lab 3	A01
15c.9; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation	Passed	2012/06/27	Lab 3	A01
15c.9; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation	Passed	2012/06/27	Lab 3	A01

3.5 Detailed Footnotes

<i>No.</i>	<i>Description</i>
3	The reference plot and reference value for the spurious emissions limit is listed in the corresponding "Band edge compliance" test case.
4	This test case has been performed in the Frequency Range 1 to 8 GHz only, because no relevant Peaks have been found in Worst Case Mode "BT transmit using 1 Mbps with GFSK modulation".



3.6 Detailed Results

3.6.1 15c.1 Conducted emissions (AC power line) §15.207

Test: 15c.1; Mode = transmit

<i>Result:</i>	Passed
<i>Setup No.:</i>	B01_15b
<i>Date of Test:</i>	2012/07/23 13:45
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15


Detailed Results:

AC MAINS CONDUCTED

EUT: (CX380b01)
 Manufacturer: Parrot
 Operating Condition: BT on 2480MHz, 1-DH1, WLAN 2437MHz 6MBit, 433MHz RX on; Data PING
 Test Site: 7 layers Ratingen
 Operator: Doe
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207
 Comment: Supplied by 120 V AC / 60 Hz
 Start of Test: 23.07.2012 / 13:18:41

SCAN TABLE: "FCC Voltage"

Short Description:		FCC Voltage					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5	
			Average				

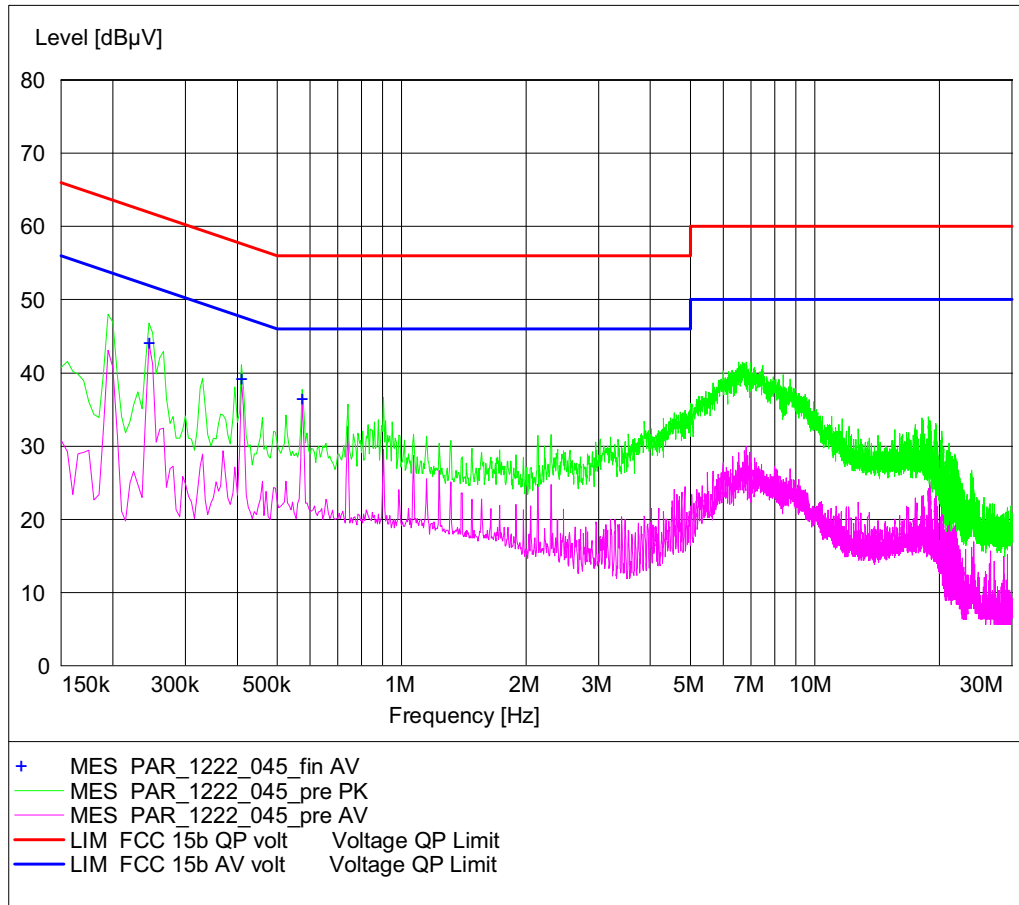

MEASUREMENT RESULT: "PAR_1222_045_fin AV"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBµV	dB	dBµV	dB		
0.245000	44.10	10.1	52	7.8	L1	GND



3.6.2 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = low

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:23
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	4804	46.78	34.73	27.22	19.27	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:31
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



Test: 15c.2; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:36
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2402 MHz 3-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = mid

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:25
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 1-DH1

Frequency range 9 kHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	4882	46.46	34.87	27.54	19.13	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:37
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15



Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 2-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: B01
Date of Test: 2012/06/20 13:38
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2441 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54						Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Channel = highest

Result: Passed
Setup No.: B01
Date of Test: 2012/06/20 13:26
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15



Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 1-DH1

Frequency range 30 MHz - 1 GHz

Ant. Polar.	Limit QPK [dBµV]	Frequency [MHz]	Corrected value QPK [dBµV]	Margin QPK [dB]	Result
Ver + Hor					Passed

Frequency range 1 GHz - 25 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	2484	53.33	38.69	20.67	15.31	Passed
	74	54	4960	46.37	34.88	27.63	19.12	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:39
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 2-DH1

Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	2484	57.62	38.87	16.38	15.13	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Test: 15c.2; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:39
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

Traffic Mode FCC 15.247 (15.35b,15.209) TX on 2480 MHz 3-DH1
Frequency range 1 GHz - 8 GHz

Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
Ver + Hor	74	54	2484	57.50	38.09	16.50	15.91	Passed

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

3.6.3 15c.3 Occupied bandwidth §15.247 (a) (1)

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 16:37
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

20 dB bandwidth MHz
0.944

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-26.61 dBm	VBW	30 kHz	
10 dBm	2.40248720 GHz	SWT	8.5 ms	Unit dBm

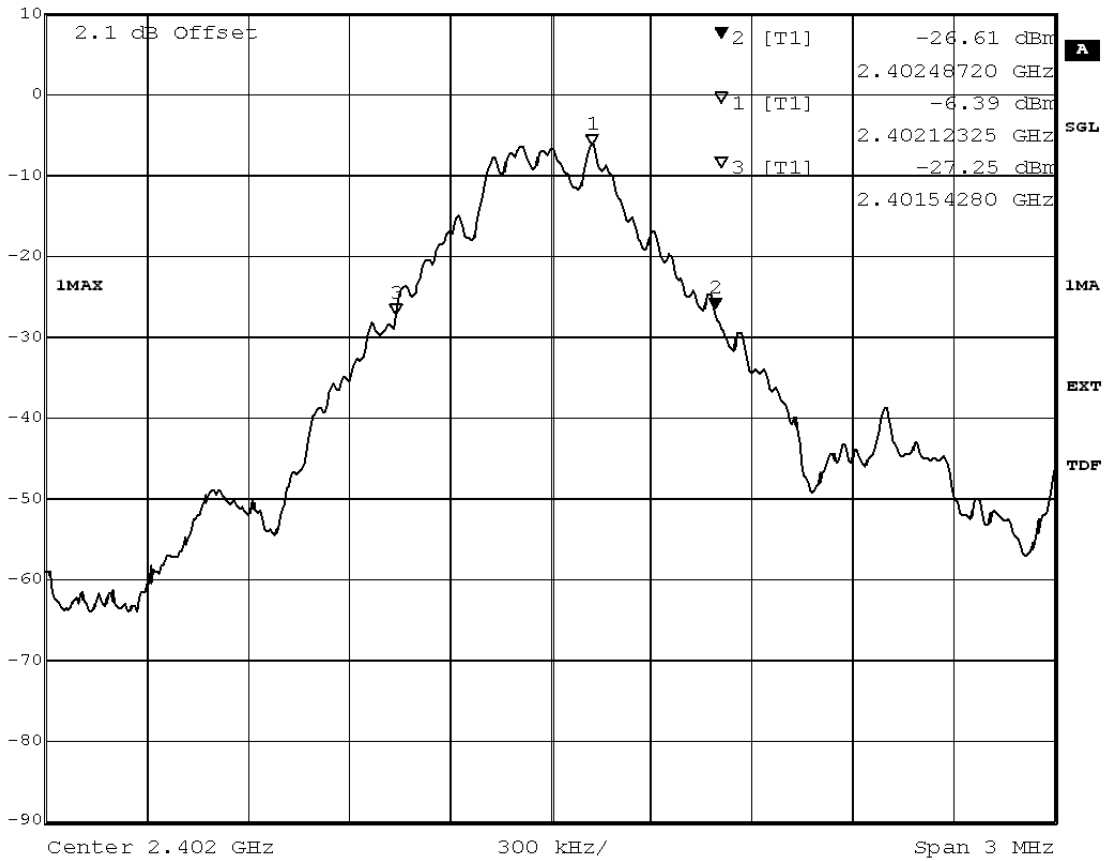

Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):944.4
 Date: 26.JUN.2012 15:25:12

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:32
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.288

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-26.14 dBm	VBW	30 kHz	
10 dBm	2.40262580 GHz	SWT	8.5 ms	Unit dBm

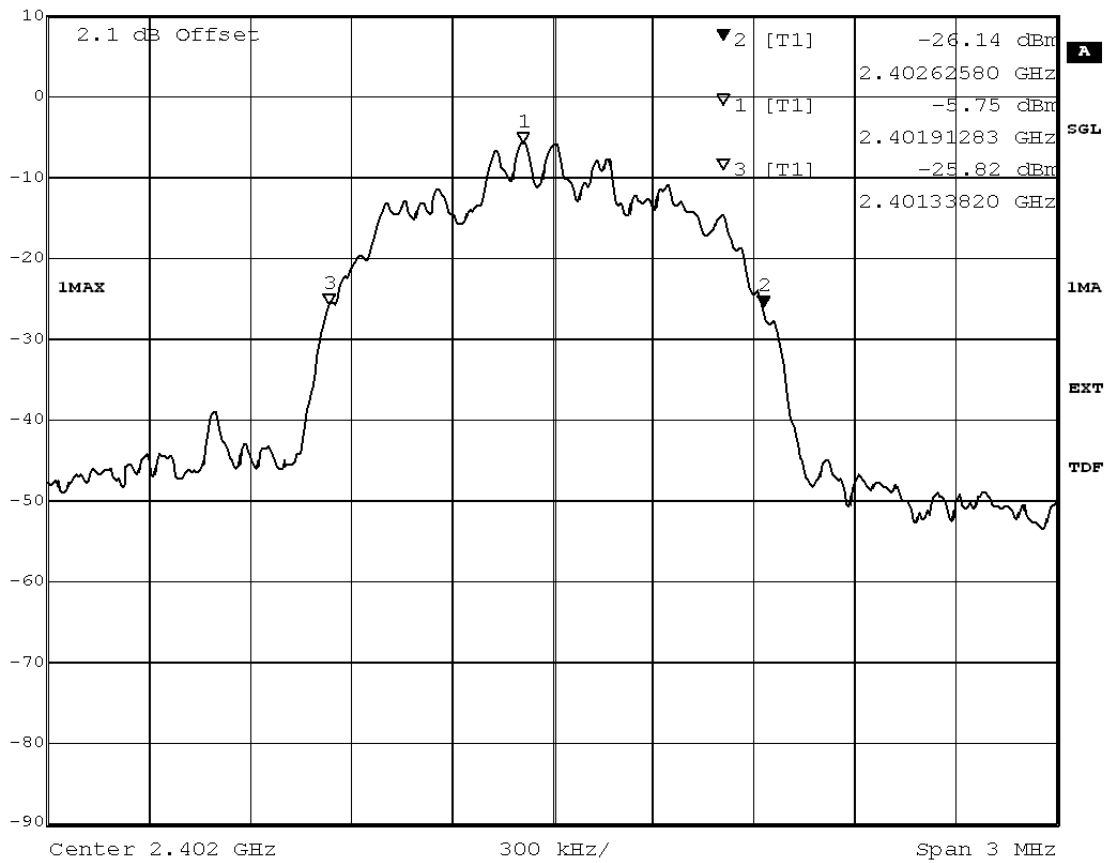

Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1287.6
 Date: 26.JUN.2012 16:25:11

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:03
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

20 dB bandwidth MHz
1.234

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-25.46 dBm	VBW	30 kHz	
10 dBm	2.40262580 GHz	SWT	8.5 ms	Unit dBm

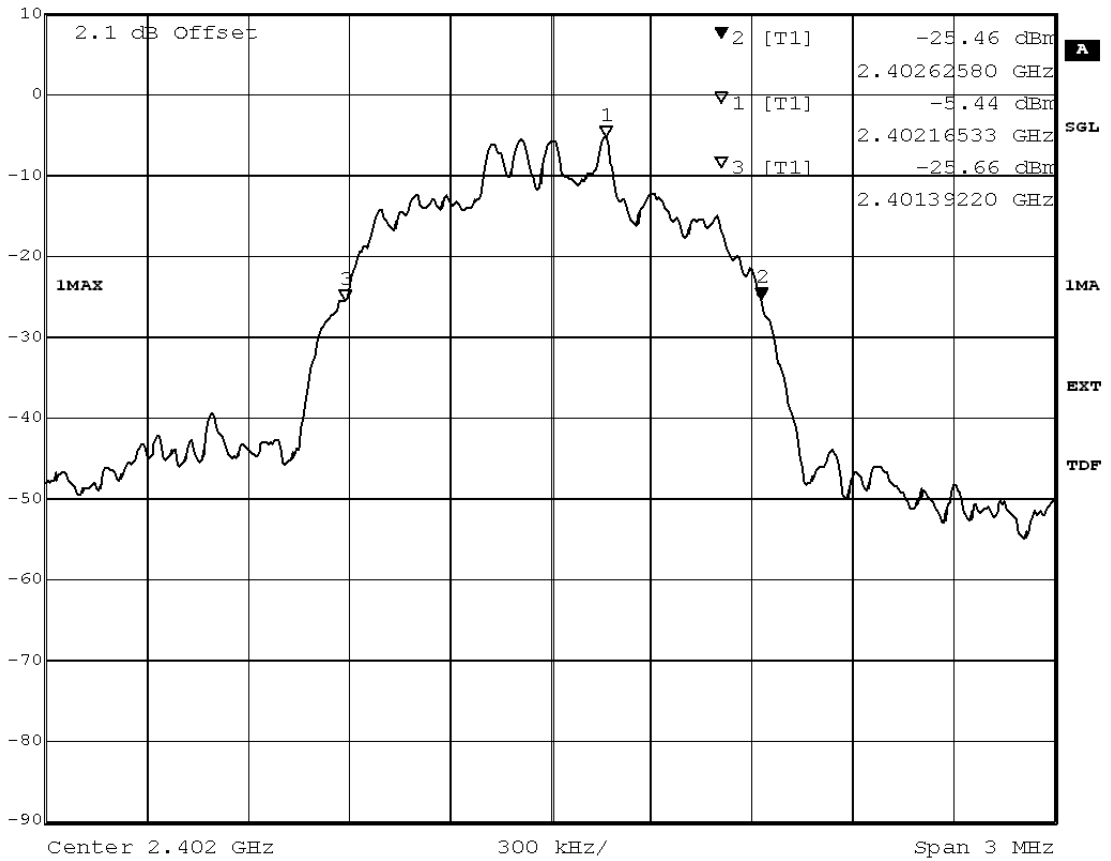

Title: 20dB Bandwidth
 Comment A: CH B: 2402 MHz; 20dB bandwidth (kHz):1233.6
 Date: 27.JUN.2012 18:43:11

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 16:43
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

20 dB bandwidth MHz
0.944

added by operator

Marker 2 [T1]	RBW 30 kHz	RF Att 20 dB
Ref Lvl -25.24 dBm	VBW 30 kHz	
10 dBm	SWT 8.5 ms	Unit dBm

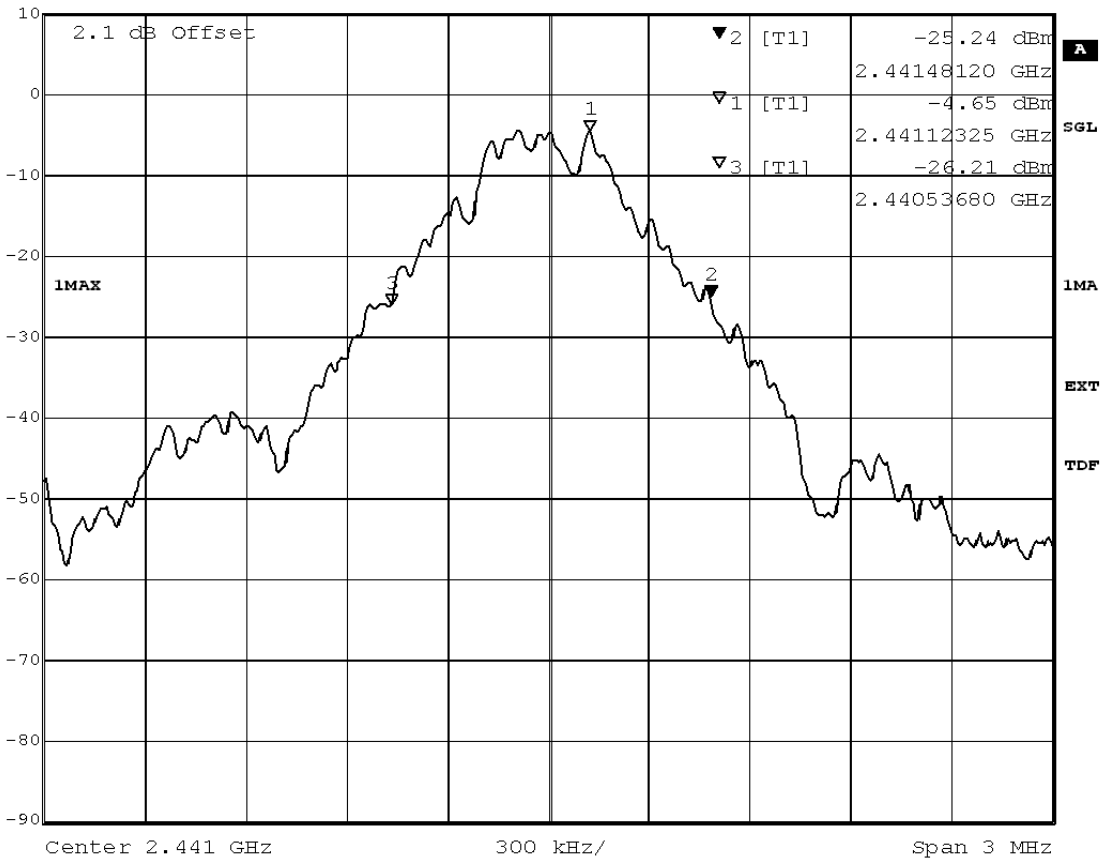

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):944.4
 Date: 26.JUN.2012 15:43:47

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:36
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.294

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-24.89 dBm	VBW	30 kHz	
10 dBm	2.44162580 GHz	SWT	8.5 ms	Unit dBm

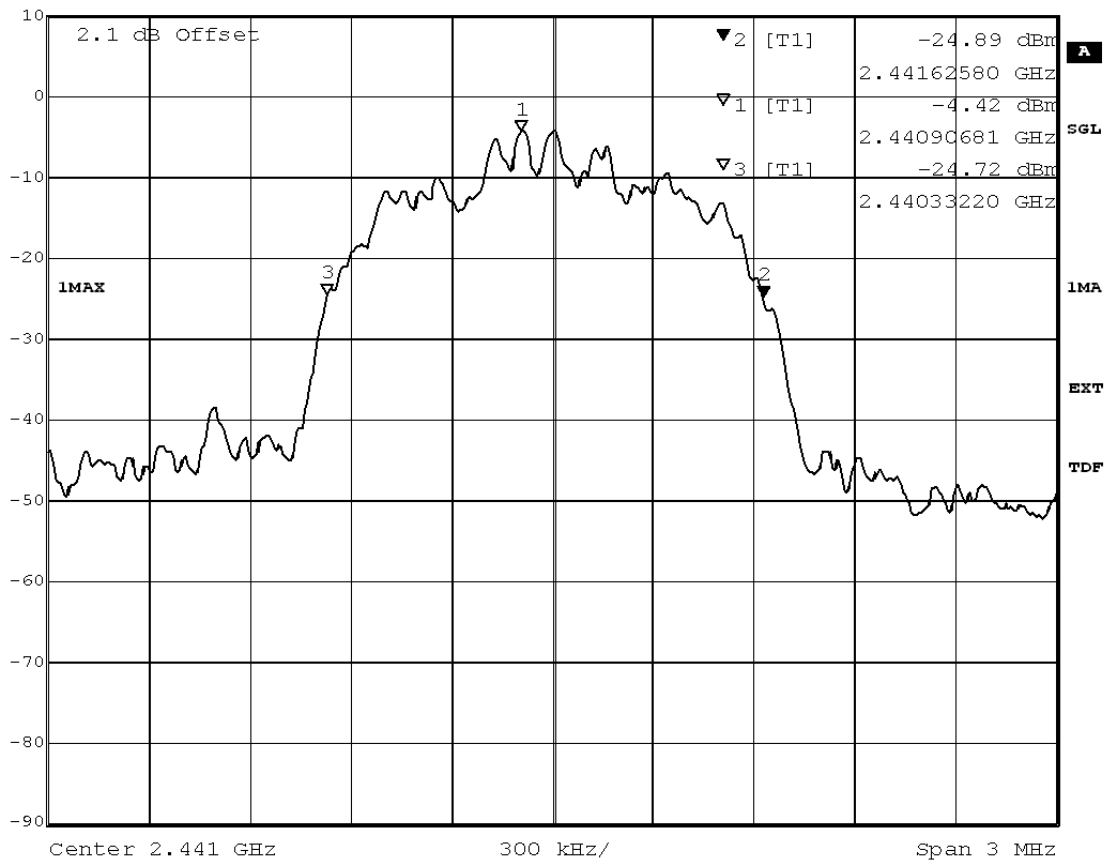

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1293.6
 Date: 27.JUN.2012 17:14:02

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:21
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

20 dB bandwidth MHz
1.264

added by operator

Marker 2 [T1] RBW 30 kHz RF Att 20 dB
 Ref Lvl -25.14 dBm VBW 30 kHz
 10 dBm 2.44163180 GHz SWT 8.5 ms Unit dBm

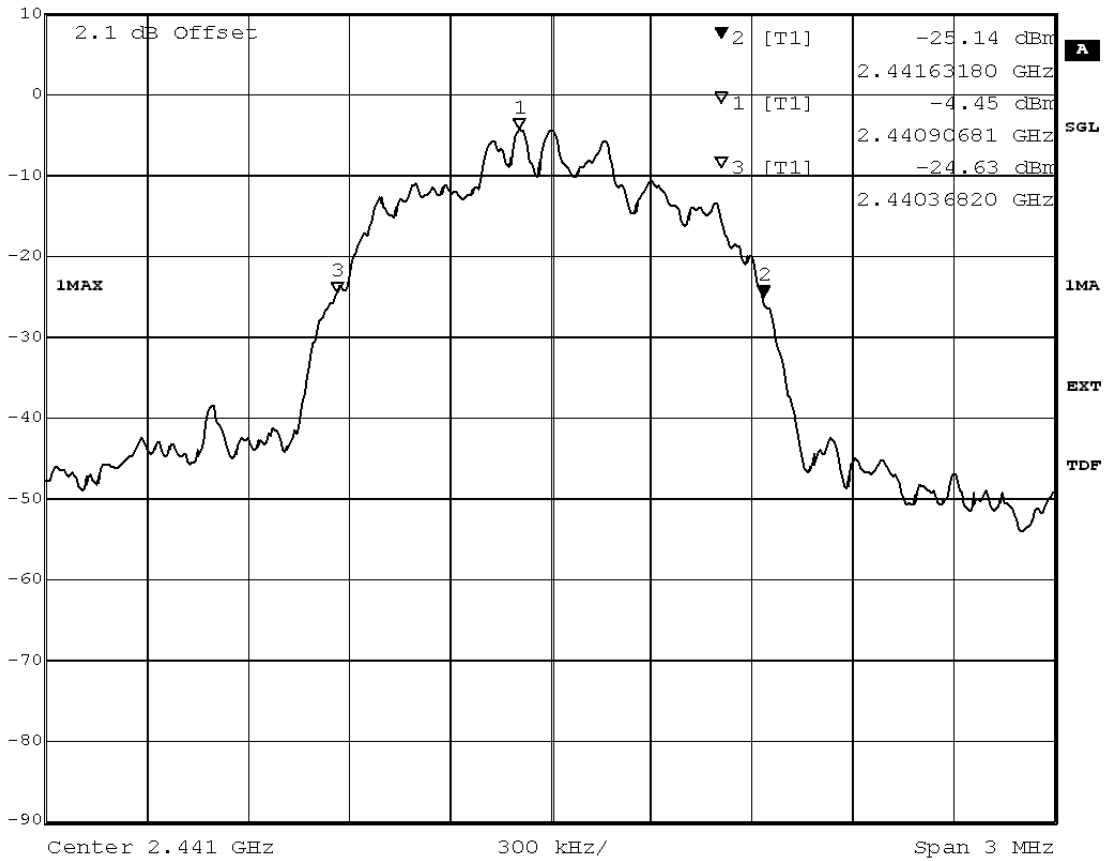

Title: 20dB Bandwidth
 Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1263.6
 Date: 27.JUN.2012 19:00:26

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 16:52
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
0.944

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-24.45 dBm	VBW	30 kHz	
10 dBm	2.48048120 GHz	SWT	8.5 ms	Unit dBm

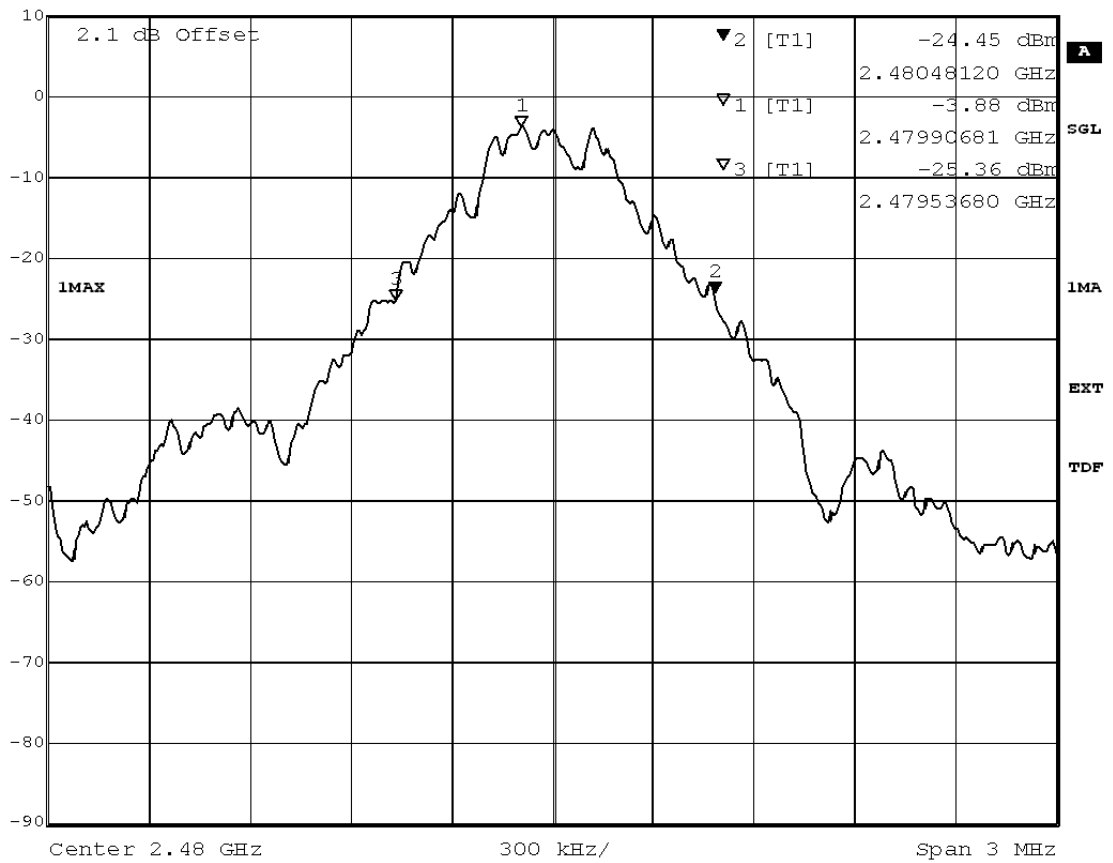

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):944.4
 Date: 26.JUN.2012 16:00:54

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:38
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

20 dB bandwidth MHz
1.294

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-24.06 dBm	VBW	30 kHz	
10 dBm	2.48062580 GHz	SWT	8.5 ms	Unit dBm

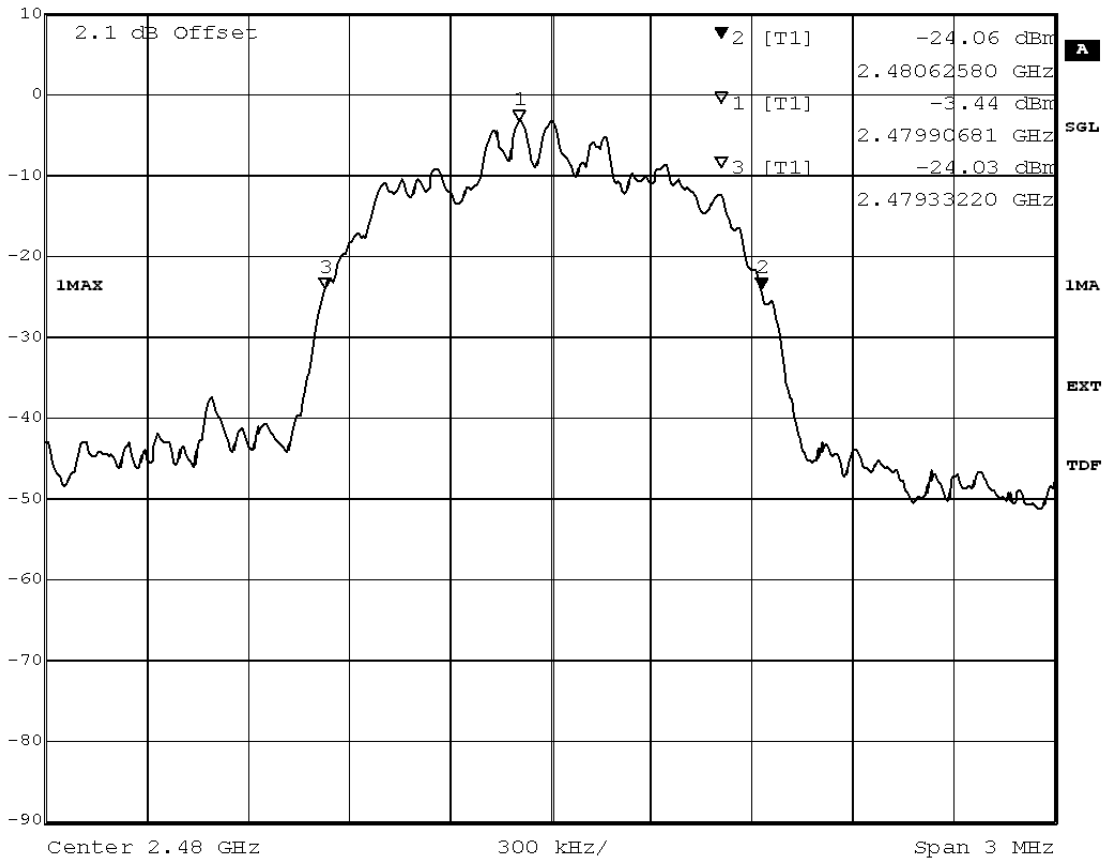

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1293.6
 Date: 27.JUN.2012 17:33:44

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.3; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:41
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

20 dB bandwidth MHz
1.270

added by operator

Marker 2 [T1]	RBW	30 kHz	RF Att	20 dB
Ref Lvl	-24.07 dBm	VBW	30 kHz	
10 dBm	2.48063180 GHz	SWT	8.5 ms	Unit dBm

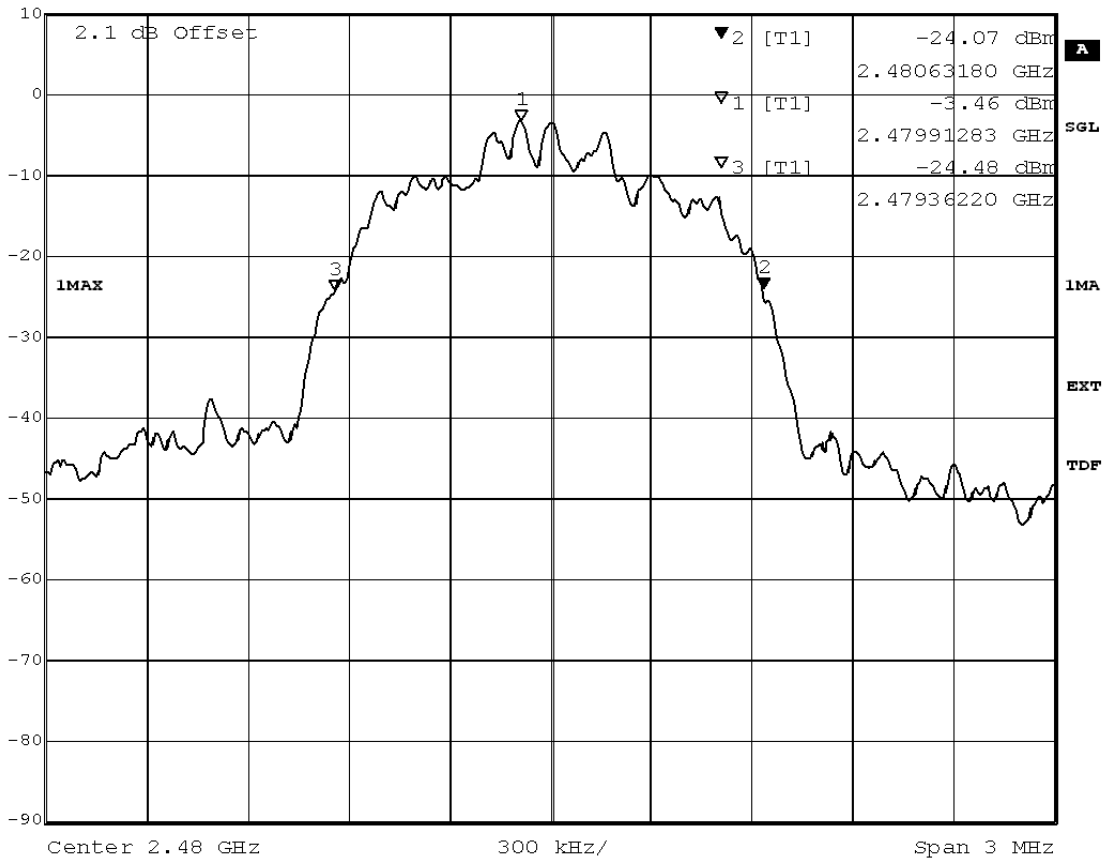

Title: 20dB Bandwidth
 Comment A: CH T: 2480 MHz; 20dB bandwidth (kHz):1269.6
 Date: 27.JUN.2012 19:17:30

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

3.6.4 15c.4 Peak power output §15.247 (b) (1)

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:22
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-3.12	-0.40	-3.52

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl -3.12 dBm VBW 3 MHz
 10 dBm 2.40205411 GHz SWT 5 ms Unit dBm

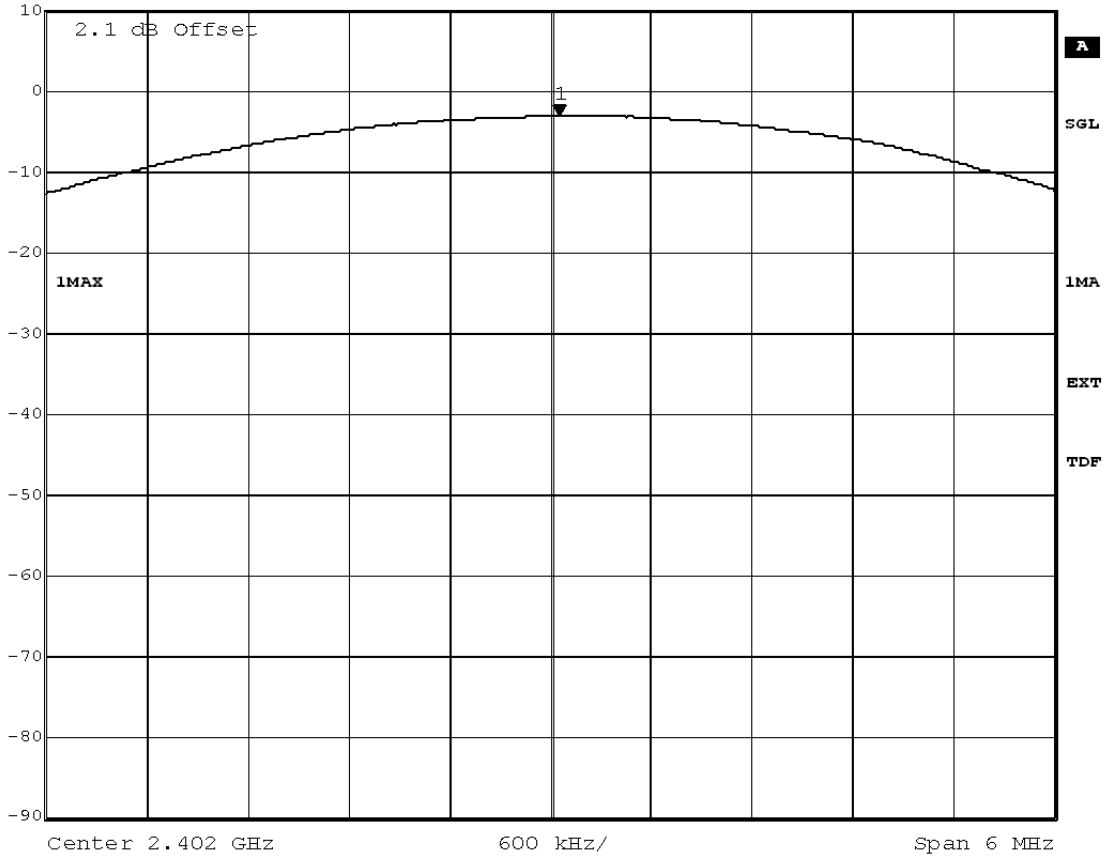

Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 15:25:44

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:32
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-1.28	-0.40	-1.68

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl -1.28 dBm VBW 3 MHz
 10 dBm 2.40195792 GHz SWT 5 ms Unit dBm

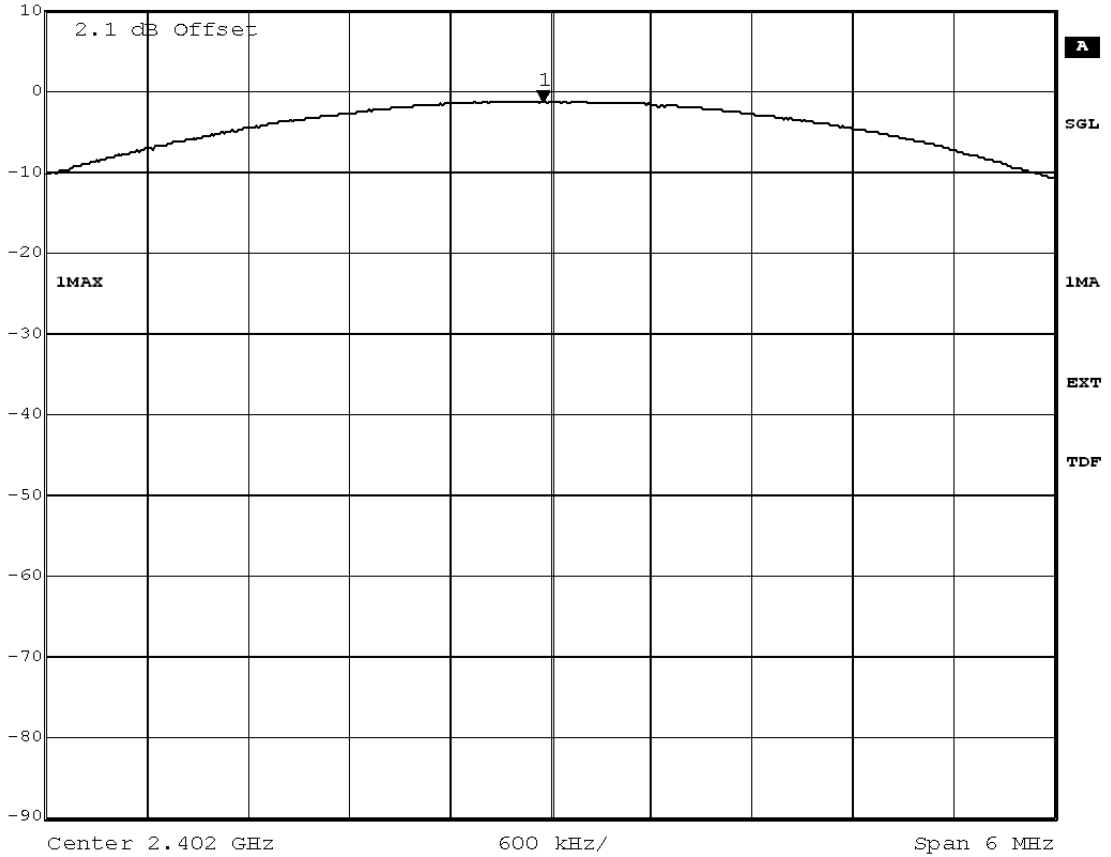

Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 16:25:46

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:04
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.72	-0.40	-1.12

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl -0.72 dBm VBW 3 MHz
 10 dBm 2.40188577 GHz SWT 5 ms Unit dBm

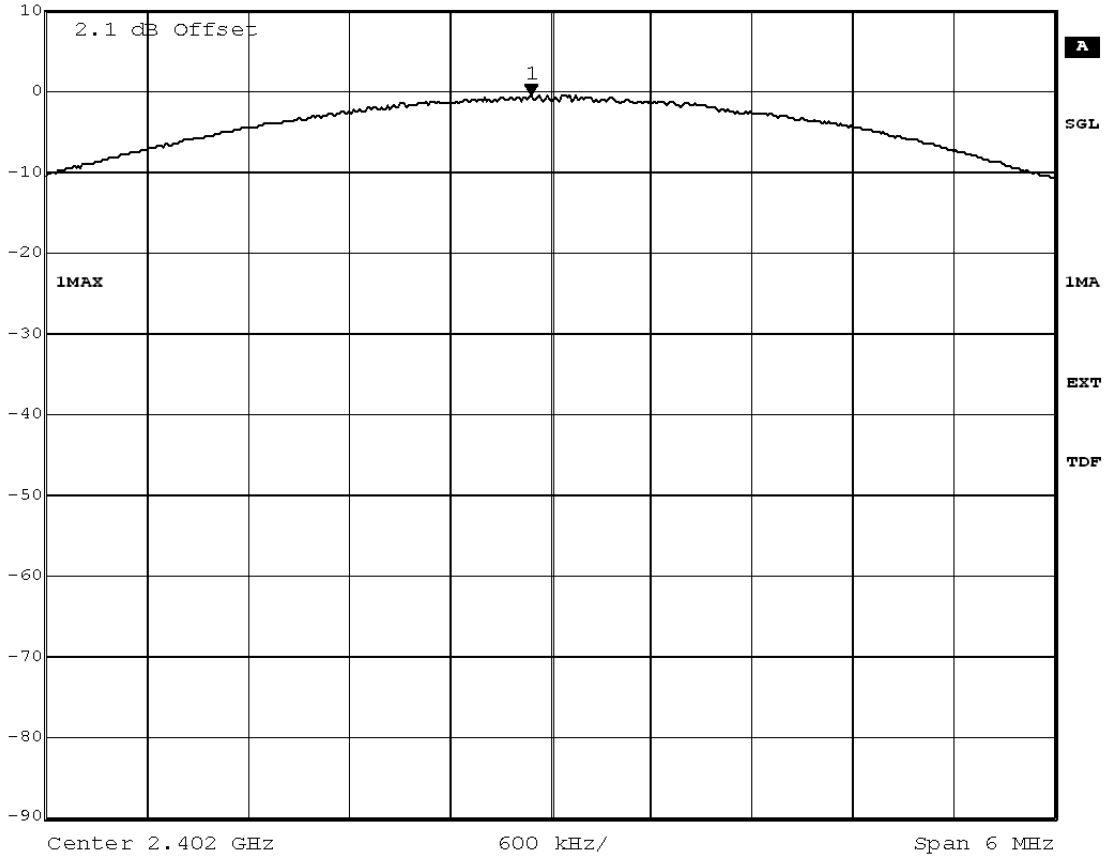

Title: Peak outputpower Power
 Comment A: CH B: 2402 MHz
 Date: 27.JUN.2012 18:43:44

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:25
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-1.27	-0.40	-1.67

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl -1.27 dBm VBW 3 MHz
 10 dBm 2.44084970 GHz SWT 5 ms Unit dBm

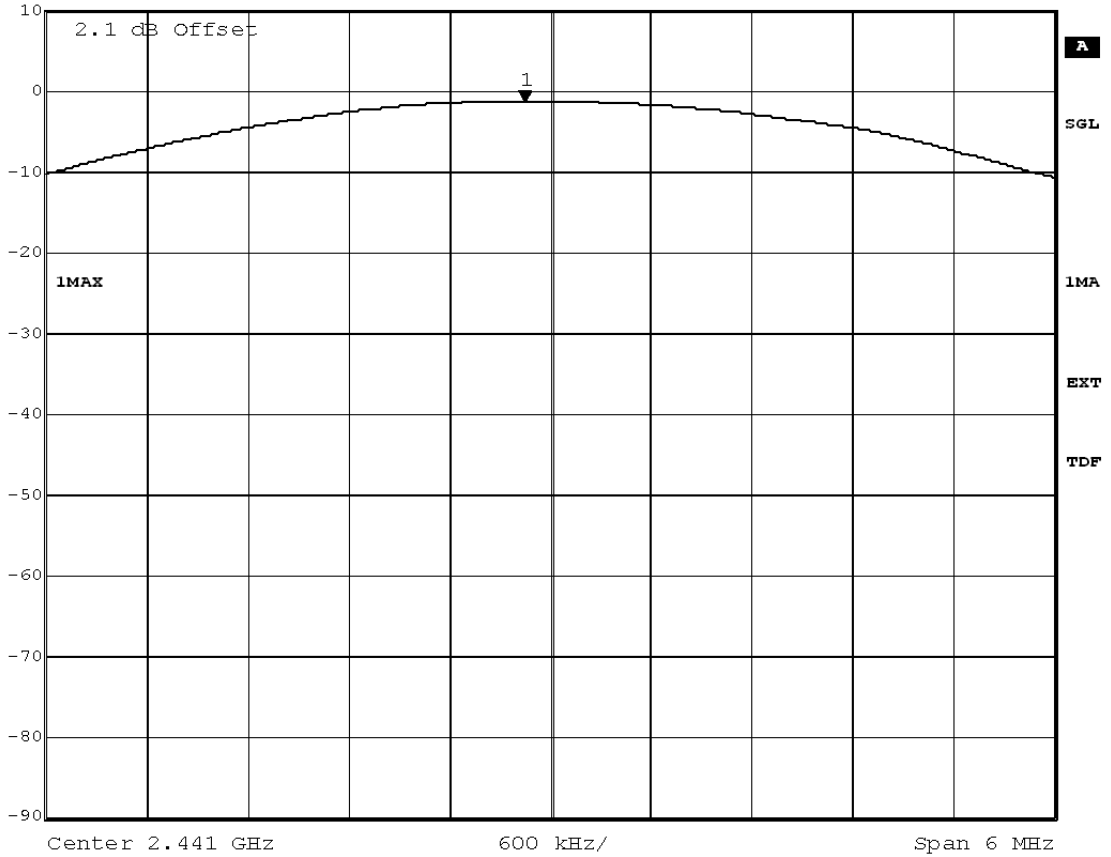

Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 26.JUN.2012 15:44:20

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:36
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
0.12	-0.40	-0.28

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl 0.12 dBm VBW 3 MHz
 10 dBm 2.44119840 GHz SWT 5 ms Unit dBm

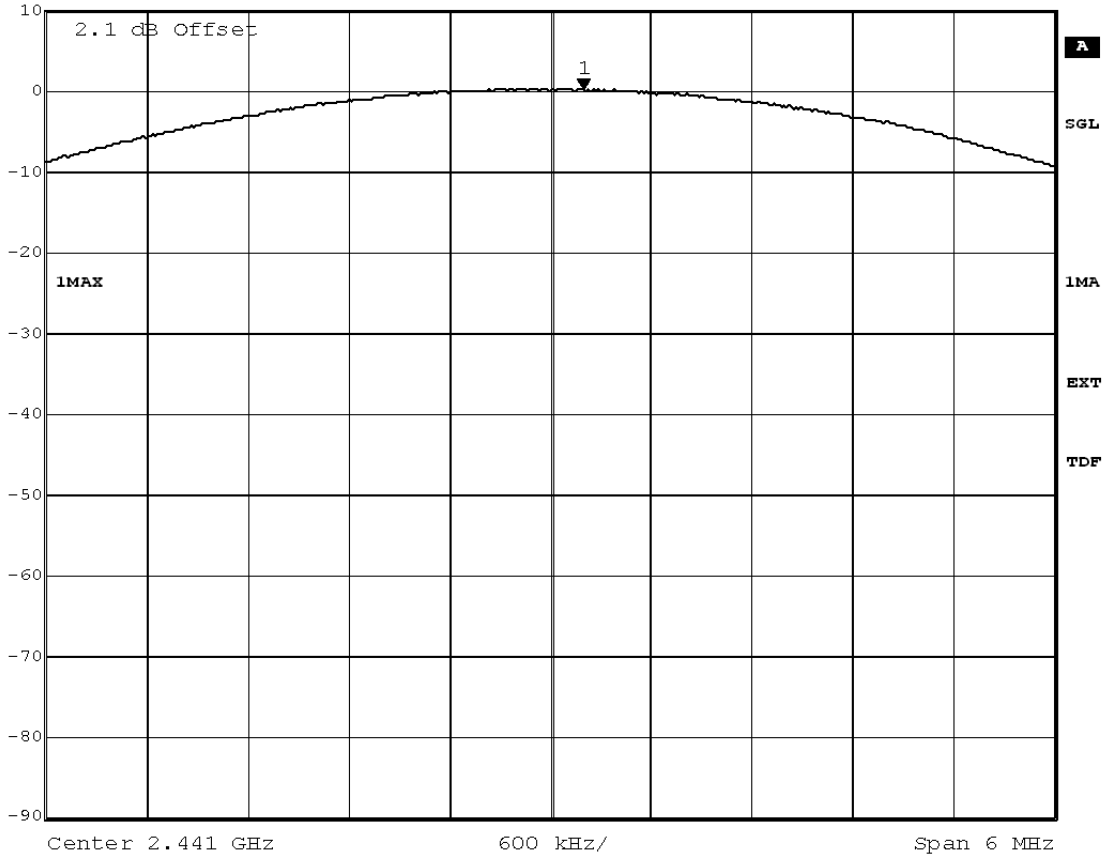

Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 27.JUN.2012 17:14:35

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:21
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
0.70	-0.40	0.30

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl 0.70 dBm VBW 3 MHz
 10 dBm 2.44107816 GHz SWT 5 ms Unit dBm

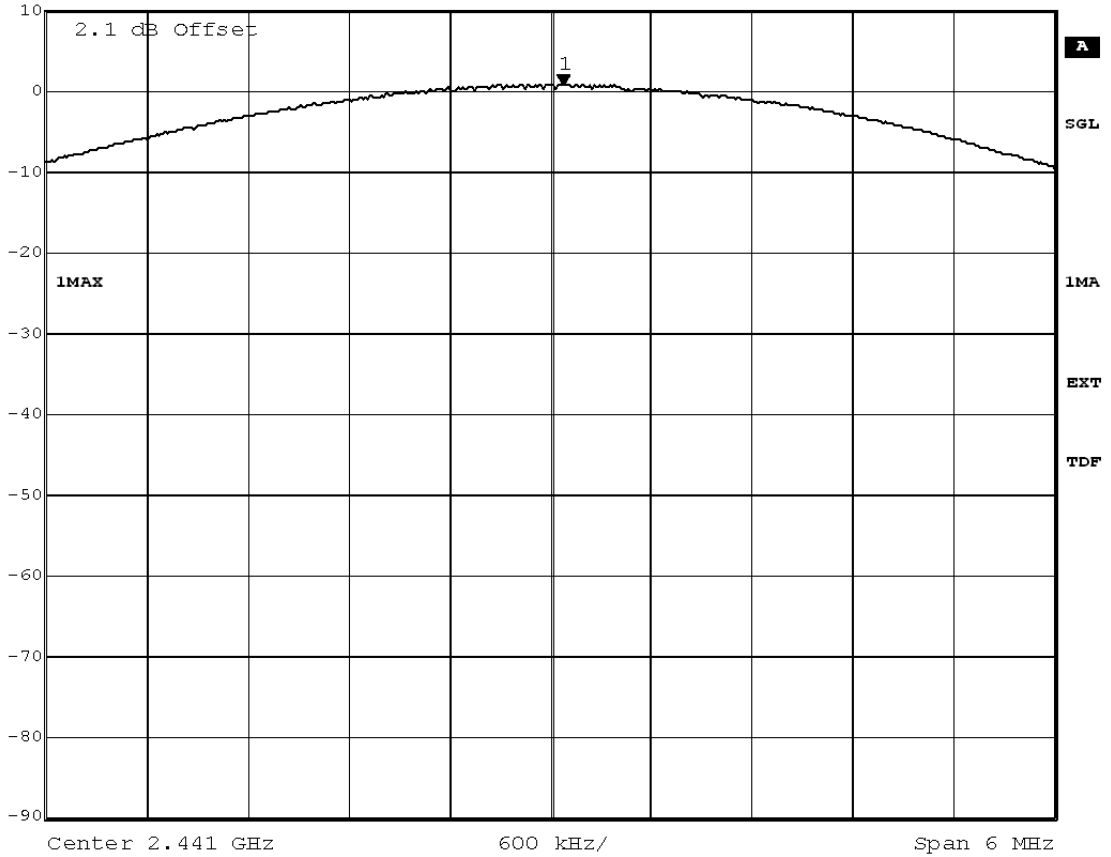

Title: Peak outputpower Power
 Comment A: CH M: 2441 MHz
 Date: 27.JUN.2012 19:00:59

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:26
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
-0.53	-0.40	-0.93

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl -0.53 dBm VBW 3 MHz
 10 dBm 2.47993387 GHz SWT 5 ms Unit dBm

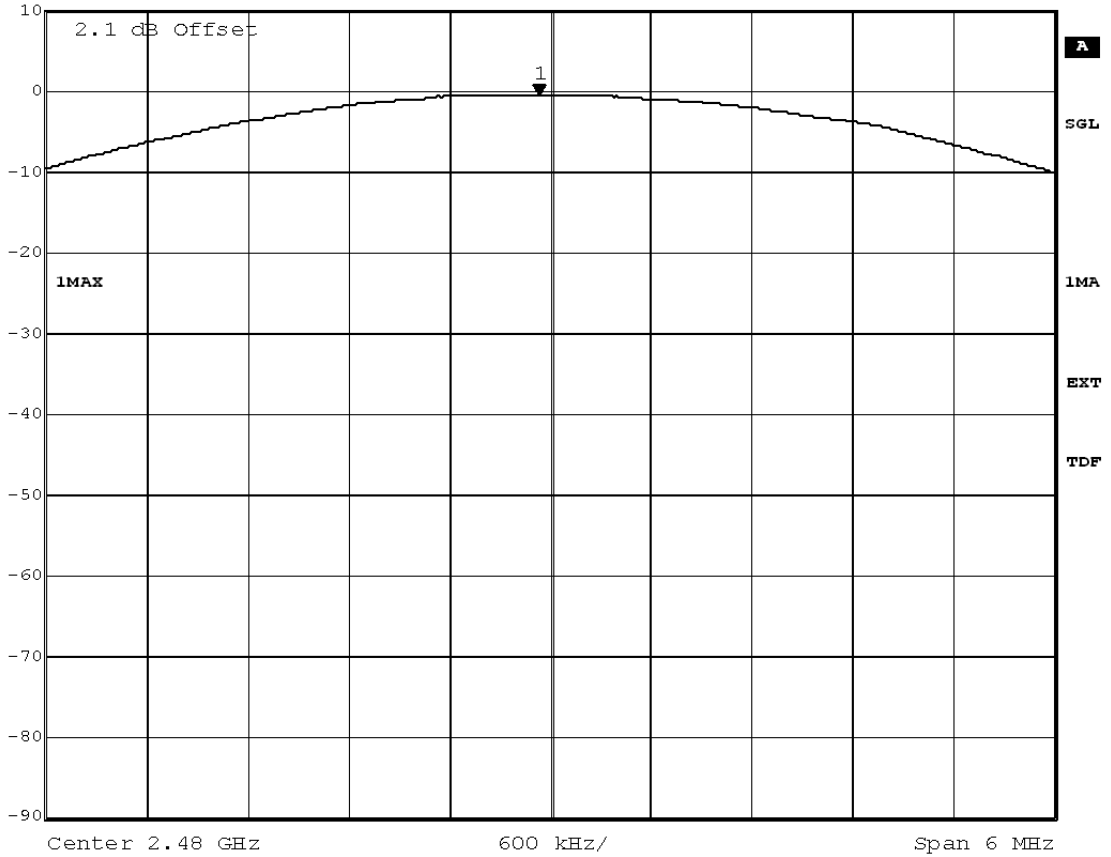

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 26.JUN.2012 16:01:27

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:38
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.08	-0.40	0.68

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl 1.08 dBm VBW 3 MHz
 10 dBm 2.47986172 GHz SWT 5 ms Unit dBm

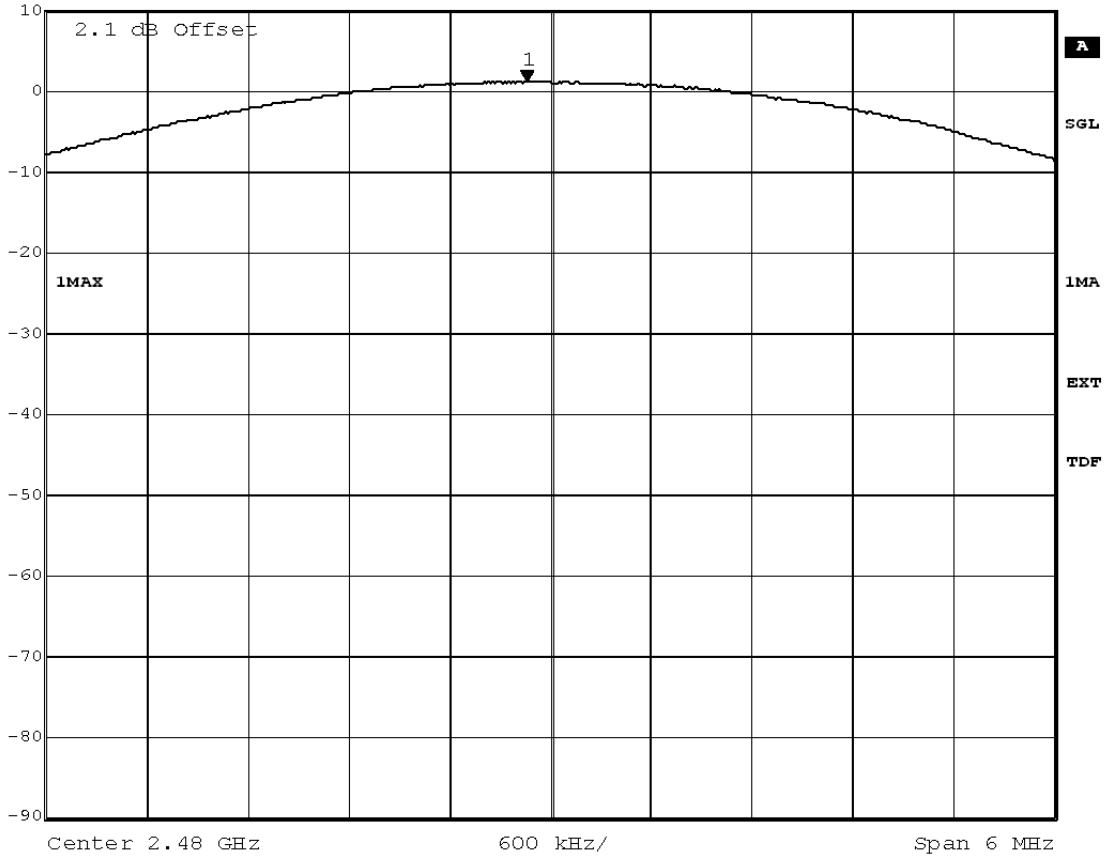

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 27.JUN.2012 17:34:18

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Test: 15c.4; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:41
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

conducted peak output power value /dBm	Antenna gain / dBi	peak value EIRP /dBm
1.69	-0.40	1.29

added by operator

Marker 1 [T1] RBW 3 MHz RF Att 20 dB
 Ref Lvl 1.69 dBm VBW 3 MHz
 10 dBm 2.48009018 GHz SWT 5 ms Unit dBm

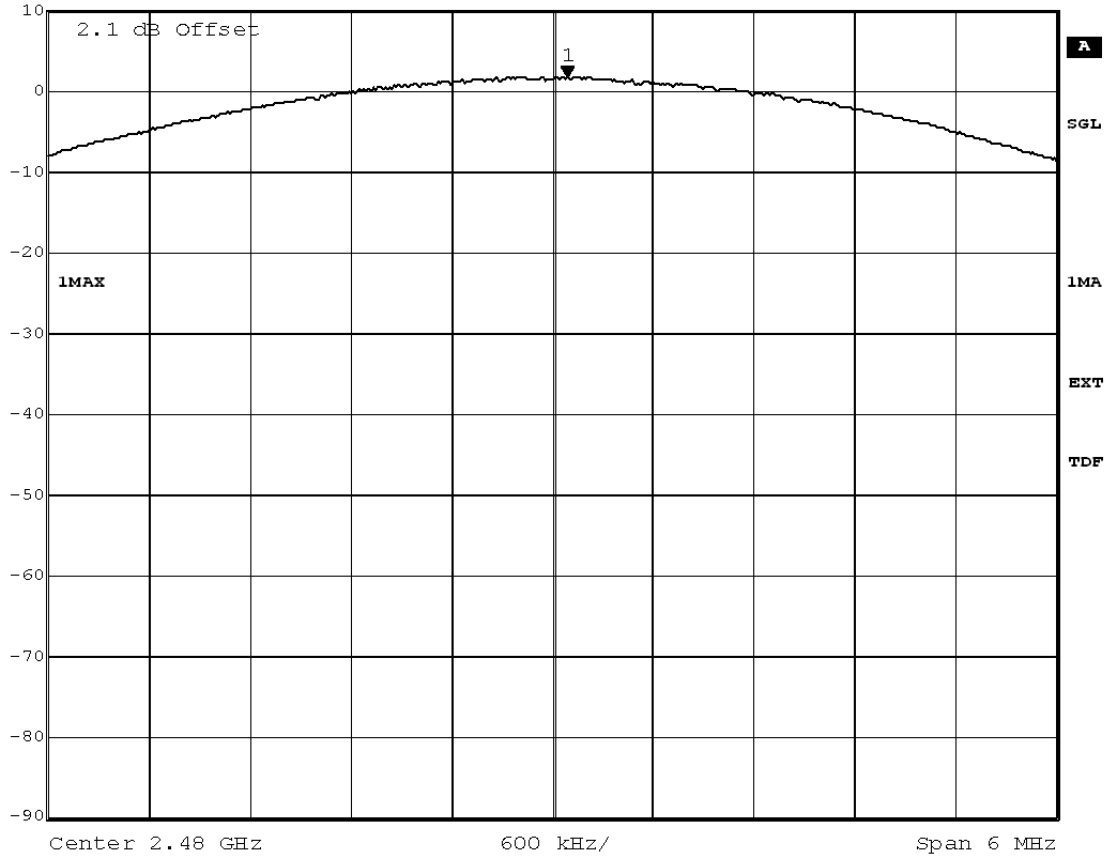

Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 27.JUN.2012 19:18:04

added by operator




3.6.5 15c.5 Spurious RF conducted emissions §15.247 (d)

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/27 18:22
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

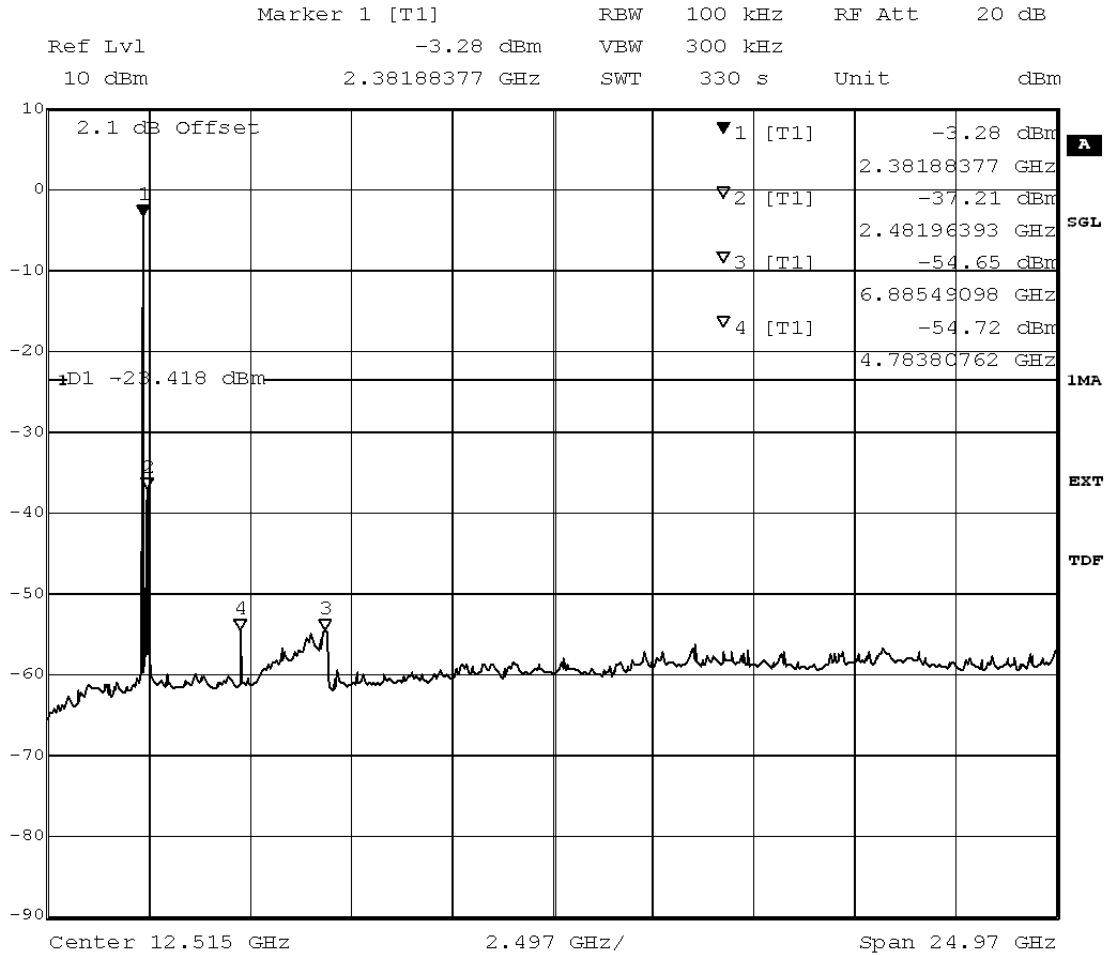

Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 15:21:45

added by operator




Test: 15c.5; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/27 18:32
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Marker 1 [T1]	REW	100 kHz	RF Att	20 dB
Ref Lvl	-2.63 dBm	VBW	300 kHz	
10 dBm	2.38188377 GHz	SWT	330 s	Unit dBm

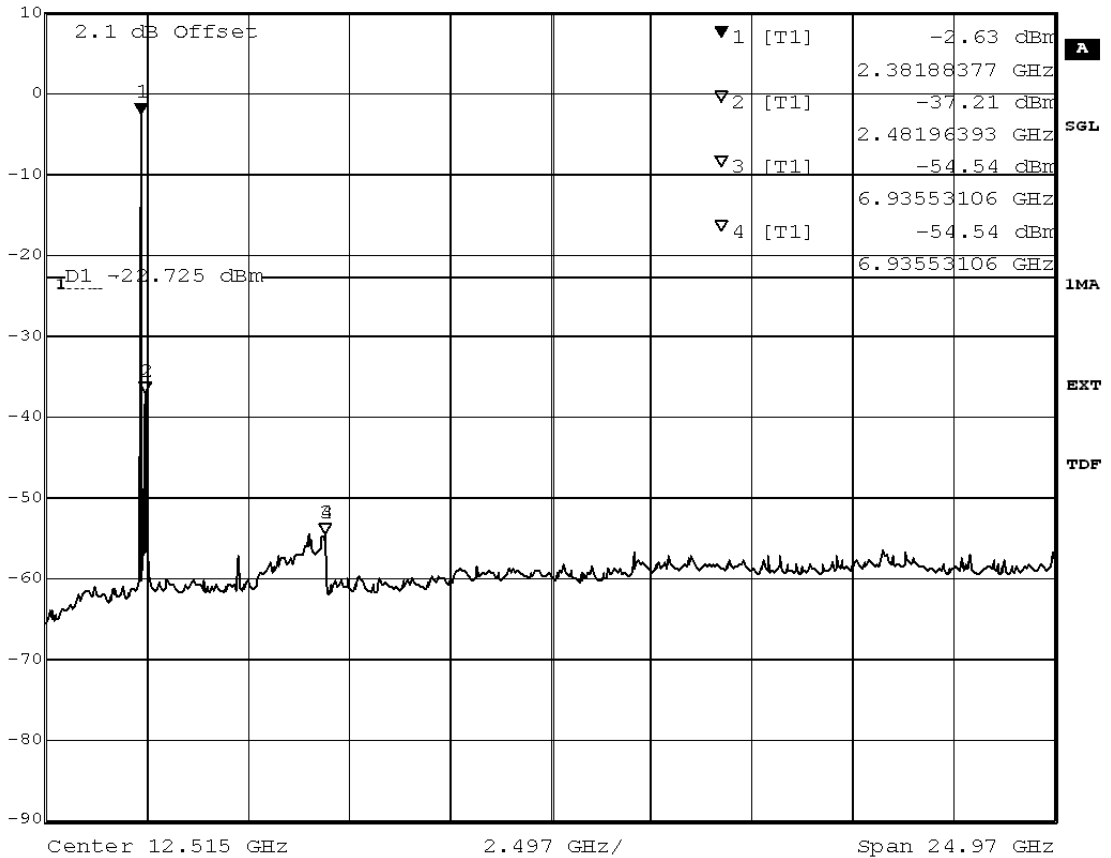

Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 16:22:03


added by operator

Test: 15c.5; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/27 19:04
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

	Marker 1 [T1]	RBW	100 kHz	RF Att	20 dB
Ref Lvl	-2.61 dBm	VBW	300 kHz		
10 dBm	2.38188377 GHz	SWT	330 s	Unit	dBm

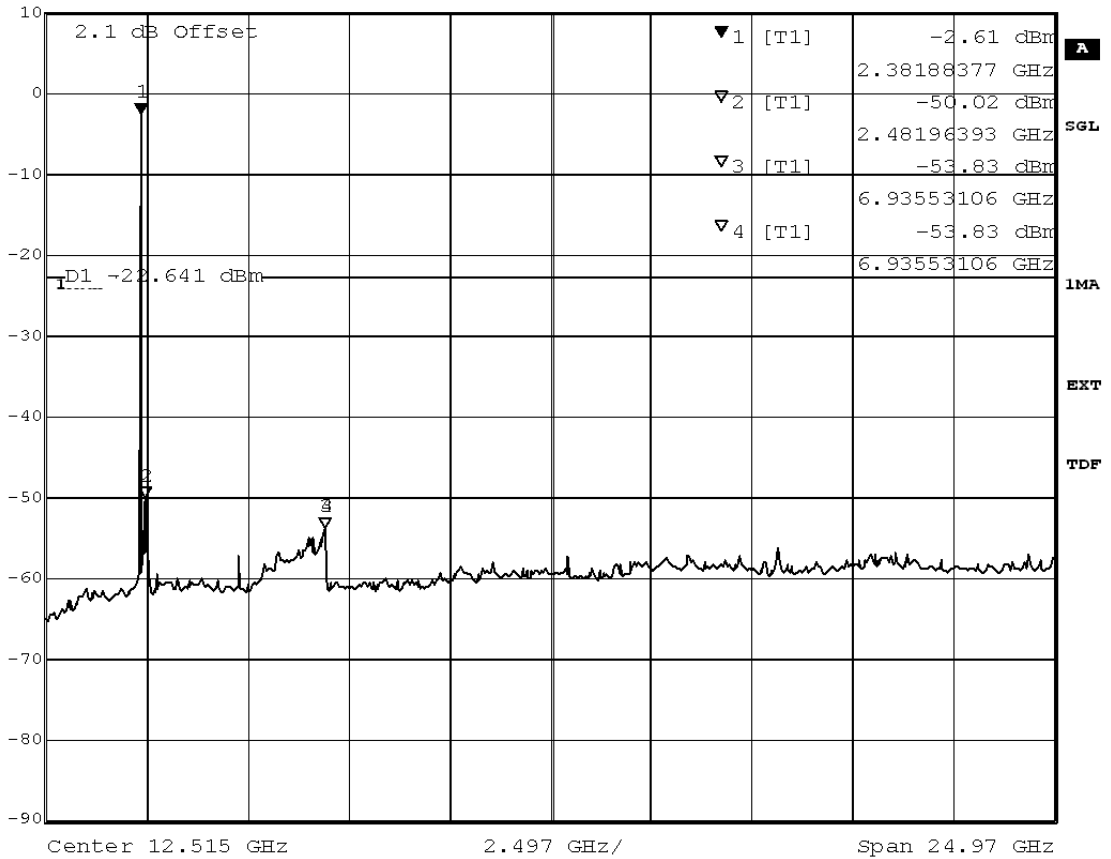

Title: spurious emissions
 Comment A: CH B: 2402 MHz
 Date: 27.JUN.2012 18:40:00

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation


<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:27
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		-1.60		

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -1.69 dBm VBW 300 kHz
 10 dBm 2.44100000 GHz SWT 5 ms Unit dBm

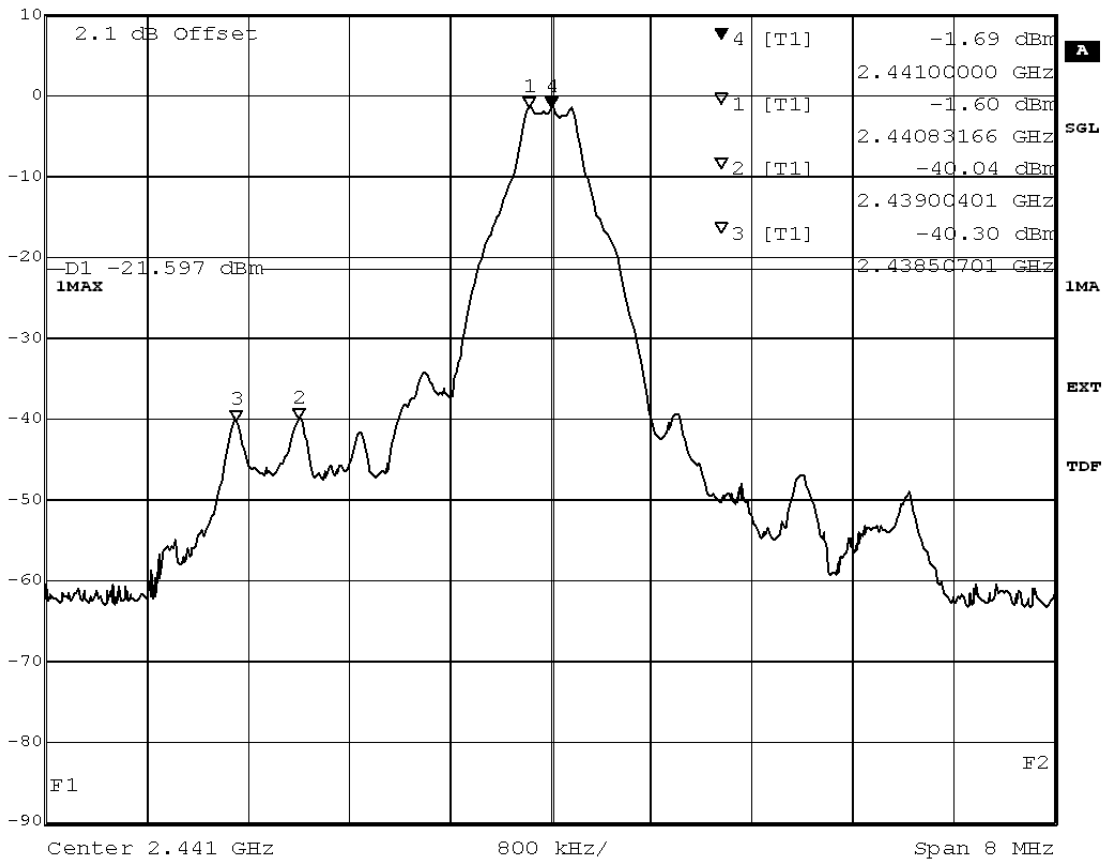


Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 26.JUN.2012 15:28:30

added by operator



Reference: MDE_PARRO_1222_FCCe

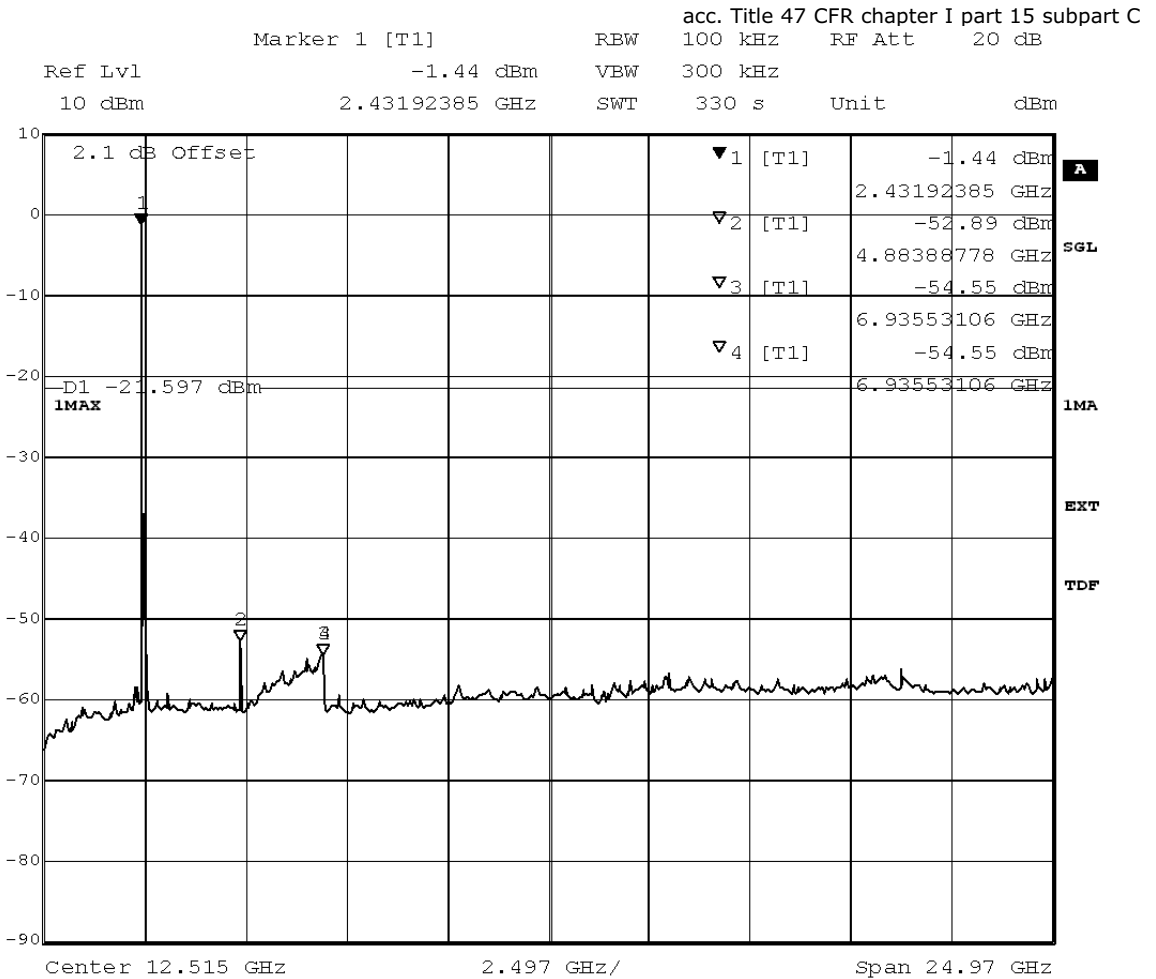

Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 26.JUN.2012 15:40:27

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation


Result: Passed
Setup No.: A01
Date of Test: 2012/06/27 18:36
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		-1.27		

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -1.27 dBm VBW 300 kHz
 10 dBm 2.44100000 GHz SWT 5 ms Unit dBm

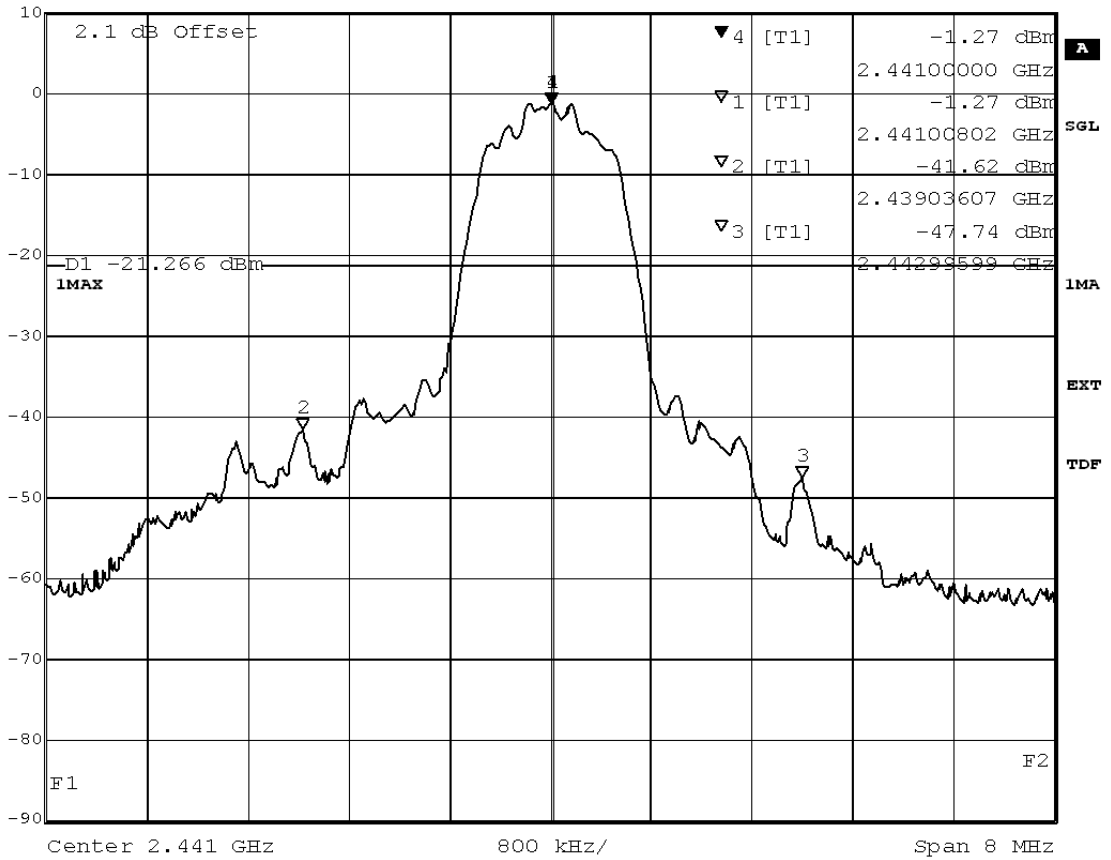


Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 27.JUN.2012 16:59:04

added by operator



Reference: MDE_PARRO_1222_FCCe

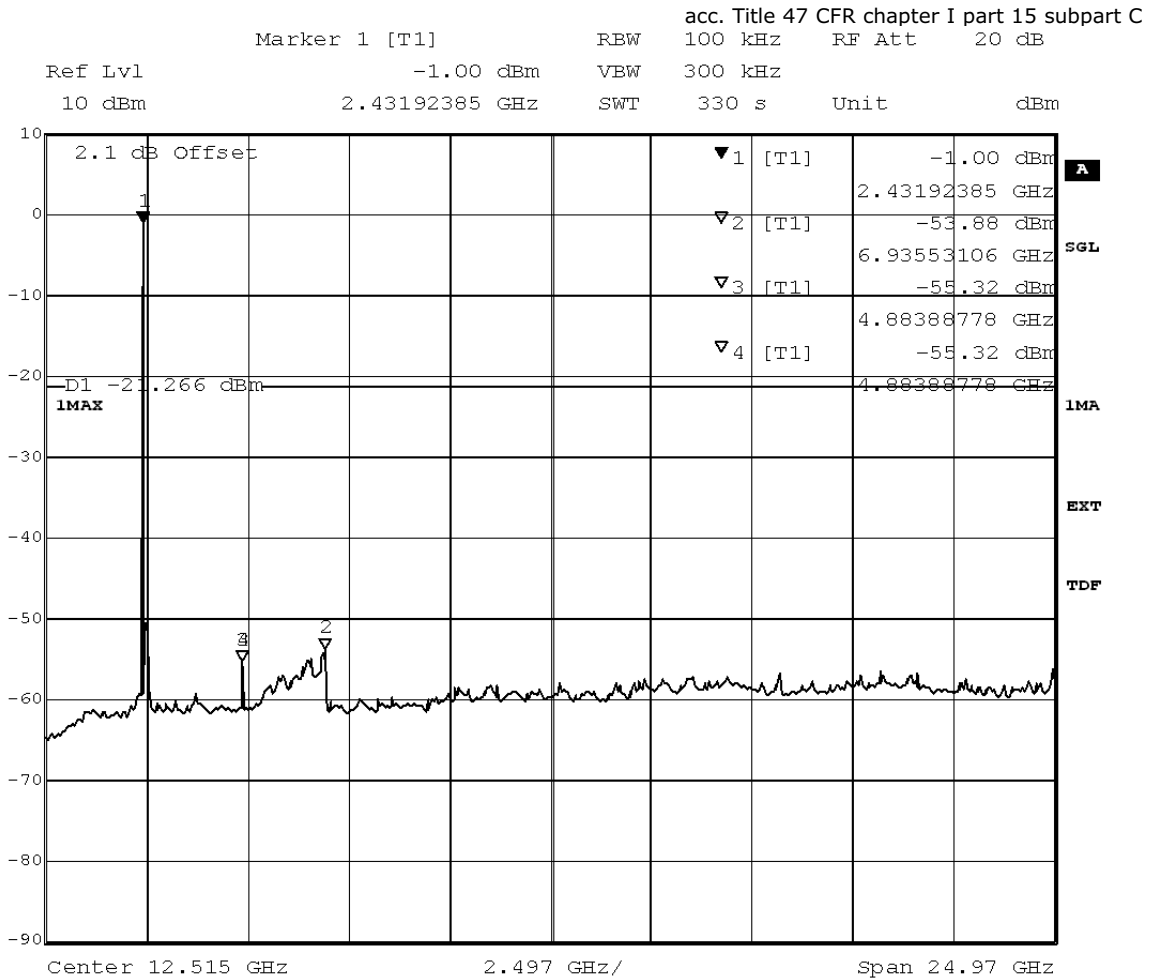

Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 27.JUN.2012 17:11:02

added by operator

Test: 15c.5; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2012/06/27 19:21
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15




Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2441		-1.28		

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -1.35 dBm VBW 300 kHz
 10 dBm 2.44100000 GHz SWT 5 ms Unit dBm

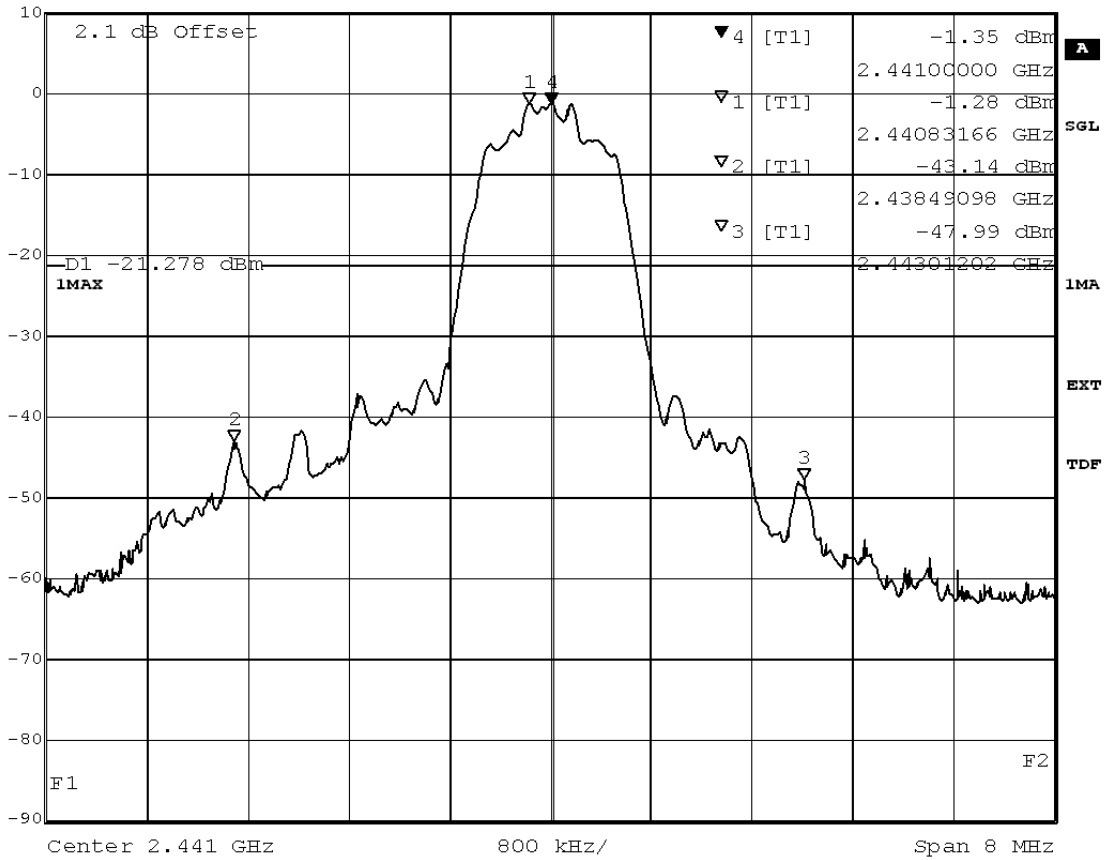


Title: Band Edge Compliance
 Comment A: CH M: 2441 MHz
 Date: 27.JUN.2012 18:45:28

added by operator



Reference: MDE_PARRO_1222_FCCe

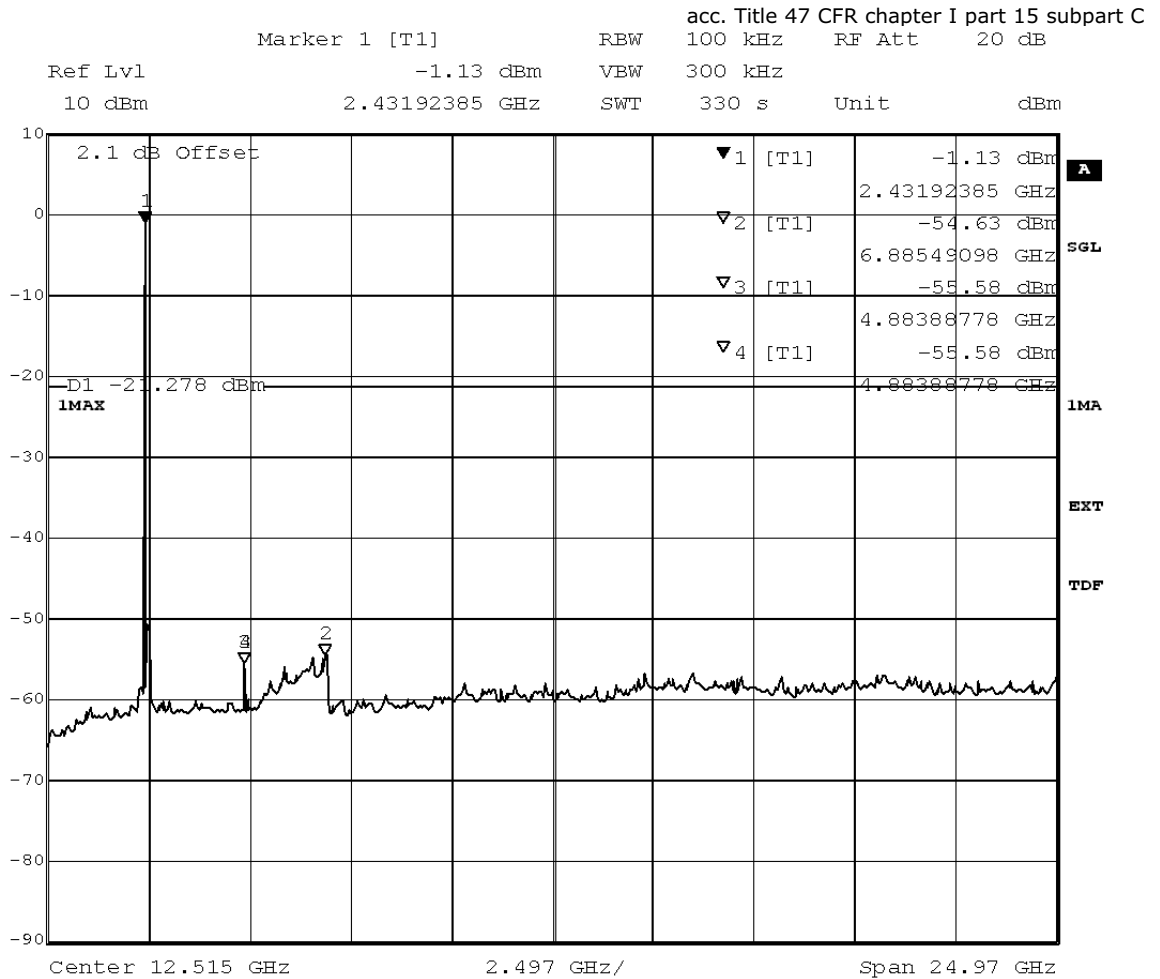

Title: spurious emissions
 Comment A: CH M: 2441 MHz
 Date: 27.JUN.2012 18:57:25

added by operator


Test: 15c.5; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2012/06/27 18:27
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15



Detailed Results:

	Marker 1 [T1]	RBW	100 kHz	RF Att	20 dB
Ref Lvl	-0.93 dBm	VBW	300 kHz		
10 dBm	2.48196393 GHz	SWT	330 s	Unit	dBm

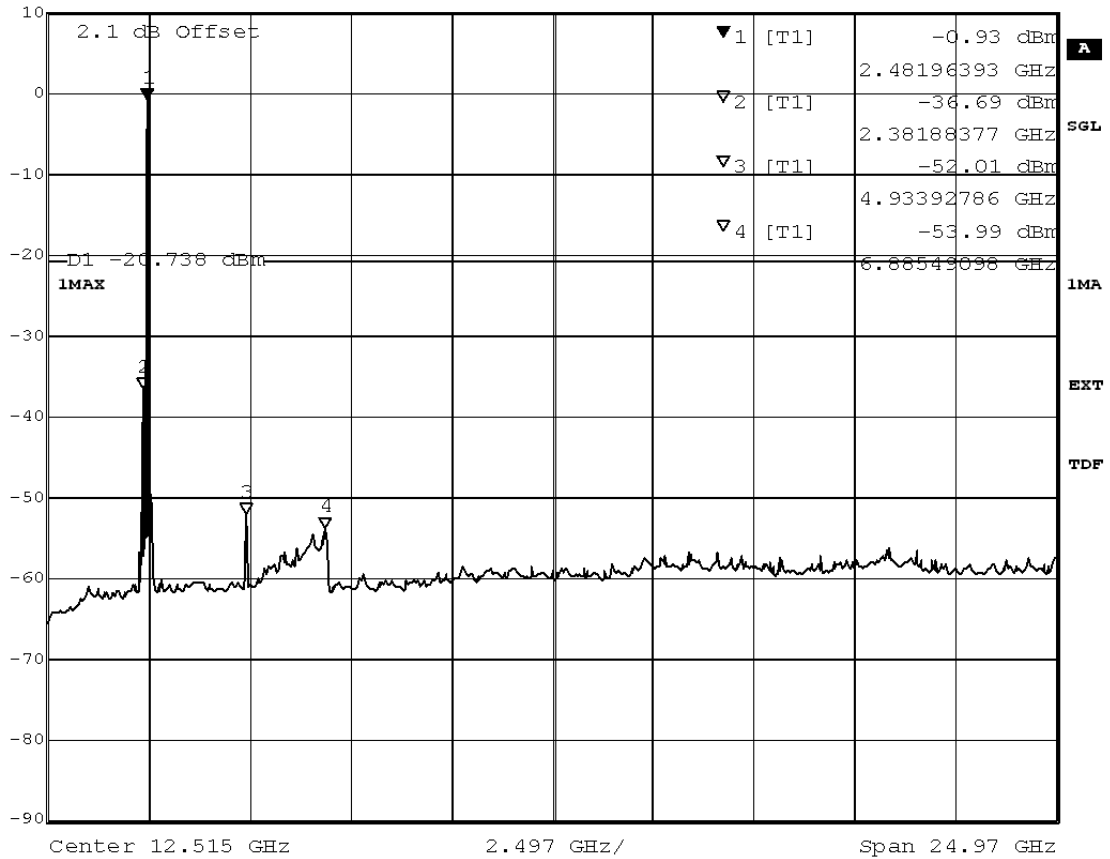

Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 26.JUN.2012 15:57:30


added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result:	Passed
Setup No.:	A01
Date of Test:	2012/06/27 18:38
Body:	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification:	FCC part 2 and 15

Detailed Results:

	Marker 1 [T1]	RBW	100 kHz	RF Att	20 dB
Ref Lvl	-0.49 dBm	VBW	300 kHz		
10 dBm	2.48196393 GHz	SWT	330 s	Unit	dBm

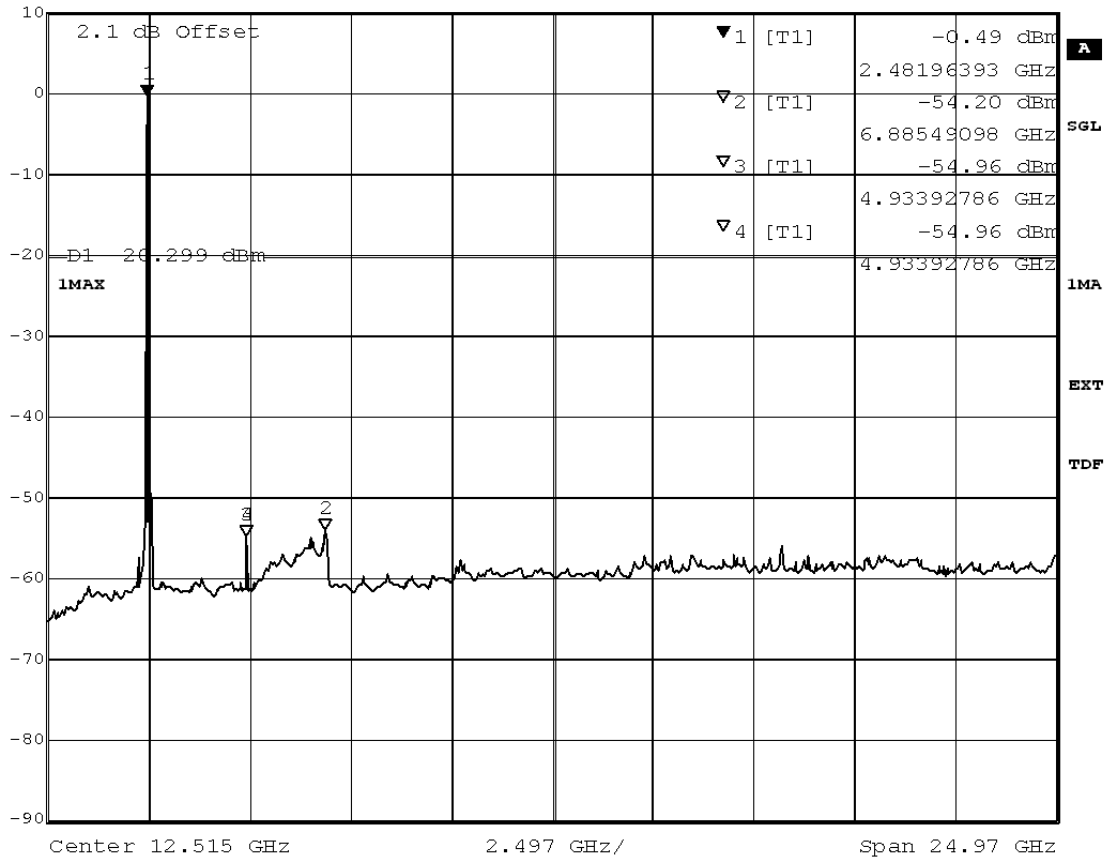

Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 27.JUN.2012 17:30:39


added by operator

Test: 15c.5; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 19:41
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Marker 1 [T1]	RBW	100 kHz	RF Att	20 dB
Ref Lvl	-0.32 dBm	VBW	300 kHz	
10 dBm	2.48196393 GHz	SWT	330 s	Unit dBm

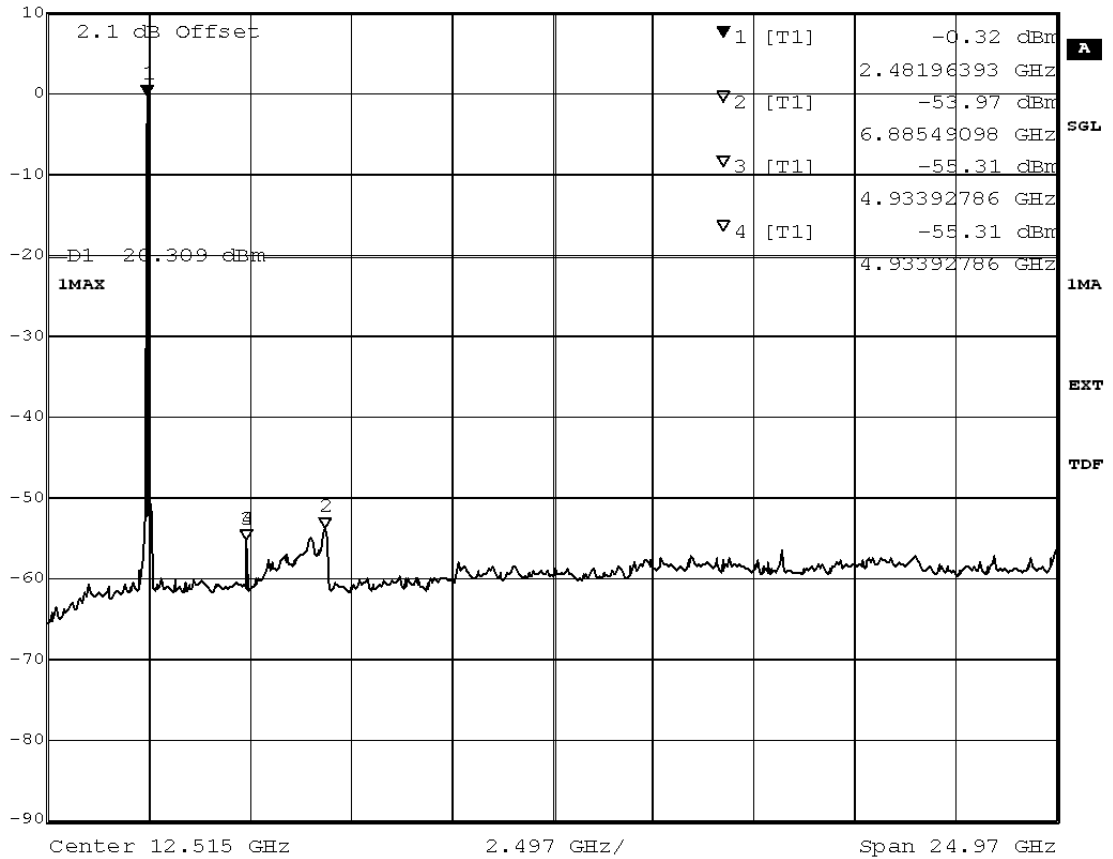

Title: spurious emissions
 Comment A: CH T: 2480 MHz
 Date: 27.JUN.2012 19:14:25

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

3.6.6 15c.6 Band edge compliance §15.247 (d)

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:22
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-53.79	-3.42	-23.42	30.37

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -53.79 dBm VBW 300 kHz
 10 dBm 2.40000000 GHz SWT 5 ms Unit dBm

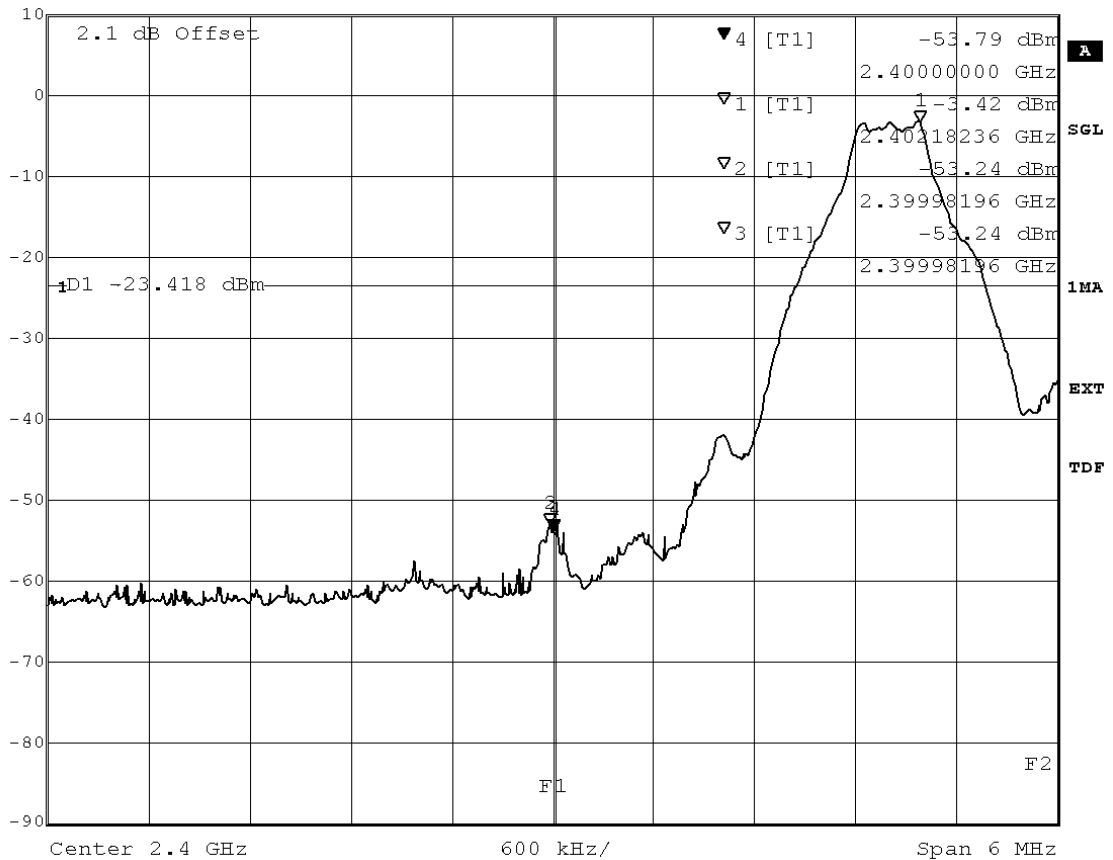

Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 15:09:46

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/27 18:32
 Body: FCC47CFRChPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15




Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-43.38	-2.72	-22.72	20.66

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -43.38 dBm VBW 300 kHz
 10 dBm 2.40000000 GHz SWT 5 ms Unit dBm

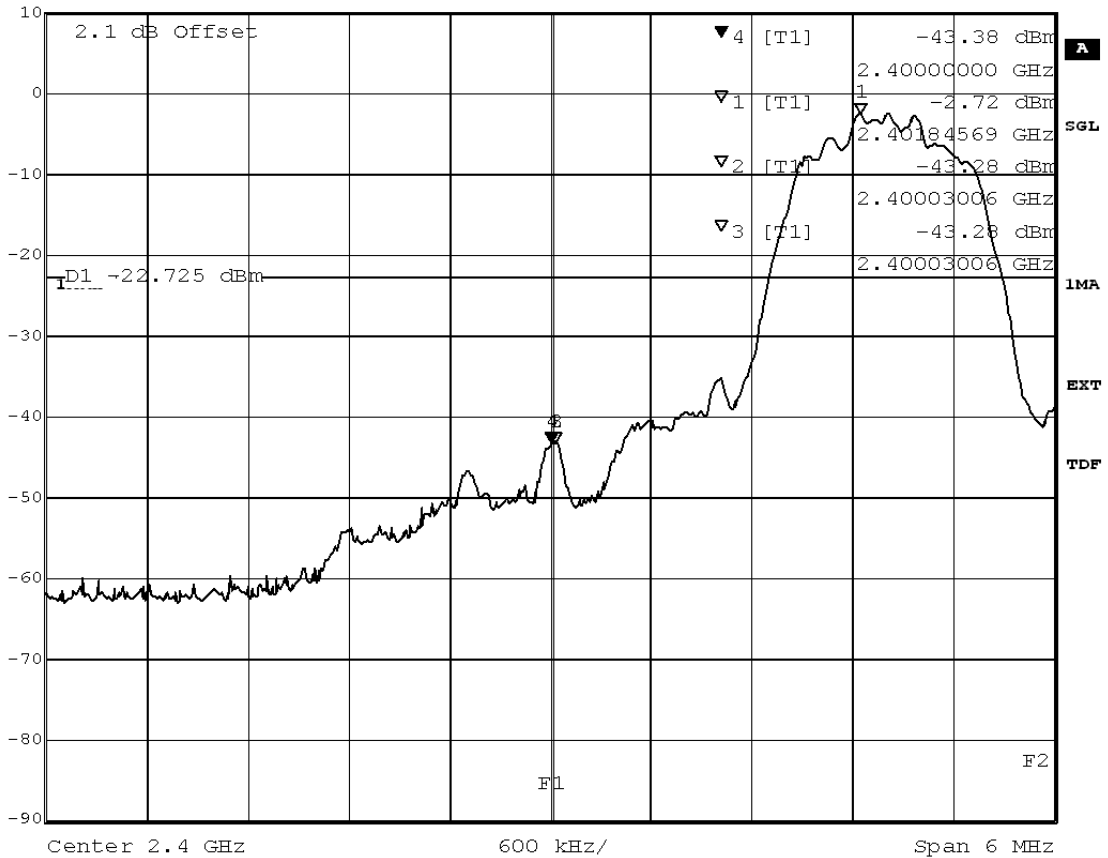

Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 16:10:06

added by operator

Test: 15c.6; Frequency = 2402, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted


Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/27 19:04
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15

Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-43.31	-2.64	-22.64	20.67

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -43.31 dBm VBW 300 kHz
 10 dBm 2.40000000 GHz SWT 5 ms Unit dBm

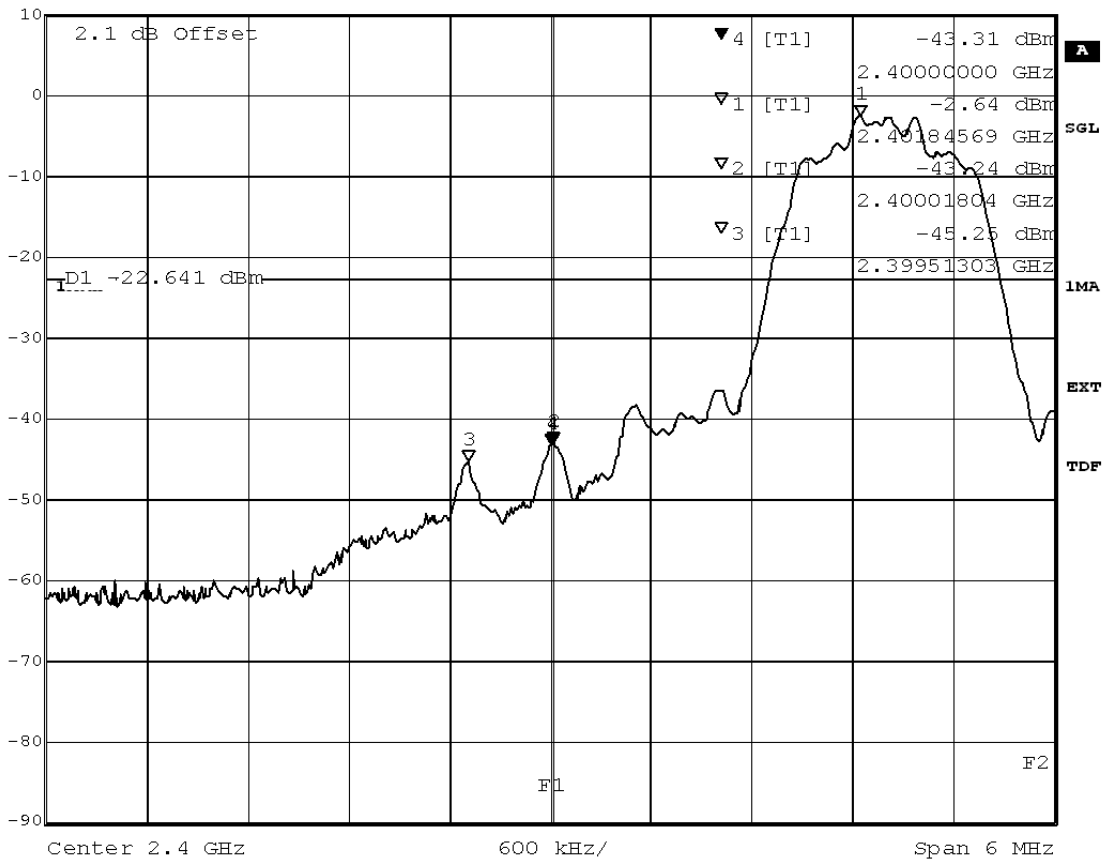

Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 27.JUN.2012 18:28:03

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = conducted

Result: Passed
 Setup No.: A01
 Date of Test: 2012/06/27 18:29
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15




Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2400	-53.79	-3.42	-23.42	30.37

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -53.79 dBm VBW 300 kHz
 10 dBm 2.40000000 GHz SWT 5 ms Unit dBm

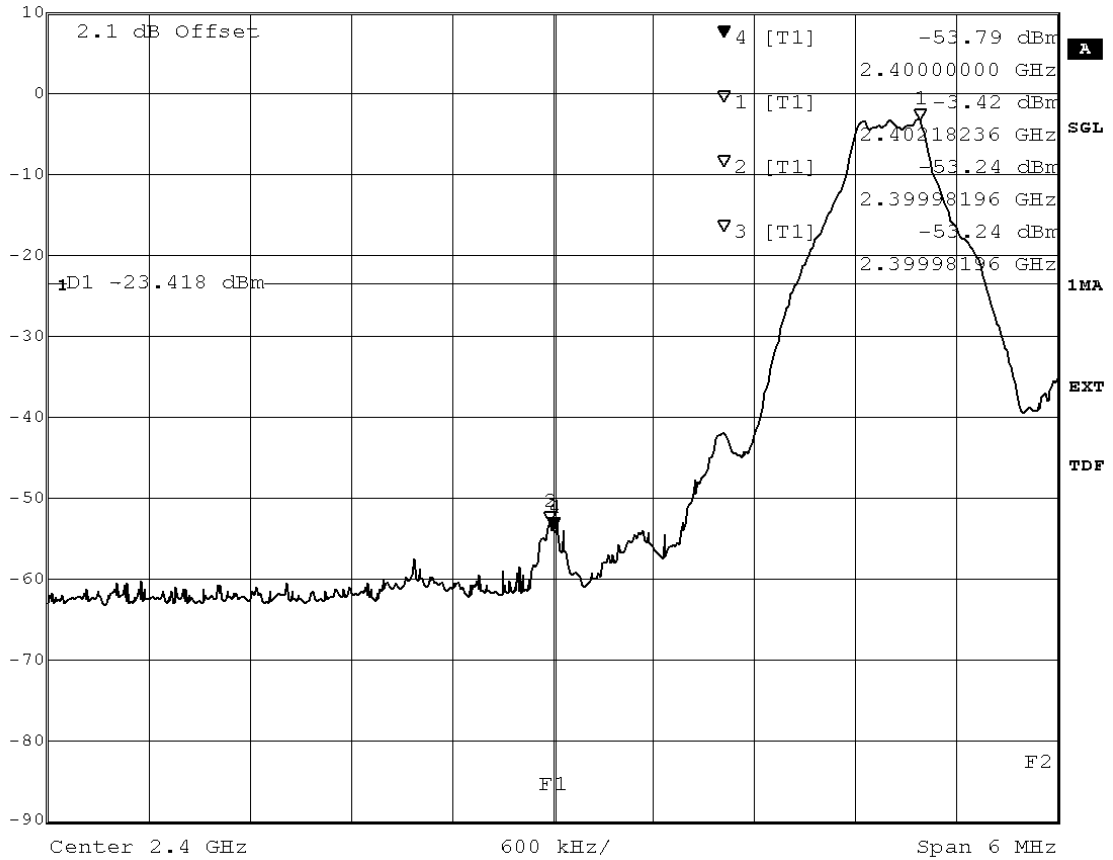

Title: Band Edge Compliance
 Comment A: CH B: 2402 MHz
 Date: 26.JUN.2012 15:09:46

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:41
 Body: FCC47CFRChPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15



Detailed Results:

TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	53.33	38.69	20.67	15.31	Passed

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = conducted

Result: Passed

Setup No.: A01

Date of Test: 2012/06/27 18:38

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15




Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-62.36	-0.30	-20.30	42.06

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -62.36 dBm VBW 300 kHz
 10 dBm 2.48350000 GHz SWT 5 ms Unit dBm

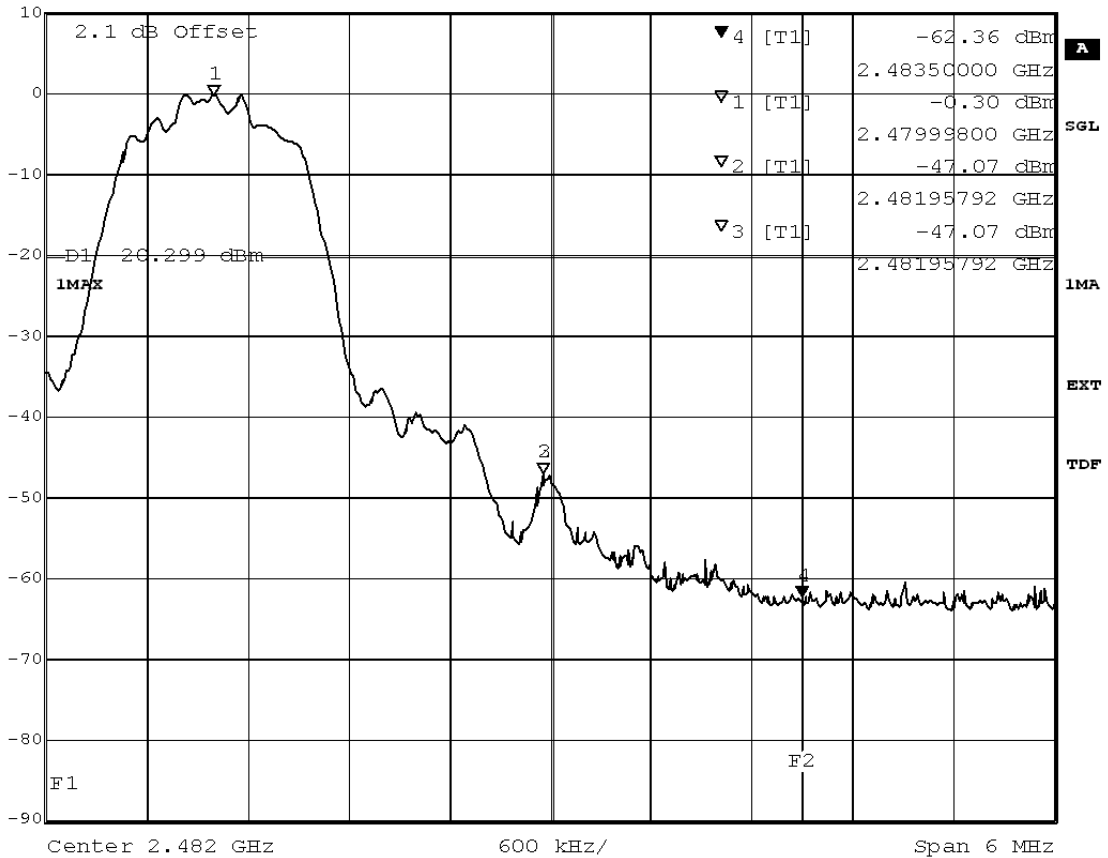

Title: Band Edge Compliance
 Comment A: CH T: 2480 MHz
 Date: 27.JUN.2012 17:18:43

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:41
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15



Detailed Results:

TX on	Ant. Polar.	Limit PK [dBµV]	Limit AV [dBµV]	Frequency [MHz]	Corrected value PK [dBµV]	Corrected value AV [dBµV]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	57.62	38.87	16.38	15.13	Passed

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = conducted

Result: Passed
Setup No.: A01
Date of Test: 2012/06/27 19:41
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15




Detailed Results:

Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
2484	-60.89	-0.31	-20.31	40.58

added by operator

Marker 4 [T1] RBW 100 kHz RF Att 20 dB
 Ref Lvl -60.89 dBm VBW 300 kHz
 10 dBm 2.48350000 GHz SWT 5 ms Unit dBm

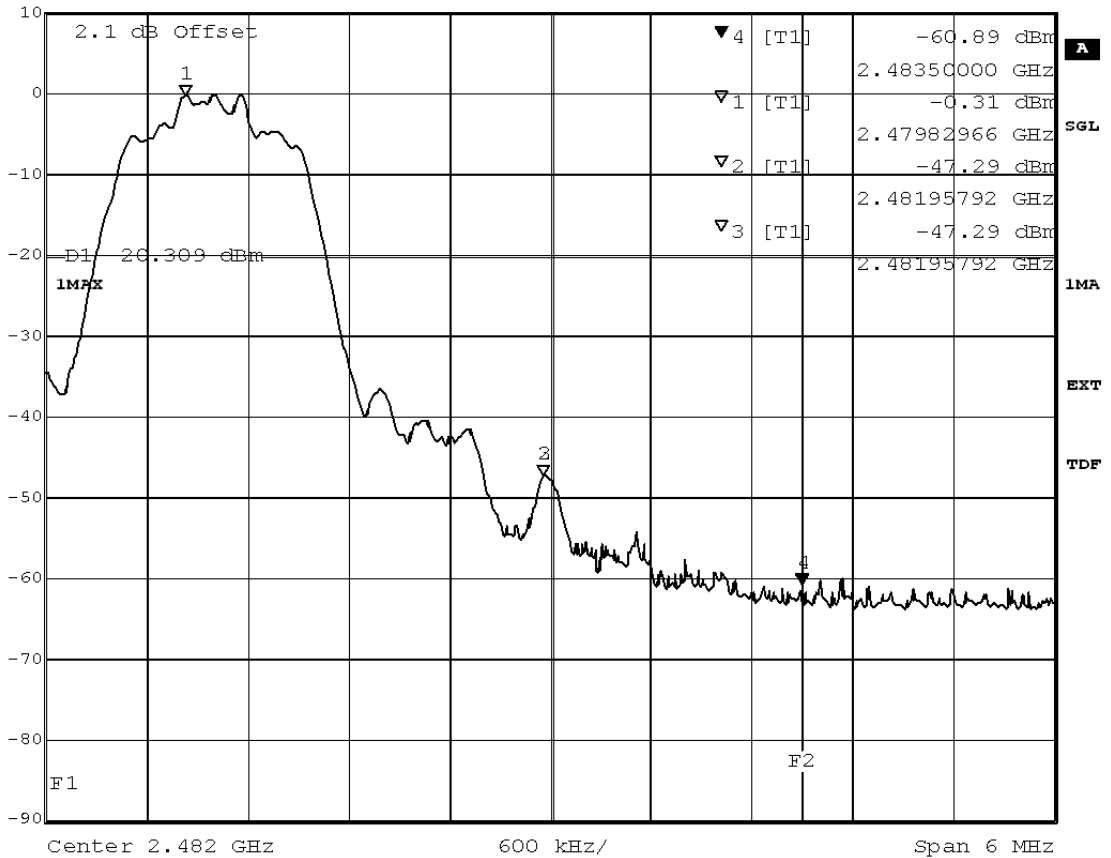

Title: Band Edge Compliance
 Comment A: CH T: 2480 MHz
 Date: 27.JUN.2012 19:02:27

added by operator

Test: 15c.6; Frequency = 2480, Mode = BT transmit using 3 Mbps with 8DPSK modulation, Method = radiated

Result: Passed
 Setup No.: B01
 Date of Test: 2012/06/20 13:42
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
 Test Specification: FCC part 2 and 15



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

Detailed Results:

TX on	Ant. Polar.	Limit PK [dB μ V]	Limit AV [dB μ V]	Frequency [MHz]	Corrected value PK [dB μ V]	Corrected value AV [dB μ V]	Margin PK [dB]	Margin AV [dB]	Result
2480 MHz	Ver + Hor	74	54	2483.5	57.50	38.09	16.50	15.91	Passed



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

3.6.7 15c.7 Dwell time §15.247 (a) (1) (iii)

Test: 15c.7; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:41
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15




Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.91	time slot length * 1600/5 /79 * 31.6	371.94

added by operator

Marker 1 [T1 ndB] RBW 1 MHz RF Att 20 dB
 Ref Lvl ndB 6.00 dB VBW 1 MHz
 10 dBm BW 2.905812 ms SWT 10 ms Unit dBm

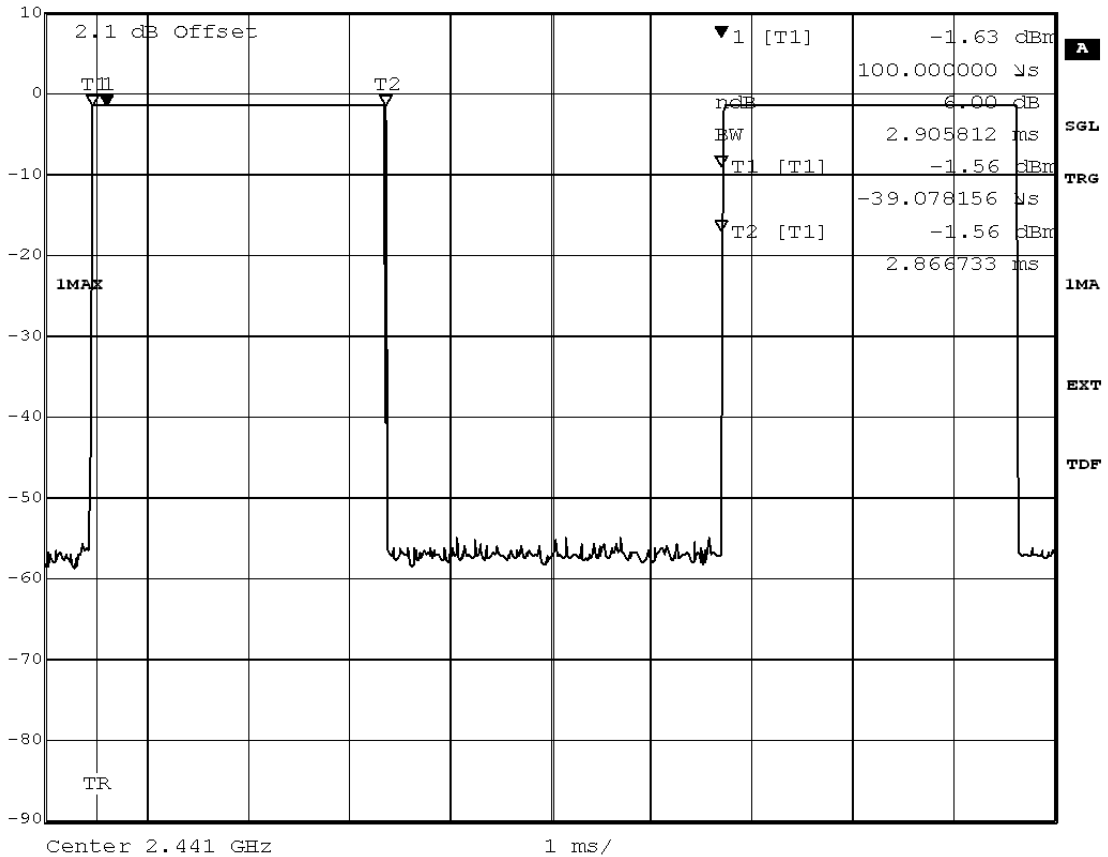

Title: Dwell time
 Comment A: CH M: 2441 MHz
 Date: 26.JUN.2012 16:03:19

added by operator

Test: 15c.7; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/28 7:50

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15



Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.93	time slot length * 1600/5 /79 * 31.6	374.51

added by operator

Test: 15c.7; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/28 7:50

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15

Detailed Results:

Packet type	Time slot length	Dwell time	Dwell time ms
DH5	2.93	time slot length * 1600/5 /79 * 31.6	374.51

added by operator



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C


3.6.8 15c.8 Channel separation §15.247 (a) (1)

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:30
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15

Detailed Results:

Channel separation / MHz
1.000

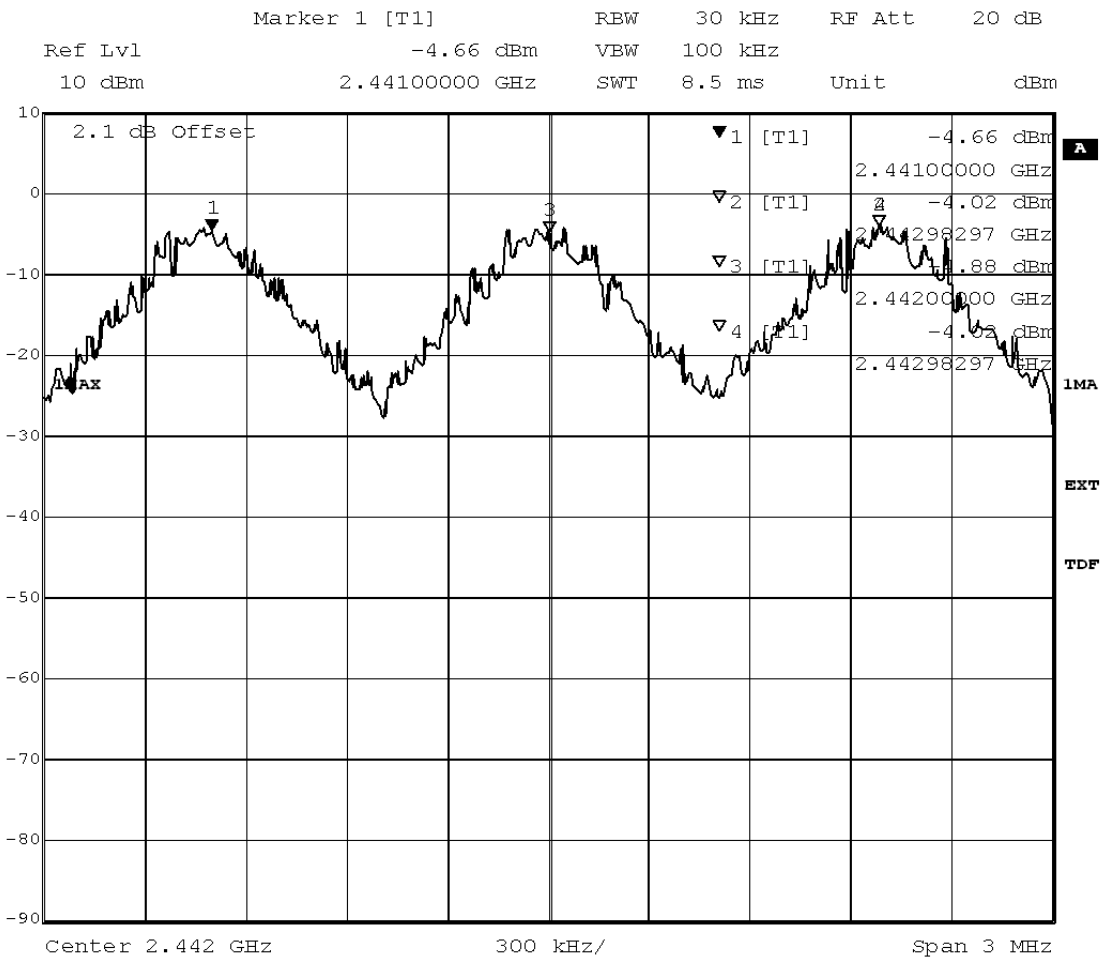

Title: Channel separation
 Comment A: CH H: Hopping
 Date: 26.JUN.2012 16:06:42

added by operator

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/27 18:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15



Detailed Results:

Channel separation / MHz
1.000

Test: 15c.8; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2012/06/27 19:51
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Channel separation / MHz
1.000



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

3.6.9 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)


Test: 15c.9; Frequency = 2441, Mode = BT transmit using 1 Mbps with GFSK modulation

<i>Result:</i>	Passed
<i>Setup No.:</i>	A01
<i>Date of Test:</i>	2012/06/27 18:30
<i>Body:</i>	FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
<i>Test Specification:</i>	FCC part 2 and 15



Detailed Results:

Number of Hopping Frequencies
79

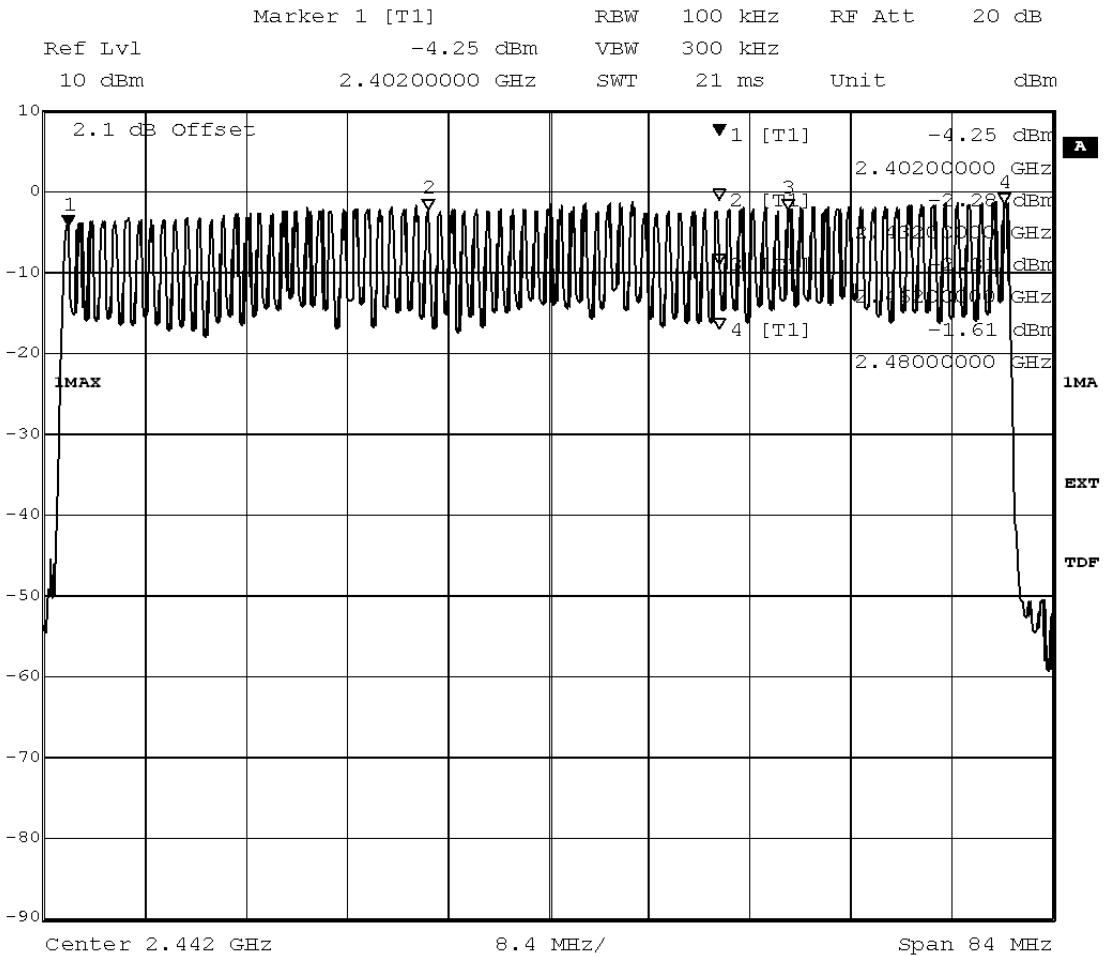

Title: Number of hopping frequencies
 Comment A: CH H: Hopping
 Date: 26.JUN.2012 16:08:29

added by operator

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation

Result: Passed

Setup No.: A01

Date of Test: 2012/06/27 18:44

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15



Detailed Results:

Number of Hopping Frequencies
79

Test: 15c.9; Frequency = 2441, Mode = BT transmit using 3 Mbps with 8DPSK modulation

Result: Passed
Setup No.: A01
Date of Test: 2012/06/27 19:56
Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES
Test Specification: FCC part 2 and 15

Detailed Results:

Number of Hopping Frequencies
79

4 Test Equipment Details

4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 2
Manufacturer:	Frankonia
Description:	Anechoic Chamber for radiated testing
Type:	10.58x6.38x6.00 m ³

Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	FCC listing 96716 3m Part15/18		2011/01/11 2014/01/10
	IC listing 3699A-1 3m		2011/02/07 2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Conducted emissions

Lab ID:	Lab 1
Manufacturer:	Rohde & Schwarz GmbH & Co.KG
Description:	EMI Conducted Auxiliary Equipment

Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Path Calibration		2011/11/11 2012/11/10
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	DKD calibration		2011/01/20 2013/01/19



Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/10/27 2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01- 2+W38.01-2	Kabel Kusch
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02- 2+W38.02-2	Rosenberger Micro-Coax
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2012/05/24 2012/11/23
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
	Path Calibration		2012/05/24 2012/11/23
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/3790709	Maturo GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 2
<i>Manufacturer:</i>	see single devices
<i>Description:</i>	Single Devices for various Test Equipment
<i>Type:</i>	various
<i>Serial Number:</i>	none

Single Devices for Auxiliary Test Equipment

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Customized calibration		2011/10/19 2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG



Test Equipment Digital Signalling Devices

Lab ID: Lab 1, Lab 2
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration		2012/01/26 2014/01/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware: V.2.01.25		2012/05/07 2012/07/03
	3G : KC42x 11.48.02		
	LTE: KC501 1.6.5 up to 1.9.8		
	KC503 1.6.5 up to 1.9.8		
	KC506 1.9.8		
	KC507 1.7.0		
KC508 1.8.5 up to 1.9.8			
KC551 1.4.1 up to 1.9.8			
KC553 1.5.5 up to 1.9.8			
KC571 1.8.5 up to 1.9.8			
KC572 1.8.5 up to 1.9.8			

Firmware: V.2.01.25		2012/07/03	
3G : KC42x 11.48.02, 12.16.00			
LTE: KC501 1.7.0 up to 2.0.0			
KC503 1.7.2 up to 2.0.0			
KC506 1.9.8 up to 2.0.0			
KC507 1.7.0			
KC508 1.8.5 up to 2.0.0			
KC551 1.4.9 up to 2.0.0			
KC553 1.7.0 up to 2.0.0			
KC556 2.0.0			
KC571 1.8.5 up to 2.0.0			
KC572 1.8.5 up to 2.0.0			

Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/05/26 2013/05/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
Hardware:			2007/07/16
B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04			
Software:			
K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22			
Firmware:			
µP1 8v50 02.05.06			

Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>	



Single Devices for Digital Signalling Devices (continued)

Single Device Name	Type	Serial Number	Manufacturer
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: µP1 8v40 01.12.05 ---		
	SW: K62, K69		2008/11/03

Test Equipment Emission measurement devices

Lab ID: Lab 1, Lab 2
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/05/22 2013/05/21
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard calibration		2012/05/21 2013/05/20
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2011/12/05 2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

Test Equipment Multimeter 12

Lab ID: Lab 3
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Customized calibration		2011/10/18 2013/10/17



Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 3
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/07/23 2013/07/22
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2012/07/23 2013/07/22
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2011/06/15 2013/06/14
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2011/08/17 2012/08/16
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution Next Exec.</i>
	Standard Calibration		2010/06/23 2013/06/20

Test Equipment Shielded Room 02

Lab ID: Lab 1
Manufacturer: Frankonia
Description: Shielded Room for conducted testing
Type: 12 qm
Serial Number: none

Test Equipment Shielded Room 07

Lab ID: Lab 3
Description: Shielded Room 4m x 6m



Test Equipment T/H Logger 04

Lab ID: Lab 3
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH

Test Equipment Temperature Chamber 01

Lab ID: Lab 3
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2012/03/12 2014/03/11



Reference: MDE_PARRO_1222_FCCe

acc. Title 47 CFR chapter I part 15 subpart C

5 Annex

5.1 Additional Information for Report



Summary of Test Results

The EUT complied with all performed tests as listed in the summary section of this report.

Technical Report Summary

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C - Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

Conducted emissions (AC power line)

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

acc. Title 47 CFR chapter I part 15 subpart C

The test set-up was made in accordance to the general provisions of ANSI C 63.4.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 μ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB μ V)	AV Limit (dB μ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB μ V) = 20 log (Limit (μ V)/1 μ V).

Occupied bandwidth

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.

The EUT was connected to the spectrum analyzer via a short coax cable.

Test Requirements / Limits**FCC Part 15, Subpart C, §15.247 (a) (1)**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW = $1.0 \text{ MHz} / 2/3 = 1.5 \text{ MHz}$
2. If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = $10 \log (\text{Output power (W)} / 1\text{mW})$

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

Peak power output

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Test Requirements / Limits**FCC Part 15, Subpart C, §15.247 (b) (1)**

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = $10 \log (\text{Limit (W)}/1\text{mW})$
==> Maximum Output Power: 30 dBm

Spurious RF conducted emissions

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz

acc. Title 47 CFR chapter I part 15 subpart C

- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

Spurious radiated emissions

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30-1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s (BT Timing 1.25 ms)
- Turntable angle range: -180 to +180°

acc. Title 47 CFR chapter I part 15 subpart C

- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to +180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/-22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/-25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit(dBμV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBμV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBμV/m)+10dB
1.705 - 30	30	30	Limit (dBμV/m)+10dB

Frequency in MHz	Limit (μV/m)	Measurement distance (m)	Limit (dBμV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m)}$

Band edge compliance

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the

acc. Title 47 CFR chapter I part 15 subpart C
desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...
Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

Dwell time

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

with:

- hop rate = $1600 * 1/s$ for DH1 packets = 1600 s⁻¹
- hop rate = $1600/3 * 1/s$ for DH3 packets = 533.33 s⁻¹
- hop rate = $1600/5 * 1/s$ for DH5 packets = 320 s⁻¹
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

Channel separation

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

Test Requirements / Limits



FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Number of hopping frequencies

Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent from the modulation pattern. The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

 FCC and IC Correlation of measurement requirements

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.


Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen: 6;RSS-210: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen: 6;RSS-210: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Antenna requirement	§ 15.203 / 15.204	RSS-Gen: 7.1.2

Digital Apparatus:

Measurement	FCC reference	IC reference
Conducted Emissions(AC Power Line)	§15.107	ICES-003
Spurious Radiated Emissions	§15.109	ICES-003

Setup Drawings

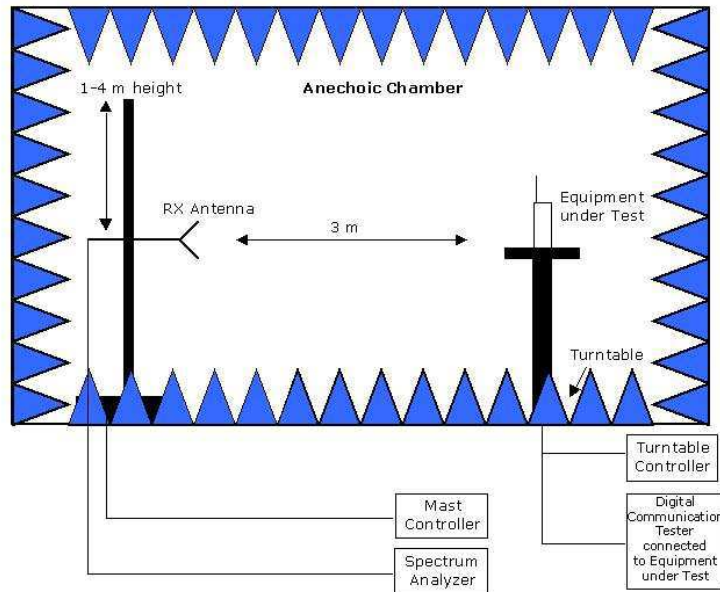

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:
Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces



6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	3
2.1	General OUT Description	3
2.2	Detailed Description of OUT Samples	4
2.3	OUT Features	5
2.4	Auxiliary Equipment	5
2.5	Setups used for Testing	6
3	Results	6
3.1	General	6
3.2	List of the Applicable Body	7
3.3	List of Test Specification	7
3.4	Summary	8
3.5	Detailed Footnotes	10
3.6	Detailed Results	11
3.6.1	15c.1 Conducted emissions (AC power line) §15.207	11
3.6.2	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	13
3.6.3	15c.3 Occupied bandwidth §15.247 (a) (1)	18
3.6.4	15c.4 Peak power output §15.247 (b) (1)	36
3.6.5	15c.5 Spurious RF conducted emissions §15.247 (d)	54
3.6.6	15c.6 Band edge compliance §15.247 (d)	66
3.6.7	15c.7 Dwell time §15.247 (a) (1) (iii)	76
3.6.8	15c.8 Channel separation §15.247 (a) (1)	79
3.6.9	15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)	82



Reference: MDE_PARRO_1222_FCCe

4 Test Equipment Details	acc. Title 47 CFR chapter I part 15 subpart C 85
4.1 List of Used Test Equipment	85
5 Annex	92
5.1 Additional Information for Report	92
6 Index	102
