

FCC - TEST REPORT

Report Number : **708882048310-00** Date of Issue: December 23, 2020Model : K218Product Type : Car Radio with BT ModuleFCC ID : **RQ9GMK218**Applicant : Yanfeng Visteon Automotive Electronics Co.,LtdAddress : 300 Minolta Road Songjiang County Shanghai, ChinaProduction Facility : Yanfeng Visteon Automotive Electronics Co.,LtdAddress : 300 Minolta Road Songjiang County Shanghai, ChinaTest Result : **Positive** **Negative**Total pages including
Appendices : 64

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

| | | |
|-----|---|----|
| 1 | Table of Contents..... | 2 |
| 2 | Details about the Test Laboratory..... | 3 |
| 3 | Description of the Equipment Under Test..... | 4 |
| 4 | Summary of Test Standards..... | 5 |
| 5 | Summary of Test Results..... | 6 |
| 6 | General Remarks..... | 7 |
| 7 | Test Setups..... | 8 |
| 8 | Systems test configuration..... | 10 |
| 9 | Technical Requirement..... | 11 |
| 9.1 | Conducted peak output power..... | 11 |
| 9.2 | 20 dB bandwidth..... | 17 |
| 9.3 | Carrier Frequency Separation..... | 22 |
| 9.4 | Number of hopping frequencies..... | 24 |
| 9.5 | Dwell Time..... | 25 |
| 9.6 | Spurious RF conducted emissions..... | 28 |
| 9.7 | Band edge testing..... | 48 |
| 9.8 | Spurious radiated emissions for transmitter and receiver..... | 55 |
| 10 | Test Equipment List..... | 61 |
| 11 | System Measurement Uncertainty..... | 62 |
| 12 | Photographs of Test Set-ups..... | 63 |
| 13 | Photographs of EUT..... | 64 |



2 Details about the Test Laboratory

Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Test Firm FCC
Registration
Number: 820234

Test Firm IC
Registration
Number: 25988

Telephone: +86 21 6141 0123
Fax: +86 21 6140 8600

3 Description of the Equipment Under Test

| | |
|----------------------------|---|
| Product: | Car Radio with BT Module |
| Model no.: | K218 |
| FCC ID: | RQ9GMK218 |
| Options and accessories: | N/A |
| Rating: | 12VDC |
| Hardware Version: | D3 |
| Software Version: | 5.6.6.97 |
| RF Transmission Frequency: | 2402~2480MHz |
| No. of Operated Channel: | 79 |
| Channel list: | 00:2402MHz, 01:2403MHz, 02:2404MHz...39:2441MHz.... 77:2479MHz, 78:2480MHz |
| Channel space: | 1MHz |
| Modulation: | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Data Rate: | 1Mbps (GFSK), 2Mbps (Pi/4 DQPSK), 3Mbps (8DPSK) |
| Duty Cycle: | less than 100% |
| Antenna Type: | PCB |
| Antenna Gain: | -5dBi |
| Description of the EUT: | Car Radio with BT Module |
| Test sample no.: | SHA-537314-1 |

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment, antenna gain or any information supplied.



4 Summary of Test Standards

| Test Standards | |
|-----------------------|--|
| FCC Part 15 Subpart C | PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators |

All the test methods were according to Public Notice DA 00-705 -Frequency Hopper Spread Spectrum Test Procedure released by FCC on March 30, 2000 and C63.10 (2013).

5 Summary of Test Results

| Technical Requirements | | | | |
|--------------------------------|--|------------|-----------|----------------|
| FCC Part 15 Subpart C | | | | |
| Test Condition | | Pages | Test Site | Test Result |
| §15.207 | Conducted emission AC power port | --- | --- | Not Applicable |
| §15.247(b)(1) | Conducted peak output power | 11 | Site 1 | Pass |
| §15.247(a)(2) | 6dB bandwidth | --- | --- | N/A |
| §15.247(a)(1) | 20dB bandwidth | 17 | Site 1 | Pass |
| §15.247(a)(1) | Carrier frequency separation | 22 | Site 1 | Pass |
| §15.247(a)(1)(iii) | Number of hopping frequencies | 24 | Site 1 | Pass |
| §15.247(a)(1)(iii) | Dwell Time | 25 | Site 1 | Pass |
| §15.247(e) | Power spectral density* | --- | --- | N/A |
| §15.247(d) | Spurious RF conducted emissions | 28 | Site 1 | Pass |
| §15.247(d) | Band edge | 48 | Site 1 | Pass |
| §15.247(d) & §15.209 & §15.203 | Spurious radiated emissions for transmitter and receiver | 55 | Site 1 | Pass |
| §15.203 | Antenna requirement | See note 2 | | Pass |

Note 1: N/A=Not Applicable.

Power supply is by 12V DC Source, and the EUT Intended Environment is for Automotive, so Conducted emission AC power port is not evaluated.

Note 2: The EUT uses a patch antenna, which gain is -5dBi. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

6 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID: RQ9GMK218, complies with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C Rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: December 4, 2020

Testing Start Date: December 11, 2020


Testing End Date: December 22, 2020

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:

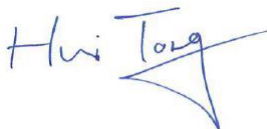

Hui TONG
Review Engineer



Jiayi XU
Project Engineer




Wenqiang LU
Test Engineer


7 Test Setups

7.1 Radiated test setups


9kHz ~ 30MHz Test Setup:

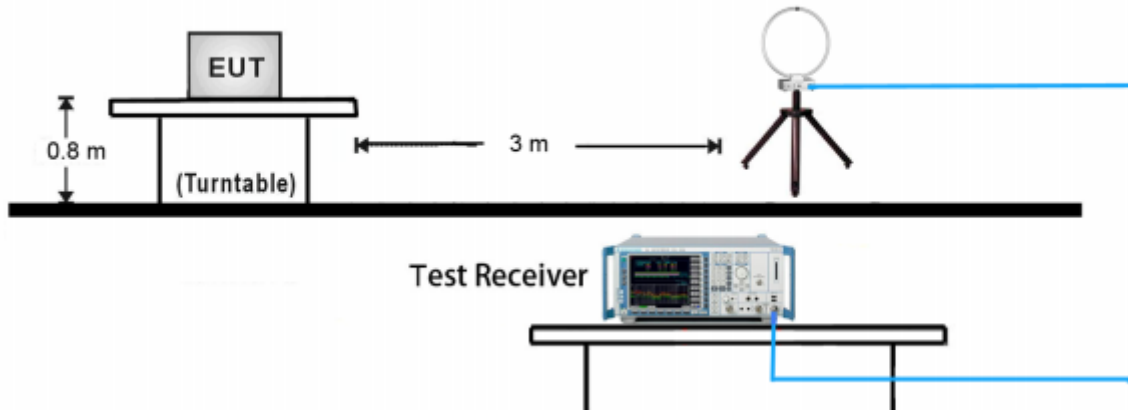


30MHz ~ 1GHz Test Setup:

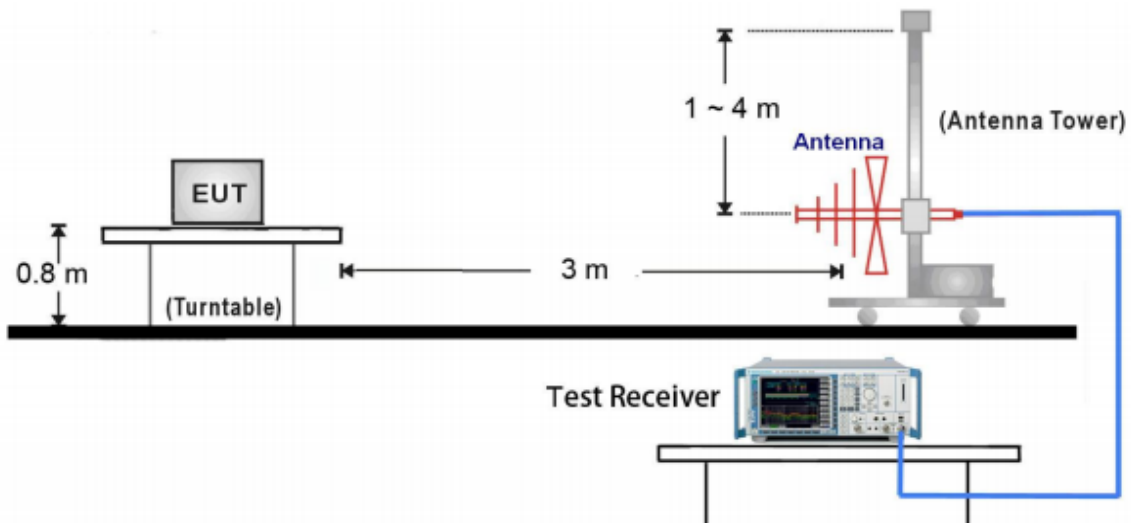


1GHz ~ 18GHz Test Setup:

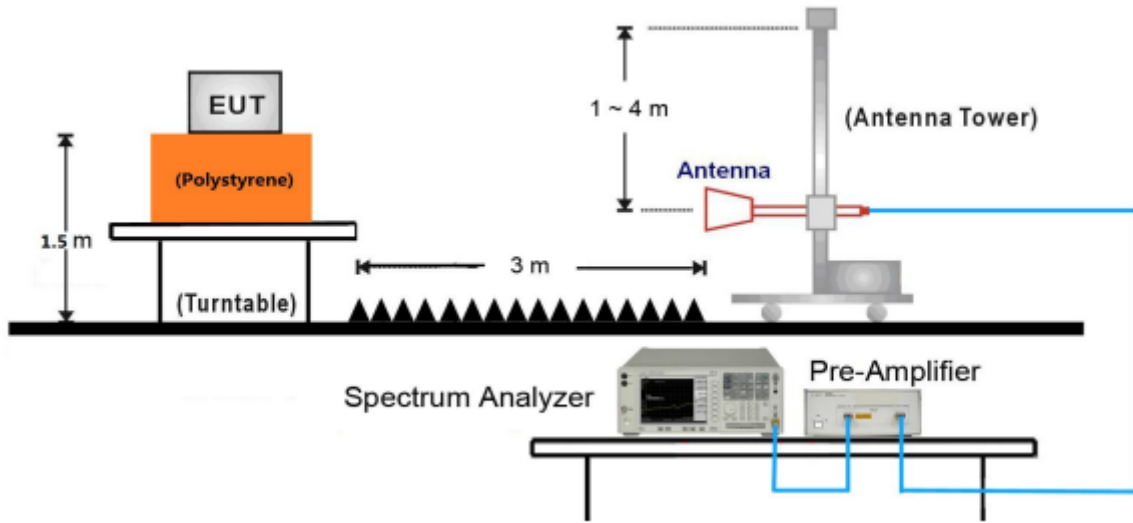

18GHz ~ 25GHz Test Setup:

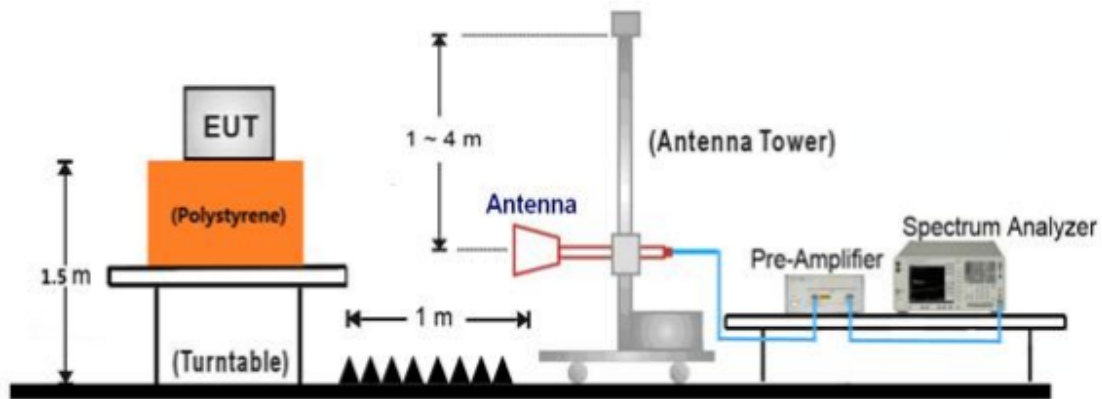

7.2 Conducted RF test setups



8 Systems test configuration

Auxiliary Equipment Used during Test:

| DESCRIPTION | MANUFACTURE R | MODEL NO.(SHIELD) | S/N(LENGTH) |
|-------------|------------------|-------------------|-------------|
| Laptop | Lenovo | E470 | --- |

Test software: SecureCRT.exe, which used to control the EUT in continues transmitting mode

The system was configured to hopping mode and non-hopping mode.

Hopping mode: typical working mode (normal hopping status)

Non-hopping mode: The system was configured to operate at a signal channel transmitting. The test software allows the configuration and operation at the worst-case duty and the highest transmit power

Each packet types were considered (e.g. DH1/3/5, 2-DH1/3/5, 3-DH1/3/5), and worst case or representative results are presented.

9 Technical Requirement

9.1 Conducted peak output power

Test Method

1. Use the following spectrum analyzer settings:
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
2. Add a correction factor to the display.
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power

Limits

| Frequency Range MHz | Limit W | Limit dBm |
|------------------------|------------|--------------|
| 2400-2483.5 | ≤1 | ≤30 |

Conducted peak output power

Bluetooth Mode GFSK modulation Test Result

| Frequency MHz | Conducted Peak Output Power dBm | Result |
|------------------------|------------------------------------|--------|
| Low channel 2402MHz | 3.19 | Pass |
| Middle channel 2441MHz | 3.17 | Pass |
| High channel 2480MHz | -1.9 | Pass |

Bluetooth Mode $\pi/4$ -DQPSK modulation Test Result


| Frequency MHz | Conducted Peak Output Power dBm | Result |
|------------------------|------------------------------------|--------|
| Low channel 2402MHz | 5.2 | Pass |
| Middle channel 2441MHz | 0.25 | Pass |
| High channel 2480MHz | 0.2 | Pass |

Bluetooth Mode 8DPSK modulation Test Result

| Frequency MHz | Conducted Peak Output Power dBm | Result |
|------------------------|------------------------------------|--------|
| Low channel 2402MHz | 5.18 | Pass |
| Middle channel 2441MHz | 5.16 | Pass |
| High channel 2480MHz | 0.17 | Pass |


Test Graphs

DH5_Ant1_2402

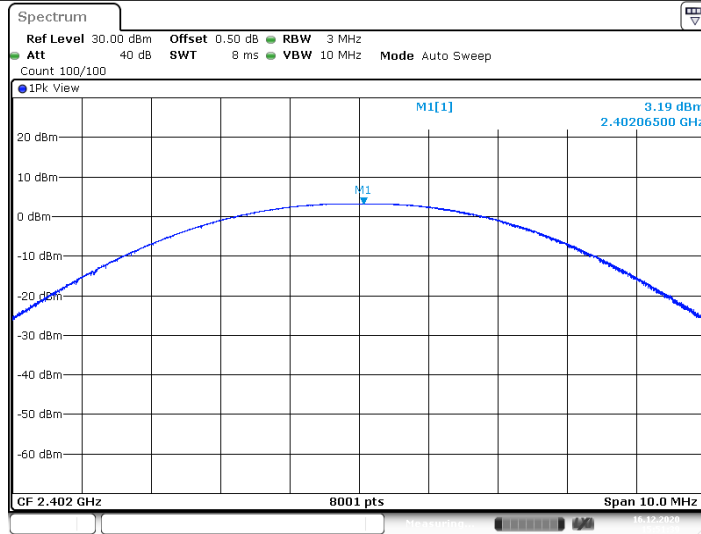


Date: 16 DEC 2020 15:51:39

DH5_Ant1_2441

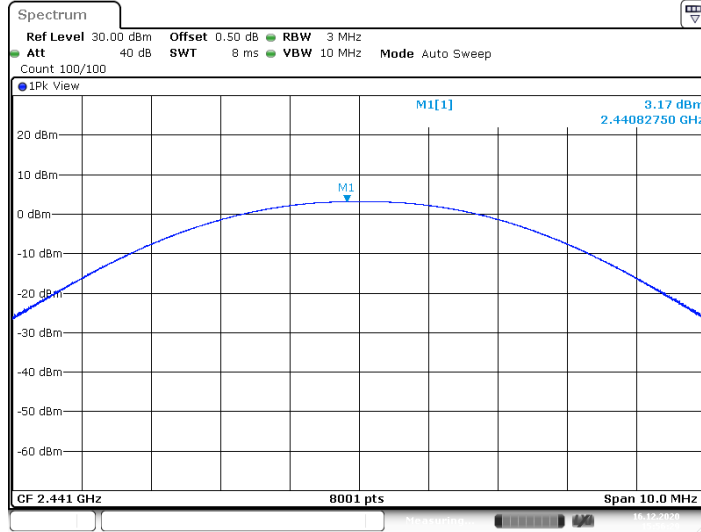


Date: 16 DEC 2020 15:56:29


DH5_Ant1_2480

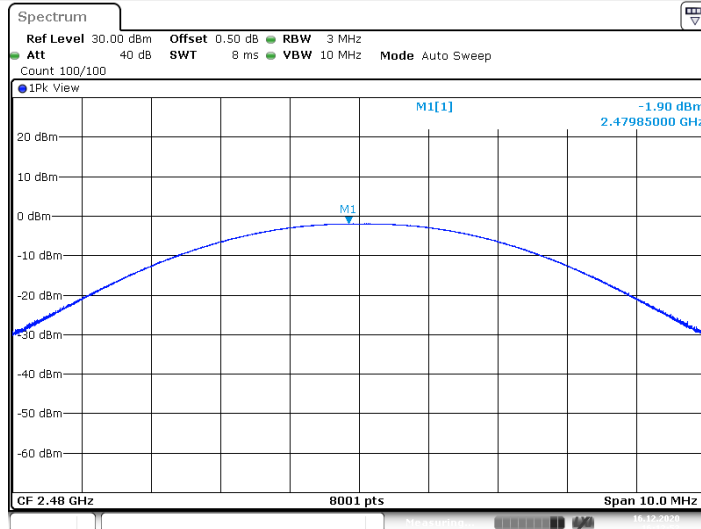

2DH5_Ant1_2402

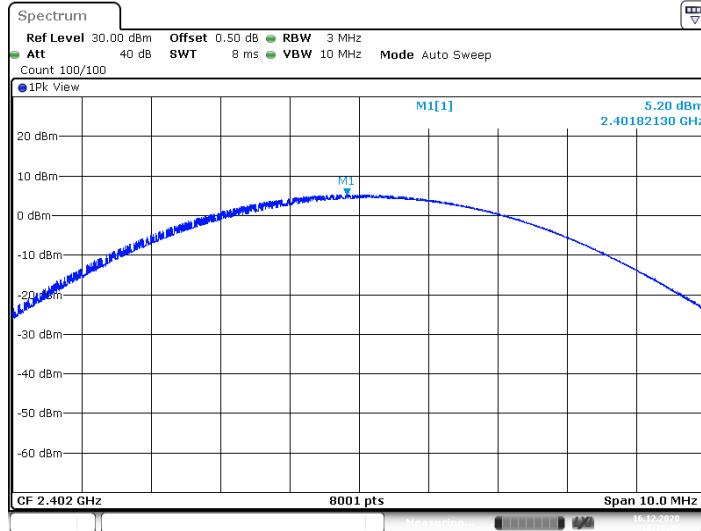


2DH5_Ant1_2441

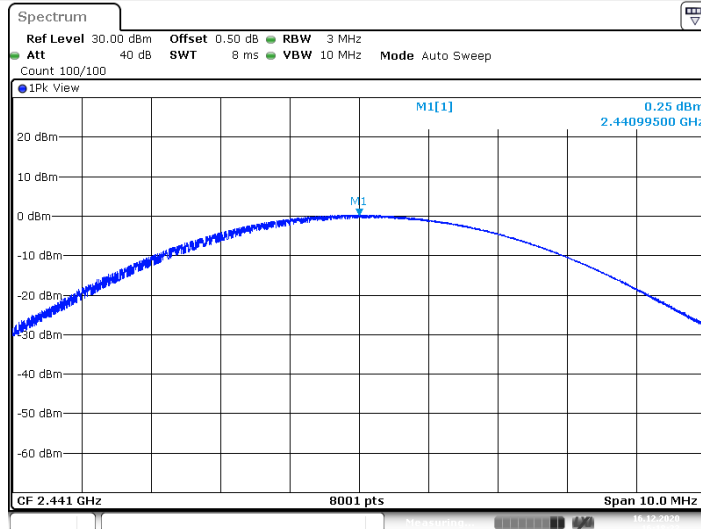


Date: 16 DEC 2020 16:18:23

2DH5_Ant1_2480

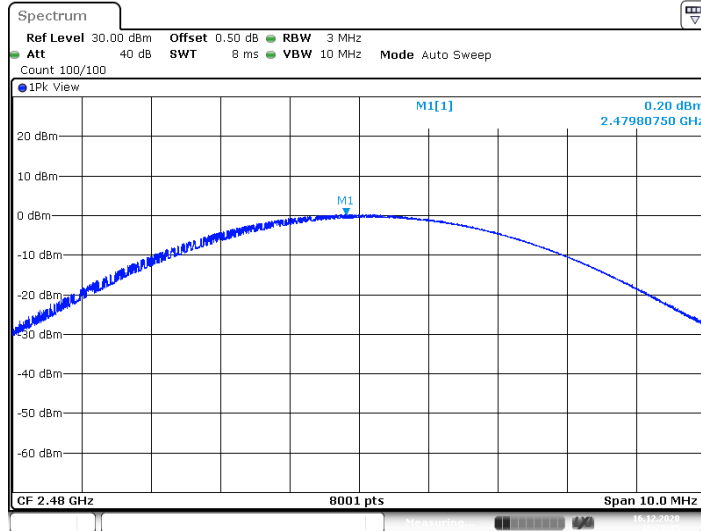


Date: 16 DEC 2020 16:20:35


3DH5_Ant1_2402

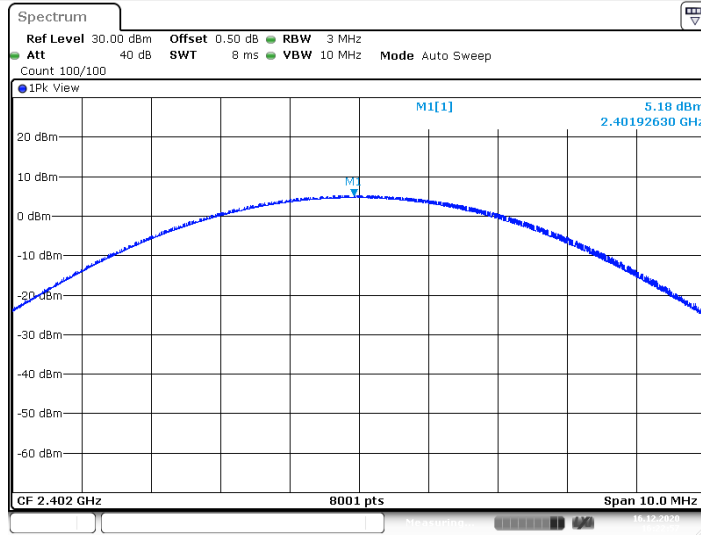

3DH5_Ant1_2441

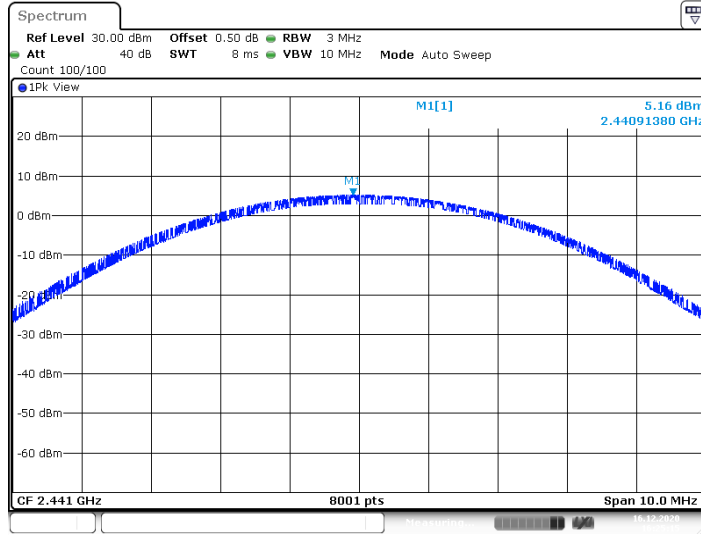

3DH5_Ant1_2480

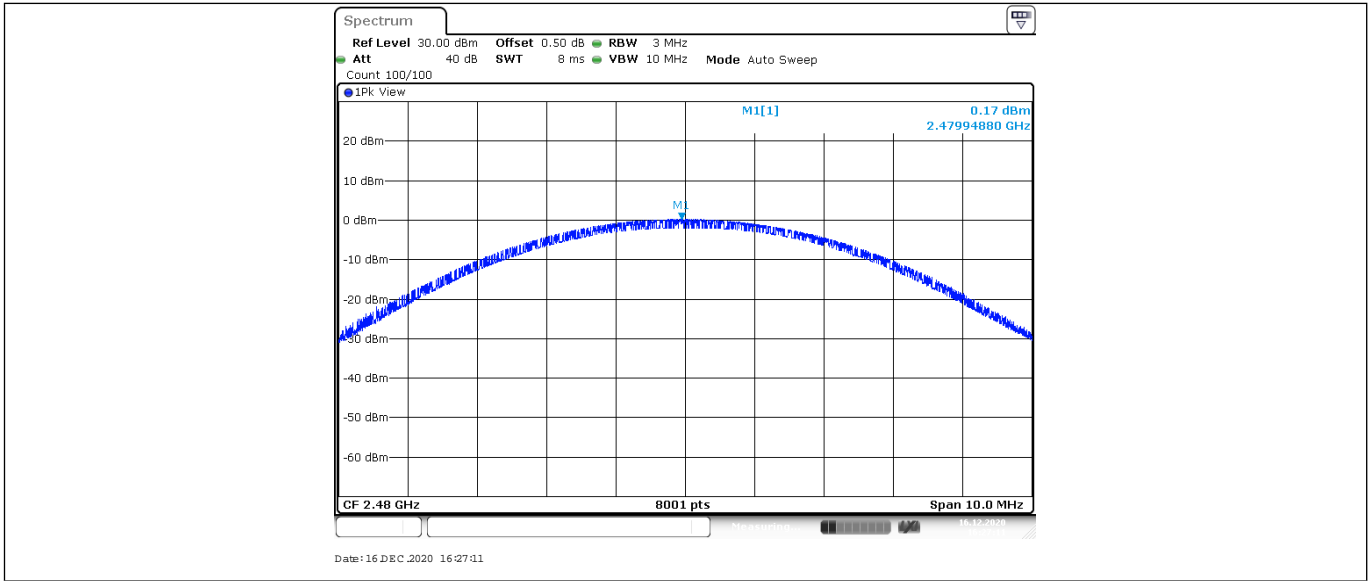

9.2 20 dB bandwidth

Test Method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Limit


Limit [kHz]

N/A


| TestMode | Channel | 20db EBW[MHz] | FL[MHz] | FH[MHz] | Verdict |
|------------------------|---------|---------------|----------|----------|---------|
| GFSK DH5 | 2402 | 1.188 | 2401.412 | 2402.600 | PASS |
| | 2441 | 1.112 | 2440.444 | 2441.556 | PASS |
| | 2480 | 1.116 | 2479.444 | 2480.560 | PASS |
| $\pi/4$ -DQPSK 2DH5 | 2402 | 1.364 | 2401.288 | 2402.652 | PASS |
| | 2441 | 1.376 | 2440.288 | 2441.664 | PASS |
| | 2480 | 1.372 | 2479.284 | 2480.656 | PASS |
| 8DPSK 3DH5 | 2402 | 1.308 | 2401.360 | 2402.668 | PASS |
| | 2441 | 1.300 | 2440.344 | 2441.644 | PASS |
| | 2480 | 1.296 | 2479.344 | 2480.640 | PASS |

Test Graphs


DH5_Ant1_2402

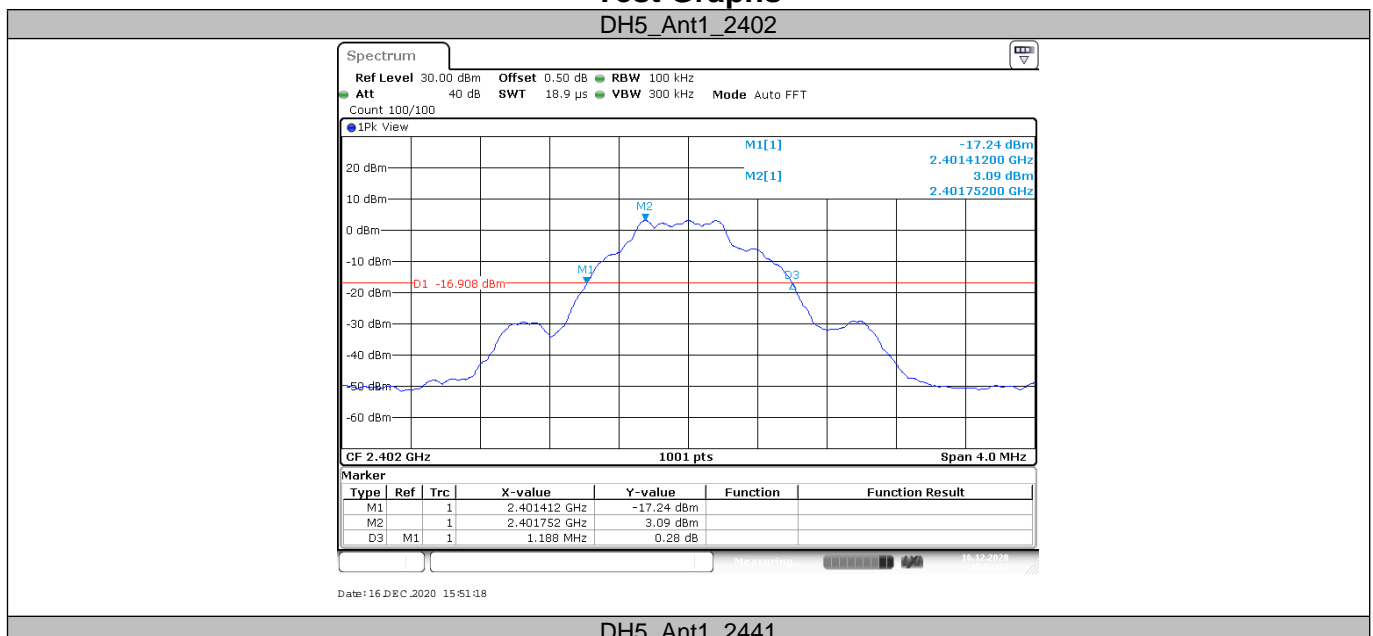


DH5_Ant1_2441

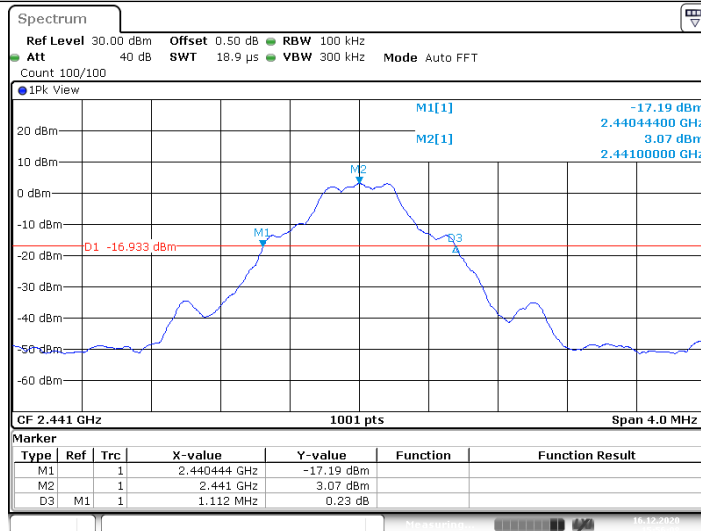


DH5_Ant1_2480

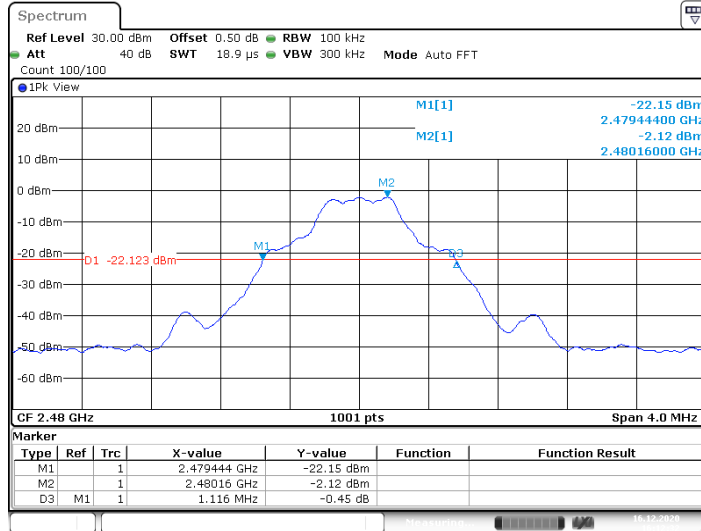


2DH5_Ant1_2402

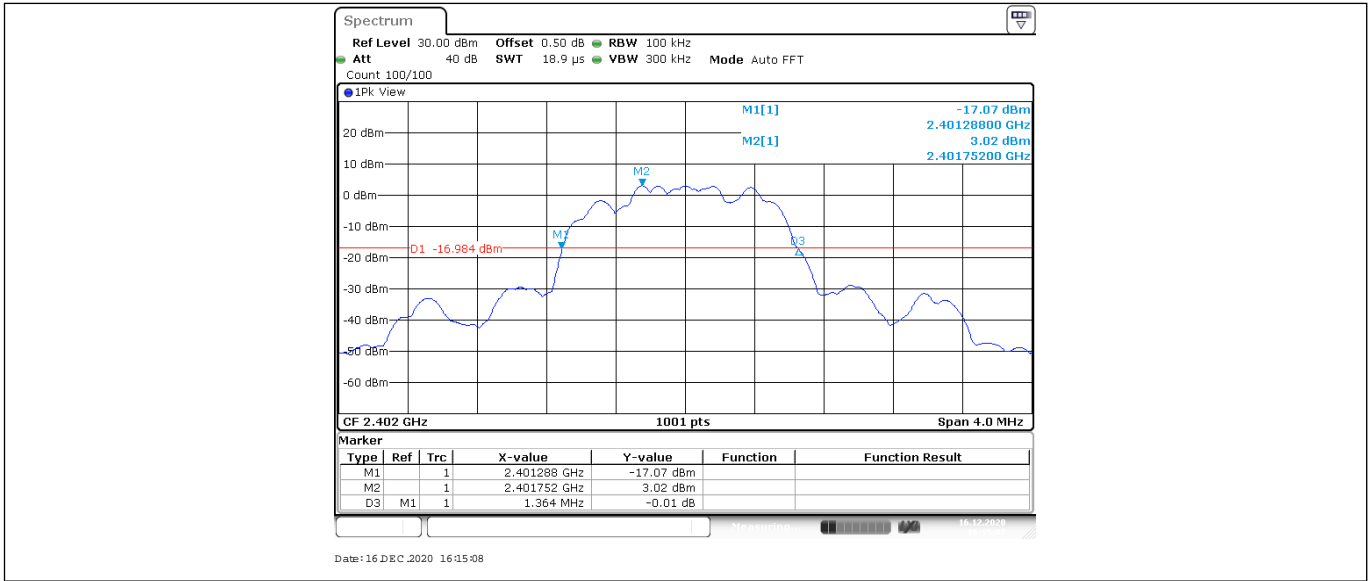


2DH5_Ant1_2441

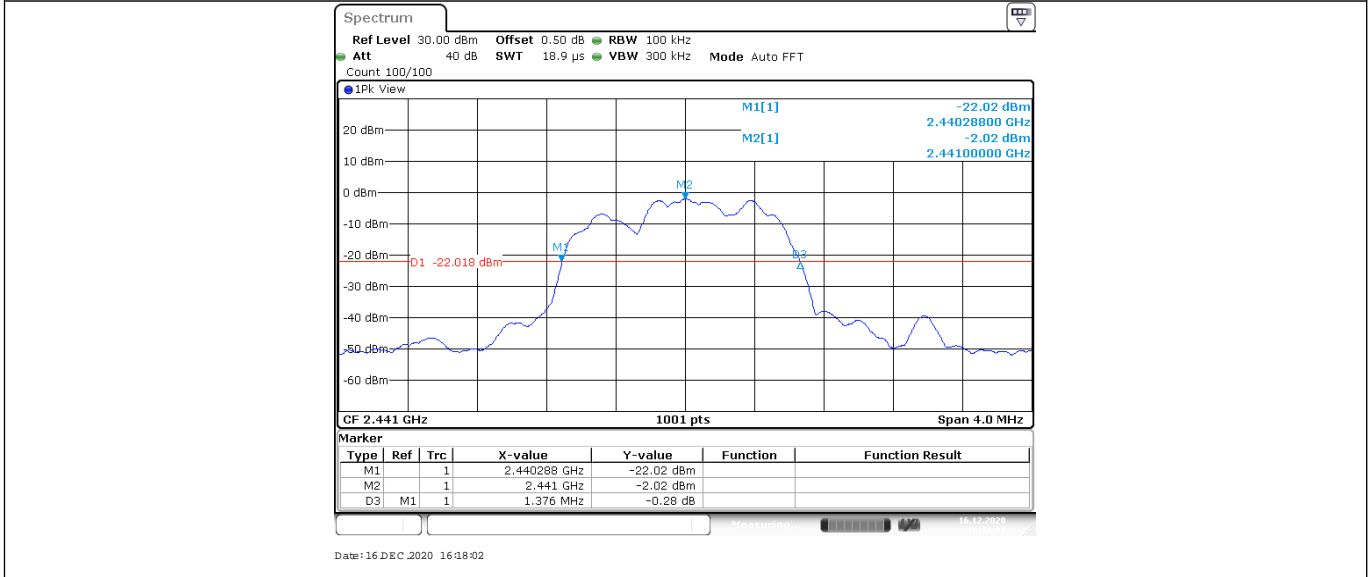


2DH5_Ant1_2480

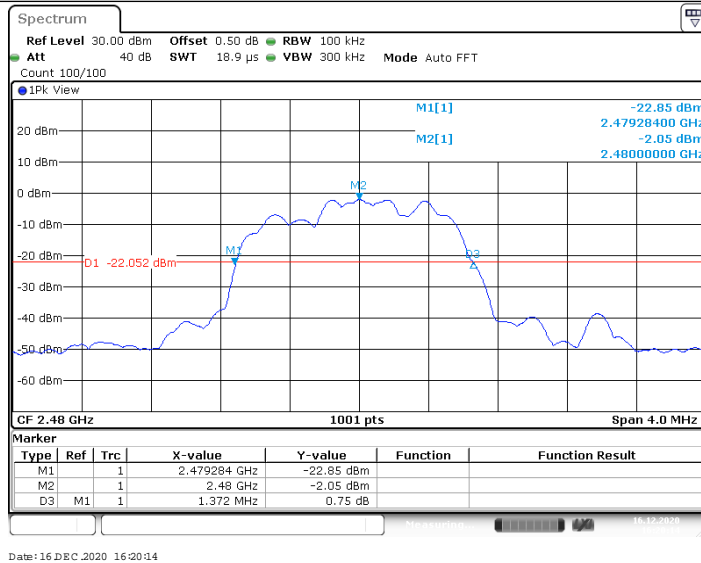


3DH5_Ant1_2402

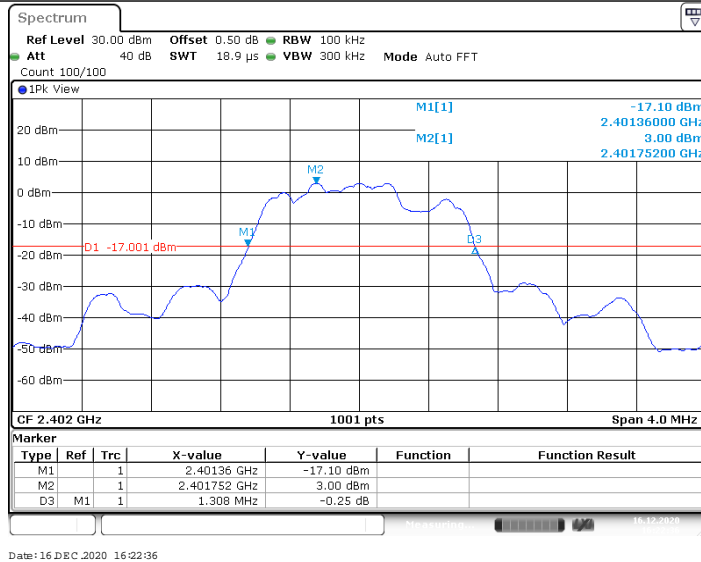

3DH5_Ant1_2441

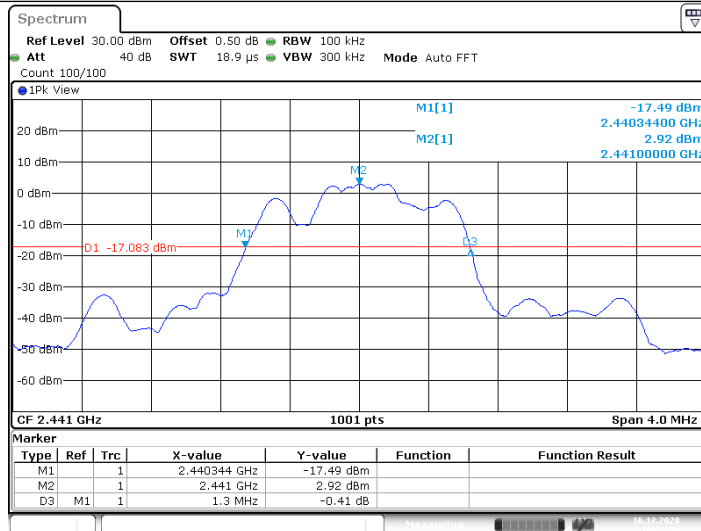

3DH5_Ant1_2480

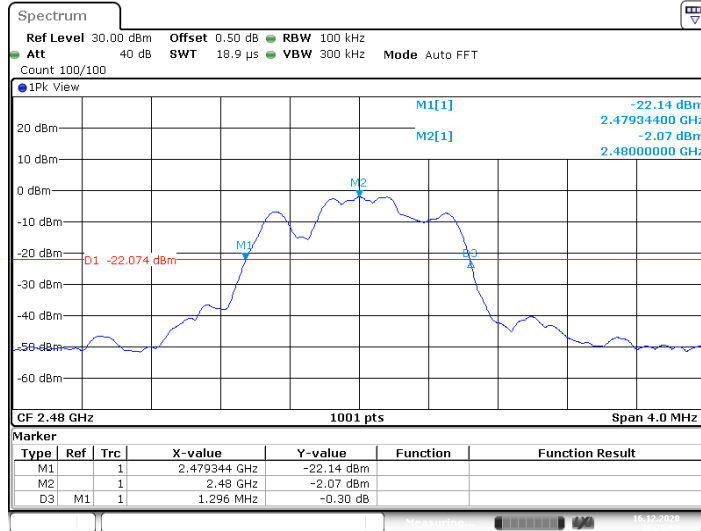

9.3 Carrier Frequency Separation

Test Method


1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, RBW \geq 1% of the span, VBW \geq RBW, Sweep = auto, Detector function = peak
2. By using the Max-Hold function record the separation of two adjacent channels.
3. Measure the frequency difference of these two adjacent channels by spectrum analyzer marker function.
4. Repeat above procedures until all frequencies measured were complete.


Limit

**Limit
kHz**

$\geq 25\text{kHz}$ or $2/3$ of the 20 dB bandwidth which is greater


| TestMode | Antenna | Channel | Result[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|-------------|--------------|---------|
| DH5 | Ant1 | Hop | 1.003 | ≥ 0.792 | PASS |
| 2DH5 | Ant1 | Hop | 1.006 | ≥ 0.917 | PASS |
| 3DH5 | Ant1 | Hop | 1.000 | ≥ 0.872 | PASS |

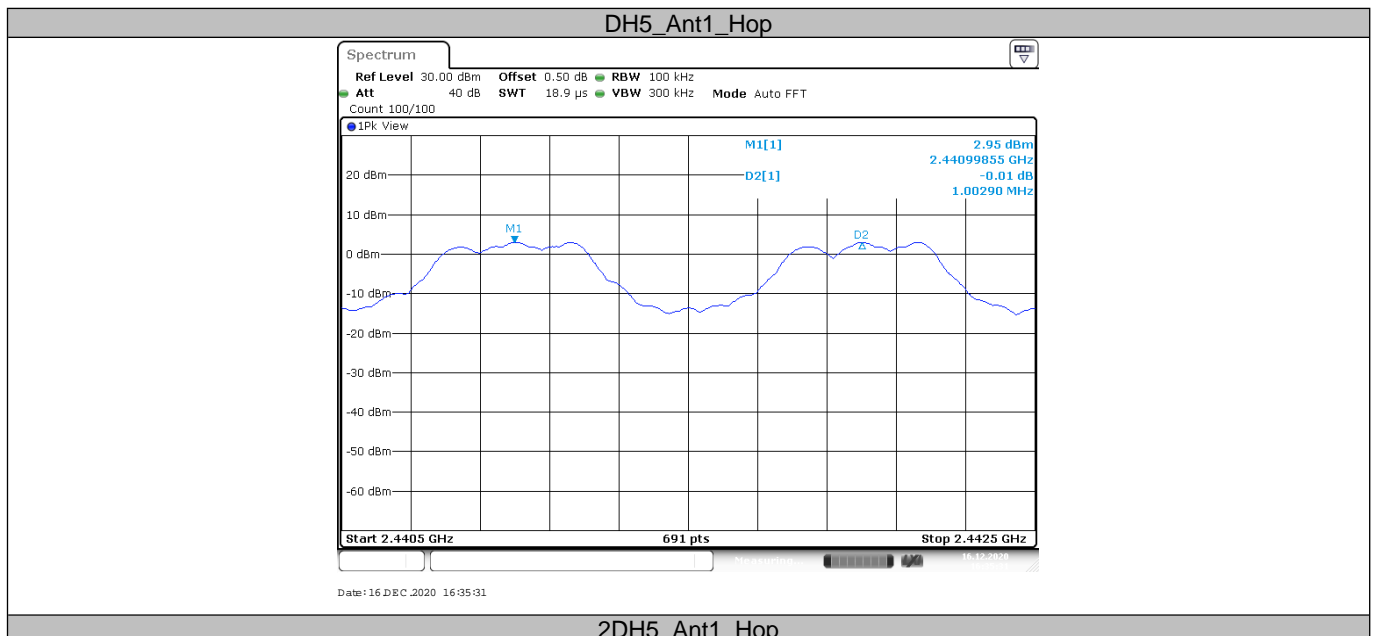

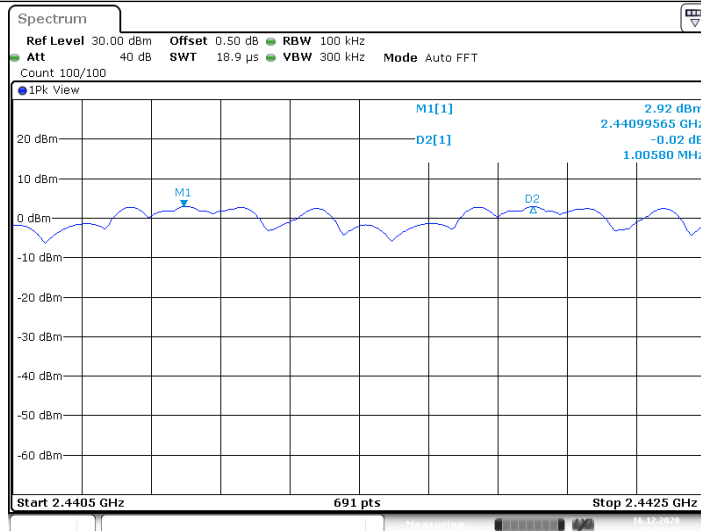

Date: 16 DEC 2020 16:41:15

3DH5_Ant1_Hop

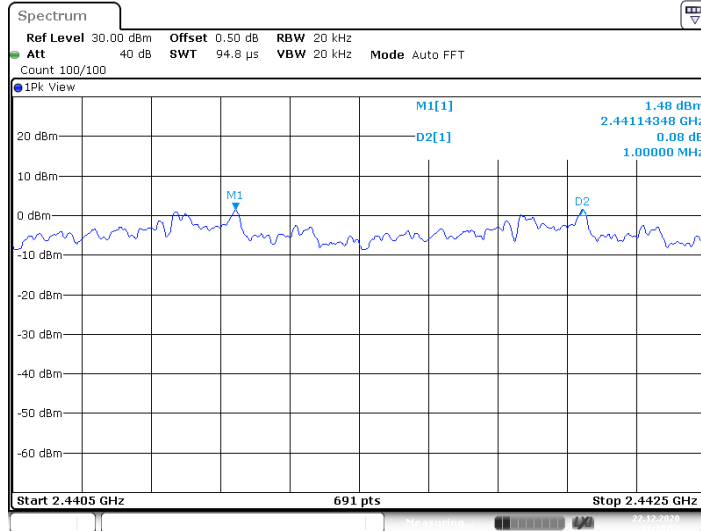

Date: 22 DEC 2020 11:39:57

9.4 Number of hopping frequencies

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels, $RBW \geq 1\%$ of the span, $VBW \geq RBW$, Sweep = auto, Detector function = peak
2. Set the spectrum analyzer on Max-Hold Mode, and then keep the EUT in hopping mode.
3. Record all the signals from each channel until each one has been recorded.
4. Repeat above procedures until all frequencies measured were complete.

Limit

**Limit
number**

≥ 15

Number of hopping frequencies


Test result: The measurement was performed with the typical configuration (normal hopping status), and the total hopping channels is constant for the all modulation mode according with the Bluetooth Core Specification. Here GFSK modulation mode was used to show compliance.

**Number of hopping
frequencies**

79

Result

Pass

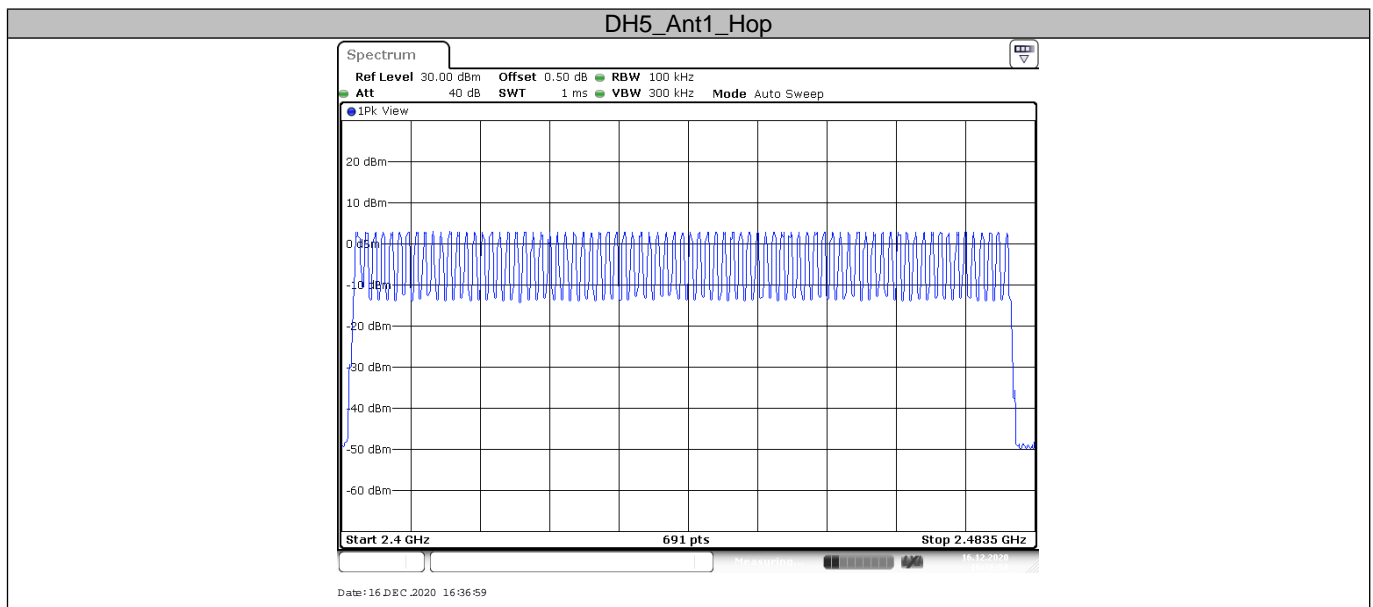

9.5 Dwell Time

Test Method

1. Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
Equipment mode: Spectrum analyzer
2. RBW: 1MHz; VBW: 1MHz; SPAN: Zero Span
3. Adjust the center frequency of spectrum analyzer on any frequency be measured.
4. Measure the Dwell Time by spectrum analyzer Marker function.
5. Repeat above procedures until all frequencies measured were complete.

Limit

The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.


Dwell time


The maximum dwell time shall be 0,4 s.
The Dwell Time = Burst Width * Total Hops.

Test Result

| Modulation | TestMode | Channel | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit[s] | Verdict |
|----------------|----------|---------|-----------------|-----------------|-----------|----------|---------|
| GFSK | DH5 | Hop | 2.89 | 90 | 0.26 | <=0.4 | PASS |
| $\pi/4$ -DQPSK | 2DH5 | Hop | 1.70 | 220 | 0.373 | <=0.4 | PASS |
| 8-DPSK | 3DH5 | Hop | 2.89 | 120 | 0.347 | <=0.4 | PASS |


Test Graphs

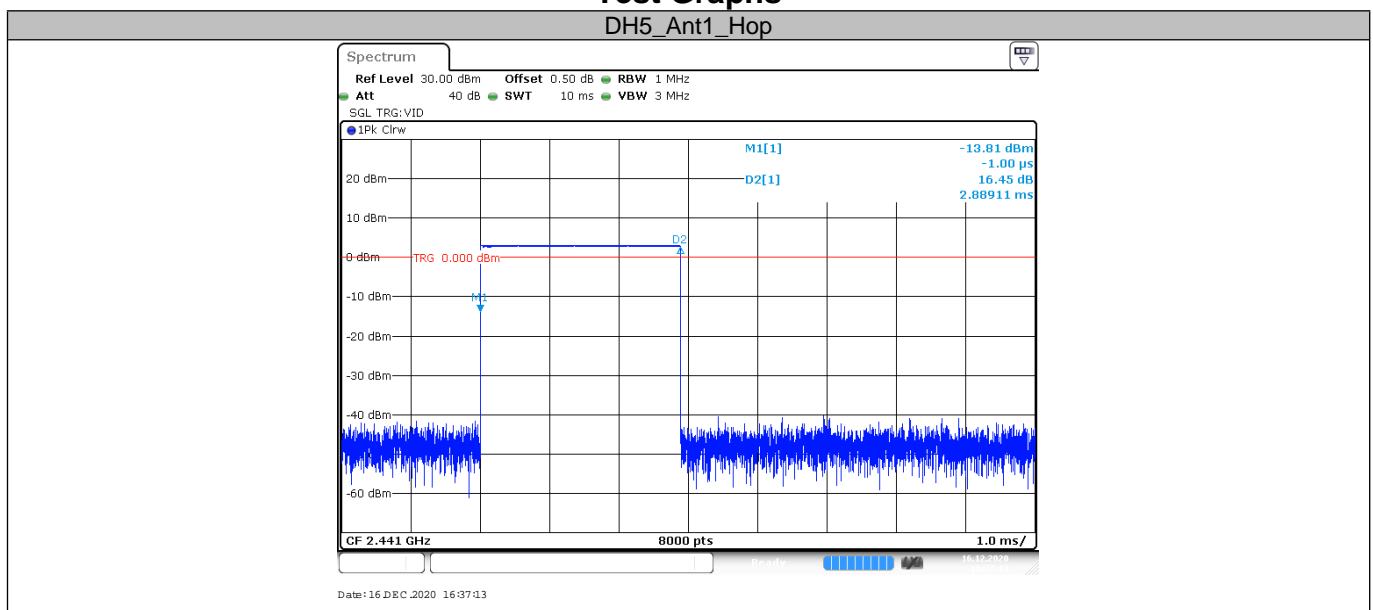

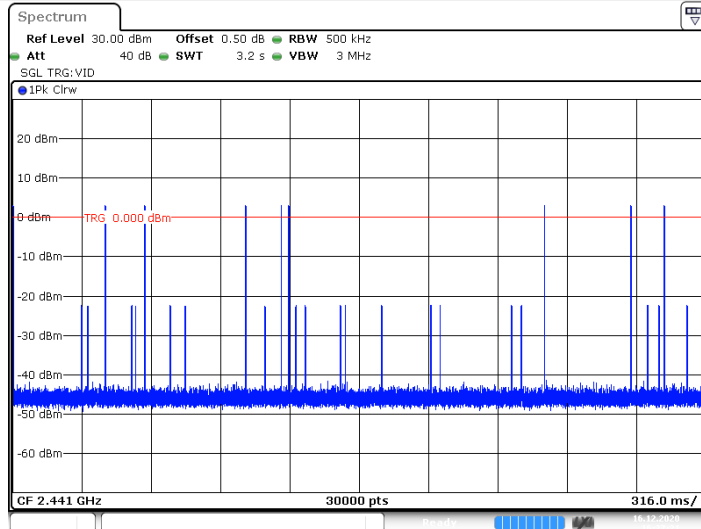


Date: 16 DEC 2020 16:37:21

2DH5_Ant1_Hop

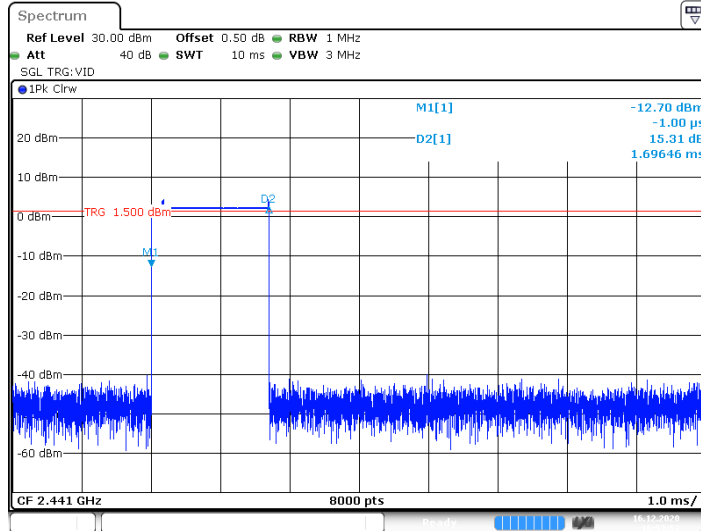


Date: 16 DEC 2020 16:53:53

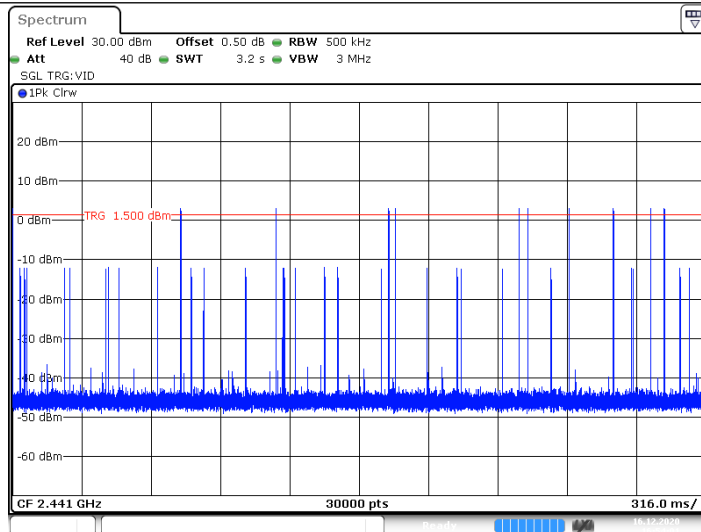


Date: 16 DEC 2020 16:54:01

3DH5_Ant1_Hop

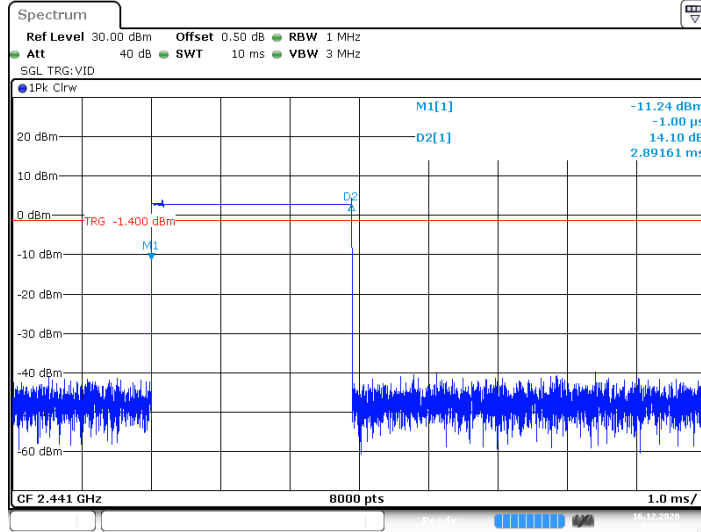

Date: 16 DEC 2020 17:03:26

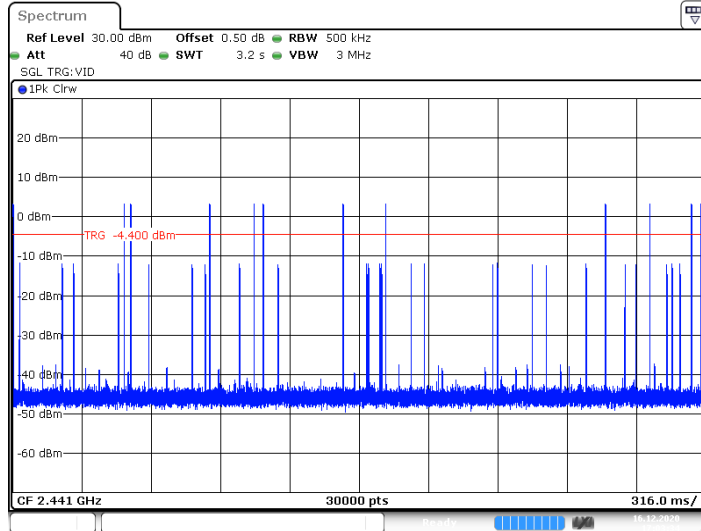

Date: 16 DEC 2020 17:03:34

9.6 Spurious RF conducted emissions

Test Method

1. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
2. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded.
3. The level displayed must comply with the limit specified in this Section. Submit these plots.
4. Repeat above procedures until all frequencies measured were complete.

Limit

| Frequency Range MHz | Limit (dBc) |
|------------------------|-------------|
| 30-25000 | -20 |




Spurious RF conducted emissions

Test Result


| TestMode | Antenna | Channel | FreqRange [MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|----------|---------|---------|-----------------|----------------|--------------|-------------|---------|
| DH5 | Ant1 | 2402 | Reference | 2.97 | 2.97 | --- | PASS |
| | | | 30~1000 | 2.97 | -58.71 | <=-17.03 | PASS |
| | | | 1000~5000 | 2.97 | -54.36 | <=-17.03 | PASS |
| | | | 5000~26500 | 2.97 | -52.38 | <=-17.03 | PASS |
| | | 2441 | Reference | 3.03 | 3.03 | --- | PASS |
| | | | 30~1000 | 3.03 | -59.18 | <=-16.97 | PASS |
| | | | 1000~5000 | 3.03 | -52.66 | <=-16.97 | PASS |
| | | | 5000~26500 | 3.03 | -52.04 | <=-16.97 | PASS |
| | | 2480 | Reference | -2.10 | -2.10 | --- | PASS |
| | | | 30~1000 | -2.10 | -59.25 | <=-22.1 | PASS |
| | | | 1000~5000 | -2.10 | -55.4 | <=-22.1 | PASS |
| | | | 5000~26500 | -2.10 | -51.67 | <=-22.1 | PASS |
| 2DH5 | Ant1 | 2402 | Reference | 2.90 | 2.90 | --- | PASS |
| | | | 30~1000 | 2.90 | -58.09 | <=-17.1 | PASS |
| | | | 1000~5000 | 2.90 | -53.64 | <=-17.1 | PASS |
| | | | 5000~26500 | 2.90 | -52.67 | <=-17.1 | PASS |
| | | 2441 | Reference | -2.05 | -2.05 | --- | PASS |
| | | | 30~1000 | -2.05 | -58.31 | <=-22.05 | PASS |
| | | | 1000~5000 | -2.05 | -56.15 | <=-22.05 | PASS |
| | | | 5000~26500 | -2.05 | -51.91 | <=-22.05 | PASS |
| | | 2480 | Reference | -2.04 | -2.04 | --- | PASS |
| | | | 30~1000 | -2.04 | -58.73 | <=-22.04 | PASS |
| | | | 1000~5000 | -2.04 | -55.45 | <=-22.04 | PASS |
| | | | 5000~26500 | -2.04 | -52.47 | <=-22.04 | PASS |
| 3DH5 | Ant1 | 2402 | Reference | 2.87 | 2.87 | --- | PASS |
| | | | 30~1000 | 2.87 | -58.82 | <=-17.13 | PASS |
| | | | 1000~5000 | 2.87 | -54.97 | <=-17.13 | PASS |
| | | | 5000~26500 | 2.87 | -52.02 | <=-17.13 | PASS |
| | | 2441 | Reference | 2.89 | 2.89 | --- | PASS |
| | | | 30~1000 | 2.89 | -58.4 | <=-17.11 | PASS |
| | | | 1000~5000 | 2.89 | -53.39 | <=-17.11 | PASS |
| | | | 5000~26500 | 2.89 | -50.38 | <=-17.11 | PASS |
| | | 2480 | Reference | -2.05 | -2.05 | --- | PASS |
| | | | 30~1000 | -2.05 | -58.87 | <=-22.05 | PASS |
| | | | 1000~5000 | -2.05 | -55.4 | <=-22.05 | PASS |
| | | | 5000~26500 | -2.05 | -52.52 | <=-22.05 | PASS |

Test Graphs


DH5_Ant1_2402_0~Reference

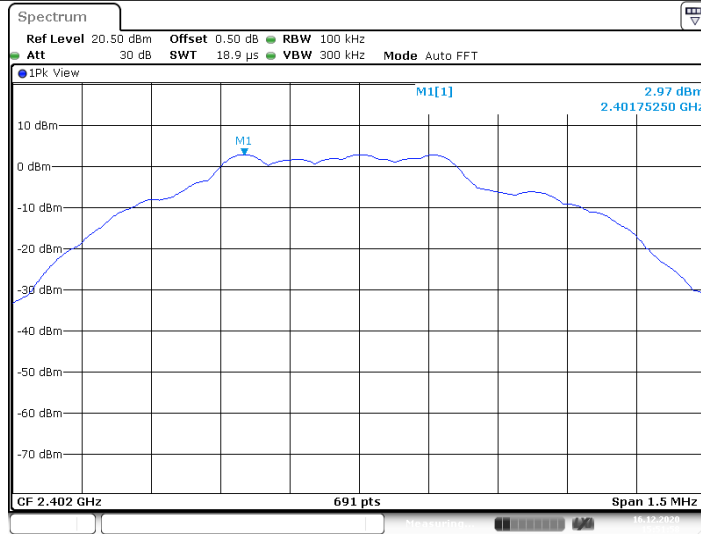

DH5_Ant1_2402_30~1000

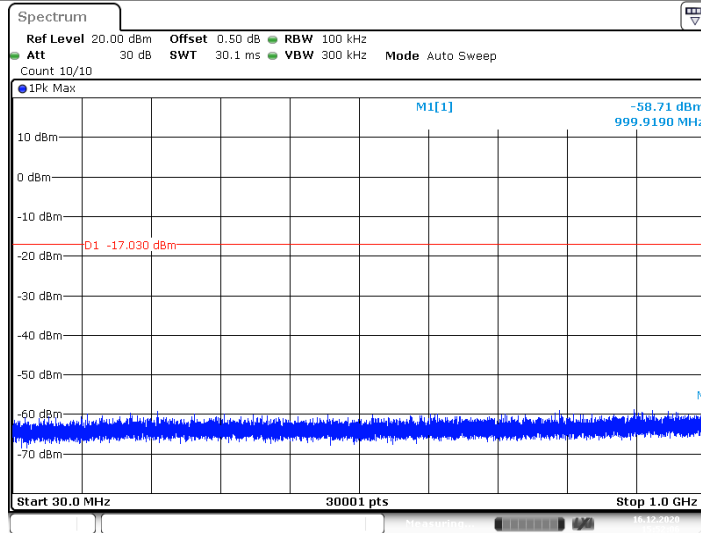


DH5_Ant1_2402_1000~5000

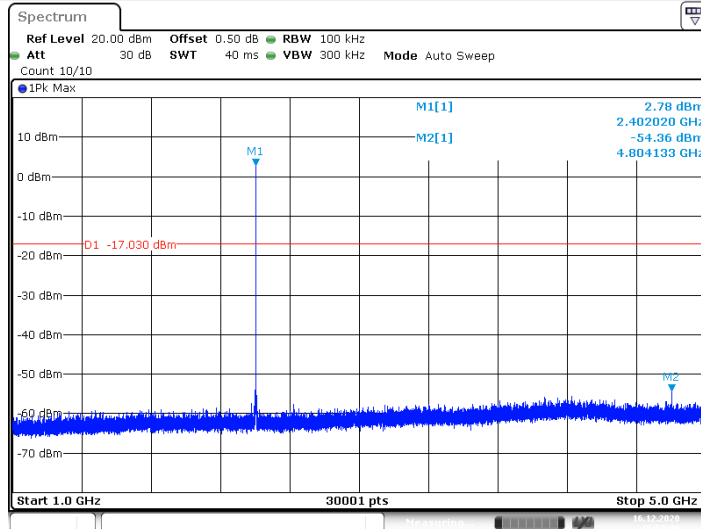


Date: 16 DEC 2020 15:52:20

DH5_Ant1_2402_5000~26500

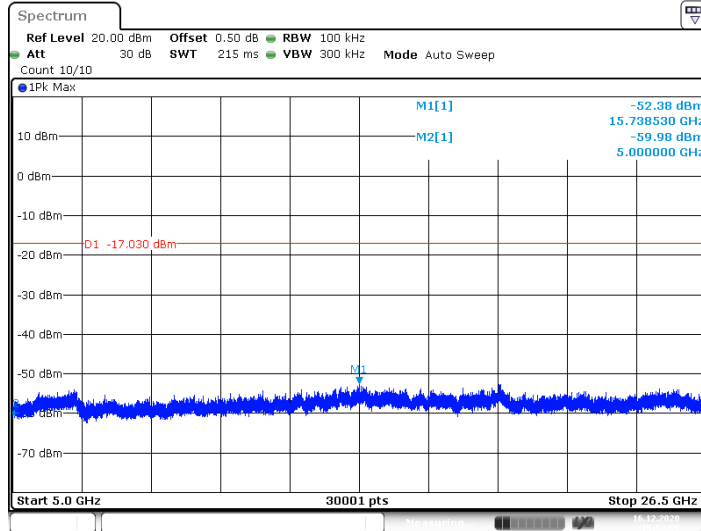


Date: 16 DEC 2020 15:52:55

DH5_Ant1_2441_0~Reference

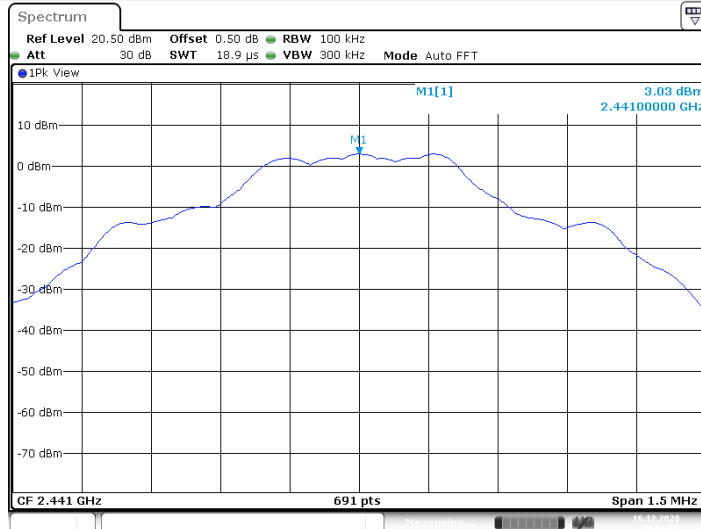


Date: 16 DEC 2020 15:56:37

DH5_Ant1_2441_30~1000

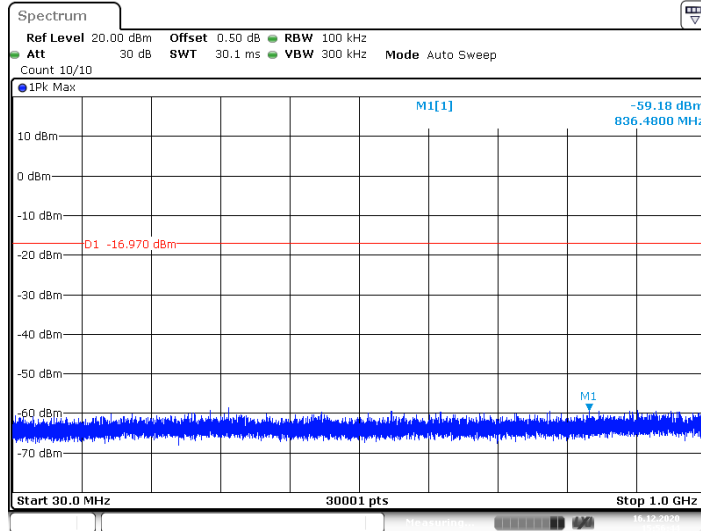


Date: 16 DEC 2020 15:56:44

DH5_Ant1_2441_1000~5000

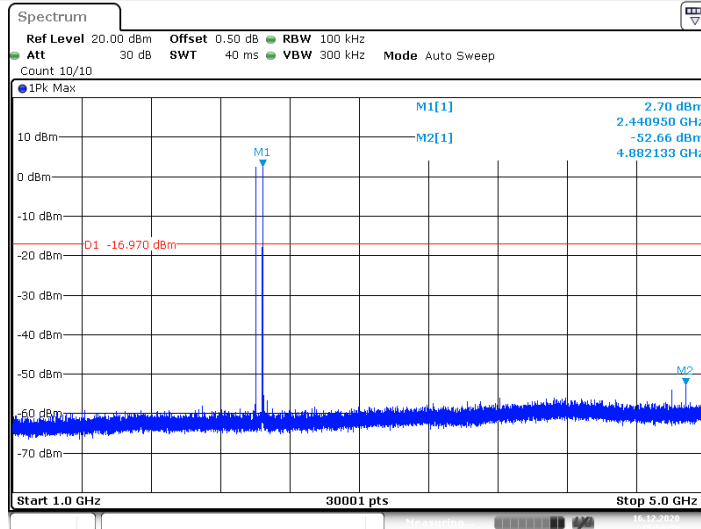


Date: 16 DEC 2020 15:56:59

DH5_Ant1_2441_5000~26500

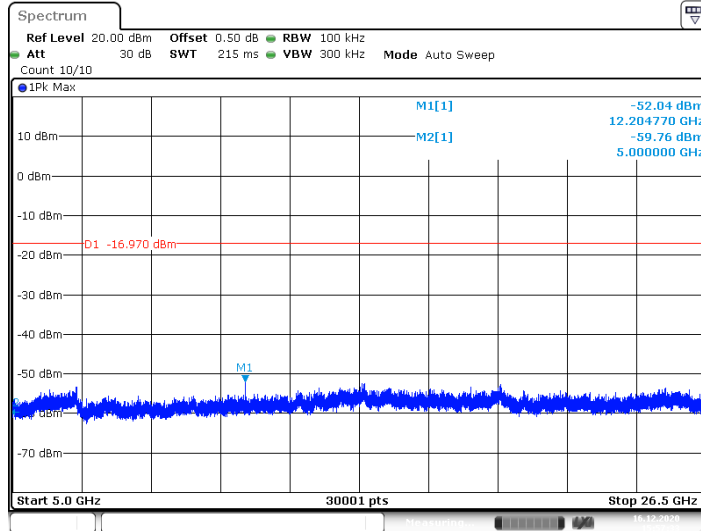


Date: 16 DEC 2020 15:57:33

DH5_Ant1_2480_0~Reference

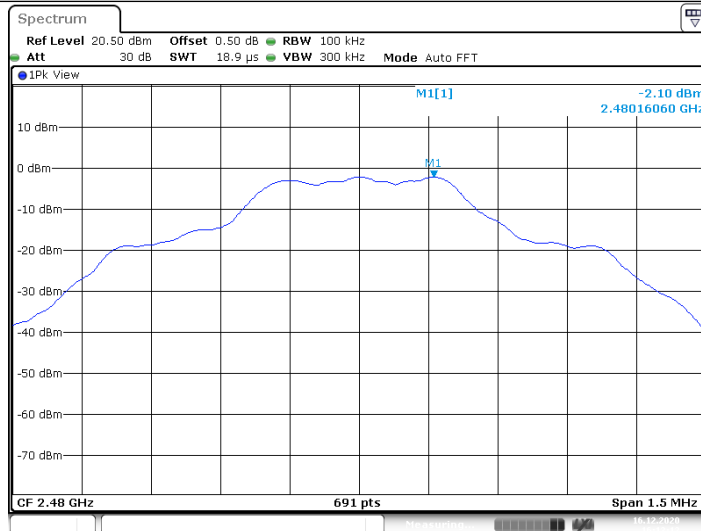


Date: 16 DEC 2020 16:13:12

DH5_Ant1_2480_30~1000

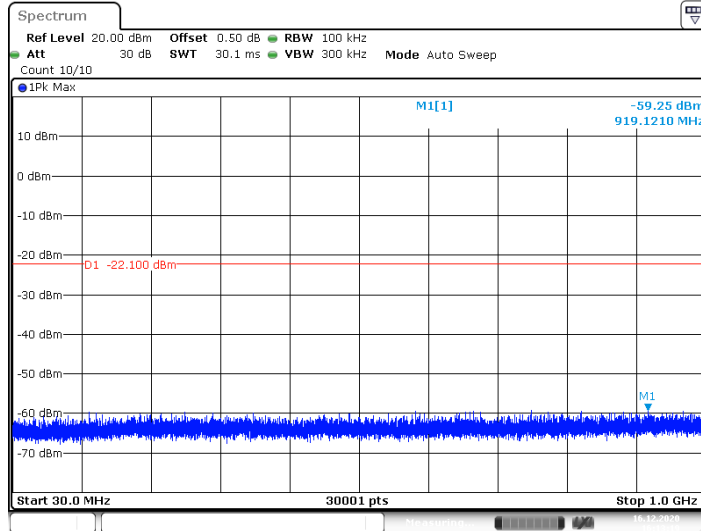


Date: 16 DEC 2020 16:13:19

DH5_Ant1_2480_1000~5000

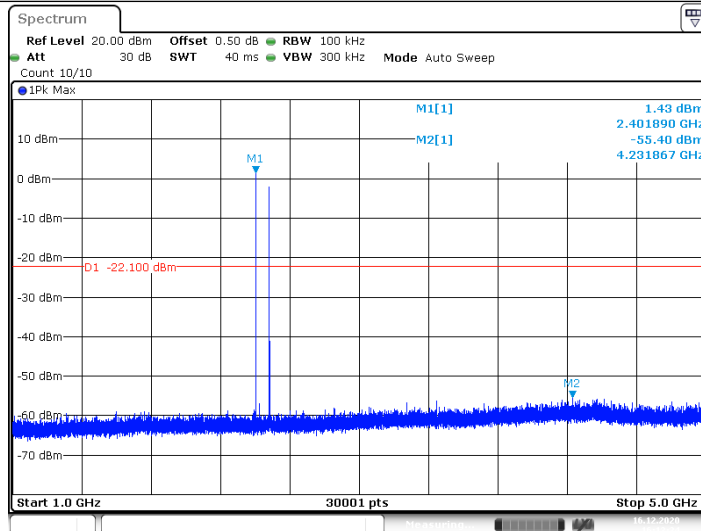


Date: 16 DEC 2020 16:13:34

DH5_Ant1_2480_5000~26500

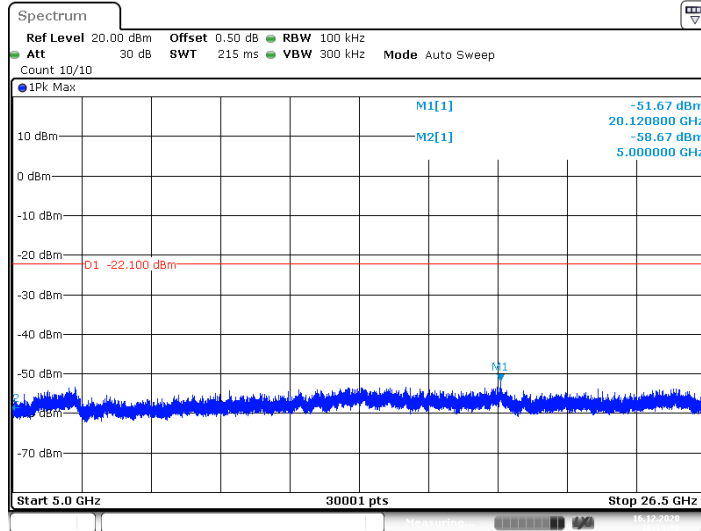


Date: 16 DEC 2020 16:14:08

2DH5_Ant1_2402_0~Reference

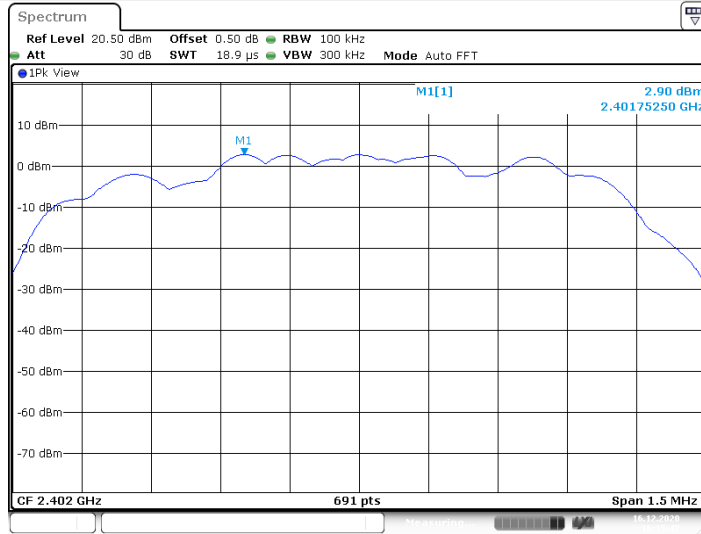


Date: 16 DEC 2020 16:15:48

2DH5_Ant1_2402_30~1000

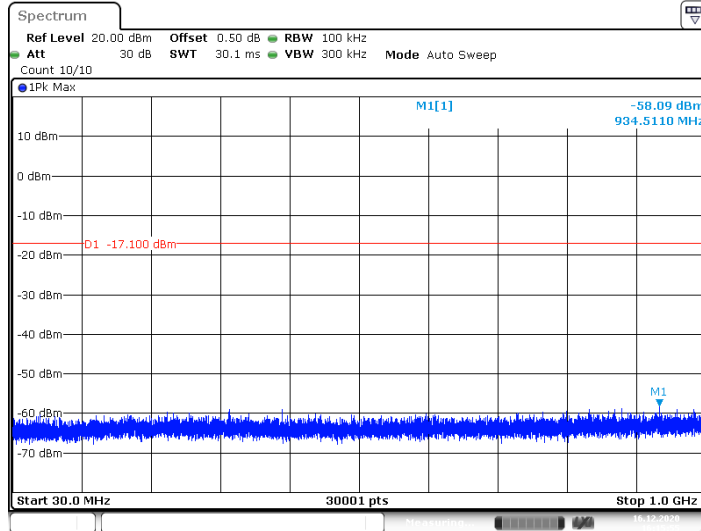


Date: 16 DEC 2020 16:15:55

2DH5_Ant1_2402_1000~5000

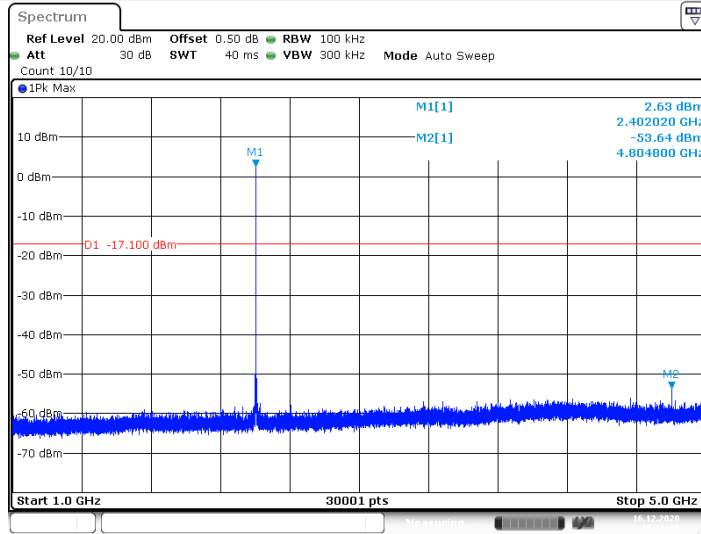


Date: 16 DEC 2020 16:16:10

2DH5_Ant1_2402_5000~26500

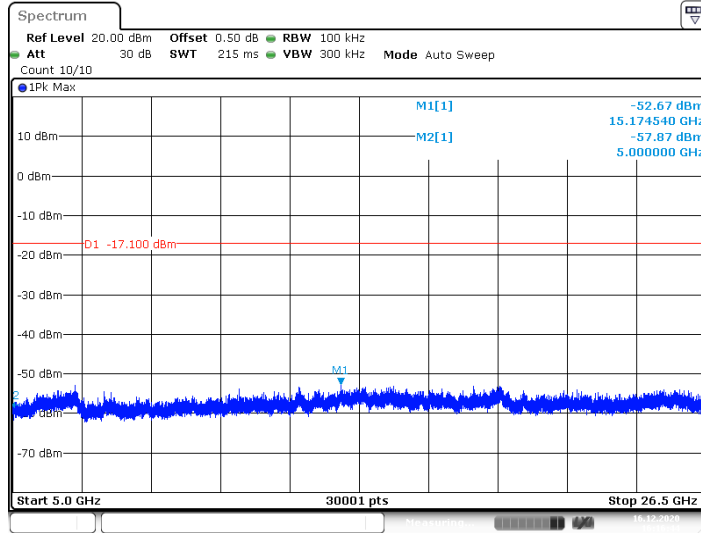


Date: 16 DEC 2020 16:16:44

2DH5_Ant1_2441_0~Reference

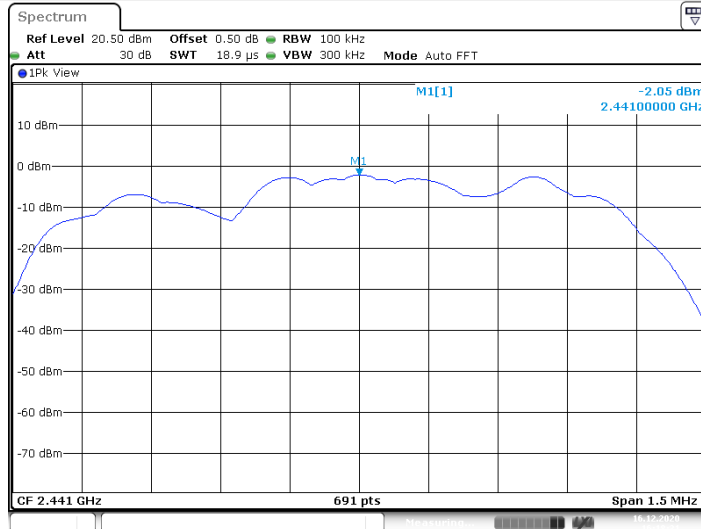


Date: 16 DEC 2020 16:18:31

2DH5_Ant1_2441_30~1000

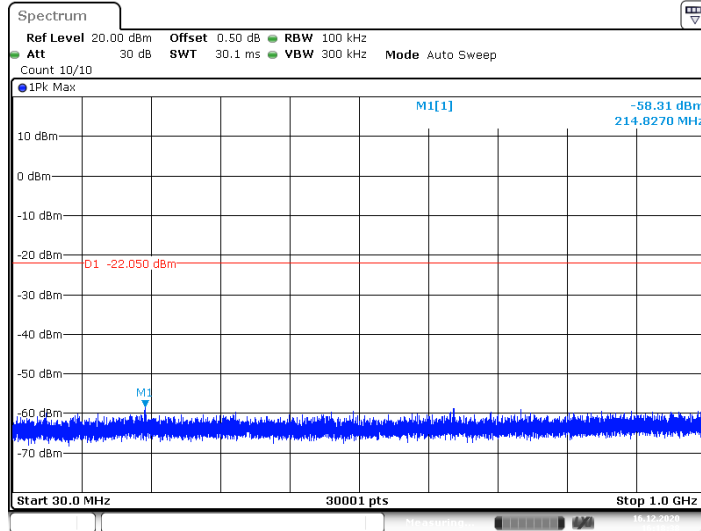


Date: 16 DEC 2020 16:18:38

2DH5_Ant1_2441_1000~5000

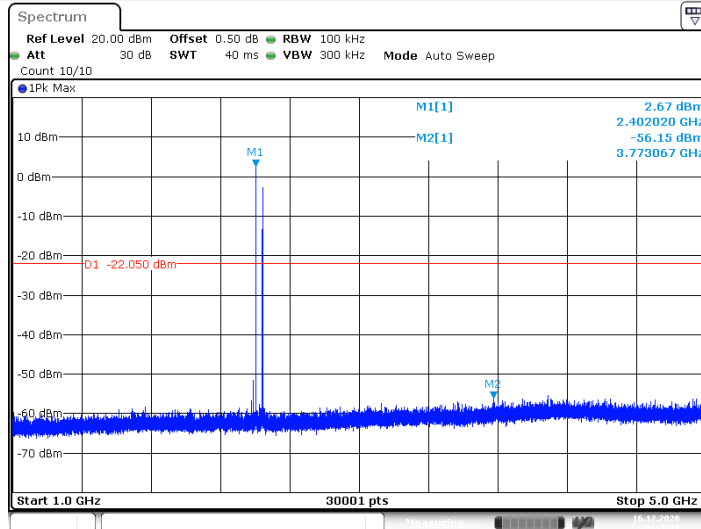


Date: 16 DEC 2020 16:18:53

2DH5_Ant1_2441_5000~26500

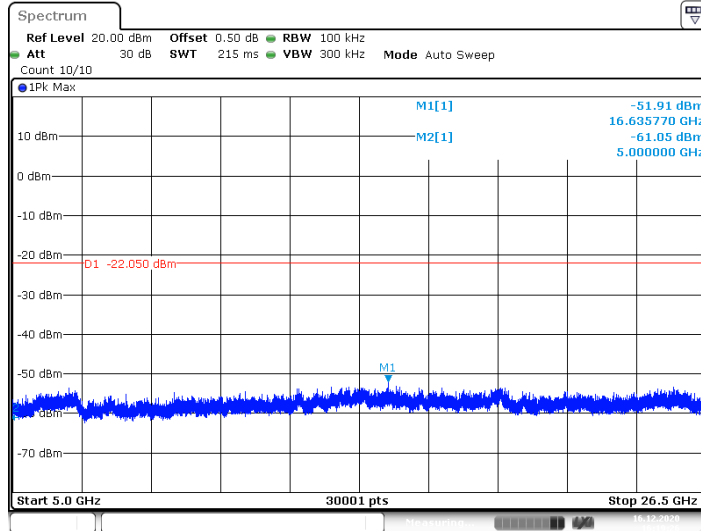


Date: 16 DEC 2020 16:19:27


2DH5_Ant1_2480_0~Reference

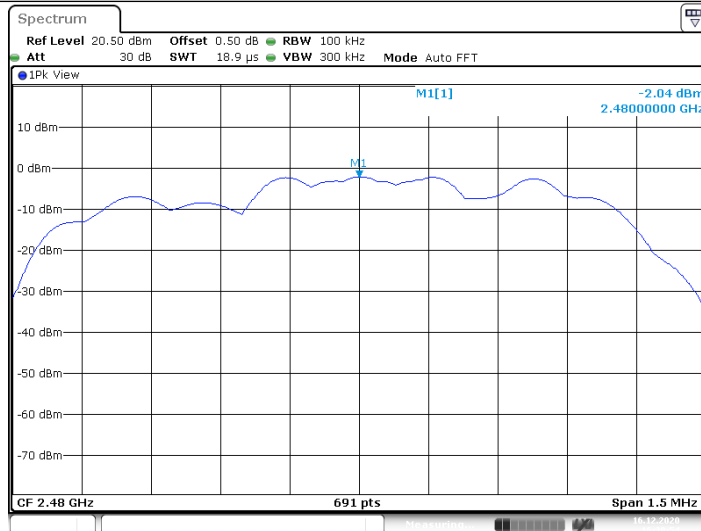

2DH5_Ant1_2480_30~1000

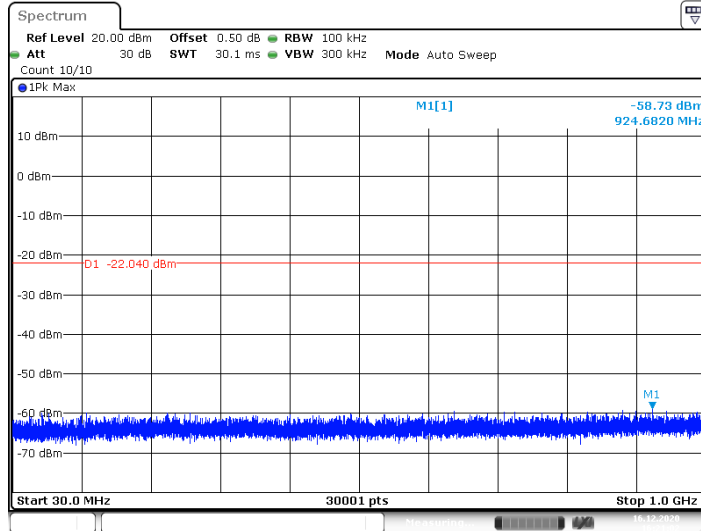


2DH5_Ant1_2480_1000~5000

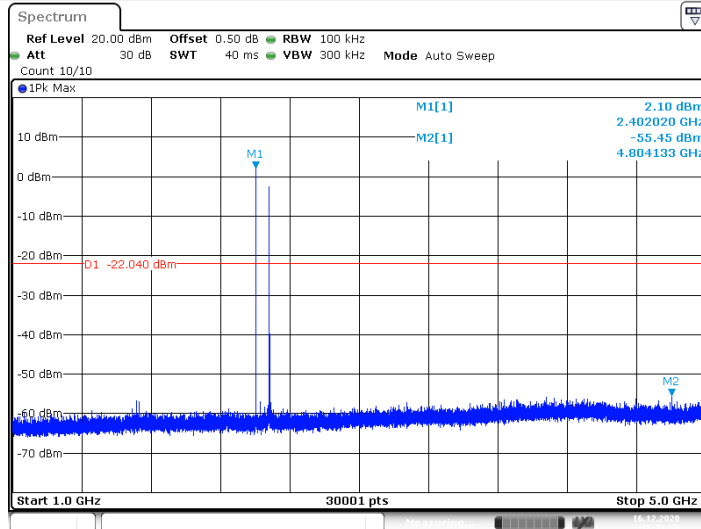


Date: 16 DEC 2020 16:21:16

2DH5_Ant1_2480_5000~26500

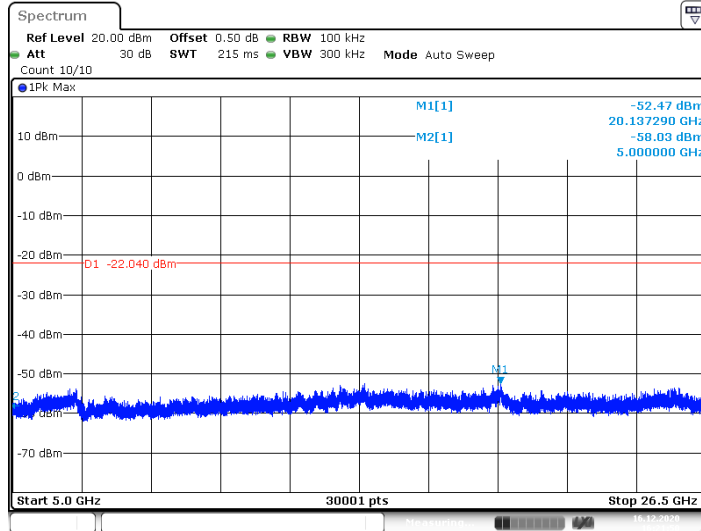


Date: 16 DEC 2020 16:21:50

3DH5_Ant1_2402_0~Reference

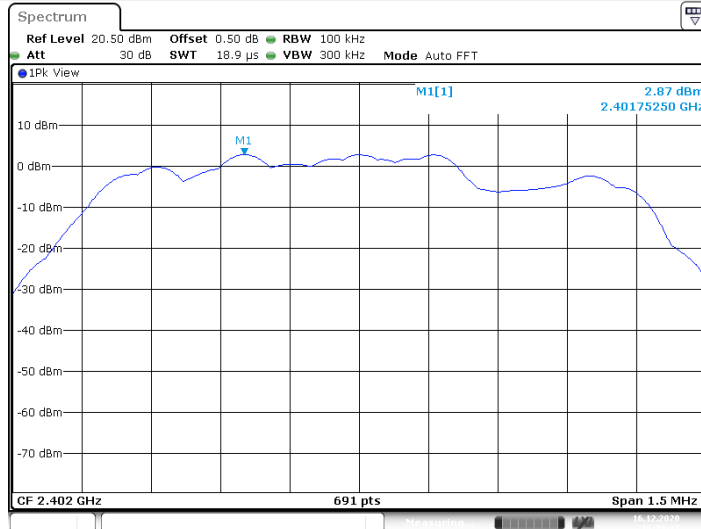


Date: 16 DEC 2020 16:23:17

3DH5_Ant1_2402_30~1000

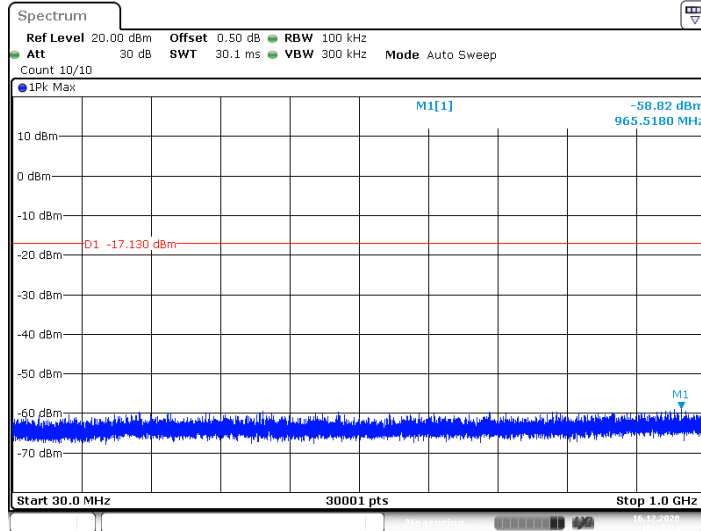


Date: 16 DEC 2020 16:23:24

3DH5_Ant1_2402_1000~5000

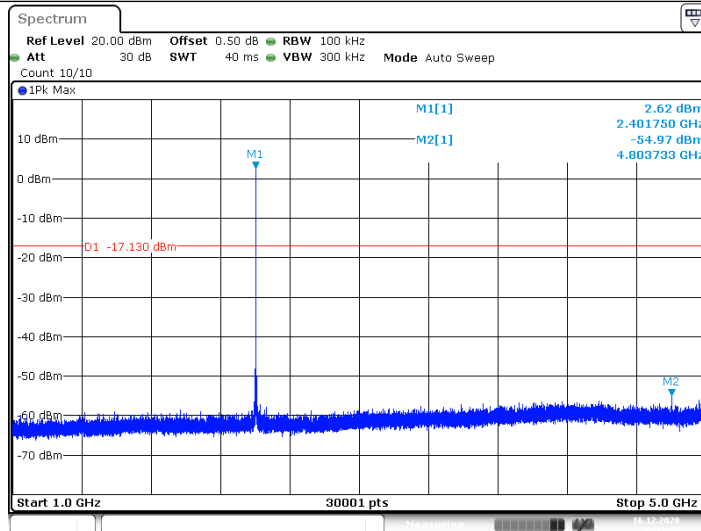


Date: 16 DEC 2020 16:23:39

3DH5_Ant1_2402_5000~26500

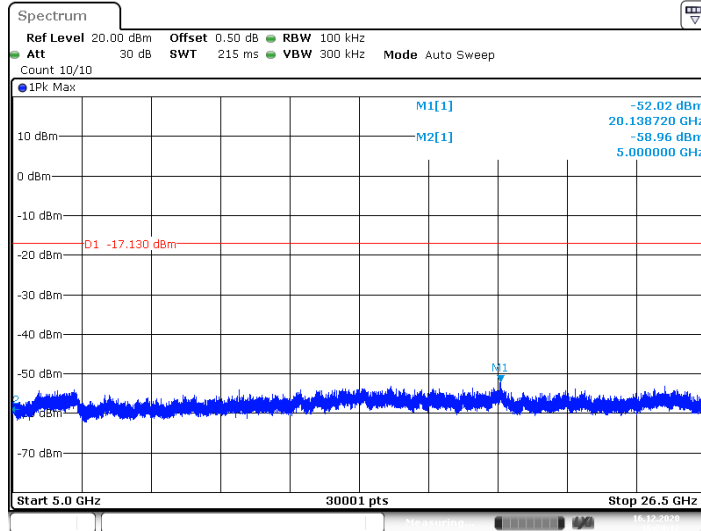


Date: 16 DEC 2020 16:24:13

3DH5_Ant1_2441_0~Reference

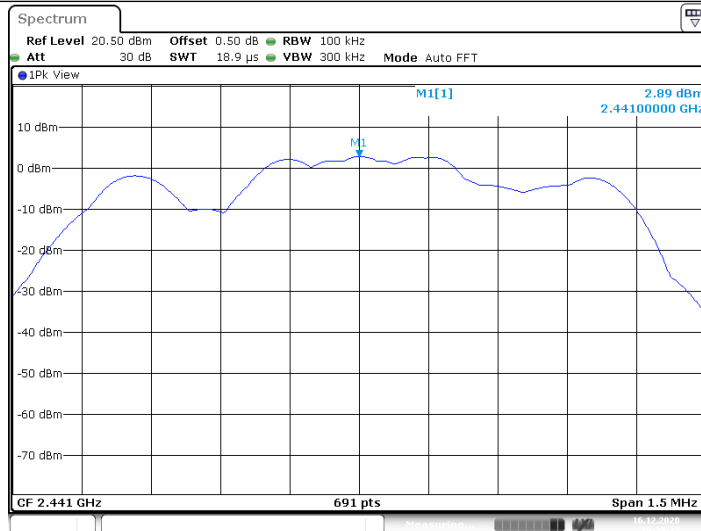


Date: 16 DEC 2020 16:25:23

3DH5_Ant1_2441_30~1000

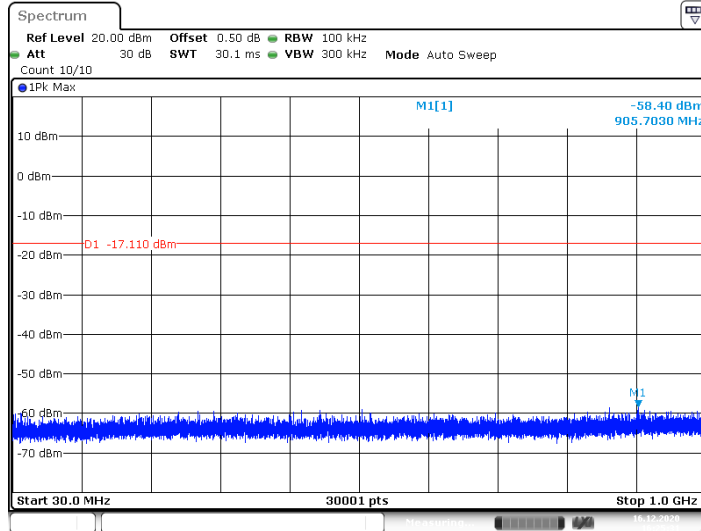


Date: 16 DEC 2020 16:25:30


3DH5_Ant1_2441_1000~5000

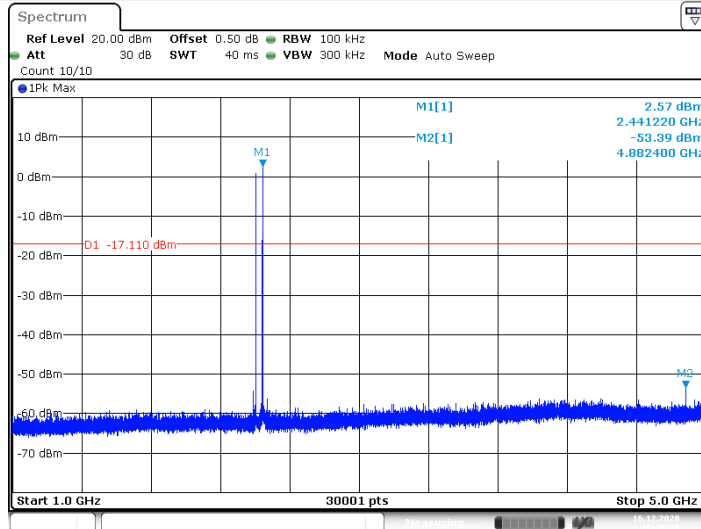


3DH5_Ant1_2441_5000~26500

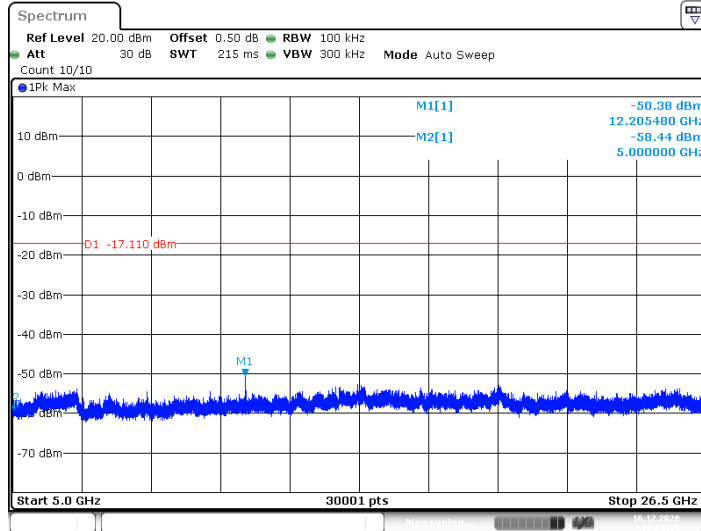


3DH5_Ant1_2480_0~Reference

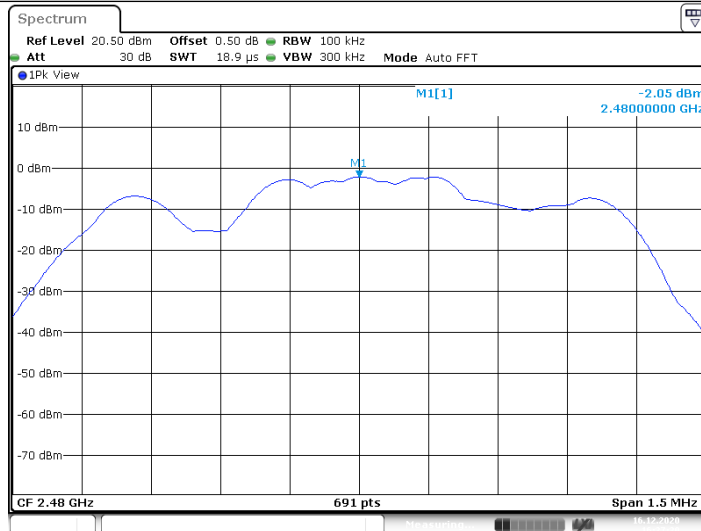


3DH5_Ant1_2480_30~1000

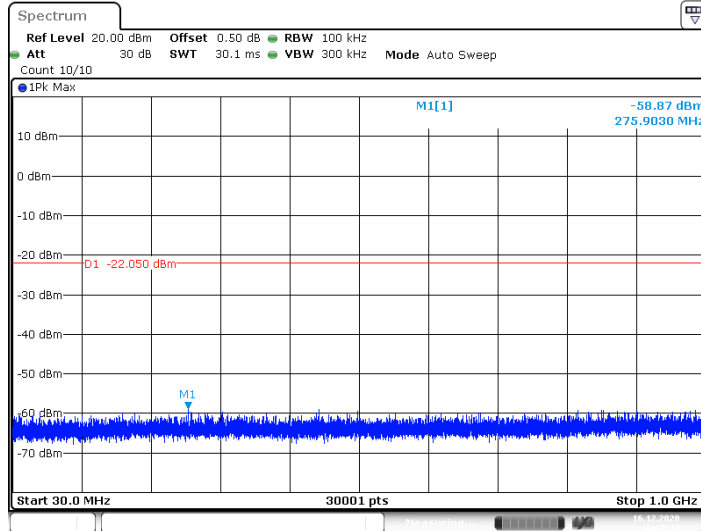

3DH5_Ant1_2480_1000~5000

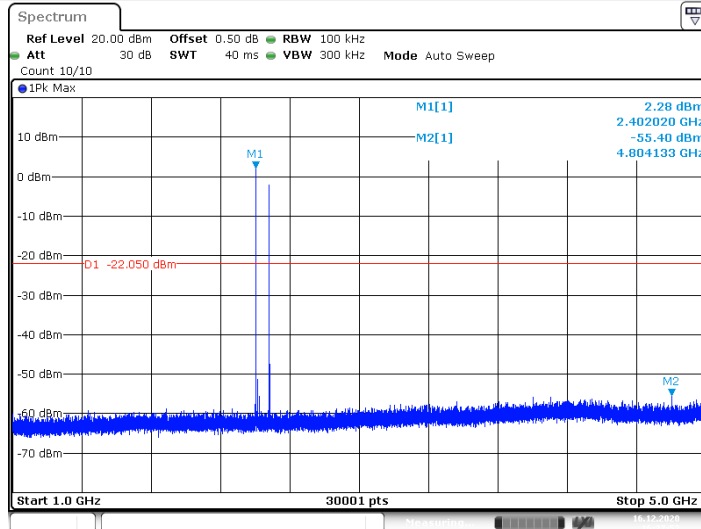

3DH5_Ant1_2480_5000~26500

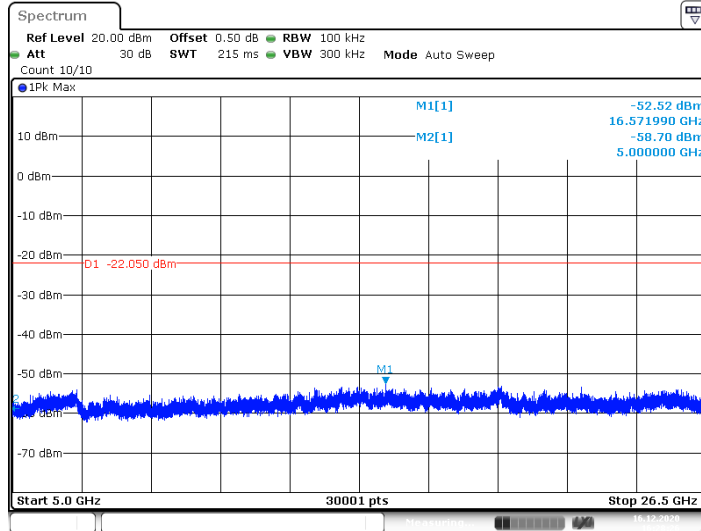

9.7 Band edge testing

Test Method

- 1 Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW \geq RBW, Sweep = auto, Detector function = peak, Trace = max hold
- 2 Allow the trace to stabilize, use the peak and delta measurement to record the result.
- 3 The level displayed must comply with the limit specified in this Section.
- 4 Repeat the test at the hopping off and hopping on mode, submit all the plots.


Limit:

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).




Test Graphs


DH5_Ant1_Low_2402

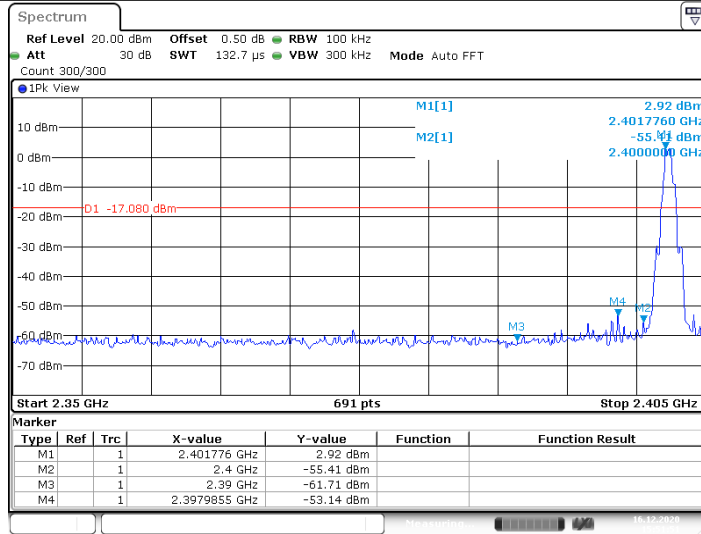


DH5_Ant1_High_2480

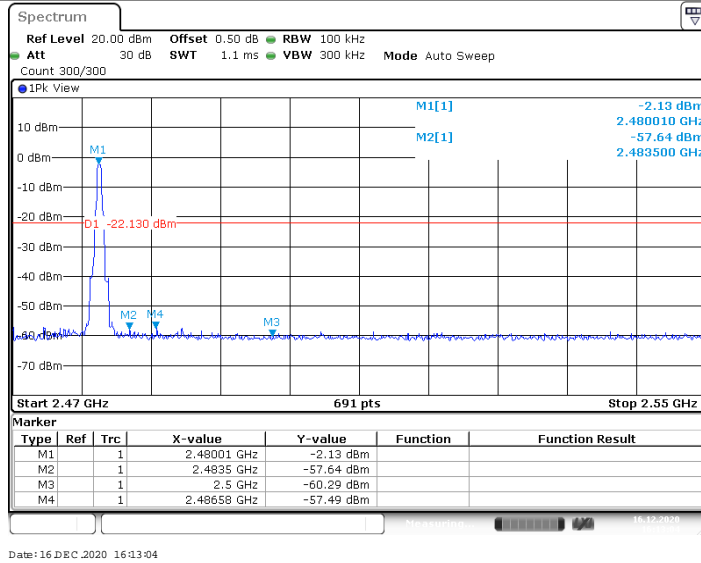


2DH5_Ant1_Low_2402

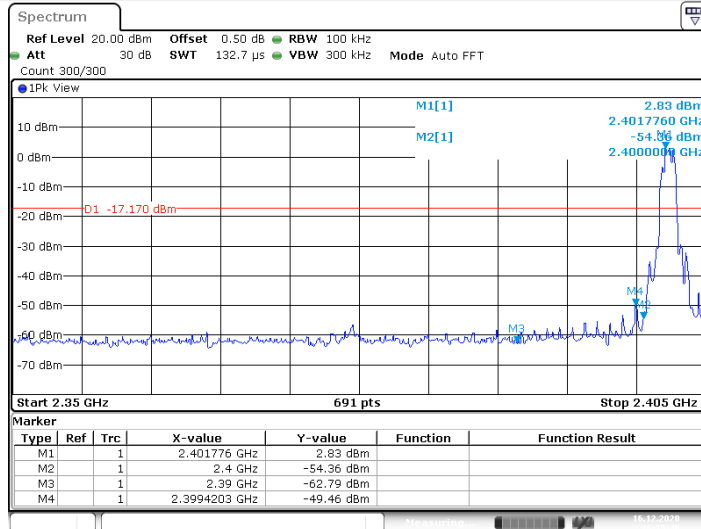


2DH5_Ant1_High_2480

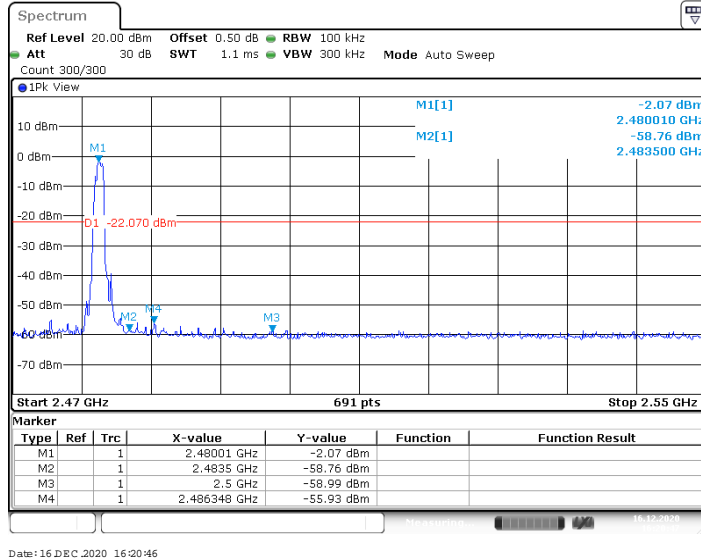


3DH5_Ant1_Low_2402

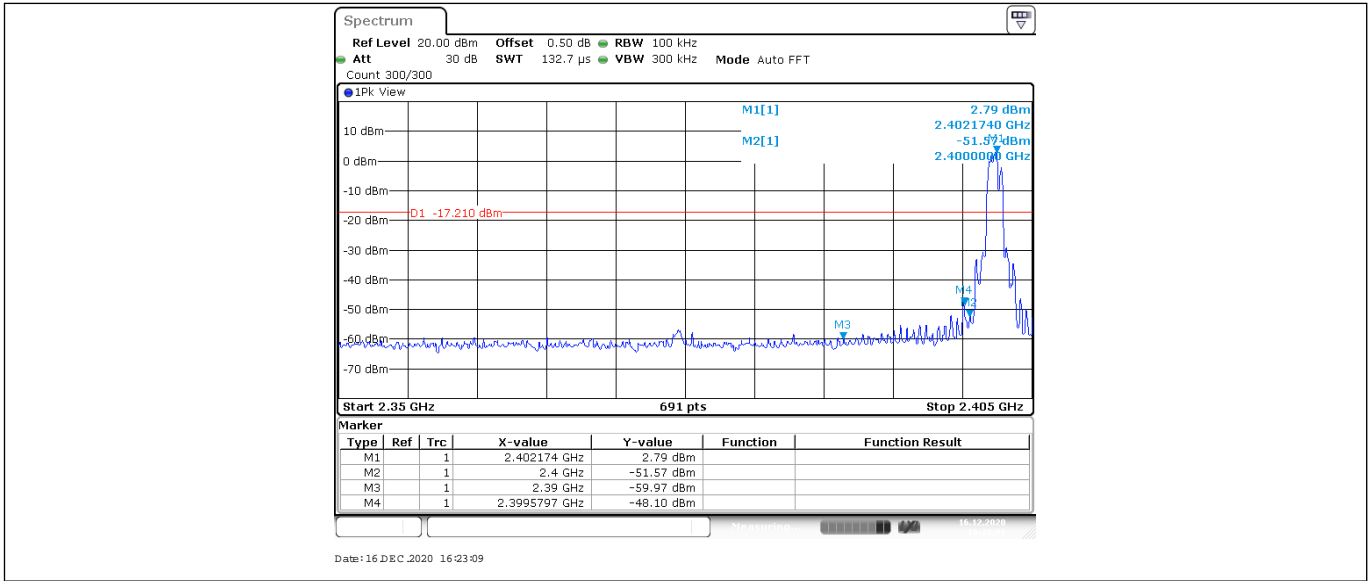


3DH5_Ant1_High_2480

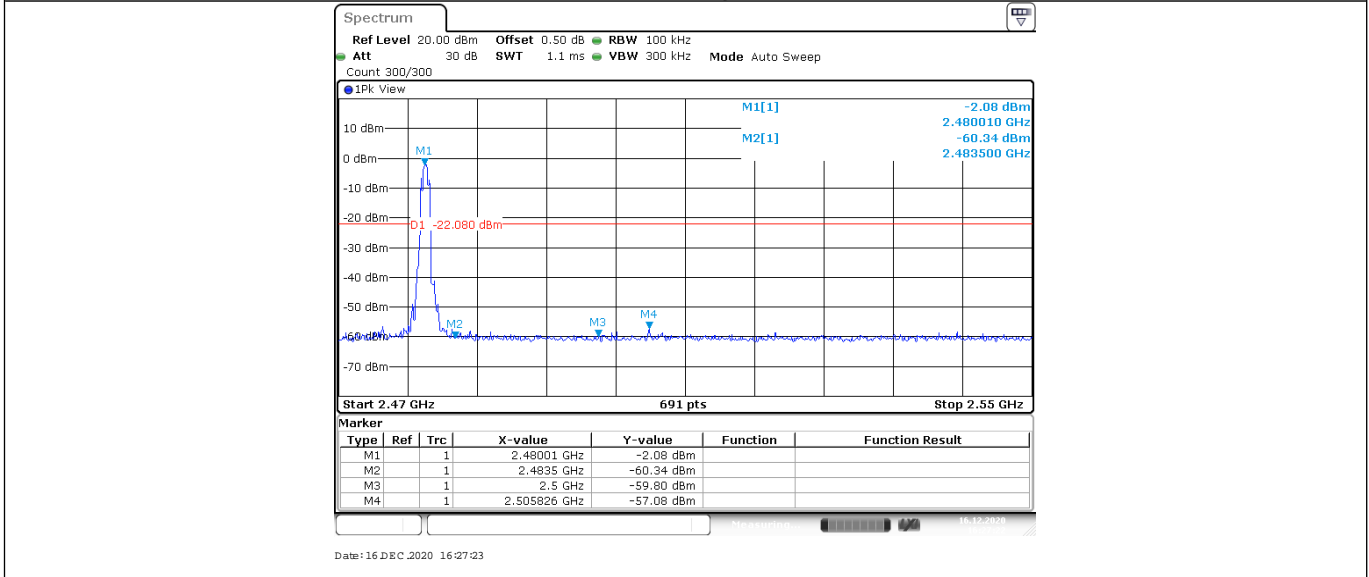


DH5_Ant1_Low_Hop_2402

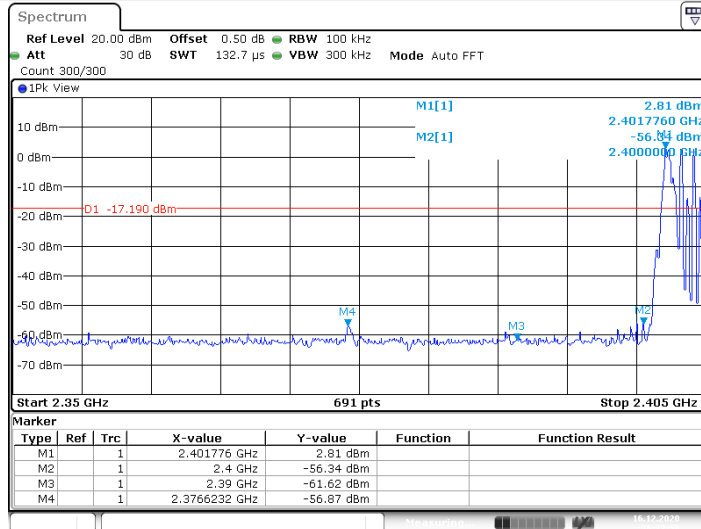


DH5_Ant1_High_Hop_2480

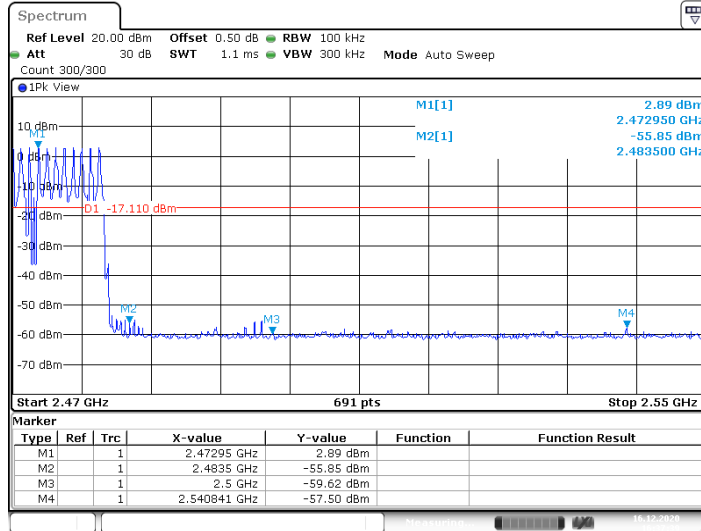


2DH5_Ant1_Low_Hop_2402

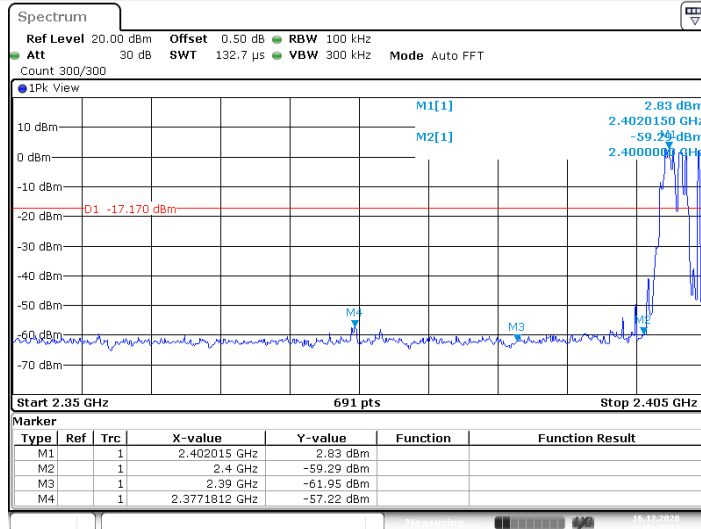


2DH5_Ant1_High_Hop_2480

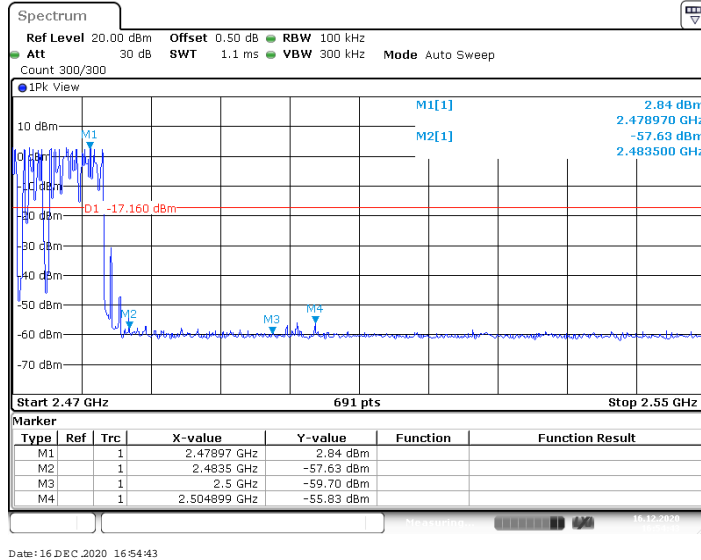

3DH5_Ant1_Low_Hop_2402

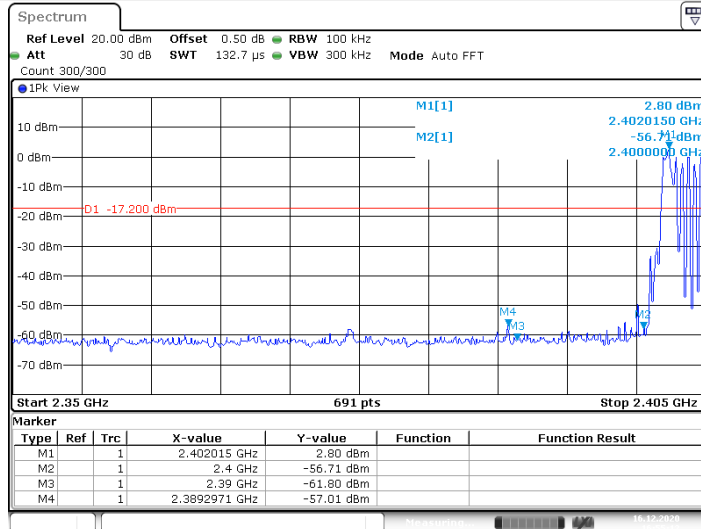

3DH5_Ant1_High_Hop_2480

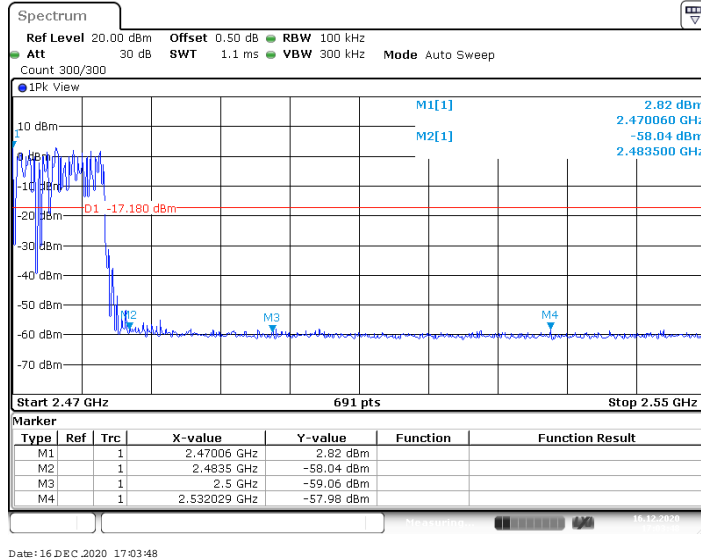

9.8 Spurious radiated emissions for transmitter and receiver

Test Method

1. The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. Use the following spectrum analyzer settings According to C63.10:

For Below 1GHz

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 100 kHz to 120 kHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

For Peak unwanted emissions Above 1GHz:

Span = wide enough to capture the peak level of the in-band emission and all spurious
 RBW = 1MHz, VBW ≥ RBW for peak measurement, Sweep = auto, Detector function = peak, Trace = max hold.

Procedures for average unwanted emissions measurements above 1000 MHz

- a) RBW = 1MHz.
- b) VBW ≥ [3 × RBW].
- c) Detector = RMS (power averaging), if $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$. Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the

emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Limit

The radio emission outside the operating frequency band shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Radiated emissions which fall in the restricted bands, as defined in section 15.205, must comply with the radiated emission limits specified in section 15.209.

| Frequency MHz | Field Strength uV/m | Measured Distance Meters |
|------------------|------------------------|-----------------------------|
| 0.009~0.490 | 2400/F (kHz) | 300 |
| 0.490~1.705 | 24000/F (kHz) | 30 |
| 1.705~30 | 30 | 30 |

| Frequency MHz | Field Strength uV/m | Field Strength dBµV/m | Detector |
|------------------|------------------------|--------------------------|----------|
| 30-88 | 100 | 40 | QP |
| 88-216 | 150 | 43.5 | QP |
| 216-960 | 200 | 46 | QP |
| 960-1000 | 500 | 54 | QP |
| Above 1000 | 500 | 54 | AV |
| Above 1000 | 5000 | 74 | PK |



Spurious radiated emissions for transmitter and receiver

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

The only worse case (which is subject to the maximum EIRP, $\pi/4$ DQPSK and 8DPSK mode) test result is listed in the report.



30-1000MHz Radiated Emission

EUT Information


EUT Name: Car Radio with BT Module
 Model: K218
 Client: Yanfeng Visteon Automotive Electronics Co.,Ltd
 Op Cond: 2402MHz Tx, π/4DQPSK 2DH5, 12VDC, T21.4, H47.3%, P103.1kPa
 Operator: Wenqiang LU
 Test Spec: FCC Part 15
 Comment: Horizontal
 Sample No: SHA-537314-1

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
 Receiver: [ESR 3]
 Level Unit: dBuV/m

| Subrange | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|----------------|-----------|-----------|-----------|------------|--------|
| 30 MHz - 1 GHz | 48.5 kHz | PK+ | 120 kHz | 0.005 s | 20 dB |

RE_VULB9168_pre_Cont_30-1000

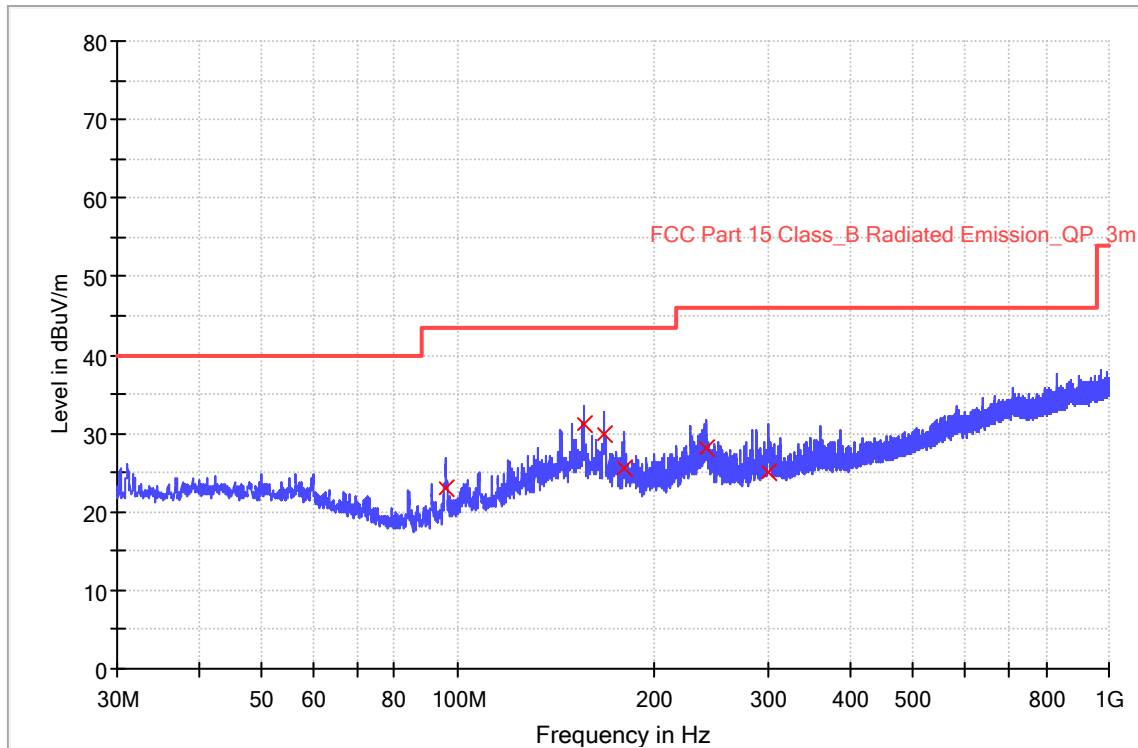

Limit and Margin

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|-----|---------------|------------|-------------------|----------------------|
| 95.960000 | 22.9 | 1000.0 | 120.000 | 199.6 | H | 207.0 | 11.0 | 20.6 | 43.5 |
| 155.800000 | 31.2 | 1000.0 | 120.000 | 199.6 | H | 60.0 | 15.7 | 12.3 | 43.5 |
| 167.880000 | 30.0 | 1000.0 | 120.000 | 199.6 | H | 166.0 | 14.9 | 13.5 | 43.5 |
| 180.040000 | 25.7 | 1000.0 | 120.000 | 199.6 | H | 359.0 | 13.3 | 17.8 | 43.5 |
| 240.360000 | 28.0 | 1000.0 | 120.000 | 199.6 | H | 125.0 | 13.4 | 18.0 | 46.0 |
| 300.280000 | 25.1 | 1000.0 | 120.000 | 199.6 | H | 257.0 | 15.0 | 20.9 | 46.0 |



30-1000MHz Radiated Emission

EUT Information


EUT Name: Car Radio with BT Module
 Model: K218
 Client: Yanfeng Visteon Automotive Electronics Co.,Ltd
 Op Cond: 2402MHz Tx, π/4DQPSK 2DH5, 12VDC, T21.4, H47.3%, P103.1kPa
 Operator: Wenqiang LU
 Test Spec: FCC Part 15
 Comment: Vertical
 Sample No: SHA-537314-1

Sweep Setup: RE_VULB9168_pre_Cont_30-1000 [EMI radiated]

Hardware Setup: RE_VULB9168
 Receiver: [ESR 3]
 Level Unit: dBuV/m

| Subrange | Step Size | Detectors | Bandwidth | Sweep Time | Preamp |
|----------------|-----------|-----------|-----------|------------|--------|
| 30 MHz - 1 GHz | 48.5 kHz | PK+ | 120 kHz | 0.005 s | 20 dB |

RE_VULB9168_pre_Cont_30-1000

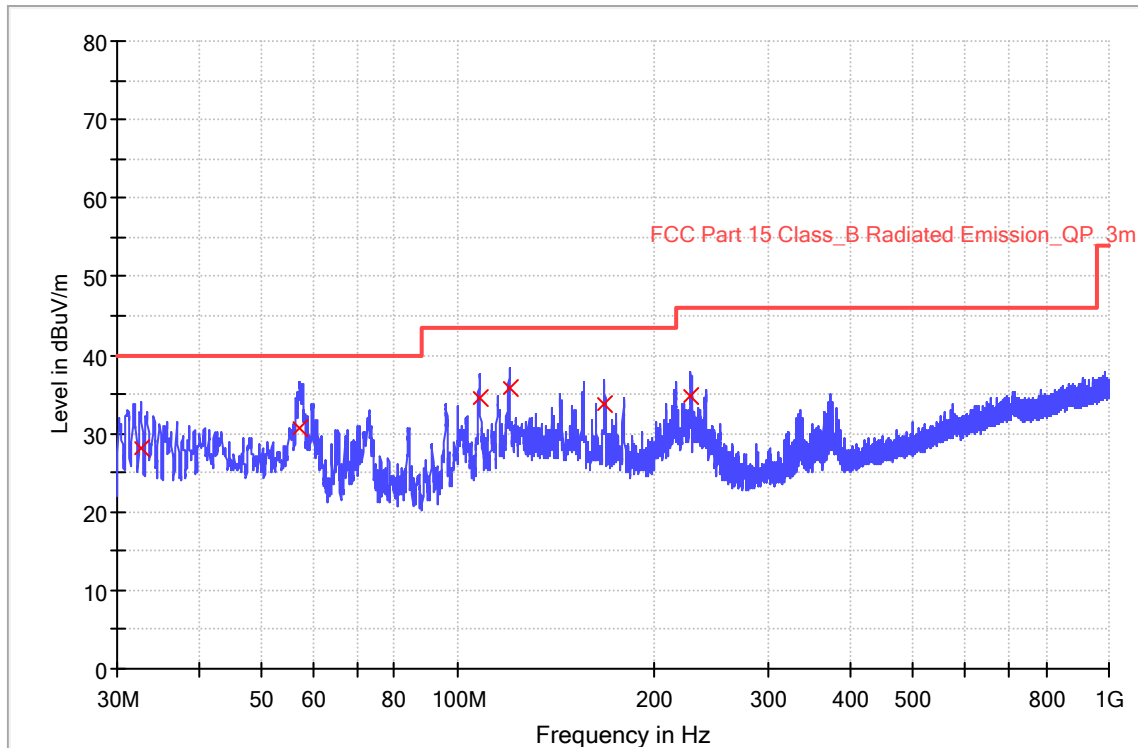

Limit and Margin

| Frequency (MHz) | QuasiPeak (dBuV/m) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) | Margin - QPK (dB) | Limit - QPK (dBuV/m) |
|-----------------|--------------------|-----------------|-----------------|-------------|-----|---------------|------------|-------------------|----------------------|
| 32.720000 | 28.2 | 1000.0 | 120.000 | 100.2 | V | 66.0 | 13.9 | 11.9 | 40.0 |
| 57.160000 | 30.8 | 1000.0 | 120.000 | 100.2 | V | 312.0 | 13.8 | 9.2 | 40.0 |
| 108.000000 | 34.6 | 1000.0 | 120.000 | 100.2 | V | 198.0 | 12.2 | 8.9 | 43.5 |
| 119.920000 | 35.8 | 1000.0 | 120.000 | 100.2 | V | 243.0 | 13.5 | 7.8 | 43.5 |
| 167.840000 | 33.8 | 1000.0 | 120.000 | 100.2 | V | 106.0 | 14.9 | 9.7 | 43.5 |
| 227.720000 | 34.8 | 1000.0 | 120.000 | 100.2 | V | 148.0 | 12.8 | 11.2 | 46.0 |

Transmitting spurious emission test result as below:

Bluetooth Mode $\pi/4$ DQPSK Modulation 2402MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Detector | Margin | Result |
|-----------|----------------|--------------|--------------|----------|--------|--------|
| MHz | dBuV/m | | dB μ V/m | | dBuV/m | |
| 2376* | 43.29 | H | 74.0 | PK | 30.71 | Pass |
| 7207 | 48.84 | H | 74.0 | PK | 25.16 | Pass |
| 2376* | 47.80 | V | 74.0 | PK | 26.2 | Pass |
| 7207 | 48.46 | V | 74.0 | PK | 25.54 | Pass |

Bluetooth Mode 8DPSK Modulation 2402MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Detector | Margin | Result |
|-----------|----------------|--------------|--------------|----------|--------|--------|
| MHz | dBuV/m | | dB μ V/m | | dBuV/m | |
| 2384* | 43.92 | H | 74.0 | PK | 30.08 | Pass |
| 7206 | 48.33 | H | 74.0 | PK | 25.67 | Pass |
| 2376* | 46.93 | V | 74.0 | PK | 27.07 | Pass |
| 7206 | 51.47 | V | 74.0 | PK | 22.53 | Pass |

Bluetooth Mode 8DPSK Modulation 2441MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Detector | Margin | Result |
|-----------|----------------|--------------|--------------|----------|--------|--------|
| MHz | dBuV/m | | dB μ V/m | | dBuV/m | |
| 7322* | 52.14 | H | 74.0 | PK | 21.86 | Pass |
| 7323* | 52.51 | V | 74.0 | PK | 21.49 | Pass |

Bluetooth Mode 8DPSK Modulation 2480MHz Test Result

| Frequency | Emission Level | Polarization | Limit | Detector | Margin | Result |
|-----------|----------------|--------------|--------------|----------|--------|--------|
| MHz | dBuV/m | | dB μ V/m | | dBuV/m | |
| 2483.5* | 46.41 | H | 74.0 | PK | 27.59 | Pass |
| 7440* | 51.58 | H | 74.0 | PK | 22.42 | Pass |
| 2483.6* | 46.18 | V | 74.0 | PK | 27.82 | Pass |
| 7440* | 50.26 | V | 74.0 | PK | 23.74 | Pass |

Remark:

- (1) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are the noise floor or attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (2) "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.
- (3) Emission Level = Reading level + Correction Factor
 Above 1GHz: Corrector factor = Antenna Factor + Cable Loss- Pre-amplifier
 Below 1GHz: Corrector factor = Antenna Factor + Cable Loss
 (The Reading Level is recorded by software which is not shown in the sheet)

Note 1: The test trace is same as the ambient noise and the amplitude of the emissions are attenuated more than 20dB below the permissible (the test frequency range: 9kHz ~ 30MHz, 18GHz ~ 25GHz), therefore no data appear in the report.

10 Test Equipment List

List of Test Instruments

Test Site1

| | DESCRIPTION | MANUFACTURER | MODEL NO. | SERIAL NO. | CAL. DATE | CAL. DUE DATE |
|----------------------------------|---|-----------------|-----------|------------|-----------|---------------|
| C | Signal Analyzer | Rohde & Schwarz | FSV40 | 101091 | 2020-8-4 | 2021-8-3 |
| RE | EMI Test Receiver | Rohde & Schwarz | ESR3 | 101906 | 2020-8-4 | 2021-8-3 |
| | Signal Analyzer | Rohde & Schwarz | FSV40 | 101091 | 2020-8-4 | 2021-8-3 |
| | Trilog Super Broadband Test Antenna | Schwarzbeck | VULB 9168 | 961 | 2019-3-16 | 2022-3-15 |
| | Horn Antenna | Rohde & Schwarz | HF907 | 102393 | 2018-6-11 | 2021-4-1 |
| | Pre-amplifier | Rohde & Schwarz | SCU-18D | 19006451 | 2020-8-4 | 2021-8-3 |
| | Loop antenna | Rohde & Schwarz | HFH2-Z2 | 100443 | 2020-6-28 | 2021-6-27 |
| | DOUBLE-RIDGED WAVEGUIDE HORN WITH PRE-AMPLIFIER (18 GHZ - 40 GHZ) | ETS-Lindgren | 3116C-PA | 002222727 | 2018-1-29 | 2021-1-28 |
| | 3m Semi-anechoic chamber | TDK | 9X6X6 | ---- | 2018-5-11 | 2021-5-10 |
| Measurement Software Information | | | | | | |
| Test Item | Software | Manufacturer | Version | | | |
| RE | EMC 32 | Rohde & Schwarz | V9.15.00 | | | |

C - Conducted RF tests

- Conducted peak output power
- 6dB bandwidth
- 20dB bandwidth and 99% Occupied Bandwidth
- Carrier frequency separation
- Number of hopping frequencies
- Dwell Time
- Power spectral density*
- Spurious RF conducted emissions
- Band edge

11 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

| Items | Extended Uncertainty |
|--|--|
| Conducted Disturbance at Mains Terminals | 150kHz to 30MHz, LISN, ± 3.16 dB |
| Radiated Disturbance | 30MHz to 1GHz, ± 5.03 dB (Horizontal) ± 5.12 dB (Vertical) 1GHz to 18GHz, ± 5.49 dB 18GHz to 25GHz, ± 5.63 dB |
| Carrier power conducted measurement | 50MHz~18GHz, ± 1.238 dB |
| Spurious Emission Conducted Measurement | 9kHz ~40GHz, ± 1.224 dB |



12 Photographs of Test Set-ups

Refer to the < Test Setup photos >.



13 Photographs of EUT

Refer to the < External Photos > & < Internal Photos >.

THE END