

# FCC Part 22H & 24E Measurement and Test Report

For

**Hyundai Corporation**

25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

**FCC ID: RQQHLT-FS50301**

**FCC Rules:** FCC Part 22H, FCC Part 24E

**Product Description:** 3G Smart Phone

**Tested Model:** E503F

**Report No.:** STR18088021I-1

**Sample Receipt Date:** 2018-08-06

**Tested Date:** 2018-08-07 to 2018-08-22

**Issued Date:** 2018-08-23

**Tested By:** Jason Su / Engineer

*Jason Su*

**Reviewed By:** Silin Chen / EMC Manager

*Silin Chen*

**Approved & Authorized By:** Jandy So / PSQ Manager

*Jandy So*

**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>3. RF EXPOSURE.....</b>	<b>10</b>
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
<b>4. RF OUTPUT POWER.....</b>	<b>11</b>
4.1 STANDARD APPLICABLE.....	11
4.2 TEST PROCEDURE.....	11
4.3 ENVIRONMENTAL CONDITIONS.....	11
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	12
<b>5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....</b>	<b>19</b>
5.1 STANDARD APPLICABLE.....	19
5.2 TEST PROCEDURE.....	19
5.3 ENVIRONMENTAL CONDITIONS.....	19
5.4 SUMMARY OF TEST RESULTS.....	20
<b>6. EMISSION BANDWIDTH.....</b>	<b>21</b>
6.1 STANDARD APPLICABLE.....	21
6.2 TEST PROCEDURE.....	21
6.3 ENVIRONMENTAL CONDITIONS.....	21
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	22
<b>7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>	<b>39</b>
7.1 STANDARD APPLICABLE.....	39
7.2 TEST PROCEDURE.....	39
7.3 ENVIRONMENTAL CONDITIONS.....	39
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	40
<b>8. SPURIOUS RADIATED EMISSIONS.....</b>	<b>88</b>
8.1 STANDARD APPLICABLE.....	88
8.2 TEST PROCEDURE.....	88
8.3 ENVIRONMENTAL CONDITIONS.....	88
8.4 SUMMARY OF TEST RESULTS/PLOTS.....	88
<b>9. FREQUENCY STABILITY.....</b>	<b>99</b>
9.1 STANDARD APPLICABLE.....	99
9.2 TEST PROCEDURE.....	99
9.3 ENVIRONMENTAL CONDITIONS.....	99
9.4 SUMMARY OF TEST RESULTS/PLOTS.....	100

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Hyundai Corporation  
Address of applicant: 25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

Manufacturer: Guizhou Fortuneship Technology Co., Ltd  
Address of manufacturer: 2nd Floor, Factory Building 4, Hi-Tech Industrial Park, Xinpu Economic Development Zone, Xinpu New District, Zunyi City, Guizhou Province, P. R. China

General Description of EUT:	
Product Name:	3G Smart Phone
Brand Name:	HYUNDAI
Model No.:	E503F
Adding Model(s):	E503FS
Rated Voltage:	DC3.7V
Battery:	2200mAh
Adapter Model:	Model: HY-C1000B Input:AC100-240V 50/60Hz 0.3A Output: DC5V 1000mA
Software Version:	HYUNDAI_E503F_V8.1.1_20180711
Hardware Version:	ZH275-MB-V1.0
Device Category:	Portable Device
<i>The EUT Main board support GSM850/PCS1900, WCDMA Band 2/5 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS class 12 for GSM850/PCS1900, GPS, FM, Bluetooth and Wi-Fi functions. For more information see the following datasheet.</i>	
<i>Note: The test data is gathered from a production sample provided by the manufacturer. The main-test model E503F has two SIM card slots, adding model E503FS has only one SIM card slots, but the circuit and the electronic construction do not change, declared by the manufacturer. The two models are test and only the worst case model is showed in the test report.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE(Only downlink)
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 33.26dBm, GSM1900: 29.36dBm
Type of Emission:	GSM850: 252KGXW, GSM1900: 252KGXW
Type of Modulation:	GMSK, 8DPSK(only downlink)
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: 0.51 dBi; GSM1900: 0.56 dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 22.48dBm, WCDMA Band 5: 22.75dBm
Type of Emission:	WCDMA Band 2: 4M19F9W WCDMA Band 5: 4M18F9W
Type of Modulation:	BPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: 0.52dBi, WCDMA Band 5: 0.55dBi

## 1.2 Test Standards

The following report is prepared on behalf of the Hyundai Corporation. in accordance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 2 subpart J, FCC Part 22 subpart H and FCC Part 24 subpart E of the Federal Communication Commissions rules.

*Maintenance of compliance* is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI/TIA-603-D: 2010 and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 971168 D01 Power Meas License Digital Systems v03 shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	GSM 1900	Low, Middle, High Channels
TM4	GPRS 1900	Low, Middle, High Channels
TM5	WCDMA Band 5	Low, Middle, High Channels
TM6	HSDPA Band 5	Low, Middle, High Channels
TM7	HSUPA Band 5	Low, Middle, High Channels
TM8	WCDMA Band 2	Low, Middle, High Channels
TM9	HSDPA Band 2	Low, Middle, High Channels
TM10	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

### EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	1.2	Unshielded	Without Core
Earphone	1.5	Unshielded	Without Core

### Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
-------------	--------------	-------	---------------

/	/	/	/
---	---	---	---

**Special Cable List and Details**

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

**1.6 Measurement Uncertainty**

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2018-05-22	2019-05-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2018-05-22	2019-05-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2018-05-22	2019-05-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2018-05-22	2019-05-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2018-05-22	2019-05-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2018-05-22	2019-05-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1068	Broadband	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07



	Antenna					
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18



## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c)	RF Output Power	Compliant
§ 24.51	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b)	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a)	Out of Band Emissions	Compliant
§ 22.355, § 24.235	Frequency Stability	Compliant

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR report.

## 4. RF Output Power

### 4.1 Standard Applicable


According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

### 4.2 Test Procedure

Conducted output power test method:

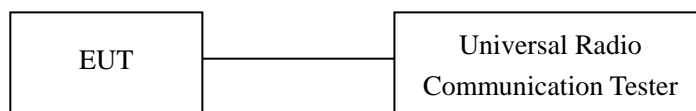

Radiated power test method:

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 4.3 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 4.4 Summary of Test Results/Plots

##### Max. Radiated Power

##### ERP For GSM Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	30.54	1.5	0	H	1.5	0	29.04	38.45
824.2	31.53	1.5	0	V	1.5	0	30.03	38.45
Middle Channel								
836.4	31.74	1.5	0	H	1.5	0	30.24	38.45
836.4	31.22	1.5	0	V	1.5	0	29.72	38.45
High Channel								
848.8	30.83	1.5	0	H	1.5	0	29.33	38.45
848.8	31.23	1.5	0	V	1.5	0	29.73	38.45

##### EIRP For GSM Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	21.23	1.5	0	H	1.9	7.7	27.03	33.00
1850.2	21.85	1.5	0	V	1.9	7.7	27.65	33.00
Middle Channel								
1880.0	21.33	1.5	0	H	1.9	7.7	27.13	33.00
1880.0	21.44	1.5	0	V	1.9	7.7	27.24	33.00
High Channel								
1909.8	21.51	1.5	0	H	1.9	7.7	27.31	33.00
1909.8	21.7	1.5	0	V	1.9	7.7	27.5	33.00

## ERP For GPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	28.67	1.5	0	H	1.5	0	27.17	38.45
824.2	29.1	1.5	0	V	1.5	0	27.6	38.45
Middle Channel								
836.6	29.16	1.5	0	H	1.5	0	27.66	38.45
836.6	28.26	1.5	0	V	1.5	0	26.76	38.45
High Channel								
848.8	28.77	1.5	0	H	1.5	0	27.27	38.45
848.8	29.52	1.5	0	V	1.5	0	28.02	38.45

## EIRP For GPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	19.31	1.5	0	H	1.9	7.7	25.11	33.00
1850.2	19.21	1.5	0	V	1.9	7.7	25.01	33.00
Middle Channel								
1880.0	19.89	1.5	0	H	1.9	7.7	25.69	33.00
1880.0	18.83	1.5	0	V	1.9	7.7	24.63	33.00
High Channel								
1909.8	19.75	1.5	0	H	1.9	7.7	25.55	33.00
1909.8	19.78	1.5	0	V	1.9	7.7	25.58	33.00

## ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	23.08	1.5	0	H	1.5	0	21.58	38.45
826.4	23.7	1.5	0	V	1.5	0	22.2	38.45
Middle Channel								
836.6	23.79	1.5	0	H	1.5	0	22.29	38.45
836.6	23.21	1.5	0	V	1.5	0	21.71	38.45
High Channel								
846.6	22.96	1.5	0	H	1.5	0	21.46	38.45
846.6	23.85	1.5	0	V	1.5	0	22.35	38.45

## ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	20.41	1.5	0	H	1.5	0	18.91	38.45
826.4	21.4	1.5	0	V	1.5	0	19.9	38.45
Middle Channel								
836.6	21.63	1.5	0	H	1.5	0	20.13	38.45
836.6	21.55	1.5	0	V	1.5	0	20.05	38.45
High Channel								
846.6	20.53	1.5	0	H	1.5	0	19.03	38.45
846.6	21.26	1.5	0	V	1.5	0	19.76	38.45

## ERP For HSUPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	20.4	1.5	0	H	1.5	0	18.9	38.45
826.4	21.08	1.5	0	V	1.5	0	19.58	38.45
Middle Channel								
836.6	21	1.5	0	H	1.5	0	19.5	38.45
836.6	21.31	1.5	0	V	1.5	0	19.81	38.45
High Channel								
846.6	20.91	1.5	0	H	1.5	0	19.41	38.45
846.6	20.88	1.5	0	V	1.5	0	19.38	38.45

## EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	15.75	1.5	0	H	1.9	7.7	21.55	33
1852.4	15.63	1.5	0	V	1.9	7.7	21.43	33
Middle Channel								
1880.0	15.47	1.5	0	H	1.9	7.7	21.27	33
1880.0	14.62	1.5	0	V	1.9	7.7	20.42	33
High Channel								
1907.6	15.9	1.5	0	H	1.9	7.7	21.7	33
1907.6	15.89	1.5	0	V	1.9	7.7	21.69	33

## EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	13.18	1.5	0	H	1.9	7.7	18.98	33
1852.4	14.99	1.5	0	V	1.9	7.7	20.79	33
Middle Channel								
1880.0	13.7	1.5	0	H	1.9	7.7	19.5	33
1880.0	13.81	1.5	0	V	1.9	7.7	19.61	33
High Channel								
1907.6	14.2	1.5	0	H	1.9	7.7	20	33
1907.6	13.29	1.5	0	V	1.9	7.7	19.09	33

## EIRP For HSUPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	14.19	1.5	0	H	1.9	7.7	19.99	33
1852.4	13.31	1.5	0	V	1.9	7.7	19.11	33
Middle Channel								
1880.0	14.73	1.5	0	H	1.9	7.7	20.53	33
1880.0	14.11	1.5	0	V	1.9	7.7	19.91	33
High Channel								
1907.6	14.29	1.5	0	H	1.9	7.7	20.09	33
1907.6	14.55	1.5	0	V	1.9	7.7	20.35	33

Note: Result = Substitute - Cable loss + Antenna Gain



**Max. Conducted Output Power**

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM	Low Channel	824.2	33.03	38.45
	Middle Channel	836.6	33.07	38.45
	High Channel	848.8	33.26	38.45
GPRS(1 Slot)	Low Channel	824.2	32.83	38.45
	Middle Channel	836.6	32.96	38.45
	High Channel	848.8	33.09	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GSM	Low Channel	1850.2	29.24	33.0
	Middle Channel	1880.0	29.16	33.0
	High Channel	1909.8	29.04	33.0
GPRS(1 Slot)	Low Channel	1850.2	29.36	33.0
	Middle Channel	1880.0	29.27	33.0
	High Channel	1909.8	29.15	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	22.66	38.45
	Middle Channel	836.6	22.75	38.45
	High Channel	846.6	22.16	38.45
HSDPA	Low Channel	826.4	21.75	38.45
	Middle Channel	836.6	21.80	38.45
	High Channel	846.6	21.36	38.45
HSUPA	Low Channel	826.4	21.80	38.45
	Middle Channel	836.6	21.74	38.45
	High Channel	846.6	21.40	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	22.48	33.00
	Middle Channel	1880.0	22.21	33.00
	High Channel	1907.6	22.33	33.00
HSDPA	Low Channel	1852.4	21.59	33.00
	Middle Channel	1880.0	21.23	33.00
	High Channel	1907.6	21.47	33.00
HSUPA	Low Channel	1852.4	21.65	33.00
	Middle Channel	1880.0	21.39	33.00
	High Channel	1907.6	21.46	33.00

## 5. Peak-to-average Ratio (PAR) of Transmitter

### 5.1 Standard Applicable


According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

### 5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

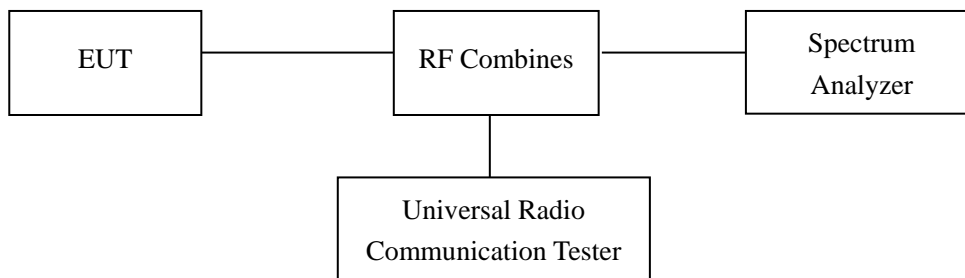

### 5.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 5.4 Summary of Test Results

Only the worst case was selected to record

For PCS Band

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	512	1850.2	4.21	13
GPRS(1 Slot)	512	1850.2	2.14	13
EDGE(1 Slot)	512	1850.2	6.51	13

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9400	1880	3.64	13
HSDPA	9400	1880	2.98	13
HSUPA	9400	1880	4.51	13

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

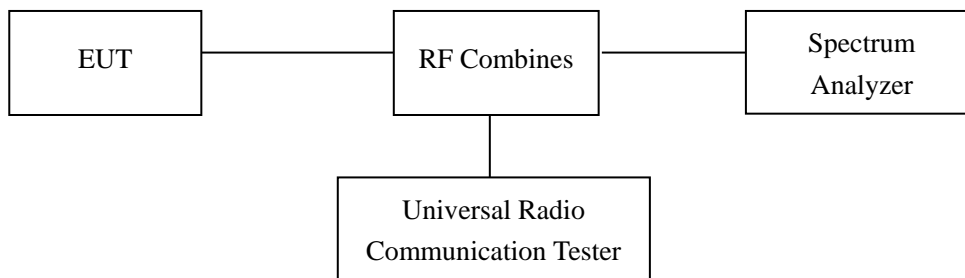

### 6.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 6.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	247.5394	310.386
	190	836.6	252.4388	318.200
	251	848.8	247.4555	322.314
GPRS	128	824.2	242.7556	300.698
	190	836.6	247.0312	317.684
	251	848.8	248.0090	316.355

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	247.1071	308.721
	661	1880.0	252.2074	319.938
	810	1909.8	245.2819	317.586
GPRS	512	1850.2	245.2648	324.368
	661	1880.0	237.5073	305.102
	810	1909.8	246.4378	323.903


## For Band 5

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	4132	826.4	4.1750	4.704
	4183	836.6	4.1757	4.698
	4233	846.6	4.1561	4.723
HSDPA	4132	826.4	4.1555	4.718
	4183	836.6	4.1610	4.698
	4233	846.6	4.1446	4.713
HSUPA	4132	826.4	4.1690	4.734
	4183	836.6	4.1484	4.716
	4233	846.6	4.1815	4.714


## For Band 2

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (MHz)	26 dB Emission Bandwidth (MHz)
WCDMA	9262	1852.4	4.1692	4.731
	9400	1880.0	4.1873	4.712
	9538	1907.6	4.1763	4.728
HSDPA	9262	1852.4	4.1650	4.717
	9400	1880.0	4.1726	4.737
	9538	1907.6	4.1798	4.735
HSUPA	9262	1852.4	4.1451	4.734
	9400	1880.0	4.1577	4.739
	9538	1907.6	4.1662	4.741

For Cellular Band  
GSM Low Channel

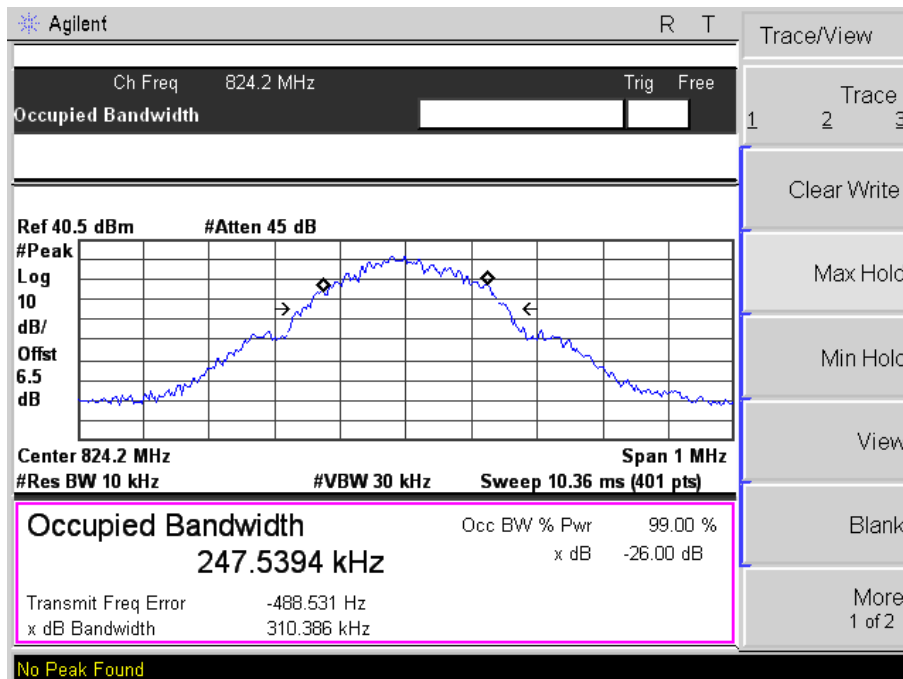


GSM Middle Channel

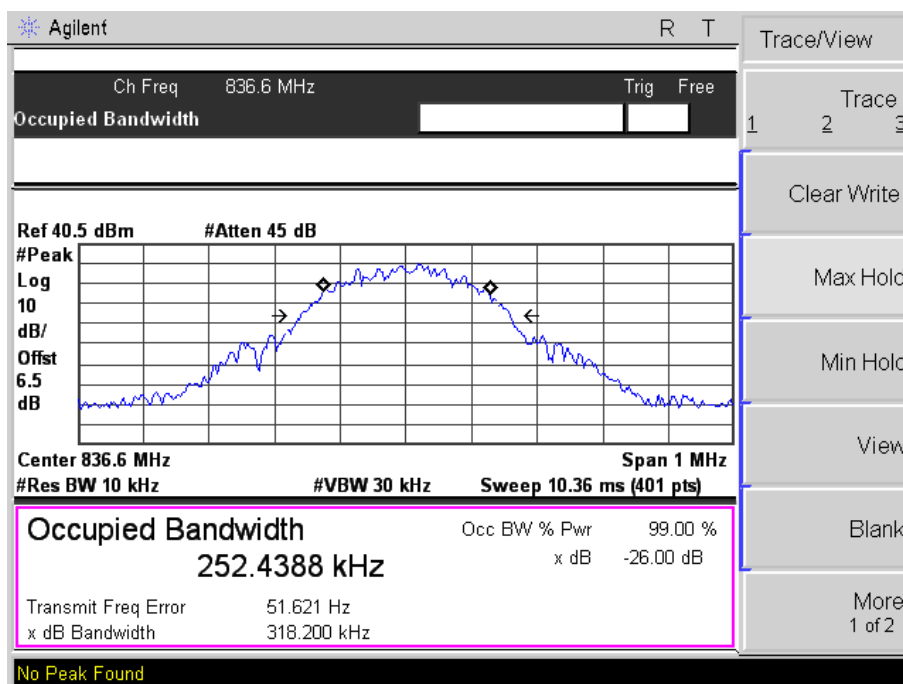





GSM High channel

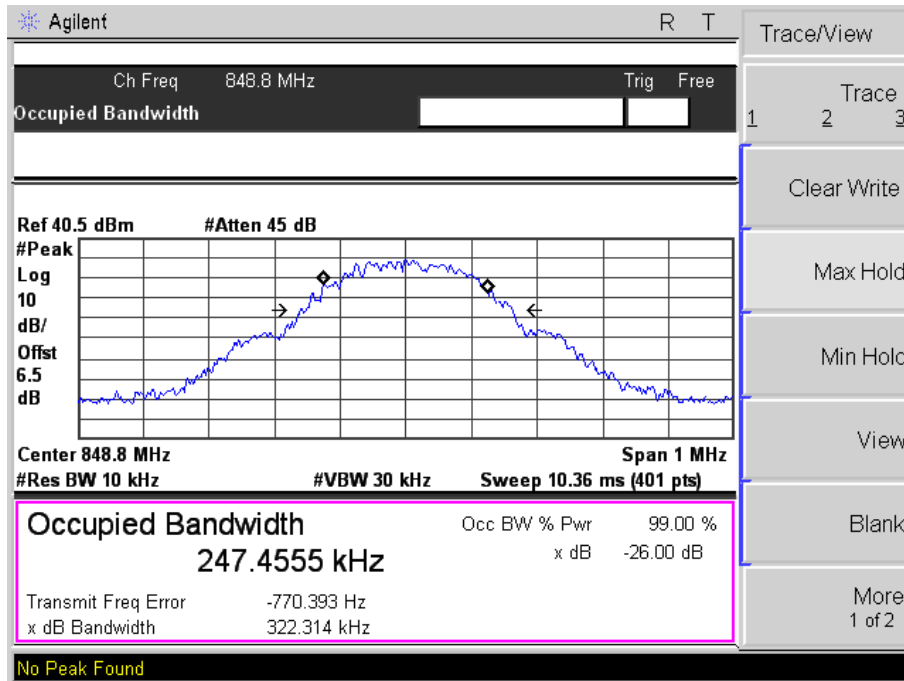


GPRS Low Channel

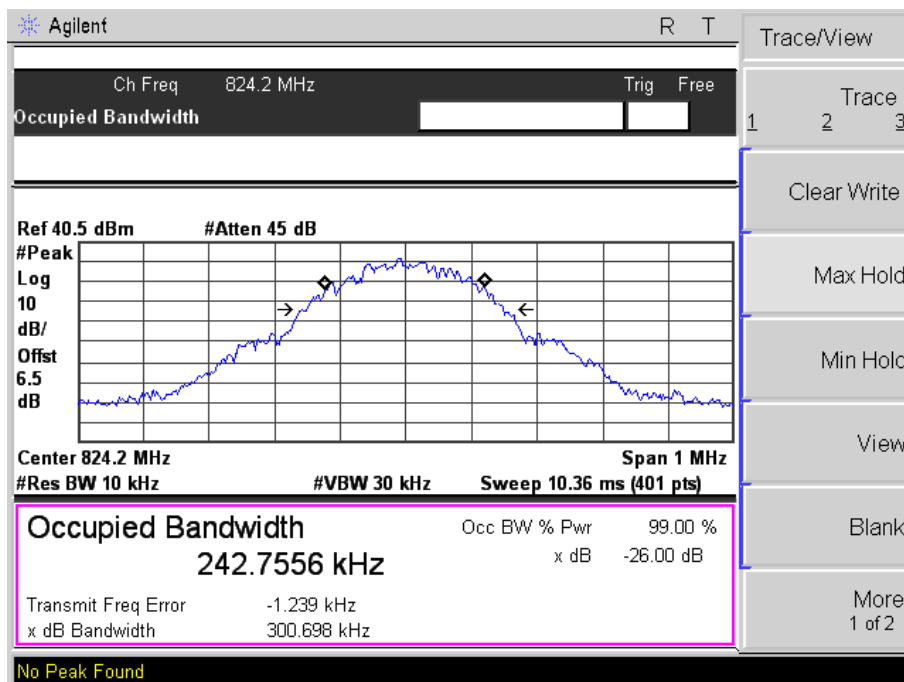


GPRS Middle Channel

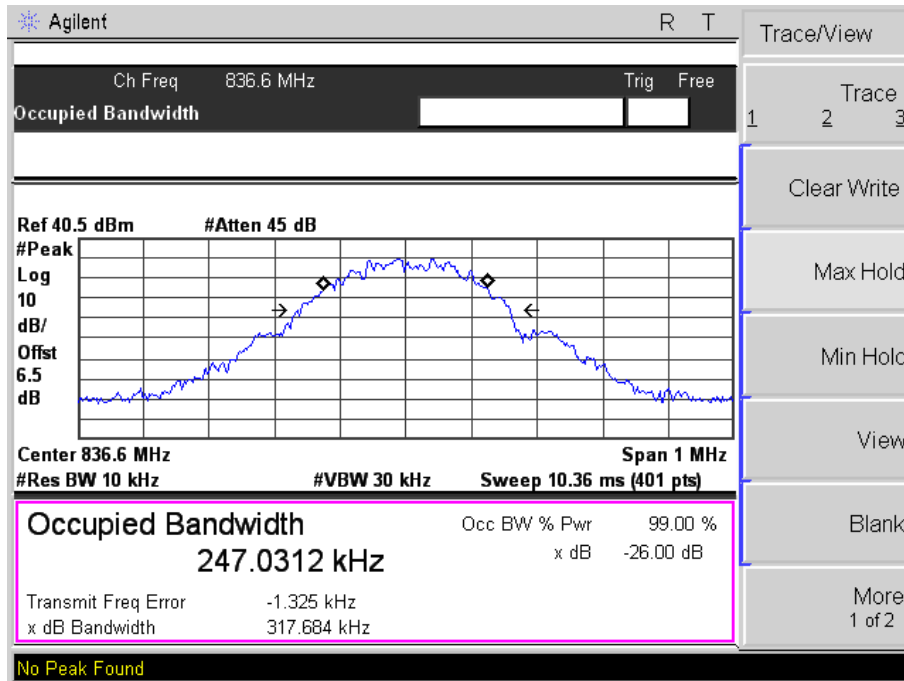


GPRS High Channel

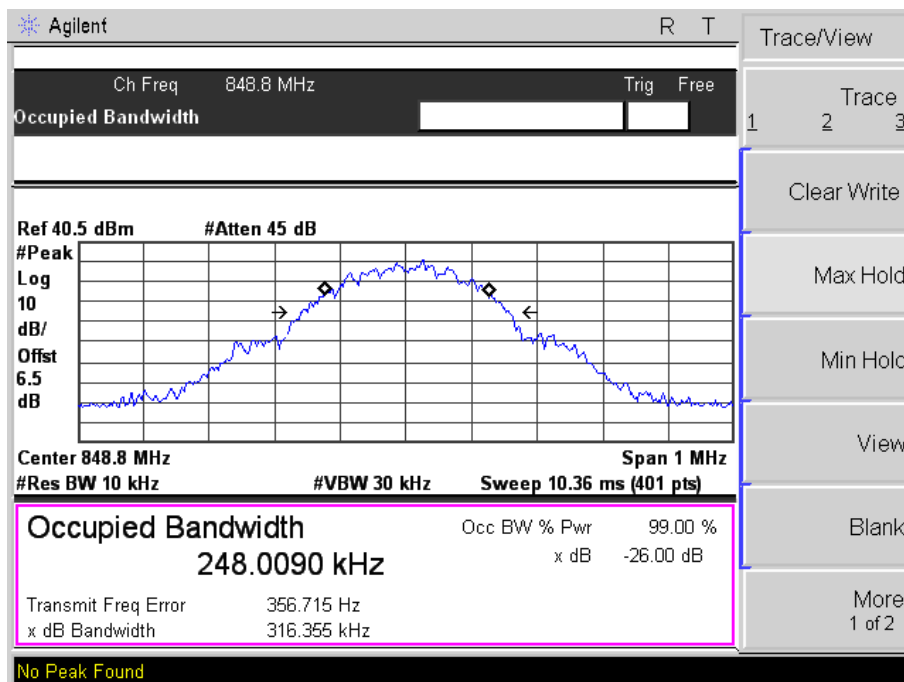


For PCS Band  
GSM Low Channel

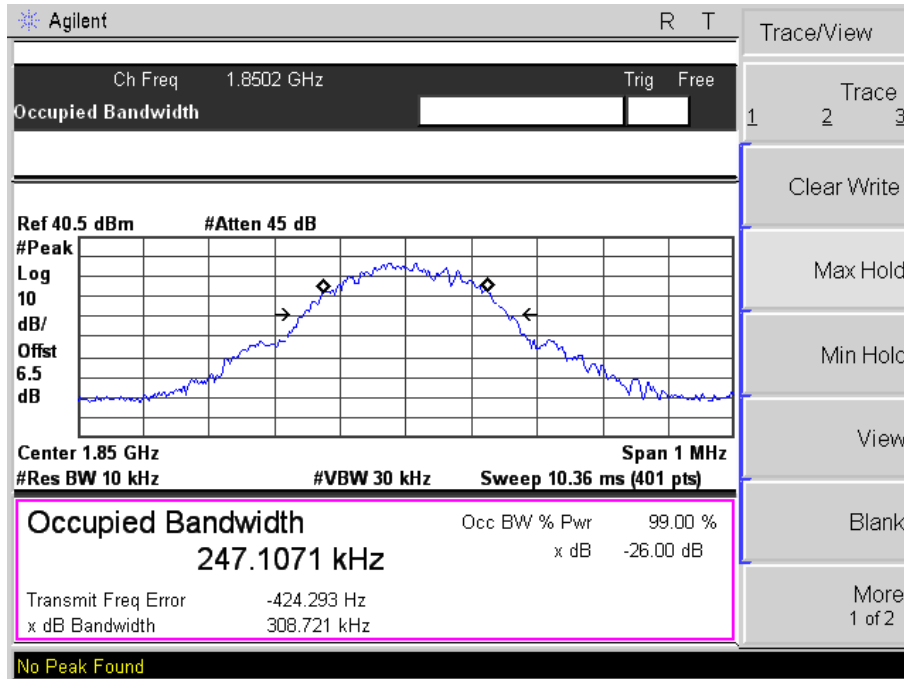


GSM Middle Channel

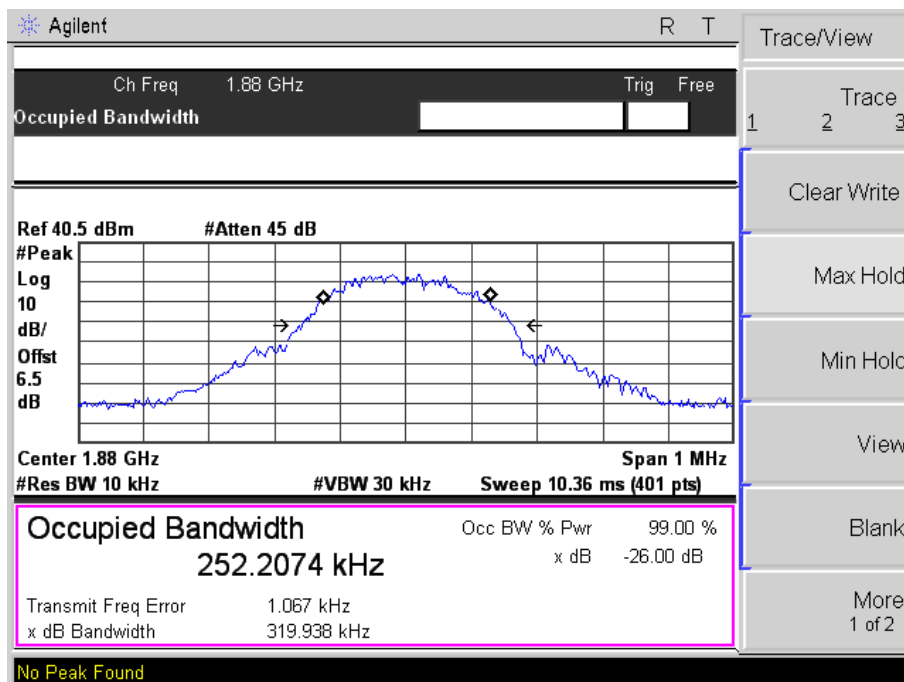


GSM High channel

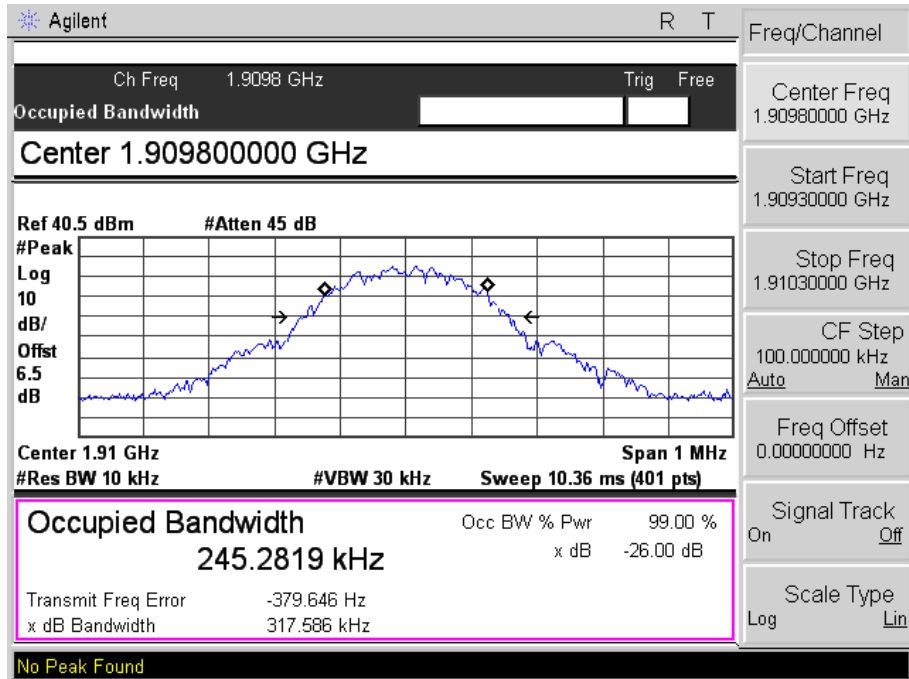


GPRS Low Channel

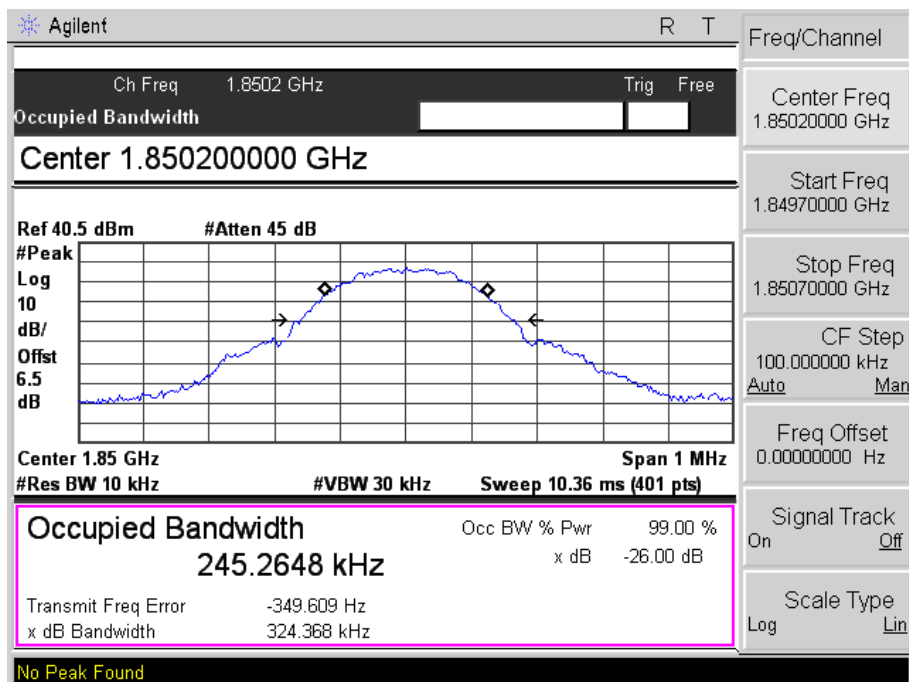


GPRS Middle Channel

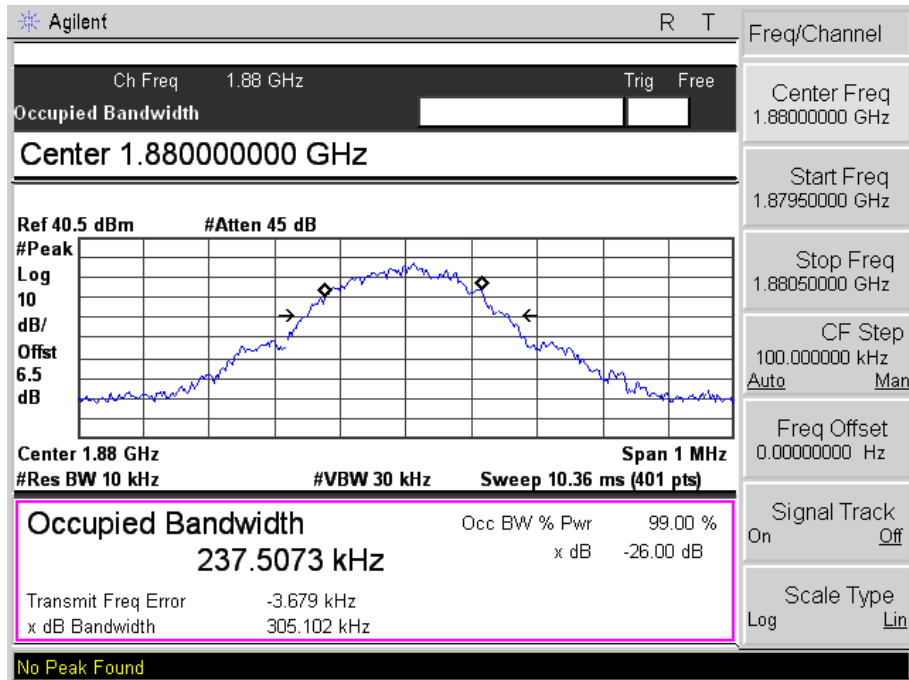


GPRS High Channel

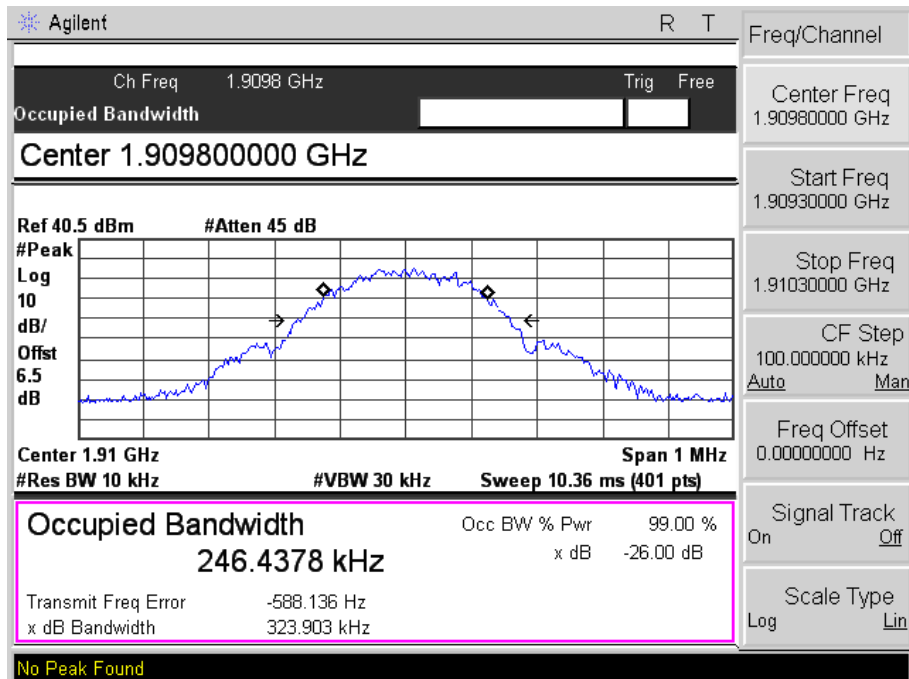


For Band V  
WCDMA Low Channel

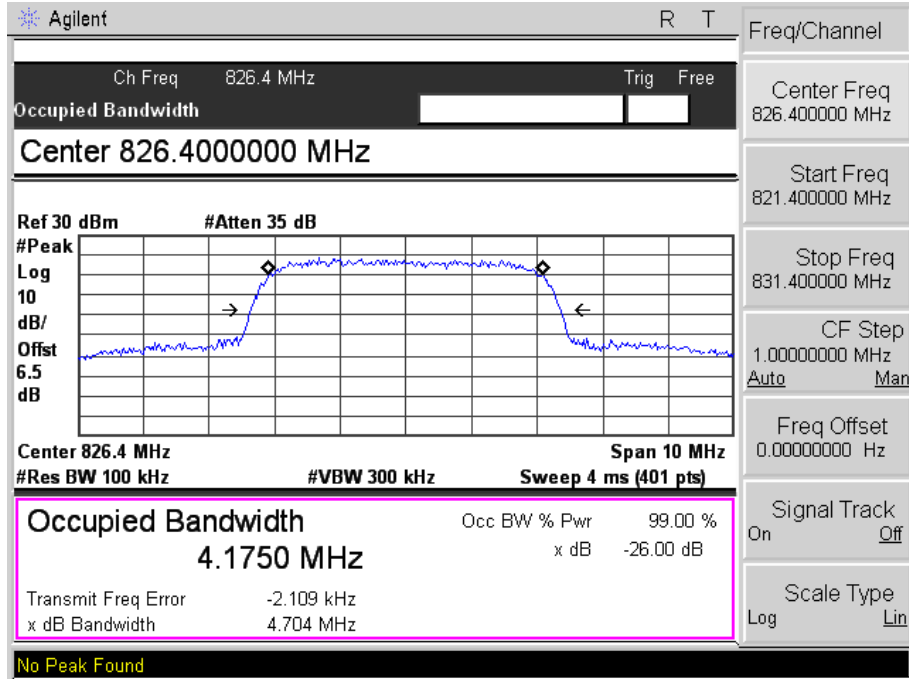


WCDMA Middle Channel

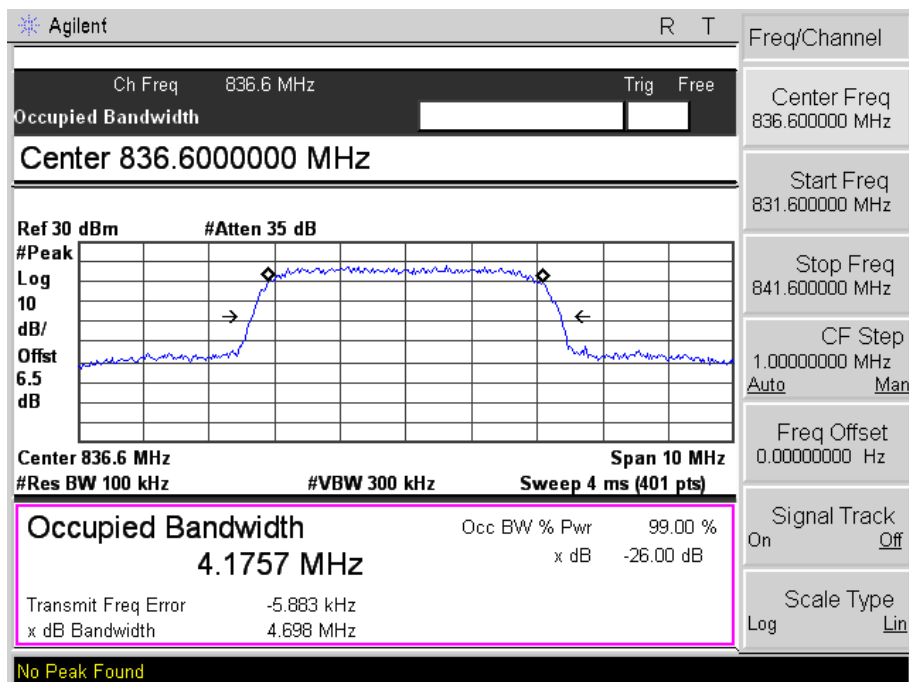


WCDMA High Channel

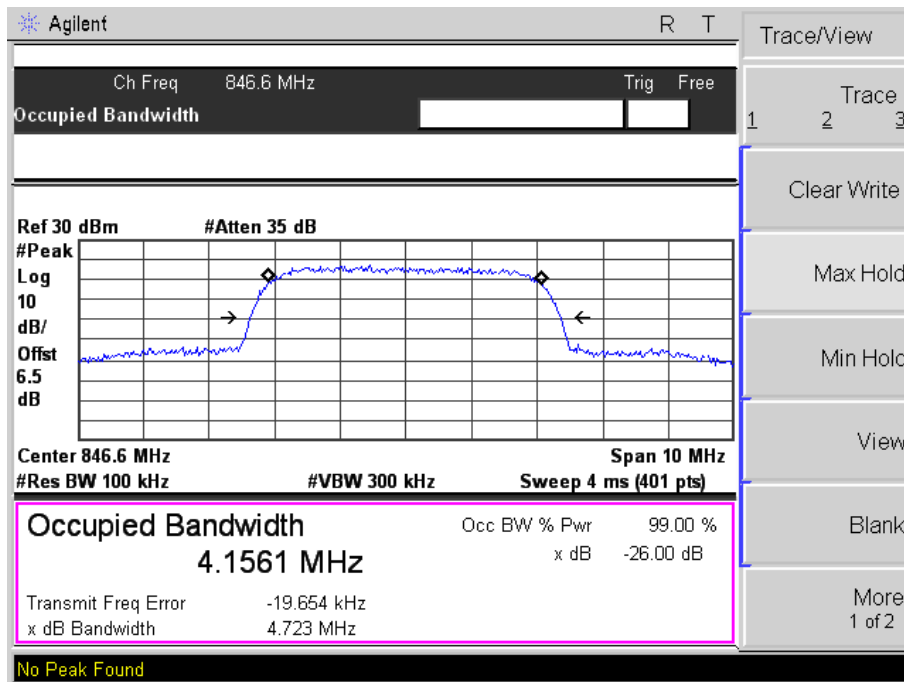


HSDPA Low Channel

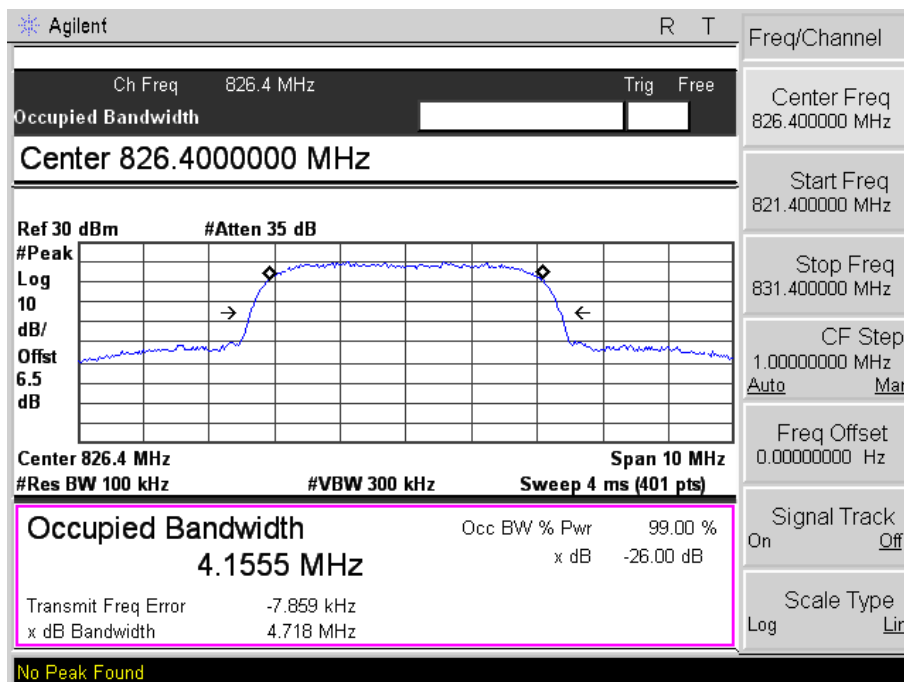

HSDPA Middle Channel

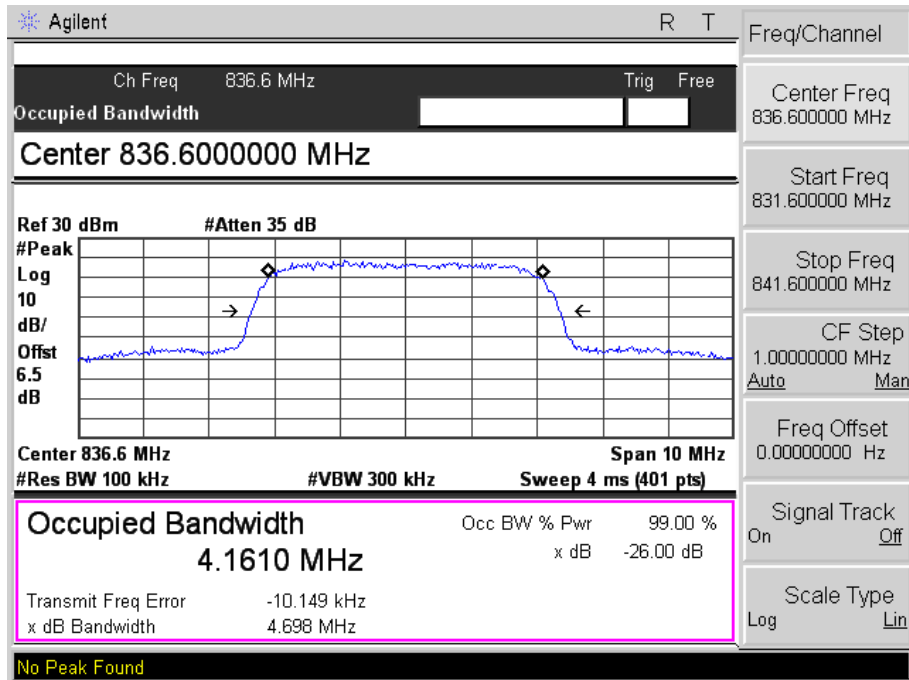


HSDPA High Channel

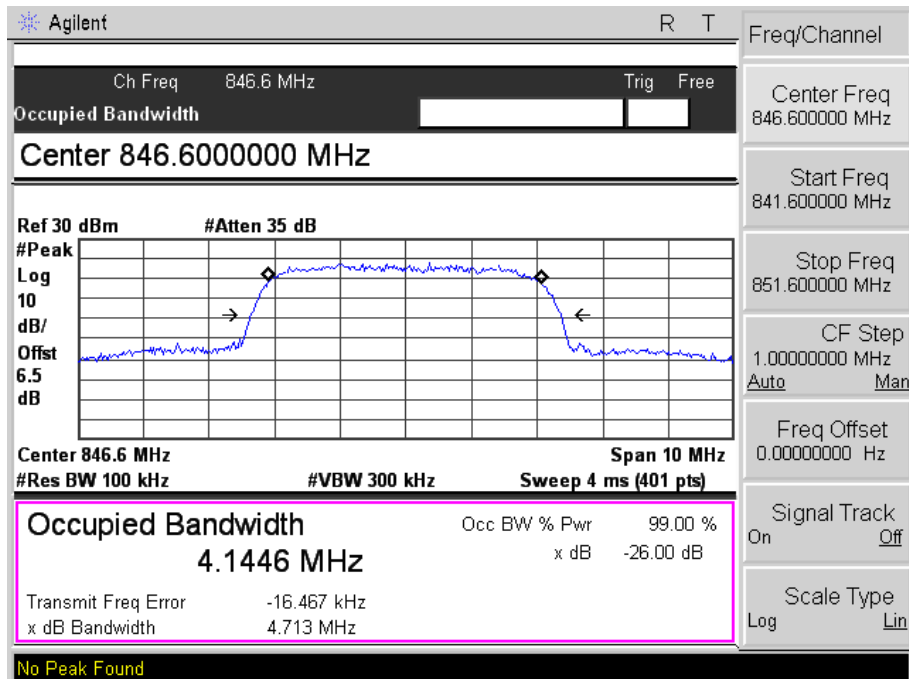





HSUPA Low Channel

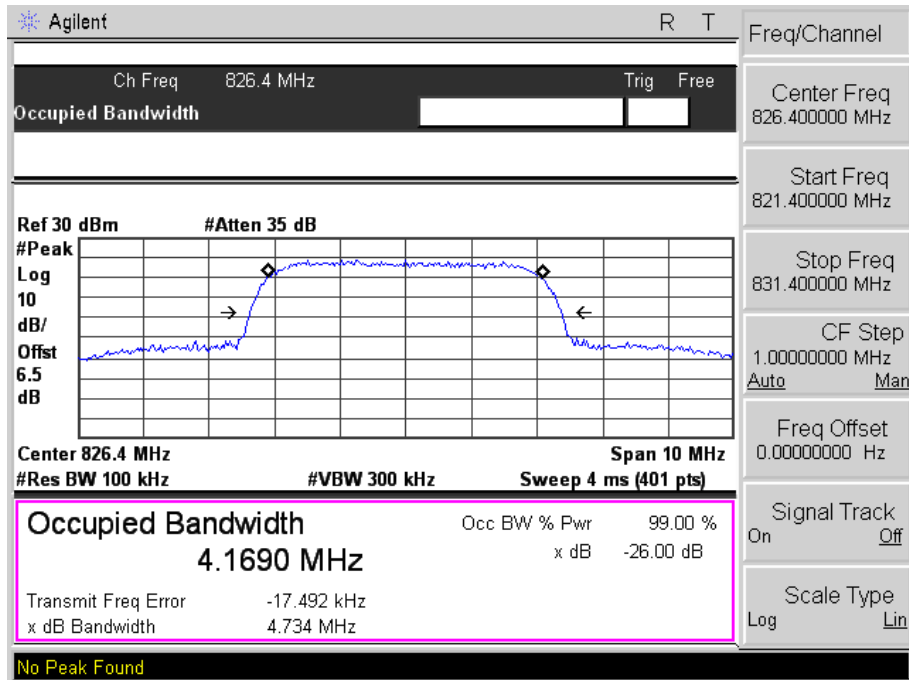


HSUPA Middle Channel

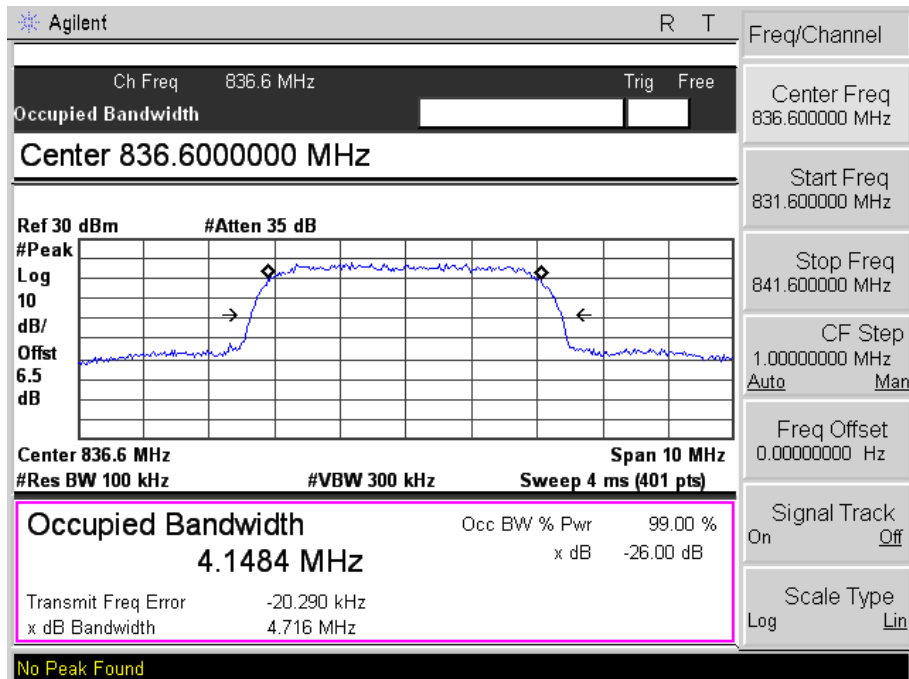


HSUPA High Channel

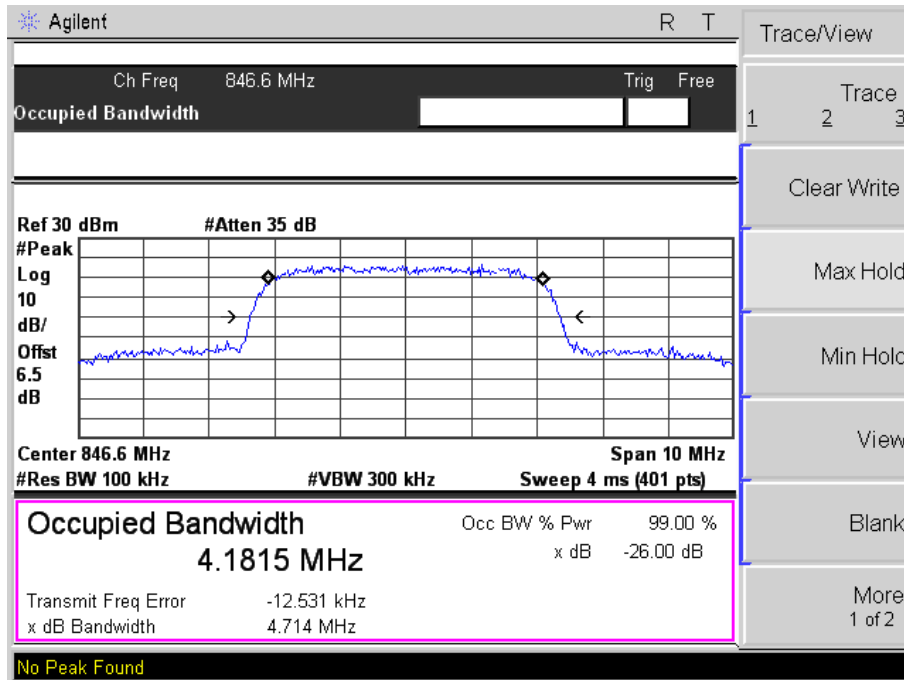


For Band II  
WCDMA Low Channel

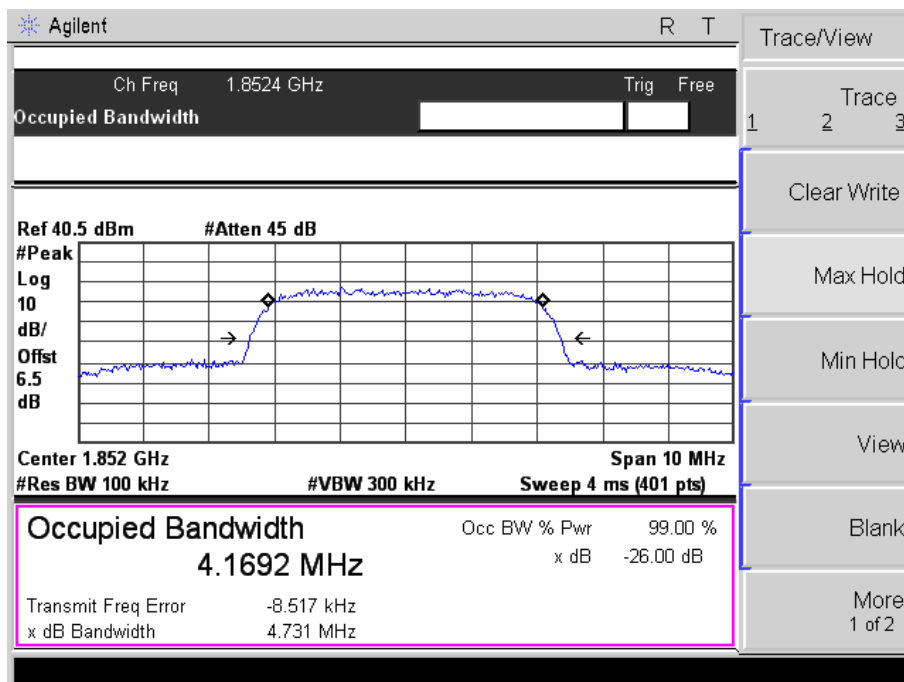


WCDMA Middle Channel

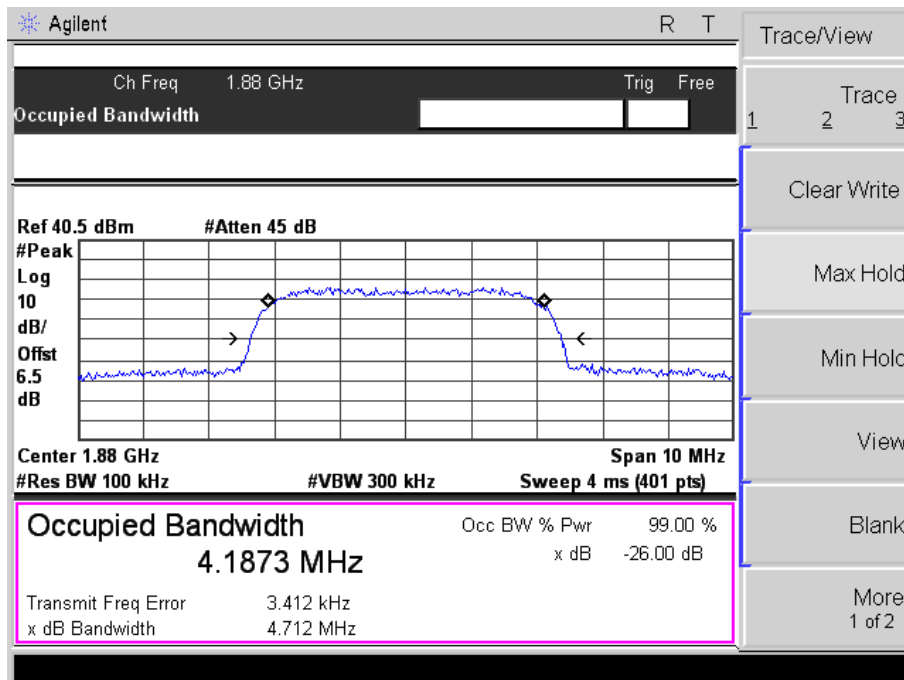


WCDMA High Channel

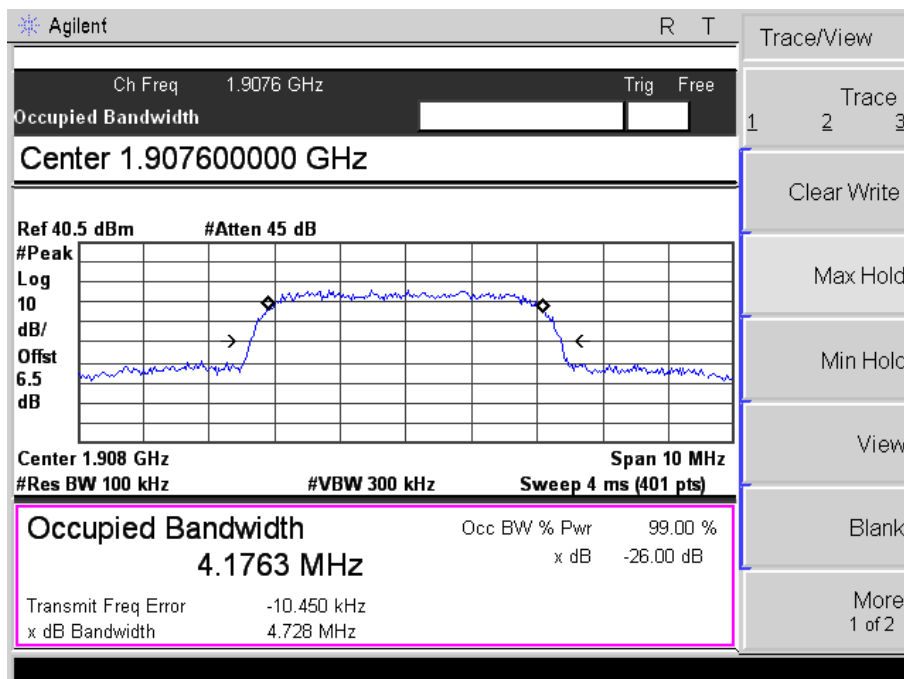


HSDPA Low Channel

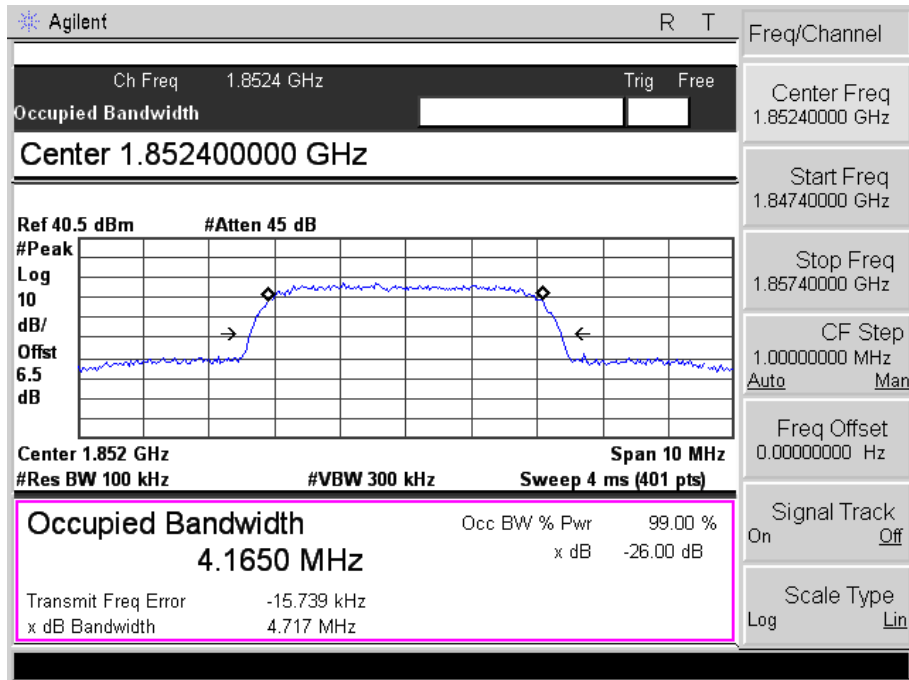


HSDPA Middle Channel

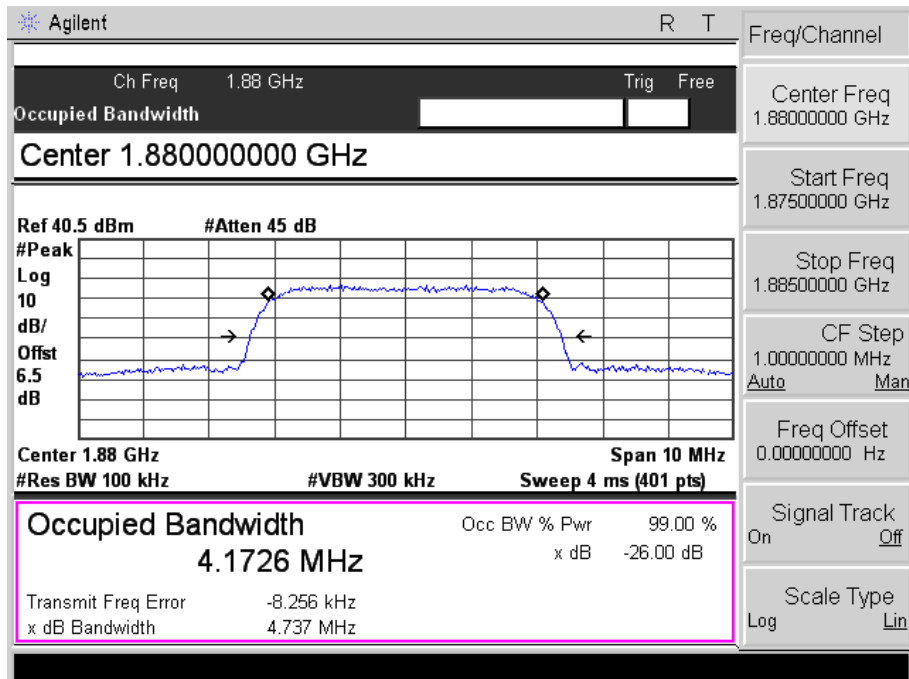


HSDPA High Channel

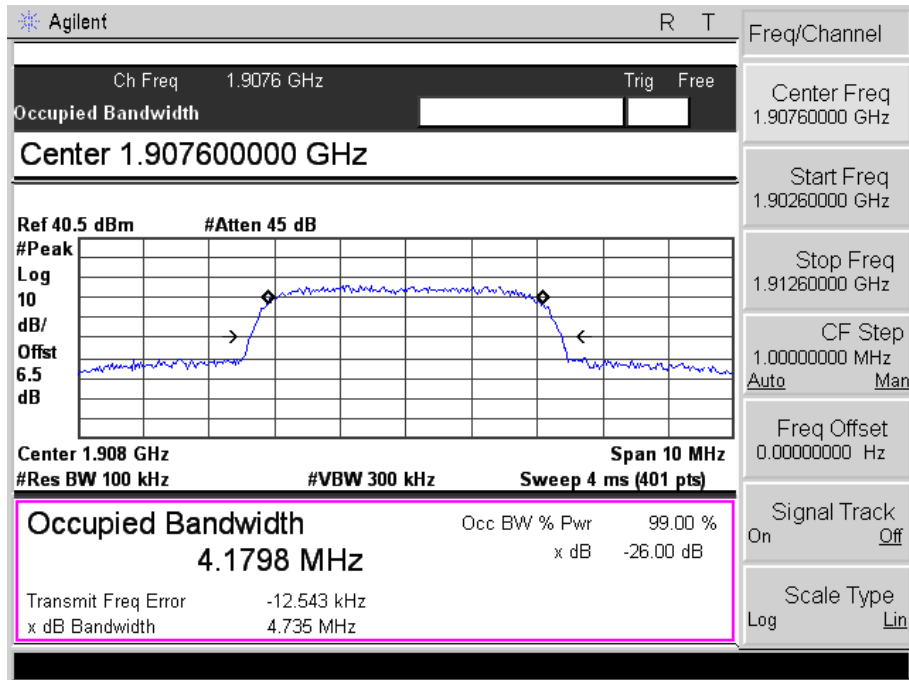


HSUPA Low Channel

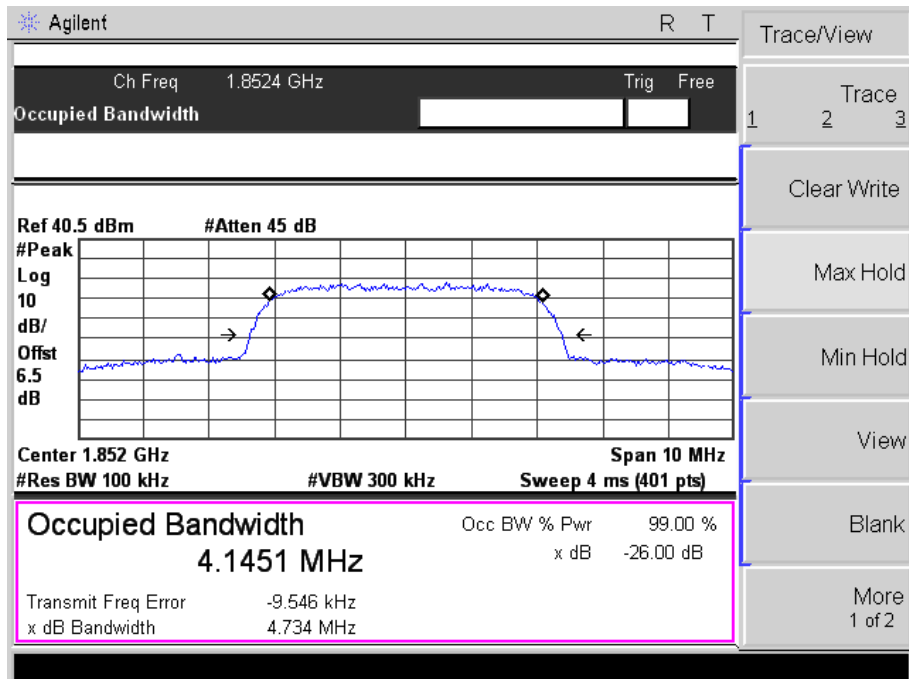

HSUPA Middle Channel

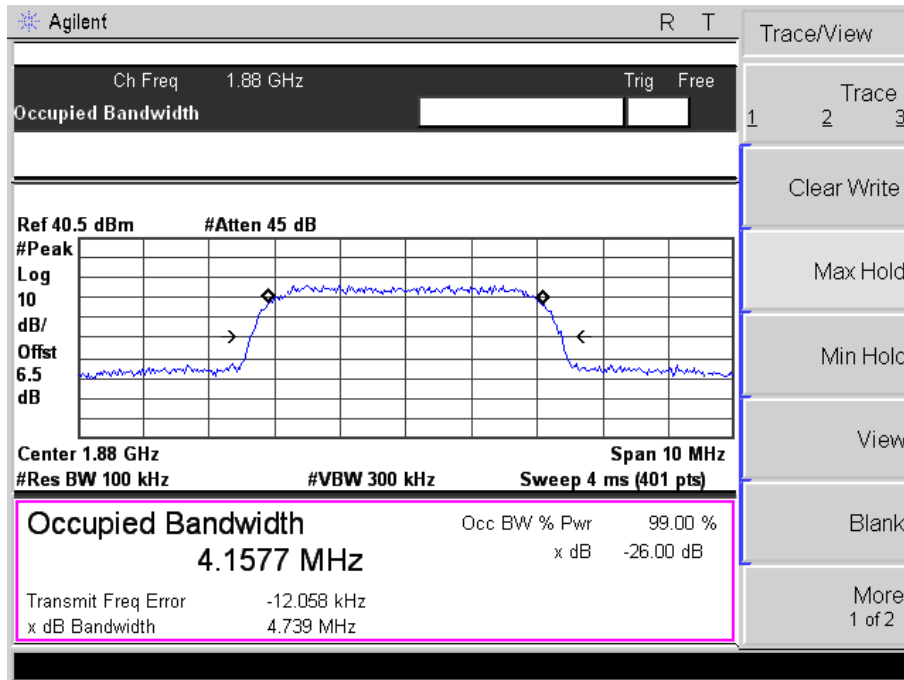

HSUPA High Channel

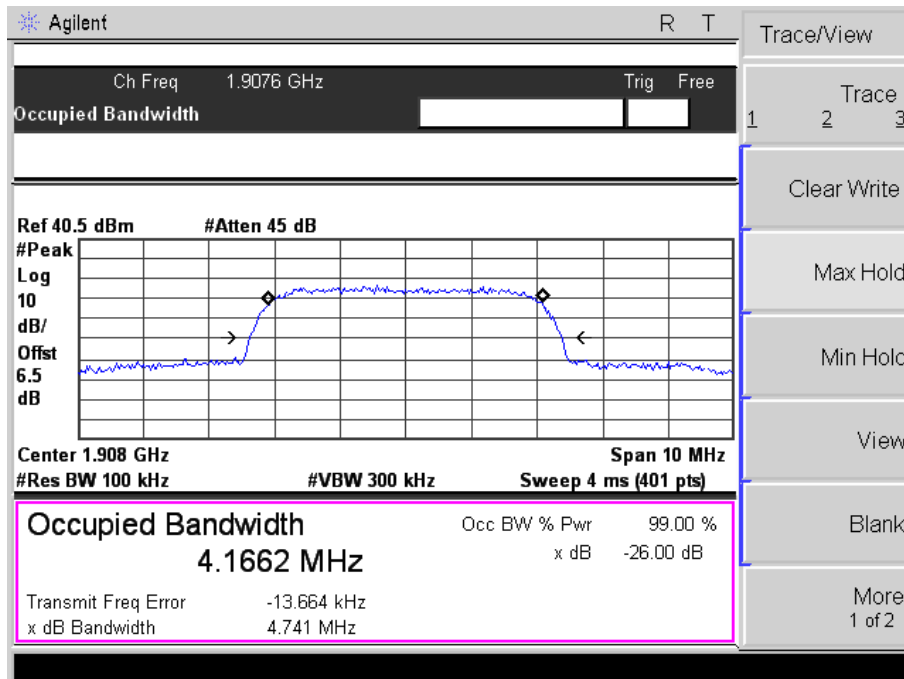

## 7. Out of Band Emissions at Antenna Terminal

### 7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

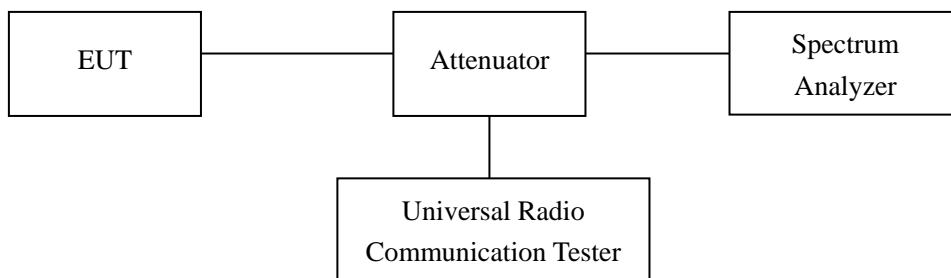



### 7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 7.4 Summary of Test Results/Plots



Please refer to the following test plots For Cellular Band

GSM Low Channel

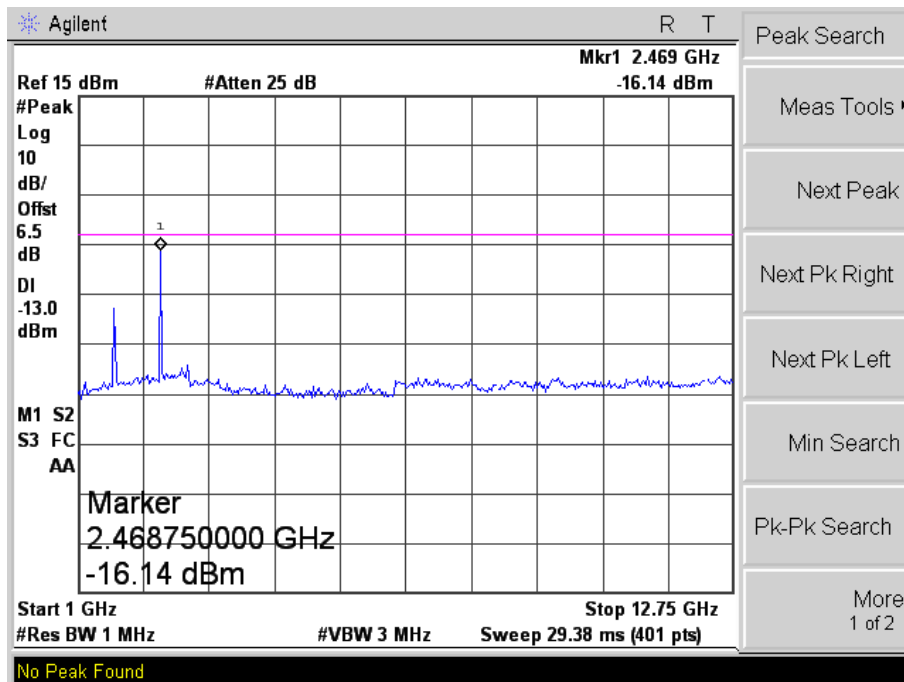
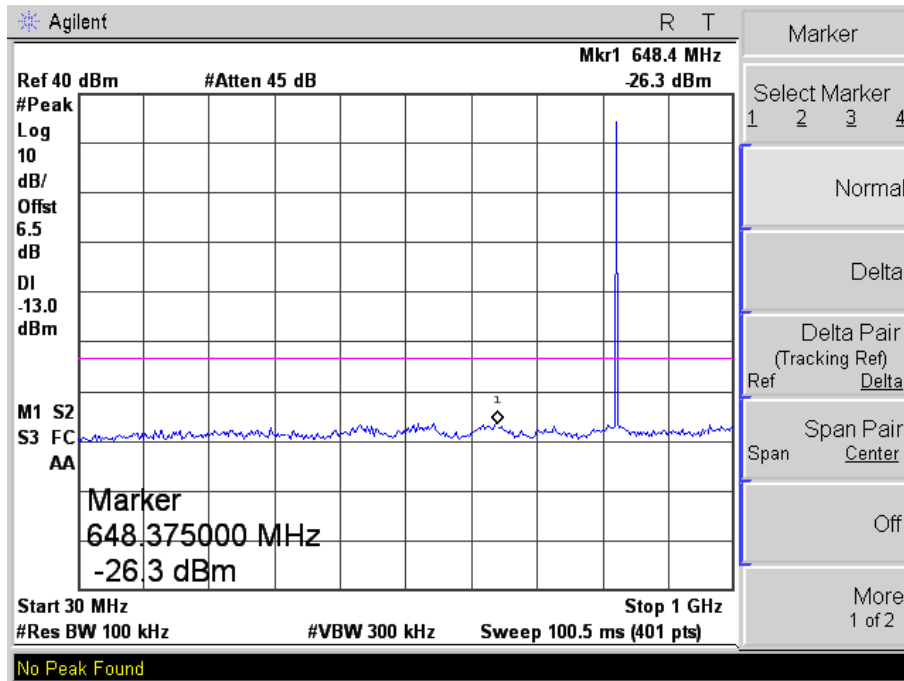





GSM Middle Channel

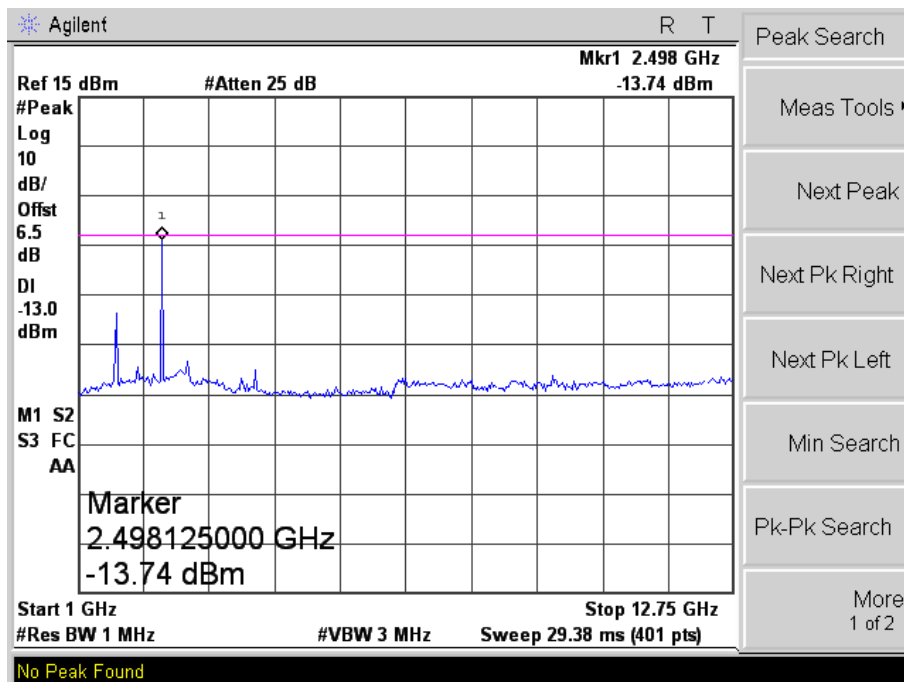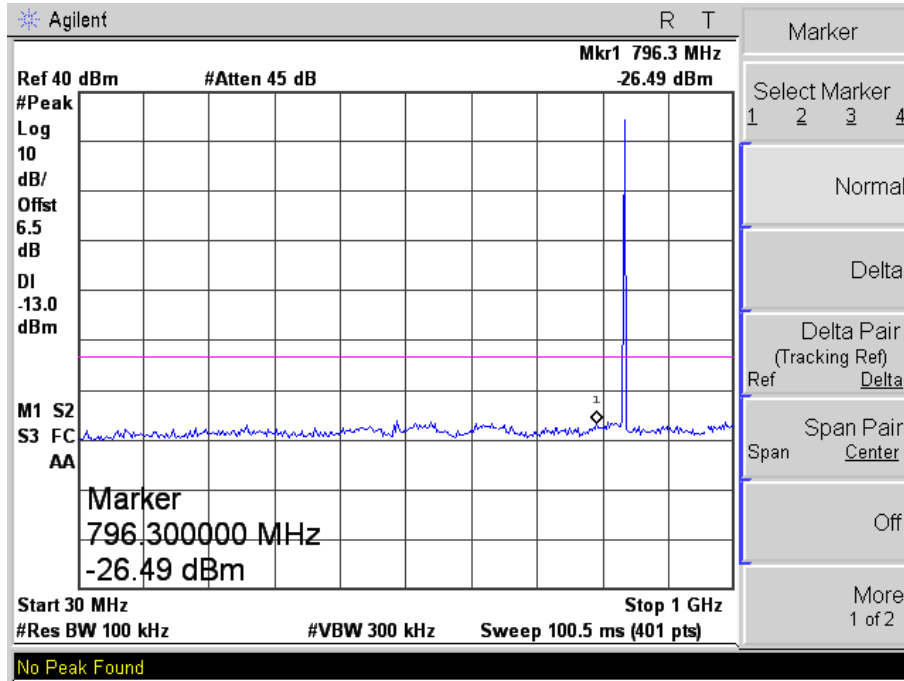


GSM High Channel

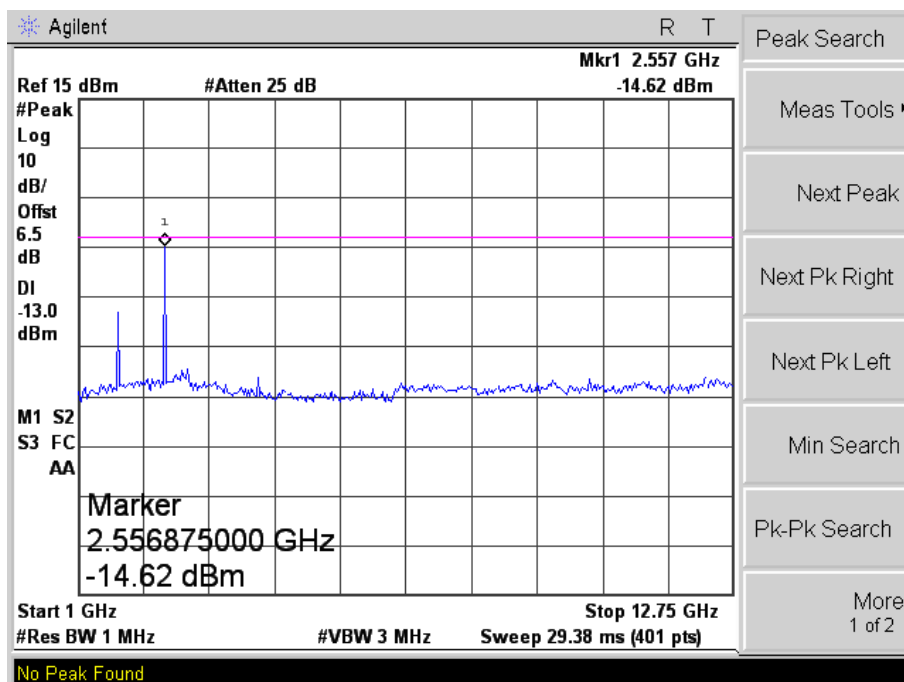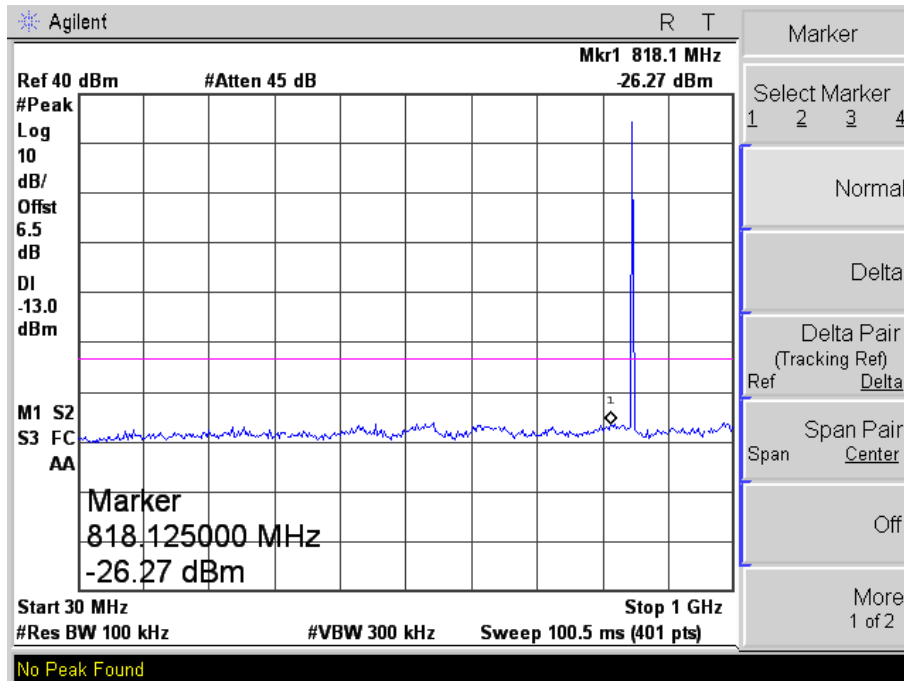



GSM Low Band Emission

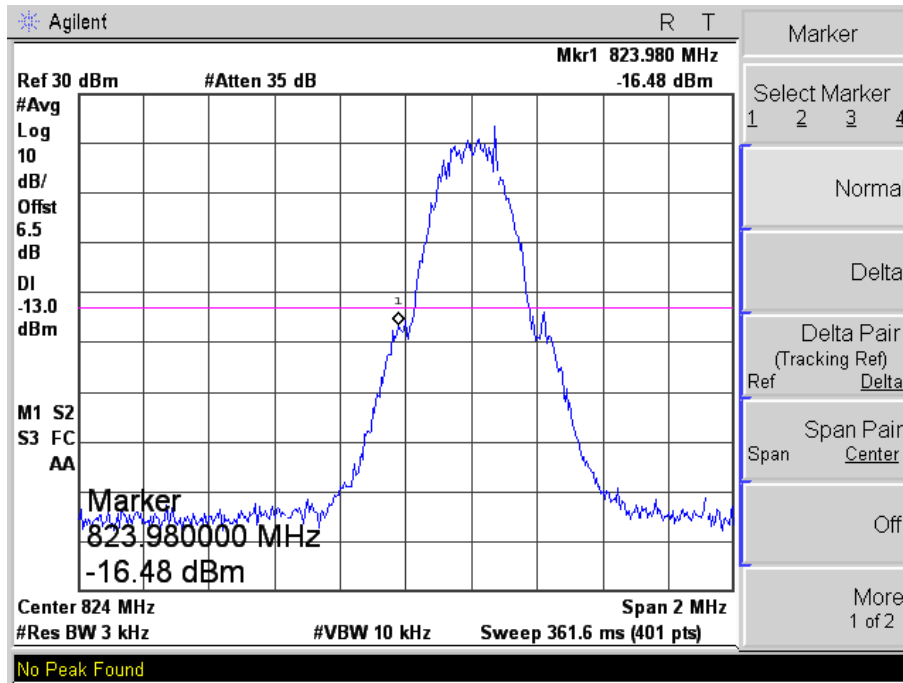



GSM High Band Emission

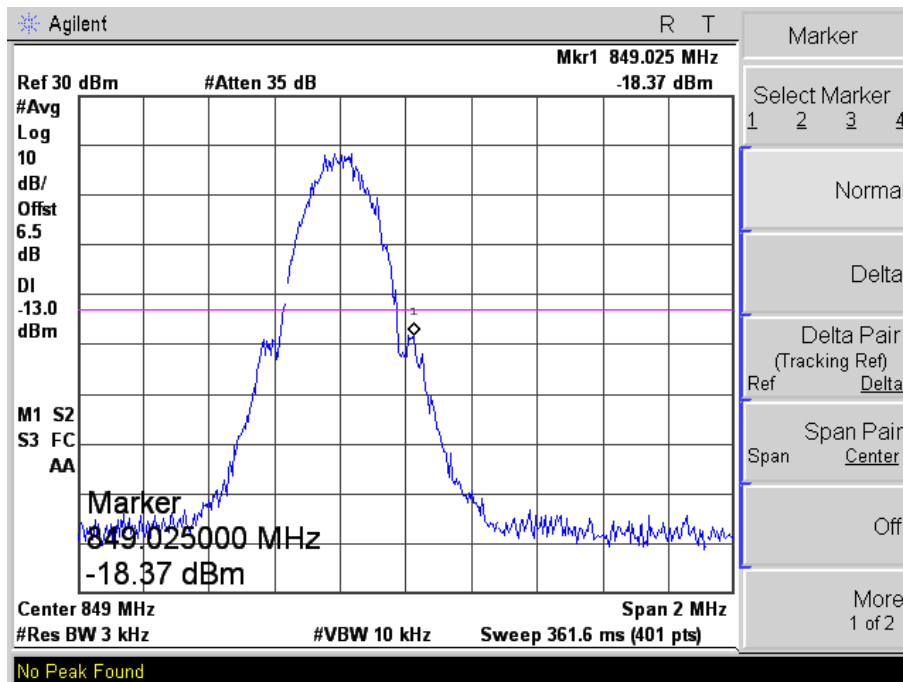



GPRS Low Channel

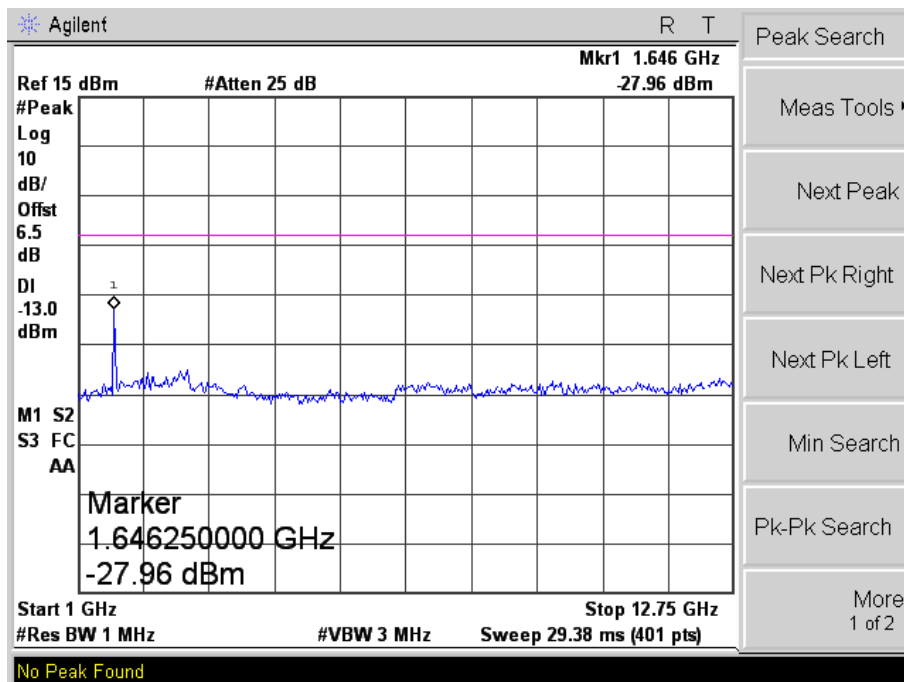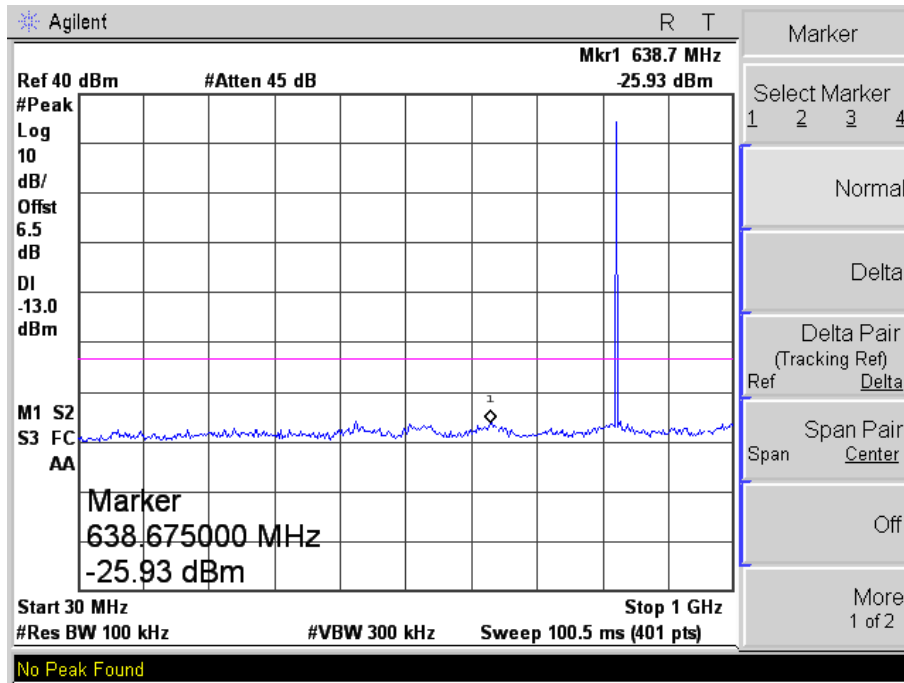


GPRS Middle Channel

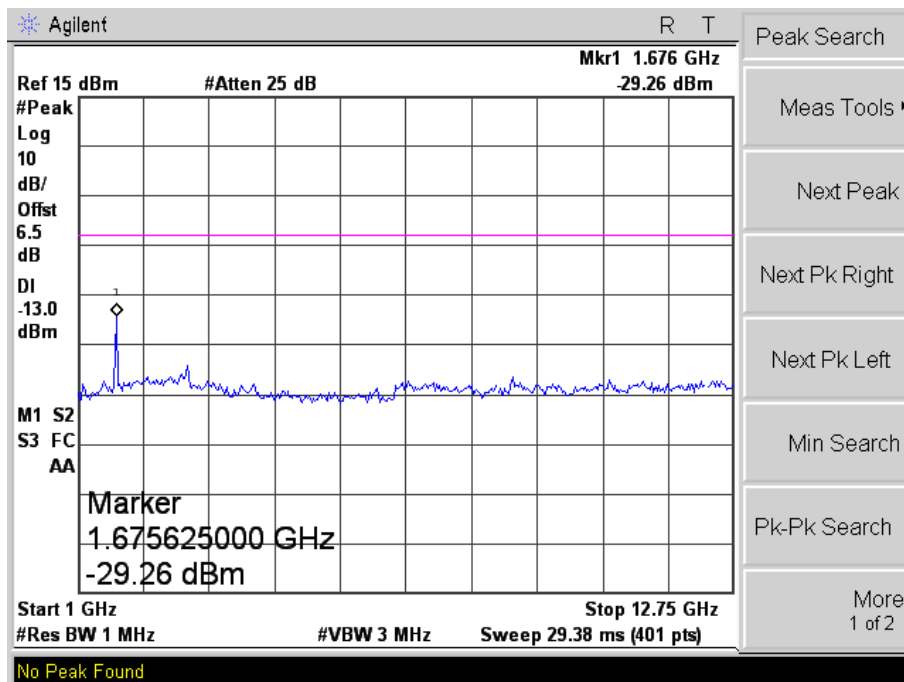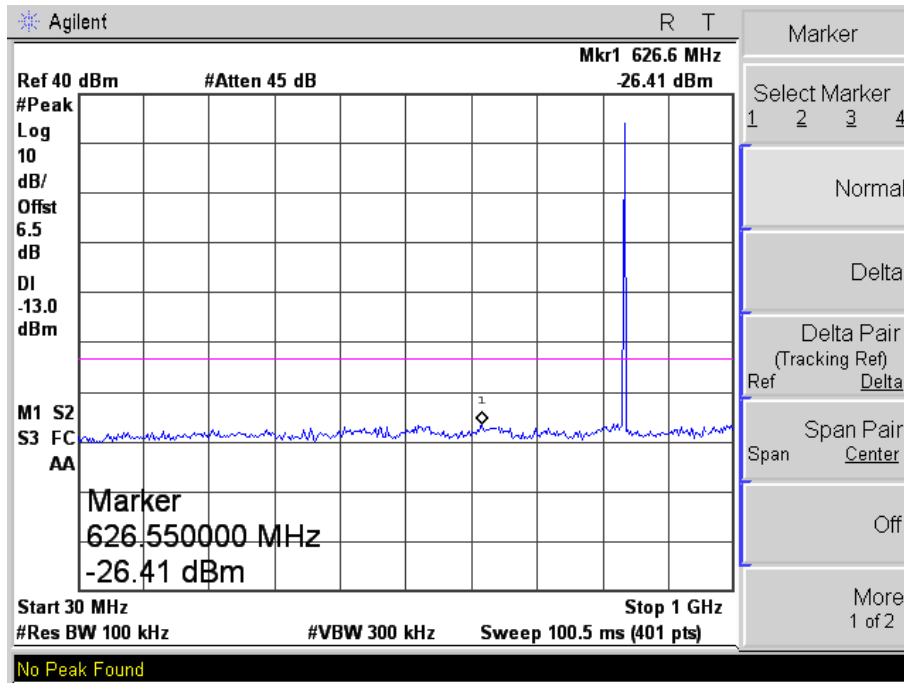


GPRS High Channel

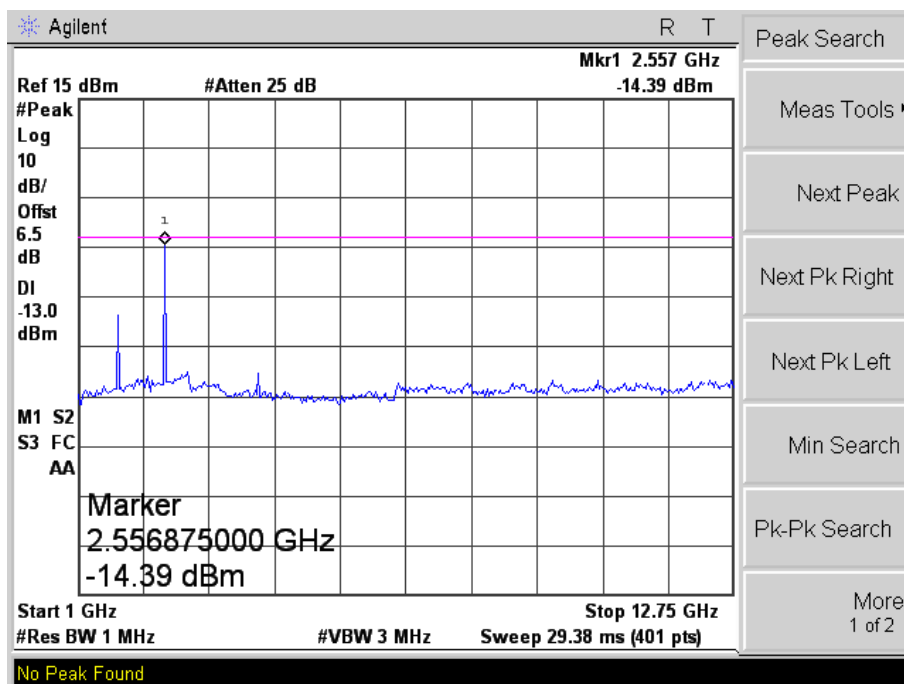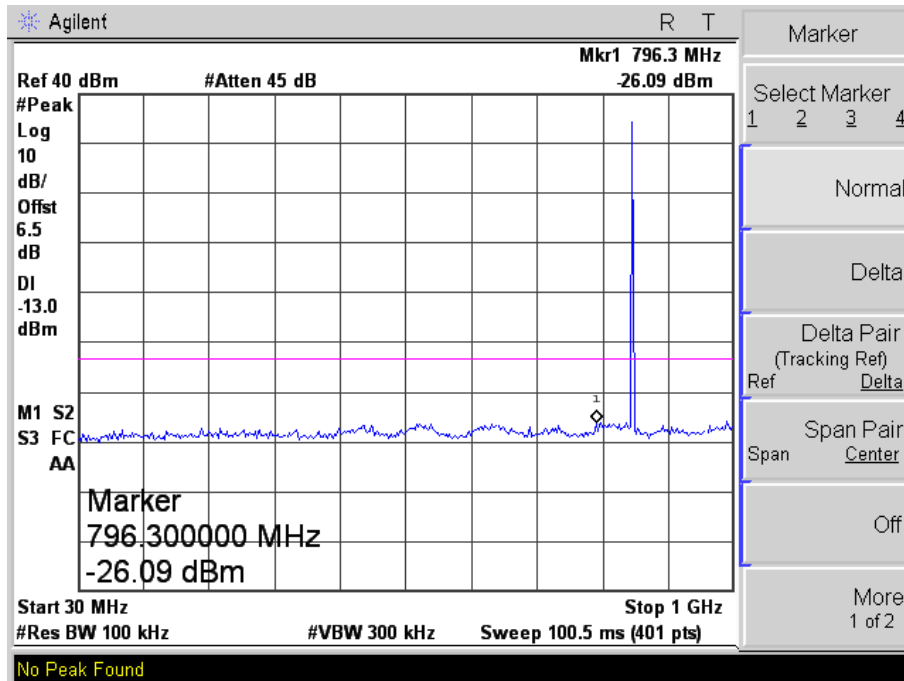



GPRS Low Band Emission

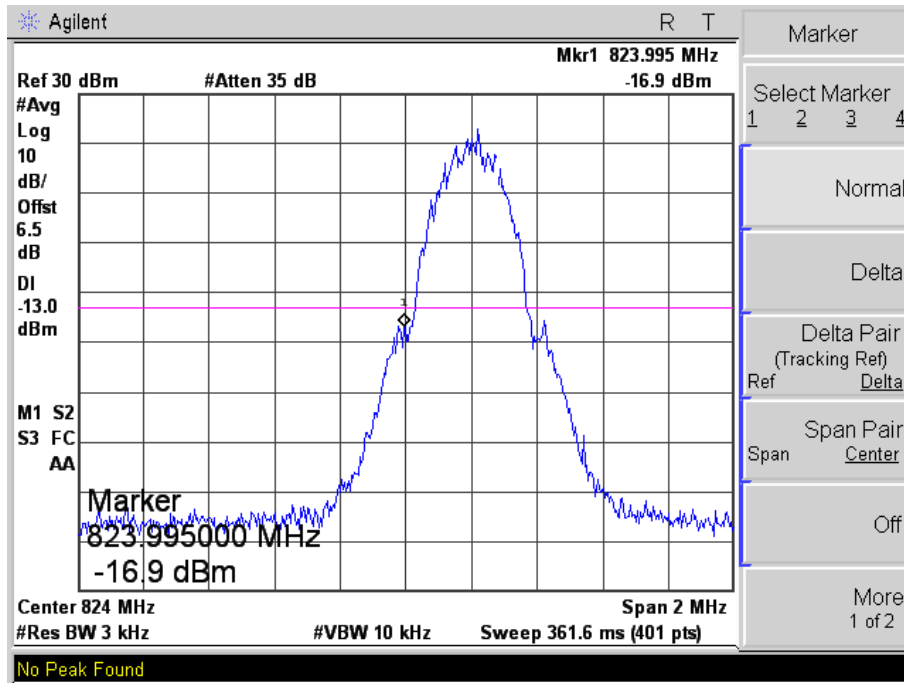


GPRS High Band Emission

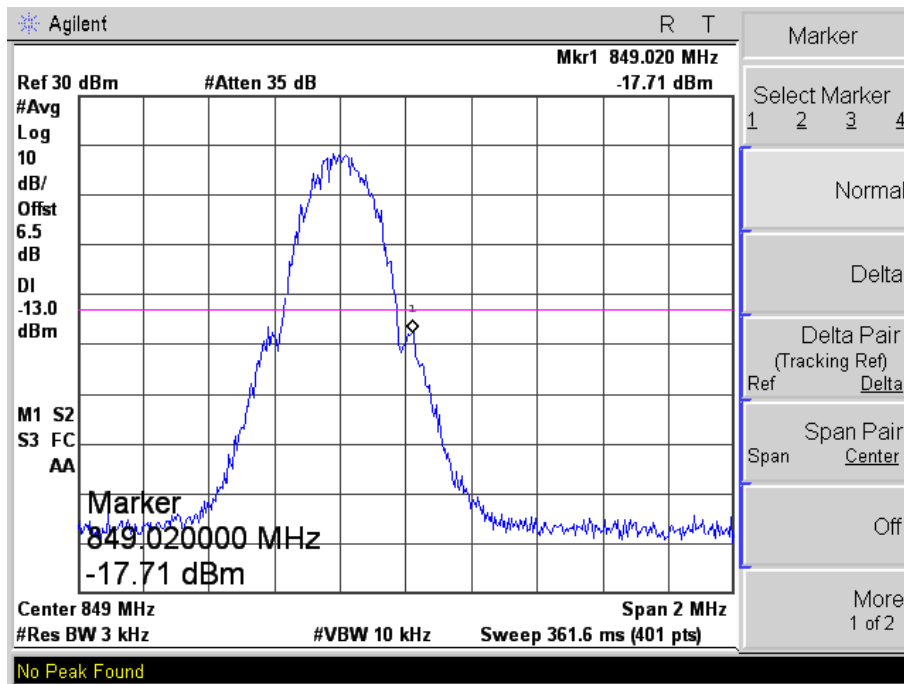


For PCS Band  
GSM Low Channel

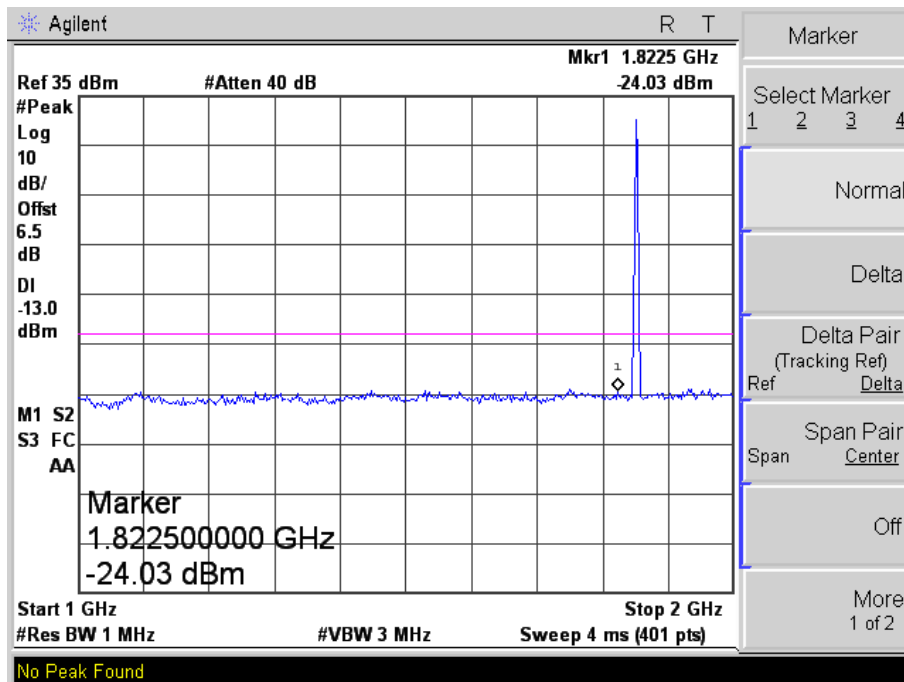
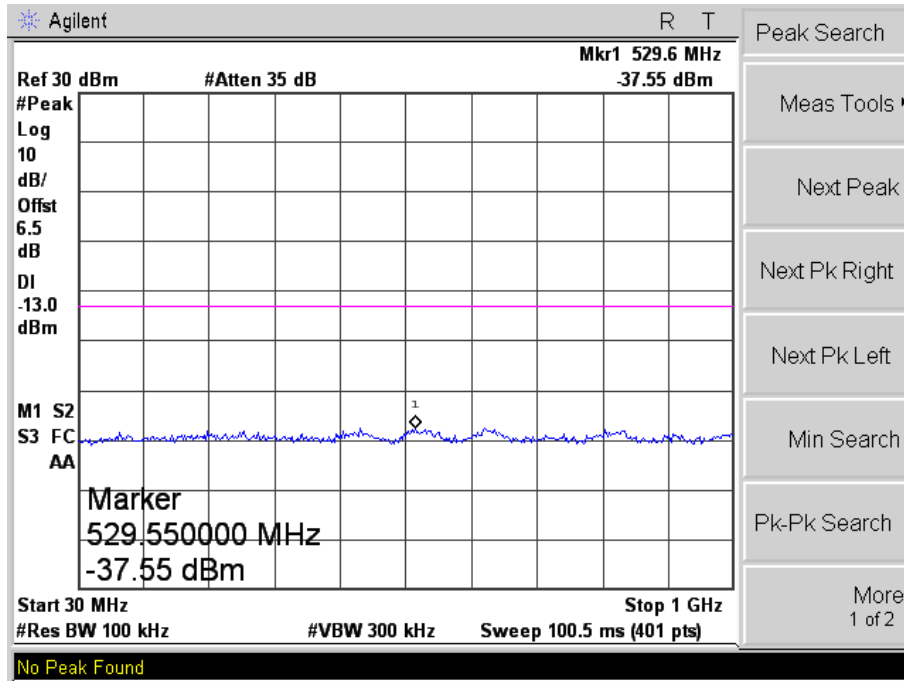





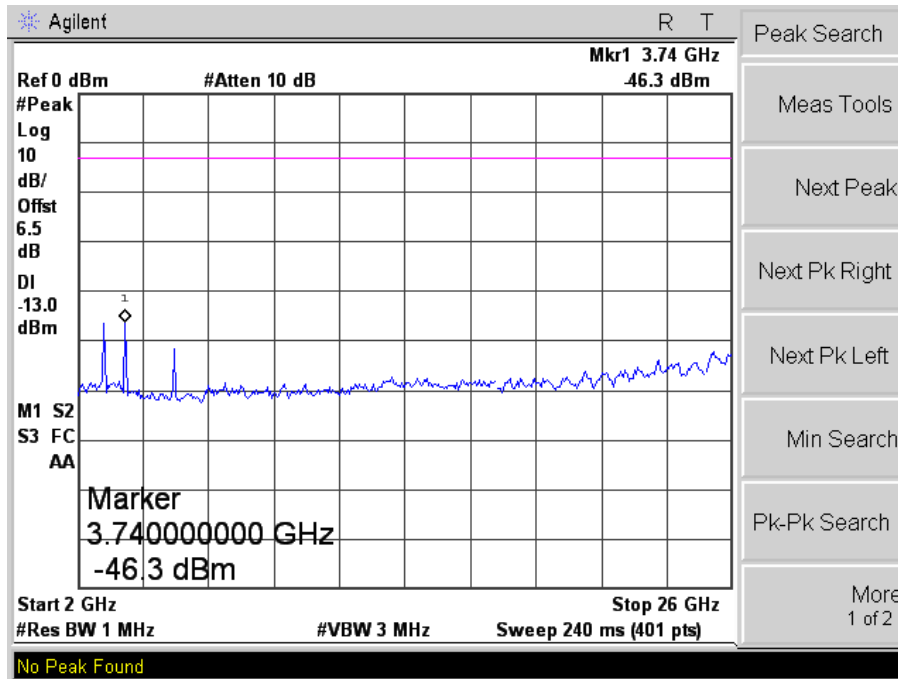



GSM Middle Channel

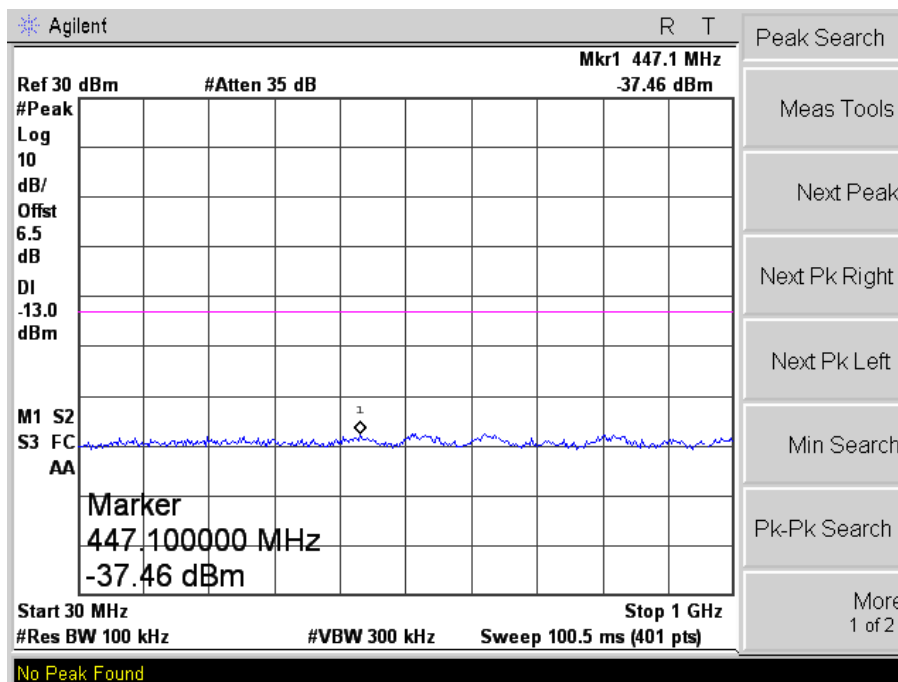

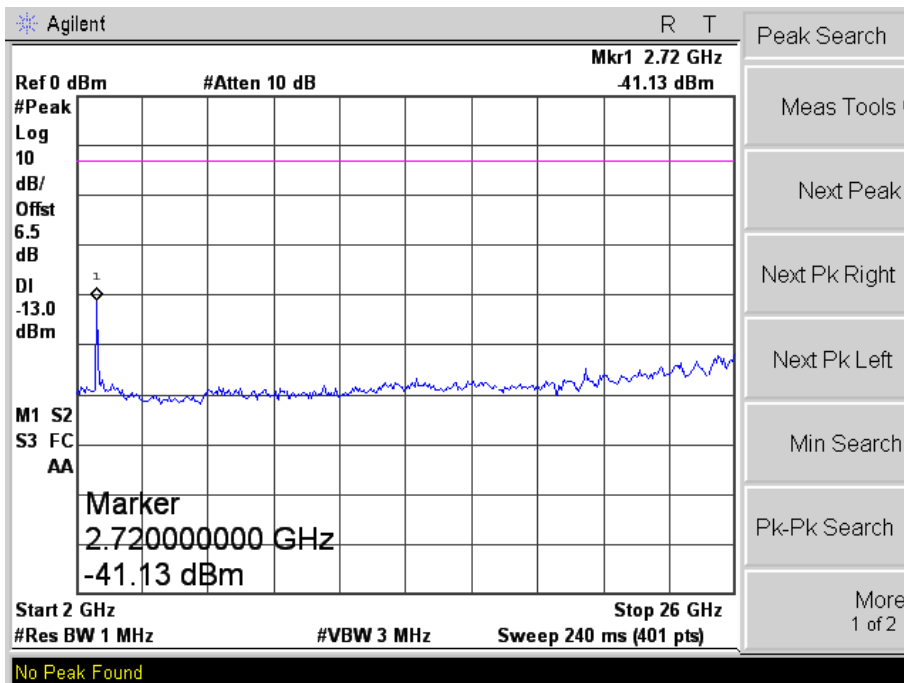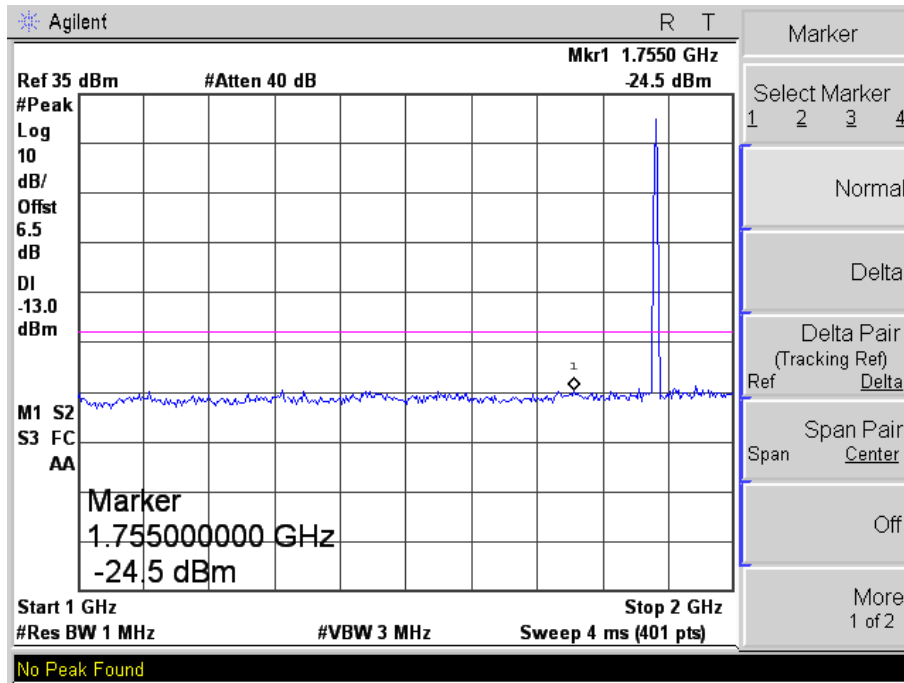


GSM High Channel

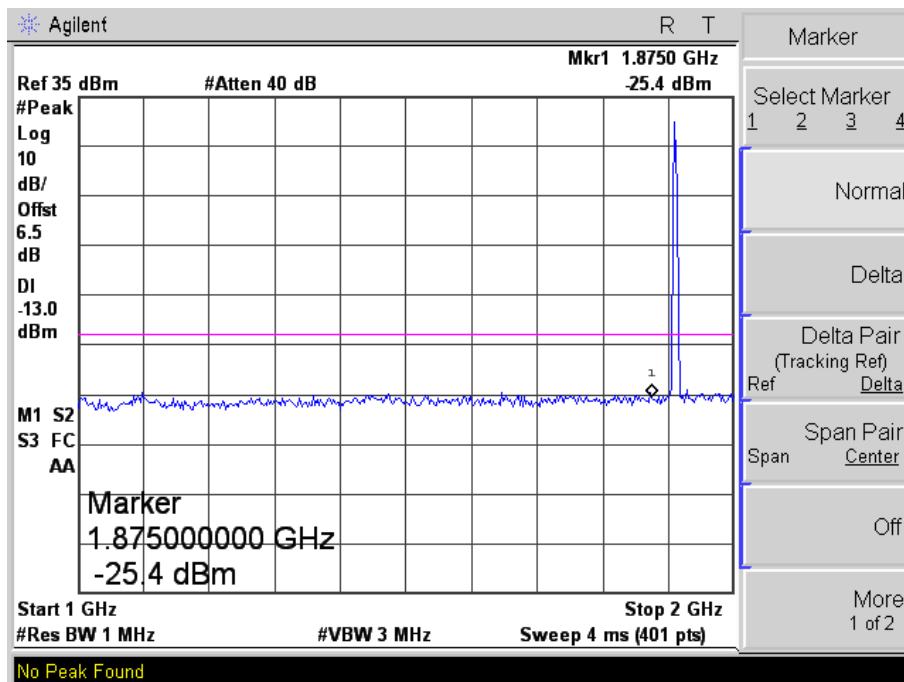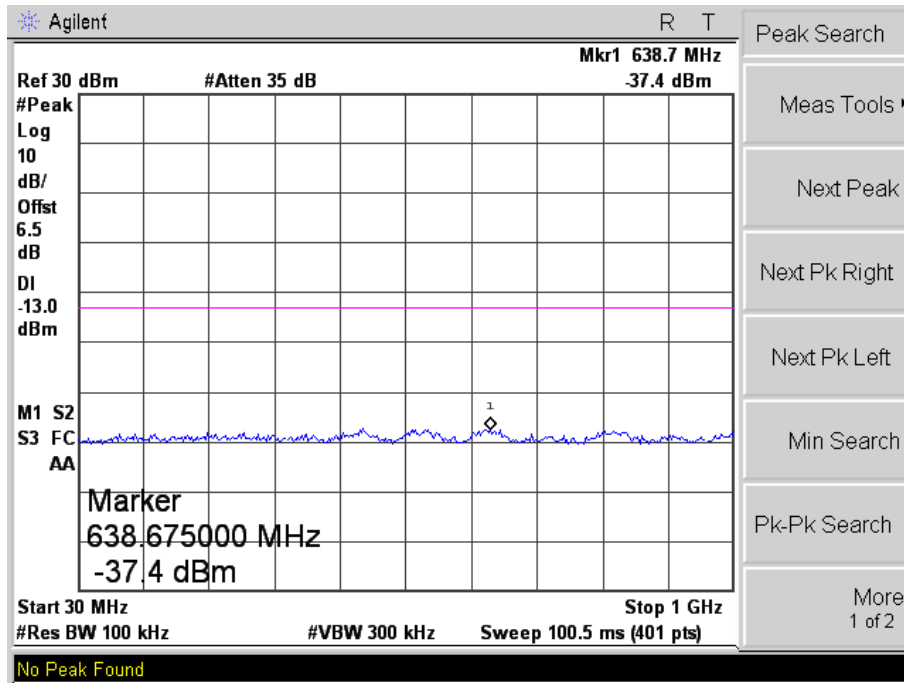


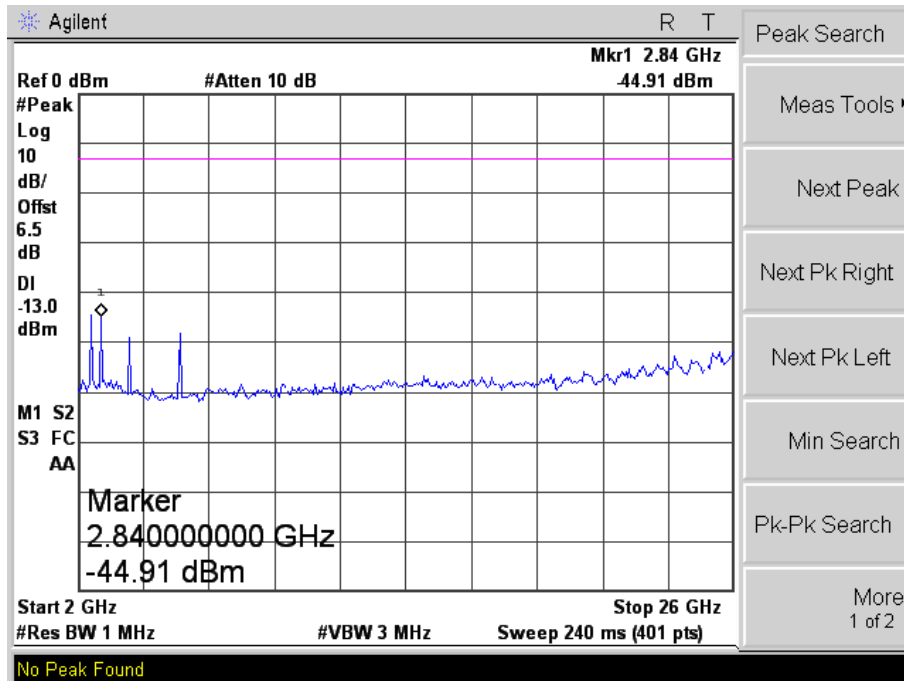


## GSM Low Band Emission


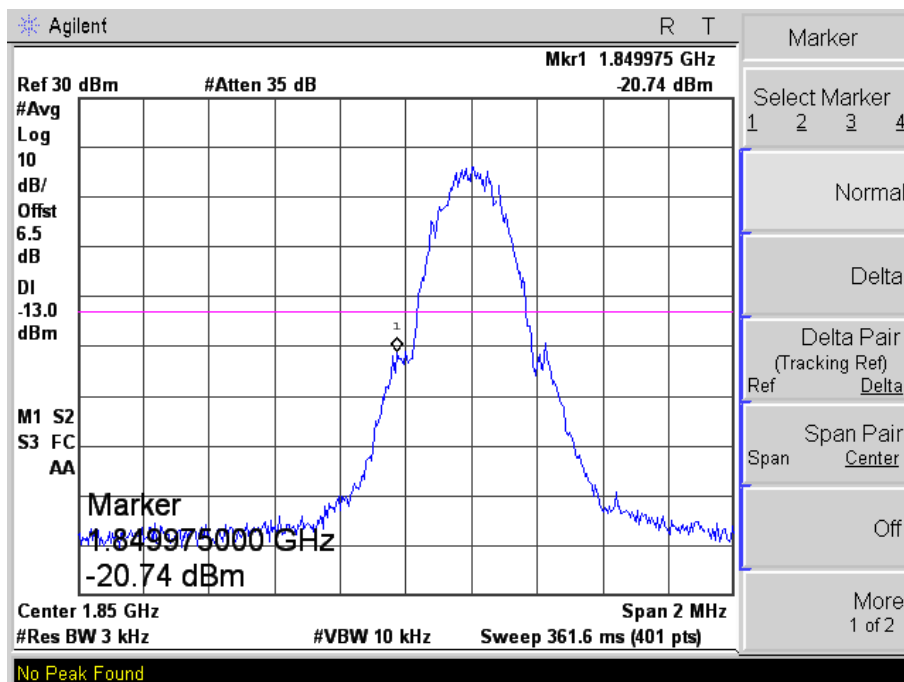


GSM High Band Emission


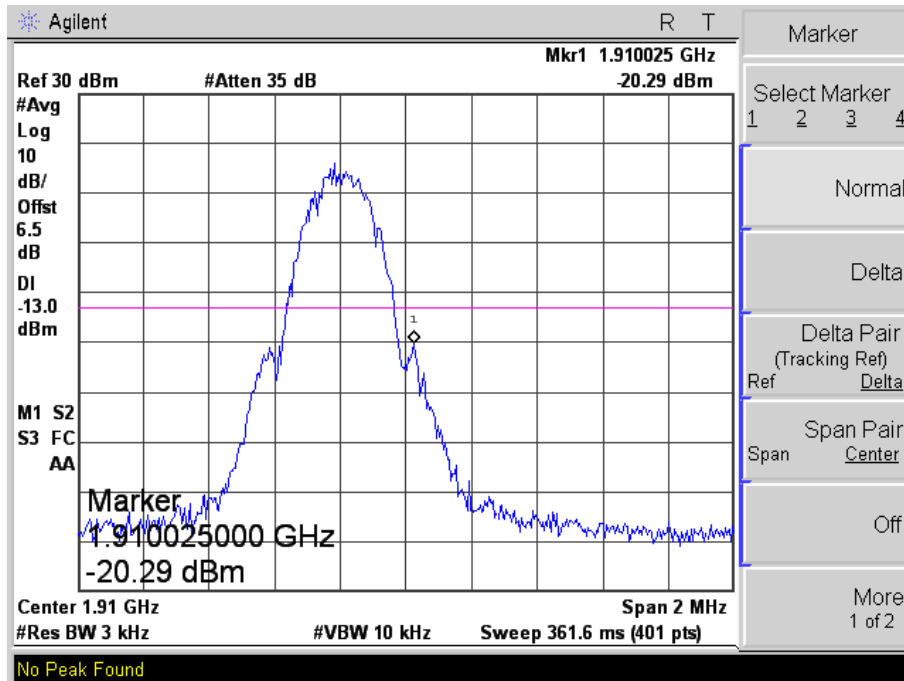



GPRS Low Channel

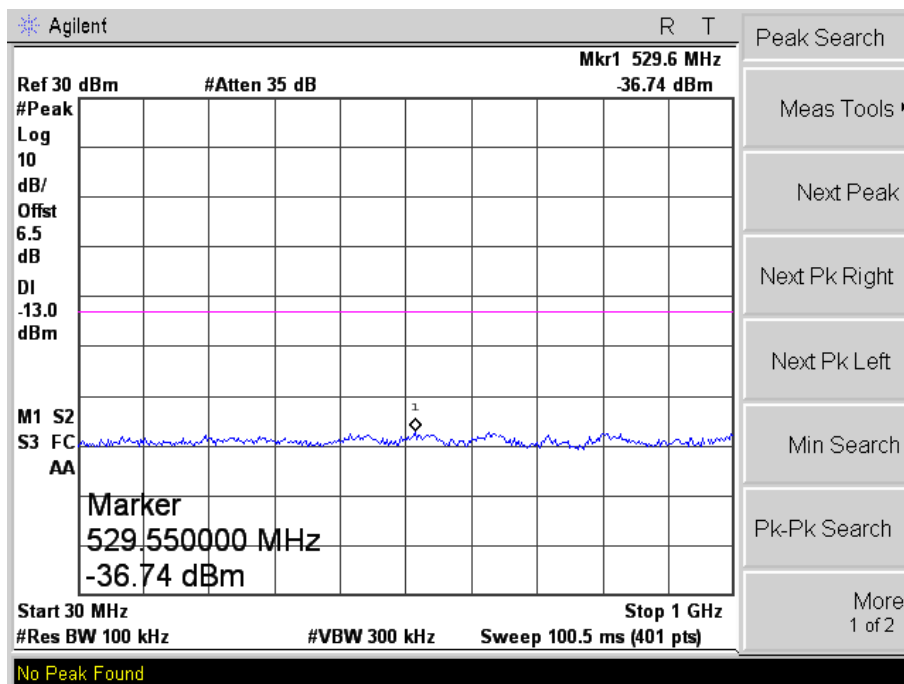

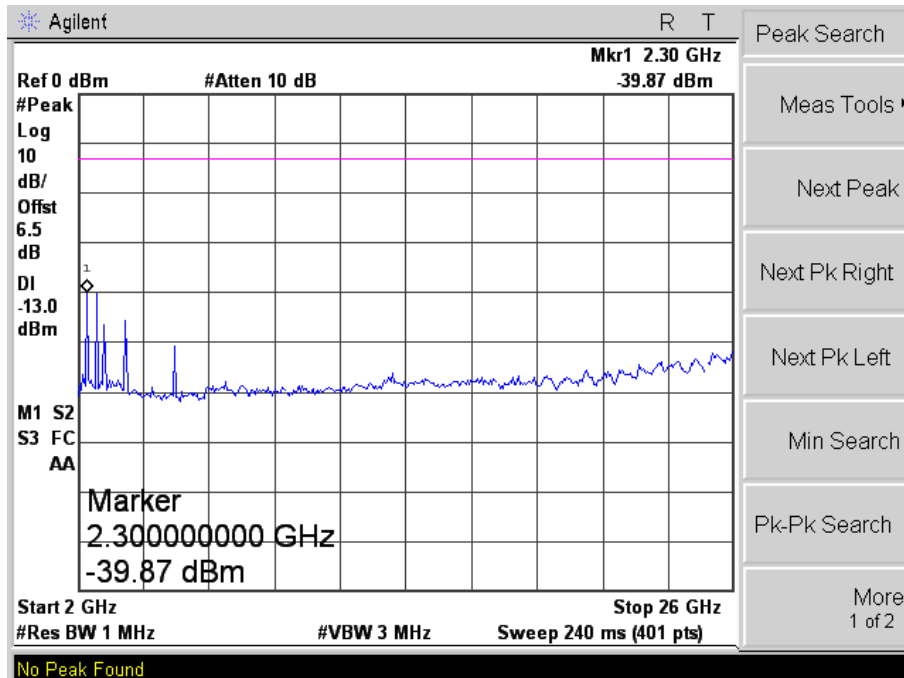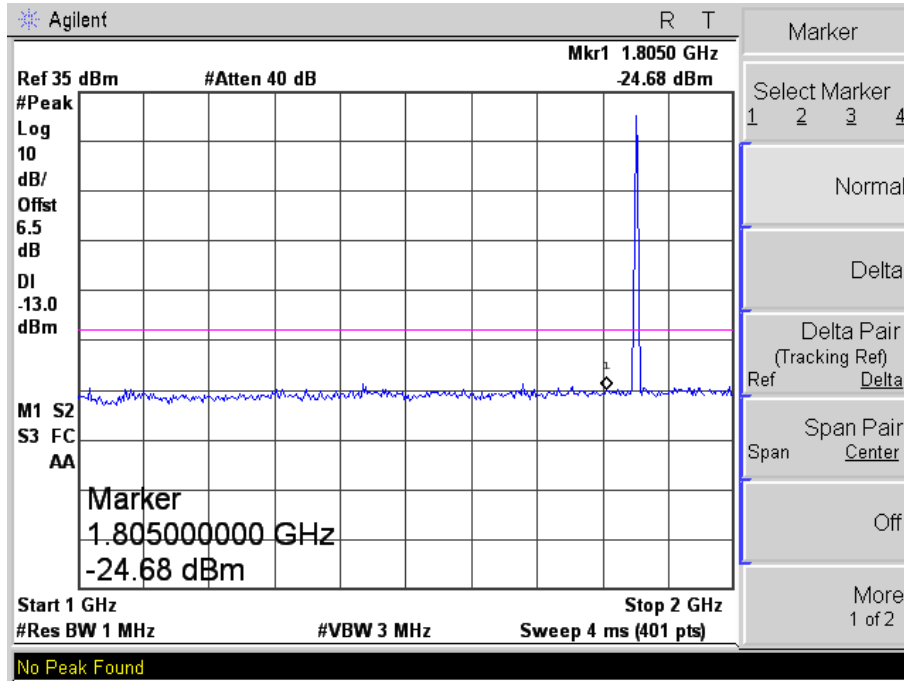


GPRS Middle Channel

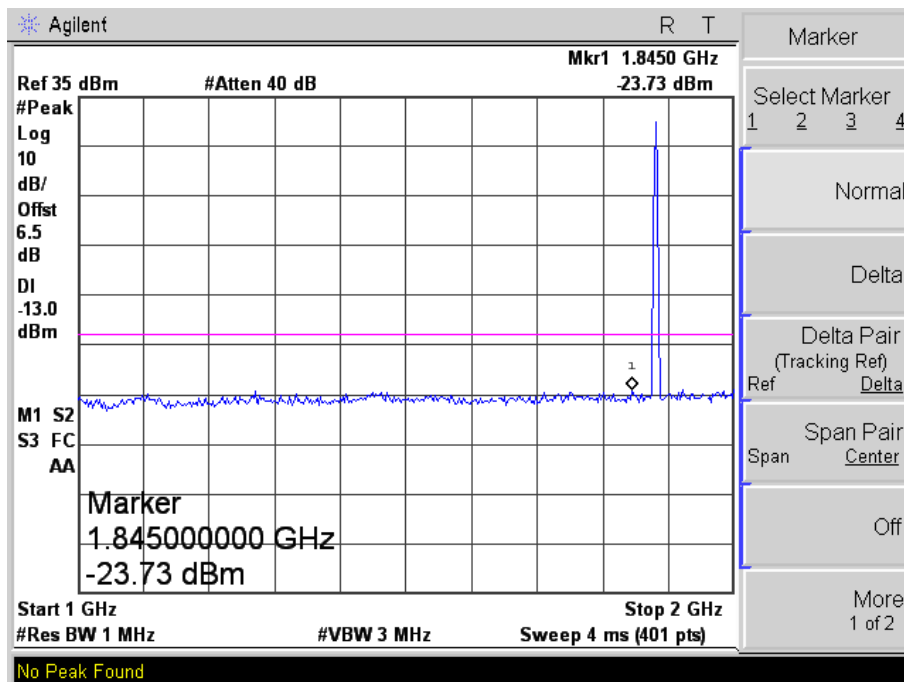
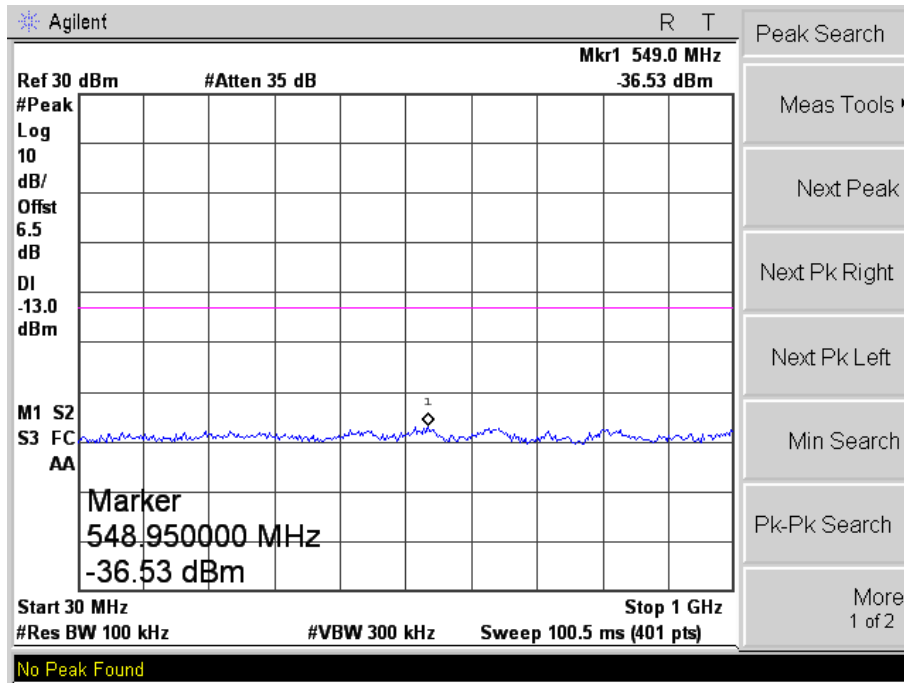


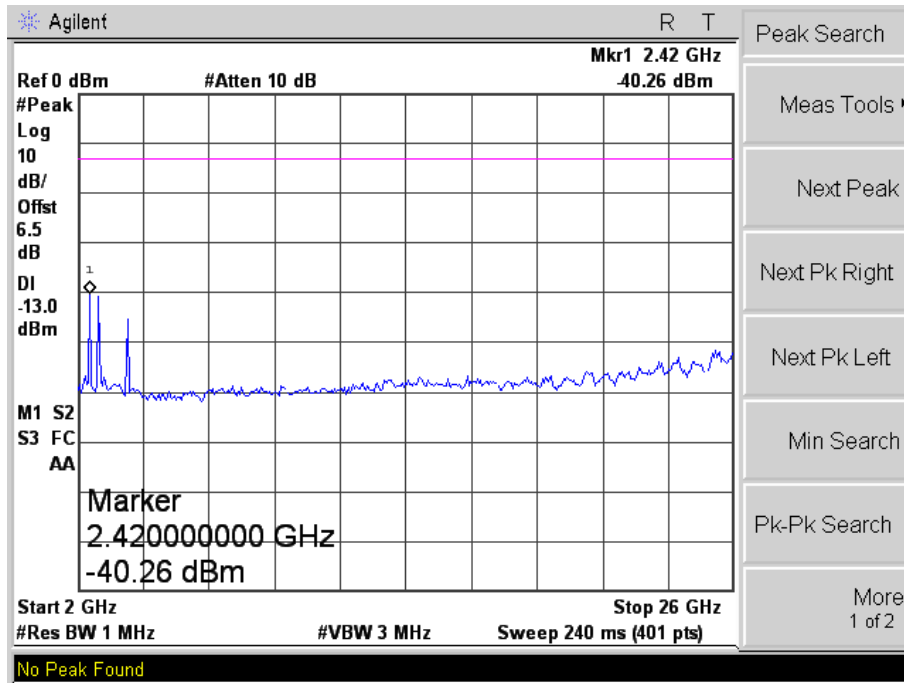


GPRS High Channel

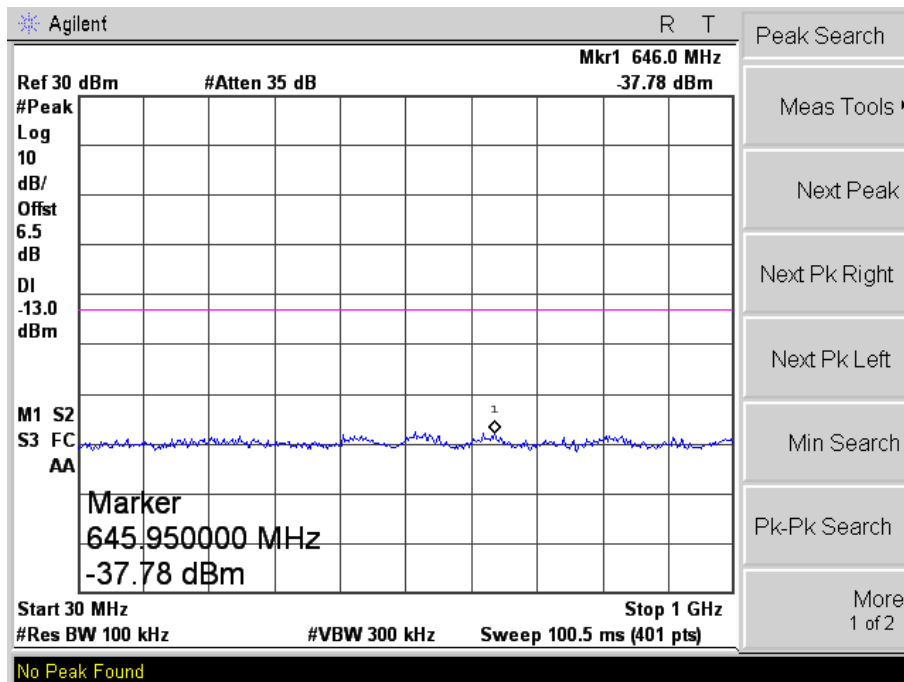




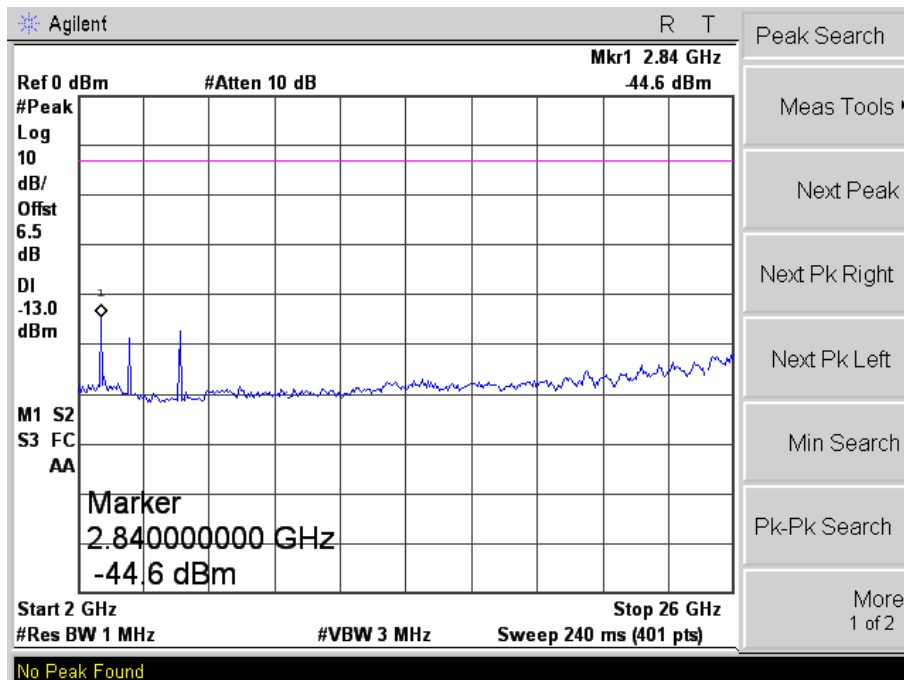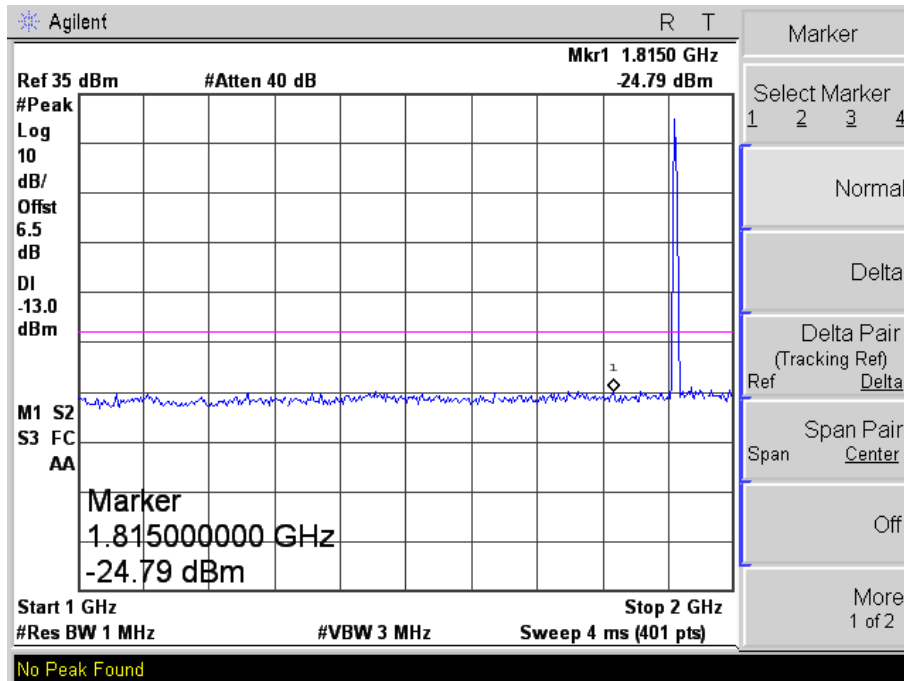



## GPRS Low Band Emission

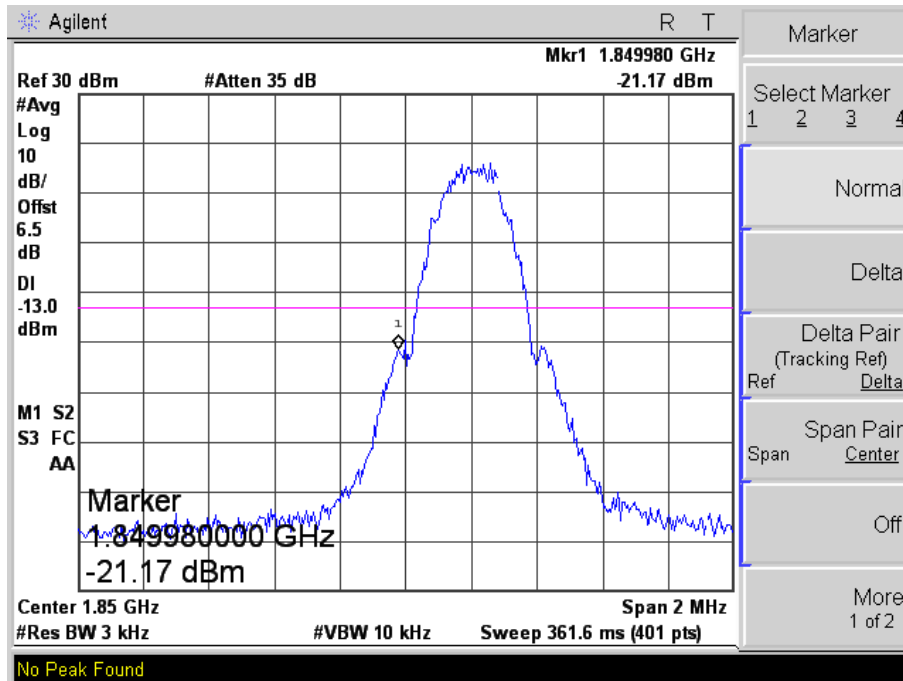



## GPRS High Band Emission

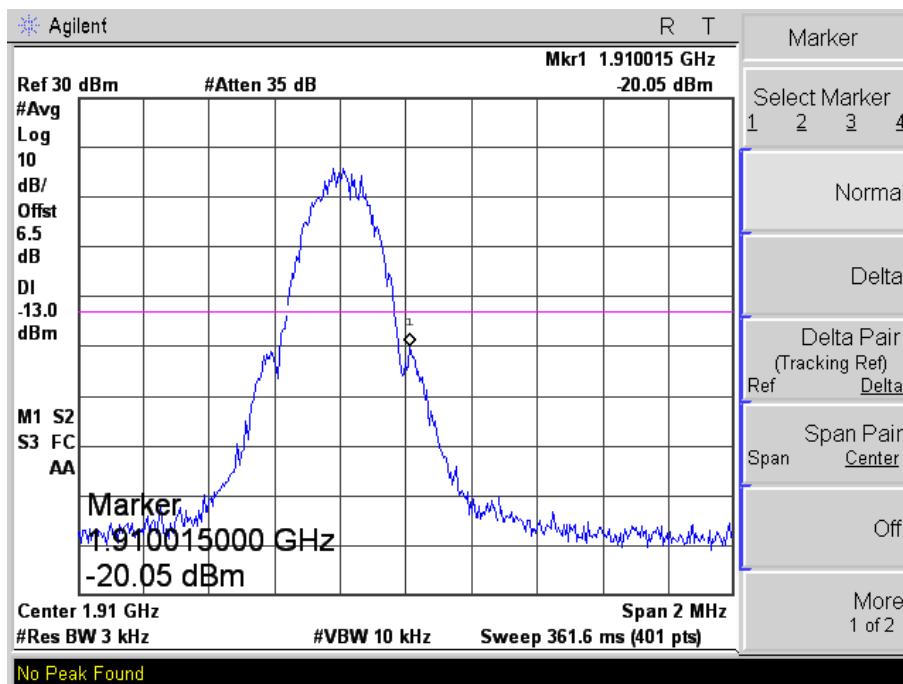



**For Band V**  
WCDMA Low Channel

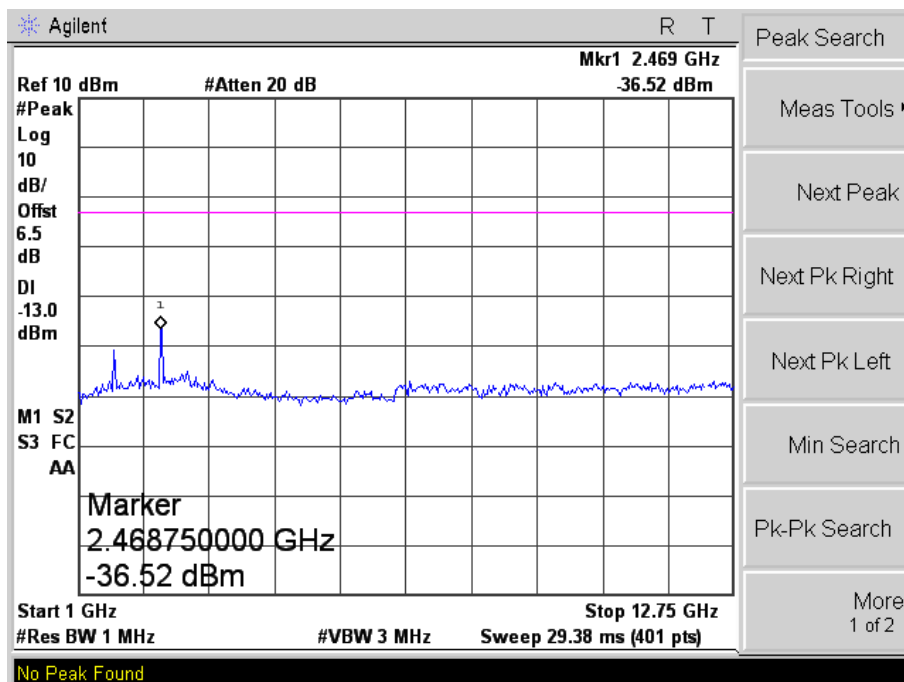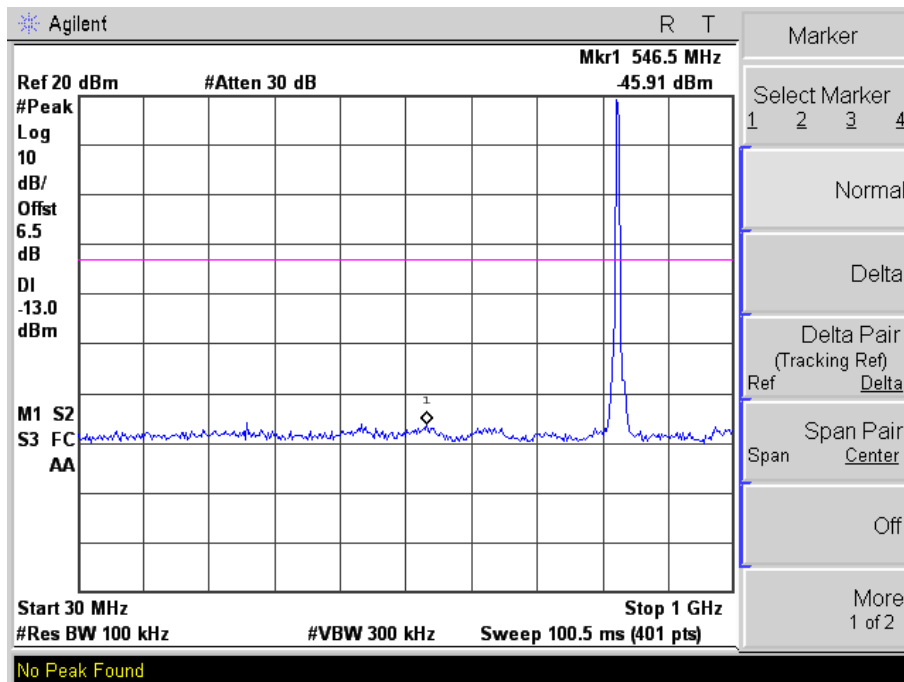


WCDMA Middle Channel

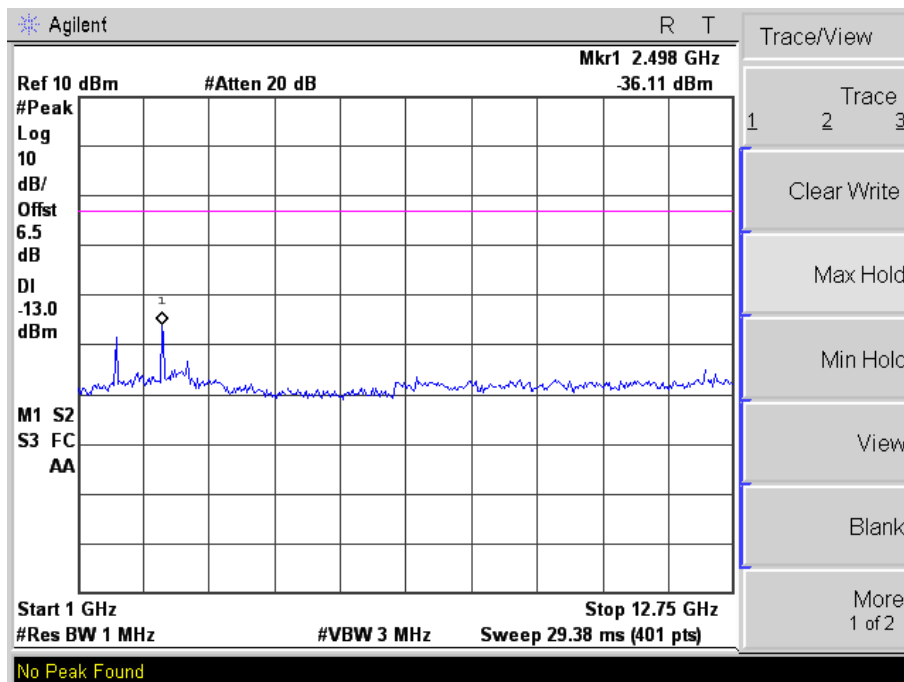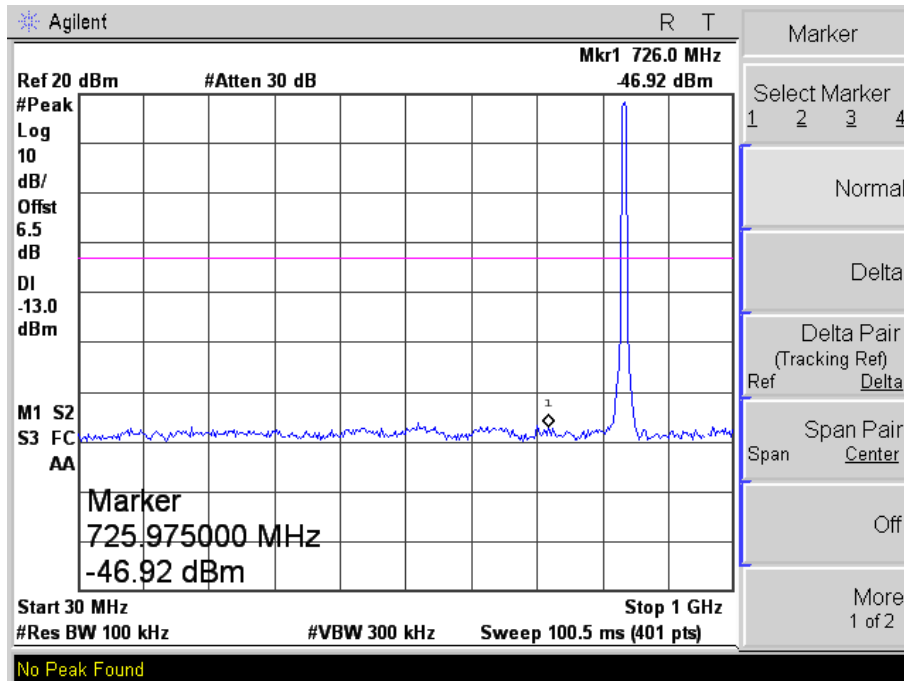


WCDMA High Channel

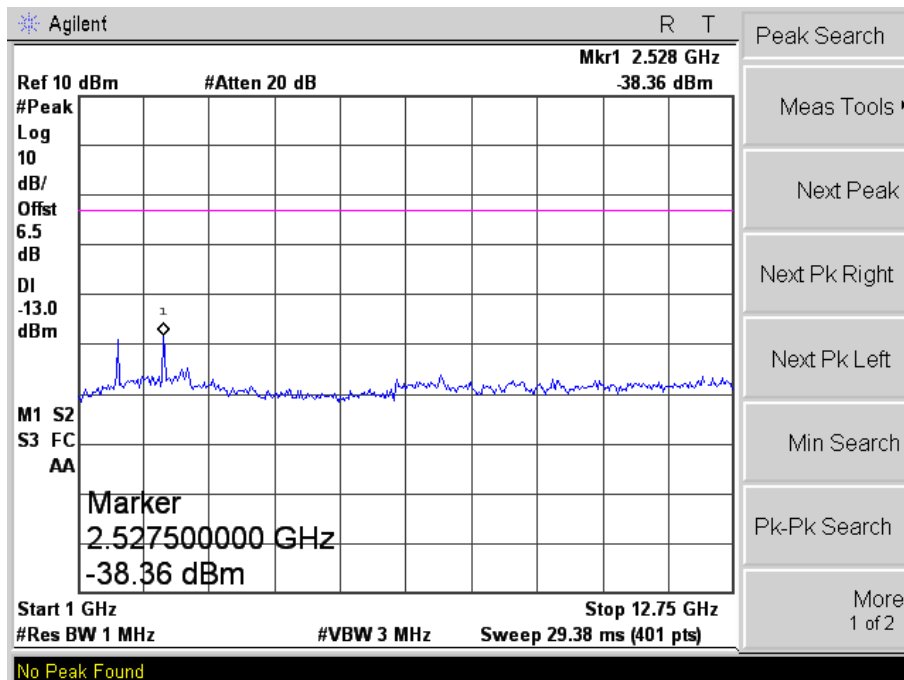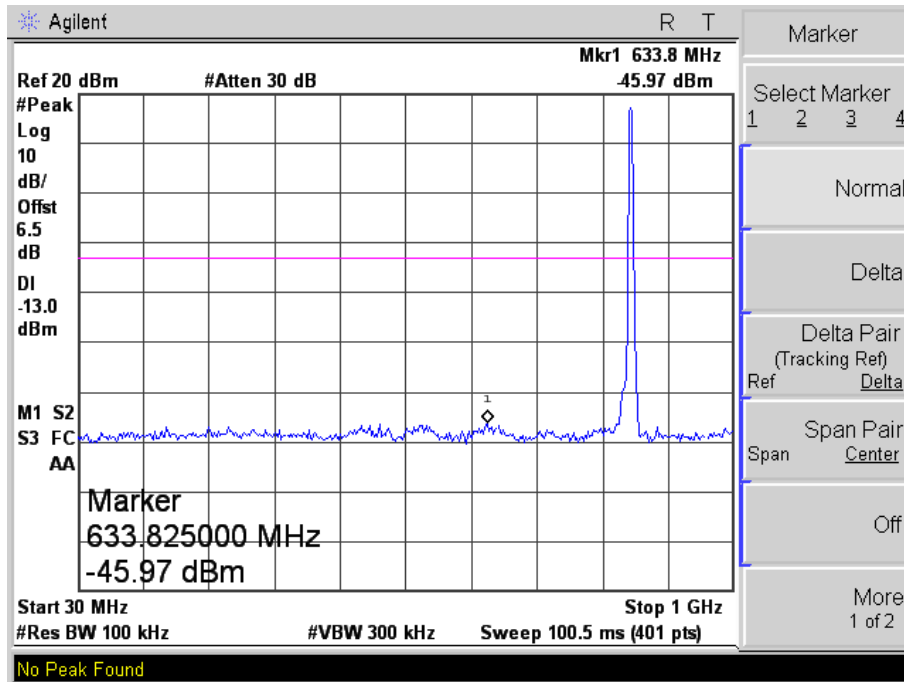



WCDMA Low Band Spurious Emission

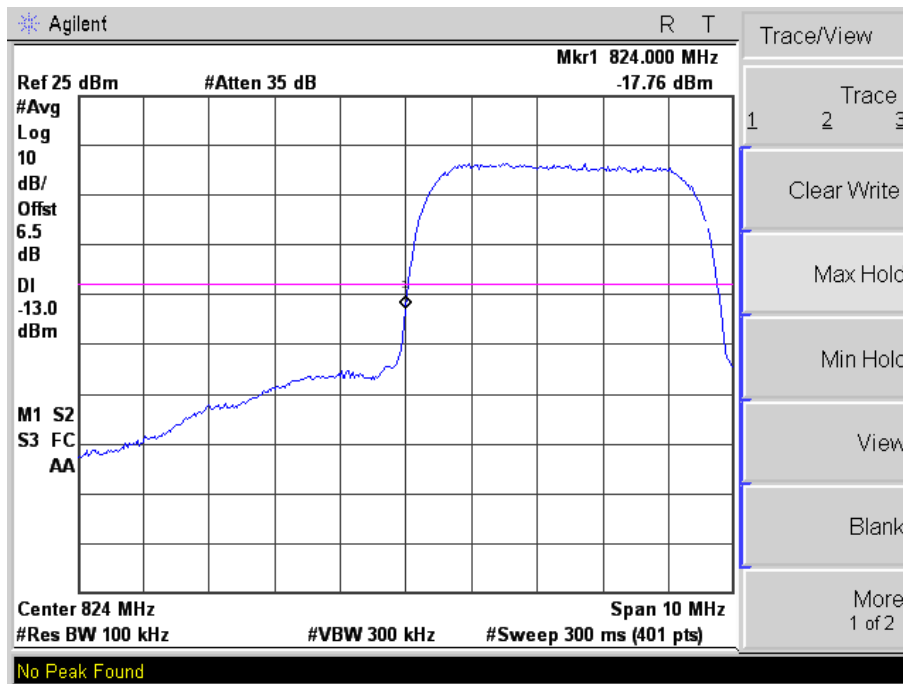



WCDMA High Band Spurious Emission

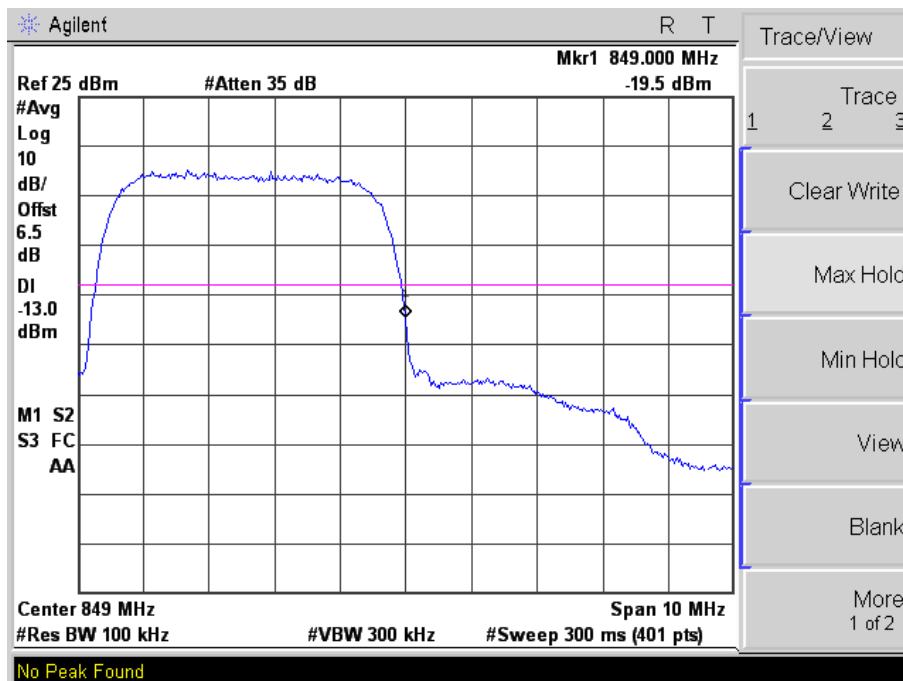

HSDPA Low Channel

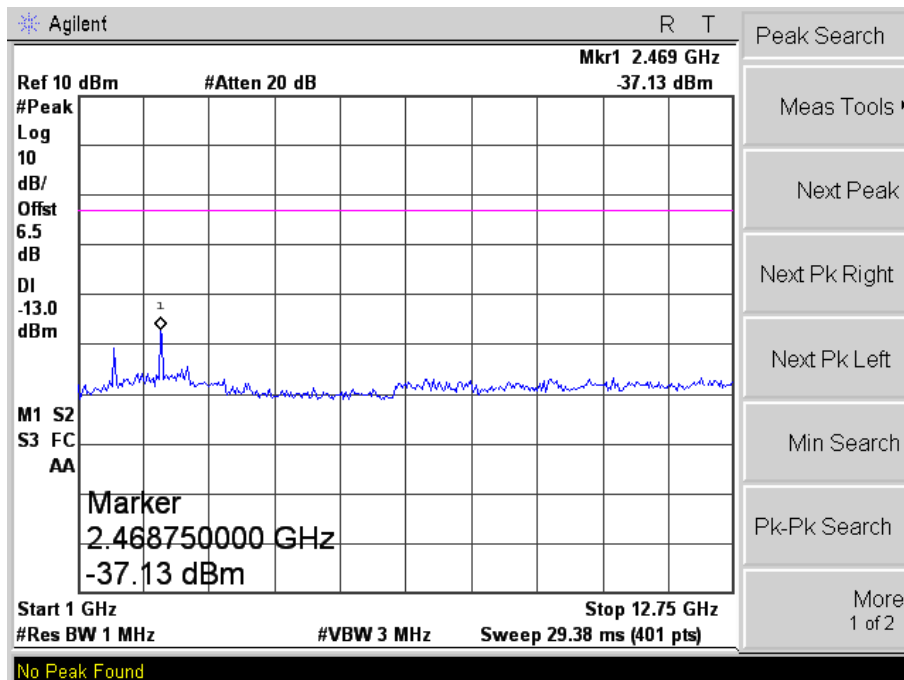
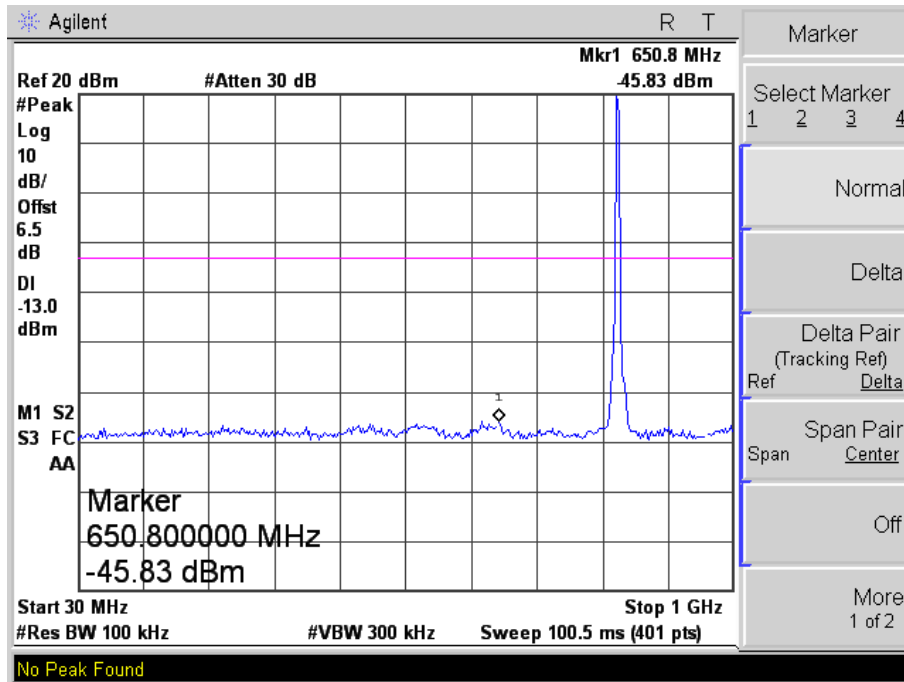


HSDPA Middle Channel

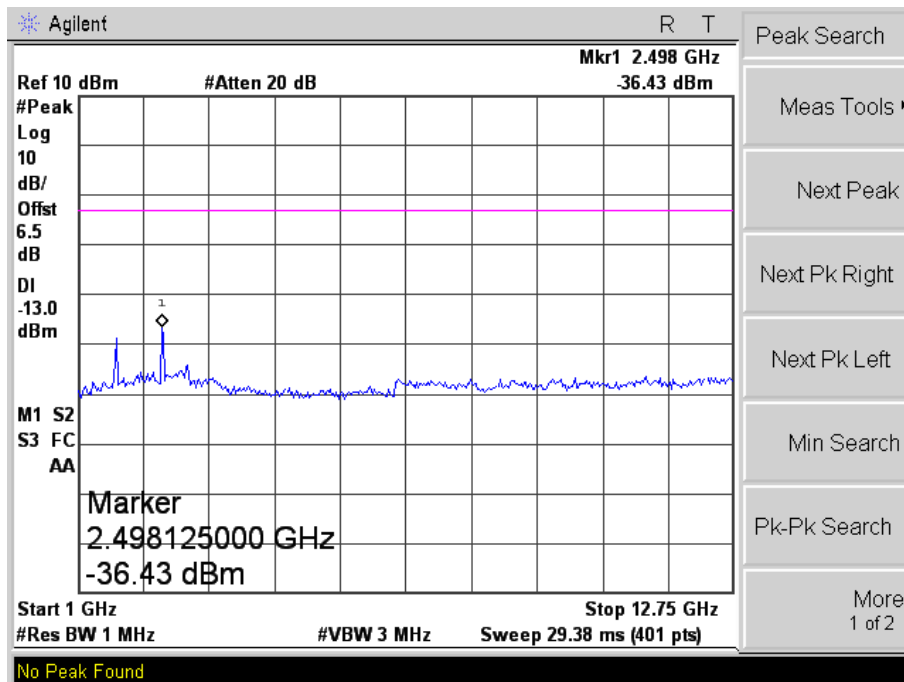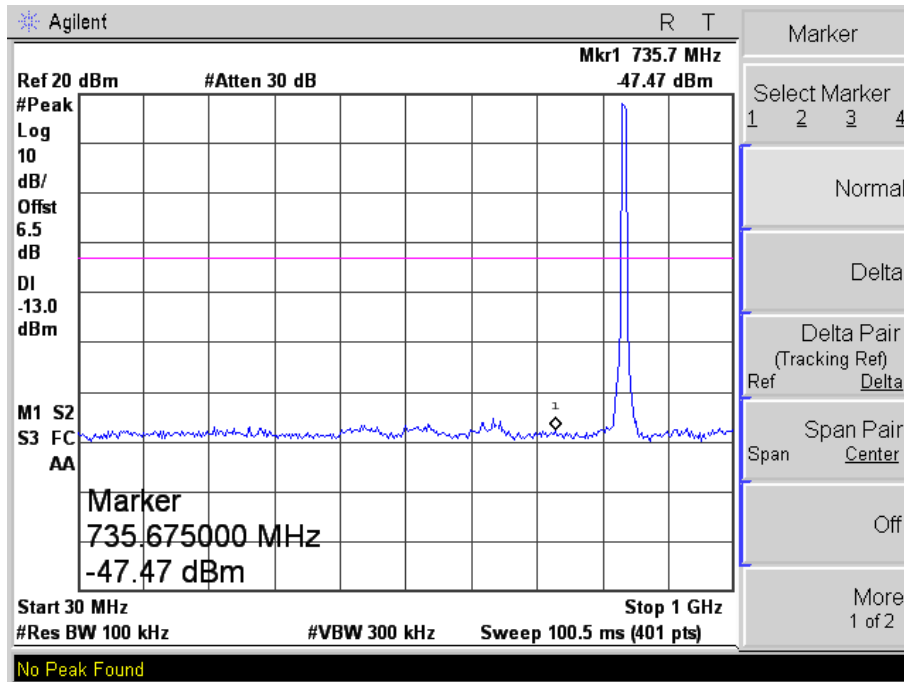





HSDPA High Channel

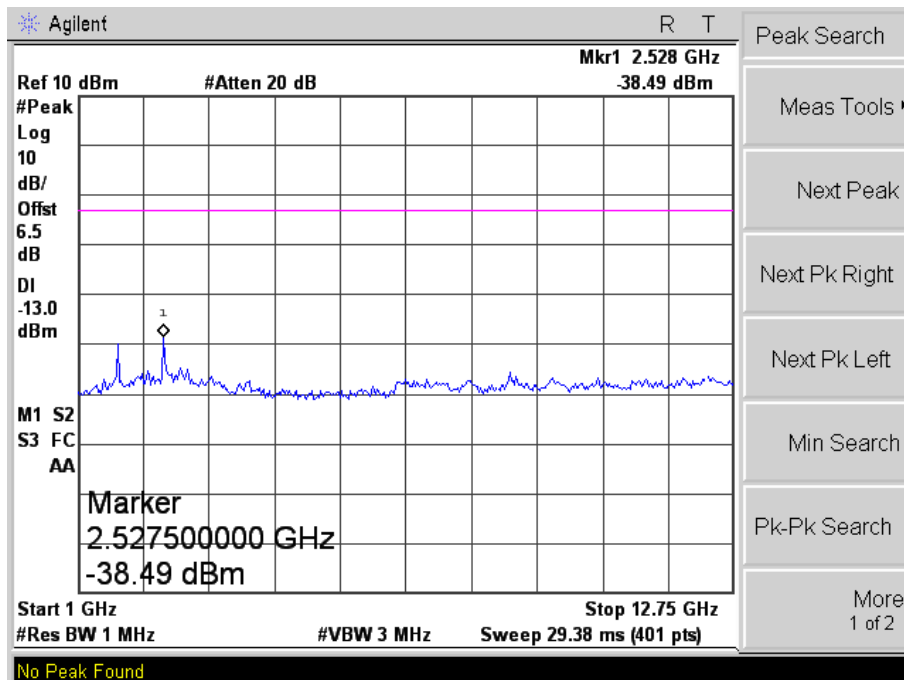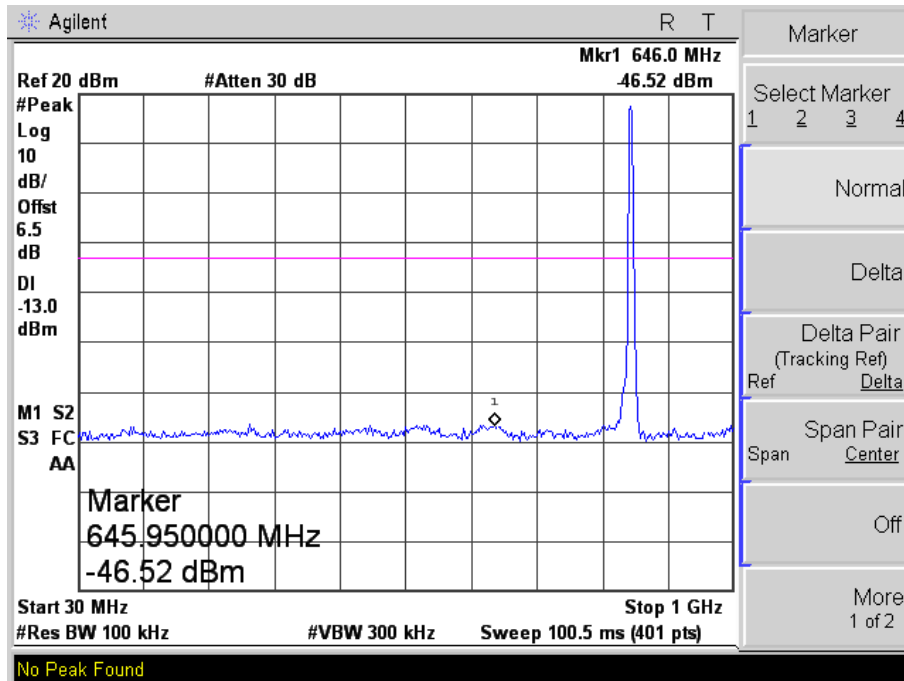



HSDPA Low Band Spurious Emission

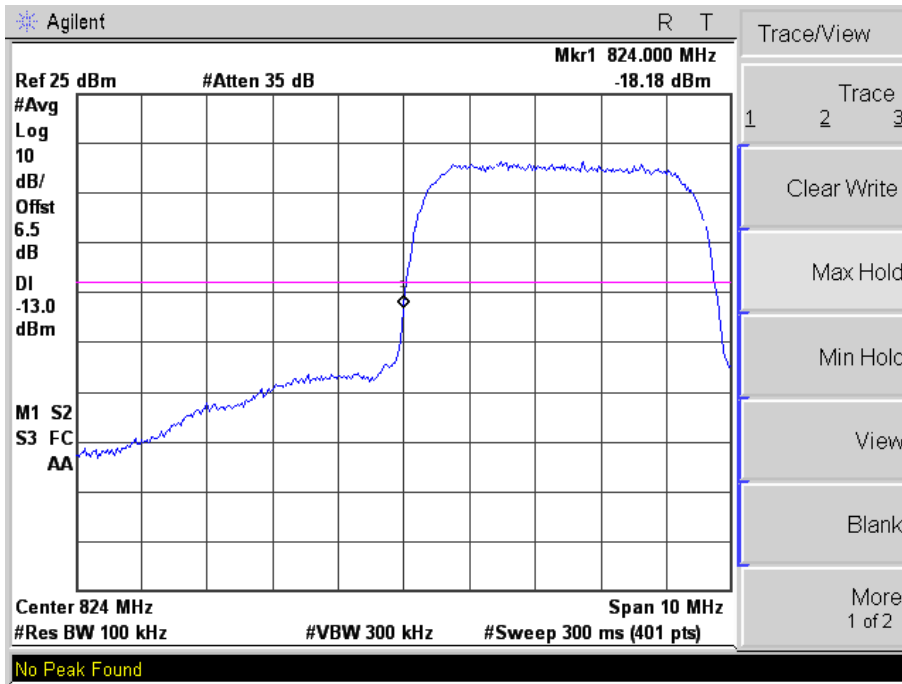



HSDPA High Band Spurious Emission

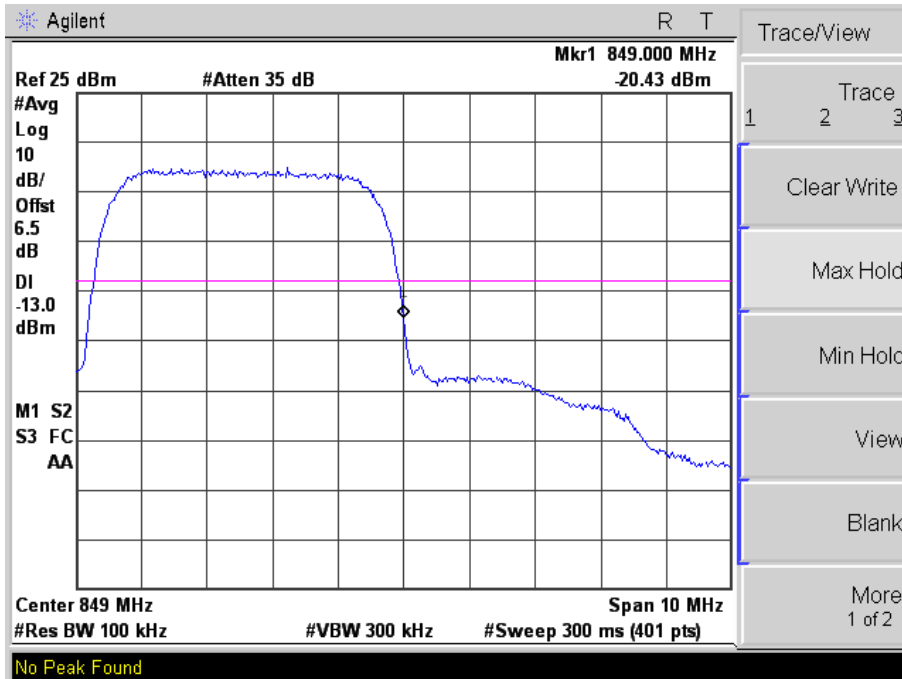



HSUPA Low Channel

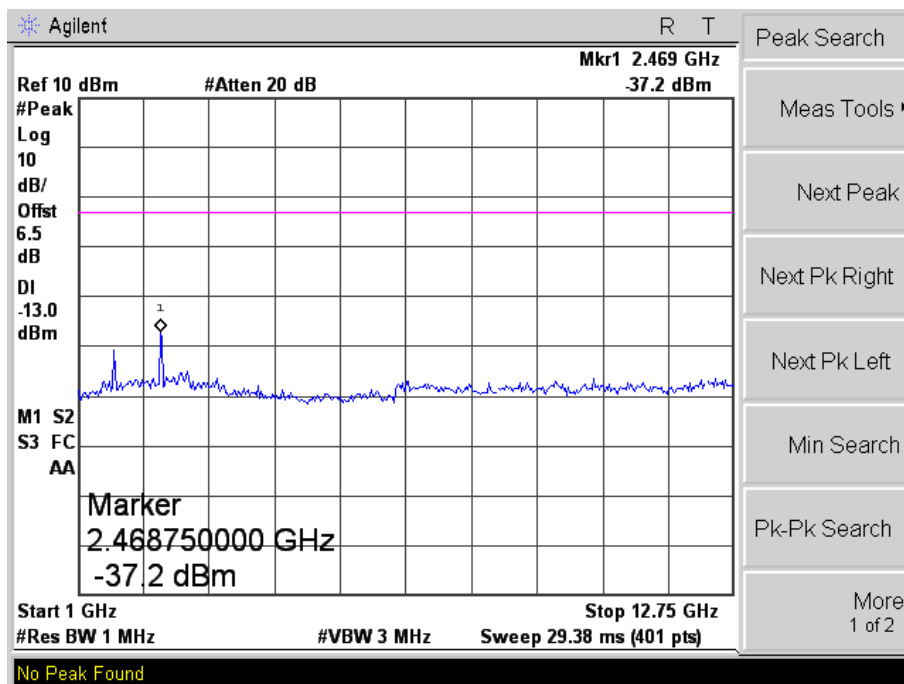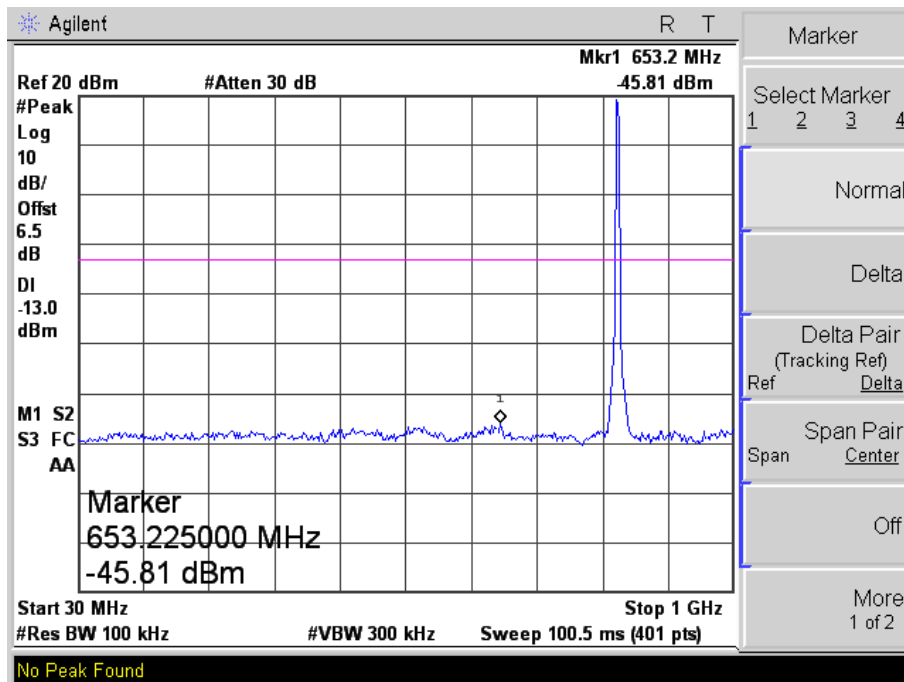


HSUPA Middle Channel

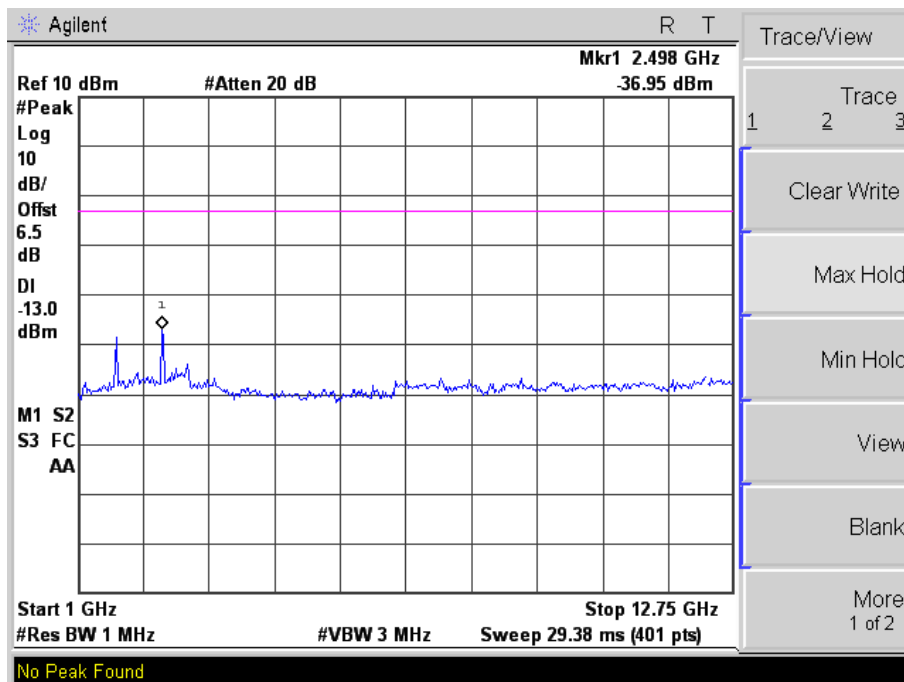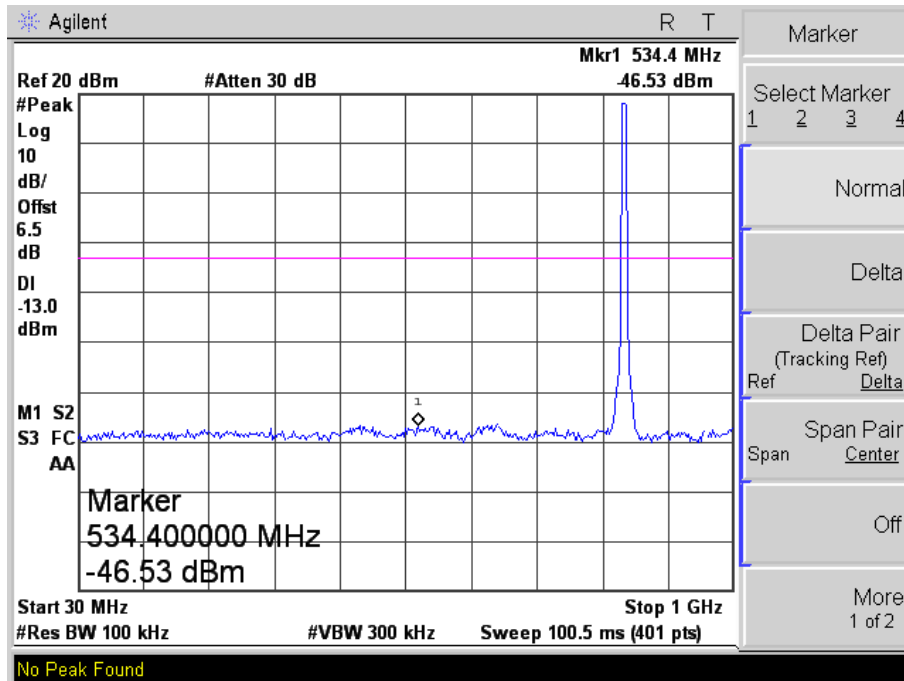


HSUPA High Channel

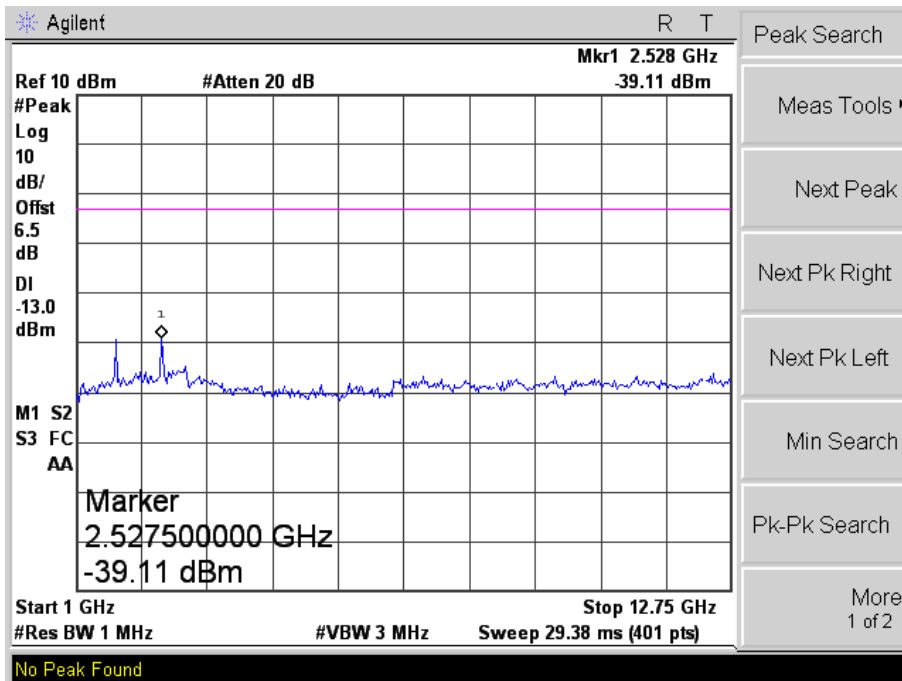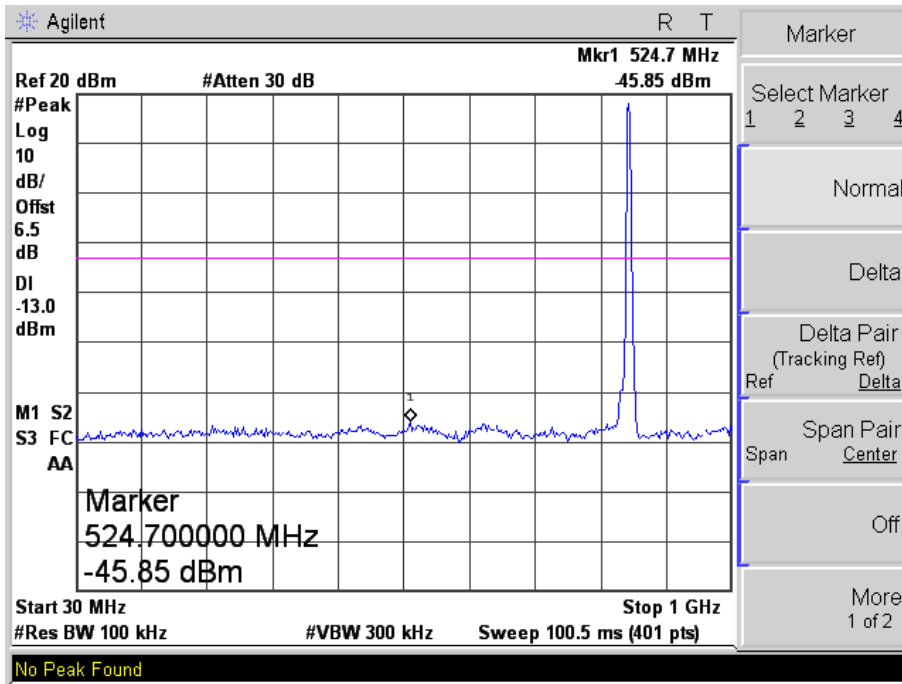



HSUPA Low Band Spurious Emission

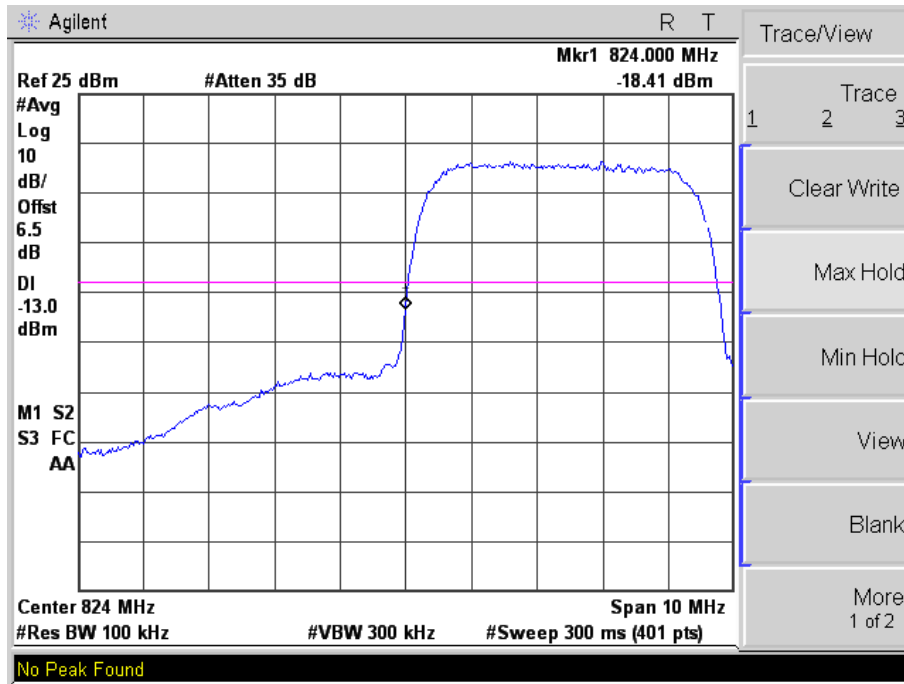


HSUPA High Band Spurious Emission

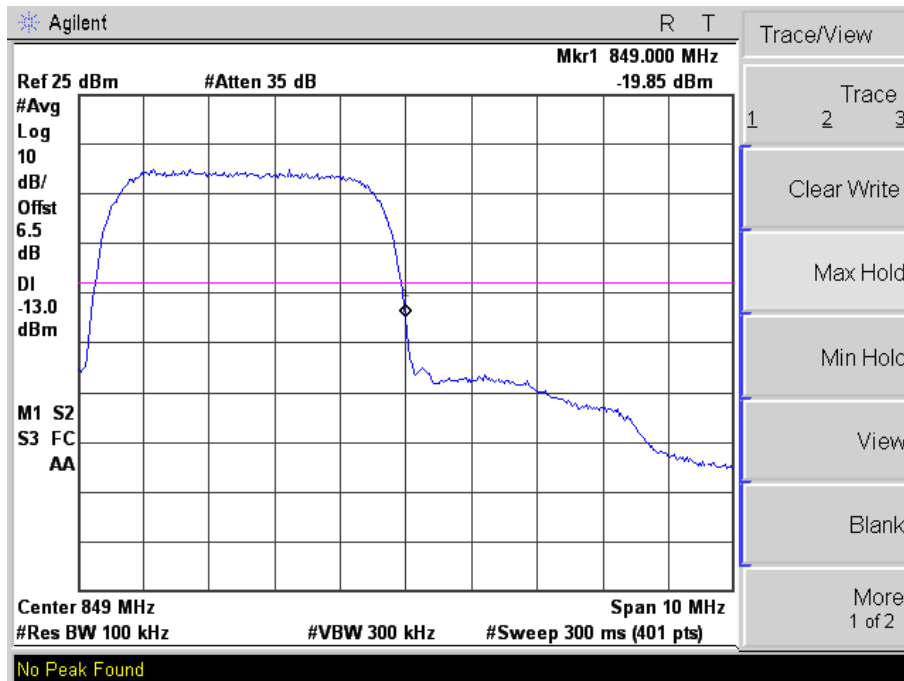


**For Band II**  
WCDMA Low Channel

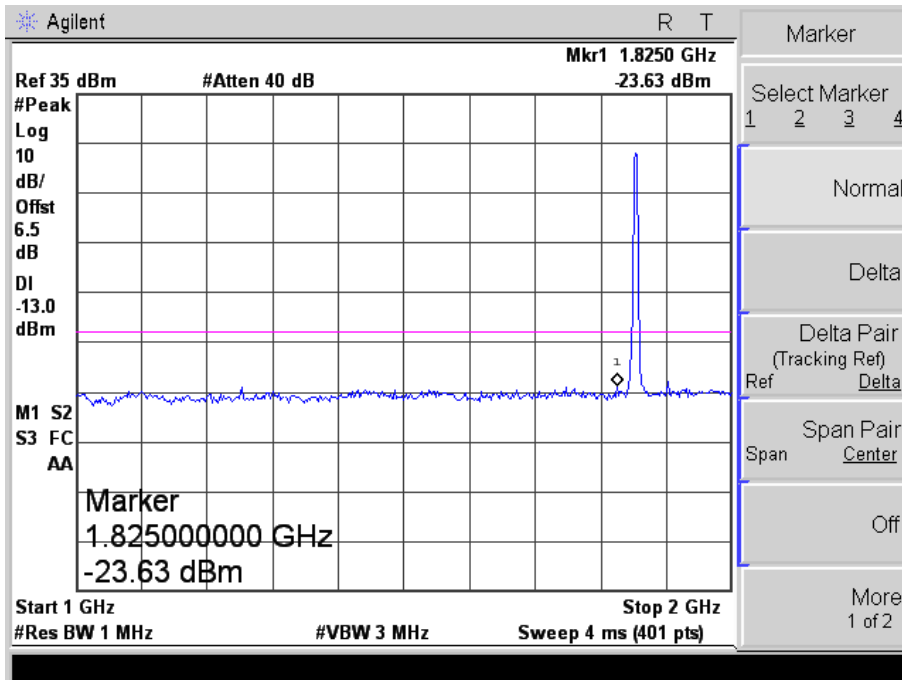
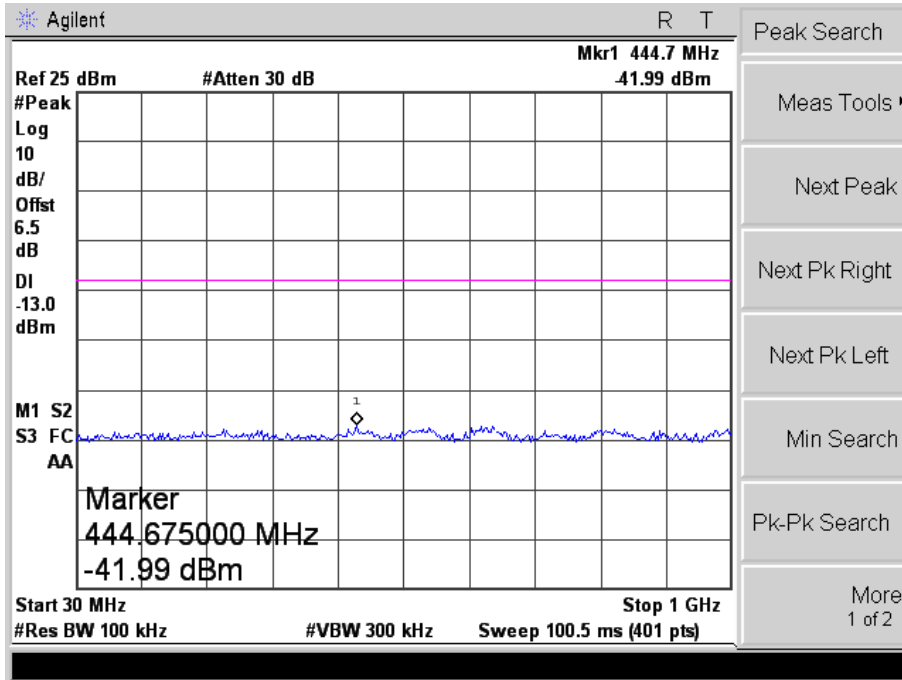


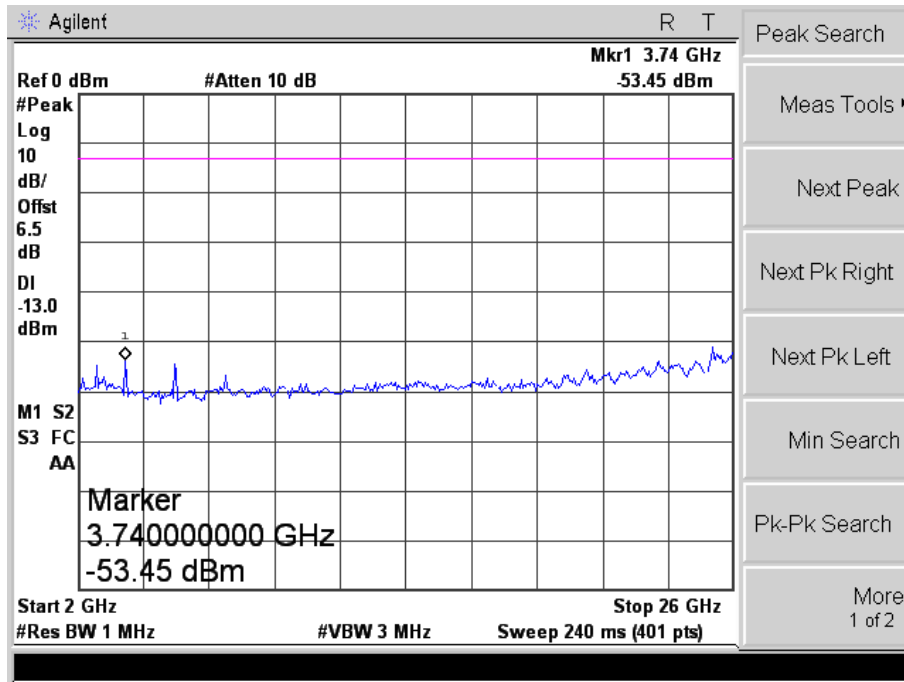



WCDMA Middle Channel

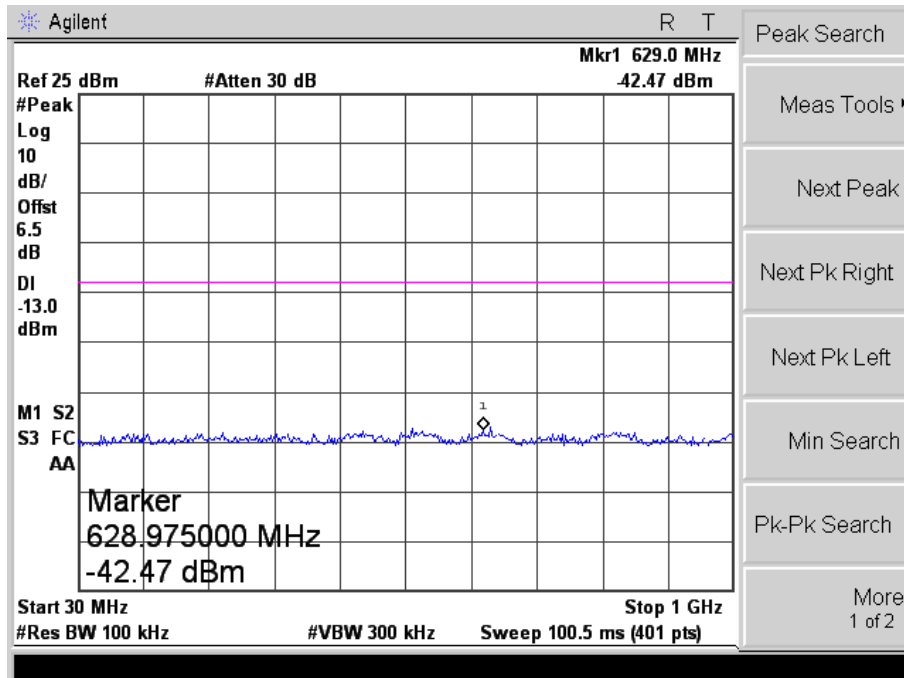




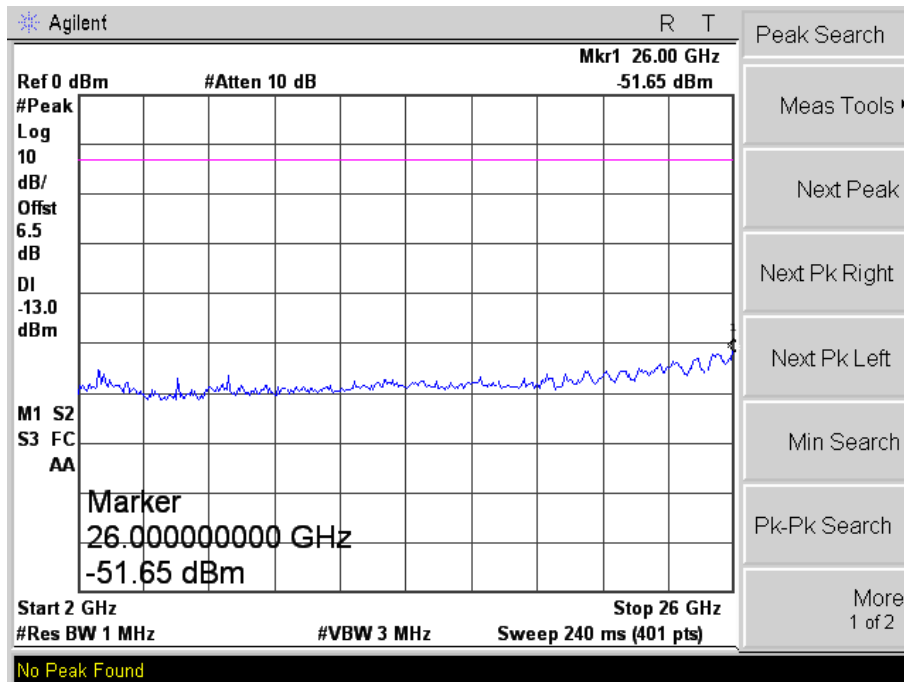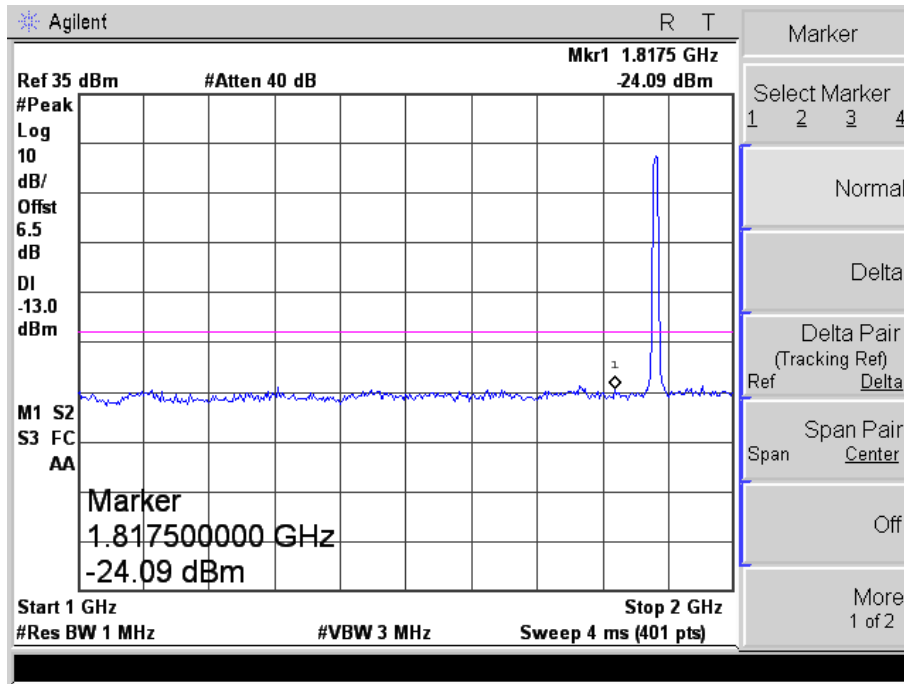


WCDMA High Channel

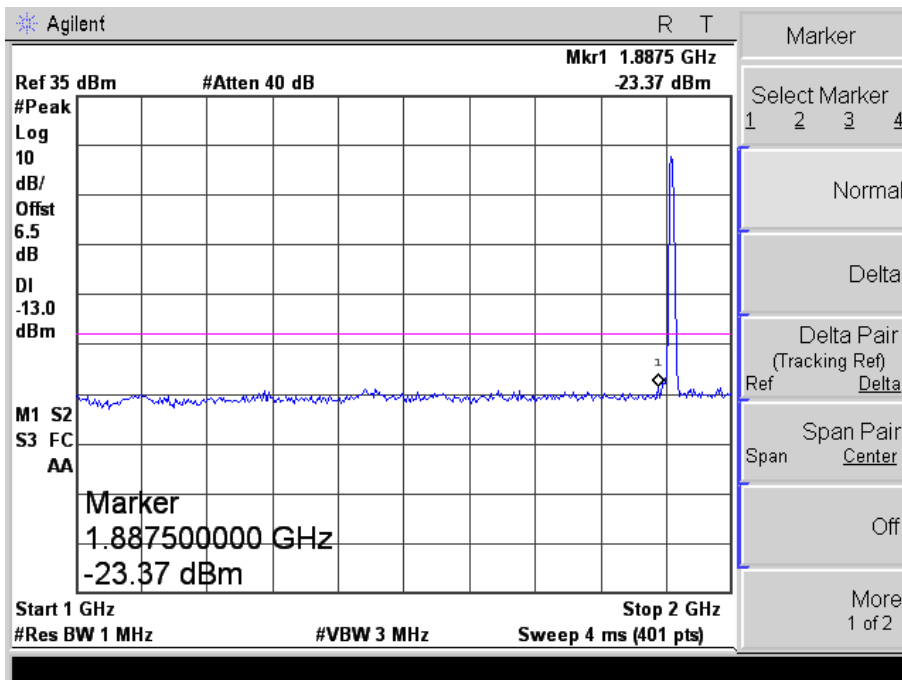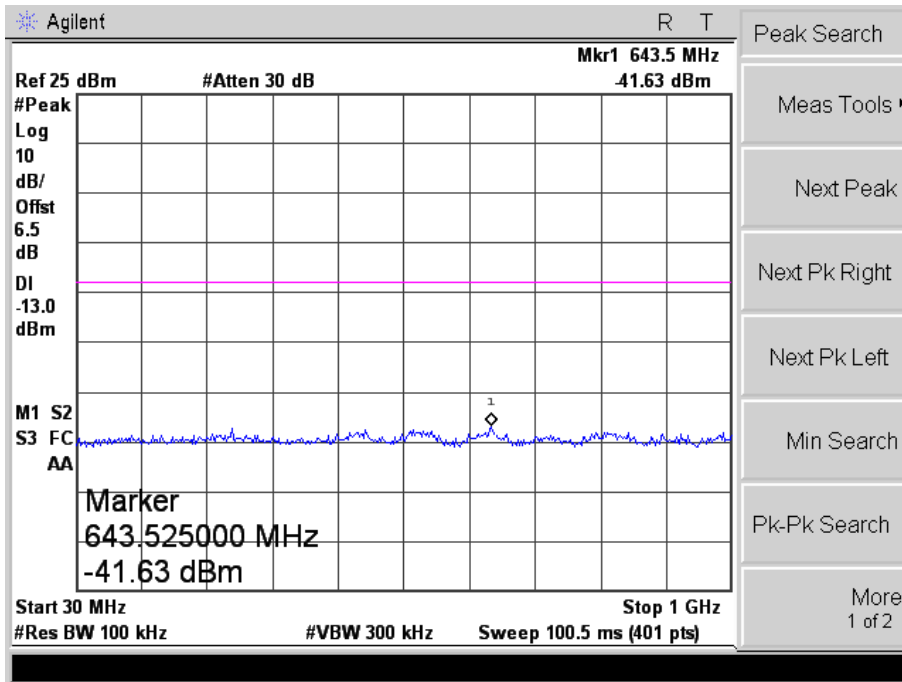


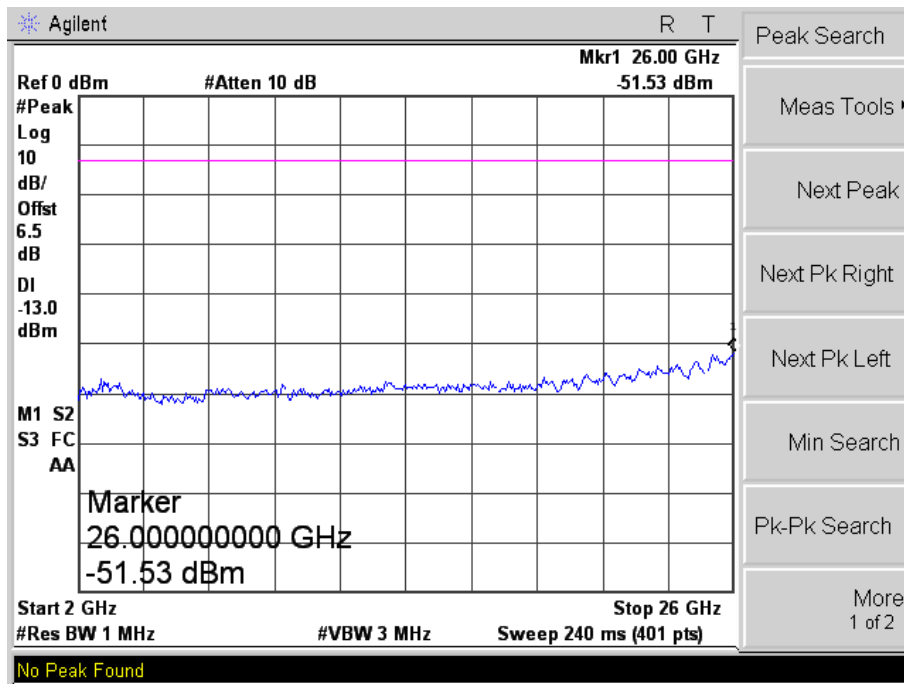


WCDMA Low Band Spurious Emission


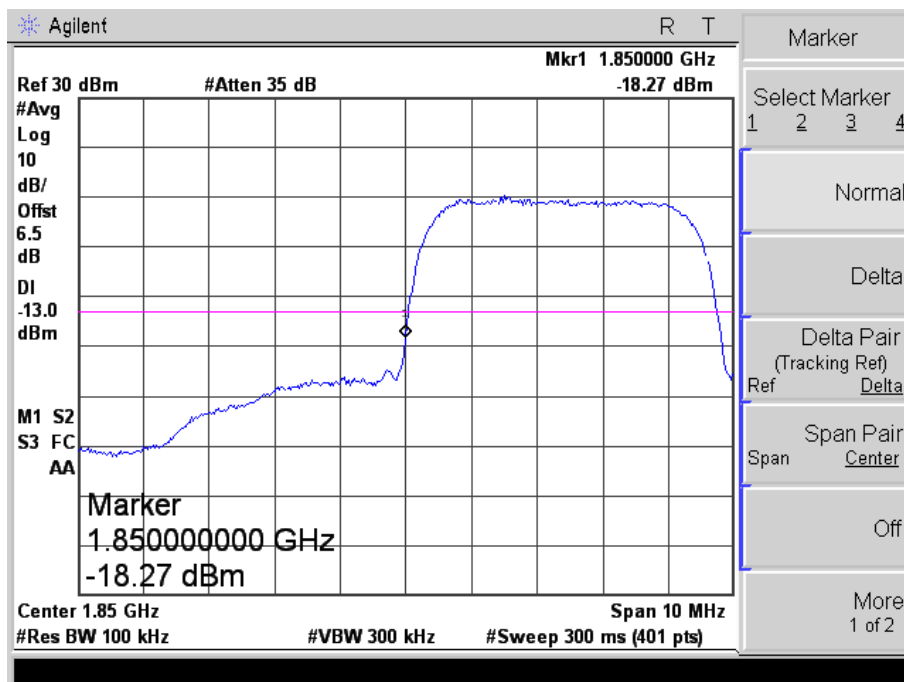


WCDMA High Band Spurious Emission


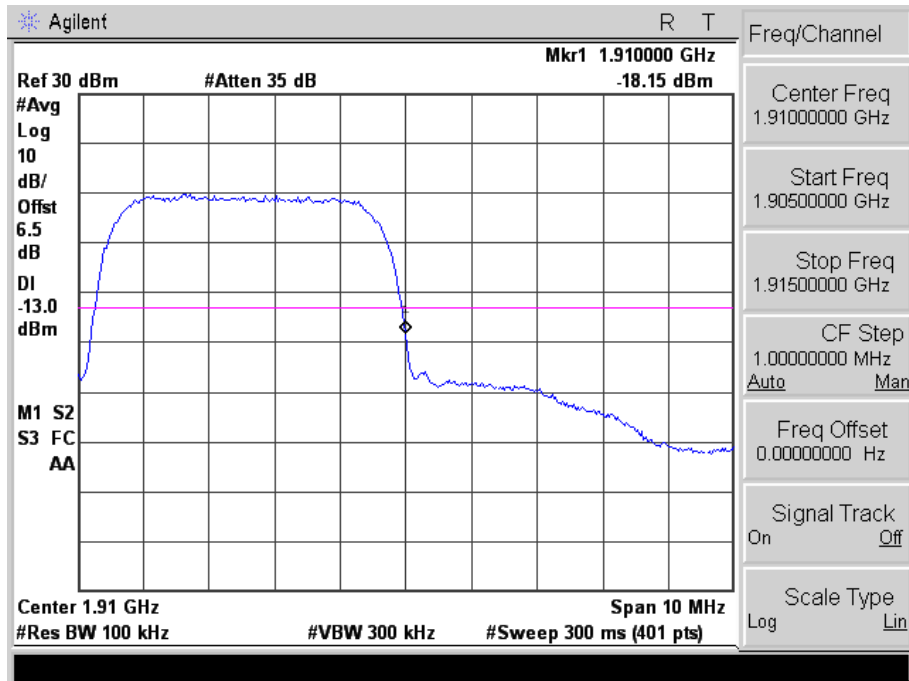



HSDPA Low Channel

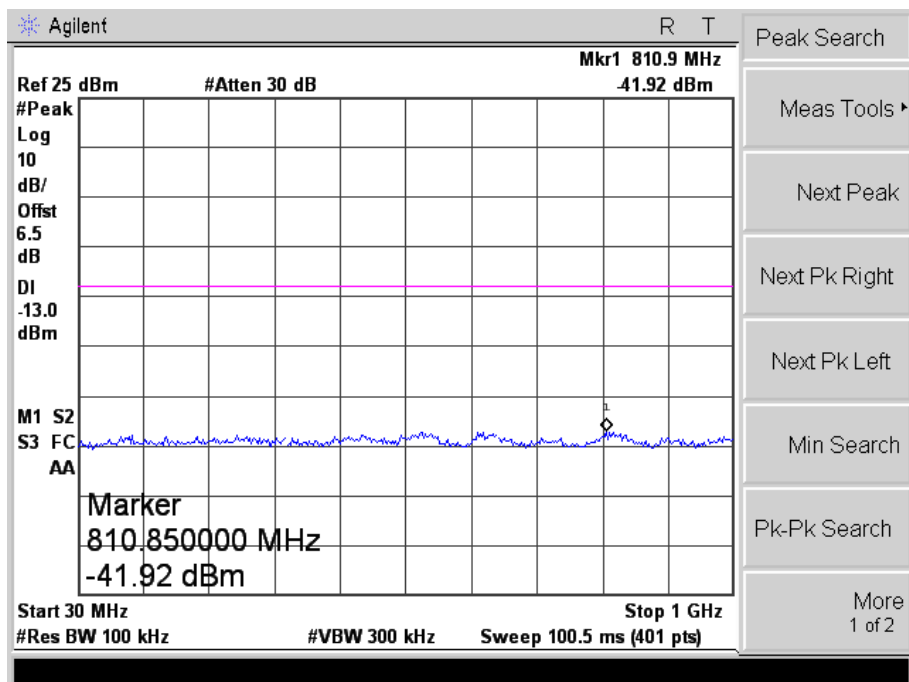

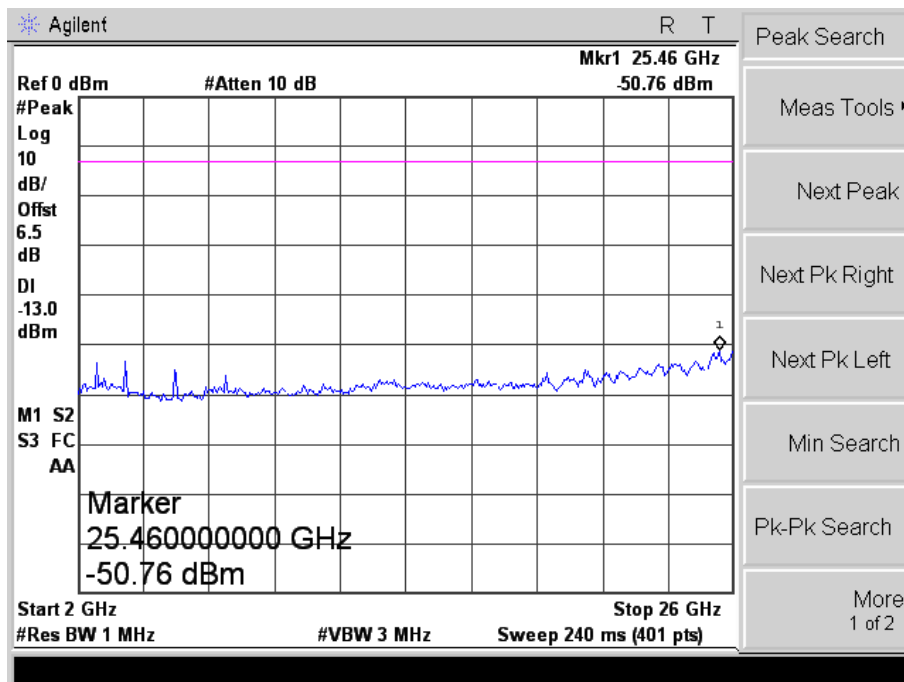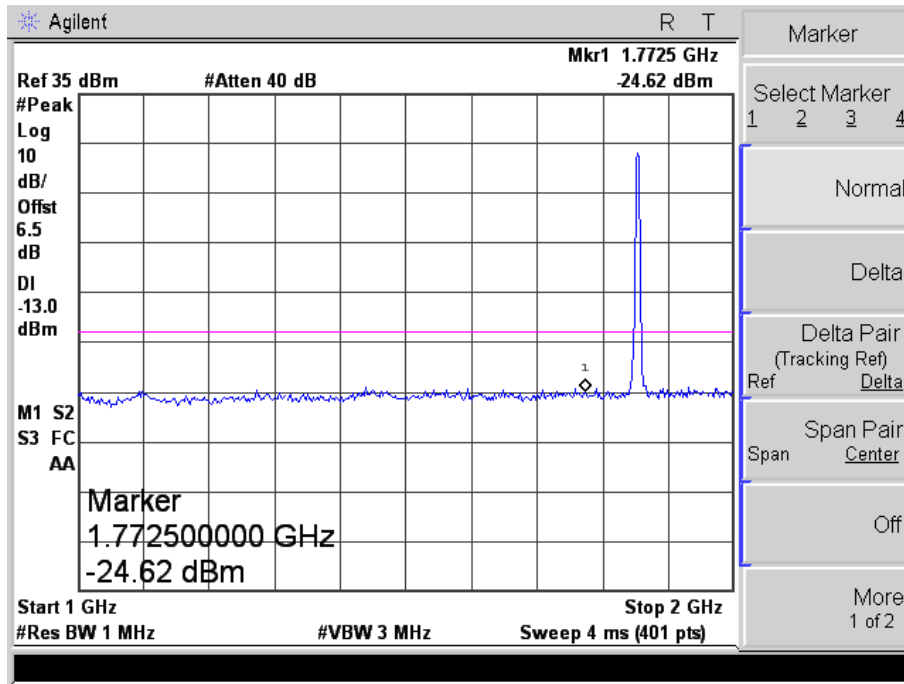




HSDPA Middle Channel

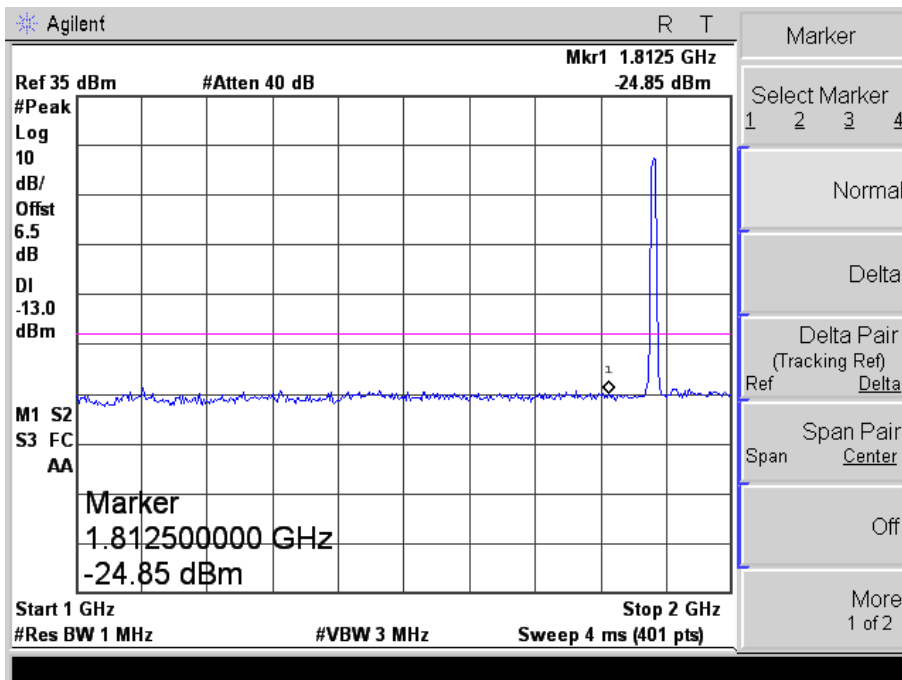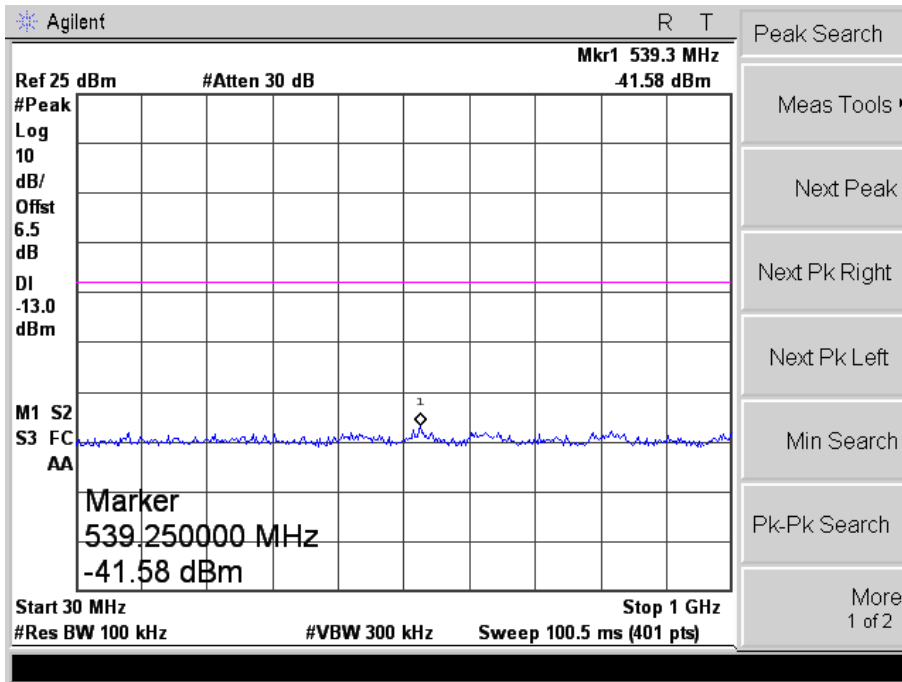

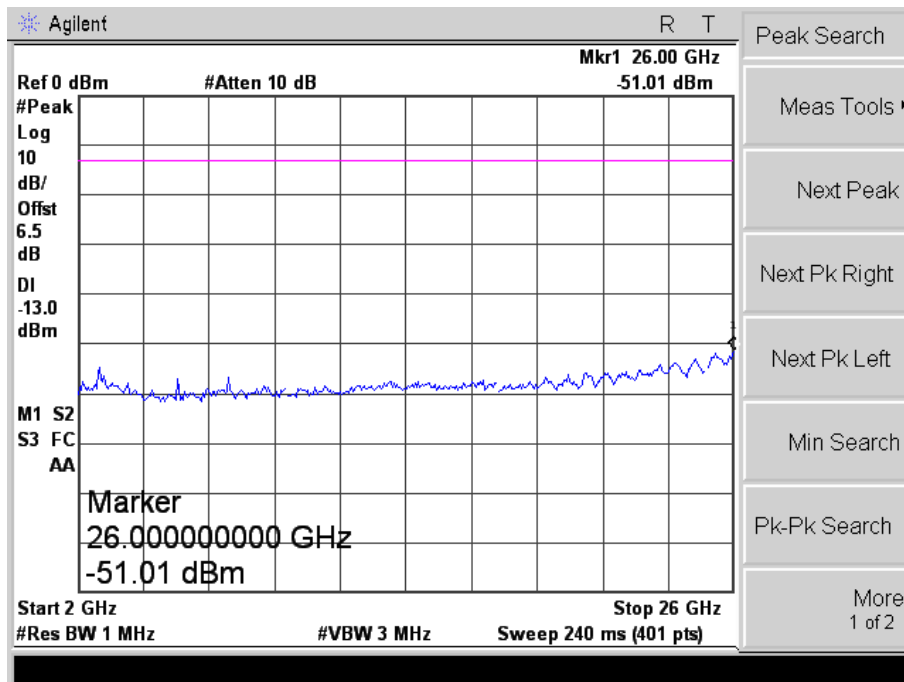


HSDPA High Channel

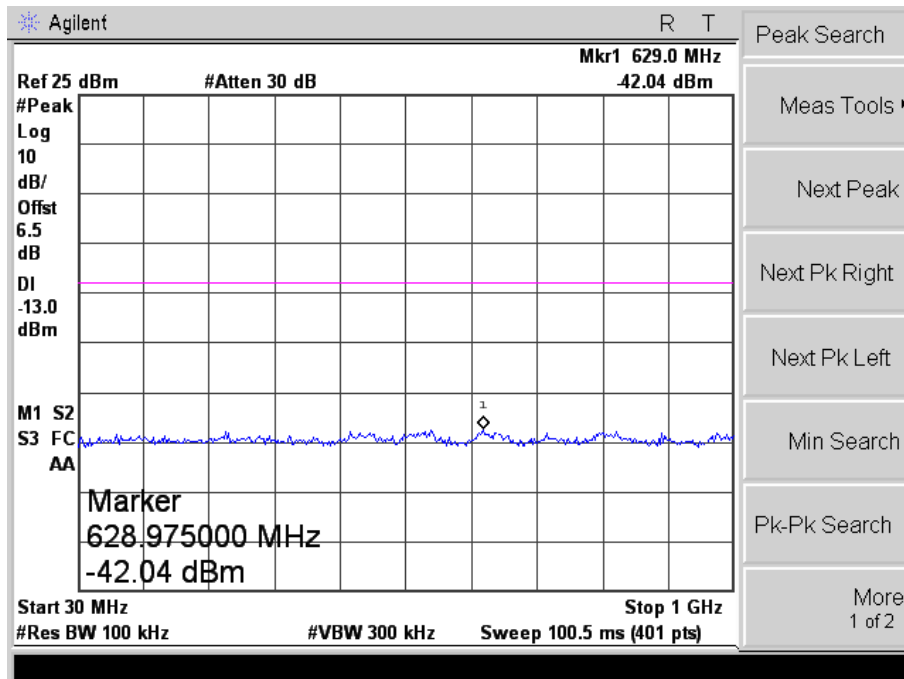

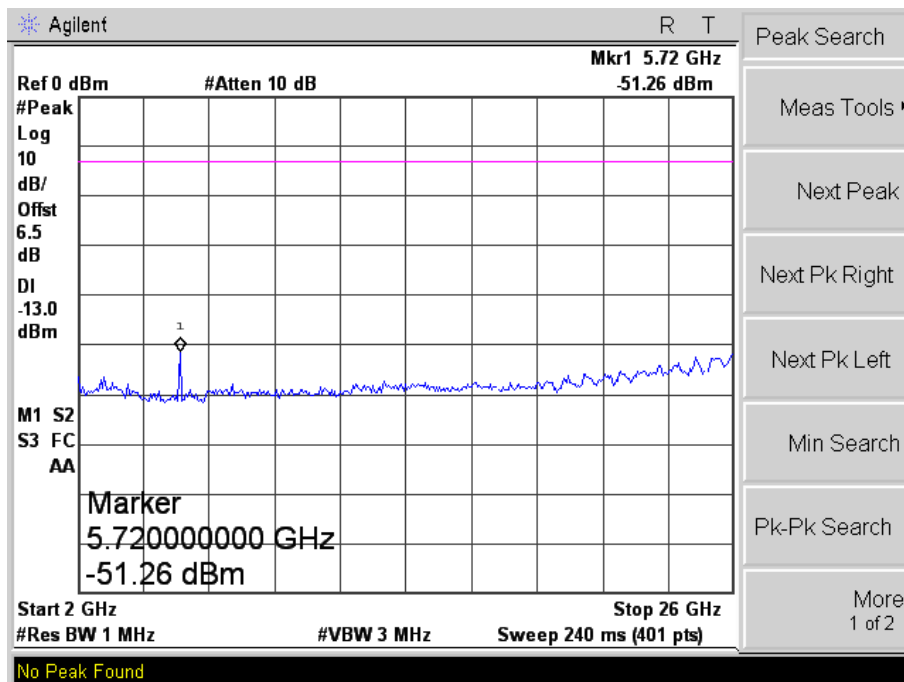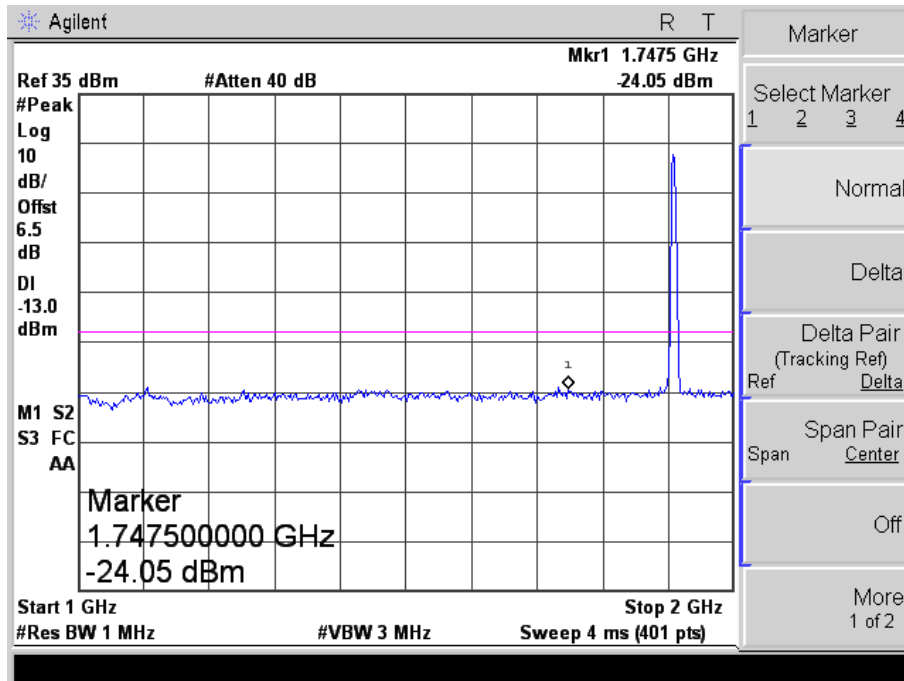






HSDPA Low Band Spurious Emission

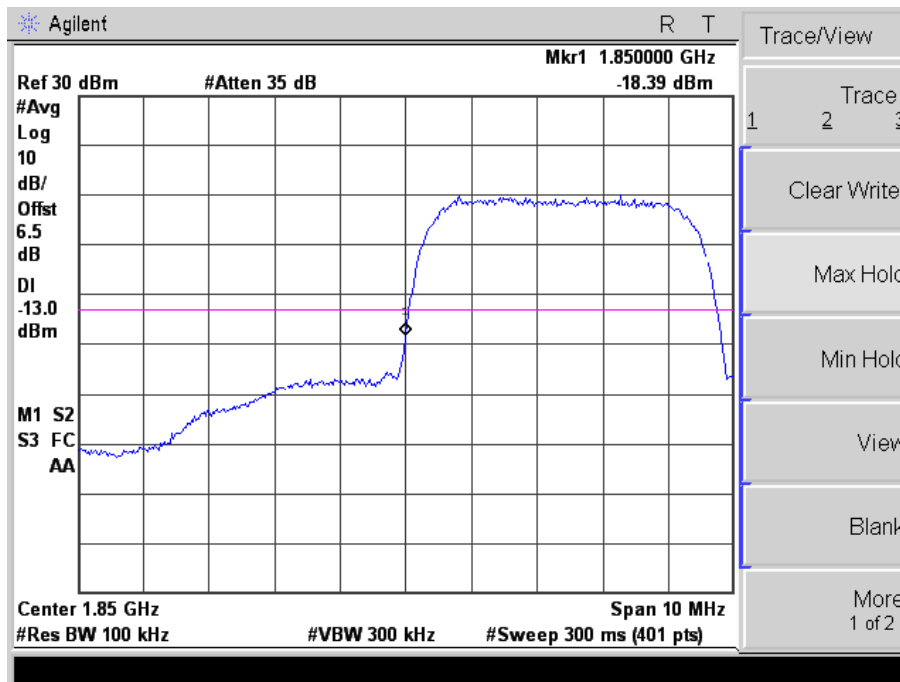


HSDPA High Band Spurious Emission

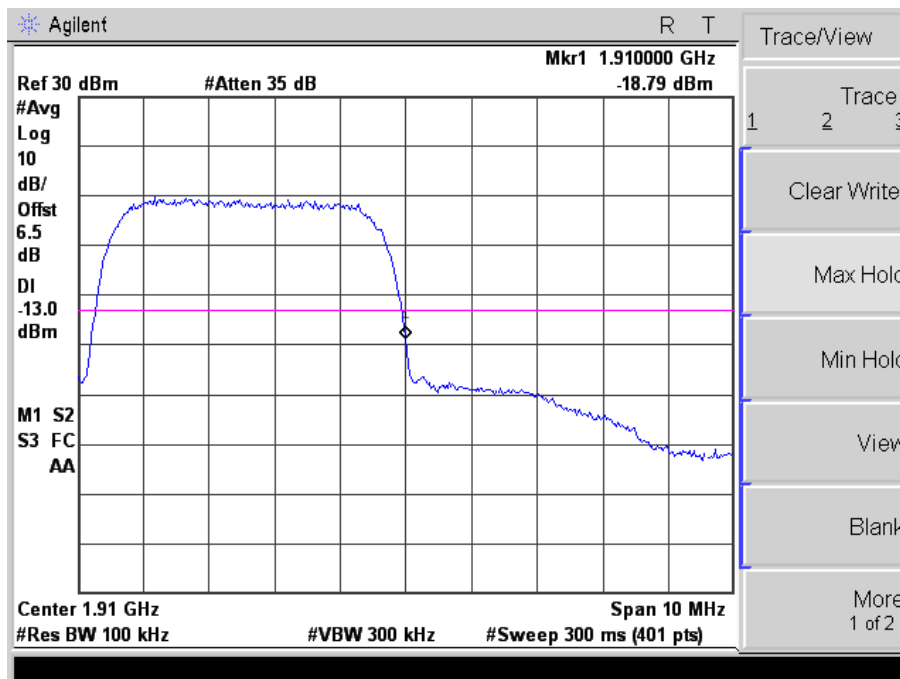




HSUPA Low Channel

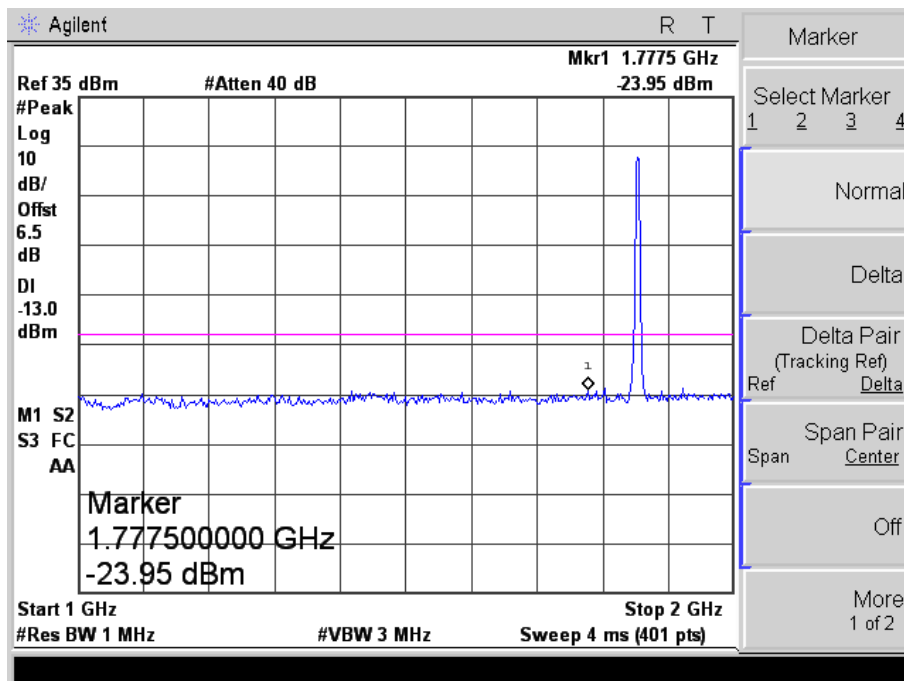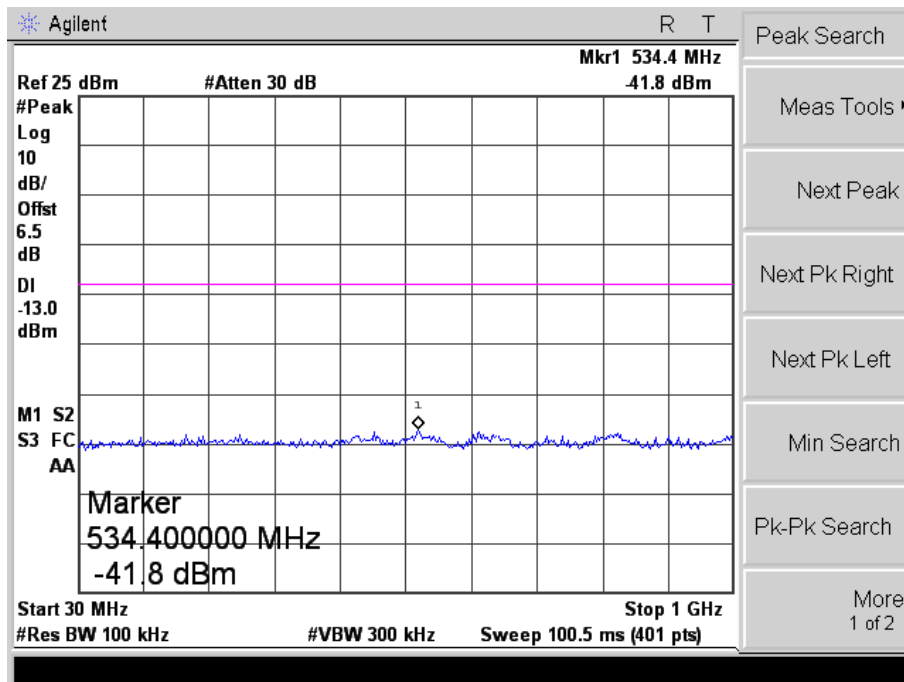


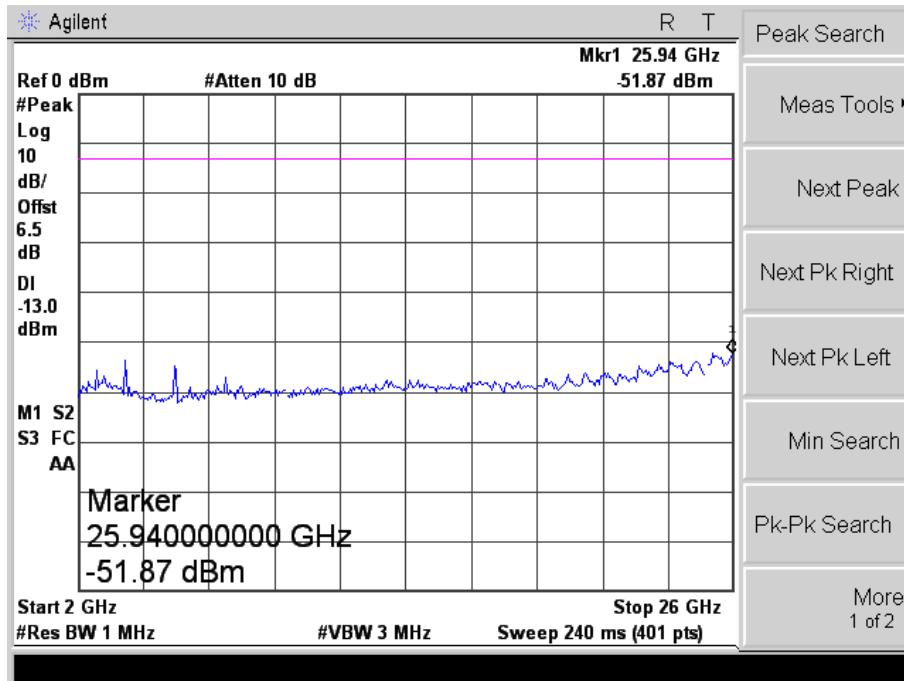



HSUPA Middle Channel

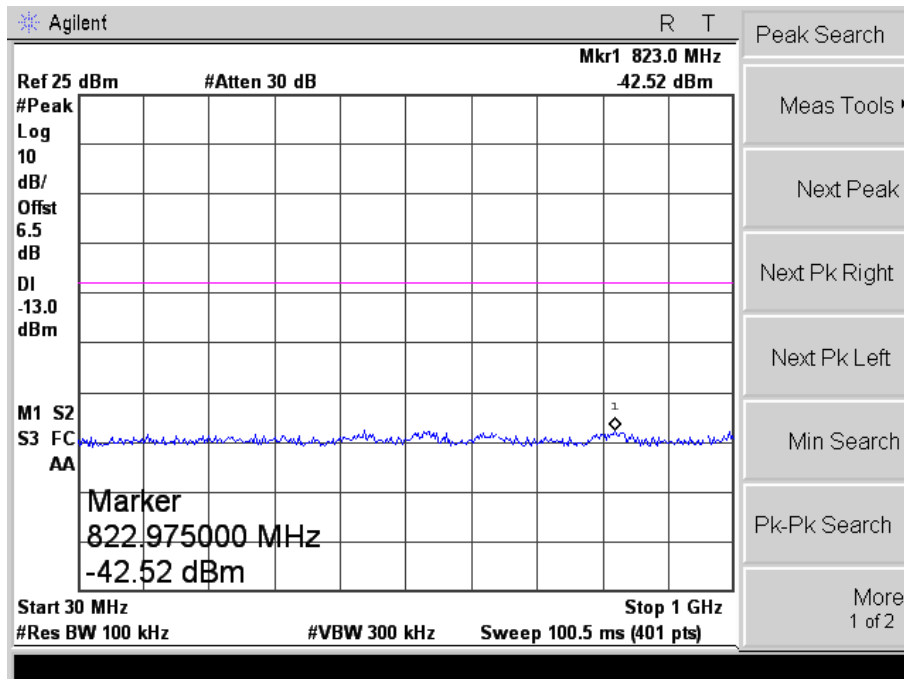

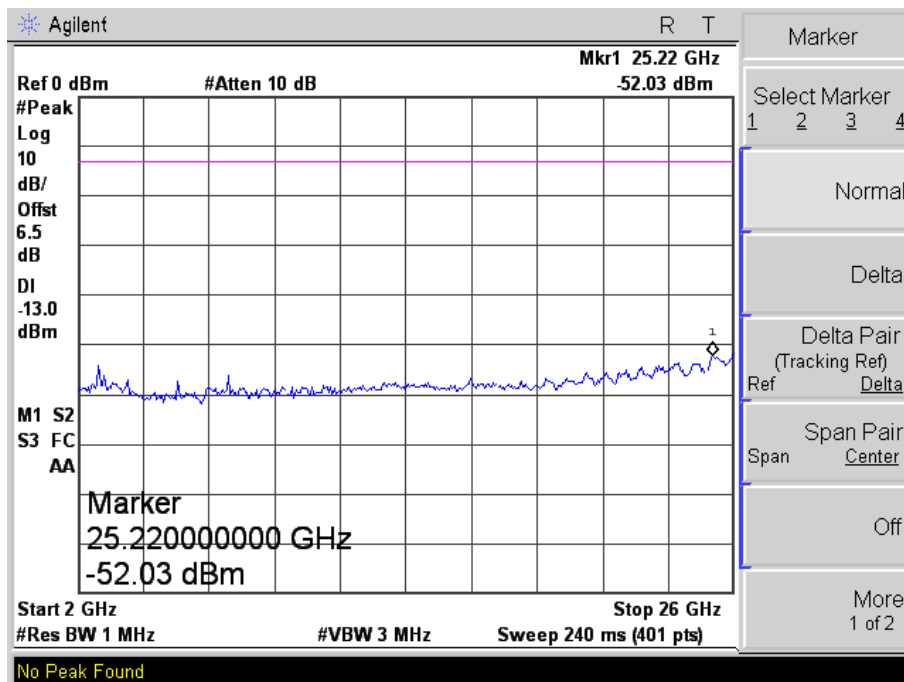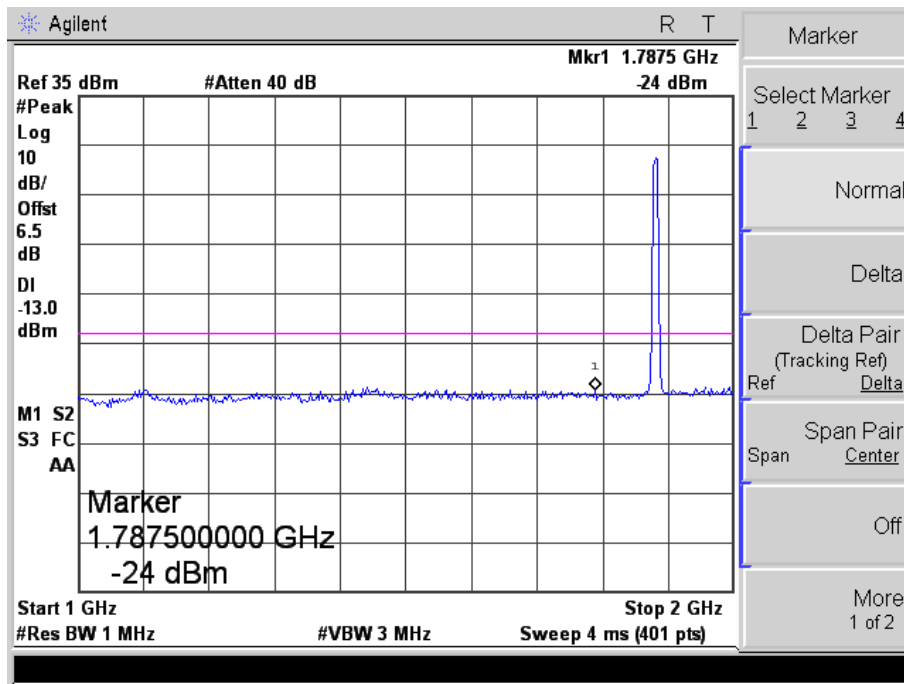


HSUPA High Channel

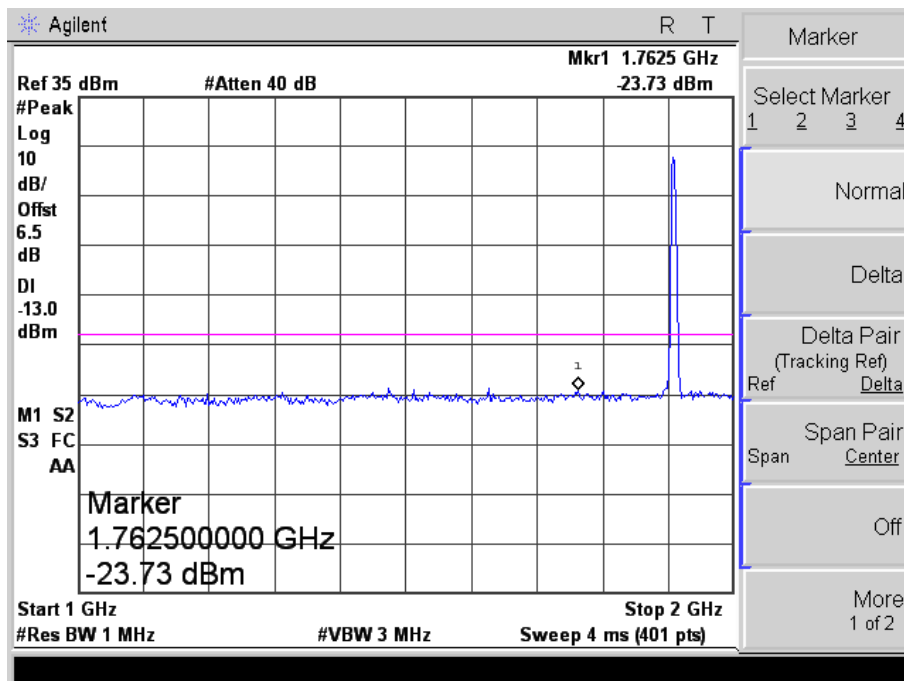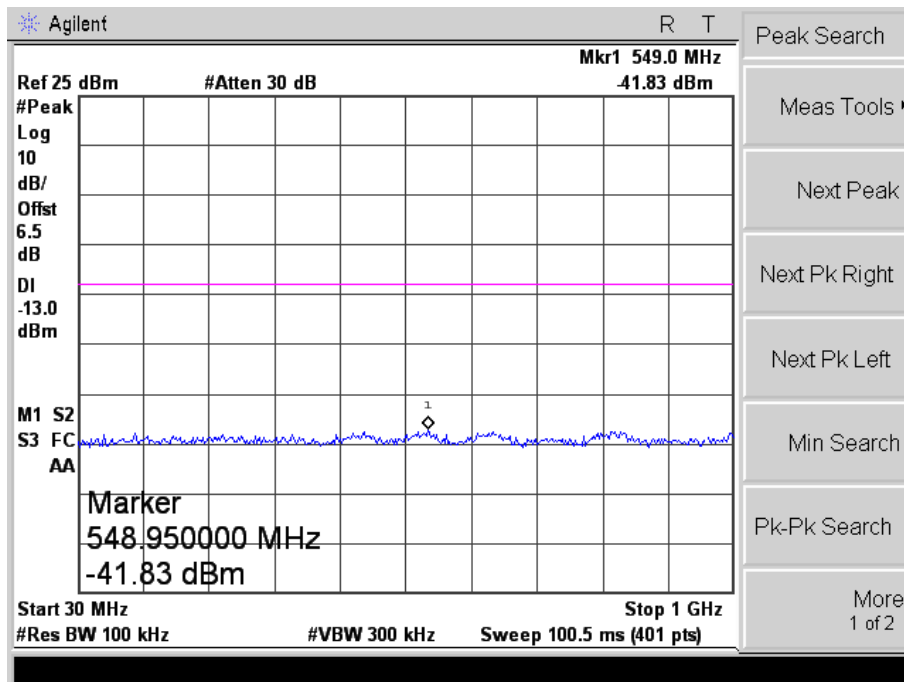


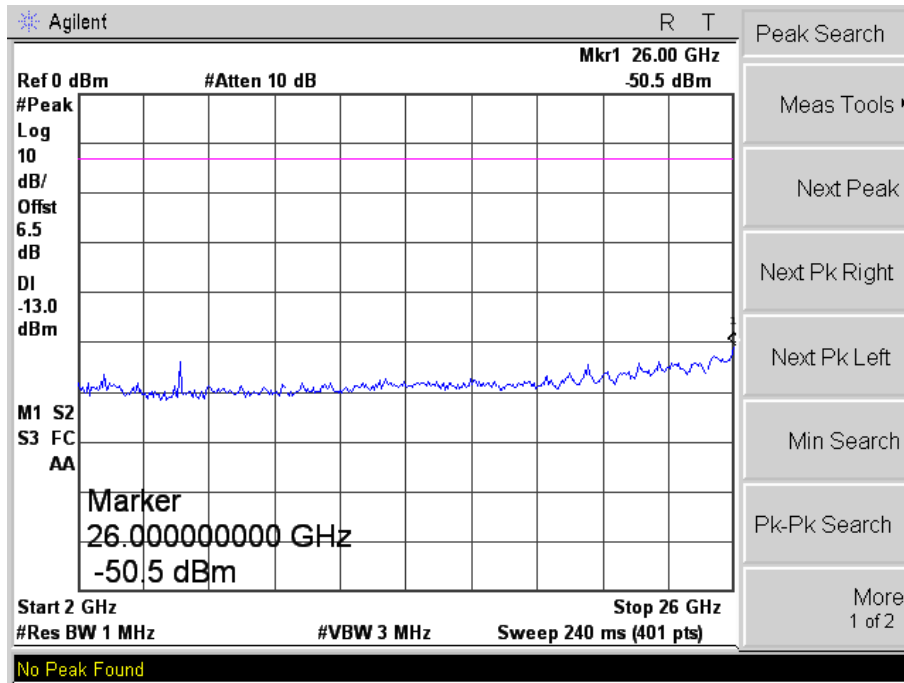

HSUPA Low Band Spurious Emission

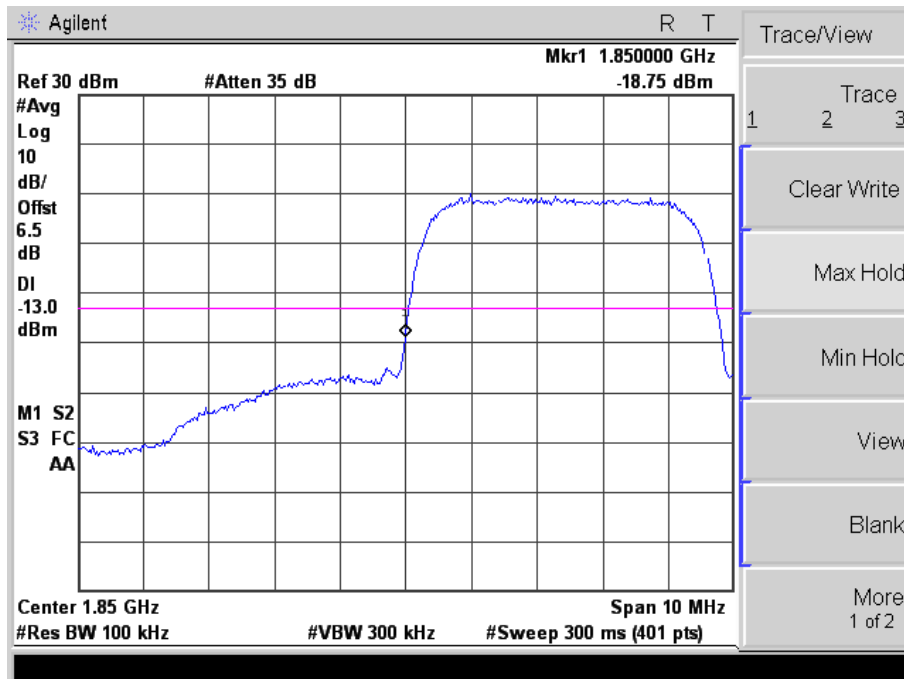

HSUPA High Band Spurious Emission

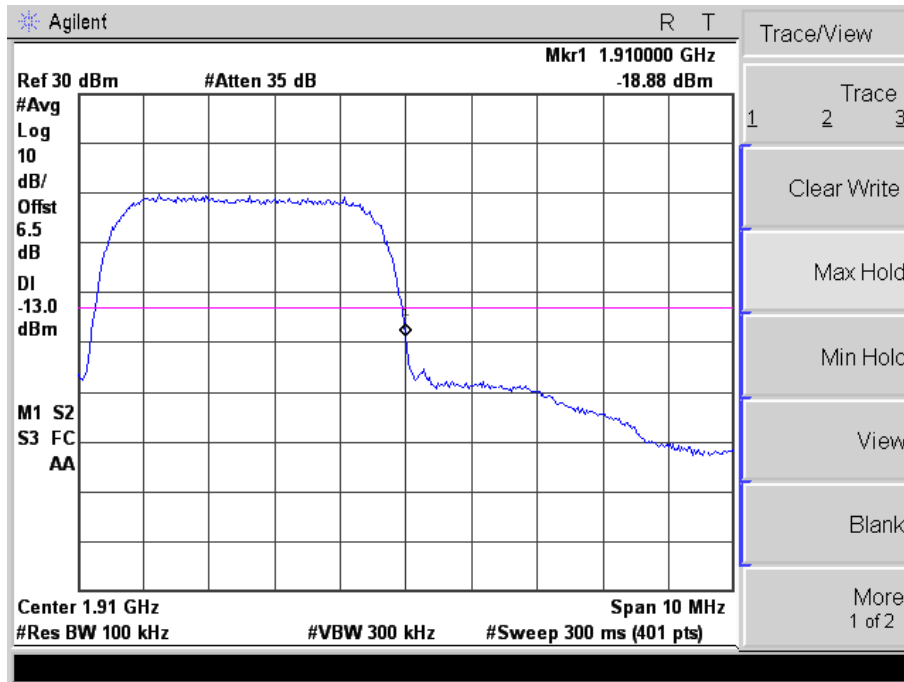

## 8. Spurious Radiated Emissions

### 8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB =  $43 + 10 \log_{10}(\text{power out in Watts})$

### 8.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 8.4 Summary of Test Results/Plots

According to the data below, the FCC Part 22.917 and 24.238 standards, and had the worst margin of:


*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*



Spurious Emission From 30MHz to 1GHz


For Cellular Band\_ GSM850 Mode

Horizontal:

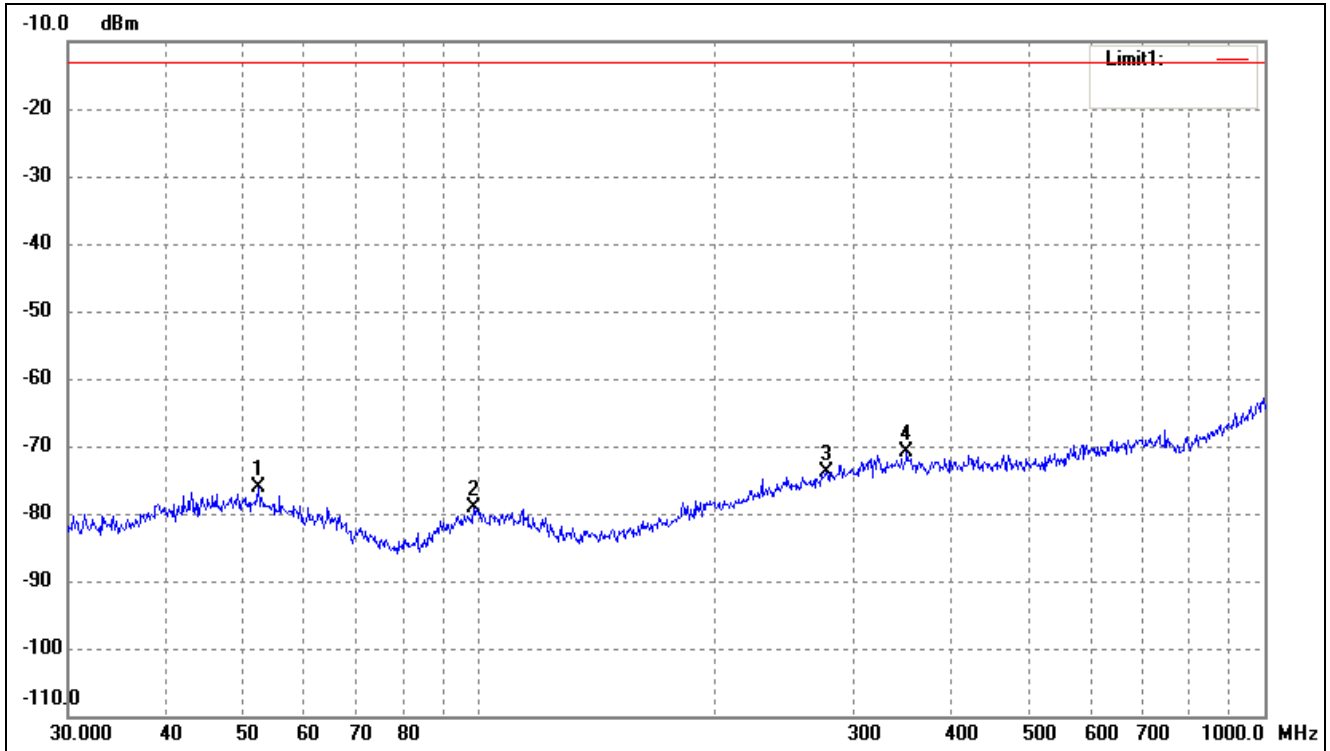

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.3912	-75.09	-1.04	-76.13	-13.00	-63.13	ERP
2	98.4866	-76.22	-2.88	-79.10	-13.00	-66.10	ERP
3	277.0935	-77.16	3.37	-73.79	-13.00	-60.79	ERP
4	350.4768	-76.22	5.31	-70.91	-13.00	-57.91	ERP


Vertical:

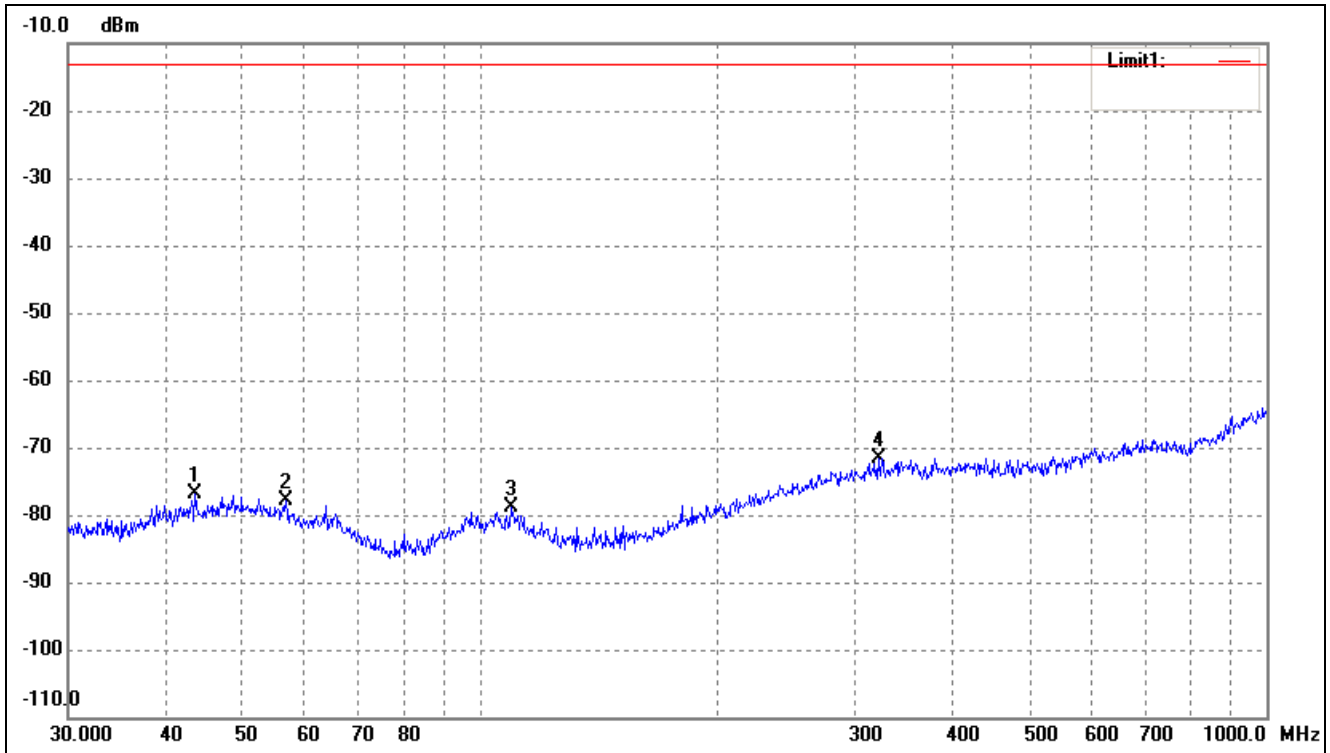

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	43.5057	-75.50	-1.31	-76.81	-13.00	-63.81	ERP
2	56.7917	-76.03	-1.96	-77.99	-13.00	-64.99	ERP
3	109.7960	-76.75	-2.12	-78.87	-13.00	-65.87	ERP
4	321.0608	-76.33	4.70	-71.63	-13.00	-58.63	ERP


For Cellular Band\_ GSM1900 Mode

Horizontal:

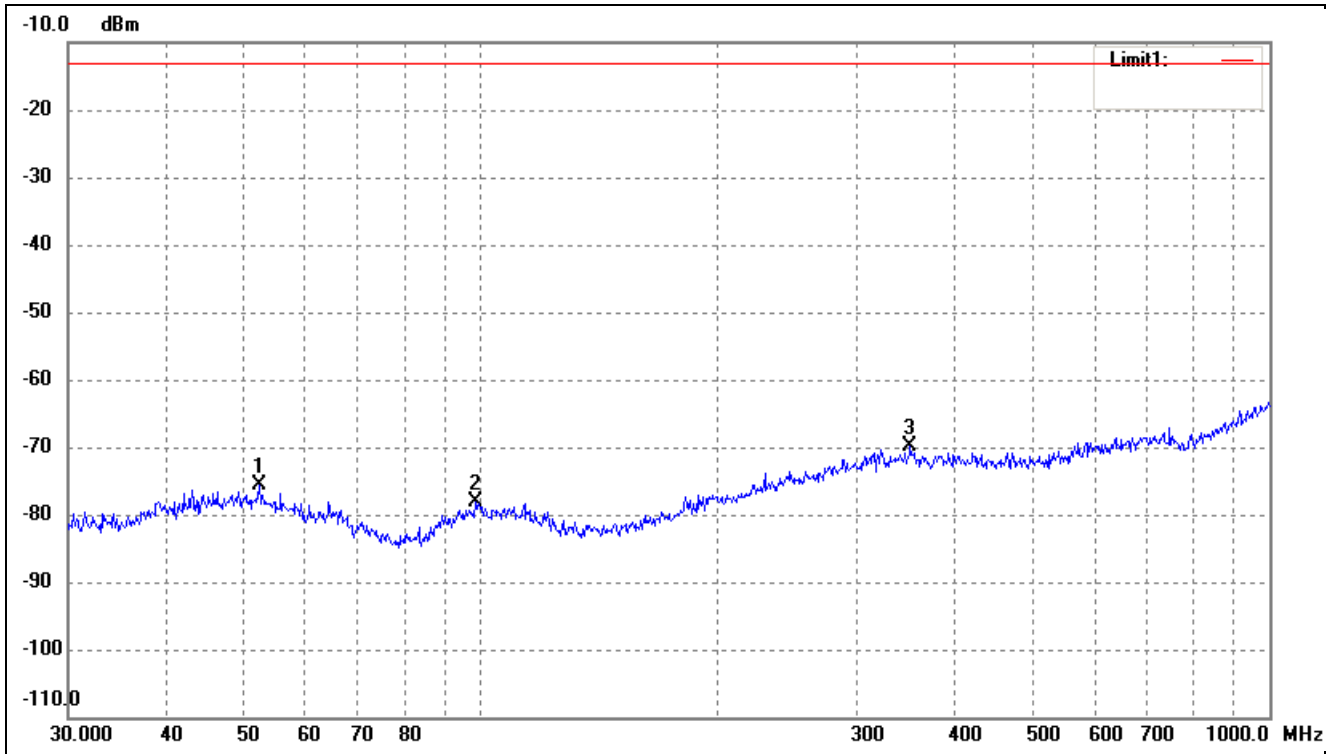

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.3913	-74.59	-1.04	-75.63	-13.00	-62.63	ERP
2	98.4865	-75.22	-2.88	-78.10	-13.00	-65.10	ERP
3	350.4768	-75.22	5.31	-69.91	-13.00	-56.91	ERP

Vertical:

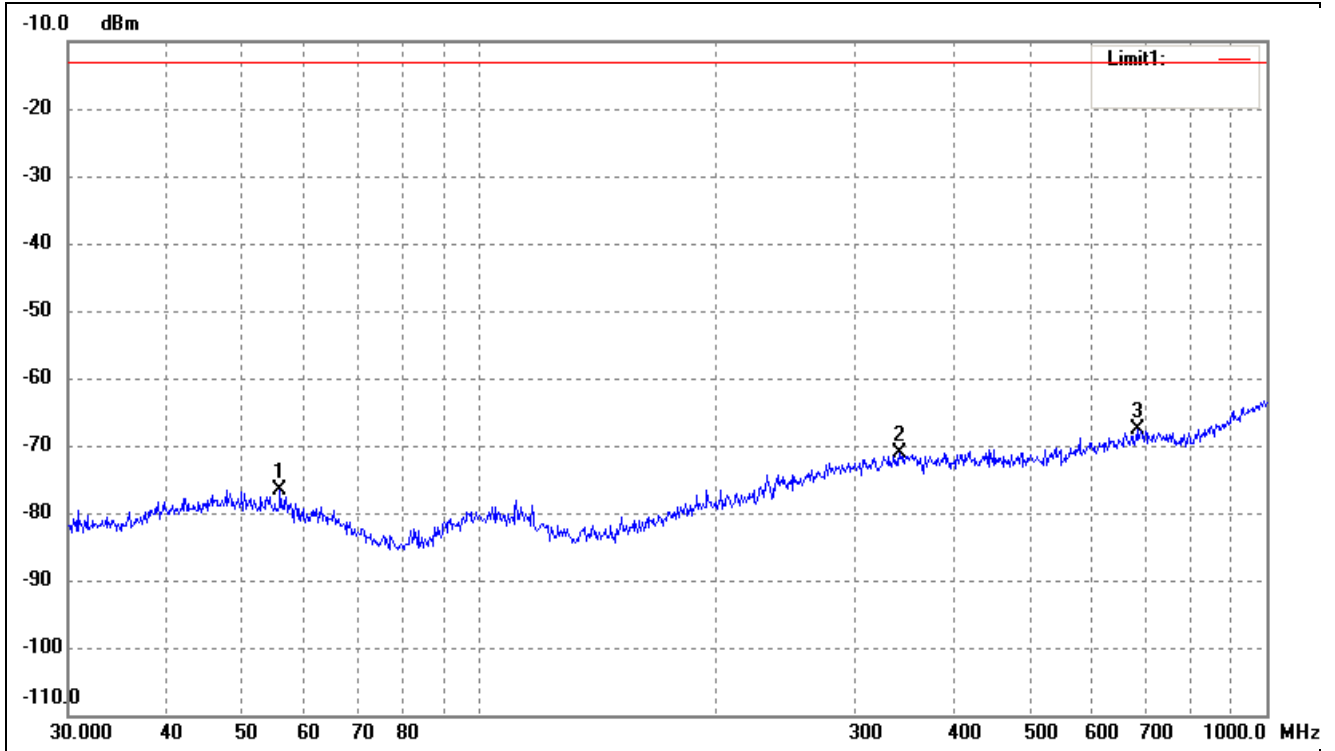


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	55.8046	-75.09	-1.60	-76.69	-13.00	-63.69	ERP
2	341.9787	-76.31	5.29	-71.02	-13.00	-58.02	ERP
3	684.7454	-76.65	8.97	-67.68	-13.00	-54.68	ERP

Note: Margin= (Reading+ Correct)- Limit


For band 5 Mode

Horizontal:

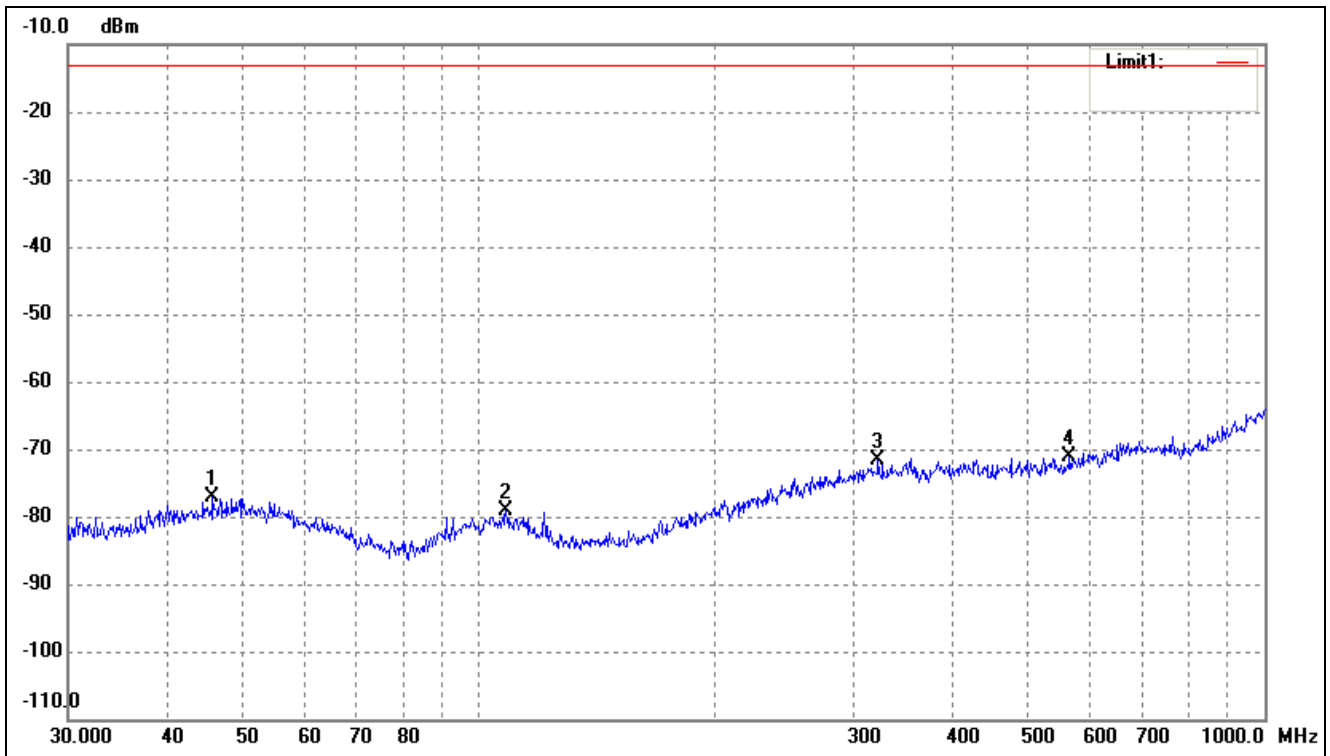

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	45.8553	-75.99	-1.12	-77.11	-13.00	-64.11	ERP
2	108.2667	-77.02	-2.16	-79.18	-13.00	-66.18	ERP
3	322.1886	-76.44	4.74	-71.70	-13.00	-58.70	ERP
4	564.6389	-78.05	6.96	-71.09	-13.00	-58.09	ERP


Vertical:

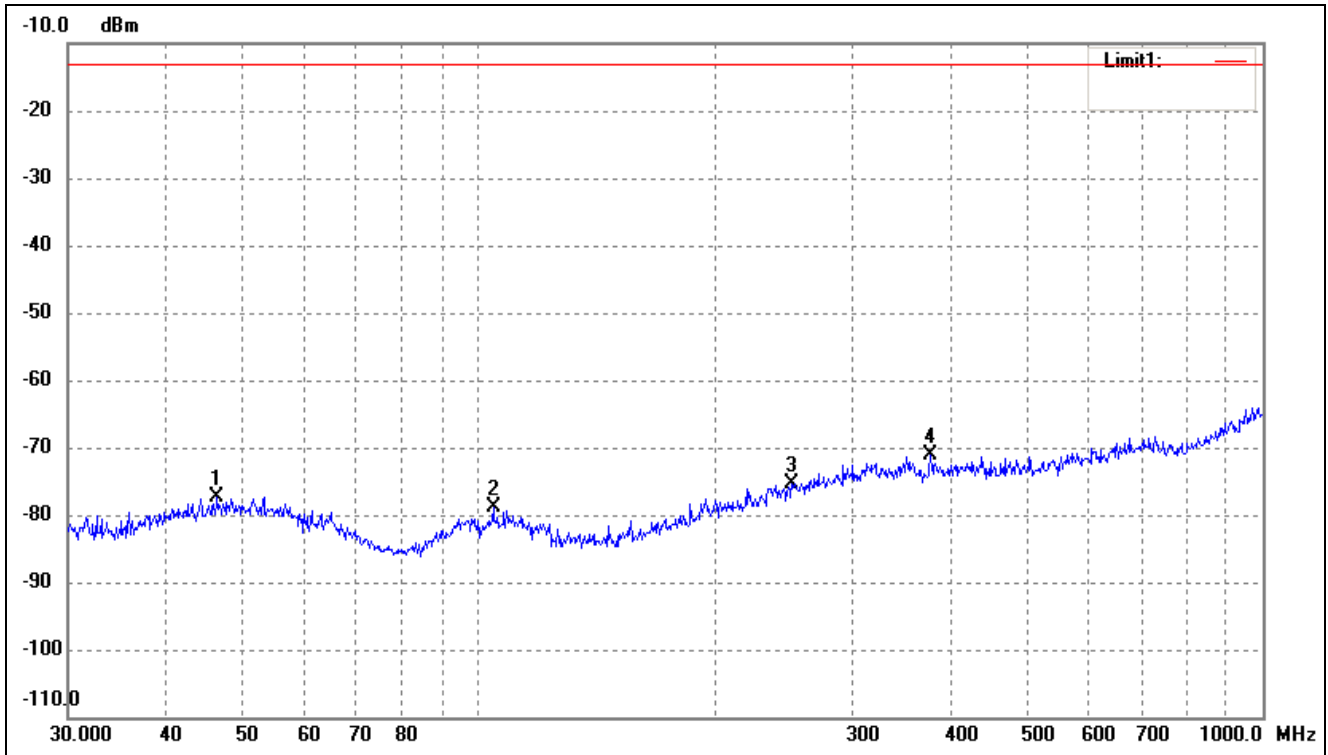

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	46.5030	-76.28	-1.07	-77.35	-13.00	-64.35	ERP
2	104.5361	-76.52	-2.29	-78.81	-13.00	-65.81	ERP
3	251.1804	-77.37	2.03	-75.34	-13.00	-62.34	ERP
4	377.2591	-76.16	5.10	-71.06	-13.00	-58.06	ERP


For band 2 Mode

Horizontal:

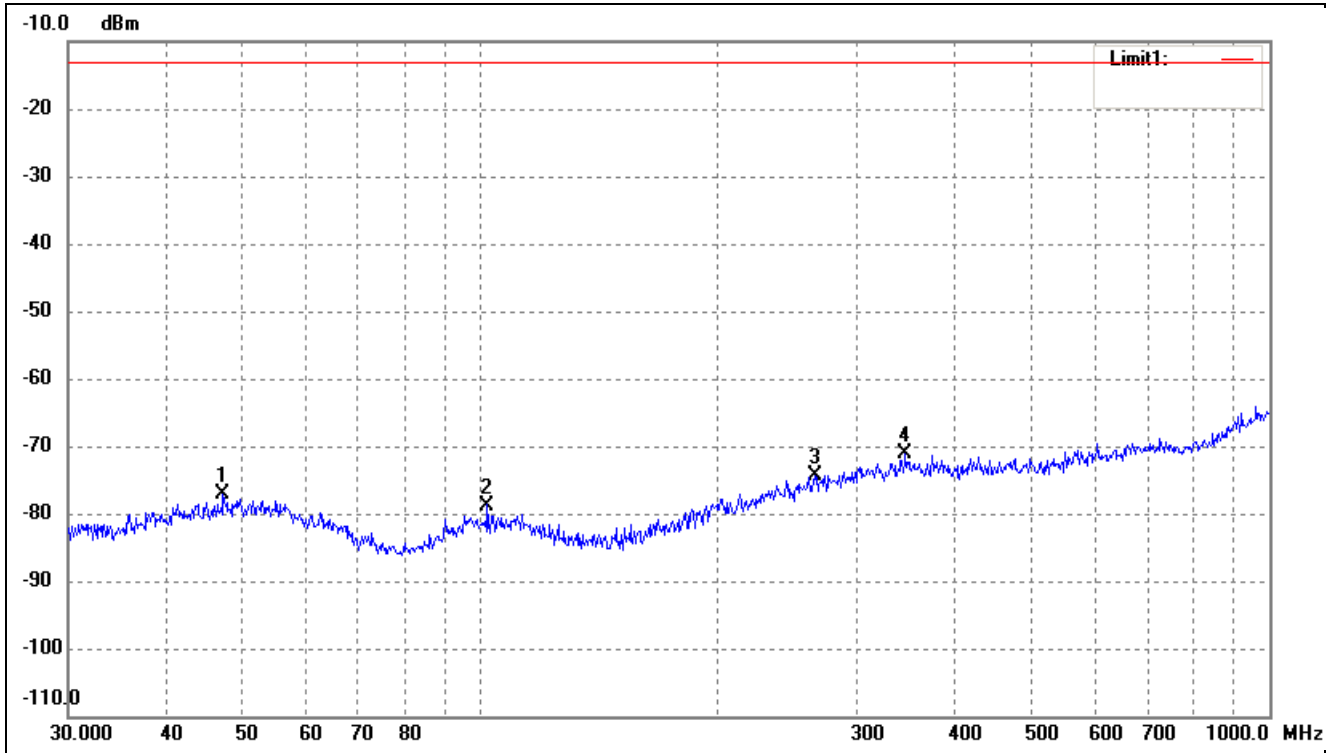

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.1599	-76.14	-1.03	-77.17	-13.00	-64.17	ERP
2	102.0014	-76.26	-2.49	-78.75	-13.00	-65.75	ERP
3	265.6757	-77.24	2.83	-74.41	-13.00	-61.41	ERP
4	345.5952	-76.48	5.30	-71.18	-13.00	-58.18	ERP

Vertical:

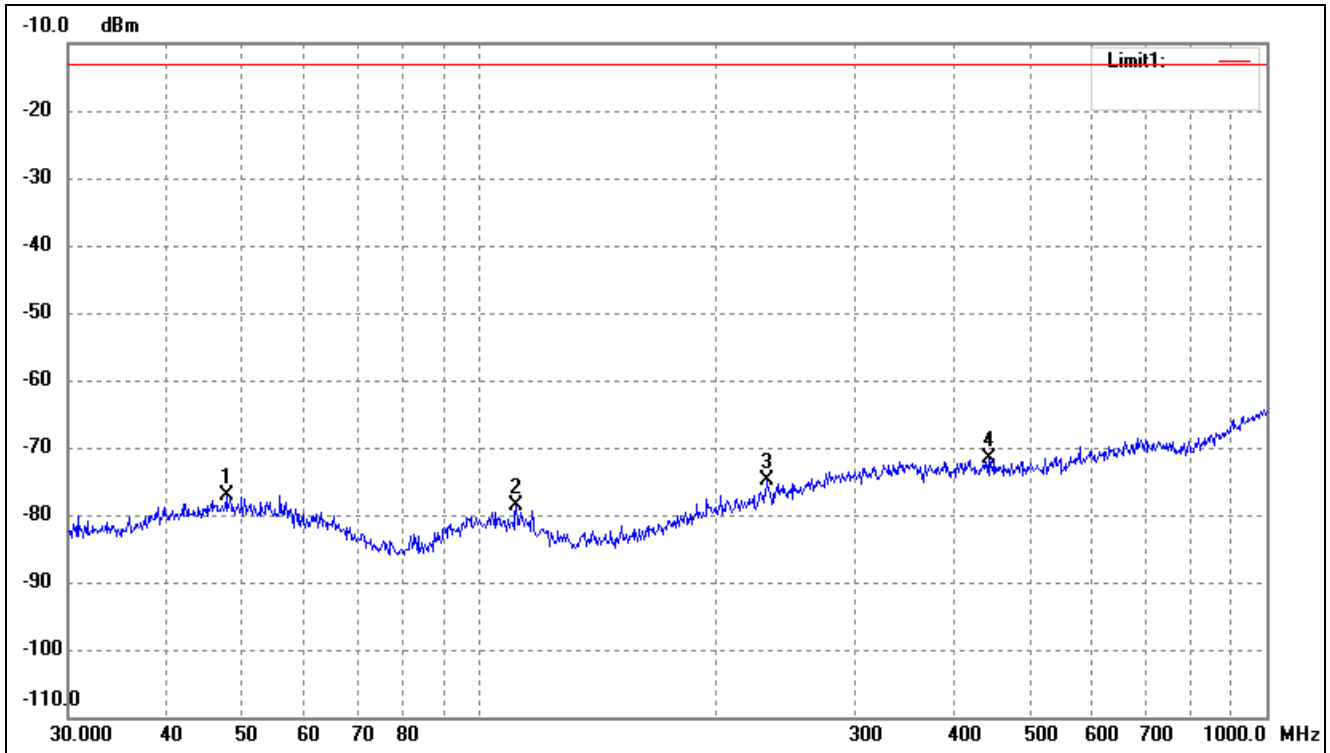

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	47.6586	-76.11	-1.00	-77.11	-13.00	-64.11	ERP
2	111.3468	-76.39	-2.34	-78.73	-13.00	-65.73	ERP
3	231.7179	-75.97	1.10	-74.87	-13.00	-61.87	ERP
4	443.2943	-76.93	5.40	-71.53	-13.00	-58.53	ERP

Note:  $Margin = (Reading + Correct) - Limit$



*Spurious Emissions Above 1GHz*  
*For Cellular Band\_GSM850 Mode*

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.2MHz)						
1648.4	-36.7	4.94	-31.76	-13	-18.76	H
2472.6	-43.68	8.46	-35.22	-13	-22.22	H
1648.4	-36.85	4.94	-31.91	-13	-18.91	V
2472.6	-41.21	8.46	-32.75	-13	-19.75	V
Middle Channel (836.6MHz)						
1673.2	-35.45	5.11	-30.34	-13	-17.34	H
2509.8	-43.29	8.54	-34.75	-13	-21.75	H
1673.2	-35.49	5.11	-30.38	-13	-17.38	V
2509.8	-41.91	8.54	-33.37	-13	-20.37	V
High Channel (848.8MHz)						
1697.6	-37.27	5.25	-32.02	-13	-19.02	H
2546.4	-42.13	8.57	-33.56	-13	-20.56	H
1697.6	-37.41	5.25	-32.16	-13	-19.16	V
2546.4	-44.69	8.57	-36.12	-13	-23.12	V

*For PCS Band\_GSM1900 Mode*

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1850.2MHz)						
3700.4	-41.26	10.54	-30.72	-13	-17.72	H
5550.6	-47.9	13.37	-34.53	-13	-21.53	H
3700.4	-40.31	10.54	-29.77	-13	-16.77	V
5550.6	-49.22	13.37	-35.85	-13	-22.85	V
Middle Channel (1880MHz)						
3760.0	-42.01	10.64	-31.37	-13	-18.37	H
5640.0	-47.32	13.54	-33.78	-13	-20.78	H
3760.0	-40.16	10.64	-29.52	-13	-16.52	V
5640.0	-48.08	13.54	-34.54	-13	-21.54	V
High Channel (1909.8MHz)						
3819.6	-42.66	10.74	-31.92	-13	-18.92	H
5729.4	-49.63	13.71	-35.92	-13	-22.92	H
3819.6	-40.91	10.74	-30.17	-13	-17.17	V
5729.4	-48.65	13.71	-34.94	-13	-21.94	V

## For Band 5 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-35.05	4.94	-30.11	-13	-17.11	H
2479.2	-43.88	8.46	-35.42	-13	-22.42	H
1652.8	-37	4.94	-32.06	-13	-19.06	V
2479.2	-41.38	8.46	-32.92	-13	-19.92	V
Middle Channel (836.6MHz)						
1672.8	-35.04	5.11	-29.93	-13	-16.93	H
2509.2	-43.54	8.54	-35	-13	-22	H
1672.8	-37.61	5.11	-32.5	-13	-19.5	V
2509.2	-43.56	8.54	-35.02	-13	-22.02	V
High Channel (846.6MHz)						
1693.2	-37.33	5.25	-32.08	-13	-19.08	H
2539.8	-43.72	8.57	-35.15	-13	-22.15	H
1693.2	-34.96	5.25	-29.71	-13	-16.71	V
2539.8	-44.36	8.57	-35.79	-13	-22.79	V

## For Band 2 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1852.4MHz)						
3704.8	-36.16	10.17	-25.99	-13	-12.99	H
5557.2	-44.51	14.69	-29.82	-13	-16.82	H
3704.8	-35.21	10.17	-25.04	-13	-12.04	V
5557.2	-42.91	14.69	-28.22	-13	-15.22	V
Middle Channel (1880MHz)						
3760.8	-35.93	10.26	-25.67	-13	-12.67	H
5640.0	-43.8	14.78	-29.02	-13	-16.02	H
3760.8	-34.1	10.26	-23.84	-13	-10.84	V
5640.0	-42.72	14.78	-27.94	-13	-14.94	V
High Channel (1907.6MHz)						
3815.2	-34.02	10.59	-23.43	-13	-10.43	H
5722.8	-44.69	15.03	-29.66	-13	-16.66	H
3815.2	-36.64	10.59	-26.05	-13	-13.05	V
5722.8	-44.05	15.03	-29.02	-13	-16.02	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 9. Frequency Stability

### 9.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

### 9.3 Environmental Conditions

Temperature:	20°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

## 9.4 Summary of Test Results/Plots

For Cellular Band GSM Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	61	0.0729
40	3.7	55	0.0657
30	3.7	43	0.0514
20	3.7	36	0.0430
10	3.7	32	0.0383
0	3.7	27	0.0323
-10	3.7	35	0.0418
-20	3.7	41	0.0490
-30	3.7	47	0.0562

For PCS Band GSM Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	61	0.0324
40	3.7	55	0.0293
30	3.7	50	0.0266
20	3.7	42	0.0223
10	3.7	38	0.0202
0	3.7	32	0.0170
-10	3.7	38	0.0202
-20	3.7	45	0.0239
-30	3.7	51	0.0271

## For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	63	0.0753
40	3.7	51	0.0610
30	3.7	47	0.0562
20	3.7	42	0.0502
10	3.7	37	0.0442
0	3.7	33	0.0394
-10	3.7	40	0.0478
-20	3.7	46	0.0550
-30	3.7	50	0.0598

## For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	67	0.0356
40	3.7	62	0.0330
30	3.7	53	0.0282
20	3.7	45	0.0239
10	3.7	39	0.0207
0	3.7	33	0.0176
-10	3.7	39	0.0207
-20	3.7	47	0.0250
-30	3.7	52	0.0277

## For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	69	0.0825
40	3.7	54	0.0645
30	3.7	47	0.0562
20	3.7	41	0.0490
10	3.7	36	0.0430
0	3.7	28	0.0335
-10	3.7	33	0.0394
-20	3.7	38	0.0454
-30	3.7	42	0.0502

## For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	66	0.0351
40	3.7	57	0.0303
30	3.7	45	0.0239
20	3.7	42	0.0223
10	3.7	34	0.0181
0	3.7	27	0.0144
-10	3.7	31	0.0165
-20	3.7	35	0.0186
-30	3.7	39	0.0207

## For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	58	0.0693
40	3.7	43	0.0514
30	3.7	37	0.0442
20	3.7	29	0.0347
10	3.7	23	0.0275
0	3.7	19	0.0227
-10	3.7	23	0.0275
-20	3.7	29	0.0347
-30	3.7	33	0.0394

## For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	62	0.0330
40	3.7	51	0.0271
30	3.7	41	0.0218
20	3.7	35	0.0186
10	3.7	30	0.0160
0	3.7	25	0.0133
-10	3.7	31	0.0165
-20	3.7	38	0.0202
-30	3.7	46	0.0245

## For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	58	0.0693
40	3.7	48	0.0574
30	3.7	43	0.0514
20	3.7	38	0.0454
10	3.7	32	0.0383
0	3.7	25	0.0299
-10	3.7	31	0.0371
-20	3.7	36	0.0430
-30	3.7	43	0.0514

## For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	3.7	62	0.0330
40	3.7	56	0.0298
30	3.7	48	0.0255
20	3.7	42	0.0223
10	3.7	38	0.0202
0	3.7	32	0.0170
-10	3.7	39	0.0207
-20	3.7	43	0.0229
-30	3.7	48	0.0255



So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm			
Environment Temperature ( °C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	39	0.0466
	3.7	36	0.0430
	4.3	35	0.0418
Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm			
Environment Temperature ( °C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	40	0.0213
	3.7	42	0.0223
	4.3	44	0.0234
Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature ( °C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	39	0.0466
	3.7	42	0.0502
	4.3	41	0.0490
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature ( °C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	41	0.0218
	3.7	45	0.0239
	4.3	38	0.0202
Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature ( °C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	41	0.0490
	3.7	41	0.0490
	4.3	43	0.0514
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			

Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	39	0.0207
	3.7	42	0.0223
	4.3	42	0.0223
Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	34	0.0406
	3.7	29	0.0347
	4.3	31	0.0371
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	32	0.0170
	3.7	35	0.0186
	4.3	24	0.0128
Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	39	0.0466
	3.7	38	0.0454
	4.3	35	0.0418
Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	3.3	51	0.0271
	3.7	42	0.0223
	4.3	42	0.0223

\*\*\*\*\* END OF REPORT \*\*\*\*\*