

FCC Part 15C Measurement and Test Report

For

Hyundai Corporation

25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

FCC ID: RQQHLT-FS50402

FCC Rule(s):	<u>FCC Part 15.247</u>
Product Description:	<u>4G Smart Phone</u>
Tested Model:	<u>L503F</u>
Report No.:	<u>STR18088022I-3</u>
Sample Receipt Date:	<u>2018-08-01</u>
Tested Date:	<u>2018-08-02 to 2018-08-24</u>
Issued Date:	<u>2018-08-24</u>
Tested By:	<u>Jason Su / Engineer</u>
Reviewed By:	<u>Silin Chen / EMC Manager</u>
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u>
Prepared By:	

Jason Su
Silin Chen
Jandy So

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	4
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RF EXPOSURE	8
3.1 STANDARD APPLICABLE	8
3.2 TEST RESULT	8
4. ANTENNA REQUIREMENT	9
4.1 STANDARD APPLICABLE	9
4.2 EVALUATION INFORMATION	9
5. POWER SPECTRAL DENSITY	10
5.1 STANDARD APPLICABLE	10
5.2 TEST PROCEDURE	10
5.3 SUMMARY OF TEST RESULTS/PLOTS	10
6. 6DB BANDWIDTH	14
6.1 STANDARD APPLICABLE	14
6.2 TEST PROCEDURE	14
6.3 SUMMARY OF TEST RESULTS/PLOTS	14
7. RF OUTPUT POWER	18
7.1 STANDARD APPLICABLE	18
7.2 TEST PROCEDURE	18
7.3 SUMMARY OF TEST RESULTS/PLOTS	18
8. FIELD STRENGTH OF SPURIOUS EMISSIONS	23
8.1 STANDARD APPLICABLE	23
8.2 TEST PROCEDURE	23
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	24
8.4 SUMMARY OF TEST RESULTS/PLOTS	24
9. OUT OF BAND EMISSIONS	32
9.1 STANDARD APPLICABLE	32
9.2 TEST PROCEDURE	32
9.3 SUMMARY OF TEST RESULTS/PLOTS	33
10. CONDUCTED EMISSIONS	48
10.1 TEST PROCEDURE	48
10.2 BASIC TEST SETUP BLOCK DIAGRAM	48
10.3 TEST RECEIVER SETUP	48
10.4 SUMMARY OF TEST RESULTS/PLOTS	48

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Hyundai Corporation
 Address of applicant: 25, Yulgok-ro 2-Gil, Jongno-gu, Seoul, South Korea

Manufacturer: Guizhou Fortuneship Technology Co., Ltd
 Address of manufacturer: 2nd Floor, Factory Building 4, Hi-Tech Industrial Park, Xinpu Economic Development Zone, Xinpu New District, Zunyi City, Guizhou Province, P. R. China

General Description of EUT	
Product Name:	4G Smart Phone
Trade Name:	HYUNDAI
Model No.:	L503F
Adding Model(s):	L503FS
Rated Voltage:	DC 3.7V by Battery
Battery:	2200mAh
Power Adapter Model:	Model: HY-C1000B Input: AC100-240V 50/60Hz 0.3A Output: DC5V 1000mA
Software Version:	HYUNDAI_L503F_V8.1.1_20180706
Hardware Version:	FS273-MB-V1.0
<p><i>The EUT Main board support GSM850/PCS1900, WCDMA Band 2/5, FDD LTE Band 2/4/7 function. It is intended for speech, Multimedia Message Service (MMS) transmission. It is equipped with GPRS/EDGE class 12 for GSM850/PCS1900, GPS, FM, Bluetooth and Wi-Fi functions. For more information see the following datasheet.</i></p> <p><i>Note: The test data is gathered from a production sample provided by the manufacturer. The main-test model L503F has two SIM card slots, adding model L503FS has only one SIM card slots, but the circuit and the electronic construction do not change, declared by the manufacturer. The two models are test and only the worst case model is showed in the test report.</i></p>	

Technical Characteristics of EUT	
Support Standards:	802.11b, 802.11g, 802.11n-HT20
Frequency Range:	2412-2462MHz
RF Output Power:	12.53dBm (Conducted)
Type of Modulation:	CCK, OFDM, QPSK, BPSK, 16QAM, 64QAM
Data Rate:	1-11Mbps, 6-54Mbps, up to 72.2Mbps
Quantity of Channels:	11
Channel Separation:	5MHz
Type of Antenna:	Integral Antenna

Antenna Gain:	0.45dBi
Lowest Internal Frequency of EUT:	26MHz

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

558074 D01 DTS Meas Guidance v04: GUIDANCE FOR PERFORMING COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEMS (DTS) OPERATING UNDER SECTION 15.247

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 DTS Meas Guidance v04

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM2	802.11g	Low:2412MHz, Middle:2437MHz,High:2462MHz
TM3	802.11n-HT20	Low:2412MHz, Middle:2437MHz,High:2462MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.2	Unshielded	Without Core
Earphone	1.5	Unshielded	Without Core

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Power Spectral Density	Conducted	±1.8dB
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has an integral antenna, fulfill the requirement of this section.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Procedure




According to the KDB 558074 D01 v04, such specifications require that the same method as used to determine the conducted output power shall also be used to determine the power spectral density. The test method of power spectral density as below:




- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set VBW $\geq 3 \times \text{RBW}$.
- e) Detector = power averaging (RMS) or sample detector (when RMS not available).
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
- g) Sweep time = auto couple.
- h) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- i) Use the peak marker function to determine the maximum amplitude level.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).




5.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	-21.50	8
	2437	-20.41	8
	2462	-19.78	8
802.11g	2412	-24.11	8
	2437	-23.54	8
	2462	-22.65	8
802.11n-HT20	2412	-25.10	8
	2437	-24.59	8
	2462	-23.15	8

Please refer to the following test plots:
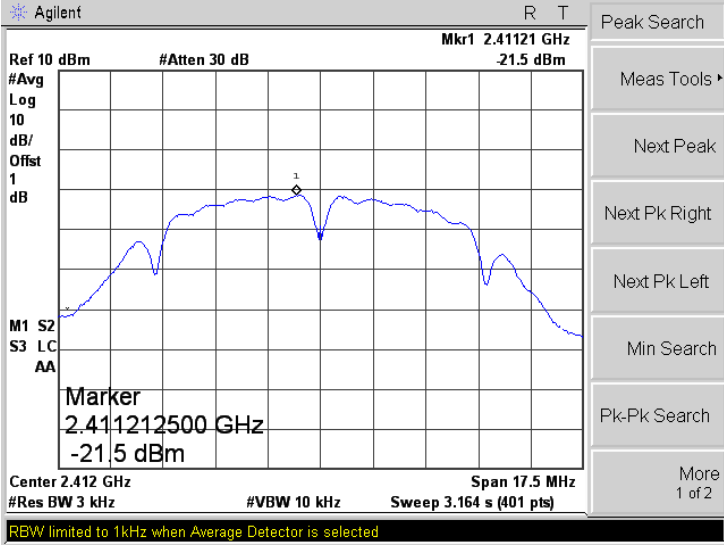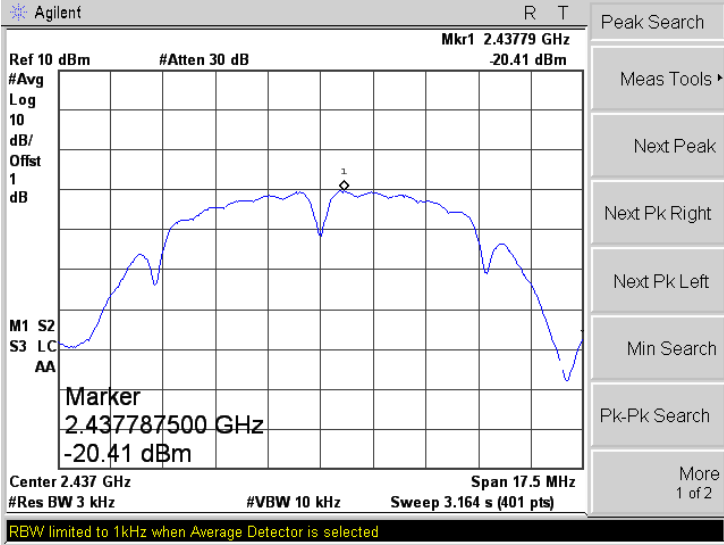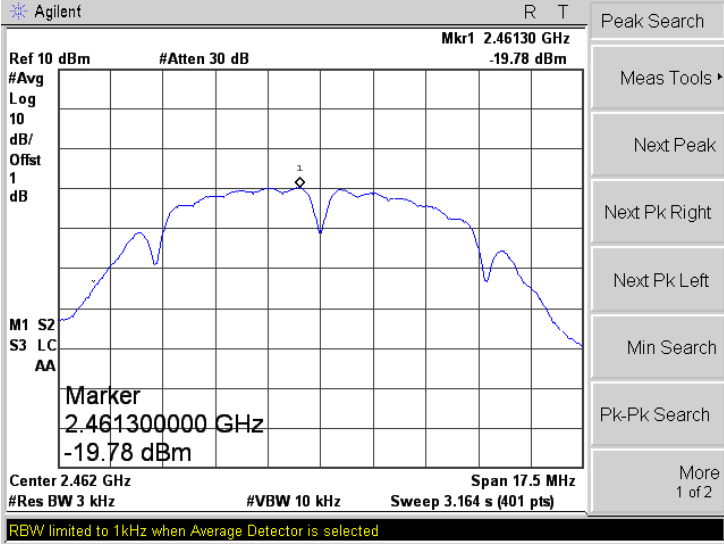
<p>802.11b-Low</p>	
<p>802.11b-Middle</p>	
<p>802.11b-High</p>	
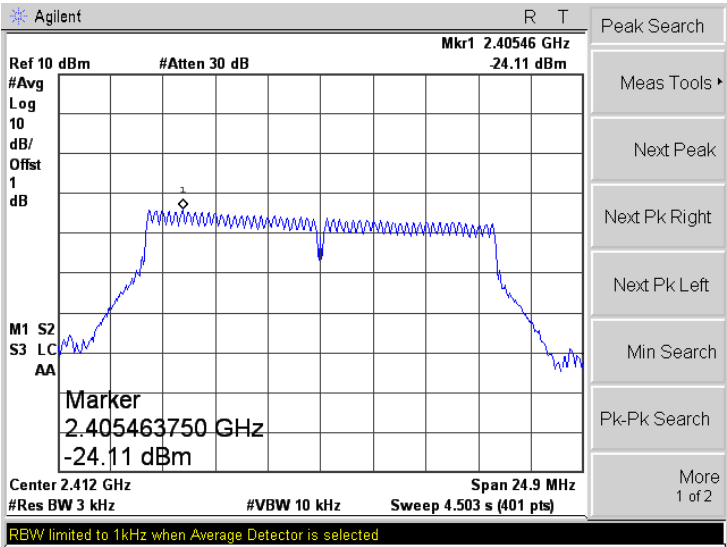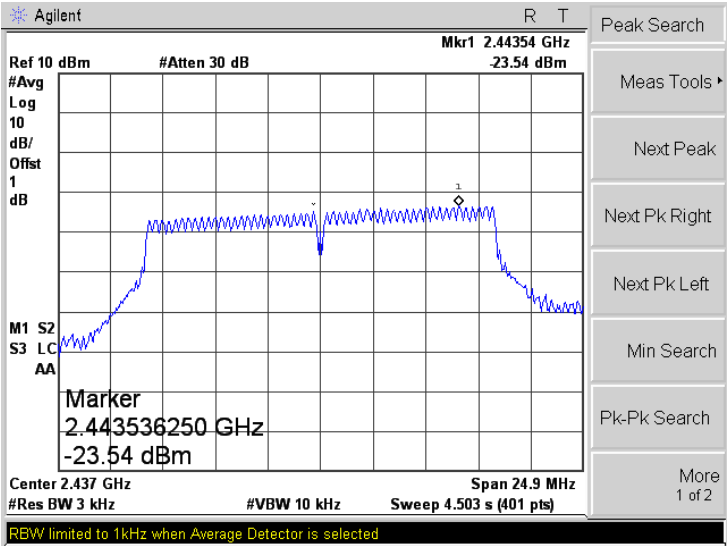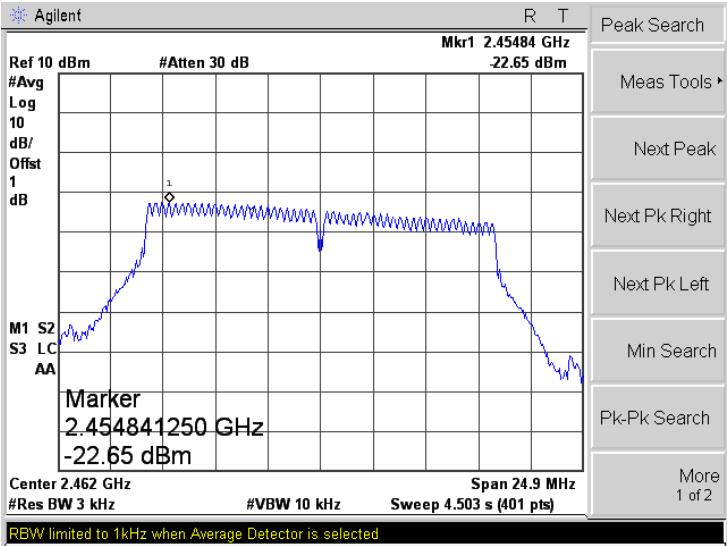
<p>802.11g-Low</p>	 <p>Agilent R T Ref 10 dBm #Atten 30 dB Mkr1 2.40546 GHz -24.11 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 LC AA Marker 2.405463750 GHz -24.11 dBm Center 2.412 GHz Span 24.9 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.503 s (401 pts) RBW limited to 1kHz when Average Detector is selected</p>
<p>802.11g-Middle</p>	 <p>Agilent R T Ref 10 dBm #Atten 30 dB Mkr1 2.44354 GHz -23.54 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 LC AA Marker 2.443536250 GHz -23.54 dBm Center 2.437 GHz Span 24.9 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.503 s (401 pts) RBW limited to 1kHz when Average Detector is selected</p>
<p>802.11g-High</p>	 <p>Agilent R T Ref 10 dBm #Atten 30 dB Mkr1 2.45484 GHz -22.65 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 LC AA Marker 2.454841250 GHz -22.65 dBm Center 2.462 GHz Span 24.9 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.503 s (401 pts) RBW limited to 1kHz when Average Detector is selected</p>
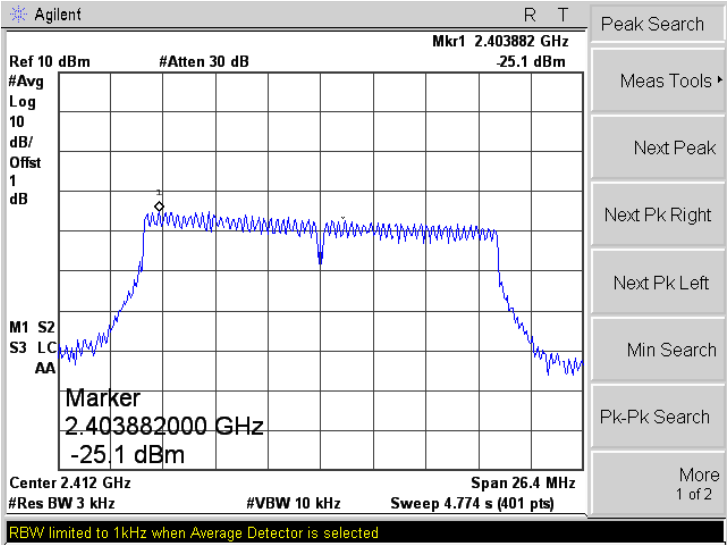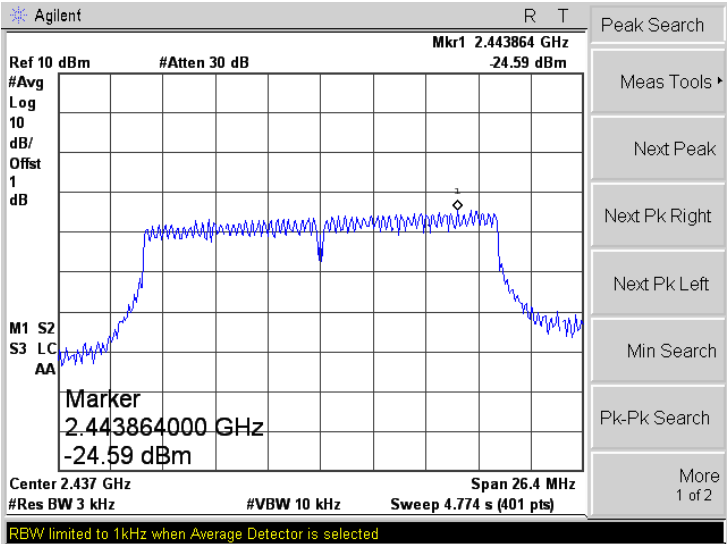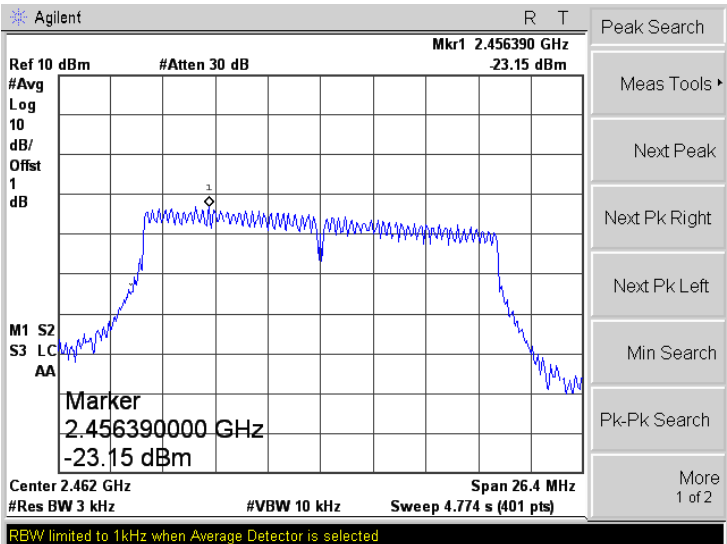
<p>802.11n-HT20-Low</p>	 <p>Agilent R T Peak Search Ref 10 dBm #Atten 30 dB Mkr1 2.403882 GHz 25.1 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 LC AA Marker 2.403882000 GHz -25.1 dBm Center 2.412 GHz Span 26.4 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.774 s (401 pts) RBW limited to 1kHz when Average Detector is selected</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Peak Search Ref 10 dBm #Atten 30 dB Mkr1 2.443864 GHz 24.59 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 LC AA Marker 2.443864000 GHz -24.59 dBm Center 2.437 GHz Span 26.4 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.774 s (401 pts) RBW limited to 1kHz when Average Detector is selected</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Peak Search Ref 10 dBm #Atten 30 dB Mkr1 2.456390 GHz 23.15 dBm #Avg Log 10 dB/ Offst 1 dB M1 S2 S3 LC AA Marker 2.456390000 GHz -23.15 dBm Center 2.462 GHz Span 26.4 MHz #Res BW 3 kHz #VBW 10 kHz Sweep 4.774 s (401 pts) RBW limited to 1kHz when Average Detector is selected</p>

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.




6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.




6.3 Summary of Test Results/Plots

Test Mode	Test Channel MHz	6 dB Bandwidth MHz	Limit kHz
802.11b	2412	8.677	≥ 500
	2437	8.640	≥ 500
	2462	8.620	≥ 500
802.11g	2412	16.149	≥ 500
	2437	16.537	≥ 500
	2462	12.059	≥ 500
802.11n-HT20	2412	16.580	≥ 500
	2437	16.916	≥ 500
	2462	16.445	≥ 500

Please refer to the following test plots:
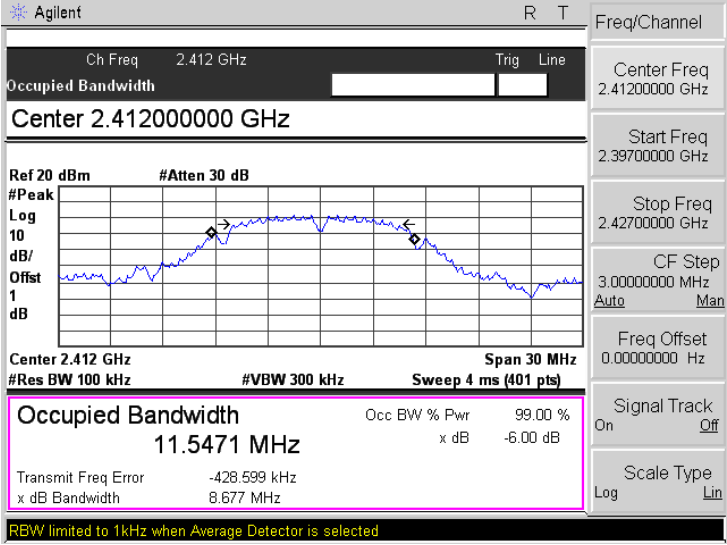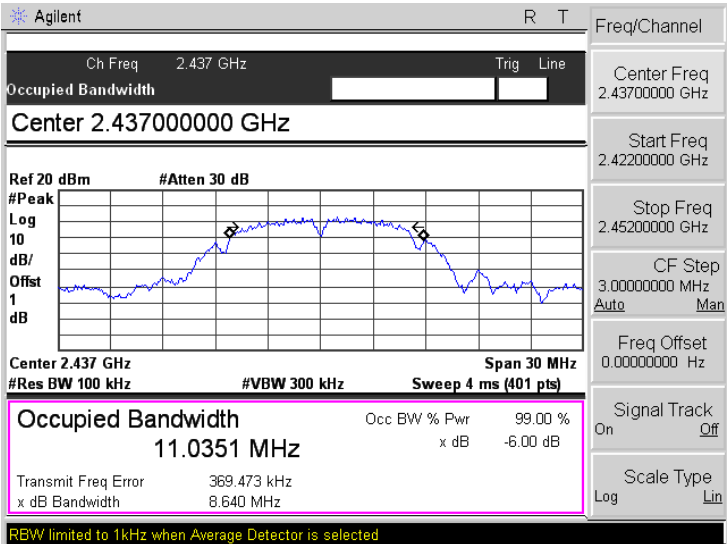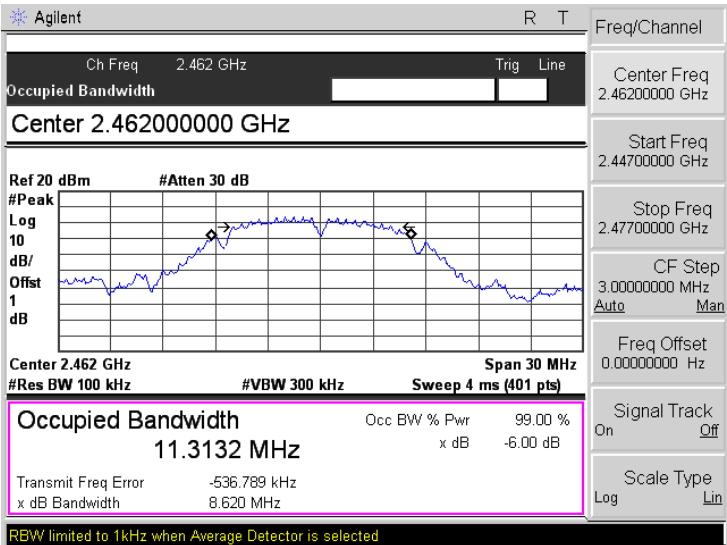
<p>802.11b-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Line</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 11.5471 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -428.599 kHz x dB Bandwidth 8.677 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Line</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 11.0351 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 369.473 kHz x dB Bandwidth 8.640 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11b-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Line</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 11.3132 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -536.789 kHz x dB Bandwidth 8.620 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11g-Low</p>	<p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Line</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>16.665 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -144.107 kHz</p> <p>x dB Bandwidth 16.149 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Line</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>17.1921 MHz x dB -6.00 dB</p> <p>Transmit Freq Error 372.437 kHz</p> <p>x dB Bandwidth 16.537 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High</p>	<p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Line</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 %</p> <p>16.6931 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -218.206 kHz</p> <p>x dB Bandwidth 12.059 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
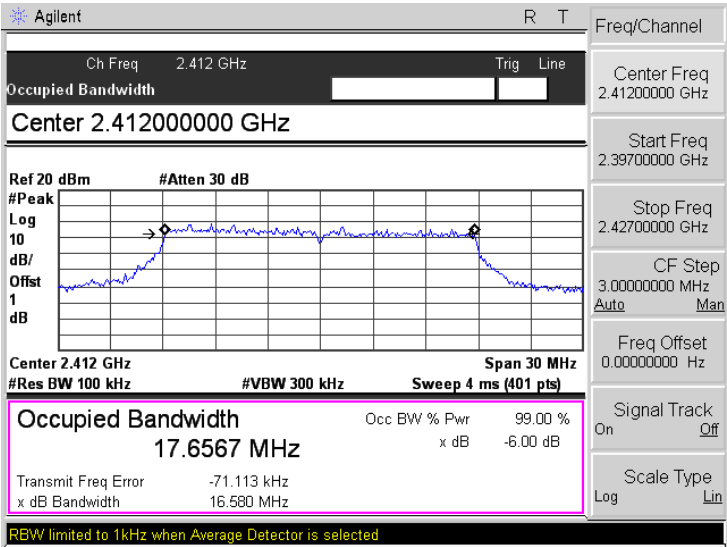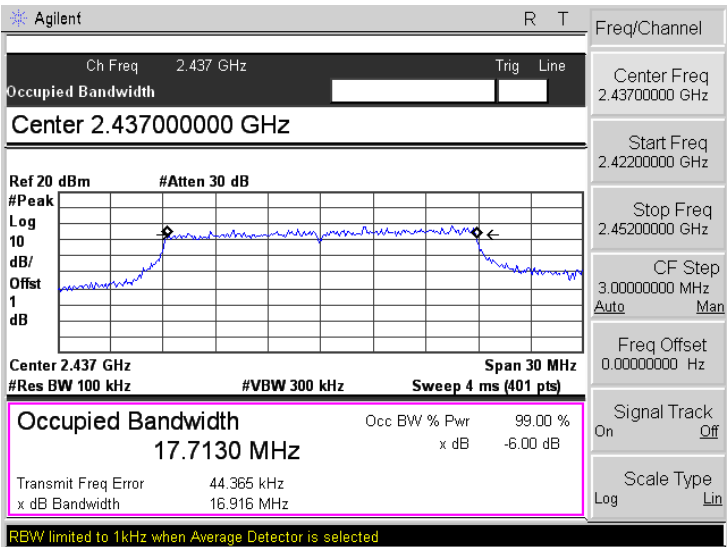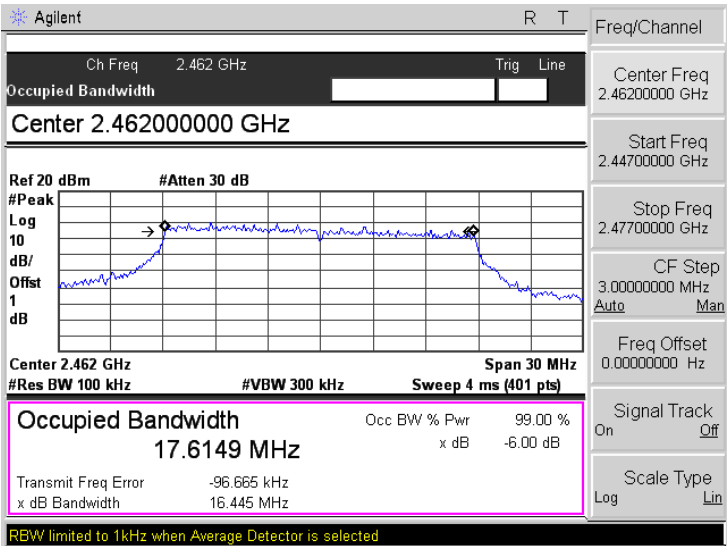
<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Line</p> <p>Occupied Bandwidth</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6567 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -71.113 kHz x dB Bandwidth 16.580 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel: Center Freq 2.41200000 GHz, Start Freq 2.39700000 GHz, Stop Freq 2.42700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Line</p> <p>Occupied Bandwidth</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.7130 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error 44.365 kHz x dB Bandwidth 16.916 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel: Center Freq 2.43700000 GHz, Start Freq 2.42200000 GHz, Stop Freq 2.45200000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Line</p> <p>Occupied Bandwidth</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 4 ms (401 pts)</p> <p>Occupied Bandwidth 17.6149 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -96.665 kHz x dB Bandwidth 16.445 MHz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel: Center Freq 2.46200000 GHz, Start Freq 2.44700000 GHz, Stop Freq 2.47700000 GHz, CF Step 3.00000000 MHz, Freq Offset 0.00000000 Hz, Signal Track On, Scale Type Log</p>

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Procedure

According to the KDB-558074 D01 v04, 9.2.2.2, when this option is exercised, the measured power is to be referenced to the OBW rather than the DTS bandwidth




- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run” .
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.




7.3 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_11Mbps	2412	11.16	13.06	1000
	2437	11.30	13.49	1000
	2462	12.53	17.91	1000
802.11g_54Mbps	2412	8.79	7.57	1000
	2437	9.72	9.38	1000
	2462	10.59	11.46	1000
802.11n HT20_MCS7	2412	7.65	5.82	1000
	2437	8.54	7.14	1000
	2462	9.41	8.73	1000

Please refer to the following test plots:

<p>802.11b-Low 11Mbps</p>	<p>Agilent R T Trace/View</p> <p>Ch Freq 2.412 GHz Trig Line</p> <p>Channel Power [] []</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 11.16 dBm / 20.0000 MHz -61.85 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p>
<p>802.11b-Middle 11Mbps</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.437 GHz Trig Line</p> <p>Channel Power [] []</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 11.30 dBm / 20.0000 MHz -61.71 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p>
<p>802.11b-High 11Mbps</p>	<p>Agilent R T Freq/Channel</p> <p>Ch Freq 2.462 GHz Trig Line</p> <p>Channel Power [] []</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 12.53 dBm / 20.0000 MHz -60.58 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p>
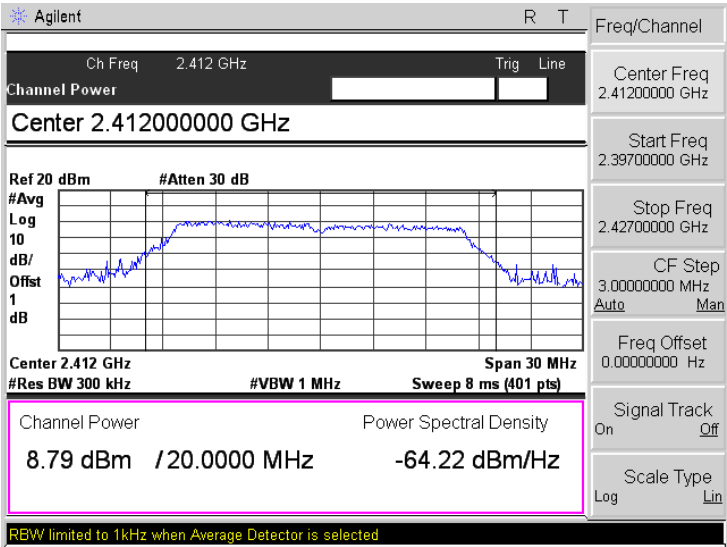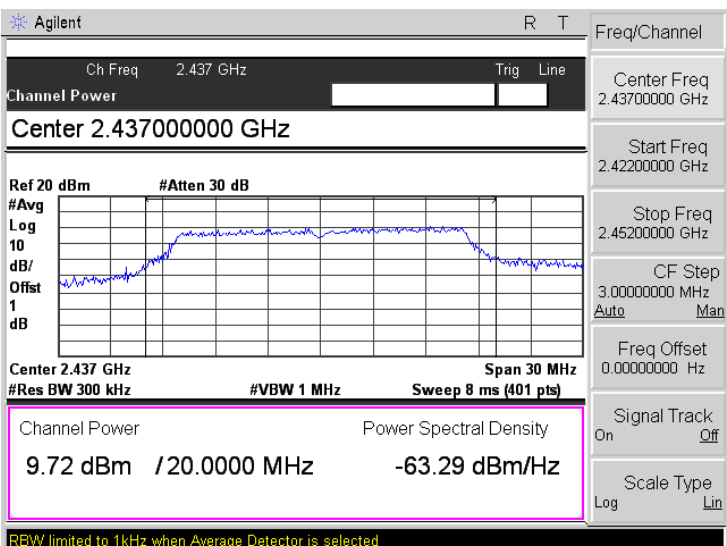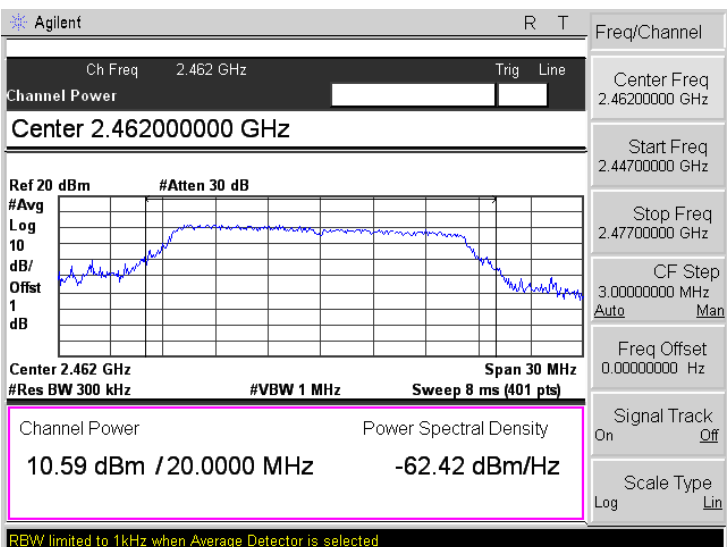
<p>802.11g-Low 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Line</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 8.79 dBm / 20.0000 MHz -64.22 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-Middle 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Line</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 9.72 dBm / 20.0000 MHz -63.29 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11g-High 54Mbps</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Line</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density 10.59 dBm / 20.0000 MHz -62.42 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
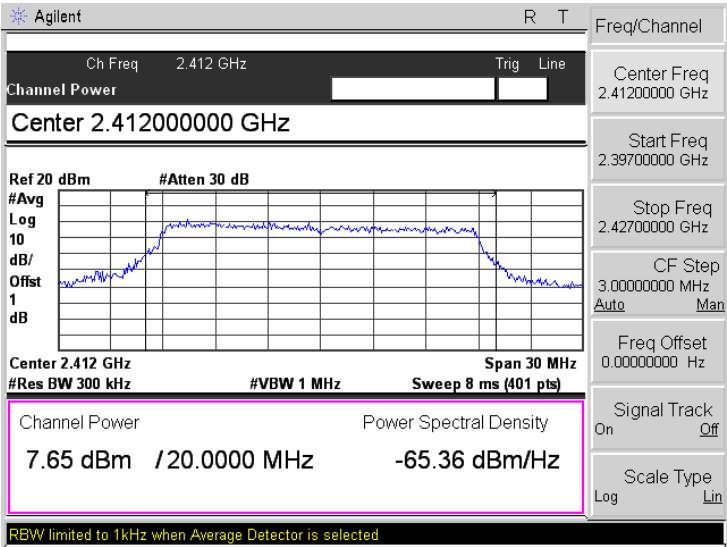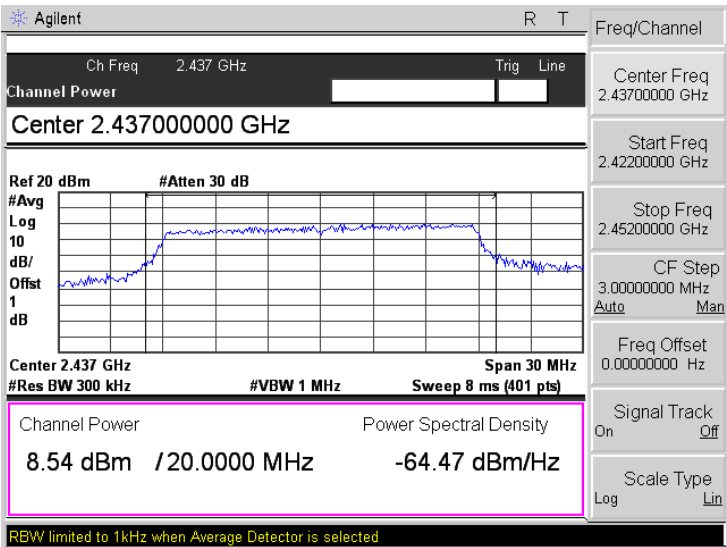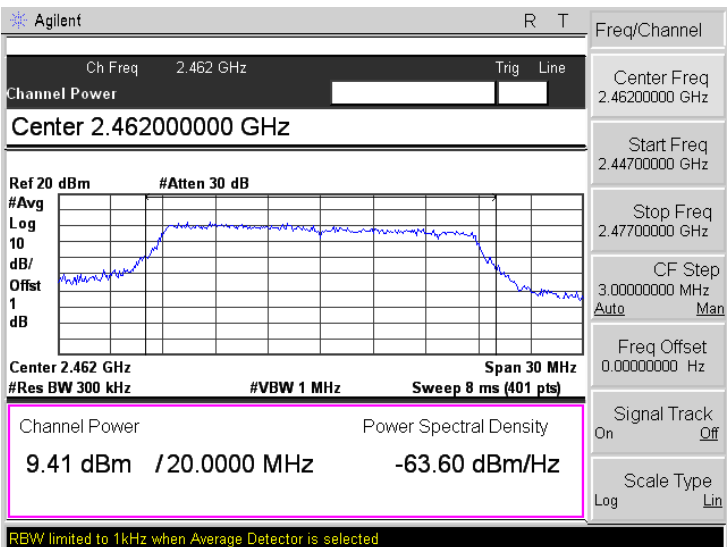
<p>802.11n-HT20-Low MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.412 GHz Trig Line</p> <p>Channel Power</p> <p>Center 2.41200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>7.65 dBm / 20.000 MHz -65.36 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.41200000 GHz</p> <p>Start Freq 2.39700000 GHz</p> <p>Stop Freq 2.42700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.437 GHz Trig Line</p> <p>Channel Power</p> <p>Center 2.43700000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>8.54 dBm / 20.000 MHz -64.47 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.43700000 GHz</p> <p>Start Freq 2.42200000 GHz</p> <p>Stop Freq 2.45200000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High MCS7</p>	 <p>Agilent R T</p> <p>Ch Freq 2.462 GHz Trig Line</p> <p>Channel Power</p> <p>Center 2.46200000 GHz</p> <p>Ref 20 dBm #Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 8 ms (401 pts)</p> <p>Channel Power Power Spectral Density</p> <p>9.41 dBm / 20.000 MHz -63.60 dBm/Hz</p> <p>RBW limited to 1kHz when Average Detector is selected</p> <p>Freq/Channel</p> <p>Center Freq 2.46200000 GHz</p> <p>Start Freq 2.44700000 GHz</p> <p>Stop Freq 2.47700000 GHz</p> <p>CF Step 3.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

8. Field Strength of Spurious Emissions

8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

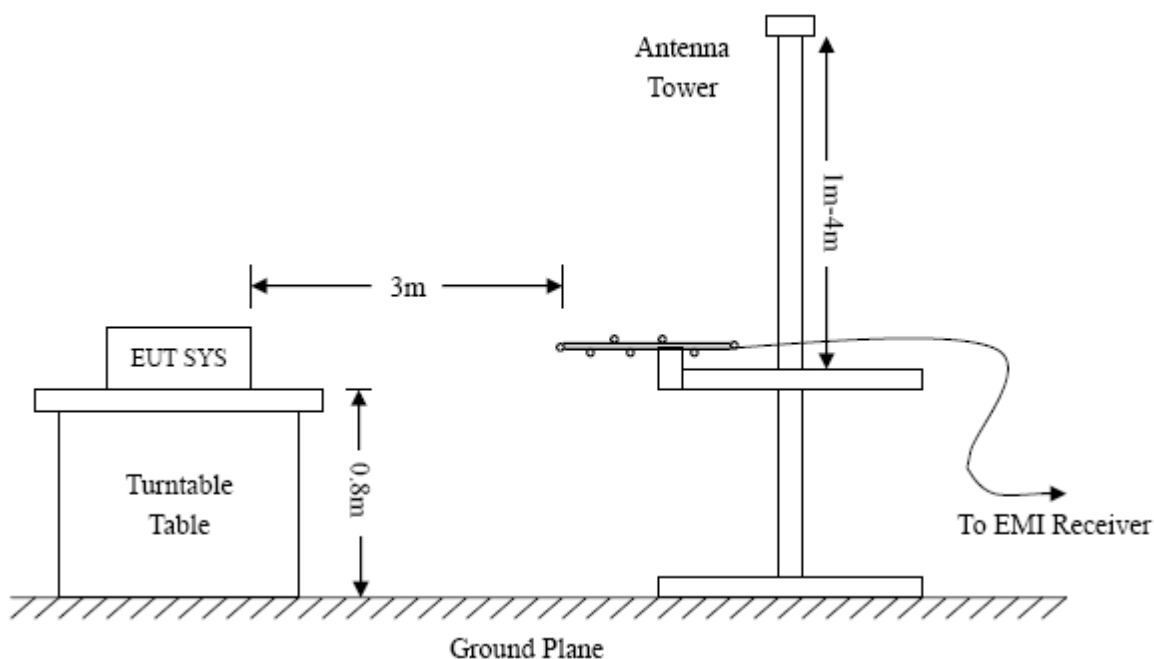

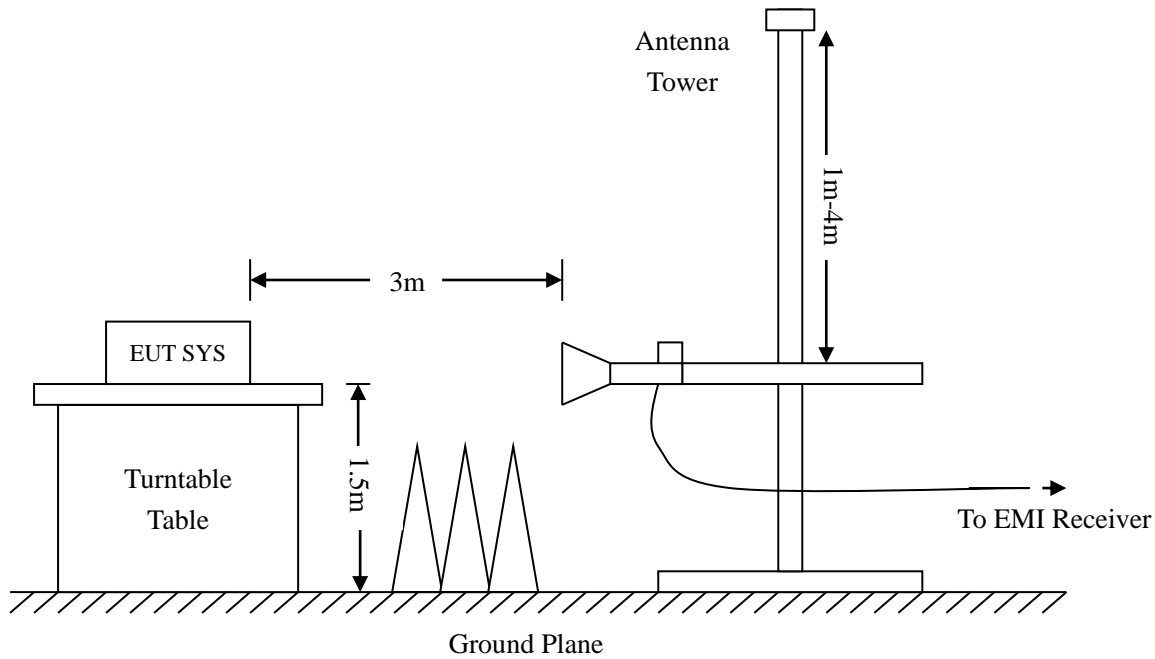

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=360KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$


8.4 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.


➤ Spurious Emissions Below 1GHz

802.11b			
Test Channel	Low	Polarity:	Horizontal

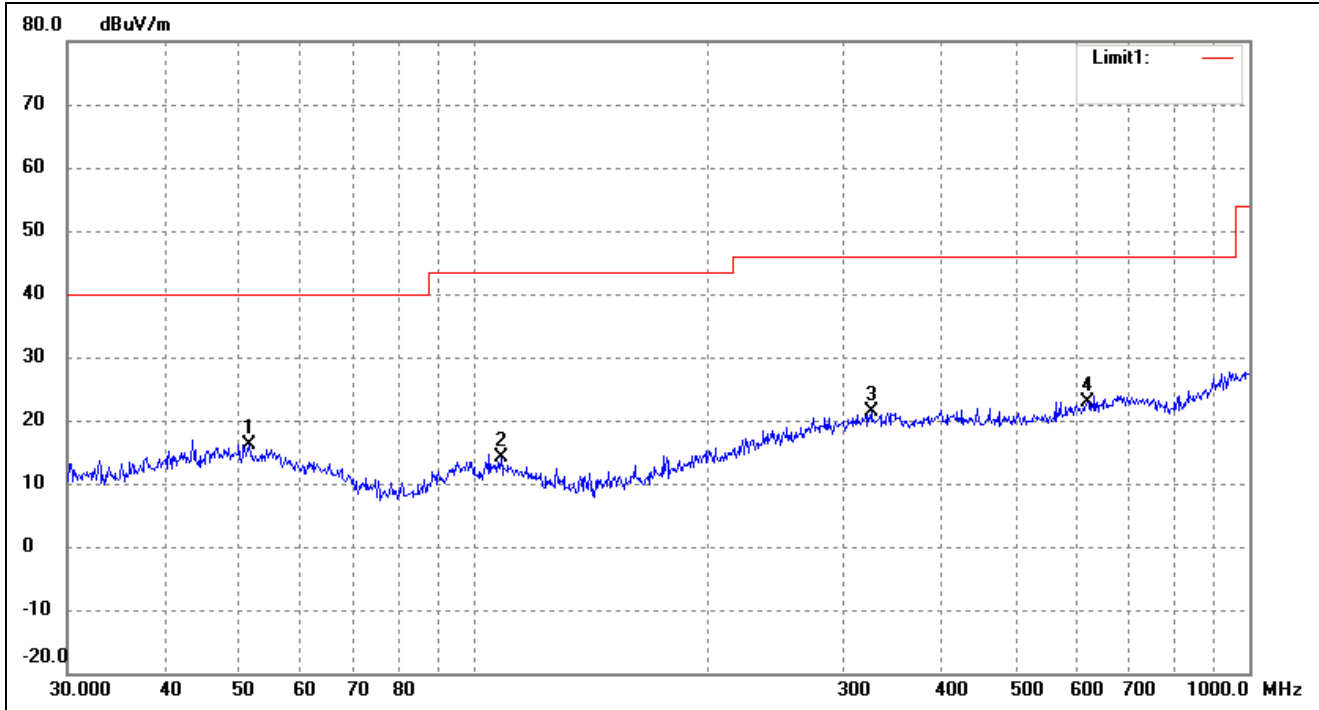


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	51.4807	28.96	-12.85	16.11	40.00	-23.89	351	100	peak
2	108.6470	28.06	-13.95	14.11	43.50	-29.39	99	100	peak
3	325.5958	28.44	-6.94	21.50	46.00	-24.50	326	100	peak
4	618.5369	26.76	-3.82	22.94	46.00	-23.06	117	100	peak

802.11b			
Test Channel	Low	Polarity:	Vertical

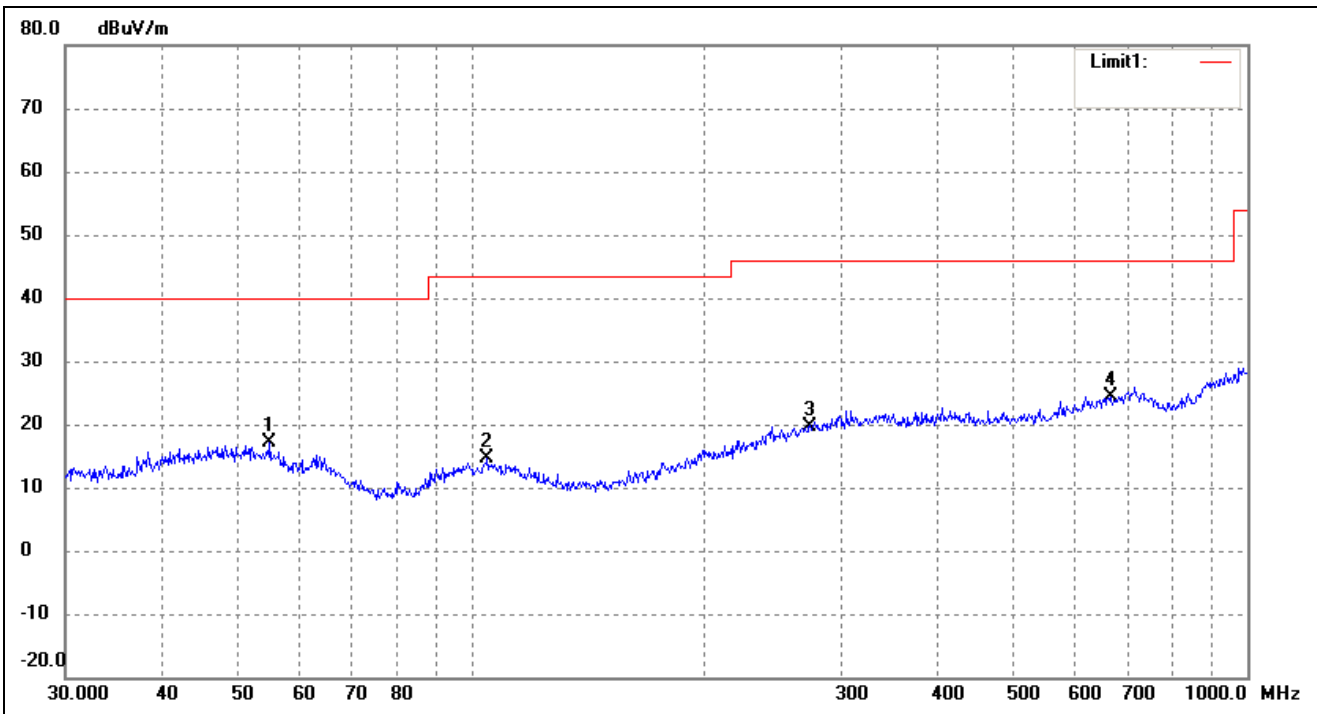


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.0274	30.24	-13.22	17.02	40.00	-22.98	241	100	peak
2	104.9033	28.60	-14.05	14.55	43.50	-28.95	238	100	peak
3	273.2341	28.36	-8.61	19.75	46.00	-26.25	73	100	peak
4	665.8035	27.56	-3.18	24.38	46.00	-21.62	192	100	peak

802.11b			
Test Channel	Middle	Polarity:	Horizontal

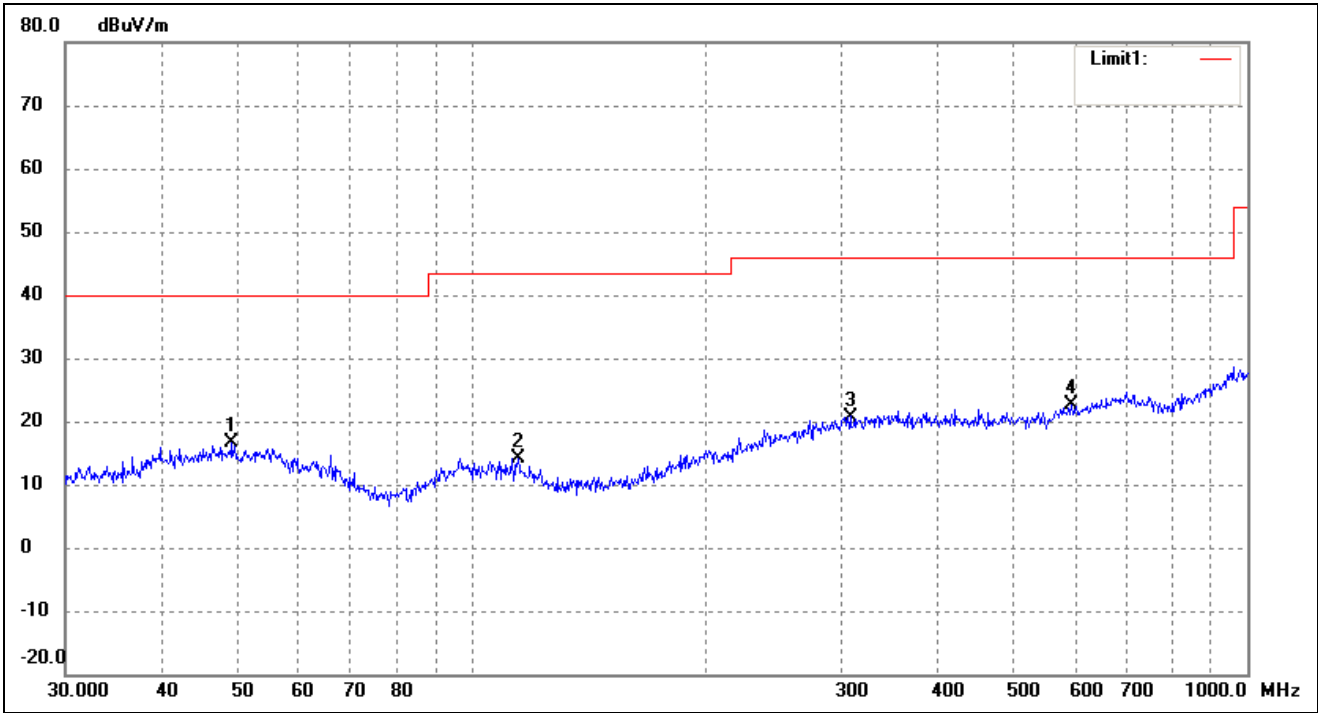


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	49.1866	29.47	-12.86	16.61	40.00	-23.39	278	100	peak
2	114.9169	28.88	-14.77	14.11	43.50	-29.39	148	100	peak
3	307.8313	27.99	-7.24	20.75	46.00	-25.25	81	100	peak
4	593.0497	26.62	-4.00	22.62	46.00	-23.38	143	100	peak

802.11b			
Test Channel	Middle	Polarity:	Vertical

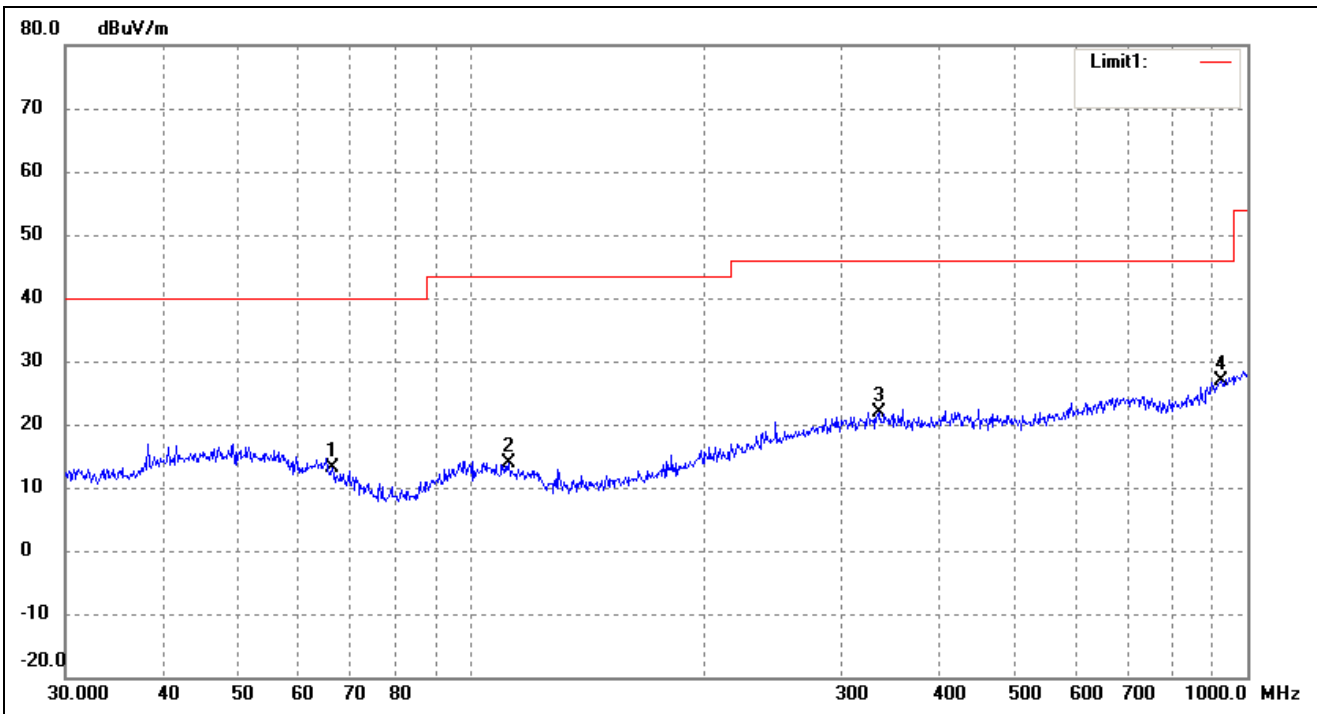


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	66.2662	28.91	-15.73	13.18	40.00	-26.82	262	100	peak
2	111.7380	28.18	-14.22	13.96	43.50	-29.54	97	100	peak
3	336.0352	28.52	-6.62	21.90	46.00	-24.10	270	100	peak
4	925.7563	24.79	1.98	26.77	46.00	-19.23	107	100	peak

802.11b			
Test Channel	High	Polarity:	Horizontal

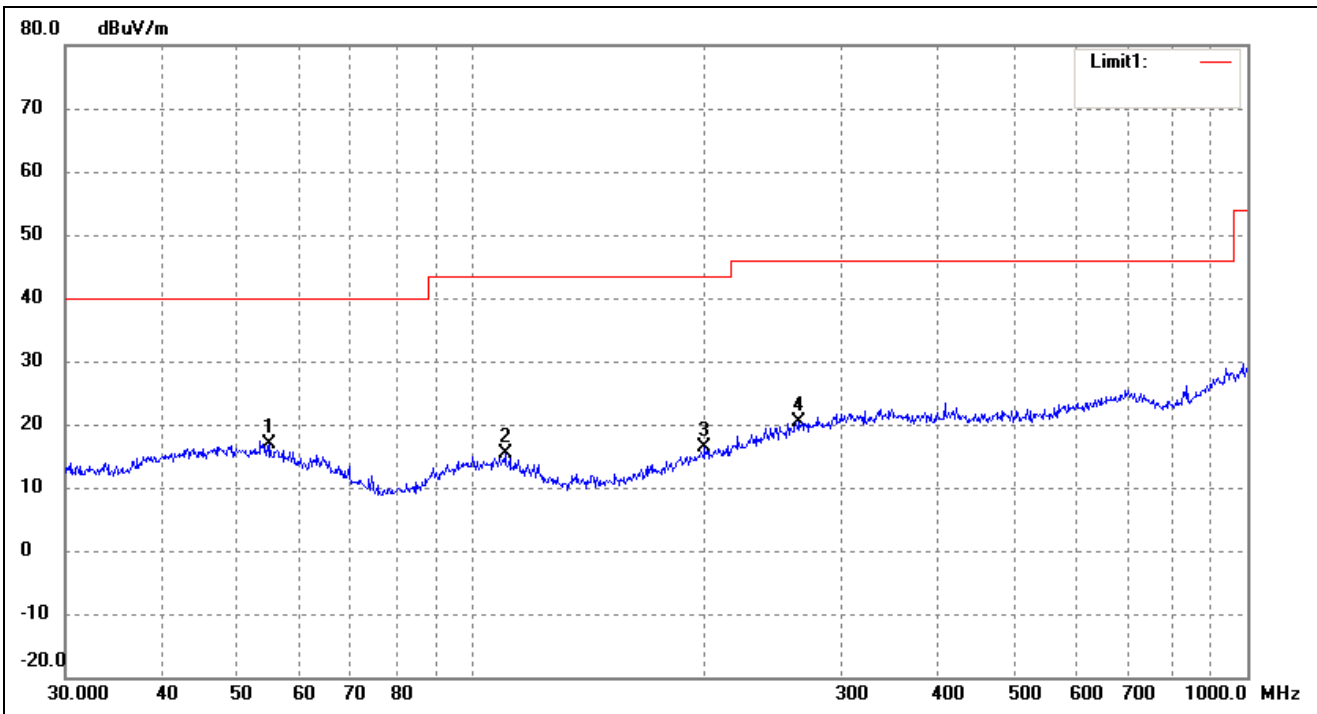

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	55.0274	29.99	-13.22	16.77	40.00	-23.23	202	100	peak
2	110.5687	29.43	-14.01	15.42	43.50	-28.08	211	100	peak
3	199.9856	28.44	-12.10	16.34	43.50	-27.16	69	100	peak
4	264.7457	29.45	-9.01	20.44	46.00	-25.56	142	100	peak

802.11b			
Test Channel	High	Polarity:	Vertical

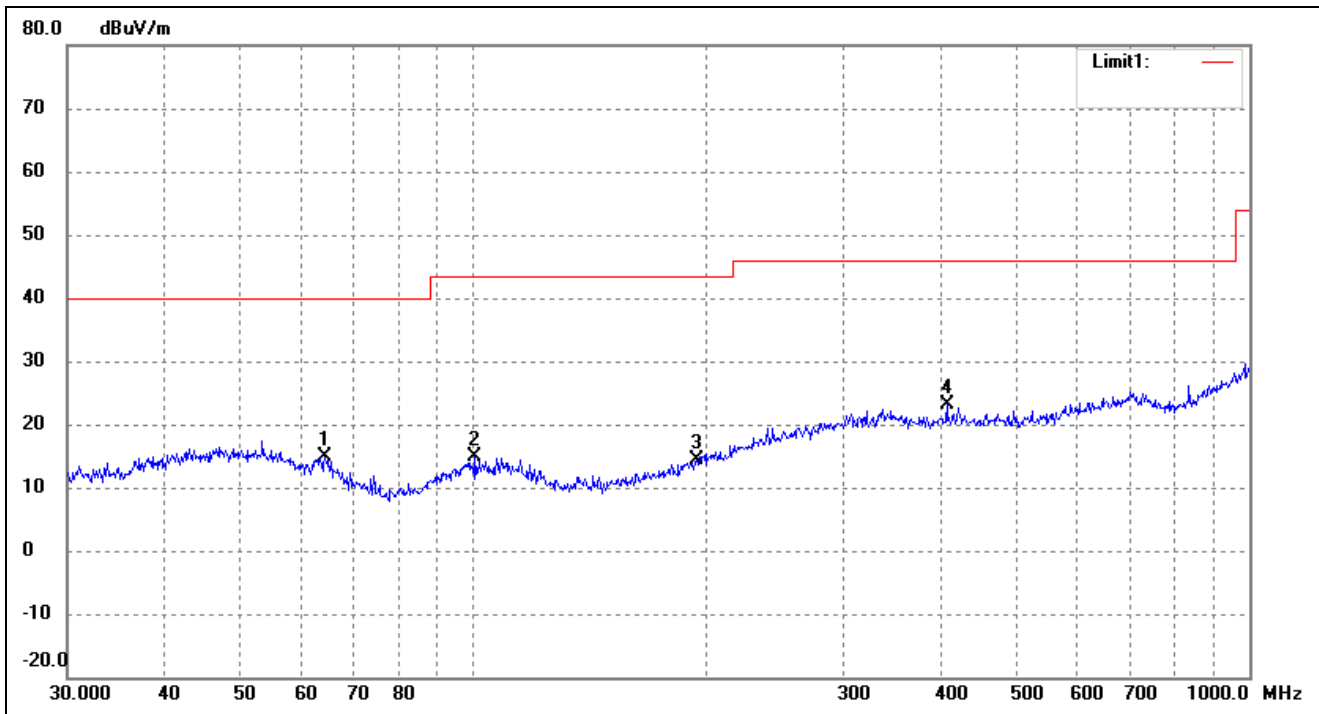

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	64.4331	30.07	-15.16	14.91	40.00	-25.09	50	100	peak
2	100.5806	29.31	-14.43	14.88	43.50	-28.62	92	100	peak
3	193.7728	27.18	-12.84	14.34	43.50	-29.16	94	100	peak
4	407.5145	29.57	-6.32	23.25	46.00	-22.75	150	100	peak

➤ Spurious Emissions Below 1GHz

➤ Test Mode: 802.11b (worst case)

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2412MHz							
4824.000	61.71	-3.86	57.85	74	-16.15	H	PK
4824.000	41.03	-3.86	37.17	54	-16.83	H	AV
7236.000	55.38	1.1	56.48	74	-17.52	H	PK
7236.000	40.42	1.1	41.52	54	-12.48	H	AV
4824.000	61.13	-3.86	57.27	74	-16.73	V	PK
4824.000	41.45	-3.86	37.59	54	-16.41	V	AV
7236.000	52.36	1.1	53.46	74	-20.54	V	PK
7236.000	39.65	1.1	40.75	54	-13.25	V	AV
Middle Channel-2437MHz							
4874.000	60.01	-3.74	56.27	74	-17.73	H	PK
4874.000	41.22	-3.74	37.48	54	-16.52	H	AV
7311.000	54.48	1.47	55.95	74	-18.05	H	PK
7311.000	40.17	1.47	41.64	54	-12.36	H	AV
4874.000	60.66	-3.74	56.92	74	-17.08	V	PK
4874.000	42.39	-3.74	38.65	54	-15.35	V	AV
7311.000	55.33	1.47	56.8	74	-17.20	V	PK
7311.000	39.18	1.47	40.65	54	-13.35	V	AV
High Channel-2462MHz							
4924.000	60.96	-3.63	57.33	74	-16.67	H	PK
4924.000	41.2	-3.63	37.57	54	-16.43	H	AV
7386.000	54.75	1.62	56.37	74	-17.63	H	PK
7386.000	39.08	1.62	40.7	54	-13.30	H	AV
4924.000	60.92	-3.63	57.29	74	-16.71	V	PK
4924.000	41.08	-3.63	37.45	54	-16.55	V	AV
7386.000	52.46	1.62	54.08	74	-19.92	V	PK
7386.000	39.36	1.62	40.98	54	-13.02	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Procedure

According to the KDB 558074D01 v04, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v04, the conducted spurious emissions test method as follows:


1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW \geq 300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

9.3 Summary of Test Results/Plots


➤ Radiated test

802.11b			
Test Channel	Low	Polarity:	Vertical(worst case)

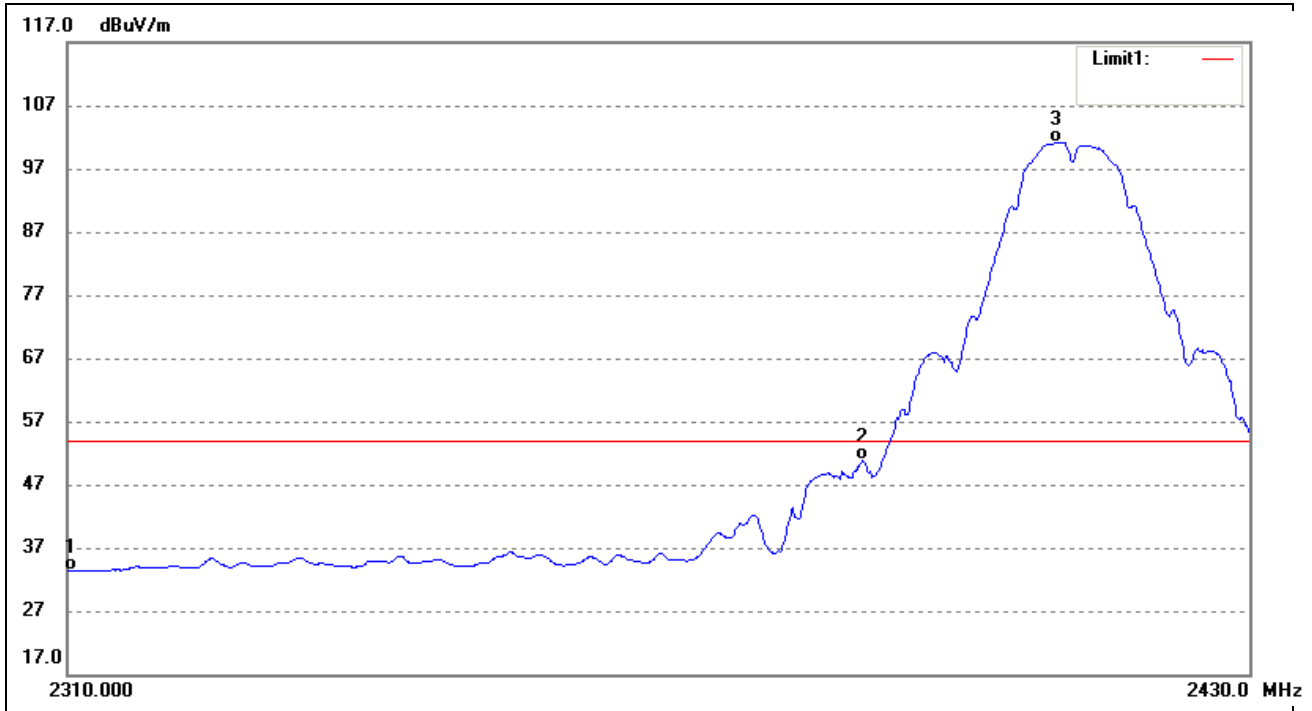


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	41.08	-7.78	33.30	54.00	-20.70	Average Detector
	2310.000	52.83	-7.78	45.05	74.00	-28.95	Peak Detector
2	2390.000	58.12	-7.32	50.80	54.00	-3.20	Average Detector
	2390.000	66.81	-7.32	59.49	74.00	-14.51	Peak Detector
3	2409.901	108.32	-7.19	101.13	/	/	Average Detector
	2410.145	116.19	-7.19	109.00	/	/	Peak Detector

802.11b			
Test Channel	High	Polarity:	Vertical(worst case)

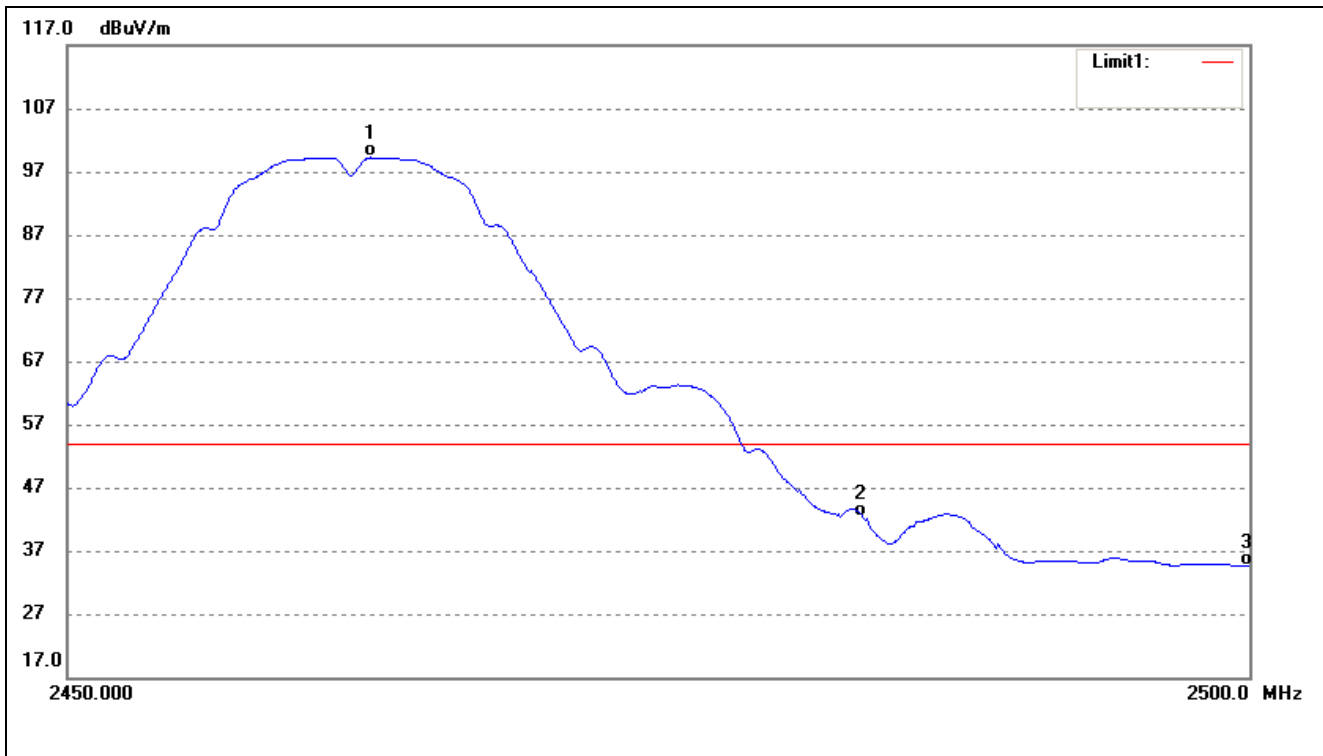


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.754	106.15	-6.89	99.26	/	/	Average Detector
	2463.351	112.61	-6.89	105.72	/	/	Peak Detector
2	2483.500	49.18	-6.77	42.41	54.00	-11.59	Average Detector
	2483.500	58.35	-6.77	51.58	74.00	-22.42	Peak Detector
3	2500.000	41.21	-6.67	34.54	54.00	-19.46	Average Detector
	2500.000	52.09	-6.67	45.42	74.00	-28.58	Peak Detector

802.11g			
Test Channel	Low	Polarity:	Vertical(worst case)

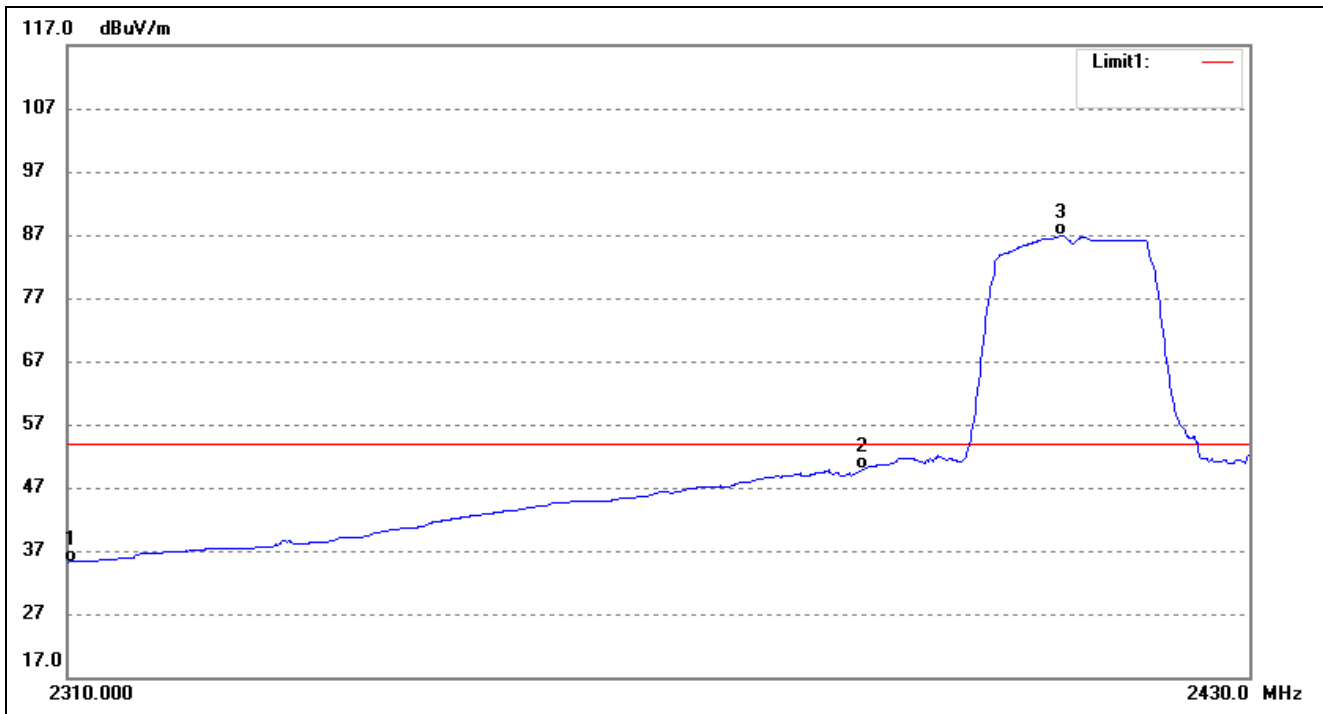


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.00	-7.78	35.22	54.00	-18.78	Average Detector
	2310.000	51.77	-7.78	43.99	74.00	-30.01	Peak Detector
2	2390.000	57.20	-7.32	49.88	54.00	-4.12	Average Detector
	2390.000	73.82	-7.32	66.50	74.00	-7.50	Peak Detector
3	2410.511	94.03	-7.19	86.84	/	/	Average Detector
	2410.878	113.15	-7.19	105.96	/	/	Peak Detector

802.11g			
Test Channel	High	Polarity:	Vertical(worst case)

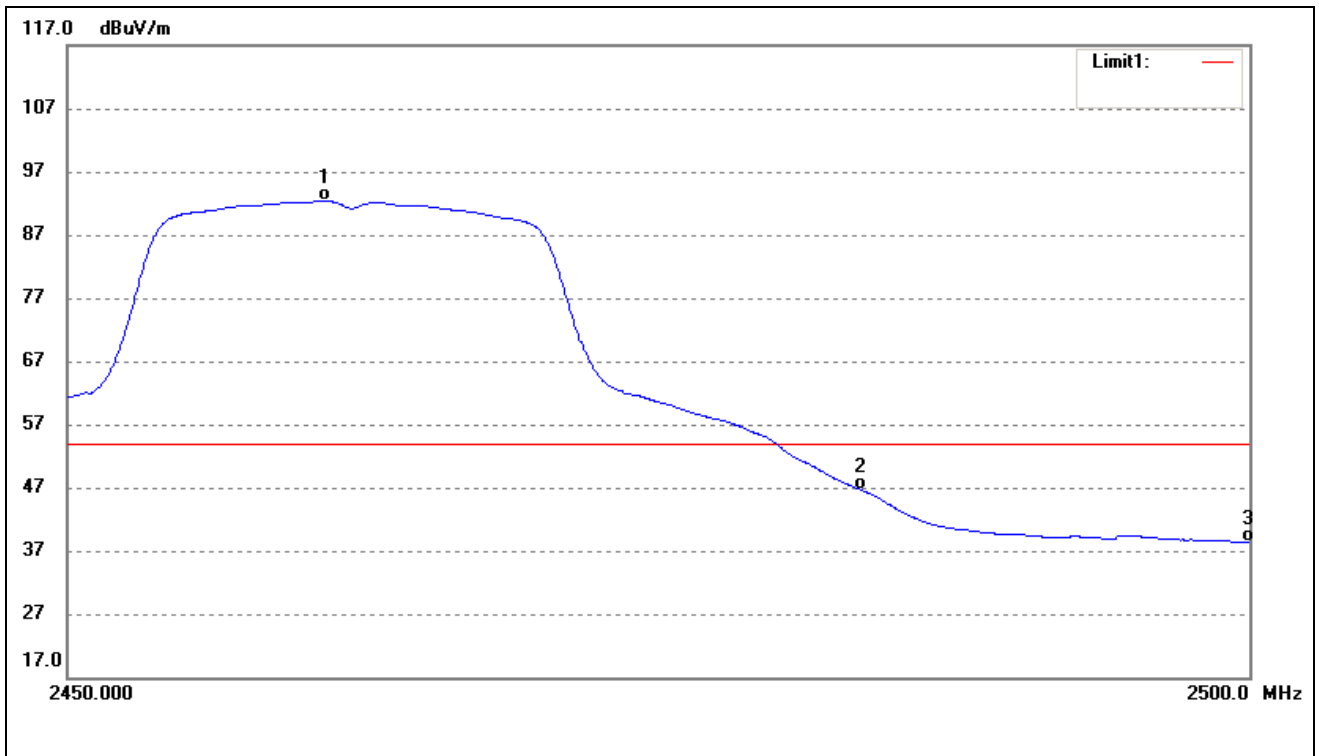


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.814	99.29	-6.90	92.39	/	/	Average Detector
	2463.251	107.69	-6.89	100.80	/	/	Peak Detector
2	2483.500	53.30	-6.77	46.53	54.00	-7.47	Average Detector
	2483.500	66.25	-6.77	59.48	74.00	-14.52	Peak Detector
3	2500.000	45.13	-6.67	38.46	54.00	-15.54	Average Detector
	2500.000	59.96	-6.67	53.29	74.00	-20.71	Peak Detector

802.11n-HT20			
Test Channel	Low	Polarity:	Vertical(worst case)

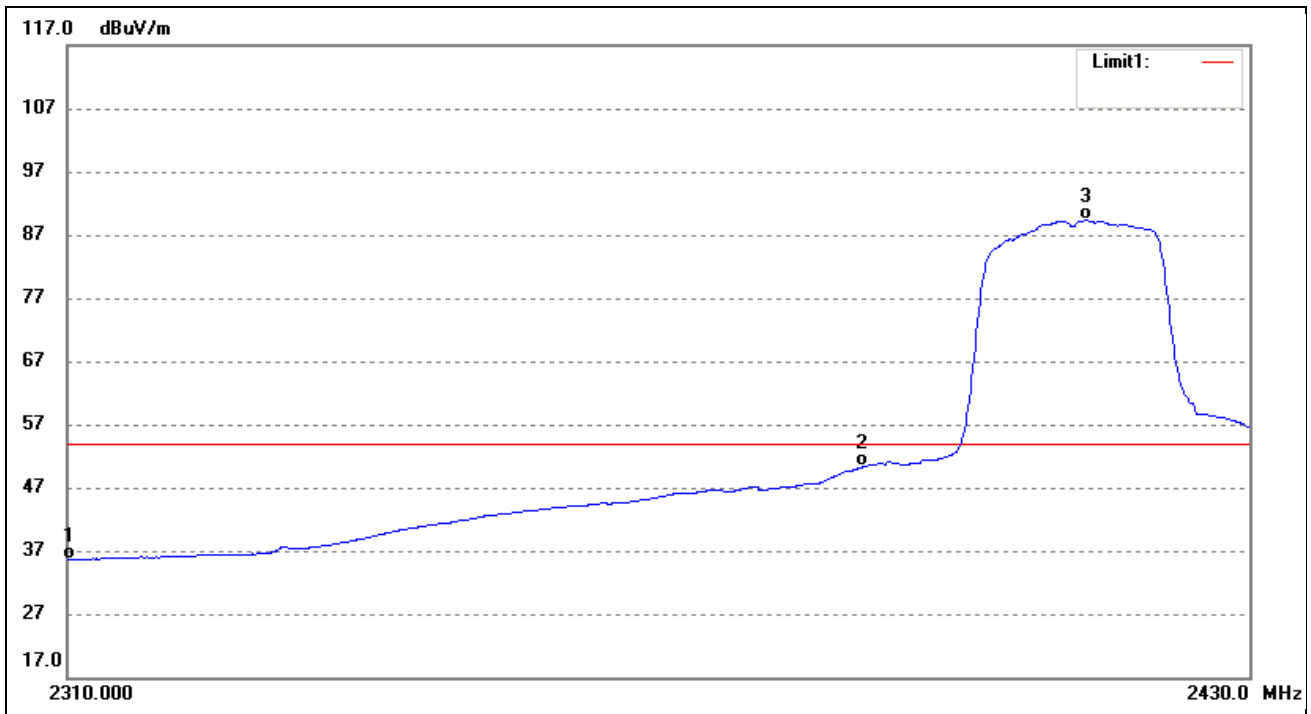

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	43.35	-7.78	35.57	54.00	-18.43	Average Detector
	2310.000	51.50	-7.78	43.72	74.00	-30.28	Peak Detector
2	2390.000	57.59	-7.32	50.27	54.00	-3.73	Average Detector
	2390.000	74.91	-7.32	67.59	74.00	-6.41	Peak Detector
3	2413.076	96.49	-7.18	89.31	/	/	Average Detector
	2410.389	110.45	-7.19	103.26	/	/	Peak Detector

802.11n-HT20			
Test Channel	High	Polarity:	Vertical(worst case)


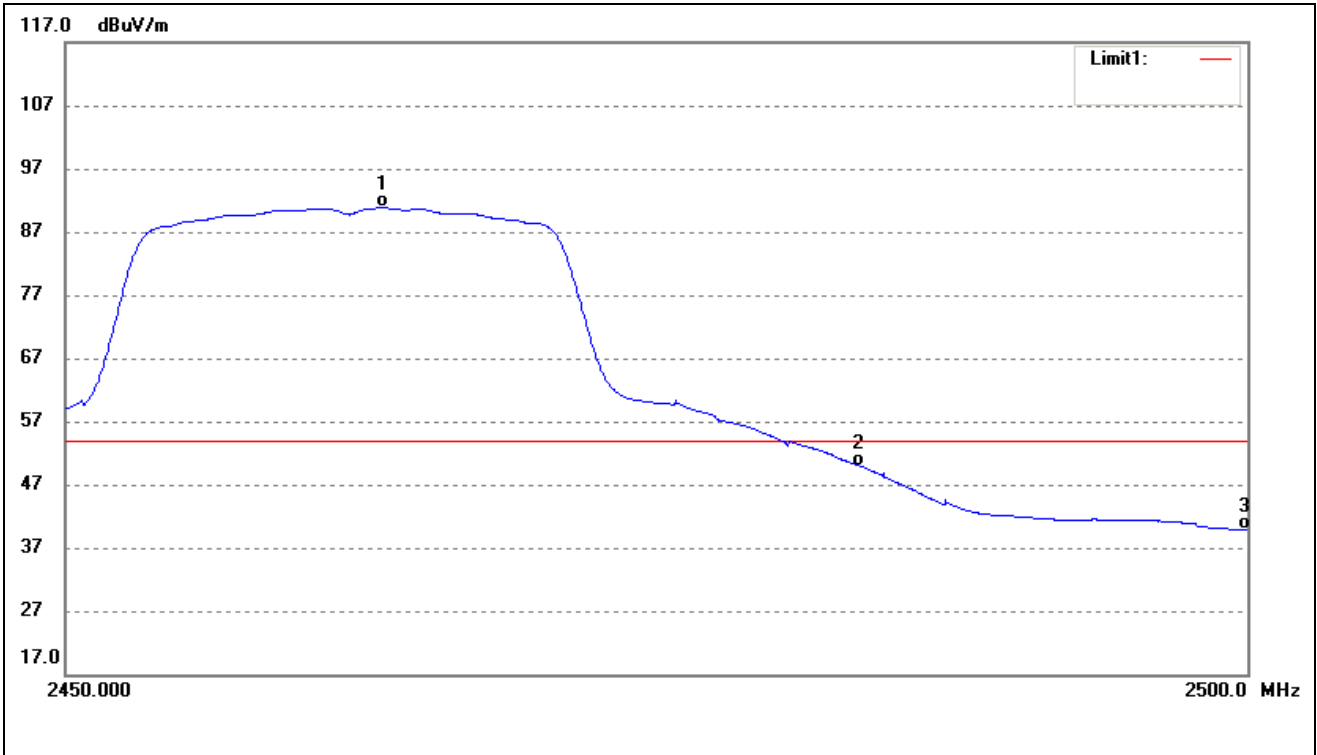


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.301	97.73	-6.89	90.84	/	/	Average Detector
	2460.566	106.10	-6.90	99.20	/	/	Peak Detector
2	2483.500	56.68	-6.77	49.91	54.00	-4.09	Average Detector
	2483.500	68.42	-6.77	61.65	74.00	-12.35	Peak Detector
3	2500.000	46.50	-6.67	39.83	54.00	-14.17	Average Detector
	2500.000	62.97	-6.67	56.30	74.00	-17.70	Peak Detector

➤ Conducted test



802.11b

Low

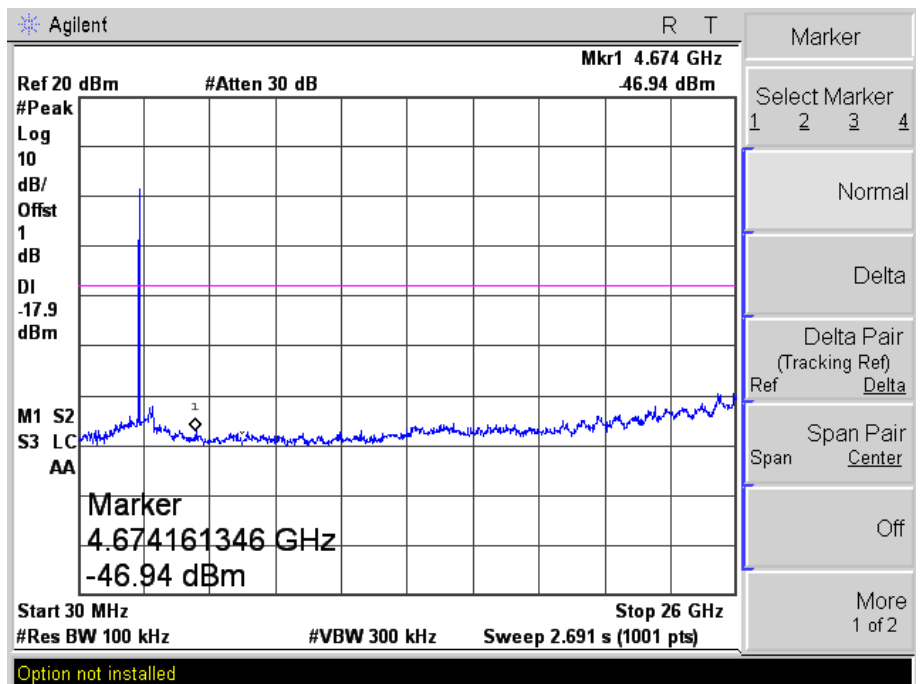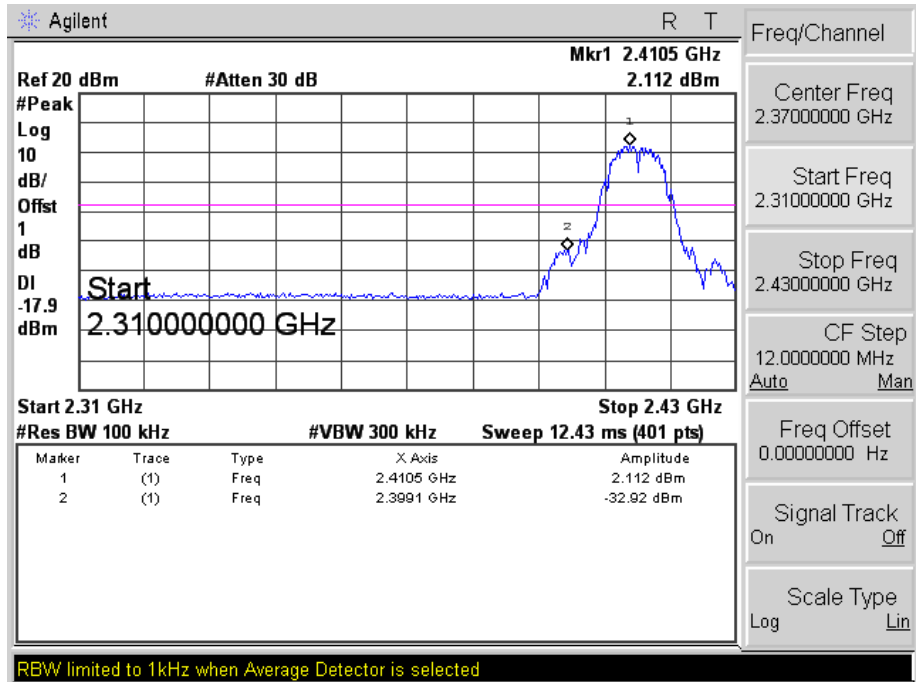



802.11b

Middle

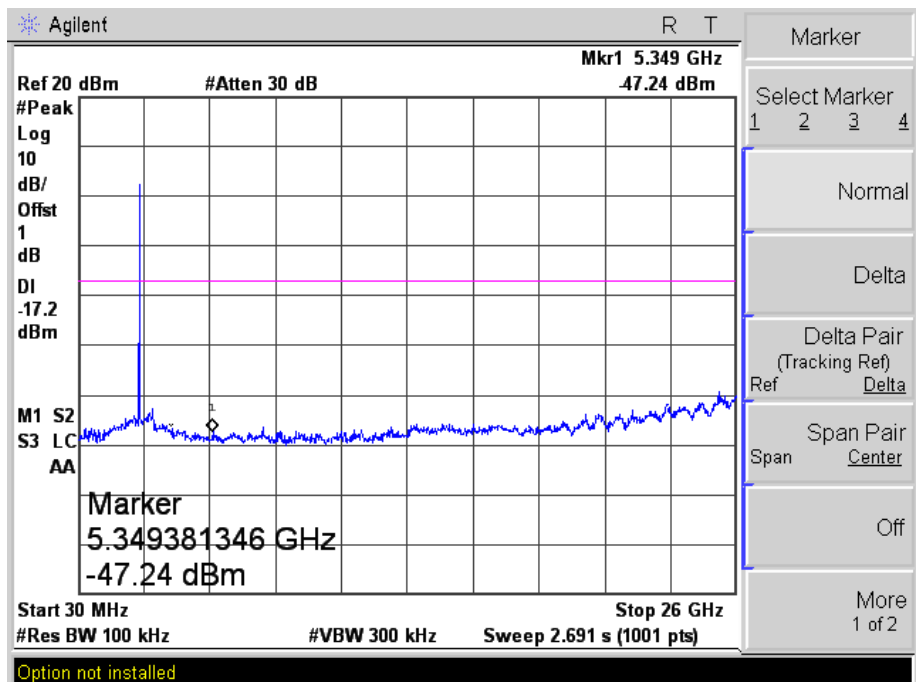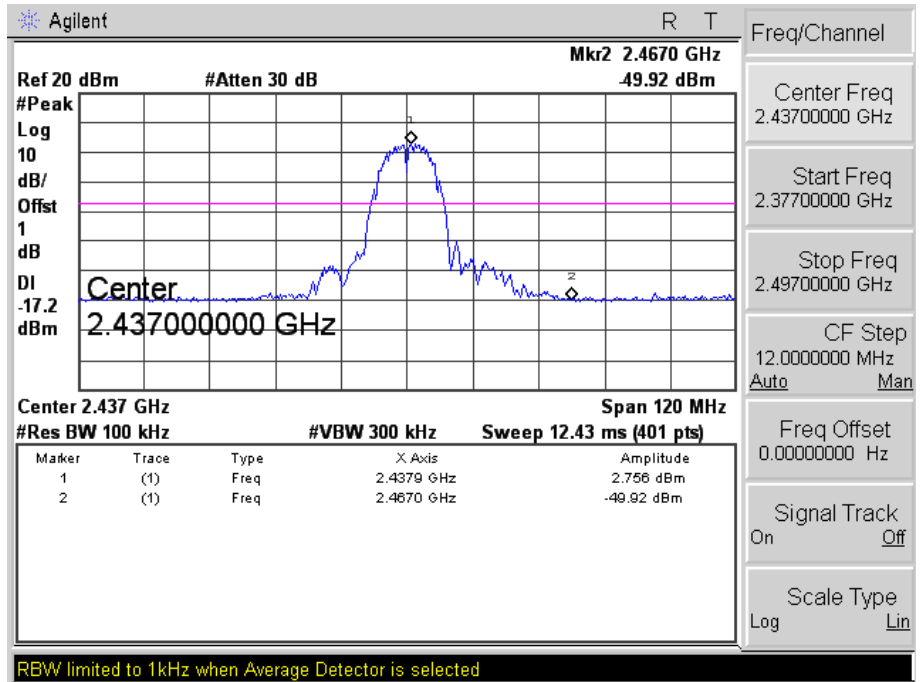



802.11b

High

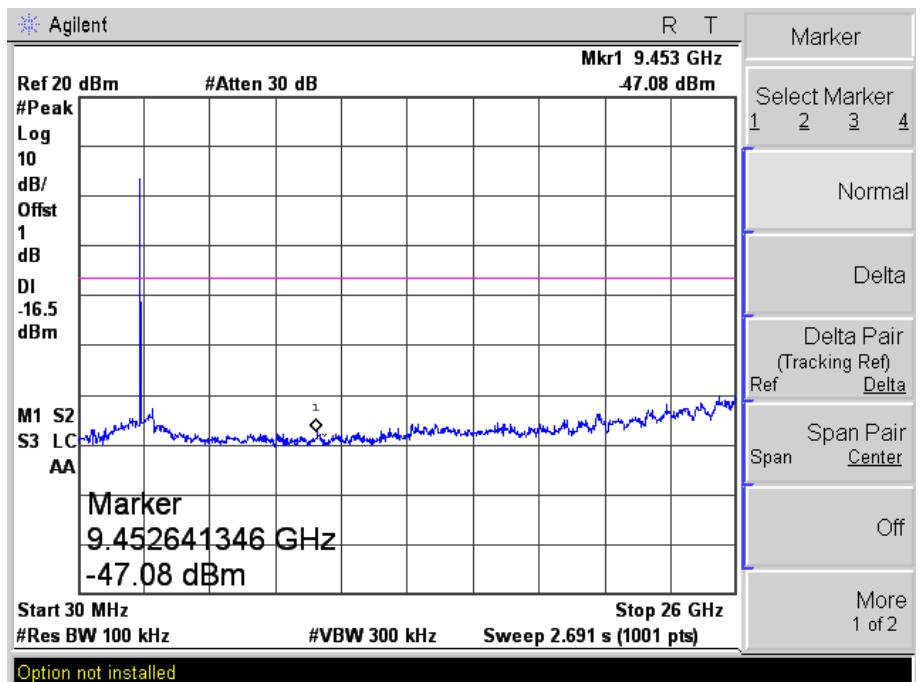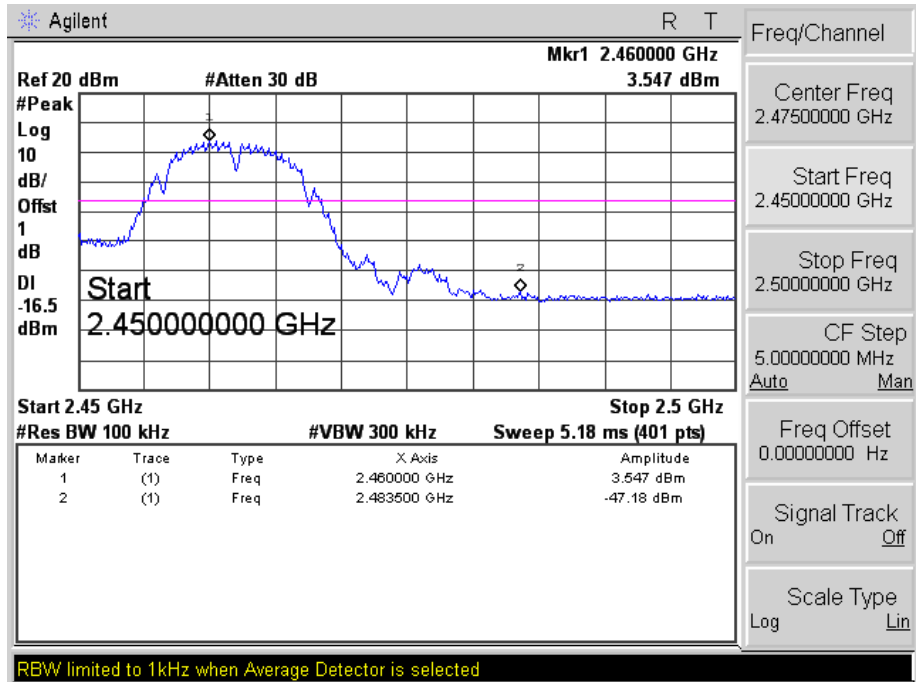



802.11g

Low

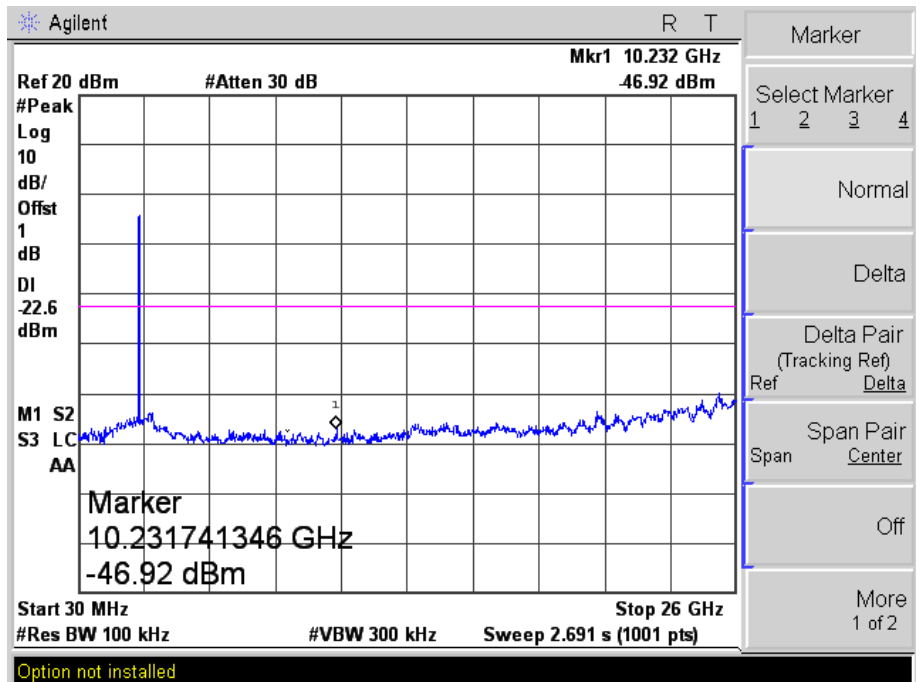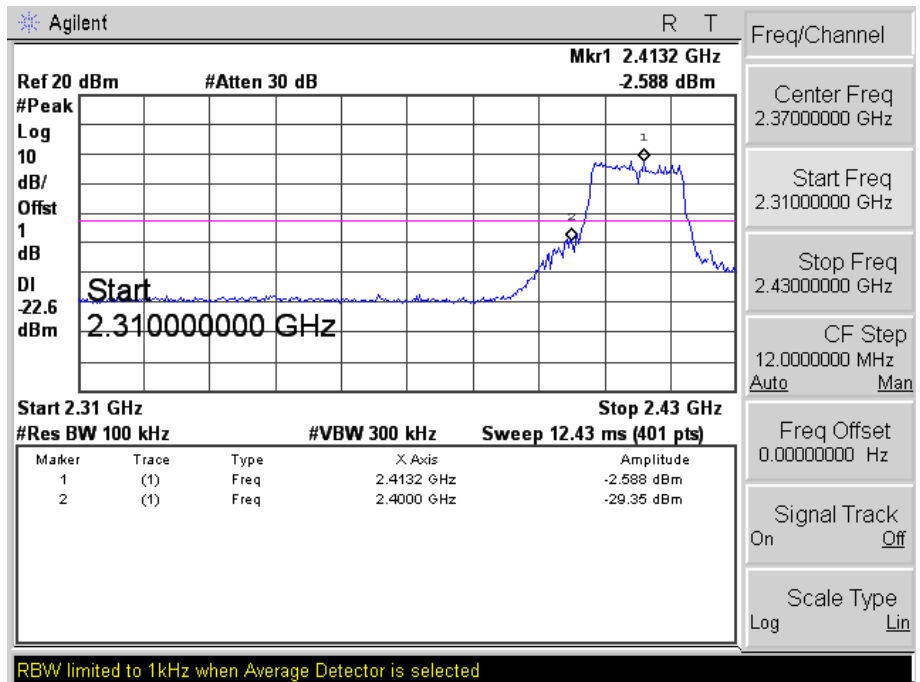



802.11g

Middle

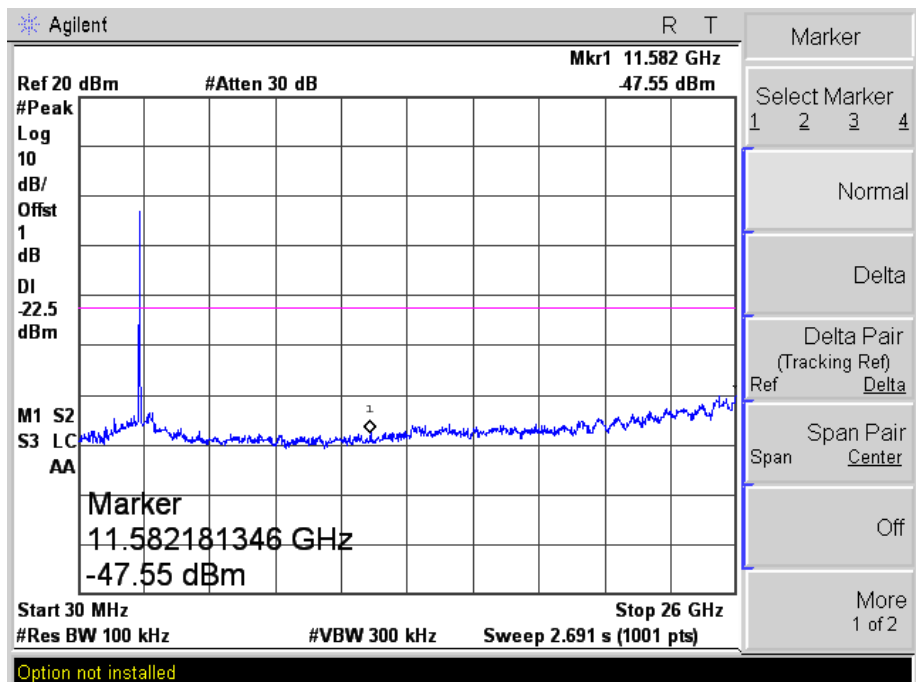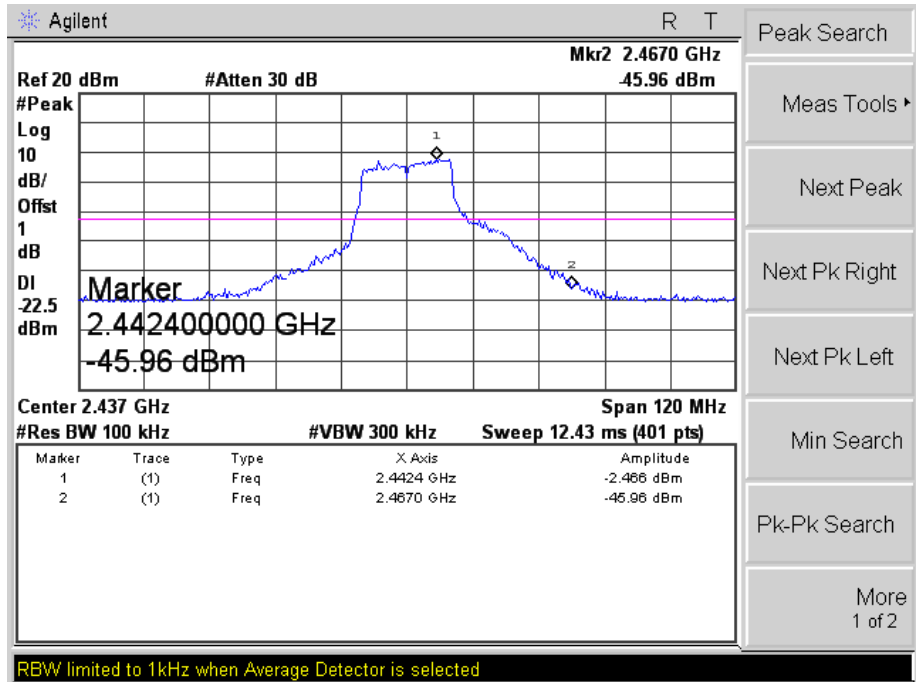



802.11g

High

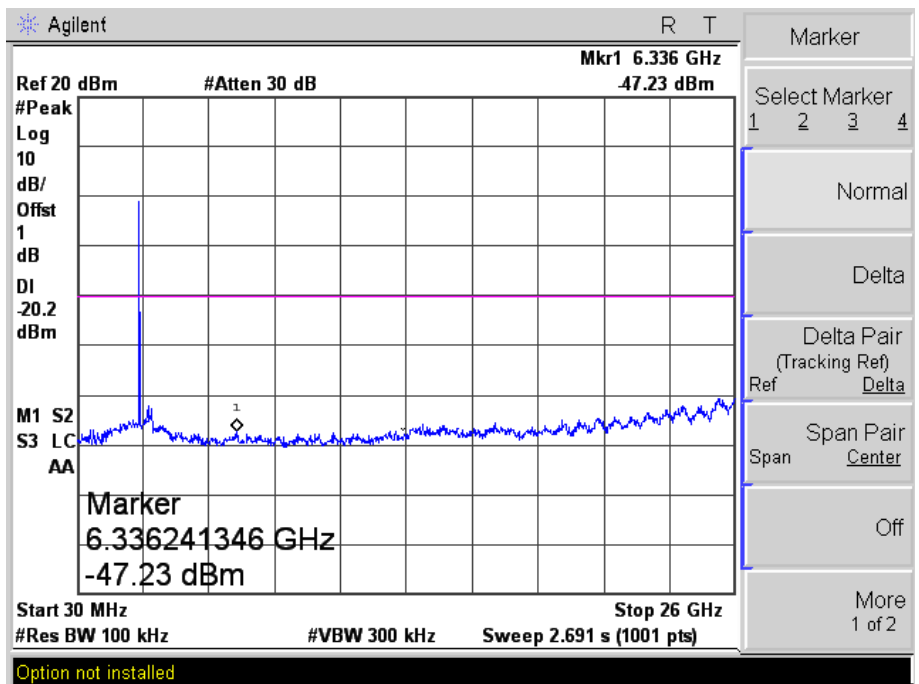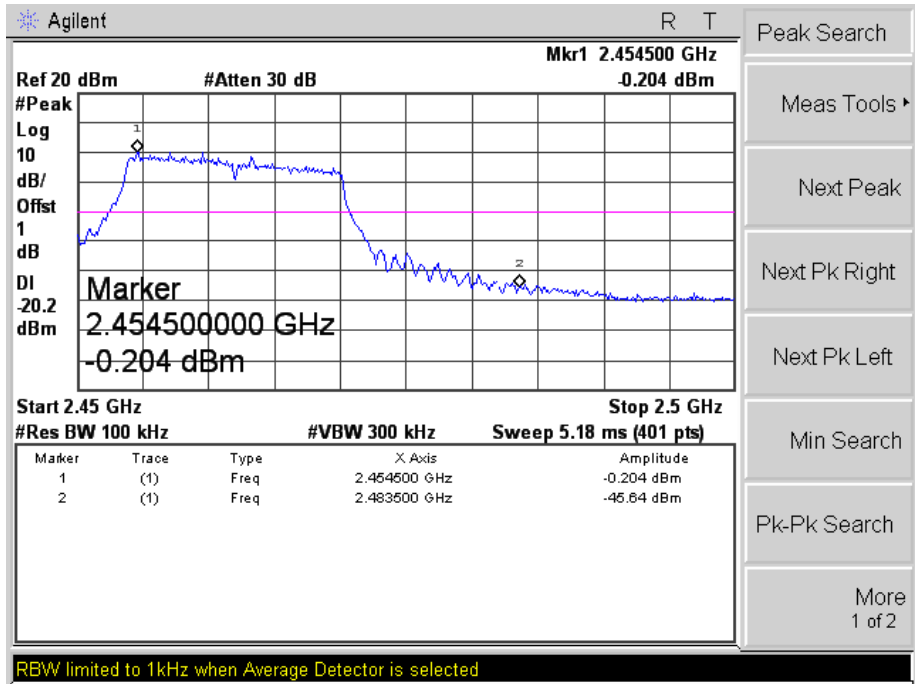



802.11n-HT20

Low

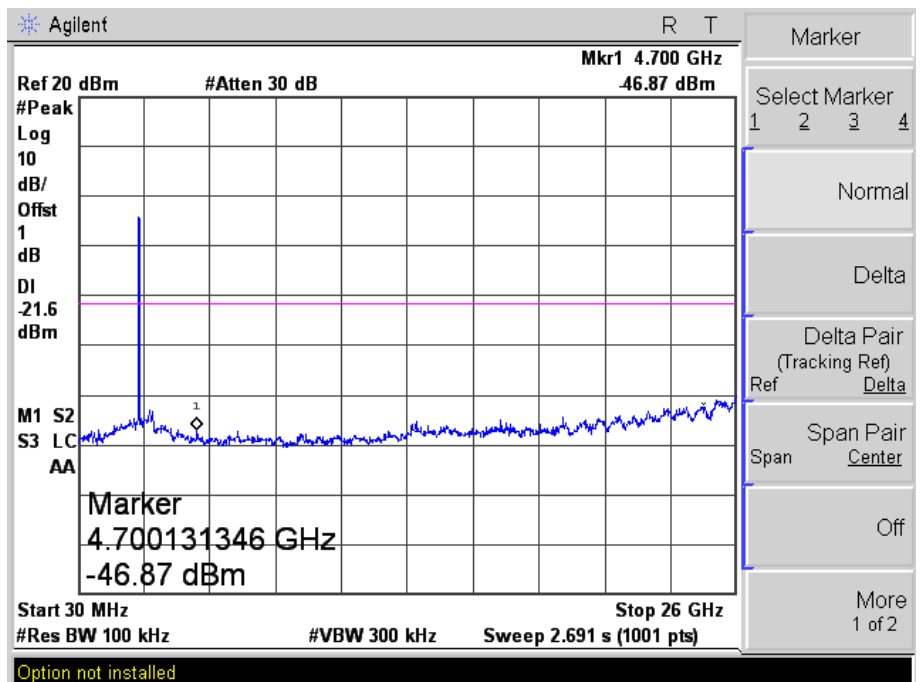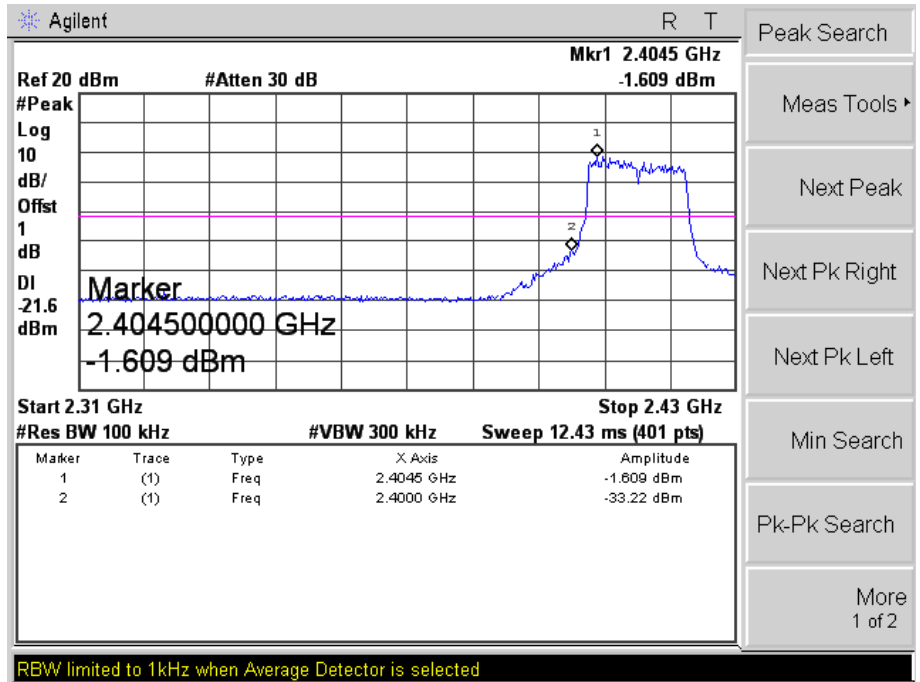



802.11n-HT20

Middle

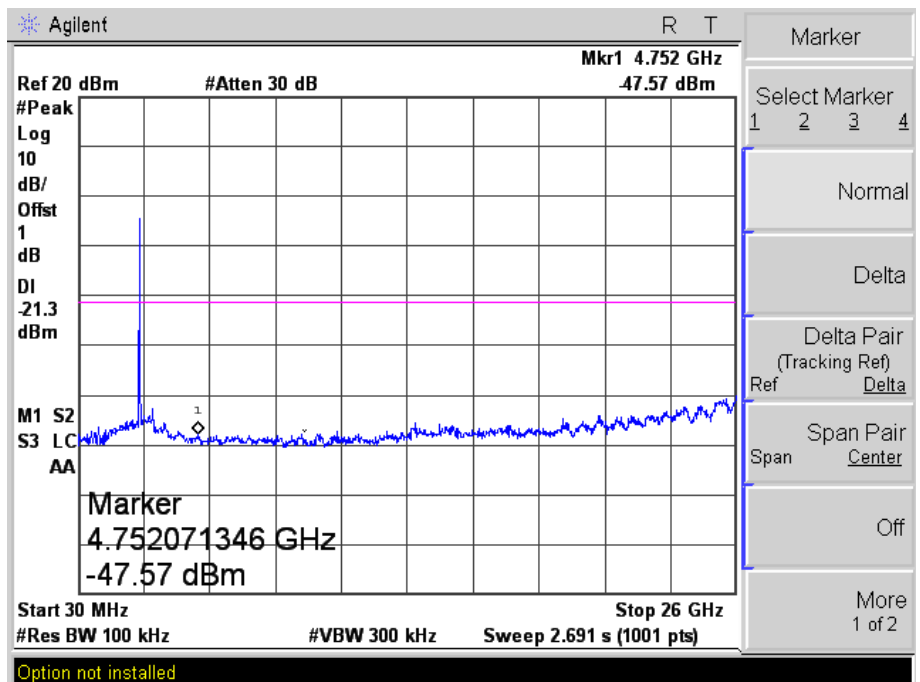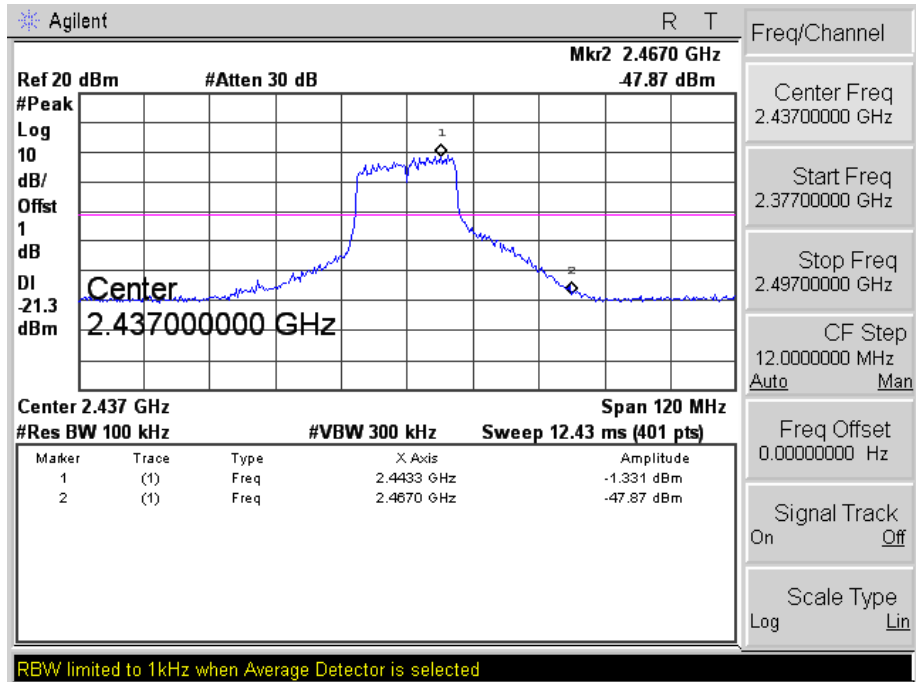

802.11n-HT20

High

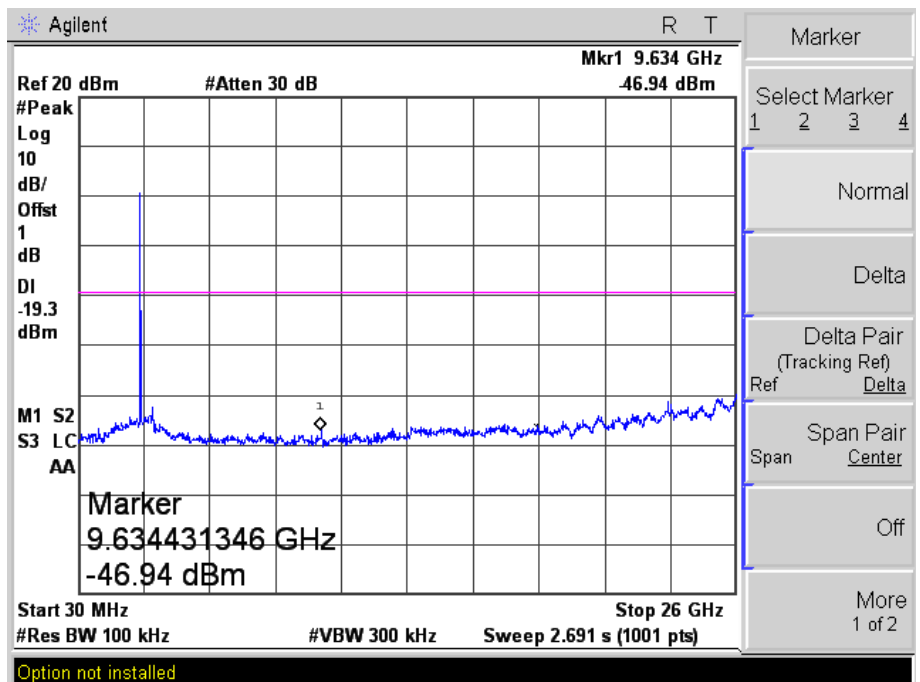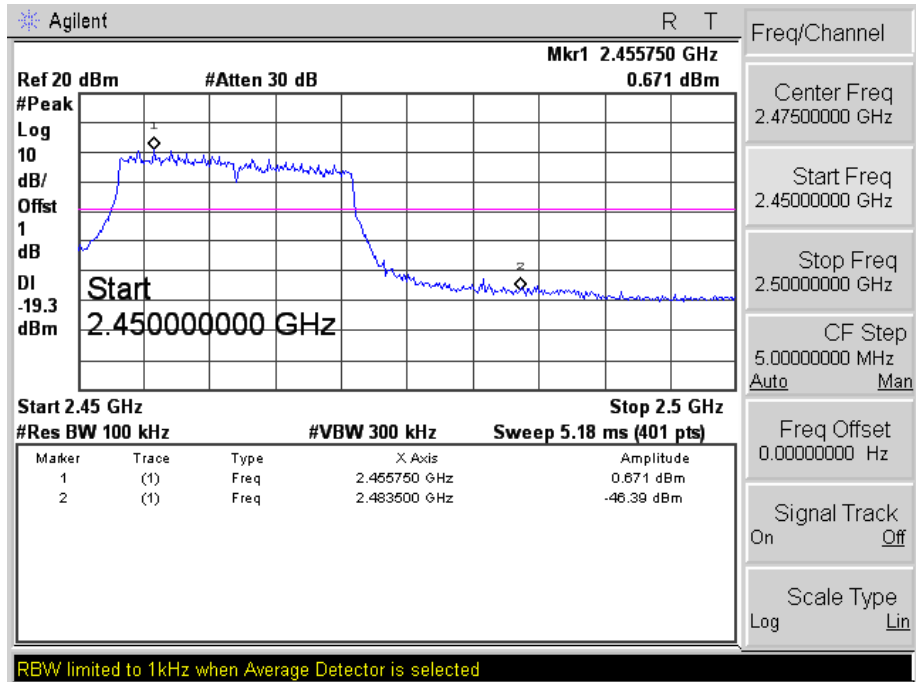


10. Conducted Emissions

10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram

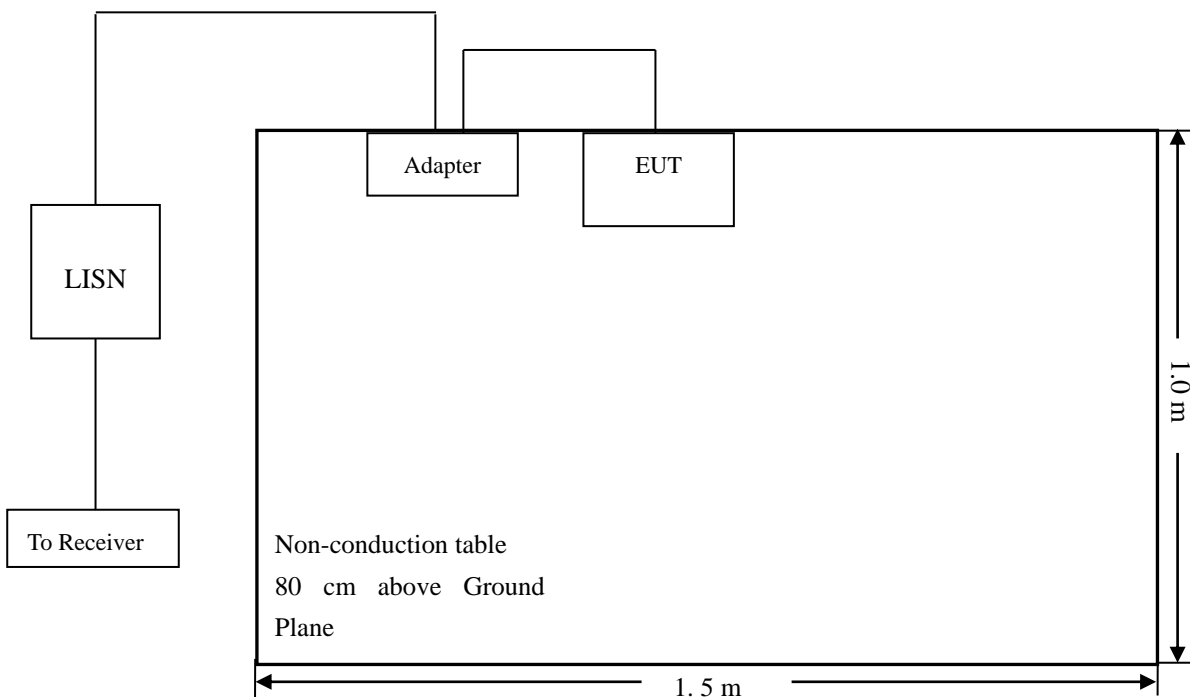


10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal


10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

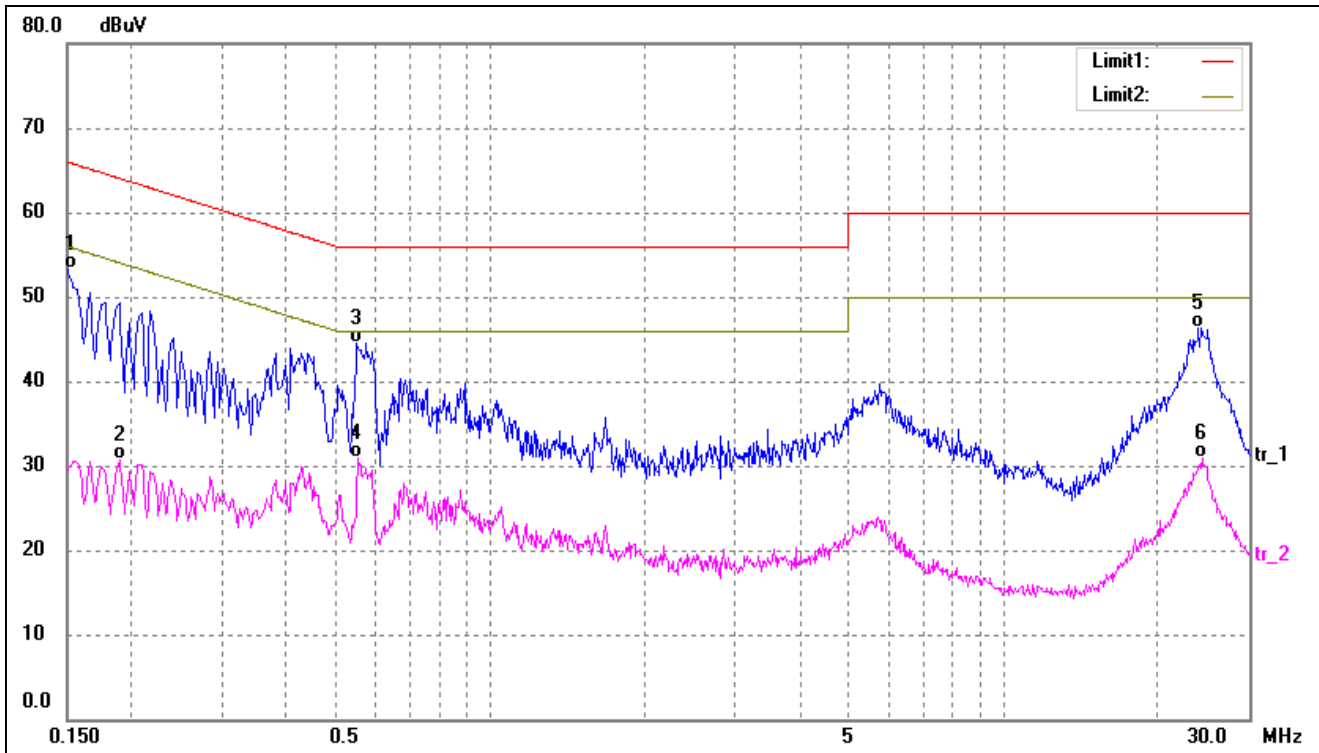

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	43.24	10.10	53.34	66.00	-12.66	QP
2	0.1900	20.57	10.12	30.69	54.04	-23.35	AVG
3*	0.5500	34.22	10.32	44.54	56.00	-11.46	QP
4	0.5540	20.66	10.32	30.98	46.00	-15.02	AVG
5	23.9340	35.13	11.21	46.34	60.00	-13.66	QP
6	24.2900	19.73	11.22	30.95	50.00	-19.05	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

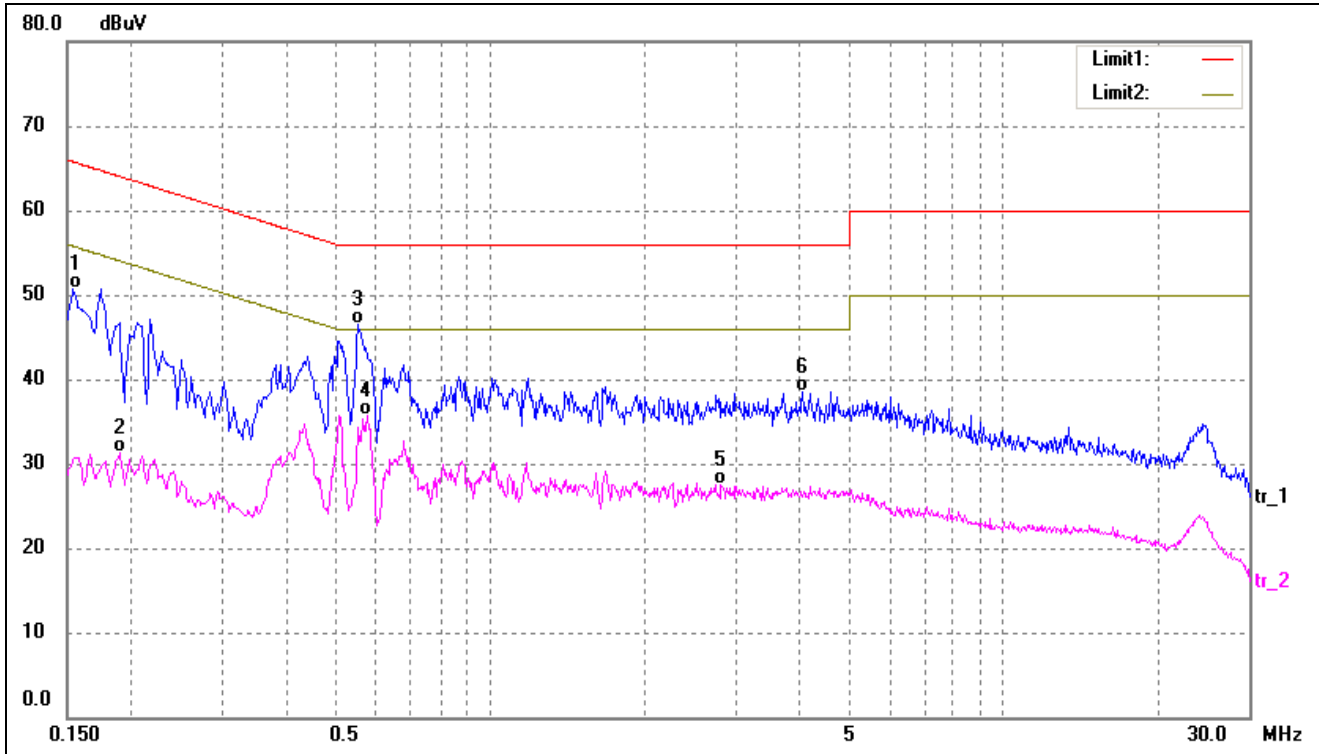

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1540	40.68	10.10	50.78	65.78	-15.00	QP
2	0.1900	21.19	10.12	31.31	54.04	-22.73	AVG
3*	0.5540	36.09	10.32	46.41	56.00	-9.59	QP
4	0.5780	25.33	10.33	35.66	46.00	-10.34	AVG
5	2.8220	16.77	10.67	27.44	46.00	-18.56	AVG
6	4.0700	27.88	10.72	38.60	56.00	-17.40	QP

***** END OF REPORT *****