
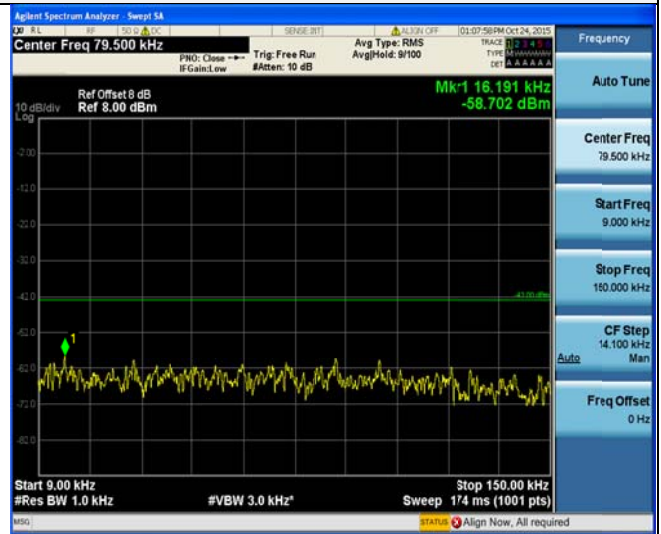


LTE FDD Band 4-3MHz Channel Bandwidth  
Middle Channel



QPSK

16QAM

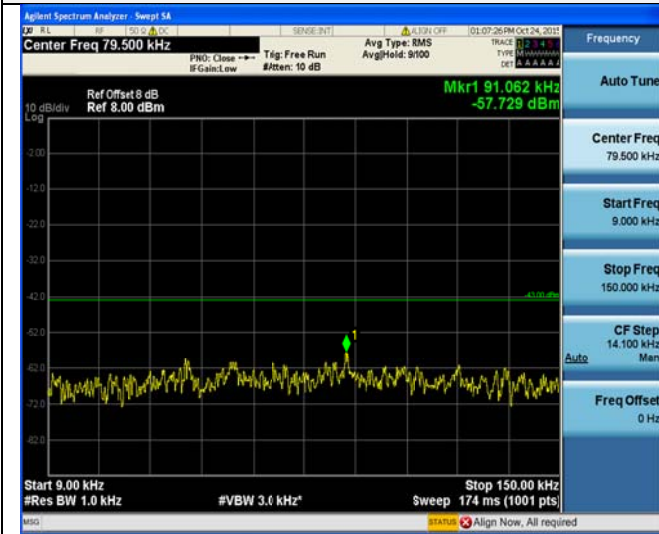

9KHz~150KHz

9KHz~150KHz

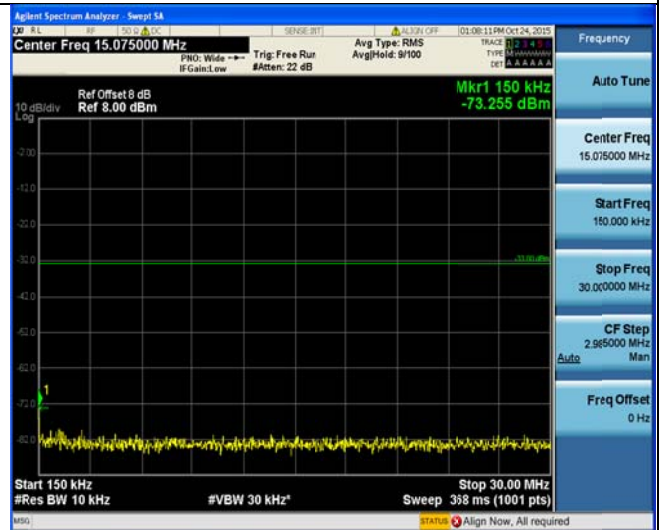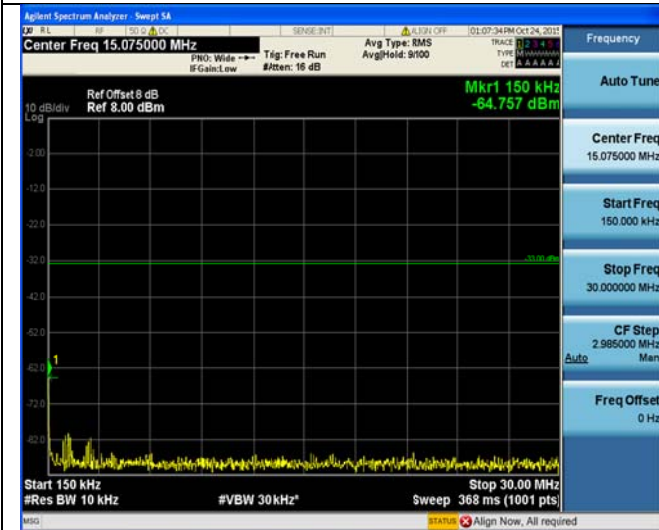

150KHz~30MHz

150KHz~30MHz




30MHz~26.5GHz

30MHz~26.5GHz

1RB#0

1RB#0

LTE FDD Band 4-3MHz Channel Bandwidth  
High Channel

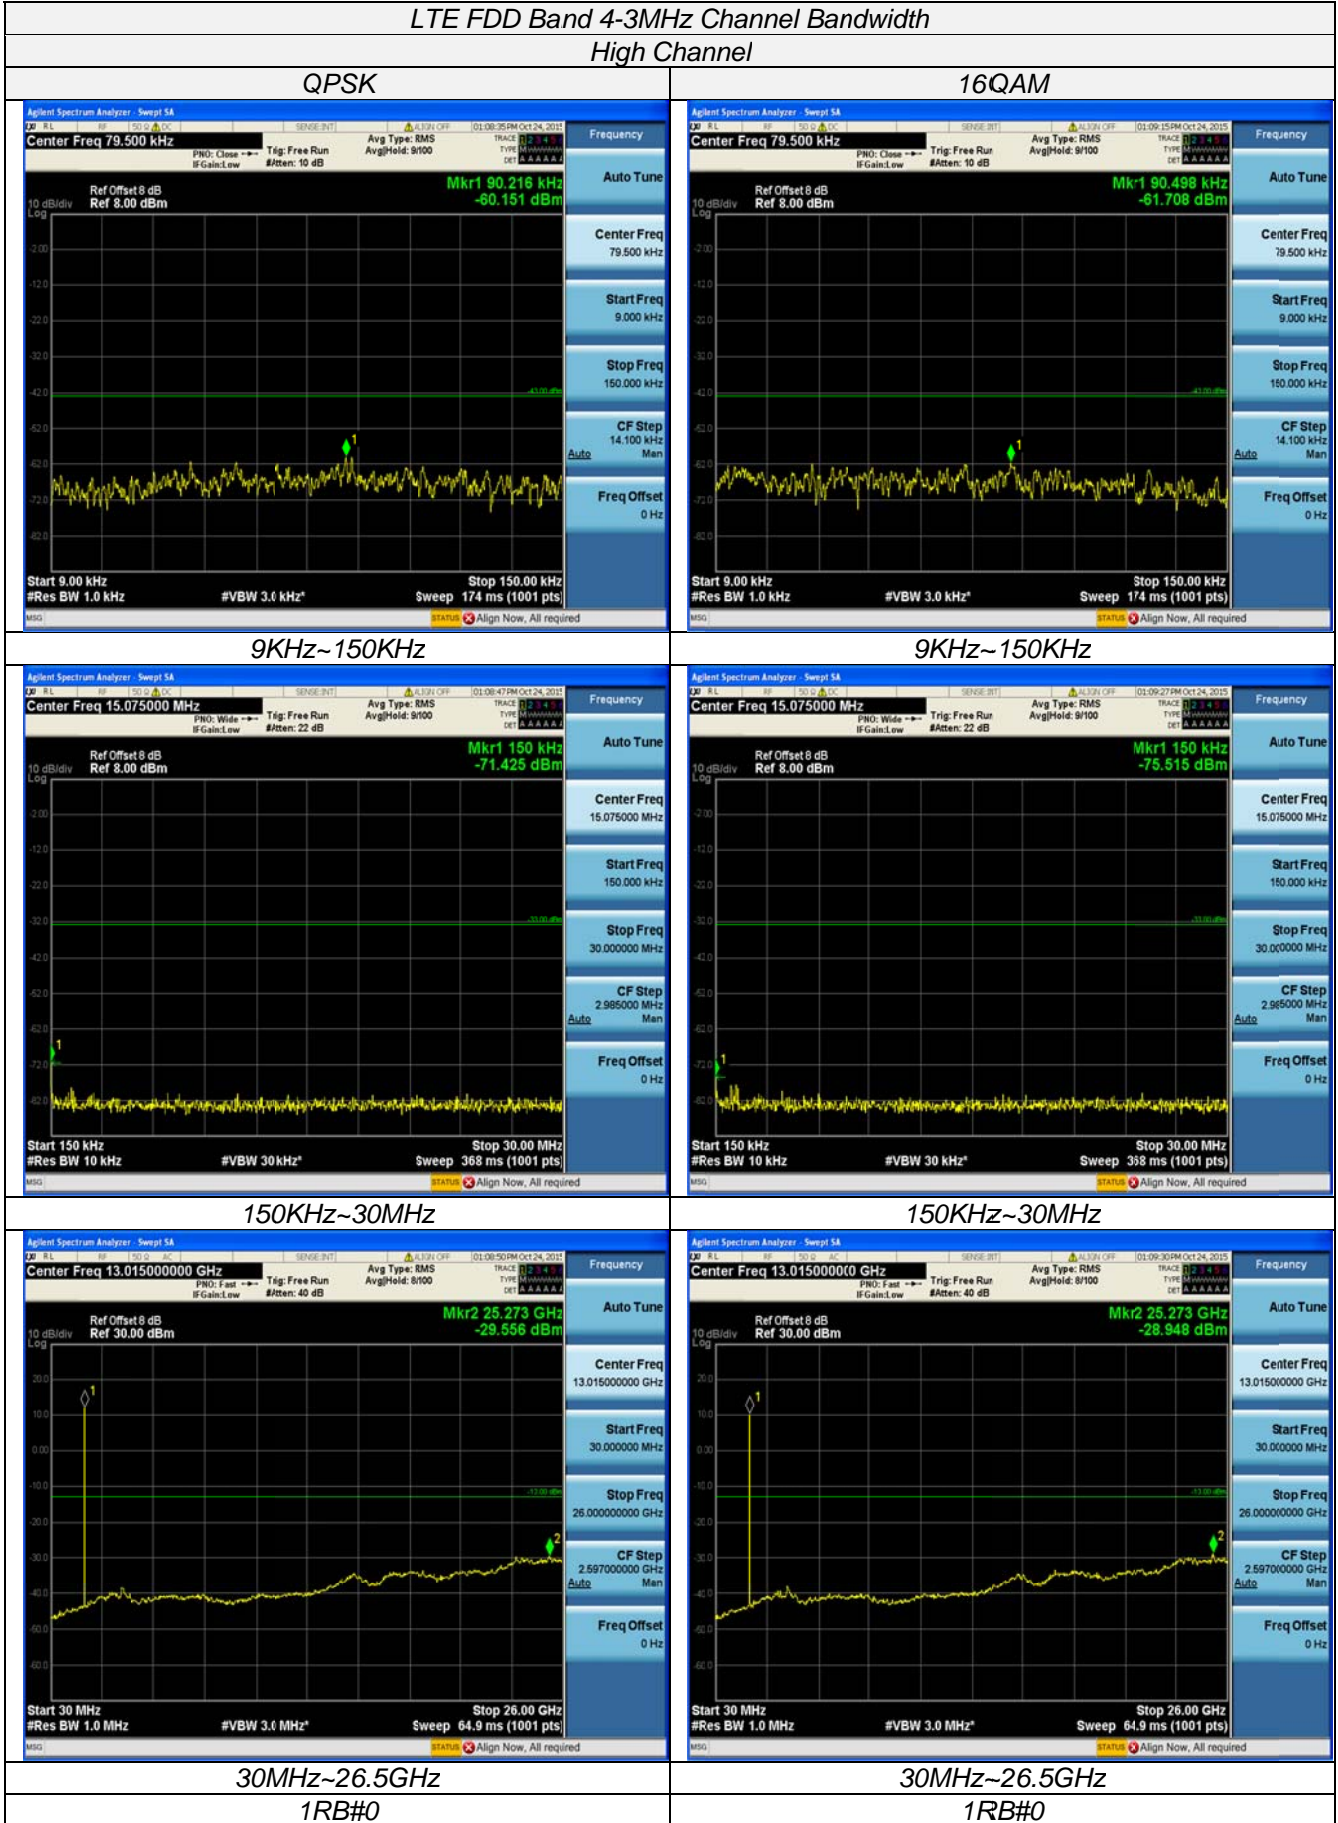




LTE FDD Band 4-5MHz Channel Bandwidth  
Low Channel



QPSK

16QAM

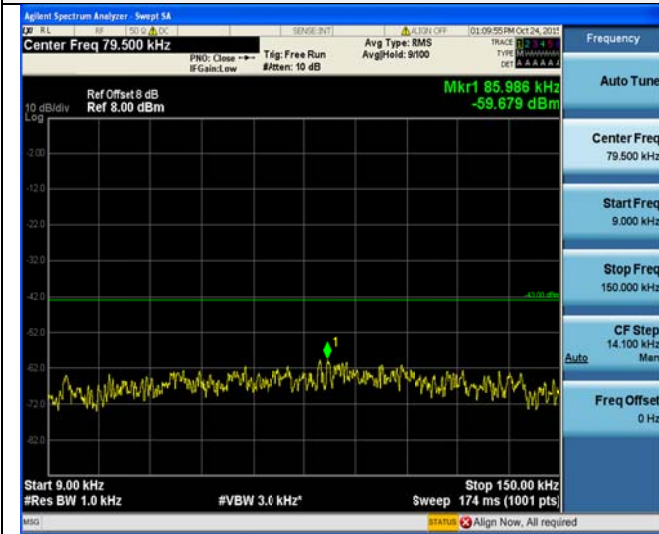

9KHz~150KHz

9KHz~150KHz

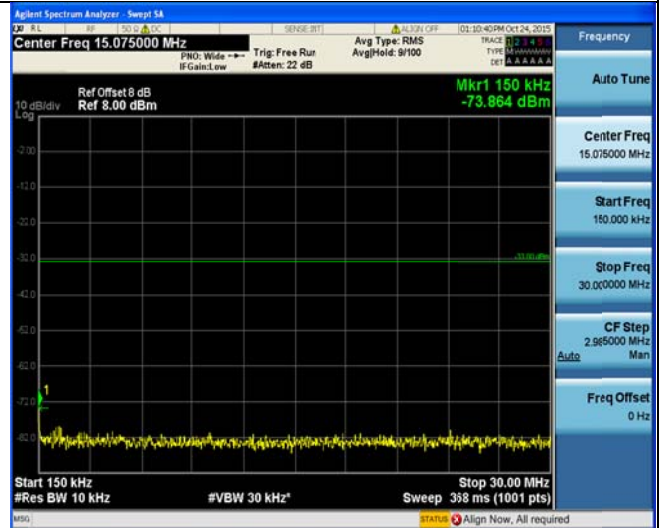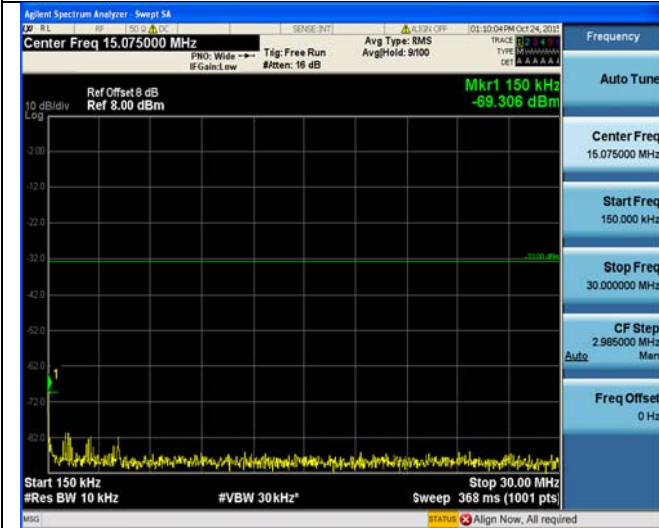

150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz


1RB#0

1RB#0

LTE FDD Band 4-5MHz Channel Bandwidth  
Middle Channel

QPSK

16QAM

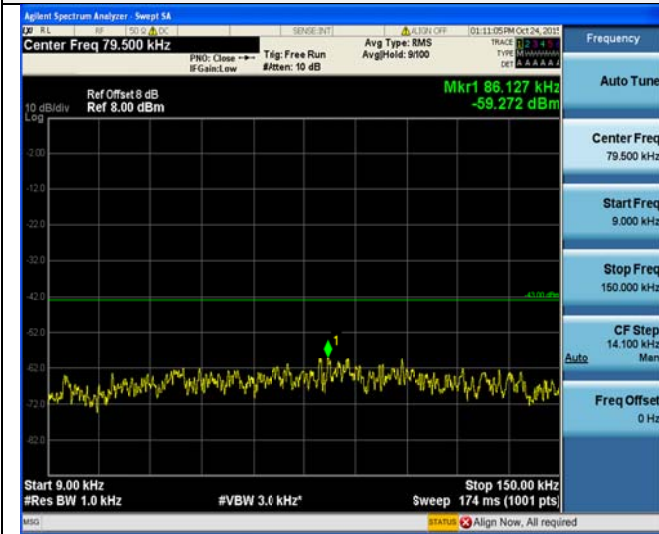

9KHz~150KHz

9KHz~150KHz



150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

1RB#0

1RB#0



LTE FDD Band 4-5MHz Channel Bandwidth  
High Channel


QPSK	16QAM
<p>Agilent Spectrum Analyzer - Swept SA Center Freq 79.500 kHz Mkr1 85.845 kHz -61.004 dBm Start 9.00 kHz, Stop 150.00 kHz, Res BW 1.0 kHz, VBW 3.0 kHz, Sweep 174 ms (1001 pts)</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 79.500 kHz Mkr1 105.867 kHz -60.465 dBm Start 9.00 kHz, Stop 150.00 kHz, Res BW 1.0 kHz, VBW 3.0 kHz, Sweep 174 ms (1001 pts)</p>
9KHz~150KHz	9KHz~150KHz
<p>Agilent Spectrum Analyzer - Swept SA Center Freq 15.075000 MHz Mkr1 150 kHz -73.097 dBm Start 150 kHz, Stop 30.000000 MHz, Res BW 10 kHz, VBW 30 kHz, Sweep 368 ms (1001 pts)</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 15.075000 MHz Mkr1 150 kHz -74.806 dBm Start 150 kHz, Stop 30.000000 MHz, Res BW 10 kHz, VBW 30 kHz, Sweep 368 ms (1001 pts)</p>
150KHz~30MHz	150KHz~30MHz
<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.01500000 GHz Mkr2 25.273 GHz -29.612 dBm Start 30 MHz, Stop 26.00 GHz, Res BW 1.0 MHz, VBW 3.0 MHz, Sweep 64.9 ms (1001 pts)</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 13.01500000 GHz Mkr2 23.637 GHz -29.826 dBm Start 30 MHz, Stop 26.00 GHz, Res BW 1.0 MHz, VBW 3.0 MHz, Sweep 64.9 ms (1001 pts)</p>
30MHz~26.5GHz	30MHz~26.5GHz
1RB#0	1RB#0

LTE FDD Band 4-10MHz Channel Bandwidth

Low Channel

QPSK

16QAM

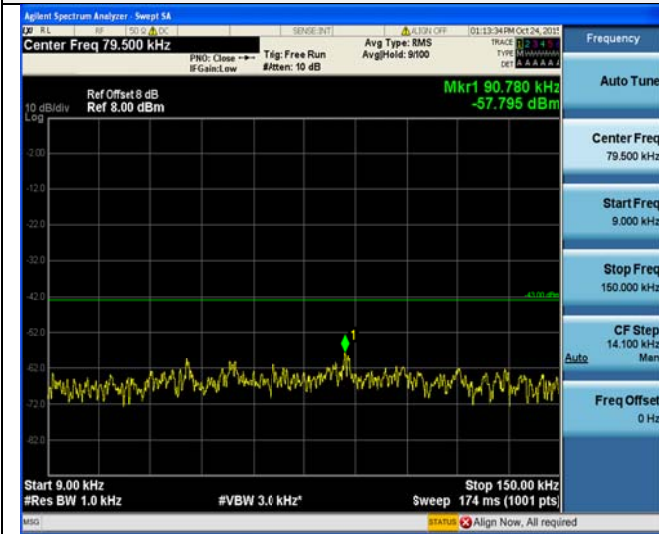

9KHz~150KHz

9KHz~150KHz



150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

1RB#0

1RB#0




LTE FDD Band 4-10MHz Channel Bandwidth

Middle Channel

QPSK

16QAM

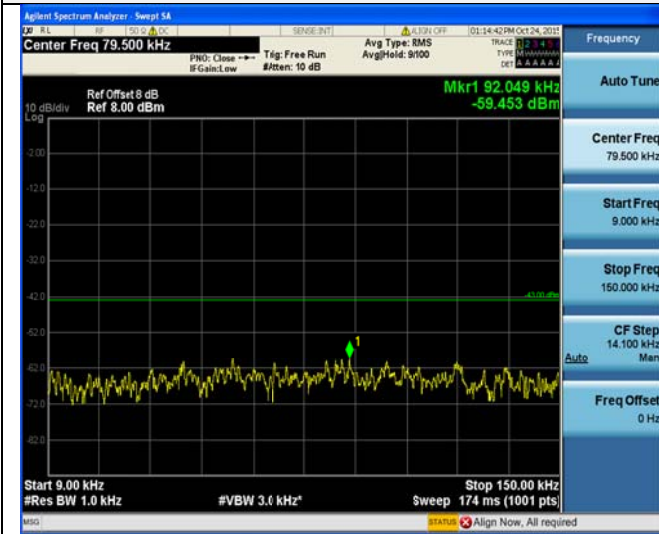

9KHz~150KHz

9KHz~150KHz



150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz



1RB#0

1RB#0

LTE FDD Band 4-10MHz Channel Bandwidth  
High Channel

QPSK

16QAM

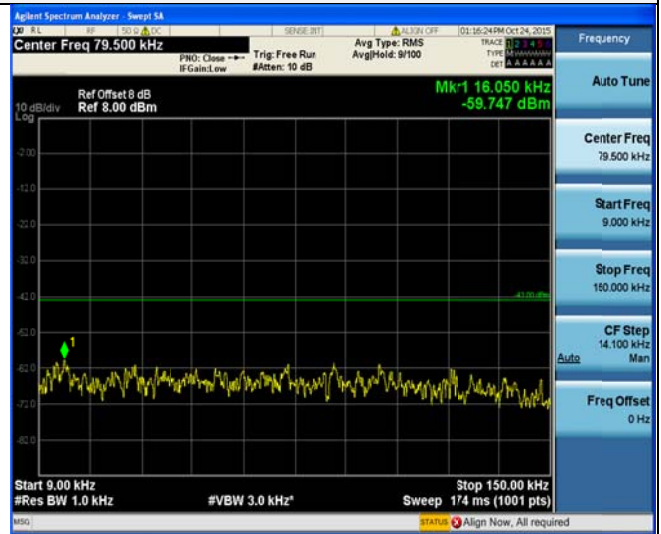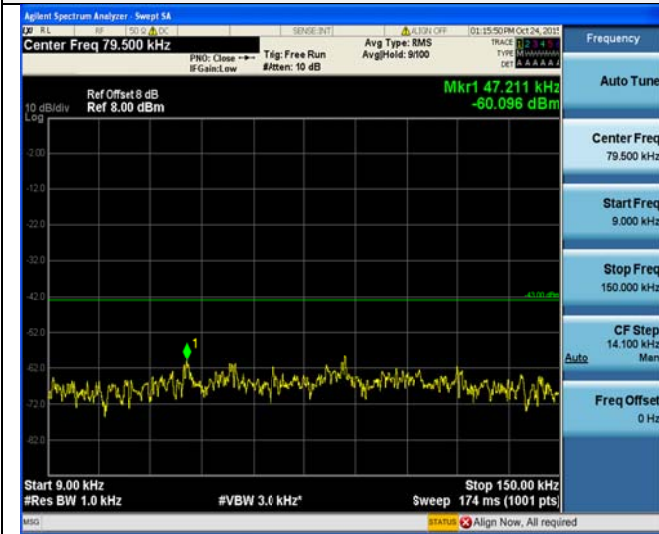

9KHz~150KHz

9KHz~150KHz



150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

1RB#0

1RB#0




LTE FDD Band 4-15MHz Channel Bandwidth

Low Channel


QPSK

16QAM

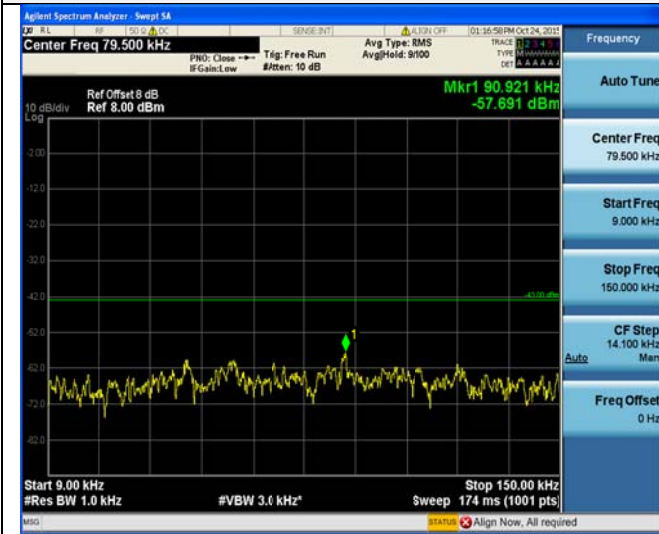

9KHz~150KHz

9KHz~150KHz

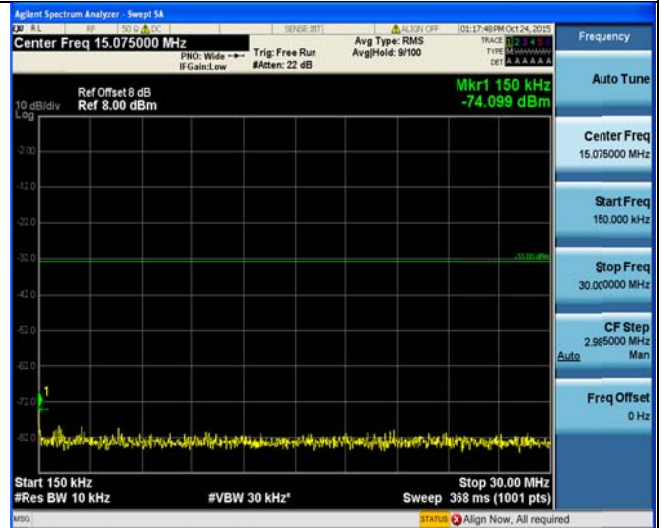

150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

1RB#0



1RB#0

LTE FDD Band 4-15MHz Channel Bandwidth

Middle Channel



QPSK

16QAM

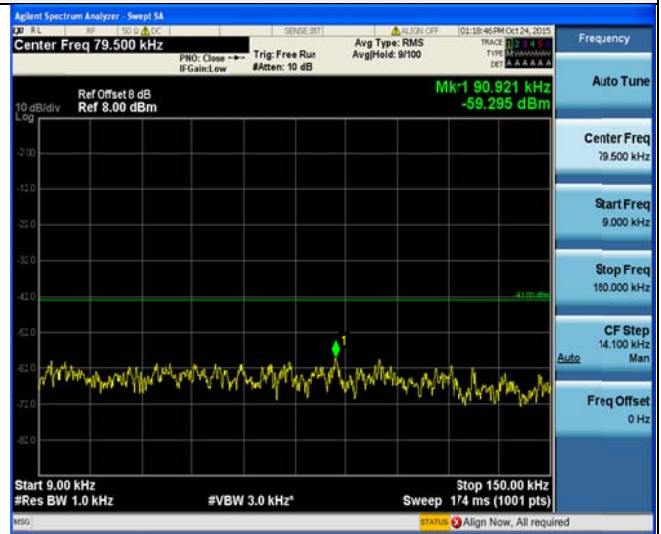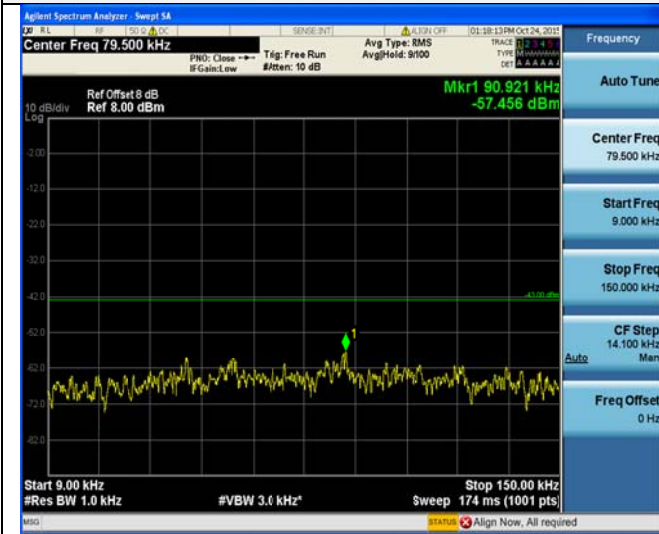

9KHz~150KHz

9KHz~150KHz

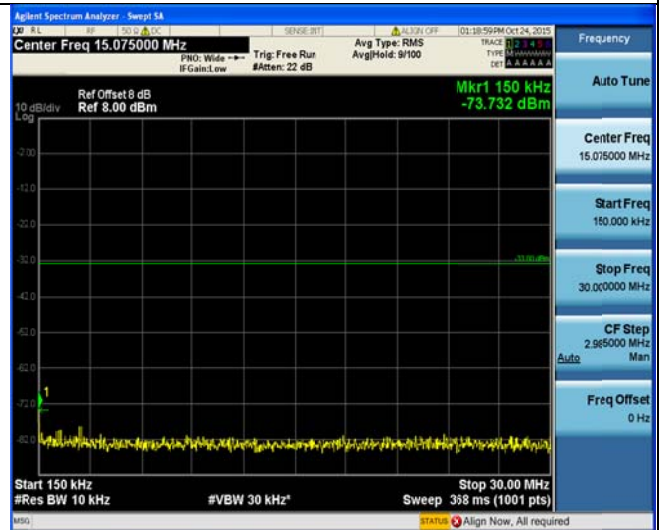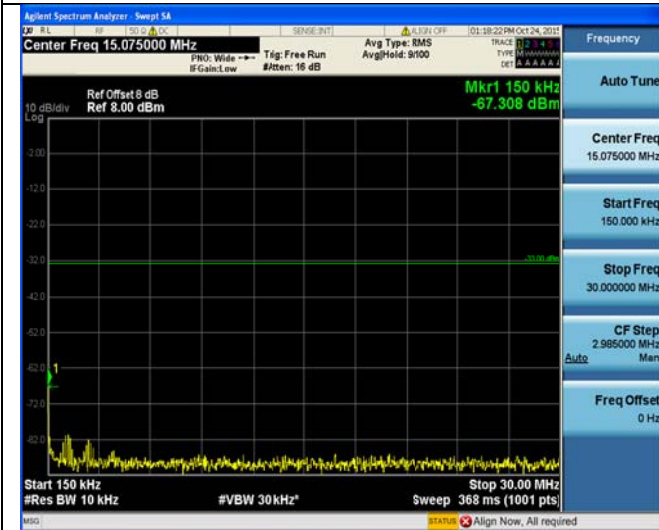

150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz

1RB#0

1RB#0





LTE FDD Band 4-15MHz Channel Bandwidth

High Channel

QPSK

16QAM

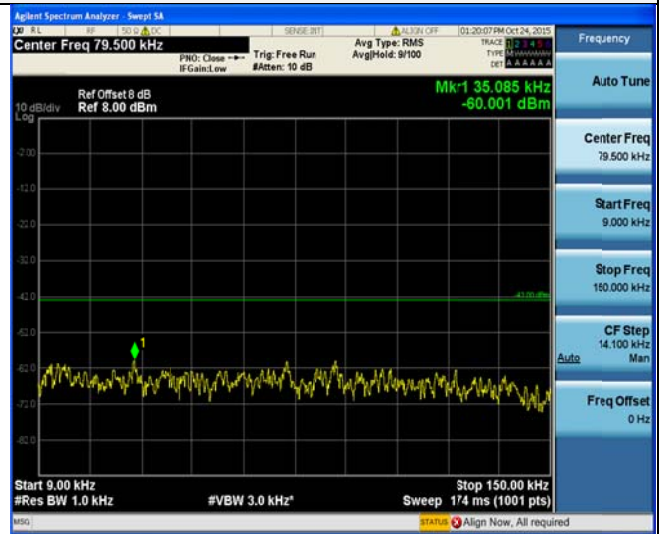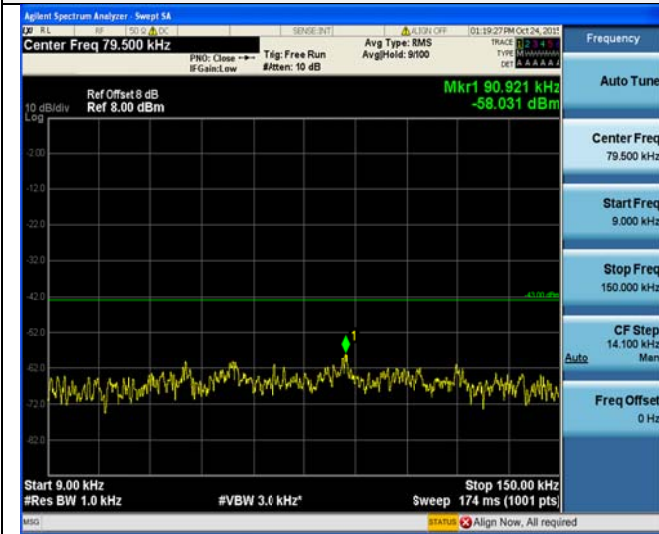

9KHz~150KHz

9KHz~150KHz



150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz



1RB#0

1RB#0

LTE FDD Band 4-20MHz Channel Bandwidth  
Low Channel



QPSK

16QAM

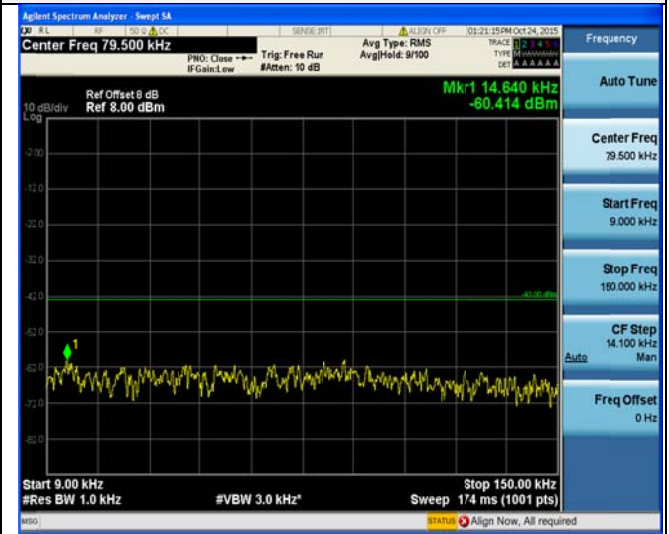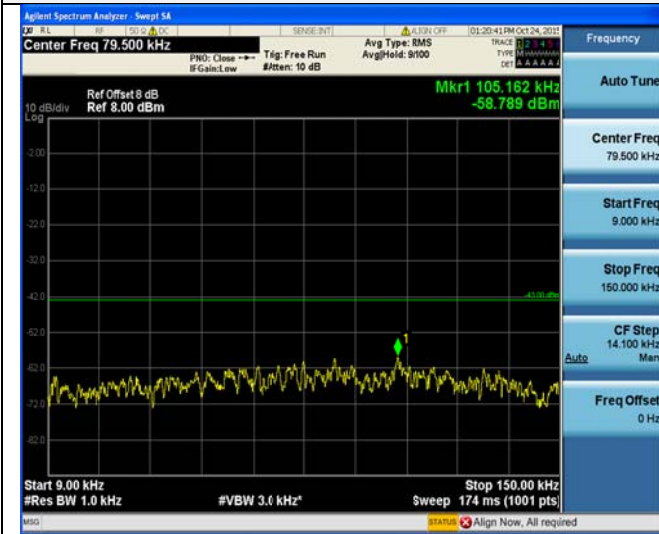

9KHz~150KHz

9KHz~150KHz

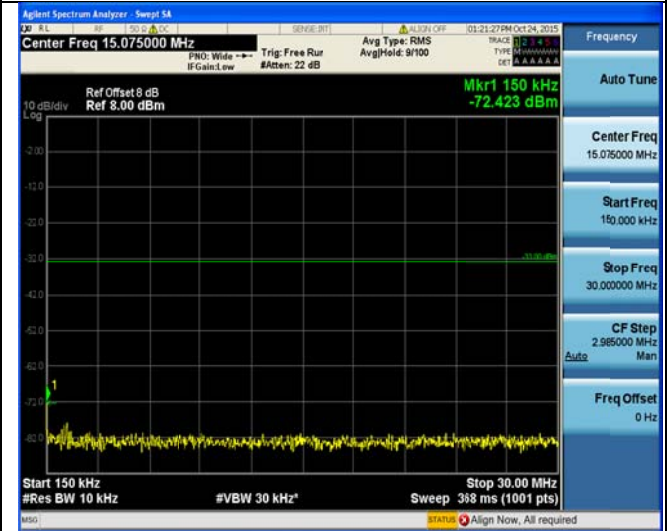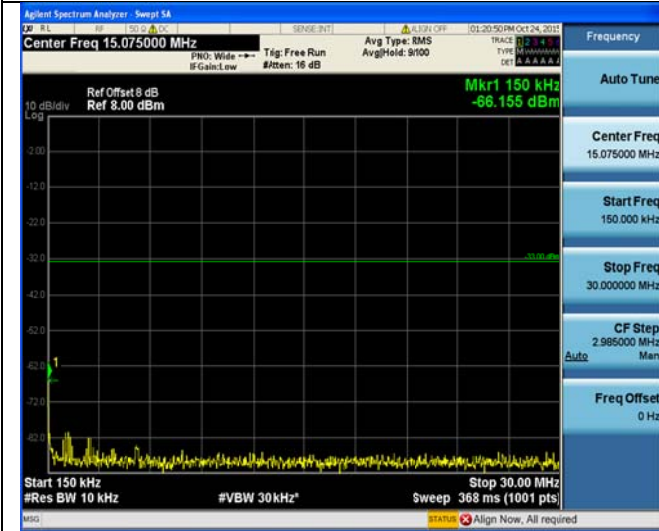

150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz  
1RB#0

30MHz~26.5GHz  
1RB#0




LTE FDD Band 4-20MHz Channel Bandwidth

Middle Channel



QPSK

16QAM

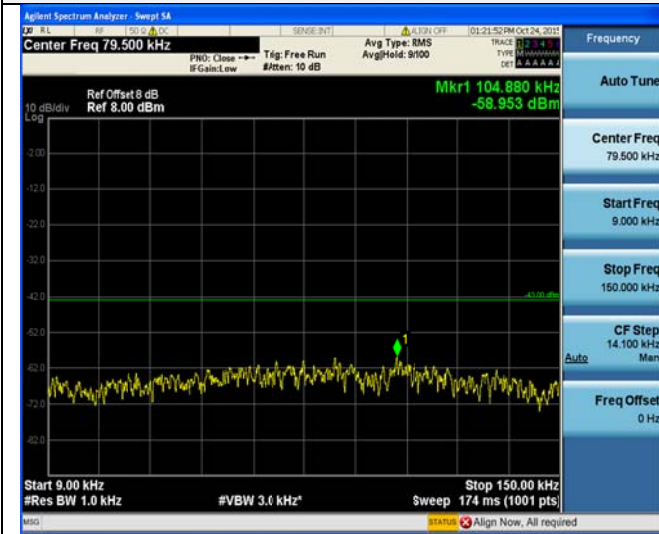

9KHz~150KHz

9KHz~150KHz

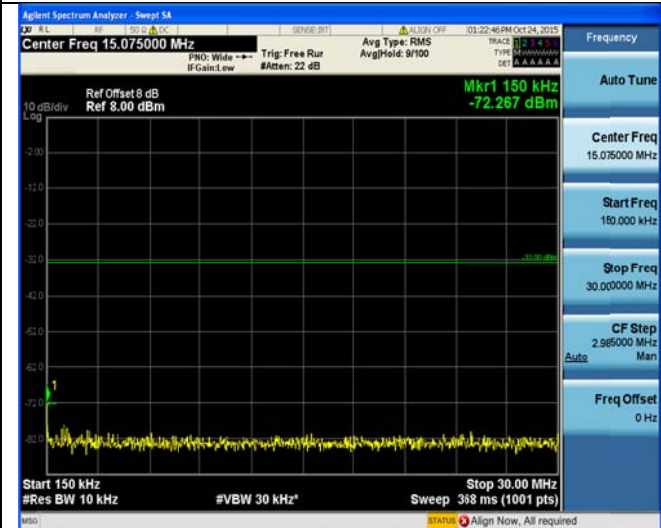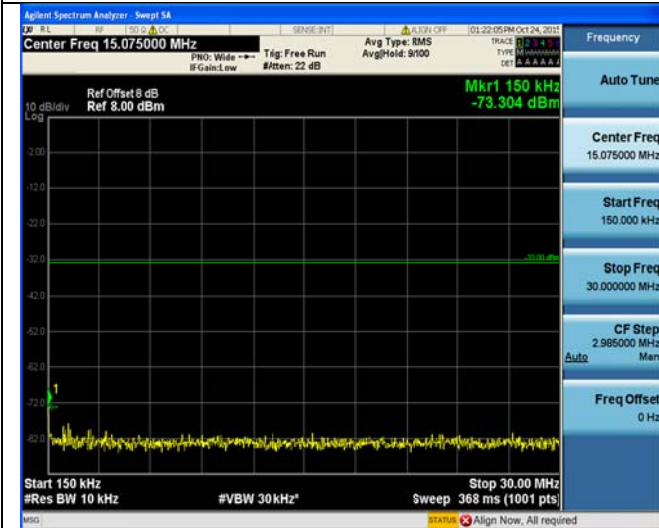

150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz

30MHz~26.5GHz


1RB#0

1RB#0

LTE FDD Band 4-20MHz Channel Bandwidth  
High Channel


QPSK

16QAM

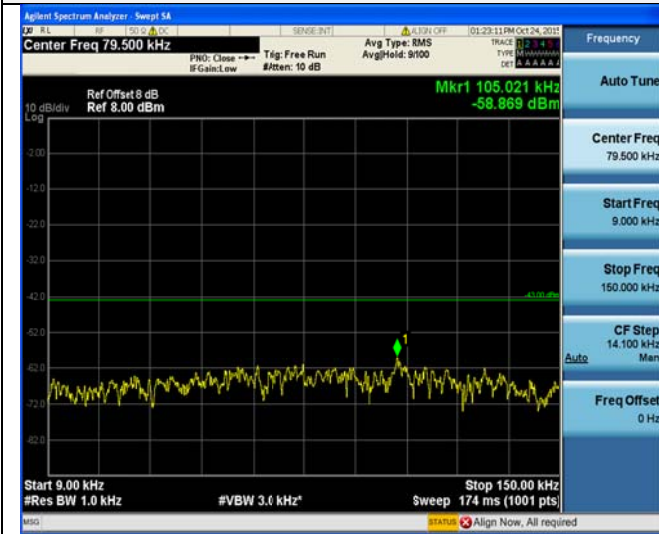

9KHz~150KHz

9KHz~150KHz

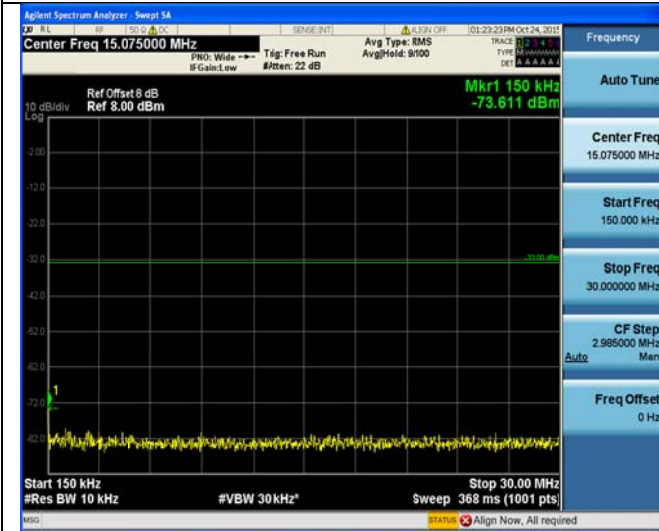

150KHz~30MHz

150KHz~30MHz



30MHz~26.5GHz  
1RB#0

30MHz~26.5GHz  
1RB#0




## 4.6 Radiated Spurious Emission

### LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

### TEST CONFIGURATION

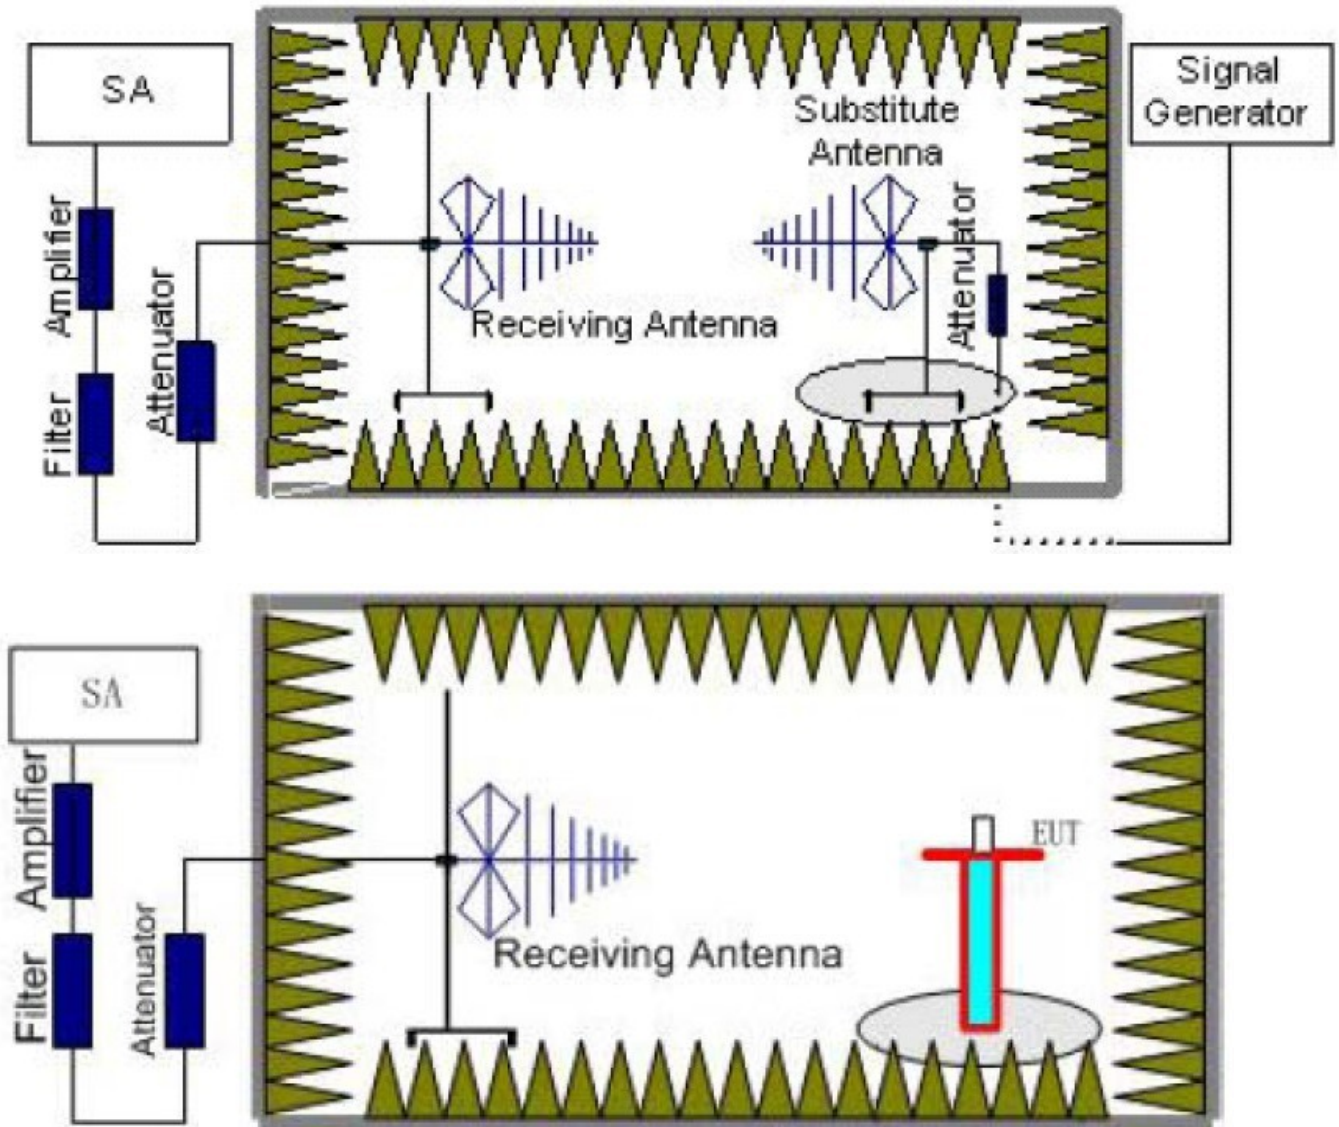

### TEST PROCEDURE

1. EUT was placed on a 0.80 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.80m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test. The measurement results are obtained as described below:  
Power(EIRP)= $P_{Mea} - P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP -2.15dBi.
8. In order to make sure test results more clearly, we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 4	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
18~20	1 MHz	3 MHz	2	

## TEST LIMITS

According to 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 4	Low	9KHz -20GHz	PASS
	Middle	9KHz -20GHz	PASS
	High	9KHz -20GHz	PASS

## Radiated Measurement:

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4. Margin = Limit - EIRP

LTE FDD Band 4\_Channel Bandwidth 1.4MHz\_QPSK\_Low Channel

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.4	-43.72	4.02	3	12.50	-35.24	-13	22.24	H
5132.1	-50.92	5.11	3	13.38	-42.65	-13	29.65	H
3421.4	-41.63	4.02	3	12.50	-33.15	-13	20.15	V
5132.1	-48.37	5.11	3	13.38	-40.10	-13	27.10	V



*LTE FDD Band 4\_Channel Bandwidth 1.4MHz\_QPSK\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-44.68	4.02	3	12.45	-36.25	-13	23.25	H
5197.5	-49.72	5.11	3	13.38	-41.45	-13	28.45	H
3465.0	-43.69	4.02	3	12.45	-35.26	-13	22.26	V
5197.5	-47.81	5.11	3	13.38	-39.54	-13	26.54	V

*LTE FDD Band 4\_Channel Bandwidth 1.4MHz\_QPSK\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3508.6	-43.87	4.02	3	12.21	-35.68	-13	22.68	H
5262.9	-50.60	5.11	3	13.26	-42.45	-13	29.45	H
3508.6	-40.77	4.02	3	12.21	-32.58	-13	19.58	V
5262.9	-49.60	5.11	3	13.26	-41.45	-13	28.45	V

*LTE FDD Band 4\_Channel Bandwidth 3MHz\_QPSK\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.0	-44.77	4.02	3	12.21	-36.58	-13	23.58	H
5134.5	-51.56	5.11	3	13.26	-43.41	-13	30.41	H
3423.0	-41.44	4.02	3	12.21	-33.25	-13	20.25	V
5134.5	-49.63	5.11	3	13.26	-41.48	-13	28.48	V

*LTE FDD Band 4\_Channel Bandwidth 3MHz\_QPSK\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-43.69	4.02	3	12.45	-35.26	-13	22.26	H
5197.5	-50.68	5.11	3	13.38	-42.41	-13	29.41	H
3465.0	-41.64	4.02	3	12.45	-33.21	-13	20.21	V
5197.5	-48.49	5.11	3	13.38	-40.22	-13	27.22	V

*LTE FDD Band 4\_Channel Bandwidth 3MHz\_QPSK\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3507.0	-44.67	4.02	3	12.21	-36.48	-13	23.48	H
5260.5	-51.80	5.11	3	13.26	-43.65	-13	30.65	H
3507.0	-43.31	4.02	3	12.21	-35.12	-13	22.12	V
5260.5	-50.72	5.11	3	13.26	-42.57	-13	29.57	V

*LTE FDD Band 4\_Channel Bandwidth 5MHz\_QPSK\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3425.0	-43.60	4.02	3	12.50	-35.12	-13	22.12	H
5137.5	-53.05	5.11	3	13.38	-44.78	-13	31.78	H
3425.0	-42.74	4.02	3	12.50	-34.26	-13	21.26	V
5137.5	-52.17	5.11	3	13.38	-43.90	-13	30.90	V

*LTE FDD Band 4\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-45.21	4.02	3	12.45	-36.78	-13	23.78	H
5197.5	-53.51	5.11	3	13.38	-45.24	-13	32.24	H
3465.0	-42.64	4.02	3	12.45	-34.21	-13	21.21	V
5197.5	-49.83	5.11	3	13.38	-41.56	-13	28.56	V

*LTE FDD Band 4\_Channel Bandwidth 5MHz\_QPSK\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3505.0	-45.84	4.02	3	12.21	-37.65	-13	24.65	H
5257.5	-52.26	5.11	3	13.26	-44.11	-13	31.11	H
3505.0	-41.85	4.02	3	12.21	-33.66	-13	20.66	V
5257.5	-49.85	5.11	3	13.26	-41.70	-13	28.70	V

*LTE FDD Band 4\_Channel Bandwidth 10MHz\_QPSK\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3430.0	-46.32	4.02	3	12.50	-37.84	-13	24.84	H
5145.0	-51.79	5.11	3	13.38	-43.52	-13	30.52	H
3430.0	-42.63	4.02	3	12.50	-34.15	-13	21.15	V
5145.0	-49.50	5.11	3	13.38	-41.23	-13	28.23	V

*LTE FDD Band 4\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-45.30	4.02	3	12.45	-36.87	-13	23.87	H
5197.5	-52.42	5.11	3	13.38	-44.15	-13	31.15	H
3465.0	-43.79	4.02	3	12.45	-35.36	-13	22.36	V
5197.5	-48.39	5.11	3	13.38	-40.12	-13	27.12	V

*LTE FDD Band 4\_Channel Bandwidth 10MHz\_QPSK\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3500.0	-43.89	4.02	3	12.50	-35.41	-13	22.41	H
5250.0	-51.93	5.11	3	13.38	-43.66	-13	30.66	H
3500.0	-39.89	4.02	3	12.50	-31.41	-13	18.41	V
5250.0	-48.79	5.11	3	13.38	-40.52	-13	27.52	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_QPSK\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3435.0	-42.63	4.02	3	12.50	-34.15	-13	21.15	H
5152.5	-50.45	5.11	3	13.38	-42.18	-13	29.18	H
3435.0	-38.71	4.02	3	12.50	-30.23	-13	17.23	V
5152.5	-49.01	5.11	3	13.38	-40.74	-13	27.74	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_QPSK\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-43.69	4.02	3	12.45	-35.26	-13	22.26	H
5197.5	-49.75	5.11	3	13.38	-41.48	-13	28.48	H
3465.0	-41.12	4.02	3	12.45	-32.69	-13	19.69	V
5197.5	-49.71	5.11	3	13.38	-41.44	-13	28.44	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_QPSK\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3495.0	-44.17	4.02	3	12.50	-35.69	-13	22.69	H
5242.5	-50.57	5.11	3	13.38	-42.30	-13	29.30	H
3495.0	-41.89	4.02	3	12.50	-33.41	-13	20.41	V
5242.5	-47.88	5.11	3	13.38	-39.61	-13	26.61	V



*LTE FDD Band 4\_Channel Bandwidth 20MHz\_QPSK\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3440.0	-43.14	4.02	3	12.50	-34.66	-13	21.66	H
5160.0	-52.42	5.11	3	13.38	-44.15	-13	31.15	H
3440.0	-40.78	4.02	3	12.50	-32.30	-13	19.30	V
5160.0	-48.79	5.11	3	13.38	-40.52	-13	27.52	V

*LTE FDD Band 4\_Channel Bandwidth 20MHz\_QPSK\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-43.82	4.02	3	12.45	-35.39	-13	22.39	H
5197.5	-51.79	5.11	3	13.38	-43.52	-13	30.52	H
3465.0	-39.85	4.02	3	12.45	-31.42	-13	18.42	V
5197.5	-47.89	5.11	3	13.38	-39.62	-13	26.62	V

*LTE FDD Band 4\_Channel Bandwidth 20MHz\_QPSK\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.0	-43.00	4.02	3	12.50	-34.52	-13	21.52	H
5235.0	-52.01	5.11	3	13.38	-43.74	-13	30.74	H
3490.0	-39.69	4.02	3	12.50	-31.21	-13	18.21	V
5235.0	-48.64	5.11	3	13.38	-40.37	-13	27.37	V

*LTE FDD Band 4\_Channel Bandwidth 1.4MHz\_16QAM\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3421.4	-47.13	4.02	3	12.50	-38.65	-13	25.65	H
5132.1	-53.38	5.11	3	13.38	-45.11	-13	32.11	H
3421.4	-43.74	4.02	3	12.50	-35.26	-13	22.26	V
5132.1	-52.01	5.11	3	13.38	-43.74	-13	30.74	V

*LTE FDD Band 4\_Channel Bandwidth 1.4MHz\_16QAM\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-46.84	4.02	3	12.45	-38.41	-13	25.41	H
5197.5	-53.53	5.11	3	13.38	-45.26	-13	32.26	H
3465.0	-44.12	4.02	3	12.45	-35.69	-13	22.69	V
5197.5	-52.42	5.11	3	13.38	-44.15	-13	31.15	V

*LTE FDD Band 4\_Channel Bandwidth 1.4MHz\_16QAM\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3508.6	-46.63	4.02	3	12.21	-38.44	-13	25.44	H
5262.9	-53.41	5.11	3	13.26	-45.26	-13	32.26	H
3508.6	-44.44	4.02	3	12.21	-36.25	-13	23.25	V
5262.9	-52.26	5.11	3	13.26	-44.11	-13	31.11	V

*LTE FDD Band 4\_Channel Bandwidth 3MHz\_16QAM\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.0	-46.06	4.02	3	12.50	-37.58	-13	24.58	H
5134.5	-54.56	5.11	3	13.38	-46.29	-13	33.29	H
3423.0	-43.89	4.02	3	12.50	-35.41	-13	22.41	V
5134.5	-52.22	5.11	3	13.38	-43.95	-13	30.95	V

*LTE FDD Band 4\_Channel Bandwidth 3MHz\_16QAM\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-45.39	4.02	3	12.45	-36.96	-13	23.96	H
5197.5	-53.11	5.11	3	13.38	-44.84	-13	31.84	H
3465.0	-45.69	4.02	3	12.45	-37.26	-13	24.26	V
5197.5	-52.70	5.11	3	13.38	-44.43	-13	31.43	V

*LTE FDD Band 4\_Channel Bandwidth 3MHz\_16QAM\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3507.0	-45.74	4.02	3	12.21	-37.55	-13	24.55	H
5260.5	-53.47	5.11	3	13.26	-45.32	-13	32.32	H
3507.0	-44.60	4.02	3	12.21	-36.41	-13	23.41	V
5260.5	-53.63	5.11	3	13.26	-45.48	-13	32.48	V

*LTE FDD Band 4\_Channel Bandwidth 5MHz\_16QAM\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3425.0	-47.07	4.02	3.00	12.50	-38.59	-13	25.59	H
5137.5	-53.60	5.11	3.00	13.38	-45.33	-13	32.33	H
3425.0	-44.89	4.02	3.00	12.50	-36.41	-13	23.41	V
5137.5	-52.84	5.11	3.00	13.38	-44.57	-13	31.57	V

*LTE FDD Band 4\_Channel Bandwidth 5MHz\_16QAM\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-45.98	4.02	3	12.45	-37.55	-13	24.55	H
5197.5	-52.60	5.11	3	13.38	-44.33	-13	31.33	H
3465.0	-45.84	4.02	3	12.45	-37.41	-13	24.41	V
5197.5	-52.53	5.11	3	13.38	-44.26	-13	31.26	V

*LTE FDD Band 4\_Channel Bandwidth 5MHz\_16QAM\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3505.0	-46.67	4.02	3	12.21	-38.48	-13	25.48	H
5257.5	-54.51	5.11	3	13.26	-46.36	-13	33.36	H
3505.0	-45.78	4.02	3	12.21	-37.59	-13	24.59	V
5257.5	-52.59	5.11	3	13.26	-44.44	-13	31.44	V

*LTE FDD Band 4\_Channel Bandwidth 10MHz\_16QAM\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3430.0	-47.07	4.02	3	12.50	-38.59	-13	25.59	H
5145.0	-54.71	5.11	3	13.38	-46.44	-13	33.44	H
3430.0	-43.74	4.02	3	12.50	-35.26	-13	22.26	V
5145.0	-53.56	5.11	3	13.38	-45.29	-13	32.29	V

*LTE FDD Band 4\_Channel Bandwidth 10MHz\_16QAM\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-45.92	4.02	3.00	12.45	-37.49	-13	24.49	H
5197.5	-53.53	5.11	3.00	13.38	-45.26	-13	32.26	H
3465.0	-43.72	4.02	3.00	12.45	-35.29	-13	22.29	V
5197.5	-51.41	5.11	3.00	13.38	-43.14	-13	30.14	V



*LTE FDD Band 4\_Channel Bandwidth 10MHz\_16QAM\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3500.0	-47.04	4.02	3	12.50	-38.56	-13	25.56	H
5250.0	-54.68	5.11	3	13.38	-46.41	-13	33.41	H
3500.0	-45.77	4.02	3	12.50	-37.29	-13	24.29	V
5250.0	-53.68	5.11	3	13.38	-45.41	-13	32.41	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_16QAM\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3435.0	-46.81	4.02	3.00	12.50	-38.33	-13	25.33	H
5152.5	-54.54	5.11	3.00	13.38	-46.27	-13	33.27	H
3435.0	-45.94	4.02	3.00	12.50	-37.46	-13	24.46	V
5152.5	-51.84	5.11	3.00	13.38	-43.57	-13	30.57	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_16QAM\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.08	4.02	3	12.45	-39.65	-13	26.65	H
5197.5	-55.39	5.11	3	13.38	-47.12	-13	34.12	H
3465.0	-44.61	4.02	3	12.45	-36.18	-13	23.18	V
5197.5	-50.89	5.11	3	13.38	-42.62	-13	29.62	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_16QAM\_High Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3495.0	-46.02	4.02	3	12.50	-37.54	-13	24.54	H
5242.5	-55.23	5.11	3	13.38	-46.96	-13	33.96	H
3495.0	-43.58	4.02	3	12.50	-35.10	-13	22.10	V
5242.5	-48.81	5.11	3	13.38	-40.54	-13	27.54	V

*LTE FDD Band 4\_Channel Bandwidth 20MHz\_16QAM\_Low Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3440.0	-47.07	4.02	3	12.50	-38.59	-13	25.59	H
5160.0	-54.68	5.11	3	13.38	-46.41	-13	33.41	H
3440.0	-44.77	4.02	3	12.50	-36.29	-13	23.29	V
5160.0	-50.75	5.11	3	13.38	-42.48	-13	29.48	V

*LTE FDD Band 4\_Channel Bandwidth 20MHz\_16QAM\_Middle Channel*

Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3465.0	-48.08	4.02	3	12.45	-39.65	-13	26.65	H
5197.5	-53.39	5.11	3	13.38	-45.12	-13	32.12	H
3465.0	-44.76	4.02	3	12.45	-36.33	-13	23.33	V
5197.5	-50.45	5.11	3	13.38	-42.18	-13	29.18	V

*LTE FDD Band 4\_Channel Bandwidth 20MHz\_16QAM\_High Channel*


Frequency (MHz)	PMea (dBm)	Pcl (dB)	Diatance	Ga Antenna Gain(dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3490.0	-45.71	4.02	3	12.50	-37.23	-13	24.23	H
5235.0	-54.72	5.11	3	13.38	-46.45	-13	33.45	H
3490.0	-44.77	4.02	3	12.50	-36.29	-13	23.29	V
5235.0	-51.48	5.11	3	13.38	-43.21	-13	30.21	V

## 4.7 Frequency Stability under Temperature & Voltage Variations

### LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

### TEST CONFIGURATION

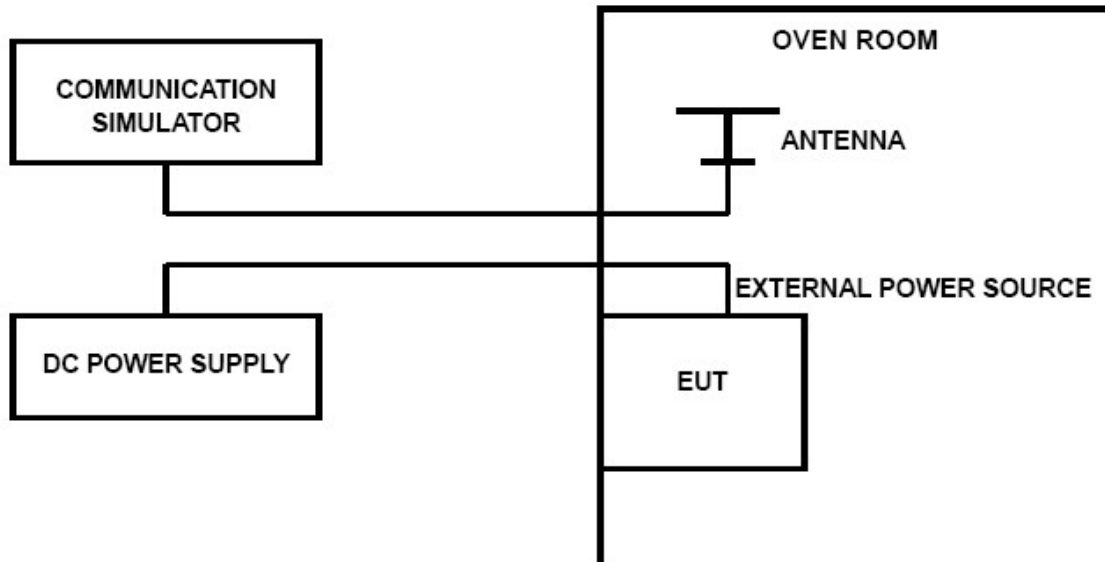

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

#### **Frequency Stability Under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.

**TEST RESULTS**

Remark:

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case.

LTE Band 4, 1.4MHz bandwidth (worst case of all bandwidths)

***Frequency Error vs Voltage***

Voltage (V)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
3.50	-6.59	-5.82	-0.003804	-0.003359	2.50
3.80	-5.14	-6.29	-0.002967	-0.003631	2.50
4.20	6.29	5.41	0.003631	0.003123	2.50

***Frequency Error vs Temperature***

Temperature (°C)	Frequency error (Hz)		Frequency error (ppm)		Limit (ppm)
	QPSK	16QAM	QPSK	16QAM	
-30°	-6.25	5.48	-0.003608	0.003163	2.50
-20°	-5.48	-8.41	-0.003163	-0.004854	2.50
-10°	4.78	-6.25	0.002759	-0.003608	2.50
0°	-3.69	-9.14	-0.002130	-0.005276	2.50
10°	-6.59	8.55	-0.003804	0.004935	2.50
20°	-8.44	8.26	-0.004872	0.004768	2.50
30°	-7.66	-5.98	-0.004421	-0.003452	2.50
40°	-8.29	8.84	-0.004785	0.005102	2.50
50°	-5.20	6.26	-0.003001	0.003613	2.50



## **5 Test Setup Photos of the EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **6 External Photos of the EUT**

Please refer to separated files for External Photos of the EUT.

## **7 Internal Photos of the EUT**

Please refer to separated files for Internal Photos of the EUT.

\*\*\*\*\* **End of Report** \*\*\*\*\*