


## FCC PART 15 SUBPART C TEST REPORT

### FCC PART 15.247

**Report Reference No.**.....: **MWR150900703**

**FCC ID**.....: **RQQHLT-L50SPM**


Compiled by  
( position+printed name+signature)..: File administrators Martin Ao



Supervised by  
( position+printed name+signature)..: Test Engineer Yuchao Wang



Approved by  
( position+printed name+signature)..: Manager Dixon Hao



Date of issue.....: Sep 24, 2015

**Representative Laboratory Name** ..: **Maxwell International Co., Ltd.**

Address .....: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

**Testing Laboratory Name** .....: **CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.**

Address .....: Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China

**Applicant's name**.....: **HYUNDAI CORPORATION**

Address .....: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Test specification** .....

Standard .....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Maxwell International Co., Ltd.

**Maxwell International Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description** .....

Trade Mark .....: HYUNDAI

**Manufacturer**.....: **Sprocomm Technologies CO.,Ltd.**

Model/Type reference.....: L445

Listed Models .....: N/A

Modulation Type.....: GFSK,8DPSK, $\pi$ /4DQPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating .....: DC 3.80V

Hardware version .....: FA1611 Ver.B

Software version .....: HYUNDAI\_L565\_V4.0.3

Result.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b>	<b>MWR150900703</b>	Sep. 24, 2015
		Date of issue

Equipment under Test : Mobile Phone

Model /Type : L565

Listed Models : N/A

**Applicant** : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Manufacturer** : **Sprocomm Technologies CO.,Ltd.**

Address : 5D-506 F1.6 Block, Tianfa Building, Tianan Chegongmiao Industrial Park, Futian Dist, Shenzhen, China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1</u></b>	<b><u>TEST STANDARDS.....</u></b>	<b><u>4</u></b>
<b><u>2</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>5</u></b>
2.1	General Remarks	5
2.2	Product Description	5
2.3	Equipment Under Test	6
2.4	Short description of the Equipment under Test (EUT)	6
2.5	EUT operation mode	6
2.6	Internal Identification of AE used during the test	7
2.7	Related Submittal(s) / Grant (s)	7
2.8	Modifications	7
<b><u>3</u></b>	<b><u>TEST ENVIRONMENT.....</u></b>	<b><u>8</u></b>
3.1	Address of the test laboratory	8
3.2	Test Facility	8
3.3	Environmental conditions	8
3.4	Test Conditions	8
3.5	Summary of measurement results	9
3.6	Equipments Used during the Test	10
<b><u>4</u></b>	<b><u>TEST CONDITIONS AND RESULTS.....</u></b>	<b><u>11</u></b>
4.1	AC Power Conducted Emission	11
4.2	Radiated Emission	13
4.3	Maximum Peak Output Power	22
4.4	20dB Bandwidth	23
4.5	Band Edge	27
4.6	Frequency Separation	39
4.7	Number of hopping frequency	41
4.8	Time of Occupancy (Dwell Time)	43
4.9	Spurious RF Conducted Emission	47
4.10	Pseudorandom Frequency Hopping Sequence	67
4.11	Antenna Requirement	68
<b><u>5</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>69</u></b>
<b><u>6</u></b>	<b><u>EXTERNAL PHOTOS OF THE EUT.....</u></b>	<b><u>69</u></b>
<b><u>7</u></b>	<b><u>INTERNAL PHOTOS OF THE EUT.....</u></b>	<b><u>69</u></b>

# **1 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2009](#): American National Standard for Testing Unlicensed Wireless Devices

## 2 SUMMARY

### 2.1 General Remarks

Date of receipt of test sample	:	Aug 27, 2015
Testing commenced on	:	Aug 28, 2015
Testing concluded on	:	Sep 24, 2015

### 2.2 Product Description

The **HYUNDAI CORPORATION**'s Model: L565 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	L565
Modulation Type	GMSK for GSM/GPRS, 8-PSK for EDGE, QPSK for UMTS, QPSK, 16QAM for LTE
Antenna Type	Internal
UMTS Operation Frequency Band	Device supported UMTS FDD Band II/IV/V
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
BT FCC Operation frequency	2402MHz-2480MHz
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
WCDMA Release Version	R99
LTE Release Version	R8
UMTS Operation Frequency Band	Device supported FDD band 2, FDD band 4, FDD band 7, FDD band 17
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
BT Modulation Type	GFSK,8DPSK, $\pi$ /4DQPSK(BT 3.0+EDR)
Hardware version	FA1611 Ver.B
Software version	HYUNDAI_L565_V4.0.3
Android version	Android 4.4.2
GPS function	Supported
WLAN	Supported 802.11b/802.11g/802.11n
Bluetooth	Supported BT 4.0/BT 3.0+EDR
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/EDGE/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
GSM Release Version	R99
GPRS/EDGE Multislot Class	GPRS/EDGE: Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.80VDC)
GPRS operation mode	Class B

## 2.3 Equipment Under Test

### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.80V

## 2.4 Short description of the Equipment under Test (EUT)

### 2.4.1 General Description

L565 is subscriber equipment in the WCDMA/GSM /LTE system. The HSPA/UMTS frequency band is Band II, Band IV and Band V, LTE frequency band is band 2.band 4, band 7,band 17; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II and Band V and GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS ,LTE and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

### 2.5 EUT operation mode

The EUT has been tested under typical operating condition. There are EDR (Enhanced Data Rate) and BDR (Basic Data Rate) mode.The Applicant provides communication tools software to control the EUT for staying in continous transmitting and receiving mode for testing. There are 79 channels of EUT, and the test carried out at the lowest channel, middle channel and highest channel .

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466

25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

## 2.6 Internal Identification of AE used during the test

AE ID*	Description
AE1	Charger

AE1

Model: L565

INPUT: AC100-240V 50/60Hz 0.3A Max

OUTPUT: DC 5.0V 1.0A

\*AE ID: is used to identify the test sample in the lab internally.

## 2.7 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-L50SPM** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.8 Modifications

No modifications were implemented to meet testing criteria.

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

**CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.**

Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China  
The sites are constructed in conformance with the requirements of ANSI C63.4 (2003) and CISPR Publication 22.

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

##### **FCC-Registration No.: 406086**

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

#### 3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	<u>15-35 ° C</u>
Humidity:	<u>30-60 %</u>
Atmospheric pressure:	<u>950-1050mbar</u>

#### 3.4 Test Conditions

Test Case	Test Conditions	
	Configuration	Description
20dB Emission Bandwidth (EBW)	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch00, TM3_3DH5_Ch39, TM3_3DH5_Ch78,
Carrier Frequency Separation	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,
Number of Hopping Channel	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Hop, TM3_3DH5_Hop,
Time of Occupancy (Dwell Time)	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch39, TM3_3DH5_Ch39.
Maximum Peak Conducted Output Power	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00, TM1_DH3_Ch39, TM1_DH3_Ch78, TM2_2DH3_Ch00, TM2_2DH3_Ch39, TM2_2DH3_Ch78, TM3_3DH3_Ch00, TM3_3DH3_Ch39, TM3_3DH3_Ch78,
Bandedge spurious emission (Conducted)	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH3_Ch00, TM1_DH3_Ch78, TM3_3DH3_Ch00, TM3_3DH3_Ch78,
Conducted RF Spurious Emission	Meas. Method	ANSI C63.10:2009
	Test Environment	NTNV
	EUT Conf.	TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, TM3_3DH5_Ch39, TM3_3DH5_Ch78.
Radiated Emissions in the Restricted Bands	Meas. Method	ANSI C63.10:2009 30 MHz to 1 GHz: Pre: RBW=100kHz; VBW=300kHz; Det. = Peak. Final: RBW=120kHz; Det. = CISPR Quasi-Peak. 1 GHz to 26.5GHz:



		Average: RBW=1 MHz; VBW= 10Hz; Det. = Peak; Sweep-time= Auto; Trace = Single. Peak: RBW=1 MHz; VBW= 3 MHz; Det. = Peak; Sweep- time= Auto; Trace≥ MaxHold * 100.
	Test Environment	NTNV
	EUT Conf.	30 MHz-1GHz TM1_DH5_Ch00 (Worst Conf.). 1-18 GHz: TM1_DH5_Ch00, TM1_DH5_Ch39, TM1_DH5_Ch78, (Worst Conf.).

Test Case	Test Conditions	
	Configuration	Description
AC Power Line Conducted Emissions	Measurement Method	AC mains conducted.
	Test Environment	NTNV
	EUT Configuration	TM1_DH5_Ch39. (Worst Conf.).

**Note:**

- For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.
- For  $\pi/4$  QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

**3.5 Summary of measurement results**

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Not applicable for FHSS!
§15.247(a)(1)	Carrier Frequency separation	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Number of Hopping channels	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Middle	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(b)(1)	Maximum output power	GFSK $\pi/4$ DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK $\pi/4$ DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	Band edge compliance conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.205	Band edge compliance radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions conducted	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(d)	TX spurious emissions radiated	GFSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a)	TX spurious	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

	Emissions radiated < 30 MHz									
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

## Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report

### 3.6 Equipments Used during the Test


Description	Manufacturer	Model	Serial No.	Test Date	Due Date
EMI Test Receiver	R&S	ESIB26	A0304218	2015.06.02	2016.06.01
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2015.01.05	2016.01.04
Loop Antenna	Schwarzbeck	HFH2-Z2	100047	2015.06.02	2016.06.01
Bilog Antenna	Schwarzbeck	VULB 9163	9163-274	2015.06.02	2016.06.01
Bilog Antenna	Schwarzbeck	VULB 9163	9163-276	2015.06.02	2016.06.01
Double ridge horn antenna	R&S	HF960	100150	2015.06.02	2016.06.01
Double ridge horn antenna	R&S	HF960	100155	2015.06.02	2016.06.01
Ultra-wideband antenna	R&S	HL562	100089	2015.06.02	2016.06.01
Ultra-wideband antenna	R&S	HL562	100090	2015.06.02	2016.06.01
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902607	2015.06.02	2016.06.01
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902611	2015.06.02	2016.06.01
Amplifier 20M~3GHz	R&S	PAP-0203H	22018	2015.06.02	2016.06.01
Amplifier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2015.06.02	2016.06.01
Amplifier 18G~40GHz	R&S	JS42-18002600-28-5A	12111.0980.00	2015.06.02	2016.06.01
System Simulator	R&S	CMW500	A130101034	2015.06.010	2016.06.09
Signal Analyzer	Agilent	N9030A	MY49430428	2015.06.010	2016.06.09
Power Sensor	R&S	NRP-Z4	823.3618.03	2015.06.02	2016.06.01
Power Meter	R&S	NRVS	1020.1809.02	2015.06.02	2016.06.01
LISN	R&S	ESRV26	A0304221	2015.06.02	2016.06.01
EMI Test Receiver	R&S	ESCS	A0304260	2015.06.02	2016.06.01

The Cal.Interval was one year

## 4 TEST CONDITIONS AND RESULTS

### 4.1 AC Power Conducted Emission

#### TEST CONFIGURATION

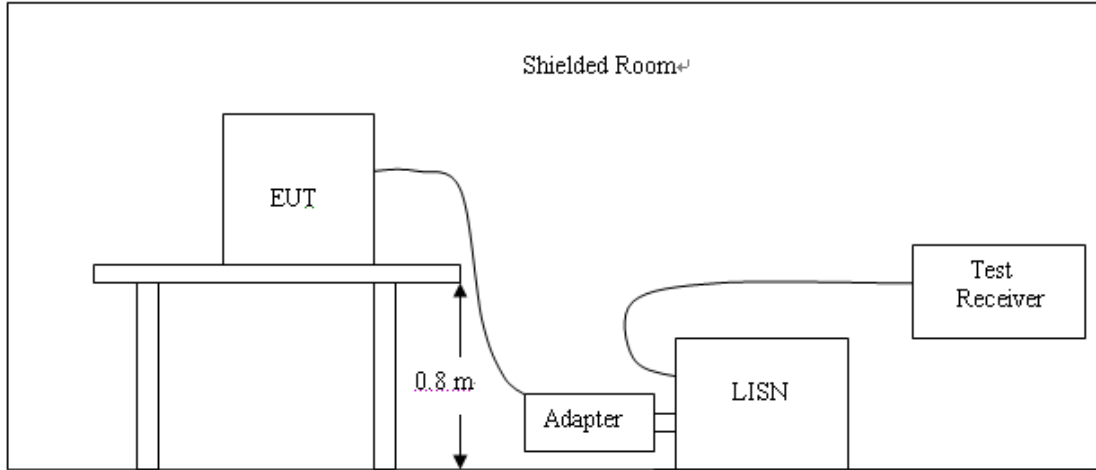

#### TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013;
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013;
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50


\* Decreasing linearly with the logarithm of the frequency

#### TEST RESULTS

*Note:* We tested Conducted Emission of GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 0.15 KHz to 30MHz (DH1, DH3 and DH5) and all channels (low, middle and high), recorded the worst case data at GFSK DH5 middle channel.


N

FCC ClassB Voltage Test

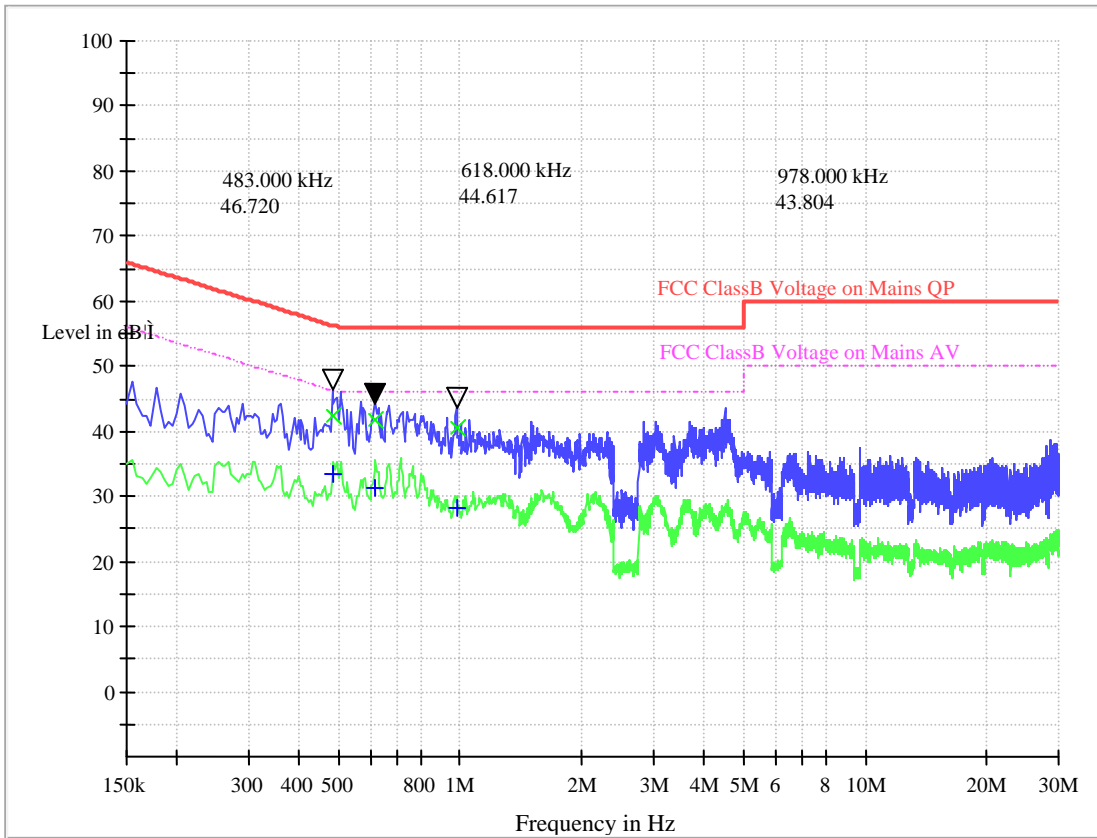




L

FCC ClassB Voltage Test

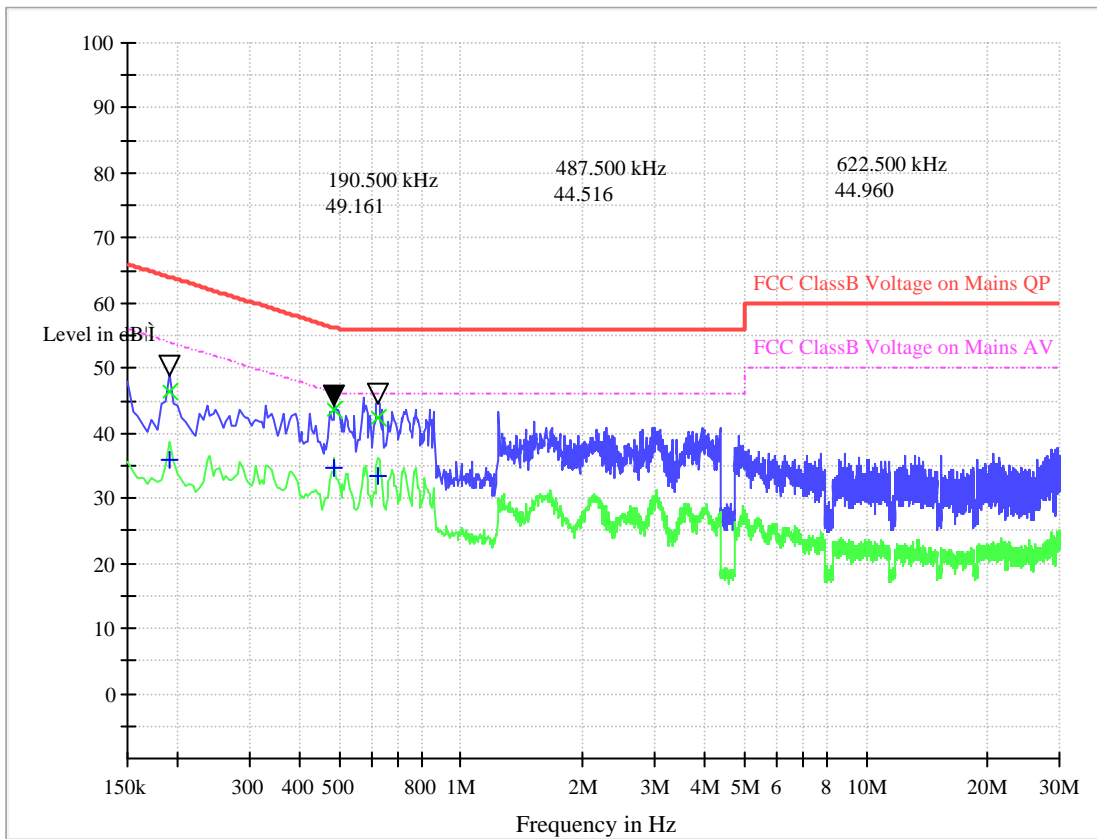

## 4.2 Radiated Emission

### TEST CONFIGURATION

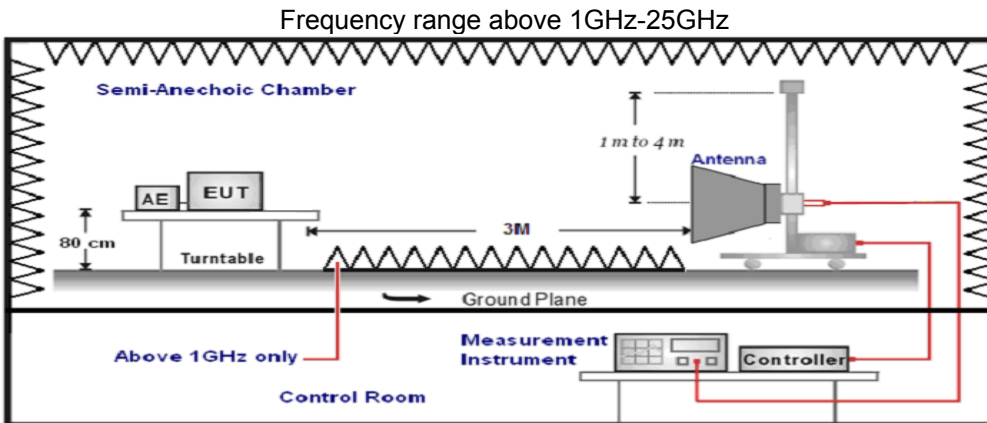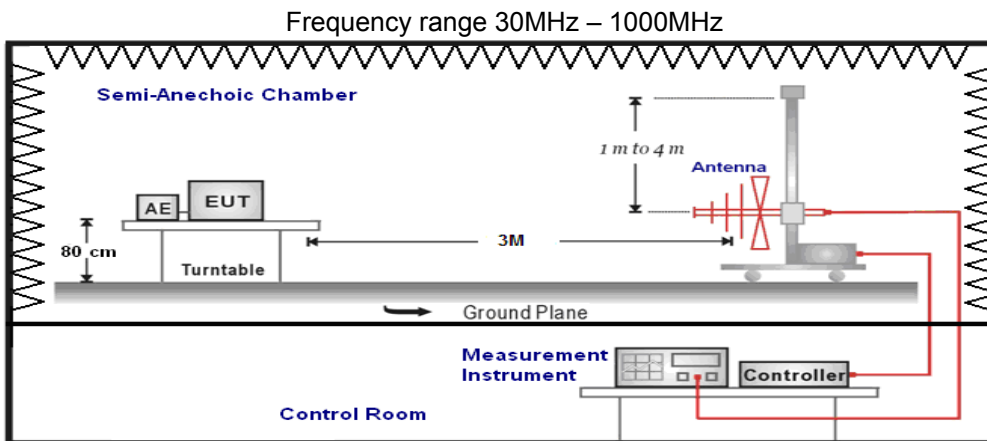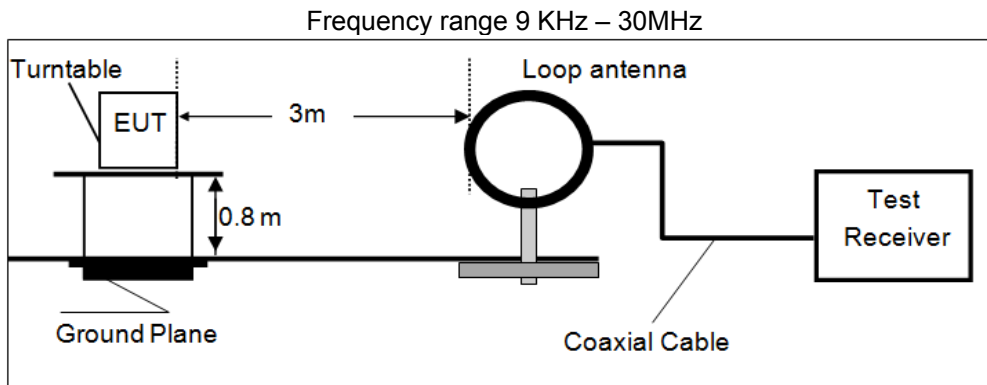

### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2480MHz. so radiated emission test frequency band from 9 KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

## 7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz, Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz, Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz, Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak (Receiver)
	Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Average (Receiver)

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Transd (dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009-0.49	300	$20\log(2400/F(\text{KHz}))+80$	$2400/F(\text{KHz})$
0.49-1.705	30	$20\log(24000/F(\text{KHz}))+40$	$24000/F(\text{KHz})$
1.705-30	30	$20\log(30)+40$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

**TEST RESULTS**



Remark:

- The radiated measurement are performed the each channel (low/mid/high) at all Packet type (DH1, DH3 and DH5) also for difference modulation type (GFSK, 8DPSK), recorded worst case at GFSK\_DH5\_Low channel (Channel 00) for below 1GHz and GFSK\_DH5\_Low channel (Channel 00), GFSK\_DH5\_Middle channel (Channel 39), GFSK\_DH5\_High channel (Channel 78).
- ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
- HORN ANTENNA for the radiation emission test above 1G.
- We tested both battery powered and powered by adapter charging mode at three orientate ones, recorded worst case at powered by adapter charging mode.
- “---” means not recorded as emission levels lower than limit.
- Margin= Limit - Level

**For 9KHz to 30MHz**

Frequency (MHz)	Corrected Reading (dB $\mu$ V/m)@3m	FCC Limit (dB $\mu$ V/m) @3m	Margin (dB)	Detector	Result
12.45	44.58	69.54	24.96	QP	PASS
24.41	41.65	69.54	27.89	QP	PASS


**For 30MHz to 1000MHz**

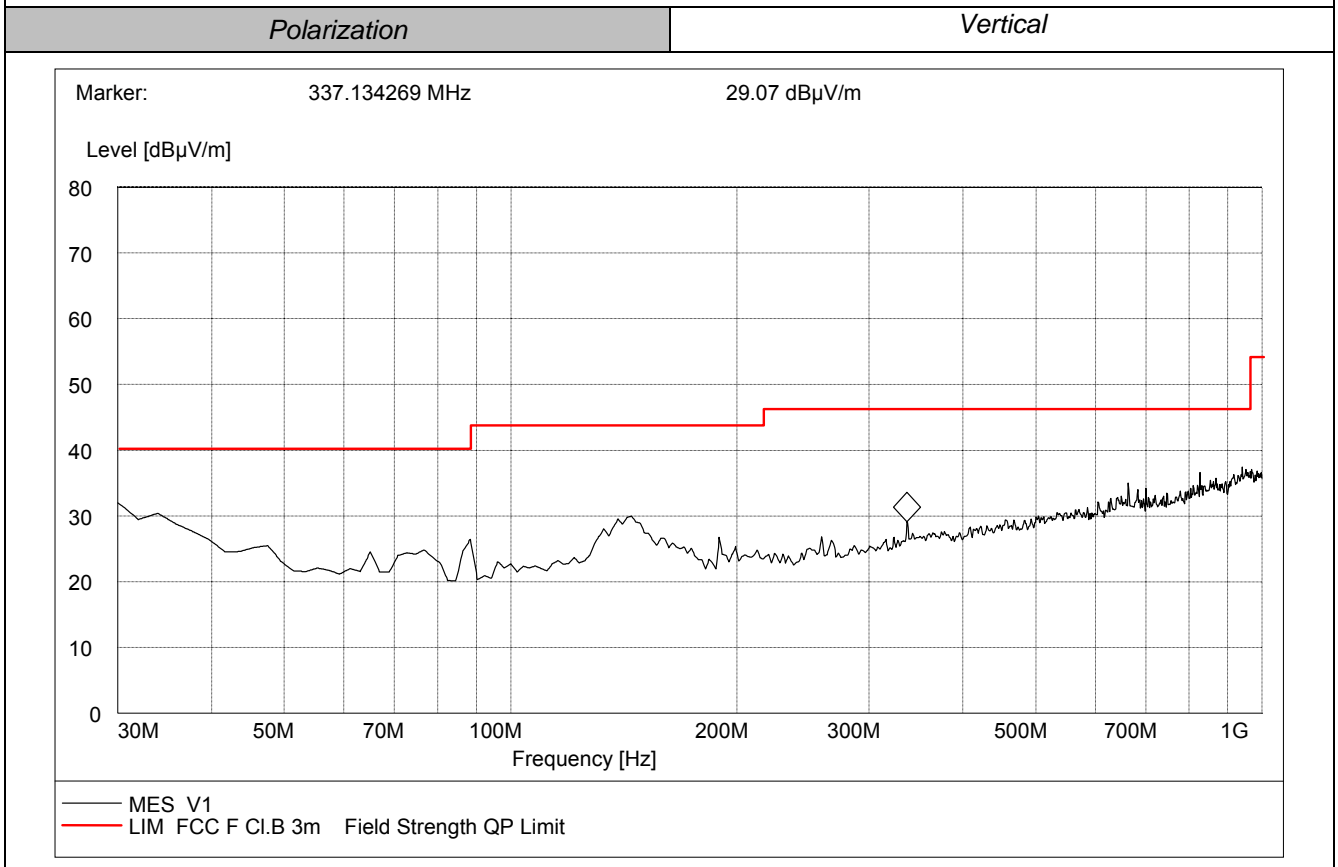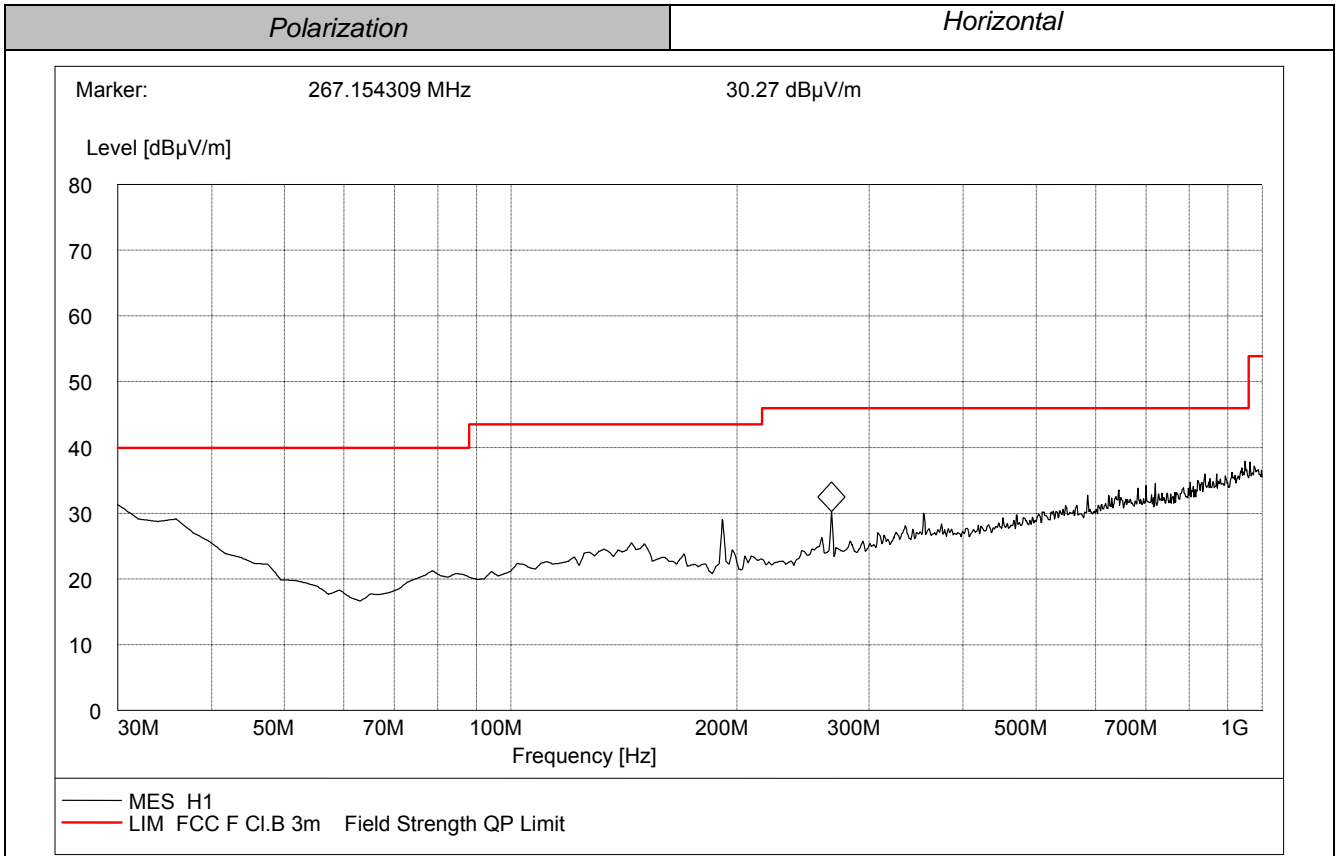


For 1GHz to 25GHz

Note: We tested GFSK Mode and 8DPSK, recorded the worst case at the GFSK (DH5) Mode.

Test mode:	Low Channel (GFSK)	Polarization	Horizontal
------------	--------------------	--------------	------------

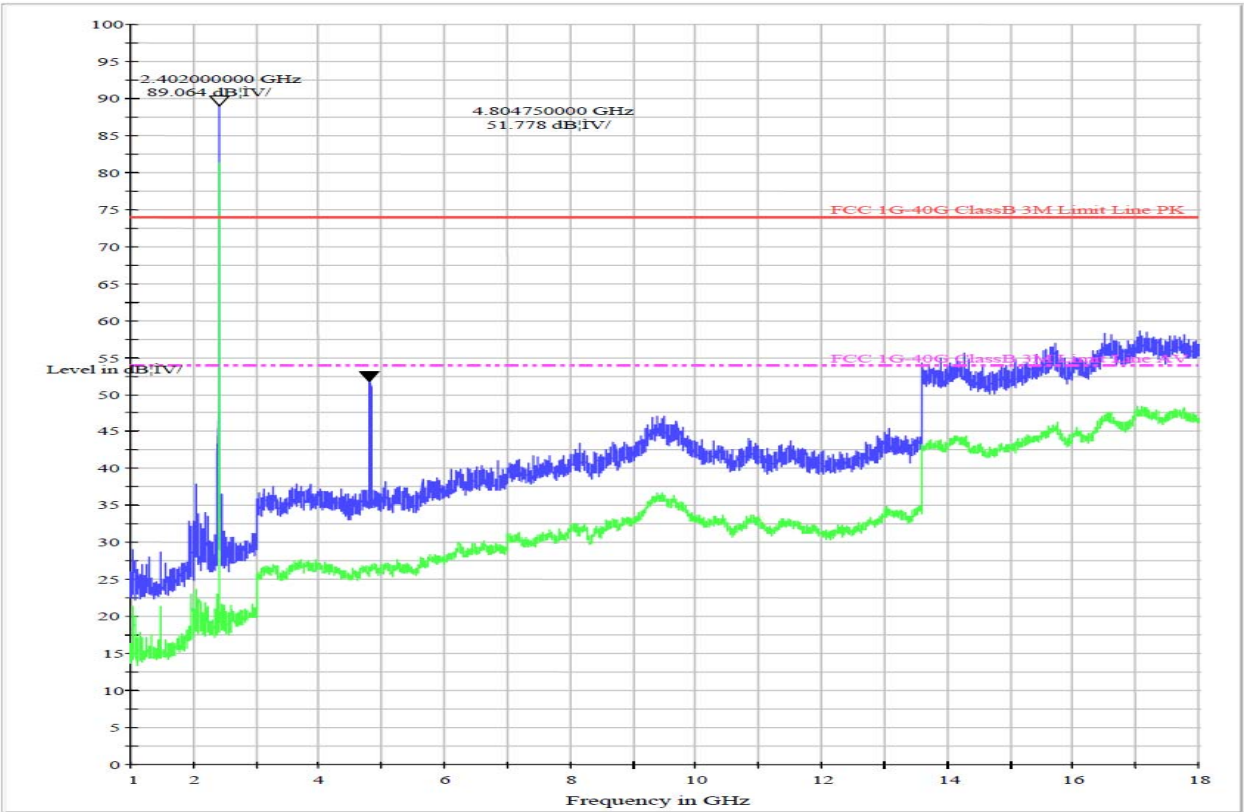

Test mode:	Low Channel (GFSK)	Polarization	Horizontal
------------	--------------------	--------------	------------

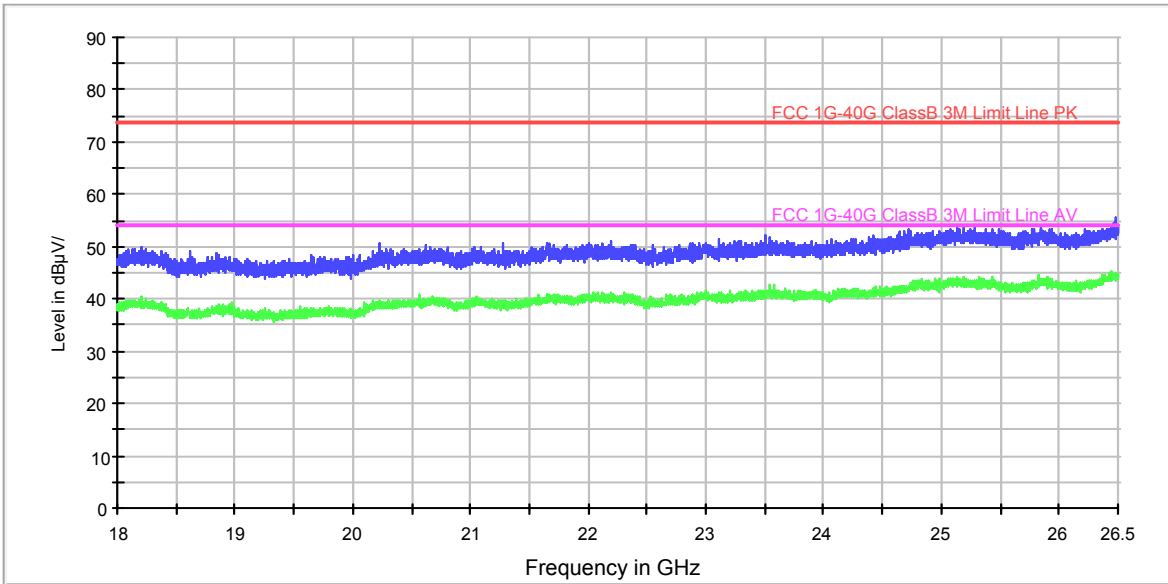




Test mode:

Low Channel (GFSK)

Polarization

Vertical

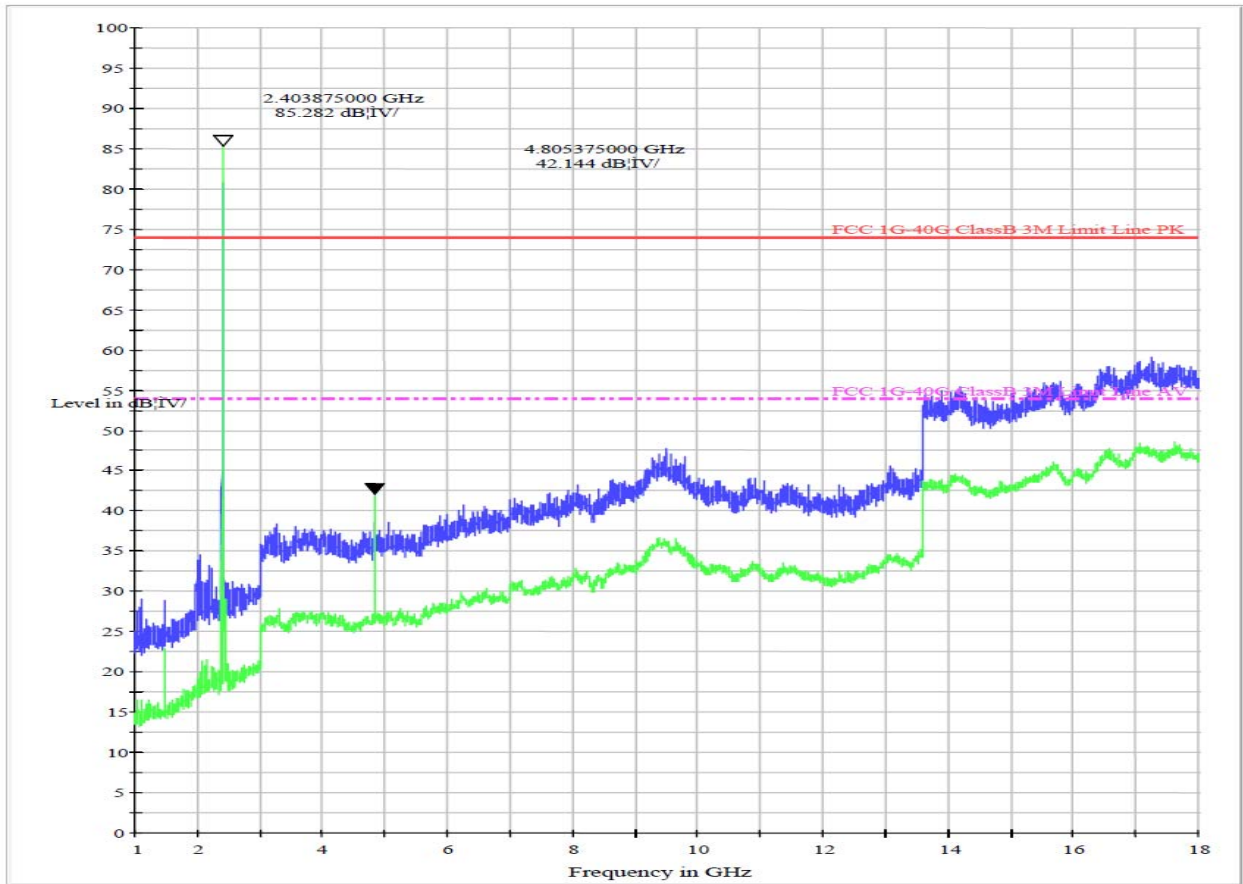


Test mode:

Low Channel (GFSK)

Polarization

Vertical

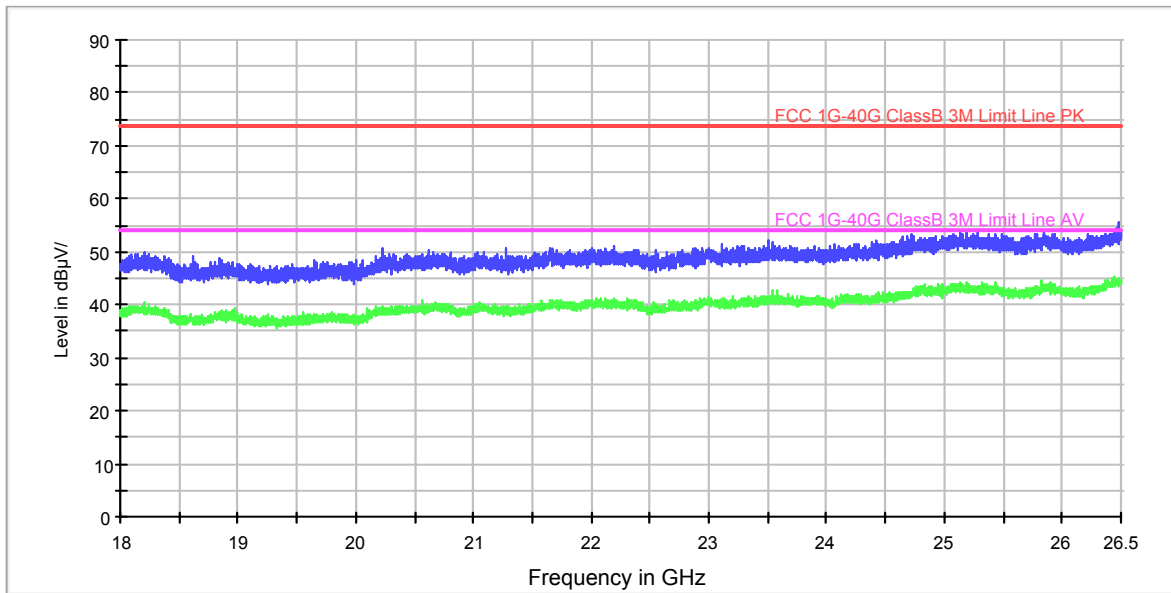


Test mode:

Mid Channel (GFSK)

Polarization

Horizontal

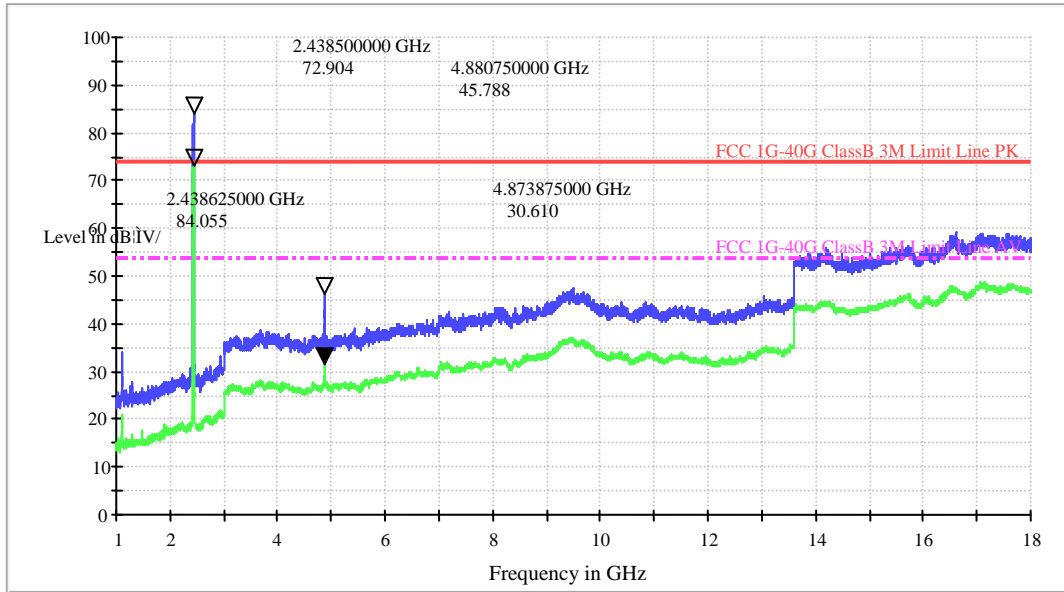


Test mode:

Mid Channel (GFSK)

Polarization

Horizontal

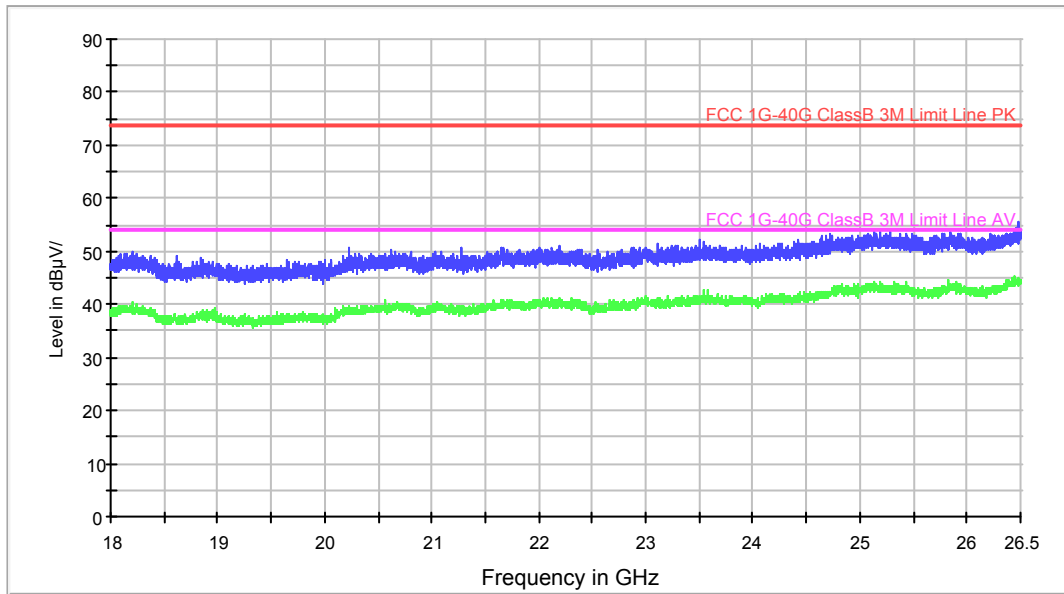


Test mode:

Mid Channel (GFSK)

Polarization

Vertical

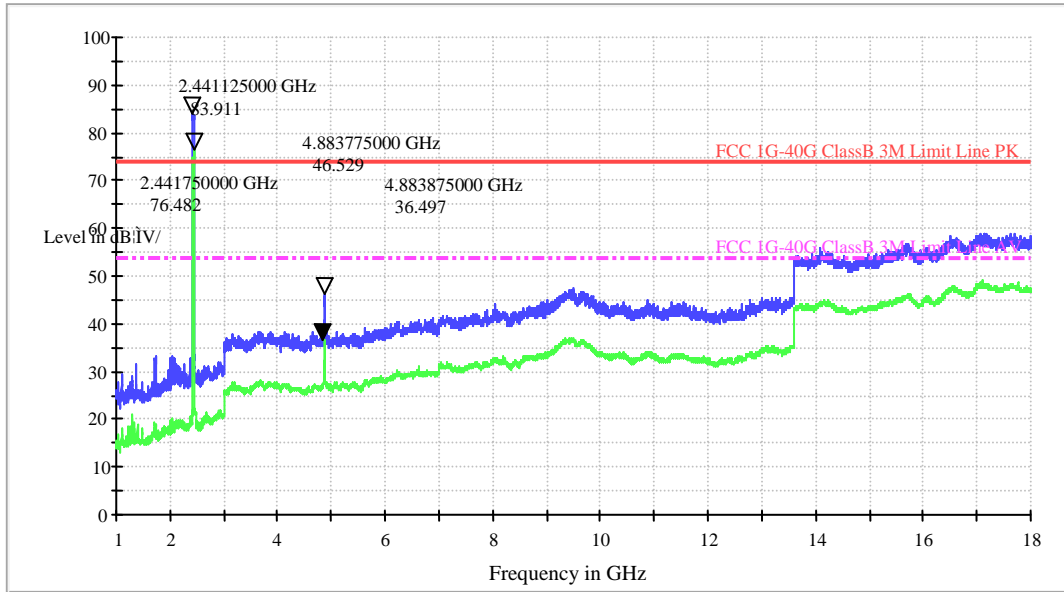


Test mode:

Mid Channel (GFSK)

Polarization

Vertical

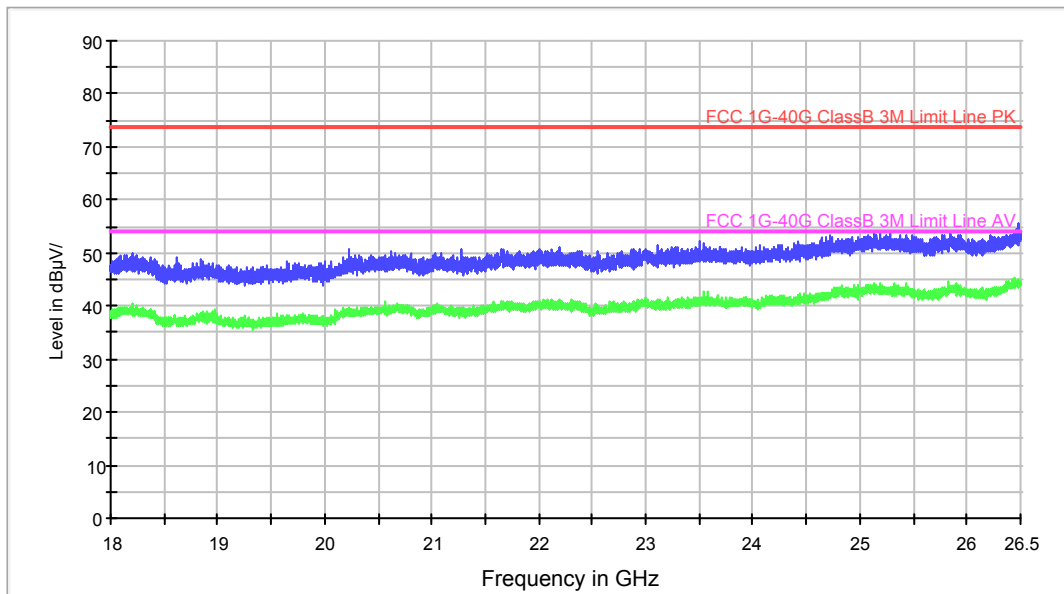


Test mode:

High Channel(GFSK)

Polarization

Horizontal

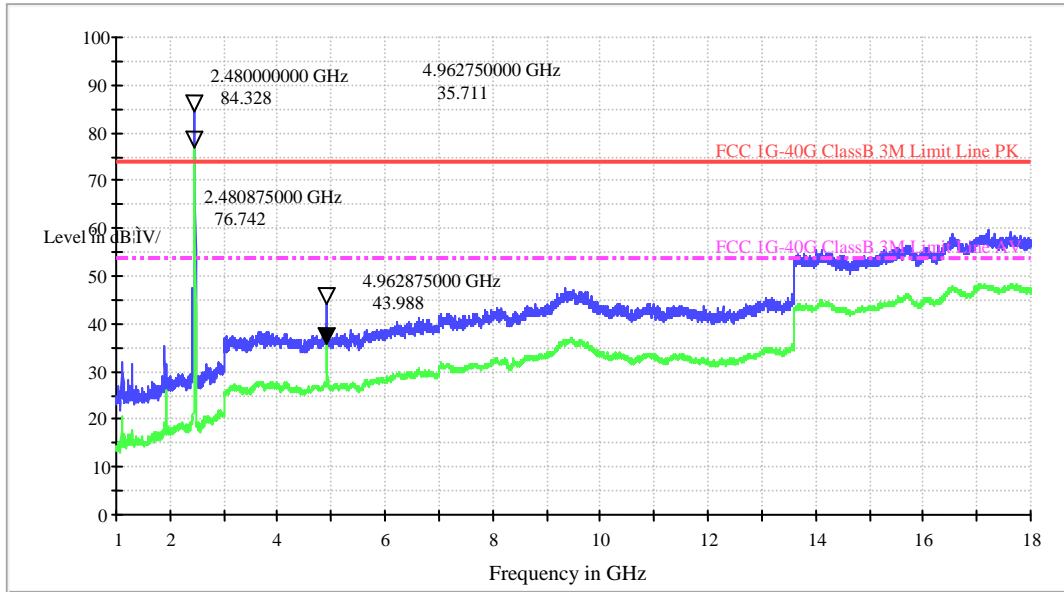


Test mode:

High Channel(GFSK)

Polarization

Horizontal

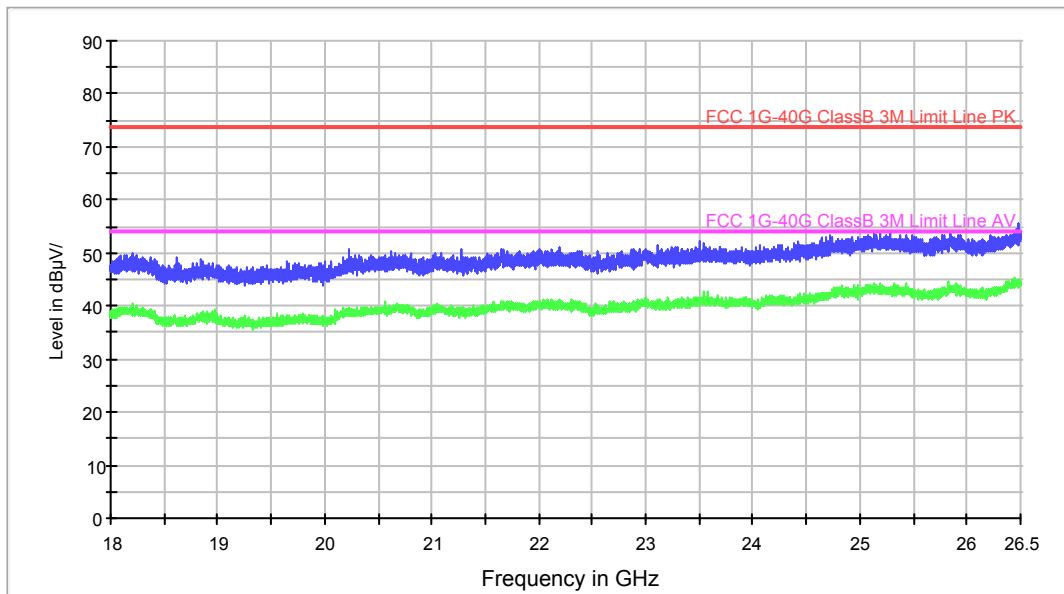


Test mode:

High Channel(GFSK)

Polarization

Vertical

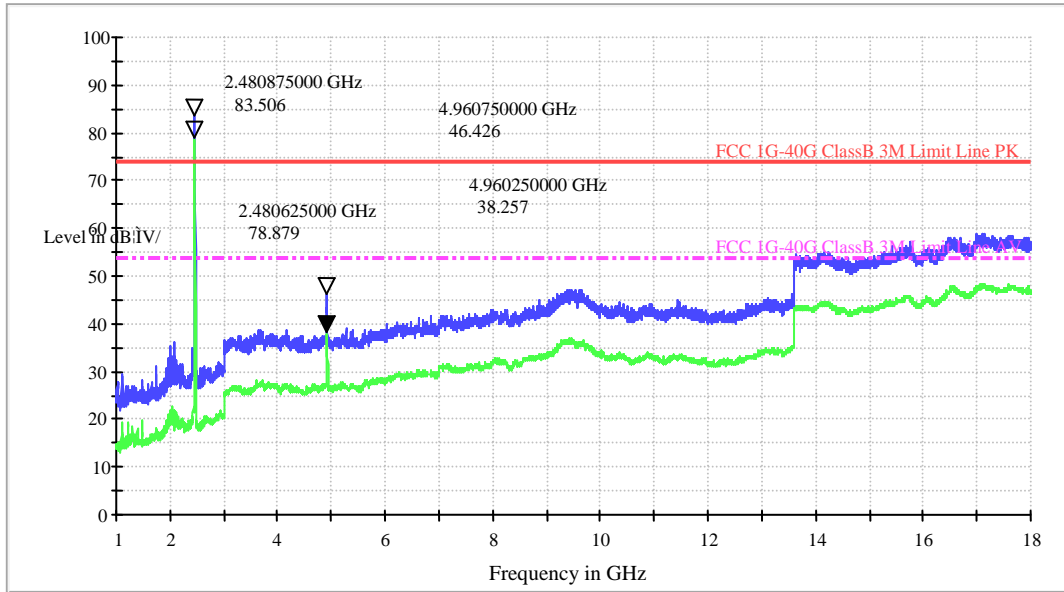


Test mode:

High Channel(GFSK)


Polarization

Vertical

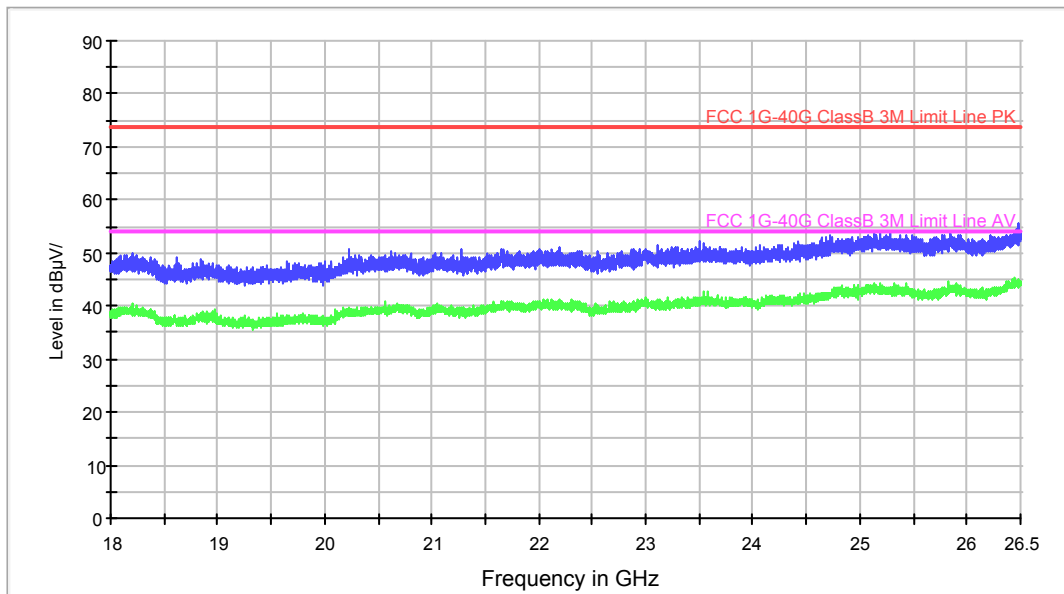

### 4.3 Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

According to ANSI C63.10:2009 Maximum peak conducted output power: Connect antenna port into power meter and reading Peak values.

#### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### TEST RESULTS

Remark: We test maximum peak output power at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5

#### 4.3.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	7.89	30	PASS
39	2441	7.90	30	PASS
78	2480	7.62	30	PASS

Note:

1.The test results including the cable lose.

#### 4.3.2 $\pi/4$ DQPSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	6.86	21	PASS
39	2441	6.88	21	PASS
78	2480	6.66	21	PASS

Note:

1.The test results including the cable lose.

#### 4.3.3 8DPSK Test Mode

##### A. Test Verdict


Channel	Frequency (MHz)	Measured Output Peak Power (dBm)	Limits (dBm)	Verdict
00	2402	6.66	21	PASS
39	2441	6.72	21	PASS
78	2480	6.52	21	PASS

Note:

1.The test results including the cable lose.

### 4.4 20dB Bandwidth

#### TEST CONFIGURATION



#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

#### LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

#### TEST RESULTS

##### 4.4.1 GFSK Test Mode

###### A. Test Verdict


Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	0.8296	Plot 4.4.1 A	/	PASS
39	2441	0.8330	Plot 4.4.1 B	/	PASS
78	2480	0.8289	Plot 4.4.1 C	/	PASS

Note: 1.The test results including the cable lose.

###### B. Test Plots



(Plot 4.4.1 A: Channel 00: 2402MHz @ GFSK)

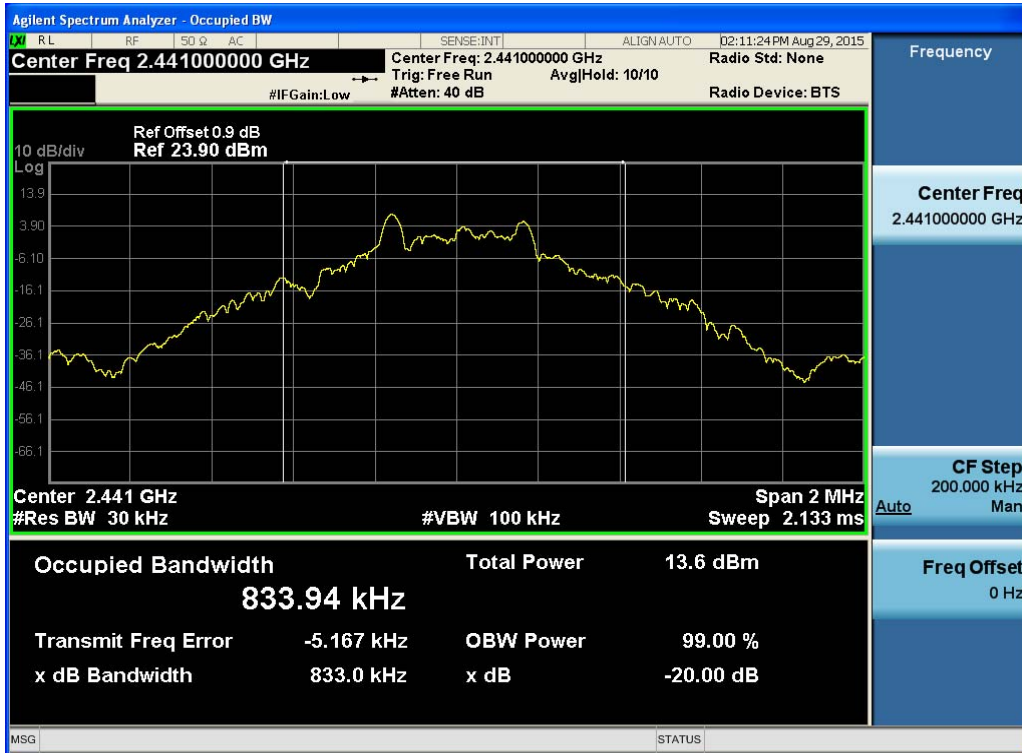

(Plot 4.4.1 B: Channel 39: 2441MHz @ GFSK)



(Plot 4.4.1 C: Channel 78: 2480MHz @ GFSK)



4.4.2 8DPSKTest Mode

A. Test Verdict

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot	Limits (MHz)	Verdict
00	2402	1.116	Plot 4.4.2 A	/	PASS
39	2441	1.126	Plot 4.4.2 B	/	PASS
78	2480	1.132	Plot 4.4.2 C	/	PASS

Note: 1.The test results including the cable lose.

B. Test Plots



(Plot 4.4.2 A: Channel 00: 2402MHz @ 8DPSK)



(Plot 4.4.2 B: Channel 39: 2441MHz @ 8DPSK)



(Plot 4.4.2 C: Channel 78: 2480MHz @ 8DPSK)

## 4.5 Band Edge

### Applicable Standard


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### TEST CONFIGURATION

#### *For Radiated*

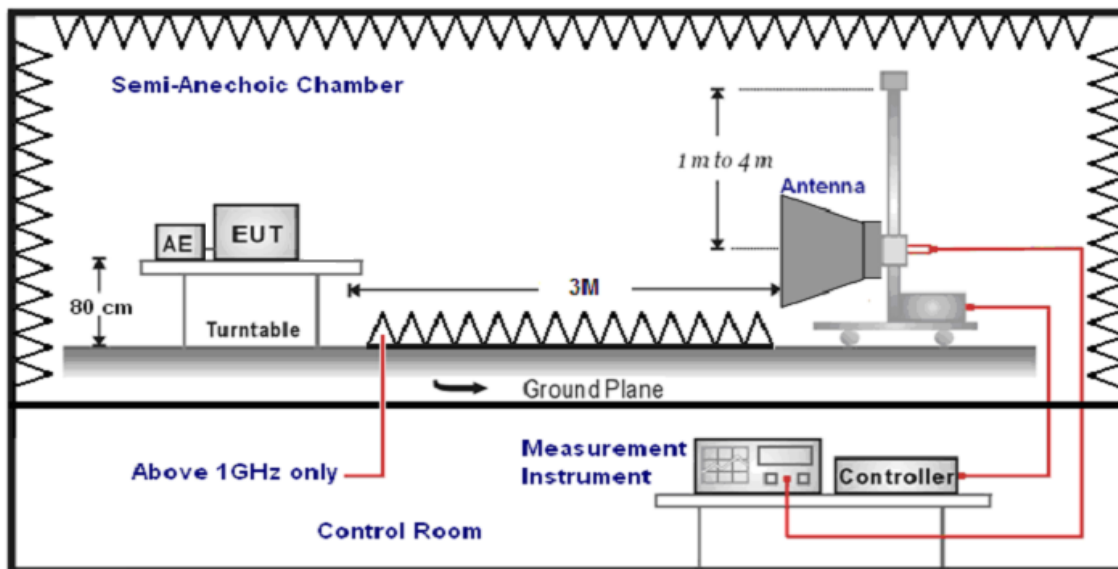

#### *For Conducted*



### TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.

3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Peak (Receiver)
1GHz-40GHz	Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto	Average (Receiver)

### **LIMIT**

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

### **TEST RESULTS**



Remark:

1. We test Band Edge at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
2. “--” means not recorded as emission levels lower than limit.

#### **4.5.1 For Radiated Bandedge Measurement**

Remark: we tested radiated bandedge at both hopping and no-hopping modes, recorded worst case at no-hopping mode

4.5.1.1 GFSK Test Mode

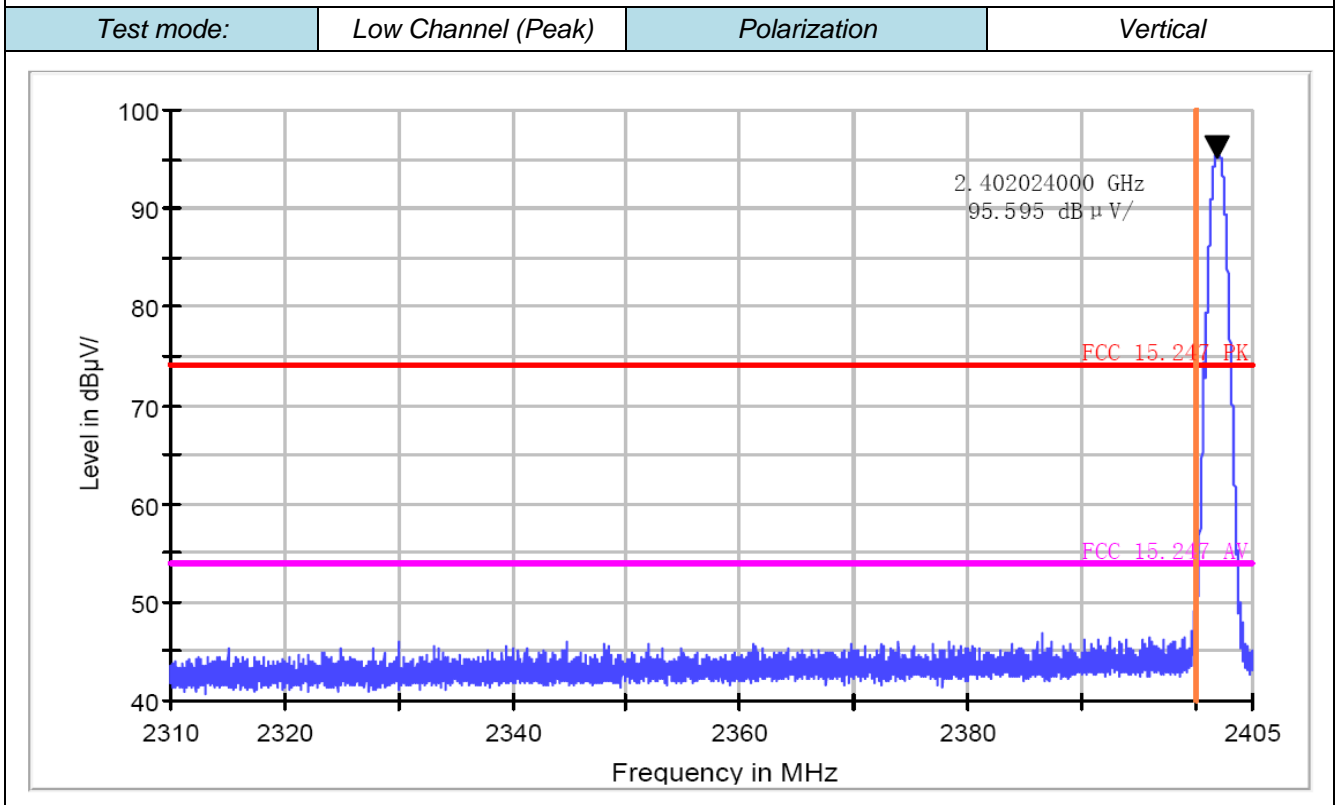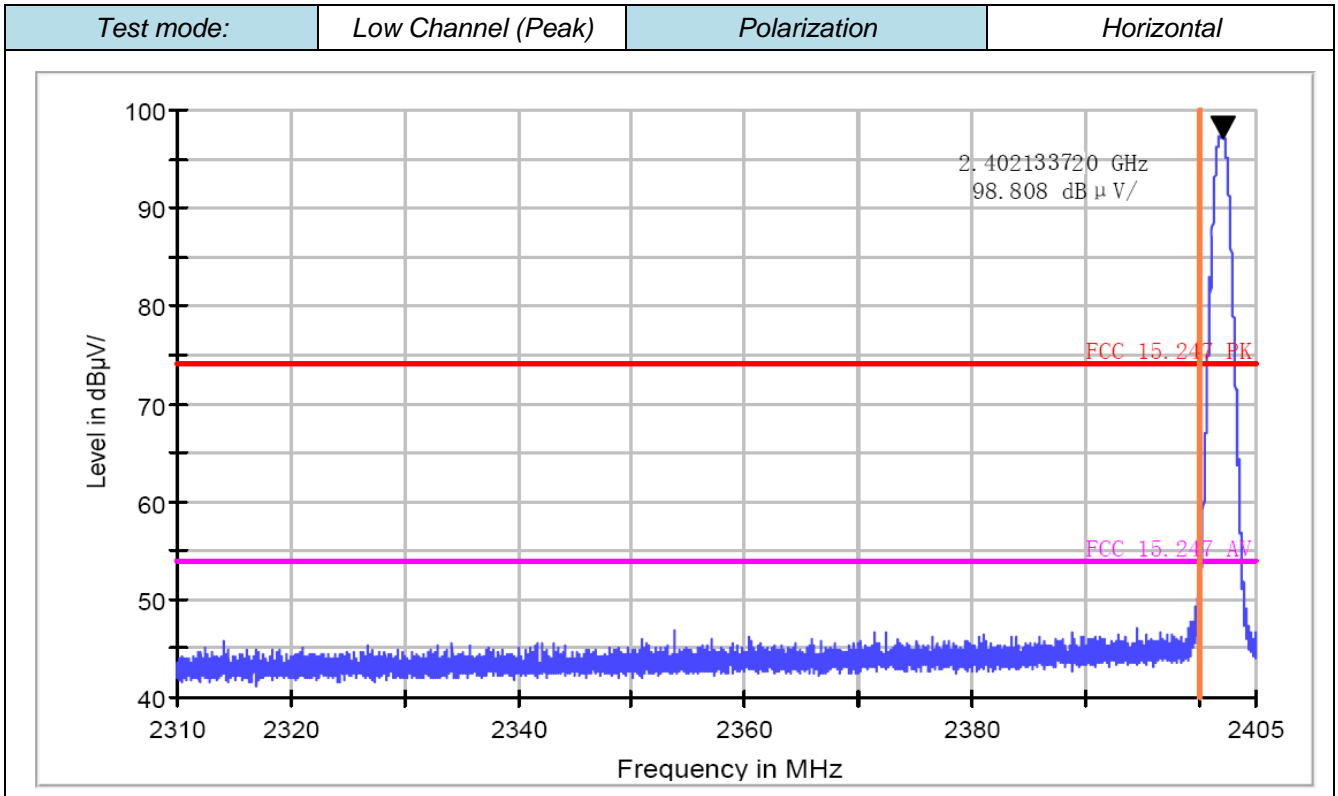


Test mode:

Low Channel (AV)

Polarization

Horizontal

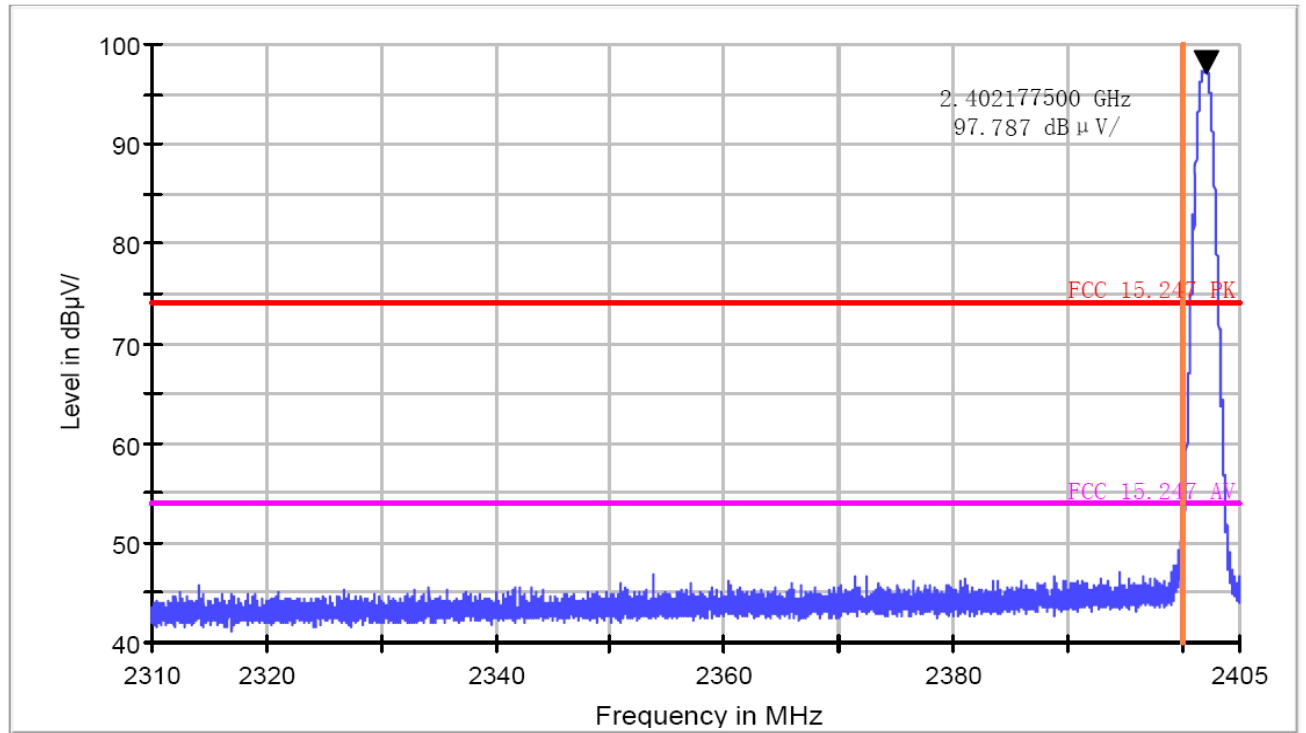


Test mode:

Low Channel (AV)

Polarization

Vertical

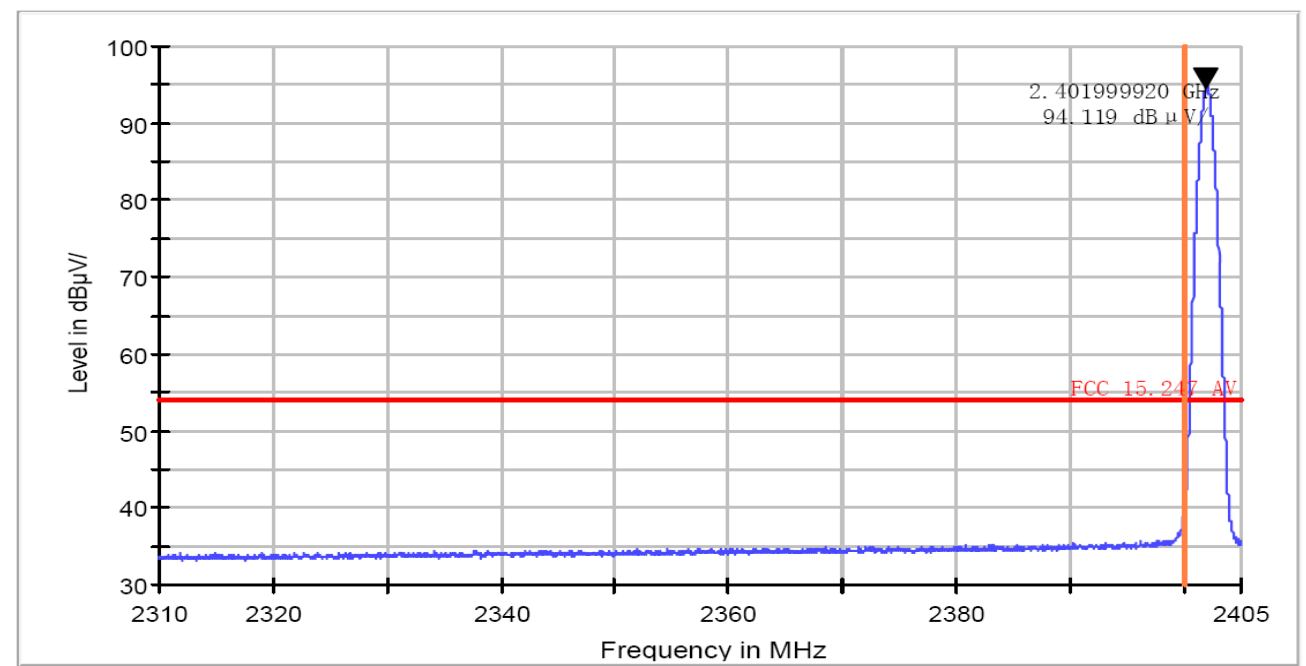


Test mode:

High Channel (Peak)

Polarization

Horizontal

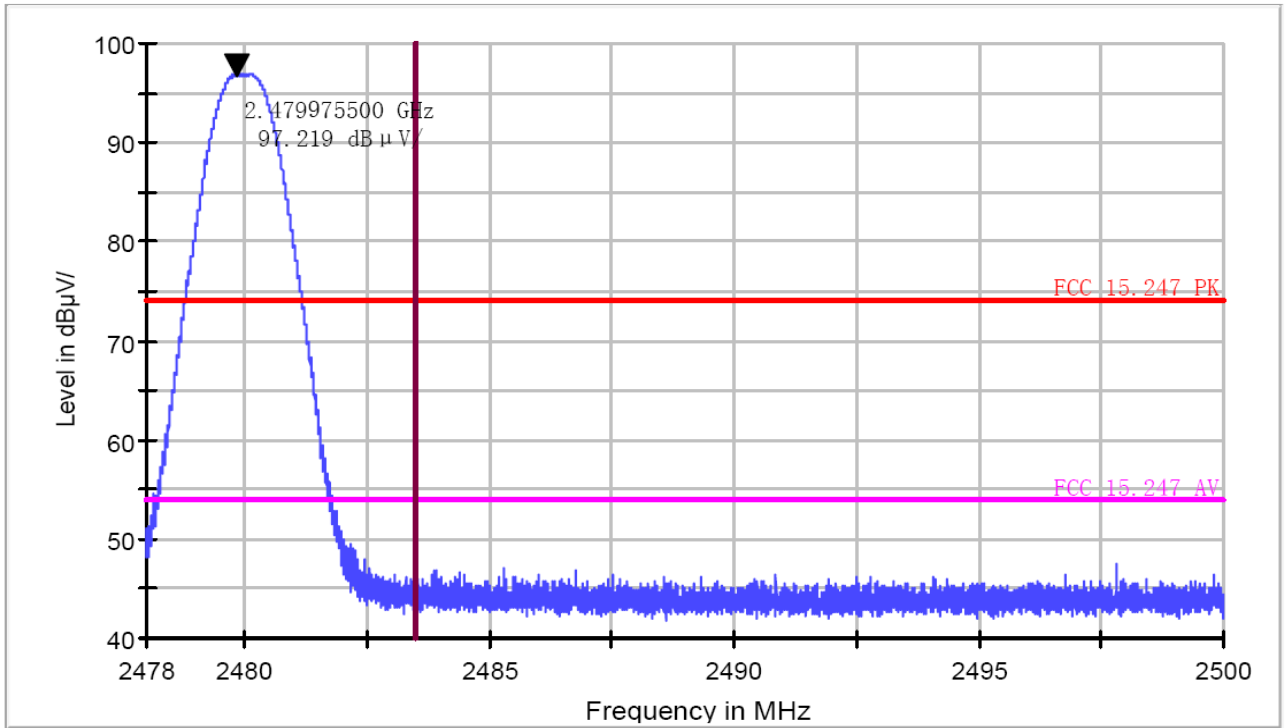


Test mode:

High Channel (Peak)

Polarization

Vertical

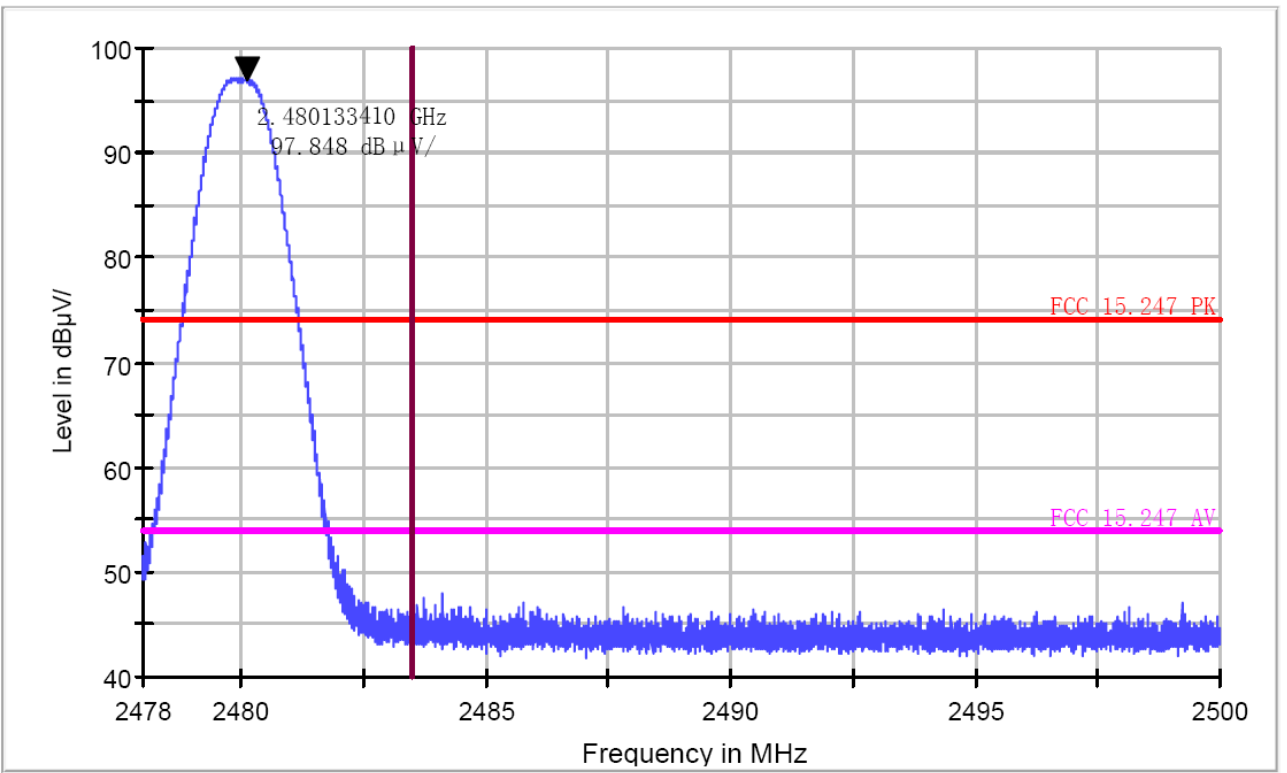


Test mode:

High Channel (AV)

Polarization

Horizontal

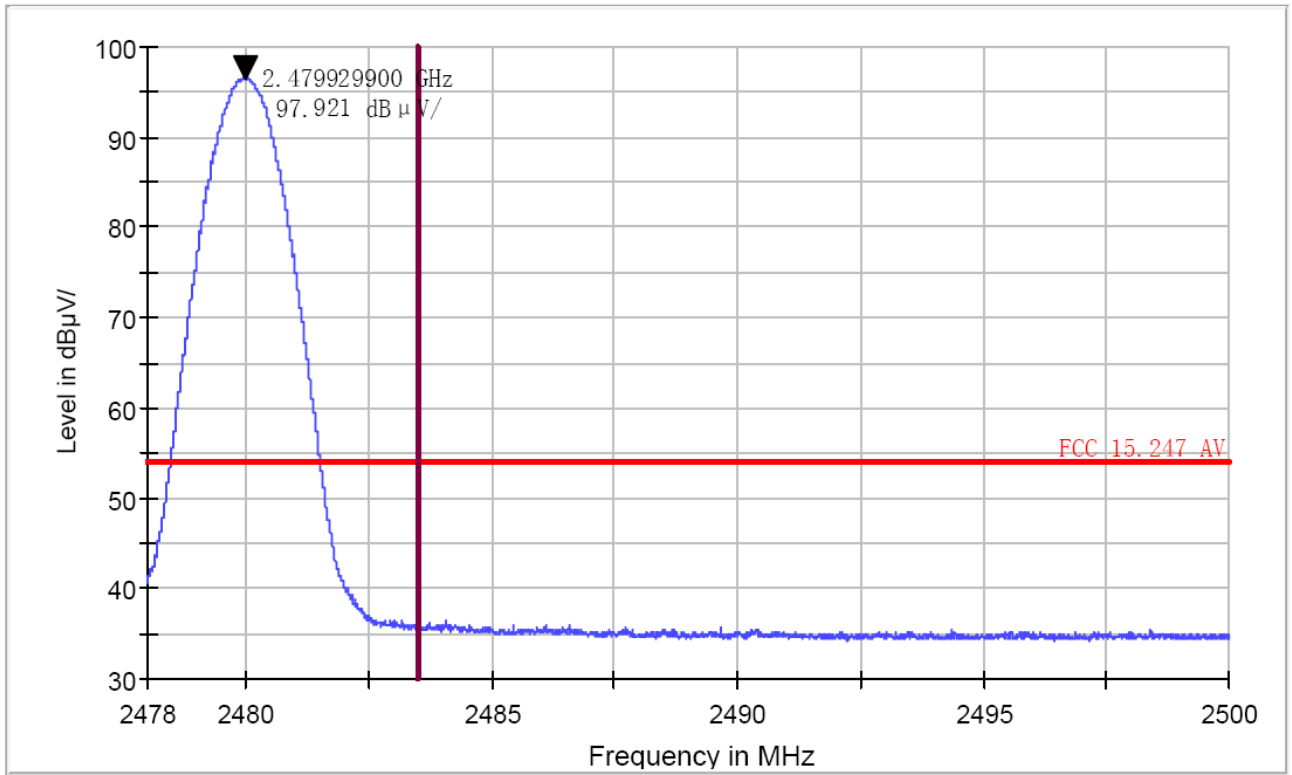


Test mode:

High Channel (AV)



Polarization

Vertical

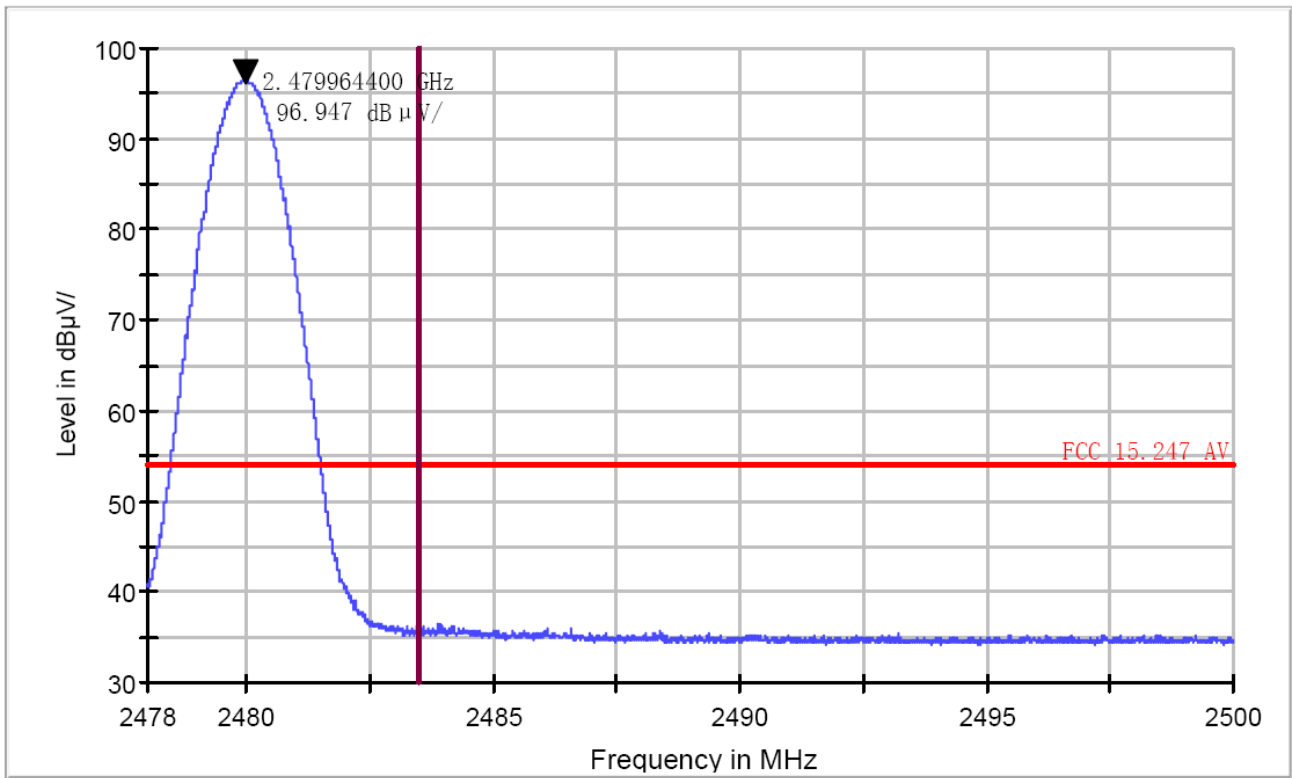



4.5.1.2 8DPSKTest Mode

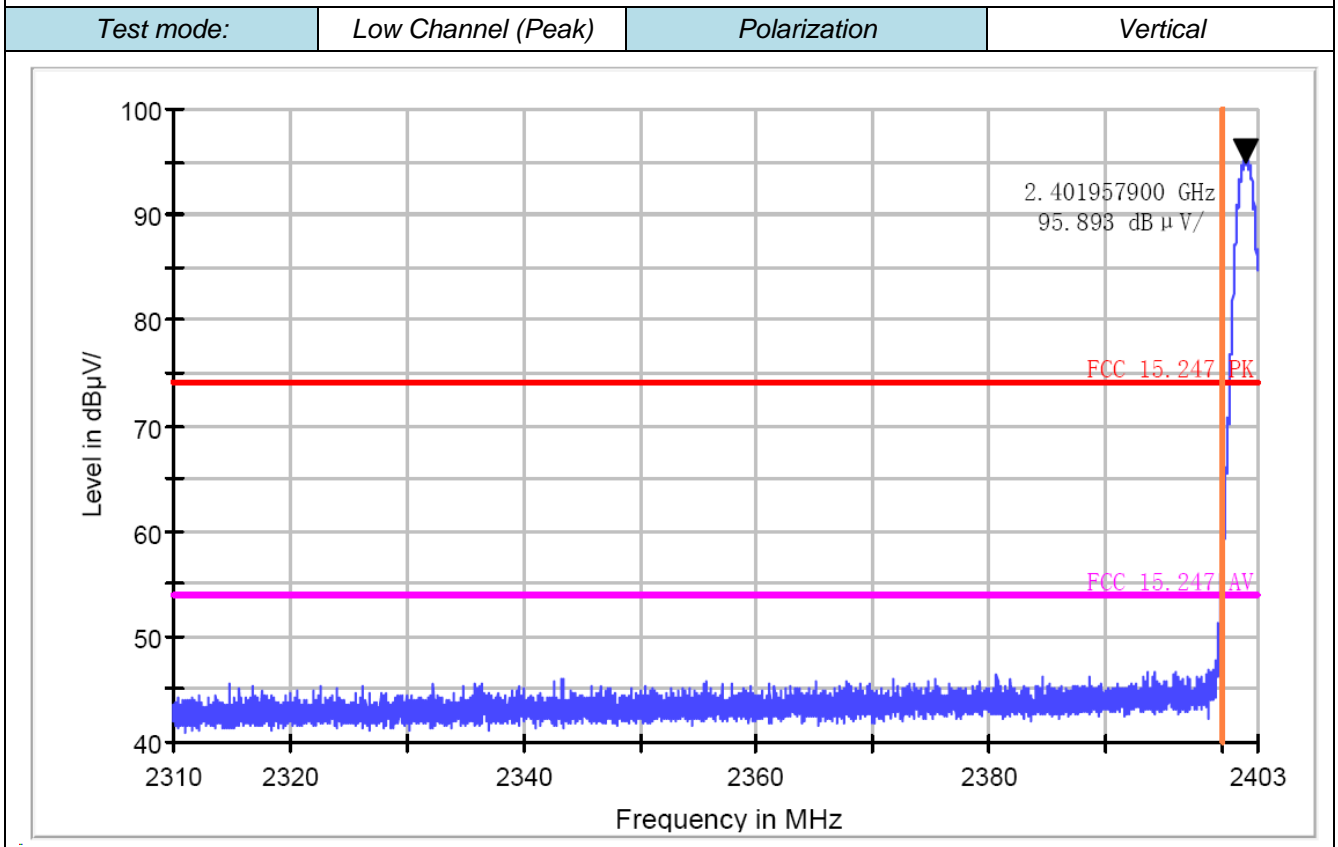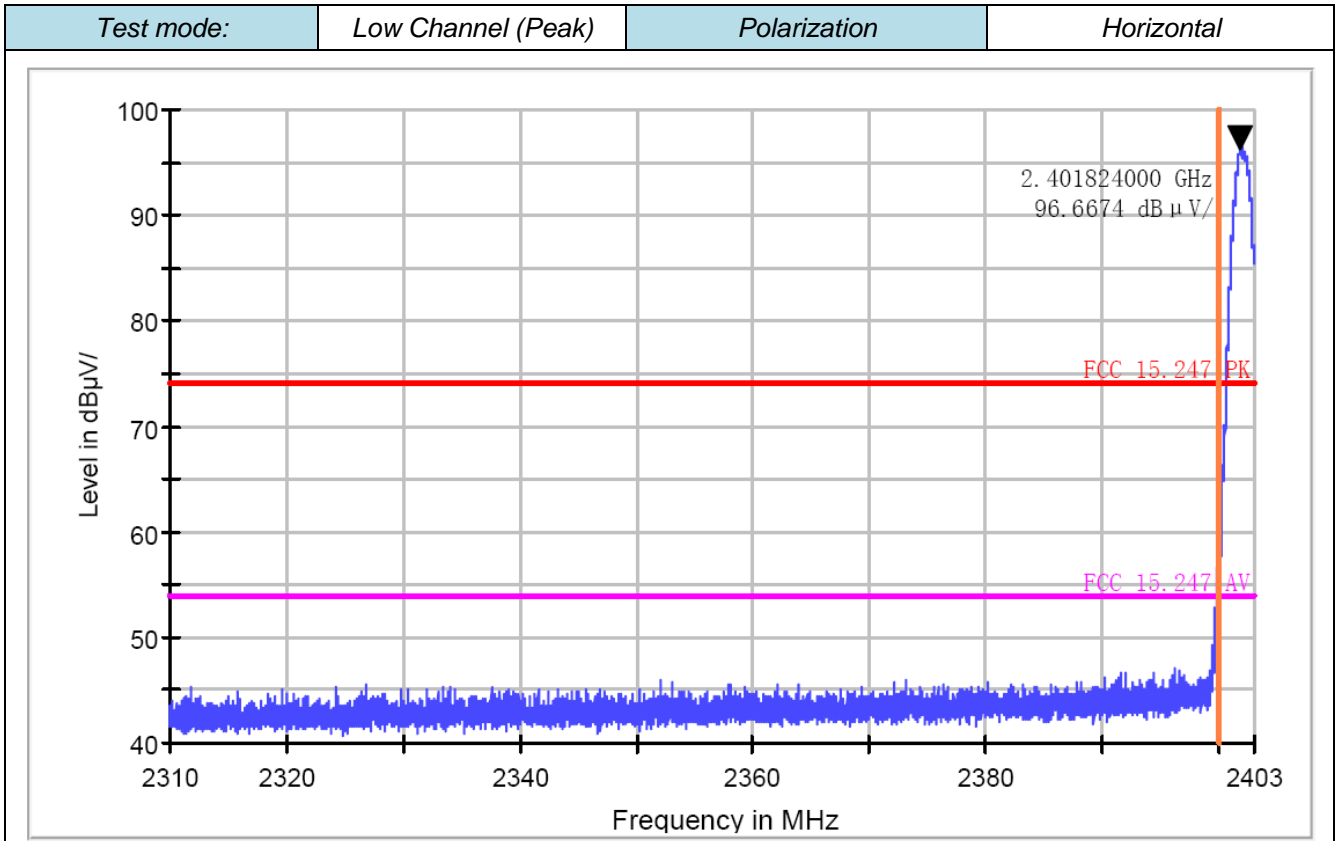


Test mode:

Low Channel (AV)

Polarization

Horizontal

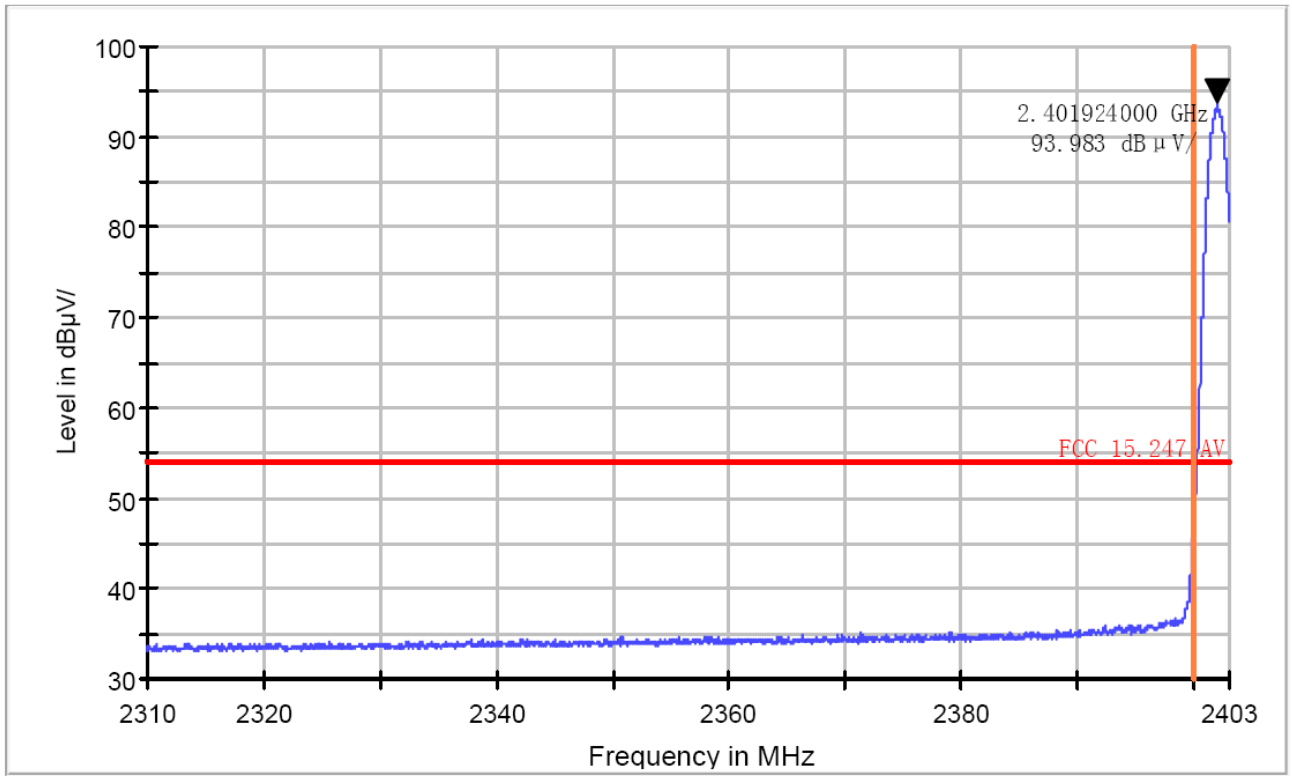


Test mode:

Low Channel (AV)

Polarization

Vertical

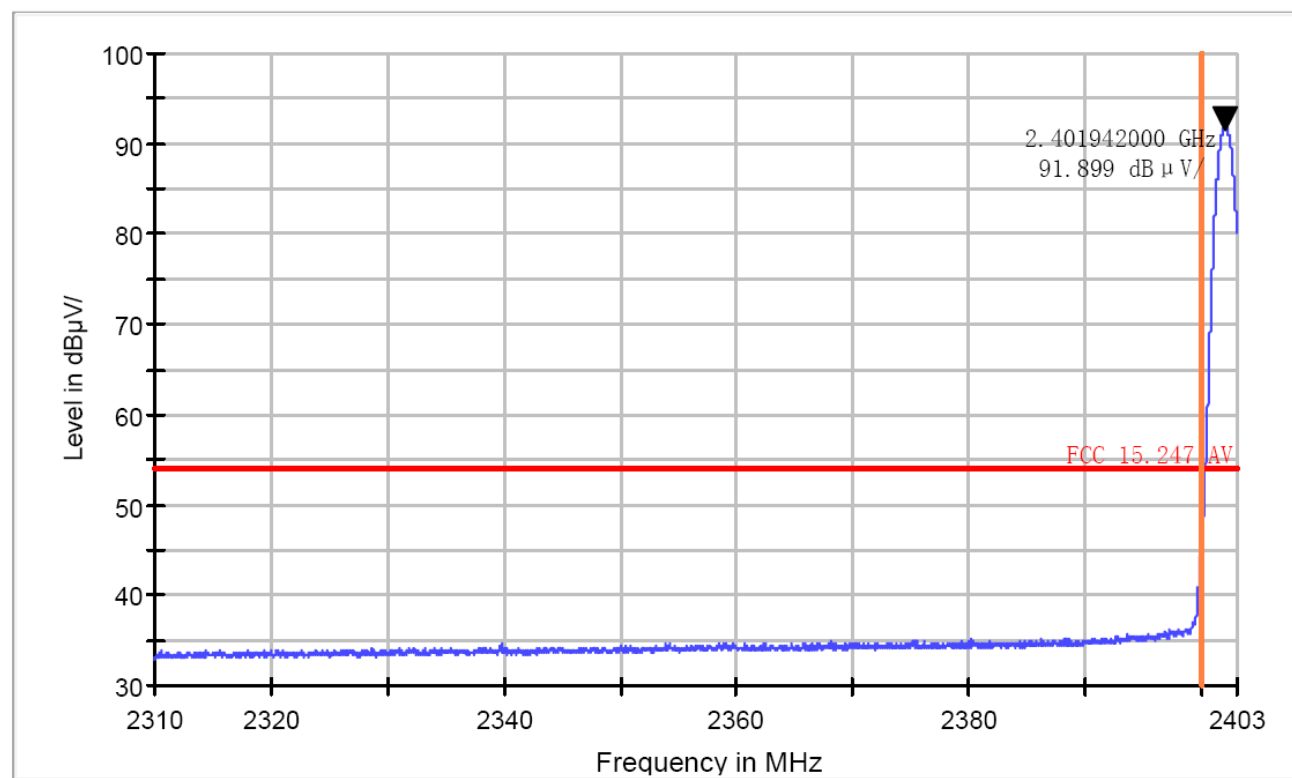


Test mode:

High Channel (Peak)

Polarization

Horizontal

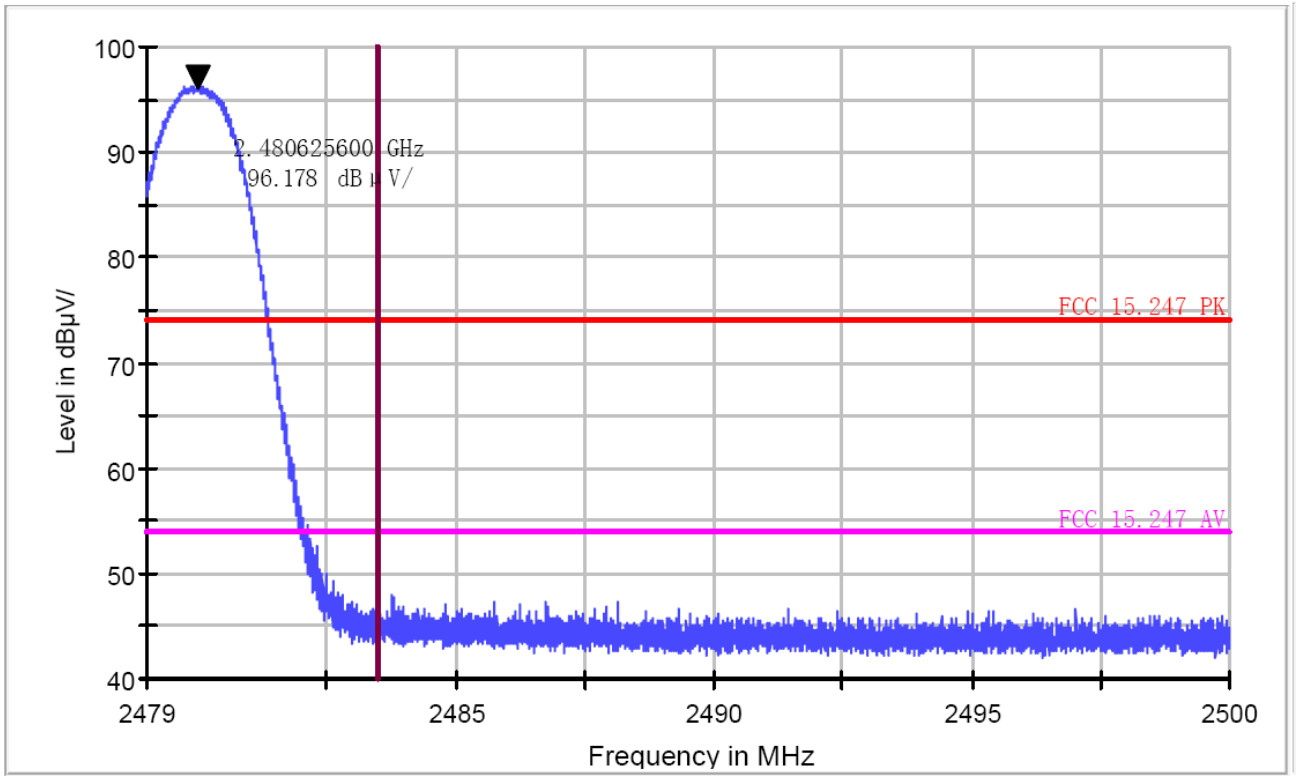


Test mode:

High Channel (Peak)

Polarization

Vertical

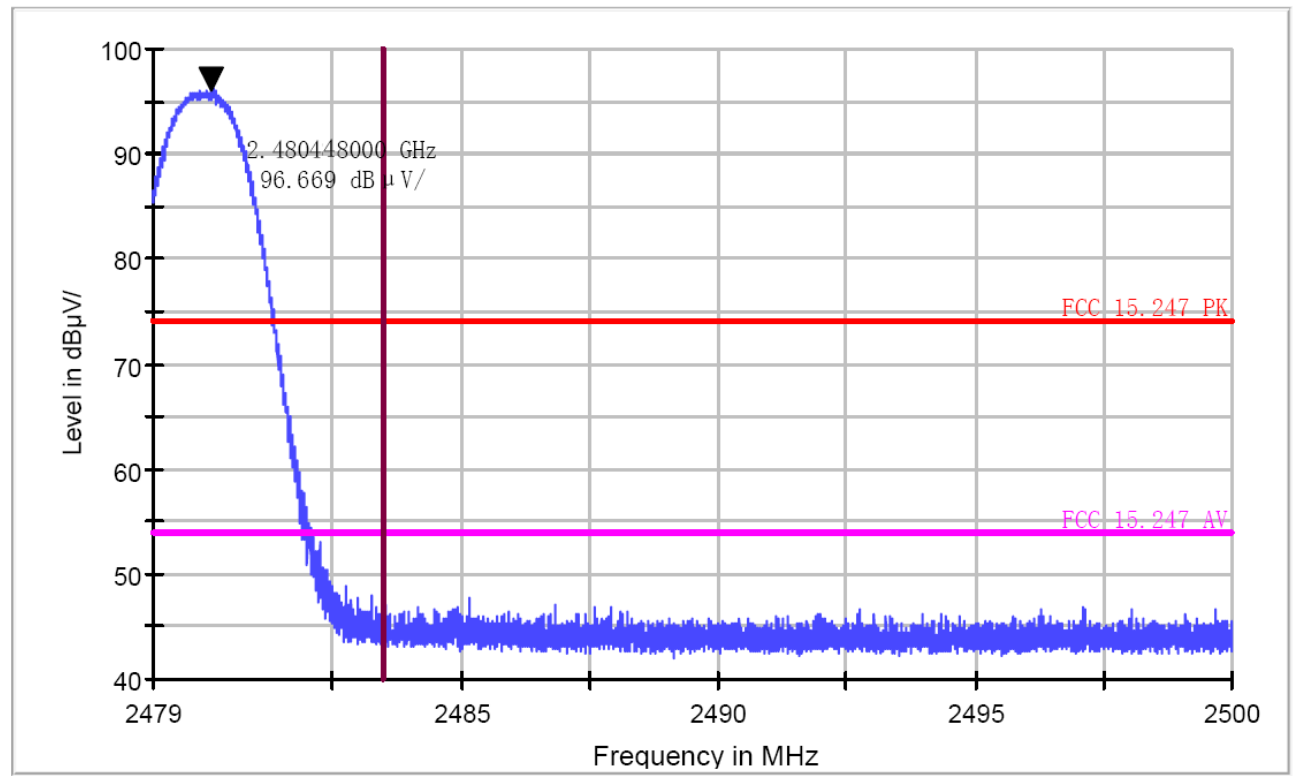


Test mode:

High Channel (AV)

Polarization

Horizontal

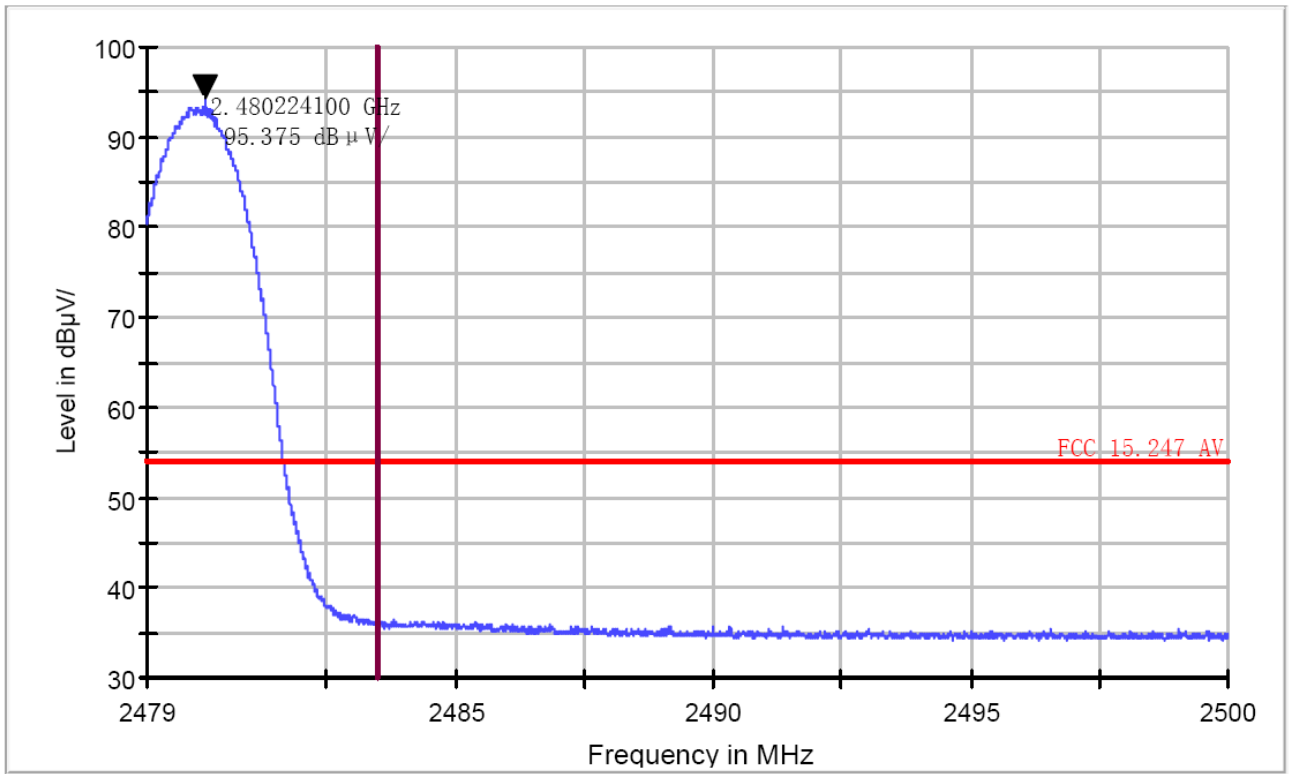


Test mode:

High Channel (AV)

Polarization

Vertical

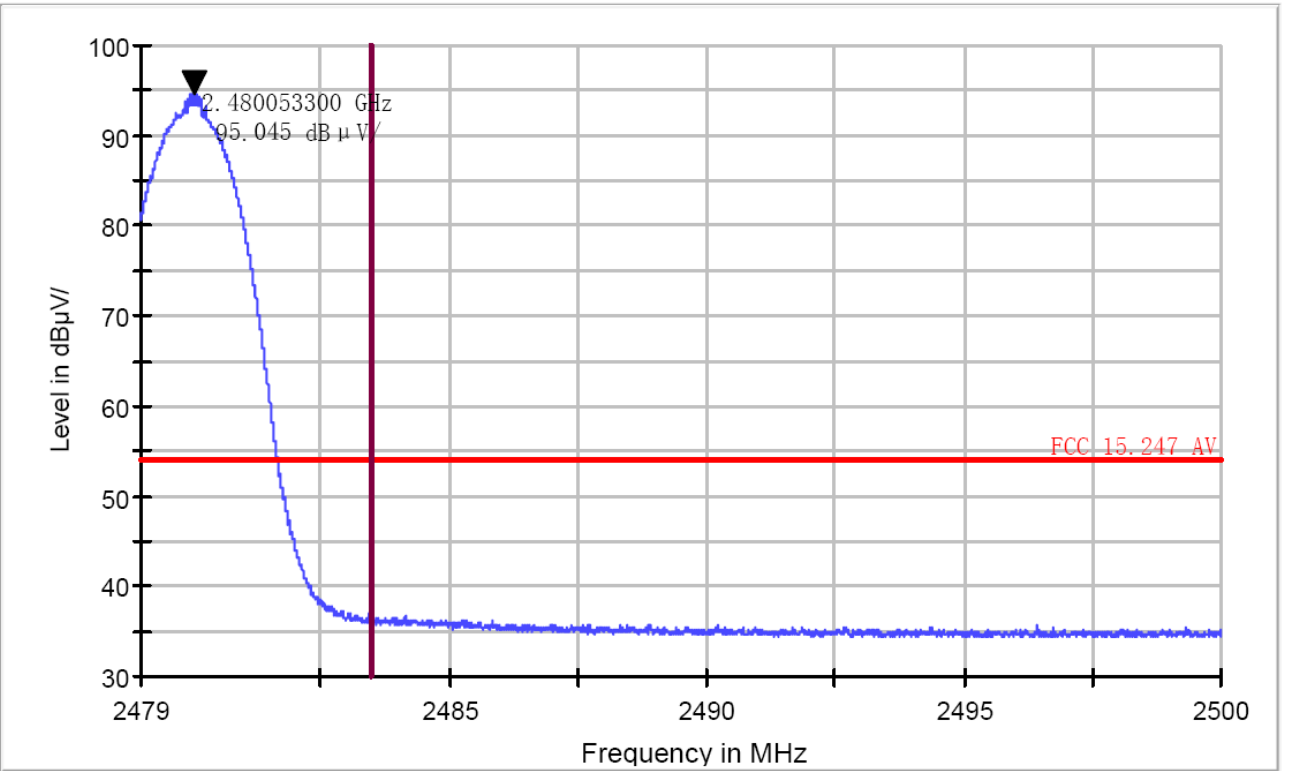


### 4.5.2 For Conducted Bandedge Measurement


#### 4.5.2.1 GFSK Test Mode

We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

#### A. Test Plots

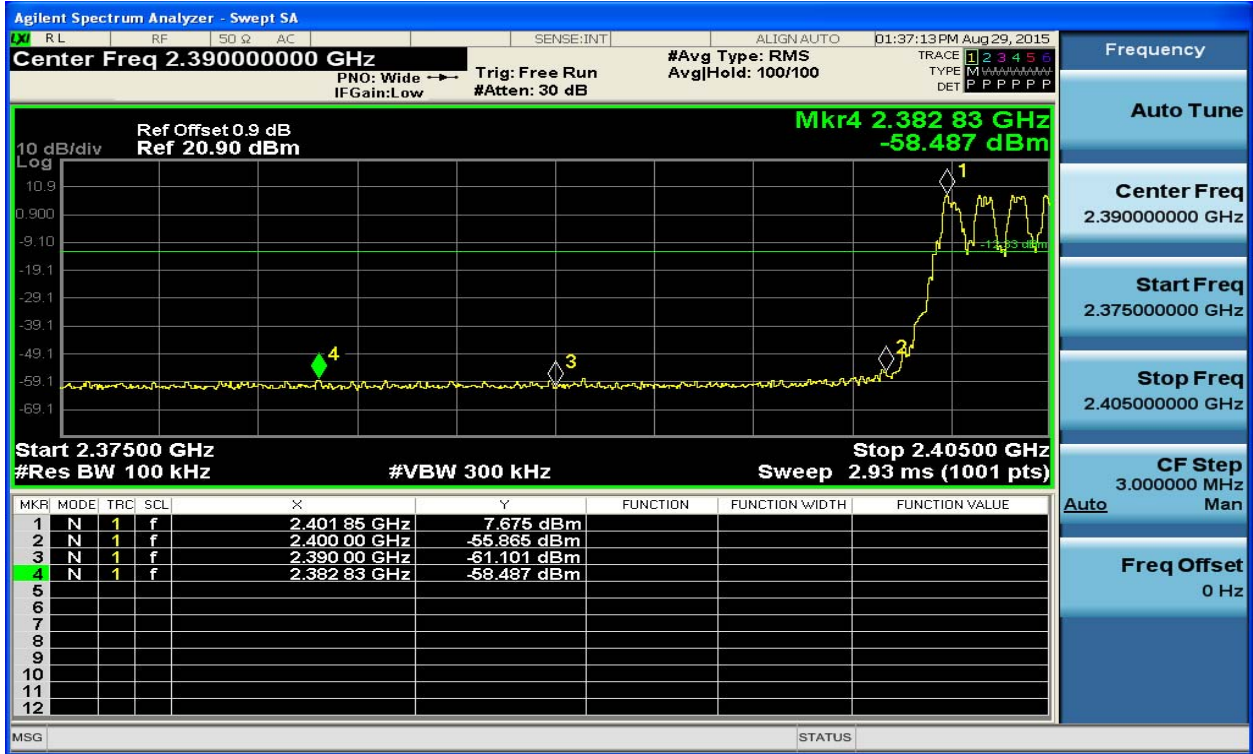

(Plot 4.5.2.1 A: Hopping Mode @ GFSK)

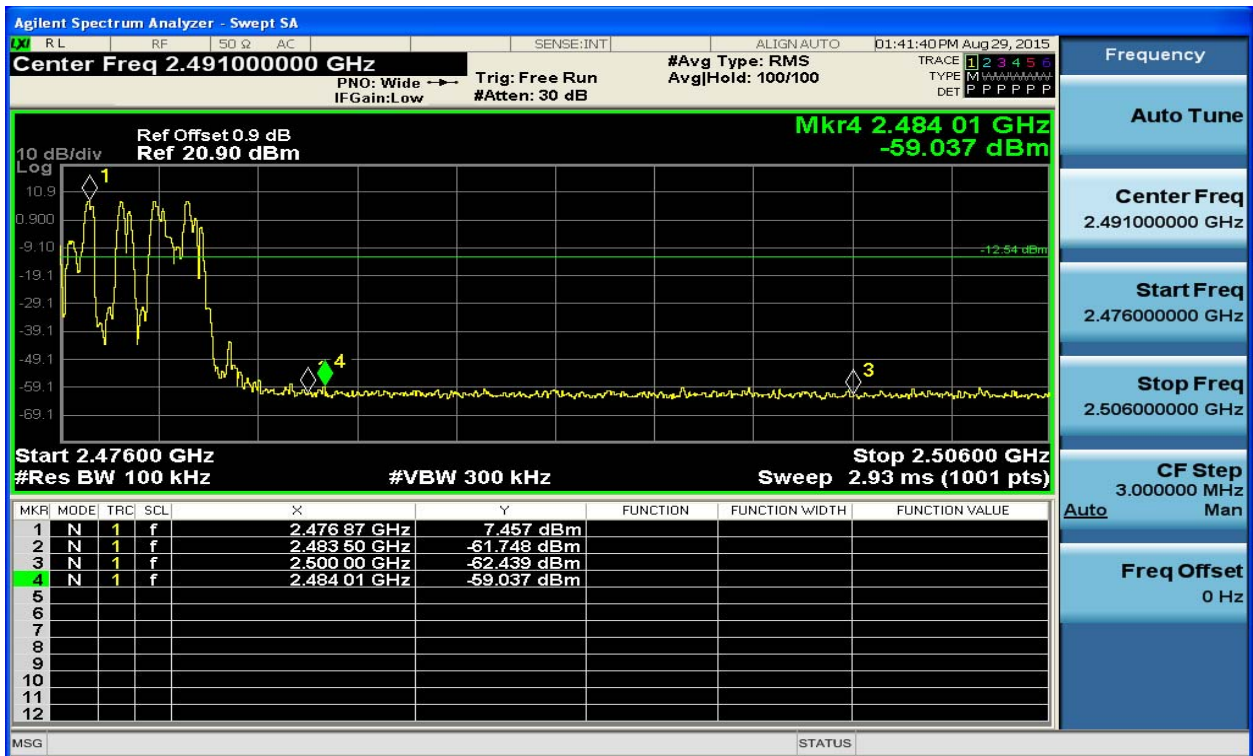


(Plot 4.5.2.1 B: Hopping Mode @ GFSK)


4.5.2.2 8DPSK Test Mode

We tested hopping mode and non-hopping mode, and recorded the worst case at the hopping mode.

A. Test Plots

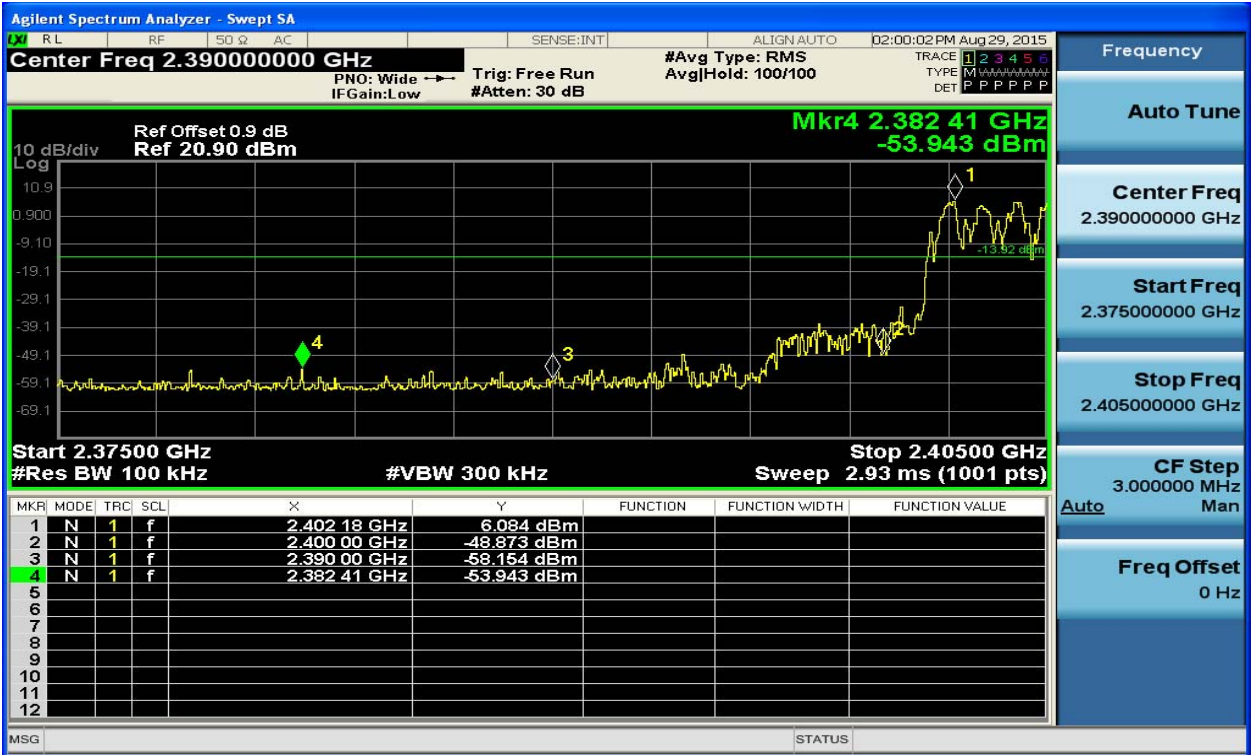


(Plot 4.5.2.2 A: Hopping Mode @ 8DPSK)

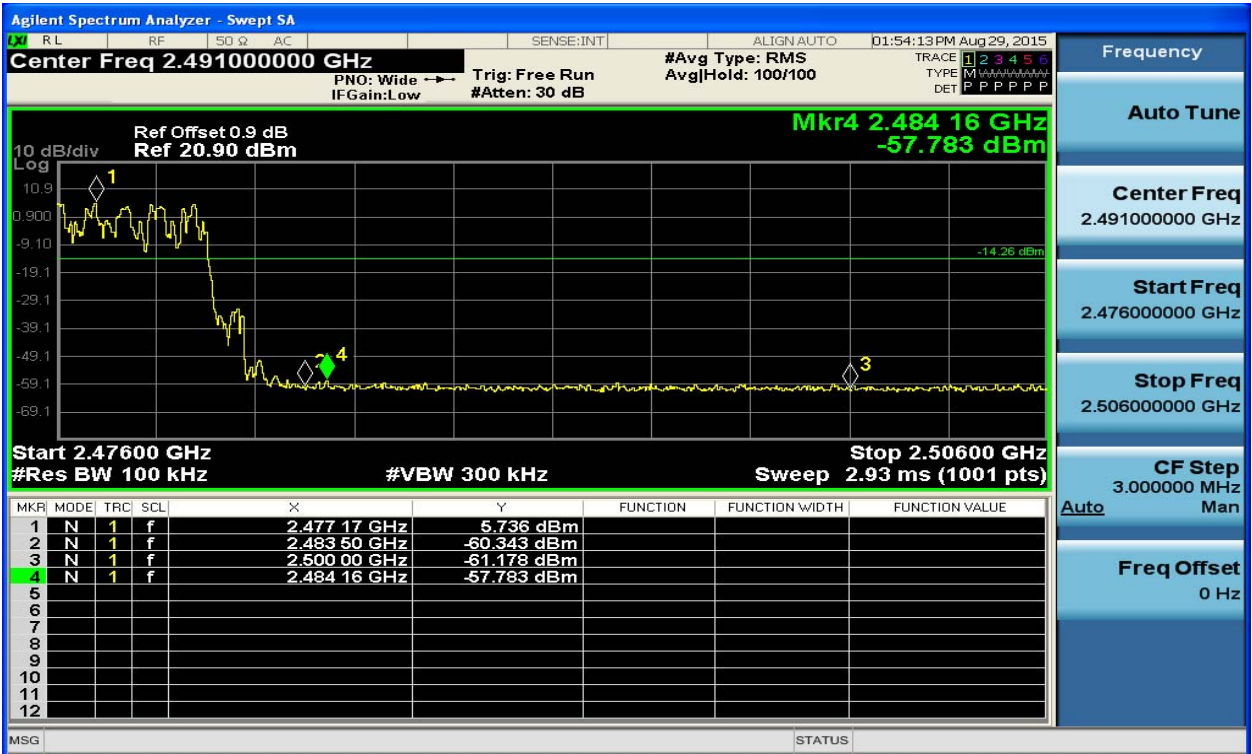

(Plot 4.5.2.2 B: Hopping Mode @ 8DPSK)

### 4.6 Frequency Separation

#### TEST CONFIGURATION



#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

#### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the 2/3\*20dB bandwidth of the hopping channel, whichever is greater.

#### TEST RESULTS


Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5) and all test channels, recorded worst case at DH5 and middle channel.

#### 4.6.1 GFSK Test Mode

##### A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440	1.000	Plot 4.6.1 A	0.8702	PASS
39	2441				

##### B. Test Plots

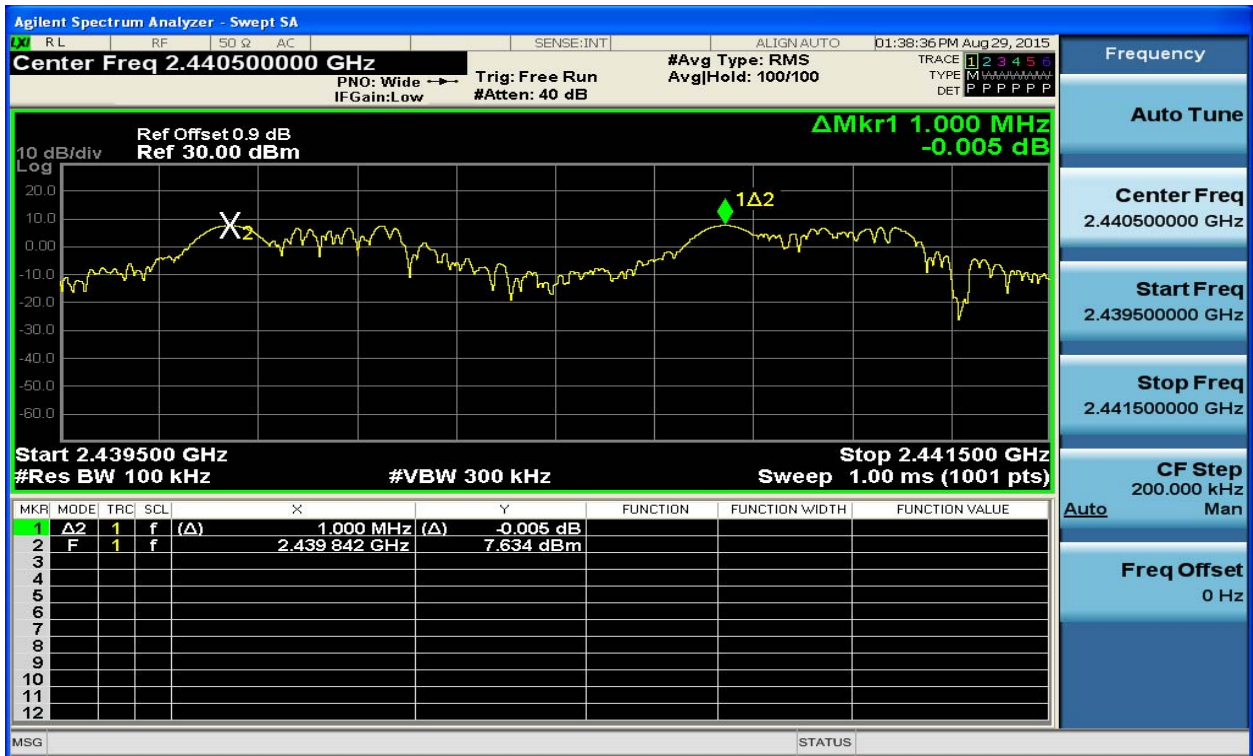

(Plot 4.6.1 A: Channel 39: 2441MHz @ GFSK)



### 4.6.2 8DPSK Test Mode

#### A. Test Verdict

Channel	Frequency (MHz)	Channel Separation (MHz)	Refer to Plot	Limits (MHz)	Verdict
38	2440	0.980	Plot 4.6.2 A	0.84936	PASS
39	2441				

#### B. Test Plots




(Plot 4.6.2 A: Channel 39: 2441MHz @ 8DPSK)



### 4.7 Number of hopping frequency

#### TEST CONFIGURATION



#### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=100 KHz and VBW=300 KHz.

#### LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

#### TEST RESULTS


Remark: 1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.

#### 4.7.1 GFSK Test Mode

##### A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.1 A1	≥15	PASS

##### B. Test Plots

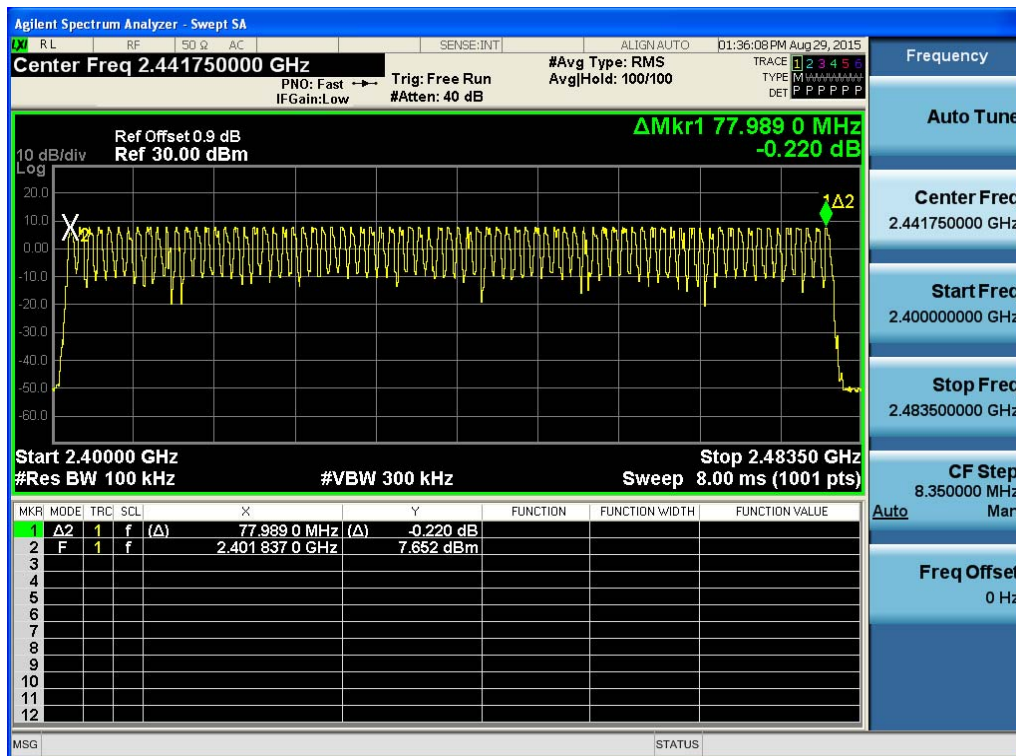


(Plot 4.7.1 A1: @ GFSK)

### 4.7.2 8DPSK Test Mode

#### A. Test Verdict

Hopping Channel Frequency Range (MHz)	Number of Hopping Channel	Refer to Plot	Limit	Verdict
2400-2483.5	79	Plot 4.7.2 A1	≥15	PASS


#### B. Test Plots

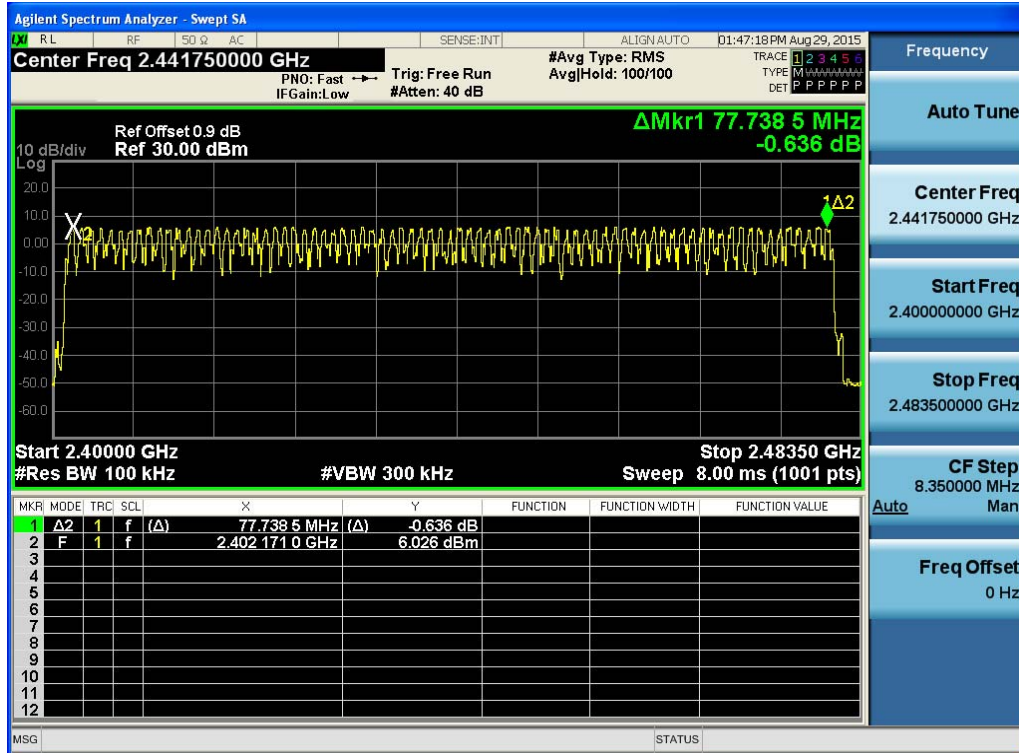

(Plot 4.7.2 A1: @ 8DPSK)

## 4.8 Time of Occupancy (Dwell Time)

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz, Span=0Hz.

### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST RESULTS

The Dwell Time=Burst Width\*Total Hops. The detailed calculations are showed as follows:

The duration for dwell time calculation:  $0.4[s]*\text{hopping number}=0.4[s]*79[\text{ch}]=31.6[s*\text{ch}]$ ;

The burst width [ms/hop/ch], which is directly measured, refers to the duration on one channel hop.

The hops per second for all channels: The selected EUT Conf uses a slot type of 5-Tx&1-Rx and a hopping rate of 1600 [ch\*hop/s] for all channels. So the final hopping rate for all channels is  $1600/6=266.67$  [ch\*hop/s]

The hops per second on one channel:  $266.67$  [ch\*hops/s]/79 [ch]=3.38 [hop/s];

The total hops for all channels within the dwell time calculation duration:  $3.38$  [hop/s]\* $31.6[s*\text{ch}]=106.67$  [hop\*ch];

The dwell time for all channels hopping:  $106.67$  [hop\*ch]\*Burst Width [ms/hop/ch].

Remark: 1. We test Frequency Separation at all test channels, recorded worst case at middle channel.

#### A. Test Verdict


#### 4.8.1 GFSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2441	0.370	0.118	0.4	Plot 4.8.1 A	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second					
DH3	2441	1.626	0.260	0.4	Plot 4.8.1 B	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second					
DH5	2441	2.873	0.307	0.4	Plot 4.8.1 C	PASS
	<b>Note:</b> Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second					


#### 4.8.2 8DPSK Test Mode

Mode	Frequency (MHz)	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Refer to Plot	Verdict
DH1	2441	0.378	0.121	0.4	Plot 4.8.2 A	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second					
DH3	2441	1.629	0.261	0.4	Plot 4.8.2 B	PASS
	<b>Note:</b> Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second					
DH5	2441	2.879	0.307	0.4	Plot 4.8.2 C	PASS
	<b>Note:</b> Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second					


#### B. Test Plots

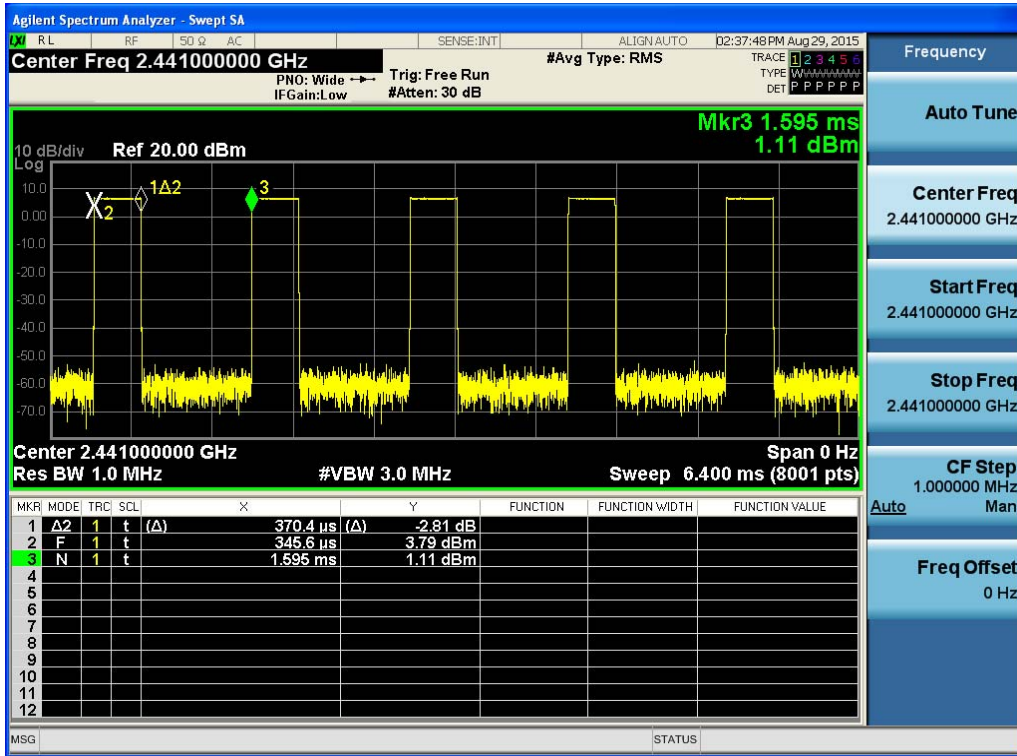


(Plot 4.8.1.A: Channel 39: 2441MHz @ GFSK @ DH1)

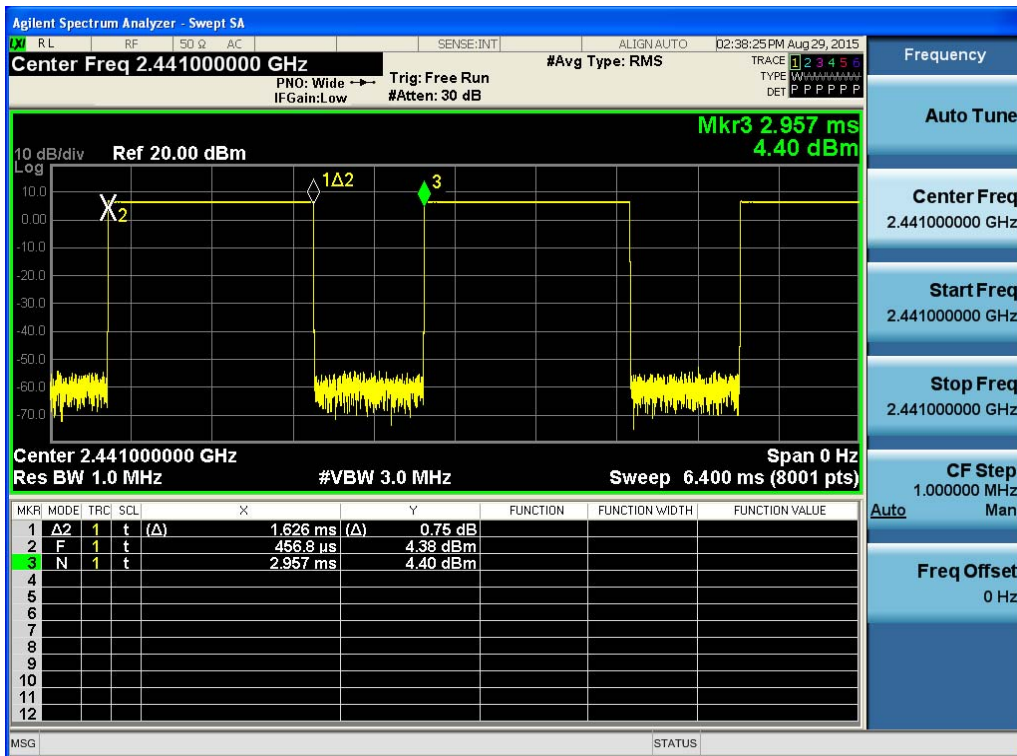


(Plot 4.8.1.B: Channel 39: 2441MHz @ GFSK @ DH3)

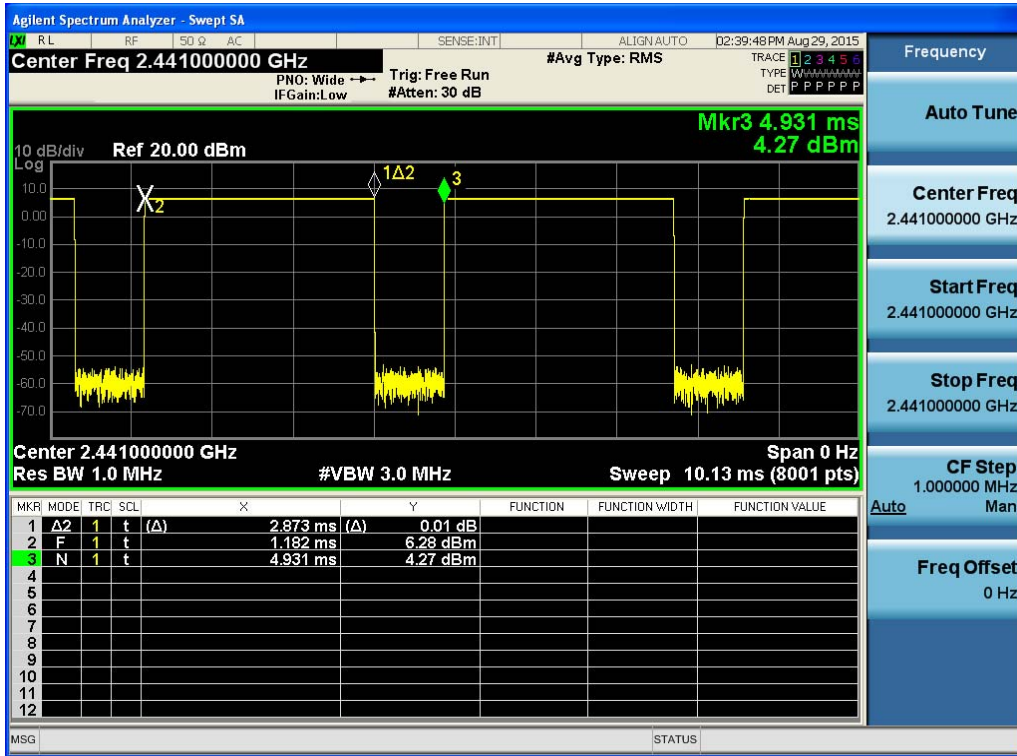


(Plot 4.8.1.C: Channel 39: 2441MHz @ GFSK @ DH5)

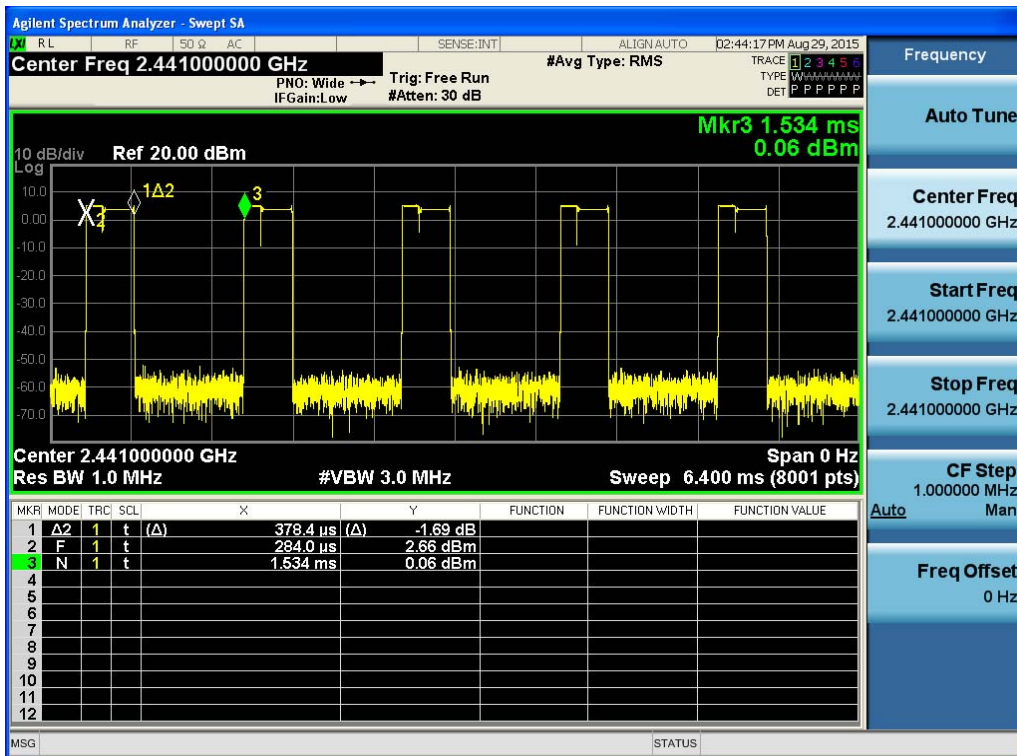

(Plot 4.8.2.A: Channel 39: 2441MHz @ 8DPSK @ DH1)

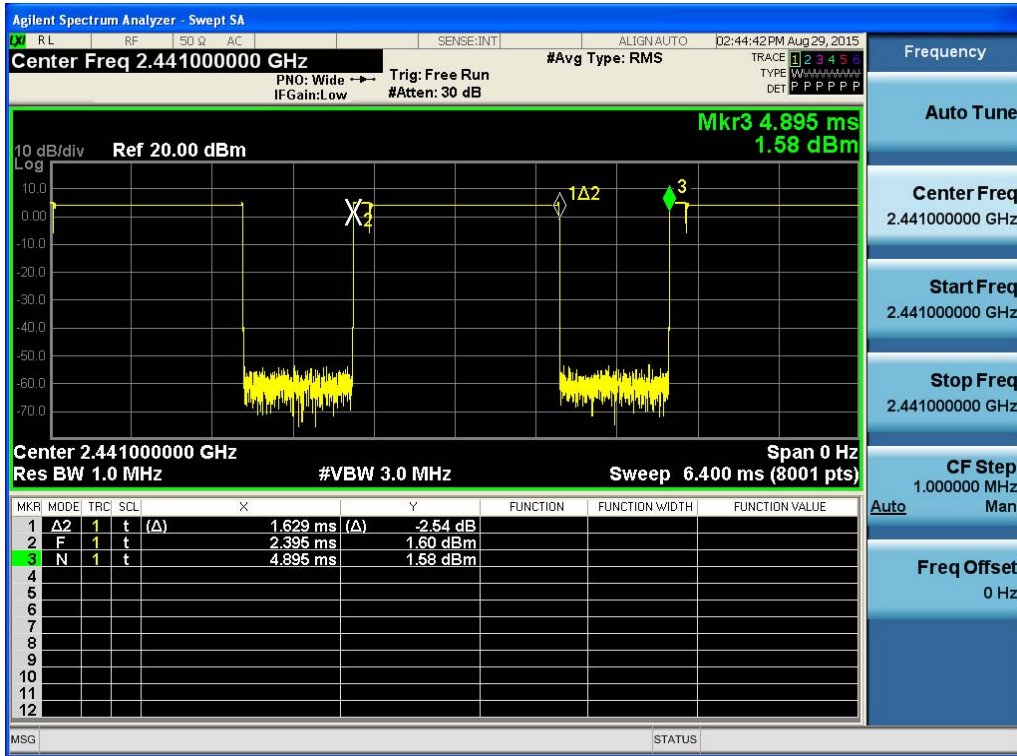

(Plot 4.8.2.B: Channel 39: 2441MHz @ 8DPSK @ DH3)

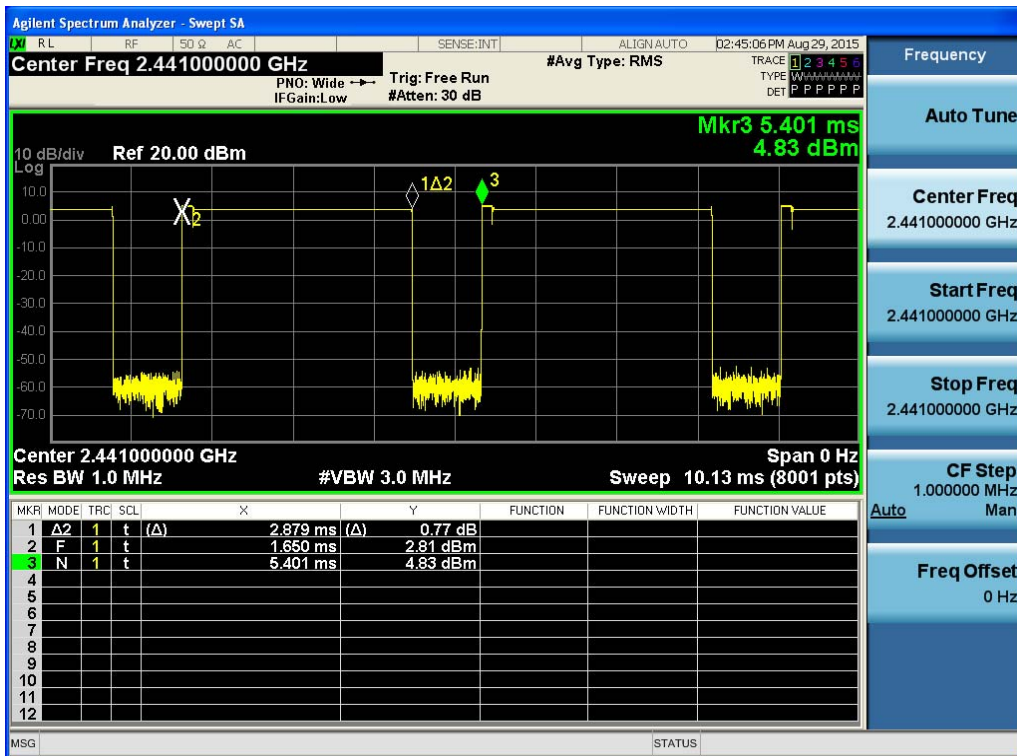


(Plot 4.8.2.C: Channel 39: 2441MHz @ 8DPSK @ DH5)



## 4.9 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBM= 300KHz to measure the peak field strength , and measurement frequency range from 9KHz to 26.5GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

### TEST RESULTS

Remark:

1. We test Frequency Separation at difference Packet Type (DH1, DH3 and DH5), recorded worst case at DH5.
2. For 9KHz -30MHz, Because there was only background, So We did not recorded data.

#### 4.9.1 GFSK Test Mode


##### A. Test Verdict

Channel	Frequency (MHz)	Frequency Range	Refer to Plot	Limit (dBc)	Verdict
00	2402	2.402 GHz	Plot 4.9.1 A1	---	PASS
		30MHz-3GHz	Plot 4.9.1 A2	-20	PASS
		3GHz-5GHz	Plot 4.9.1 A3	-20	PASS
		5GHz-10GHz	Plot 4.9.1 A4	-20	PASS
		10GHz-15GHz	Plot 4.9.1 A5	-20	PASS
		15GHz-25GHz	Plot 4.9.1 A6	-20	PASS
39	2441	2.441 GHz	Plot 4.9.1 B1	---	PASS
		30MHz-3GHz	Plot 4.9.1 B2	-20	PASS
		3GHz-5GHz	Plot 4.9.1 B3	-20	PASS
		5GHz-10GHz	Plot 4.9.1 B4	-20	PASS
		10GHz-15GHz	Plot 4.9.1 B5	-20	PASS
		15GHz-25GHz	Plot 4.9.1 B6	-20	PASS
78	2480	2.480 GHz	Plot 4.9.1 C1	---	PASS
		30MHz-3GHz	Plot 4.9.1 C2	-20	PASS
		3GHz-5GHz	Plot 4.9.1 C3	-20	PASS
		5GHz-10GHz	Plot 4.9.1 C4	-20	PASS
		10GHz-15GHz	Plot 4.9.1 C5	-20	PASS
		15GHz-25GHz	Plot 4.9.1 C6	-20	PASS


Note:

1. The test results including the cable lose.

##### B. Test Plots

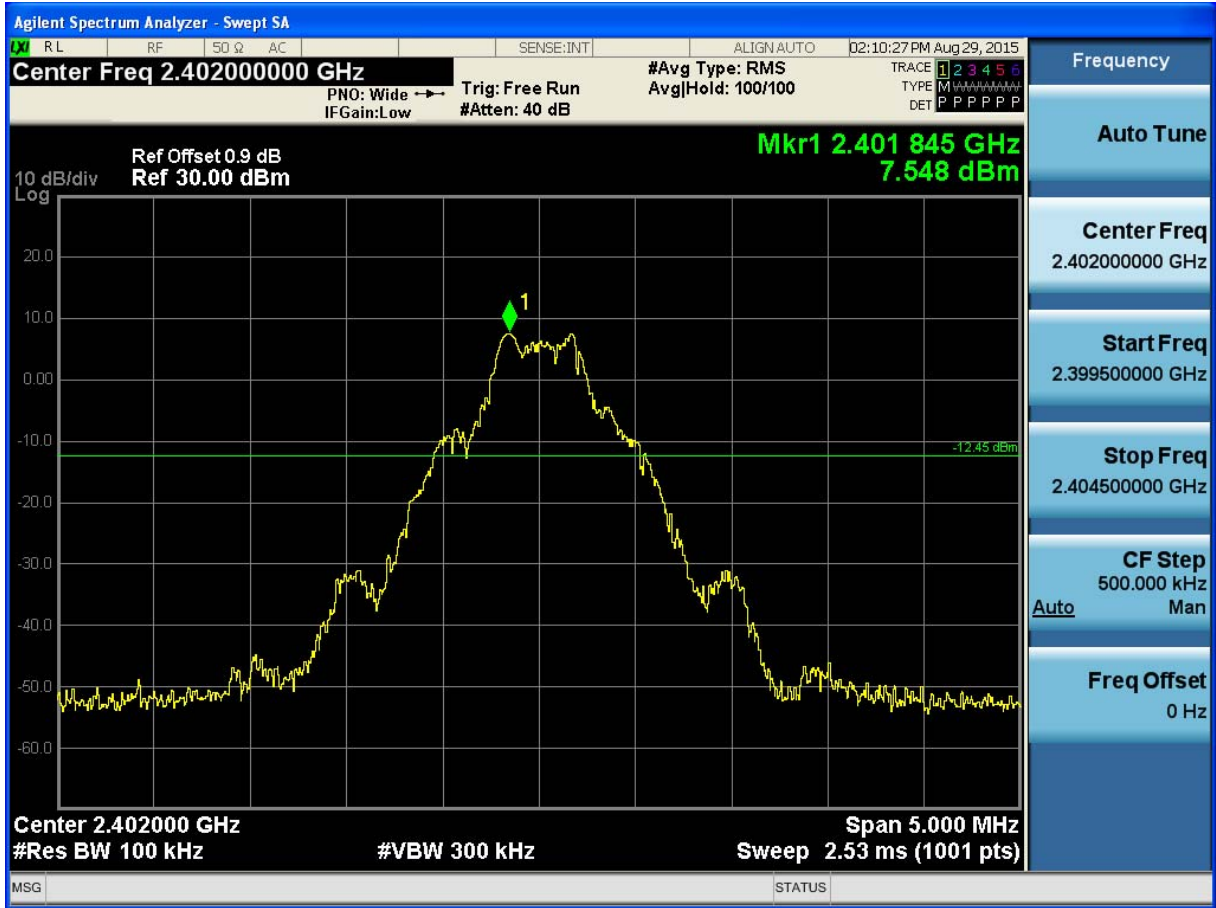


(Plot 4.9.1 A1: Channel 00: 2402MHz @ GFSK)

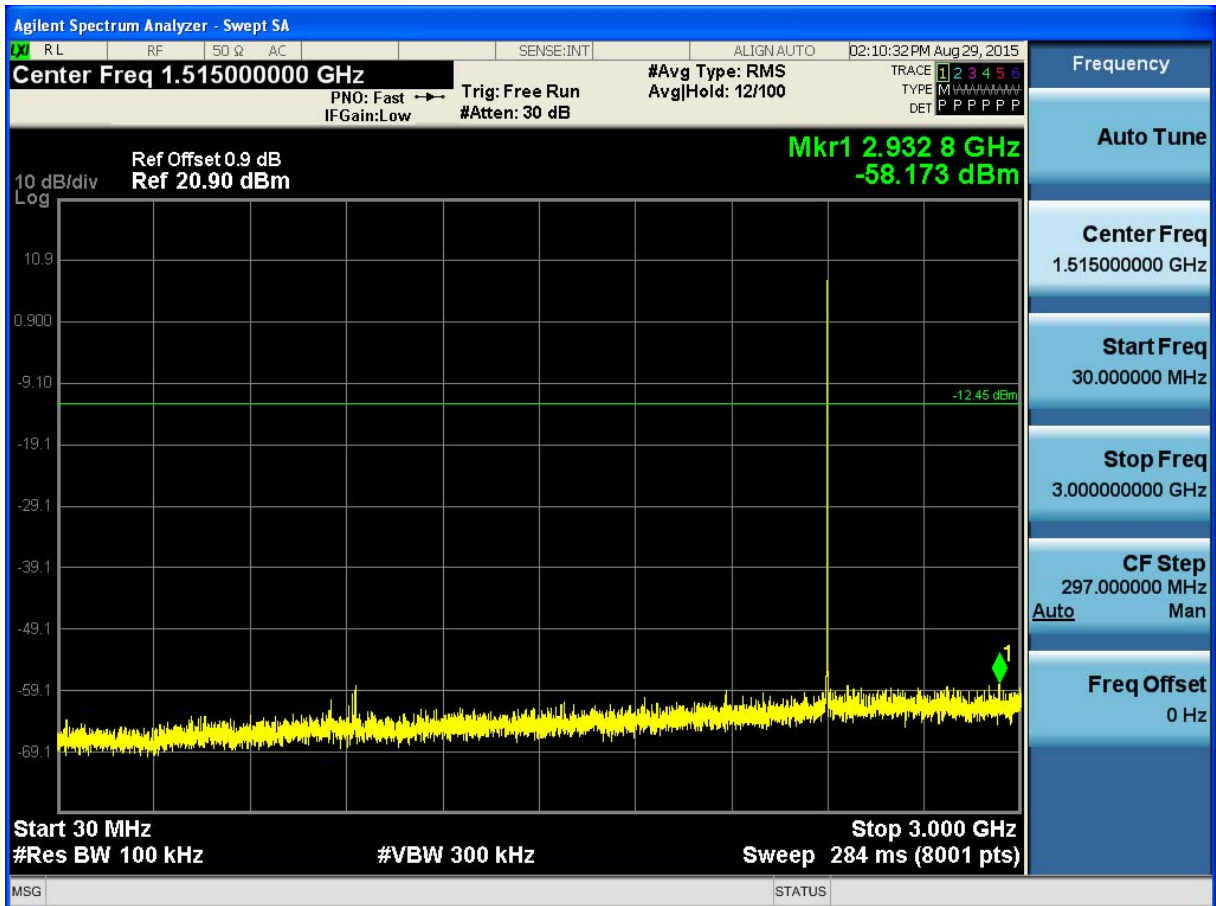


(Plot 4.9.1 A2: Channel 00: 2402MHz @ GFSK)




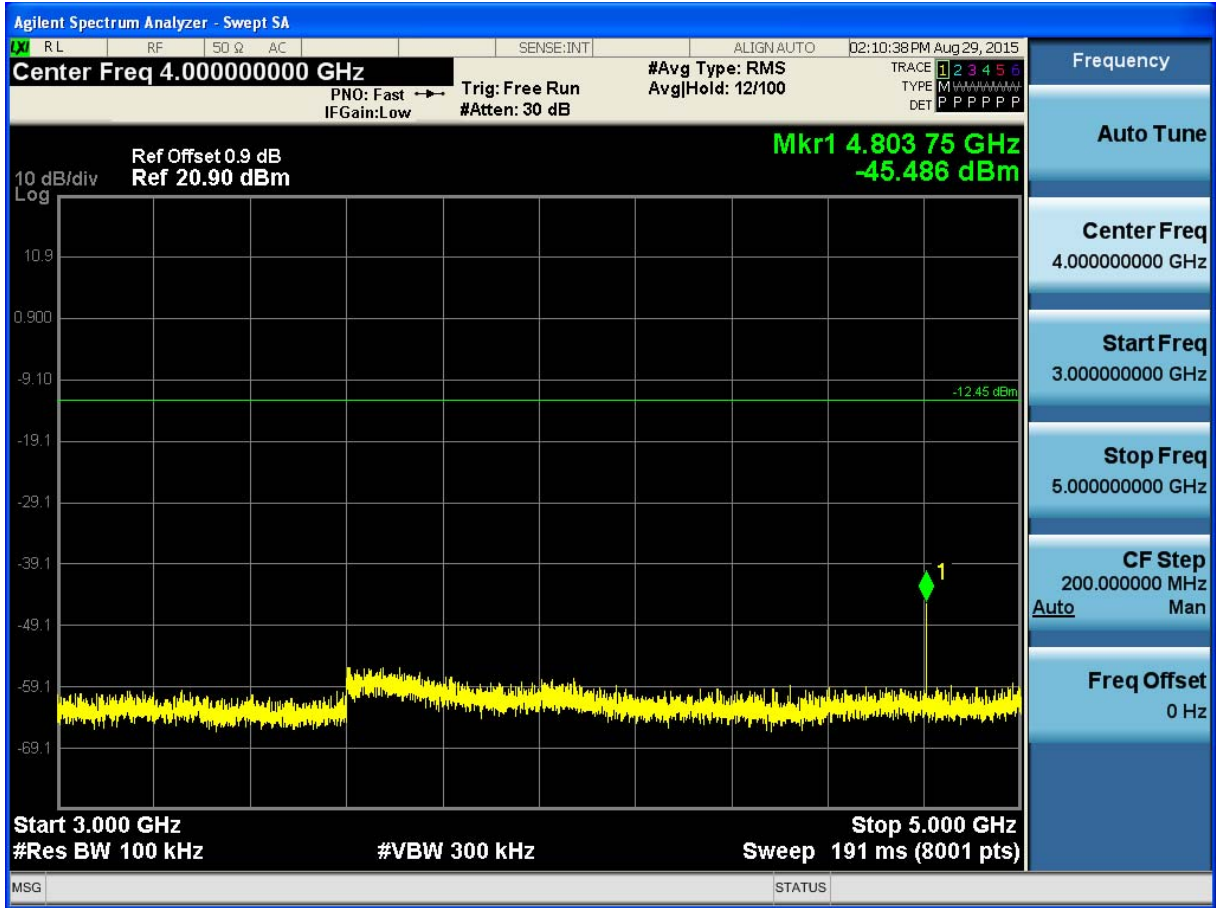


(Plot 4.9.1 A3: Channel 00: 2402MHz @ GFSK)

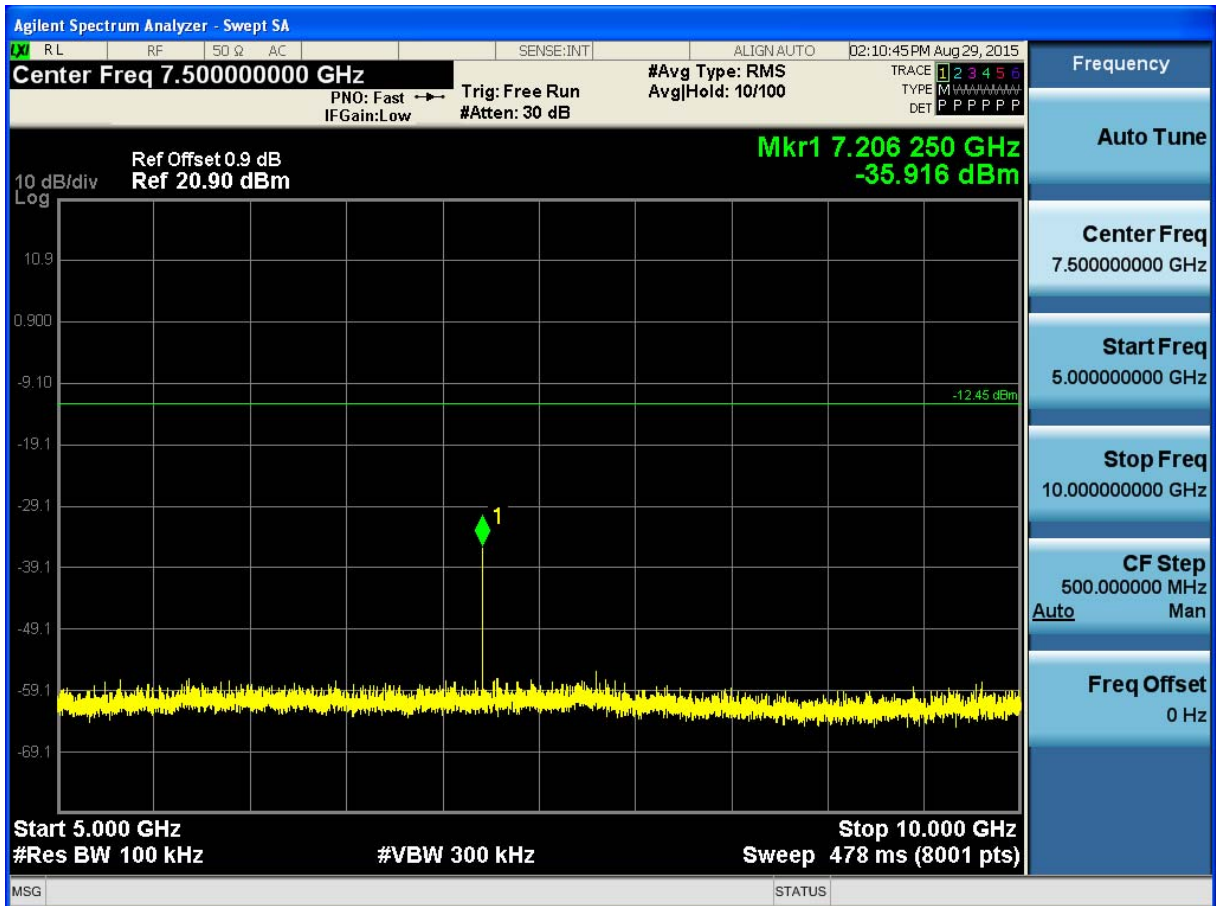

(Plot 4.9.1 A4: Channel 00: 2402MHz @ GFSK)

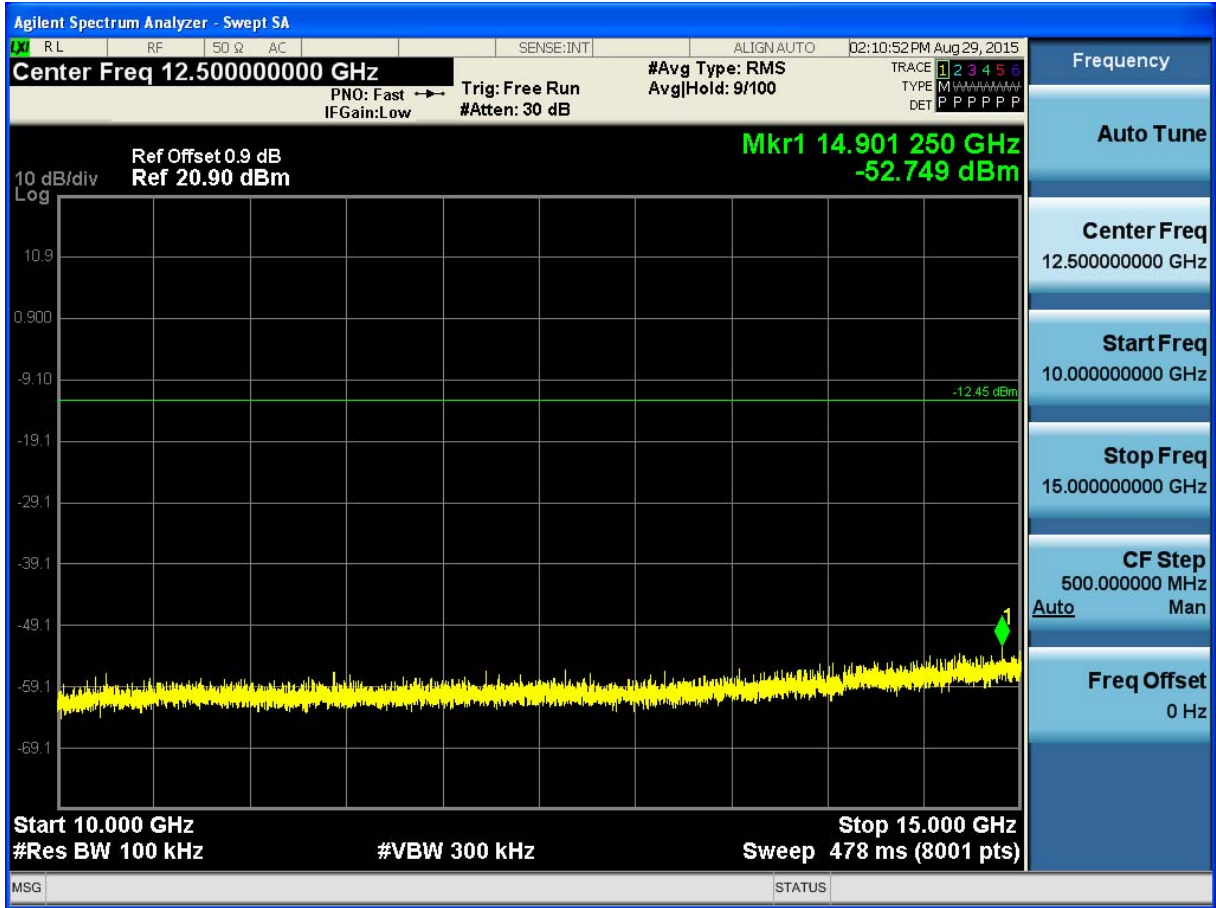

(Plot 4.9.1 A5: Channel 00: 2402MHz @ GFSK)

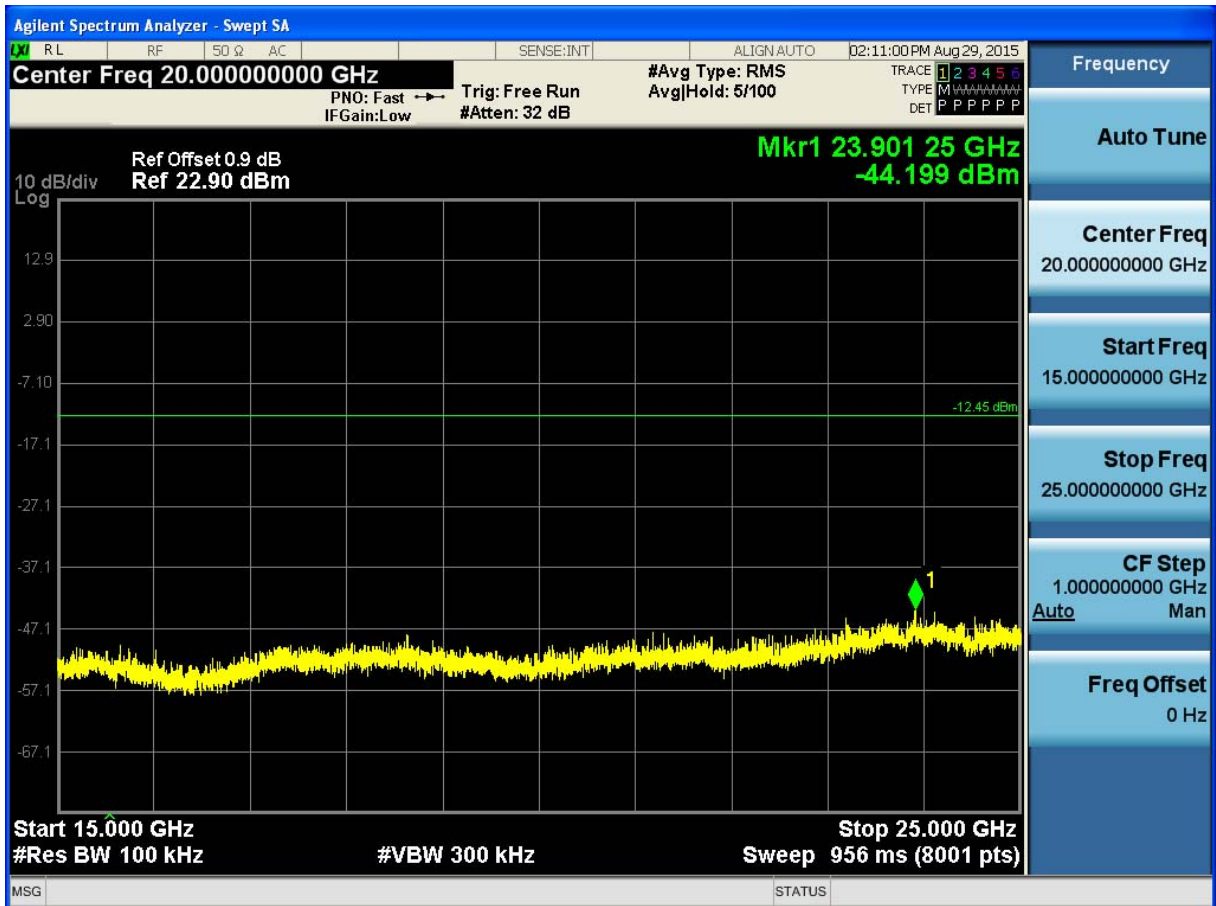

(Plot 4.9.1 A6: Channel 00: 2402MHz @ GFSK)