

## FCC PART 27 TEST REPORT

### FCC Part 27

**Report Reference No.....:** MWR161000108  
**FCC ID.....:** RQQHLT-L55UTM  
 Compiled by  
 ( position+printed name+signature)..: File administrators Martin Ao  
 Supervised by  
 ( position+printed name+signature)..: Test Engineer Yuchao Wang  
 Approved by  
 ( position+printed name+signature)..: Manager Dixon Hao  
 Date of issue.....: October 24, 2016


---


---



**Representative Laboratory Name ..:** Maxwell International Co., Ltd.  
 Address .....: Room 509, Hongfa center building, Baoan District, Shenzhen, Guangdong, China

**Testing Laboratory Name .....** Shenzhen CTL Testing Technology Co., Ltd.  
 Address .....: Floor 1-A, Baisha Technology Park, No. 3011, Shahehexi Road, Nanshan, Shenzhen 518055 China

**Applicant's name.....:** HYUNDAI CORPORATION  
 Address .....: 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Test specification .....**  
 Standard .....: **FCC CFR Title 47 Part 2, Part 27**  
**EIA/TIA 603-D: 2010**  
**KDB 971168 D01**  
 TRF Originator.....: Maxwell International Co., Ltd.

**Maxwell International Co., Ltd. All rights reserved.**  
 This publication may be reproduced in whole or in part for non-commercial purposes as long as the Maxwell International Co., Ltd. as copyright owner and source of the material. Maxwell International Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description .....** Mobile Phone  
 Trade Mark .....: HYUNDAI  
**Manufacturer.....:** Shenzhen Rainbow Time Technology Co.,Ltd  
 Model/Type reference.....: TITAN LTE  
 Listed Models .....: N/A  
 Modulation Type .....: QPSK, 16QAM  
 Rating .....: DC 3.80V  
 Hardware version .....: 5101SP\_S52  
 Software version .....: V1.0  
 Result.....: **PASS**

**TEST REPORT**

<b>Test Report No. :</b>	<b>MWR161000108</b>	October 24, 2016
		Date of issue

Equipment under Test : Mobile Phone

Model /Type : TITAN LTE

Listed Models : N/A

**Applicant** : **HYUNDAI CORPORATION**

Address : 140-2, Kye-dong, Chongro-ku, Seoul, South Korea

**Manufacturer** : **Shenzhen Rainbow Time Technology Co.,Ltd**

Address : Room 905, ChangHong Technology Building, Science and Technology Park, Nanshan District, Shenzhen, China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Revision History

Revision	Issue Date	Revisions	Revised By
00	2016-10-24	Initial Issue	Dixon Hao

## Contents

<b>1.</b>	<b><u>TEST STANDARDS.....</u></b>	<b>5</b>
<b>2.</b>	<b><u>SUMMARY .....</u></b>	<b>6</b>
2.1.	General Remarks	6
2.2.	Product Description	6
2.3.	Equipment under Test	7
2.4.	Short description of the Equipment under Test (EUT)	7
2.5.	Internal Identification of AE used during the test	7
2.6.	Normal Accessory setting	7
2.7.	EUT configuration	7
2.8.	Related Submittal(s) / Grant (s)	7
2.9.	Modifications	8
2.10.	General Test Conditions/Configurations	8
<b>3.</b>	<b><u>TEST ENVIRONMENT.....</u></b>	<b>9</b>
3.1.	Address of the test laboratory	9
3.2.	Test Facility	9
3.3.	Environmental conditions	9
3.4.	Test Description	9
3.5.	Equipments Used during the Test	10
<b>4.</b>	<b><u>TEST CONDITIONS AND RESULTS.....</u></b>	<b>11</b>
4.1.	Output Power	11
4.2.	Peak-to-Average Ratio (PAR)	16
4.3.	Occupied Bandwidth and Emission Bandwidth	21
4.4.	Band Edge compliance	26
4.5.	Spurious Emssion on Antenna Port	31
4.6.	Radiated Spurious Emssion	40
4.7.	Frequency Stability	46
<b>5.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b>48</b>
<b>6.</b>	<b><u>EXTERNAL PHOTOS OF THE EUT.....</u></b>	<b>48</b>
<b>7.</b>	<b><u>INTERNAL PHOTOS OF THE EUT.....</u></b>	<b>48</b>

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Part 27\(10-1-12 Edition\)](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES  
[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[47 CFR FCC Part 15 Subpart B](#): - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[ANSI C63.4:2014](#): Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

[FCCKDB971168D01](#) Power Meas License Digital Systems

## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample	:	September 18, 2016
Testing commenced on	:	September 19, 2016
Testing concluded on	:	October 24, 2016

### 2.2. Product Description

The **HYUNDAI CORPORATION**'s Model: TITAN LTE or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Mobile Phone
Model Number	TITAN LTE
Modulation Type	GMSK for GSM/GPRS/EDGE, 8-PSK for EDGE only downlink, QPSK for UMTS, QPSK/16QAM for LTE
Antenna Type	Internal
UMTS Operation Frequency Band	Device supported UMTS FDD Band II, FDD Band V
WLAN FCC Operation frequency	IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz IEEE 802.11n HT40:2422-2452MHz
BT FCC Operation frequency	2402MHz-2480MHz
HSDPA Release Version	Release 10
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
WCDMA Release Version	R99
WLAN FCC Modulation Type	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
BT Modulation Type	GFSK,8DPSK, $\pi$ /4DQPSK(BT3.0+EDR),GFSK(BLE)
Hardware version	5101SP_S52
Software version	V1.0
Android version	Android 5.1
GPS function	Supported
WLAN	Supported 802.11b/802.11g/802.11n
Bluetooth	Supported BT 4.0/BT 3.0+EDR
GSM/EDGE/GPRS	Supported GSM/GPRS/EDGE
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GSM/EDGE/GPRS Operation Frequency	GSM850 :824.2MHz-848.8MHz/PCS1900:1850.2MHz-1909.8MHz
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900/EDGE850/EDGE1900
GSM Release Version	R99
GPRS/EDGE Multislot Class	GPRS: Multi-slot Class 12
Extreme temp. Tolerance	-30°C to +50°C
Extreme vol. Limits	3.40VDC to 4.20VDC (nominal: 3.80VDC)
GPRS operation mode	Class B

## 2.3. Equipment under Test

### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 120V / 60 Hz	<input type="radio"/> 115V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 3.80V

## 2.4. Short description of the Equipment under Test (EUT)

### 2.4.1 General Description

TITAN LTE is subscriber equipment in the WCDMA/GSM system. The HSPA/UMTS frequency band is Band I, Band II and Band V; The GSM/GPRS/EDGE frequency band includes GSM850 and GSM900 and DCS1800 and PCS1900, but only Band II, Band V, GSM850 and PCS1900 bands test data included in this report. The Mobile Phone implements such functions as RF signal receiving/transmitting, HSPA/UMTS and GSM/GPRS/EDGE protocol processing, voice, video MMS service, GPS and WIFI etc. Externally it provides micro SD card interface, earphone port (to provide voice service) and SIM card interface. It also provides Bluetooth module to synchronize data between a PC and the phone, or to use the built-in modem of the phone to access the Internet with a PC, or to exchange data with other Bluetooth devices.

NOTE: Unless otherwise noted in the report, the functional boards installed in the units shall be selected from the below list, but not means all the functional boards listed below shall be installed in one unit.

## 2.5. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE2	Charger

AE1

Model: DC500

INPUT: AC180-240V~ 50/60Hz 0.15A

OUTPUT: DC 5.0V 1000mA

\*AE ID: is used to identify the test sample in the lab internally.

## 2.6. Normal Accessory setting

Fully charged battery was used during the test.

## 2.7. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- supplied by the manufacturer

- supplied by the lab

<input type="radio"/> Power Cable	Length (m) :	/
	Shield :	/
	Detachable :	/
<input type="radio"/> Multimeter	Manufacturer :	/
	Model No. :	/

## 2.8. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: RQQHLT-L55UTM** filing to comply with FCC Part 27, Rules.

## 2.9. Modifications

No modifications were implemented to meet testing criteria.

## 2.10. General Test Conditions/Configurations

### 2.10.1 Test Environment

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Temperature	TN	Ambient
Voltage	VL	3.40V
	VN	3.80V
	VH	4.20V

NOTE: VL=lower extreme test voltage VN=nominal voltage  
VH=upper extreme test voltage TN=normal temperature



### 3. TEST ENVIRONMENT

#### 3.1. Address of the test laboratory

**Shenzhen CTL Testing Technology Co., Ltd.**

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

#### 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

#### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

#### 3.4. Test Description

##### 3.4.1 AWS Band (1710-1755MHz pairedwith 2110-2155MHz)

Test Item	FCC Rule No.	Requirements	Verdict
Effective (Isotropic) Radiated Output Power	§2.1046, §27.50(d)	EIRP ≤ 1W;	Pass
Peak-Average Ratio	§2.1046, §27.50(d)	Limits≤13dB	Pass
Modulation Characteristics	§2.1047	Digital modulation	N/A
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Pass
Band Edges Compliance	§2.1051, §27.53(h)	≤ -13dBm/1%*EBW, in 1MHz bands immediately outside and adjacent to The frequency block.	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(h)	≤ -13dBm/1MHz, from 9kHz to 10 <sup>th</sup> harmonics but outside authorized operating frequency ranges.	Pass
Field Strength of Spurious Radiation	§2.1055, §27.54	Within authorized bands of operation/frequency block.	Pass
Frequency Stability	§2.1053, §27.53(h)	≤ -13dBm/1MHz.	Pass

NOTE 1: For the verdict, the "N/A" denotes "not applicable", the "N/T" de notes "not tested".

### 3.5. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01
Spectrum Analyzer	Agilent	N9030A	MY49430428	2016/05/21	2017/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	SCHWARZBECK	BBHA9170D	BBH A9170179	2016/05/19	2017/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
EMC Test Software	R&S	ES-K1	N/A	N/A	N/A
EMC Test Software	Audix	E3	N/A	N/A	N/A
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/ Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
RF Cable	Megalon	RF-A303	N/A	2016/06/02	2017/06/01
Power Sensor	R&S	NRP-Z4	823.3618.03	2016/06/02	2017/06/01
Power Meter	R&S	NRVS	1020.1809.02	2016/06/02	2017/06/01
System Simulator	R&S	CMW500	A130101034	2016/05/22	2017/05/21

## 4. TEST CONDITIONS AND RESULTS


### 4.1. Output Power

#### TEST APPLICABLE

During the process of testing, the EUT was controlled via R&S Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains output power and EIRP measurements for the EUT. In all cases, output power is within the specified limits

#### 4.1.1. Conducted Output Power

#### TEST CONFIGURATION

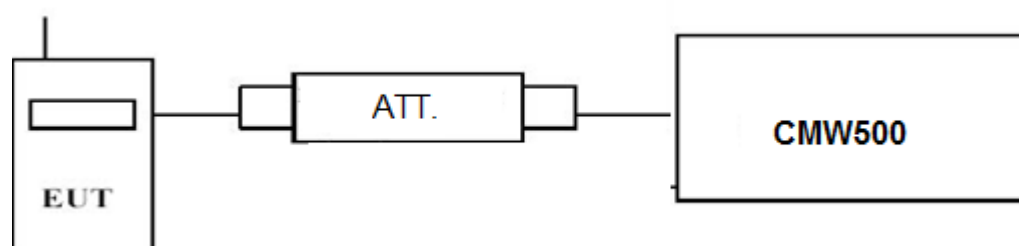

#### TEST PROCEDURE

##### Conducted Power Measurement:

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a CMW500 by an Att.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display CMW500, and then test.

#### TEST RESULTS

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7;
- We measured at both SIM 1 and SIM 2, recorded worst case at SIM 1;

LTE FDD Band 7				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	Average Power [dBm]	
			QPSK	16QAM
5 MHz	2502.5	1 RB low	21.56	20.78
		1 RB high	21.41	20.64
		50% RB mid	20.56	19.68
		100% RB	20.48	19.57
	2535.0	1 RB low	21.59	20.86
		1 RB high	21.53	20.79
		50% RB mid	20.58	19.76
		100% RB	20.53	19.60
	2567.5	1 RB low	21.41	20.59
		1 RB high	21.26	20.29
		50% RB mid	20.71	19.78
		100% RB	20.67	19.72
10 MHz	2505.0	1 RB low	21.12	20.46
		1 RB high	20.43	19.42
		50% RB mid	20.32	19.55
		100% RB	20.19	19.42
	2535.0	1 RB low	21.25	20.71
		1 RB high	20.13	19.45
		50% RB mid	20.24	19.07
		100% RB	20.30	19.58
2565.0	1 RB low	20.75	20.03	


		1 RB high	20.48	19.98
		50% RB mid	20.41	19.45
		100% RB	20.47	19.51
15 MHz	2507.5	1 RB low	21.12	20.49
		1 RB high	20.68	19.72
		50% RB mid	20.19	19.18
		100% RB	20.09	19.01
	2535.0	1 RB low	21.26	20.64
		1 RB high	20.74	20.11
		50% RB mid	20.08	19.06
		100% RB	20.28	19.26
	2562.5	1 RB low	20.26	19.28
		1 RB high	20.52	19.91
		50% RB mid	20.53	19.49
		100% RB	20.22	19.19
20 MHz	2510.0	1 RB low	20.06	19.18
		1 RB high	20.01	19.11
		50% RB mid	19.87	19.01
		100% RB	19.90	19.06
	2535.0	1 RB low	21.41	20.98
		1 RB high	20.87	19.03
		50% RB mid	19.91	19.06
		100% RB	20.06	19.15
	2560.0	1 RB low	20.06	19.35
		1 RB high	20.45	20.03
		50% RB mid	20.56	19.36
		100% RB	19.98	19.23

## 4.1.2. Radiated Output Power

### LIMIT

According to §27.50 (d) (4): Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

### TEST CONFIGURATION

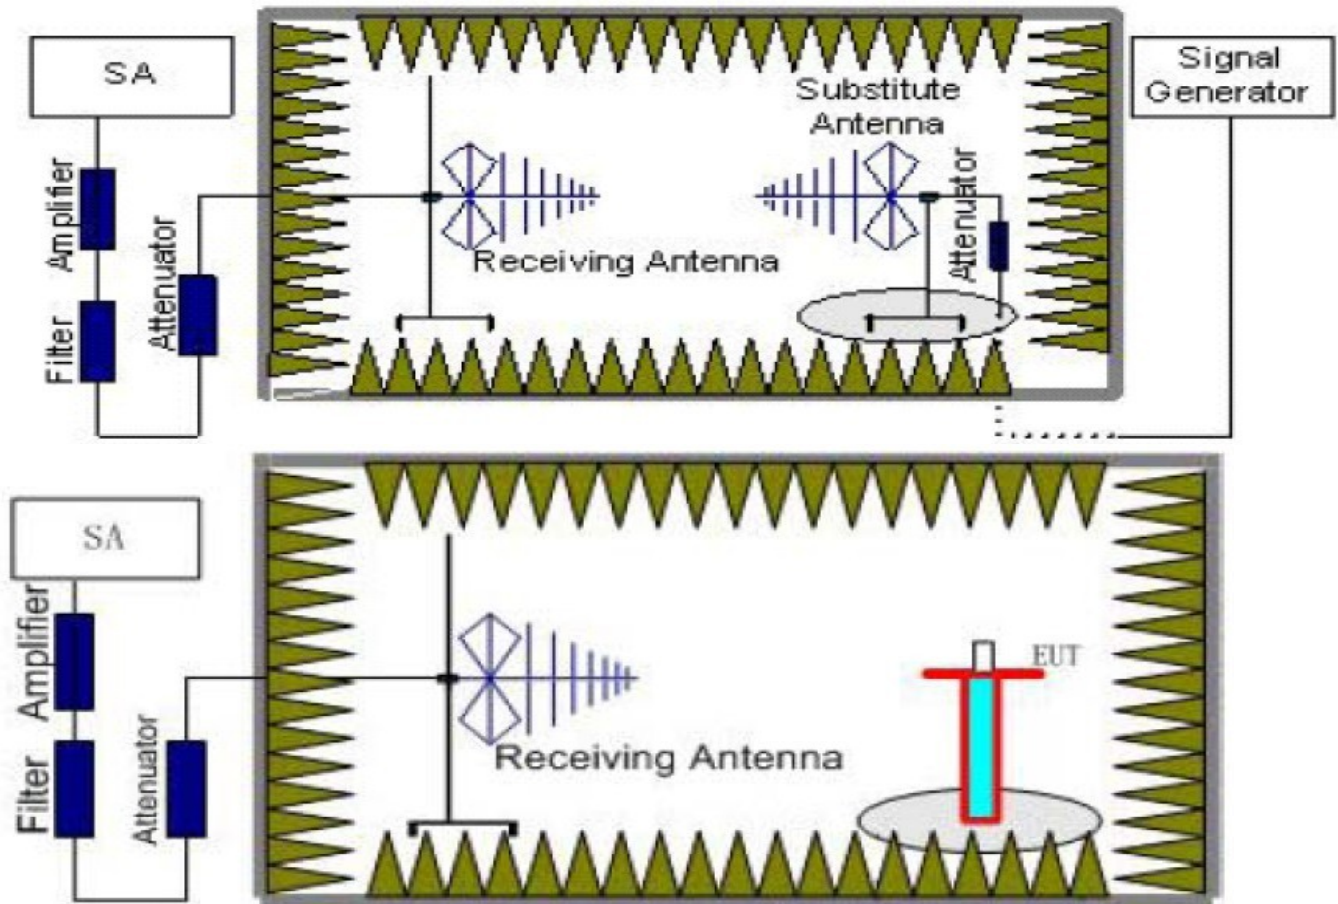

### TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as ( $P_r$ ).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{Ag}} - P_{\text{cl}} + G_a$$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{\text{Mea}} - P_{\text{cl}} + G_a$$

6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$ .

## TEST RESULTS

Note: We test the H direction and V direction and V direction is worse.

Remark:

- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 4; recorded worst case for each Channel Bandwidth of LTE FDD Band 4.
- $\text{EIRP} = P_{\text{Mea}}(\text{dBm}) - P_{\text{cl}}(\text{dB}) + P_{\text{Ag}}(\text{dB}) + G_a(\text{dBi})$
- We measured at SIM 1 as conducted burst average power higher at SIM 1;
- We measured both Horizontal and Vertical direction, recorded worst case direction.

### LTE FDD Band 7\_Channel Bandwidth 5MHz\_QPSK

Frequency (MHz)	$P_{\text{Mea}}$ (dBm)	$P_{\text{cl}}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{\text{Ag}}$ (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-21.89	3.06	9.68	34.8	19.53	30	10.47	V
2535	-21.46	3.17	9.68	34.8	19.85	30	10.15	V
2567.5	-22.73	3.22	9.75	34.8	18.60	30	11.40	V

### LTE FDD Band 7\_Channel Bandwidth 10MHz\_QPSK

Frequency (MHz)	$P_{\text{Mea}}$ (dBm)	$P_{\text{cl}}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{\text{Ag}}$ (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505	-22.69	3.06	9.68	34.8	18.73	30	11.27	V
2535	-21.35	3.17	9.68	34.8	19.96	30	10.04	V
2565	-22.90	3.22	9.75	34.8	18.43	30	11.57	V

### LTE FDD Band 7\_Channel Bandwidth 15MHz\_QPSK

Frequency (MHz)	$P_{\text{Mea}}$ (dBm)	$P_{\text{cl}}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{\text{Ag}}$ (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-22.21	3.06	9.68	34.8	19.21	30	10.79	V
2535	-21.25	3.17	9.68	34.8	20.06	30	9.94	V
2562.5	-21.90	3.22	9.75	34.8	19.43	30	10.57	V

### LTE FDD Band 7\_Channel Bandwidth 20MHz\_QPSK

Frequency (MHz)	$P_{\text{Mea}}$ (dBm)	$P_{\text{cl}}$ (dB)	$G_a$ Antenna Gain(dB)	$P_{\text{Ag}}$ (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510	-22.20	3.06	9.68	34.8	19.22	30	10.78	V
2535	-21.64	3.17	9.68	34.8	19.67	30	10.33	V
2560	-22.64	3.22	9.75	34.8	18.69	30	11.31	V

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_16QAM*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2502.5	-22.47	3.06	9.68	34.8	18.95	30	11.05	V
2535	-21.97	3.17	9.68	34.8	19.34	30	10.66	V
2567.5	-23.01	3.22	9.75	34.8	18.32	30	11.68	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_16QAM*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2505	-22.83	3.06	9.68	34.8	18.59	30	11.41	V
2535	-22.42	3.17	9.68	34.8	18.89	30	11.11	V
2565	-22.62	3.22	9.75	34.8	18.71	30	11.29	V

*LTE FDD Band 7\_Channel Bandwidth 15MHz\_16QAM*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2507.5	-22.83	3.06	9.68	34.8	18.59	30	11.41	V
2535	-22.47	3.17	9.68	34.8	18.84	30	11.16	V
2562.5	-22.62	3.06	9.68	34.8	18.80	30	11.20	V

*LTE FDD Band 7\_Channel Bandwidth 20MHz\_16QAM*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	G <sub>a</sub> Antenna Gain(dB)	P <sub>Aq</sub> (dB)	Burst Average EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
2510	-22.54	3.06	9.68	34.8	18.88	30	11.12	V
2535	-21.88	3.17	9.68	34.8	19.43	30	10.57	V
2560	-22.45	3.22	9.75	34.8	18.88	30	11.12	V

## 4.2. Peak-to-Average Ratio (PAR)

### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

### TEST CONFIGURATION

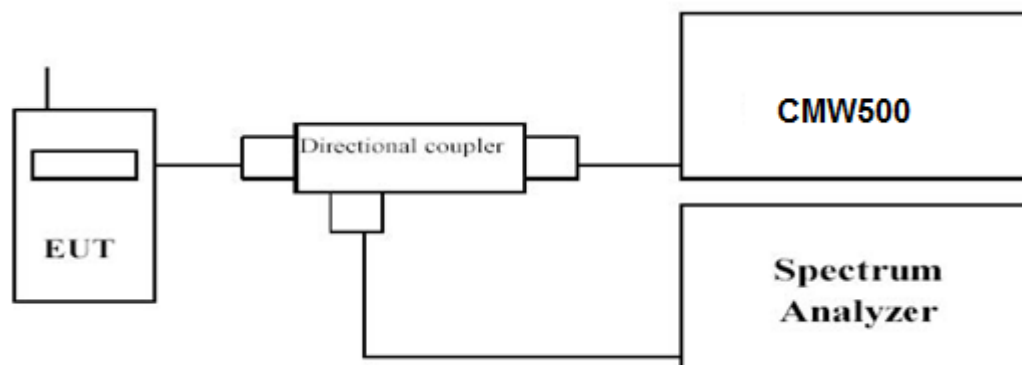

### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;

LTE FDD Band 7				
TX Channel Bandwidth	Frequency (MHz)	RB Size/Offset	PAPR (dB)	
			QPSK	16QAM
5 MHz	2502.5	1RB#0	3.50	4.51
	2535.0		3.61	4.64
	2567.5		3.88	4.95
10 MHz	2505.0	1RB#0	5.01	6.00
	2535.0		5.15	6.24
	2565.0		5.23	6.20
15 MHz	2507.5	1RB#0	5.78	6.86
	2535.0		5.84	6.78
	2562.5		5.77	6.88
20 MHz	2510.0	1RB#0	6.46	7.09
	2535.0		6.46	7.27
	2560.0		6.44	7.11




LTE FDD Band 7 – 5 MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel

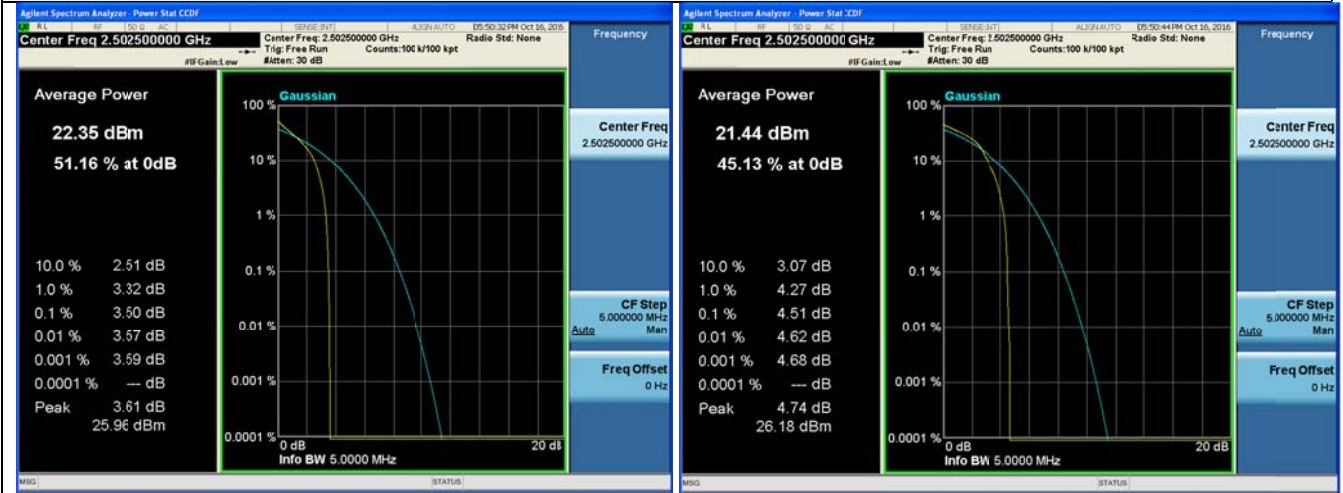

1RB#0

1RB#0


Middle Channel

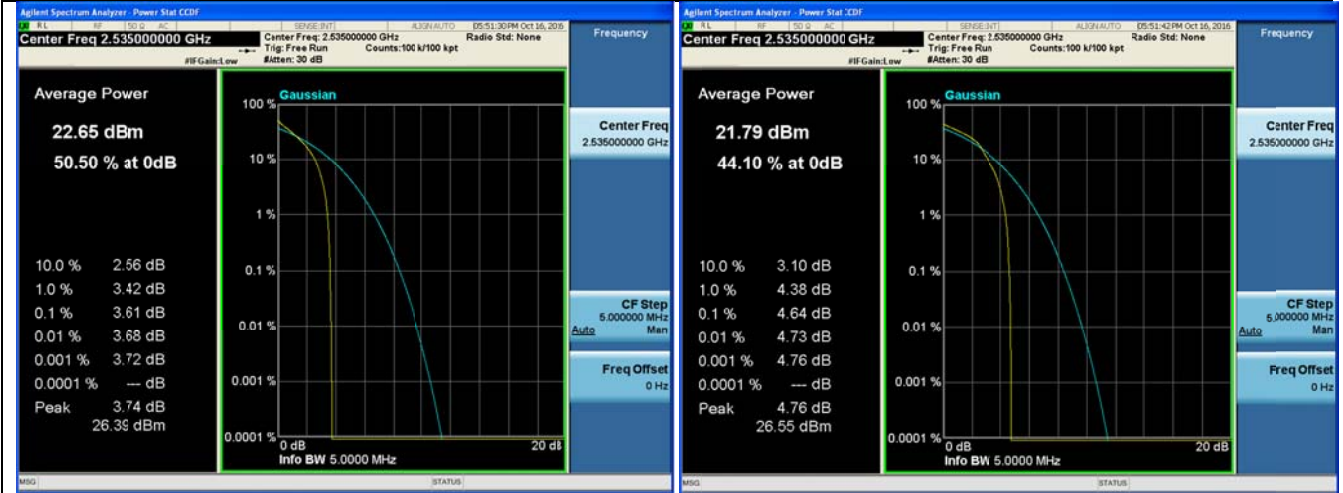

1RB#0

1RB#0

High Channel

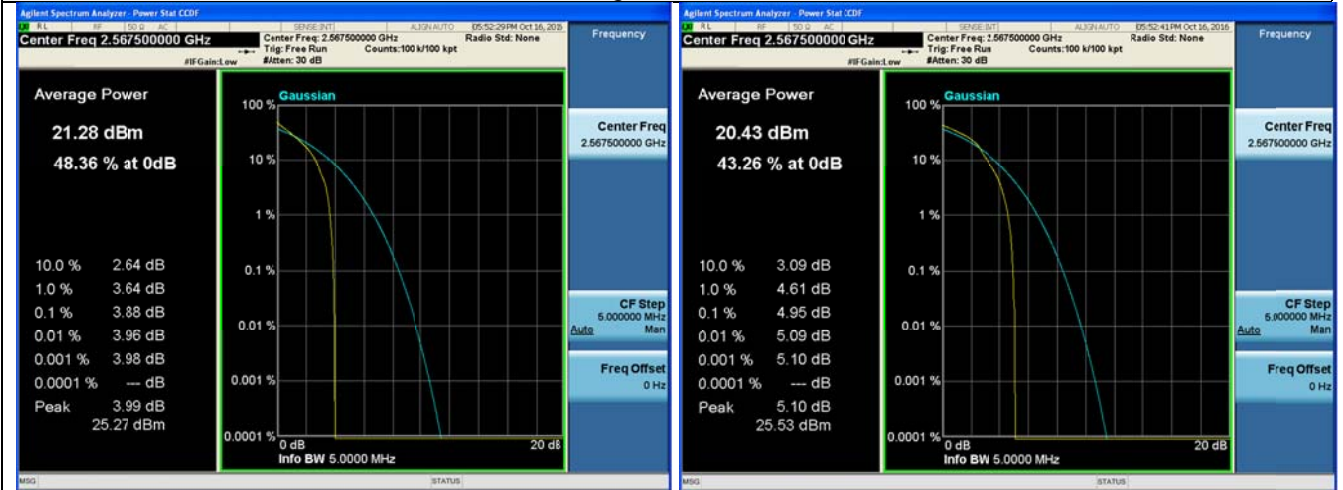

1RB#0

1RB#0

LTE FDD Band 7 – 10 MHz Channel Bandwidth PAPR

QPSK

16QAM

Low Channel



1RB#0

1RB#0

Middle Channel



1RB#0

1RB#0

High Channel



1RB#0


1RB#0

LTE FDD Band 7 – 15 MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel

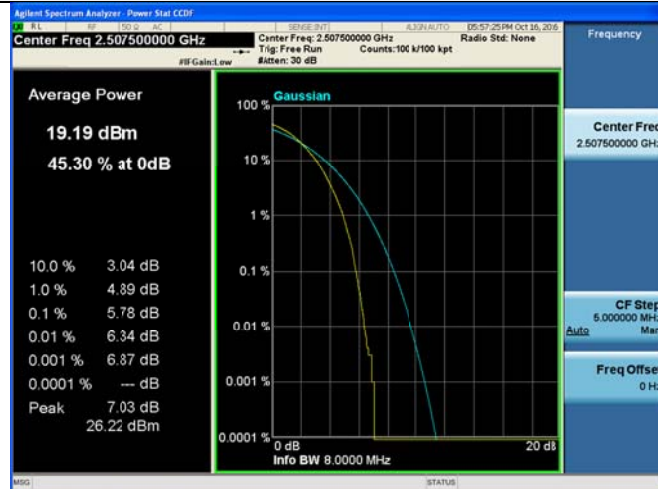

1RB#0

1RB#0

Middle Channel

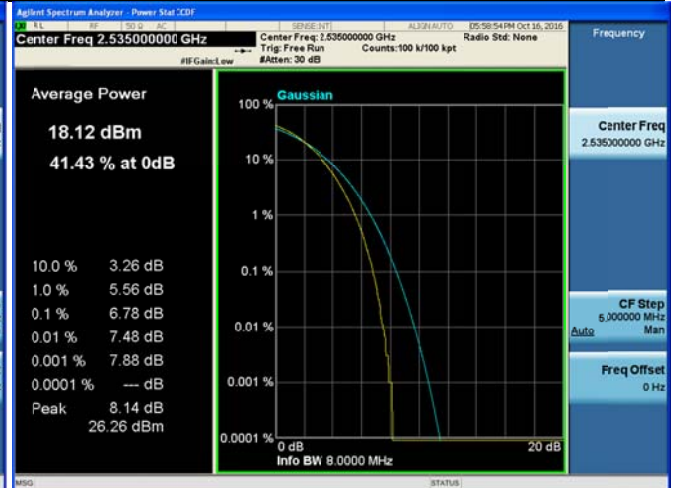

1RB#0

1RB#0

High Channel



1RB#0

1RB#0



LTE FDD Band 7 – 20 MHz Channel Bandwidth PAPR

QPSK

16QAM


Low Channel



1RB#0

1RB#0

Middle Channel

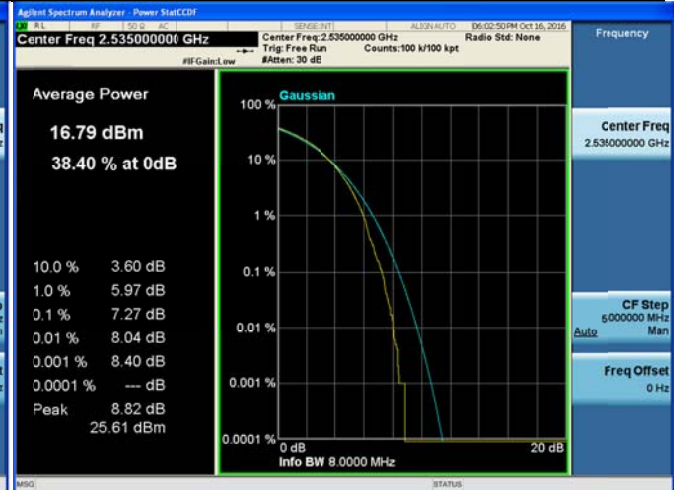

1RB#0

1RB#0

High Channel



1RB#0


1RB#0

### 4.3. Occupied Bandwidth and Emission Bandwidth

#### LIMIT

N/A

#### TEST CONFIGURATION

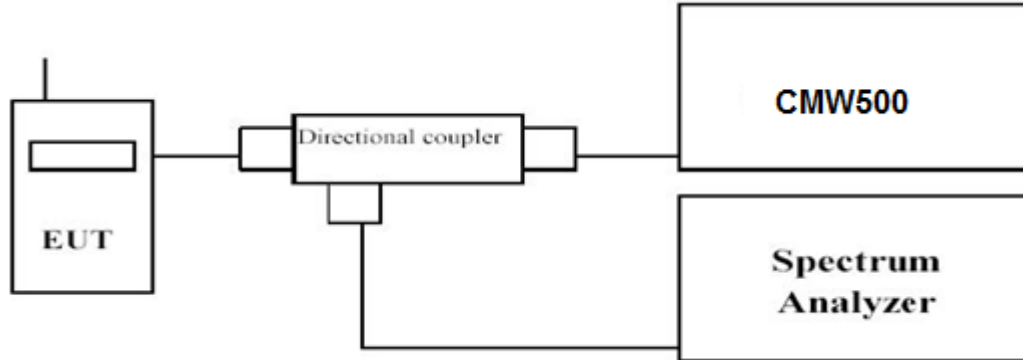

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;


LTE FDD Band 7						
TX Channel Bandwidth	RB Size/Offset	Frequency (MHz)	-26dBc Emission bandwidth (MHz)		99% Occupied bandwidth (MHz)	
			QPSK	16QAM	QPSK	16QAM
5 MHz	25RB#0	2502.5	4.875	4.840	4.4973	4.5037
		2535.0	4.867	4.816	4.4919	4.5027
		2567.5	4.848	4.864	4.4965	4.4957
10 MHz	50RB#0	2505.0	9.680	9.681	9.0321	9.0385
		2535.0	9.682	9.660	9.0086	8.9805
		2565.0	9.690	9.675	8.9932	8.9819
15 MHz	75RB#0	2507.5	14.18	14.23	13.478	13.476
		2535.0	14.16	14.18	13.394	13.396
		2562.5	14.17	14.15	13.409	13.409
20 MHz	100RB#0	2510.0	18.98	18.98	18.032	18.037
		2535.0	18.93	18.88	17.937	17.830
		2560.0	18.94	18.83	17.905	17.927

LTE FDD Band 7 – 5 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

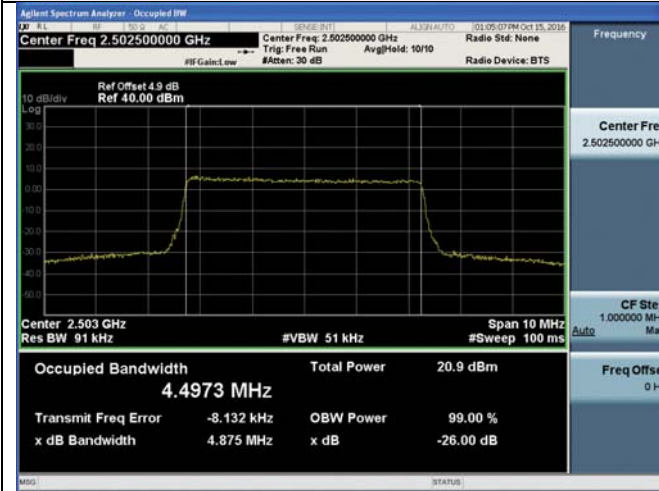

25RB#0

25RB#0



Middle Channel

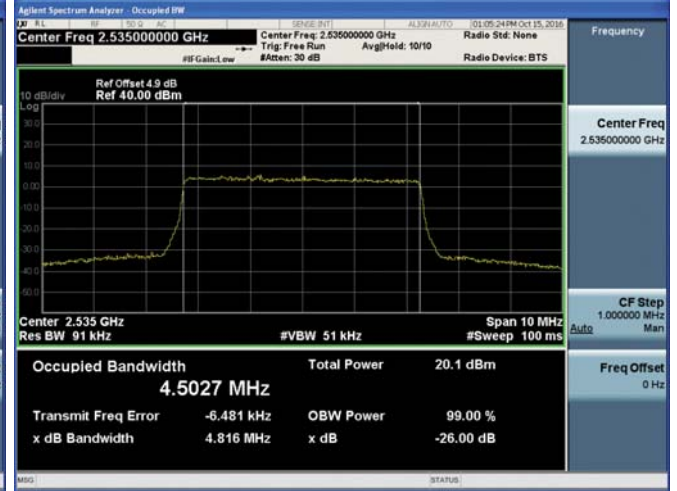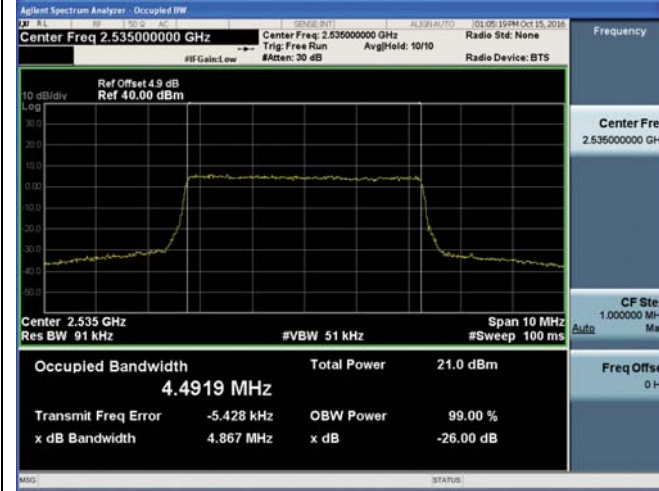

25RB#0

25RB#0

High Channel

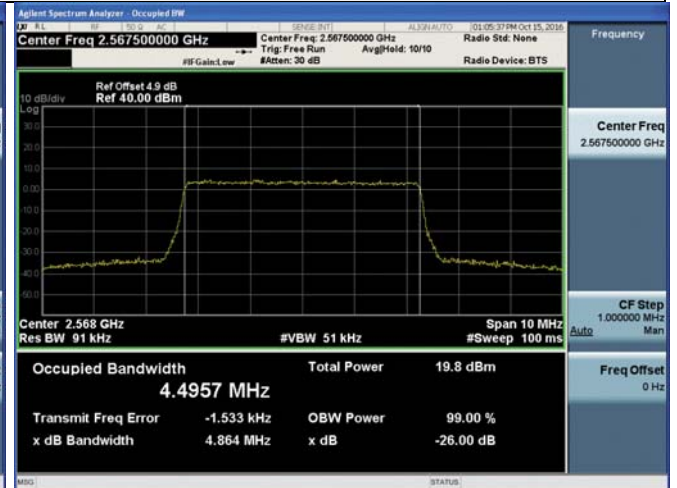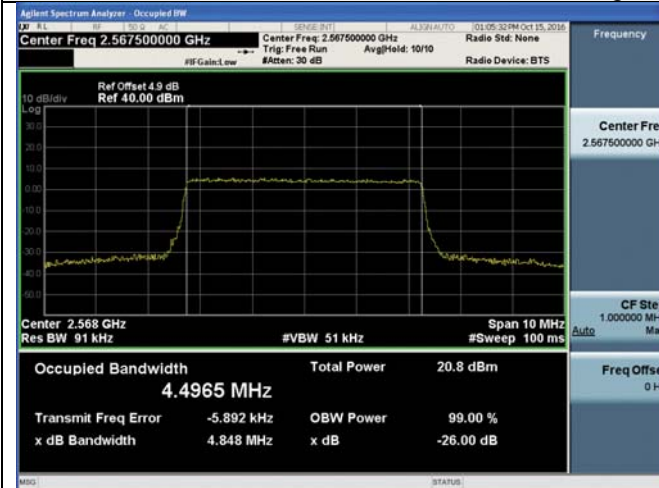

25RB#0


25RB#0

LTE FDD Band 7 – 10 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

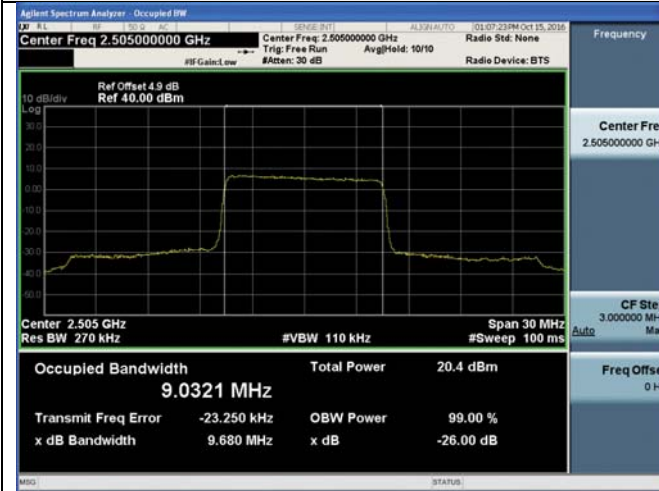

50RB#0

50RB#0



Middle Channel

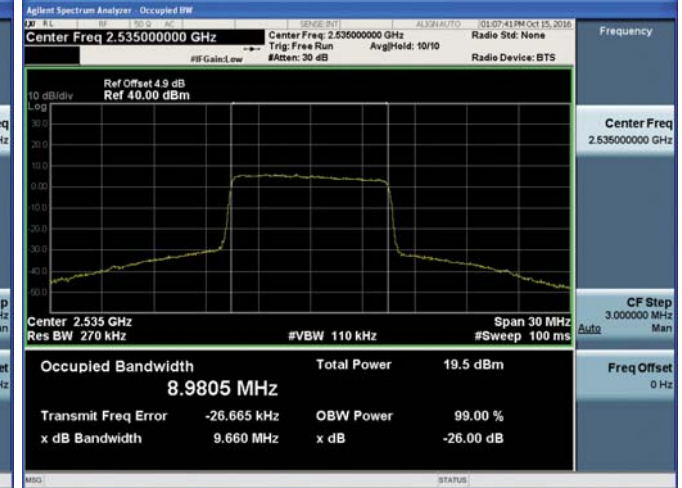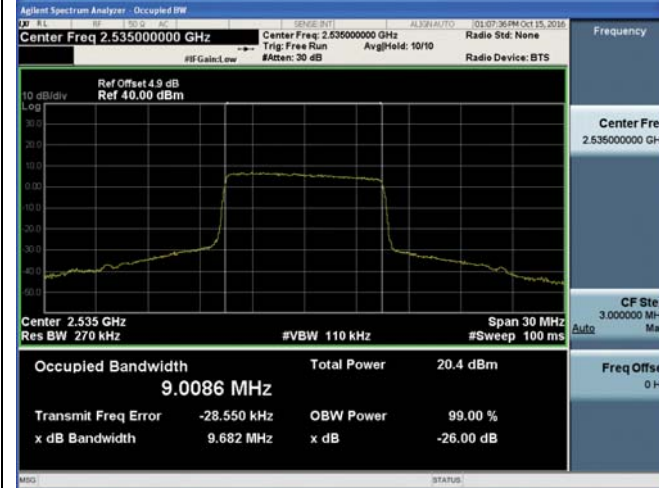

50RB#0

50RB#0

High Channel

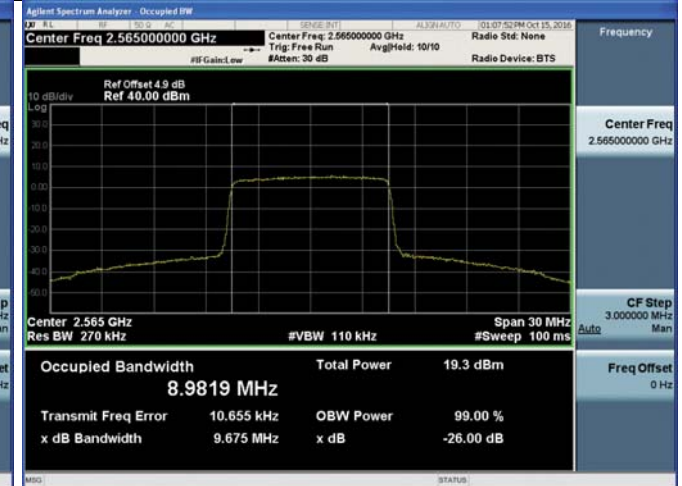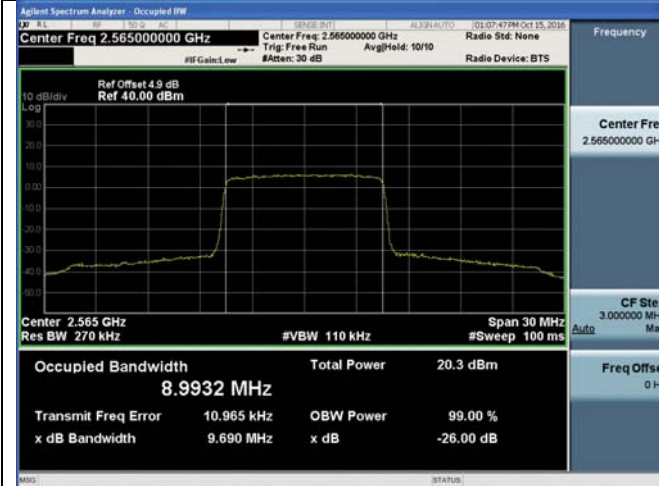

50RB#0

50RB#0





LTE FDD Band 7 – 15 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

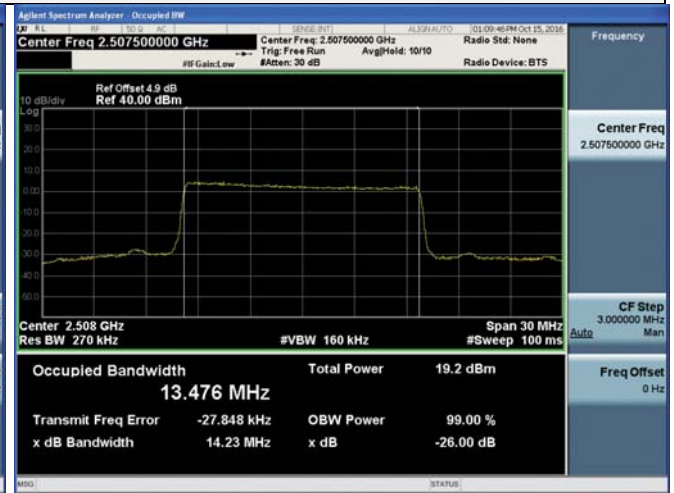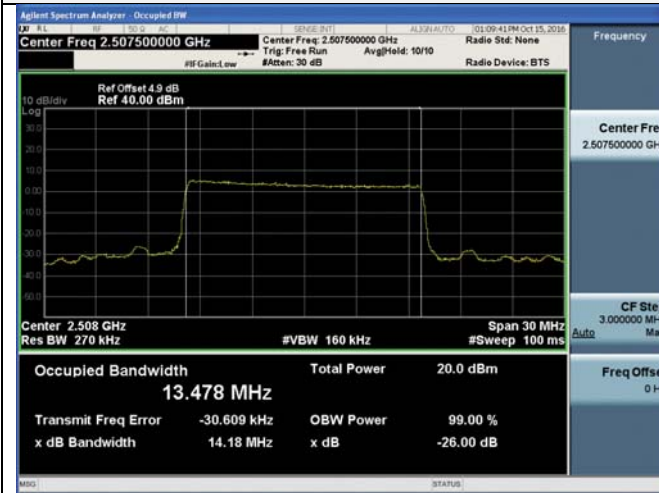

75RB#0

75RB#0



Middle Channel

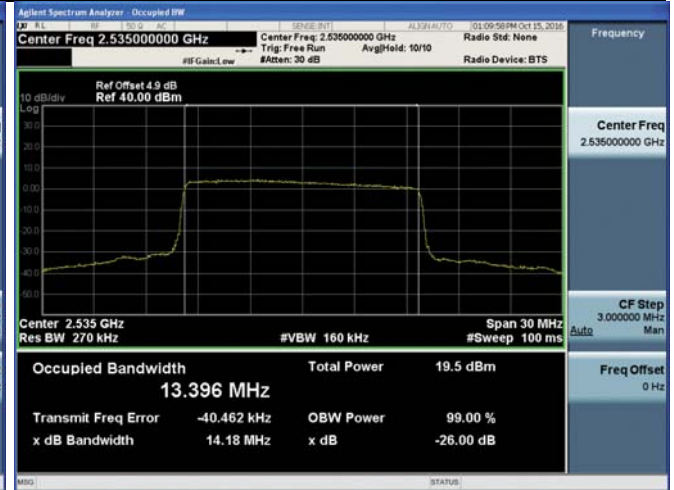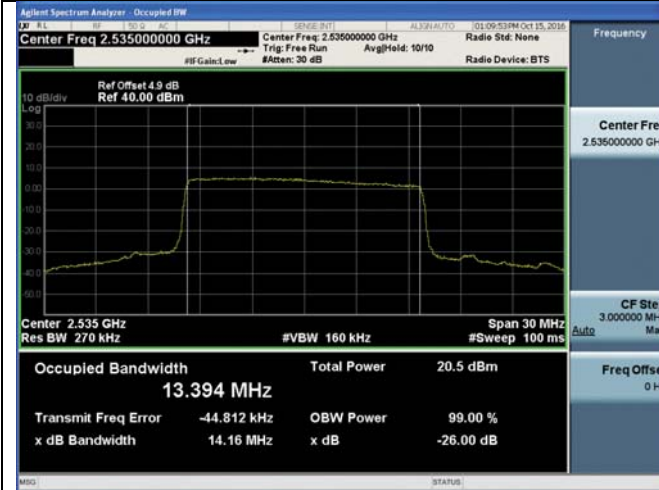

75RB#0

75RB#0

High Channel

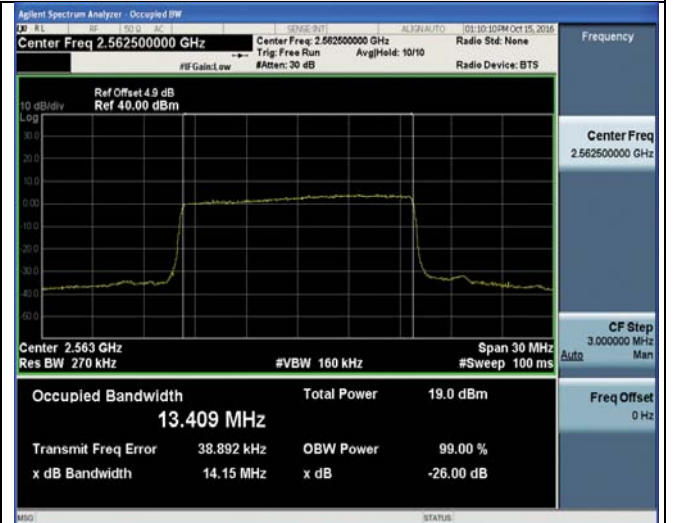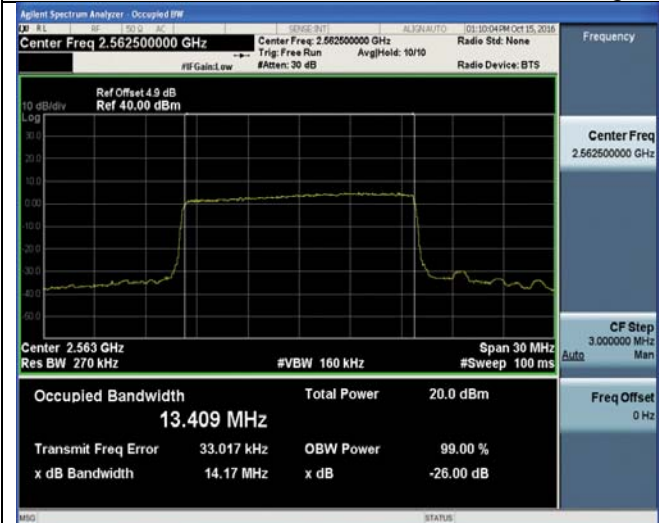

75RB#0

75RB#0





LTE FDD Band 7 – 20 MHz Channel Bandwidth Occupied Bandwidth and Emission Bandwidth

QPSK

16QAM



Low Channel

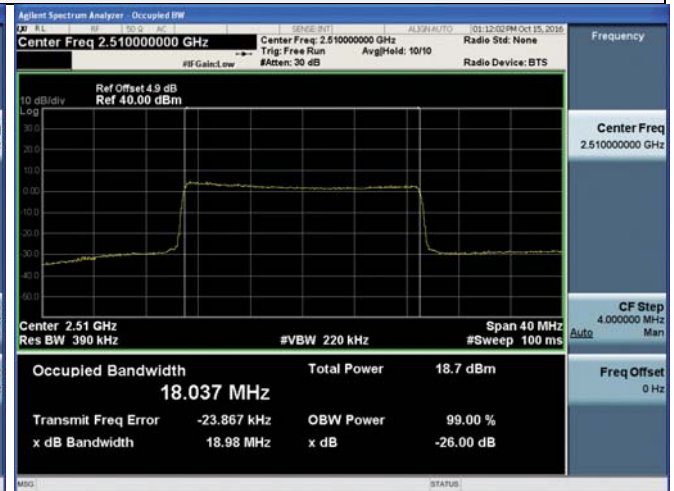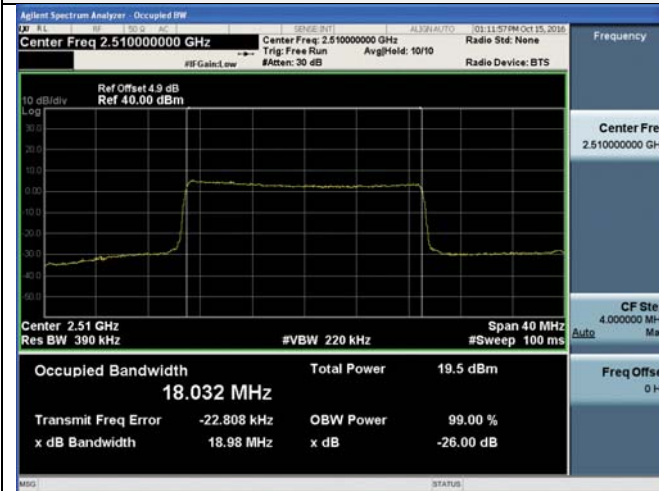

100RB#0

100RB#0


Middle Channel

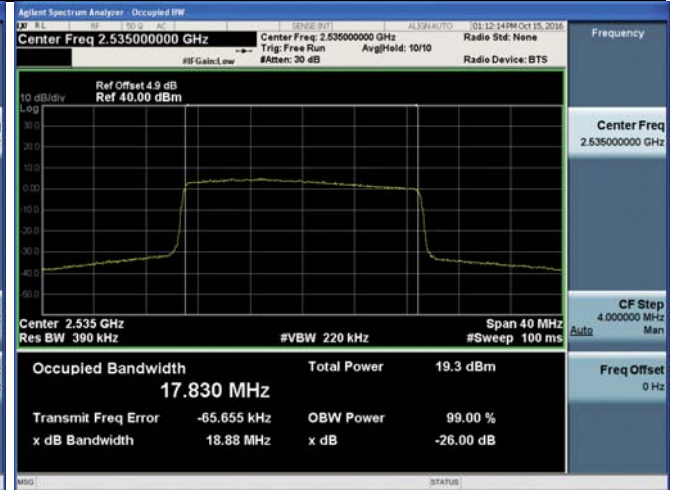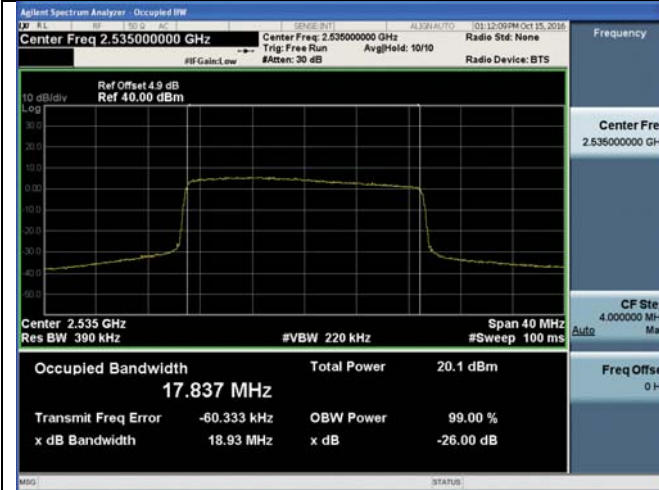

100RB#0

100RB#0

High Channel

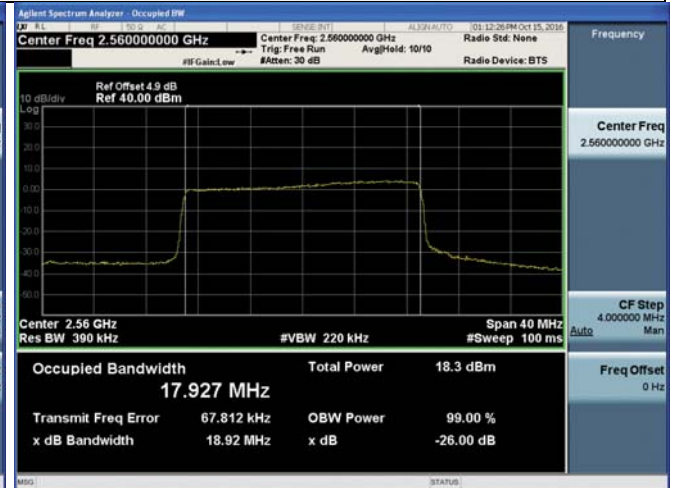

100RB#0


100RB#0

#### 4.4. Band Edge compliance

##### LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

##### TEST CONFIGURATION

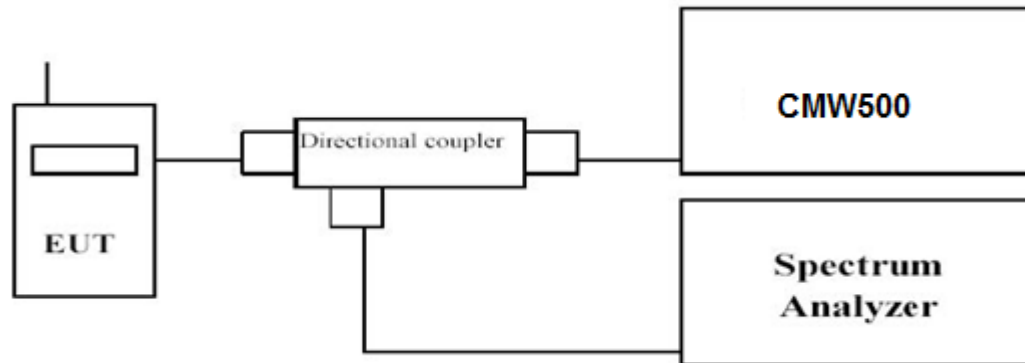

##### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

##### TEST RESULTS

###### *Remark:*


1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;

LTE FDD Band 7 – 5 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM



Low Channel

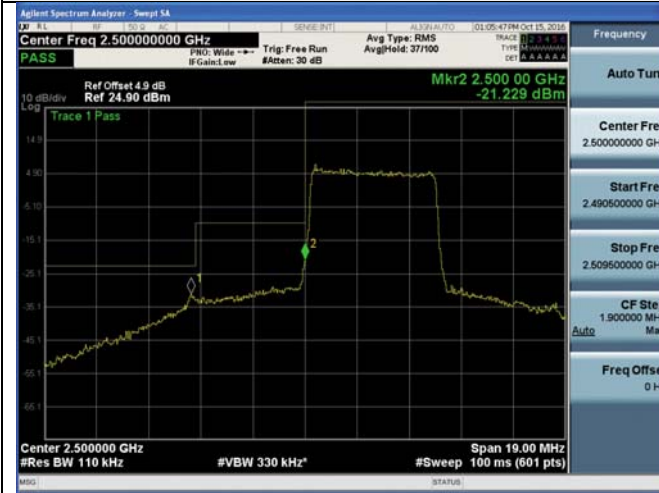

25RB#0

25RB#0

High Channel

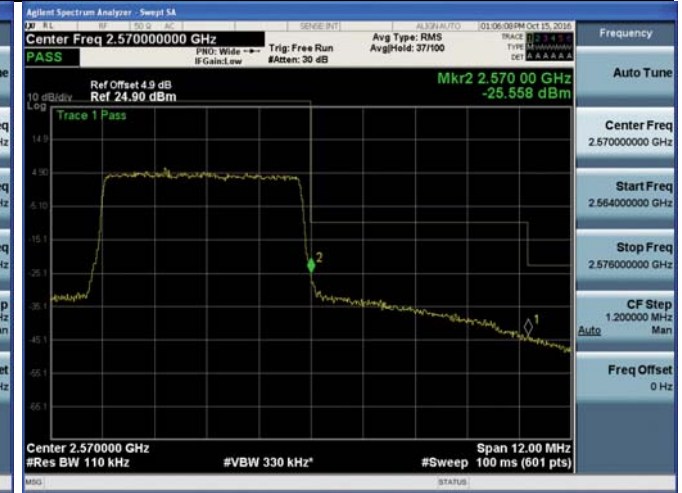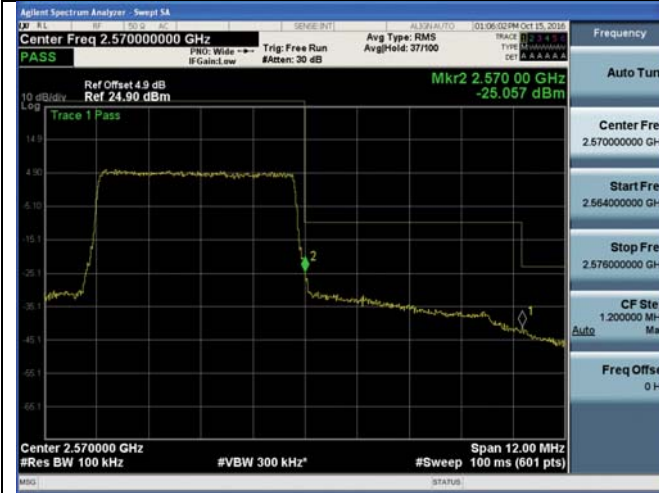

25RB#0

25RB#0

LTE FDD Band 7 – 10 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



50RB#0

50RB#0

High Channel



50RB#0

50RB#0

LTE FDD Band 7 – 15 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



75RB#0

75RB#0

High Channel



75RB#0

75RB#0



LTE FDD Band 7 – 20 MHz Channel Bandwidth Band Edge Compliance

QPSK

16QAM

Low Channel



100RB#0

100RB#0

High Channel



100RB#0


100RB#0

## 4.5. Spurious Emission on Antenna Port

### LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

### TEST CONFIGURATION

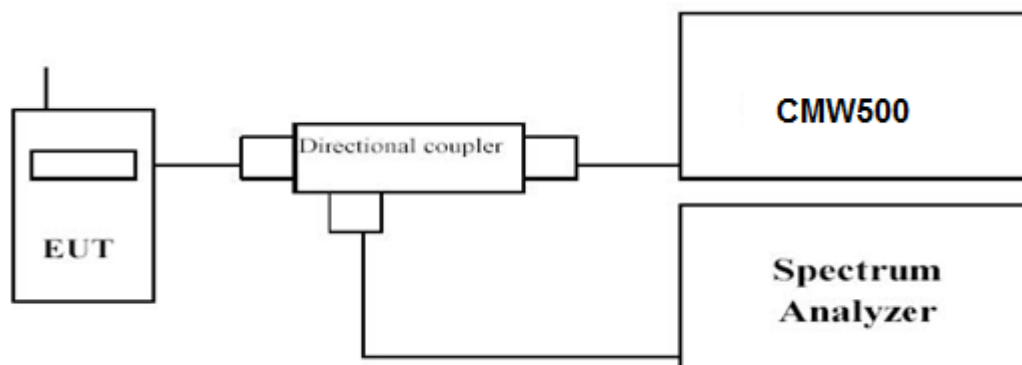

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10<sup>th</sup> harmonic.
- Please refer to following tables for test antenna conducted emissions.



Working Frequency	Sub range (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 7	0.000009~0.000015	1KHz	3KHz	Auto
	0.000015~0.03	10KHz	30KHz	Auto
	0.03~4	1 MHz	3 MHz	Auto
	4~26	1 MHz	3 MHz	Auto

### TEST RESULTS

Remark:



- We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
- We measured at SIM 1 as conducted burst average power higher at SIM 1;
- We measured at both QPSK and 16QAM modulation, recorded worst case at QPSK modulation;

LTE FDD Band 7 – 5 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)

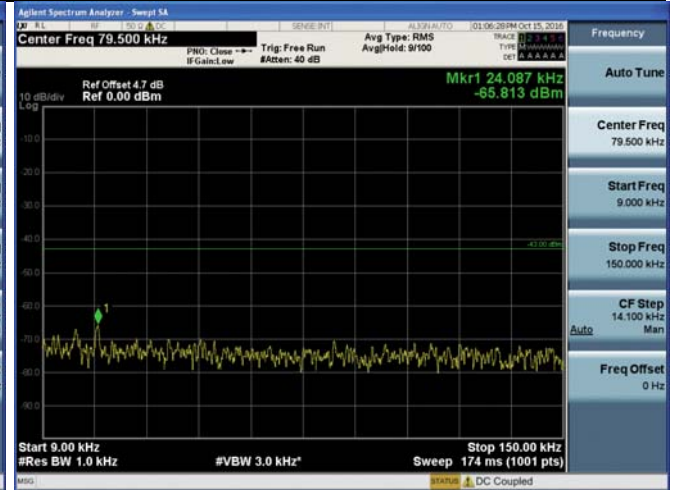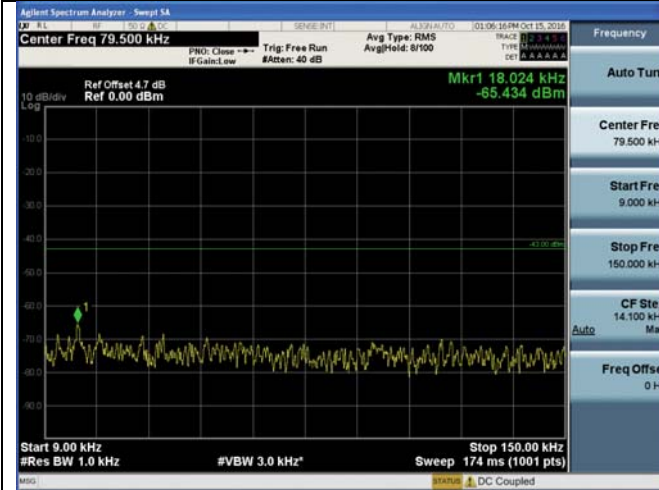



9 KHz – 150 KHz

9 KHz – 150 KHz

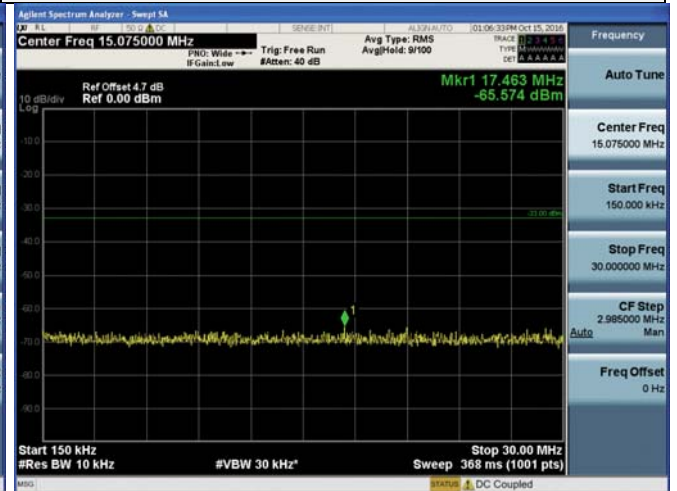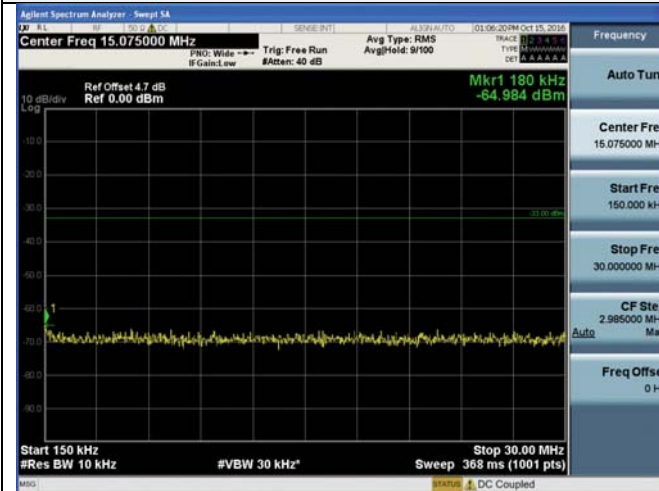

150 KHz – 30 MHz

150 KHz – 30 MHz

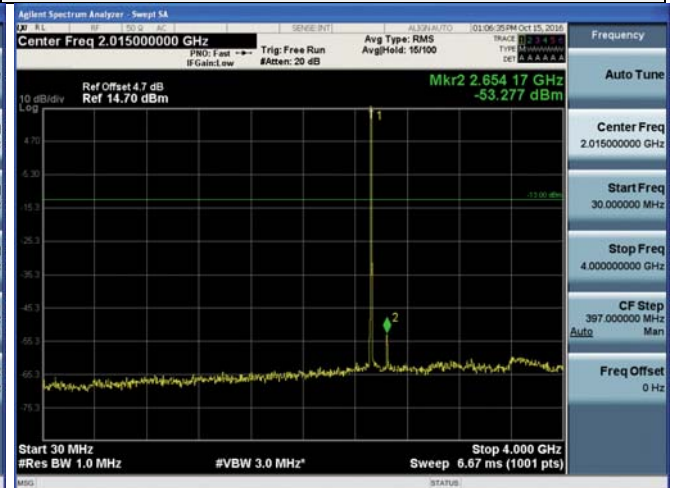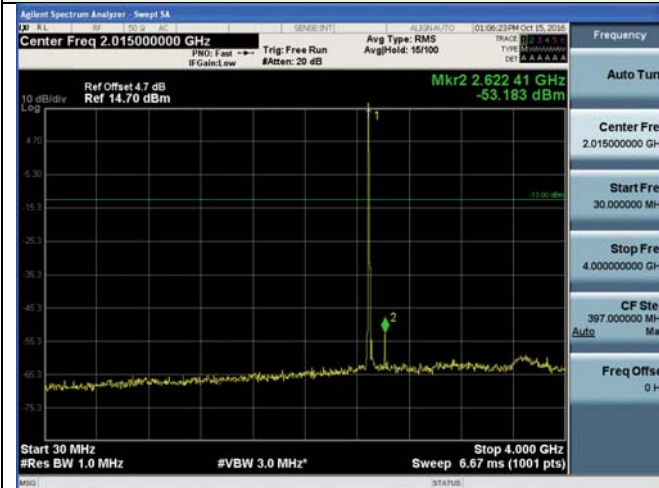

30 MHz – 4 GHz

30 MHz – 4 GHz



LTE FDD Band 7 – 5 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)





4 GHz – 26 GHz

4 GHz – 26 GHz


High Channel (1RB#0)

High Channel (1RB#0)

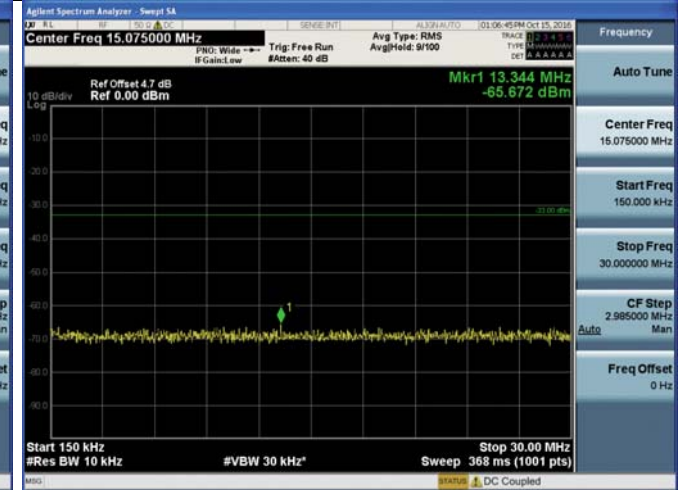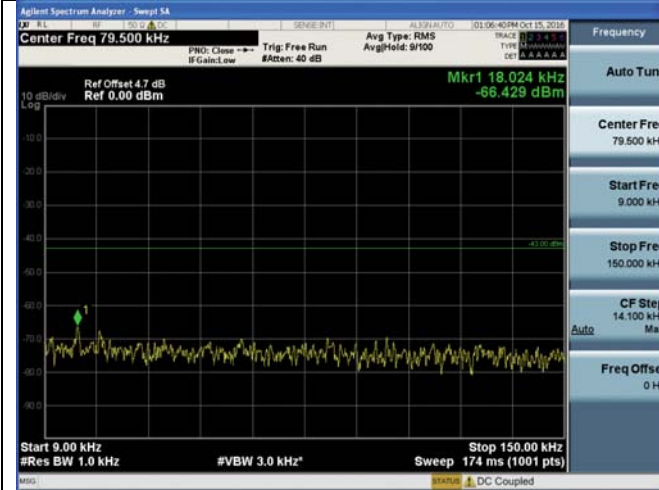

9 KHz – 150 KHz



150 KHz – 30 MHz

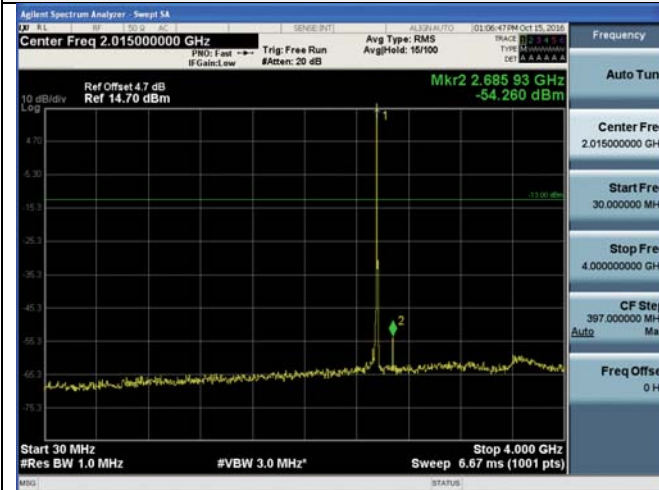

30 MHz – 4 GHz



4 GHz – 26 GHz

LTE FDD Band 7 – 10 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)

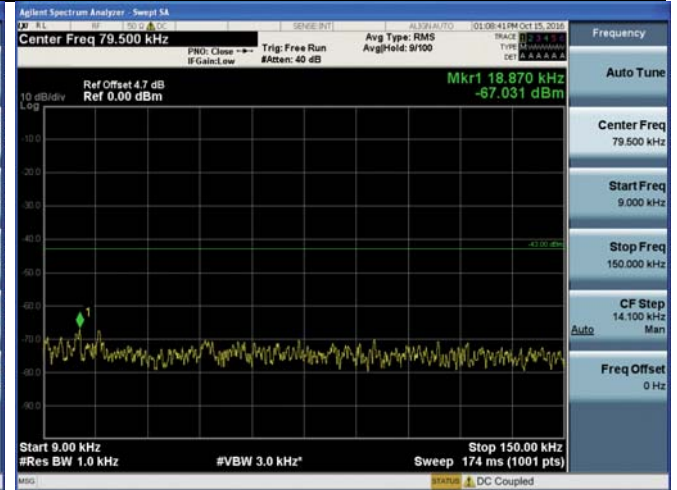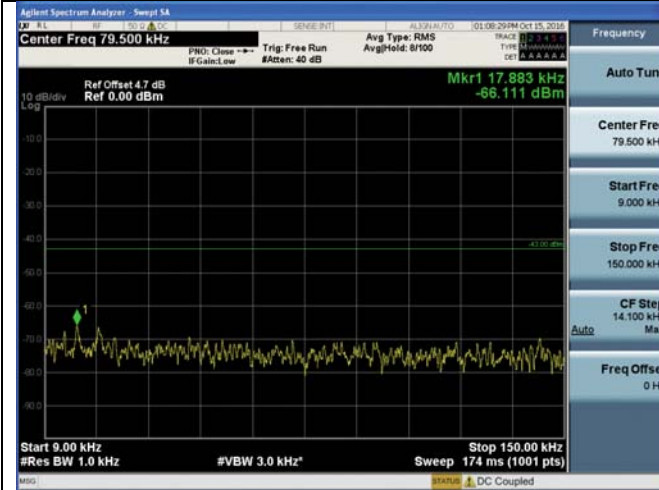


9 KHz – 150 KHz

9 KHz – 150 KHz

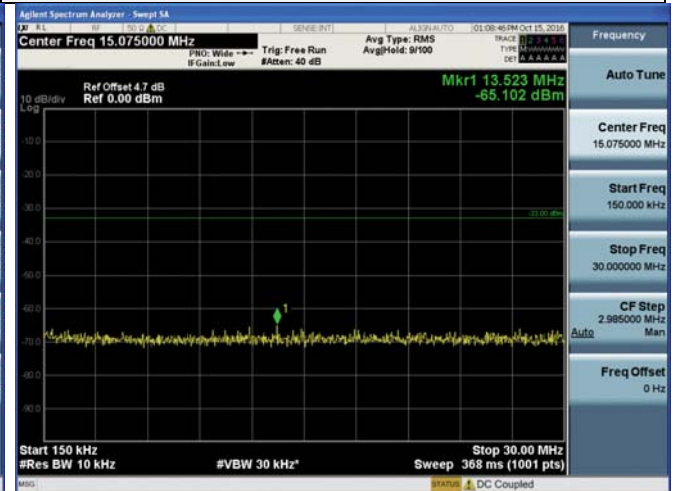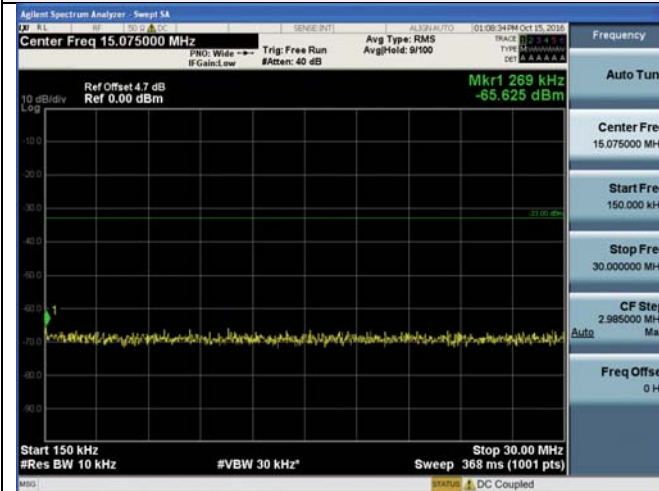

150 KHz – 30 MHz

150 KHz – 30 MHz

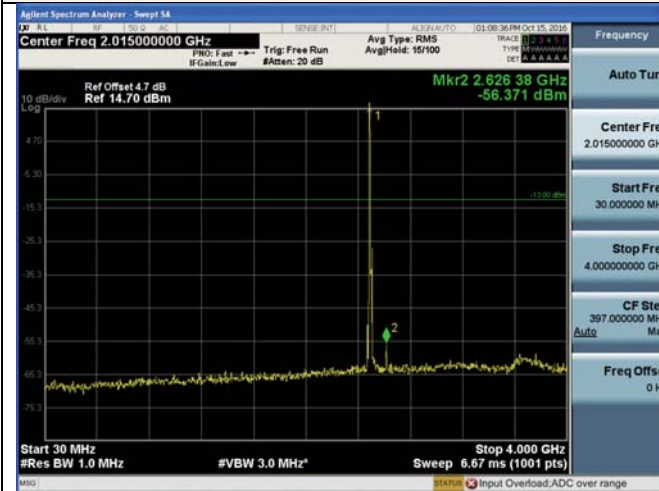

30 MHz – 4 GHz



30 MHz – 4 GHz

LTE FDD Band 7 – 10 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)




4 GHz – 26 GHz  
 High Channel (1RB#0)

4 GHz – 26 GHz  
 High Channel (1RB#0)

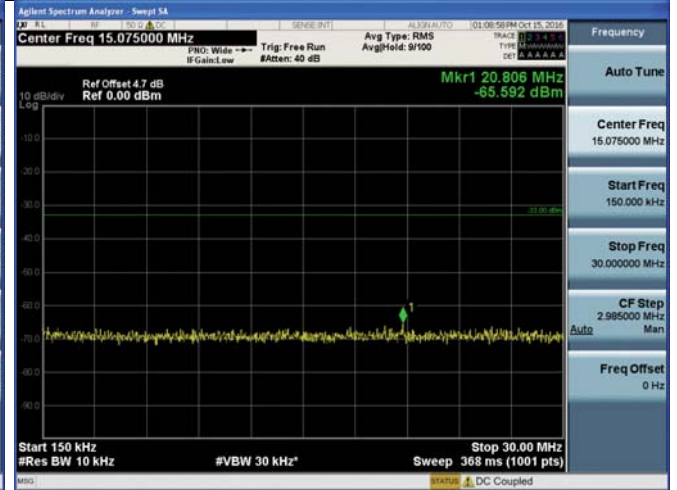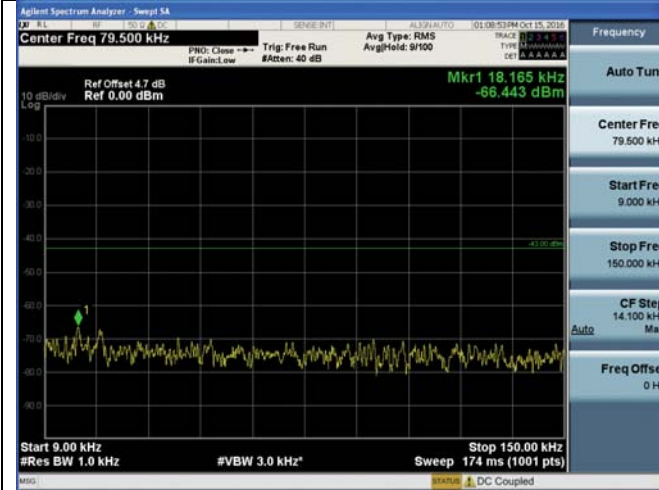

9 KHz – 150 KHz

150 KHz – 30 MHz


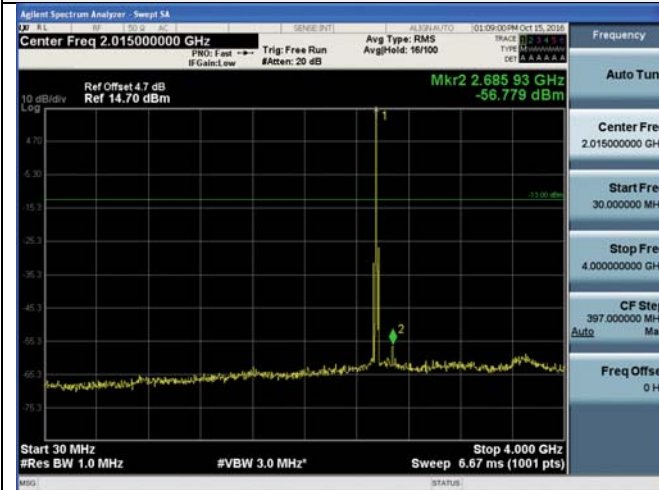


30 MHz – 4 GHz

4 GHz – 26 GHz





LTE FDD Band 7 – 15 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)

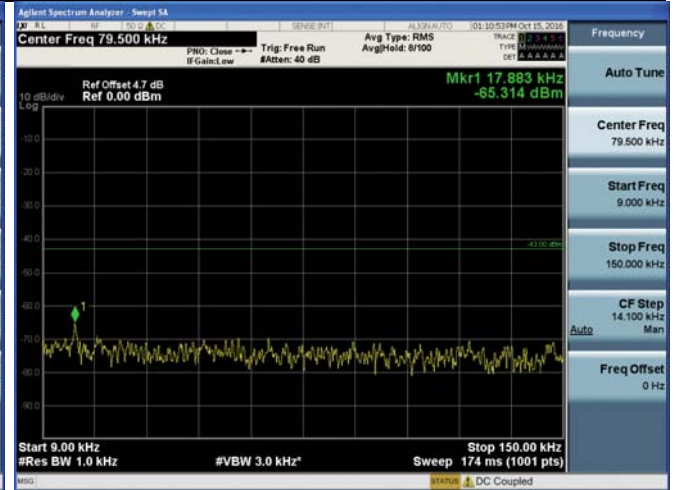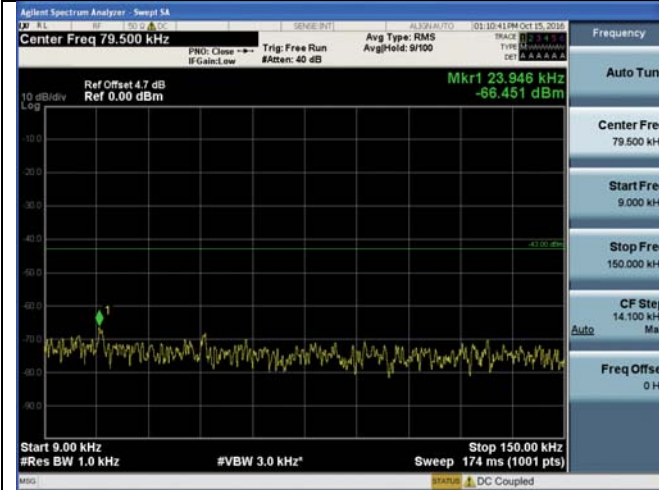


9 KHz – 150 KHz

9 KHz – 150 KHz

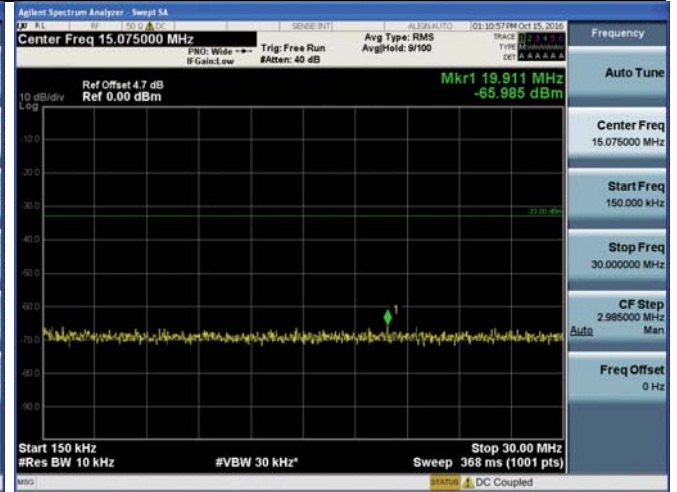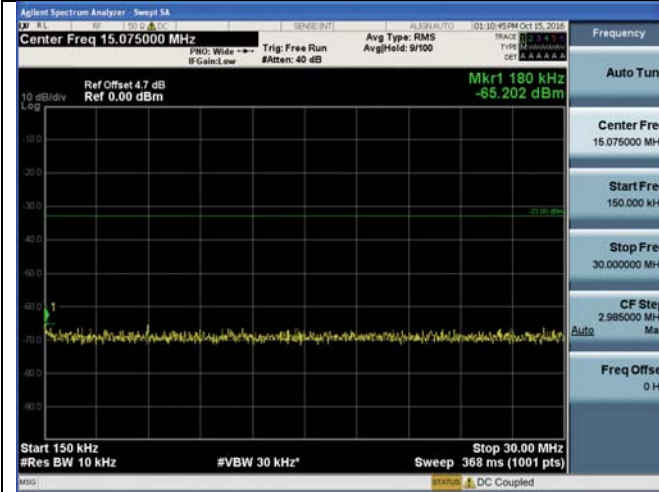

150 KHz – 30 MHz

150 KHz – 30 MHz

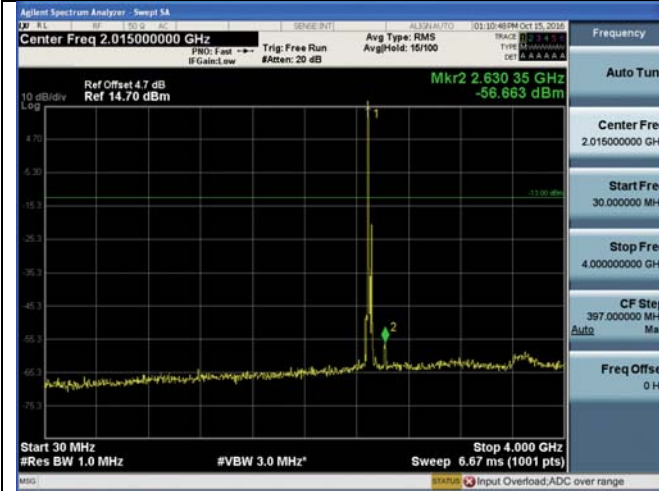

30 MHz – 4 GHz



30 MHz – 4 GHz

LTE FDD Band 7 – 15 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)




4 GHz – 26 GHz  
 High Channel (1RB#0)

4 GHz – 26 GHz  
 High Channel (1RB#0)

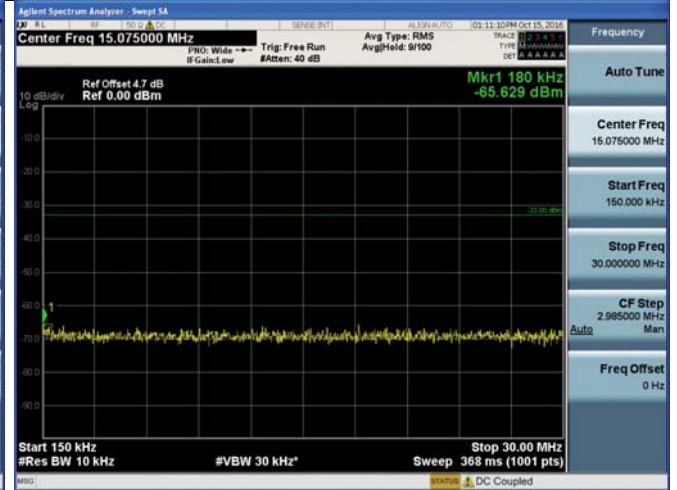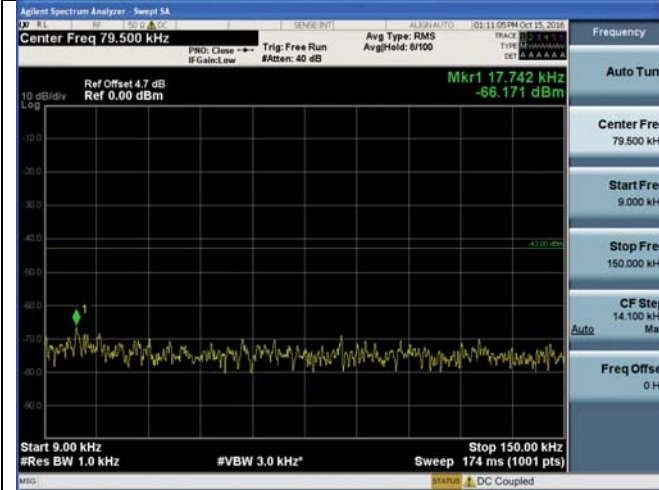

9 KHz – 150 KHz



150 KHz – 30 MHz

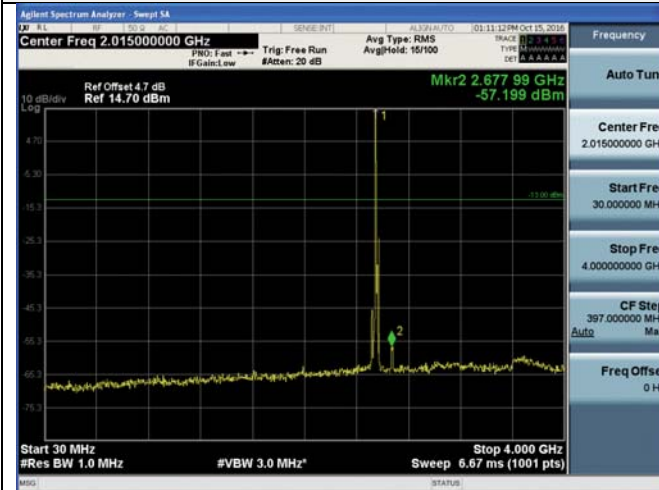

30 MHz – 4 GHz



4 GHz – 26 GHz

LTE FDD Band 7 – 20 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)

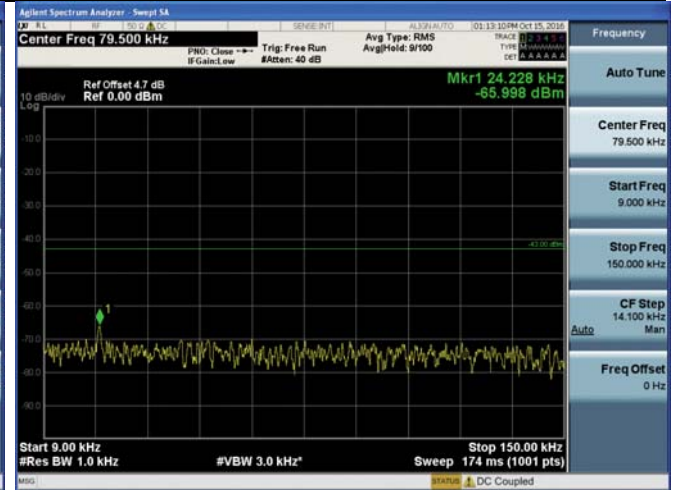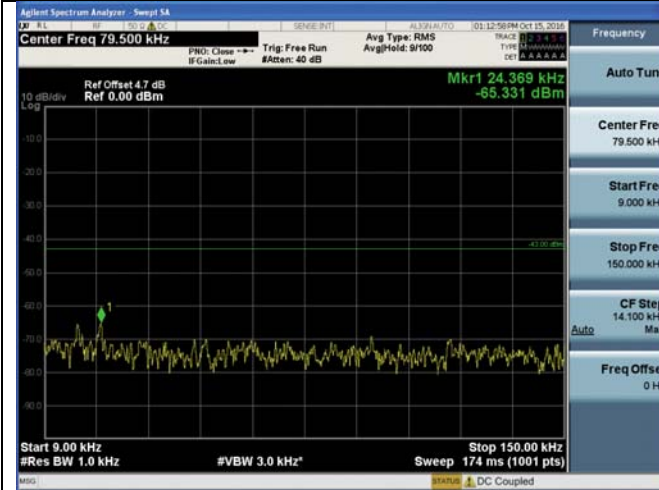

9 KHz – 150 KHz

9 KHz – 150 KHz

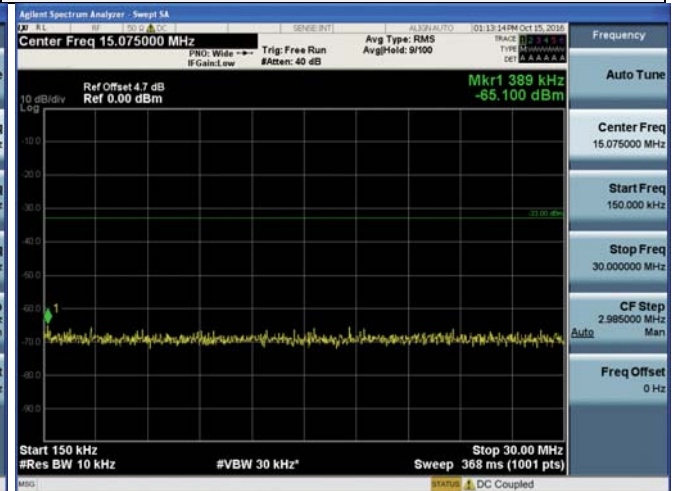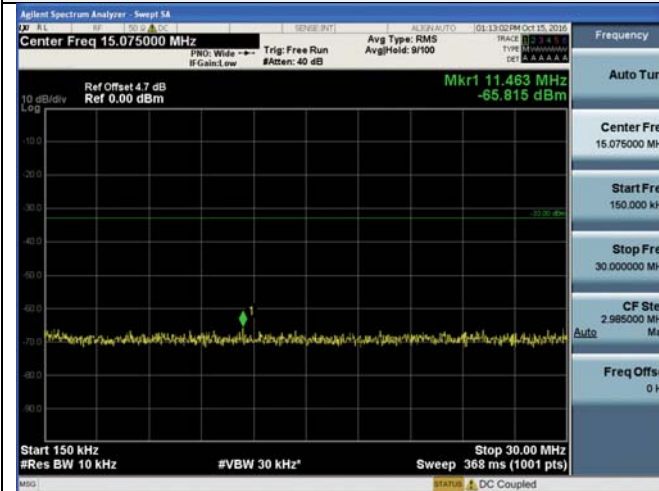

150 KHz – 30 MHz

150 KHz – 30 MHz



30 MHz – 4 GHz

30 MHz – 4 GHz





LTE FDD Band 7 – 20 MHz Channel Bandwidth Conducted Spurious Emissions  
 Low Channel (1RB#0) Middle Channel (1RB#0)




4 GHz – 26 GHz  
 High Channel (1RB#0)

4 GHz – 26 GHz  
 High Channel (1RB#0)

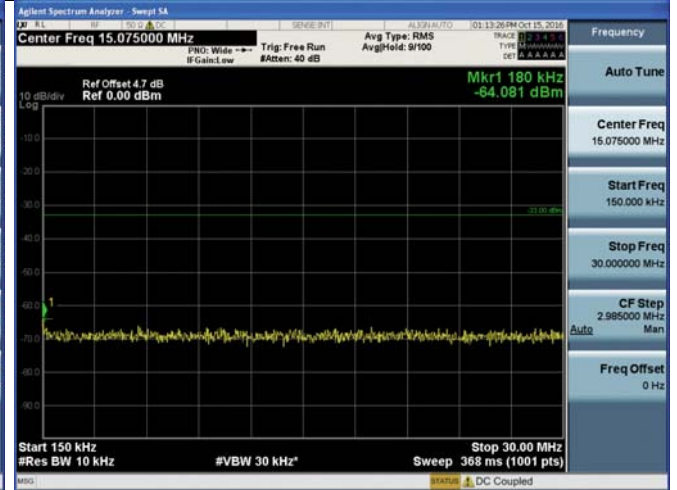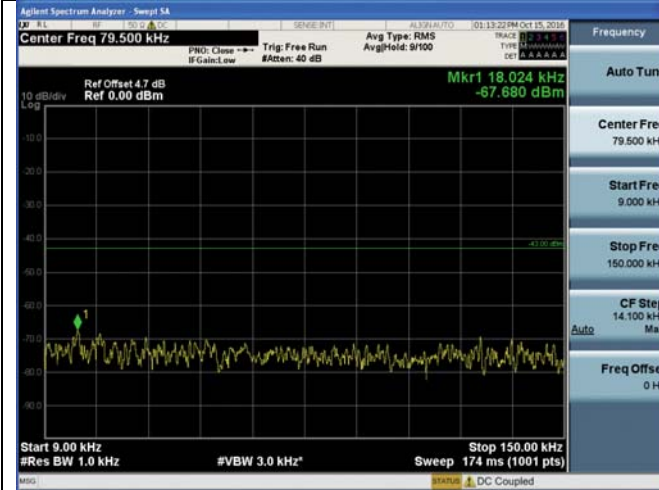

9 KHz – 150 KHz

150 KHz – 30 MHz

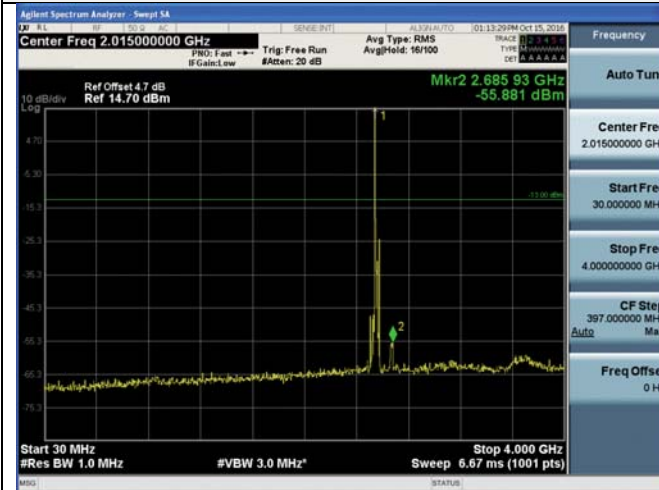

30 MHz – 4 GHz


4 GHz – 26 GHz

## 4.6. Radiated Spurious Emission

### LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

### TEST CONFIGURATION

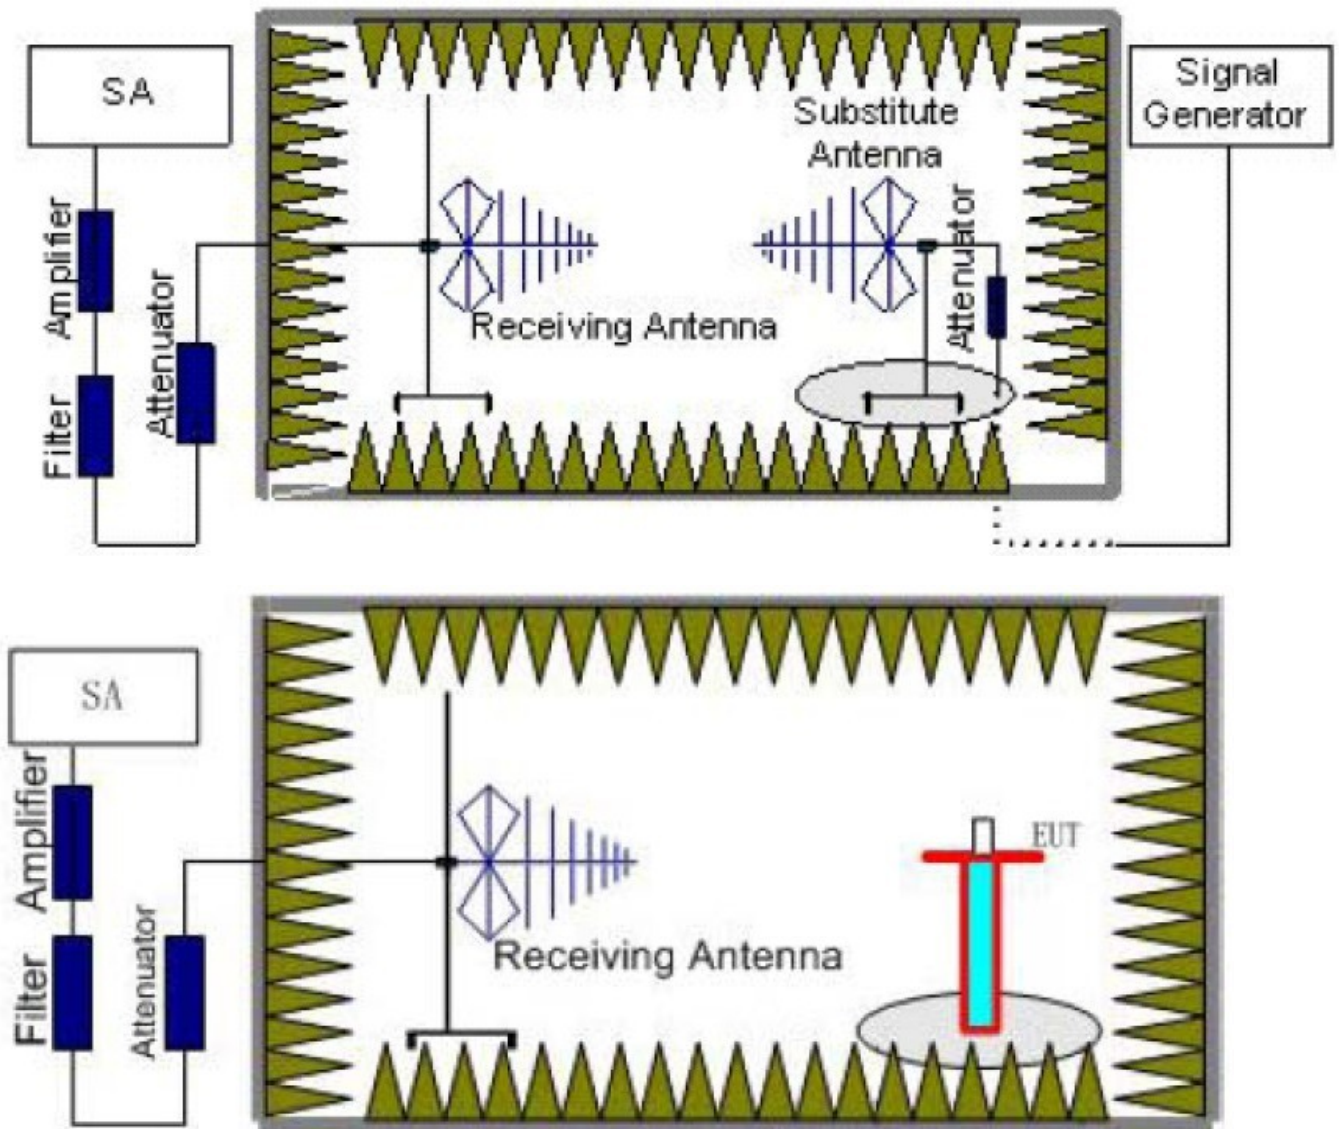

### TEST PROCEDURE

1. EUT was placed on a 1.50 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.50 meter. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P<sub>r</sub>).



4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss ( $P_{cl}$ ), the Substitution Antenna Gain ( $G_a$ ) and the Amplifier Gain ( $P_{Ag}$ ) should be recorded after test.  
The measurement results are obtained as described below:  
 $Power(EIRP)=P_{Mea}- P_{Ag} - P_{cl} + G_a$
6. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
7. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP -2.15dBi$ .
8. In order to make sure test results more clearly,we set frequency range and sweep time for difference frequency range as follows table:

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
LTE FDD Band 7	0.00009~0.15	1KHz	3KHz	30
	0.00015~0.03	10KHz	30KHz	10
	0.03~1	100KHz	300KHz	10
	1~2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
20~26	1 MHz	3 MHz	2	

### TEST LIMITS

According to 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Frequency	Channel	Frequency Range	Verdict
LTE FDD Band 7	Low	9KHz -26GHz	PASS
	Middle	9KHz -26GHz	PASS
	High	9KHz -26GHz	PASS

### **Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case for each Channel Bandwidth of LTE FDD Band 7.
2.  $EIRP=P_{Mea}(dBm)-P_{cl}(dB) +G_a(dBi)$
3. We were not recorded other points as values lower than limits.
4.  $Margin = Limit - EIRP$
5. We measured at SIM 1 as conducted burst average power higher at SIM 1;

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.00	-44.80	5.11	3.00	13.38	-36.53	-13.00	23.53	H
7507.50	-50.08	6.02	3.00	13.98	-42.12	-13.00	29.12	H
5005.00	-45.47	5.11	3.00	13.38	-37.20	-13.00	24.20	V
7507.50	-51.37	6.02	3.00	13.98	-43.41	-13.00	30.41	V

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-42.32	5.11	3.00	13.38	-34.05	-13.00	21.05	H
7605.00	-50.12	6.02	3.00	13.98	-42.16	-13.00	29.16	H
5070.00	-45.88	5.11	3.00	13.38	-37.61	-13.00	24.61	V
7605.00	-52.10	6.02	3.00	13.98	-44.14	-13.00	31.14	V

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.00	-45.01	5.11	3.00	13.38	-36.38	-13.00	23.38	H
7702.50	-48.63	6.02	3.00	13.98	-43.36	-13.00	30.36	H
5135.00	-52.44	5.11	3.00	13.38	-37.61	-13.00	24.61	V
7702.50	-54.27	6.02	3.00	13.98	-44.82	-13.00	31.82	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-47.40	5.11	3.00	13.38	-39.13	-13.00	26.13	H
7515.00	-51.64	6.02	3.00	13.98	-43.68	-13.00	30.68	H
5010.00	-46.38	5.11	3.00	13.38	-38.11	-13.00	25.11	V
7515.00	-53.73	6.02	3.00	13.98	-45.77	-13.00	32.77	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-46.21	5.11	3.00	13.38	-37.94	-13.00	24.94	H
7605.00	-50.95	6.02	3.00	13.98	-42.99	-13.00	29.99	H
5070.00	-48.95	5.11	3.00	13.38	-40.68	-13.00	27.68	V
7605.00	-51.21	6.02	3.00	13.98	-43.25	-13.00	30.25	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5130.00	-45.49	5.11	3.00	13.38	-37.22	-13.00	24.22	H
7695.00	-50.69	6.02	3.00	13.98	-42.73	-13.00	29.73	H
5130.00	-48.97	5.11	3.00	13.38	-40.70	-13.00	27.70	V
7695.00	-52.29	6.02	3.00	13.98	-44.33	-13.00	31.33	V

*LTE FDD Band 7\_Channel Bandwidth 15MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.00	-46.49	5.11	3.00	13.38	-38.22	-13.00	25.22	H
7522.50	-49.12	6.02	3.00	13.98	-41.16	-13.00	28.16	H
5015.00	-48.52	5.11	3.00	13.38	-40.25	-13.00	27.25	V
7522.50	-51.37	6.02	3.00	13.98	-43.41	-13.00	30.41	V

*LTE FDD Band 7\_Channel Bandwidth 15MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-45.68	5.11	3.00	13.38	-37.41	-13.00	24.41	H
7605.00	-51.95	6.02	3.00	13.98	-43.99	-13.00	30.99	H
5070.00	-46.30	5.11	3.00	13.38	-38.03	-13.00	25.03	V
7605.00	-53.98	6.02	3.00	13.98	-46.02	-13.00	33.02	V

*LTE FDD Band 7\_Channel Bandwidth 15MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125.00	-46.01	5.11	3.00	13.38	-37.74	-13.00	24.74	H
7687.50	-52.16	6.02	3.00	13.98	-44.20	-13.00	31.20	H
5125.00	-47.06	5.11	3.00	13.38	-38.79	-13.00	25.79	V
7687.50	-53.98	6.02	3.00	13.98	-46.02	-13.00	33.02	V

*LTE FDD Band 7\_Channel Bandwidth 20MHz\_QPSK\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020.00	-46.56	5.11	3.00	13.38	-38.29	-13.00	25.29	H
7530.00	-53.20	6.02	3.00	13.98	-45.24	-13.00	32.24	H
5020.00	-49.27	5.11	3.00	13.38	-41.00	-13.00	28.00	V
7530.00	-55.24	6.02	3.00	13.98	-47.28	-13.00	34.28	V

*LTE FDD Band 7\_Channel Bandwidth 20MHz\_QPSK\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-48.52	5.11	3.00	13.38	-40.25	-13.00	27.25	H
7605.00	-51.52	6.02	3.00	13.98	-43.56	-13.00	30.56	H
5070.00	-48.98	5.11	3.00	13.38	-40.71	-13.00	27.71	V
7605.00	-52.22	6.02	3.00	13.98	-44.26	-13.00	31.26	V

*LTE FDD 7\_Channel Bandwidth 20MHz\_QPSK\_High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.00	-47.60	5.11	3.00	13.38	-39.33	-13.00	26.33	H
7680.00	-52.12	6.02	3.00	13.98	-44.16	-13.00	31.16	H
5120.00	-48.52	5.11	3.00	13.38	-40.25	-13.00	27.25	V
7680.00	-53.98	6.02	3.00	13.98	-46.02	-13.00	33.02	V

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_16QAM\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5005.00	-46.50	5.11	3.00	13.38	-38.23	-13.00	25.23	H
7507.50	-50.76	6.02	3.00	13.98	-42.80	-13.00	29.80	H
5005.00	-48.55	5.11	3.00	13.38	-40.28	-13.00	27.28	V
7507.50	-53.17	6.02	3.00	13.98	-45.21	-13.00	32.21	V

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_16QAM\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-45.12	5.11	3.00	13.38	-36.85	-13.00	23.85	H
7605.00	-48.80	6.02	3.00	13.98	-40.84	-13.00	27.84	H
5070.00	-46.90	5.11	3.00	13.38	-38.63	-13.00	25.63	V
7605.00	-52.16	6.02	3.00	13.98	-44.20	-13.00	31.20	V

*LTE FDD Band 7\_Channel Bandwidth 5MHz\_ 16QAM\_ High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5135.00	-46.47	5.11	3.00	13.38	-38.20	-13.00	25.20	H
7702.50	-49.80	6.02	3.00	13.98	-41.84	-13.00	28.84	H
5135.00	-49.81	5.11	3.00	13.38	-41.54	-13.00	28.54	V
7702.50	-51.86	6.02	3.00	13.98	-43.90	-13.00	30.90	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_ 16QAM\_ Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5010.00	-37.69	5.11	3.00	13.38	-29.42	-13.00	16.42	H
7515.00	-44.18	6.02	3.00	13.98	-36.22	-13.00	23.22	H
5010.00	-40.16	5.11	3.00	13.38	-31.89	-13.00	18.89	V
7515.00	-45.78	6.02	3.00	13.98	-37.82	-13.00	24.82	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_ 16QAM\_ Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-46.43	5.11	3.00	13.38	-38.16	-13.00	25.16	H
7605.00	-50.99	6.02	3.00	13.98	-43.03	-13.00	30.03	H
5070.00	-48.46	5.11	3.00	13.38	-40.19	-13.00	27.19	V
7605.00	-52.15	6.02	3.00	13.98	-44.19	-13.00	31.19	V

*LTE FDD Band 7\_Channel Bandwidth 10MHz\_ 16QAM\_ High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5130.00	-48.27	5.11	3.00	13.38	-40.00	-13.00	27.00	H
7695.00	-54.32	6.02	3.00	13.98	-46.36	-13.00	33.36	H
5130.00	-49.66	5.11	3.00	13.38	-41.39	-13.00	28.39	V
7695.00	-52.72	6.02	3.00	13.98	-44.76	-13.00	31.76	V

*LTE FDD Band 4\_Channel Bandwidth 15MHz\_ 16QAM\_ Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5015.00	-49.24	5.11	3.00	13.38	-40.97	-13.00	27.97	H
7522.50	-51.23	6.02	3.00	13.98	-43.27	-13.00	30.27	H
5015.00	-50.47	5.11	3.00	13.38	-42.20	-13.00	29.20	V
7522.50	-52.83	6.02	3.00	13.98	-44.87	-13.00	31.87	V

*LTE FDD Band 7\_Channel Bandwidth 15MHz\_ 16QAM\_ Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-47.04	5.11	3.00	13.38	-38.77	-13.00	25.77	H
7605.00	-51.16	6.02	3.00	13.98	-43.20	-13.00	30.20	H
5070.00	-49.47	5.11	3.00	13.38	-41.20	-13.00	28.20	V
7605.00	-52.31	6.02	3.00	13.98	-44.35	-13.00	31.35	V

*LTE FDD Band 7\_Channel Bandwidth 15MHz\_ 16QAM\_ High Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5125.00	-49.44	5.11	3.00	13.38	-41.17	-13.00	28.17	H
7687.50	-51.91	6.02	3.00	13.98	-43.95	-13.00	30.95	H
5125.00	-50.47	5.11	3.00	13.38	-42.20	-13.00	29.20	V
7687.50	-54.49	6.02	3.00	13.98	-46.53	-13.00	33.53	V

*LTE FDD Band 7\_Channel Bandwidth 20MHz\_16QAM\_Low Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5020.00	-50.47	5.11	3.00	13.38	-42.20	-13.00	29.20	H
7530.00	-55.45	6.02	3.00	13.98	-47.49	-13.00	34.49	H
5020.00	-49.50	5.11	3.00	13.38	-41.23	-13.00	28.23	V
7530.00	-55.88	6.02	3.00	13.98	-47.92	-13.00	34.92	V

*LTE FDD Band 7\_Channel Bandwidth 20MHz\_16QAM\_Middle Channel*

Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5070.00	-48.27	5.11	3.00	13.38	-40.00	-13.00	27.00	H
7605.00	-51.00	6.02	3.00	13.98	-43.04	-13.00	30.04	H
5070.00	-46.93	5.11	3.00	13.38	-38.66	-13.00	25.66	V
7605.00	-52.17	6.02	3.00	13.98	-44.21	-13.00	31.21	V

*LTE FDD Band 7\_Channel Bandwidth 20MHz\_16QAM\_High Channel*


Frequency (MHz)	P <sub>Mea</sub> (dBm)	P <sub>cl</sub> (dB)	Diatance	G <sub>a</sub> Antenna Gain(dB)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
5120.00	-47.17	5.11	3.00	13.38	-38.90	-13.00	25.90	H
7680.00	-52.17	6.02	3.00	13.98	-44.21	-13.00	31.21	H
5120.00	-49.39	5.11	3.00	13.38	-41.12	-13.00	28.12	V
7680.00	-54.35	6.02	3.00	13.98	-46.39	-13.00	33.39	V

## 4.7. Frequency Stability

### LIMIT

According to §27.54, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

### TEST CONFIGURATION

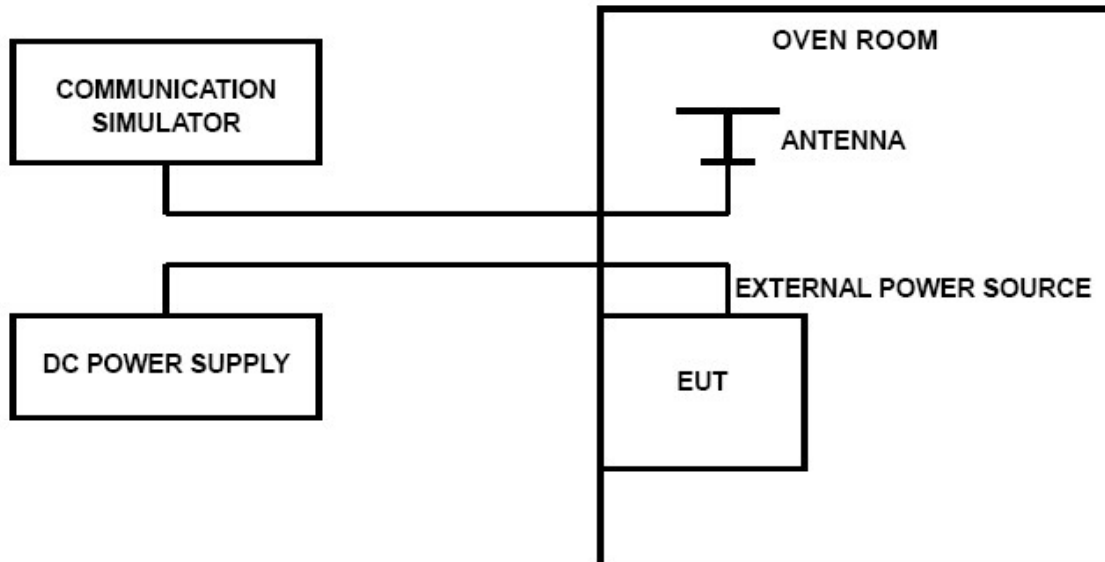

### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

#### **Frequency Stability Under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 4, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

#### **Frequency Stability Under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.

**TEST RESULTS***Remark:*

1. We tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 7; recorded worst case.
2. We measured at SIM 1 as conducted burst average power higher at SIM 1;

LTE Band 7, 5 MHz bandwidth , QPSK (worst case of all bandwidths)

<b>LTE FDD Band 7</b>					
<b>DC Power</b>	<b>Temperature (°C)</b>	<b>Frequency error(Hz)</b>	<b>Frequency error(ppm)</b>	<b>Limit (ppm)</b>	<b>Verdict</b>
3.40	20	8.68	0.003	2.50	PASS
3.80	20	-8.12	0.003	2.50	PASS
4.20	20	4.85	0.002	2.50	PASS
3.80	-30	5.36	0.002	2.50	PASS
3.80	-20	-8.16	0.003	2.50	PASS
3.80	-10	-6.35	0.003	2.50	PASS
3.80	0	5.12	0.002	2.50	PASS
3.80	10	-3.78	0.001	2.50	PASS
3.80	20	-5.89	0.002	2.50	PASS
3.80	30	4.89	0.002	2.50	PASS
3.80	40	-5.74	0.002	2.50	PASS
3.80	50	6.75	0.003	2.50	PASS

LTE Band 7, 5 MHz bandwidth , 16QAM (worst case of all bandwidths)

<b>LTE FDD Band 7</b>					
<b>DC Power</b>	<b>Temperature (°C)</b>	<b>Frequency error(Hz)</b>	<b>Frequency error(ppm)</b>	<b>Limit (ppm)</b>	<b>Verdict</b>
3.40	20	8.26	0.003	2.50	PASS
3.80	20	5.14	0.002	2.50	PASS
4.20	20	-3.65	0.001	2.50	PASS
3.80	-30	3.78	0.001	2.50	PASS
3.80	-20	6.87	0.003	2.50	PASS
3.80	-10	-6.47	0.003	2.50	PASS
3.80	0	-4.71	0.002	2.50	PASS
3.80	10	6.12	0.002	2.50	PASS
3.80	20	-3.16	0.001	2.50	PASS
3.80	30	-2.79	0.001	2.50	PASS
3.80	40	8.74	0.003	2.50	PASS
3.80	50	-5.16	0.002	2.50	PASS

## **5. Test Setup Photos of the EUT**

Please refer to separated files for Test Setup Photos of the EUT.

## **6. External Photos of the EUT**

Please refer to separated files for External Photos of the EUT.

## **7. Internal Photos of the EUT**

Please refer to separated files for Internal Photos of the EUT.

\*\*\*\*\* End of Report \*\*\*\*\*