
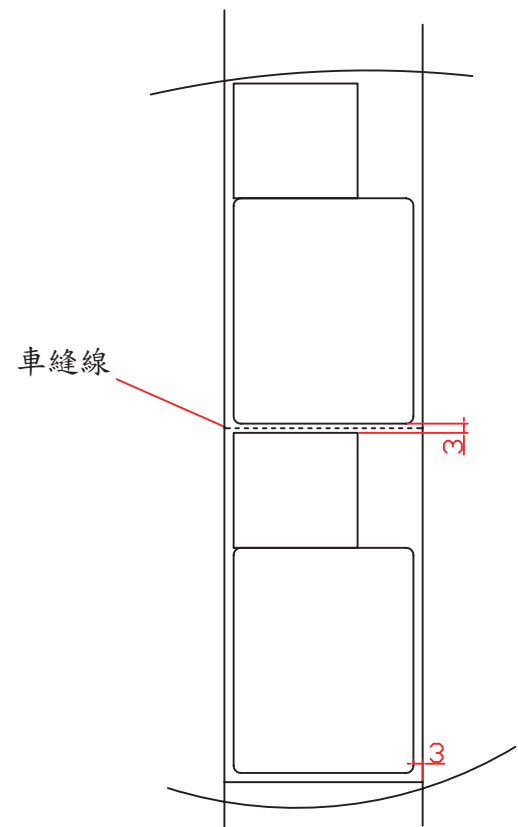


REV.	MARK	ECR/ECN NO.	DATE	UPDATE DESCRIPTION	SIGNATURE
00	N/A	N/A	13.12.20	First Release	yanfen

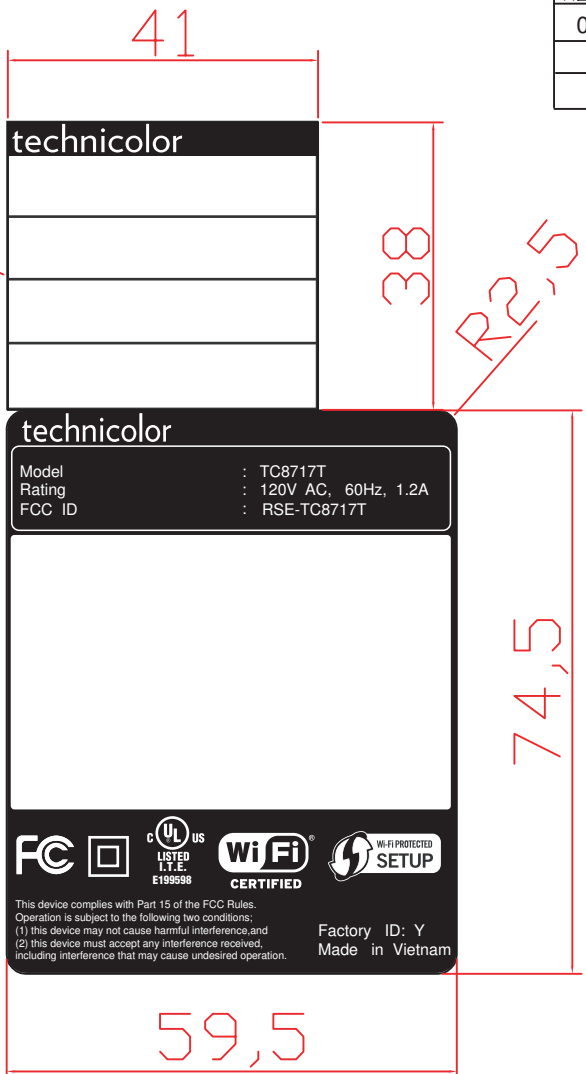

Package style  
scale: 1:2

- NOTES:
1. Surface Material: 50# 壓花 Mylar (matte white)
  - \* 2. Surface Material tolerance: 0.052 ± 0.004mm
  3. Surface Material color: white
  4. printing color is as color defined in artwork
  5. Adhesive base: Synthetic Resin
  - \* 6. Adhesive thickness: 0.033 ± 0.003mm
  - \* 7. Adhesion to steel (180# 磨鋼粘着力): 1.0-2.2 kg/inch
  - \* 8. Initial Tack (初期力): 1-6#
  9. Release Power (90# 剥离力): 4-20 g/in
  - \* 10. Holding Power (持粘力测试法): minimum 1hr/kg\*inch2
  11. Package Style: Reel
  12. When label is adhesived on housing smooth face (material ABS) after it is tested under test condition -40~70°C 90%R.H. 72hrs. it must be fine.
  13. This part must comply with ROHS.

MATERIAL (SPEC.)										SCALE
FINISH										SHEET
N/A										1/1
Select Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	* Label	UNIT
0~6	0.05	0.05	0.10						0.20	MM
6~30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00		0.25	SIZE
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00		0.30	A4
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00		0.50	
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00		0.80	
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK *										

FOXCONN		
HON HAI PRECISION IND. CO., LTD.		
CNSBG		
PART NAME		
Product Information label		
MODEL	PART NO.	DESIGNED
U46C222.09	500.01684.005	yanfen
CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED
TC8717T	T	Sunny