

Cellphone-Mate, Inc.

TEST REPORT FOR

5 Band Mobile Consumer Booster Model: Fusion2Go 3.0

Tested to The Following Standard:

FCC Part 20.21 / 22H / 24E / 27

Report No.: 101623-12

Date of issue: September 7, 2018



Test Certificate # 803.06

This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	4
Test Report Information	4
Report Authorization	4
Test Facility Information	5
Software Versions	5
Site Registration & Accreditation Information	5
Summary of Results	6
Modifications During Testing	8
Conditions During Testing	8
Equipment Under Test	9
General Product Information	9
FCC Part 20.21/22H/24E/27	10
General Test Setup	10
7.1 Authorized Frequency Band Verification	11
Summary of Results	12
7.2 Maximum Power / 7.3 Maximum Gain	18
Summary of Results	19
7.4 Intermodulation Product	42
Summary of Results	43
7.5 Out of Band Emissions	49
Summary of Results	50
7.6 Conducted Spurious Emissions	82
Summary of Results	83
7.7 Noise limit	108
Summary of Results	109
7.7.1 Maximum Transmitter Noise Power Level	113
7.7.2 Variable UL Noise Timing	118
7.8 Uplink Inactivity	121
Summary of Results	122

7.9 Booster Gain Limit	125
Summary of Results	126
7.9.1 Maximum Gain	129
7.9.2 Variable uplink Gain Timing	129
7.10 Occupied Band Width	132
Summary of Results	133
7.11 Oscillation Detection	184
Summary of Results	186
7.11.2 Oscillation Restart Tests	188
7.12 Radiated Spurious Emissions	198
Summary of Results	199
Exhibit A: Test Setup Photos	202

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Cellphone-Mate, Inc.
48346 Milmont Drive
Fremont, CA 94538

Representative: Dennis Findley
Customer Reference Number: SC20180720D

DATE OF EQUIPMENT RECEIPT:

DATE(S) OF TESTING:

REPORT PREPARED BY:

Terri Rayle
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 101623

August 6, 2018

August 6-24, 2018

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.11
EMITest Immunity	5.03.10

Site Registration & Accreditation Information

Location	NIST CB #	TAIWAN	CANADA	FCC	JAPAN
Fremont, CA	US0082	SL2-IN-E-1148R	3082B-1	US1023	A-0149

SUMMARY OF RESULTS

Standard / Specification: FCC Part 20.21/22H/24E/27

Wideband Consumer Signal Booster Measurement Guidance: KDB #935210 DO3 v04r02, June 19, 2018

Correlation Matrix & Results					
Guidance Section	Guidance Description	FCC Section	FCC Rule Description	Mods	Results
7.1 a) - k)	Authorized Frequency Band Verification Test	20.21(e)(3)	Frequency Bands	NA	Pass
7.2.2 a) - k)	Maximum Power Measurement Procedure	2.1046/20.21(e)(8)(i)(D)	Power Limit	NA	Pass
7.3 a) - d)	Maximum Booster Gain Computation	20.21(e)(8)(i)(B)	Bidirectional Capabilities	NA	Pass
7.4 a) - n)	Intermodulation Product	20.21(e)(8)(i)(F)	Intermodulation Limit	NA	Pass
7.5 a) - n)	Out of Band Emissions	20.21(e)(8)(i)(E)	Out of Band Emission	NA	Pass
7.6 a) - e)	Conducted Spurious Emission	2.1051/22H/24E/27	Spurious emission	NA	Pass
7.7.1 a) - g) 7.7.1 h) - n) 7.7.2 a) - g)	Noise Limit Procedure Variable Noise Variable Noise Timing	20.21(e)(8)(i)(A)(2)(i) 20.21(e)(8)(i)(A)(1) 20.21(e)(8)(i)(H)	Noise Limits Transmit Power Off Mode	NA	Pass
7.8 a) - l)	Uplink inactivity	20.21(e)(8)(i)(I)	Uplink Inactivity	NA	Pass

NA = Not Applicable

Standard / Specification: FCC Part 20.21/22H/24E/27 - continued

Correlation Matrix & Results					
Guidance Section	Guidance Description	FCC Section	FCC Rule Description	Mods	Results
7.9.1 a) - l)	Variable Booster Gain	20.21(e)(8)(i)(C) (1), (2)(i)	Booster Gain	NA	Pass
7.9.2 a) - f)	Variable Uplink Gain Timing	20.21(e)(8)(i)(H)	Transmit Power Off Mode		
7.10.a) - j)	Occupied Band Width	2.1049/22H/24E/27	Occupied Band Width	NA	Pass
7.11.2 a) - r) 7.11.3 a) - h) 7.11.4 a) - h) (alternate to 7.11.3)	Anti-Oscillation	20.21(e)(8)(ii)(A)	Anti-Oscillation	NA	Pass
7.12a) - f)	Radiated Spurious Emission	2.1053/ 22H/24E/27	Spurious Emission	NA	Pass
7.13 a) - c)	Spectrum Block Filter	NA	NA	NA	NA1

NA = Not applicable

NA1 = Not applicable because the EUT does not employ spectrum block filter and also not dual-enclosure wideband consumer signal booster.

ISO/IEC 17025 Decision Rule
The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
None

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
5 Band Mobile Consumer Booster	Cellphone-Mate, Inc.	Fusion2Go 3.0	3

Support Equipment:

Device	Manufacturer	Model #	S/N
Power Supply	Surecall	GME36A-120300FDS	NA

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Equipment	Wideband Consumer booster/Zone Enhancer
Operating Frequency Range:	UL: 824-849MHz DL: 869-894MHz UL: 1850-1915MHz DL: 1930-1995MHz UL: 1710-1755MHz, 698-716MHz, 776-787MHz DL: 2110-2155MHz, 728-746MHz, 746-757MHz
OBW and Emissions Type(s):	GXW (GSM) G7W (EDGE) F9W(CDMA) F9W(WCDMA) W7D (LTE)
Modulation Type(s):	0.3 GMSK (GSM) 3p/8 8-PSK (EDGE) QPSK (CDMA) BPSK/QPSK (WCDMA) OFDM (LTE)
Number of TX Chains:	1
Antenna Type(s) and Gain:	Dedicated, See antenna kitting information
Beamforming Type:	NA
Antenna Connection Type:	Donor/Outdoor antenna/ UL: 50-ohm FME Server / indoor antenna/ DL: 50-ohm FME
Nominal Input Voltage:	12VDC
Firmware used for Test:	Fusion2GO V3.2.01-FC

FCC PART 20.21/22H/24E/27

General Test Setup

Summary of Conditions

The equipment under test (EUT) is a Mobile Wideband Consumer Booster intended for automotive.

The EUT is placed on the Styrofoam platform for radiated emissions and a test bench for conducted emissions measurements.

UL: 824-849MHz

DL: 869-894MHz

UL: 1850-1915MHz

DL: 1930-1995MHz

UL: 1710-1755MHz, 698-716MHz, 776-787MHz

DL: 2110-2155MHz, 728-746MHz, 746-757MHz

Test procedure:

The test was performed in accordance with the FCC document: 935210 D03 Signal Booster Measurements v04r02, dated June 19, 2018.

Firmware: Fusion2GO V3.2.01-FC

Device is powered by a support 12V DC power supply

7.1 Authorized Frequency Band Verification

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.1 Authorized Frequency Band Verification**
 Work Order #: **101623** Date 08/06/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu Song Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test environment conditions: Temperature: 23.6°C Relative Humidity: 44% Pressure: 102.5 kPa
--


Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020


Summary of Results

Pass: The plots below show the device only operates on the CMRS frequency bands authorized for use by the NPS.


Plots

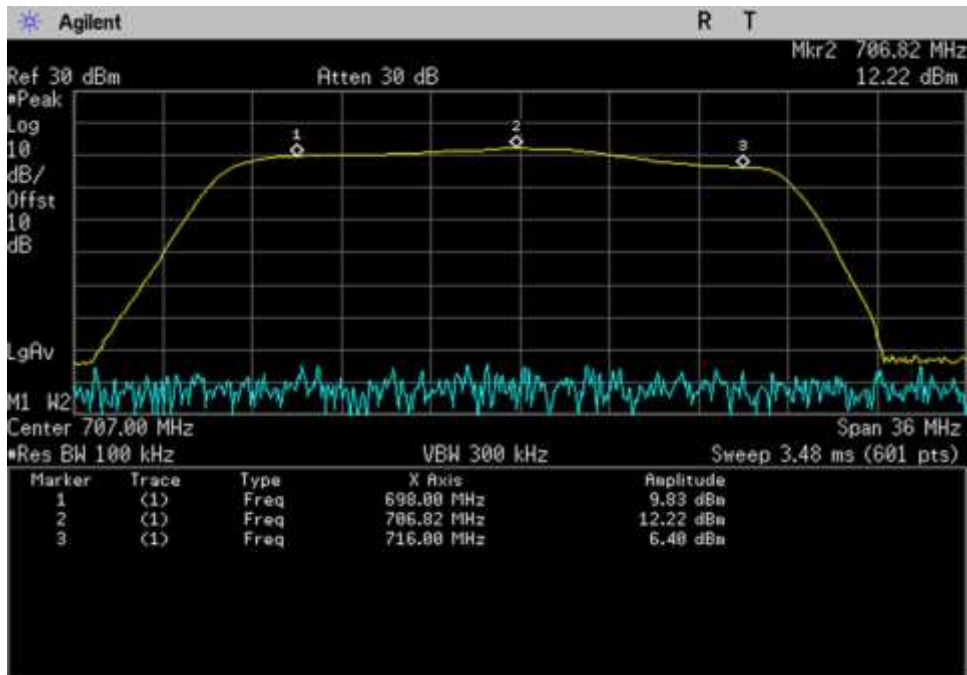


UL_698-716_698-706.82MHz

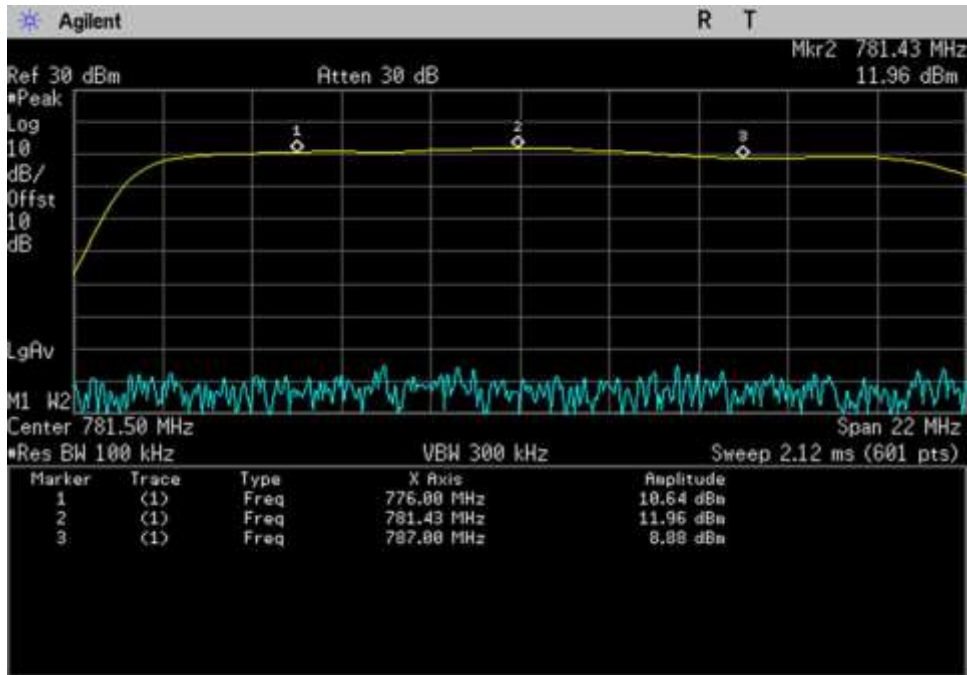


UL_776-787_ 776- 781.43MHz

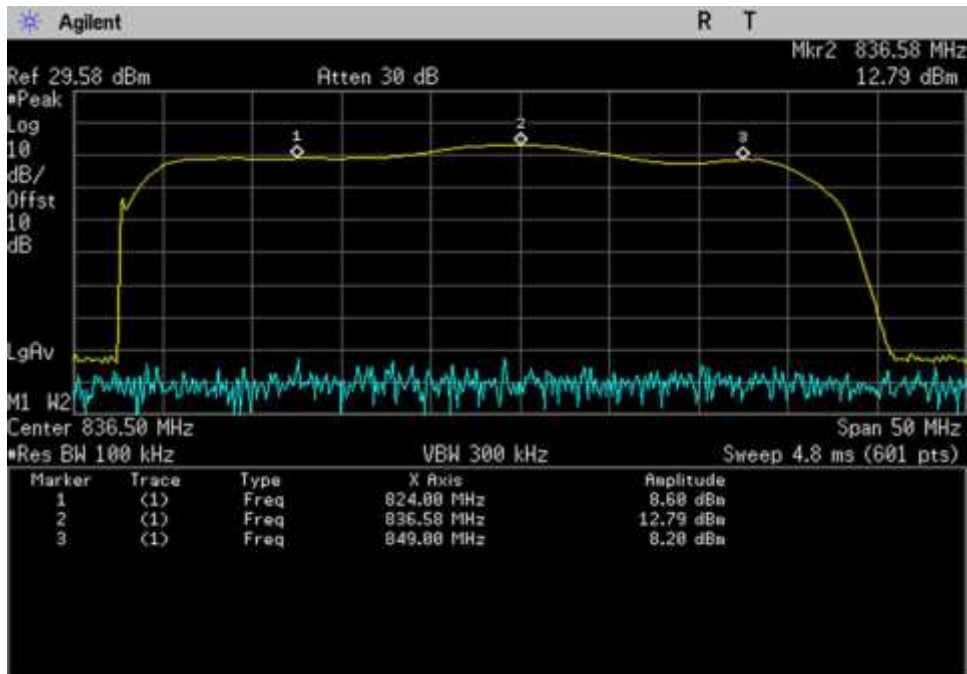


UL_824-849_ 824- 836.58MHz

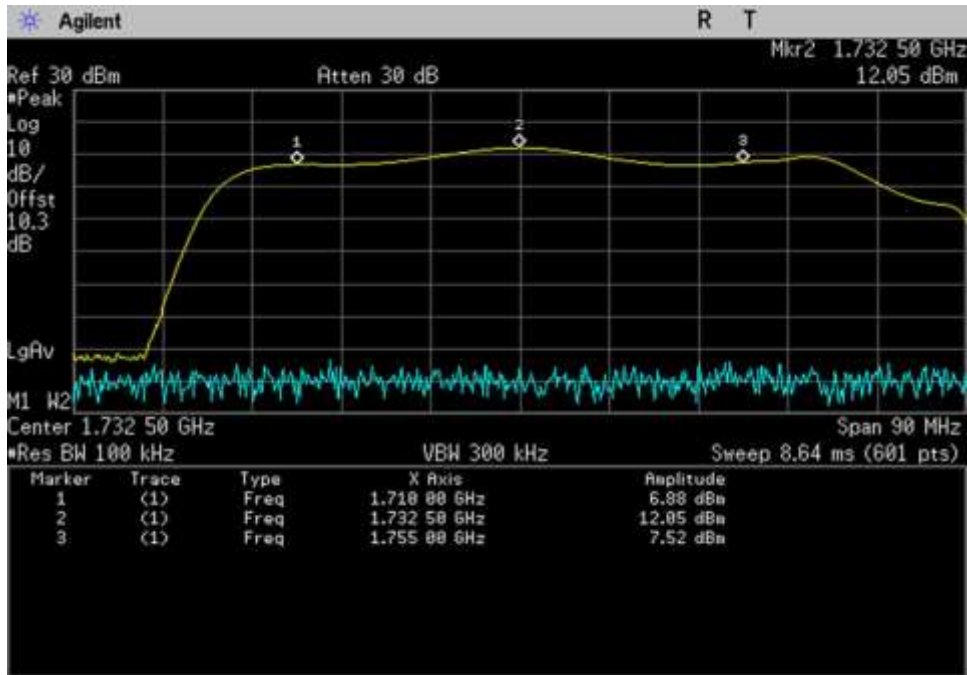


UL_1710-1755_ 1710- 1732.5MHz

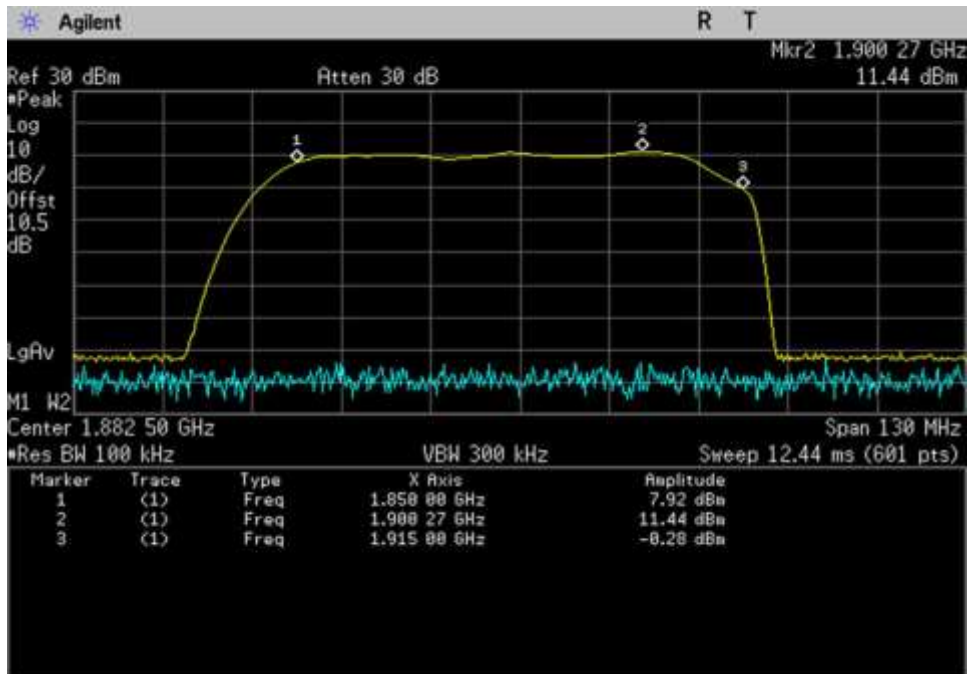


UL_1850-1915_ 1850- 1900.27MHz

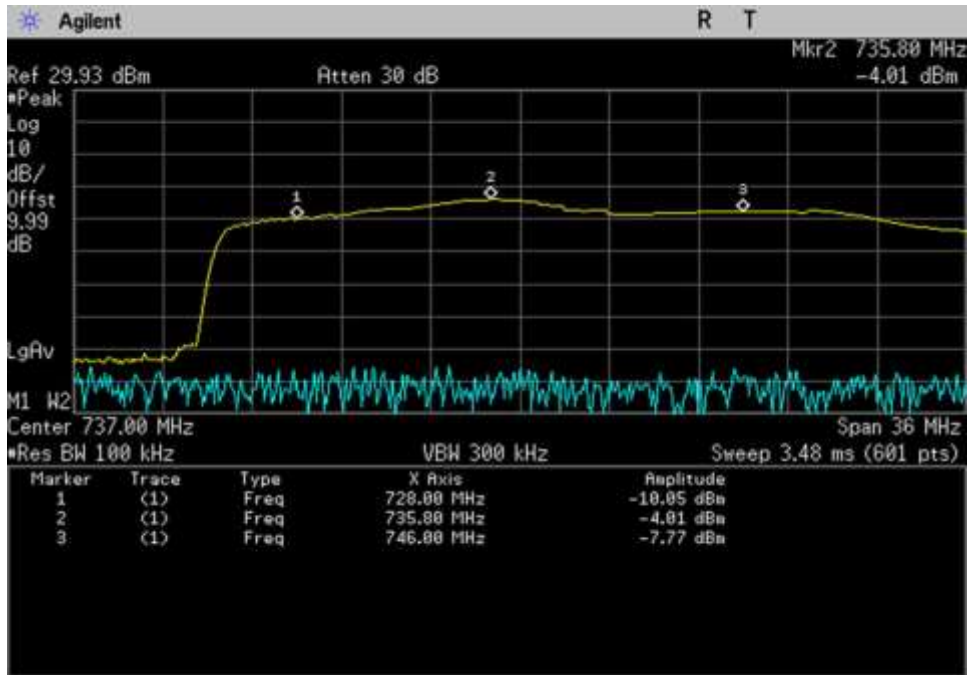


DL_728-746_ 728- 735.8MHz

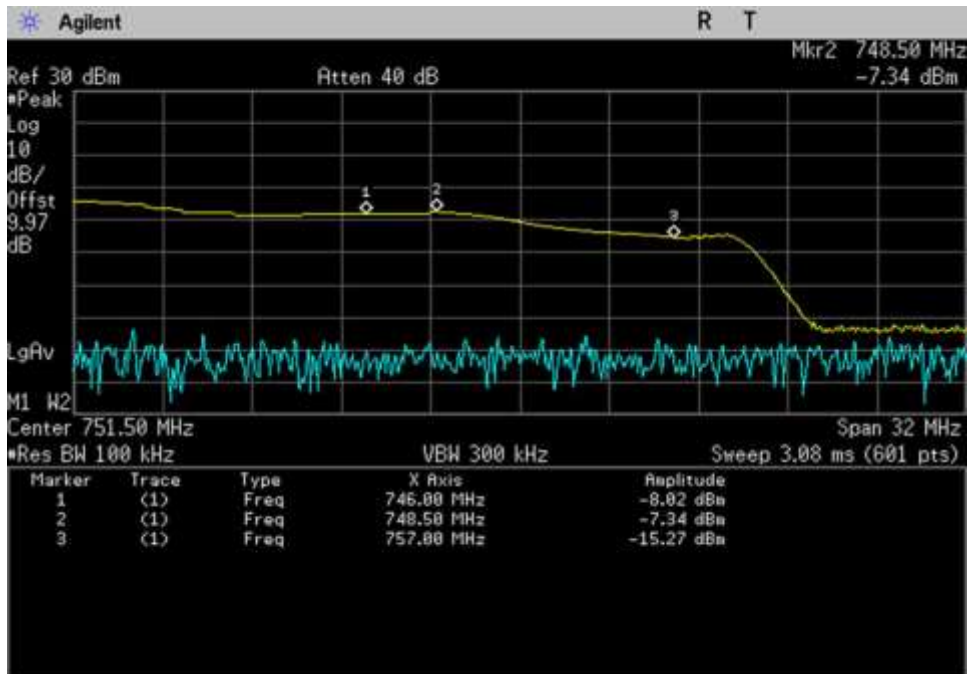


DL_746-757_ 746- 748.5MHz

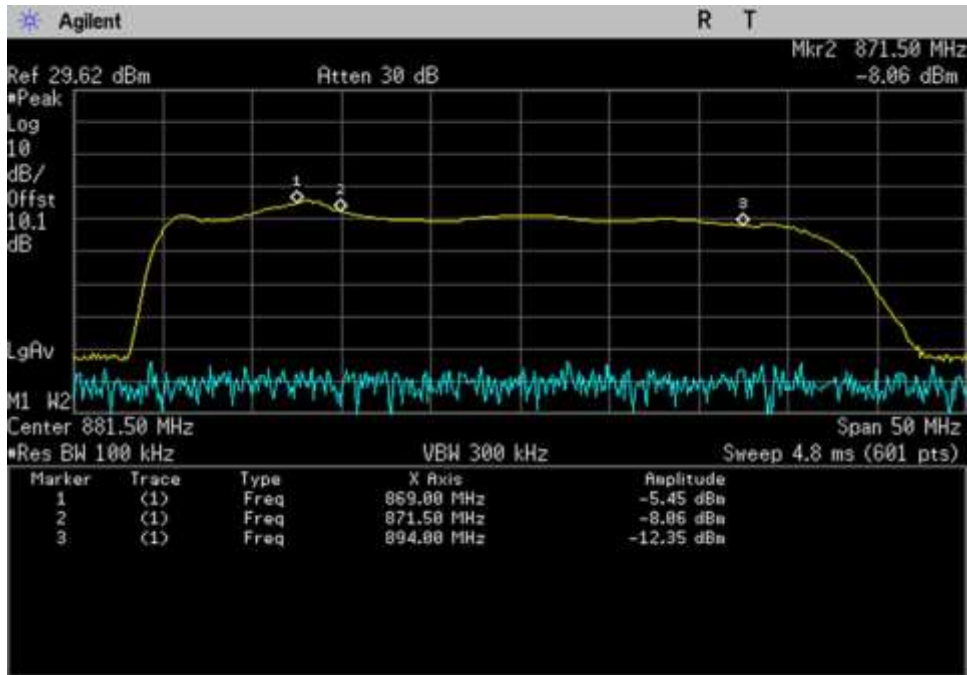

DL_869-894_ 869- 871.5MHz

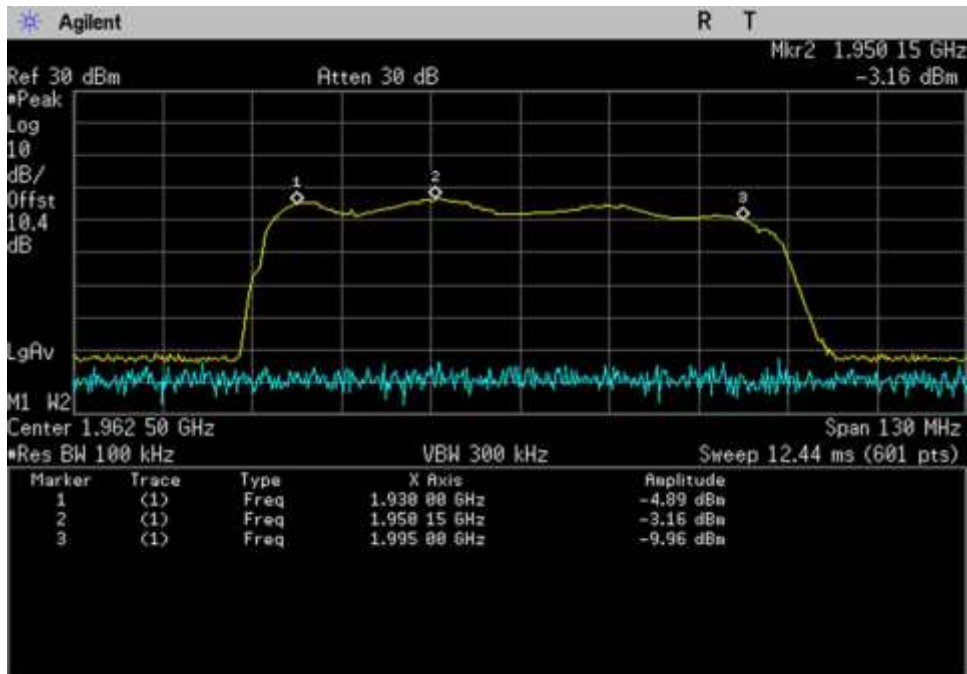

DL_1930-1995_ 1930- 1950.15MHz

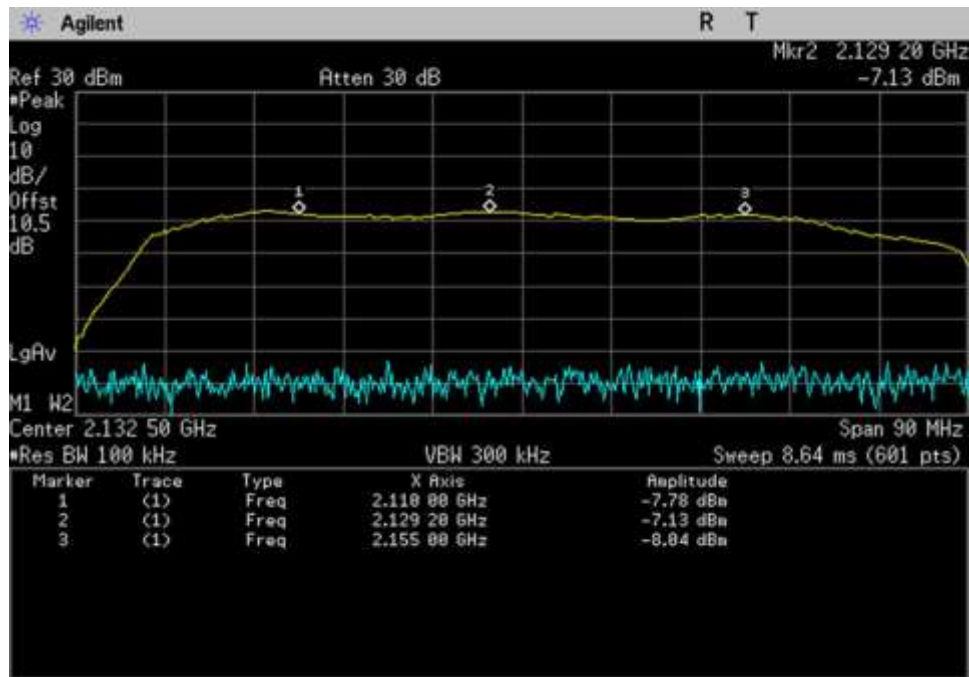

DL_2110-2155_ 2110- 2129.2MHz

7.2 Maximum Power / 7.3 Maximum Gain

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.2 Maximum Power Measurement**
7.3 Maximum Booster Gain
 Work Order #: **101623** Date 08/06/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu Song Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test environment conditions:
 Temperature: 23.6°C
 Relative Humidity: 44%
 Pressure: 102.5 kPa

Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020

Summary of Results

Pass: As summarized in table below, measured EIRP, Gain and UL/DL gain ratio are within limits.

Pre AGC				Pre AGC		
Pulse GSM				4.1 MHz AWGN		
Frequency (MHz)	Input (dBm)	Output (dBm)	Gain (dB)	Input (dBm)	Output (dBm)	Gain (dB)
UL1710-1755	-27.2	20.0	47.2	-25.3	20.7	46.0
UL1850-1915	-25.6	20.9	46.5	-25.9	19.6	45.5
UL824-894	-25.3	22.3	47.6	-21.7	25.6	47.3
UL 698-716	-24.1	23.0	47.1	-20.1	26.6	46.7
UL776-787	-21.3	25.6	46.9	-20.5	25.9	46.4
DL2110-2155	-48.5	-3.7	44.8	-49.4	-4.5	44.9
DL1930-1995	-45.7	1.0	46.7	-46.7	0.2	46.9
DL869-894	-51.1	-5.5	45.6	-51.6	-5.8	45.8
DL:728-746	-48.0	-0.3	47.7	-48.4	-1.8	46.6
DL 746-757	-49.4	-2.8	46.6	-50.9	-4.3	46.6

Pulse GSM					Conducted	Conducted and EIRP
Frequency (MHz)	Output Power (dBm)	*Ant Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL1710-1755	20.0	4.0	6.1	17.9	17	30
UL1850-1915	20.9	4.0	6.5	18.4	17	30
UL824-894	22.3	3.0	4.0	21.3	17	30
UL 698-716	23.0	3.0	3.5	22.5	17	30
UL776-787	25.6	3.0	3.5	25.1	17	30
DL2110-2155	-3.7	10.0	3.8	2.5	NA	17
DL1930-1995	1.0	10.0	3.6	7.4	NA	17
DL869-894	-5.5	7.0	2.3	-0.8	NA	17
DL:728-746	-0.3	7.0	2.1	4.6	NA	17
DL 746-757	-2.8	7.0	2.1	2.1	NA	17

4.1MHz AWGN					Conducted	Conducted and EIRP
Frequency (MHz)	Output Power (dBm)	*Ant Gain (dBi)	Cable loss (dB)	EIRP (dBm)	Limit Min (dBm)	Limit Max (dBm)
UL1710-1755	20.7	4.0	6.1	18.6	17	30
UL1850-1915	19.6	4.0	6.5	17.1	17	30
UL824-894	25.6	3.0	4.0	24.6	17	30
UL 698-716	26.6	3.0	3.5	26.1	17	30
UL776-787	25.9	3.0	3.5	25.4	17	30
DL2110-2155	-4.5	10.0	3.8	1.7	NA	17
DL1930-1995	0.2	10.0	3.6	6.7	NA	17
DL869-894	-5.8	7.0	2.3	-1.1	NA	17
DL:728-746	-1.8	7.0	2.1	3.1	NA	17
DL 746-757	-4.3	7.0	2.1	0.6	NA	17

* Antenna gain and cable losses indicated from Fusion2go 3.2.0 Marine-1 Kit

UL SC288Wor Galaxy 5412-P and SC240-40FN


DL SC248W and SC240-20FN

Section 5.5 power						
Frequency (MHz)	Pulse GSM			4.1 MHz AWGN		
	Input (dBm)	Output (dBm)	Gain (dB)	Input (dBm)	Output (dBm)	Gain (dB)
UL1710-1755	10.0	20.1	10.1	10.0	19.7	9.7
UL1850-1915	10.0	20.3	10.3	10.0	19.1	9.1
UL824-894	10.0	21.9	11.9	10.0	25.6	15.6
UL 698-716	10.0	22.2	12.2	10.0	26.4	16.4
UL776-787	10.0	25.2	15.2	10.0	25.8	15.8
DL2110-2155	-20.0	-3.6	16.4	-20.0	-4.5	15.5
DL1930-1995	-20.0	0.3	20.3	-20.0	-0.7	19.4
DL869-894	-20.0	-5.7	14.3	-20.0	-6.4	13.6
DL:728-746	-20.0	-0.3	19.7	-20.0	-2.3	17.7
DL 746-757	-20.0	-2.8	17.2	-20.0	-4.9	15.1


UL gain vs DL gain	Pulse GSM (dB)	4.1MHz AWGN (dB)	Limit (dB)
UL gain vs DL gain 1710/2110	2.4	1.1	9.0
UL gain vs DL gain 1850/1930	-0.2	-1.4	9.0
UL gain vs DL gain 824/869	2.0	1.5	9.0
UL gain vs DL gain 776/728	-0.6	0.1	9.0
UL gain vs DL gain 776/746	0.3	-0.2	9.0

Plots


AWGN

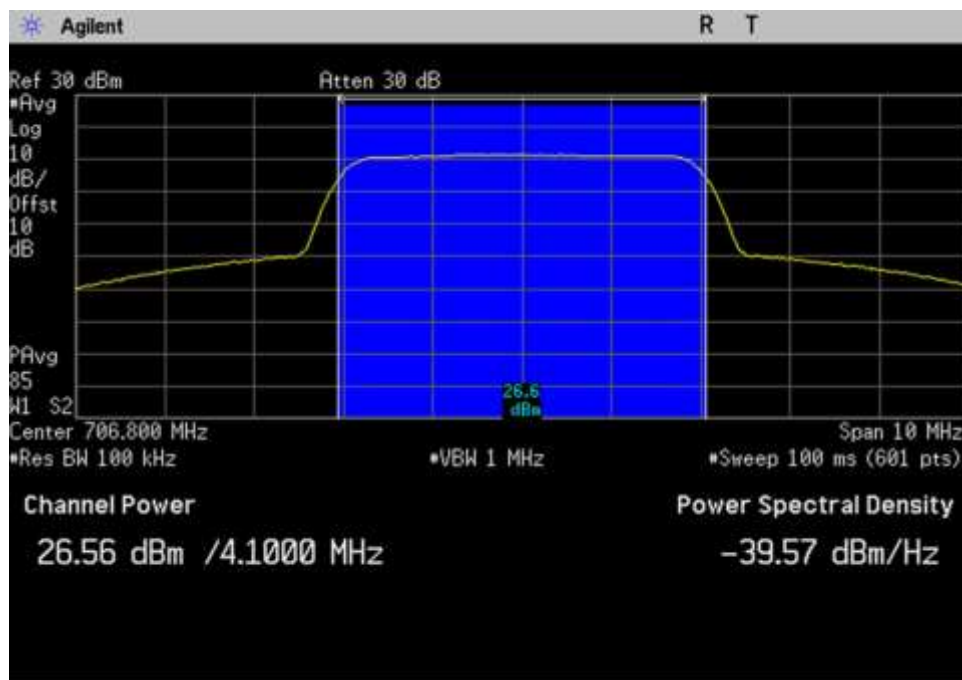


UL_698-716_AWGN_706.8MHz

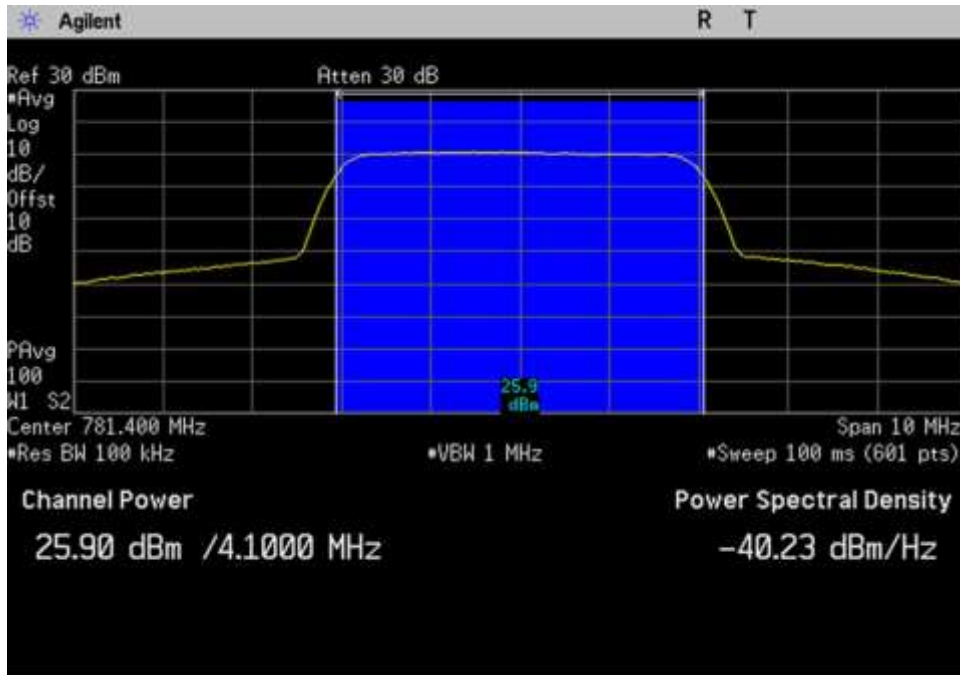


UL_698-716_AWGN_Max_706.8MHz

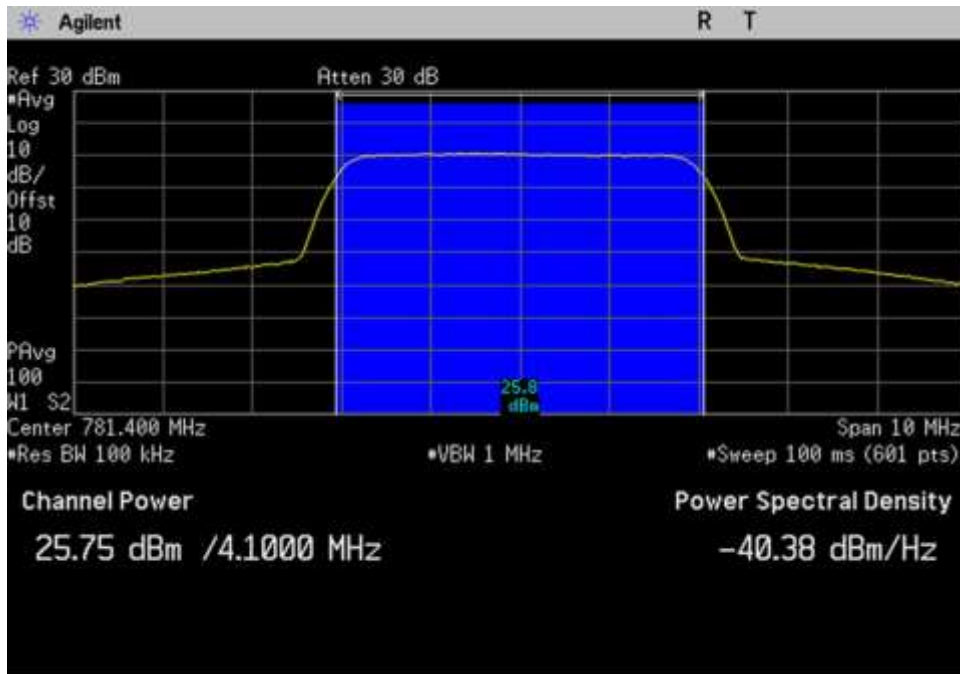


UL_776-787_AWGN_781.4MHz

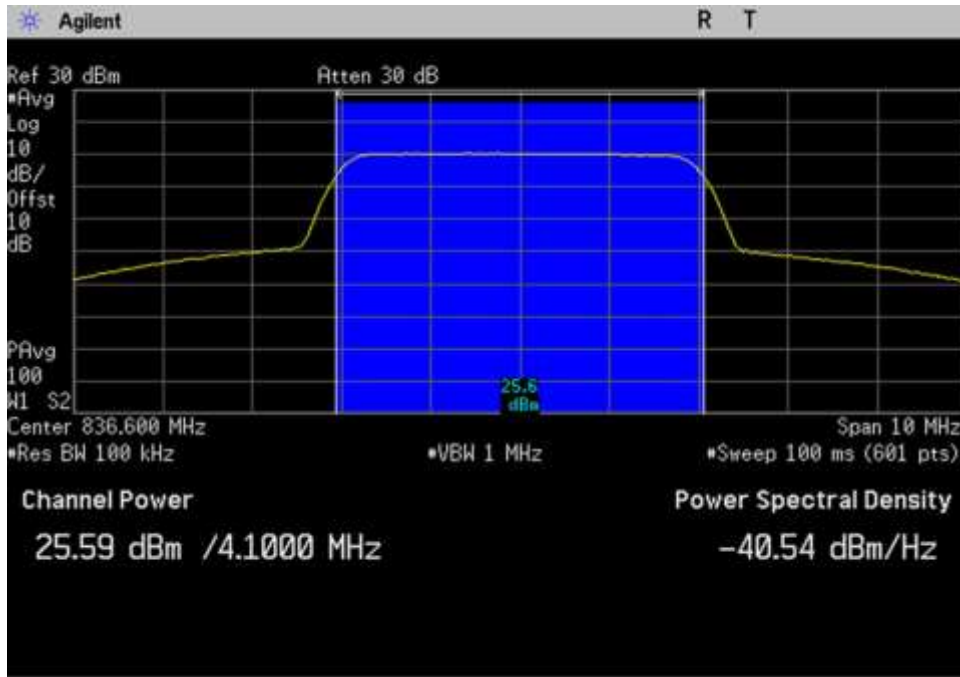

UL_776-787_AWGN_Max_781.4MHz

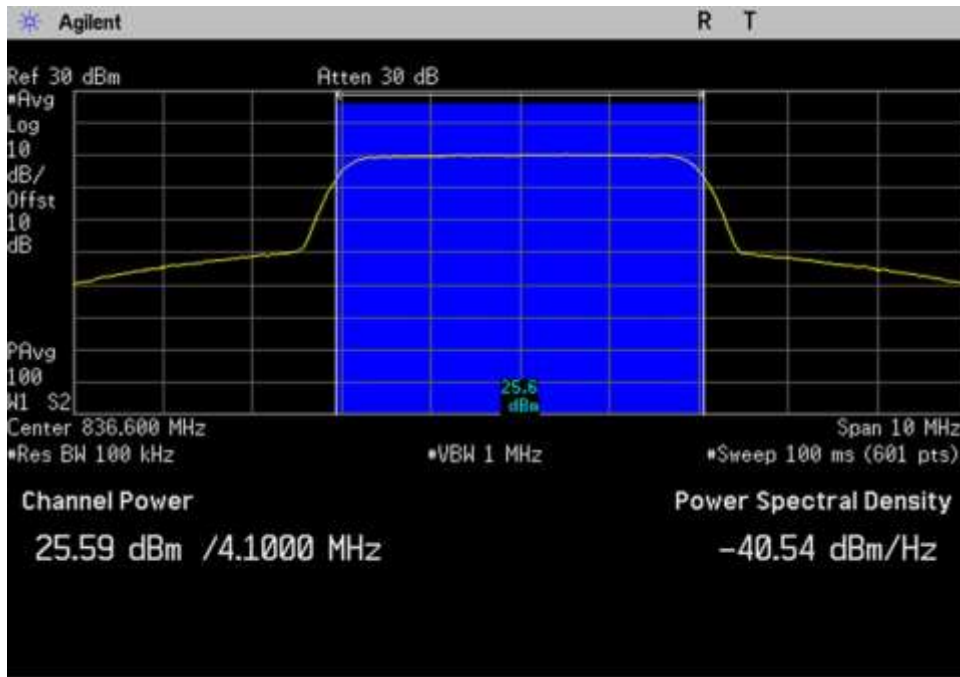


UL_824-849_AWGN_836.6MHz

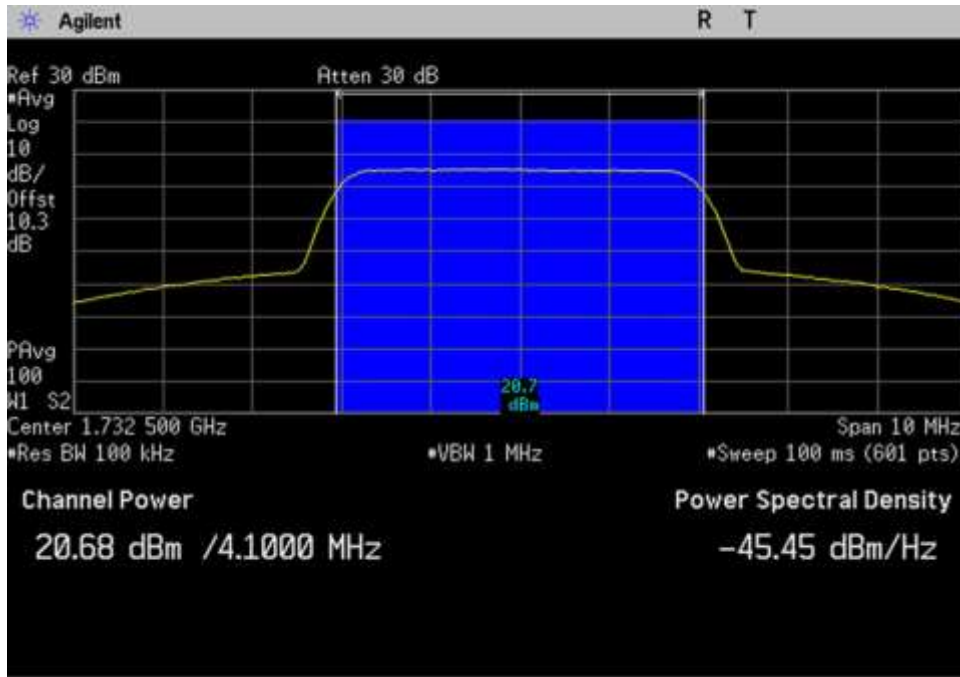


UL_824-849_AWGN_Max_836.6MHz




UL_1710-1755_AWGN_1732.5MHz

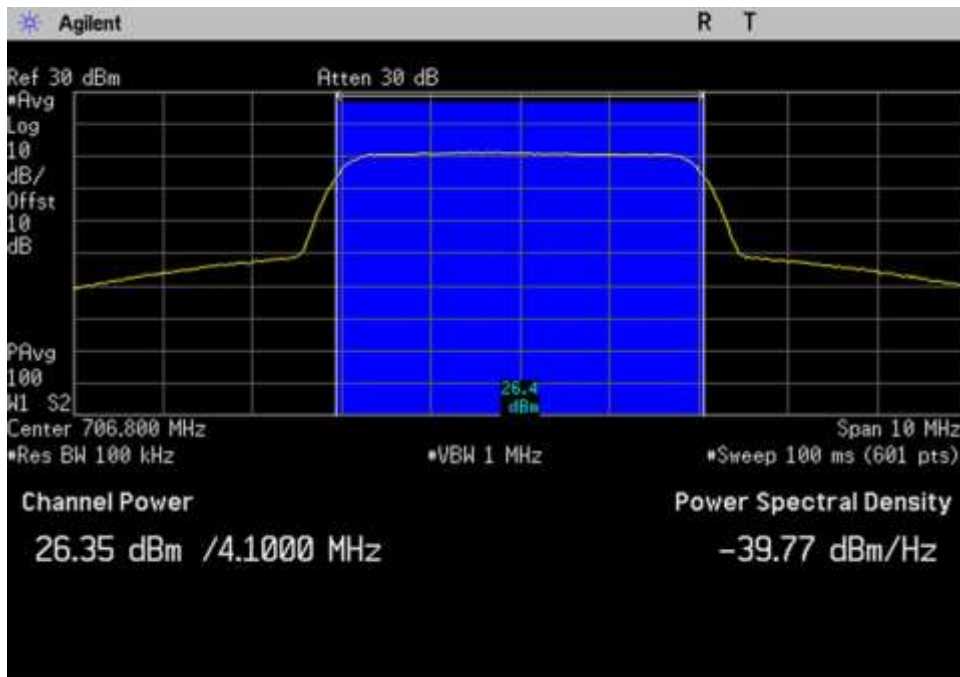


UL_1710-1755_AWGN_Max_1732.5MHz

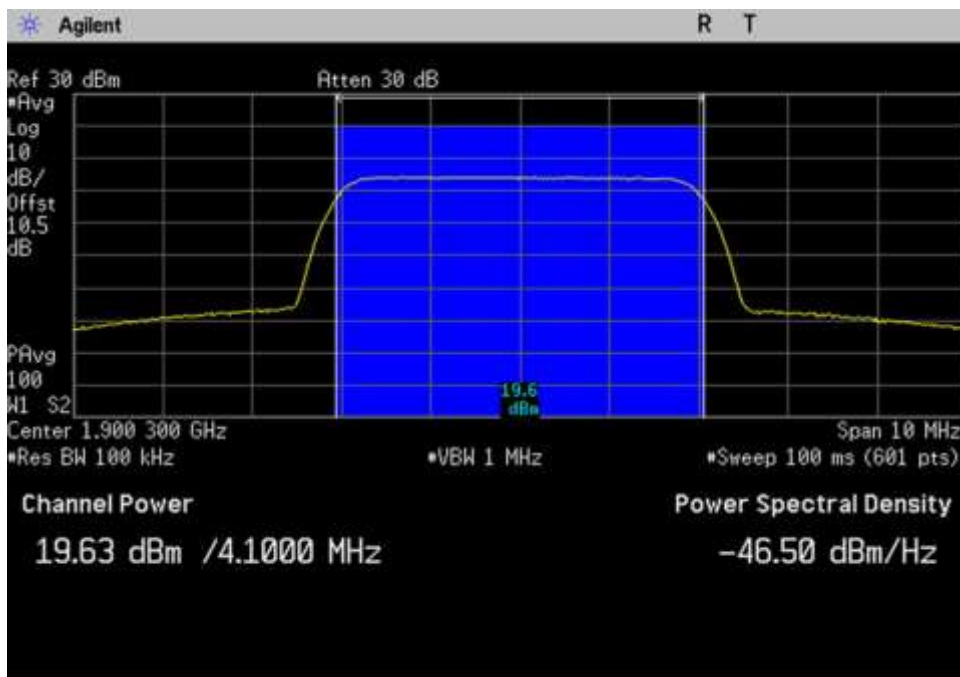


UL_1850-1915_AWGN_1900.3MHz

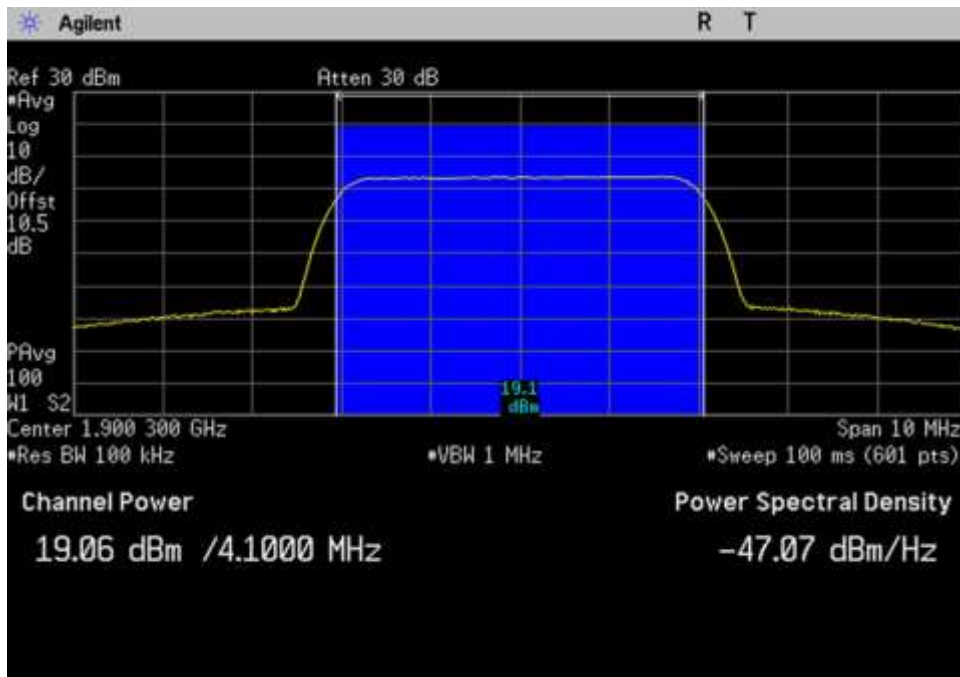


UL_1850-1915_AWGN_Max_1900.3MHz

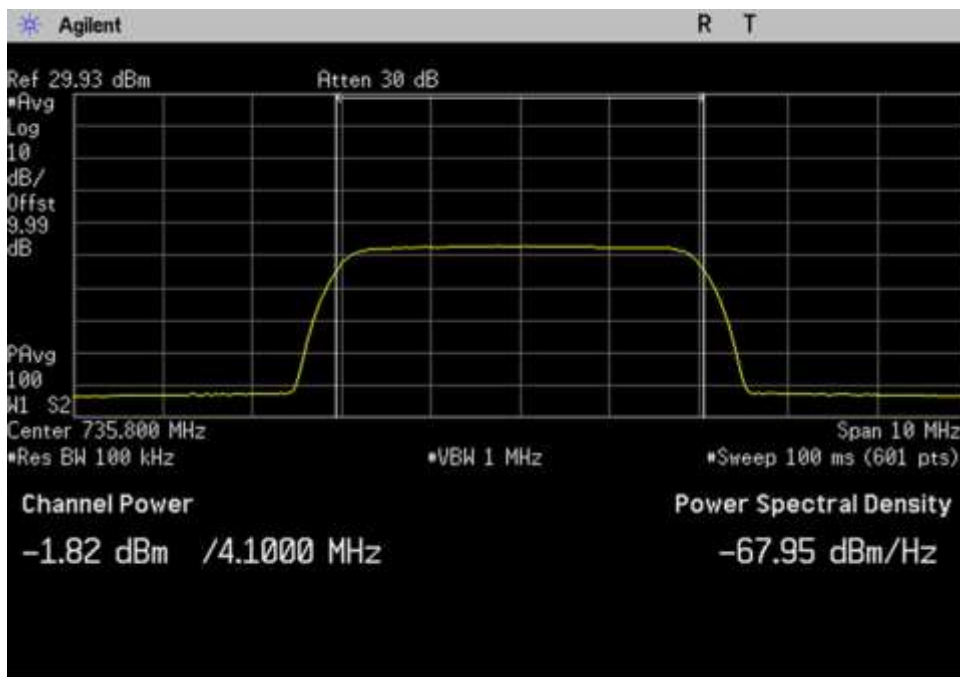


DL_728-746_AWGN_735.8MHz

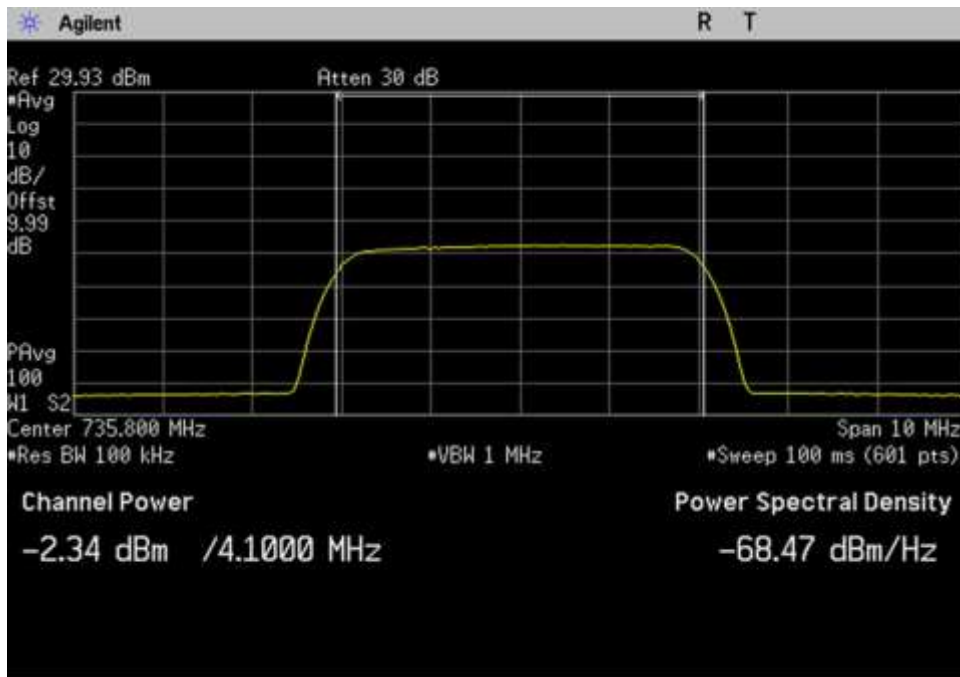


DL_728-746_AWGN_Max_735.8MHz

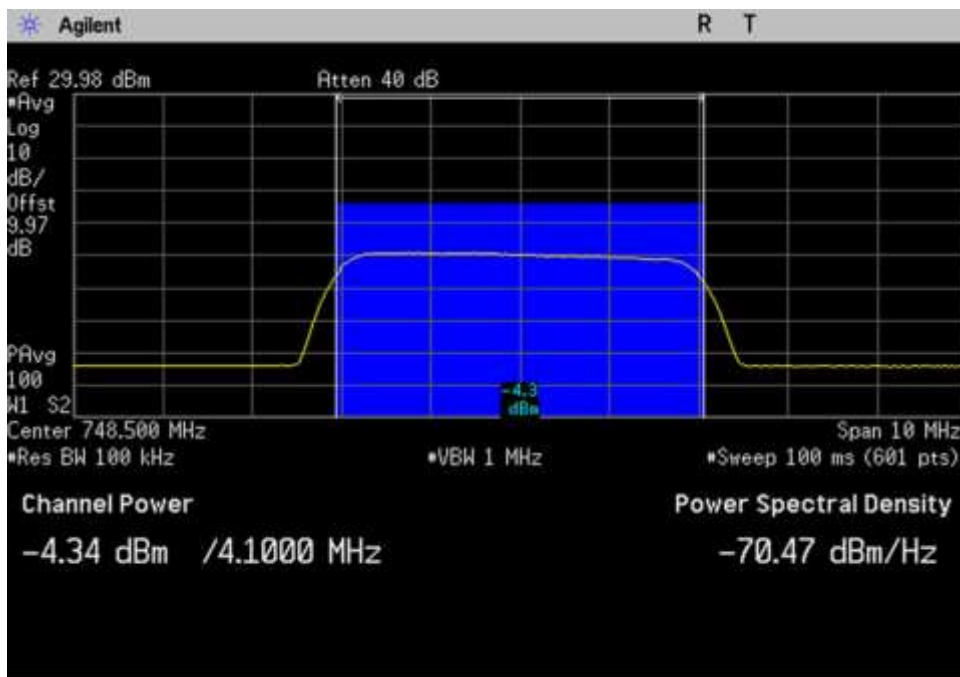


DL_746-757_AWGN_748.5MHz

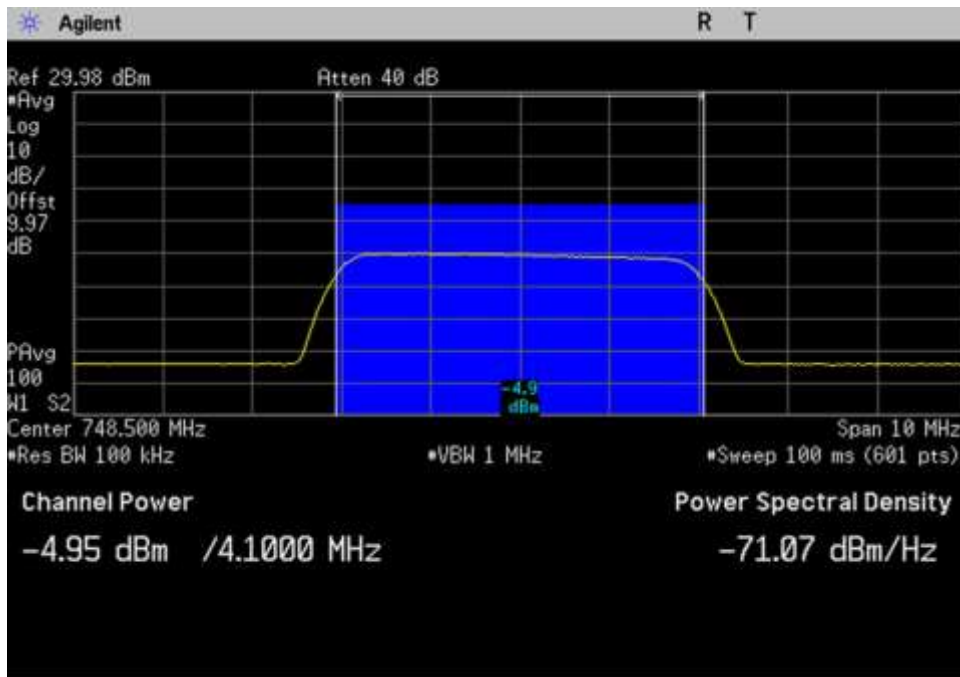


DL_746-757_AWGN_Max_748.5MHz

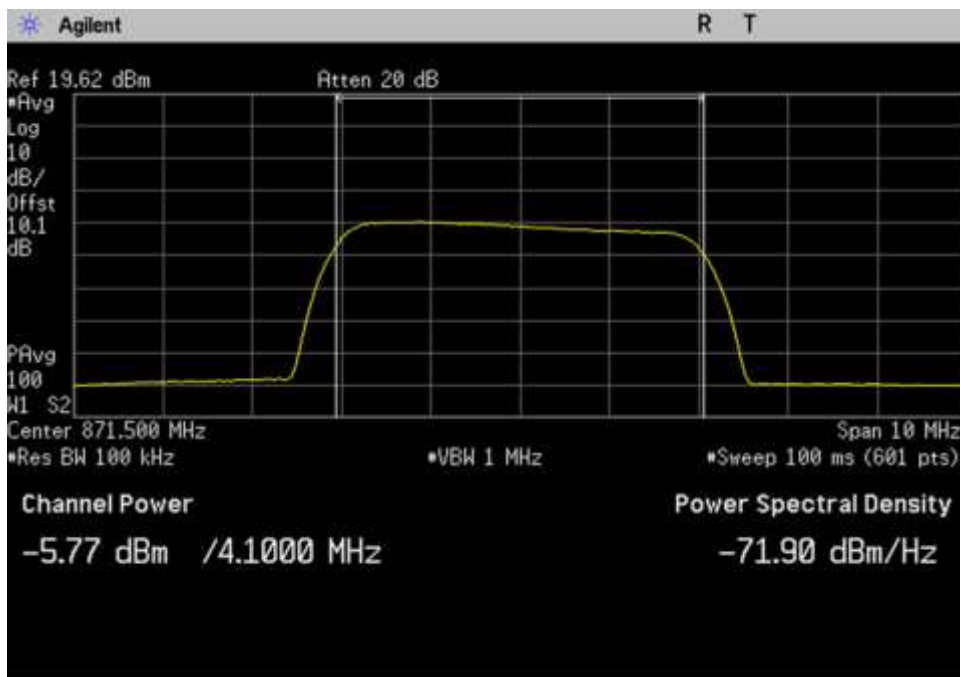


DL_869-894_AWGN_871.5MHz

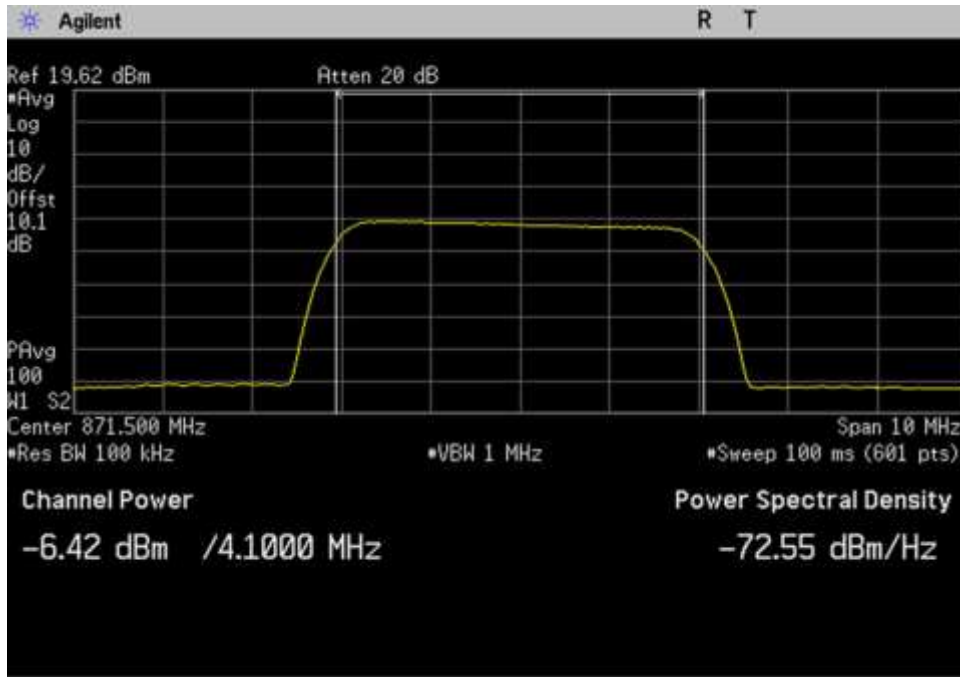


DL_869-894_AWGN_Max_871.5MHz

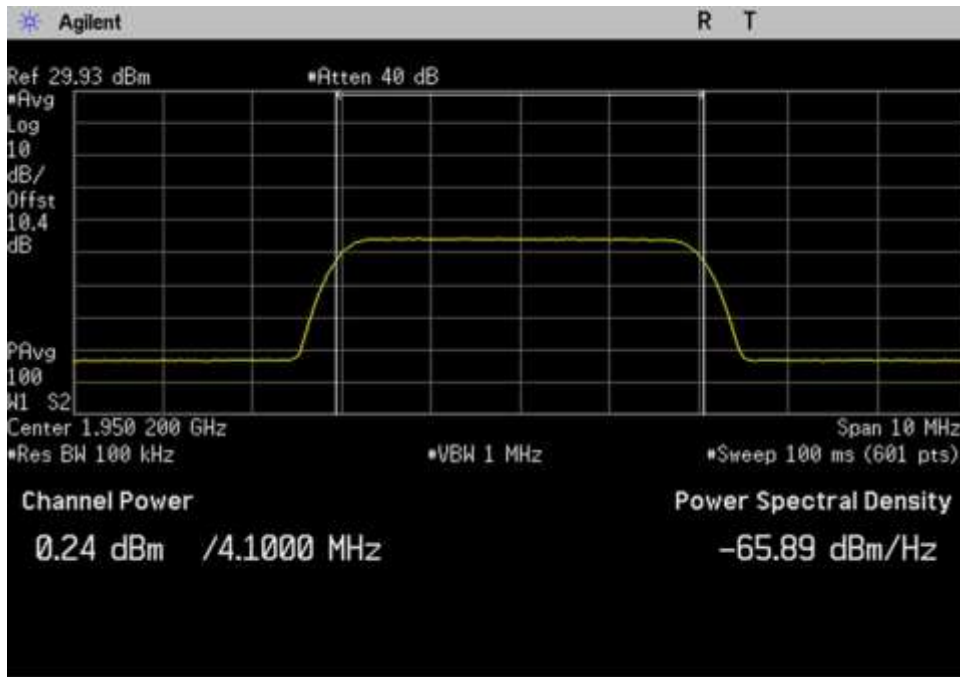


DL_1930-1995_AWGN_1950.2MHz

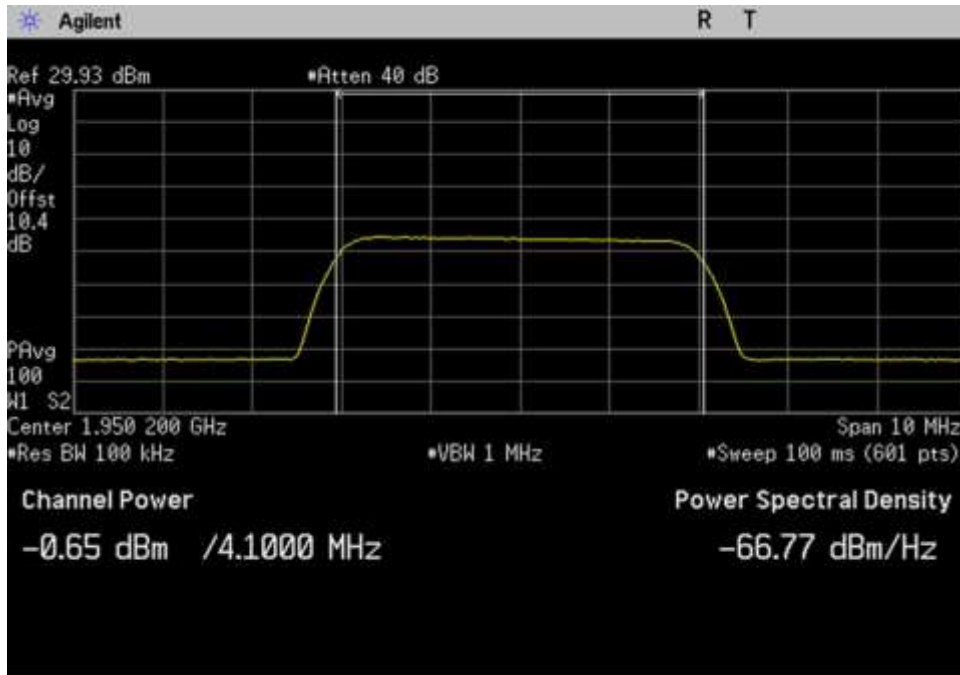

DL_1930-1995_AWGN_Max_1950.2MHz

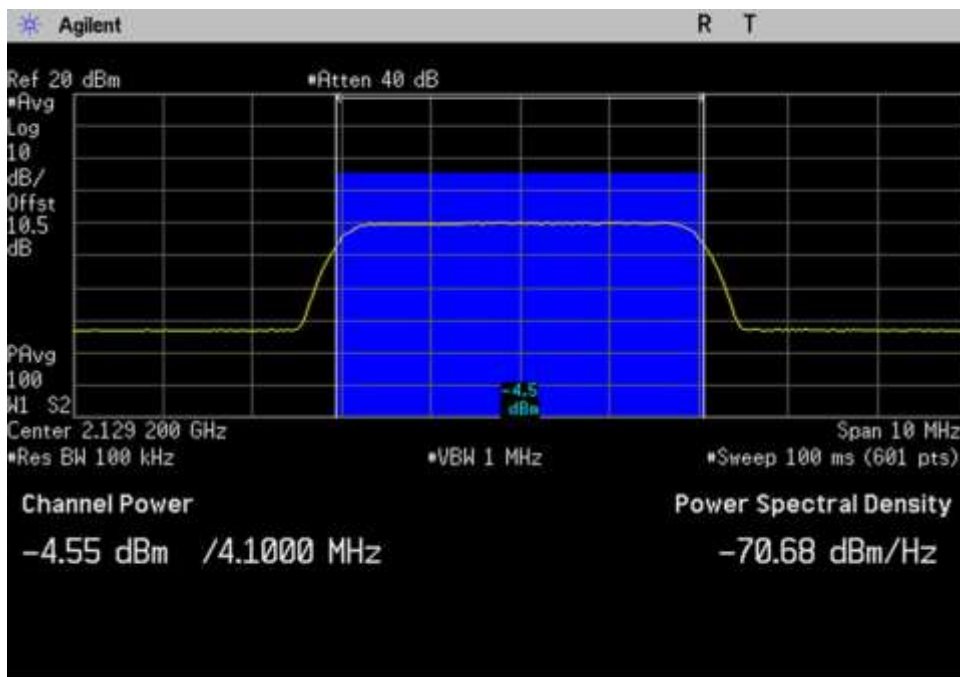


DL_2110-2155_AWGN_2129.2MHz

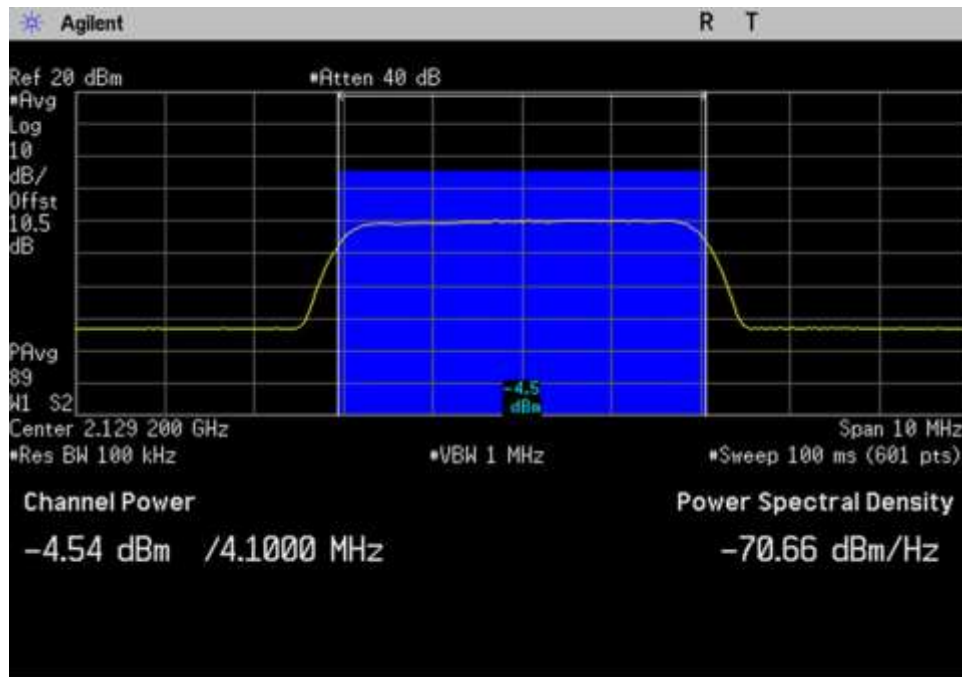


DL_2110-2155_AWGN_Max_ 2129.2MHz


GSM

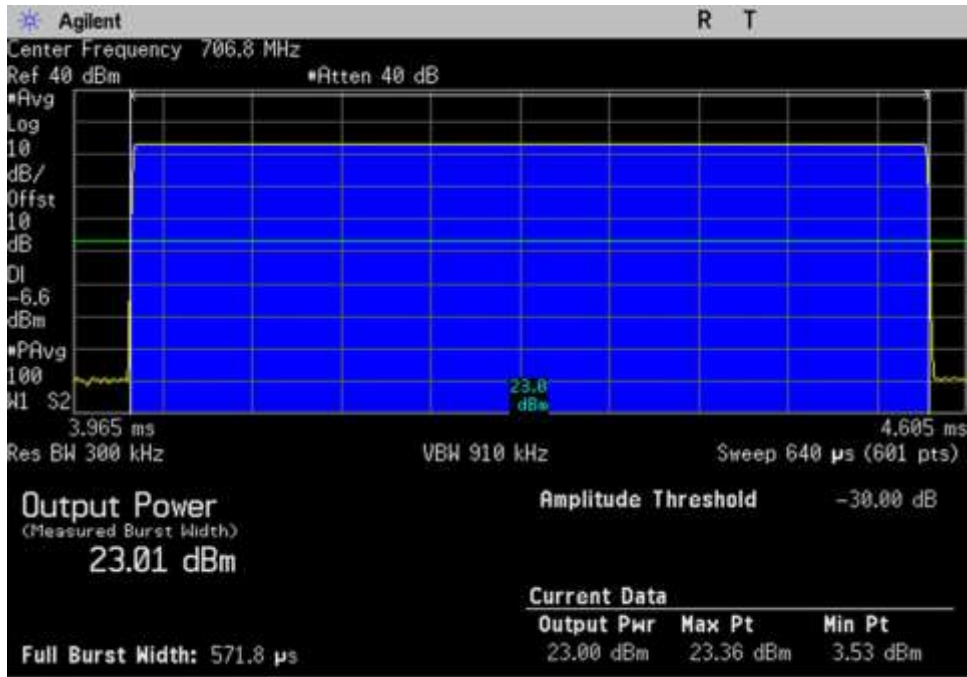


UL_698-716_GSM_706.8MHz

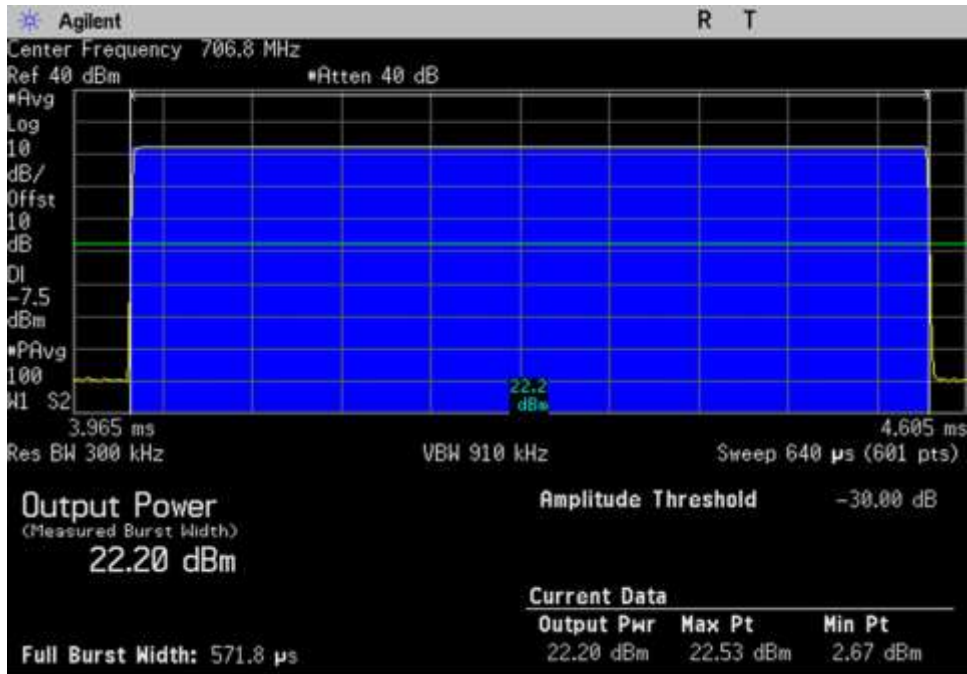


UL_698-716_GSM_Max_706.8MHz

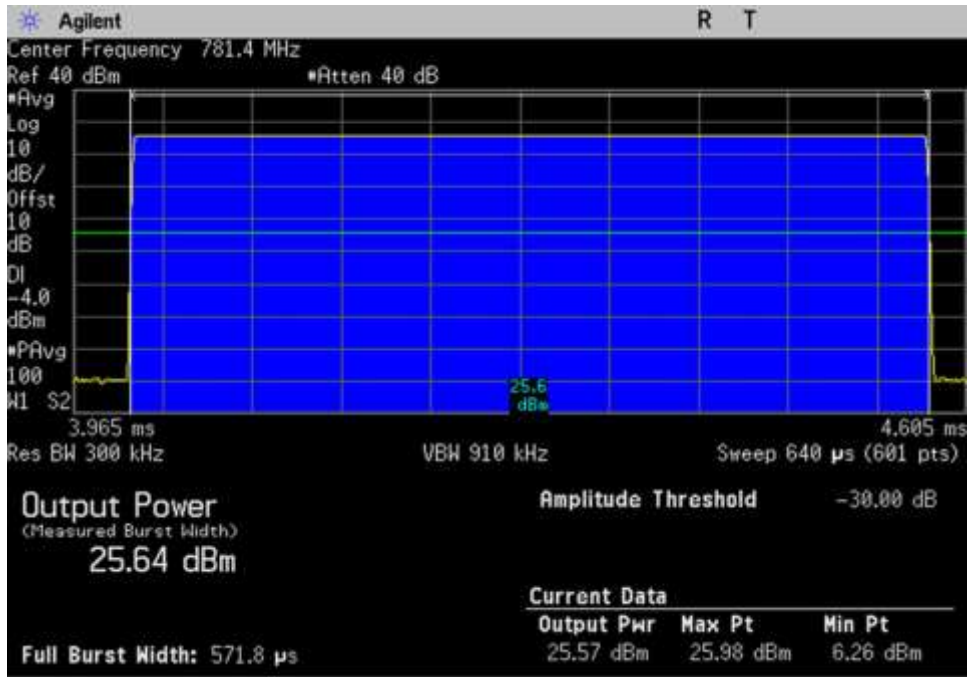


UL_776-787_GSM_ 781.4MHz

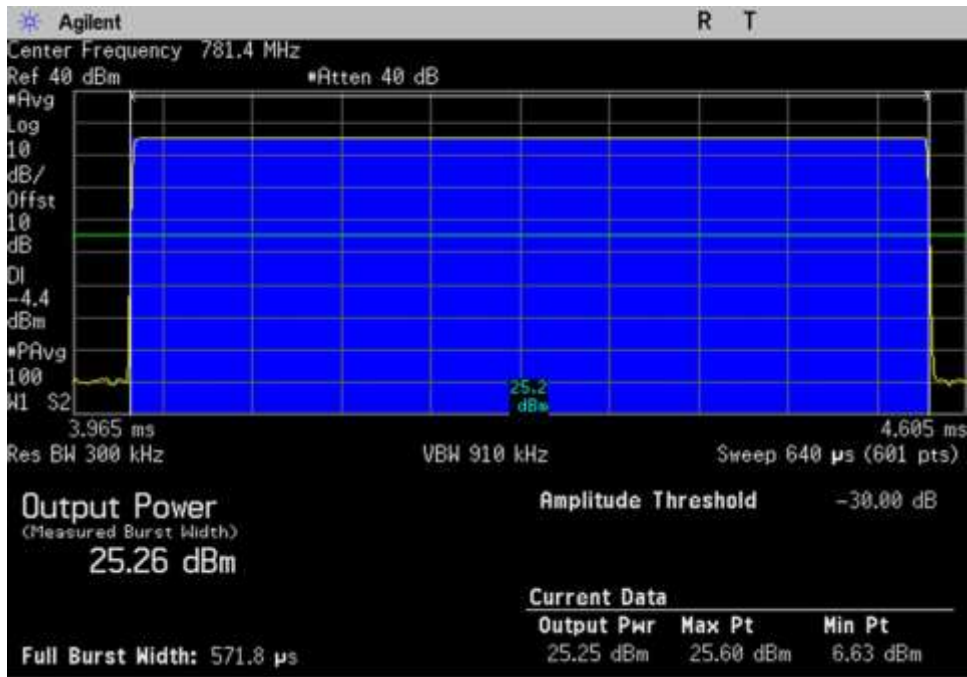


UL_776-787_GSM_Max_ 781.4MHz

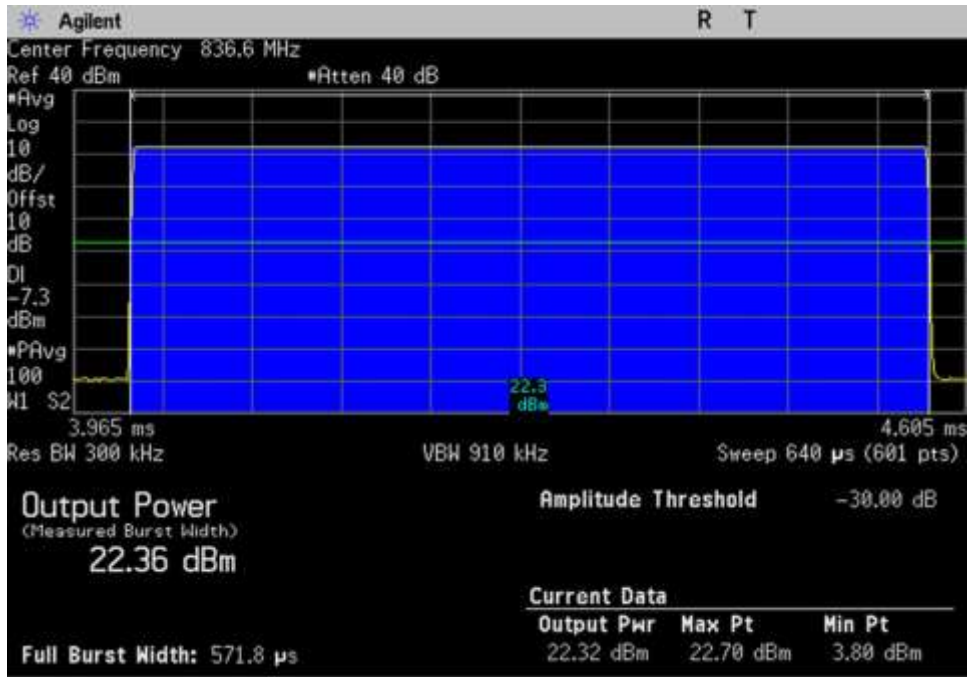


UL_824-849_GSM_836.6MHz

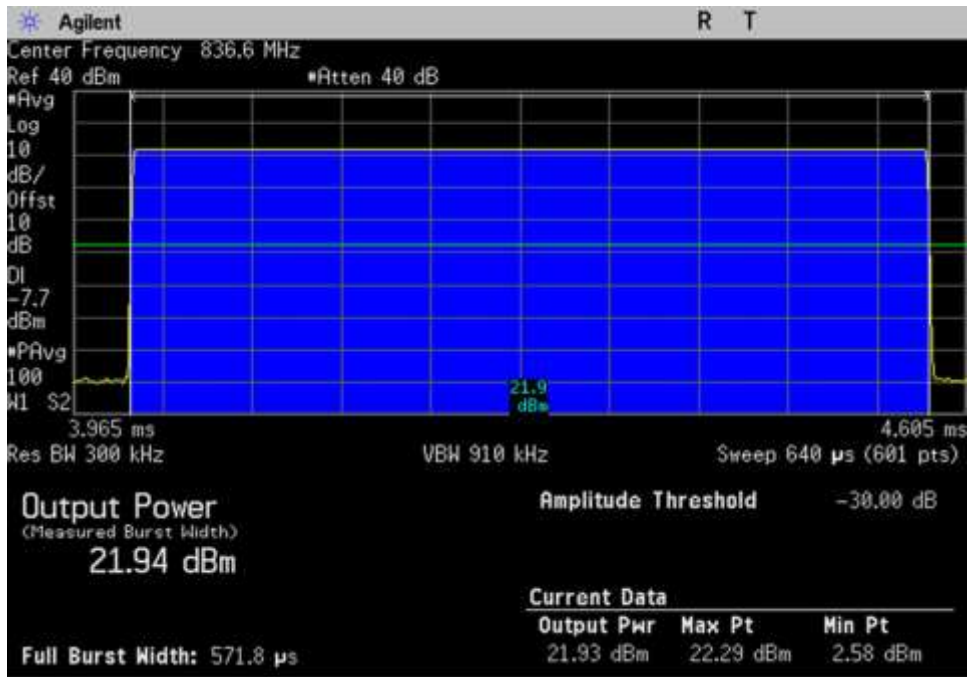


UL_824-849_GSM_Max_836.6MHz

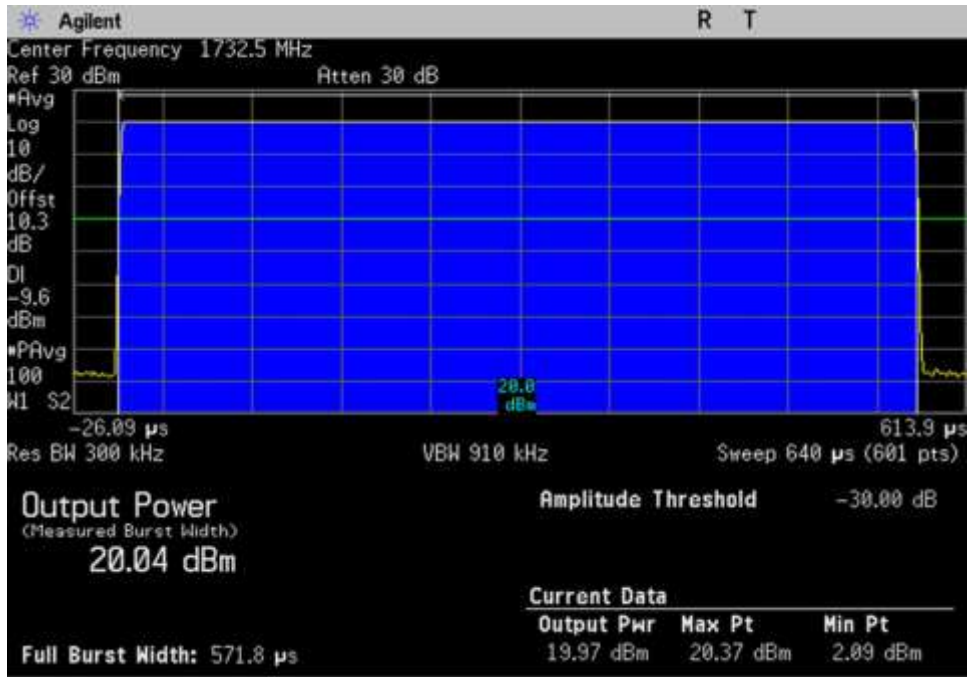


UL_1710-1755_GSM_1732.5MHz

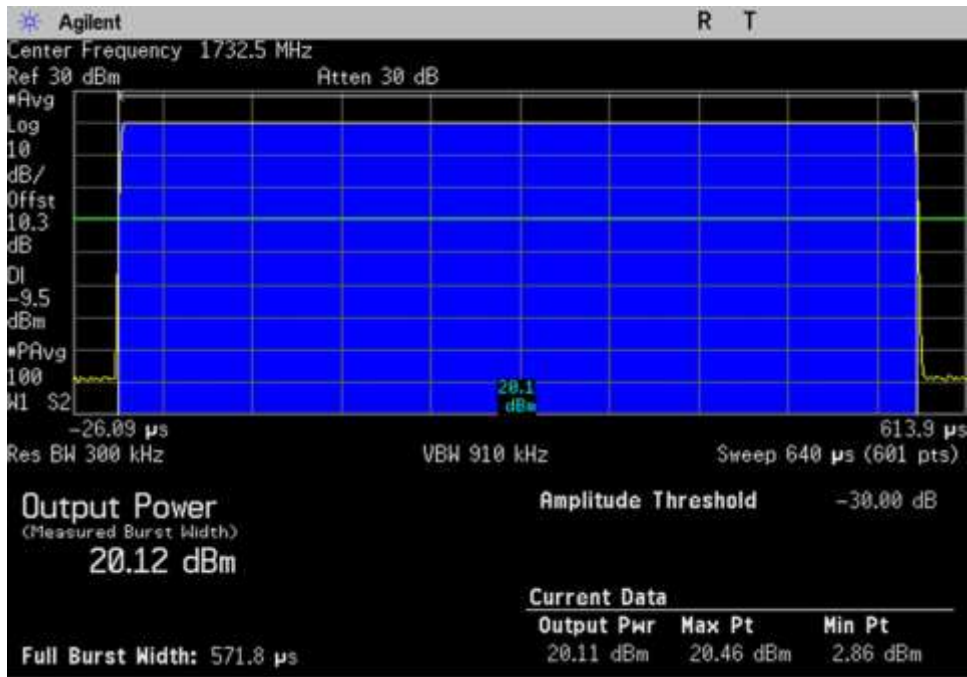


UL_1710-1755_GSM_Max_1732.5MHz

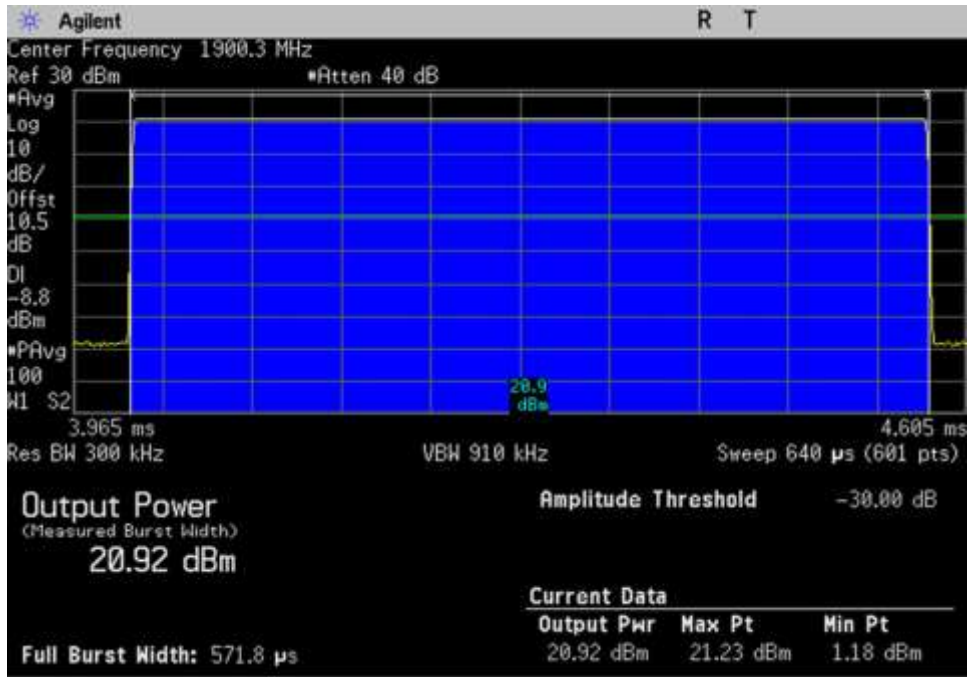


UL_1850-1915_GSM_1900.3MHz

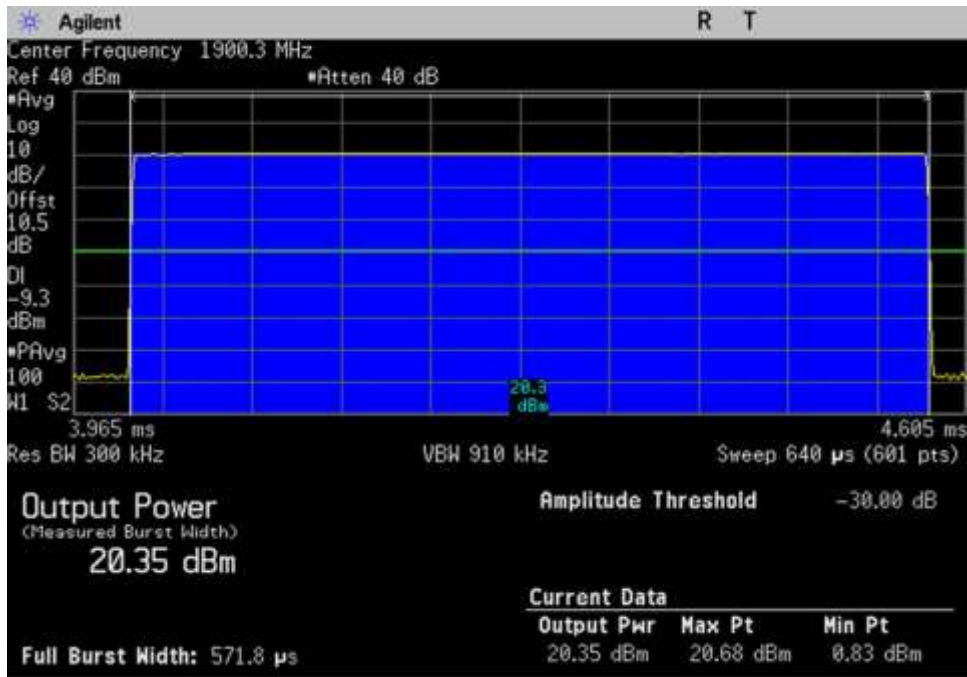


UL_1850-1915_GSM_Max_1900.3MHz

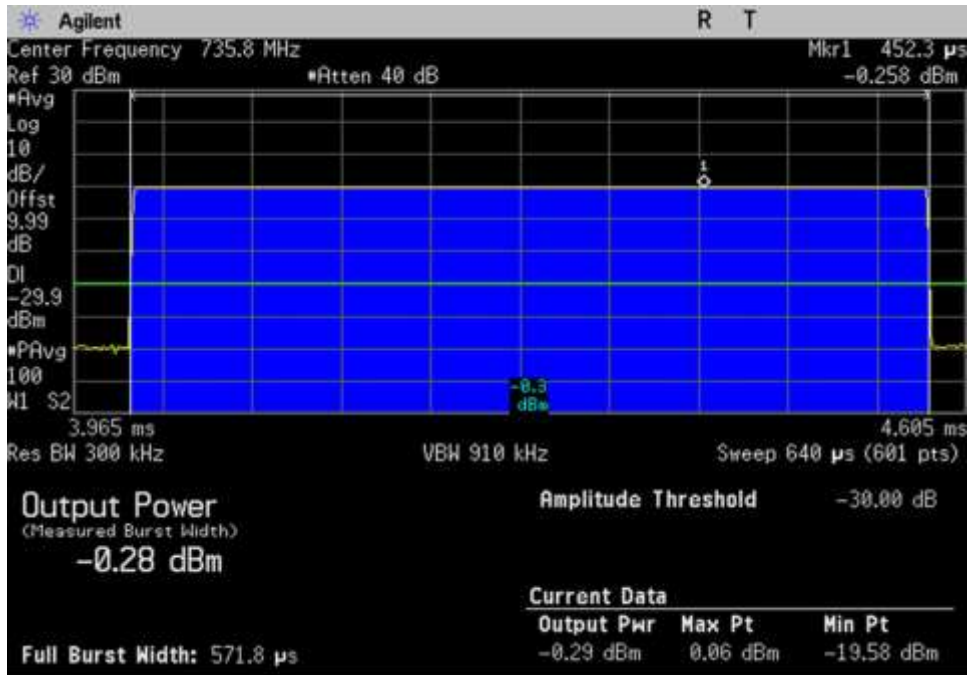


DL_728-746_GSM_735.8MHz

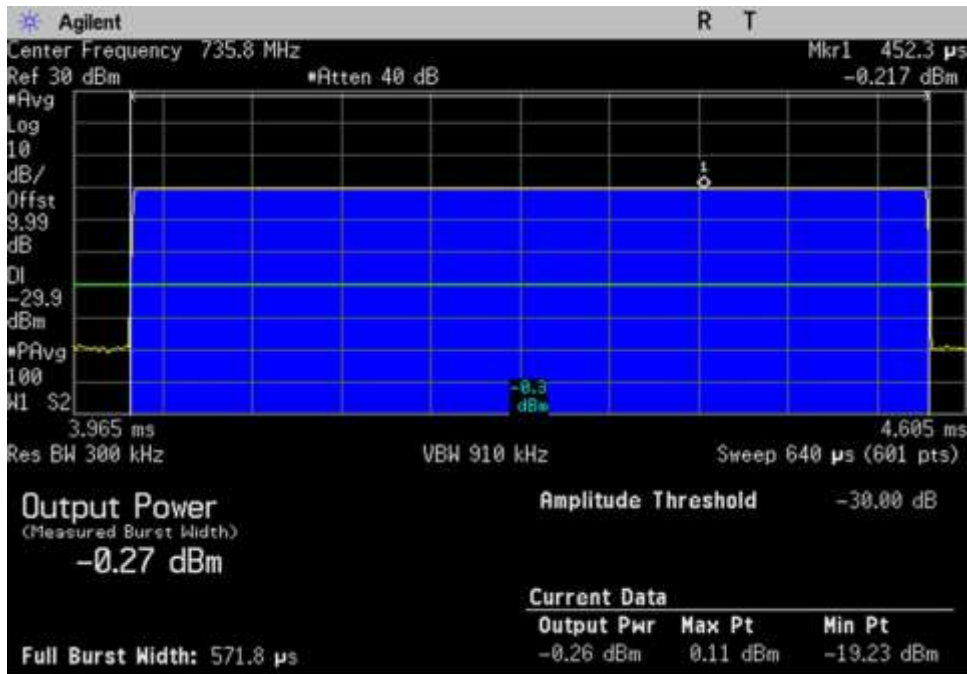


DL_728-746_GSM_Max_735.8MHz

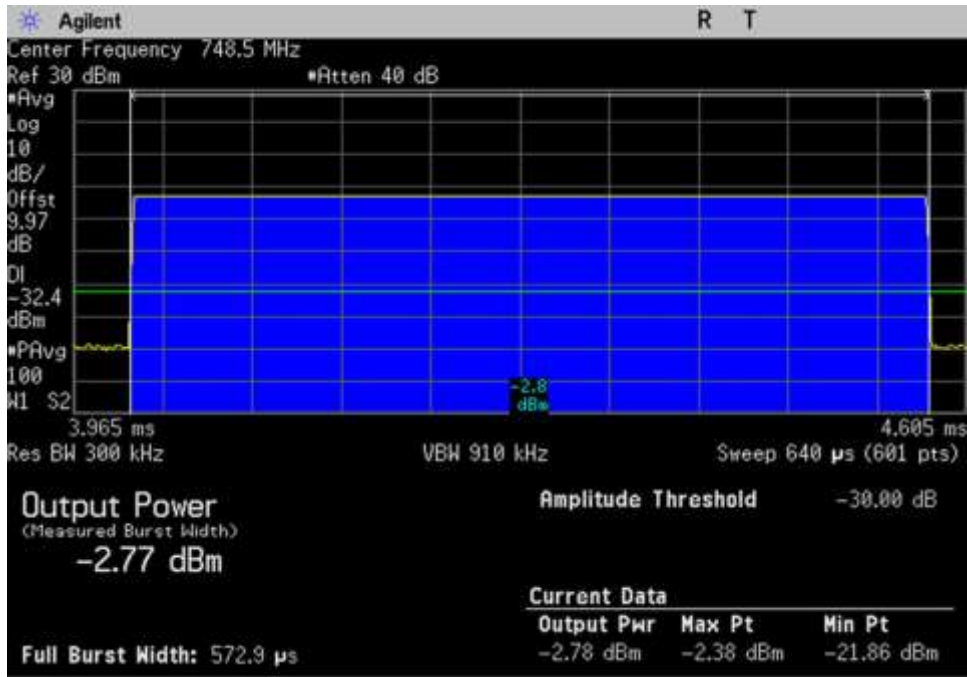


DL_746-757_GSM_748.5MHz

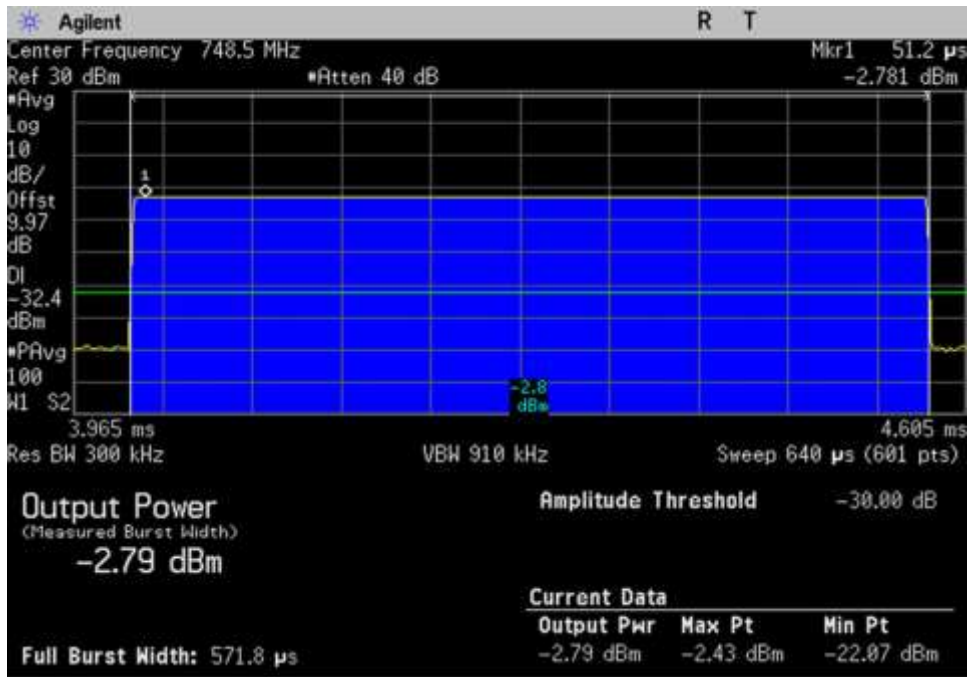


DL_746-757_GSM_Max_748.5MHz

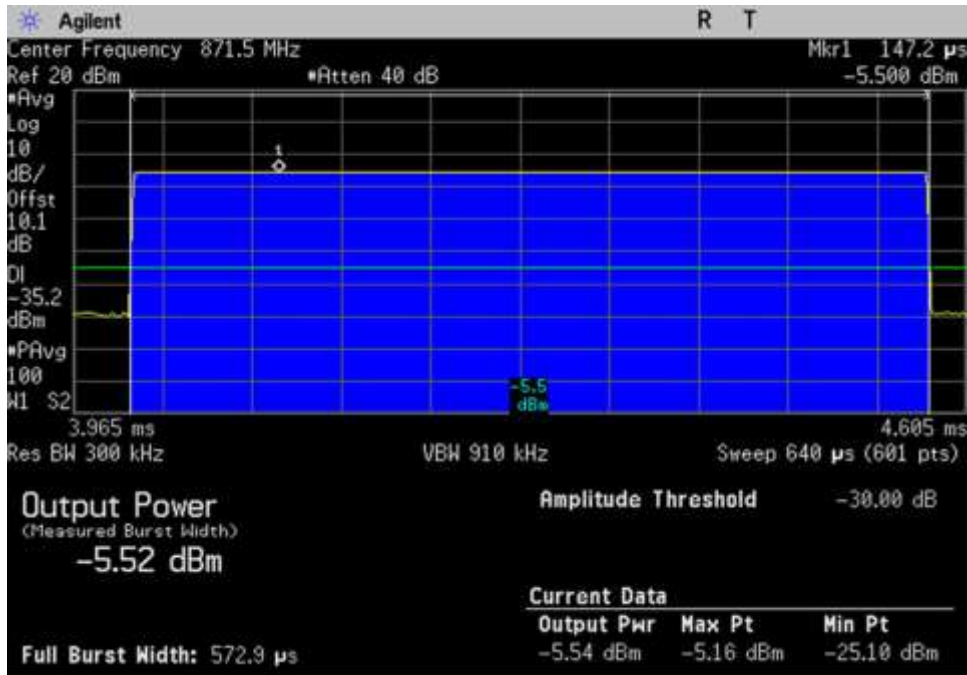


DL_869-894_GSM_ 871.5MHz

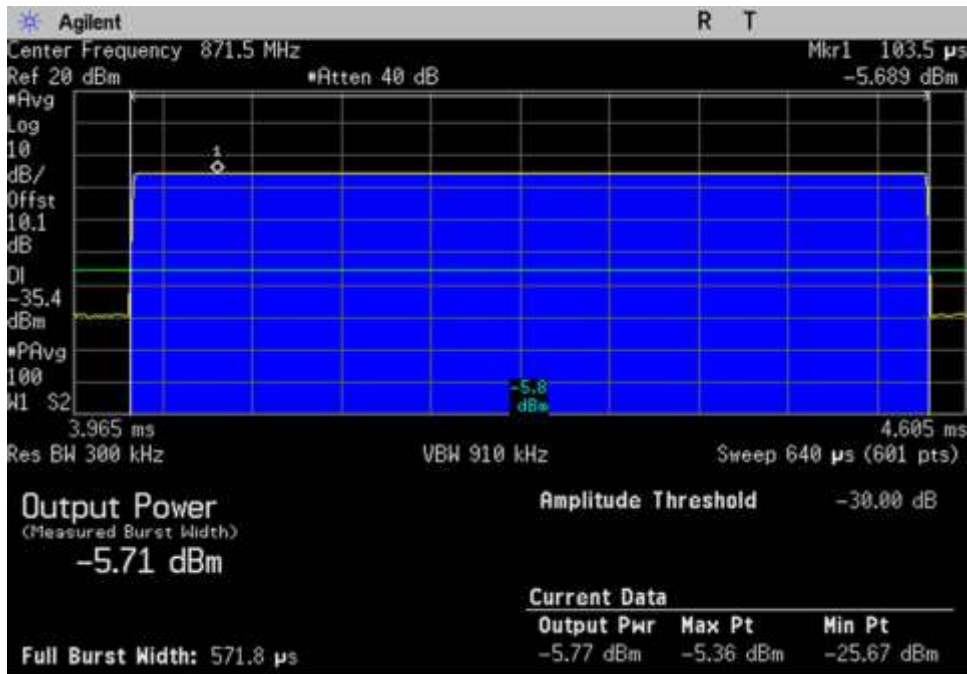


DL_869-894_GSM_Max_ 871.5MHz

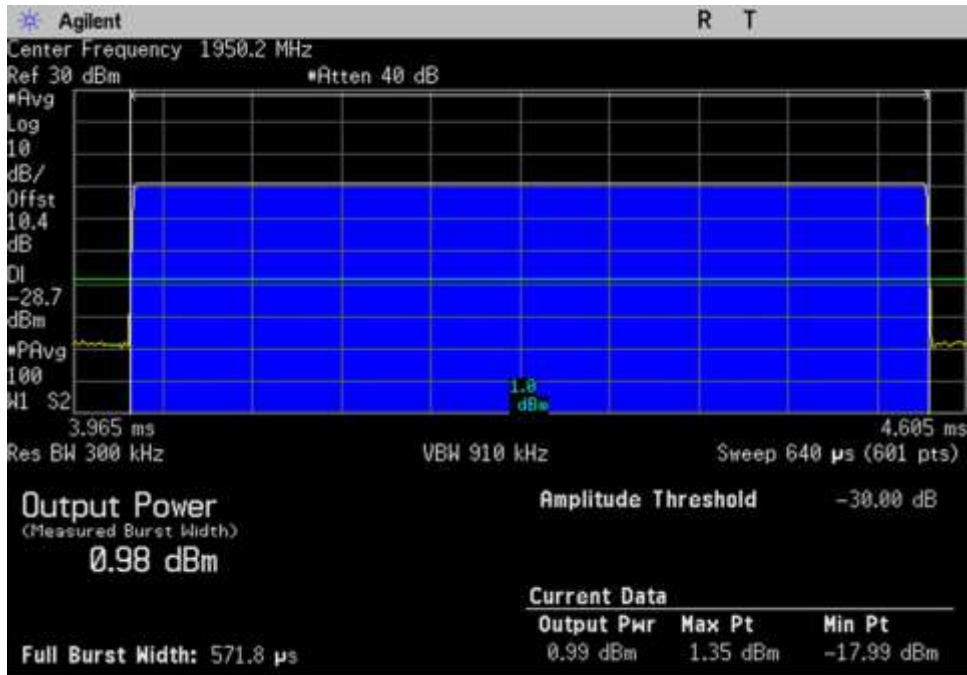


DL_1930-1995_GSM_1950.2MHz

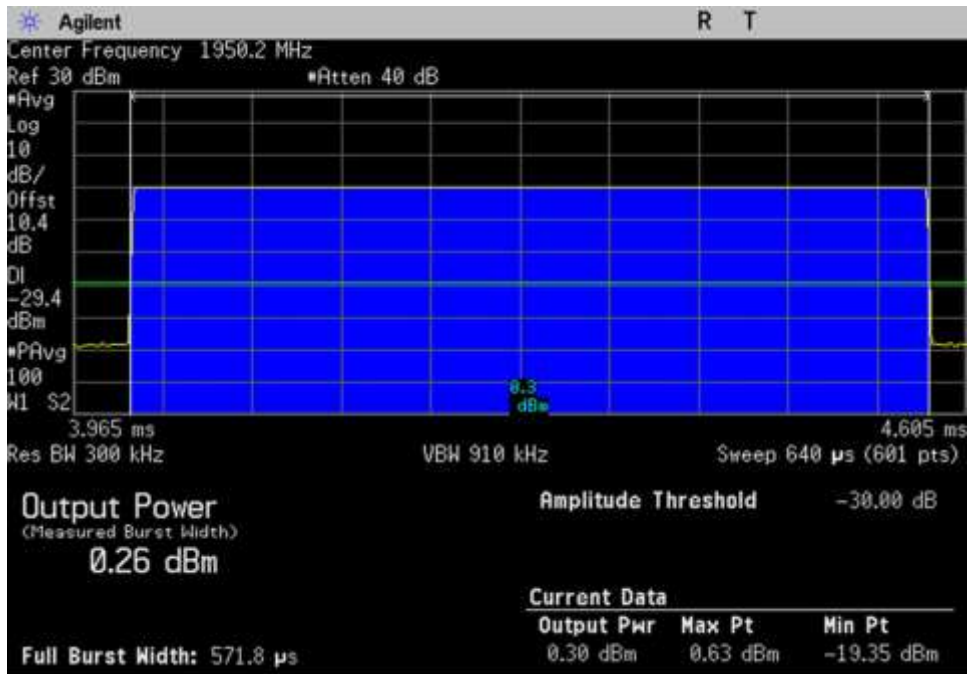

DL_1930-1995_GSM_Max_1950.2MHz

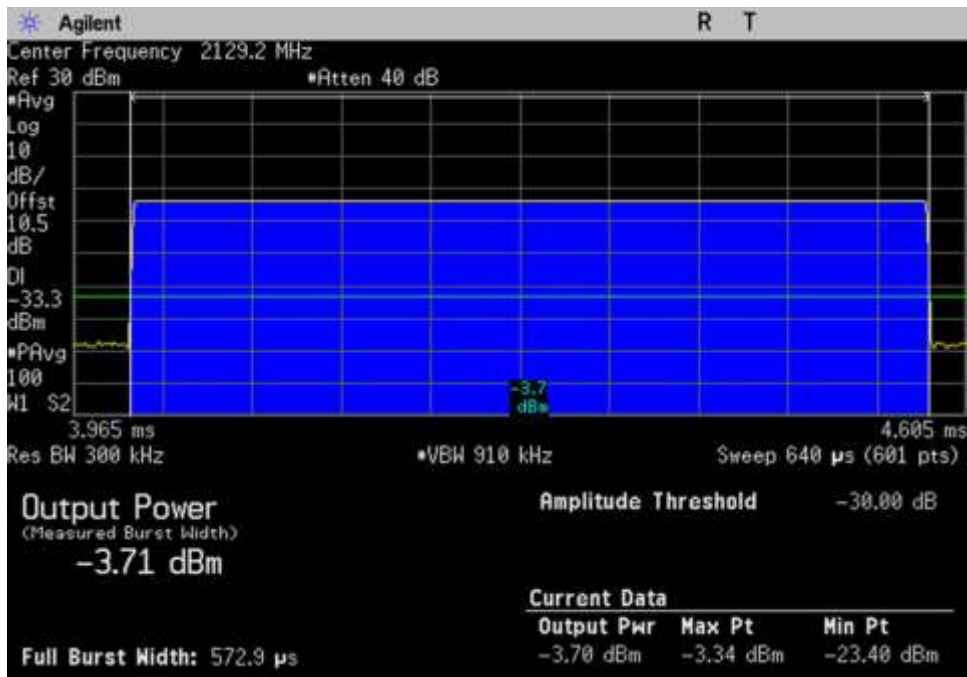

DL_2110-2155_GSM_2129.2MHz

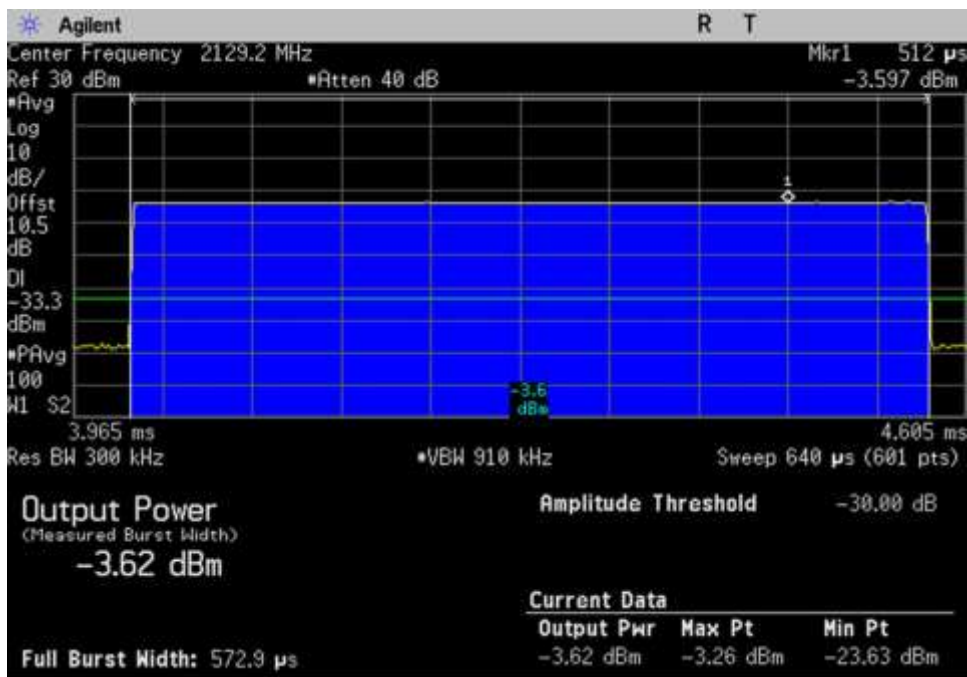

DL_2110-2155_GSM_Max_2129.2MHz

7.4 Intermodulation Product

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.4 Intermodulation Product**
 Work Order #: **101623** Date 08/07/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu S. Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test environment conditions: Temperature: 22.3°C Relative Humidity: 45.6% Pressure: 101.1kPa

Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020


Summary of Results

Pass: As shown on the plots, all intermodulation products are measured below -19dbm limit.


Inter Modulation Product			
Frequency (MHz)	Pre AGC (dBm)	Limit (dBm)	Results
UL 1710-1755	-27.2	-19	Pass
UL 1850-1915	-29.5	-19	Pass
UL 824-894	-25.4	-19	Pass
UL 698-716	-28.4	-19	Pass
UL 776-787	-22.4	-19	Pass
DL 2110-2155	-56.9	-19	Pass
DL 1930-1995	-57.3	-19	Pass
DL 869-894	-70.4	-19	Pass
DL 728-746	-58.9	-19	Pass
DL 746-757	-66.6	-19	Pass

Note: The EUT maintains compliance with the intermodulation limit at input power of AGC+10dB


Plots

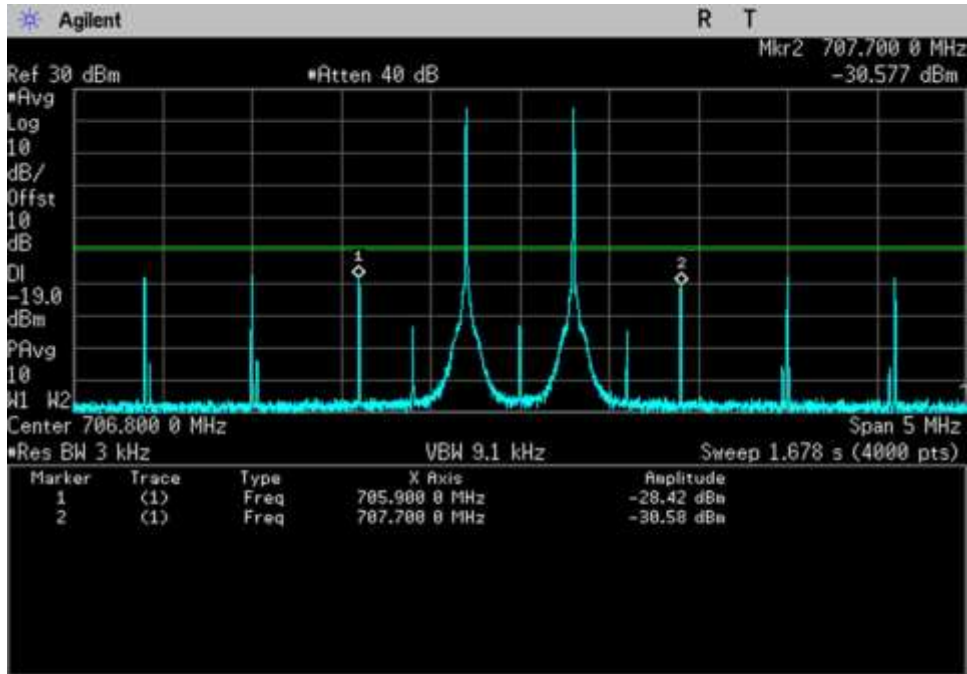


UL_698-716_706.8MHz

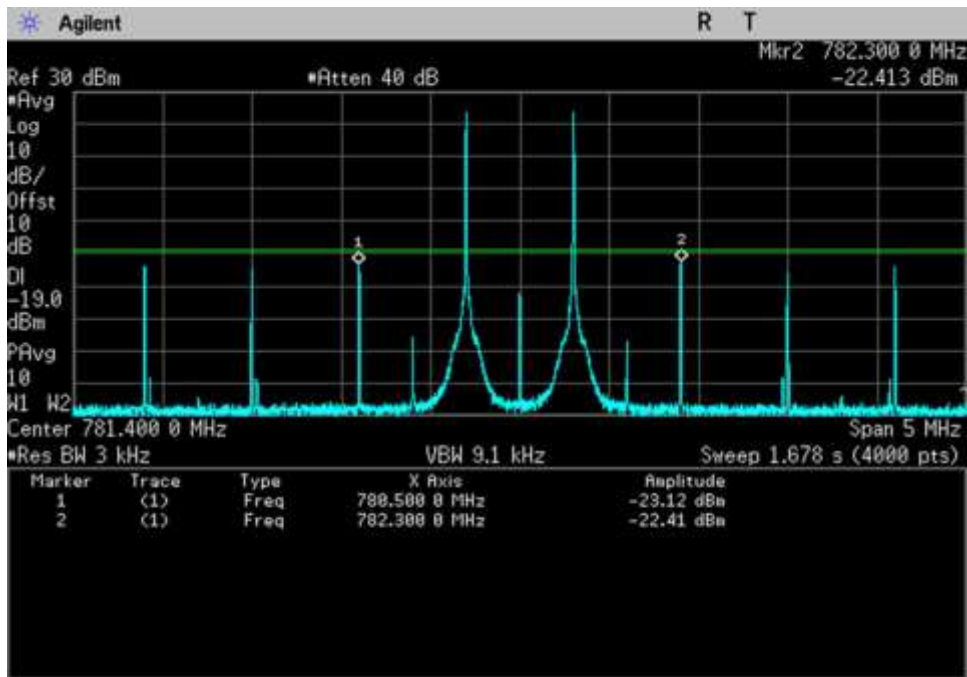


UL_776-787_781.4MHz

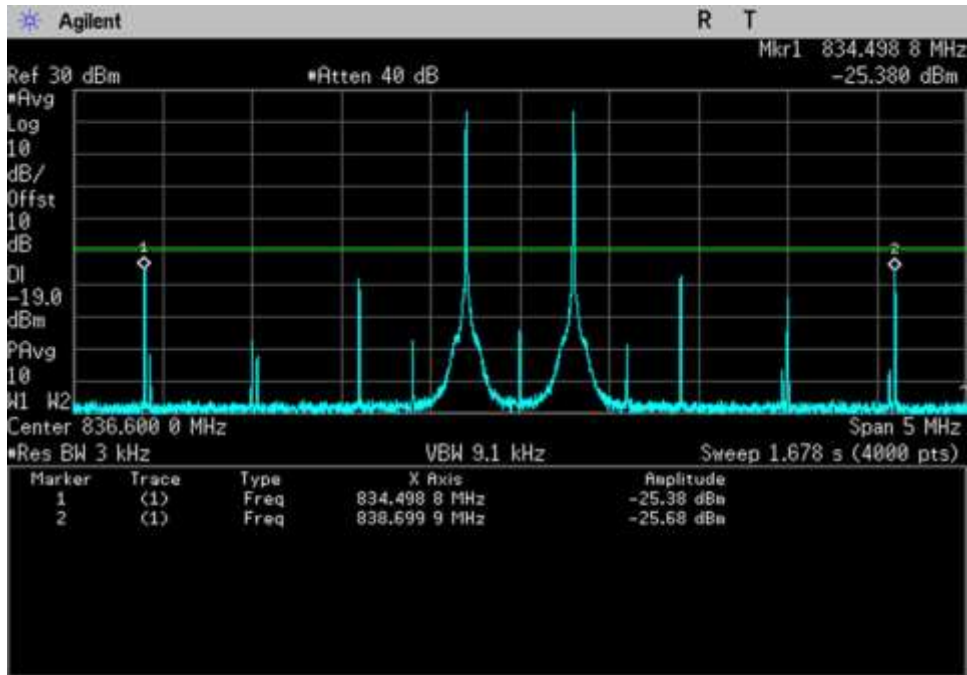


UL_824-849_ 836.6MHz

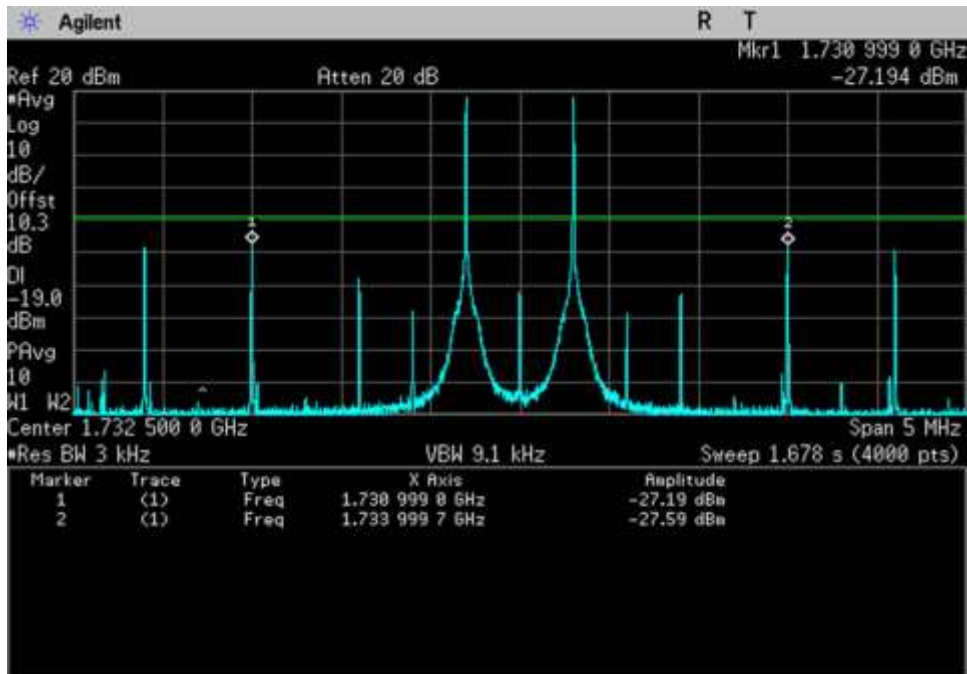


UL_1710-1755_ 1732.5MHz

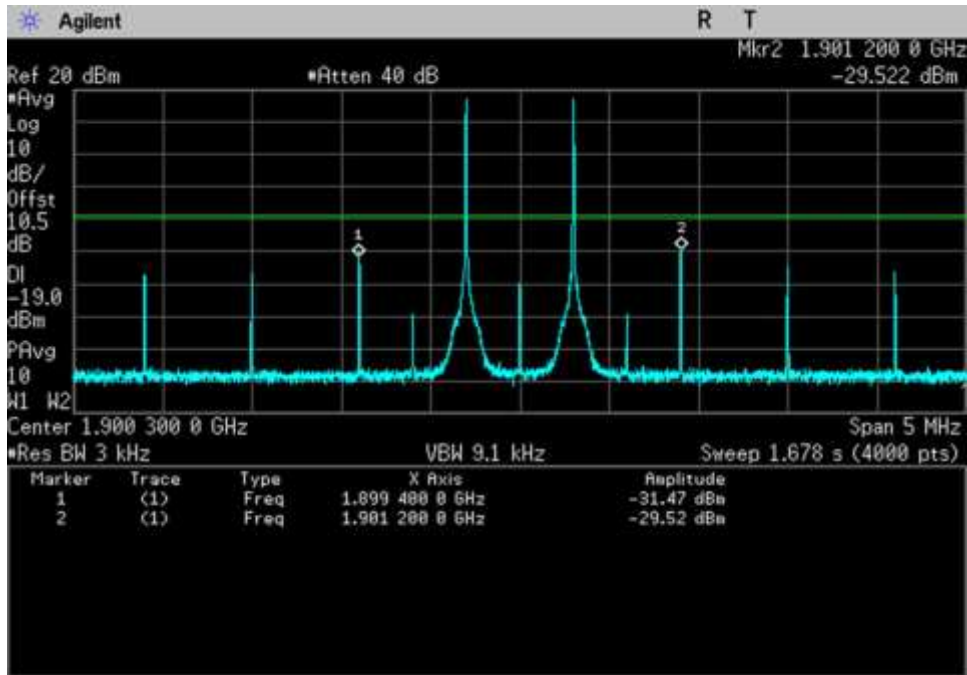


UL_1850-1915_1900.3MHz

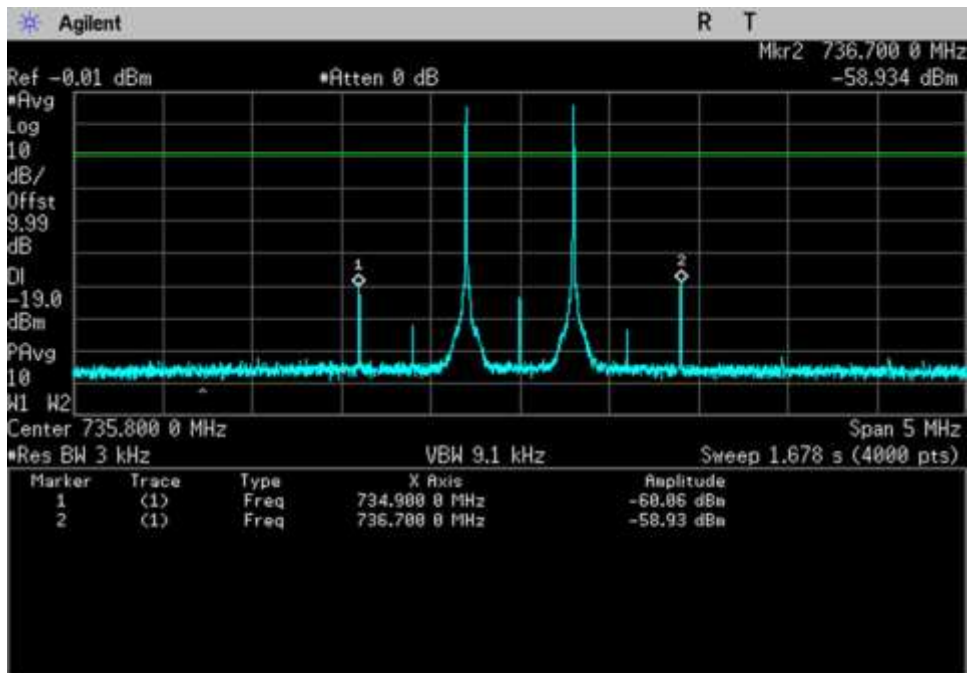


DL_728-746_735.8MHz

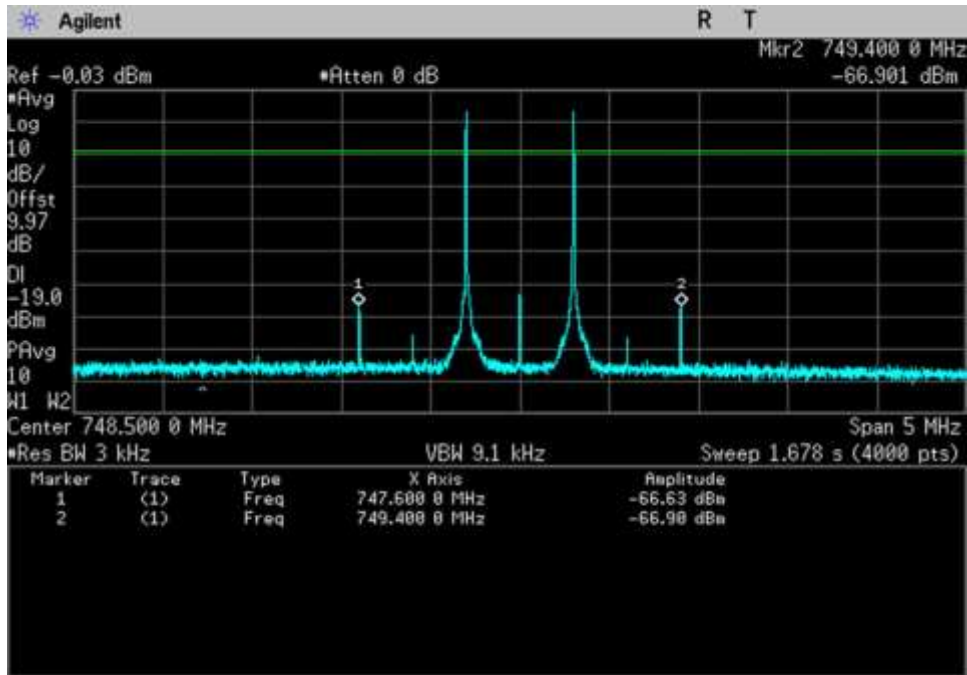


DL_746-757_ 748.5MHz

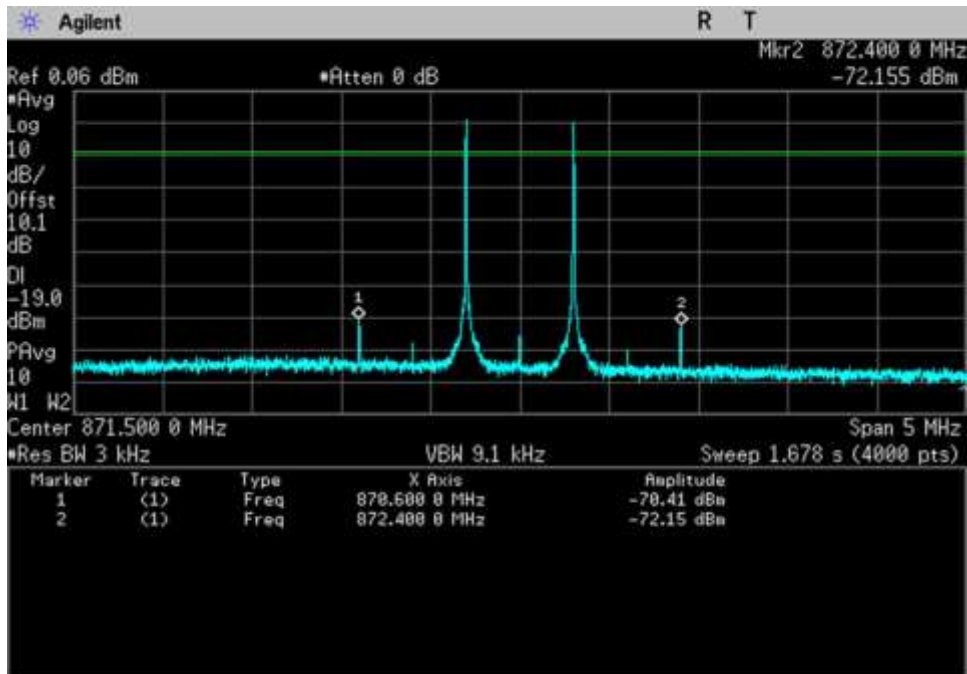

DL_869-894_ 871.5MHz

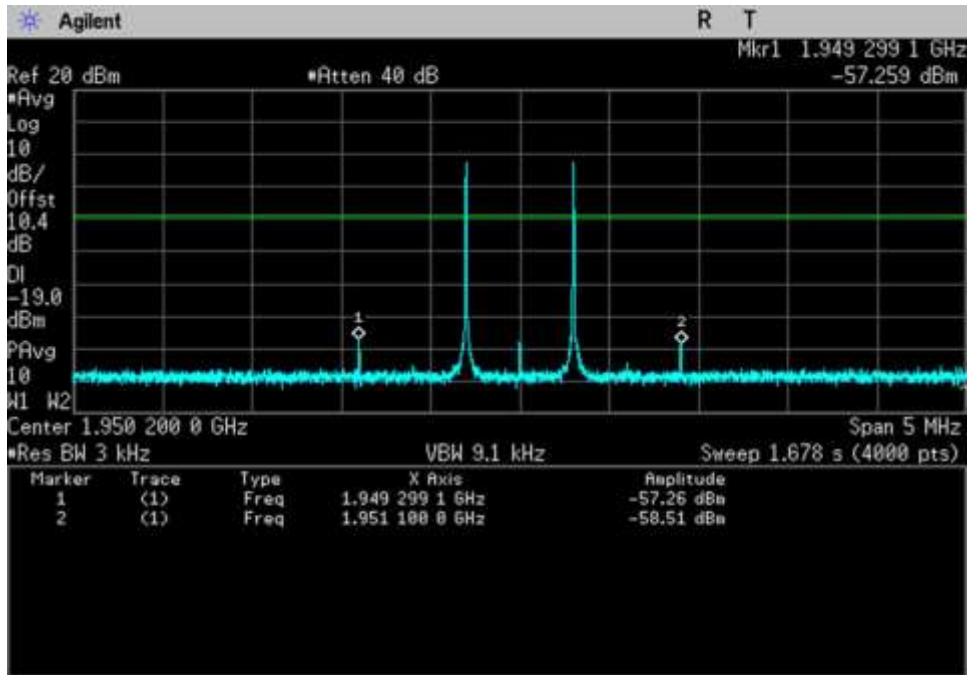

DL_1930-1995_ 1950.2MHz

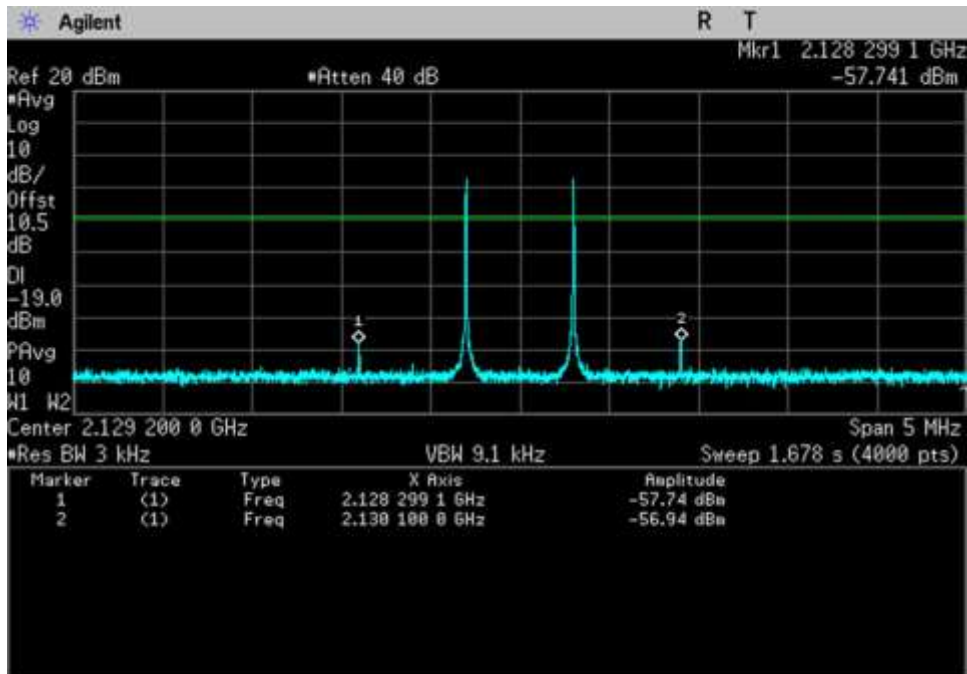

DL_2110-2155_ 2129.2MHz

7.5 Out of Band Emissions

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.5 Out-of-band Emissions**
 Work Order #: **101623** Date 08/07/18 and 08/14/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu Song Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

08/07/18: Test environment conditions: Temperature: 22.3°C Relative Humidity: 45.6% Pressure: 101.1kPa 08/14/18: Test environment conditions: Temperature: 22.6°C Relative Humidity: 48% Pressure: 101.9kPa
--

Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020

Summary of Results

Pass: As indicated in plots below, all OBE are under the limit of -19dBm.

GSM

Low			
Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-26.8	-19	Pass
UL1850-1915	-27.0	-19	Pass
UL824-849	-19.9	-19	Pass
UL 698-716	-19.7	-19	Pass
UL776-787	-20.8	-19	Pass
DL2110-2155	-48.7	-19	Pass
DL1930-1995	-47.2	-19	Pass
DL869-894	-46.1	-19	Pass
DL:728-746	-51.5	-19	Pass
DL 746-757	-48.1	-19	Pass

High			
Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-26.5	-19	Pass
UL1850-1915	-31.7	-19	Pass
UL824-849	-22.0	-19	Pass
UL 698-716	-20.1	-19	Pass
UL776-787	-19.5	-19	Pass
DL2110-2155	-50.8	-19	Pass
DL1930-1995	-51.7	-19	Pass
DL869-894	-51.4	-19	Pass
DL:728-746	-48.9	-19	Pass
DL 746-757	-54.8	-19	Pass

CDMA (alternative 1.25 MHz AWGN)

Low			
Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-36.9	-19	Pass
UL1850-1915	-31.8	-19	Pass
UL824-849	-28.0	-19	Pass
UL 698-716	-23.4	-19	Pass
UL776-787	-31.7	-19	Pass
DL2110-2155	-62.8	-19	Pass
DL1930-1995	-64.8	-19	Pass
DL869-894	-69.3	-19	Pass
DL:728-746	-74.6	-19	Pass
DL 746-757	-70.3	-19	Pass

High			
Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-35.2	-19	Pass
UL1850-1915	-40.8	-19	Pass
UL824-849	-29.0	-19	Pass
UL 698-716	-26.2	-19	Pass
UL776-787	-24.0	-19	Pass
DL2110-2155	-61.3	-19	Pass
DL1930-1995	-68.3	-19	Pass
DL869-894	-75.0	-19	Pass
DL:728-746	-73.8	-19	Pass
DL 746-757	-75.3	-19	Pass

LTE (alternative 4.1MHz AWGN)


Low			
Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-34.7	-19	Pass
UL1850-1915	-32.7	-19	Pass
UL824-849	-29.1	-19	Pass
UL 698-716	-25.8	-19	Pass
UL776-787	-28.7	-19	Pass
DL2110-2155	-53.7	-19	Pass
DL1930-1995	-53.7	-19	Pass
DL869-894	-57.7	-19	Pass
DL:728-746	-61.6	-19	Pass
DL 746-757	-55.7	-19	Pass

High			
Out of Band Emission			
Frequency (MHz)	Pre AGC	Limit (dBm)	Results
UL1710-1755	-33.0	-19	Pass
UL1850-1915	-38.0	-19	Pass
UL824-849	-32.7	-19	Pass
UL 698-716	-29.3	-19	Pass
UL776-787	-27.8	-19	Pass
DL2110-2155	-55.8	-19	Pass
DL1930-1995	-57.8	-19	Pass
DL869-894	-61.5	-19	Pass
DL:728-746	-59.6	-19	Pass
DL 746-757	-66.1	-19	Pass


Note: The EUT also maintains compliance with the out-of-band emissions limit at input power indicated in section 5.5.

Plots


CDMA

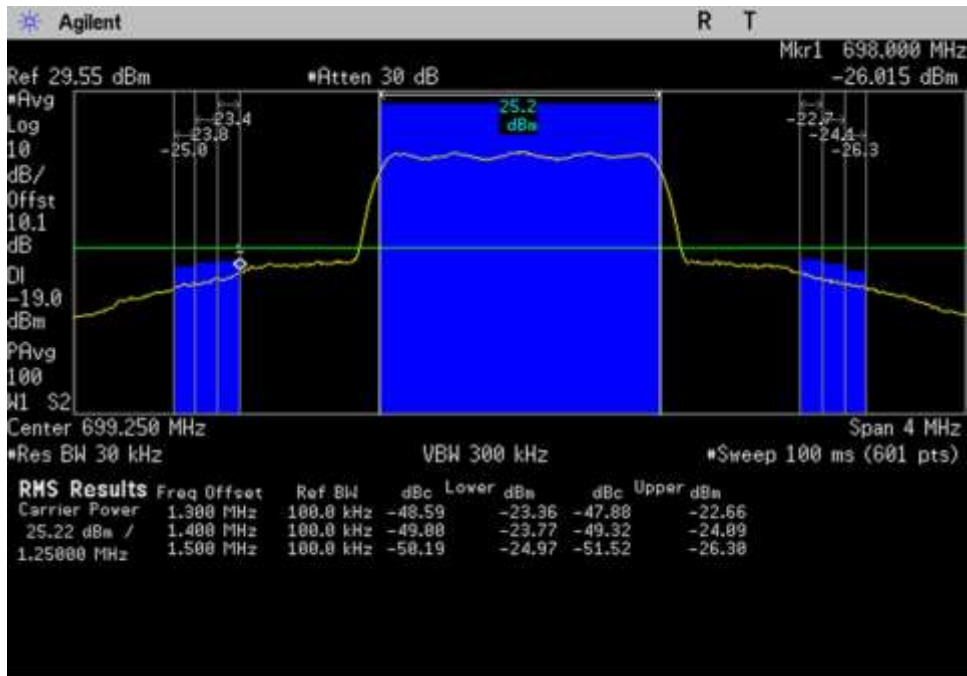


UL_698-716_CDMA_697.25-701.25MHz

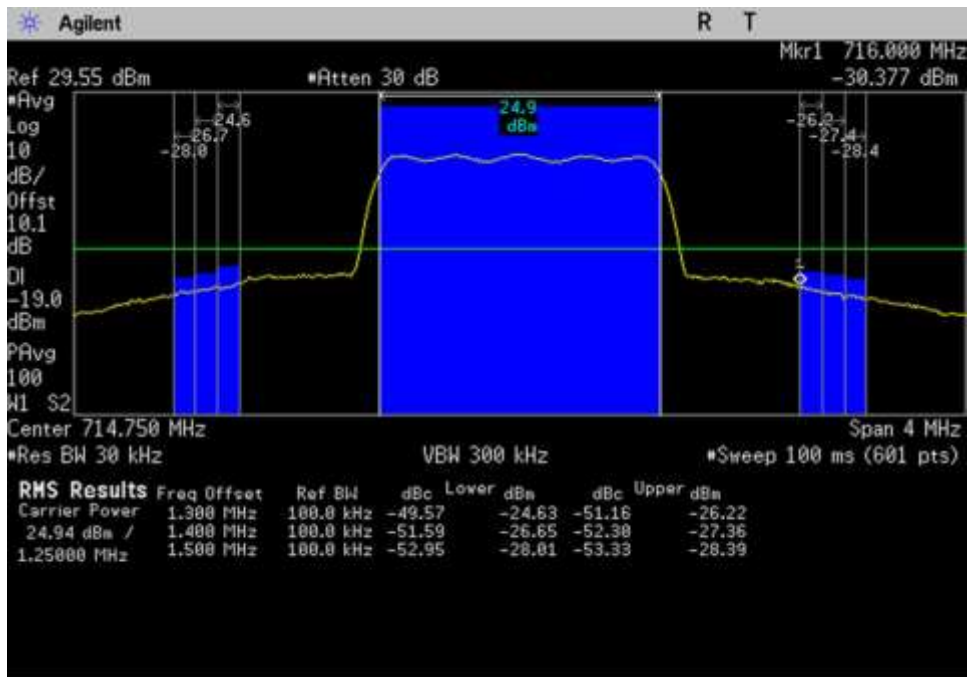


UL_698-716_CDMA_712.75-716.75MHz

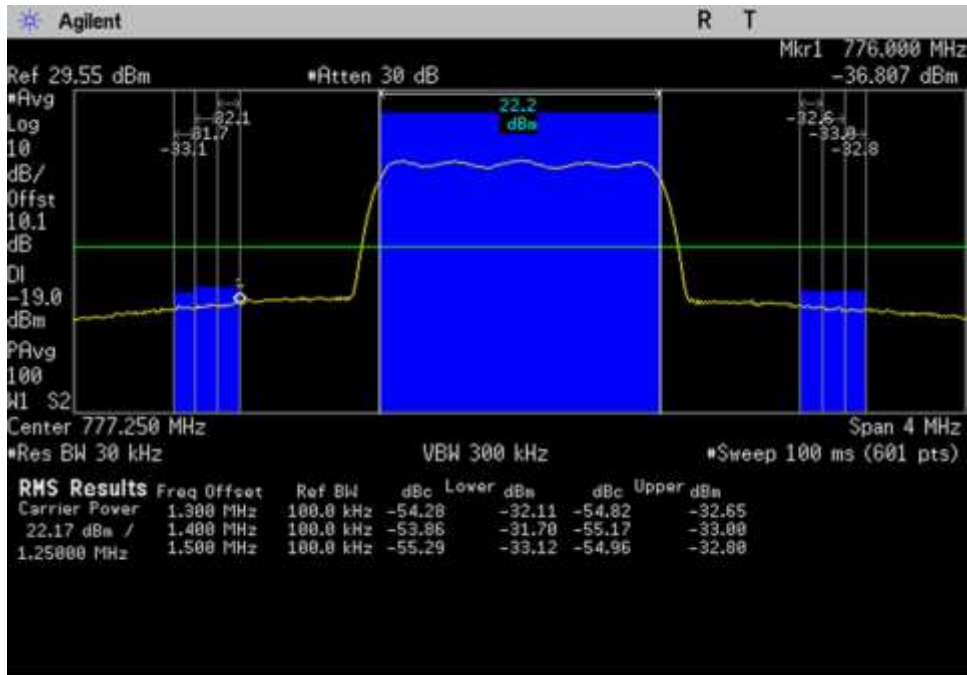


UL_776-787_CDMA_775.25-779.25MHz

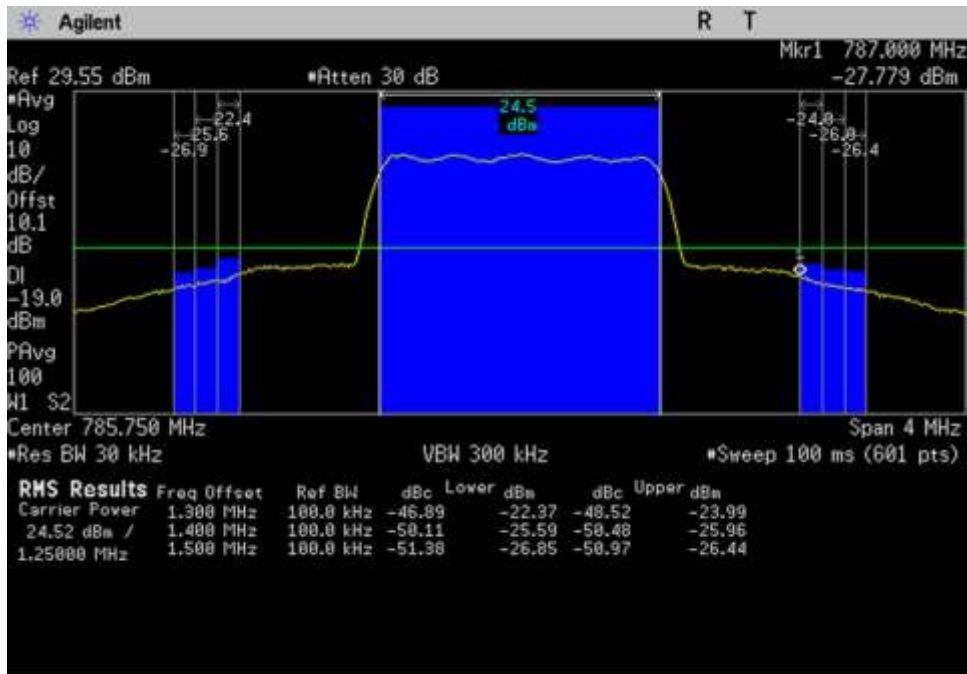


UL_776-787_CDMA_783.75-787.75MHz

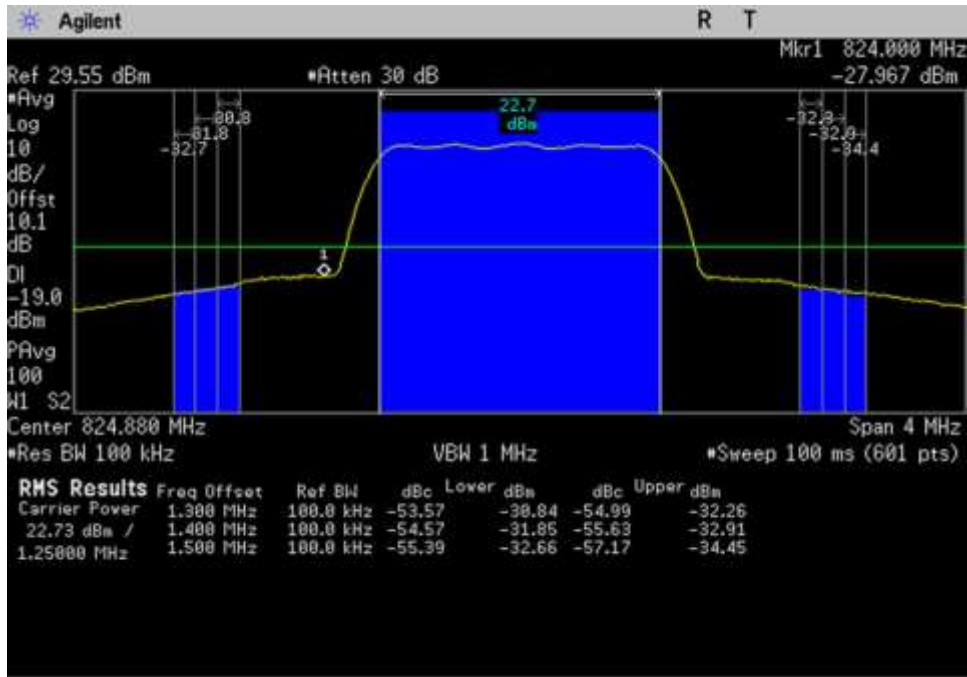


UL_824-849_CDMA_822.88-826.88MHz

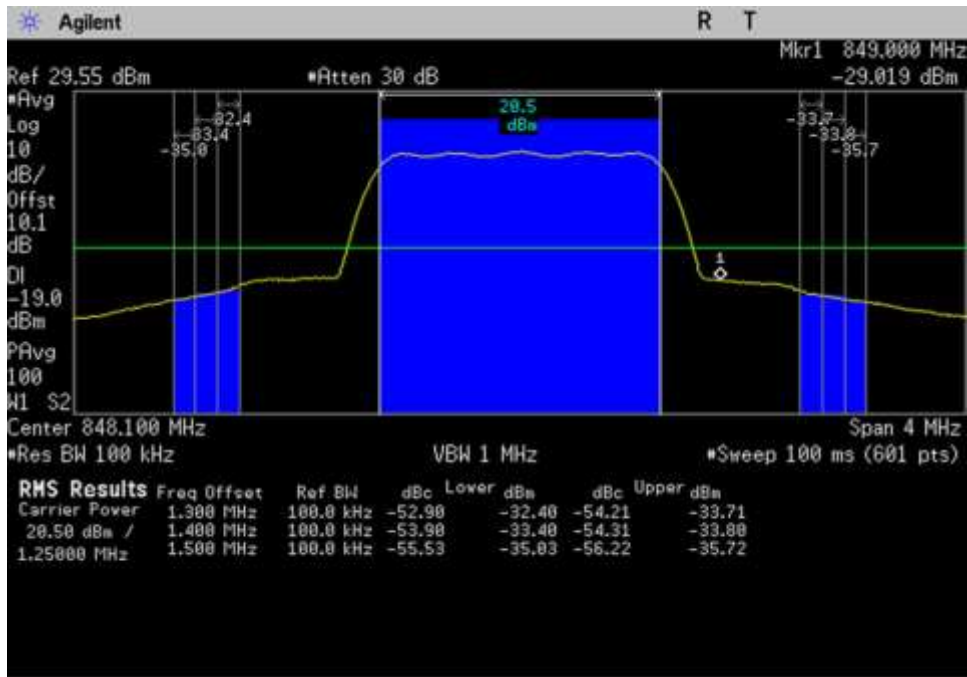


UL_824-849_CDMA_846.1-850.1MHz

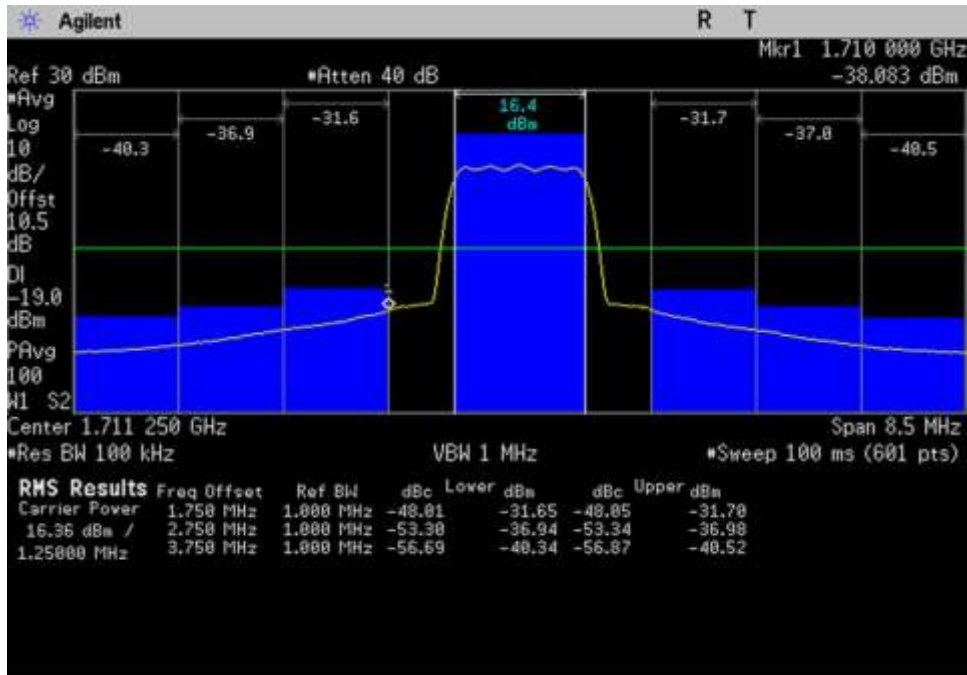


UL_1710-1755_CDMA_1707-1715.5MHz

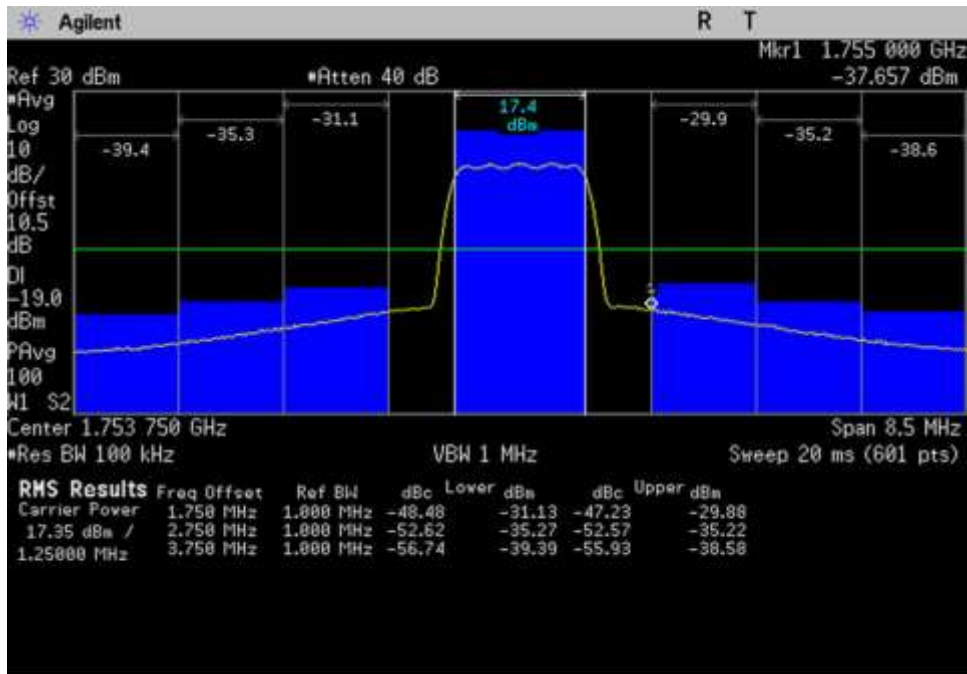


UL_1710-1755_CDMA_1749.5-1758MHz

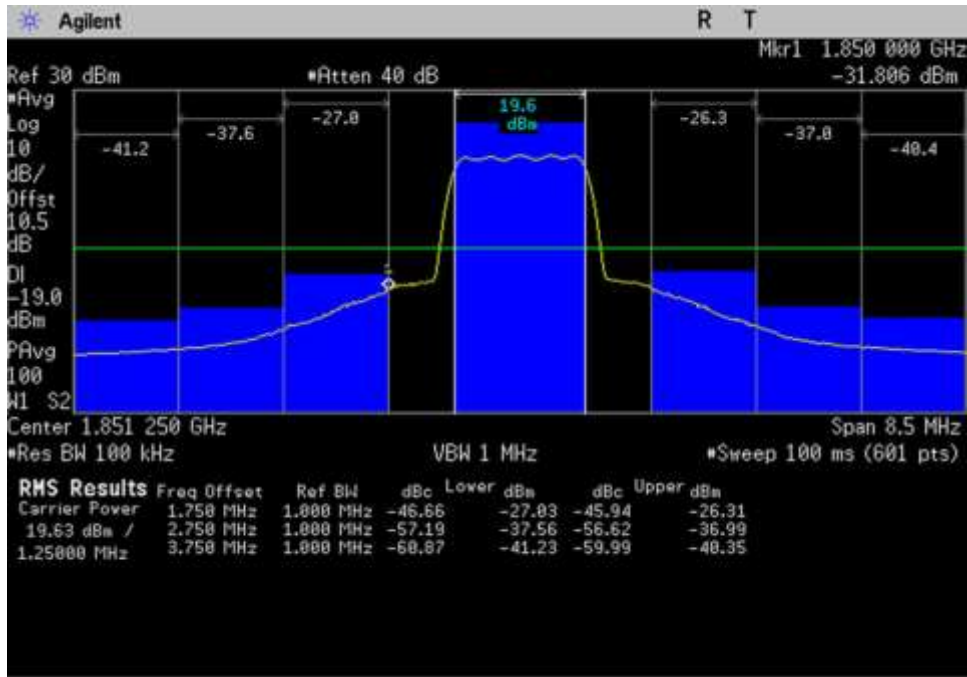


UL_1850-1915_CDMA_1847-1855.5MHz

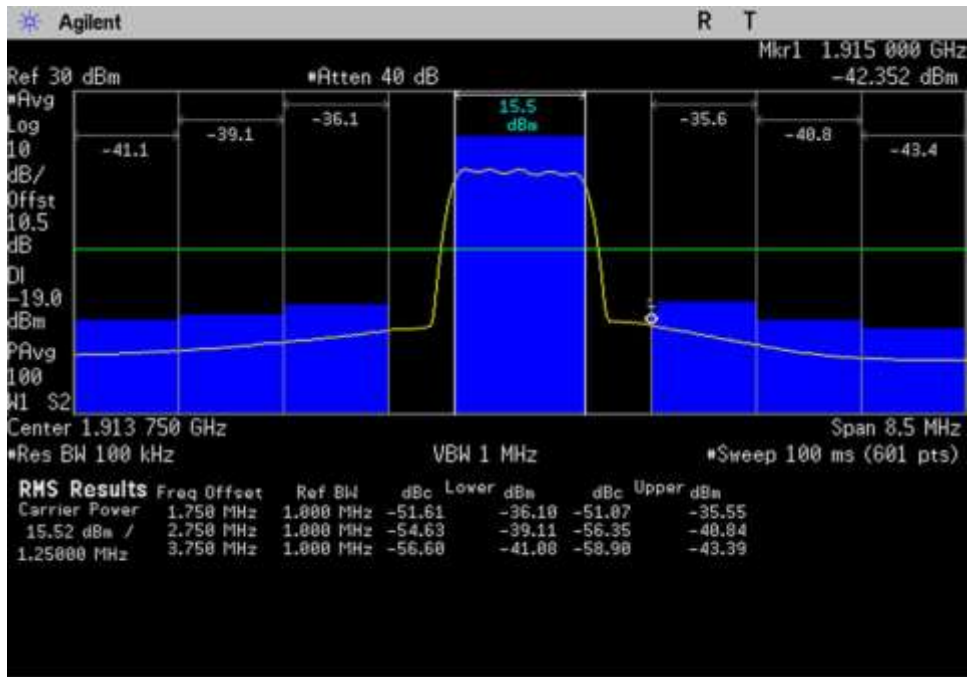


UL_1850-1915_CDMA_1909.5-1918MHz

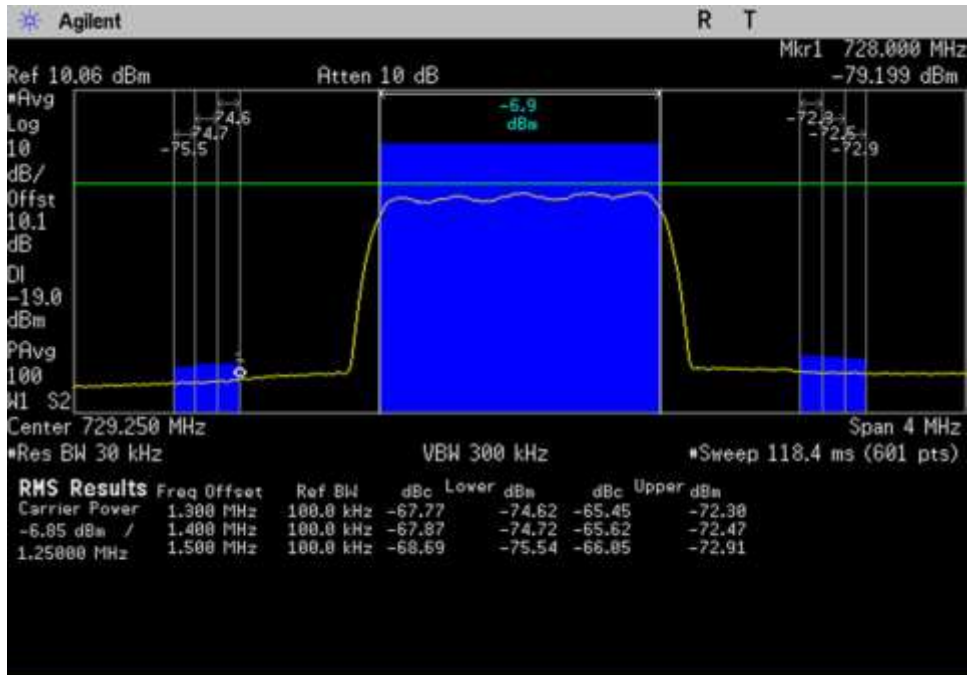


DL_728-746_CDMA_727.25-731.25MHz

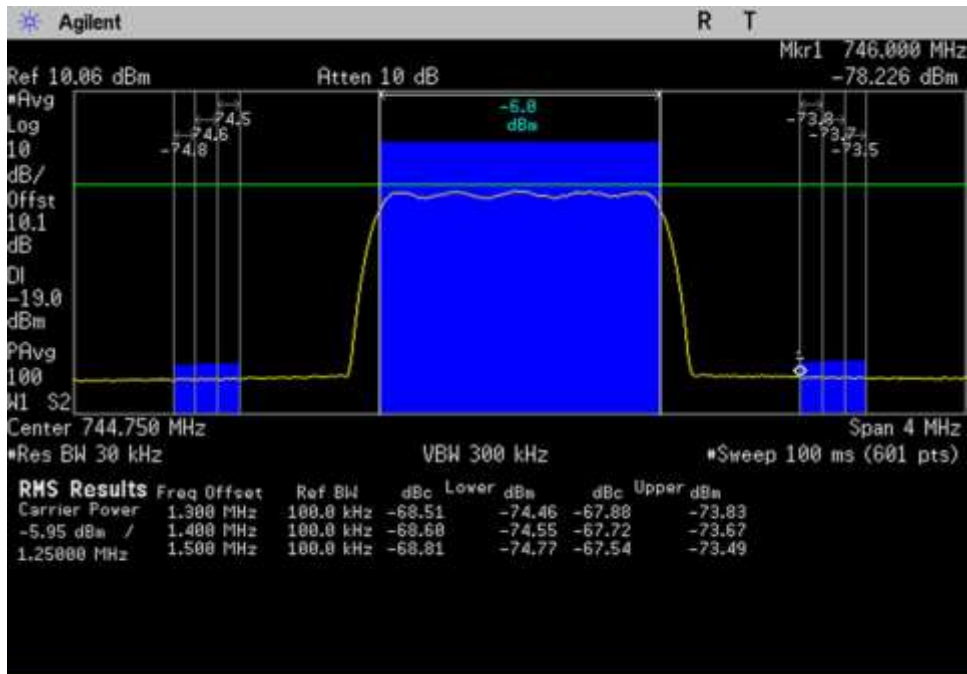


DL_728-746_CDMA_742.75-746.75MHz

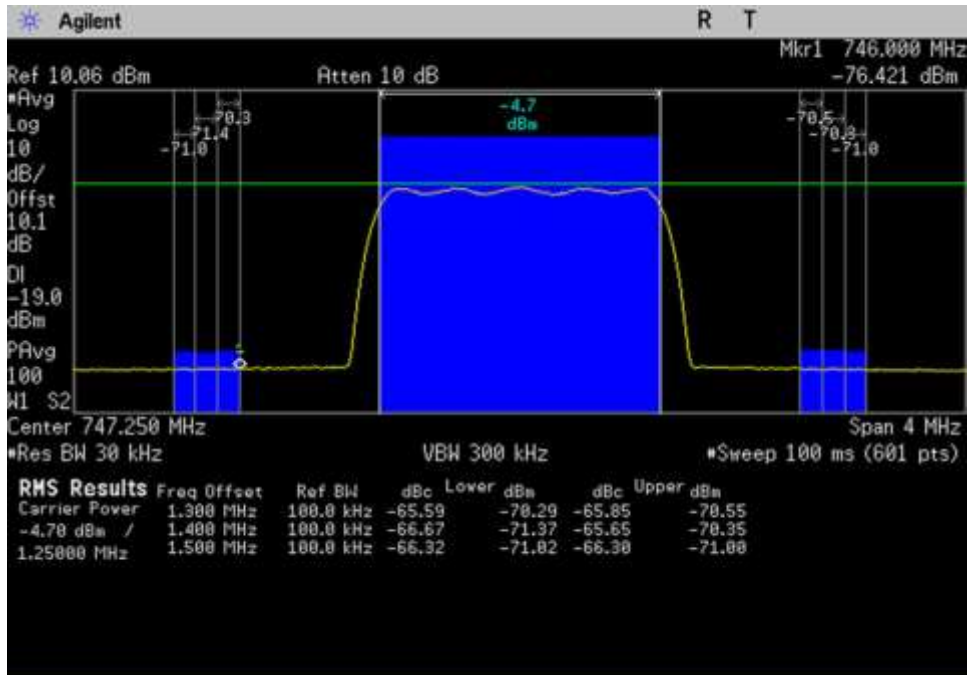


DL_746-757_CDMA_745.25-749.25MHz

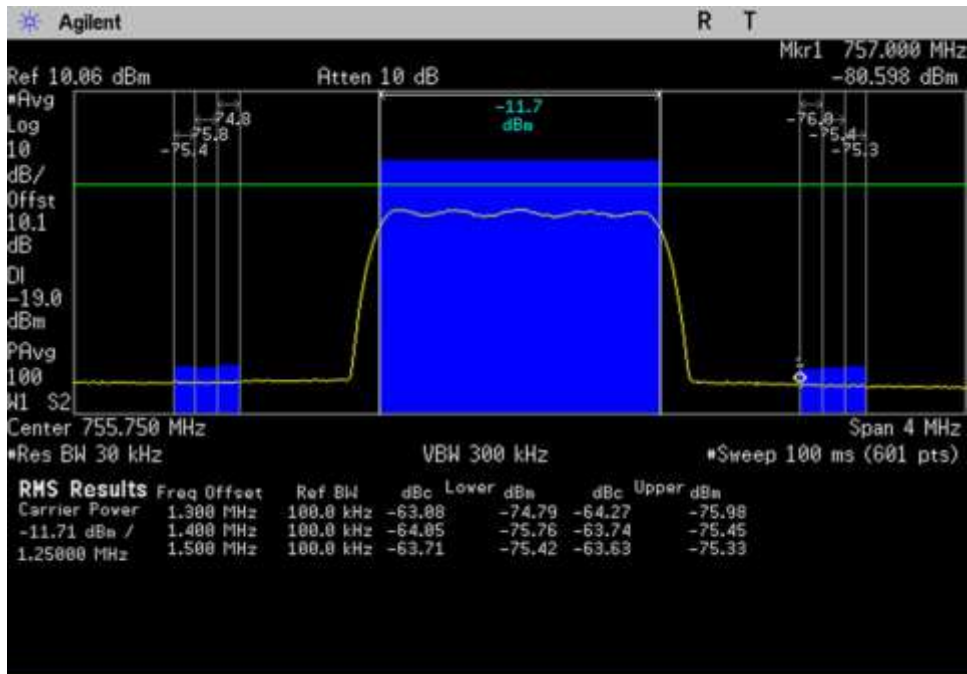


DL_746-757_CDMA_753.75-757.75MHz

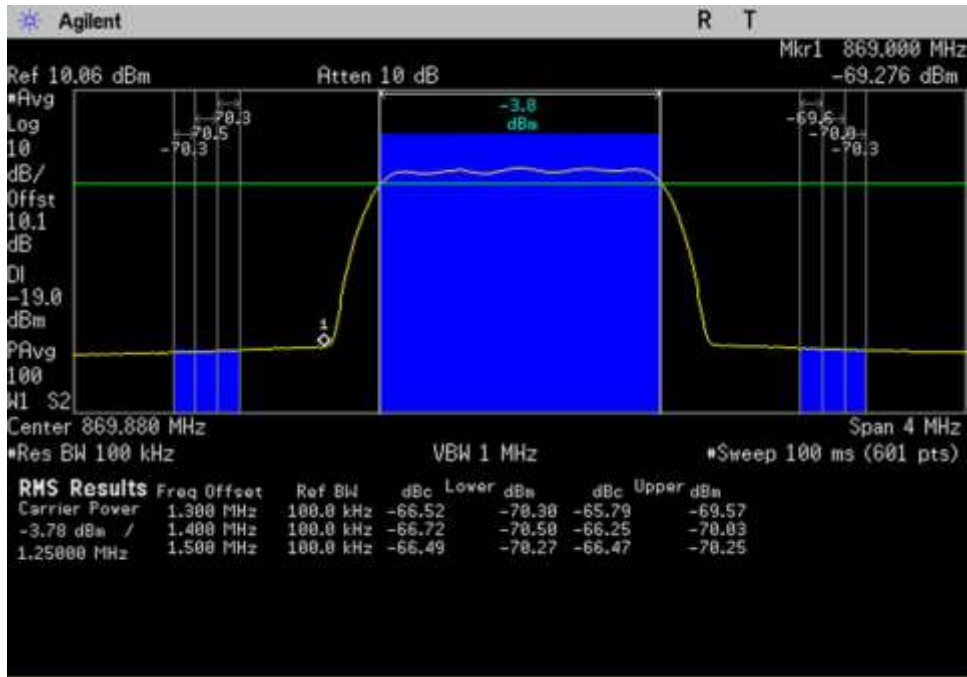


DL_869-894_CDMA_867.88-871.88MHz

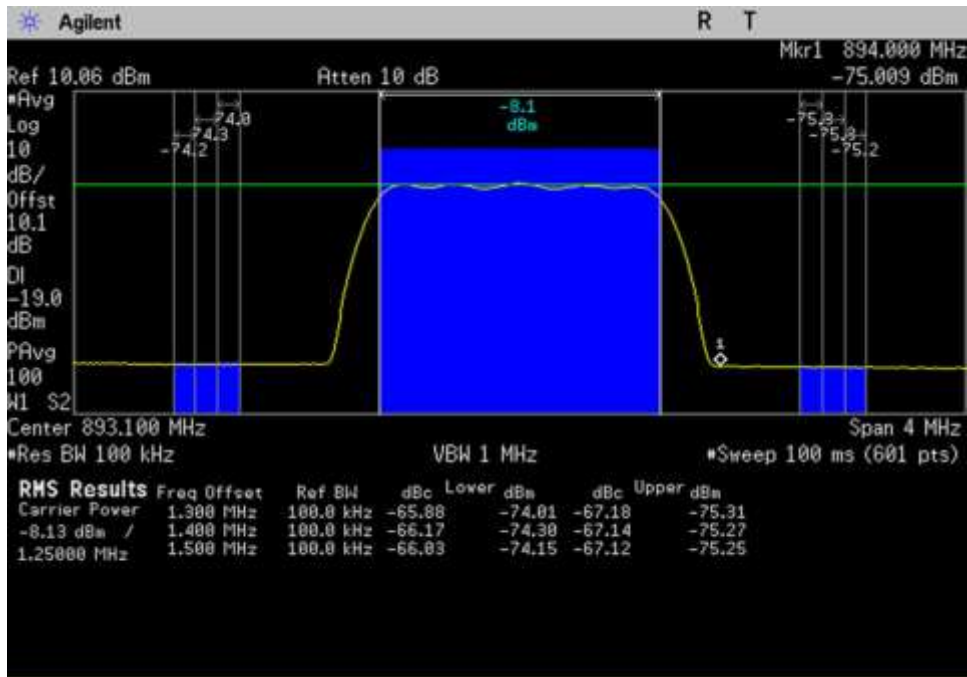


DL_869-894_CDMA_891.1-895.1MHz

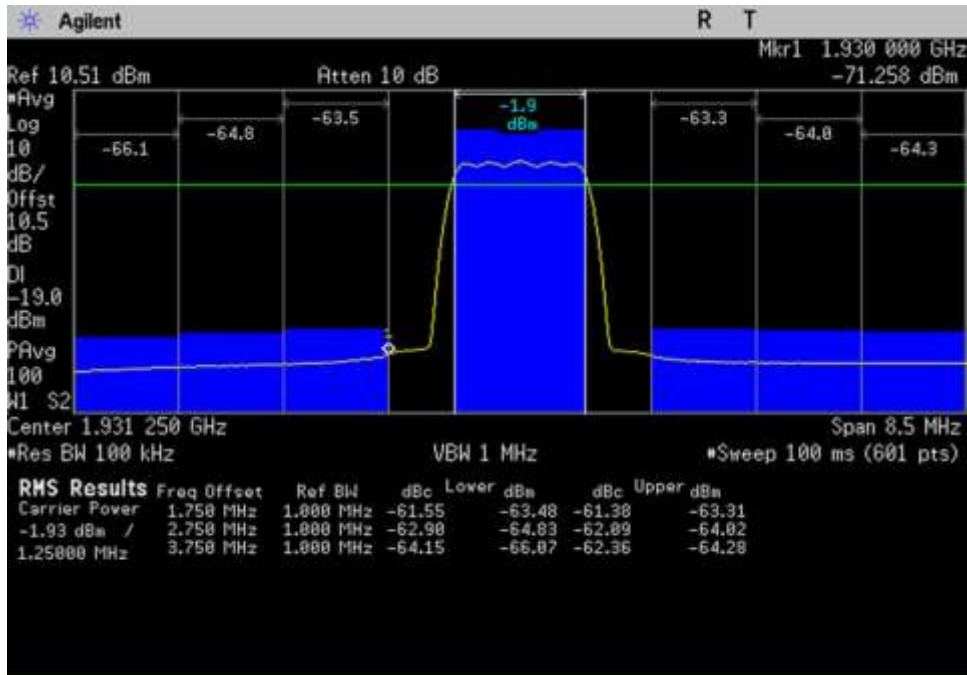


DL_1930-1995_CDMA_1927-1935.5MHz

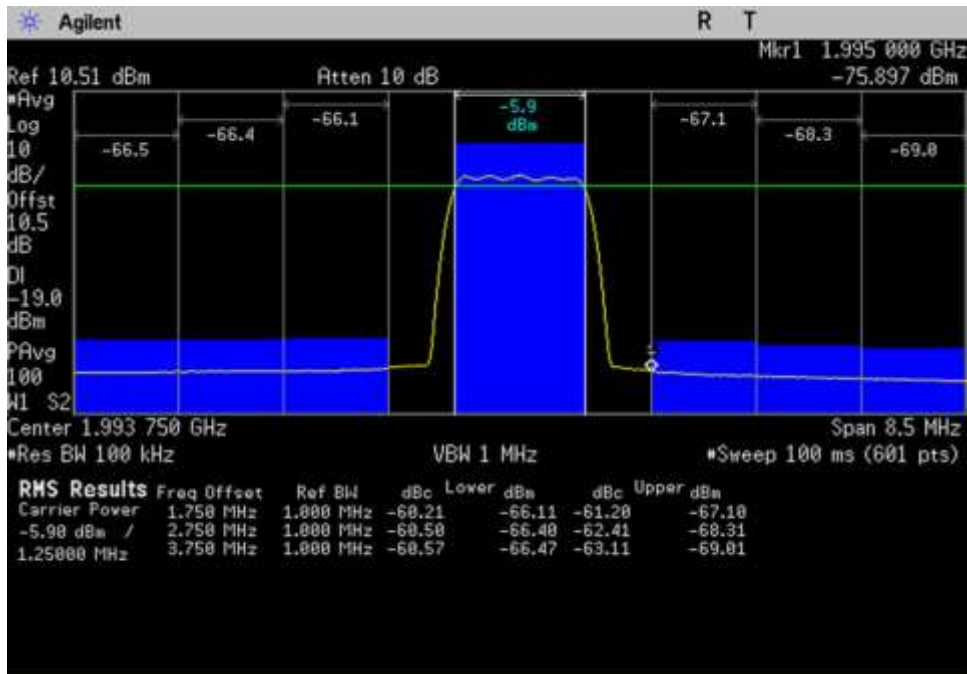

DL_1930-1995_CDMA_1989.5-1998MHz

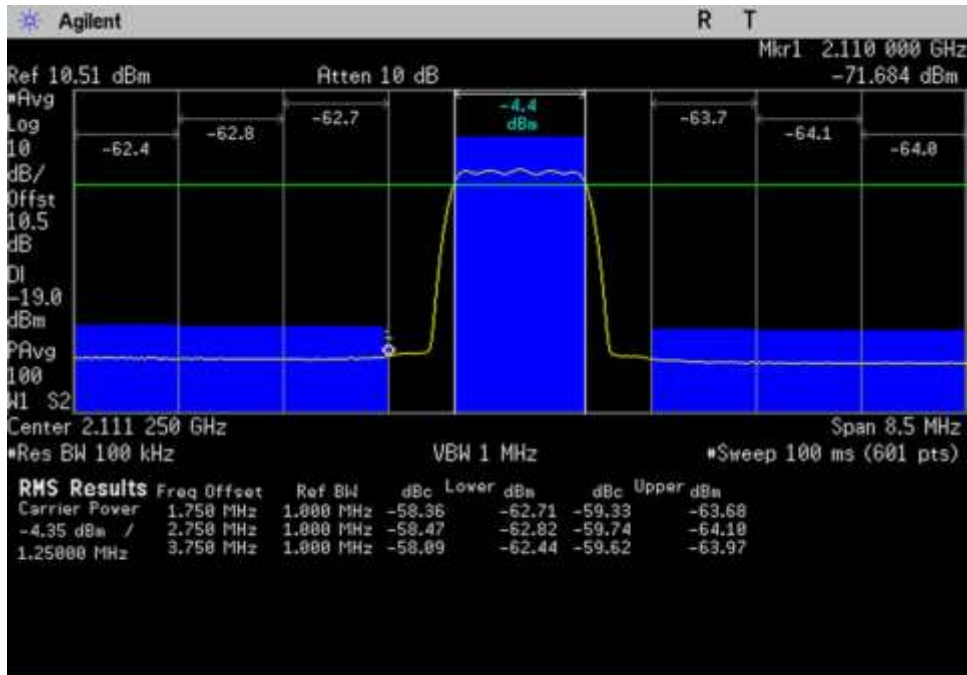


DL_2110-2155_CDMA_2107- 2115.5MHz

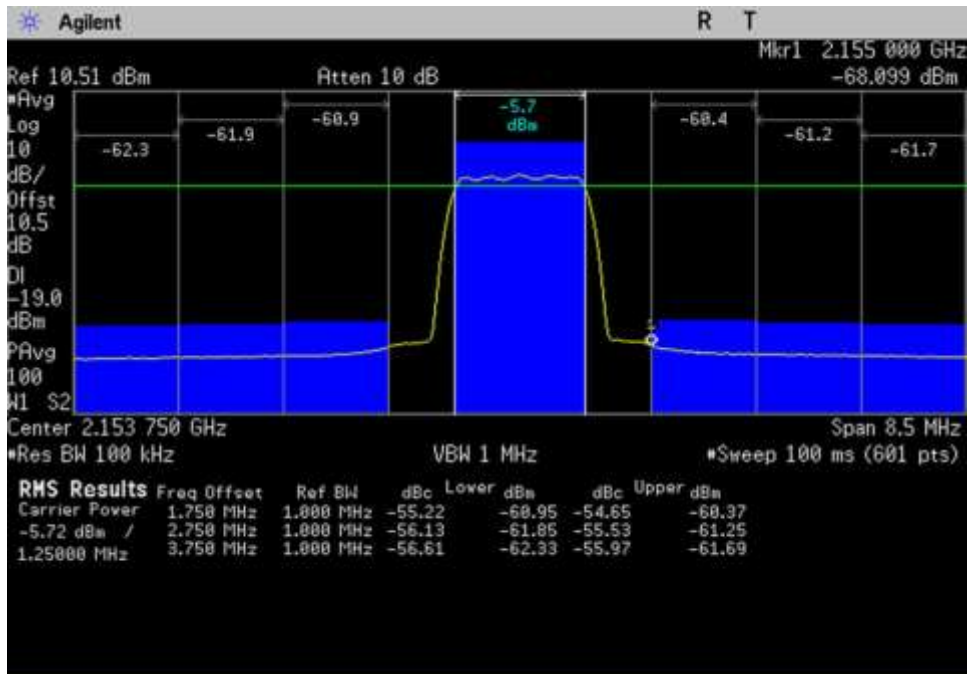


DL_2110-2155_CDMA_2149.5- 2158MHz


GSM

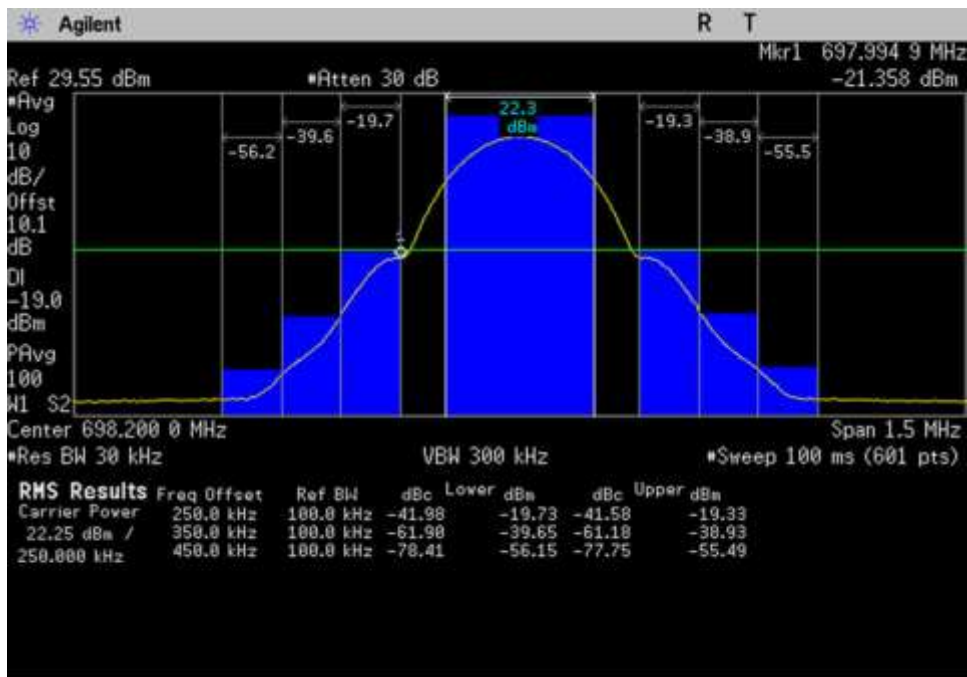


UL_698-716_GSM_697.45-698.95MHz

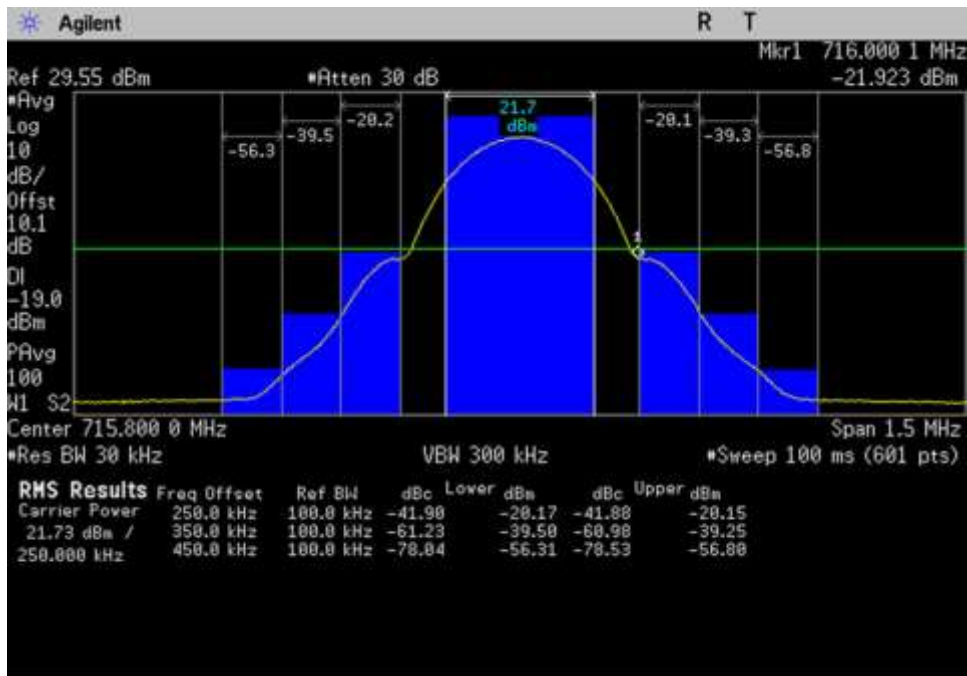


UL_698-716_GSM_715.05-716.55MHz

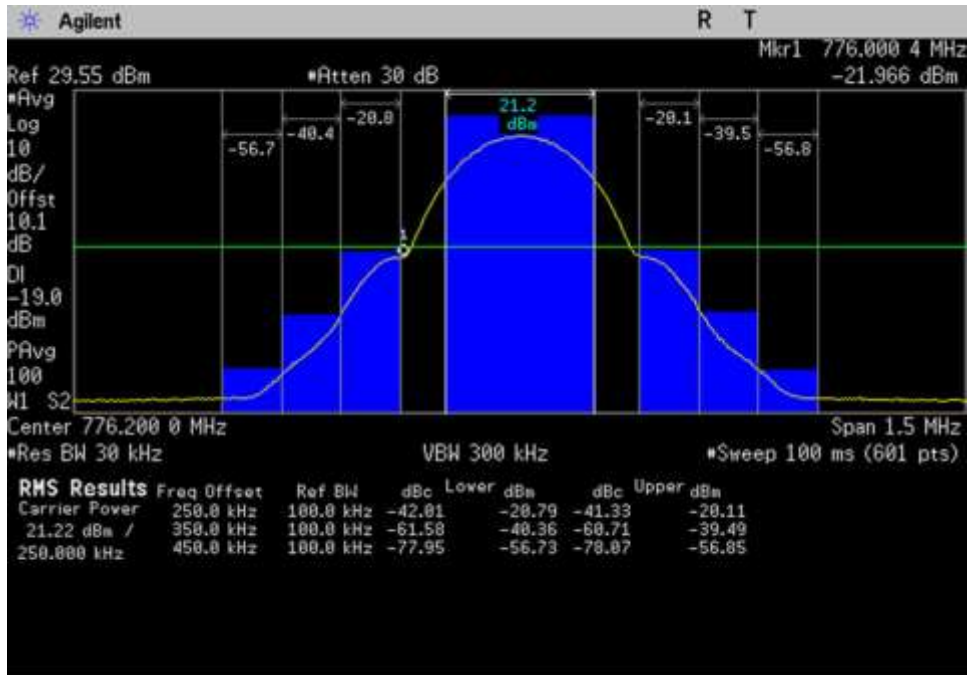


UL_776-787_GSM_775.45-776.95MHz

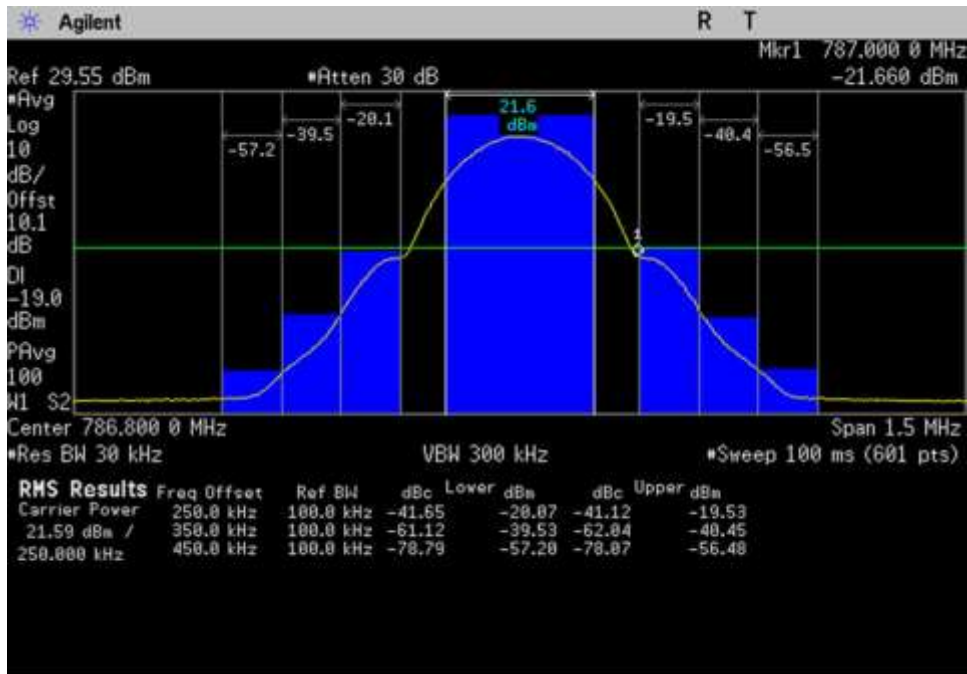


UL_776-787_GSM_786.05-787.55MHz

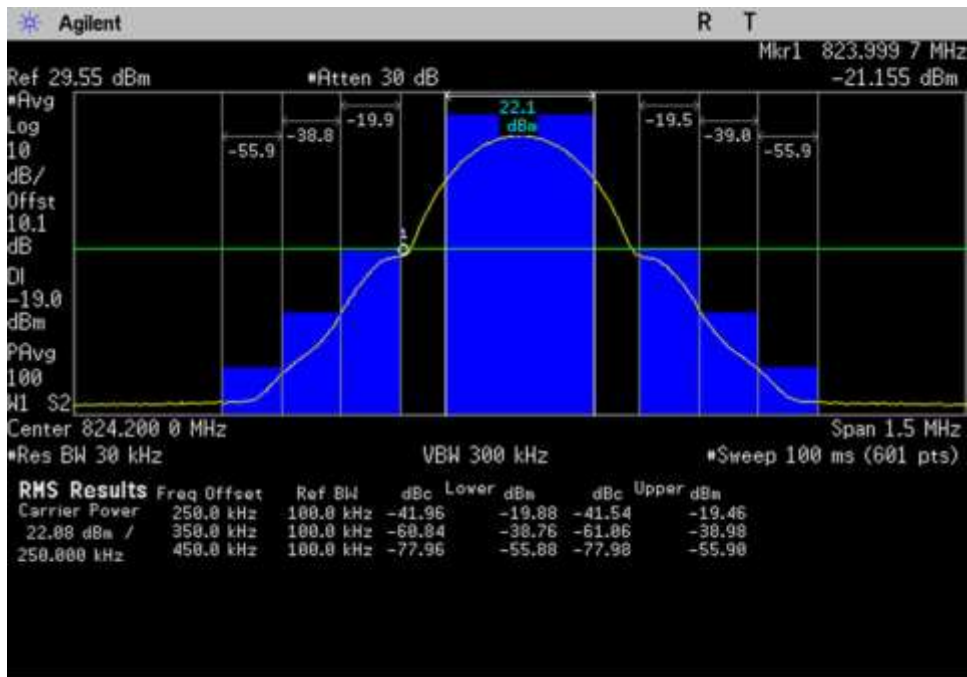


UL_824-849_GSM_823.45-824.95MHz

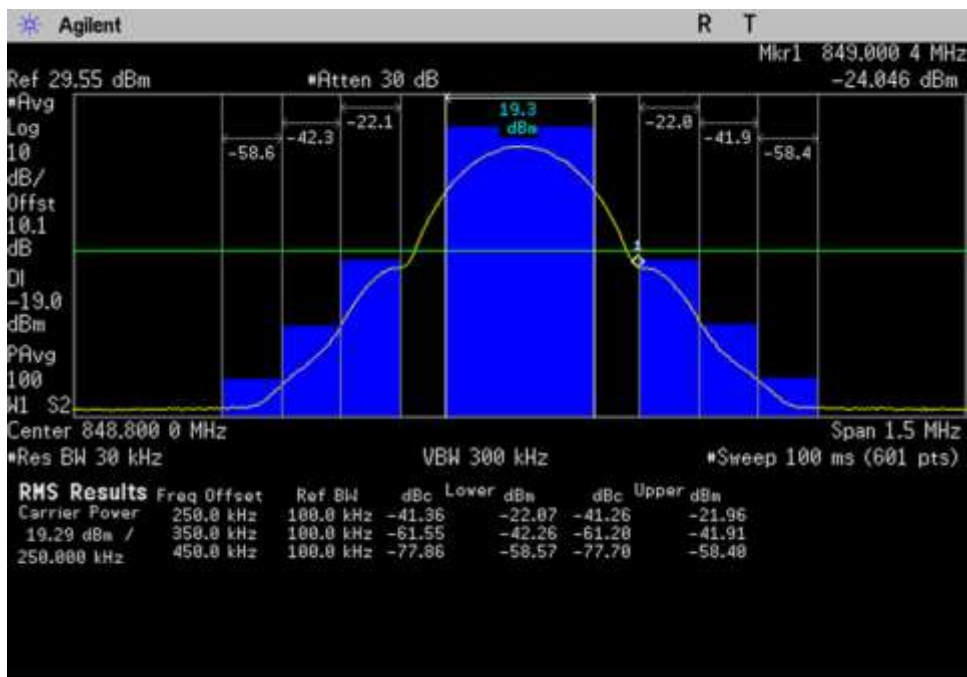


UL_824-849_GSM_848.05-849.55MHz

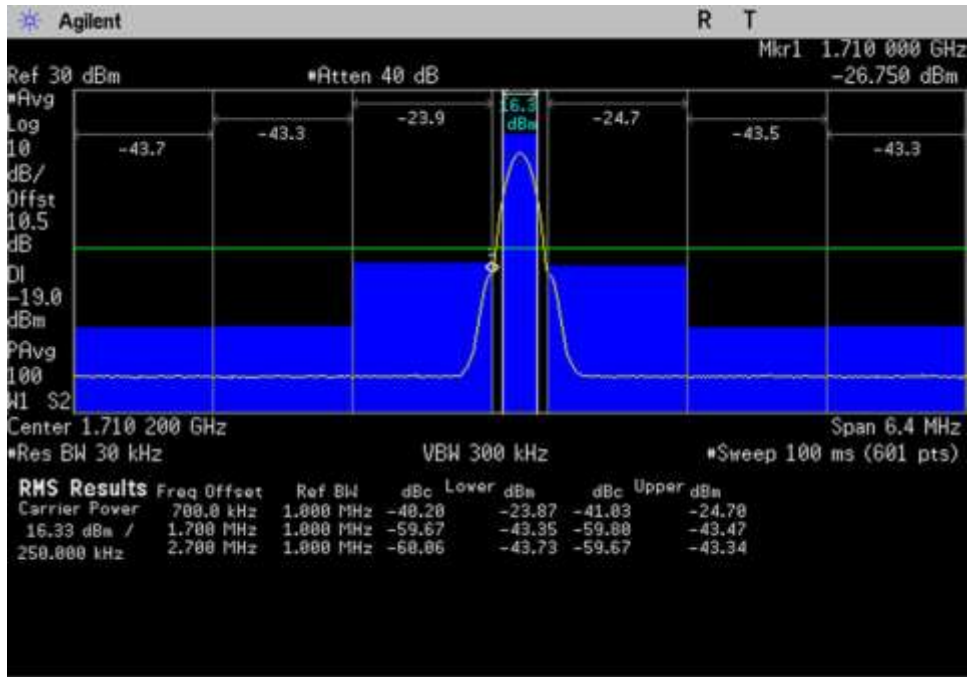


UL_1710-1755_GSM_1707-1713.4MHz

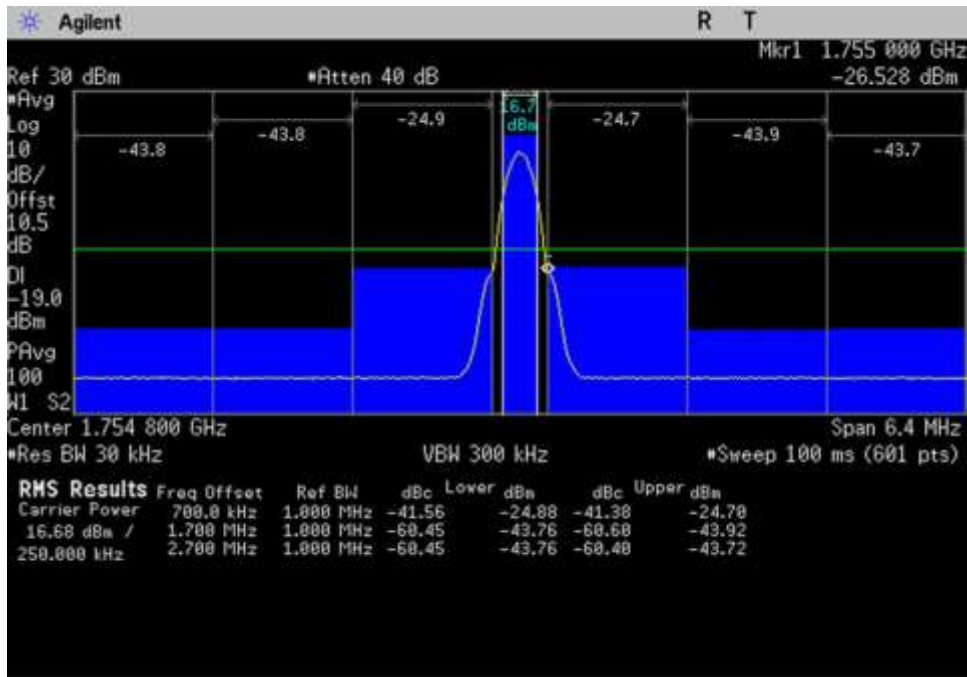


UL_1710-1755_GSM_1751.6-1758MHz

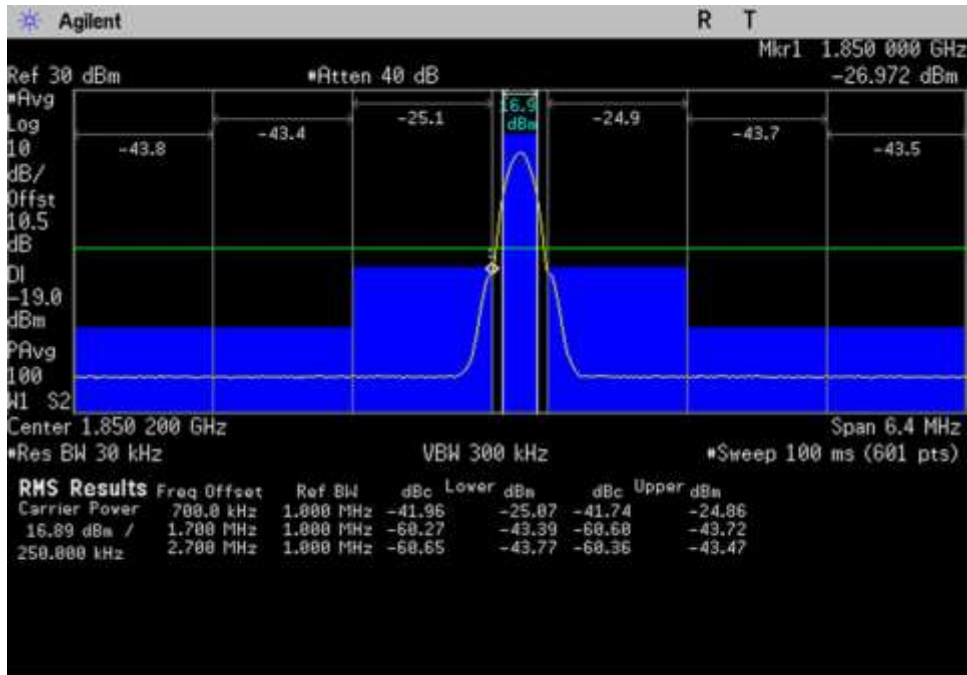


UL_1850-1915_GSM_1847-1853.4MHz

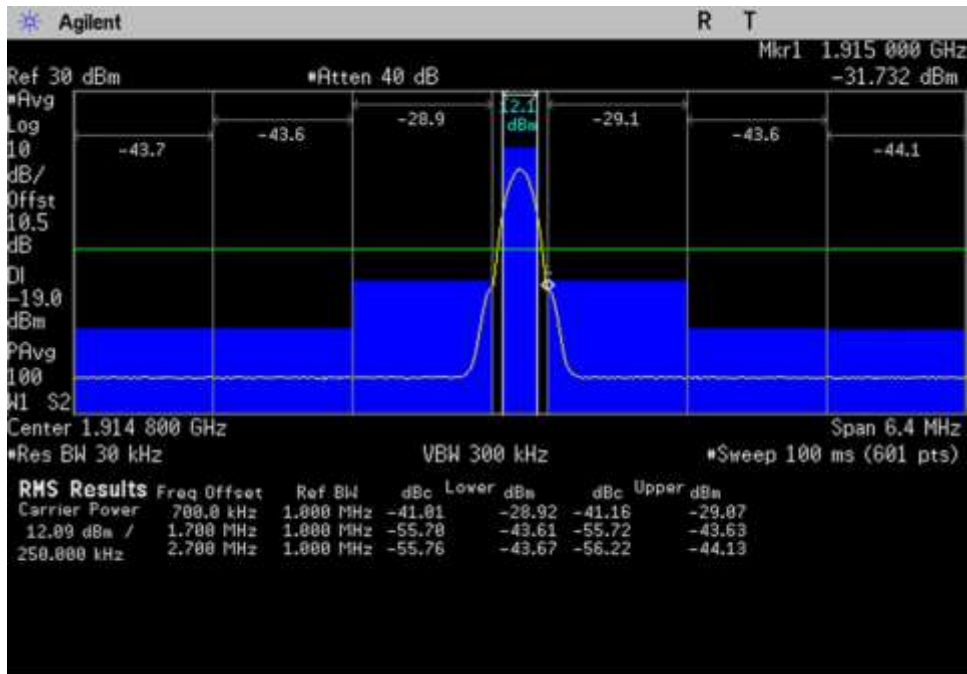


UL_1850-1915_GSM_1911.6-1918MHz

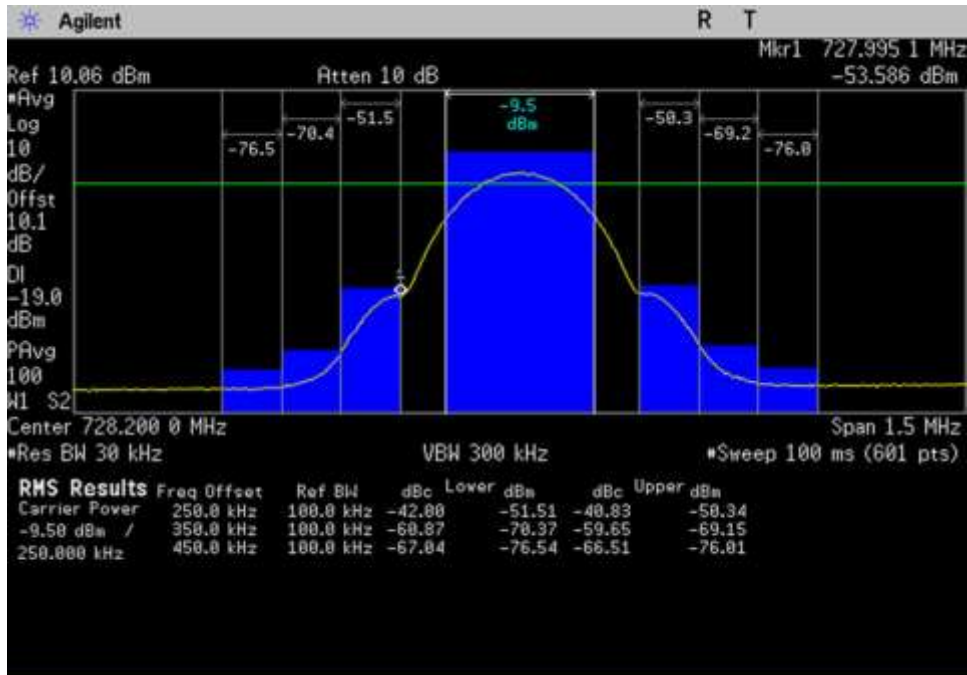


DL_728-746_GSM_727.45-728.95MHz

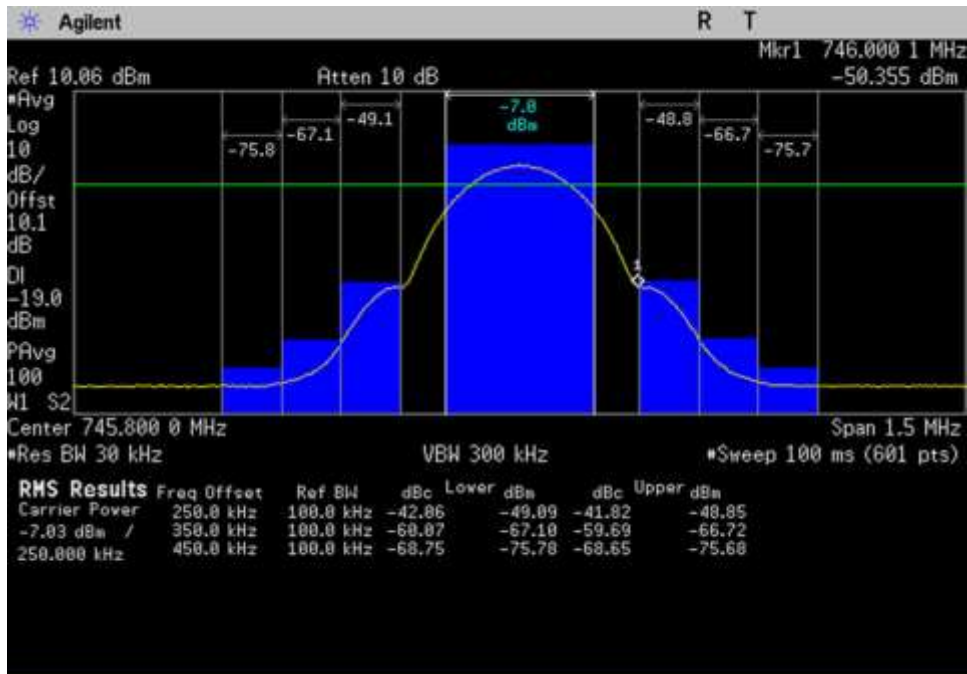


DL_728-746_GSM_745.05-746.55MHz

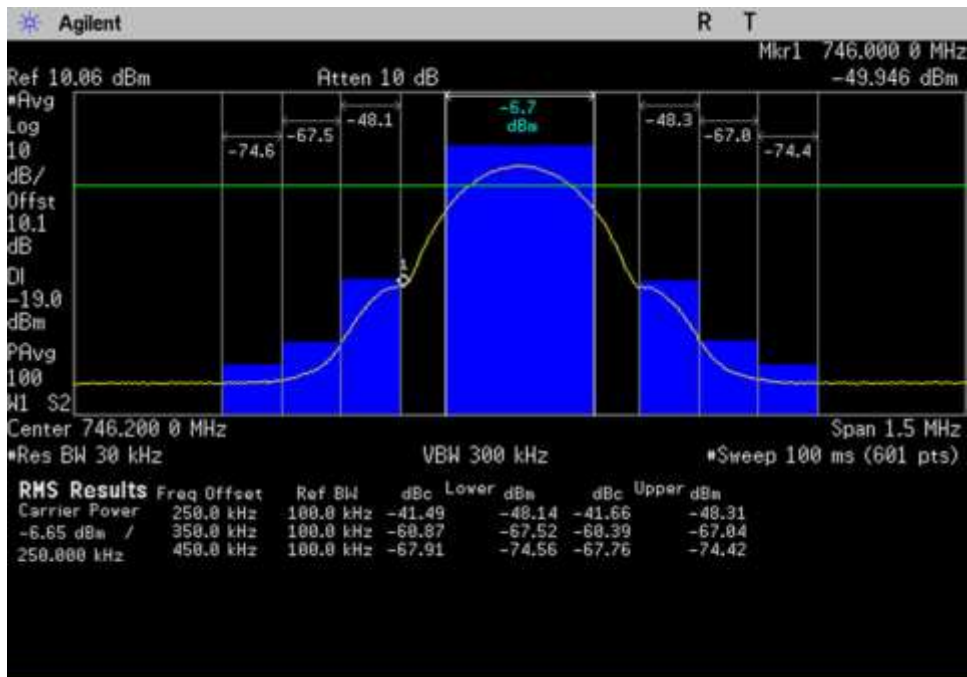


DL_746-757_GSM_745.45-746.95MHz

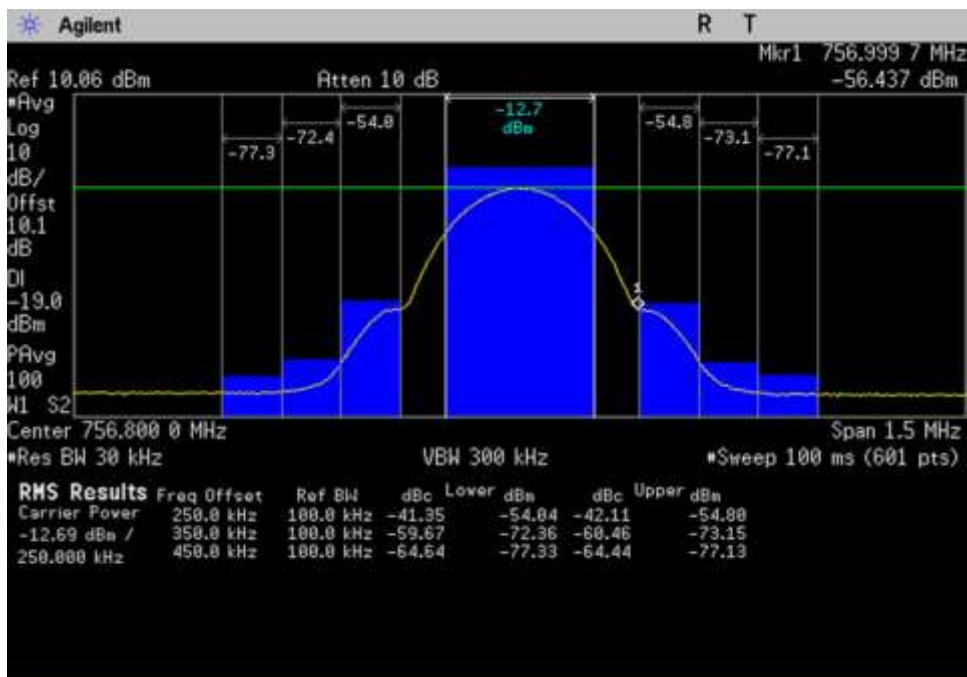


DL_746-757_GSM_756.05-757.55MHz

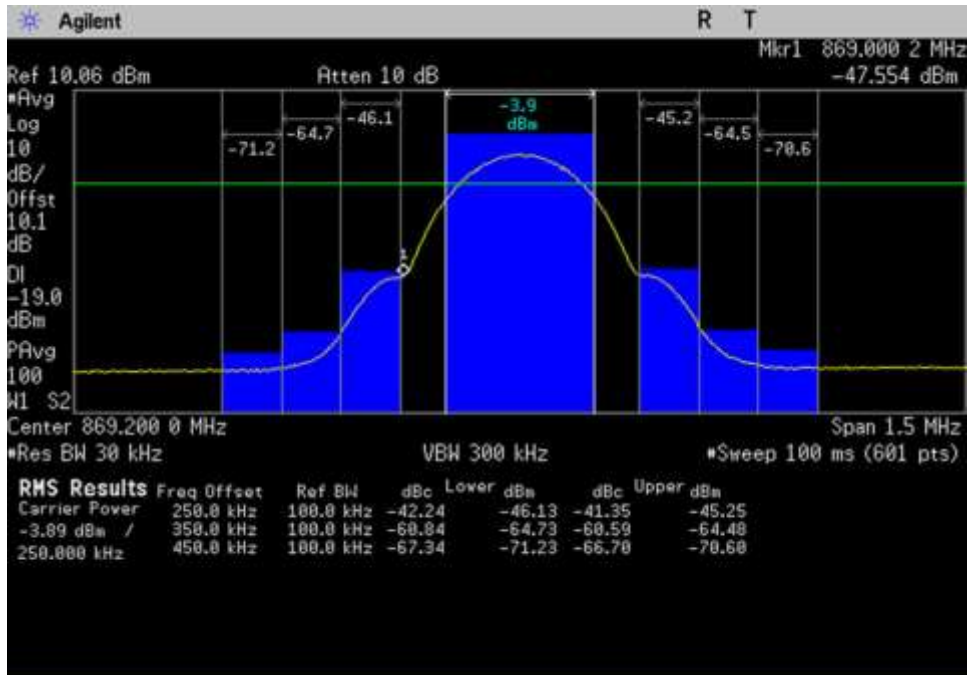


DL_869-894_GSM_868.45-869.95MHz

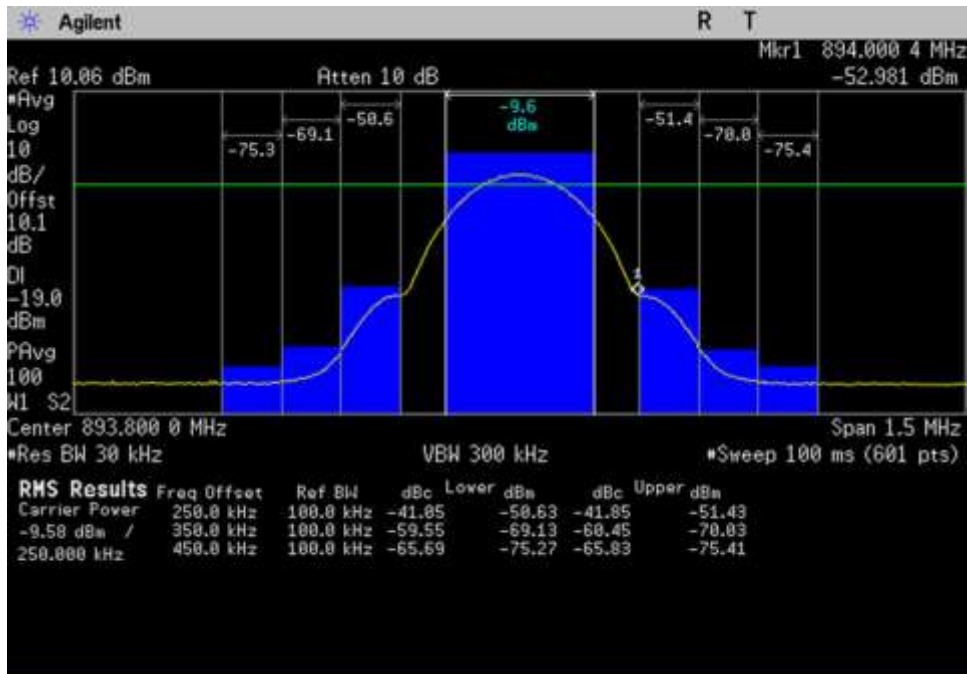


DL_869-894_GSM_893.05-894.55MHz

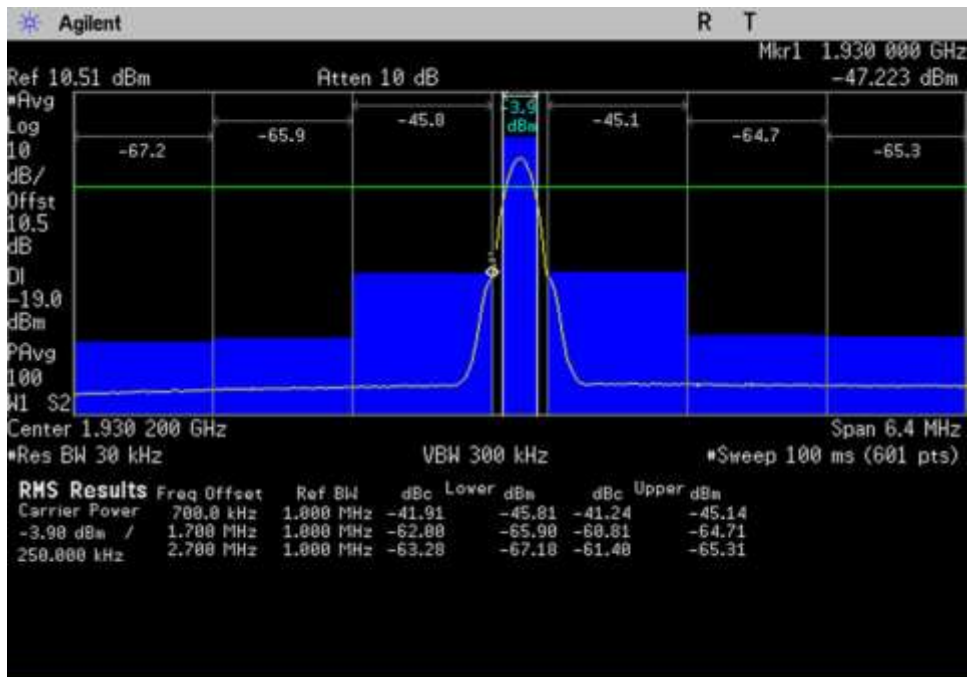


DL_1930-1995_GSM_1927-1933.4MHz

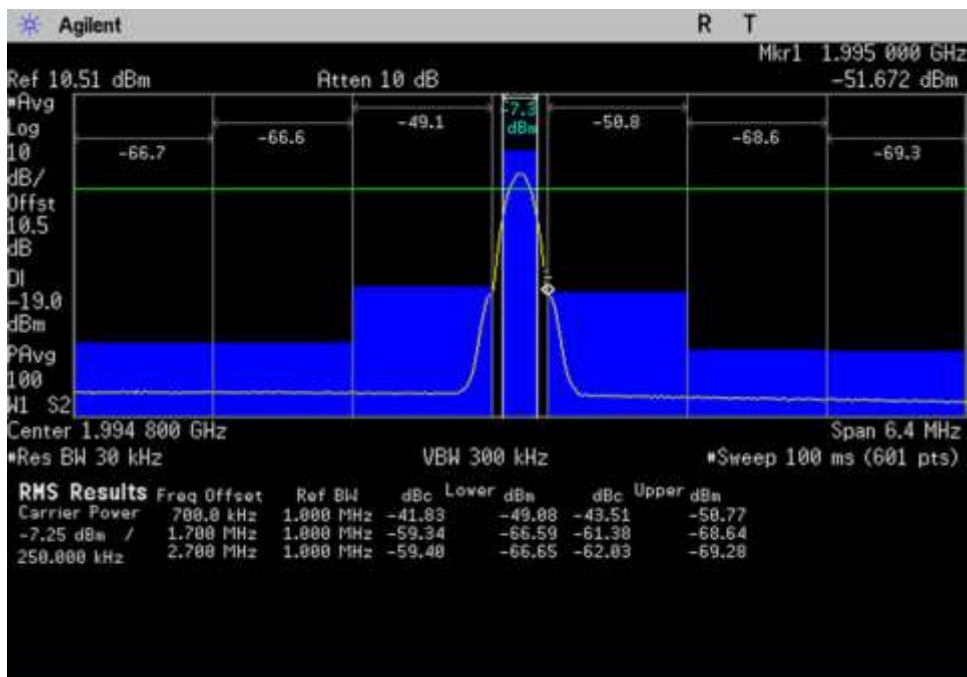

DL_1930-1995_GSM_1991.6-1998MHz

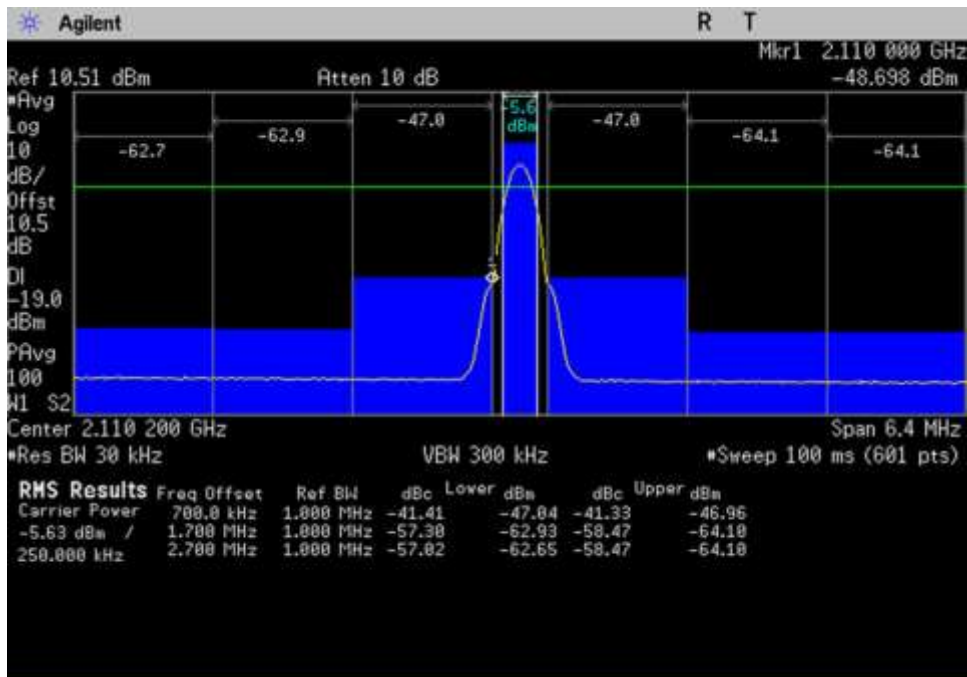


DL_2110-2155_GSM_2107- 2113.4MHz

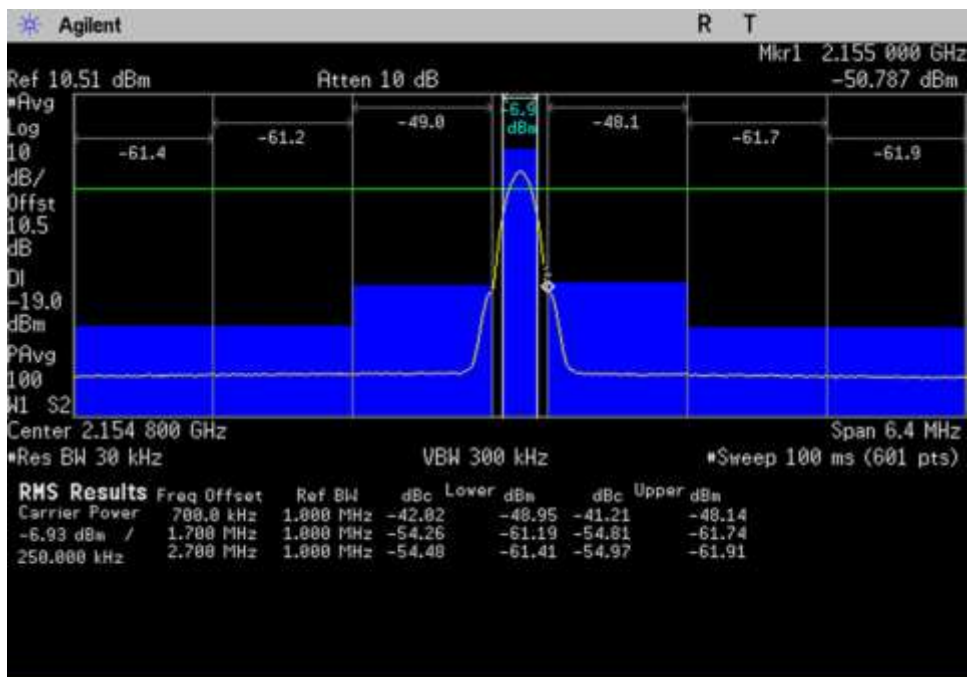


DL_2110-2155_GSM_2151.6- 2158MHz


LTE

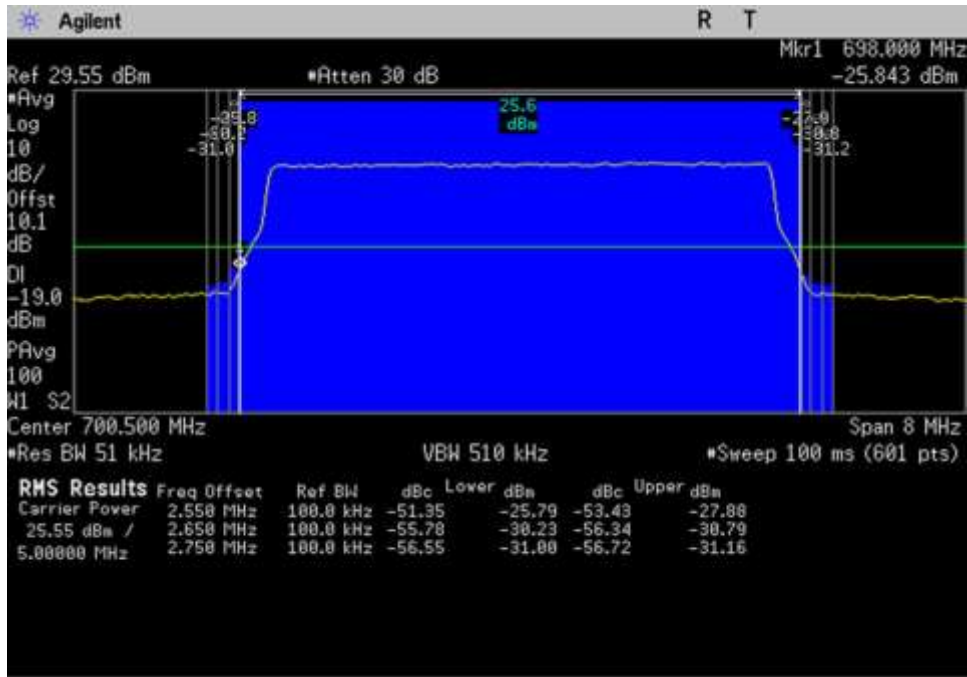


UL_698-716_LTE_696.5- 704.5MHz

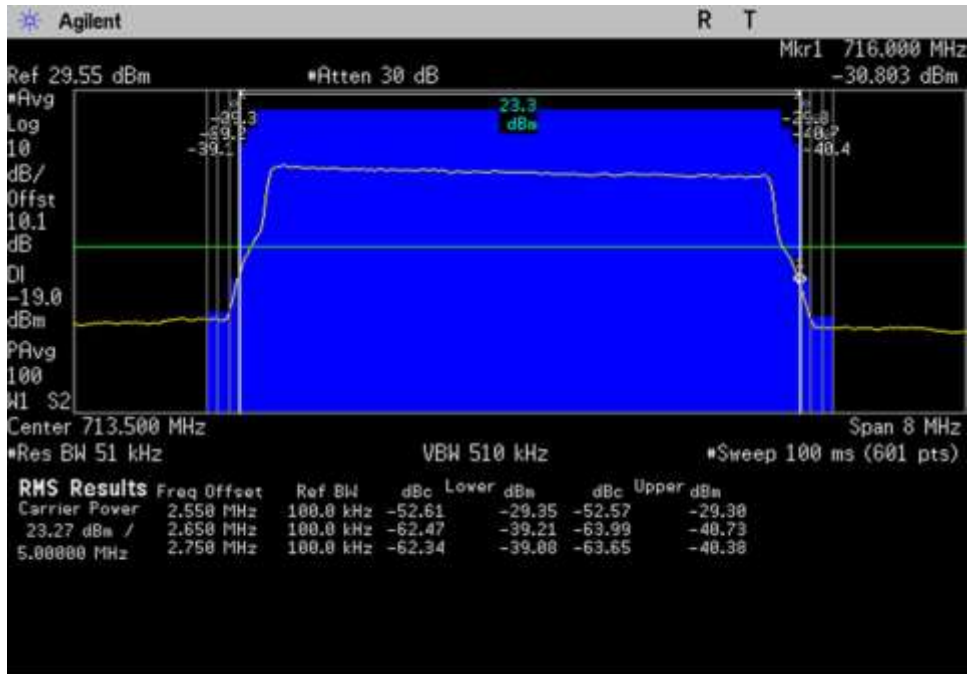


UL_698-716_LTE_709.5- 717.5MHz

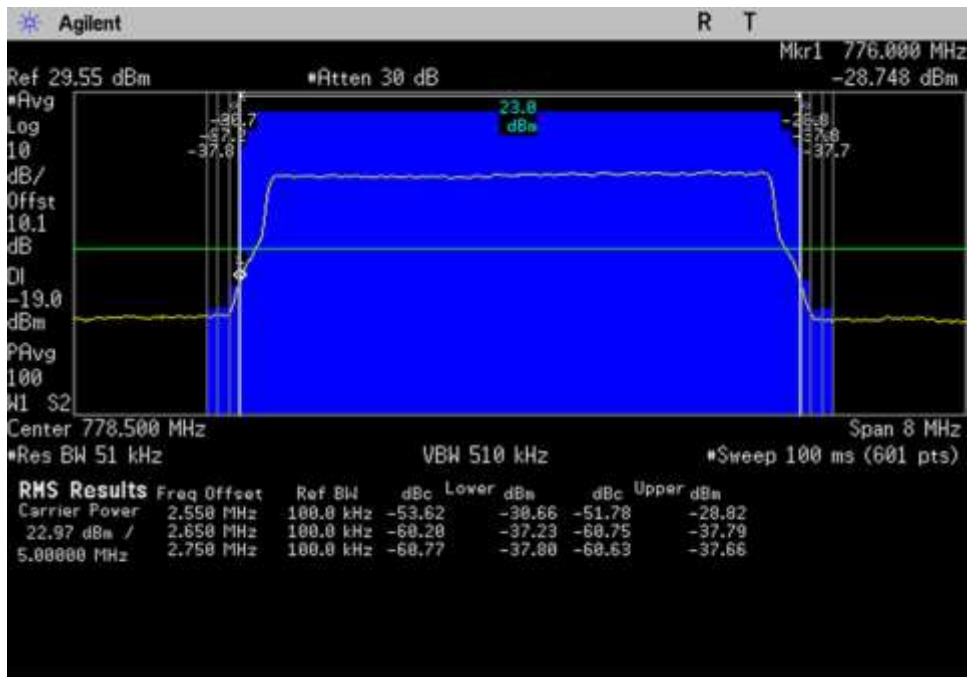


UL_776-787_LTE_774.5-782.5MHz

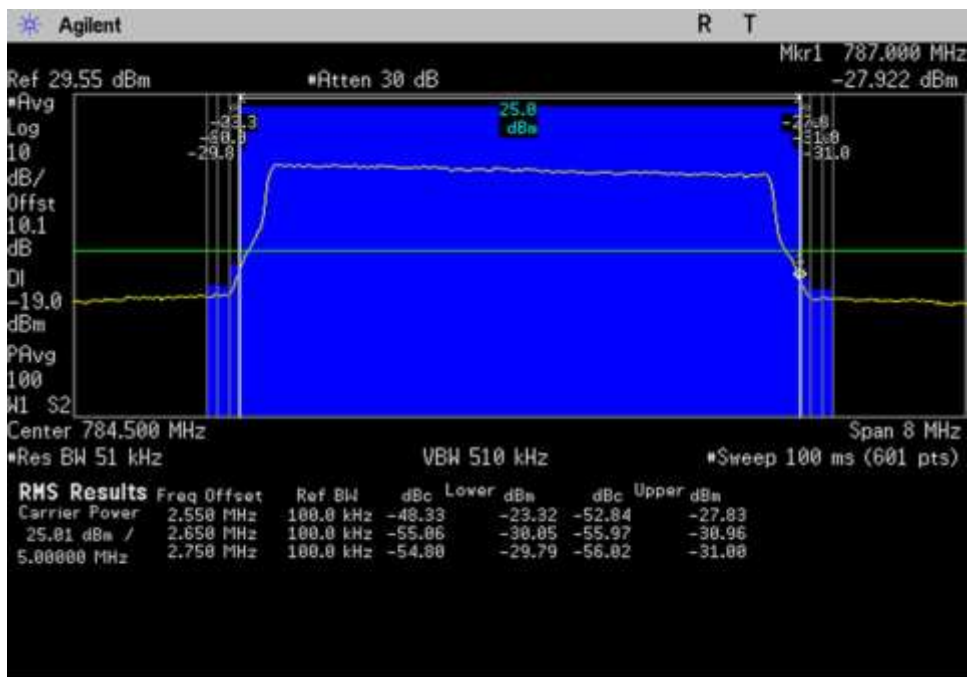


UL_776-787_LTE_780.5-788.5MHz

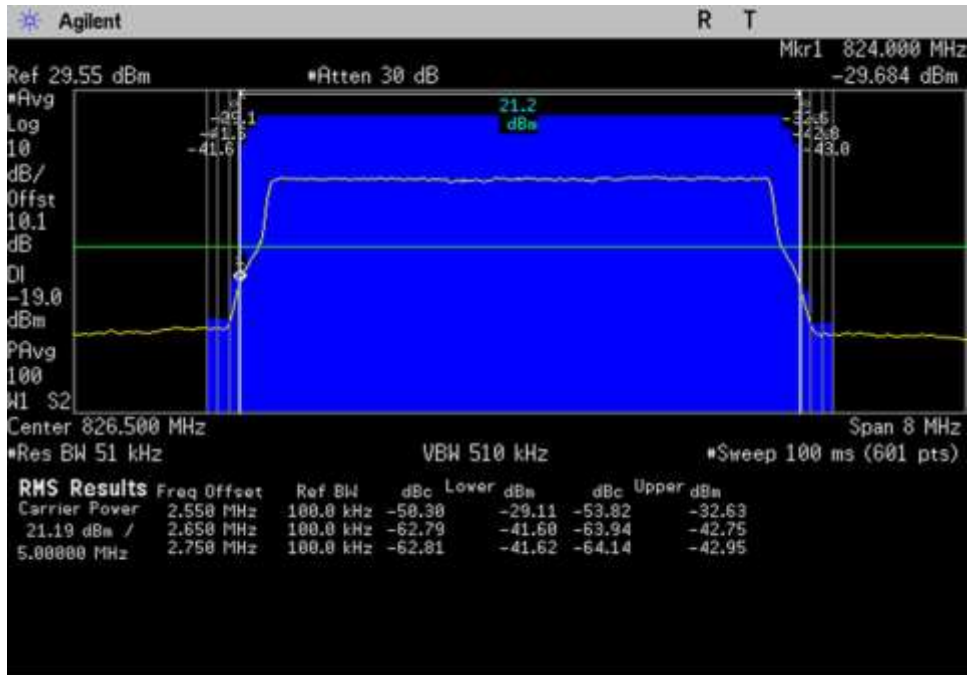


UL_824-849_LTE_822.5-830.5MHz

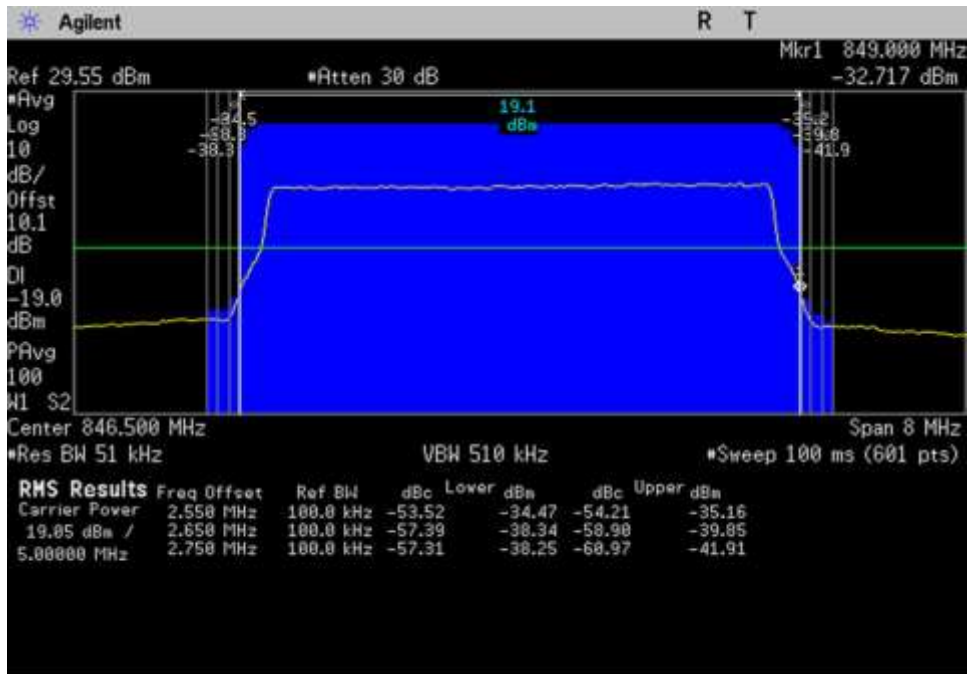


UL_824-849_LTE_842.5-850.5MHz

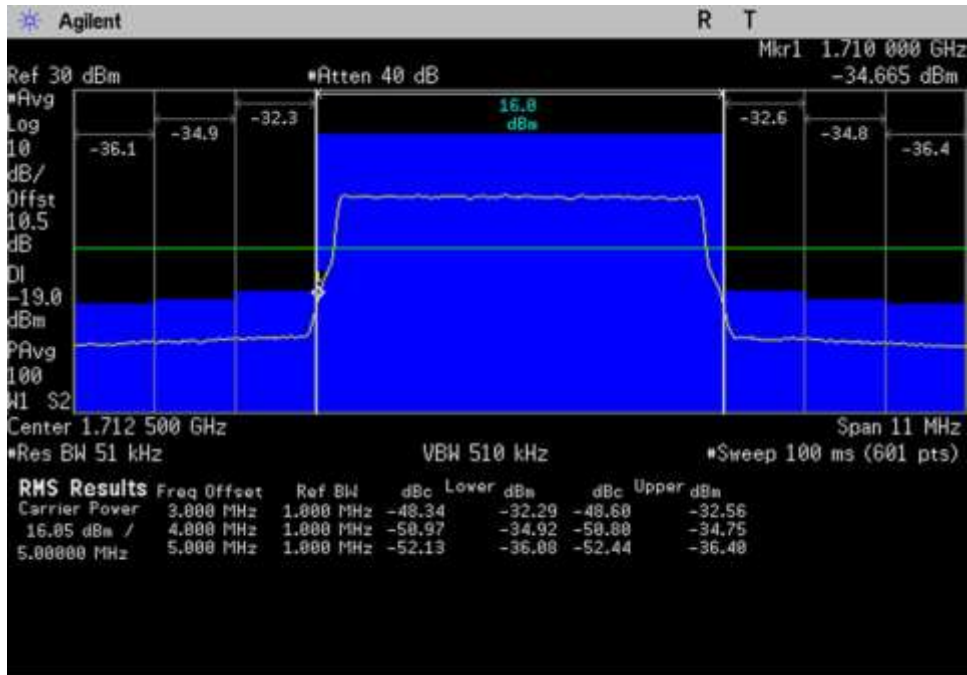


UL_1710-1755_LTE_1707-1718MHz

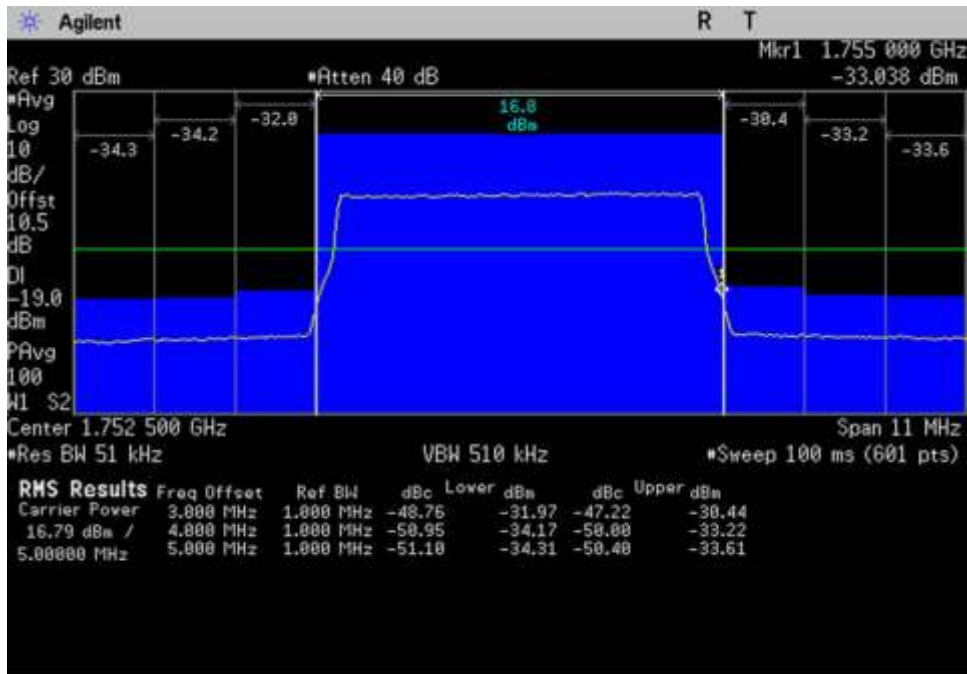


UL_1710-1755_LTE_1747-1758MHz

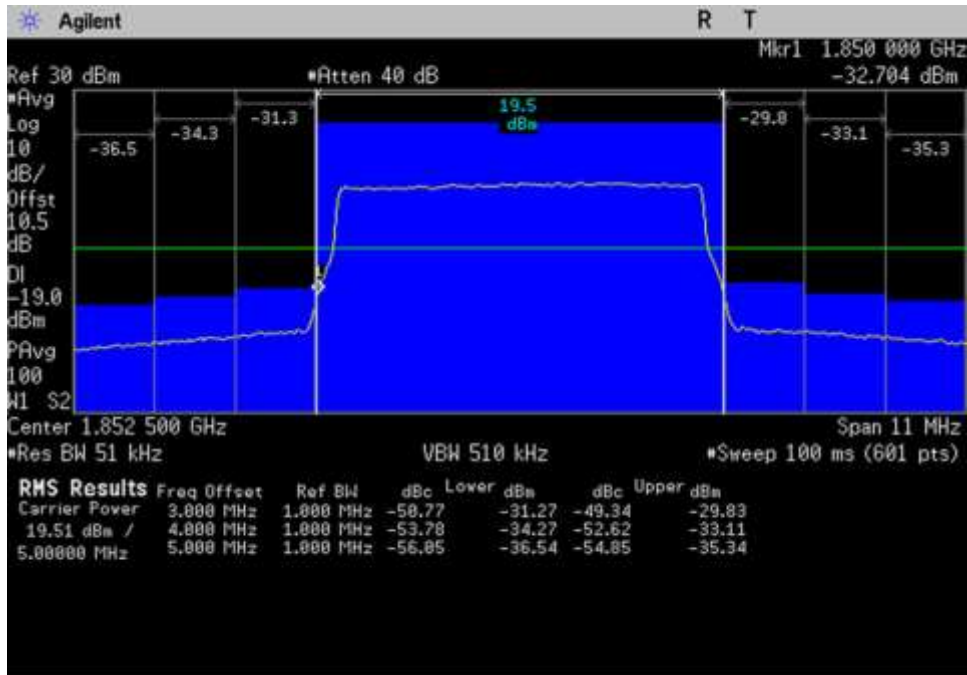


UL_1850-1915_LTE_1847-1858MHz

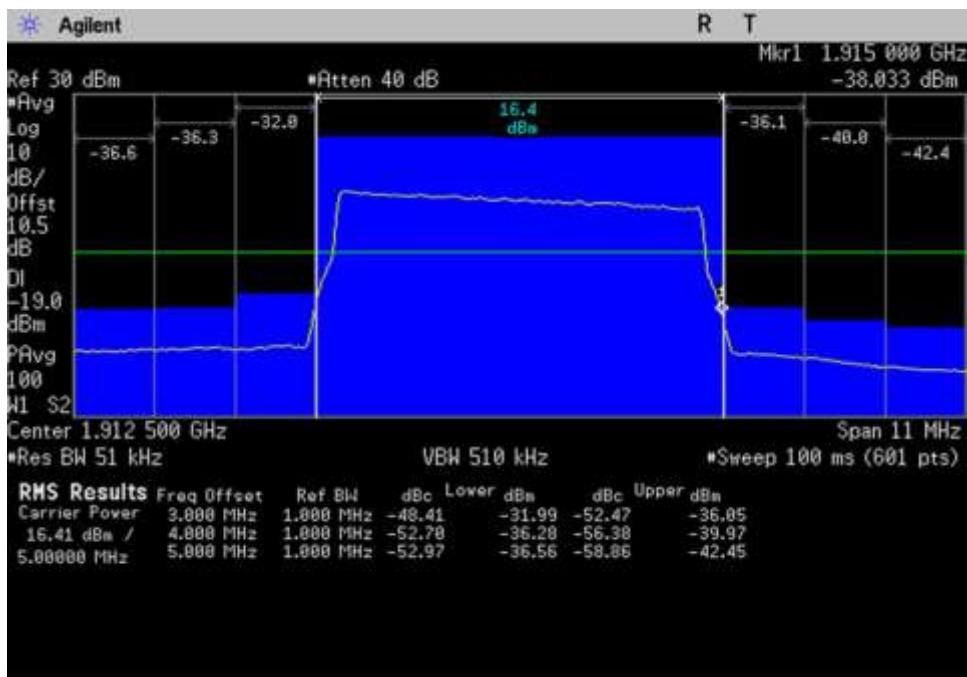


UL_1850-1915_LTE_1907-1918MHz

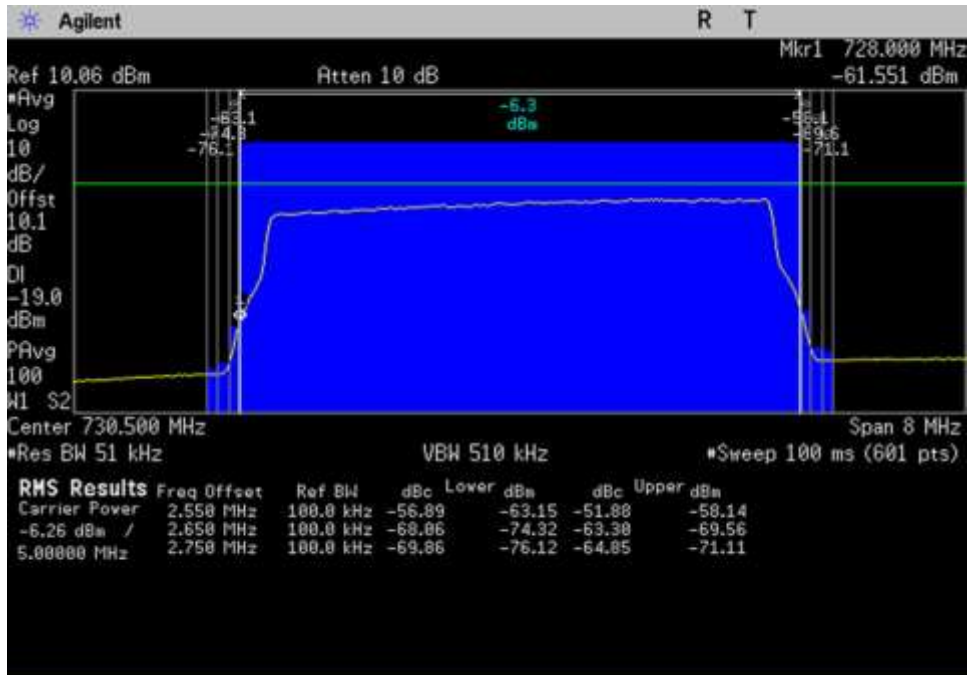


DL_728-746_LTE_726.5-734.5MHz

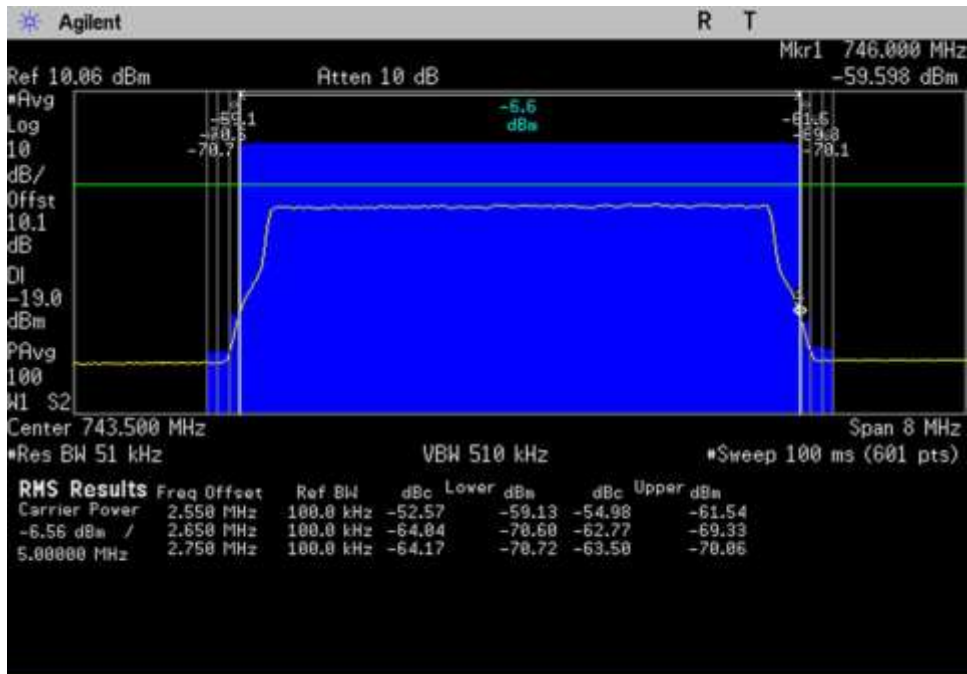


DL_728-746_LTE_739.5-747.5MHz

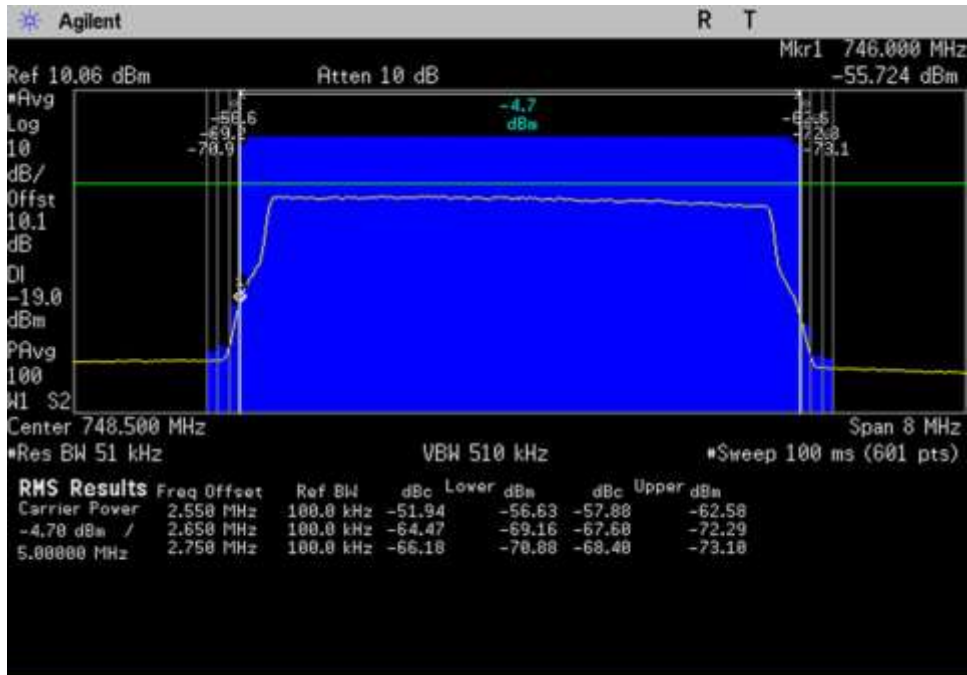


DL_746-757_LTE_744.5-752.5MHz

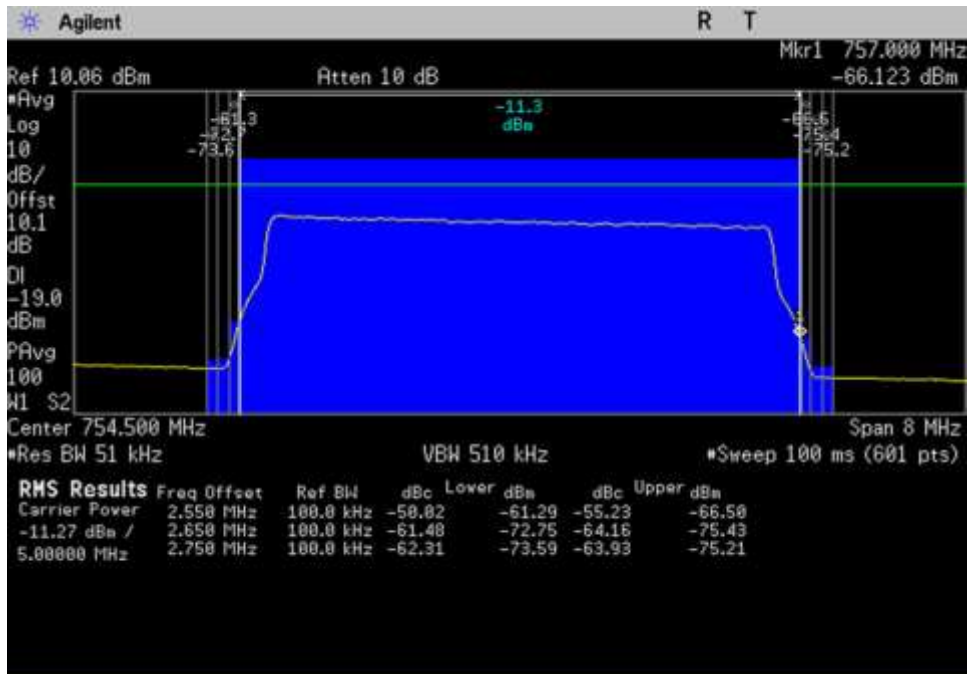


DL_746-757_LTE_750.5-758.5MHz

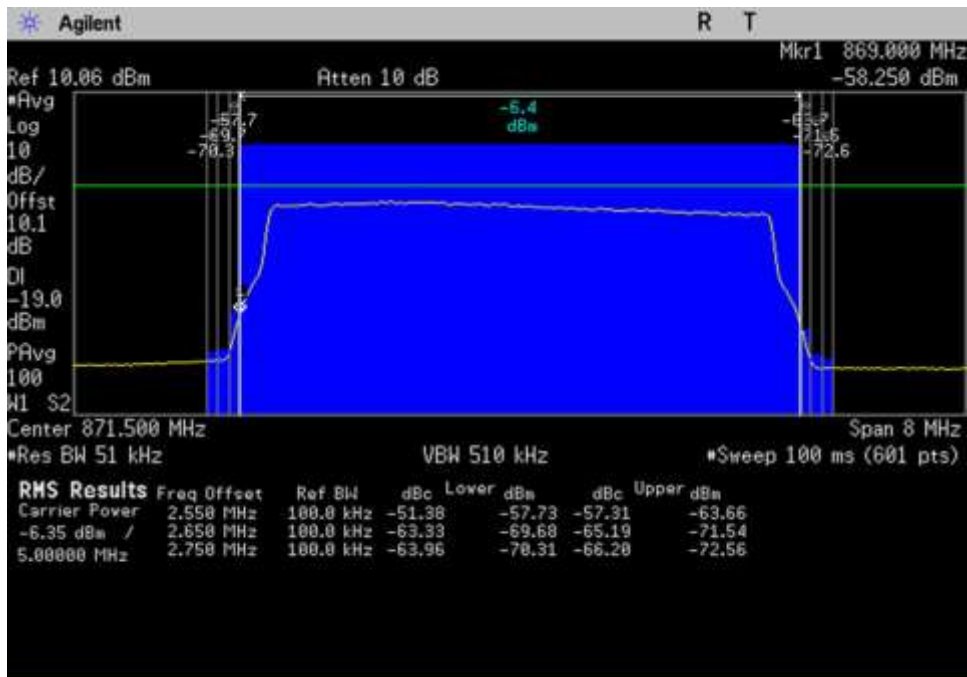


DL_869-894_LTE_867.5-875.5MHz

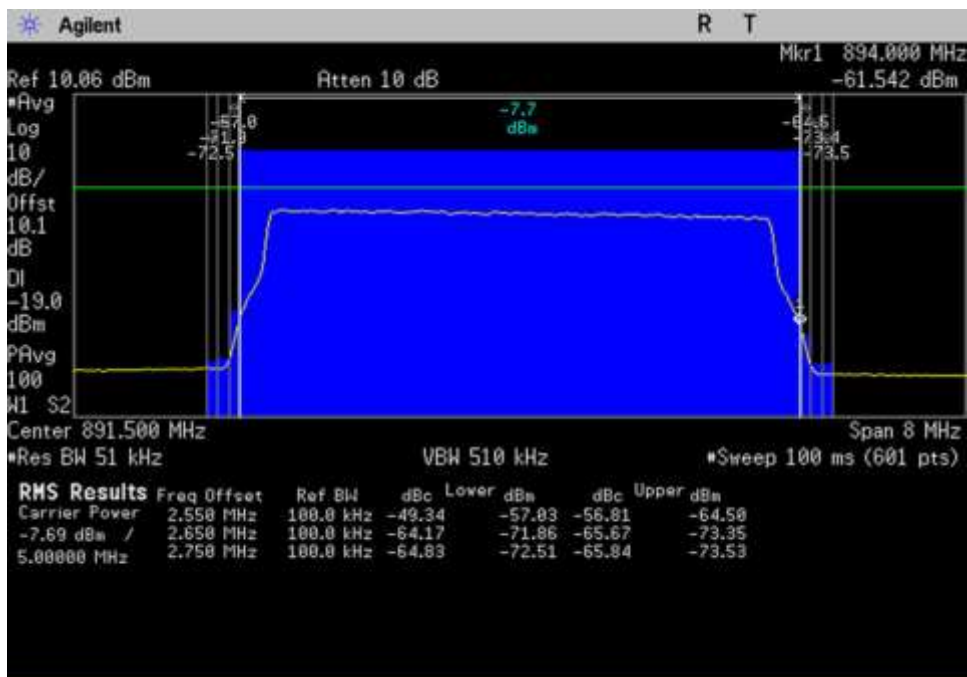


DL_869-894_LTE_887.5-895.5MHz

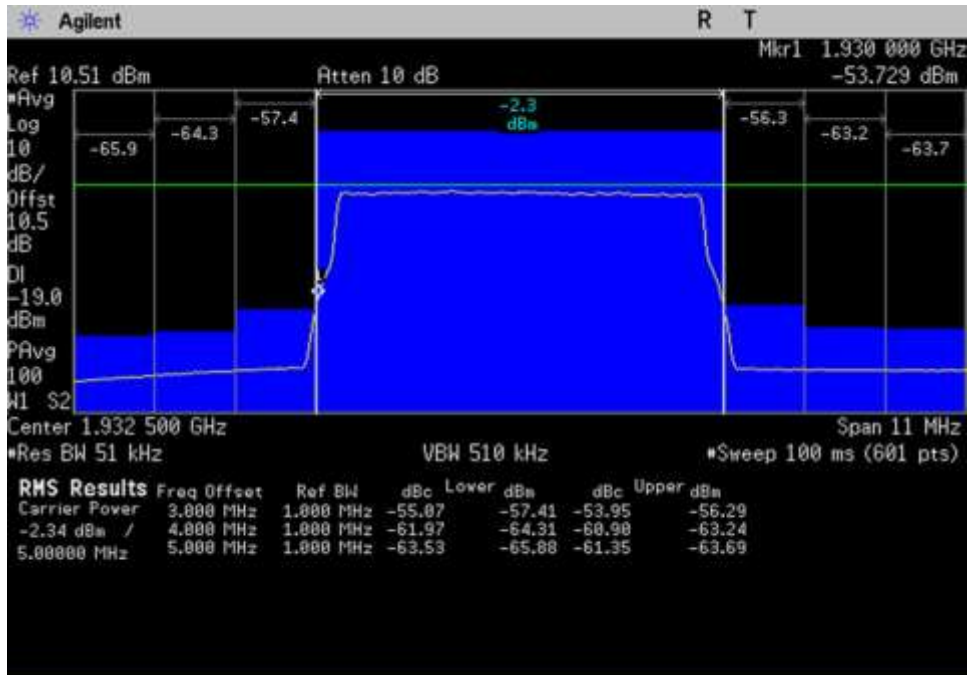


DL_1930-1995_LTE_1927-1938MHz

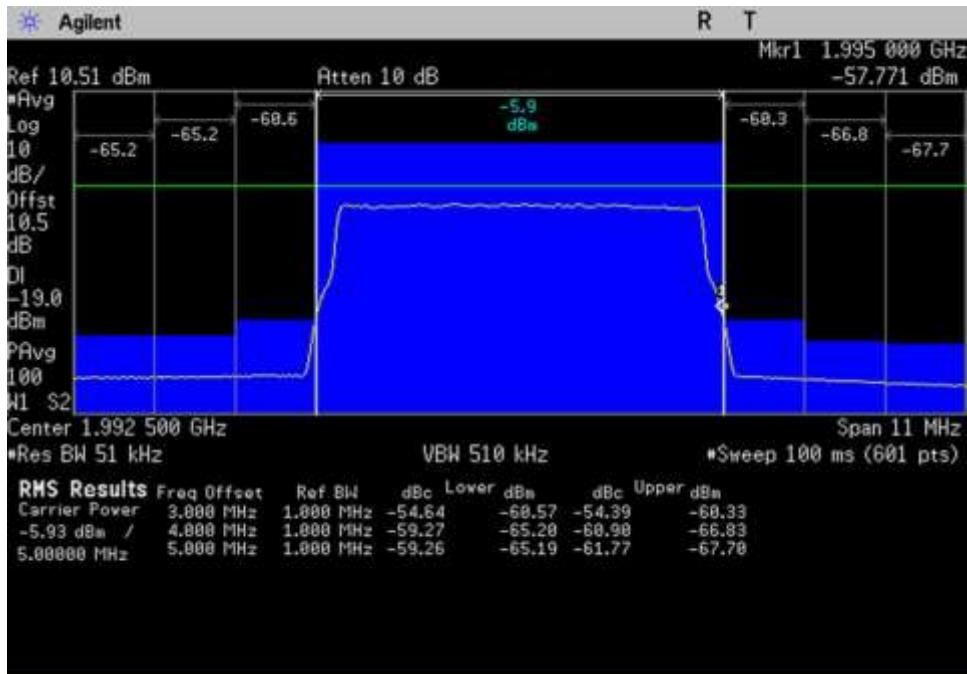

DL_1930-1995_LTE_1987-1998MHz

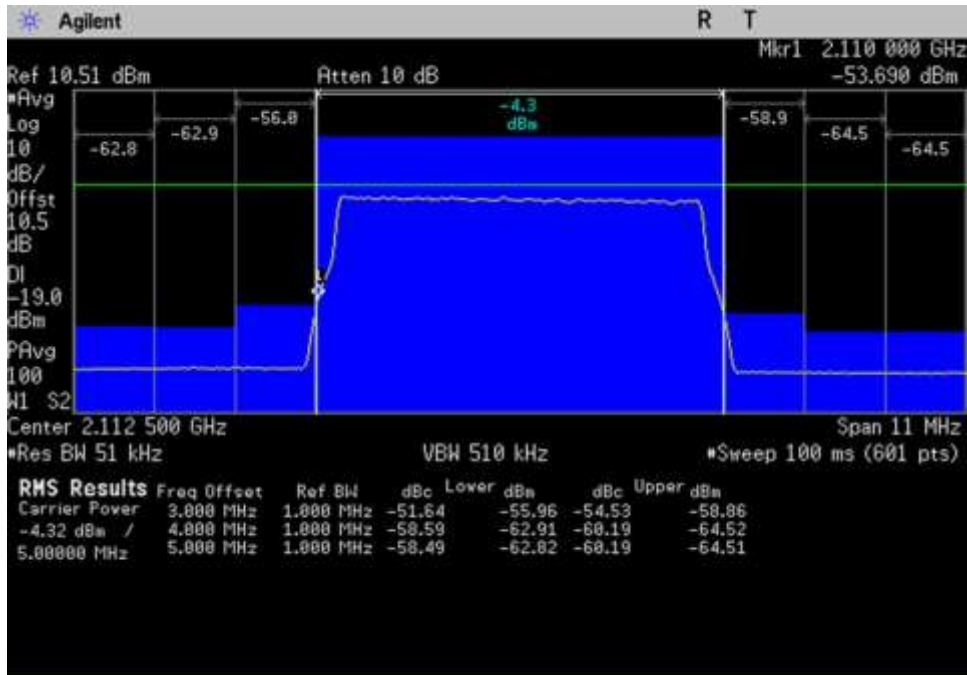

DL_2110-2155_LTE_2107-2118MHz

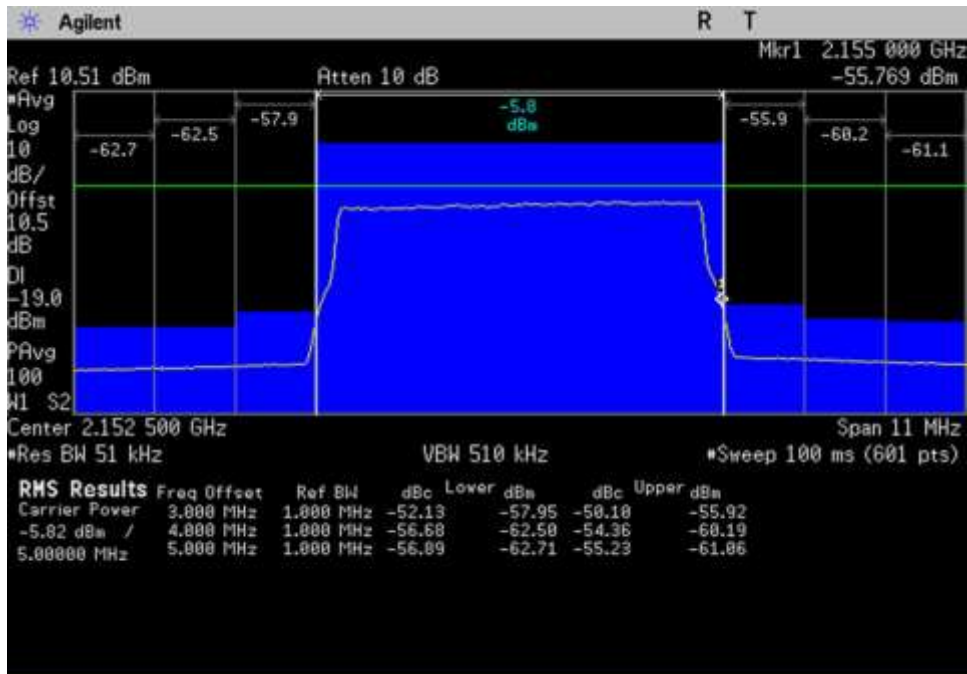

DL_2110-2155_LTE_2147-2158MHz

7.6 Conducted Spurious Emissions

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.6 Conducted Spurious Emissions / 47 CFR §2.1051 Spurious Emissions at Antenna Terminals**
 Work Order #: **101623** Date 08/14/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu S Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N

Test Conditions / Notes:

Test environment conditions:
 Temperature: 22.6°C
 Relative Humidity: 48%
 Pressure: 101.9kPa

Frequency range of measurement = 30MHz- 22GHz.
 30 MHz - 1000MHz -> RBW*= 1MHz VBW= 3MHz
 1000 MHz - 22000MHz ->RBW= 1MHz VBW= 3MHz

*Note: As specified on 7.6 Conducted spurious emissions test procedure of 935210 D03 Signal Booster Measurements v04r02, for frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected, then a final measurement of these emissions shall be made with the power averaging (RMS) detector.

27.53 (f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020

Summary of Results

Pass: As summarized in plots below, the conducted spurious emissions are within limits.

9 KHz-30 MHz

No Conducted Spurious Emissions were found within 20dB of the limit.

Per section 27.53 (f), the 1559-1610 band was also investigated and found emission within limits using applied correction (see calculation below).

Limit Line Calculation*				
Frequency (MHz)	Antenna Gain- cable loss (dBi)	Limit line EIRP (dBW/MHz)	Limit line EIRP (dBm)	Limit line EIRP corrected (dBm)
UL 776-787	-0.5	-70.0	-40	-40.5

LIMIT LINE FOR SPURIOUS CONDUCTED EMISSION

$$\text{REQUIRED ATTENUATION} = 43 + 10 \text{ LOG } P \text{ DB}$$


$$\text{Limit line (dBuV)} = V_{\text{dBuV}} - \text{Attenuation}$$

$$\begin{aligned} V_{\text{dBuV}} &= 20 \text{ Log } \frac{V}{1 \times 10^{-6}} \\ &= 20 (\text{Log } V - \text{Log } 1 \times 10^{-6}) \\ &= 20 \text{ Log } V - 20 \text{ Log } 1 \times 10^{-6} \\ &= 20 \text{ Log } V - 20 (-6) \\ &= 20 \text{ Log } V + 120 \end{aligned}$$


$$\begin{aligned} \text{Attenuation} &= 43 + 10 \text{ Log } P \\ &= 43 + 10 \text{ Log } \frac{V^2}{R} \\ &= 43 + 10 (\text{Log } V^2 - \text{Log } R) \\ &= 43 + 10 (2 \text{ Log } V - \text{Log } R) \\ &= 43 + 20 \text{ Log } V - 10 \text{ Log } R \end{aligned}$$

$$\begin{aligned} \text{Limit line} &= V_{\text{dBuV}} - \text{Attenuation} \\ &= 20 \text{ Log } V + 120 - (43 + 20 \text{ Log } V - 10 \text{ Log } R) \\ &= 20 \text{ Log } V + 120 - 43 - 20 \text{ Log } V + 10 \text{ Log } R \\ &= 20 \text{ Log } V + 120 - 43 - 20 \text{ Log } V + 10 \text{ Log } R \\ &= 120 - 43 + 10 \text{ Log } 50 \quad \text{Note : } R = 50 \Omega \\ &= 120 - 43 + 16.897 \\ &= 94 \text{ dBuV at any power level} \end{aligned}$$


Plots

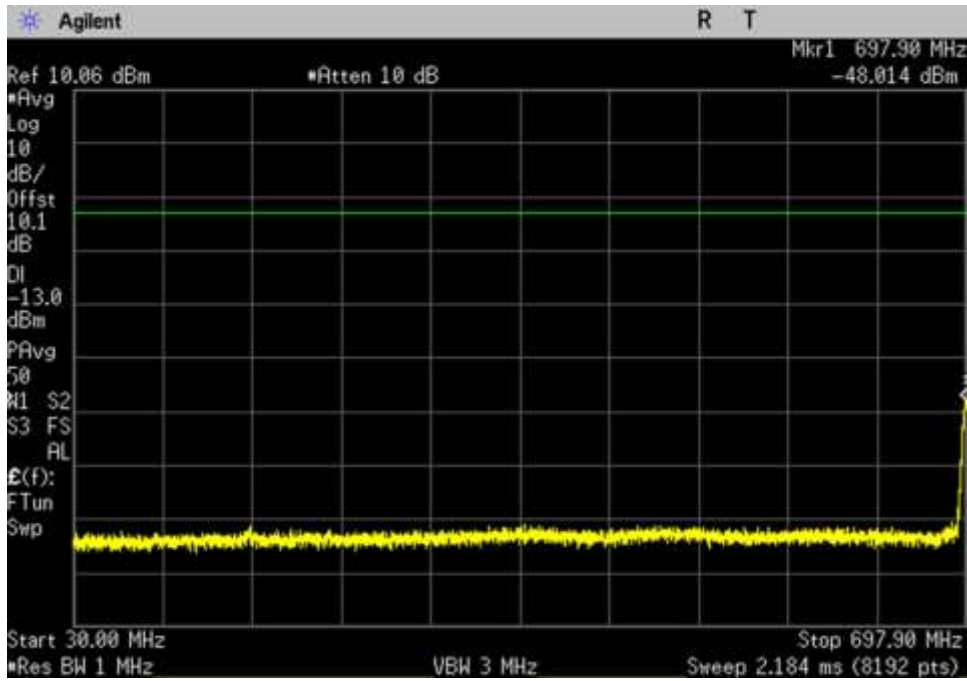


UL_698-716_30- 697.9MHz

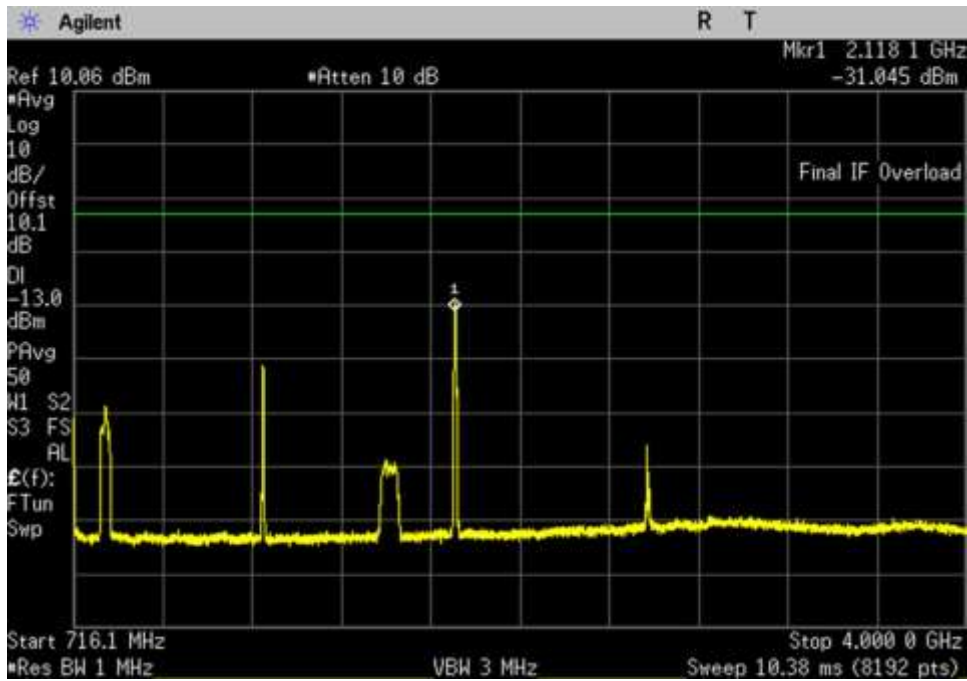


UL_698-716_716.1- 4000MHz

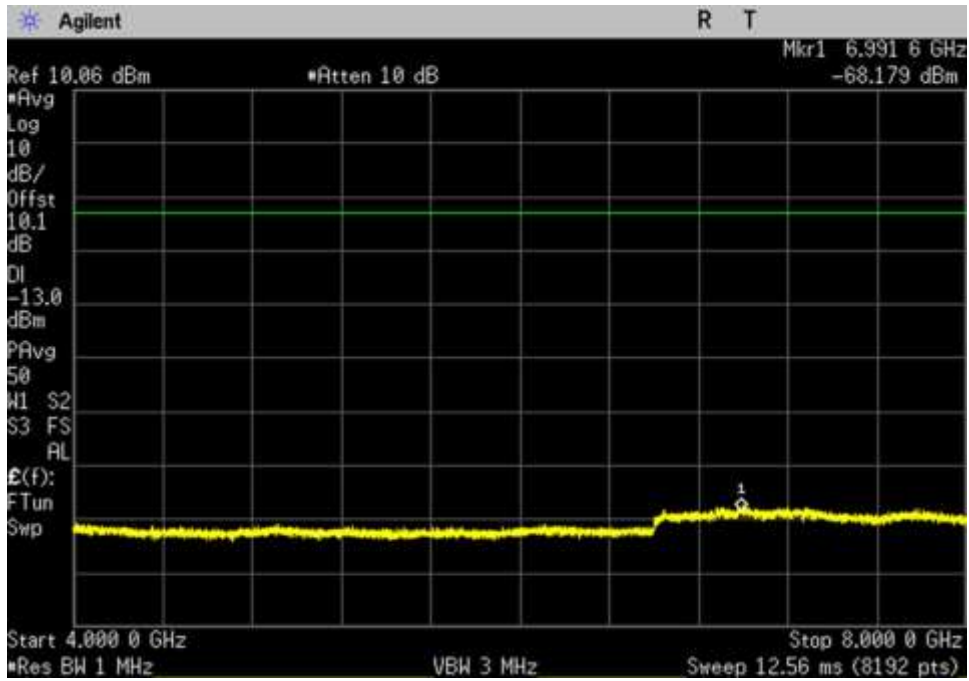


UL_698-716_4000-8000MHz

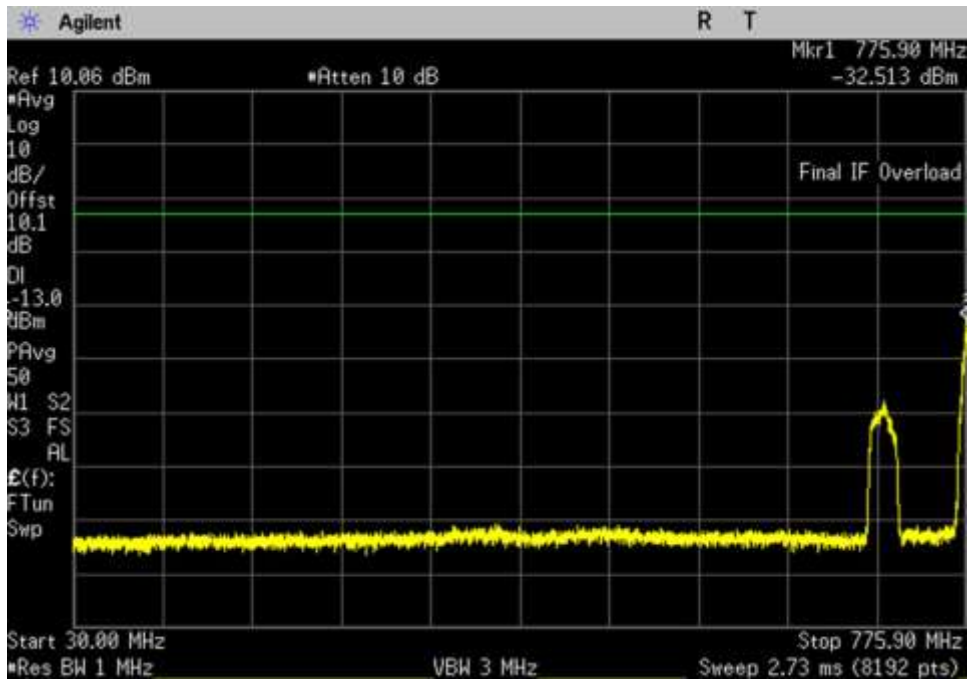


UL_776-787_30-775.9MHz

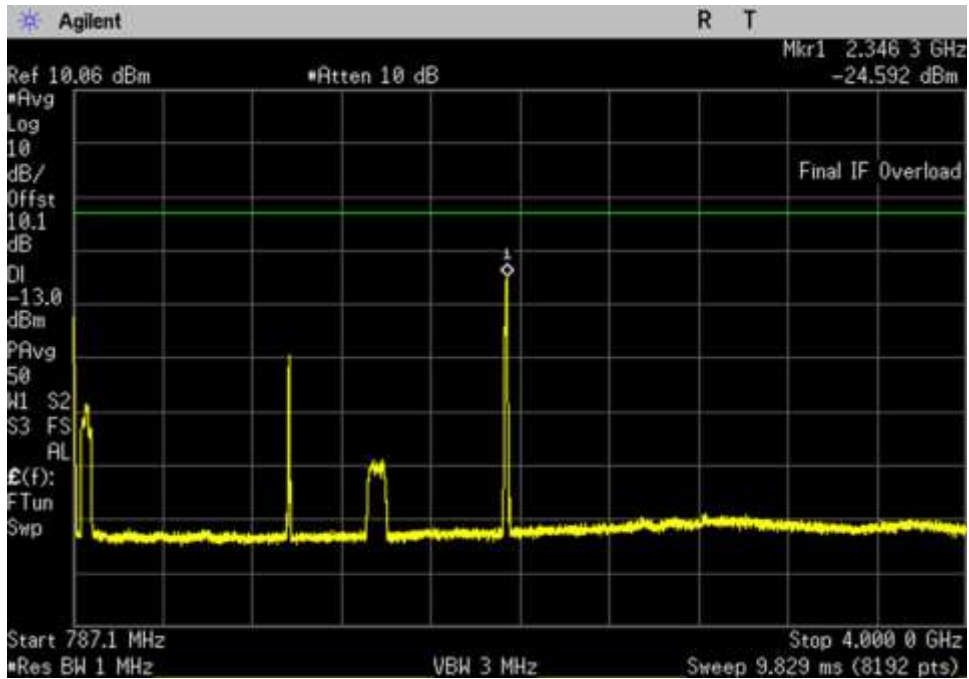


UL_776-787_ 787.1- 4000MHz

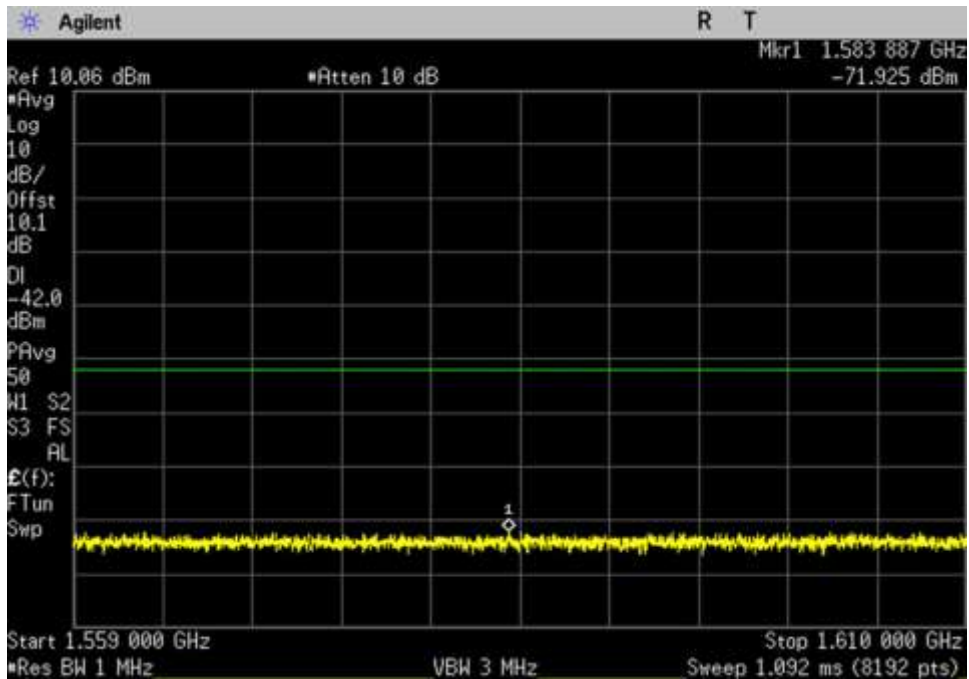


UL_776-787_ 1559- 1610MHz

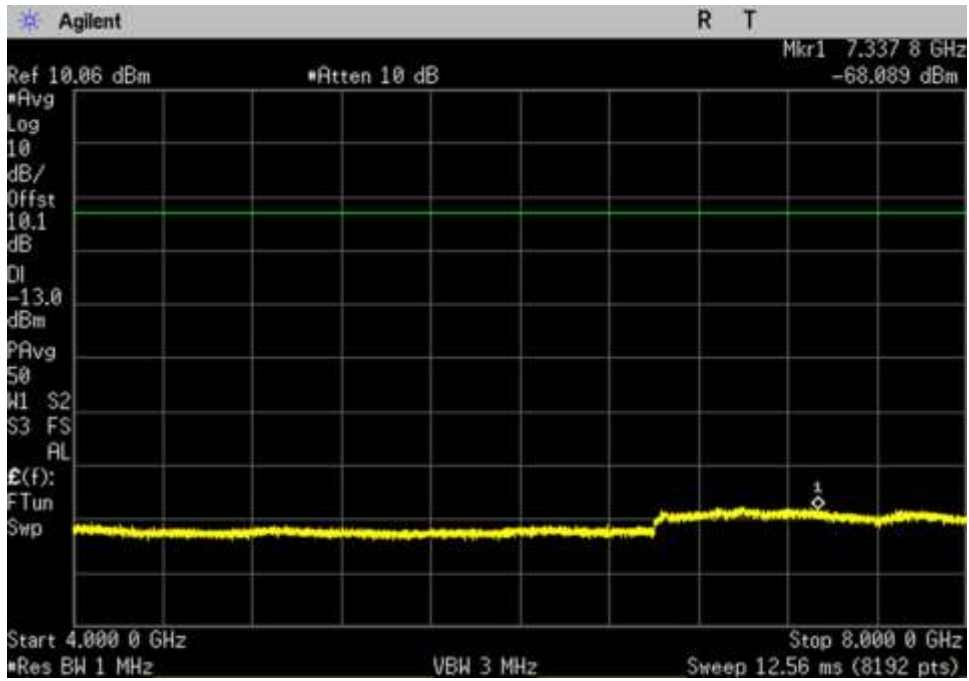


UL_776-787_ 4000- 8000MHz

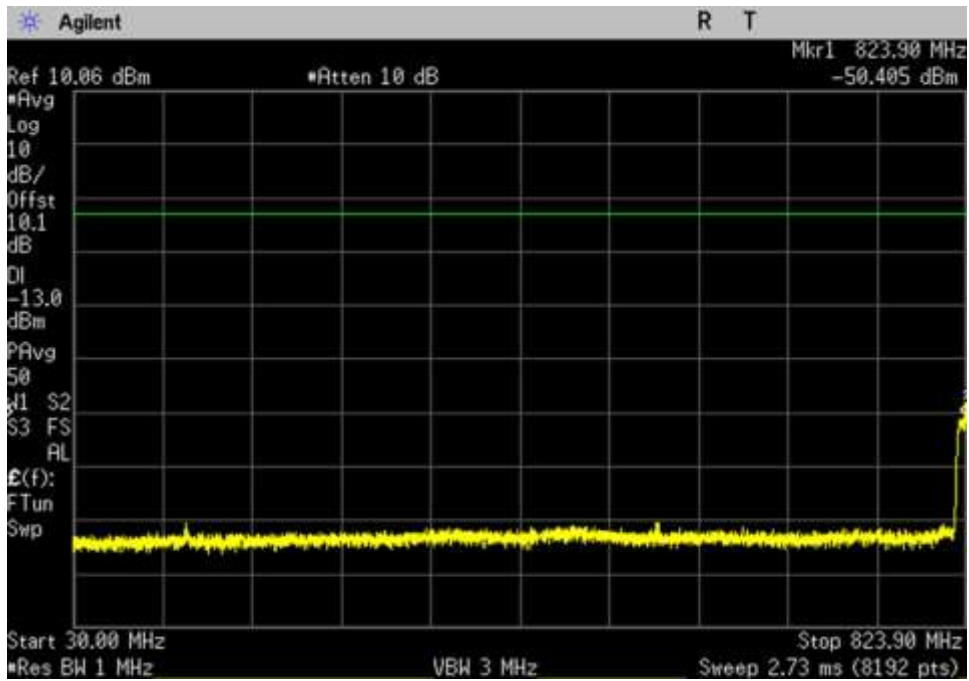


UL_824-849_ 30- 823.9MHz

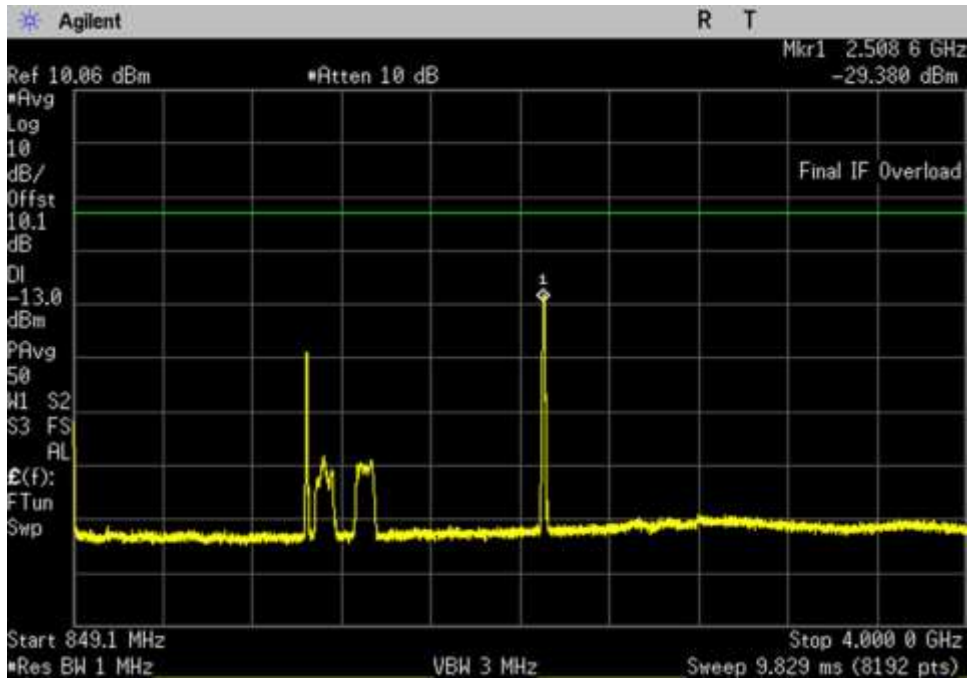


UL_824-849_ 849.1- 4000MHz

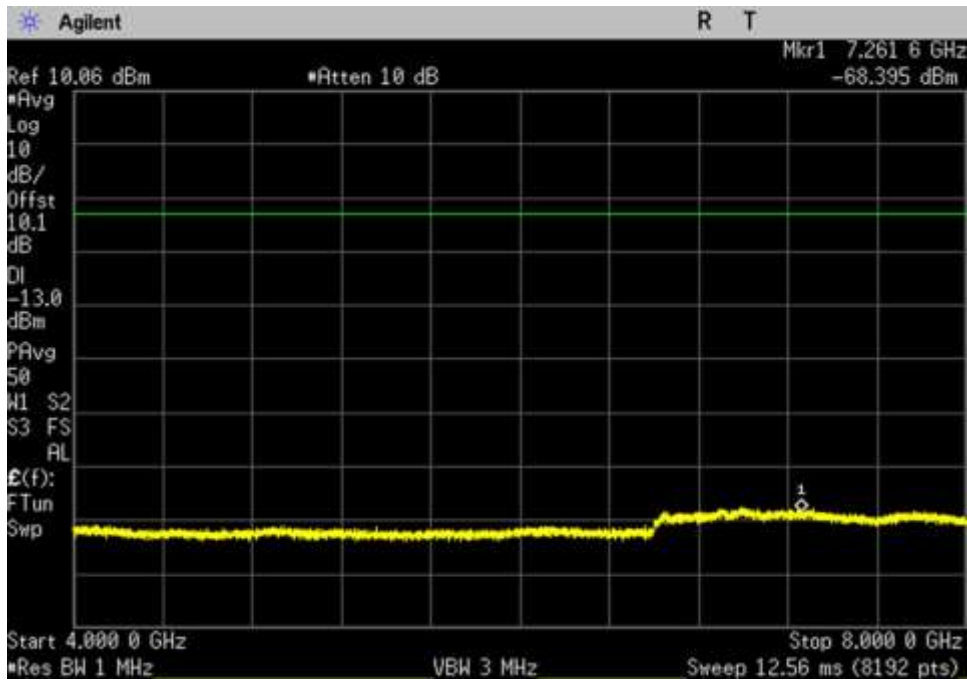


UL_824-849_ 4000- 8000MHz

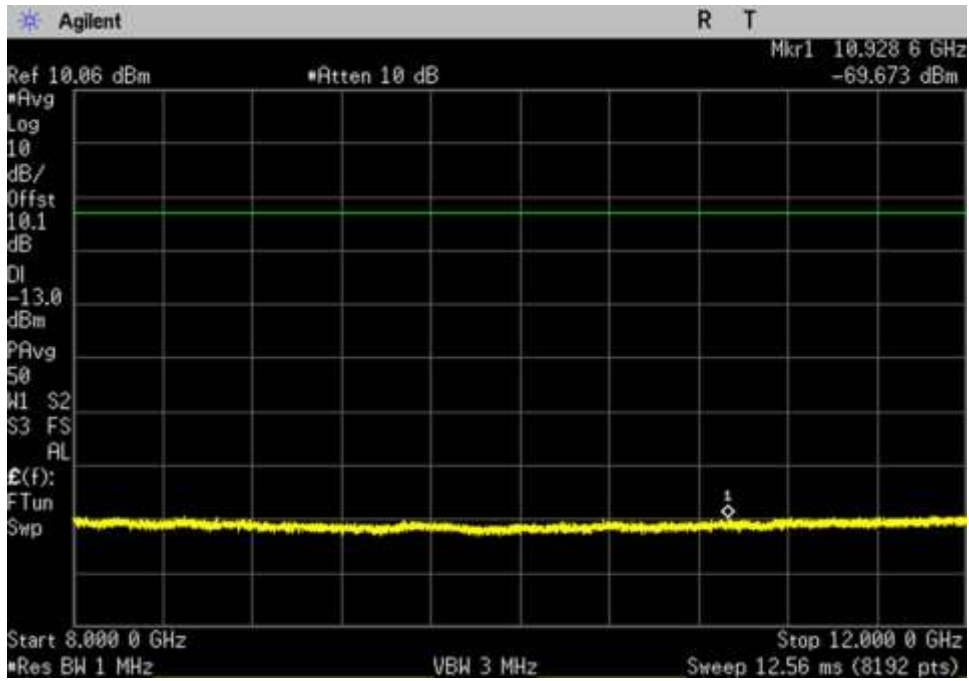


UL_824-849_ 8000- 12000MHz

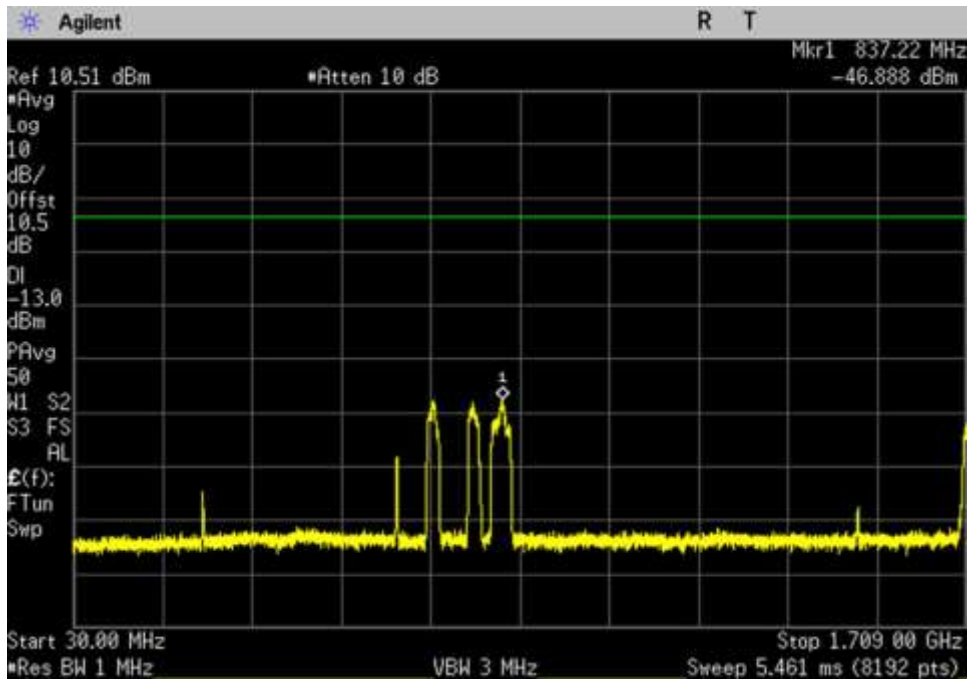


UL_1710-1755_ 30- 1709MHz

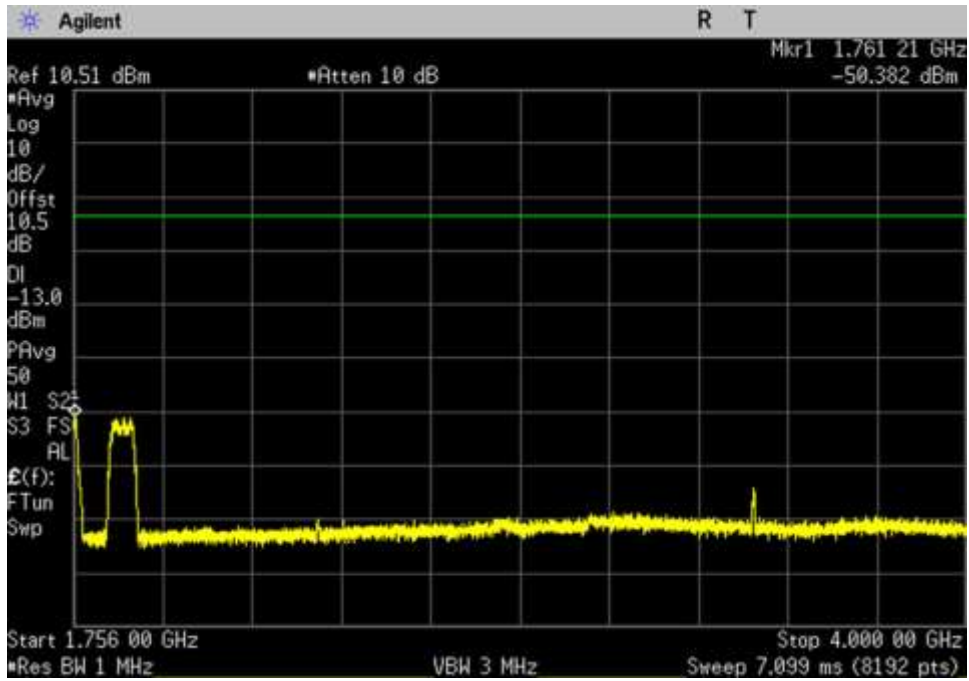


UL_1710-1755_ 1756- 4000MHz

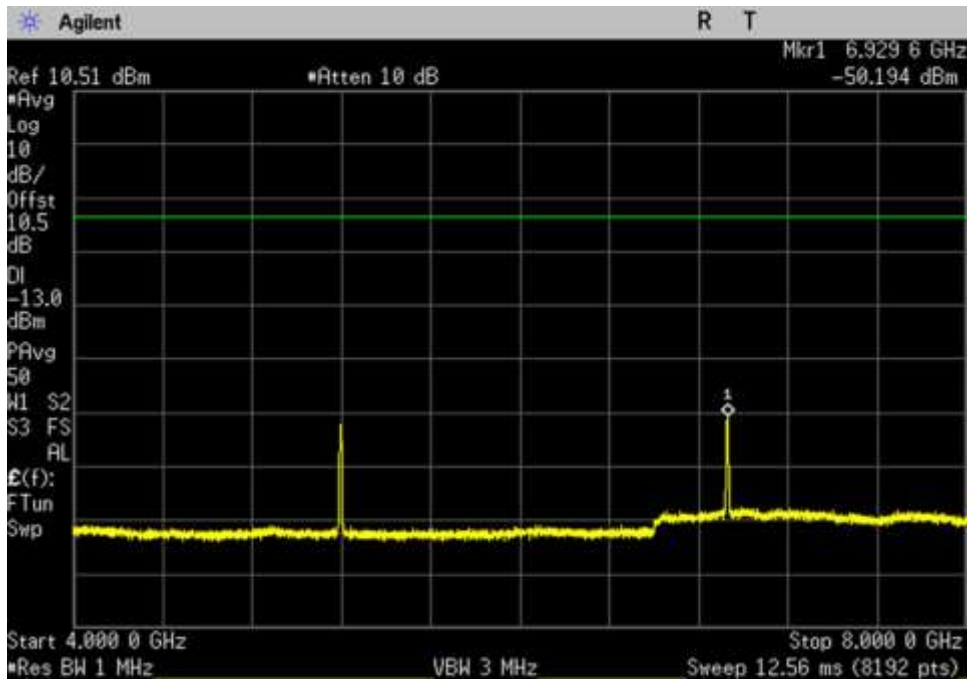


UL_1710-1755_ 4000- 8000MHz

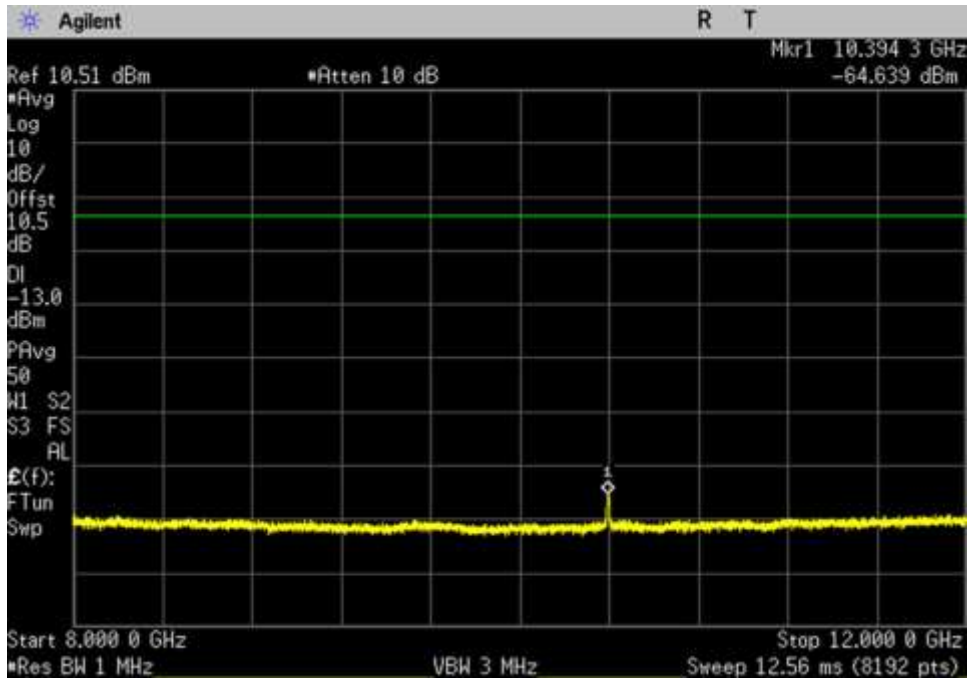


UL_1710-1755_8000-12000MHz

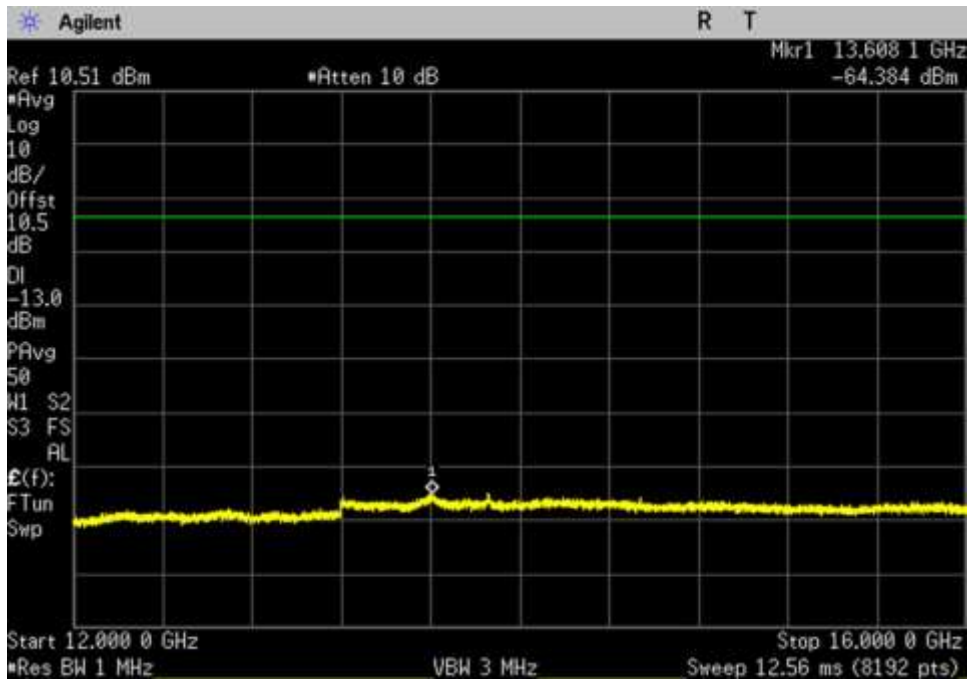


UL_1710-1755_12000-16000MHz

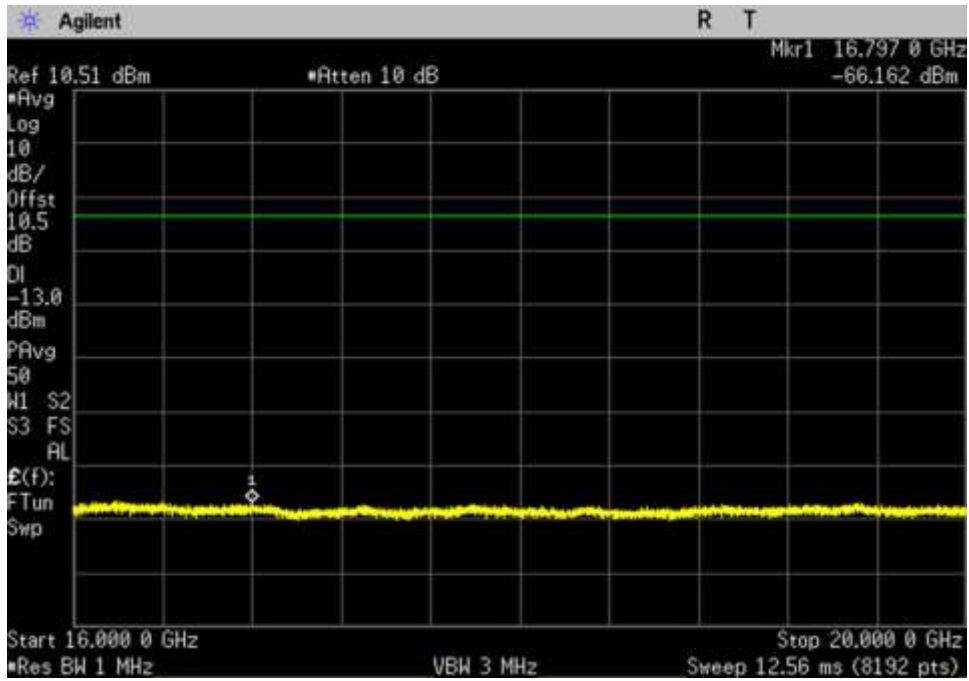


UL_1710-1755_ 16000- 20000MHz

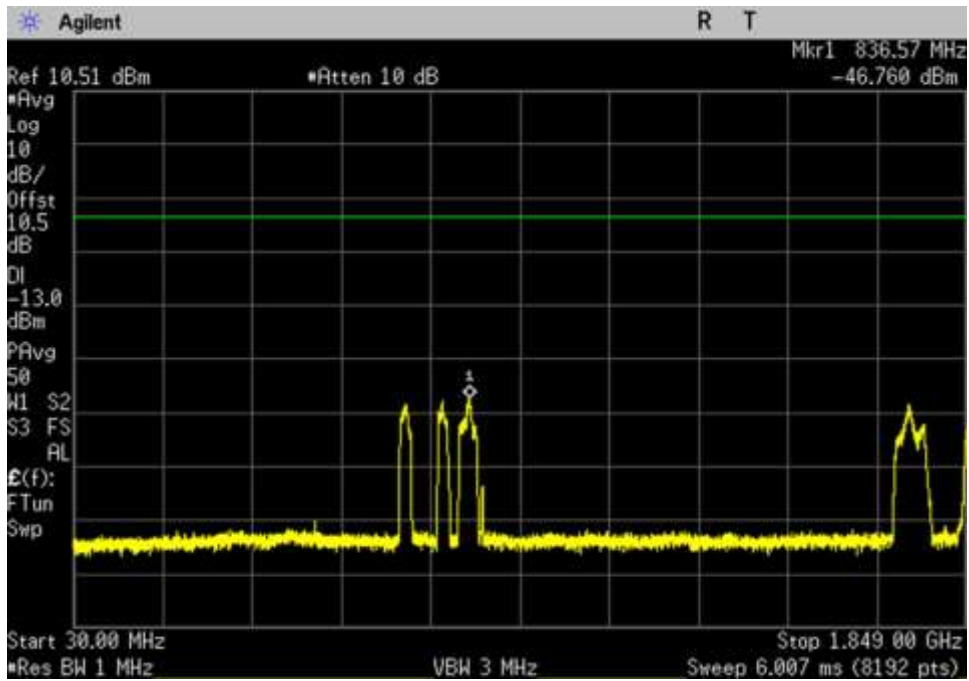


UL_1850-1915_ 30- 1849MHz

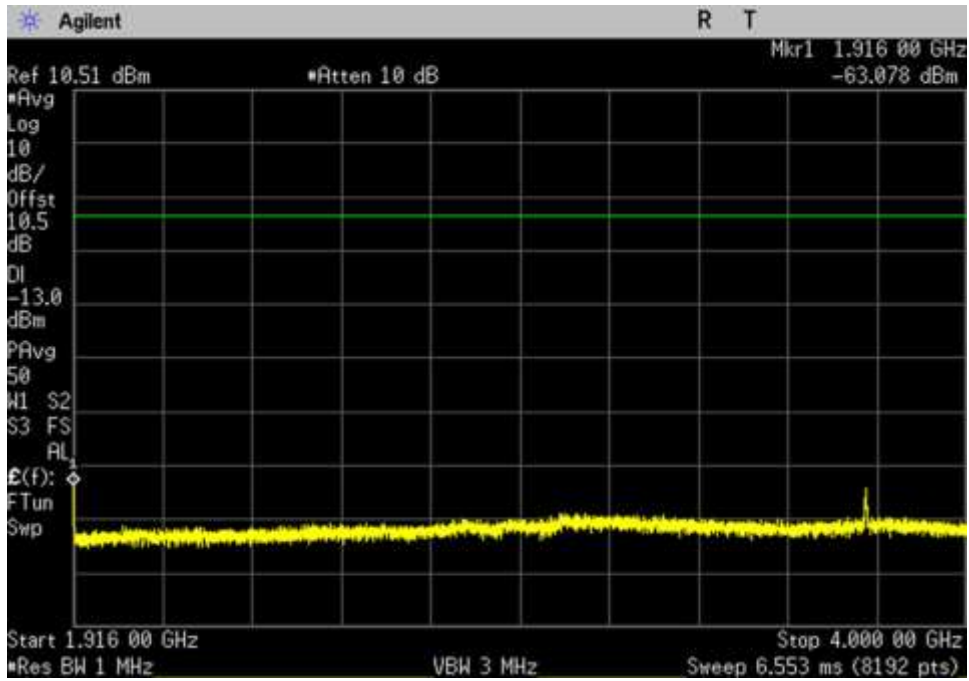


UL_1850-1915_ 1916- 4000MHz

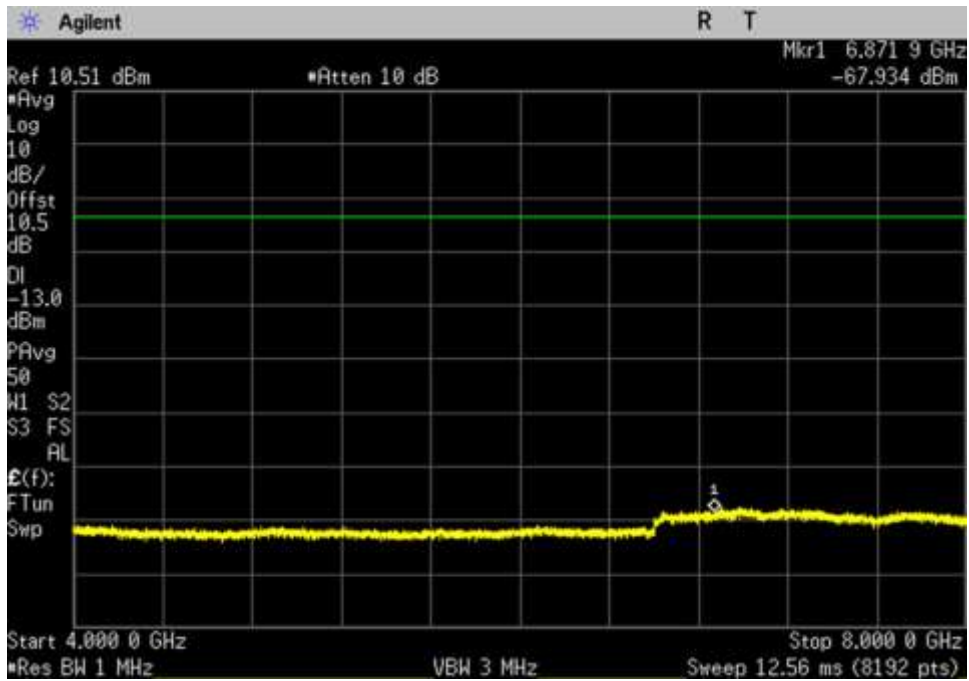


UL_1850-1915_ 4000- 8000MHz

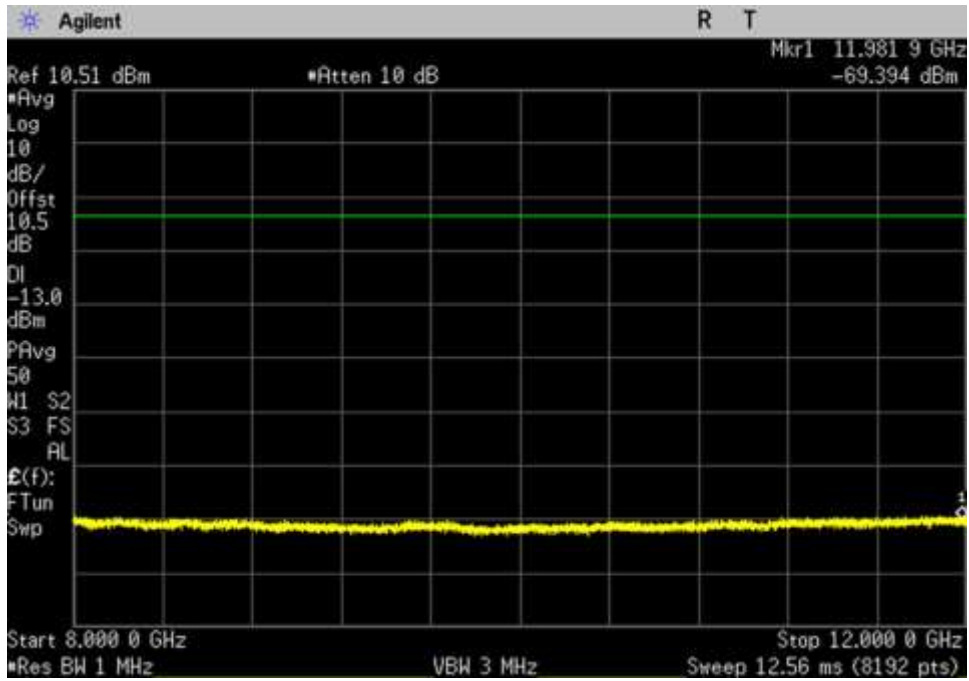


UL_1850-1915_ 8000- 12000MHz

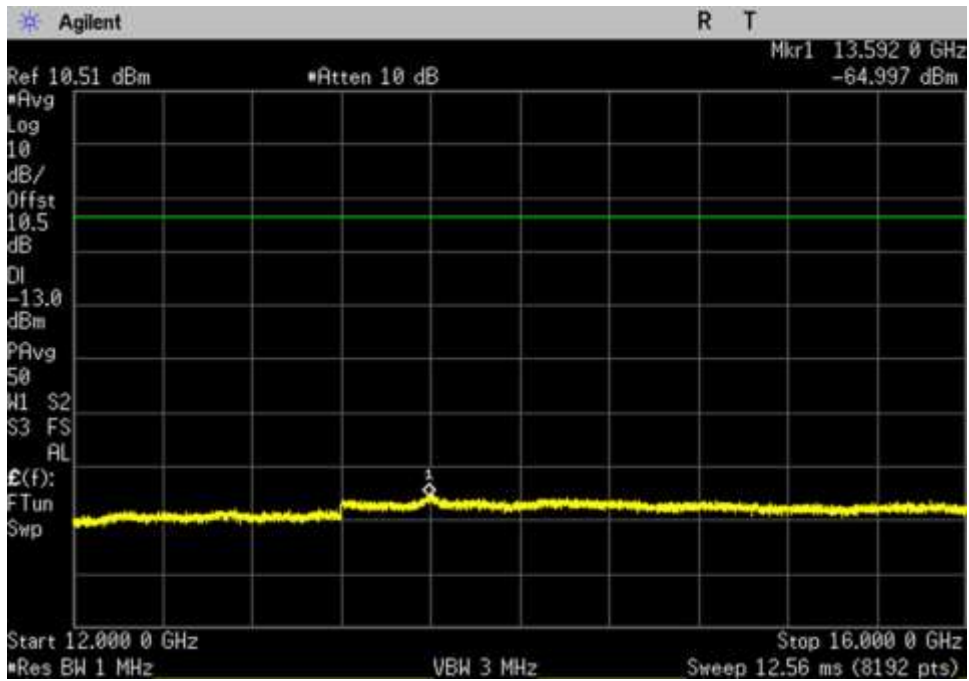


UL_1850-1915_ 12000- 16000MHz

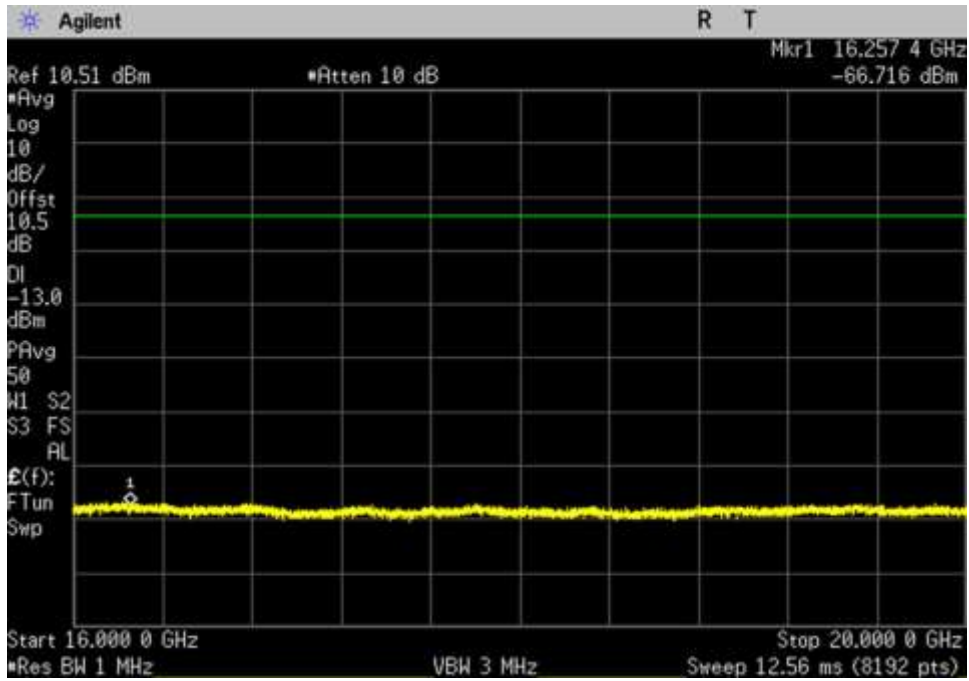


UL_1850-1915_ 16000- 20000MHz

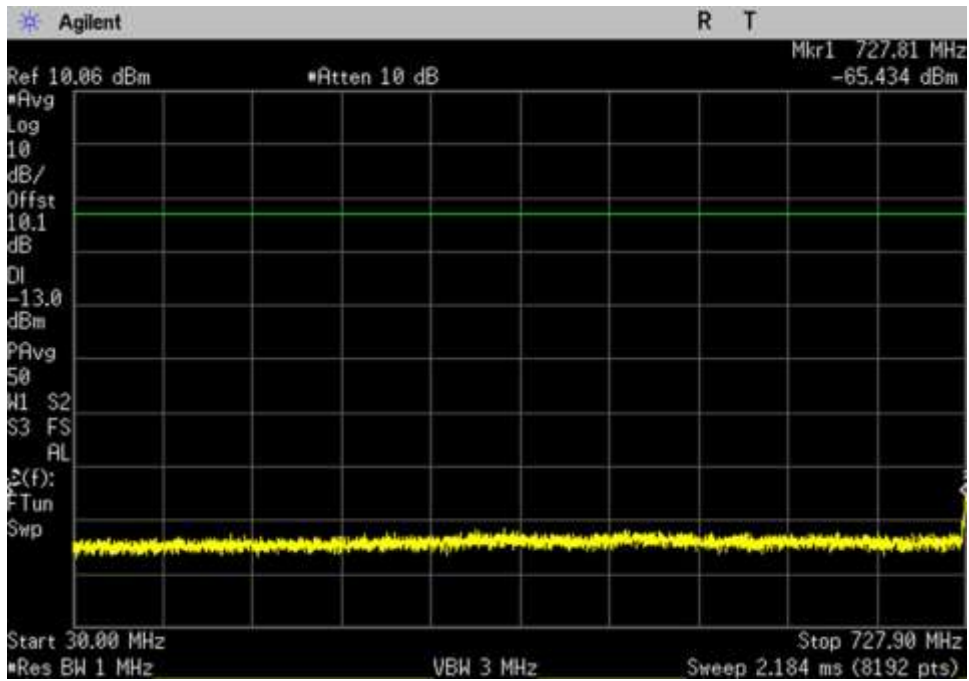


DL_728-746_ 30- 727.9MHz

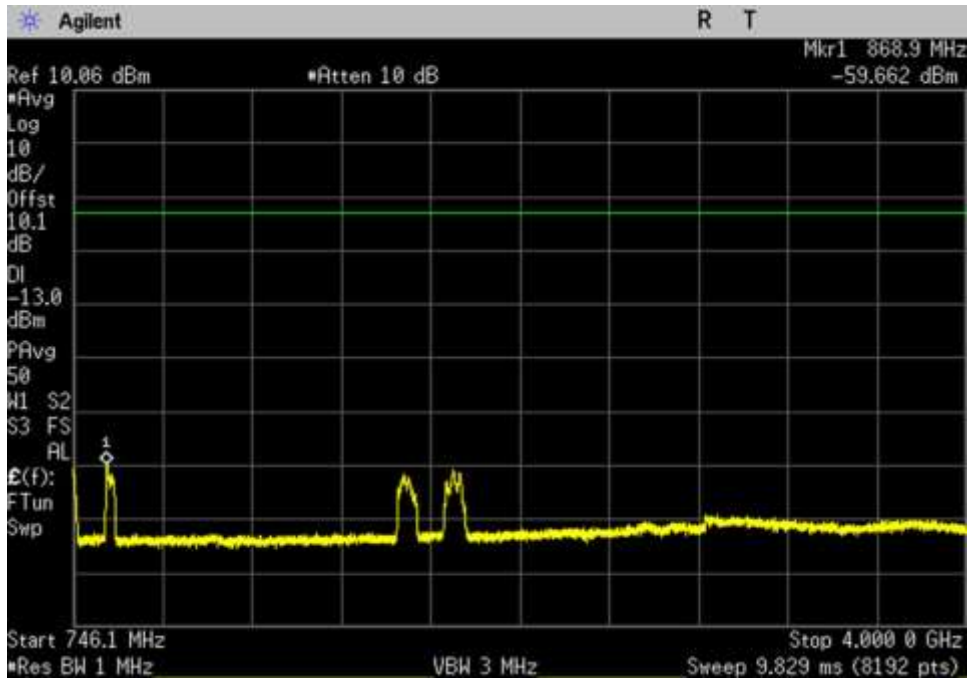


DL_728-746_ 746.1- 4000MHz

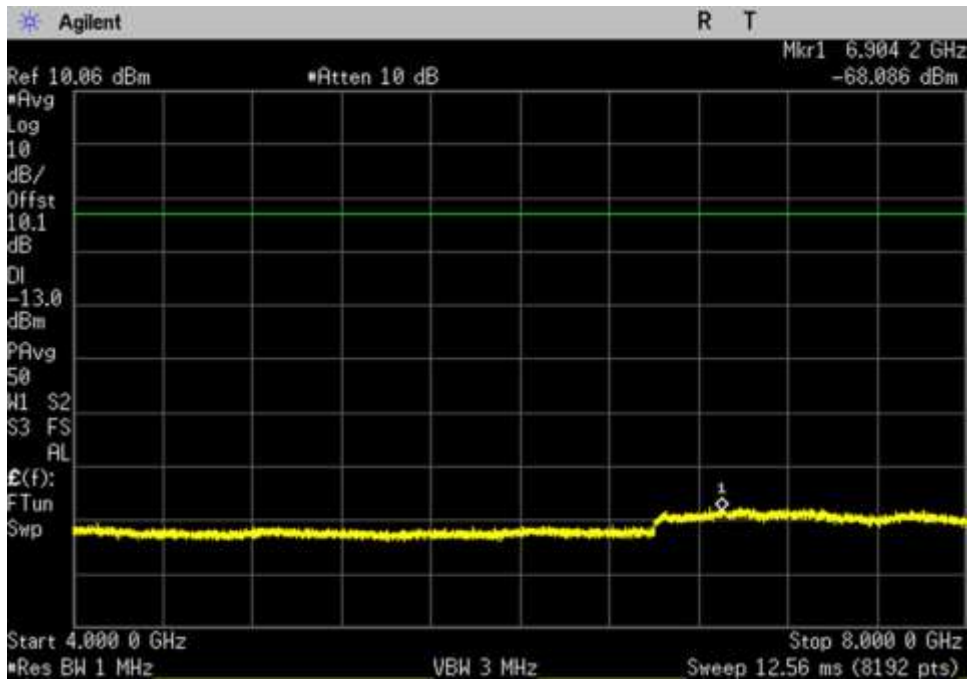


DL_728-746_ 4000- 8000MHz

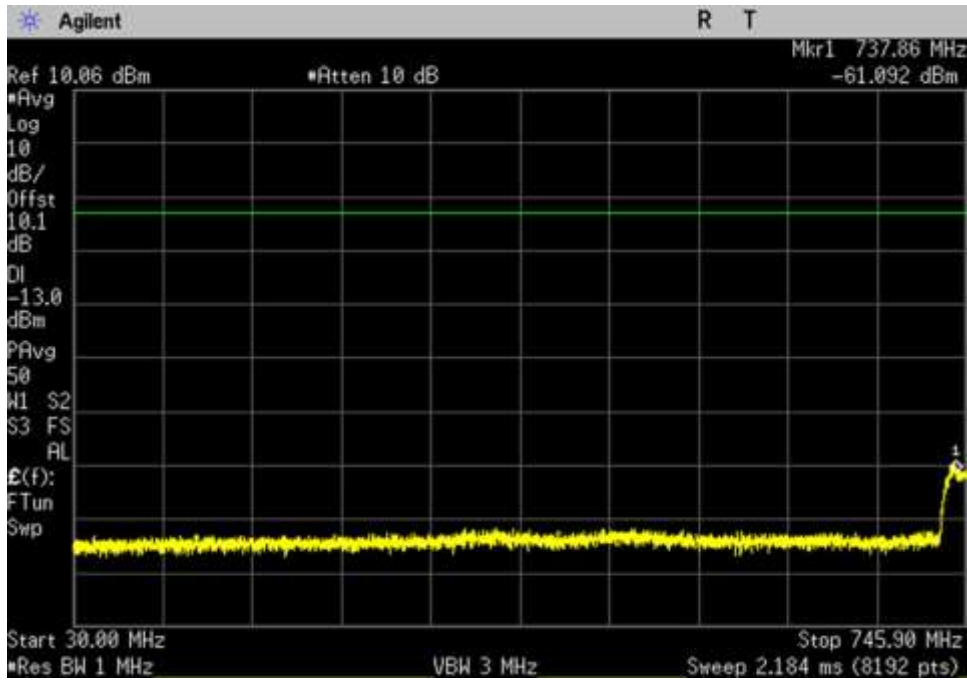


DL_746-757_30- 745.9MHz

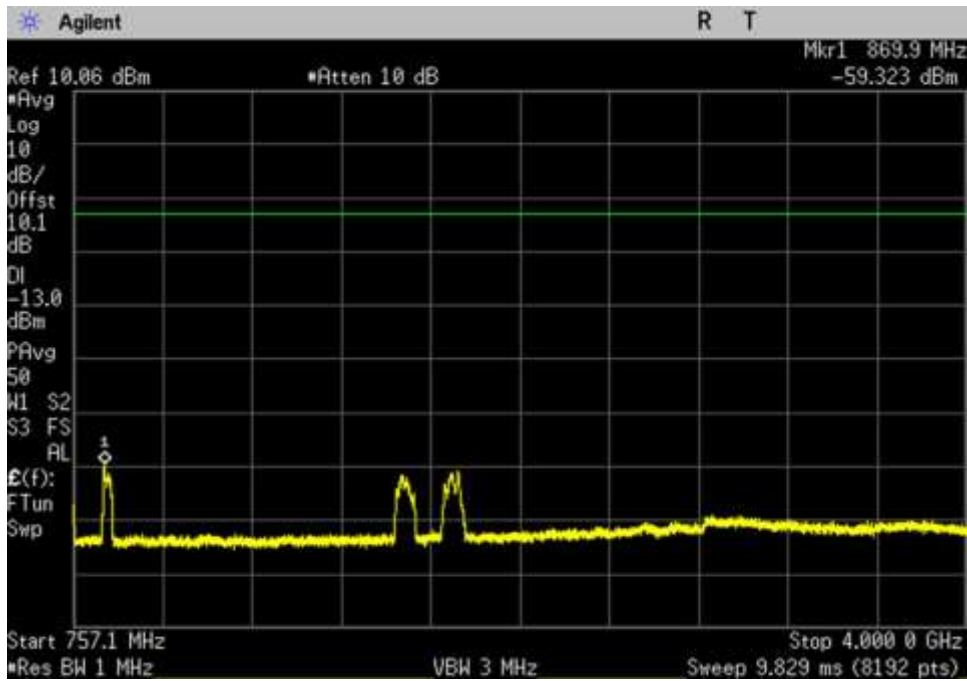


DL_746-757_ 757.1- 4000MHz

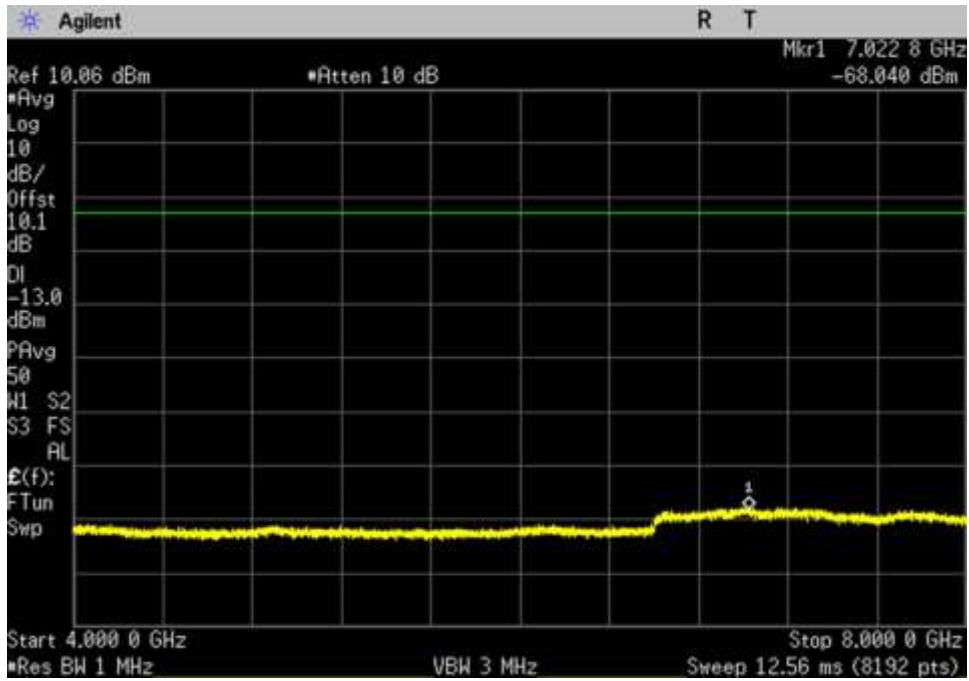


DL_746-757_ 4000- 8000MHz

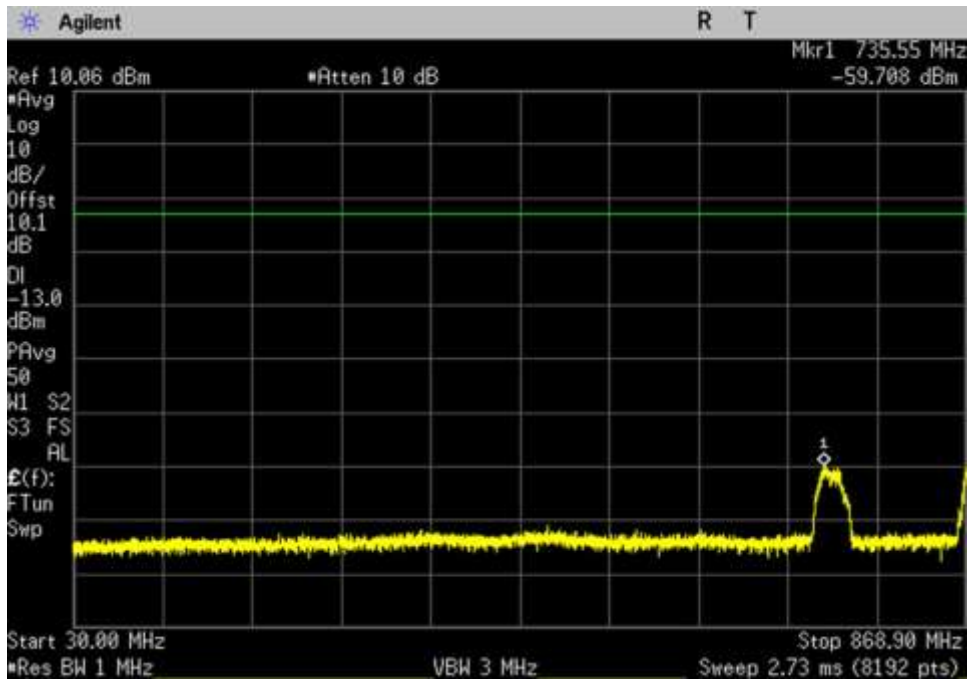


DL_869-894_ 30- 868.9MHz

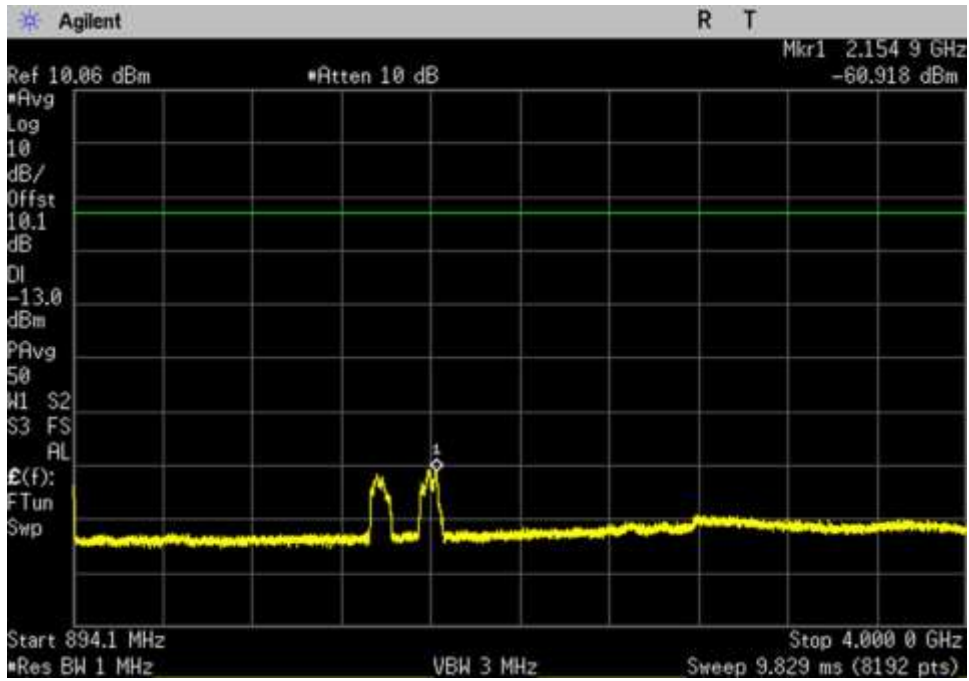


DL_869-894_ 894.1- 4000MHz

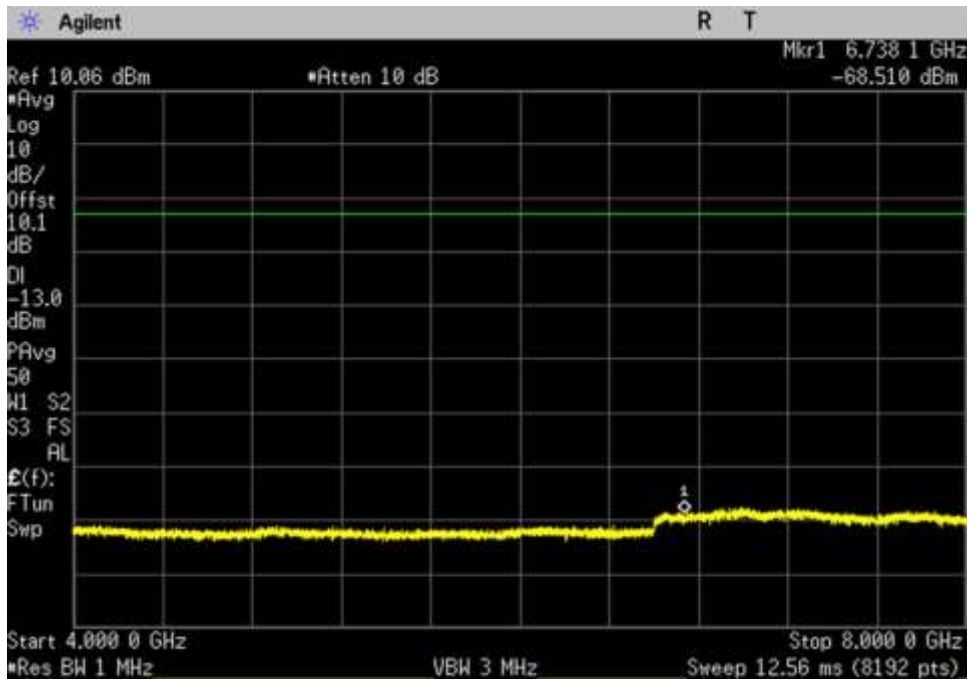


DL_869-894_ 4000- 8000MHz

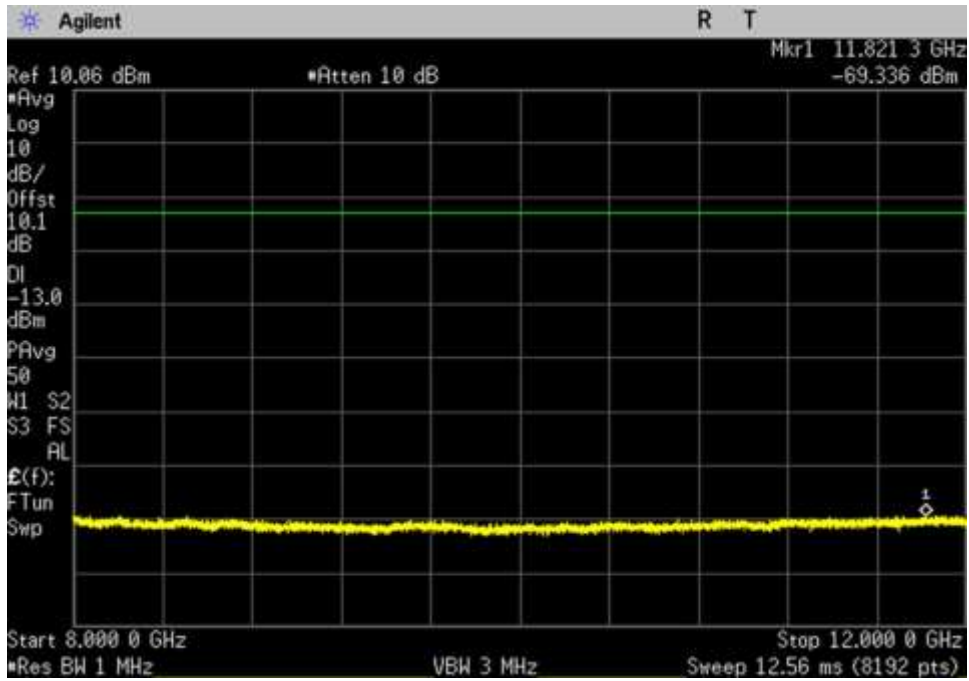


DL_869-894_ 8000- 12000MHz

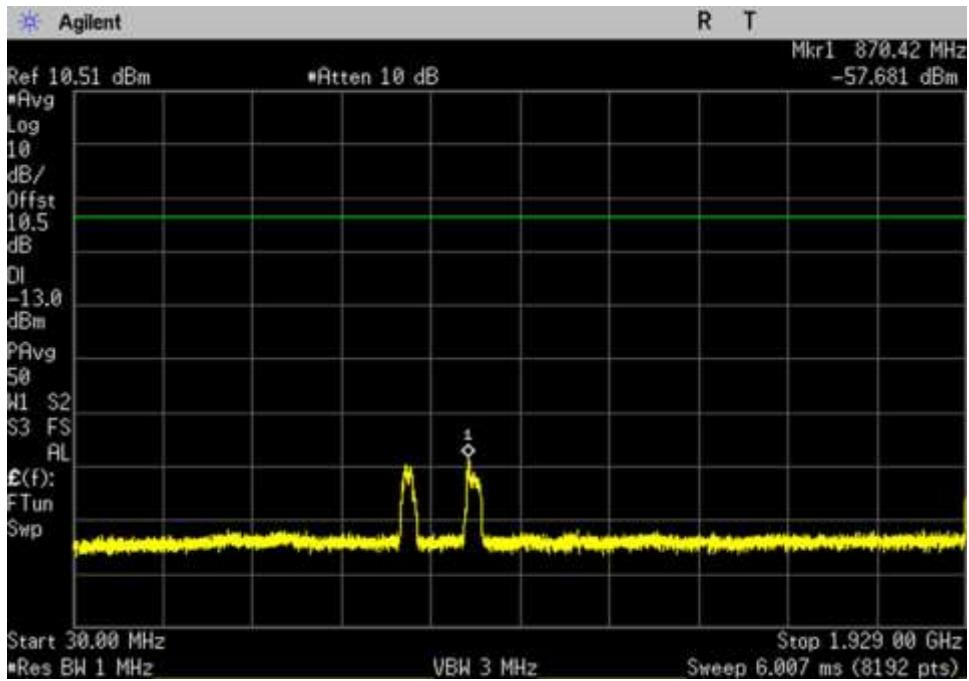


DL_1930-1995_ 30- 1929MHz

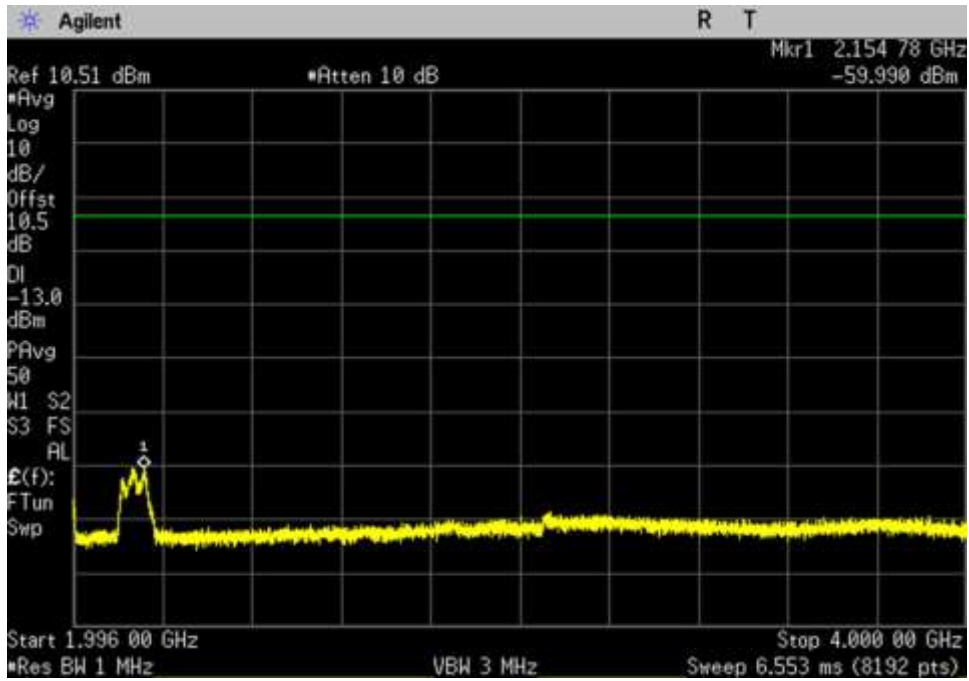


DL_1930-1995_ 1996- 4000MHz

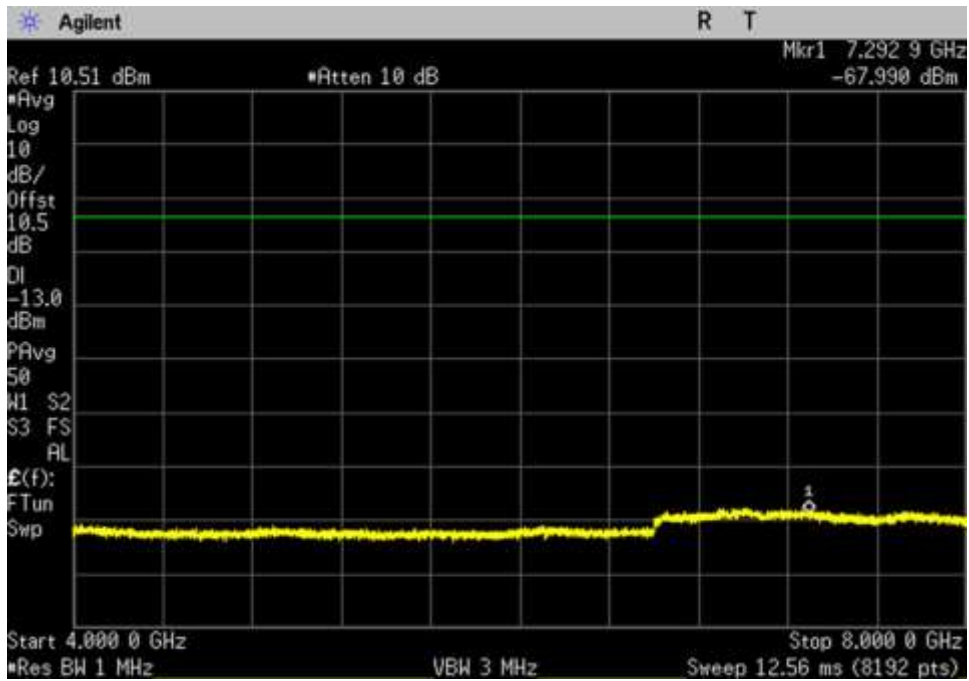


DL_1930-1995_ 4000- 8000MHz

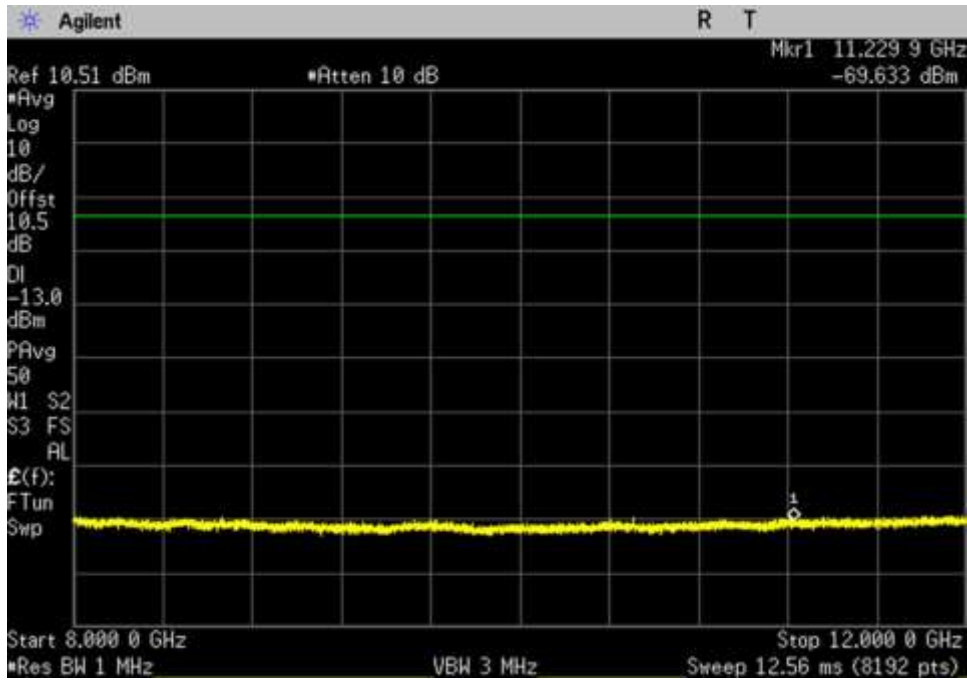


DL_1930-1995_ 8000- 12000MHz

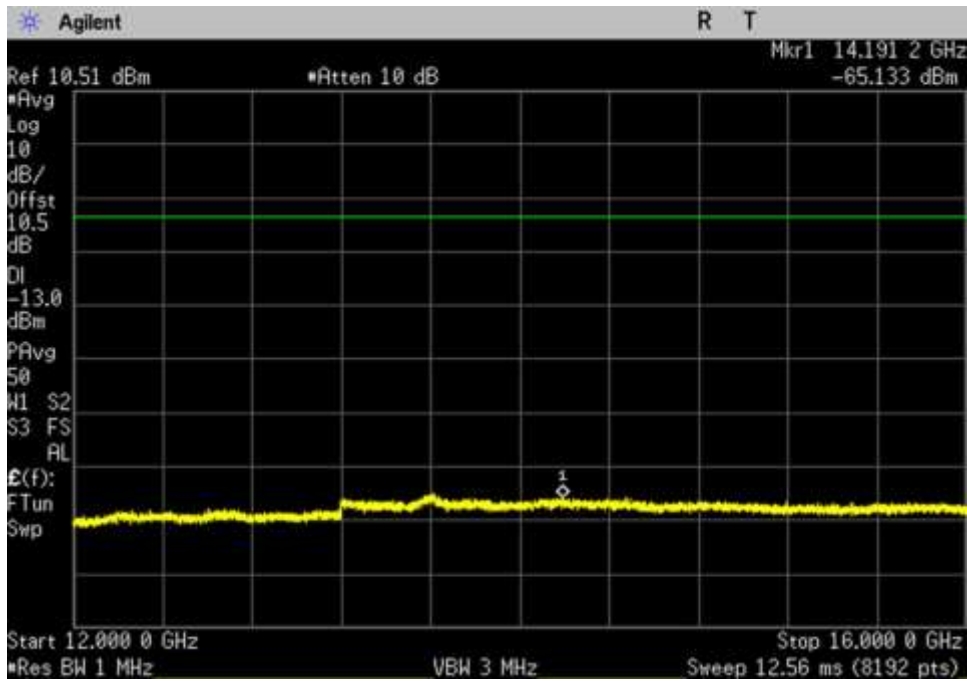


DL_1930-1995_ 12000- 16000MHz

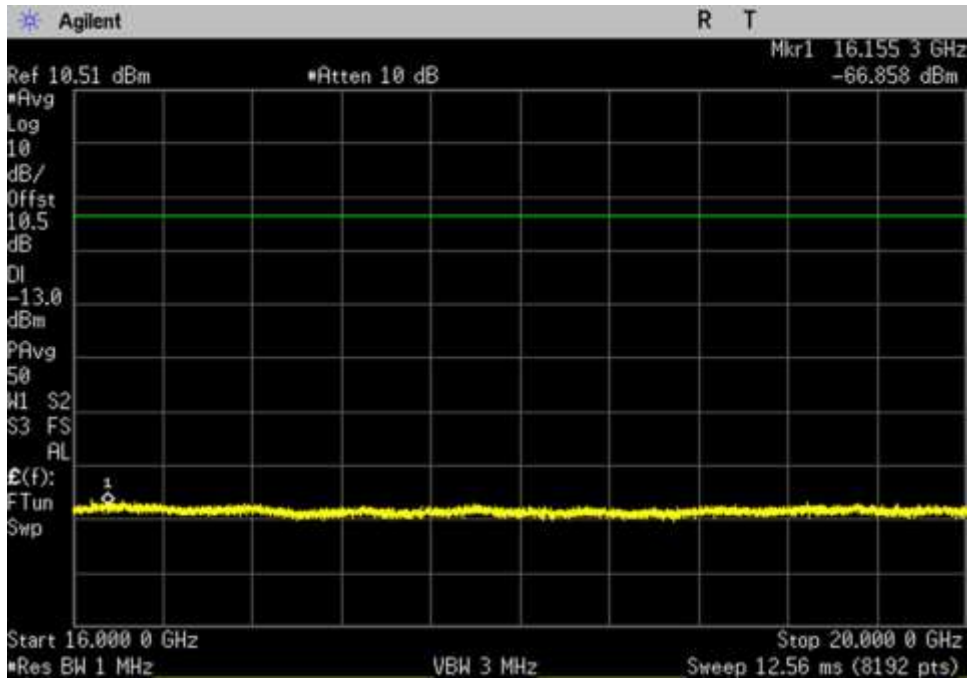


DL_1930-1995_ 16000- 20000MHz

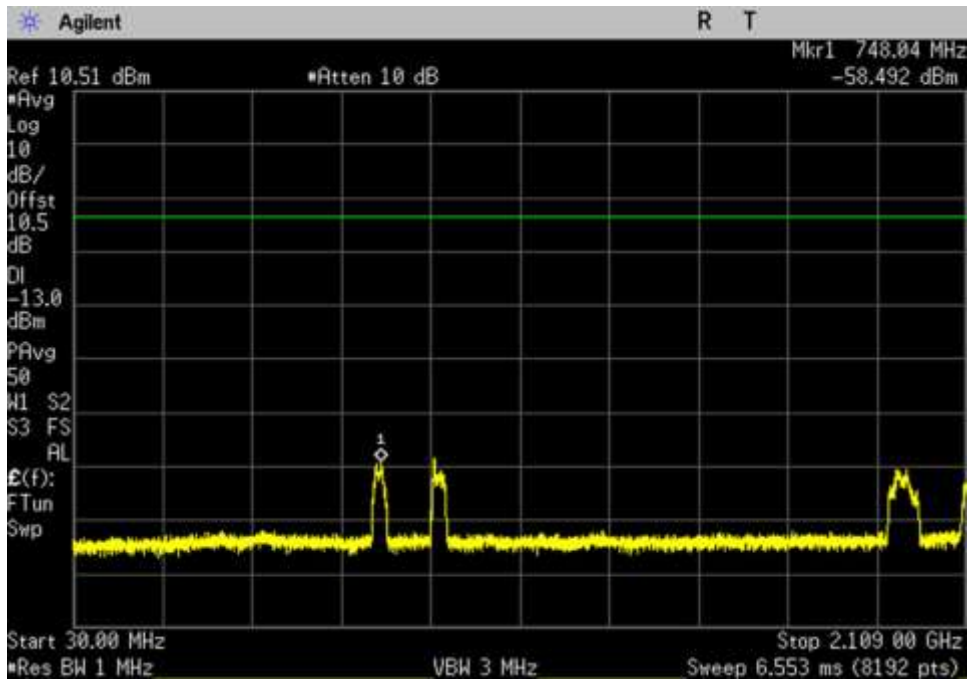


DL_2110-2155_ 30- 2109MHz

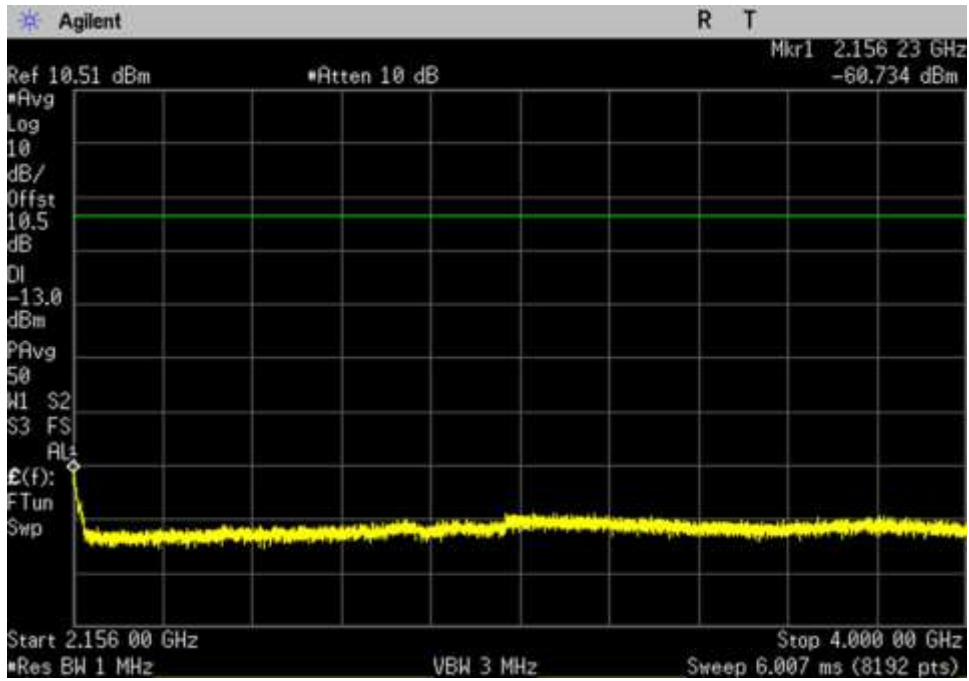


DL_2110-2155_ 2156- 4000MHz

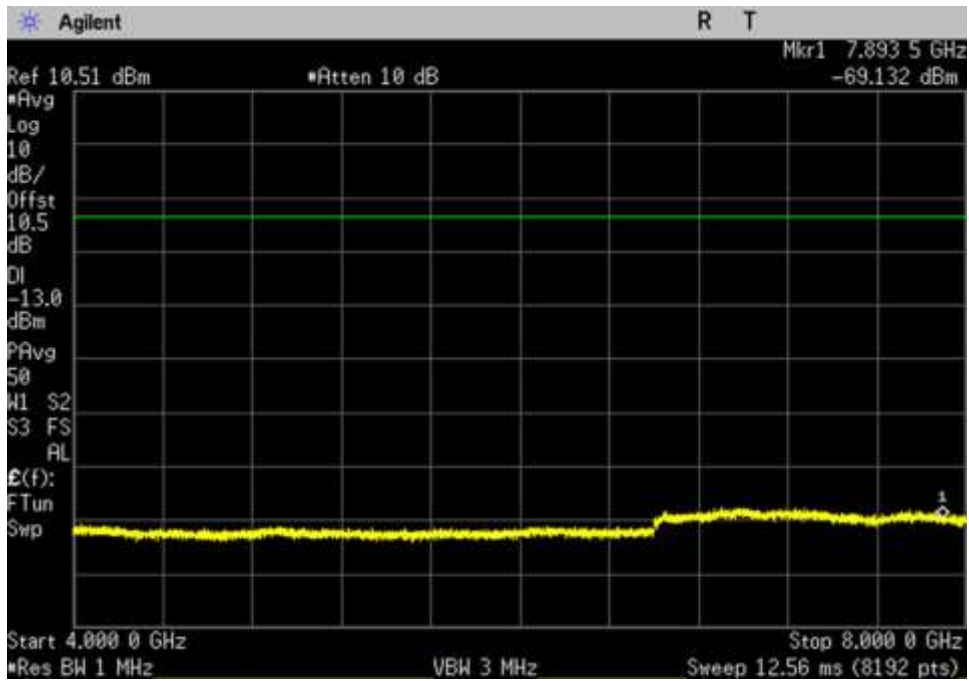


DL_2110-2155_ 4000- 8000MHz

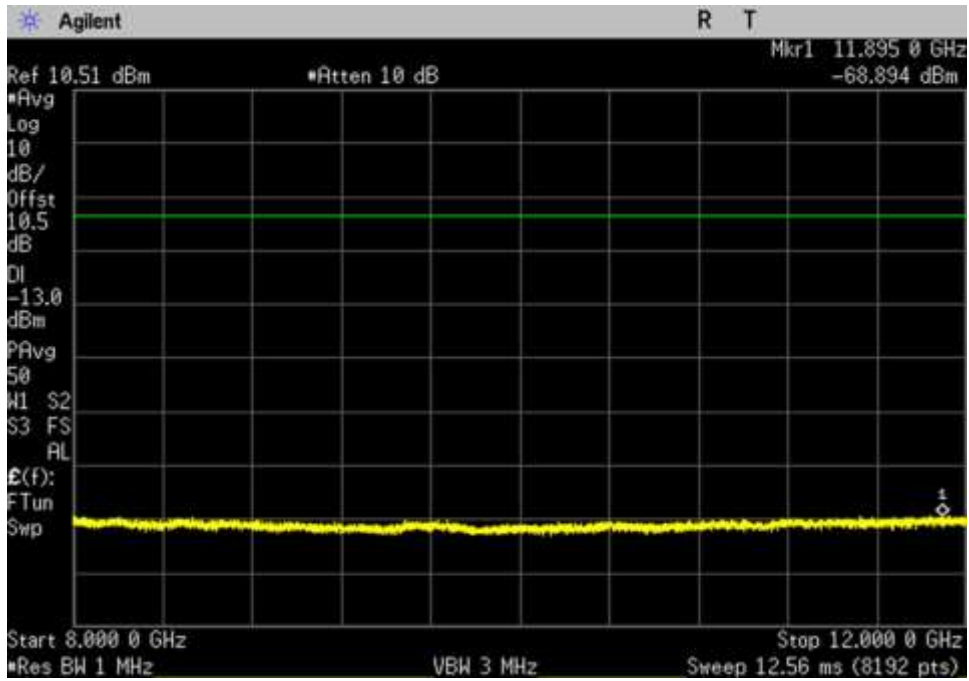


DL_2110-2155_ 8000- 12000MHz

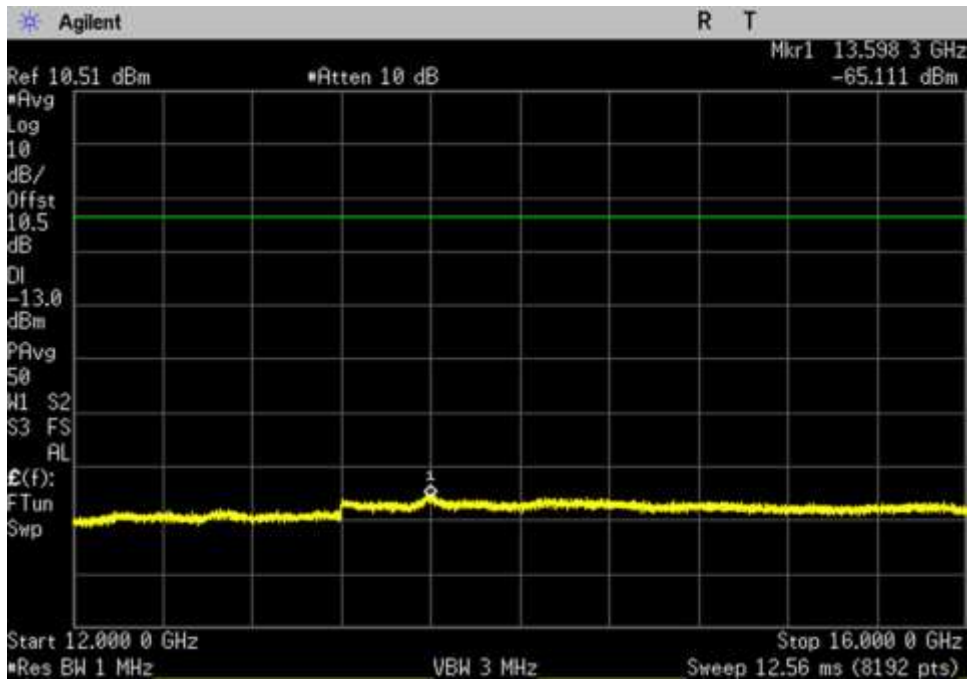

DL_2110-2155_ 12000- 16000MHz

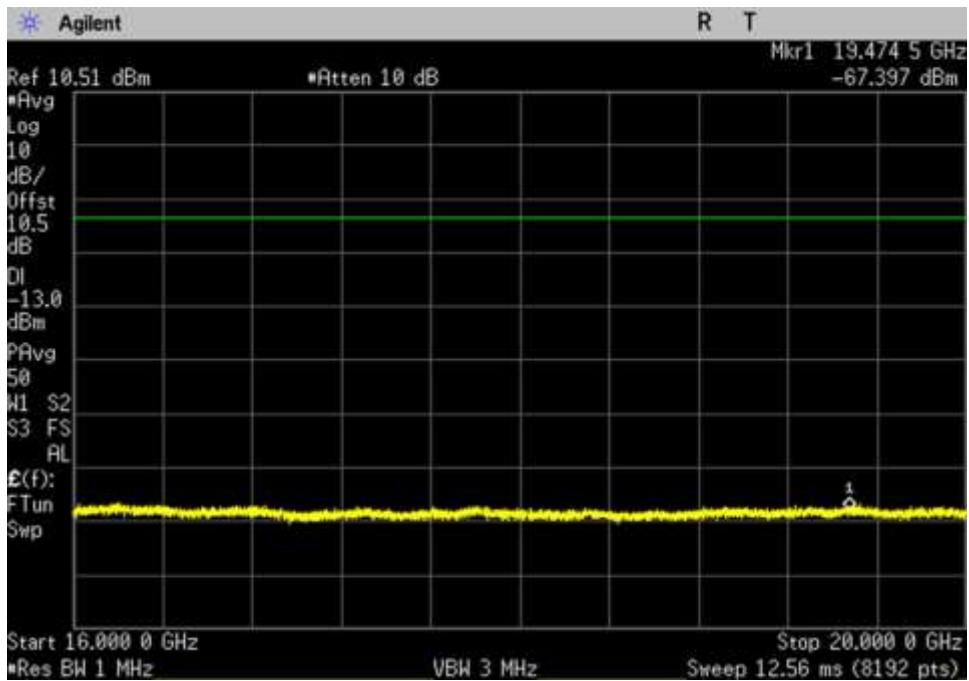

DL_2110-2155_ 16000- 20000MHz

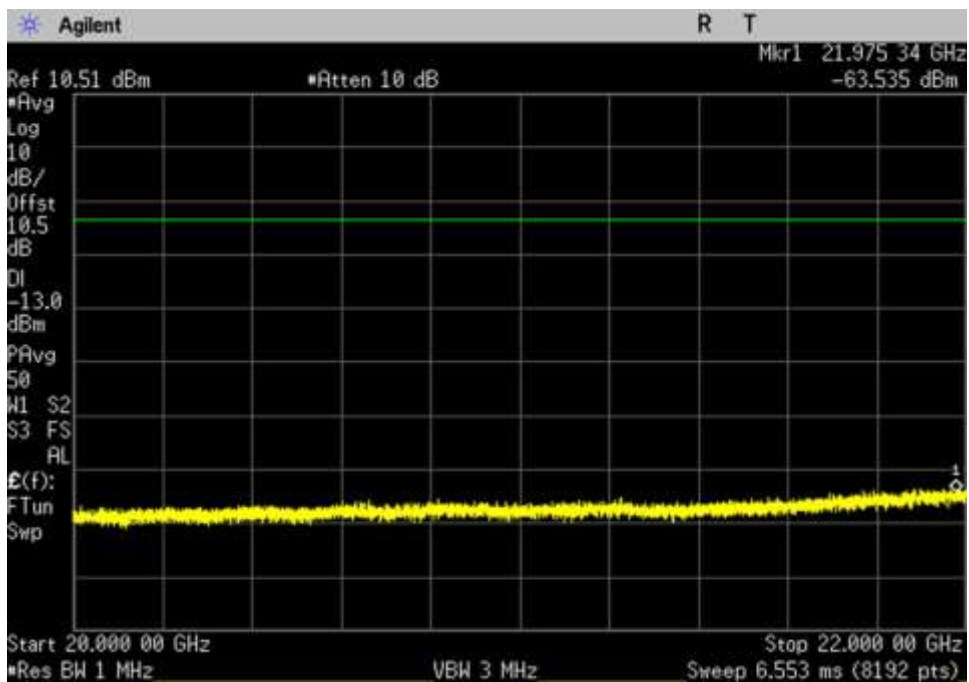

DL_2110-2155_ 20000- 22000MHz

7.7 Noise limit

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.7 Noise Limit (Maximum Transmitter Noise Power Level / Variable UL Noise Timing)**
 Work Order #: **101623** Date: 08/22/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu Song Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test environment conditions: Temperature: 21.6°C Relative Humidity: 47% Pressure: 101.5kPa

Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020
C00082	Directional Coupler	MECA Electronics, Inc.	722-10-1.500V	9/18/2017	9/18/2019
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020


Summary of Results

7.7.1 Maximum transmitter noise power level

- 7.7.1 a-g: Maximum transmitter noise with 50-ohm shielded load

Maximum Noise Power			
Frequency MHz	Measured dBm./MHz	Limit dBm/MHz	Margin
UL 1710-1755	-60.4	-59.0	-1.4
UL 1850-1915	-60.3	-59.0	-1.3
UL 824-849	-61.0	-59.0	-2.0
UL 698-716	-60.8	-59.0	-1.8
UL 776-787	-61.1	-59.0	-2.1
DL 2110-2155	-61.0	-59.0	-2.0
DL 1930-1995	-60.5	-59.0	-1.5
DL 869-894	-59.1	-59.0	-0.1
DL 728-746	-60.1	-59.0	-1.1
DL 746-757	-60.2	-59.0	-1.2


- 7.7.1 h-n: Maximum transmitter noise when varying the DL signal generator output level with a 4.1MHz AWGN signal

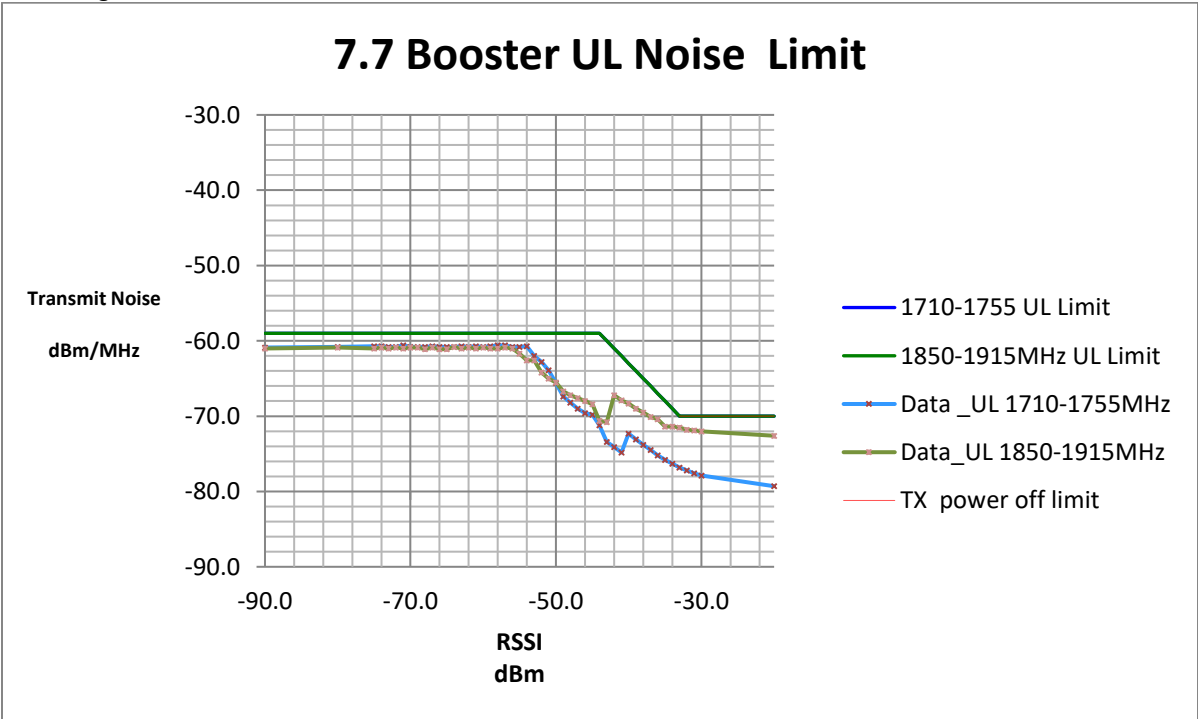

1710.0 - 1755.0 MHz					
Limit					Margin
RSSI (dBm)	Measured Noise (dBm/MHz)	RSSI Dependent	Mobile Booster Limit	TX off	
-75.0	-60.7	-	-59.0	-	-1.7
-71.0	-60.6	-	-59.0	-	-1.6
-34.0	-76.3	-69.0	-	-	-7.3
-33.0	-76.8	-70.0	-	-	-6.8
-32.0	-77.2	-	-	-70	-7.2
-31.0	-77.6	-	-	-70	-7.6

1850.0 - 1915.0 MHz					
Limit					Margin
RSSI (dBm)	Measured Noise (dBm/MHz)	RSSI Dependent	Mobile Booster Limit	TX off	
-90.0	-61.0	-	-59.0	-	-2.0
-80.0	-60.9	-	-59.0	-	-1.9
-34.0	-71.4	-69.0	-59.0	-	-2.4
-33.0	-71.5	-70.0	-59.0	-	-1.5
-32.0	-71.8	-	-	-70	-1.8
-31.0	-71.9	-	-	-70	-1.9

7.7 Booster UL Noise Limit

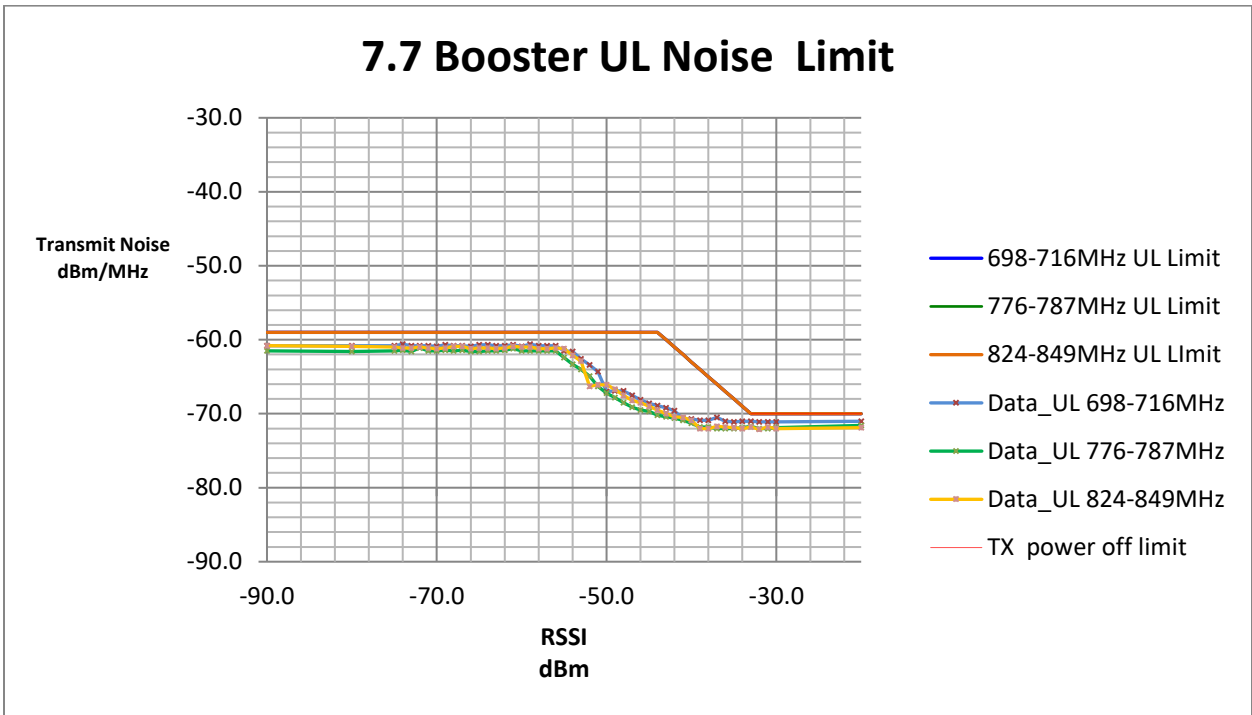

824.0 - 849.0 MHz					
Limit					Margin
RSSI (dBm)	Measured Noise (dBm/MHz)	RSSI Dependent	Mobile Booster Limit	TX off	
-90.0	-60.8	-	-59.0	-	-1.8
-80.0	-60.9	-	-59.0	-	-1.9
-34.0	-72.0	-69.0	-	-	-3.0
-33.0	-71.8	-70.0	-	-	-1.8
-31.0	-71.8	-	-	-70	-1.8
-20.0	-71.9	-	-	-70	-1.9


698.0 - 716.0 MHz					
RSSI (dBm)	Measured Noise (dBm/MHz)	Limit			Margin
		RSSI Dependent	Mobile Booster Limit	TX off	
-74.0	-60.6	-	-59.0	-	-1.6
-59.0	-60.6	-	-59.0	-	-1.6
-34.0	-71.0	-69.0	-	-	-2.0
-33.0	-71.0	-70.0	-	-	-1.0
-32.0	-71.1	-	-	-70	-1.1
-31.0	-71.1	-	-	-70	-1.1

776.0 - 787.0 MHz					
RSSI (dBm)	Measured Noise (dBm/MHz)	Limit			Margin
		RSSI Dependent	Mobile Booster Limit	TX off	
-74.0	-61.4	-	-59.0	-	-2.4
-72.0	-61.1	-	-59.0	-	-2.1
-34.0	-71.9	-69.0	-	-	-2.9
-33.0	-71.7	-70.0	-	-	-1.7
-30.0	-71.9	-	-	-70	-1.9
-20.0	-71.6	-	-	-70	-1.6


7.7.2 Variable uplink noise timing

Uplink Noise timing		
Frequency MHz	Measured Sec	Limit sec
UL1710-1755	0.85	1.00
UL1850-1915	0.75	1.00
UL824-849	0.75	1.00
UL 698-716	0.85	1.00
UL776-787	0.87	1.00


7.7.1 Maximum Transmitter Noise Power Level
Plots

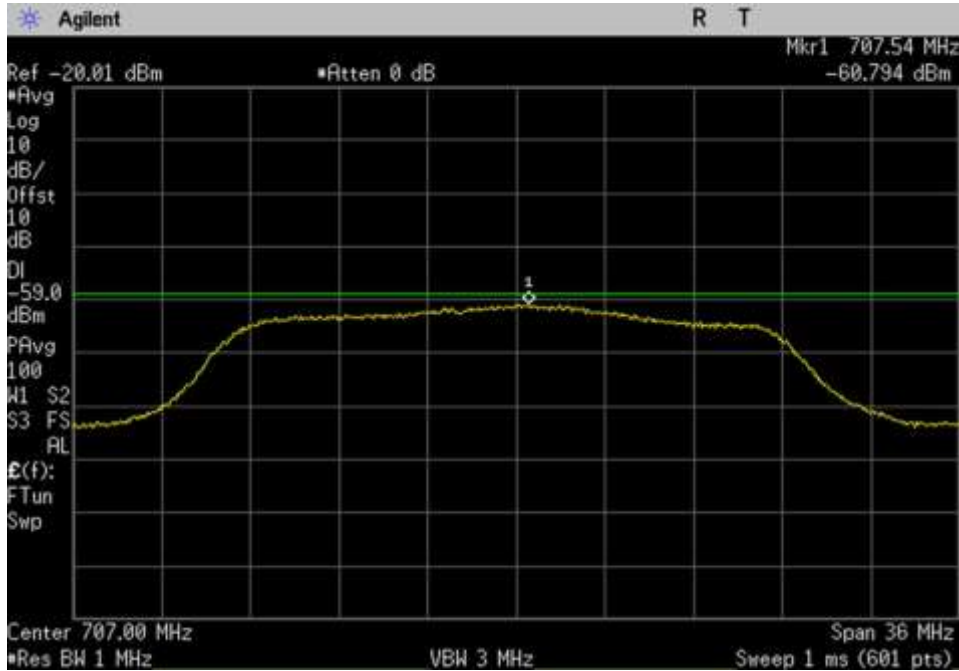


UL_698-716_707MHz

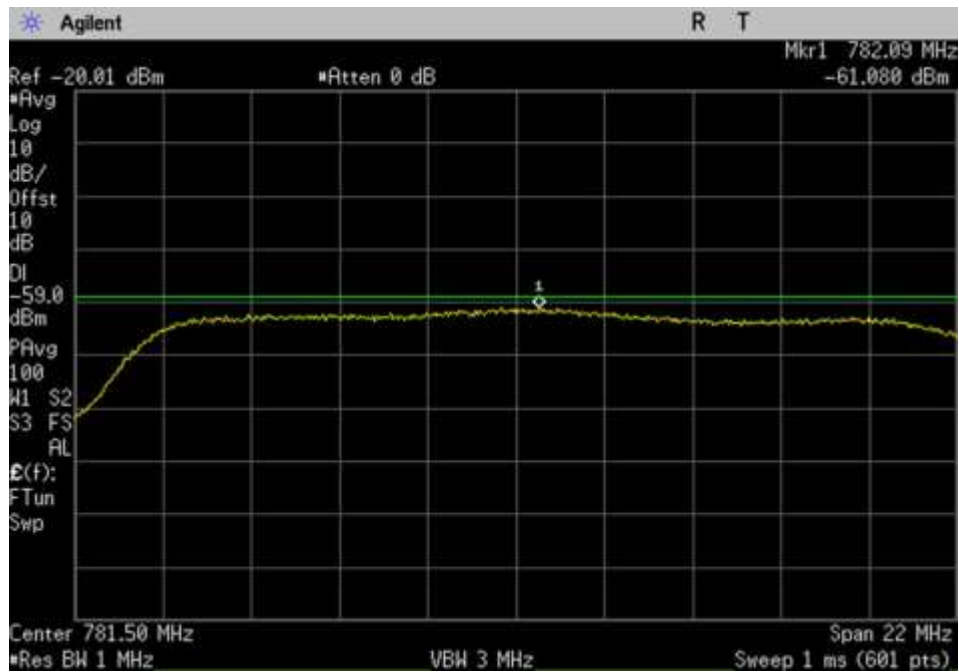


UL_776-787_781.5MHz

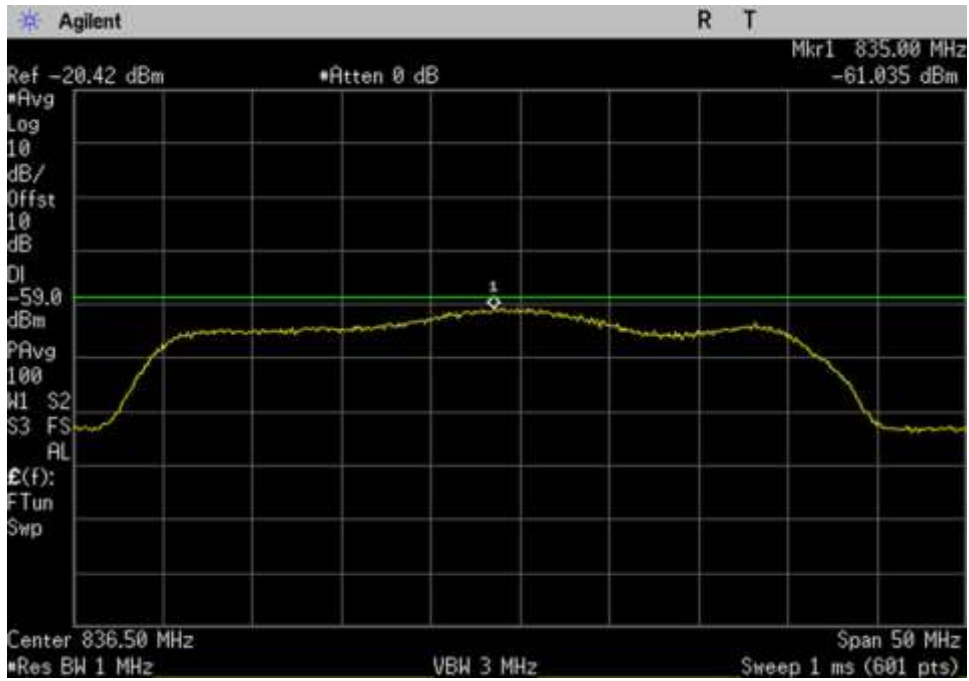


UL_824-849_ 836.5MHz

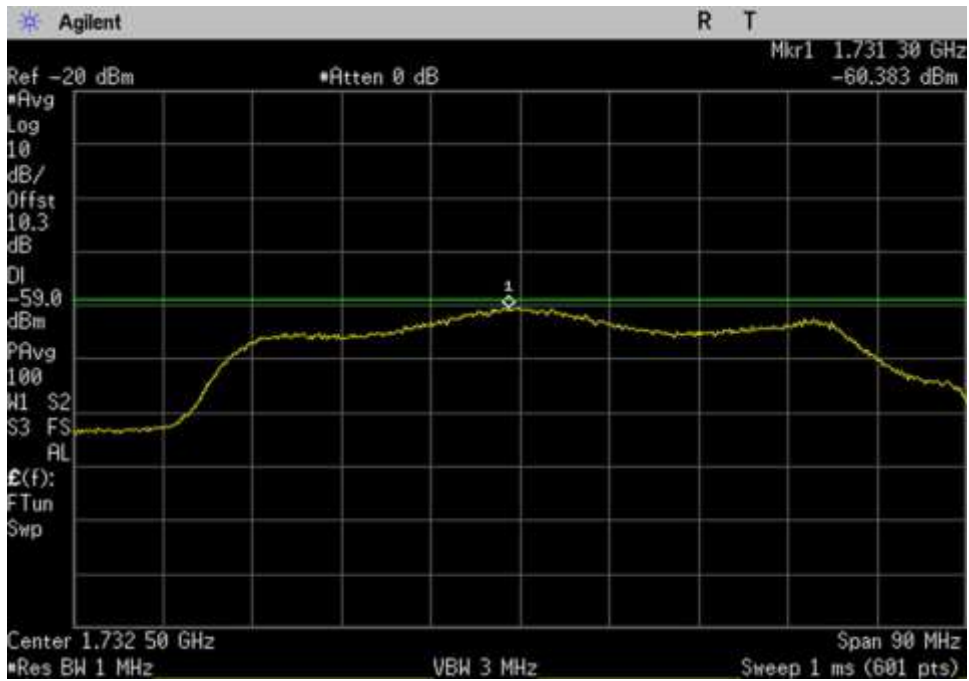


UL_1710-1755_ 1732.5MHz

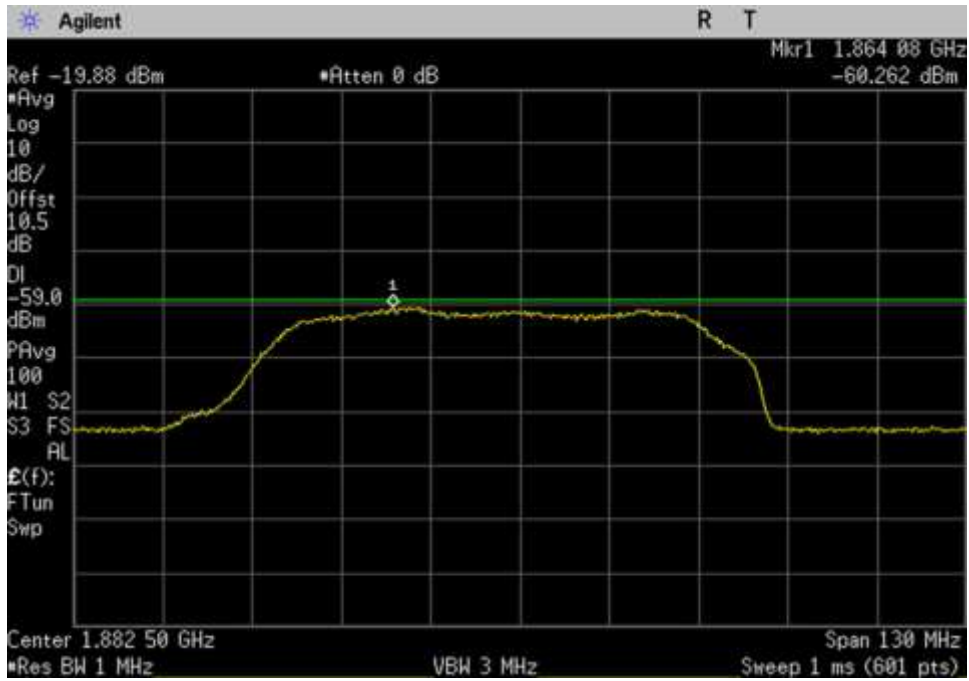


UL_1850-1915_ 1882.5MHz

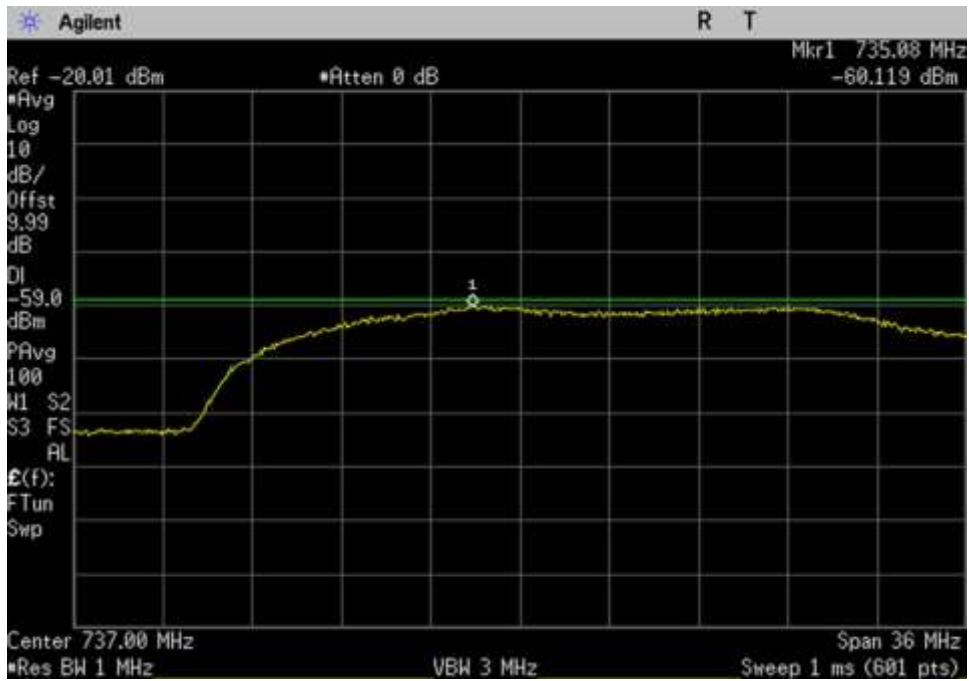


DL_728-746_ 737MHz

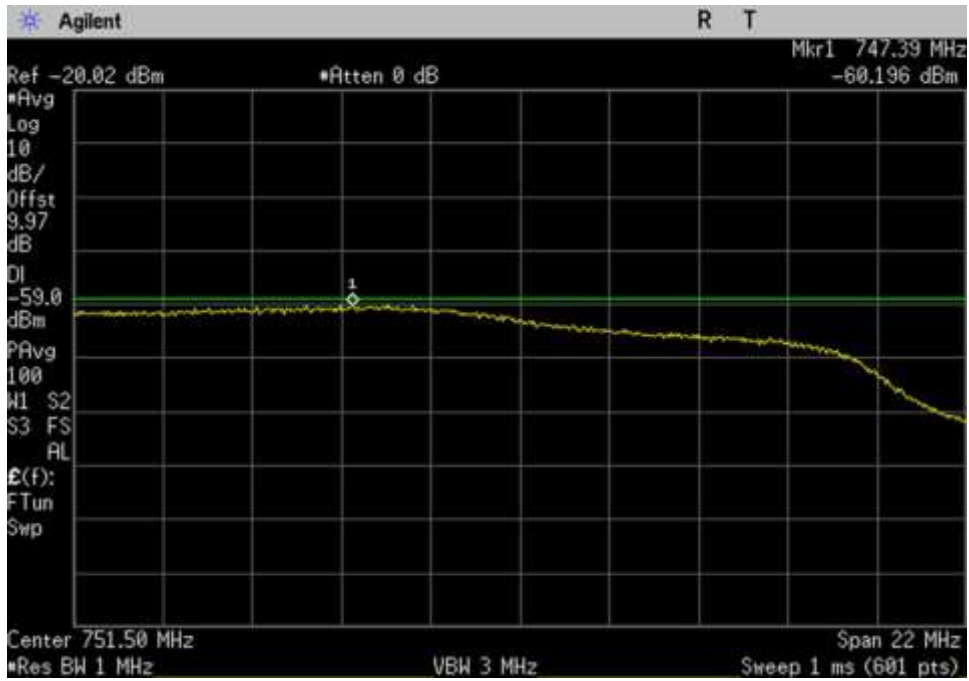


DL_746-757_ 751.5MHz

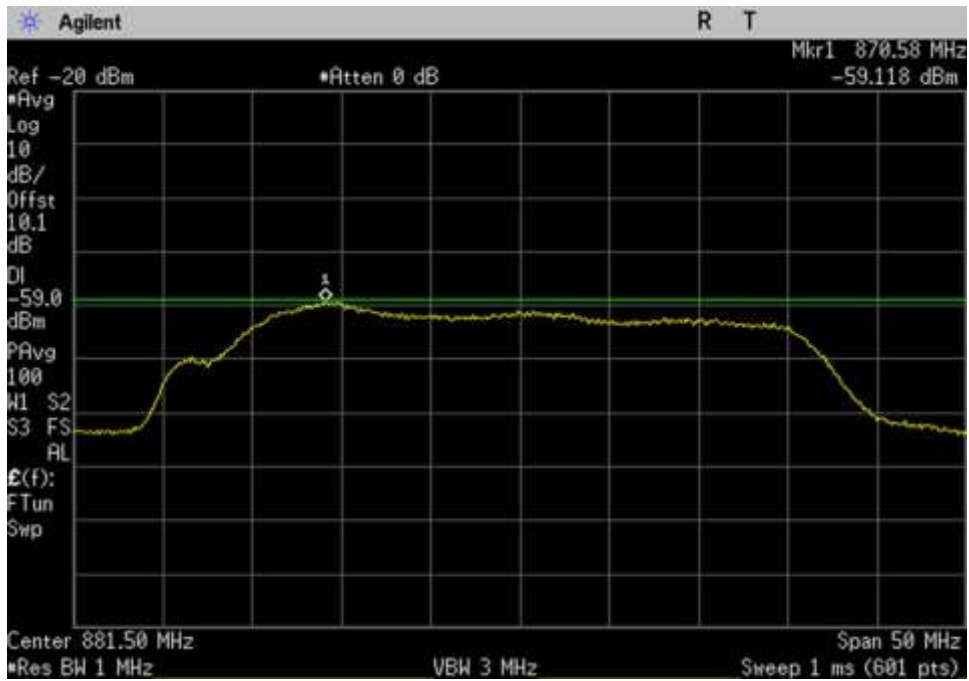

DL_869-894_ 881.5MHz

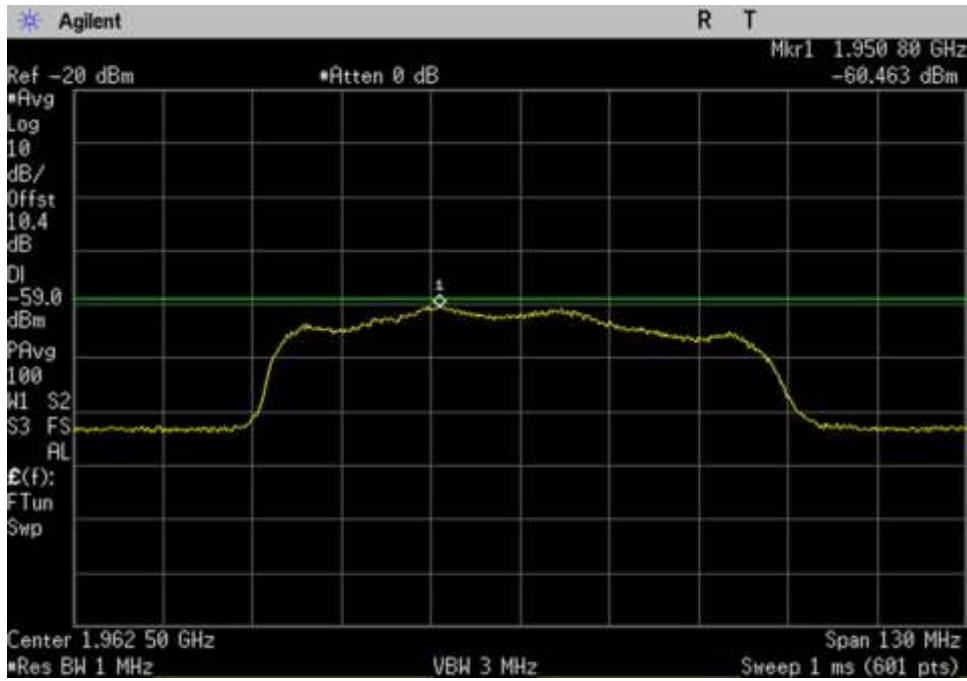


DL_1930-1995_ 1962.5MHz

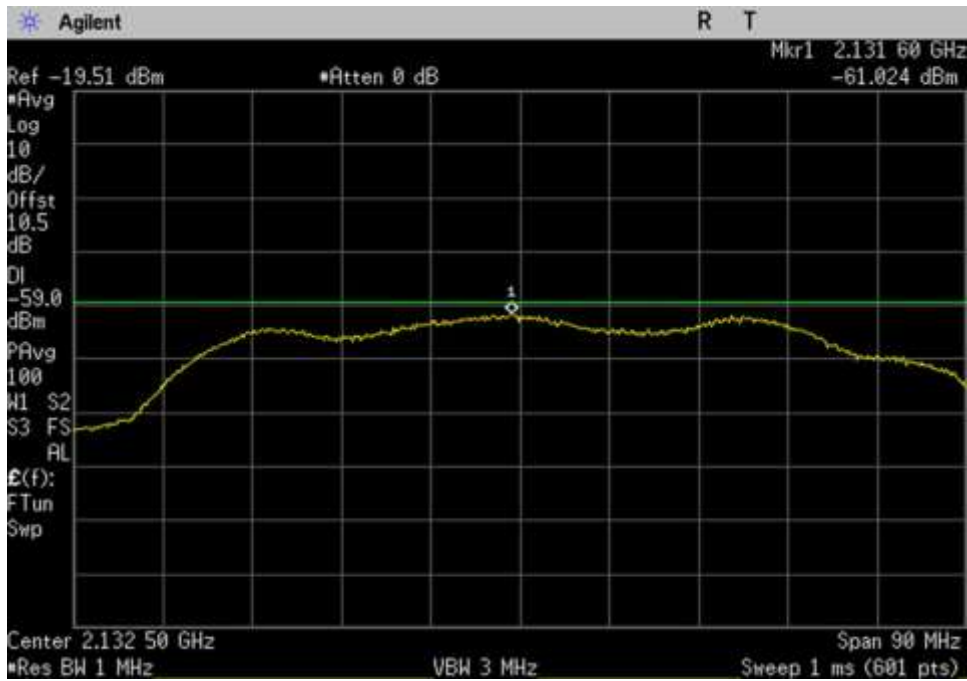


DL_2110-2155_ 2132.5MHz

7.7.2 Variable UL Noise Timing


Plots

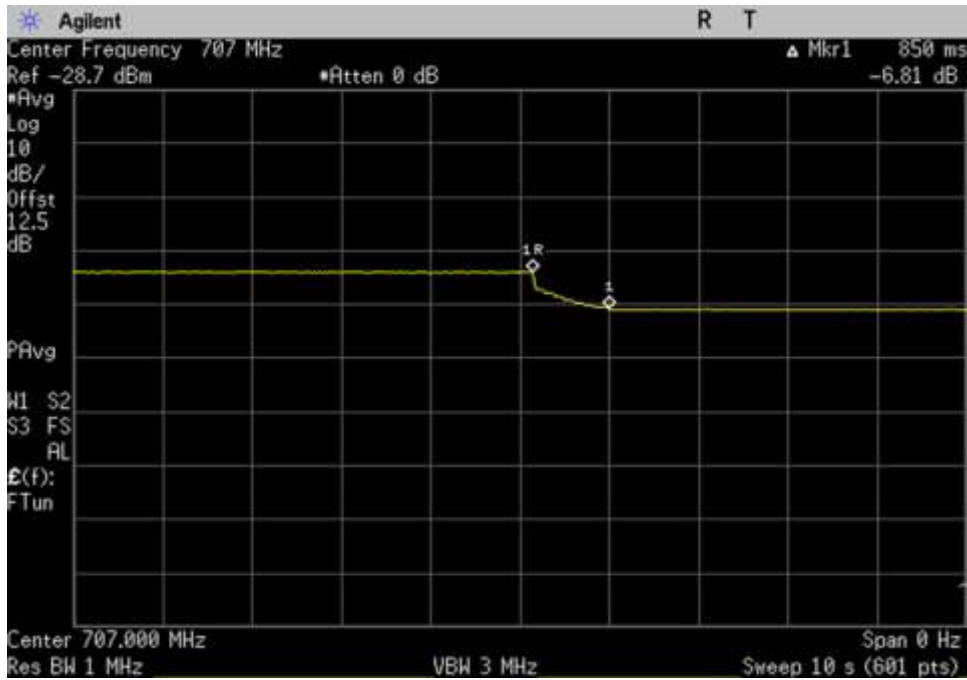


UL_698-716_707MHz_Var

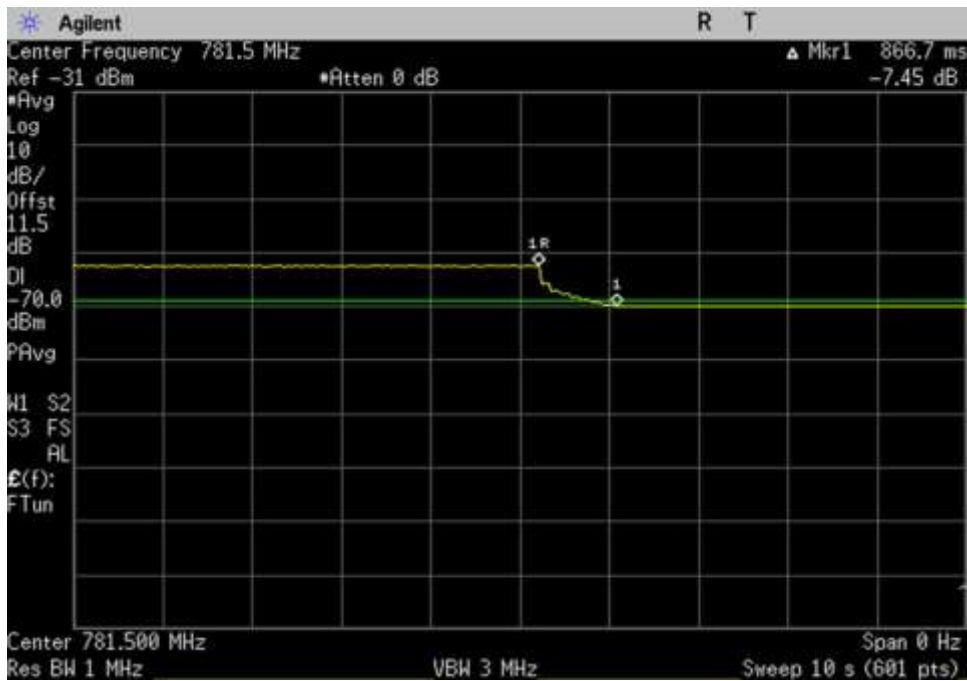


UL_776-787_781.5MHz_Var

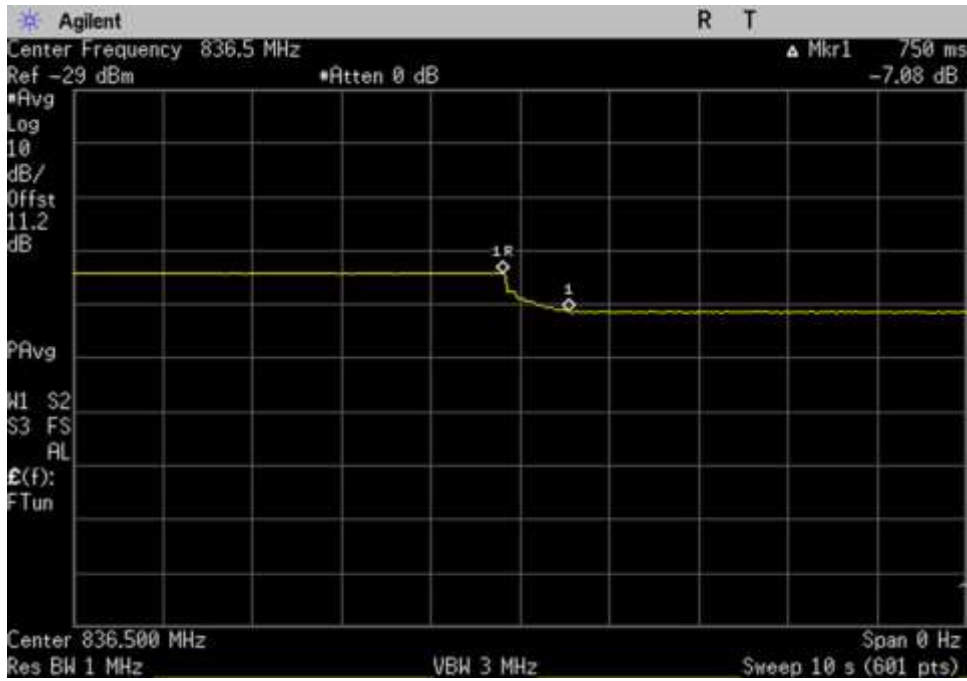

UL_824-849_ 836.5MHz_Var

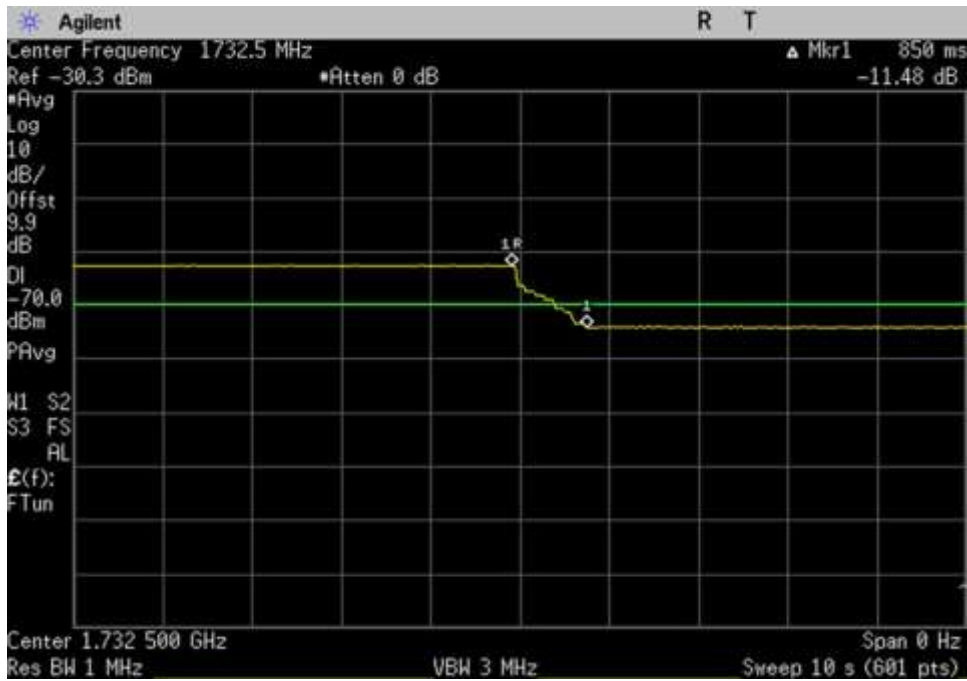

UL_1710-1755_ 1732.5MHz_Var

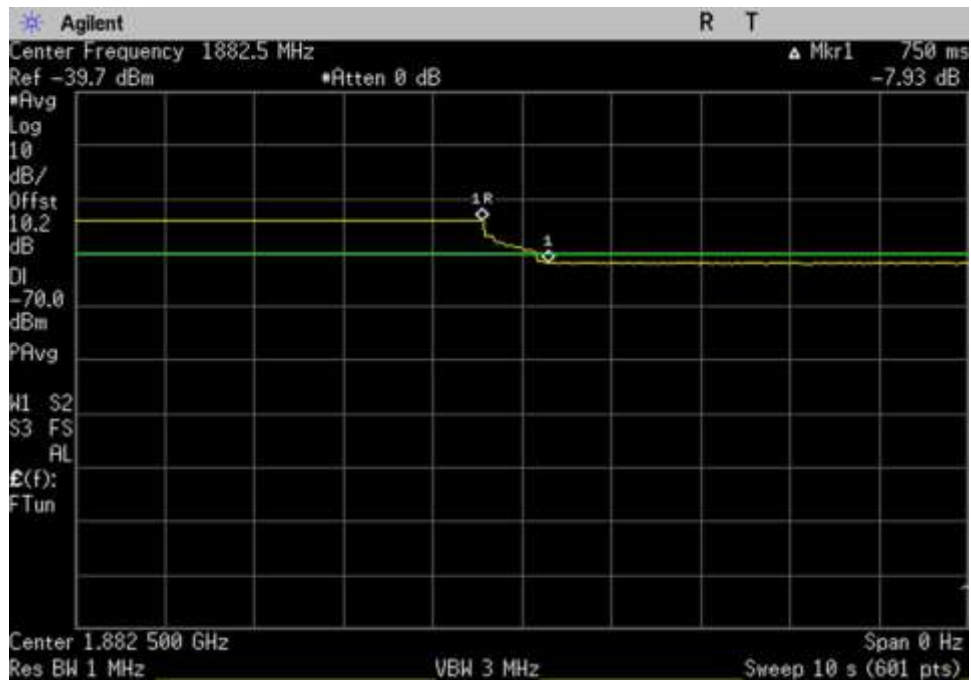

UL_1850-1915_1882.5MHz_Var

7.8 Uplink Inactivity

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.8 Uplink Inactivity**
 Work Order #: **101623** Date: 08/22/18
 Test Type: **Conducted Emissions**
 Tested By: **Hieu Song Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test environment conditions:
 Temperature: 21.6 °C
 Relative Humidity: 47%
 Pressure: 101.5kPa

Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020
P05411	Attenuator	Weinschel	54A-10	1/19/2018	1/19/2020

Summary of Results


Pass: As demonstrated, when the booster is not serving an active device connection after 5 minutes the uplink noise power does not exceed -70dBm/MHz.

Uplink Inactivity		
Frequency MHz	Measured Min	Limit Min
UL1710-1755	4.0	5.0
UL1850-1915	4.0	5.0
UL824-849	4.0	5.0
UL 698-716	4.0	5.0
UL776-787	4.0	5.0


Plots




UL_698-716_707MHz

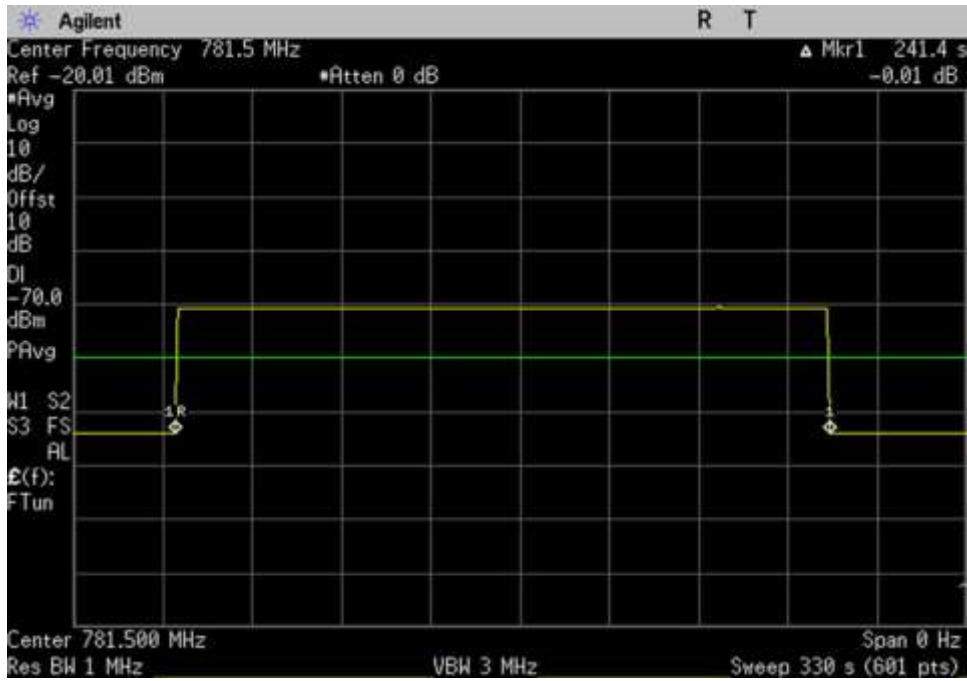


UL_776-787_ 781.5MHz

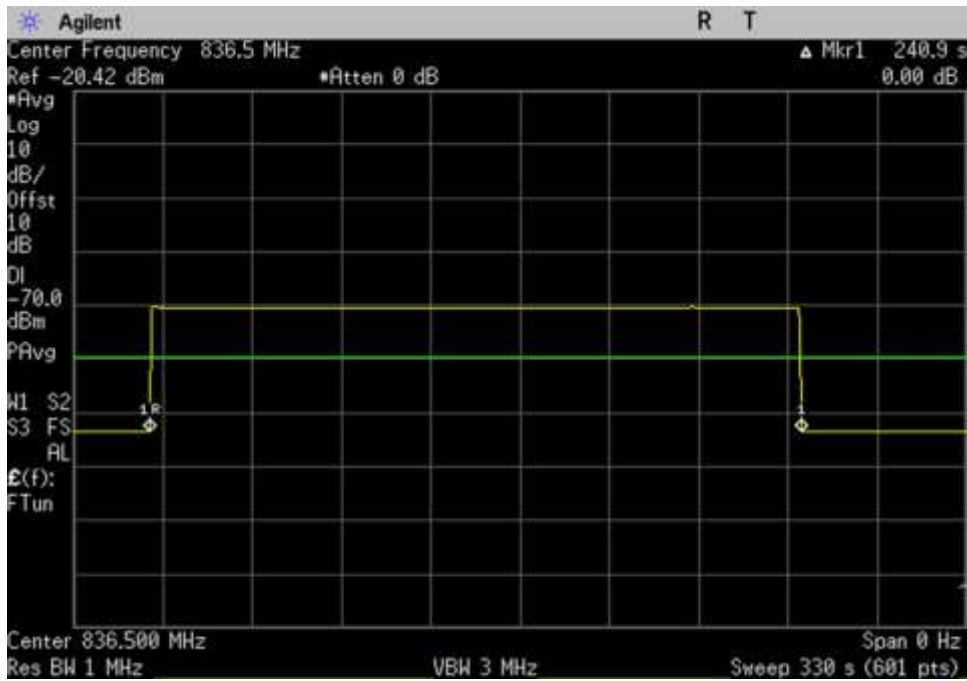

UL_824-849_ 836.5MHz

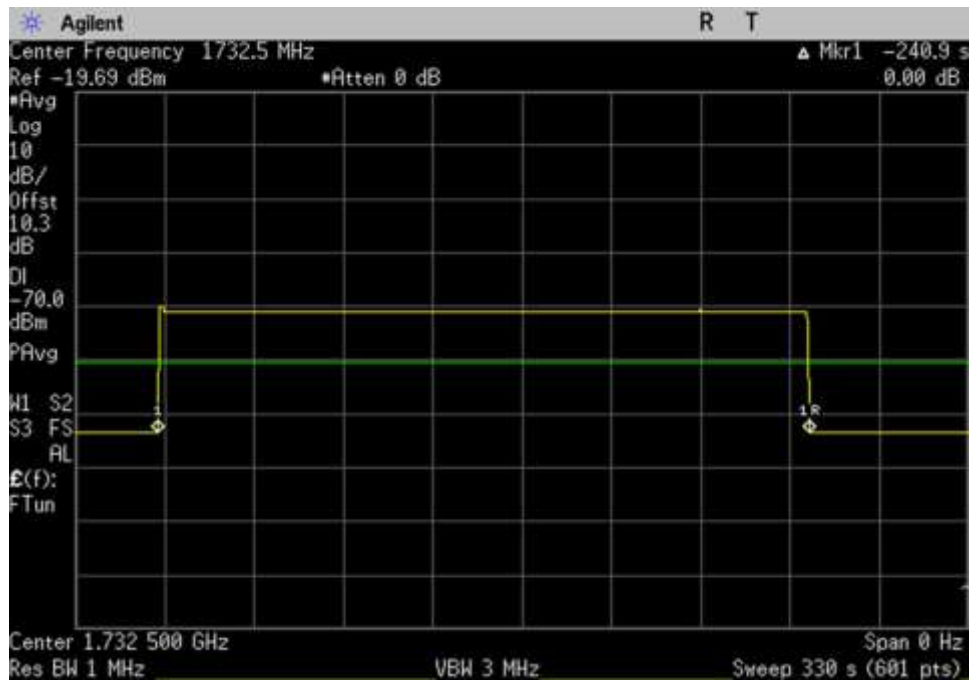

UL_1710-1755_ 1732.5MHz

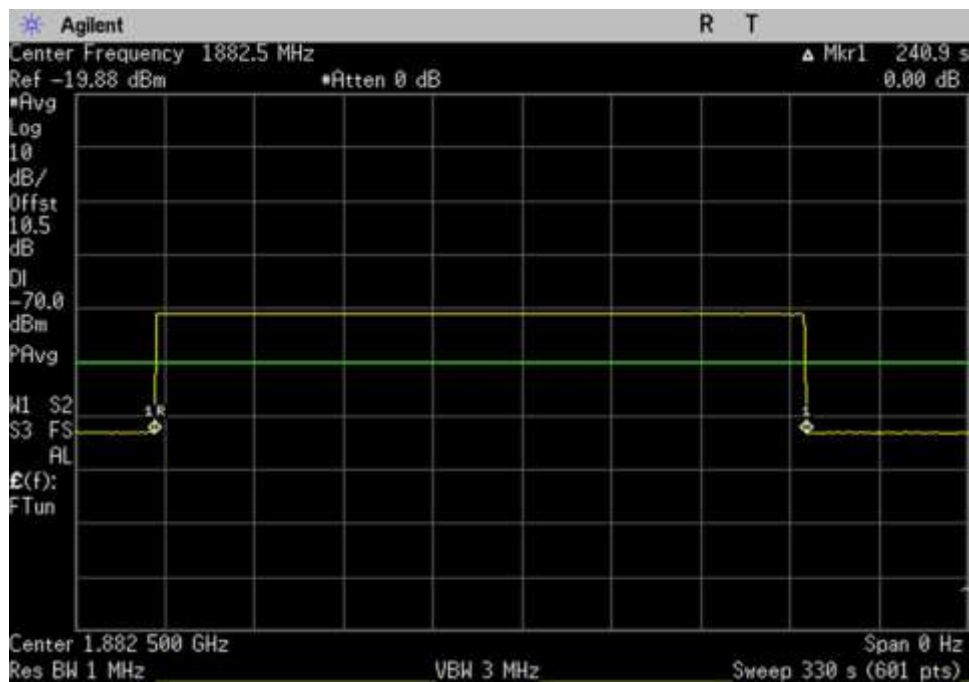

UL_1850-1915_ 1882.5MHz

7.9 Booster Gain Limit

Test Conditions / Setup

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: Cellphone-Mate, Inc.
 Specification: **7.9 Variable Booster gain(Max Gain / Variable Uplink Gain Timing)**
 Work Order #: **101623**
 Test Type: **Conducted Emissions** Date 08/23/18
 Tested By: **Hieu Song Nguyenpham**
 Software: EMITest 5.03.11

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Test environment conditions: Temperature: 21.9°C Relative Humidity: 46.9% Pressure: 100.8kPa	
Frequency (MHz)	MSCL (dB)
PCS(1850-1915)	37.8
Cellular(824-849)	32.5
LTE(698-716)	30.6
LTE(776-787)	31.5
AWS(1710-1755)	37


Test Equipment:

Asset #	Description	Manufacturer	Model	Calibration Date	Cal Due Date
P07192	Cable	Astro	32022-29094K-29094K-48TC	10/9/2017	10/9/2019
P07191	Cable	Astro	32022-29094K-29094K-48TC	10/30/2017	10/30/2019
03418	Signal Generator	Agilent	E4438C	6/19/2017	6/19/2019
03470	Spectrum Analyzer	Agilent	E4440A	1/3/2018	1/3/2020
P06904	Cable	Astrolab	32022-29094K-29094K-36TC	1/4/2018	1/4/2020
C00082	Directional Coupler	MECA Electronics, Inc.	722-10-1.500V	9/18/2017	9/18/2019
C00032	Arbitrary Waveform Generator	Agilent	E4433B	3/19/2018	3/19/2020

Summary of Results


Pass: As demonstrated, computed gains are within the gain limit. All maximum variable uplink gain timings are within 1 second limit.

7.9.1 Maximum gain

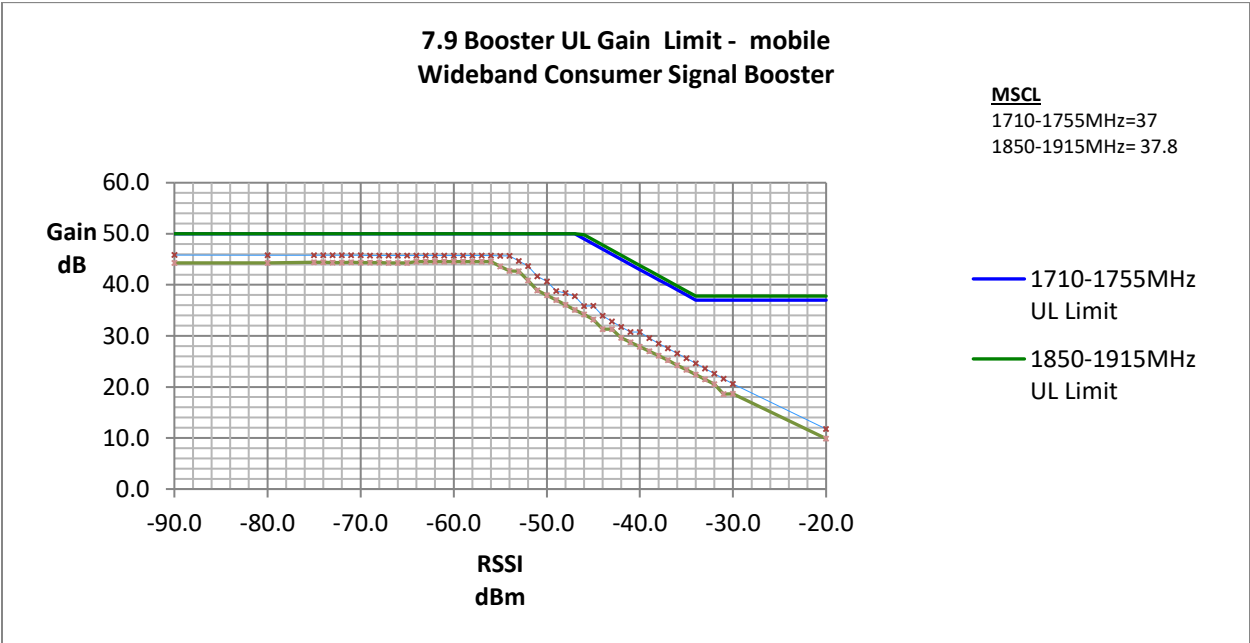

1710.0 - 1755.0 MHz							
RSSI (dBm)	Input (dBm)	Measured Output (dBm)	Measured Gain (dBm)	Limit			Margin
				RSSI Dependent	Mobile Booster Limit	TX off	
-90.0	-29	16.83	45.8	-	50.0	-	-4.2
-80.0	-29	16.814	45.8	-	50.0	-	-4.2
-45.0	-29	6.9	35.9	48.0	-	-	-12.1
-40.0	-29	1.8	30.8	43.0	-	-	-12.2
-34.0	-29	-4.4	24.6	-	-	37	-12.4
-33.0	-29	-5.4	23.6	-	-	37	-13.4

1850.0 - 1915.0 MHz							
RSSI (dBm)	Input (dBm)	Measured Output (dBm)	Measured Gain (dBm)	Limit			Margin
				RSSI Dependent	Mobile Booster Limit	TX off	
-75.0	-30.0	14.4	44.4	-	50.0	-	-5.6
-74.0	-30.0	14.4	44.4	-	50.0	-	-5.6
-36.0	-30.0	-5.7	24.3	39.8	-	-	-15.5
-35.0	-30.0	-6.7	23.3	38.8	-	-	-15.5
-34.0	-30.0	-7.6	22.4	-	-	37.8	-15.4
-33.0	-30.0	-8.5	21.5	-	-	37.8	-16.3

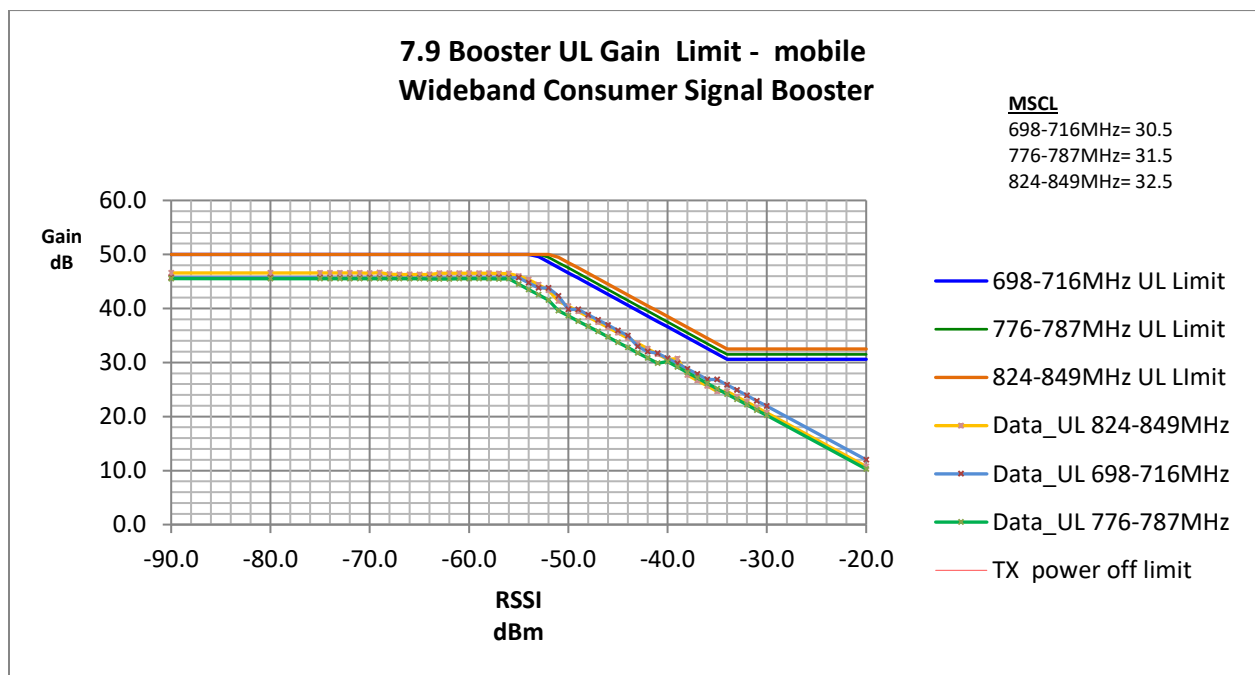

824.0 - 849.0 MHz							
RSSI (dBm)	Input (dBm)	Measured Output (dBm)	Measured Gain (dBm)	Limit			Margin
				RSSI Dependent	Mobile Booster Limit	TX off	
-90.0	-26.5	20.1	46.6	-	50.0	-	-3.4
-80.0	-26.5	20.1	46.6	-	50.0	-	-3.4
-50.0	-26.5	13.9	40.4	48.5	-	-	-8.1
-49.0	-26.5	12.9	39.4	47.5	-	-	-8.1
-34.0	-26.5	-1.8	24.7	-	-	32.5	-7.8
-33.0	-26.5	-2.8	23.7	-	-	32.5	-8.8

698.0 - 716.0MHz							
RSSI (dBm)	Input (dBm)	Measured Output (dBm)	Measured Gain (dBm)	Limit			Margin
				RSSI Dependent	Mobile Booster Limit	TX off	
-90.0	-24.5	21.2	45.7	-	50.0	-	-4.3
-80.0	-24.5	21.2	45.7	-	50.0	-	-4.3
-36.0	-24.5	2.4	26.9	32.6	-	-	-5.7
-35.0	-24.5	2.4	26.9	31.6	-	-	-4.7
-34.0	-24.5	1.4	25.9	-	-	30.6	-4.7
-33.0	-24.5	0.4	24.9	-	-	30.6	-5.7

776.0 - 787.0 MHz							
RSSI (dBm)	Input (dBm)	Measured Output (dBm)	Measured Gain (dBm)	Limit			Margin
				RSSI Dependent	Mobile Booster Limit	TX off	
-90.0	-25.0	20.5	45.5	-	50.0	-	-4.5
-80.0	-25.0	20.5	45.5	-	50.0	-	-4.5
-36.0	-25.0	1.2	26.2	33.5	-	-	-7.3
-35.0	-25.0	0.2	25.2	32.5	-	-	-7.3
-34.0	-25.0	-0.9	24.1	-	-	31.5	-7.4
-33.0	-25.0	-1.8	23.2	-	-	31.5	-8.3

7.9.2 Variable uplink gain timing


Uplink Gain Timing		
Frequency (MHz)	Measured (Sec)	Limit (Sec)
UL 1710-1755	0.63	1.00
UL 1850-1915	0.88	1.00
UL 824-849	0.75	1.00
UL 698-716	0.78	1.00
UL 776-787	0.72	1.00

7.9.1 Maximum Gain

For this subsection, see summary of results of 7.9
7.9.1 Maximum gain

7.9.2 Variable uplink Gain Timing

Plots

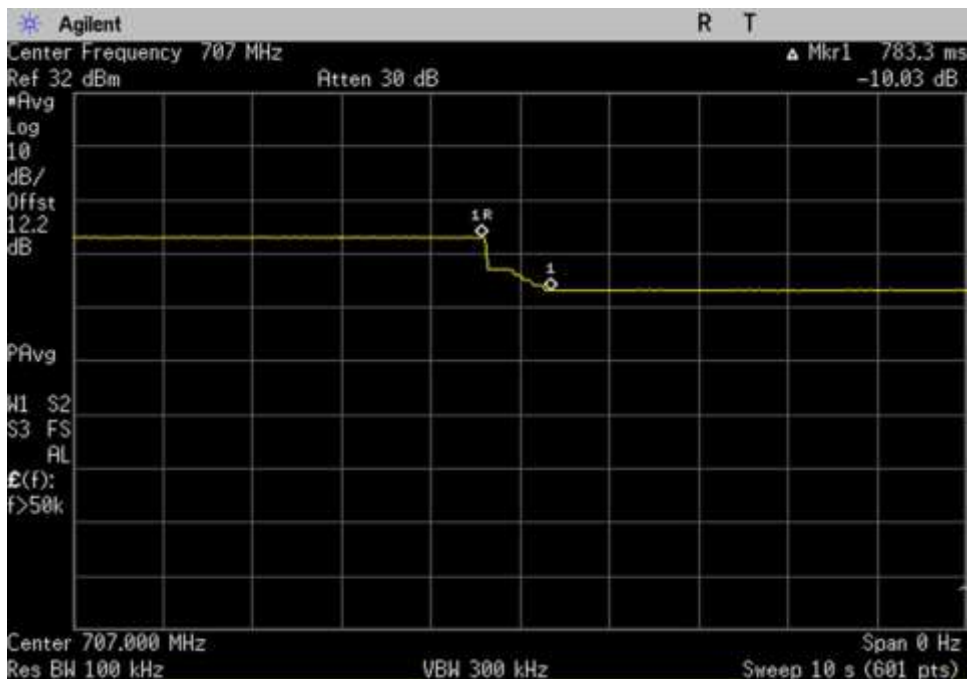

UL_698-716_707MHz