

# Cellphone-Mate, Inc.

TEST REPORT FOR

**Fixed Wideband Consumer Signal Booster  
Model: Force-5**

**Tested To The Following Standards:**

**FCC Part 22H**

**Report No.: 95255-10**

**Date of issue: January 27, 2014**



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

Administrative Information .....	3
Test Report Information .....	3
Report Authorization .....	3
Test Facility Information .....	4
Software Versions .....	4
Site Registration & Accreditation Information .....	4
Summary of Results .....	5
Conditions During Testing .....	5
Equipment Under Test .....	6
Peripheral Devices .....	6
FCC Part 22H .....	7
2.1046 RF Power Output .....	7
2.1047 Modulation Characteristics .....	7
2.1049 Occupied Bandwidth .....	7
2.1051 / 22.917(a) Spurious Emissions at Antenna Terminals .....	16
2.1053 / 22.917(a) Field Strength of Spurious Radiation .....	20
2.1055 Frequency Stability .....	24
Supplemental Information .....	25
Measurement Uncertainty .....	25
Emissions Test Details .....	25

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Cellphone-Mate, Inc.  
48346 Milmont Drive  
Fremont, CA 94538

**REPORT PREPARED BY:**

Morgan Tramontin  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

REPRESENTATIVE: Hongtao Zhan  
Customer Reference Number: CKC20131226

Project Number: 95255

**DATE OF EQUIPMENT RECEIPT:**

January 3, 2014

**DATE(S) OF TESTING:**

January 3-15, 2014

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
*CKC Laboratories, Inc.*

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
110 Olinda Place  
Brea, CA 92823

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.00.14

## Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Brea A	US0060	SL2-IN-E-1146R	3082D-1	90473	A-0147
Brea D	US0060	SL2-IN-E-1146R	3082D-2	100638	A-0147

## SUMMARY OF RESULTS

**Standard / Specification: FCC Part(s) 2 / 22H**

Test Procedure/Method	Description	Results
2.1046	RF Power Output	NA
2.1047	Modulation Characteristics	NA
2.1049	Occupied Bandwidth	Pass
2.1051 / 22.917(a)	Spurious Emissions at Antenna Terminals	Pass
2.1053 / 22.917(a)	Field Strength of Spurious Radiation	Pass
2.1055	Frequency Stability	NA

NA = Not applicable.

## Conditions During Testing

This list is a summary of the conditions noted for or modifications made to the equipment during testing.

Summary of Conditions
None

## **EQUIPMENT UNDER TEST (EUT)**

### **EQUIPMENT UNDER TEST**

#### **Fixed Wideband Consumer Signal Booster**

Manuf: Cellphone-Mate, Inc.

Model: Force-5

Serial: None

### **PERIPHERAL DEVICES**

The EUT was tested with the following peripheral device(s):

#### **AC to 18Vdc Power Adapter**

Manuf: Adapter Tech.

Model: STD-1805

Serial: None

## FCC PART 22H

This report contains EMC emissions test results under United States Federal Communications Commission (FCC) requirements for licensed devices. 47 CFR Part 22: Public Mobile Services

### 2.1046 RF Power Output

2.1046: Not applicable because the EUT also falls under other FCC rule parts; see applicable FCC test report.

### 2.1047 Modulation Characteristics

Not applicable because the EUT does not employ modulation characteristics.

### 2.1049 Occupied Bandwidth

## Test Conditions / Setup

Test Location: CKC Laboratories • 110 Olinda Place • Brea, CA 92823 • 714-993-6112

Customer: **Cellphone-Mate, Inc.**

Specification: **47 CFR §2.1049(I) Occupied Bandwidth**

Work Order #: **95255** Date: 01/10/2014

Test Type: **Conducted Emissions**

Equipment: Fixed Wideband Consumer Signal  
Booster

Manufacturer: Cellphone-Mate, Inc. Tested By: Yamamoto

Model: Force-5 110V 60Hz

S/N: (none)

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02672	Spectrum Analyzer	E4446A	9/4/2012	9/4/2014
T2	AN03431	Attenuator	89-20-21	9/5/2013	9/5/2015
T3	AN02946	Cable	32022-2-2909K-36TC	7/31/2013	7/31/2015

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Fixed Wideband Consumer Signal Booster	Cellphone-Mate, Inc.	Force-5	(none)

**Support Devices:**


Function	Manufacturer	Model #	S/N
AC to 18Vdc Power Adapter	Adapter Tech.	STD-1805	(none)

**Test Conditions / Notes:**

The EUT is placed on the test bench. Gain is set to maximum gain. All dip switches are set to Off position. Evaluation performed at the Outside (Donor) and Inside (Server) antenna ports. Input and output screen captures were made at the center frequency of each of the following two bands: UL 824-849MHz, DL 869-894MHz. Carrier was modulated with GSM, CDMA, and LTE.


Test procedure:  
 The test was performed in accordance with section 7.10 of the FCC Publication: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516 August 7, 2013.  
 Test environment conditions: 23°C, 32%, 100kPa

## Test Data

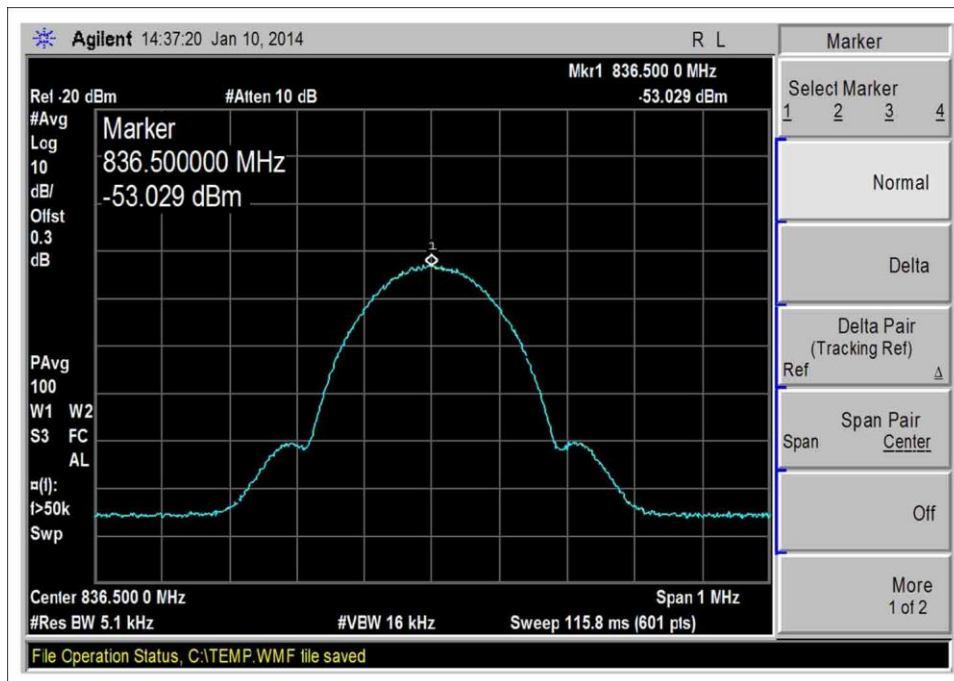


824-849MHz UL, GSM-Input




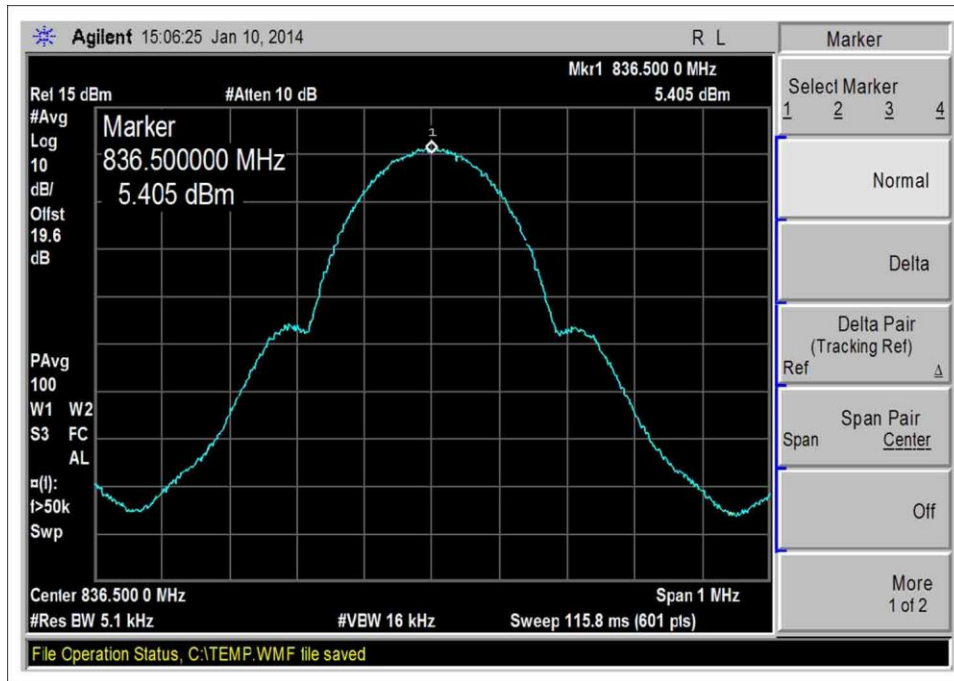


824-849MHz UL, GSM-Output

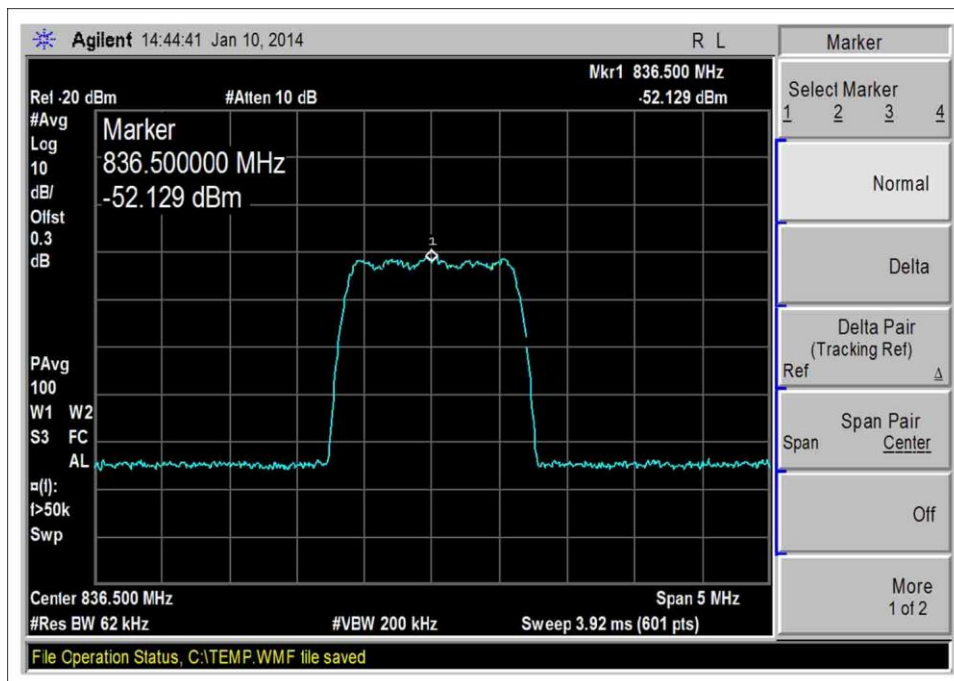


824-849MHz UL, CDMA-Input

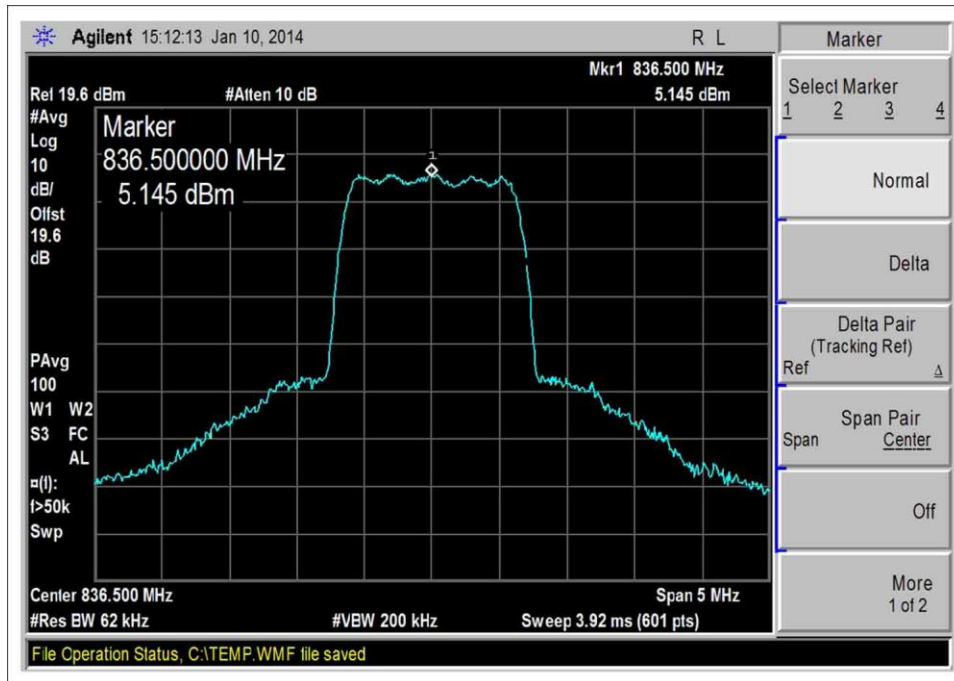


824-849MHz UL, CDMA-Output

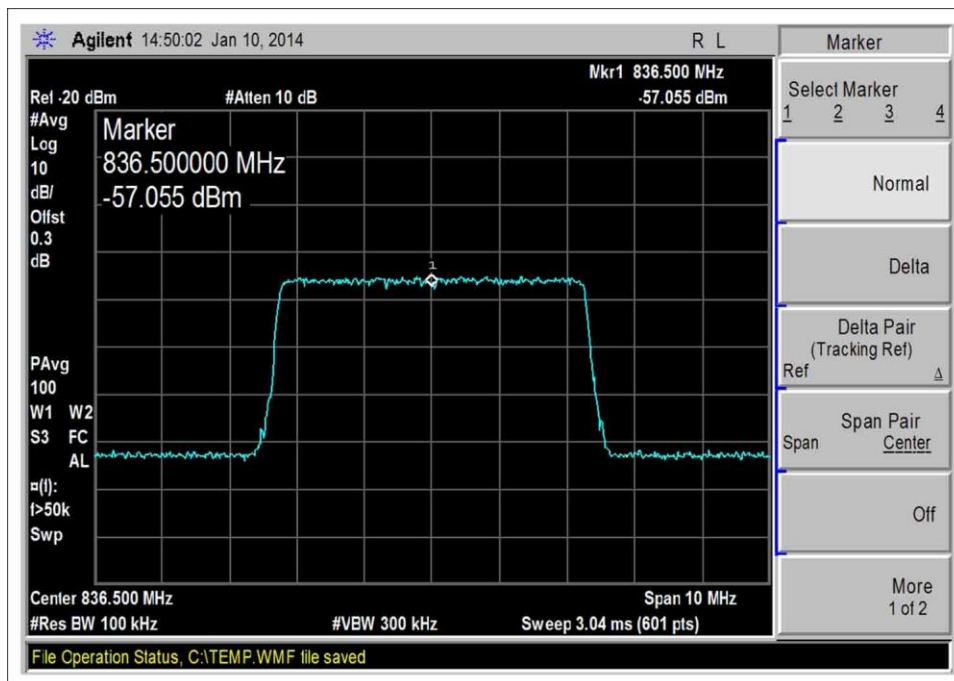


824-849MHz UL, LTE-Input

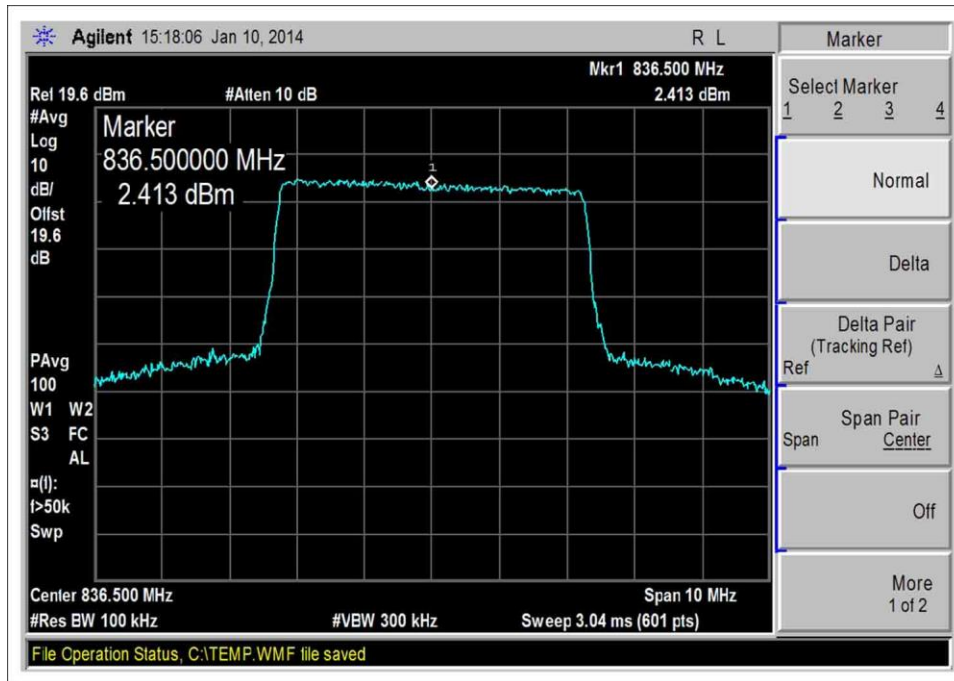


824-849MHz UL, LTE-Output

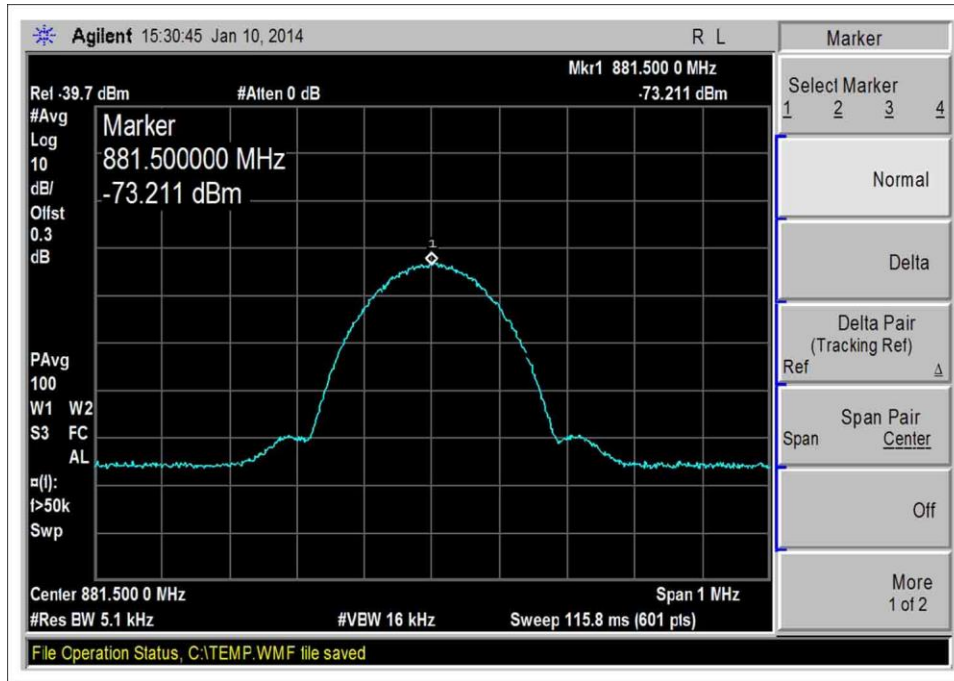


869-894MHz DL, GSM-Input

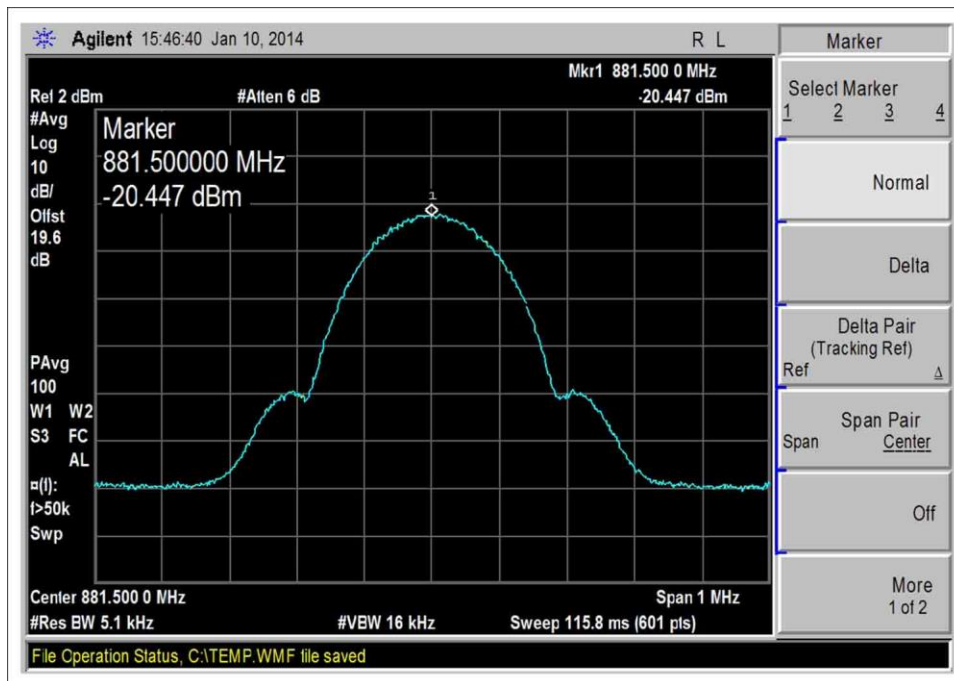


869-894MHz DL, GSM-Output

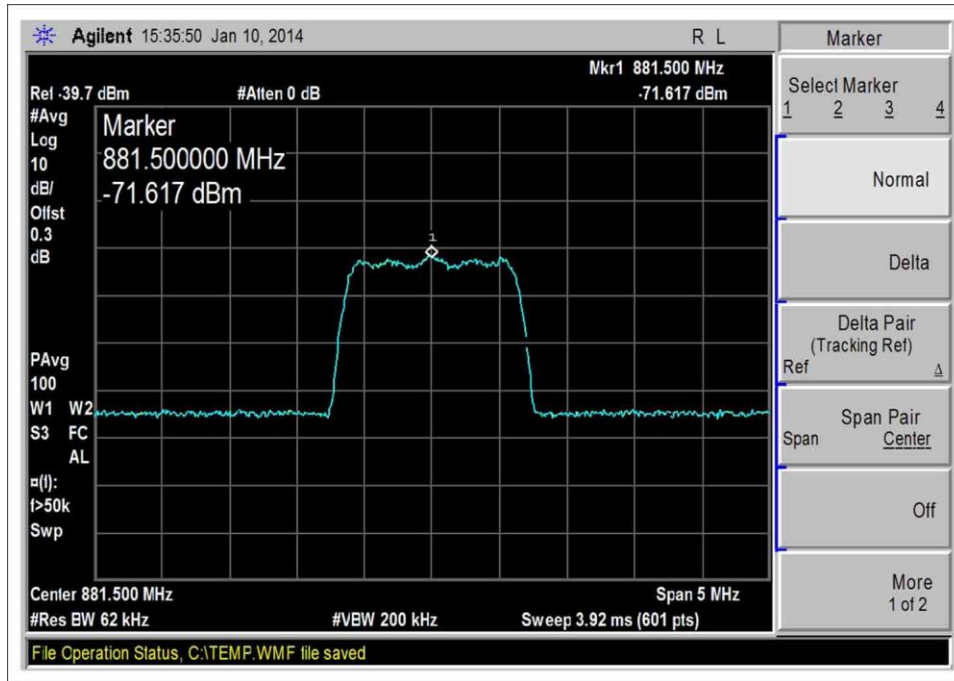


869-894MHz DL, CDMA-Input

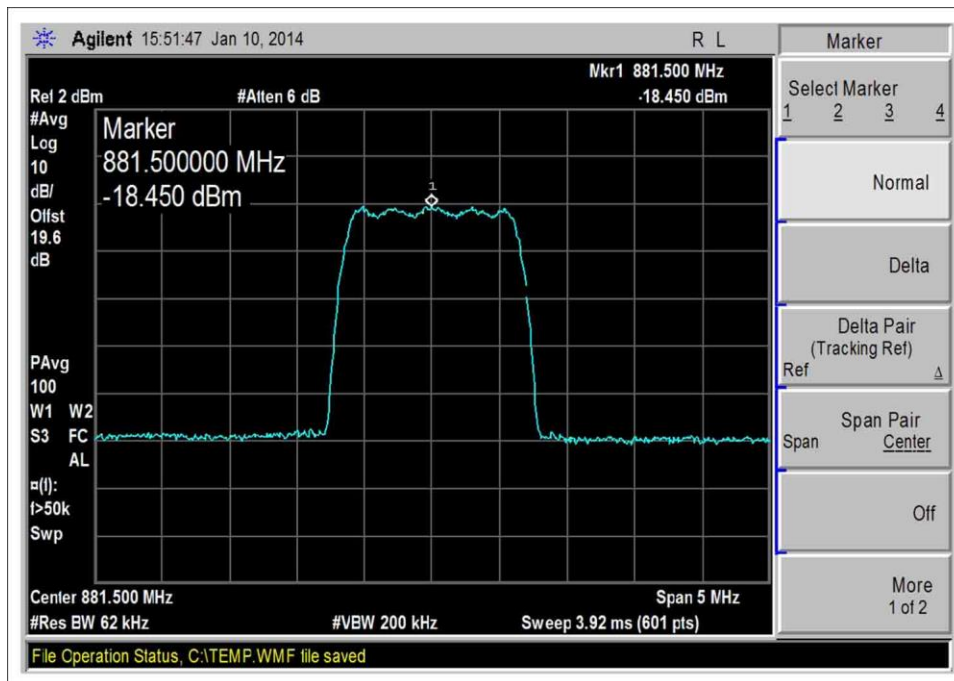

869-894MHz DL, CDMA-Output

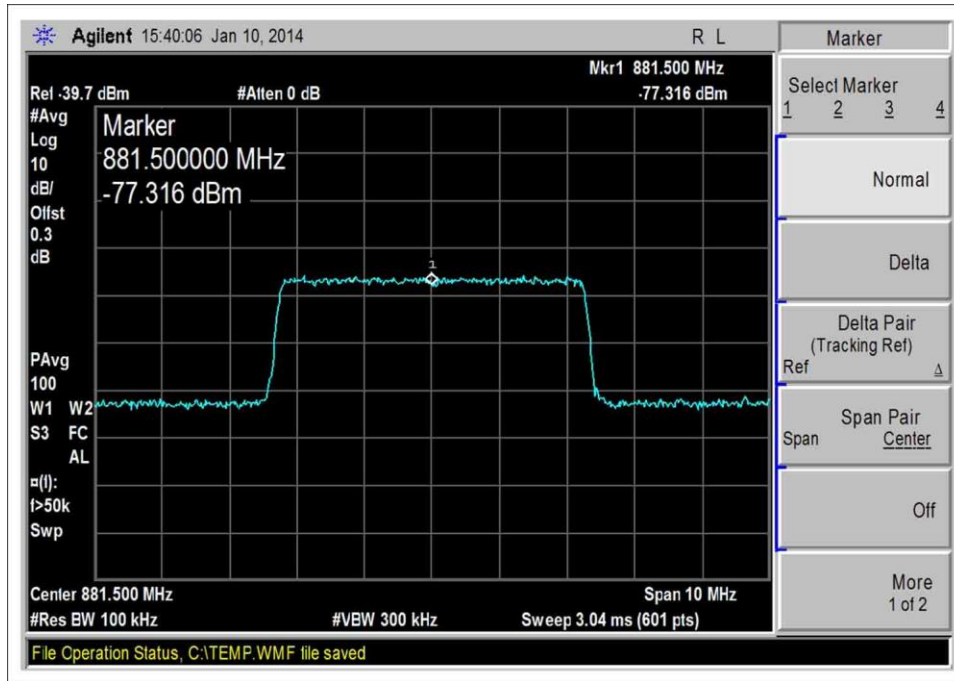

869-894MHz DL, LTE-Input

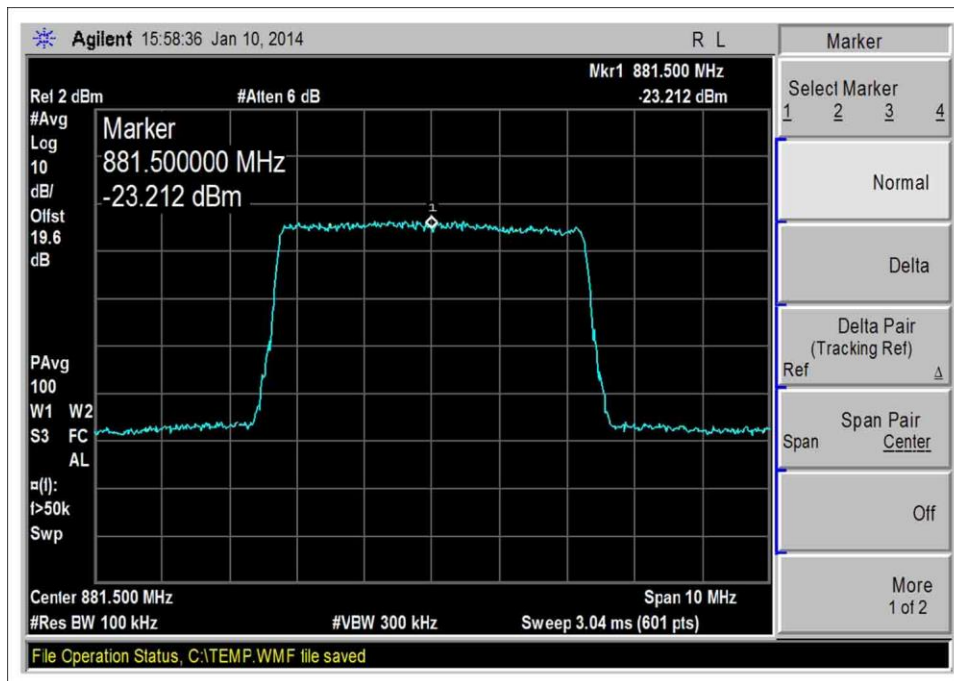

869-894MHz DL, LTE-Output

**Test Setup Photo(s)**



**2.1051 / 22.917(a) Spurious Emissions at Antenna Terminals**

**Test Conditions / Setup**

Test Location: CKC Laboratories • 110 Olinda Place • Brea, CA 92823 • 714-993-6112

Customer: **Cellphone-Mate, Inc.**

Specification: **47 CFR §22.917 Spurious Emissions**

Work Order #: **95255** Date: 1/8/2014

Test Type: **Conducted Emissions** Time: 14:08:40

Equipment: **Fixed Wideband Consumer Signal Boosters** Sequence#: 1

Manufacturer: Cellphone-Mate, Inc. Tested By: S. Yamamoto

Model: Force-5 110V 60Hz

S/N:

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02946	Cable	32022-2-2909K-36TC	7/31/2013	7/31/2015
T2	AN03431	Attenuator	89-20-21	9/5/2013	9/5/2015
	AN02672	Spectrum Analyzer	E4446A	9/4/2012	9/4/2014

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Fixed Wideband Consumer Signal Boosters*	Cellphone-Mate, Inc.	Force-5	

**Support Devices:**

Function	Manufacturer	Model #	S/N
Signal Generator	Agilent	E4438C	MY42082260
Power Supply	Adapter Tech.	STD-1805	

**Test Conditions / Notes:**

The equipment under test (EUT) is placed on the test bench. EUT gain set to maximum gain. All dip switches are set to Off position, ie toward the 1 2 4 8 16 direction.

Evaluation performed at the Outside (Donor) and Inside (Server) antenna port.

The EUT operates in the following band: UL 824-849MHz DL 869-894MHz

EUT set to transmit on the following frequencies: UL 836.5MHz DL 881.5MHz

Protocol: 4.1MHz AWGN

Frequency range of measurement = 9kHz to 10GHz. 9kHz-150kHz RBW=200Hz VBW=600Hz, 150kHz-30MHz RBW=9kHz VBW=27kHz, 30MHz-1000MHz RBW=120kHz VBW=360kHz, 1000MHz-10000MHz RBW=1MHz VBW=3MHz.

Site D test environment conditions: 21°C, 31%, 100kPa

Test procedure: The test was performed in accordance with section 7.6 of the FCC Publication: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516 August 7, 2013.

**Measurement Data:**

Reading listed by margin.


Test Lead: Ant Port

#	Freq	Rdng	T1	T2	Dist	Corr	Spec	Margin	Polar
---	------	------	----	----	------	------	------	--------	-------



	MHz	dB $\mu$ V	dB	dB	dB	Table	dB $\mu$ V	dB $\mu$ V	dB	Ant
1	1970.800M	52.0	+0.5	+19.4		+0.0	71.9	94.0	-22.1	Ant P
2	2136.700M	49.9	+0.8	+19.4		+0.0	70.1	94.0	-23.9	Ant P
3	868.000M	36.1	+0.5	+19.2		+0.0	55.8	94.0	-38.2	Ant P
4	739.000M	34.9	+0.5	+19.2		+0.0	54.6	94.0	-39.4	Ant P
5	895.000M	33.6	+0.5	+19.3		+0.0	53.4	94.0	-40.6	Ant P
6	850.000M	33.2	+0.5	+19.2		+0.0	52.9	94.0	-41.1	Ant P
7	823.000M	29.9	+0.5	+19.2		+0.0	49.6	94.0	-44.4	Ant P

CKC Laboratories Inc Date: 1/8/2014 Time: 14:08:40 Cellphone-Mate, Inc WO#: 95255  
 47 CFR §22.917 Spurious Emissions Test Lead: Ant Port 110V 60Hz Sequence#: 1 Ext ATTN: 0 dB

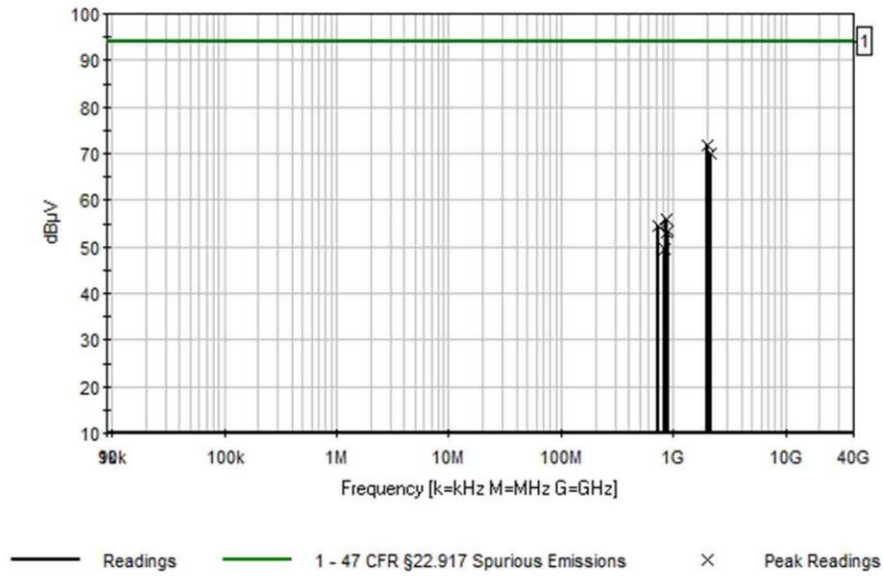

LIMIT LINE FOR SPURIOUS CONDUCTED EMISSION

**REQUIRED ATTENUATION = 43+10 LOG P DB**

Limit line (dBuV) =  $V_{dBuV}$  - Attenuation

$$\begin{aligned}
 V_{dBuV} &= 20 \text{Log} \frac{V}{1 \times 10^{-6}} \\
 &= 20 (\text{Log } V - \text{Log } 1 \times 10^{-6}) \\
 &= 20 \text{Log } V - 20 \text{Log } 1 \times 10^{-6} \\
 &= 20 \text{Log } V - 20 (-6) \\
 &= 20 \text{Log } V + 120
 \end{aligned}$$

$$\begin{aligned}
 \text{Attenuation} &= 43 + 10 \text{Log } P \\
 &= 43 + 10 \text{Log} \frac{V^2}{R} \\
 &= 43 + 10 (\text{Log } V^2 - \text{Log } R) \\
 &= 43 + 10 (2 \text{Log } V - \text{Log } R) \\
 &= 43 + 20 \text{Log } V - 10 \text{Log } R
 \end{aligned}$$

$$\begin{aligned}
 \text{Limit line} &= V_{dBuV} - \text{Attenuation} \\
 &= 20 \text{Log } V + 120 - (43 + 20 \text{Log } V - 10 \text{Log } R) \\
 &= 20 \text{Log } V + 120 - 43 - 20 \text{Log } V + 10 \text{Log } R \\
 &= 20 \text{Log } V + 120 - 43 - 20 \text{Log } V + 10 \text{Log } R \\
 &= 120 - 43 + 10 \text{Log } 50 \quad \text{Note : } R = 50 \Omega \\
 &= 120 - 43 + 16.897 \\
 &= 94 \text{ dBuV at any power level}
 \end{aligned}$$

**Test Setup Photo(s)**



**2.1053 / 22.917(a) Field Strength of Spurious Radiation**

**Test Conditions / Setup**

Test Location: CKC Laboratories • 110 Olinda Place • Brea, CA 92823 • 714-993-6112

Customer: **Cellphone-Mate, Inc.**

Specification: **47 CFR §22.917 Spurious Emissions**

Work Order #: **95255** Date: 1/13/2014

Test Type: **Maximized Emissions** Time: 14:58:57

Equipment: **Fixed Wideband Consumer Signal Boosters** Sequence#: 1

Manufacturer: Cellphone-Mate, Inc. Tested By: S. Yamamoto

Model: Force-5

S/N:

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02672	Spectrum Analyzer	E4446A	9/4/2012	9/4/2014
	ANP05555	Cable	RG223/U	6/19/2012	6/19/2014
	AN00010	Preamp	8447D	3/29/2012	3/29/2014
	ANP05569	Cable	RG-214/U	6/19/2012	6/19/2014
T1	ANP04382	Cable	LDF-50	8/30/2012	8/30/2014
	AN00851	Biconilog Antenna	CBL6111C	5/16/2012	5/16/2014
T2	AN01646	Horn Antenna	3115	4/13/2012	4/13/2014
T3	AN03169	High Pass Filter	HM1155-11SS	7/30/2013	7/30/2015
T4	AN02945	Cable	32022-2-2909K-36TC	10/30/2013	10/30/2015
T5	AN00787	Preamp	83017A	5/31/2013	5/31/2015
T6	ANP06360	Cable	L1-PNMNM-48	8/29/2012	8/29/2014
	AN00314	Loop Antenna	6502	6/29/2012	6/29/2014
	AN02946	Cable	32022-2-2909K-36TC	7/31/2013	7/31/2015
	AN01413	Horn Antenna-ANSI C63.5 (dB/m)	84125-80008	11/9/2012	11/9/2014
	AN01413	Horn Antenna-SAE ARP958 (dB/m)	84125-80008	11/9/2012	11/9/2014

**Equipment Under Test (\* = EUT):**

Function	Manufacturer	Model #	S/N
Fixed Wideband Consumer Signal Boosters*	Cellphone-Mate, Inc.	Force-5	

**Support Devices:**

Function	Manufacturer	Model #	S/N
Signal Generator	Agilent	E4438C	MY42082260
Signal Generator	Agilent	E4433B	US40053164
Power Supply	Adapter Tech.	STD-1805	


**Test Conditions / Notes:**

The equipment under test (EUT) is placed on the styrofoam table top. EUT set at maximum gain. All DIP switches are set to Off position, ie towards the 1 2 4 8 16 direction.  
 Evaluation of DL path was performed with signal fed into the Outside (Donor) antenna port while Inside ( Server) antenna port terminated with 50 Ohm load.  
 Evaluation of UL path was performed with signal fed into the Inside ( Server) antenna port while Outside ( Donor) antenna port terminated with 50 Ohm load.  
 The EUT was tested while transmitting in each of the following bands: UL 824-849MHz, DL 869-894MHz  
 TXFreq = Center frequency of above listed bands.  
 Modulation: CW  
 Frequency range of measurement = 9 kHz to 10 GHz.  
 9kHz-150 kHz, RBW=200 Hz,VBW=200Hz;150kHz-30MHz, RBW=9kHz,VBW=9kHz;30MHz-1000MHz, RBW=120kHz,VBW=120kHz;1000MHz-10000MHz, RBW=1MHz,VBW=1MHz.  
 Temperature: 27°C, Humidity: 30%, Pressure: 100kPa  
 Test procedure: The test was performed in accordance with section 7.12of the FCC Publication: 935210 D03 Wideband Consumer Signal Booster Measurement Guidance DR04-41516 August 7, 2013.

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	1618.500M	43.1	+5.0 -39.8	+26.5 +2.7	+0.3	+0.6	+0.0	38.4	82.2	-43.8	Horiz
2	1618.500M	41.5	+5.0 -39.8	+26.5 +2.7	+0.3	+0.6	+0.0	36.8	82.2	-45.4	Vert
3	1673.000M	39.4	+5.1 -39.8	+26.7 +2.7	+0.3	+0.6	+0.0	35.0	82.2	-47.2	Vert
4	1673.000M	39.2	+5.1 -39.8	+26.7 +2.7	+0.3	+0.6	+0.0	34.8	82.2	-47.4	Horiz

CKC Laboratories Inc Date: 1/13/2014 Time: 14:58:57 Cellphone-Mate, Inc. WO#: 95255  
 47 CFR §22.917 Spurious Emissions Test Distance: 3 Meters Sequence#: 1 Ext ATTN: 0 dB

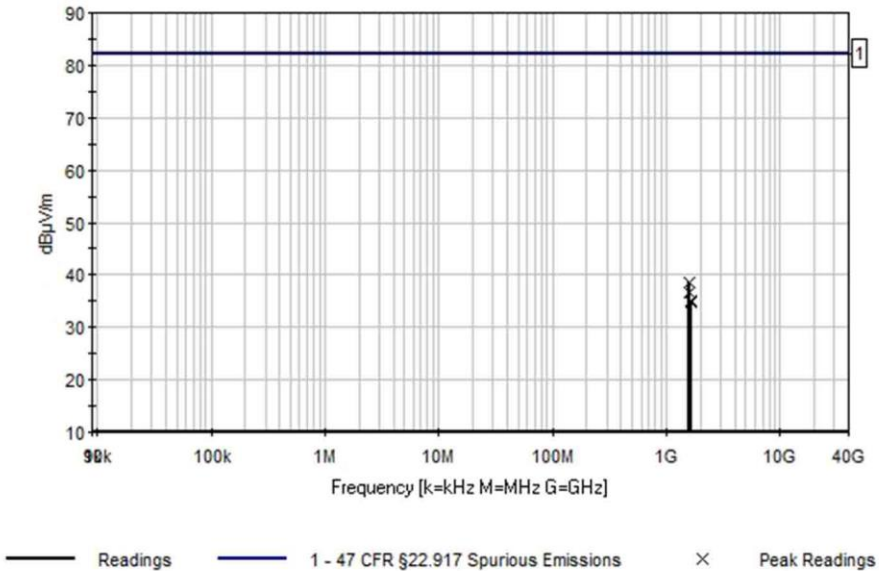

LIMIT LINE FOR SPURIOUS RADIATED EMISSION

$$\text{REQUIRED ATTENUATION} = 43+10 \text{ LOG P (DB)}$$

For radiated spurious emission measured at 3 meter test distance,

$$\begin{aligned} \text{Required attenuation} &= 43+10 \text{ Log } P_{t \text{ at 3 meter}} \text{ dB} \\ \text{Limit line (dBuV)} &= E_{\text{dBuV}} - \text{Attenuation} \end{aligned}$$

$E_{\text{dBuV}}$  = Measured field strength at 3 meter in dBuV/m

**Power Density (Isotropic)**

$$P_D = \frac{P_t}{4\pi r^2}$$

$P_D$  = Power Density in Watts /m<sup>2</sup>  
 $P_t$  = Average Transmit Power  
 $r$  = Test distance

**Field Intensity E (V/m)**

$$E = \sqrt{P_D \times 377}$$

$$E = \frac{\sqrt{P_t \times 377}}{4\pi r^2}$$

$$E = \sqrt{\frac{P_t \times 30}{r^2}}$$

$$P_t = \left( \frac{E^2 \times r^2}{30} \right)$$

$$10 \text{ Log } P_t = 10 \text{ Log } E^2 \text{ (V/m)} + 10 \text{ Log } r^2 - 10 \text{ Log } 30$$

$$10 \text{ Log } P_t = 20 \text{ Log } E \text{ (V/m)} + 20 \text{ Log } r - 10 \text{ Log } 30$$

At 3 meter,  $r = 3 \text{ m}$

$$10 \text{ Log } P_t = 20 \text{ Log } E \text{ (V/m)} + 20 \text{ Log } 3 - 10 \text{ Log } 30$$

$$10 \text{ Log } P_t = 20 \text{ Log } E \text{ (V/m)} + 9.54 - 14.77$$

$$10 \text{ Log } P_t = 20 \text{ Log } E \text{ (V/m)} - 5.23$$

**Since  $20 \text{ Log } E \text{ (V/m)} = 20 \text{ Log } E \text{ (uV/m)} - 120$**

$$10 \text{ Log } P_t = 20 \text{ Log } E \text{ (uV/m)} - 120 - 5.23$$

$$10 \text{ Log } P_t = 20 \text{ Log } E \text{ (uV/m)} - 125.23$$


$$\begin{aligned} \text{Limit line (dBuV) at 3 meter} &= E_{\text{dBuV}} - \text{Attenuation} \\ &= E_{\text{dBuV}} - (43 + 10 \text{ Log } P_{t \text{ at 3 meter}}) \\ &= E_{\text{dBuV}} - 43 - 10 \text{ Log } P_{t \text{ at 3 meter}} \\ &= E_{\text{dBuV}} - 43 - (20 \text{ Log } E \text{ (uV/m)} - 125.23) \\ &= E_{\text{dBuV}} - 43 - 20 \text{ Log } E \text{ (uV/m)} + 125.23 \\ &= E_{\text{dBuV}} - 20 \text{ Log } E \text{ (uV/m)} + 82.23 \end{aligned}$$

Since  $20 \text{ Log } E \text{ (uV/m)} = E \text{ in dBuV/m}$

$$= E_{\text{dBuV}} - E_{\text{dBuV}} + 82.23$$

Radiated Emission limit 3 meter = 82.23 dBuV at any power level measured in dBuV

**Test Setup Photo(s)**

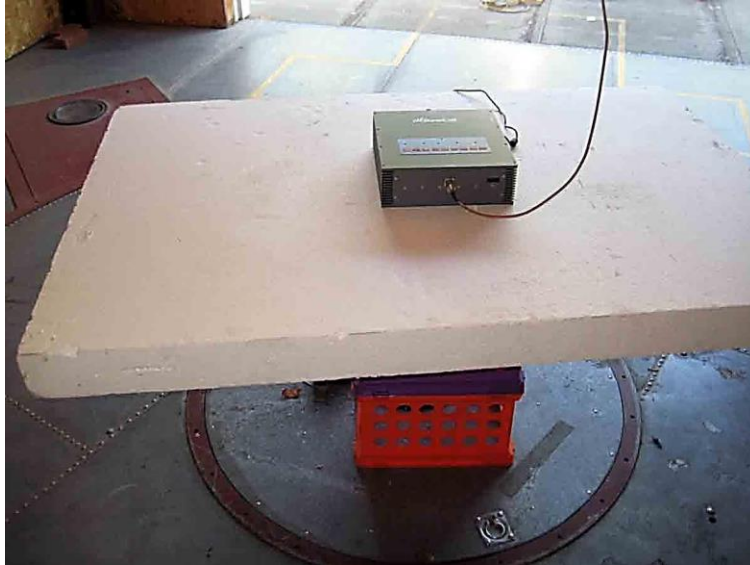

**2.1055 Frequency Stability**

Frequency stability does not apply to this type of equipment.



## SUPPLEMENTAL INFORMATION

### Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

The reported measurement uncertainties are calculated based on the worst case of all laboratory environments from CKC Laboratories, Inc. test sites. Only those parameters which require estimation of measurement uncertainty are reported. The reported worst case measurement uncertainty is less than the maximum values derived in CISPR 16-4-2. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

**TESTING PARAMETERS**

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

**CORRECTION FACTORS**

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dBµV/m, the spectrum analyzer reading in dBµV was corrected by using the following formula. This reading was then compared to the applicable specification limit.

SAMPLE CALCULATIONS		
	Meter reading	(dB $\mu$ V)
+	Antenna Factor	(dB)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dB $\mu$ V/m)

#### TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

#### SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or carrot ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

##### **Peak**

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

##### **Quasi-Peak**

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

##### **Average**

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.