

## ***FCC TEST REPORT***


Under  
FCC 15 Subpart C, Paragraph 15.249: 2003

Prepared For :

**Strategic Vista Technologies Inc.**  
300 Alden Road, Markham, Ontario Canada, L3R 4C1.

<b>FCC ID: RTMSV-04-TX</b>
<b>EUT: 2.4G Wireless Transmitter with 315MHz IR Extender</b>
<b>Model: WL23TXIR</b>

December 31, 2004

<b>Report Type:</b> Original Report
<b>Test Engineer:</b> <u>Peter Lin</u>
<b>Test Date:</b> <u>September 8, 2004</u>
 <b>Review By:</b> _____ Apollo Liu / Manager

---

**TABLE OF CONTENTS**

<b>1. General Information.....</b>	<b>3</b>
1. 1 Notes.....	3
1. 2 Testing Laboratory.....	3
1. 3 Details of Applicant.....	3
1. 4 Application Details.....	3
1. 5 Test Item.....	3
1. 6 Test Standards.....	4
<b>2. Technical Test.....</b>	<b>5</b>
2. 1 Summary of Test Results.....	5
<b>3. EUT Modifications.....</b>	<b>5</b>
<b>4. Conducted Power Line Test.....</b>	<b>6</b>
4. 1 Test Equipment.....	6
4. 2 Test Procedure.....	6
4. 3 Test Setup.....	6
4. 4 Configuration of the EUT.....	7
4. 5 EUT Operating Condition.....	8
4. 6 Conducted Power Line Emission Limits.....	8
4. 7 Conducted Power Line Test Result.....	9
<b>5. Radiated Emission Test.....</b>	<b>11</b>
5. 1 Test Equipment.....	11
5. 2 Test Procedure.....	11
5. 3 Radiated Test Setup.....	11
5. 4 Configuration of the EUT.....	12
5. 5 EUT Operating Condition.....	12
5. 6 Radiated Emission Limit.....	12
5. 7 Radiated Emission Test Result.....	13
<b>6. Band Edge.....</b>	<b>15</b>
6. 1 Test Equipment.....	15
6. 2 Test Procedure.....	15
6. 3 Test Setup.....	15
6. 4 Configuration of The EUT.....	15
6. 5 EUT Operating Condition.....	15
6. 6 Band Edge FCC 15.249(d) Limit.....	15
6. 7 Band Edge Test Result.....	16
<b>7. Antenna Requirement.....</b>	<b>17</b>
<b>8. Photos of Testing.....</b>	<b>18</b>
8. 1 EUT Test Photographs.....	18
8. 2 EUT Detailed Photographs.....	19
<b>9. FCC ID Label.....</b>	<b>24</b>
<b>10. Test Equipment.....</b>	<b>25</b>

## 1. General Information

### 1.1 Notes

The test results of this report relate exclusively to the test item specified in 1.5. The KMO Lab does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the KMO Lab.

### 1.2 Testing Laboratory

#### **Ke Mei Ou Laboratory Co., Ltd.**

7A, Jiexiangge, Jiahuixincheng, No.3027, Shennan Rd., Futian, Shenzhen, Guangdong, P.R.China.

Tel: +86 755 83642690 Fax: +86 755 83297077

Email: [kmo@kmlab.com](mailto:kmo@kmlab.com)

Internet: [www.kmlab.com](http://www.kmlab.com)

Site on File with the Federal Communications Commission – United States

Registration Number: 125782

For 3 & 10 meter OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC4986

For 3 & 10 meter OATS

### 1.3 Details of Applicant

**Name** : Strategic Vista Technologies Inc.  
**Address** : 300 Alden Road, Markham, Ontario Canada, L3R 4C1.  
**Contact** : Mr. Joel Kligman / President  
**Tel** : + 905 9468589  
**Fax** : + 905 9470138

### 1.4 Application Details

Date of Receipt of Application : July 20, 2004  
Date of Receipt of Test Item : July 20, 2004  
Date of Test : September 8–November 31, 2004

### 1.5 Test Item

Manufacturer : Protronic (Far East) Ltd.  
Trade Name : LOREX  
Model No. : WL23TXIR  
Description : 2.4G Wireless Transmitter with 315MHz IR Extender

### Additional Information

Frequency : 2433.5MHz, 2452.5MHz, 2472.5MHz, 2410.5MHz  
Maximum Range : N/A  
Number of Channels : 4  
Transmitter Antenna : N/A  
Power Supply : DC9V, 500mA (Power by Class 2 Adaptor)  
Current Consumption : 150mA TYP.

## 1. 6 Test Standards

FCC 15 Subpart C, Paragraph 15.249: 2003
--

Note: All radiated measurements were made in all three orthogonal planes. The values reported are the maximum values.

## 2. Technical Test

### 2.1 Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	PASS	Complies
FCC Part 15, Paragraph 15.207	Conducted Test	PASS	Minimum passing margin is -26.84 / -27.54 dB at 0.530 MHz Line
FCC Part 15 Subpart C Paragraph 15.249(a) and 15.249(b) Limit	Field Strength of Fundamental	PASS	Minimum passing margin is - 20.35 at 2410.66 MHz Horizontal
FCC Part 15, Paragraph 15.209	Radiated Test	PASS	Meets Class B Limit Minimum passing margin is - 7.44 dB at 31.760 MHz Horizontal
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Measured Band Edges	PASS	Complies.

## 3. EUT Modifications

No modification by Ke Mei Ou Laboratory Co., Ltd.

## 4. Conducted Power Line Test

### 4.1 Test Equipment


Please refer to Section 10 this report.

### 4.2 Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination.

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission., the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2001 on conducted measurement. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 4.3 Test Setup

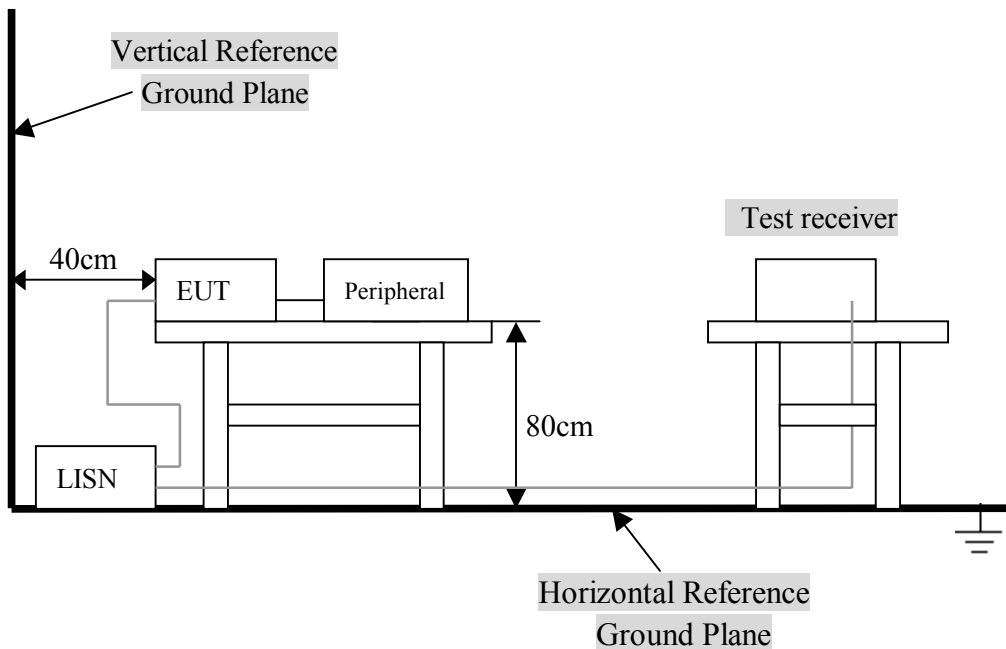

For the actual test configuration, Please refer to the related items – Photos of Testing.

#### 4.4 Configuration of the EUT

The EUT was configured according to ANSI C63.4-2001. EUT was used DC 9V (Power by Class 2 Adaptor). The operation frequency is from 2411MHz~2473MHz. Enable the signal transmitted from the external antenna from EUT to receiver. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Note:

- 1) Below 1GHz, the channel 1, 2, 3 and 4 were pre-tested, The channel 1, worst case one, was chosen for conducted and radiated emission test.
- 2) Above 1GHz, the channel 1, 2, 3 and 4 were tested individually.

#### A. EUT

Device	Manufacturer	Model #	FCC ID
2.4G Wireless Transmitter with 315MHz IR Extender	Protronic (Far East) Ltd.	WL23TXIR	RTMSV-04-TX

#### B. Internal Devices

Device	Manufacturer	Model #	FCC ID
N/A			


#### C. Peripherals

Device	Manufacturer	Model # Serial #	FCC ID/ DoC	Cable
Wireless Receiver	Protronic (Far East) Ltd.	WL23RXIR	N/A	N/A

### 4. 5 EUT Operating Condition

Operating condition is according to ANSI C63.4 - 2001.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

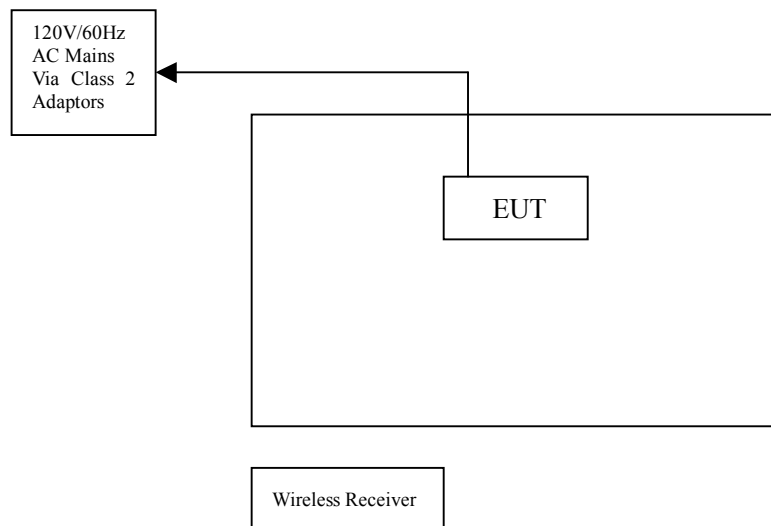

### 4. 6 Conducted Power Line Emission Limits

FCC Part 15 Paragraph 15.207 (dBuV)		
Frequency Range (MHz)	Class A QP/AV	Class B QP/AV
0.15 – 0.5	79/66	66-56/56-46
0.5 – 5.0	73/60	56/46
5.0 - 30	73/60	60/50

**Note:** In the above table, the tighter limit applies at the band edges.



## 4.7 Conducted Power Line Test Result

Product	: 2.4G Wireless Transmitter with 315MHz IR Extender	Test Mode	: CH1
Test Item	: Conducted Emission Data	Temperature	: 25 °C
Test Voltage	: DC 9V (Power by Class 2 Adaptor)	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

The frequency spectrum from 0.15 MHz to 30 MHz was investigated. All readings are quasi -peak values with a resolution bandwidth of 9 KHz.

- Temperature : 26 °C
- Humidity : 53 % RH

### CH1

FCC Part 15 Paragraph 15.207							
Frequency (MHz)	Emission (dBuV)		LINE/ NEUTRAL	Limit (dBuV)		Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.166	35.96	21.86	LINE	65.16	55.16	-29.20	-33.30
0.170	35.53	21.69	NEUTRAL	64.96	54.96	-29.43	-33.27
0.210	34.30	21.15	LINE	63.21	53.21	-28.91	-32.06
0.206	34.19	21.28	NEUTRAL	63.37	53.37	-29.18	-32.09
0.530	29.16	18.46	LINE	56.00	46.00	-26.84	-27.54
0.621	26.30	21.60	NEUTRAL	56.00	46.00	-29.70	-24.40

Note: NF = No Significant Peak was Found.

#### Note:

- 1.Uncertainty in conducted emission measured is <+/- 2dB.
- 2.The emission levels of other frequencies were very low against the limit.
- 3.All Reading Levels are Quasi-Peak and Average value.
- 4.Emission = Meter Reading + Factor; Factor = Insertion Loss + Cable Loss.
- 5.Margin Value = Emission Level - Limit Value.

**Conducted Emission**

**EN55022**

EUT: 2.4G Wireless Transmitter with 315MHz IR Extender  
M/N: WL23TXIR

Manufacturer: Protronic (Far East) Ltd.


Operating Condition: Transmitter

Test Site: Ke Mei Ou Laboratory

Operator: Peter Lin

Test Specification: LINE&NEUTRAL

Comment:

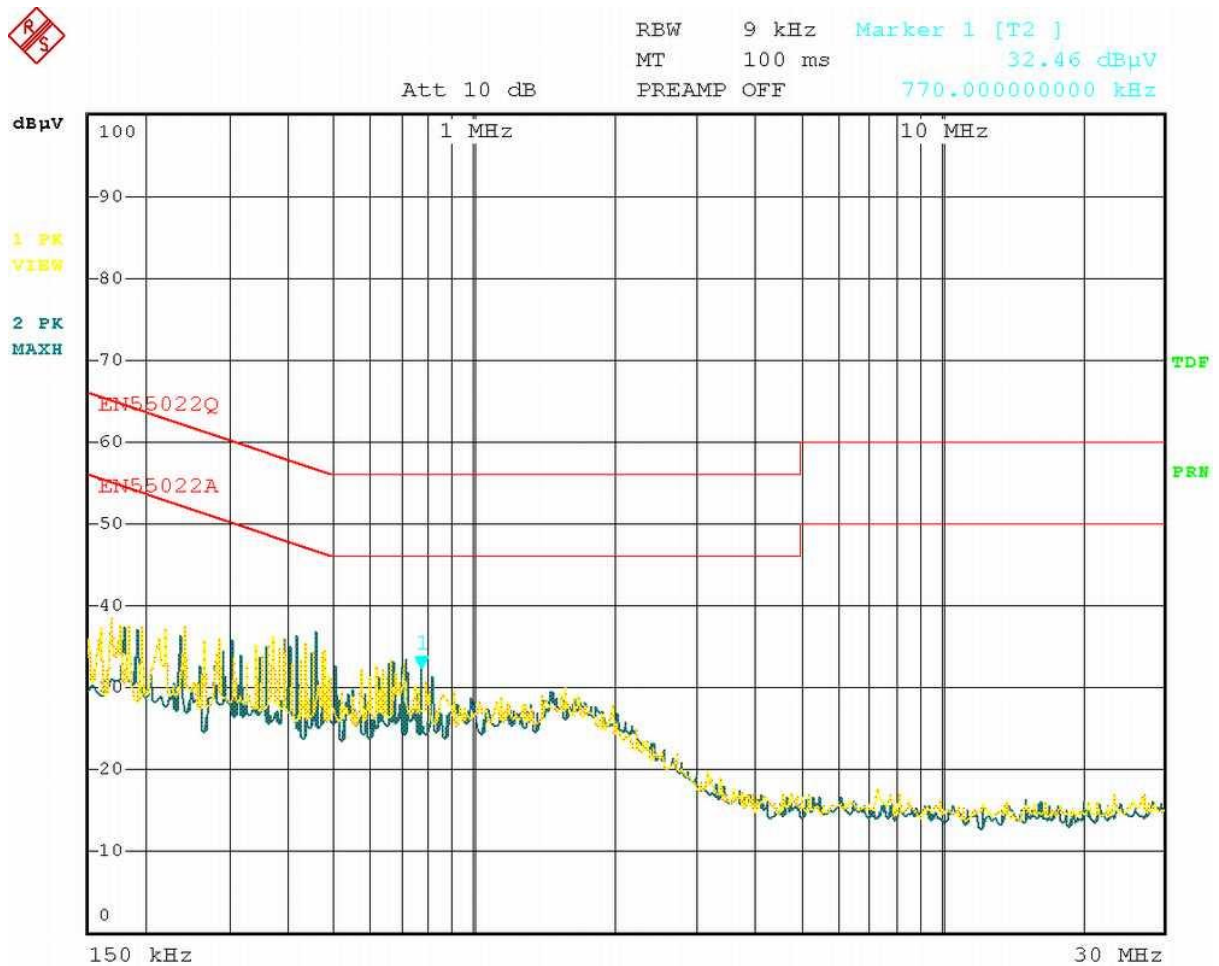

Date: 8.SEP.2004 14:22:50

## 5. Radiated Emission Test


### 5.1 Test Equipment

Please refer to Section 10 this report.

### 5.2 Test Procedure

1. The EUT was tested according to ANSI C63.4 - 2001. The radiated test was performed at Ke Mei Ou Laboratory .This site is on file with the FCC laboratory division, Registration No. 125782.
2. The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.4-2001.
3. The frequency spectrum from 30 MHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 KHz. All readings are above 1 GHz , peak values with a resolution bandwidth of 1 MHz . Measurements were made at 3 meters.
4. The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
5. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
6. The antenna polarization: Vertical polarization and Horizontal polarization.

### 5.3 Radiated Test Setup

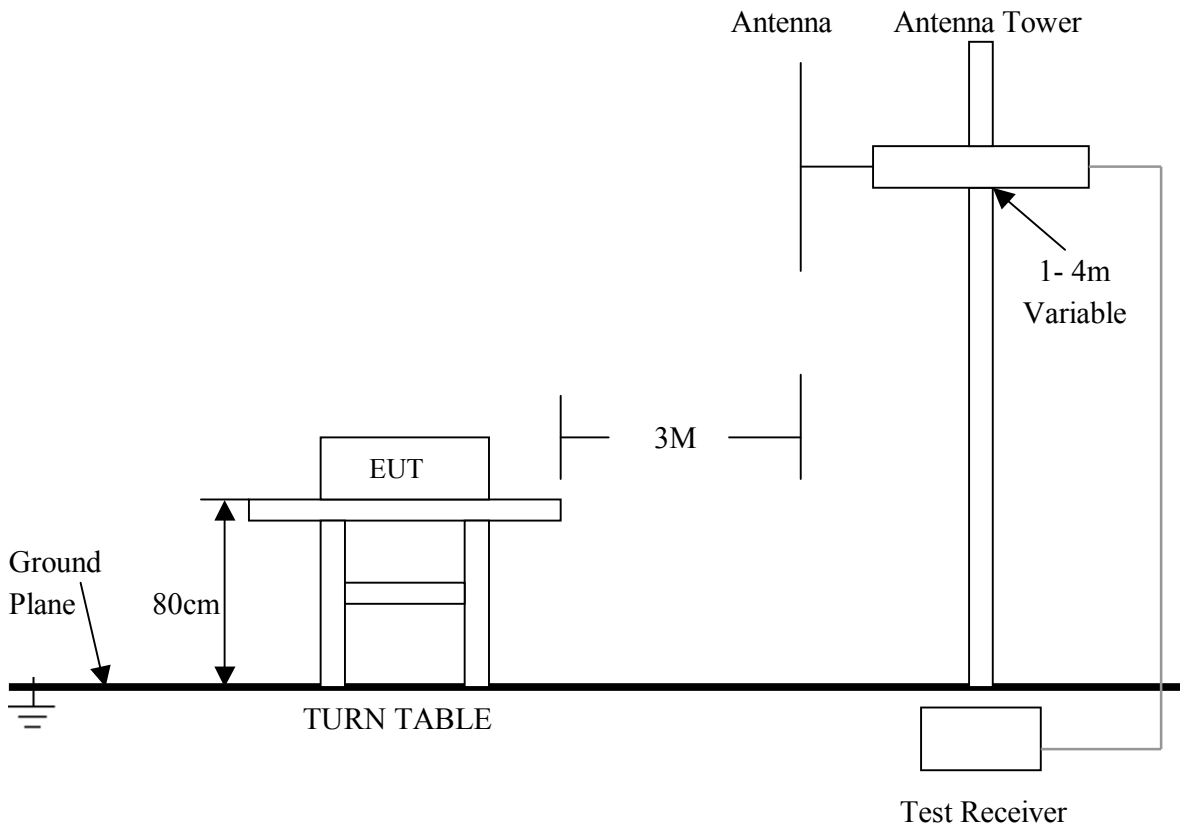

For the actual test configuration, please refer to the related items – Photos of Testing.

## 5. 4 Configuration of the EUT

Same as section 4.4 of this report

## 5. 5 EUT Operating Condition

Same as section 4.5 of this report.

## 5. 6 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

### A. FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency (MHz)	Field Strength of Fundamental (3m)		Field Strength of Harmonics (3m)		
	mV/m	dBuV/m	uV/m	dBuV/m	
902~928	50	94(Average) 114(Peak)	500	54(Average)	74(Peak)
2400~2483.5	50	94(Average) 114(Peak)	500	54(Average)	74(Peak)

- Note:**
- (1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
  - (2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
  - (3) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

### B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency (MHz)	Distance (m)	Field Strength (dBuV/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

- Note:**
- (1) RF Voltage (dBuV) = 20 log RF Voltage (uV)
  - (2) In the Above Table, the tighter limit applies at the band edges.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

## 5.7 Radiated Emission Test Result

### A. Fundamental Radiated Emission Data

Product : 2.4G Wireless Transmitter with 315MHz IR Extender Test Mode : CH1~CH4  
 Test Item : Fundamental Radiated Emission Data Temperature : 25 °C  
 Test Voltage : DC 9V (Power by Class 2 Adaptor) Humidity : 56%RH  
 Test Result : **PASS**

#### CH1

Freq. (GHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
2.43356	90.17	HORIZ	114 / 94	-23.83
2.43356	82.62	VERT	114 / 94	-31.38

#### CH2

Freq. (GHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
2.45264	87.95	HORIZ	114 / 94	-26.05
2.45264	83.46	VERT	114 / 94	-30.54

#### CH3

Freq. (GHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
2.47264	87.61	HORIZ	114 / 94	-26.39
2.47264	82.23	VERT	114 / 94	-31.77

#### CH4

Freq. (GHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
2.41066	93.65	HORIZ	114 / 94	-20.35
2.41066	82.86	VERT	114 / 94	-31.14

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
  - (3) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

### B. Harmonics Radiated Emission Data

Product : 2.4G Wireless Transmitter with 315MHz IR Extender Test Mode : CH1~CH4  
 Test Item : Harmonics Radiated Emission Data Temperature : 25 °C  
 Test Voltage : DC 9V (Power by Class 2 Adaptor) Humidity : 56%RH  
 Test Result : **PASS**

#### CH1

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4867.12	51.6	HORZ	74.0 / 54.0	-22.4
4867.12	50.8	VERT	74.0 / 54.0	-23.2
7300.68	53.4	HORZ	74.0 / 54.0	-20.6
7300.68	53.0	VERT	74.0 / 54.0	-21.0

#### CH2

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4905.28	51.2	HORZ	74.0 / 54.0	-22.8
4905.28	51.0	VERT	74.0 / 54.0	-23.0
7357.92	54.1	HORZ	74.0 / 54.0	-19.9
7357.92	53.8	VERT	74.0 / 54.0	-20.2

**CH3**

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4945.28	52.6	HORZ	74.0 / 54.0	-21.4
4945.28	53.8	VERT	74.0 / 54.0	-20.2
7417.92	53.5	HORZ	74.0 / 54.0	-20.5
7417.92	53.0	VERT	74.0 / 54.0	-21.0

**CH4**

Freq. (MHz)	Emission (dBuV/m) Peak Detector	HORIZ / VERT	Limits (dBuV/m) Peak / Average	Margin (dB)
4821.32	51.8	HORZ	74.0 / 54.0	-22.2
4821.32	51.4	VERT	74.0 / 54.0	-22.6
7231.98	53.7	HORZ	74.0 / 54.0	-20.3
72.31.98	52.6	VERT	74.0 / 54.0	-21.4

- Note:**
- (1) All Reading Levels below 1GHz are Quasi-Peak, above are peak and average value.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.
  - (3) Receiver setting (Peak Detector) : RBW=1MHz; VBW=1MHz; Span=100MHz
  - (4) Receiver setting (AVG Detector): RBW=1MHz; VBW=30Hz; Span=20MHz
  - (5) The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

**C. General Radiated Emission Data**

Product : 2.4G Wireless Transmitter with 315MHz IR Extender      Test Mode : CH1  
 Test Item : General Radiated Emission Data      Temperature : 25 °C  
 Test Voltage : DC 9V (Power by Class 2 Adaptor)      Humidity : 56%RH  
 Test Result : **PASS**

**CH1**

Freq. (MHz)	Emission (dBuV/m) QP Detector	HORIZ / VERT	Limits (dBuV/m)	Margin (dB)
31.760	32.56	HORZ	40.0	-7.44
37.320	29.42	VERT	40.0	-10.58
174.960	21.28	HORZ	43.5	-22.22
166.080	25.08	VERT	43.5	-18.42
214.960	28.60	HORZ	43.5	-14.90
213.920	29.50	VERT	43.5	-14.00

- Note:**
- (1) All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
  - (2) Emission Level = Reading Level + Probe Factor + Cable Loss.

## 6. Band Edge


### 6.1 Test Equipment

Please refer to Section 10 this report.

### 6.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instruments. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.

### 6.3 Test Setup

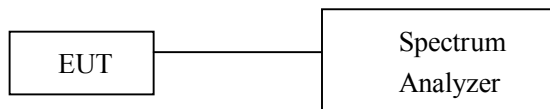

### 6.4 Configuration of The EUT

Same as section 4 . 4 of this report

### 6.5 EUT Operating Condition


Same as section 4 . 5 of this report.

### 6.6 Band Edge FCC 15.249(d) Limit

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.


### 6.7 Band Edge Test Result

Product	: 2.4G Wireless Transmitter with 315MHz IR Extender	Test Mode	: CH4, CH3
Test Item	: Band Edge Data	Temperature	: 25 °C
Test Voltage	: DC 9V (Power by Class 2 Adaptor)	Humidity	: 56%RH
Test Result	: <b>PASS</b>		

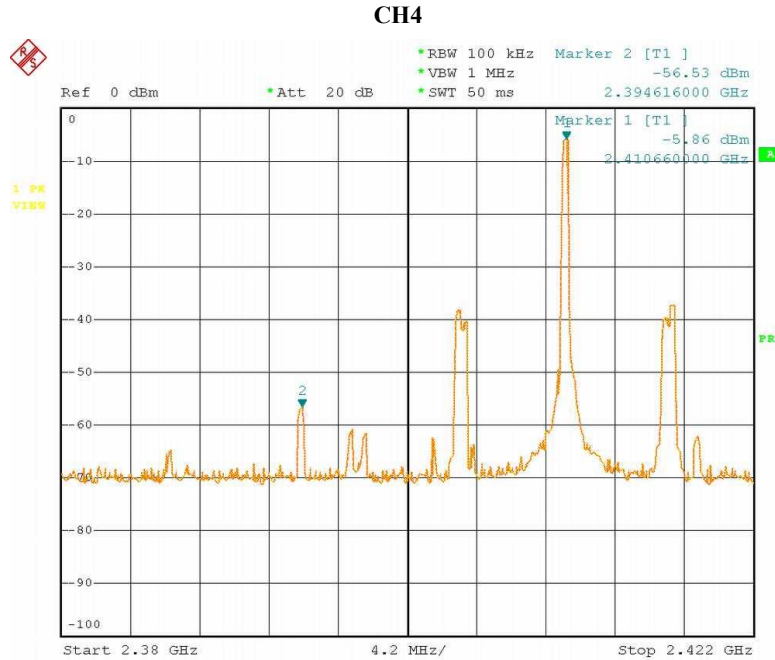

Date: 13.SEP.2004 23:27:38

**Note:** Lower band edge: Emission radiated outside of the lower band edge are attenuated by at least 50dB below the level of the fundamental. The maximum is -56.53dBm at 2.394616GHz which complies with the limits.

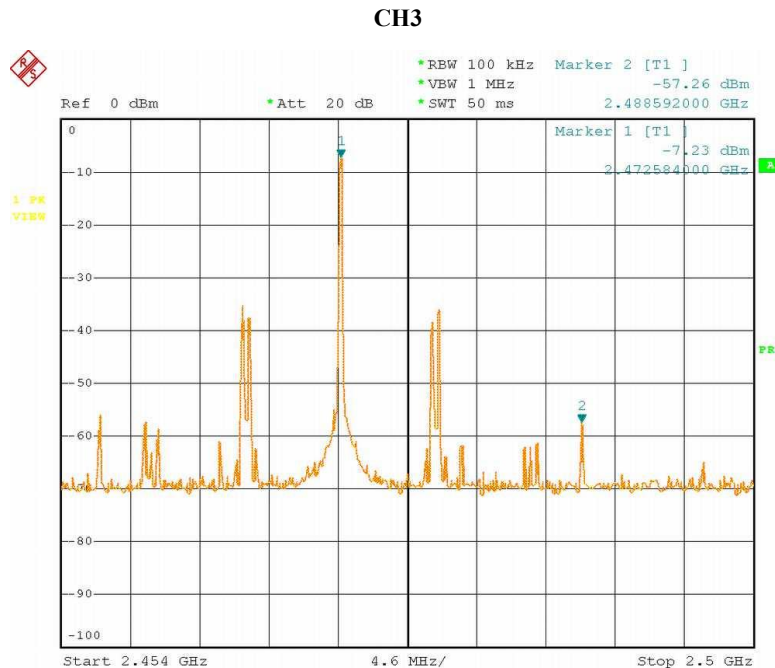

Date: 13.SEP.2004 23:32:55

**Note:** Upper band edge: Emission radiated outside of the upper band edge are attenuated by at least 50dB below the level of the fundamental. The maximum is -57.26dBm at 2.488592GHz which complies with the limits.



## **7. Antenna Requirement**

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a dipole antenna, this is permanently attached antenna and meets the requirements of this section.

## 8. Photos of Testing

### 8.1 EUT Test Photographs

Conducted emission test view



Radiated emission test view



## 8.2 EUT Detailed Photographs

EUT top view



EUT bottom view





EUT inside whole view



Main & RF board component side





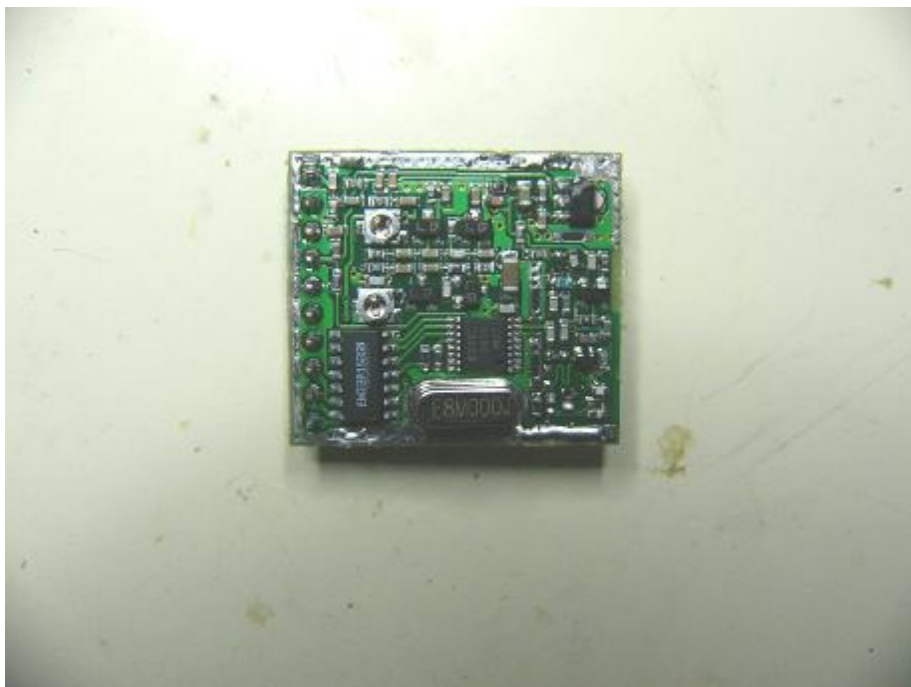

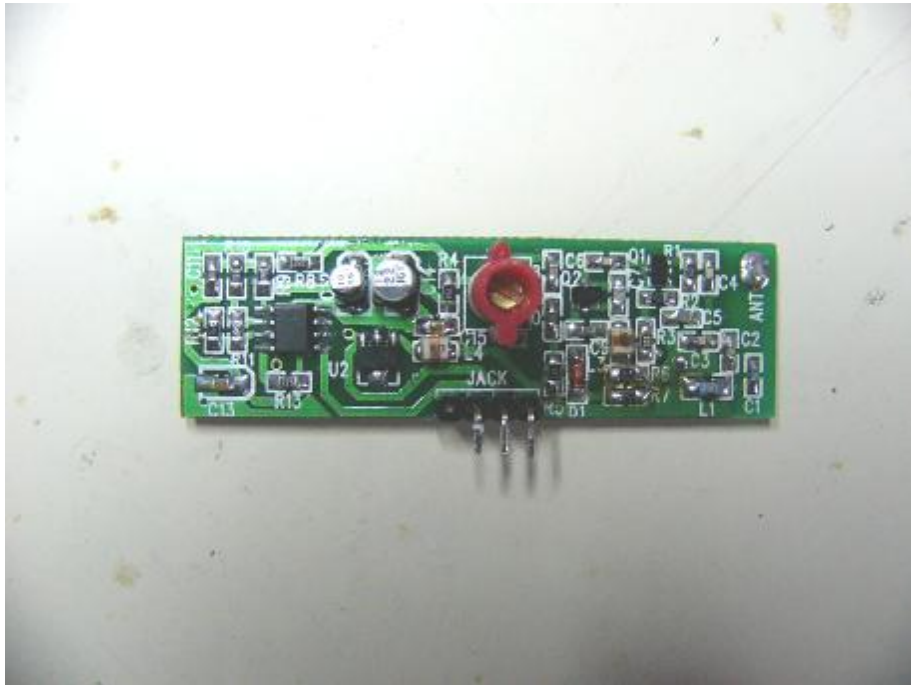

Main & RF board solder side



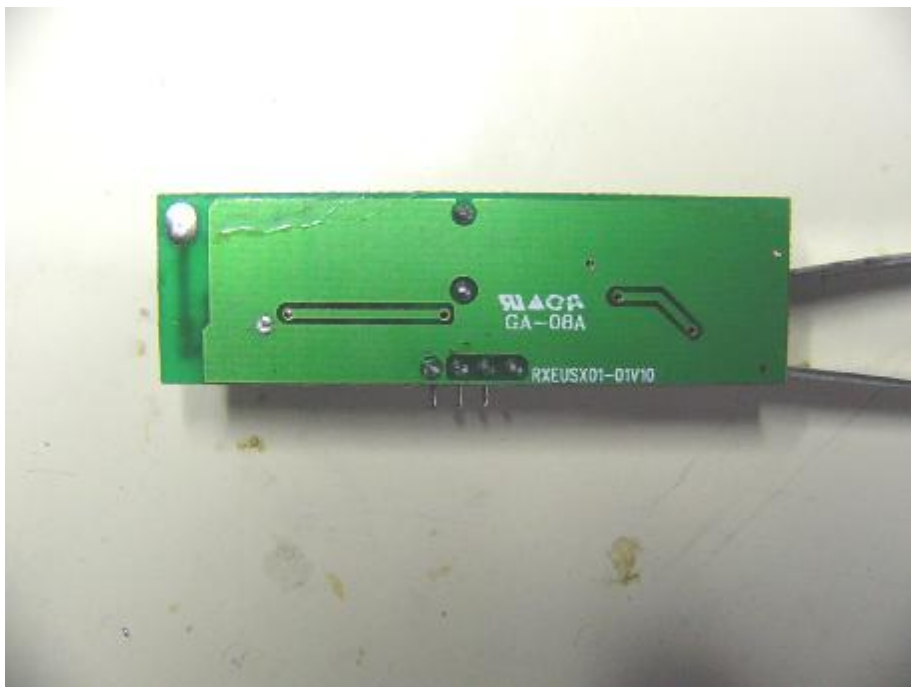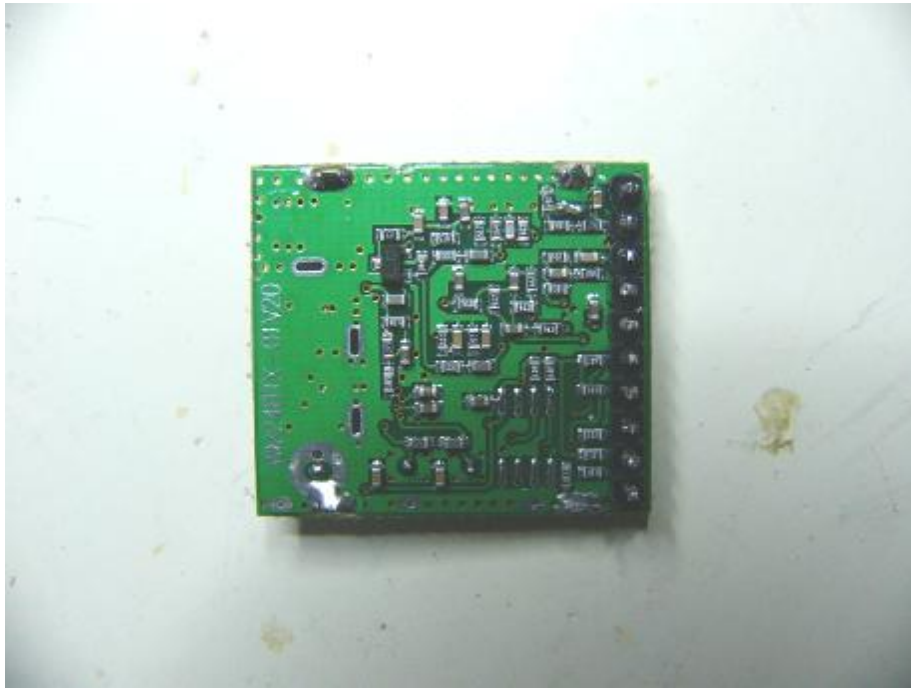

## 9. FCC ID Label

**FCC ID: RTMSV-04-TX**

**This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.**

The Label must not be a stick-on paper label. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

### Proposed Label Location on EUT

EUT Bottom View/Proposed FCC ID Label Location





## 10. Test Equipment

The following test equipments were used during the radiated & conducted emission test:

Equipment/ Facilities	Manufacturer	Model #	Serial No.	Date of Cal.	Due Date
Turntable	KMO	KSZ001T	200306	NCR	NCR
Antenna Tower	KMO	KSZ002AT	200307	NCR	NCR
OATS	KMO	KSZSITE001	N/A	July 06, 2004	July 06, 2005
EMI Test Receiver	Rohde & Schwarz	ESPI3	100180	Oct.18, 2003	Oct.18, 2004
Signal Generator	Rohde & Schwarz	SMT03	100059	Feb.01, 2004	Feb.01, 2005
Signal Generator	FLUKE	PM5418+Y/C	LO747012	Feb 01, 2004	Feb 01, 2005
Signal Generator	FLUKE	PM5418TX	LO738007	Feb 01, 2004	Feb 01, 2005
Biconical Antenna	Rohde & Schwarz	HK116	EMC0502	Dec. 14,2003	Dec. 14,2004
Bilog Antenna	Chase	CBL6111C	2576	Feb.01, 2004	Feb.01, 2005
Ultra Broadband Antenna	Rohde & Schwarz	HL 562	100110	June.05, 2004	June.05, 2005
AMN	Rohde & Schwarz	ESH3-Z5	100196	Oct. 23,2003	Oct. 23, 2004
AMN	Rohde & Schwarz	ESH3-Z5	100197	Oct. 23,2003	Oct. 23, 2004
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
Absorbing Clamp	Rohde & Schwarz	MDS-21	N/A	Oct. 29,2003	Oct. 29,2004
KMO Shielded Room	KMO	KMO-001	N/A	N/A	N/A
EMI Test Receiver	Rohde & Schwarz	ESCS30	100003	Feb. 27, 2004	Feb.27, 2005
AMN	Rohde & Schwarz	ESH3-Z5	100002	Feb. 01, 2004	Feb.01, 2005
LISN	Kyoritsu	KNW-407	8-1441-8	Feb. 23, 2004	Feb.23, 2005
EMI Test Receiver	Rohde & Schwarz	ESI26	838786/013	Feb. 01, 2004	Feb.01, 2005
Bilog Antenna	Chase	CBL6112B	2591	Feb. 01, 2004	Feb.01, 2005
Horn Antenna	Rohde & Schwarz	HF906	100014	Feb. 01, 2004	Feb.01, 2005
Power Meter	Rohde & Schwarz	NRVD	100041	Feb. 01, 2004	Feb.01, 2005
Radio Communication Test Set	Rohde & Schwarz	CMS 54	846621/024	Feb 01, 2004	Feb 01, 2005
Modulation Analyzer	Hewlett-Packard	8901B	2303A00362	Feb 01, 2004	Feb 01, 2005
Temperature Chamber	TABAI	PSL-4GTW	N/A	Feb 06,2004	Feb 06, 2005
3m Semi-Anechoic Chamber	Albatross Projects	9mX6mX6m	N/A	Feb. 01, 2004	Feb.01, 2005