

# FCC RADIO TEST REPORT

according to

47 CFR FCC Part 15 Subpart E § 15.407

**Equipment** : 802.11abgn Wireless USB Module  
**Model No.** : WUBR-507N(M); WUBR-507N(MU)  
**Brand Name** : SparkLAN  
**Filing Type** : New Application  
**Applicant** : SparkLAN Communications, Inc.  
8F., No.257, Sec. 2, Tiding Blvd., Neihsu District, Taipei, Taiwan  
**FCC ID** : RYK-WUBR507N  
**Manufacturer** : SparkLAN Communications, Inc.  
8F., No.257, Sec. 2, Tiding Blvd., Neihsu District, Taipei, Taiwan  
**Received Date** : Oct. 23, 2010  
**Final Test Date** : Nov. 08, 2010

## Statement

Test result included is only for the dipole antenna 802.11a/n (5150~5350MHz; 5470~5725MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart E.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



**SPORTON International Inc.**

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

**Table of Contents**

**1 SUMMARY OF THE TEST RESULT .....2**

**2 GENERAL INFORMATION.....3**

2.1 Product Details.....3

2.2 Table for Filed Antenna.....3

2.3 Table for Carrier Frequencies.....5

2.4 Table for Test Modes .....6

2.5 Table for Testing Locations .....6

2.6 Table for Supporting Units.....7

2.7 Table for Parameters of Test Software Setting .....7

2.8 Test Configuration.....8

**3 TEST RESULT ..... 10**

3.1 AC Power Line Conducted Emissions Measurement.....10

3.2 99% Occupied Bandwidth Measurement.....14

3.3 Maximum Conducted Output Power Measurement .....30

3.4 Power Spectral Density Measurement.....34

3.5 Peak Excursion Measurement.....50

3.6 Radiated Emissions Measurement .....67

3.7 Band Edge and Fundamental Emissions Measurement .....123

3.8 Frequency Stability Measurement .....133

3.9 Antenna Requirements.....136

**4 LIST OF MEASURING EQUIPMENTS ..... 137**

**5 TEST LOCATION..... 139**

**6 TAF CERTIFICATE OF ACCREDITATION ..... 140**

**APPENDIX A. MAXIMUM PERMISSIBLE EXPOSURE ..... A1 ~ A3**

**APPENDIX B. TEST PHOTOS ..... B1 ~ B7**

**APPENDIX C. PHOTOGRAPHS OF EUT ..... C1 ~ C14**

### History of This Test Report

Original Issue Date: Nov. 10, 2010

Report No.: FR001817AN

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

# CERTIFICATE OF COMPLIANCE

according to

47 CFR FCC Part 15 Subpart E § 15.407

Equipment : 802.11abgn Wireless USB Module  
Model No. : WUBR-507N(M); WUBR-507N(MU)  
Brand Name : SparkLAN  
Applicant : SparkLAN Communications, Inc.  
8F., No.257, Sec. 2, Tiding Blvd., Neihu District, Taipei, Taiwan

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 23, 2010 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu / Vice Manager

## **SPORTON International Inc.**

No. 52 Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

**1 SUMMARY OF THE TEST RESULT**

<b>Applied Standard: 47 CFR FCC Part 15 Subpart E</b>				
<b>Part</b>	<b>Rule Section</b>	<b>Description of Test</b>	<b>Result</b>	<b>Under Limit</b>
3.1	15.207	AC Power Line Conducted Emissions	Complies	3.54 dB
3.2	15.407(a)	26dB Spectrum Bandwidth	Complies	-
3.3	15.407(a)	Maximum Conducted Output Power	Complies	1.89 dB
3.4	15.407(a)	Power Spectral Density	Complies	0.11 dB
3.5	15.407(a)	Peak Excursion	Complies	5.05 dB
3.6	15.407(b)	Radiated Emissions	Complies	4.11 dB
3.7	15.407(b)	Band Edge Emissions	Complies	1.25 dB
3.8	15.407(g)	Frequency Stability	Complies	-
3.9	15.203	Antenna Requirements	Complies	-

<b>Test Items</b>	<b>Uncertainty</b>	<b>Remark</b>
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.5dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
Peak Excursion	±0.5dB	Confidence levels of 95%
26dB Spectrum Bandwidth / Frequency Stability	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

## 2 GENERAL INFORMATION

### 2.1 Product Details

Only the radio detail of IEEE 802.11a/n is shown in this report. For more detailed features description, please refer to the manufacturer’s specifications or user’s manual.

Items	Description
Power Type	Power from host
Modulation Data Rate (Mbps)	See the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Frequency Range	5150~5350MHz; 5470~5725MHz
Channel Band Width (99%)	1TX-802.11a: Band 1: 16.75 MHz ; Band 2~Band 3: 16.67 MHz 2TX-802.11n MCS 8: (20MHz) Band 1: 17.60 MHz ; Band 2: 17.70 MHz ; Band 3: 17.60 MHz (40MHz) Band 1~Band 3: 36.00 MHz
Conducted Output Power	1TX-802.11a: Band 1: 12.11 dBm ; Band 2: 11.67 dBm ; Band 3: 11.75 dBm 2TX-802.11n MCS 8: (20MHz) Band 1: 11.61 dBm ; Band 2: 11.26 dBm ; Band 3: 11.43 dBm (40MHz) Band 1: 11.38 dBm ; Band 2: 11.51 dBm ; Band 3: 11.61 dBm

### 2.2 Table for Filed Antenna

#### Antenna & Bandwidth

Antenna Mode	Single Chain		Two Chain	
	20 MHz	40 MHz	20 MHz	40 MHz
802.11a (5150~5250MHz)	V	X	X	X
802.11a (5250~5350MHz)	V	X	X	X
802.11a (5470~5725MHz)	V	X	X	X
5G 802.11n (5150~5250MHz)	X	X	V	V
5G 802.11n (5250~5350MHz)	X	X	V	V
5G 802.11n (5470~5725MHz)	X	X	V	V

Ant.	Antenna Type	Connector	Gain (dBi)		Remark
			2.4G	5G	
A	Dipole Antenna	U.FL	2	2	TX / RX
B	Dipole Antenna	U.FL	2	2	TX / RX

Note:

1. IEEE 802.11 a only used one antenna for signal transmitting and receiving.
2. IEEE 802.11n used two antennas are for signal transmitting and receiving.  
(2T2R Spatial Multiplexing MIMO configuration)

**IEEE 802.11n Modulation Scheme**

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Data rate(Mbps)	
					20MHz	40MHz	20MHz	40MHz	800nsGI	
									20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

**2.3 Table for Carrier Frequencies**

Frequency Band	Channel No.	Frequency (20MHz)	Channel No.	Frequency (40MHz)
5150~5250 MHz Band 1	36	5180 MHz	38	5190 MHz
	40	5200 MHz	46	5230 MHz
	44	5220 MHz	-	-
	48	5240 MHz	-	-

Frequency Band	Channel No.	Frequency (20MHz)	Channel No.	Frequency (40MHz)
5250~5350 MHz Band 2	52	5260 MHz	54	5270 MHz
	56	5280 MHz	62	5310 MHz
	60	5300 MHz	-	-
	64	5320 MHz	-	-

Frequency Band	Channel No.	Frequency (20MHz)
5470~5725 MHz Band 3	100	5500 MHz
	104	5520 MHz
	108	5540 MHz
	112	5560 MHz
	116	5580 MHz
	132	5660 MHz
	136	5680 MHz
	140	5700 MHz
	Channel No.	Frequency (40MHz)
	102	5510 MHz
	110	5550 MHz
	134	5670 MHz



**2.4 Table for Test Modes**

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on the entire possible Configuration for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal Mode	Auto	-	-
Max. Conducted Output Power	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56 /64/100/116/140	A
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56 /64/100/116/140	A/B /A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	38/46/54/62/102/110/134	
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement Power Spectral Density Peak Excursion	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56 /64/100/116/140	A
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56 /64/100/116/140	A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	38/46/54/62/102/110/134	
Radiated Emission Below 1GHz	Normal Mode	Auto	-	-
Radiated Emission Above 1GHz	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56 /64/100/116/140	A
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56 /64/100/116/140	A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	38/46/54/62/102/110/134	
Band Edge Emission	11a Band 1~3/BPSK	6Mbps	36/40/48/52/56 /64/100/116/140	A
	11n Band 1~3/BPSK MCS 8 (20MHz)	13Mbps	36/40/48/52/56 /64/100/116/140	A+B
	11n Band 1~3/BPSK MCS 8 (40MHz)	27Mbps	38/46/54/62/102/110/134	

**2.5 Table for Testing Locations**

Test Site No.	Site Category	Location
CO04-HY	Conduction	Hwa Ya
TH01-HY	OVEN Room	Hwa Ya
03CH03-HY	SAC	Hwa Ya

Semi Anechoic Chamber (SAC).

**2.6 Table for Supporting Units**

Support Unit	Brand	Model	FCC ID	Remark
Notebook	DELL	PP20L	N/A	Conducted
(USB) Mouse	Microsoft	1004	N/A	
iPod nano	Apple	A1119	N/A	
AP (Remote Workstation)	EDIMAX	BR-6204WG	NDD9562040507	
Notebook	DELL	PP20L	N/A	Radiated

**2.7 Table for Parameters of Test Software Setting**

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

**For Single Chain:**

**Power Parameters of IEEE 802.11a**

Test Software Version	RT3x7xQA		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n	8	8	8
Frequency	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11n	8	8	8
Frequency	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11n	0A	0B	0C

**For Two Chain:**

**Power Parameters of IEEE 802.11n Ant. A+Ant. B (20MHz)**

Test Software Version	RT3x7xQA		
Frequency	5180 MHz	5200 MHz	5240 MHz
IEEE 802.11n	04/04	05/05	05/05
Frequency	5260 MHz	5280 MHz	5320 MHz
IEEE 802.11n	05/05	05/05	05/05
Frequency	5500 MHz	5580 MHz	5700 MHz
IEEE 802.11n	08/07	09/08	0A/08


**Power Parameters of IEEE 802.11n Ant. A+Ant. B (40MHz)**

Test Software Version	RT3x7xQA		
Frequency	5190 MHz	5230 MHz	5270 MHz
IEEE 802.11n	06/05	06/06	07/06
Frequency	5310 MHz	5510 MHz	5550 MHz
IEEE 802.11n	07/07	09/08	09/08
Frequency	5670 MHz		
IEEE 802.11n	0A/09		


## 2.8 Test Configuration

### 2.8.1 Radiation Emissions Test Configuration

**For radiated emissions 9kHz~1GHz**

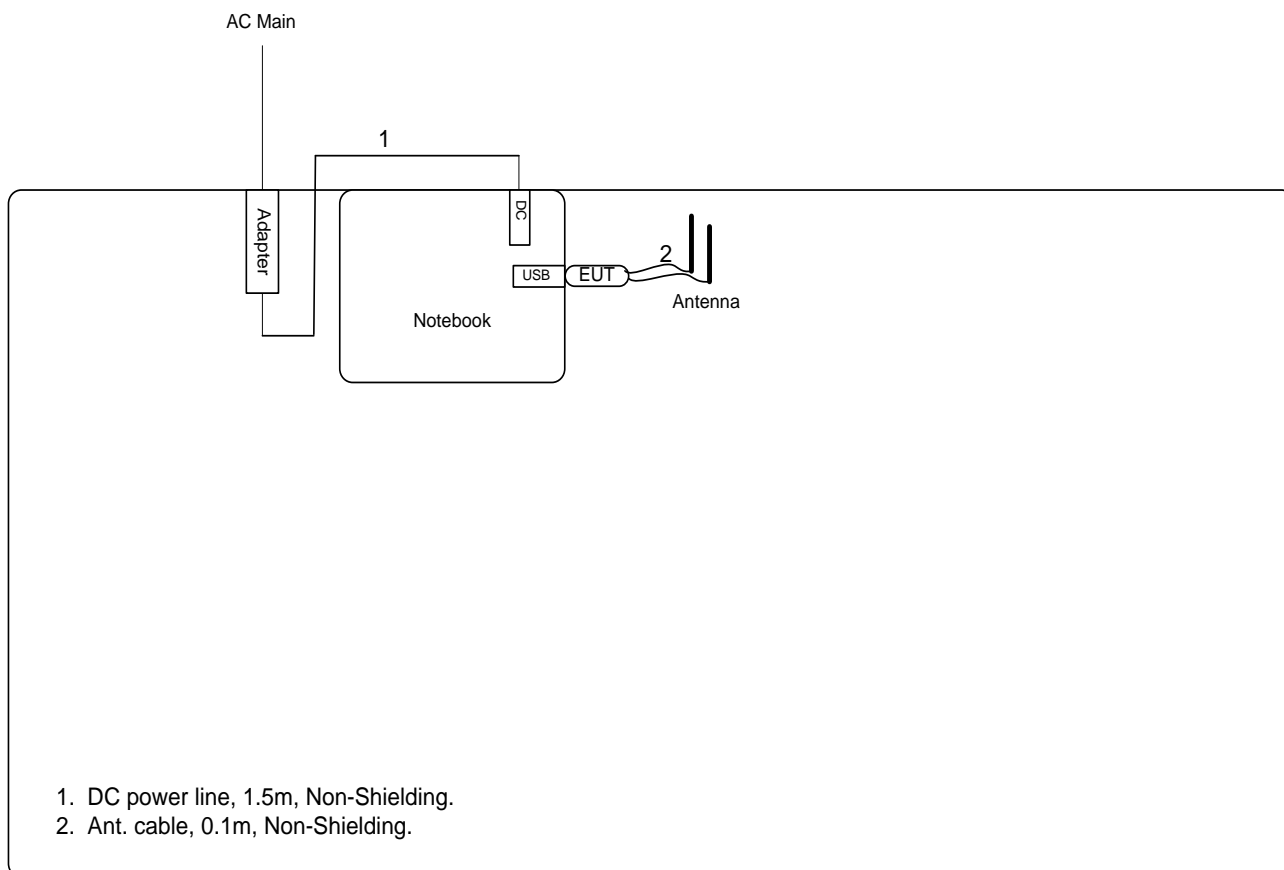

**For radiated emissions above 1GHz**

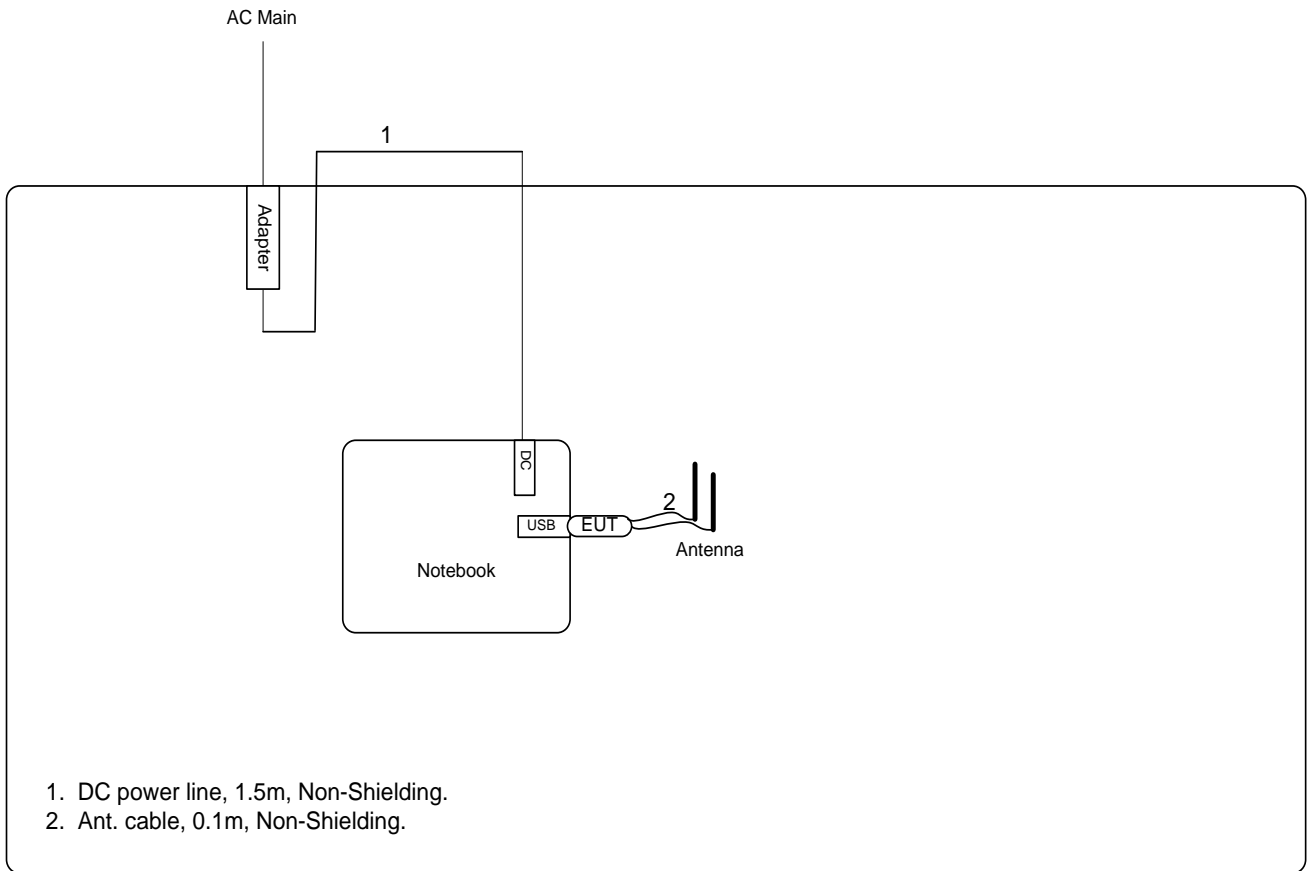

### 3 TEST RESULT

#### 3.1 AC Power Line Conducted Emissions Measurement

##### 3.1.1 Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

**Class B**

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

##### 3.1.2 Measuring Instruments and Setting


Please refer to section 4 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

##### 3.1.3 Test Procedures

1. The EUT warm up about 15 minutes then start test.
2. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
5. The frequency range from 150 KHz to 30 MHz was searched.
6. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
7. The measurement has to be done between each power line and ground at the power terminal.

3.1.4 Test Setup Layout

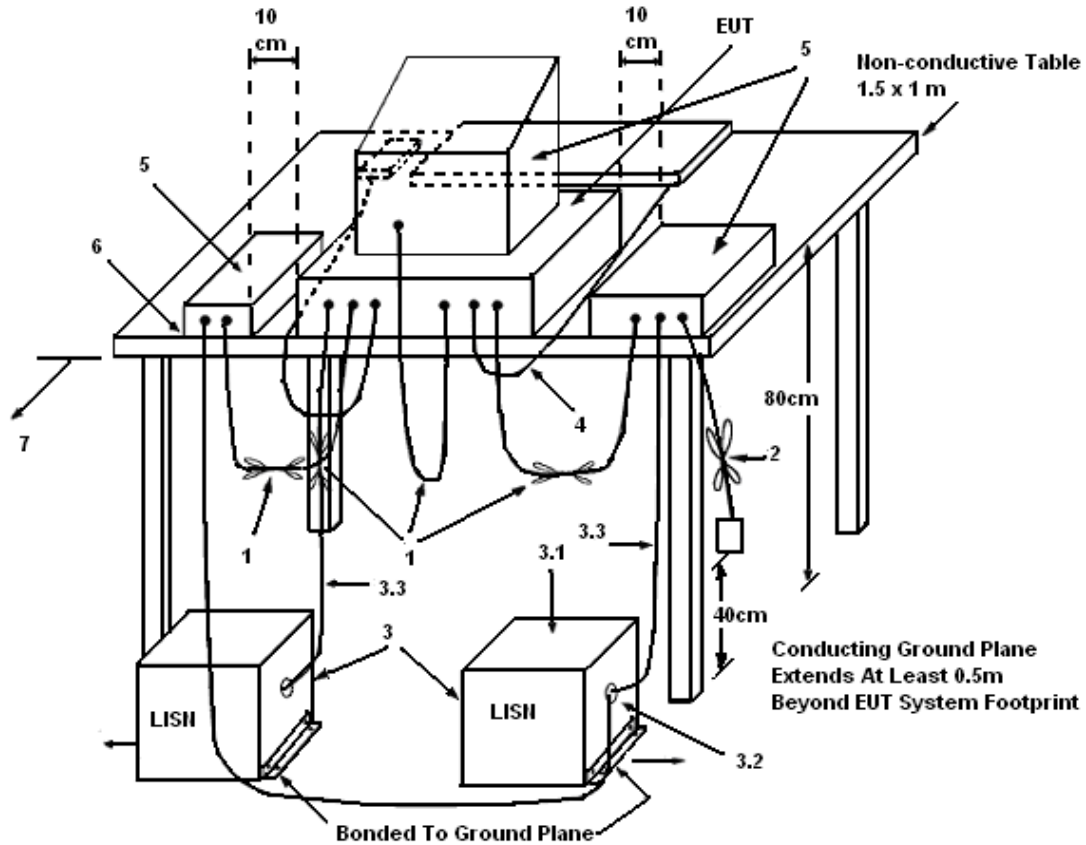

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
- (3.1) All other equipment powered from additional LISN(s).
- (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
- (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

3.1.5 Test Deviation

There is no deviation with the original standard.


3.1.6 EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.

3.1.7 Results of AC Power Line Conducted Emissions Measurement


Final Test Date	Nov. 08, 2010	Test Site No.	CO04-HY
Temperature	24.9°C	Humidity	47.2%
Test Engineer	Jason	Configuration	Normal Mode

Line

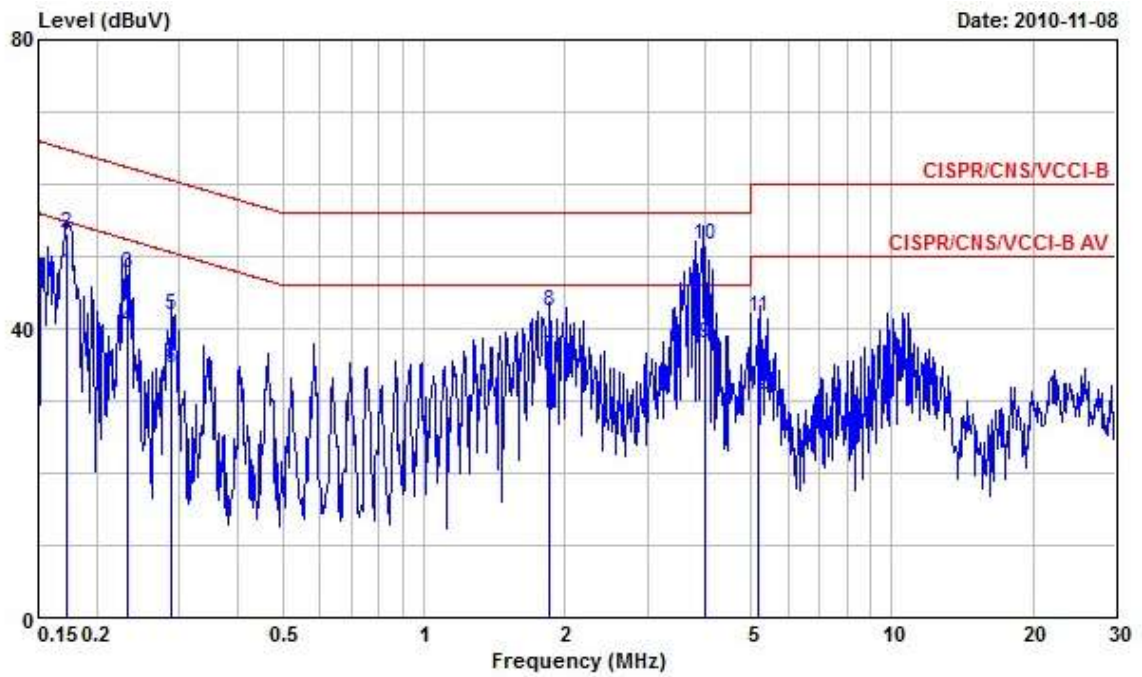

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1730540	47.68	-7.13	54.81	47.31	0.08	0.29	Average
2	0.1730540	53.18	-11.63	64.81	52.81	0.08	0.29	QP
3	0.2316380	47.76	-14.63	62.39	47.40	0.08	0.28	QP
4	0.2316380	39.96	-12.43	52.39	39.60	0.08	0.28	Average
5	0.2893470	41.89	-18.65	60.54	41.59	0.09	0.21	QP
6	0.2893470	34.39	-16.15	50.54	34.09	0.09	0.21	Average
7	1.850	35.97	-10.03	46.00	35.70	0.13	0.14	Average
8	1.850	42.37	-13.63	56.00	42.10	0.13	0.14	QP
9	4.000	37.78	-8.22	46.00	37.40	0.16	0.22	Average
10	4.000	51.48	-4.52	56.00	51.10	0.16	0.22	QP
11	5.200	41.65	-18.35	60.00	41.21	0.19	0.25	QP
12	5.200	30.75	-19.25	50.00	30.31	0.19	0.25	Average

Neutral

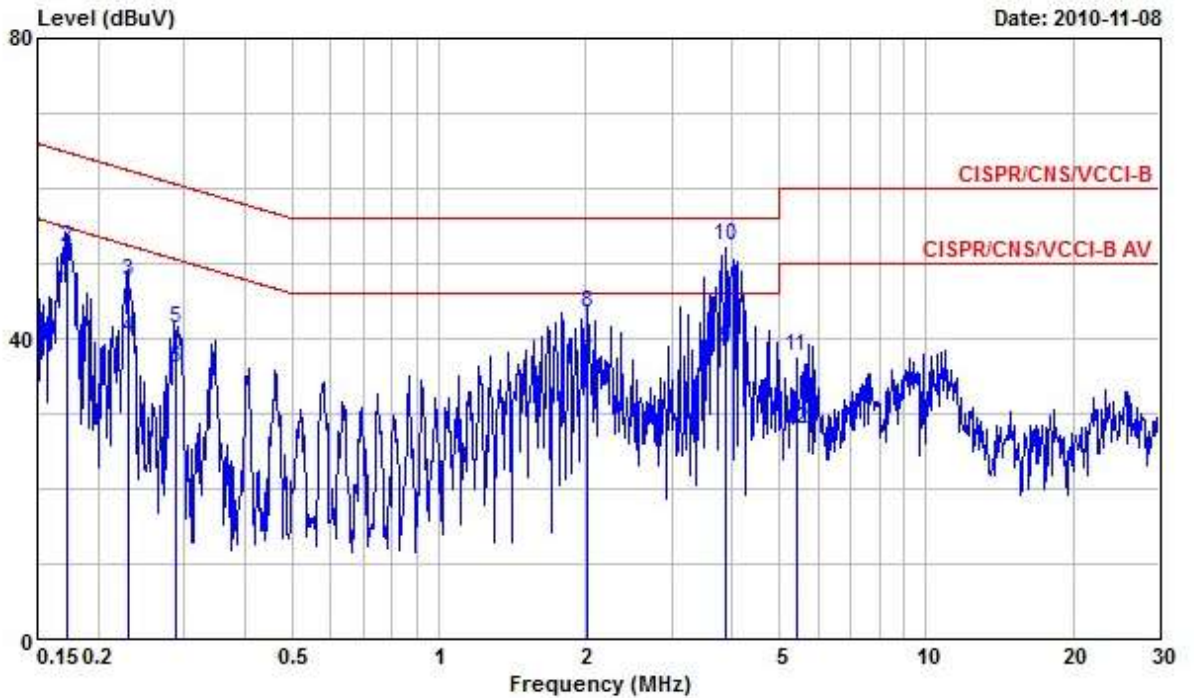

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1720450	46.27	-8.59	54.86	45.90	0.08	0.29	Average
2	0.1720450	52.14	-12.72	64.86	51.77	0.08	0.29	QP
3	0.2303960	47.66	-14.78	62.44	47.30	0.08	0.28	QP
4	0.2303960	39.96	-12.48	52.44	39.60	0.08	0.28	Average
5	0.2882840	41.39	-19.18	60.57	41.10	0.08	0.21	QP
6	0.2882840	35.99	-14.58	50.57	35.70	0.08	0.21	Average
7	2.020	36.95	-9.05	46.00	36.70	0.11	0.14	Average
8	2.020	43.55	-12.45	56.00	43.30	0.11	0.14	QP
9	3.870	38.76	-7.24	46.00	38.39	0.15	0.22	Average
10	3.870	52.46	-3.54	56.00	52.09	0.15	0.22	QP
11	5.420	37.75	-22.25	60.00	37.30	0.19	0.26	QP
12	5.420	27.95	-22.05	50.00	27.50	0.19	0.26	Average

Note:

Level = Read Level + LISN Factor + Cable Loss.



**3.2 99% Occupied Bandwidth Measurement**

**3.2.1 Limit**

No restriction limits. But resolution bandwidth within band edge measurement is 1% of the 99% occupied bandwidth.

**3.2.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.2.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 300 kHz and the video bandwidth of 1000 kHz were used.
3. Measured the spectrum width with power higher than 26dB below carrier.
4. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.2.4 Test Setup Layout**

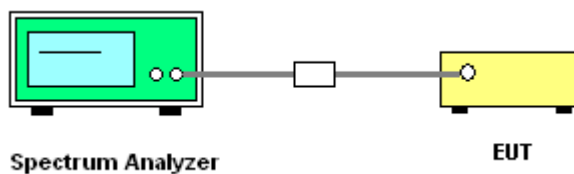

**3.2.5 Test Deviation**

There is no deviation with the original standard.

**3.2.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.2.7 Test Result of 99% Occupied Bandwidth**

<b>Final Test Date</b>	Nov. 04, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**For Single Chain:**

**Configuration of IEEE 802.11a**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.11	16.75
40	5200 MHz	20.11	16.75
48	5240 MHz	20.11	16.67
52	5260 MHz	20.11	16.67
56	5280 MHz	20.11	16.67
64	5320 MHz	20.03	16.67
100	5500 MHz	20.03	16.67
116	5580 MHz	20.11	16.67
140	5700 MHz	20.03	16.67

**For Two Chain:**

**Configuration IEEE 802.11n (20MHz)**


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	21.10	17.60
40	5200 MHz	20.00	17.60
48	5240 MHz	20.00	17.60
52	5260 MHz	20.00	17.60
56	5280 MHz	19.90	17.70
64	5320 MHz	19.90	17.60
100	5500 MHz	19.90	17.60
116	5580 MHz	19.80	17.60
140	5700 MHz	19.90	17.60

**Configuration IEEE 802.11n (40MHz)**

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.00	36.00
46	5230 MHz	40.00	36.00
54	5270 MHz	40.00	36.00
62	5310 MHz	39.80	36.00
102	5510 MHz	40.00	36.00
110	5550 MHz	40.00	36.00
134	5670 MHz	40.00	36.00


For Single Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

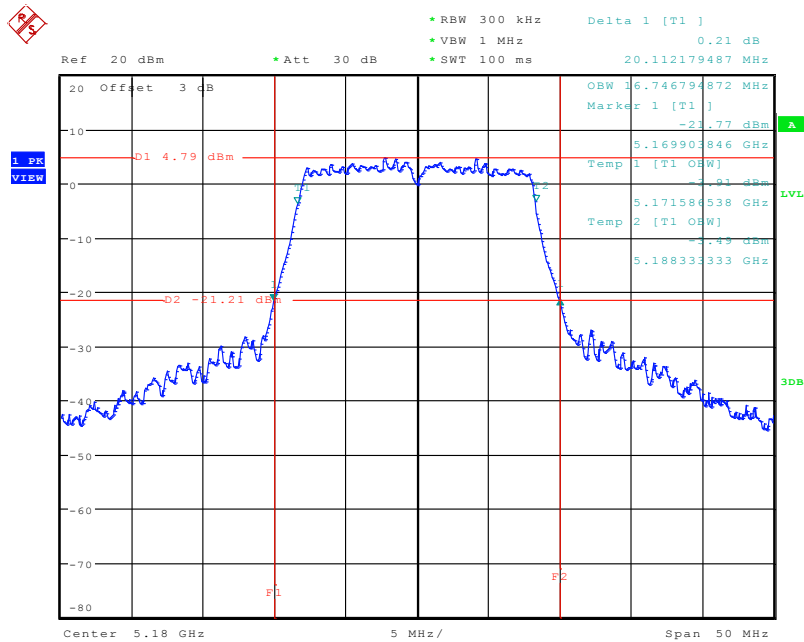


Date: 4.NOV.2010 10:54:26

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

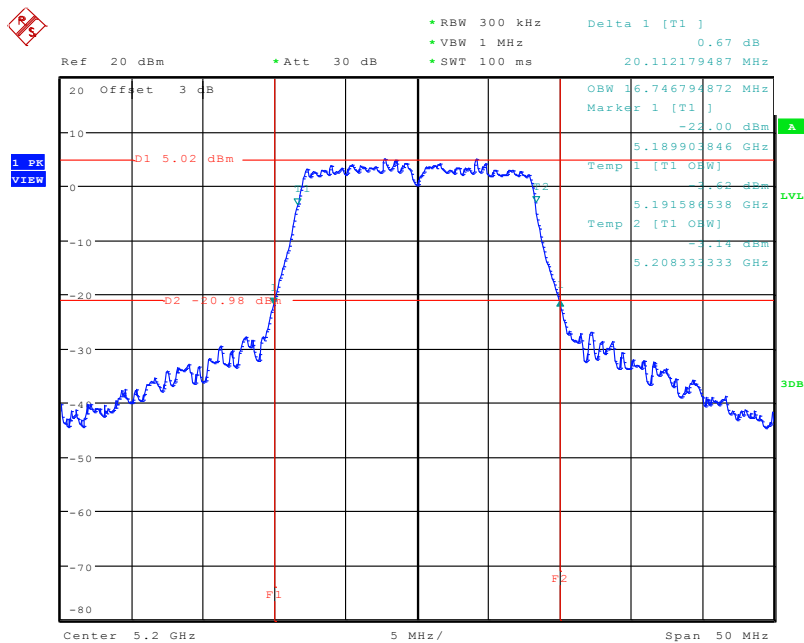


Date: 4.NOV.2010 10:58:39

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

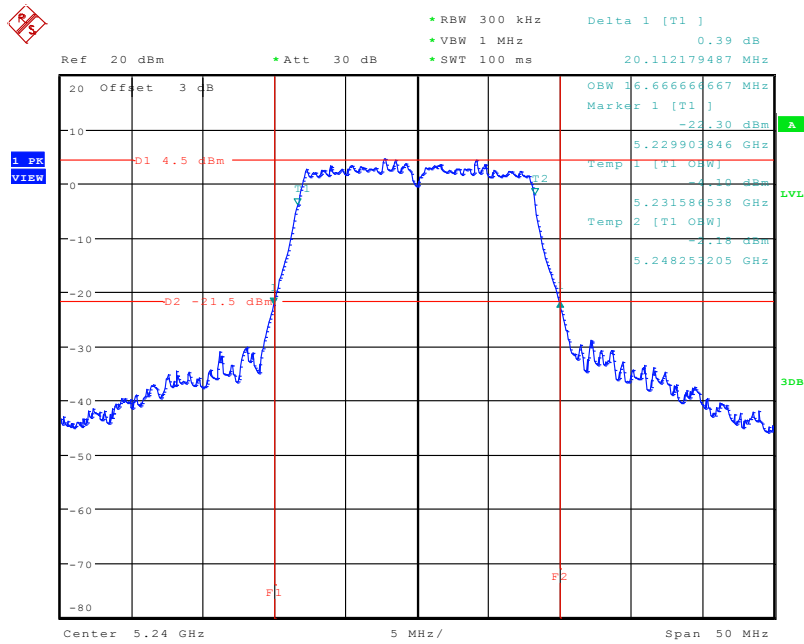


Date: 4.NOV.2010 11:00:43

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5260 MHz

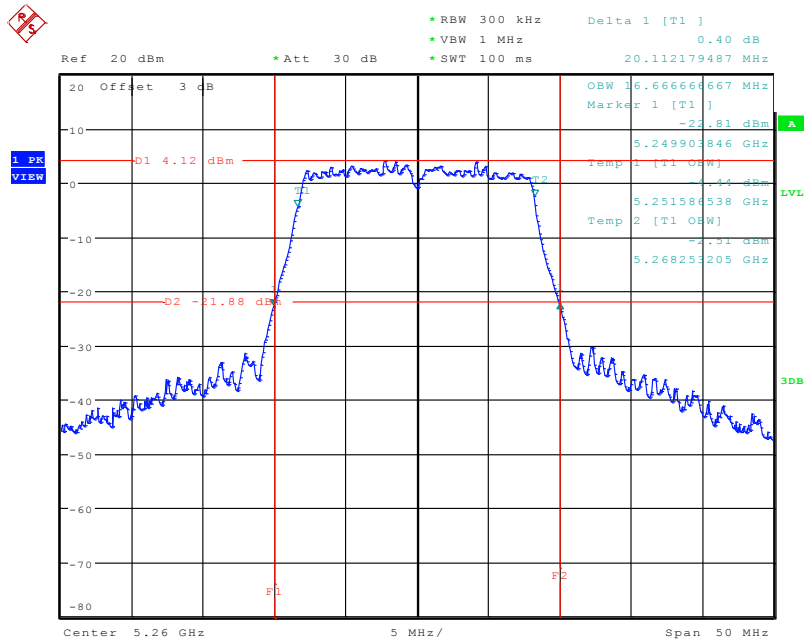


Date: 4.NOV.2010 11:02:37

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5280 MHz

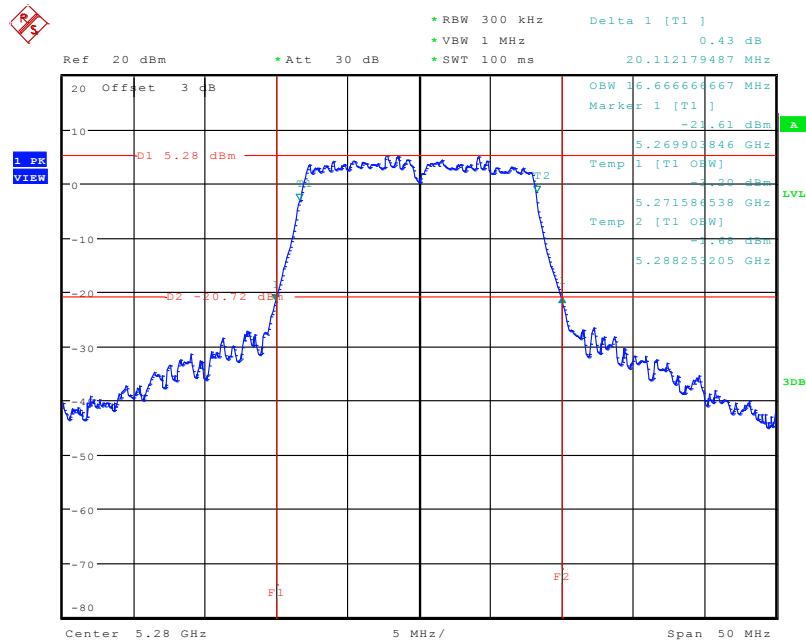


Date: 4.NOV.2010 12:40:06

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5320 MHz

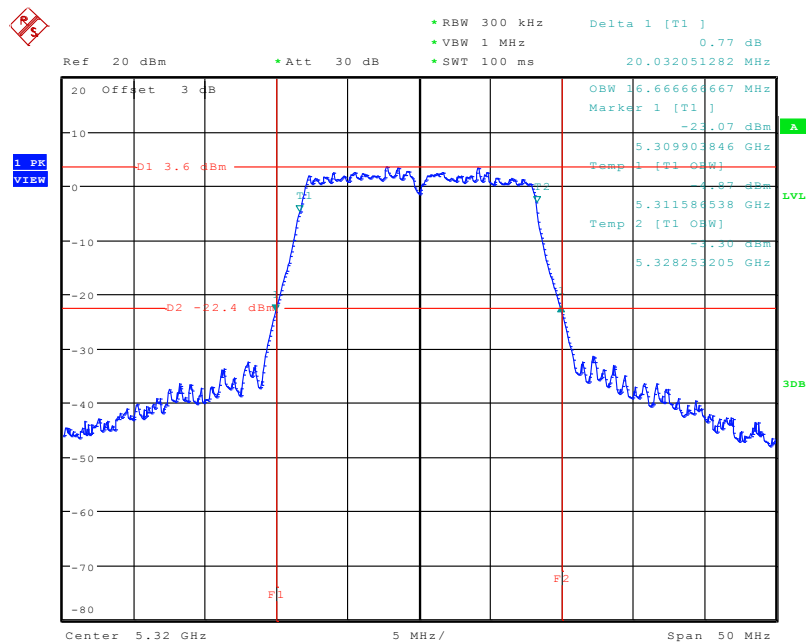


Date: 4.NOV.2010 12:42:40

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5500 MHz

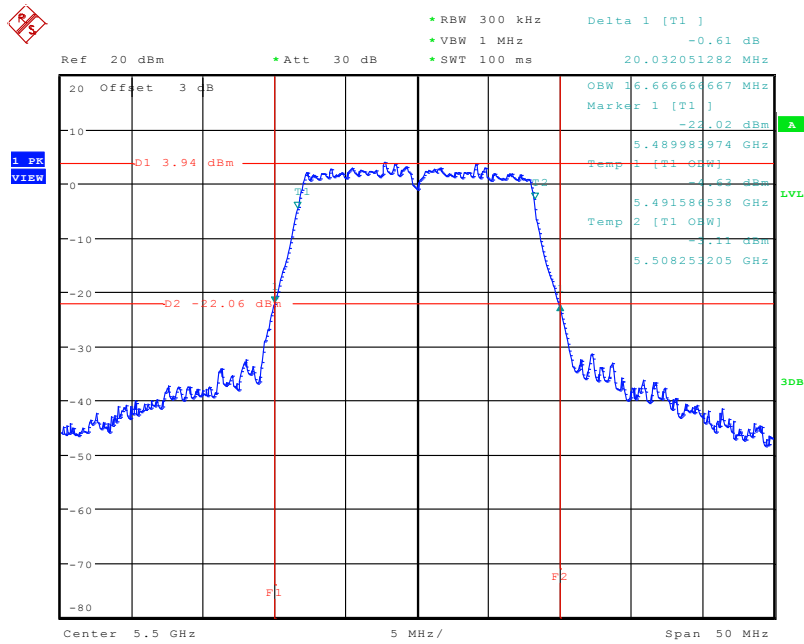


Date: 4.NOV.2010 12:44:42

26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5580 MHz

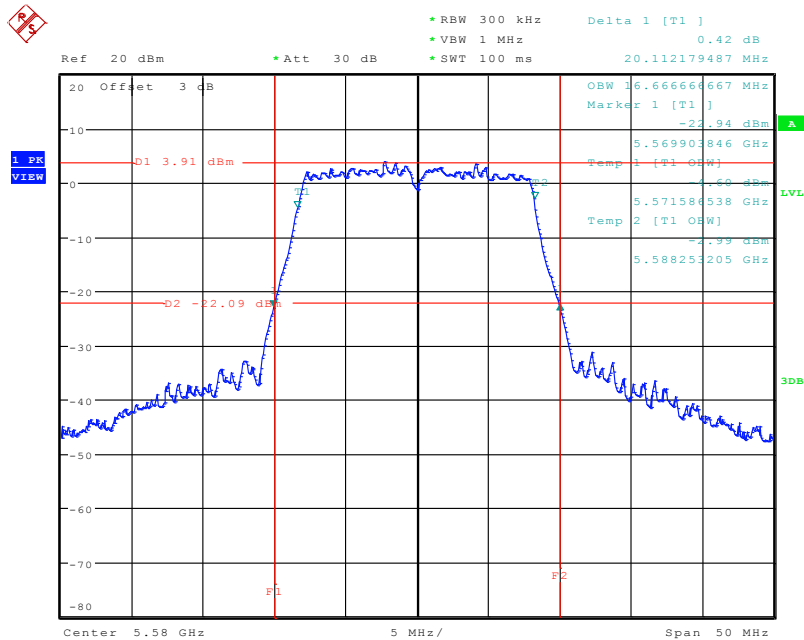

Date: 4.NOV.2010 12:46:34


26 dB Bandwidth Plot on Configuration IEEE 802.11a / 5700 MHz

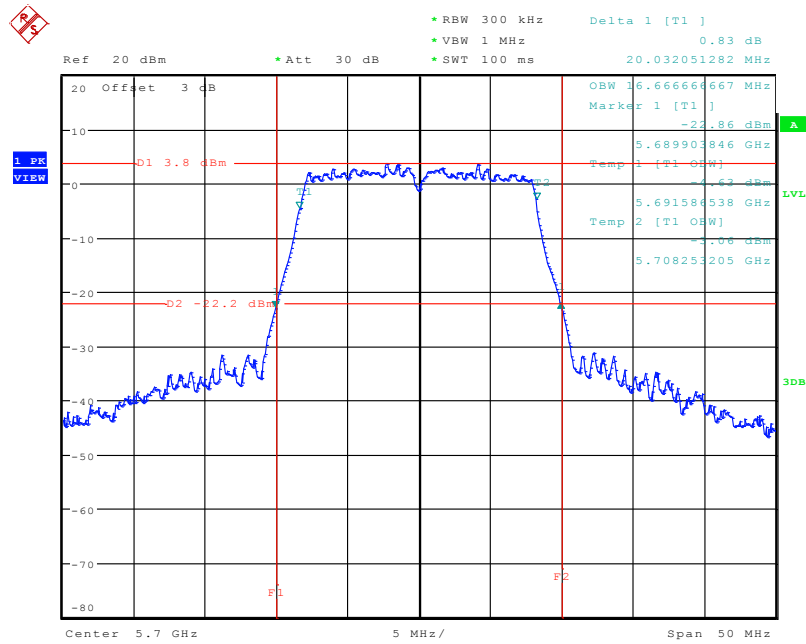

Date: 4.NOV.2010 12:48:22


For Two Chain:

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)/ 5180 MHz

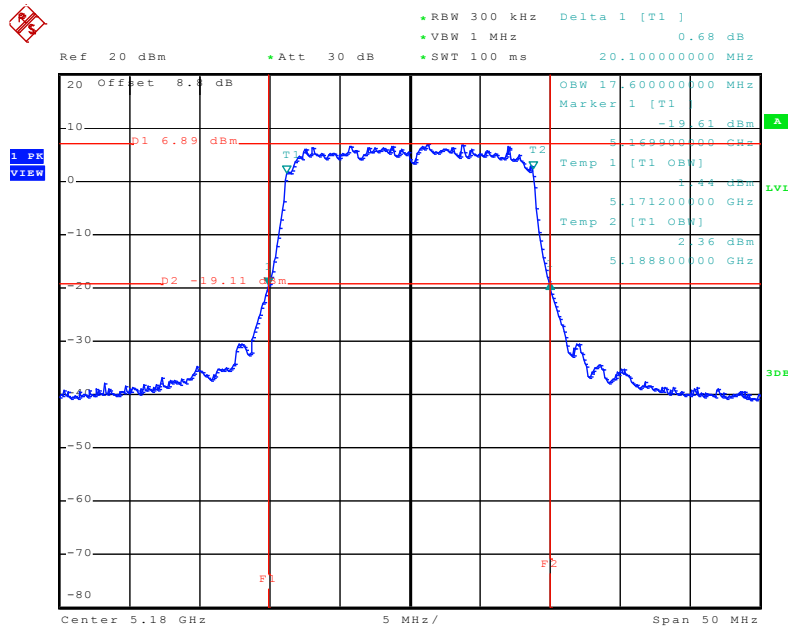

Date: 4.NOV.2010 20:45:22


26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5200 MHz

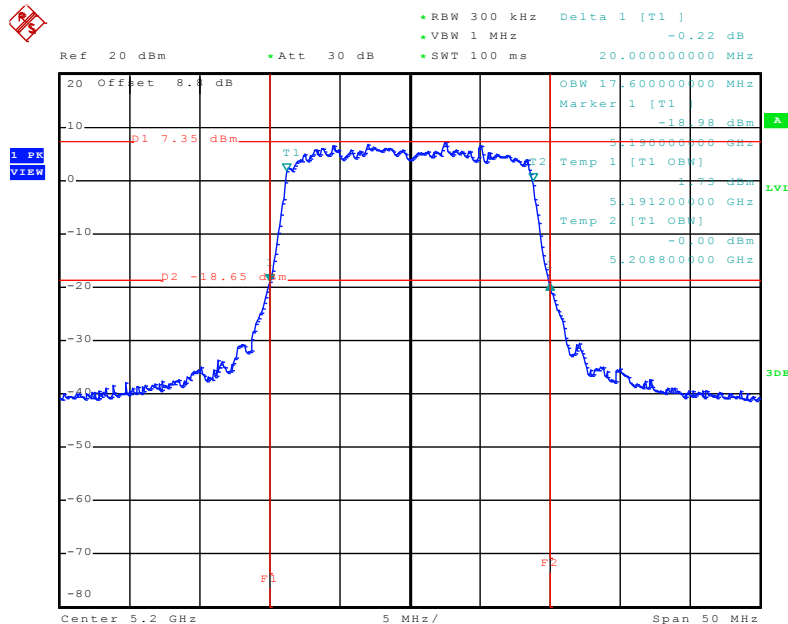

Date: 4.NOV.2010 20:48:41




26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5240 MHz

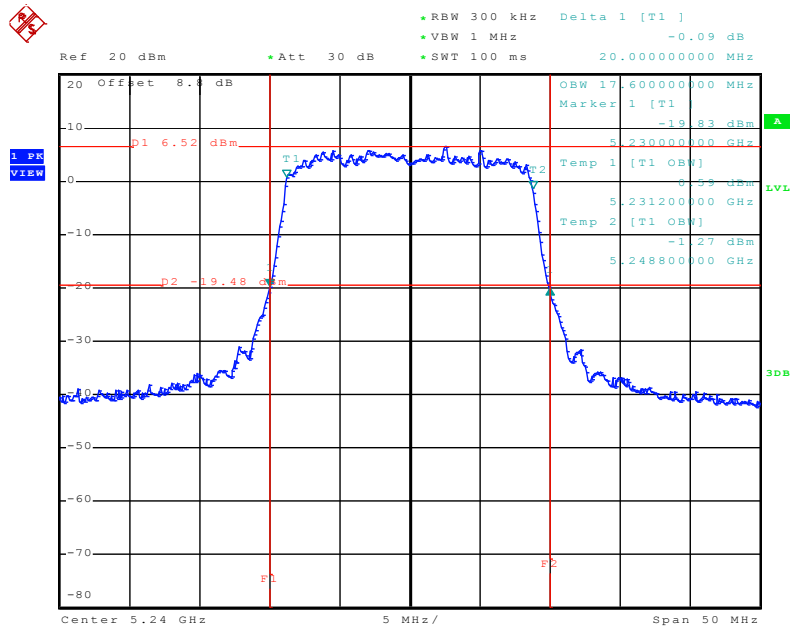


Date: 4.NOV.2010 20:50:40

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)/ 5260 MHz

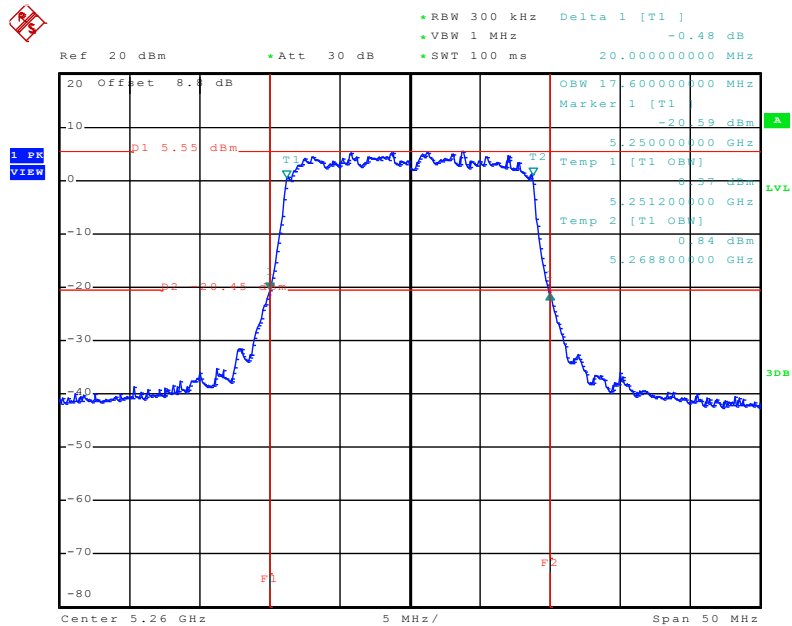


Date: 4.NOV.2010 20:52:23

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5280 MHz

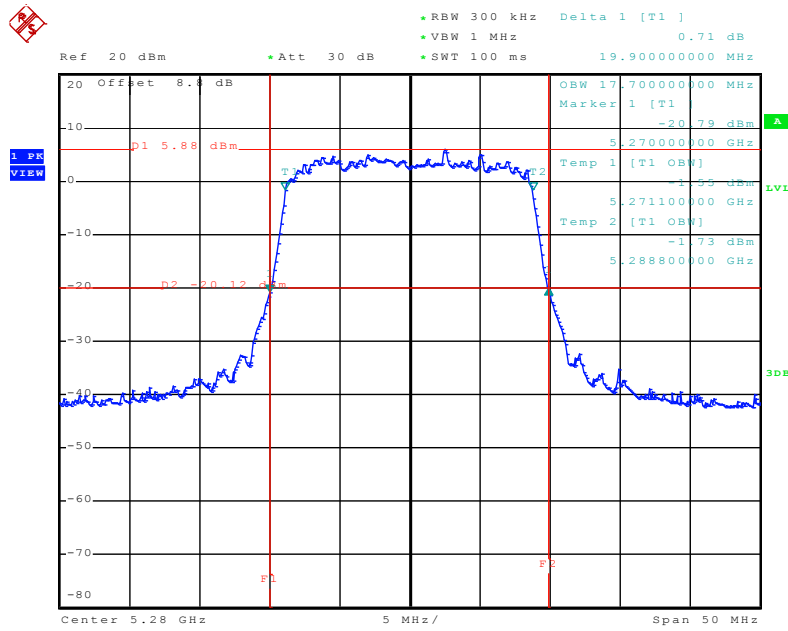


Date: 4.NOV.2010 20:54:10

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5320 MHz

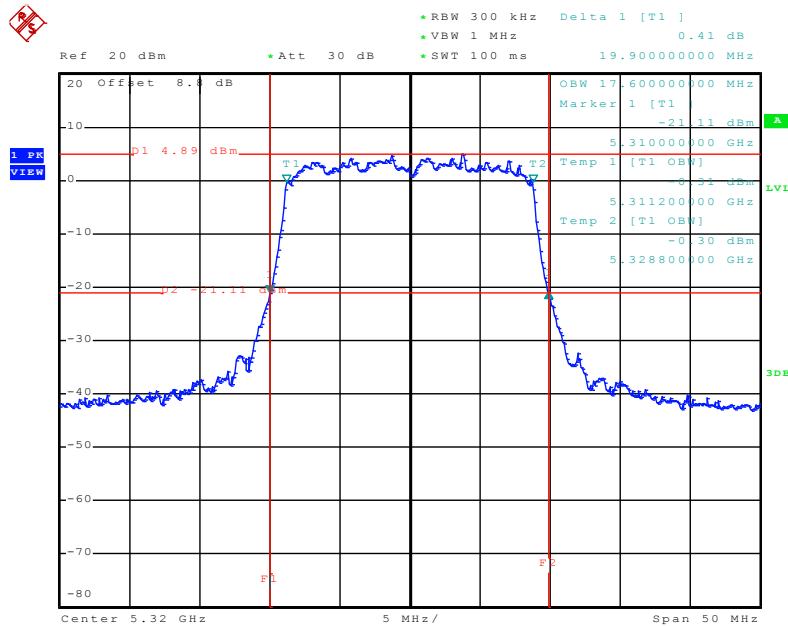


Date: 4.NOV.2010 20:56:08

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)/ 5500 MHz

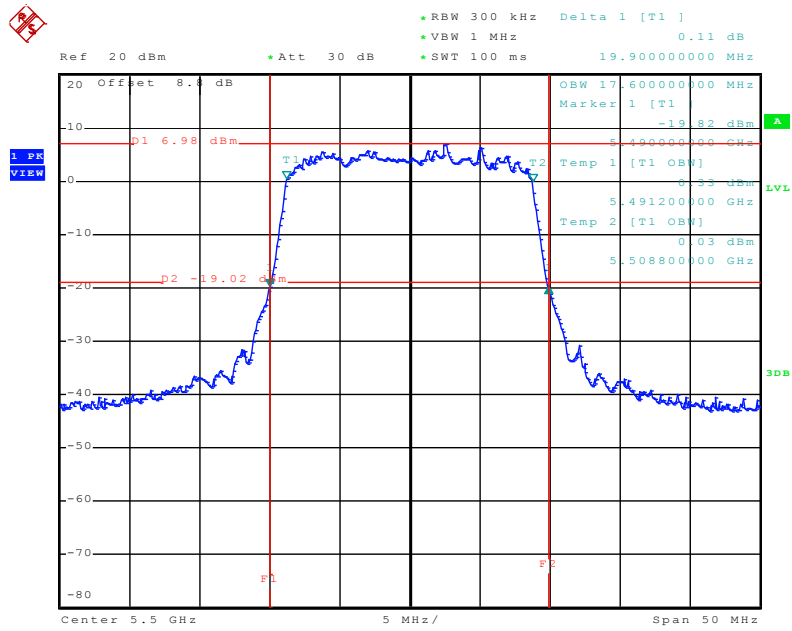


Date: 4.NOV.2010 20:58:04

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5580 MHz

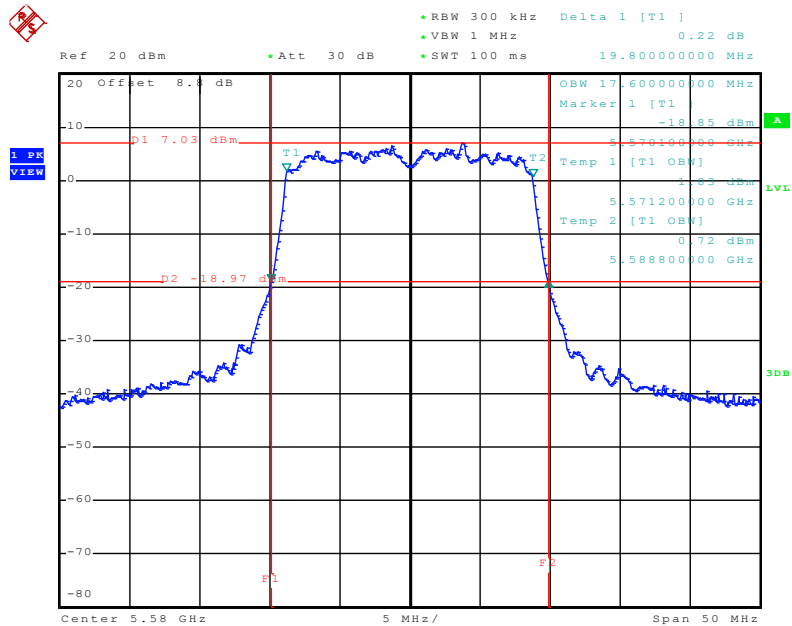


Date: 4.NOV.2010 21:00:17

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5700 MHz

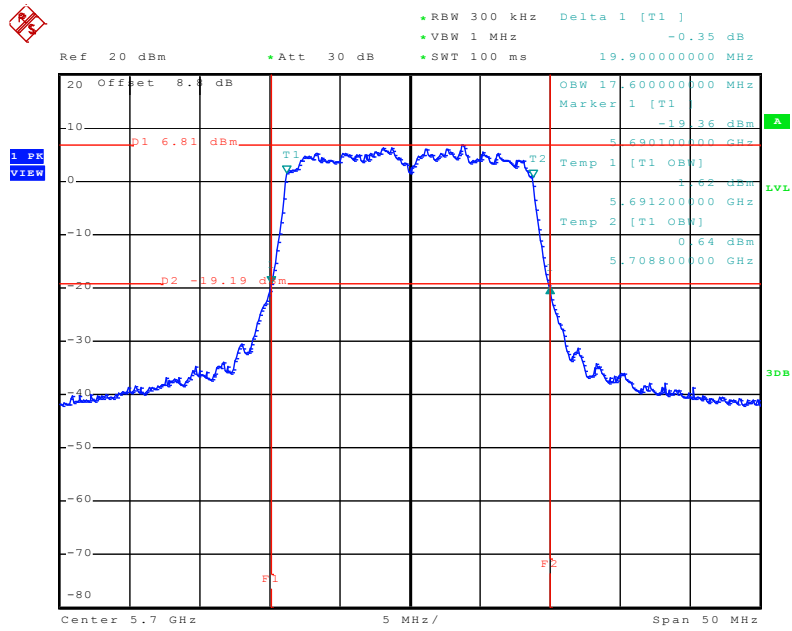


Date: 4.NOV.2010 21:02:20

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5190 MHz

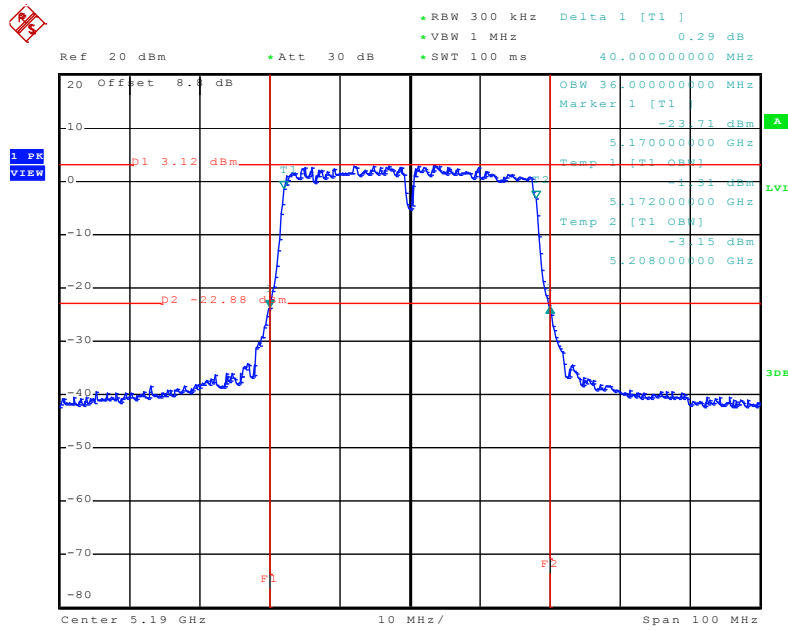


Date: 4.NOV.2010 22:31:12

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5230 MHz

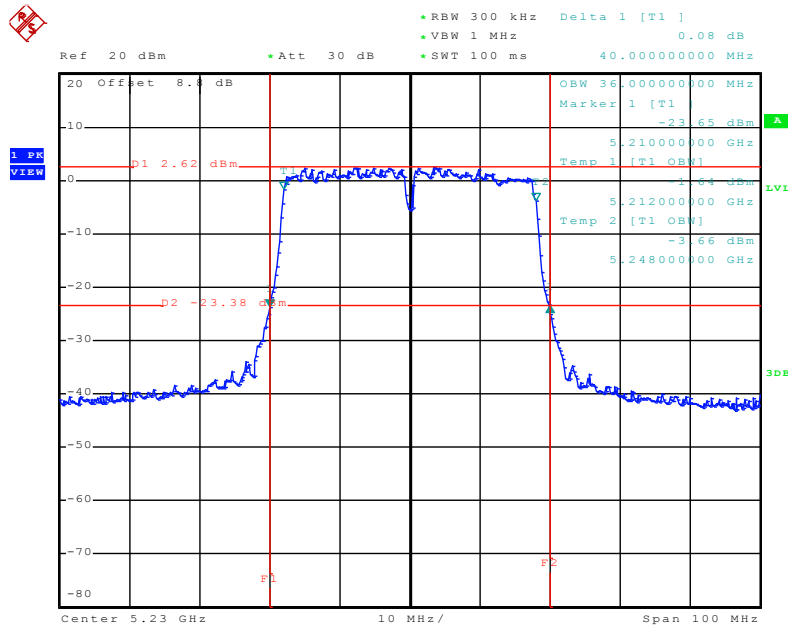


Date: 4.NOV.2010 22:33:32

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5270 MHz

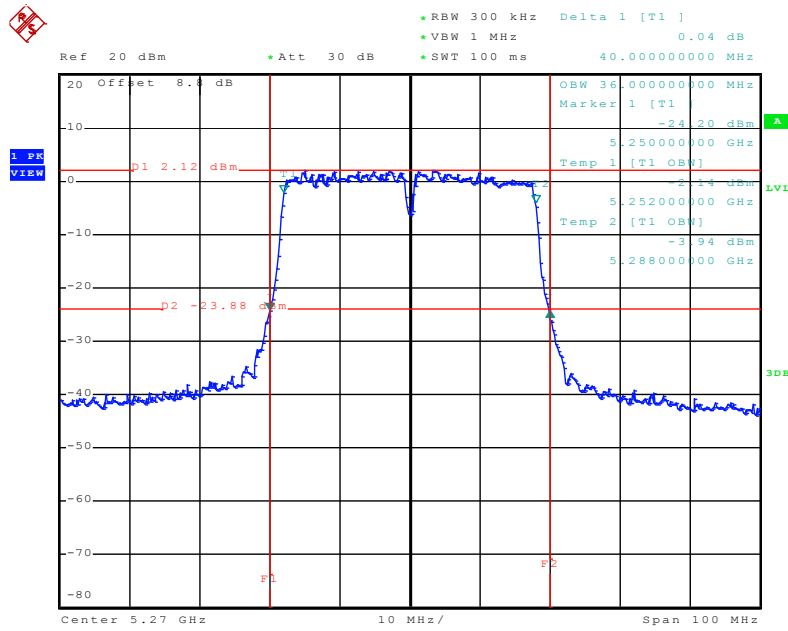


Date: 4.NOV.2010 22:35:19

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5310 MHz

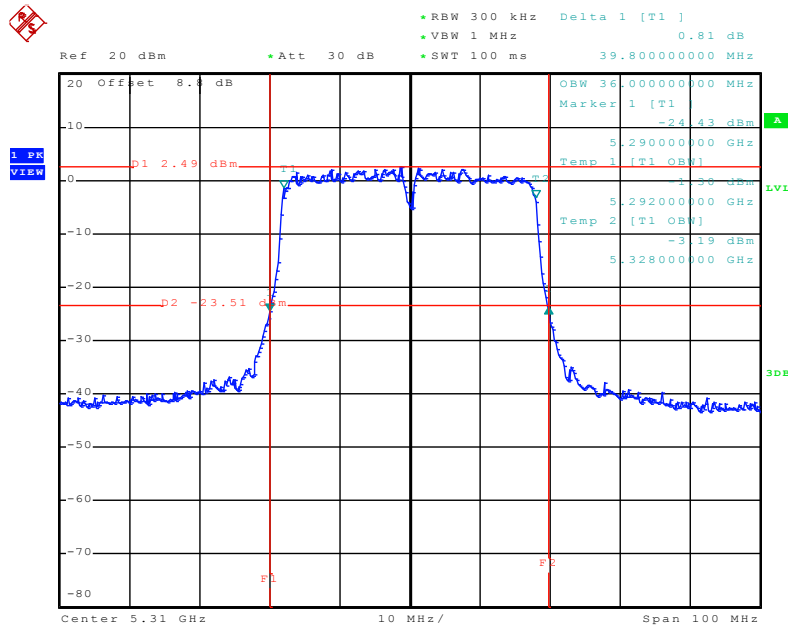


Date: 4.NOV.2010 22:37:27

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5510 MHz

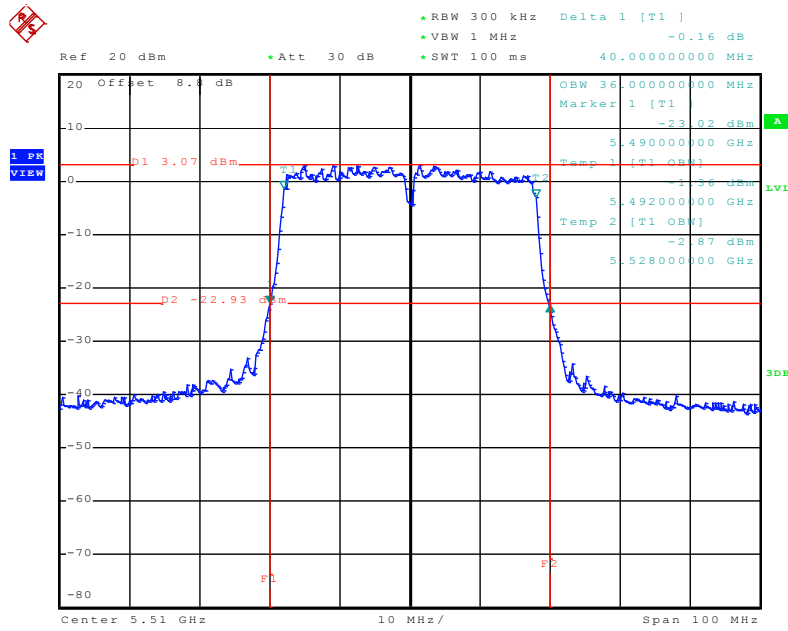


Date: 4.NOV.2010 22:39:42

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5550 MHz

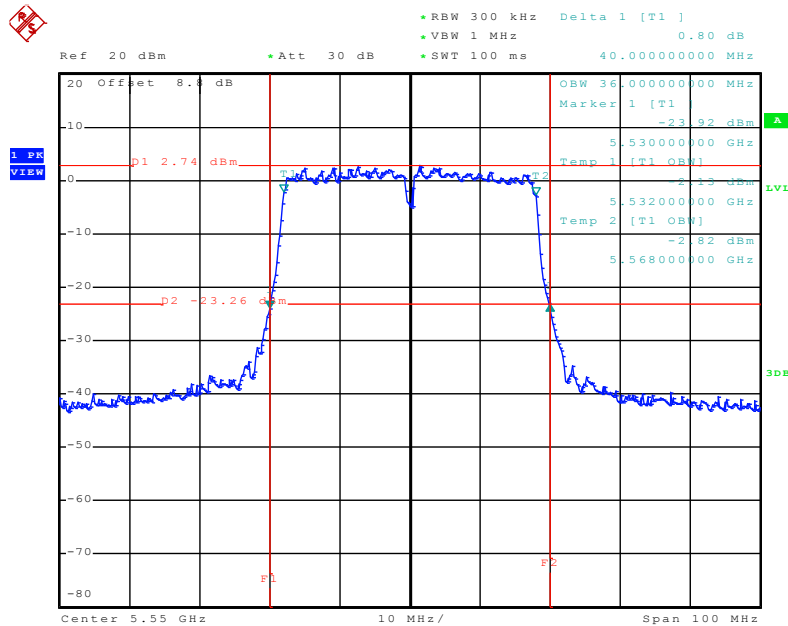

Date: 4.NOV.2010 22:41:44

26 dB Bandwidth Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5670 MHz

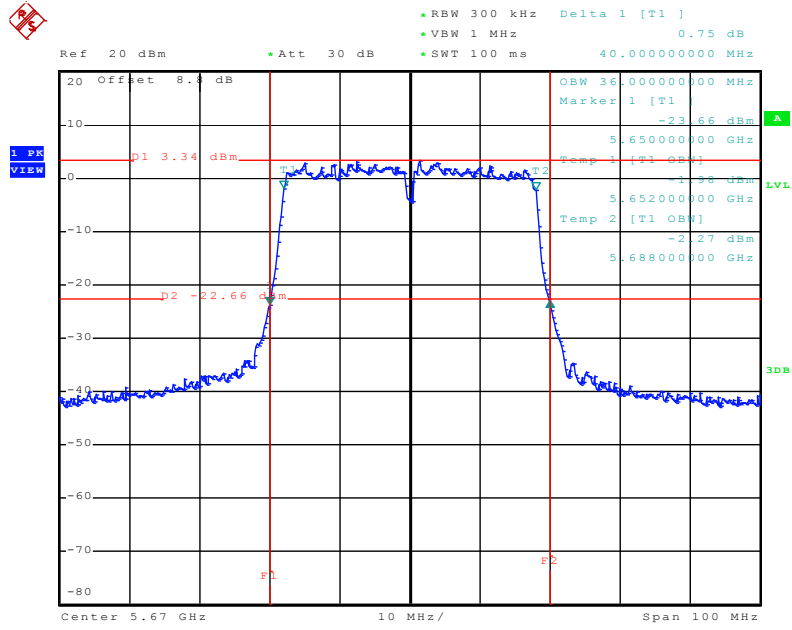

Date: 4.NOV.2010 22:43:20



**3.3 Maximum Conducted Output Power Measurement**

**3.3.1 Limit**

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or 4 dBm + 10log B, where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.825 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 1 W (30dBm) or 17 dBm + 10log B. If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power and power density from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain up to 23 dBi without any corresponding reduction in the transmitter peak output power and peak power spectral density. For fixed, point-to-point U-NII transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in peak transmitter power and peak power spectral density for each 1 dB of antenna gain in excess of 23 dBi would be required.

Maximum Conducted Output Power mean that the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level

**3.3.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

<b>Power Meter Parameter</b>	<b>Setting</b>
Filter No.	Auto
Measurement time	0.135 s ~ 26 s
Used Sensor	MA2411B

**3.3.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the wideband power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.
4. When measuring maximum conducted output power within multiple antenna systems, add every result of the values by mathematic formula.

**3.3.4 Test Setup Layout**

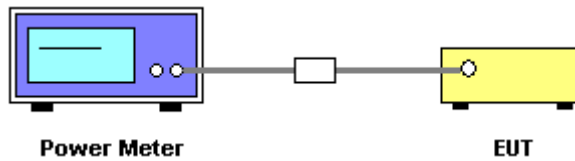

**3.3.5 Test Deviation**

There is no deviation with the original standard.

**3.3.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.3.7 Test Result of Maximum Conducted Output Power**

<b>Final Test Date</b>	Nov. 04, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**For Single Chain:**

**Configuration of IEEE 802.11a**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.11	17.00	<b>Complies</b>
40	5200 MHz	11.78	17.00	<b>Complies</b>
48	5240 MHz	11.65	17.00	<b>Complies</b>
52	5260 MHz	11.67	24.00	<b>Complies</b>
56	5280 MHz	11.12	24.00	<b>Complies</b>
64	5320 MHz	11.38	24.00	<b>Complies</b>
100	5500 MHz	11.26	24.00	<b>Complies</b>
116	5580 MHz	11.75	24.00	<b>Complies</b>
140	5700 MHz	11.58	24.00	<b>Complies</b>

**For Two Chain:**

**Configuration IEEE 802.11n Ant. A (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	7.29	17.00	Complies
40	5200 MHz	8.52	17.00	Complies
48	5240 MHz	8.09	17.00	Complies
52	5260 MHz	8.03	24.00	Complies
56	5280 MHz	8.07	24.00	Complies
64	5320 MHz	8.29	24.00	Complies
100	5500 MHz	8.47	24.00	Complies
116	5580 MHz	8.30	24.00	Complies
140	5700 MHz	8.39	24.00	Complies

**Configuration IEEE 802.11n Ant. B (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	7.65	17.00	Complies
40	5200 MHz	8.67	17.00	Complies
48	5240 MHz	8.21	17.00	Complies
52	5260 MHz	8.17	24.00	Complies
56	5280 MHz	8.23	24.00	Complies
64	5320 MHz	8.21	24.00	Complies
100	5500 MHz	8.36	24.00	Complies
116	5580 MHz	8.48	24.00	Complies
140	5700 MHz	8.18	24.00	Complies

**Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	10.48	17.00	Complies
40	5200 MHz	11.61	17.00	Complies
48	5240 MHz	11.16	17.00	Complies
52	5260 MHz	11.11	24.00	Complies
56	5280 MHz	11.16	24.00	Complies
64	5320 MHz	11.26	24.00	Complies
100	5500 MHz	11.43	24.00	Complies
116	5580 MHz	11.40	24.00	Complies
140	5700 MHz	11.30	24.00	Complies

**Configuration IEEE 802.11n Ant. A (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	8.64	17.00	<b>Complies</b>
46	5230 MHz	8.41	17.00	<b>Complies</b>
54	5270 MHz	8.67	24.00	<b>Complies</b>
62	5310 MHz	8.43	24.00	<b>Complies</b>
102	5510 MHz	8.52	24.00	<b>Complies</b>
110	5550 MHz	8.46	24.00	<b>Complies</b>
134	5670 MHz	8.29	24.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. B (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	8.08	17.00	<b>Complies</b>
46	5230 MHz	8.18	17.00	<b>Complies</b>
54	5270 MHz	8.31	24.00	<b>Complies</b>
62	5310 MHz	8.56	24.00	<b>Complies</b>
102	5510 MHz	8.61	24.00	<b>Complies</b>
110	5550 MHz	8.52	24.00	<b>Complies</b>
134	5670 MHz	8.88	24.00	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A+Ant. B (40MHz)**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	11.38	17.00	<b>Complies</b>
46	5230 MHz	11.31	17.00	<b>Complies</b>
54	5270 MHz	11.50	24.00	<b>Complies</b>
62	5310 MHz	11.51	24.00	<b>Complies</b>
102	5510 MHz	11.58	24.00	<b>Complies</b>
110	5550 MHz	11.50	24.00	<b>Complies</b>
134	5670 MHz	11.61	24.00	<b>Complies</b>

**3.4 Power Spectral Density Measurement**

**3.4.1 Limit**

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 3.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15~5.25 GHz	4
5.25-5.35 GHz	11
5.725-5.825	17

**3.4.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz
VB	3000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**3.4.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 3000kHz. Set Detector to Peak, Trace to Max Hold. Mark the frequency with maximum peak power as the center of the display of the spectrum.
3. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.4.4 Test Setup Layout**

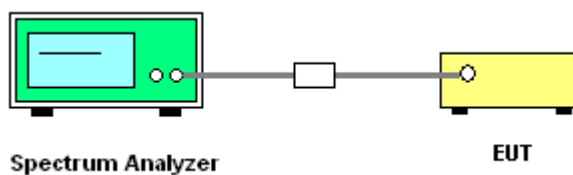

**3.4.5 Test Deviation**

There is no deviation with the original standard.

**3.4.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.4.7 Test Result of Power Spectral Density**

<b>Final Test Date</b>	Nov. 04, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**For Single Chain:**

**Configuration of IEEE 802.11a**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	2.23	4.00	<b>Complies</b>
5200 MHz	1.24	4.00	<b>Complies</b>
5240 MHz	0.74	4.00	<b>Complies</b>
5260 MHz	0.80	11.00	<b>Complies</b>
5280 MHz	0.05	11.00	<b>Complies</b>
5320 MHz	0.42	11.00	<b>Complies</b>
5500 MHz	0.55	11.00	<b>Complies</b>
5580 MHz	0.67	11.00	<b>Complies</b>
5700 MHz	0.77	11.00	<b>Complies</b>

**For Two Chain:**

**Configuration IEEE 802.11n (20MHz)**


Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5180 MHz	3.60	4.00	<b>Complies</b>
5200 MHz	3.89	4.00	<b>Complies</b>
5240 MHz	3.51	4.00	<b>Complies</b>
5260 MHz	2.78	11.00	<b>Complies</b>
5280 MHz	2.60	11.00	<b>Complies</b>
5320 MHz	2.16	11.00	<b>Complies</b>
5500 MHz	3.44	11.00	<b>Complies</b>
5580 MHz	4.43	11.00	<b>Complies</b>
5700 MHz	4.16	11.00	<b>Complies</b>

**Configuration IEEE 802.11n (40MHz)**

Frequency	Power Density (dBm)	Max. Limit (dBm)	Result
5190 MHz	1.06	4.00	<b>Complies</b>
5230 MHz	1.15	4.00	<b>Complies</b>
5270 MHz	1.06	11.00	<b>Complies</b>
5310 MHz	0.39	11.00	<b>Complies</b>
5510 MHz	0.84	11.00	<b>Complies</b>
5550 MHz	0.51	11.00	<b>Complies</b>
5670 MHz	0.97	11.00	<b>Complies</b>


For Single Chain:

Power Density Plot on Configuration IEEE 802.11a / 5180 MHz

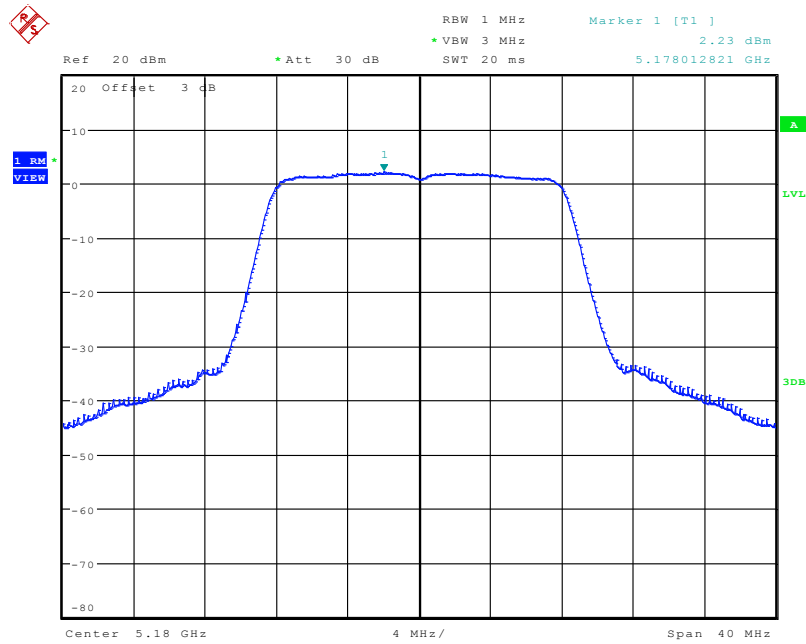


Date: 4.NOV.2010 10:10:10

Power Density Plot on Configuration IEEE 802.11a / 5200 MHz

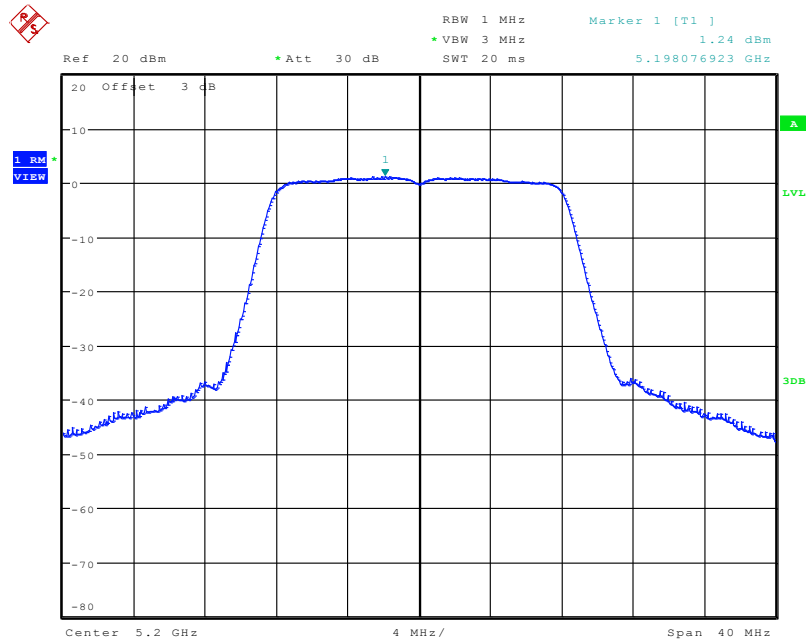


Date: 4.NOV.2010 10:12:11

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

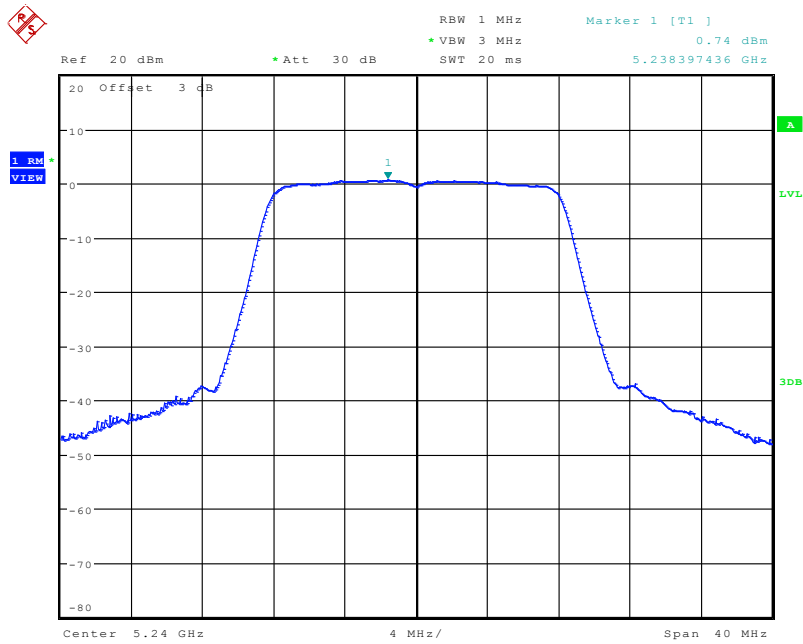

Date: 4.NOV.2010 10:14:07


Power Density Plot on Configuration IEEE 802.11a / 5260 MHz

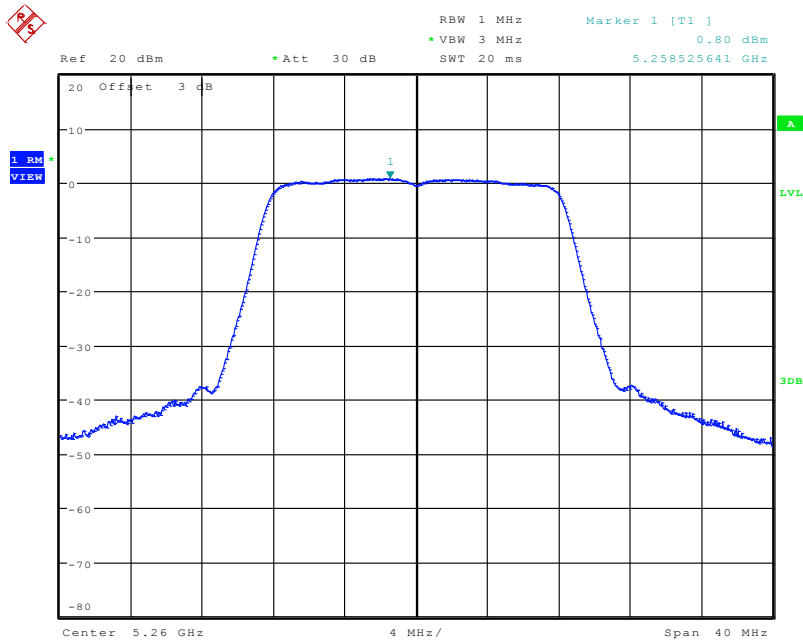

Date: 4.NOV.2010 10:16:22




Power Density Plot on Configuration IEEE 802.11a / 5280 MHz

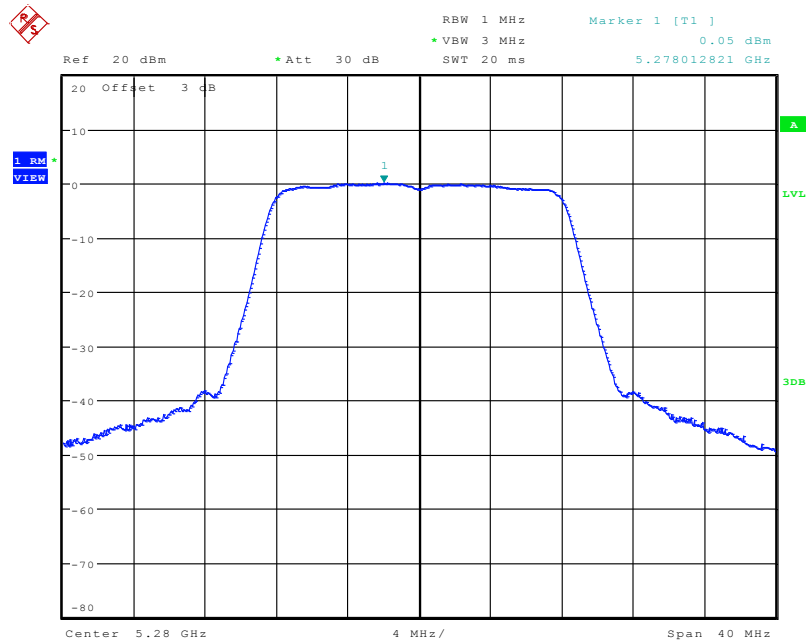


Date: 4.NOV.2010 10:18:37

Power Density Plot on Configuration IEEE 802.11a / 5320 MHz

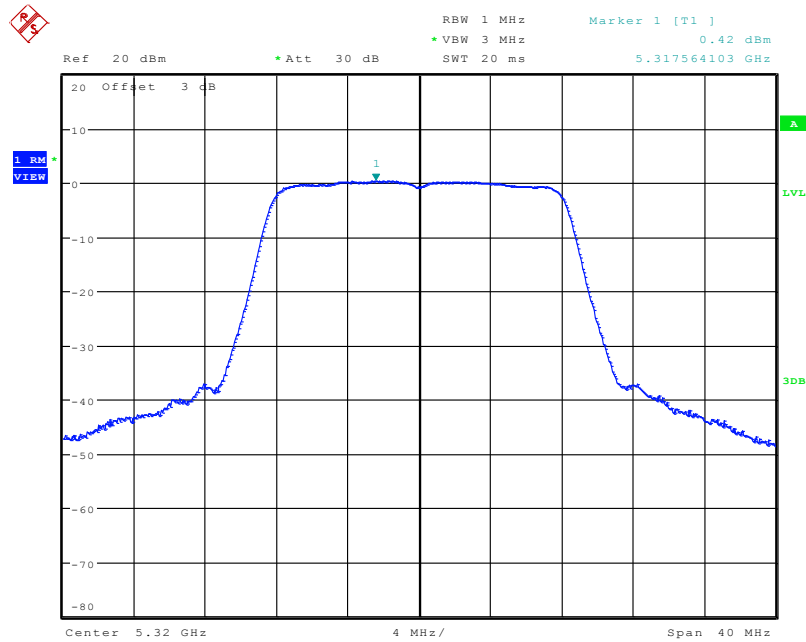


Date: 4.NOV.2010 10:20:52

Power Density Plot on Configuration IEEE 802.11a / 5500 MHz

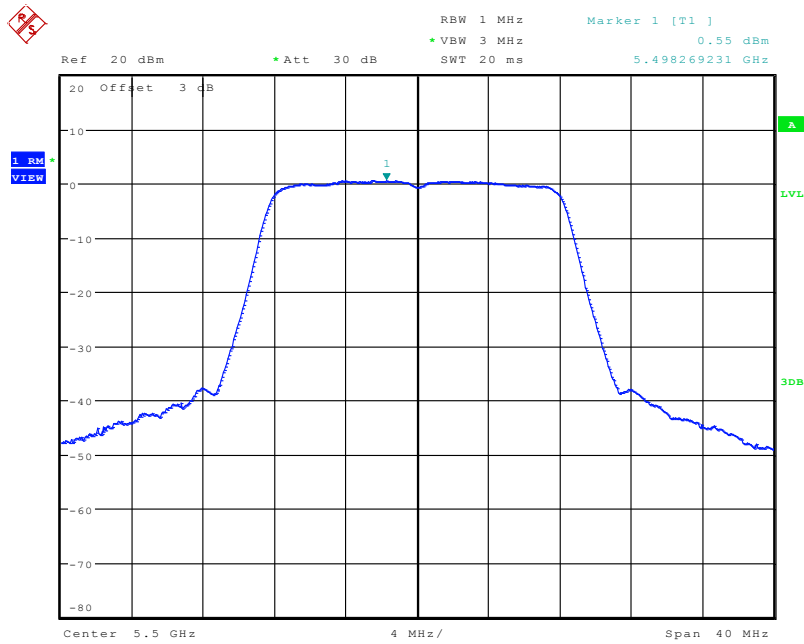


Date: 4.NOV.2010 10:46:39

Power Density Plot on Configuration IEEE 802.11a / 5580 MHz

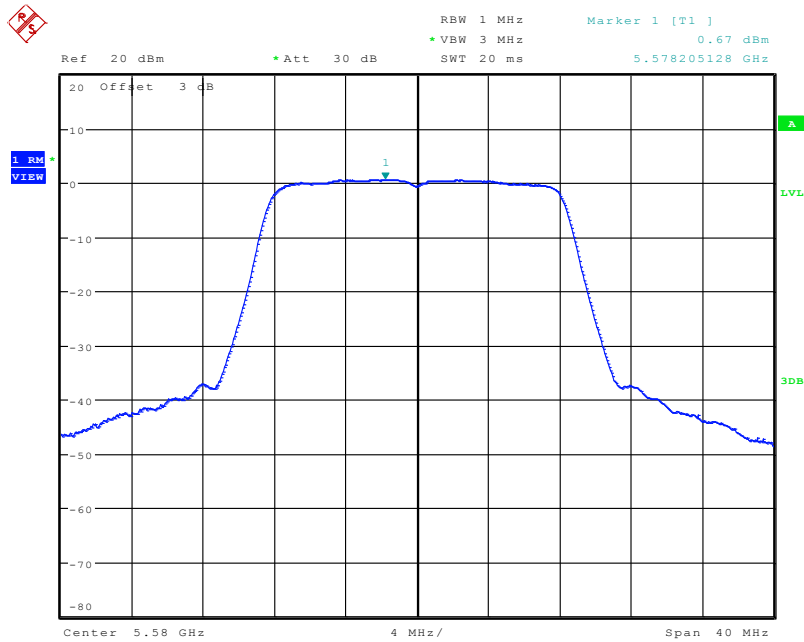

Date: 4.NOV.2010 10:42:58


Power Density Plot on Configuration IEEE 802.11a / 5700 MHz

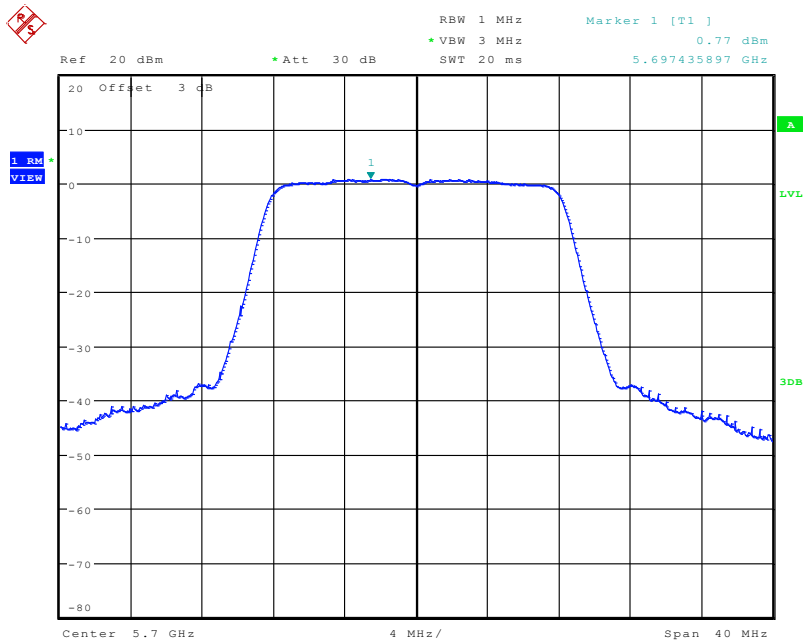

Date: 4.NOV.2010 10:44:55


For Two Chain:

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5180 MHz

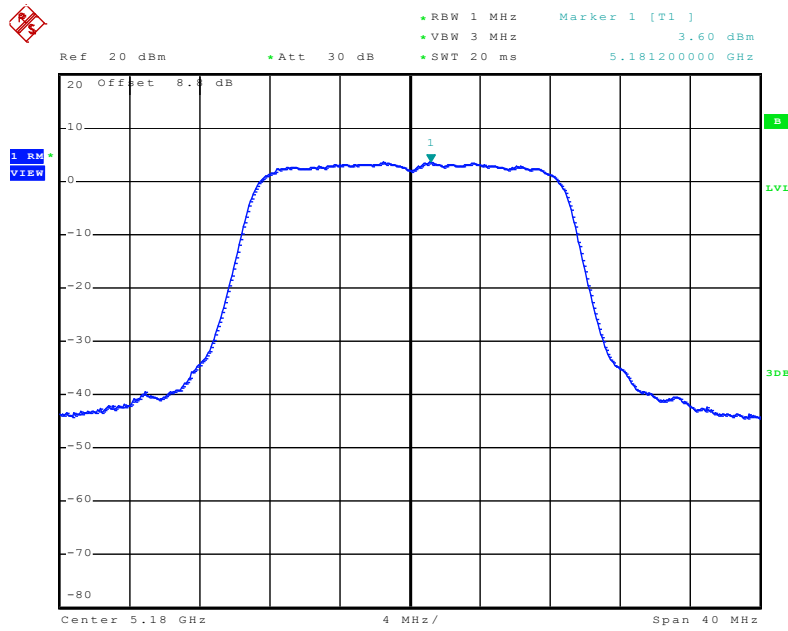


Date: 4.NOV.2010 20:00:33

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5200 MHz

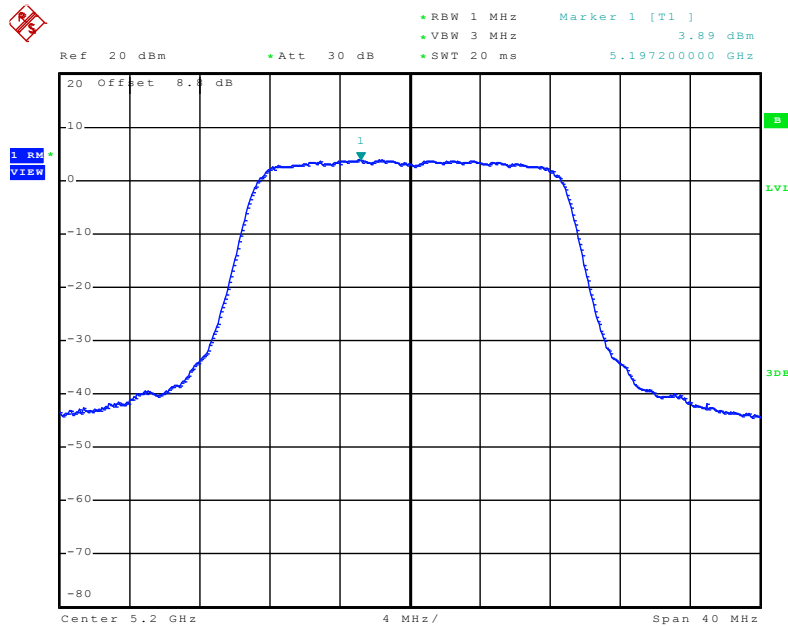


Date: 4.NOV.2010 20:02:00

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5240 MHz

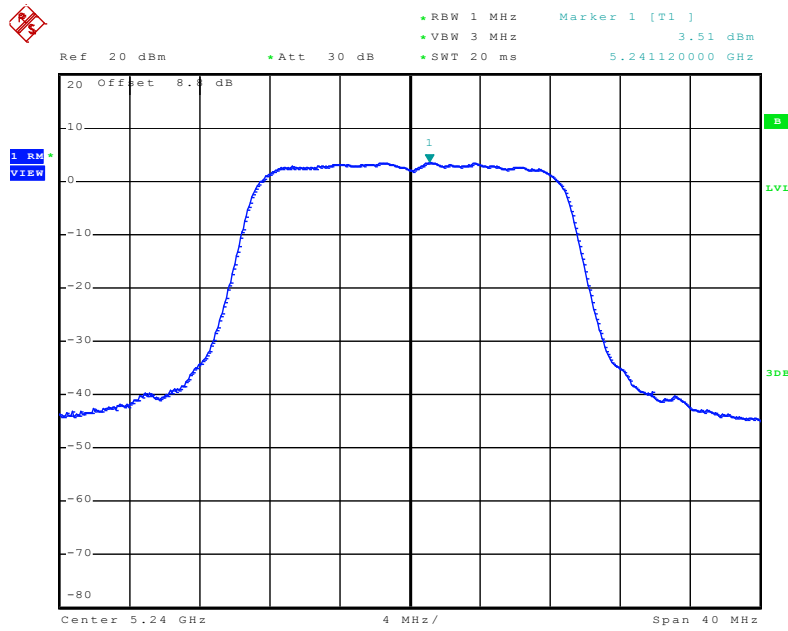


Date: 4.NOV.2010 20:03:10

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5260 MHz

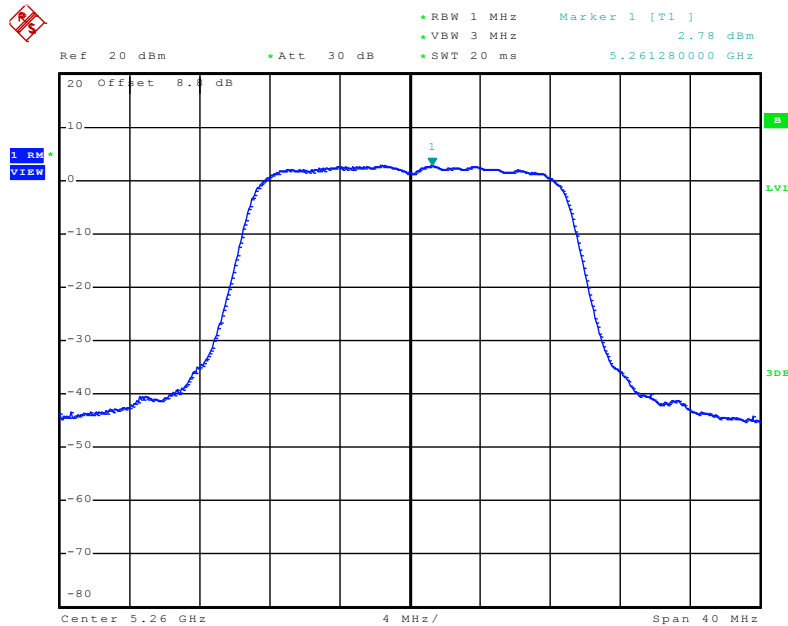


Date: 4.NOV.2010 20:04:39

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5280 MHz

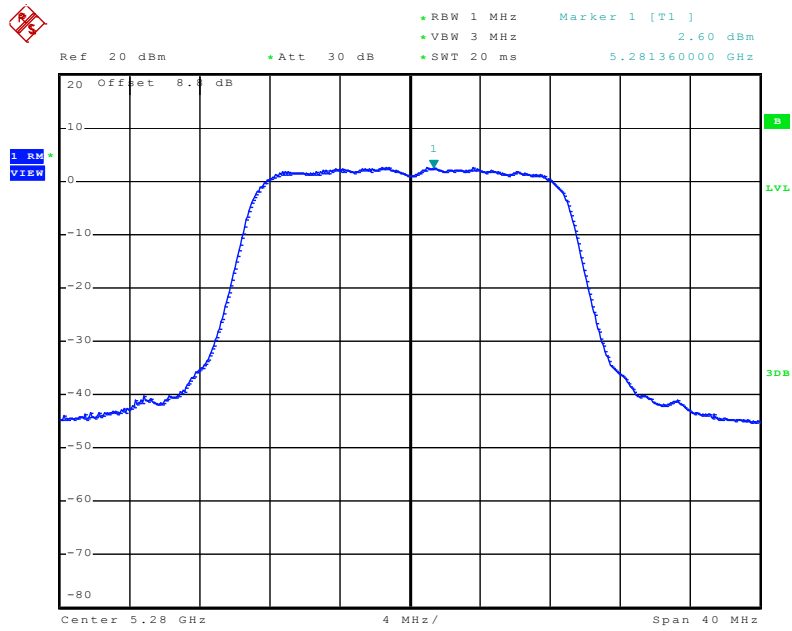


Date: 4.NOV.2010 20:05:29

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5320 MHz

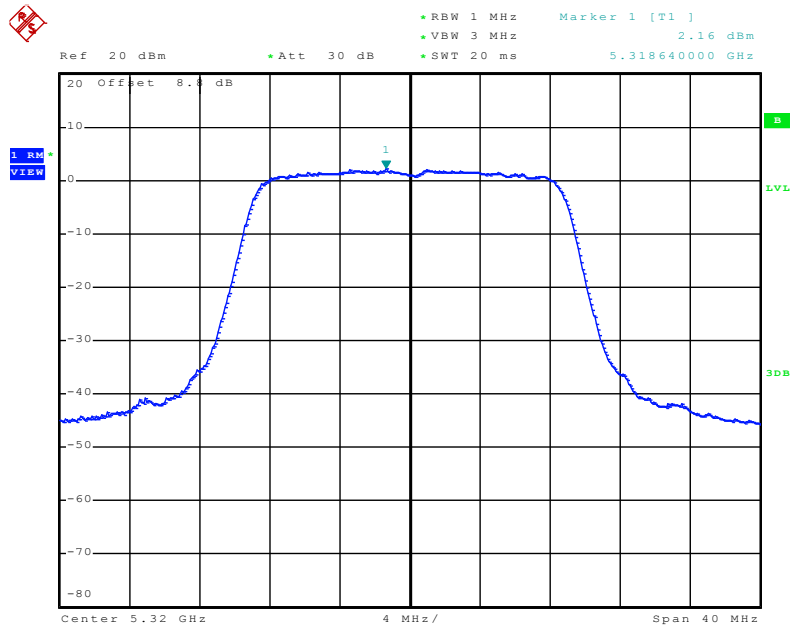


Date: 4.NOV.2010 20:06:22

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5500 MHz

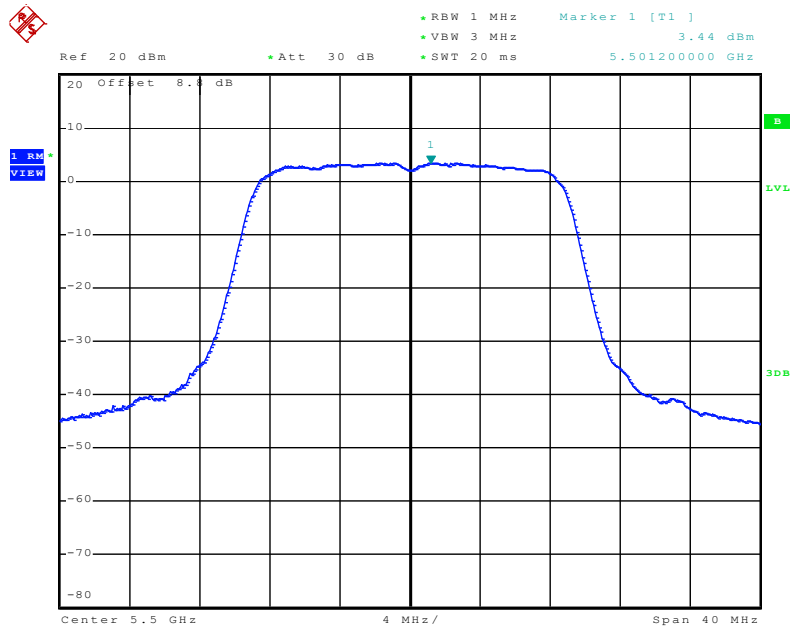


Date: 4.NOV.2010 20:07:29

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5580 MHz

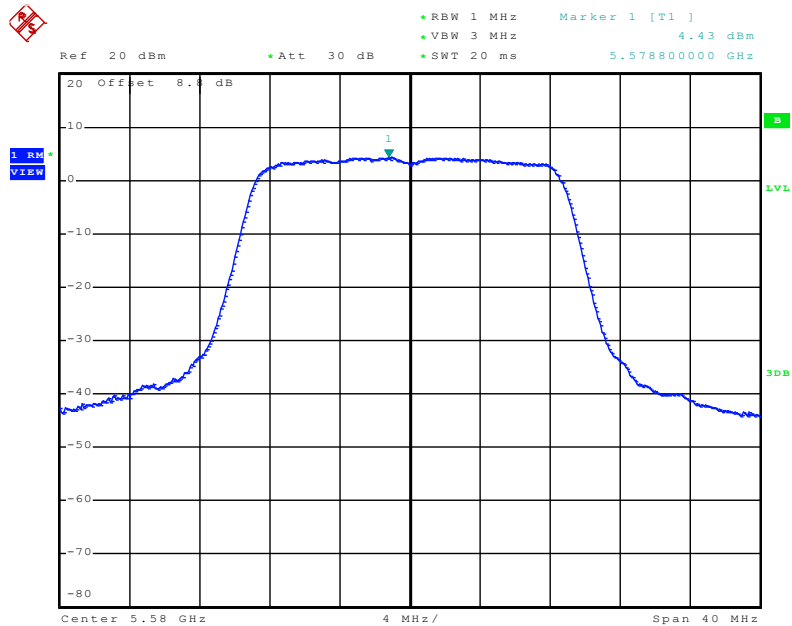

Date: 4.NOV.2010 20:08:28


Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5700 MHz

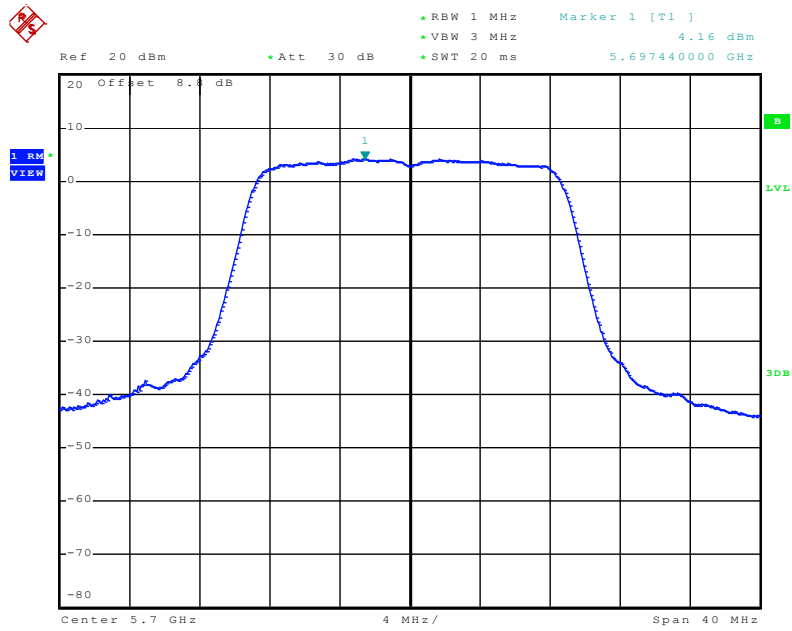

Date: 4.NOV.2010 20:09:30




Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5190 MHz

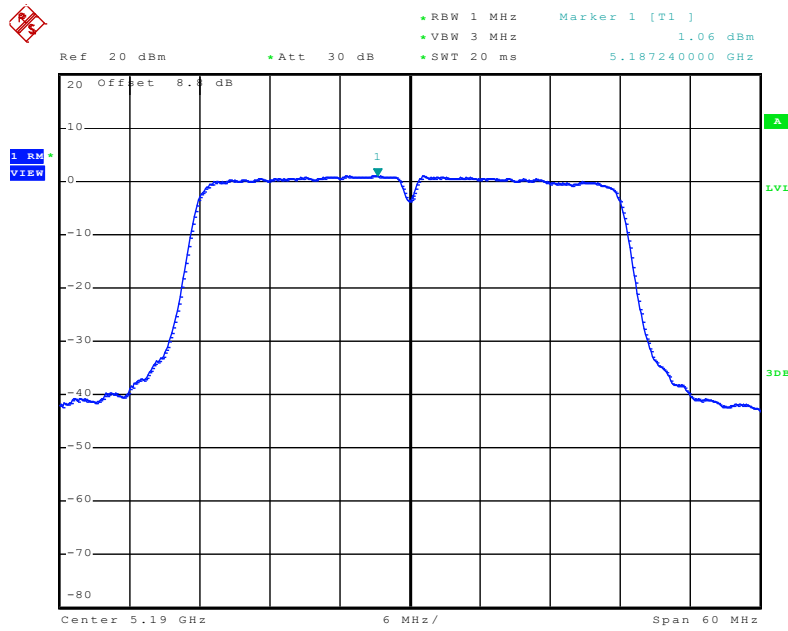


Date: 4.NOV.2010 21:58:07

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5230 MHz

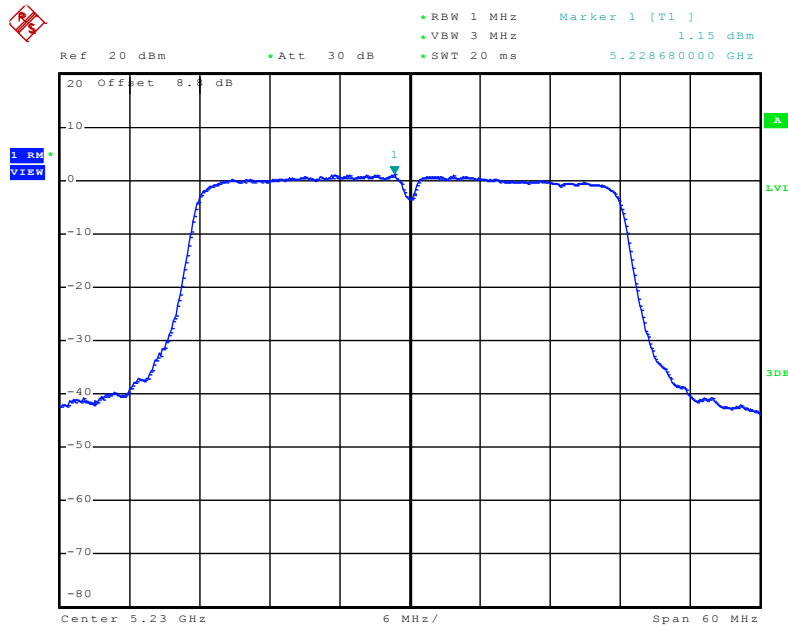


Date: 4.NOV.2010 21:59:12

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5270 MHz

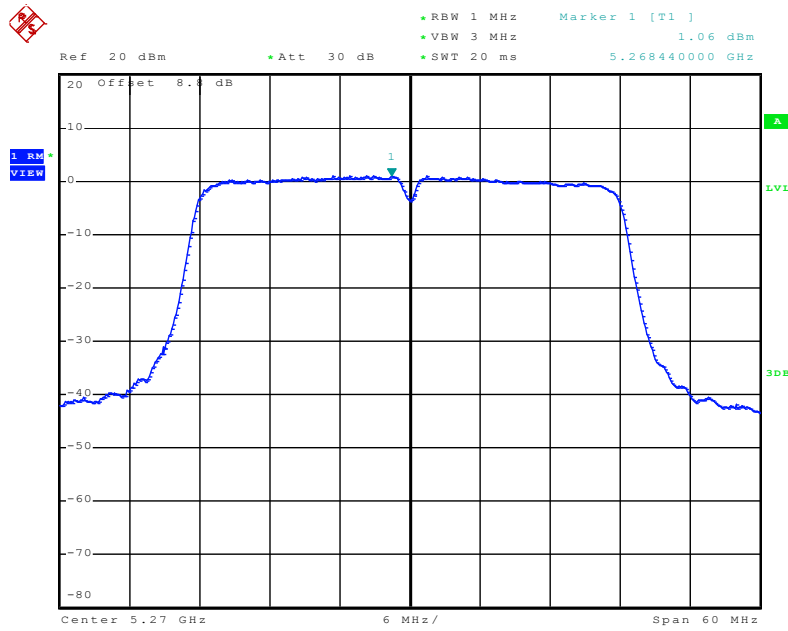


Date: 4.NOV.2010 22:14:21

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5310 MHz

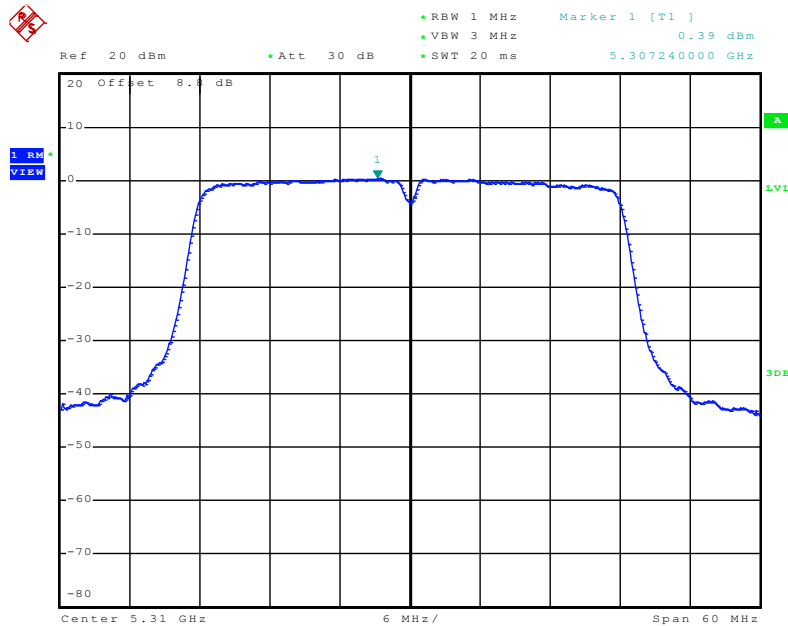


Date: 4.NOV.2010 22:15:23

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5510 MHz

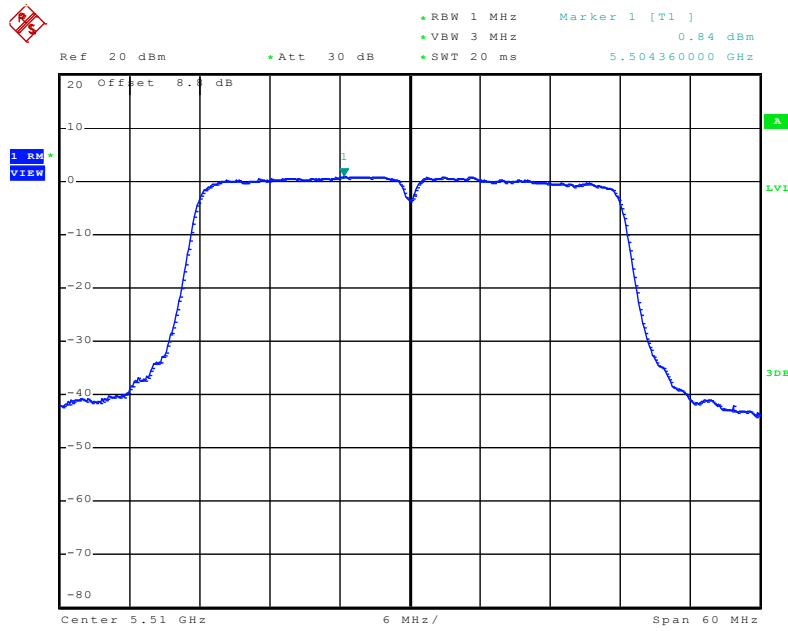


Date: 4.NOV.2010 22:16:17

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5550 MHz

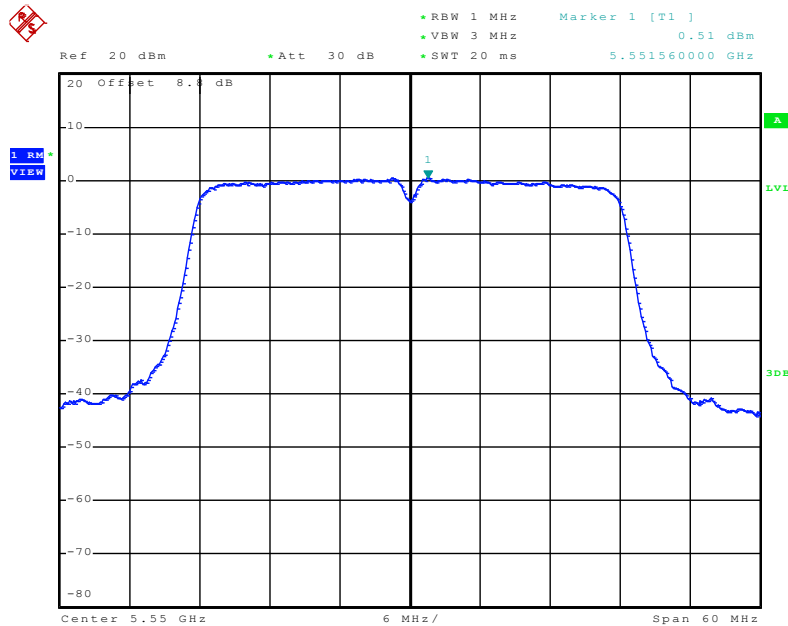

Date: 4.NOV.2010 22:17:15

Power Density Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5670 MHz

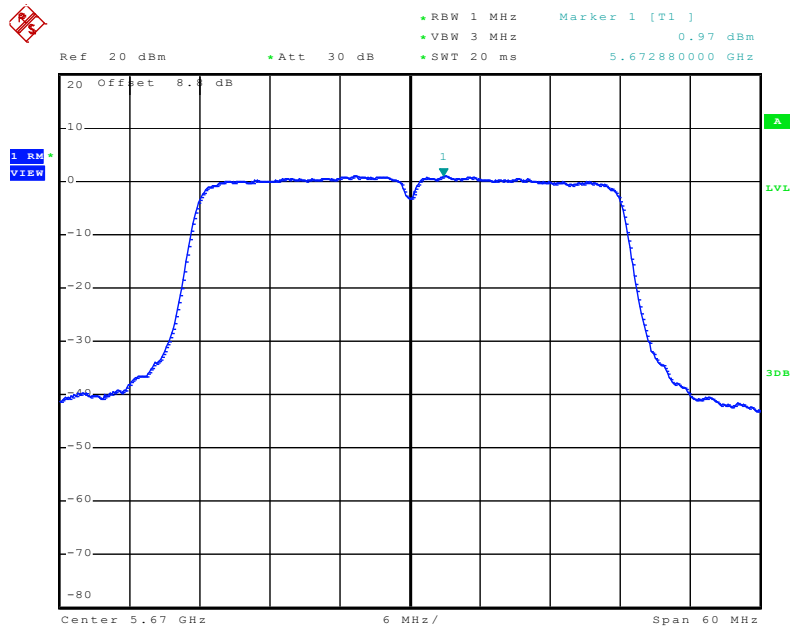

Date: 4.NOV.2010 22:18:17

**3.5 Peak Excursion Measurement**

**3.5.1 Limit**

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

**3.5.2 Measuring Instruments and Setting**


Please refer to section 4 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1000 kHz (Peak Trace) / 1000 kHz (Average Trace)
VB	3000 kHz (Peak Trace) / 300 kHz (Average Trace)
Detector	Peak (Peak Trace) / Sample (Average Trace)
Trace	Max Hold
Sweep Time	60s

**3.5.3 Test Procedures**

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set the spectrum analyzer span to view the entire emissions bandwidth. The largest difference between the following two traces (Peak Trace and Average Trace) must be  $\leq 13$  dB for all frequencies across the emissions bandwidth. Submit a plot.
3. Peak Trace: Set RBW = 1 MHz, VBW  $\geq 3$  MHz with peak detector and max-hold settings.
4. Average Trace: Method #3—video averaging with max hold--and sum power across the band. Set span to encompass the entire emissions bandwidth (EBW) of the signal. Set sweep trigger to “free run”. Set RBW = 1 MHz. Set VBW  $\geq 1/T$  (IEEE 802.11a VBW = 300kHz  $\geq 1/4\mu$ s). Use sample detector mode if bin width (i.e., span/number of points in spectrum)  $< 0.5$  RBW. Otherwise use peak detector mode. Set max hold. Allow max hold to run for 60 seconds.
5. Measuring multiple antennas, the connectors are required to link with Spectrum Analyzer through a combiner.

**3.5.4 Test Setup Layout**

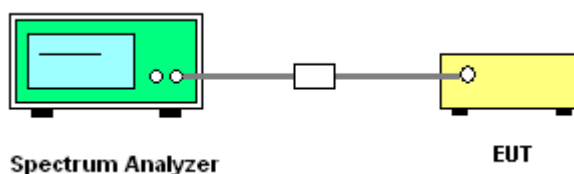

**3.5.5 Test Deviation**

There is no deviation with the original standard.

**3.5.6 EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

**3.5.7 Test Result of Peak Excursion**

<b>Final Test Date</b>	Nov. 04, 2010	<b>Test Site No.</b>	TH01-HY
<b>Temperature</b>	24°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Ian	<b>Configurations</b>	802.11a/n

**For Single Chain:**

**Configuration of IEEE 802.11a**

<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
5180 MHz	5.63	13	<b>Complies</b>
5200 MHz	5.65	13	<b>Complies</b>
5240 MHz	5.54	13	<b>Complies</b>
5260 MHz	5.54	13	<b>Complies</b>
5280 MHz	5.49	13	<b>Complies</b>
5320 MHz	5.49	13	<b>Complies</b>
5500 MHz	5.59	13	<b>Complies</b>
5580 MHz	5.52	13	<b>Complies</b>
5700 MHz	5.42	13	<b>Complies</b>

For Two Chain:

**Configuration IEEE 802.11n Ant. A+Ant. B (20MHz)**


Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5180 MHz	6.67	13	<b>Complies</b>
5200 MHz	7.02	13	<b>Complies</b>
5240 MHz	7.41	13	<b>Complies</b>
5260 MHz	7.51	13	<b>Complies</b>
5280 MHz	6.95	13	<b>Complies</b>
5320 MHz	7.60	13	<b>Complies</b>
5500 MHz	7.95	13	<b>Complies</b>
5580 MHz	7.86	13	<b>Complies</b>
5700 MHz	7.36	13	<b>Complies</b>

**Configuration IEEE 802.11n Ant. A+Ant. B (40MHz)**

Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
5190 MHz	6.10	13	<b>Complies</b>
5230 MHz	7.24	13	<b>Complies</b>
5270 MHz	7.28	13	<b>Complies</b>
5310 MHz	7.10	13	<b>Complies</b>
5510 MHz	7.13	13	<b>Complies</b>
5550 MHz	7.16	13	<b>Complies</b>
5670 MHz	7.19	13	<b>Complies</b>


For Single Chain:

Peak Excursion Plot on Configuration IEEE 802.11a / 5180 MHz

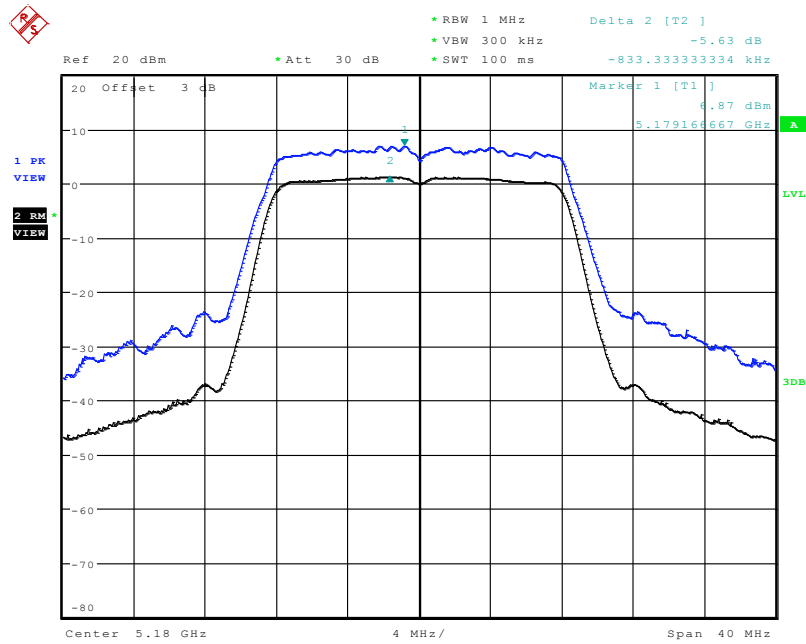

Date: 4.NOV.2010 13:10:59


Peak Excursion Plot on Configuration IEEE 802.11a / 5200 MHz

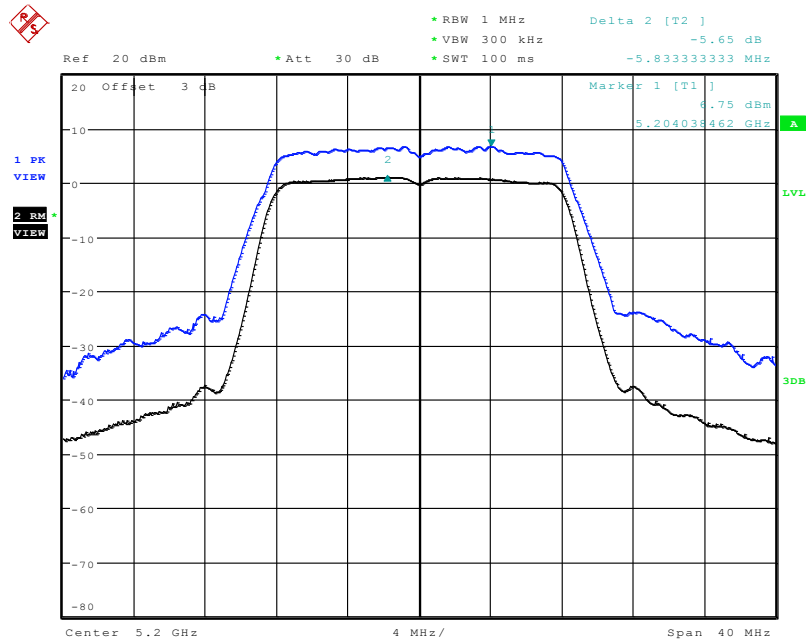

Date: 4.NOV.2010 13:31:50




Peak Excursion Plot on Configuration IEEE 802.11a / 5240 MHz

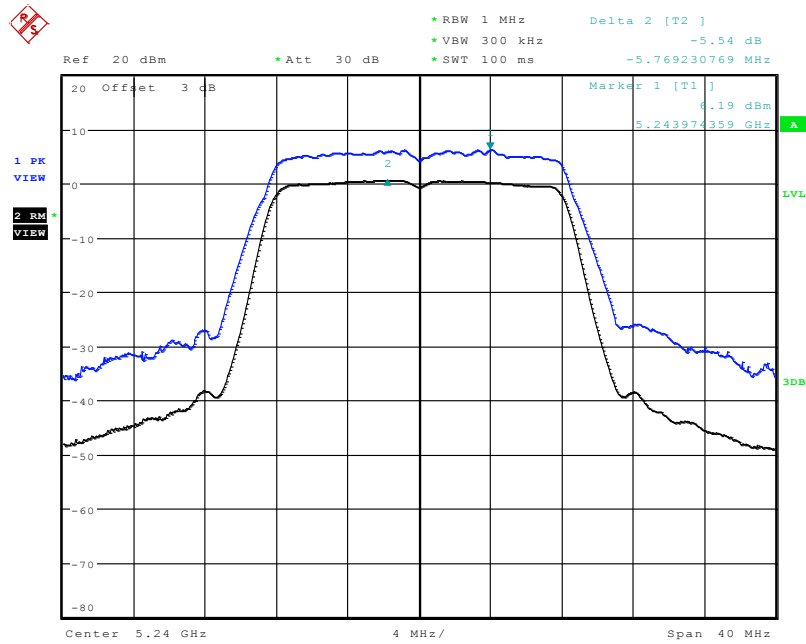


Date: 4.NOV.2010 13:33:02

Peak Excursion Plot on Configuration IEEE 802.11a / 5260 MHz

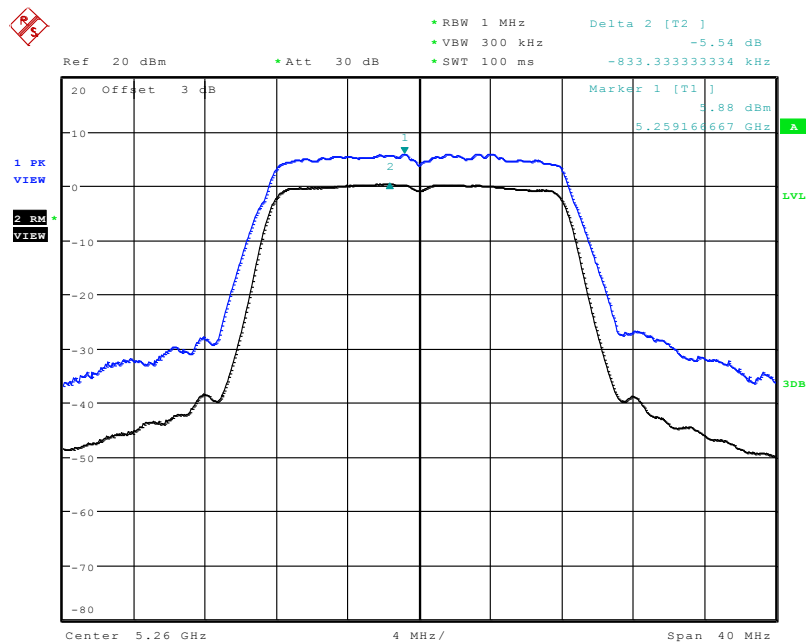


Date: 4.NOV.2010 13:34:10

Peak Excursion Plot on Configuration IEEE 802.11a / 5280 MHz

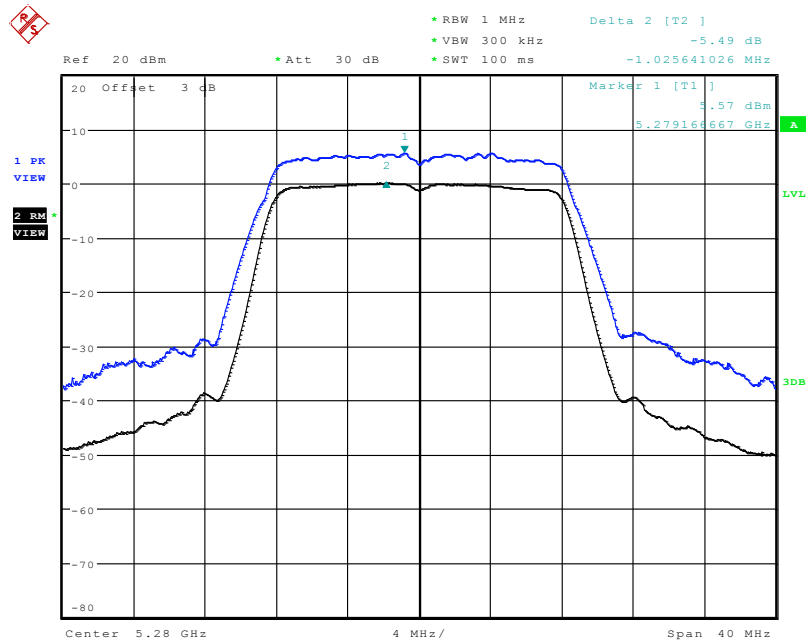


Date: 4.NOV.2010 13:35:11

Peak Excursion Plot on Configuration IEEE 802.11a / 5320 MHz

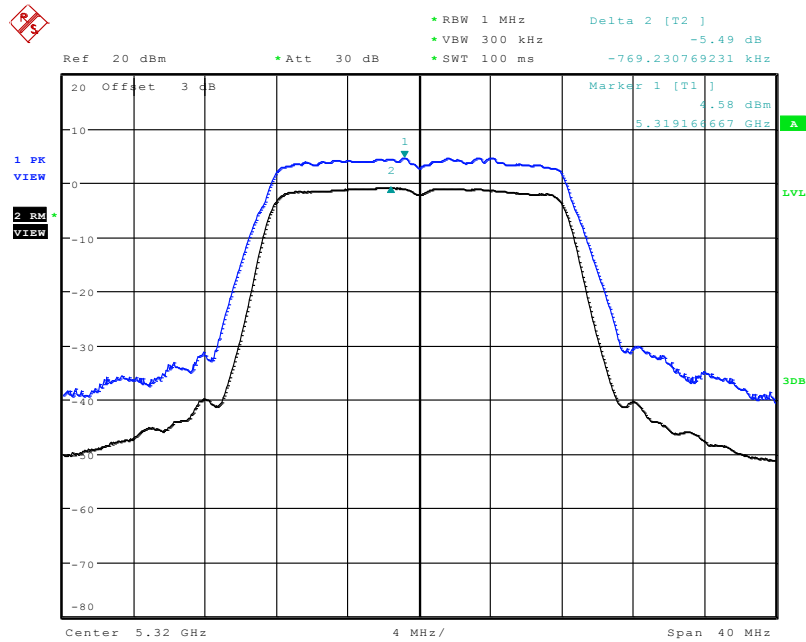


Date: 4.NOV.2010 13:36:20

Peak Excursion Plot on Configuration IEEE 802.11a / 5500 MHz

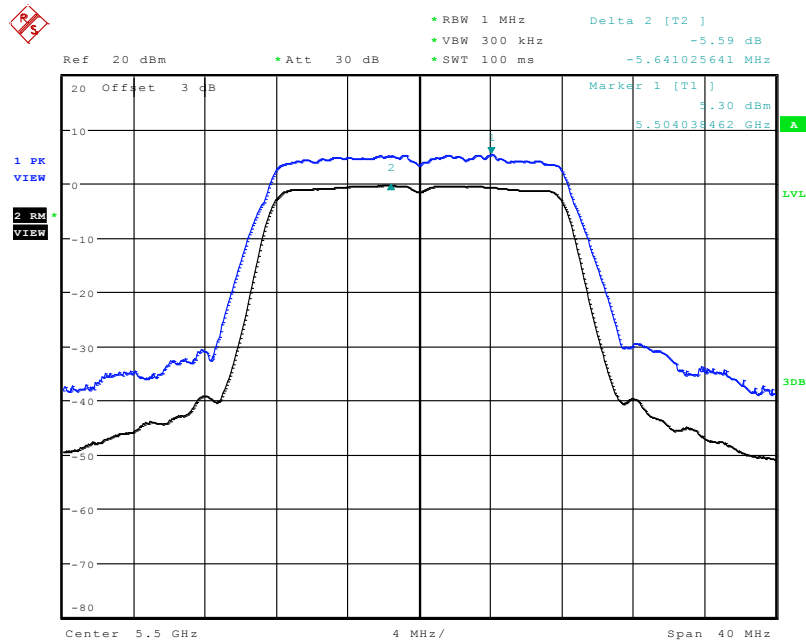


Date: 4.NOV.2010 13:37:47

Peak Excursion Plot on Configuration IEEE 802.11a / 5580 MHz

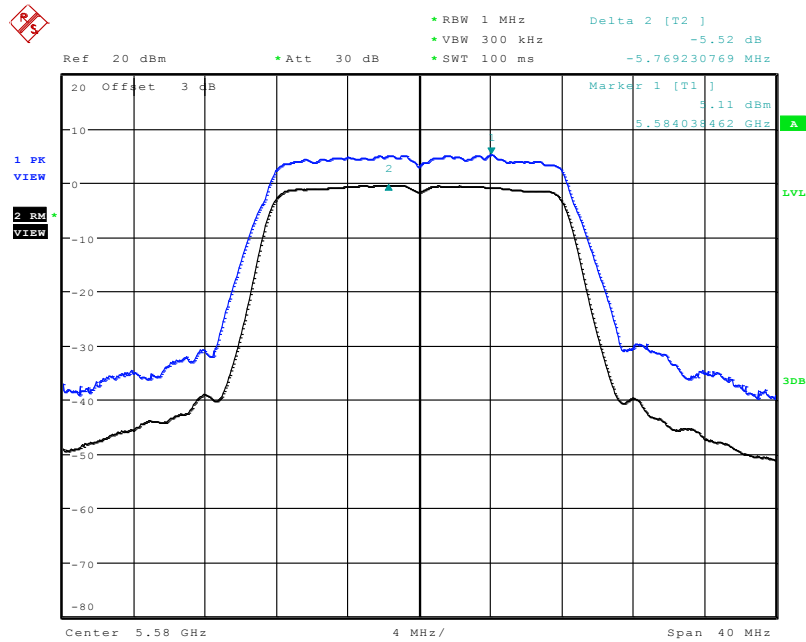

Date: 4.NOV.2010 13:38:55


Peak Excursion Plot on Configuration IEEE 802.11a / 5700 MHz

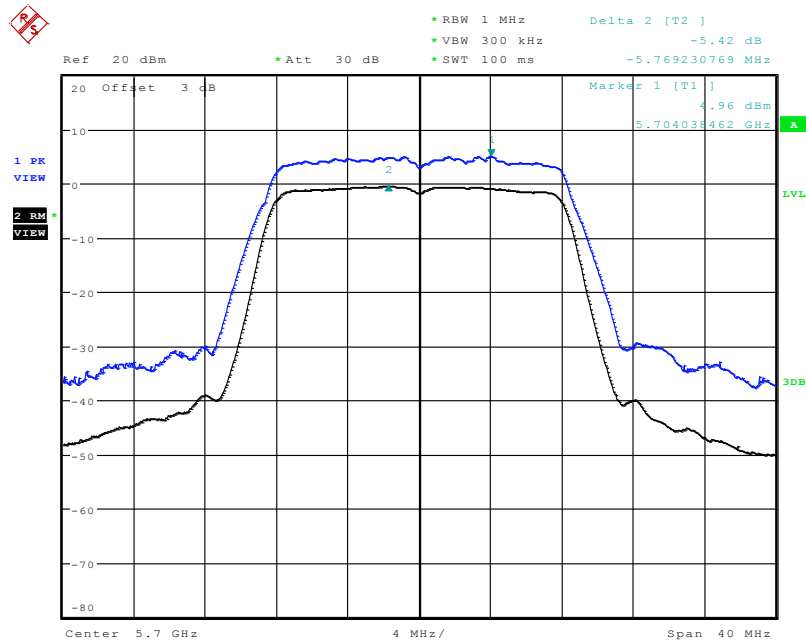

Date: 4.NOV.2010 13:40:02


For Two Chain:

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5180 MHz

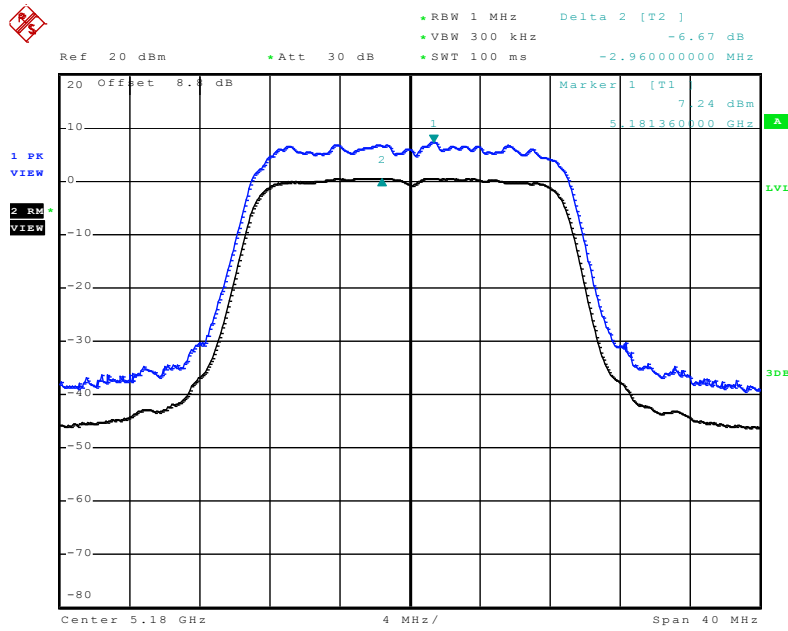


Date: 4.NOV.2010 21:04:44

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5200 MHz

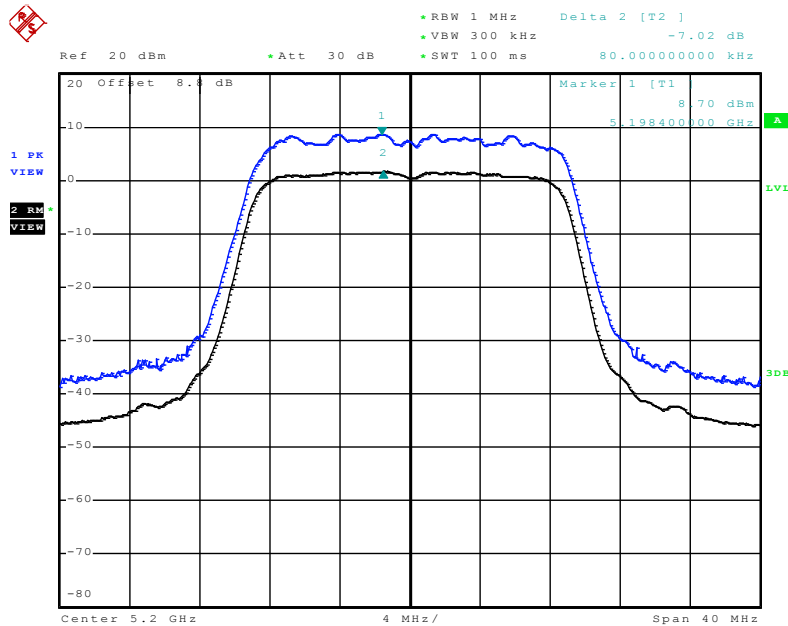


Date: 4.NOV.2010 21:05:48

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5240 MHz

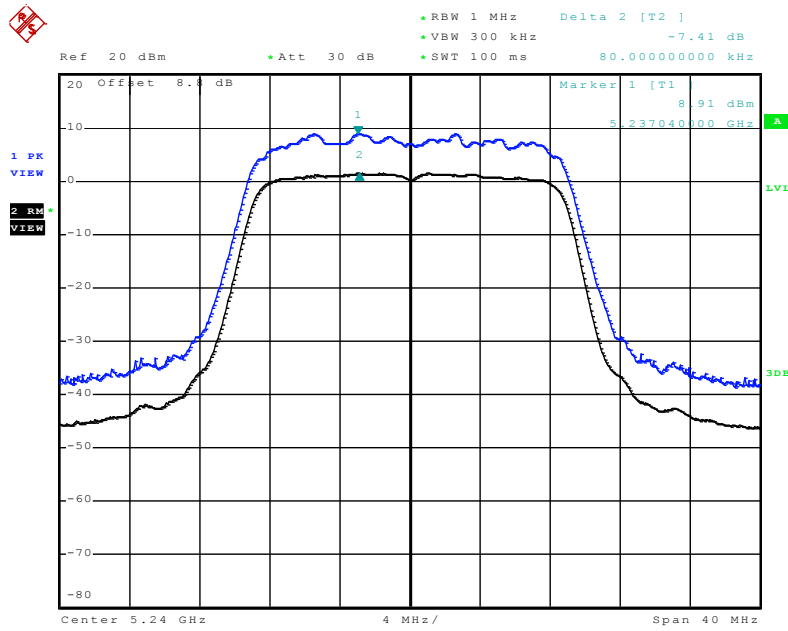


Date: 4.NOV.2010 21:07:32

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5260 MHz

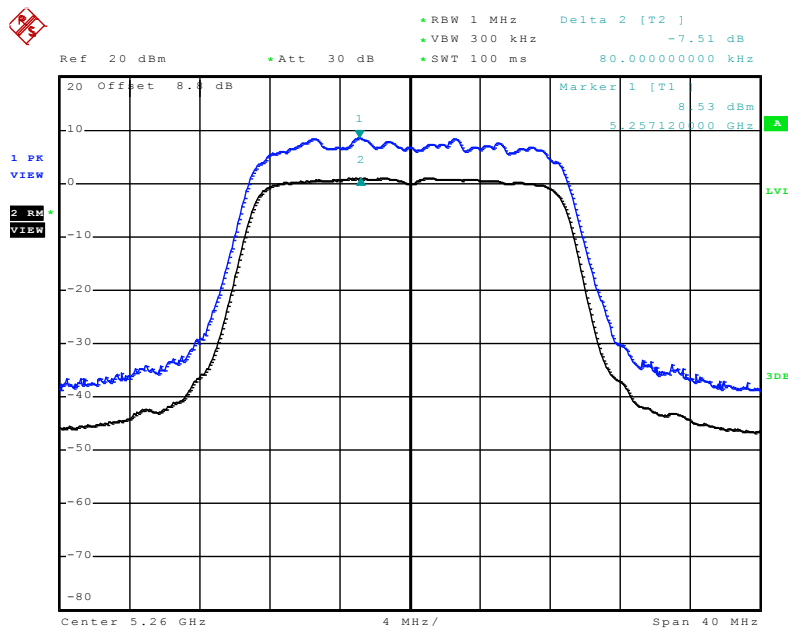


Date: 4.NOV.2010 21:08:44

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5280 MHz

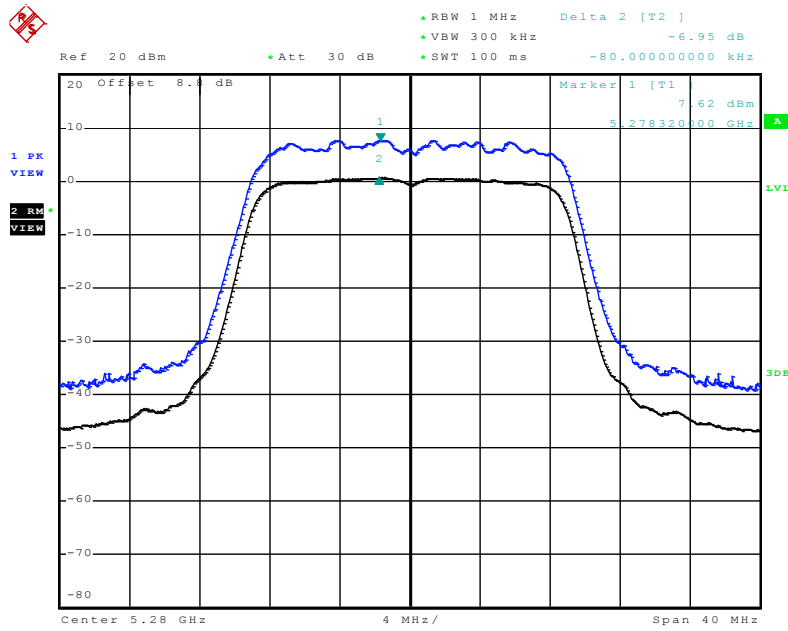


Date: 4.NOV.2010 21:09:48

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5320 MHz

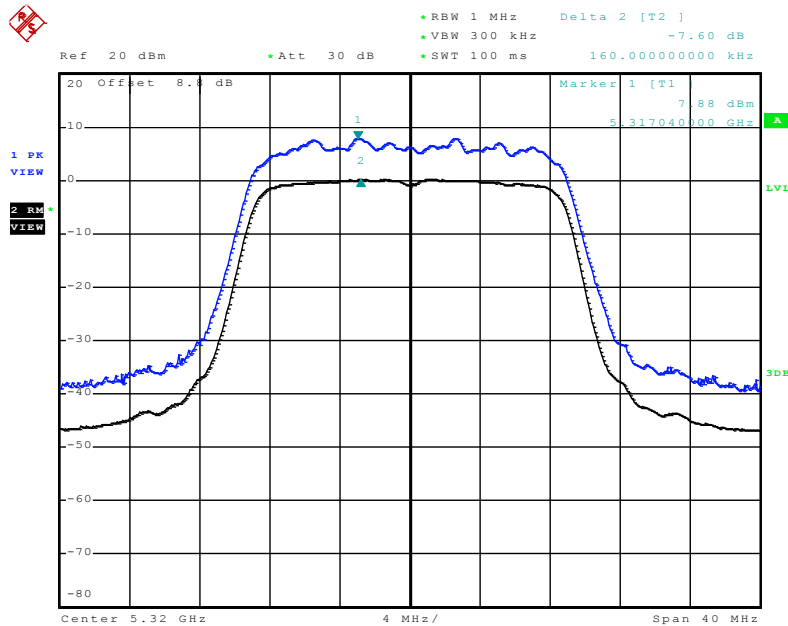


Date: 4.NOV.2010 21:10:51

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5500 MHz

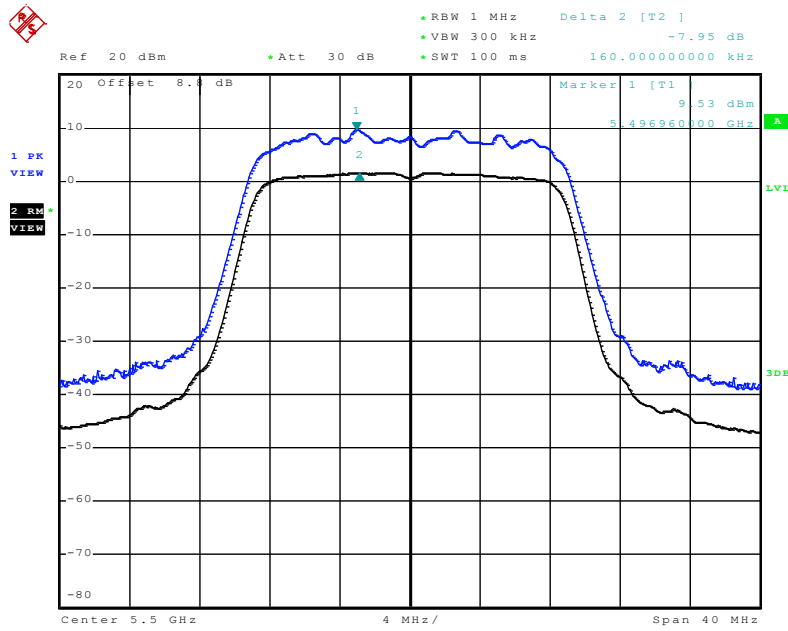

Date: 4.NOV.2010 21:12:27


Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5580 MHz

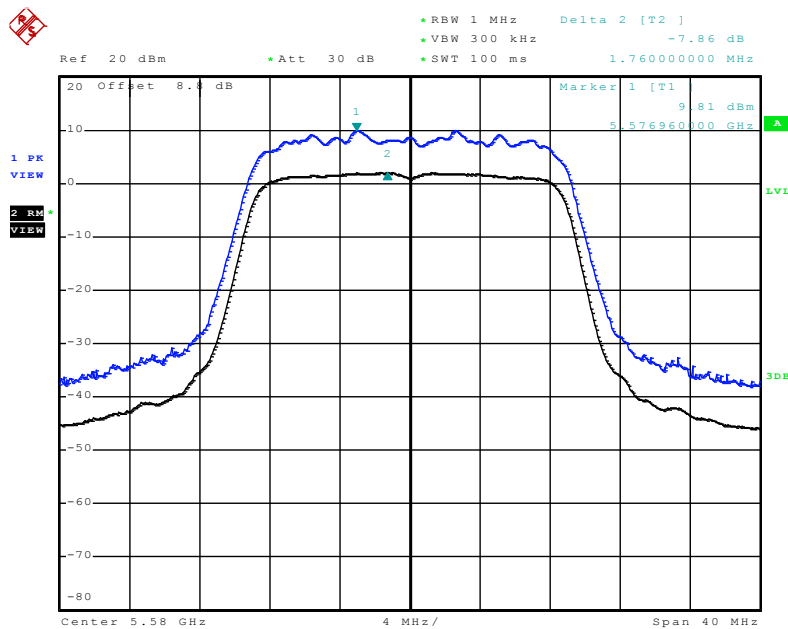

Date: 4.NOV.2010 21:13:53




Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (20MHz) / 5700 MHz

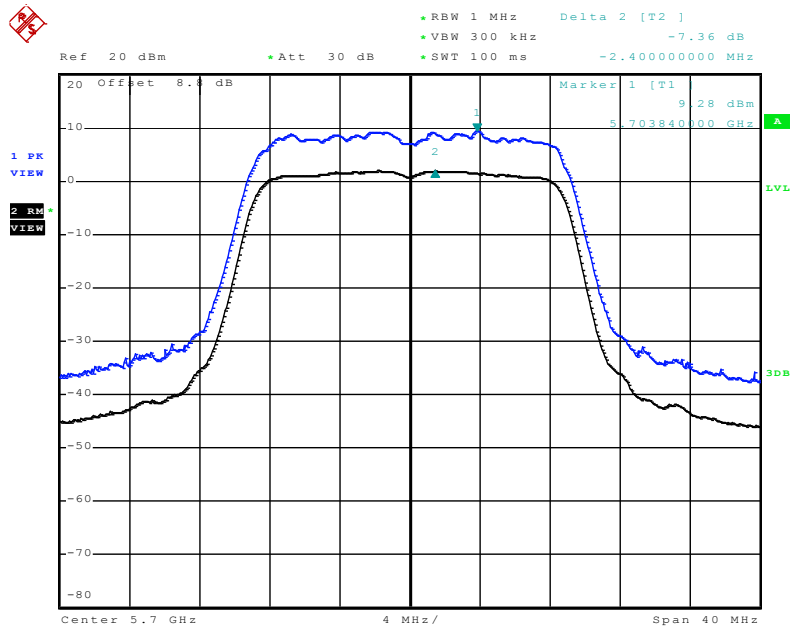


Date: 4.NOV.2010 21:15:42

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5190 MHz

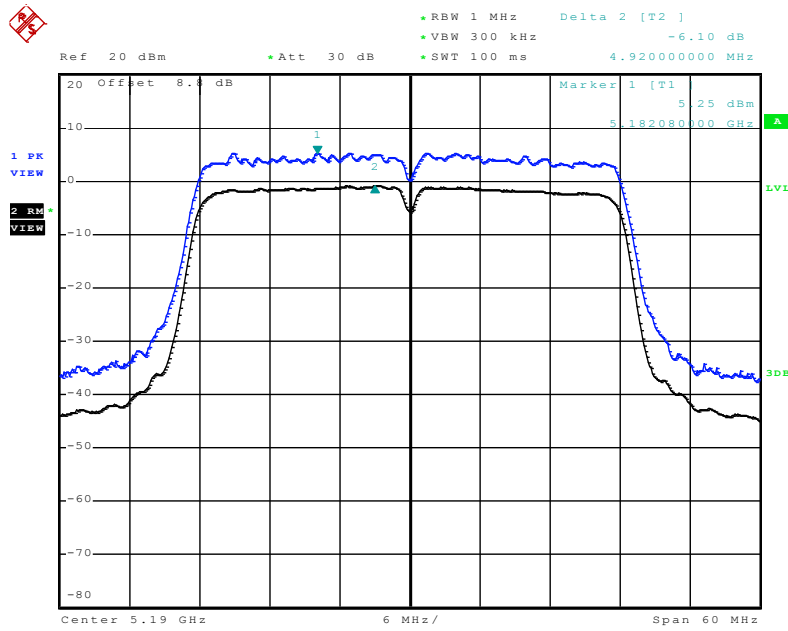


Date: 4.NOV.2010 22:21:47

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5230 MHz

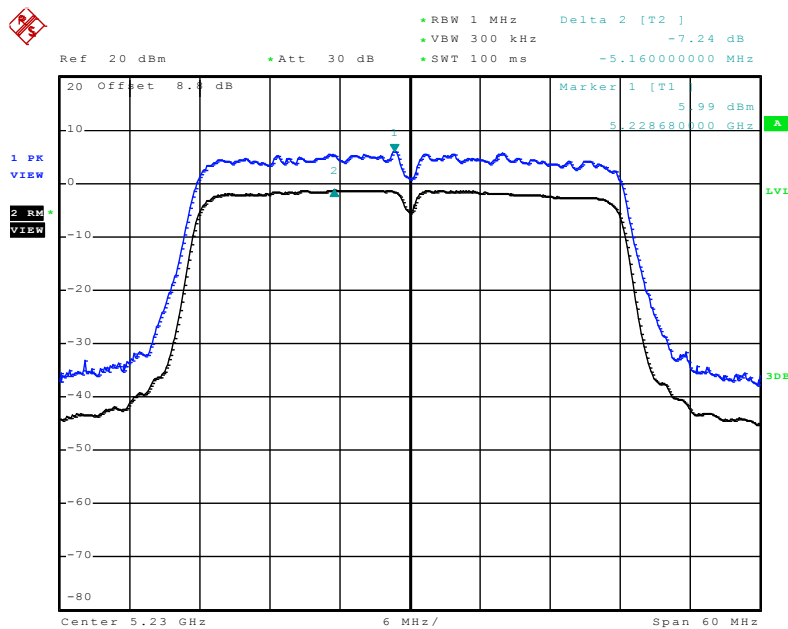


Date: 4.NOV.2010 22:22:56

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5270 MHz

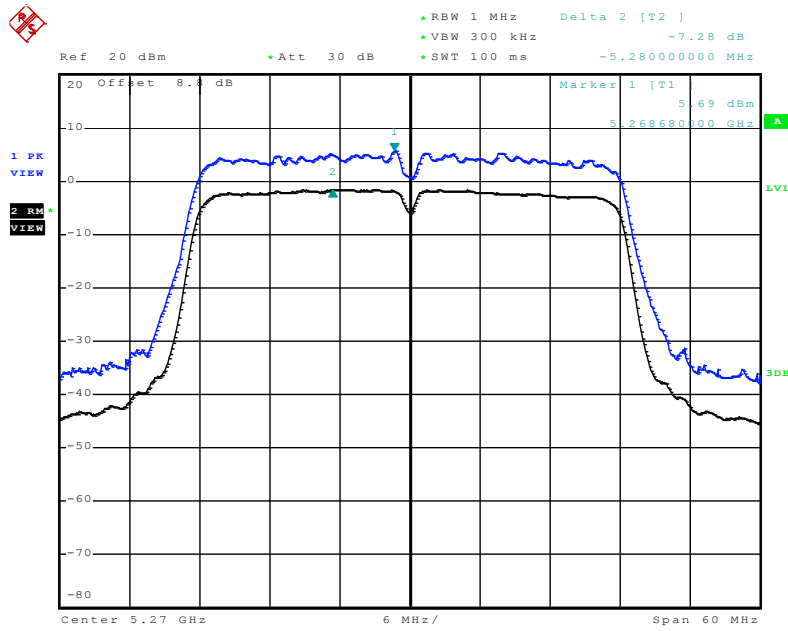


Date: 4.NOV.2010 22:24:01

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5310 MHz

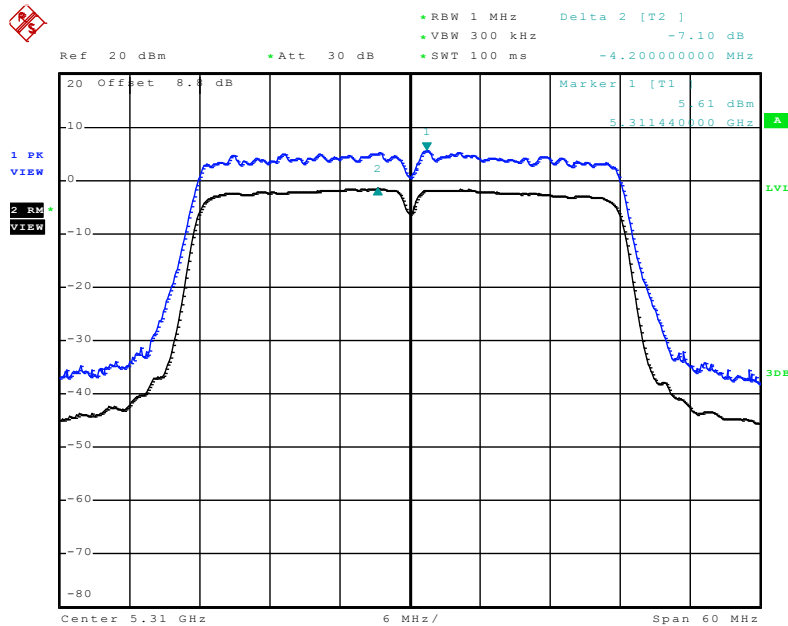


Date: 4.NOV.2010 22:25:04

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5510 MHz

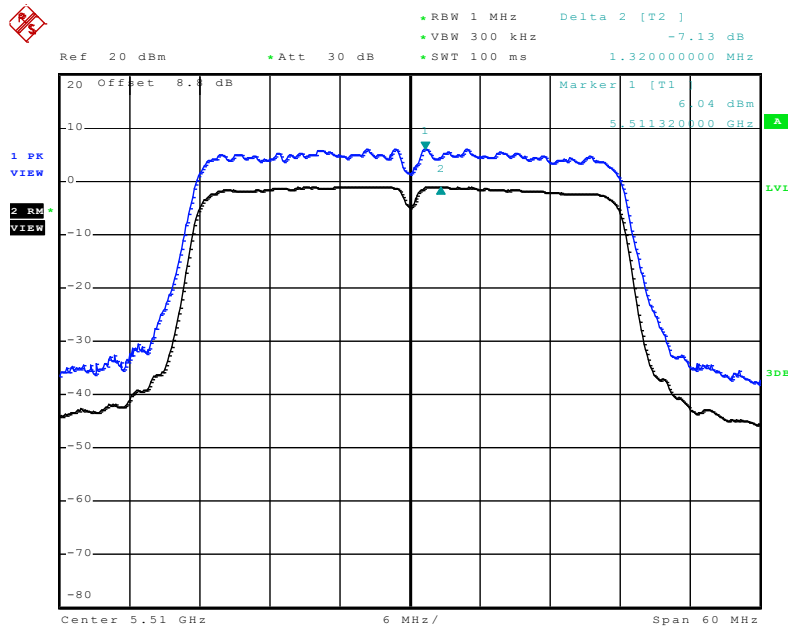


Date: 4.NOV.2010 22:26:05

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5550 MHz

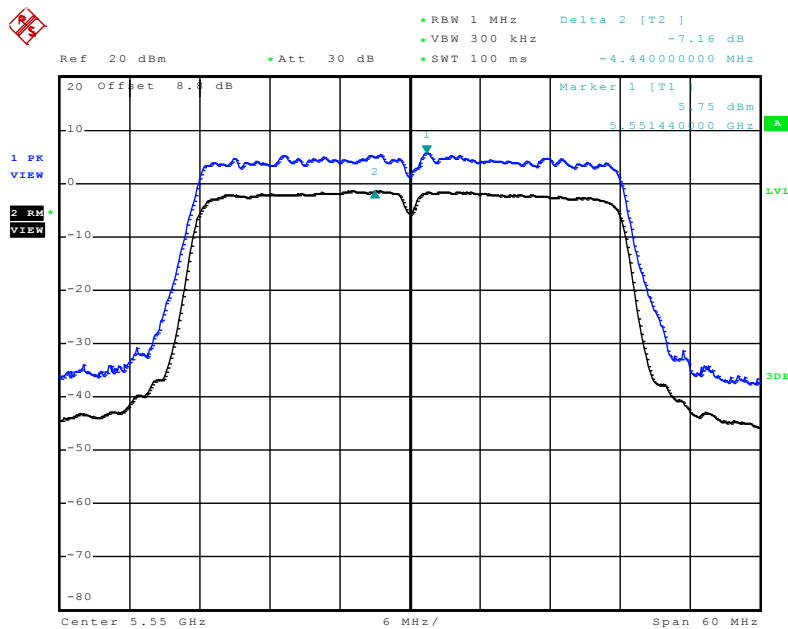

Date: 4.NOV.2010 22:27:08

Peak Excursion Plot on Configuration IEEE 802.11n Ant. A+Ant. B (40MHz) / 5670 MHz

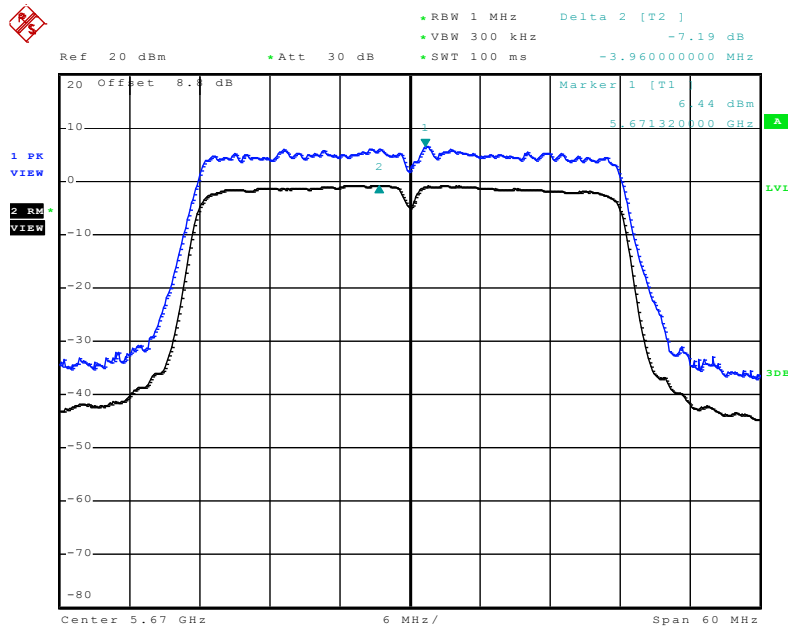

Date: 4.NOV.2010 22:28:08

**3.6 Radiated Emissions Measurement**

**3.6.1 Limit**

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

<b>Frequencies (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**3.6.2 Measuring Instruments and Setting**

Please refer to section 4 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

<b>Spectrum Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz z for peak


<b>Receiver Parameter</b>	<b>Setting</b>
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

**3.6.3 Test Procedures**


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

### 3.6.4 Test Setup Layout

For radiated emissions below 30MHz

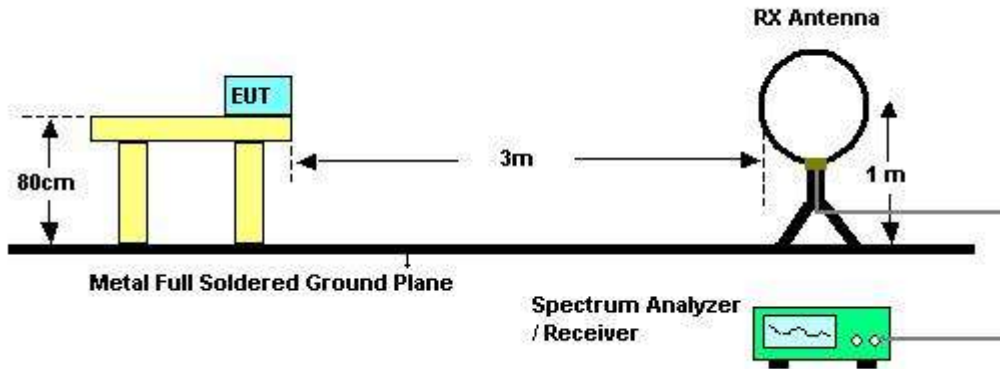

For radiated emissions above 30MHz

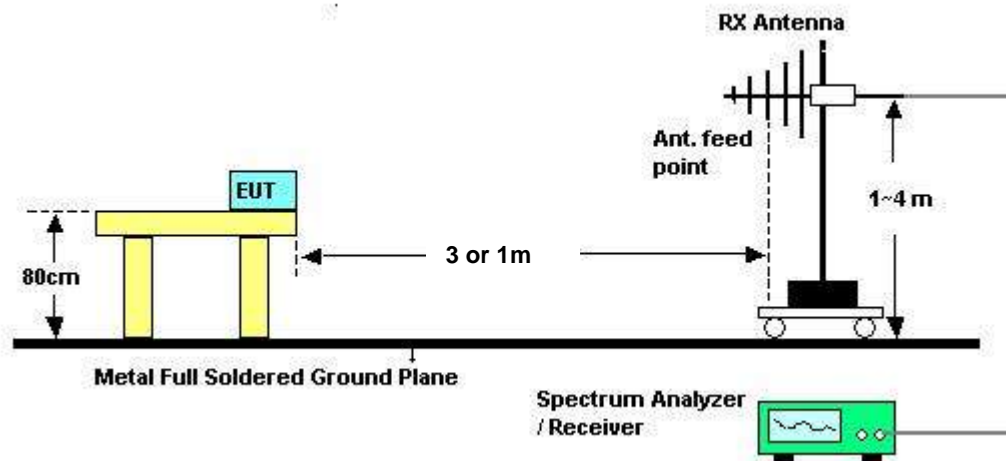

Above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [9.54 dB].

### 3.6.5 Test Deviation

There is no deviation with the original standard.

### 3.6.6 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



**3.6.7 Results of Radiated Emissions (9kHz~30MHz)**

<b>Final Test Date</b>	Oct. 26, 2010	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	24.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

3.6.8 Results of Radiated Emissions (30MHz~1GHz)


Final Test Date	Oct. 26, 2010	Test Site No.	03CH03-HY
Temperature	24.9°C	Humidity	54%
Test Engineer	Eddie	Configurations	Normal Mode

Horizontal

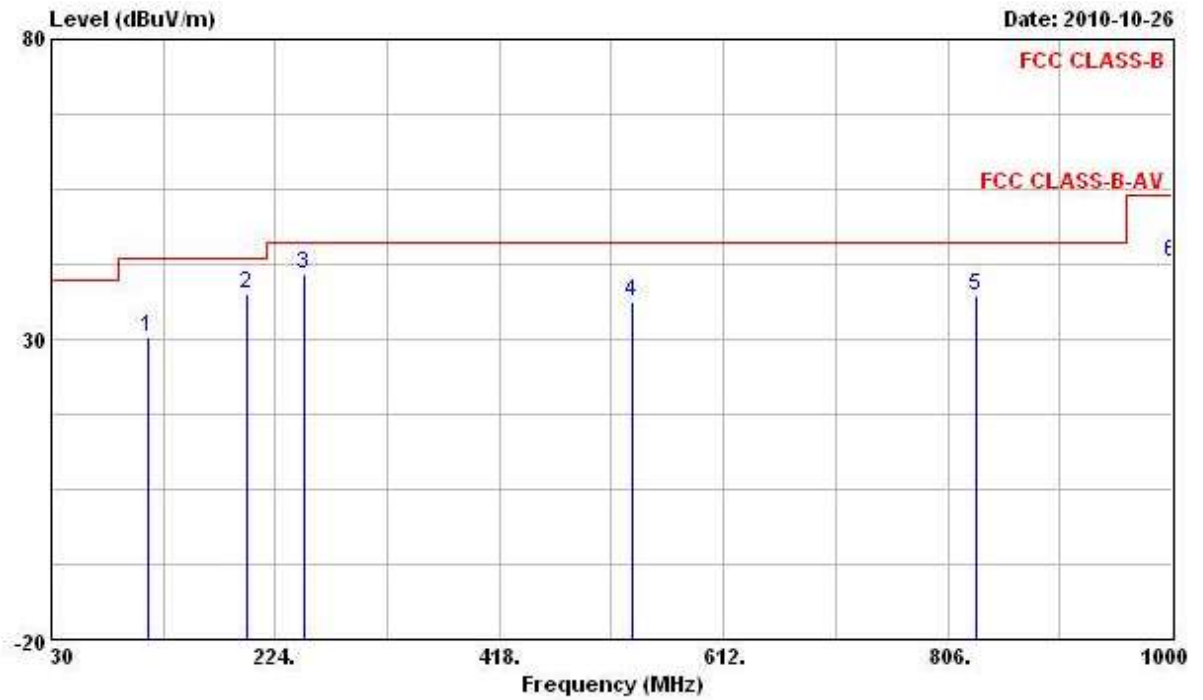

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	113.420	30.35	-13.15	43.50	43.40	12.80	1.72	27.57	Peak
2	198.780	37.57	-5.93	43.50	51.05	11.28	2.31	27.07	Peak
3	249.220	40.73	-5.27	46.00	51.90	12.97	2.68	26.82	Peak
4	532.460	36.40	-9.60	46.00	42.58	18.21	3.78	28.17	Peak
5	831.220	37.08	-8.92	46.00	39.66	20.19	4.83	27.60	Peak
6	1000.000	42.90	-31.10	74.00	41.97	22.50	5.47	27.04	Peak

Vertical

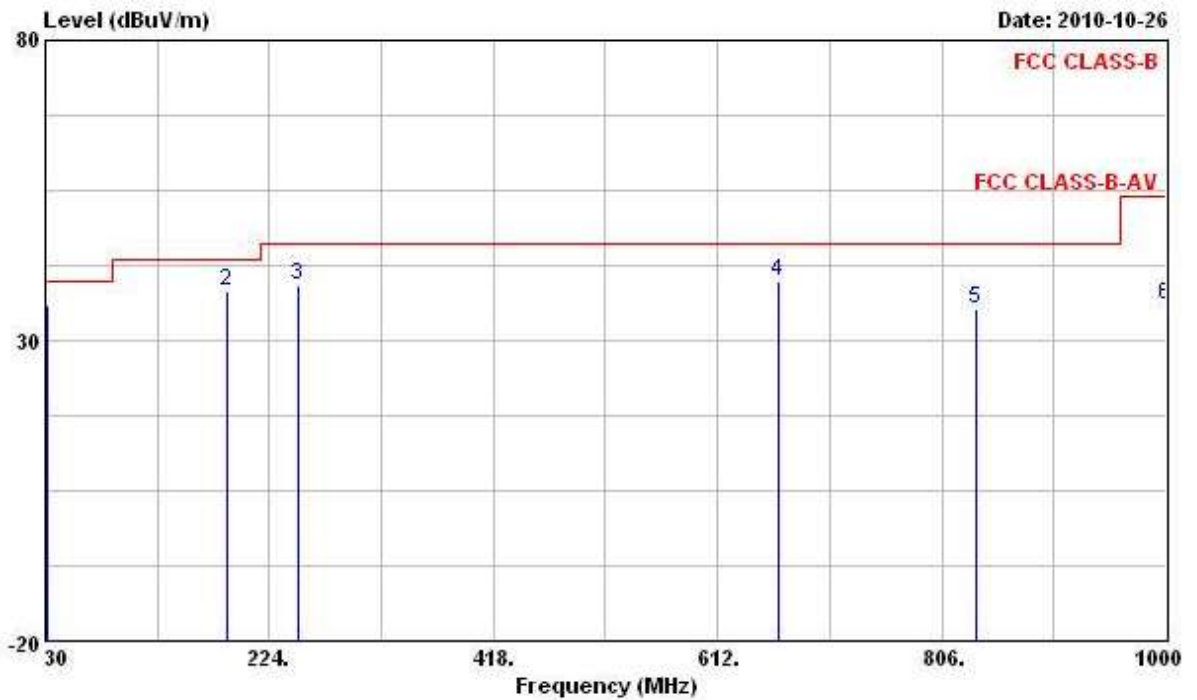

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	31.940	35.89	-4.11	40.00	47.49	15.48	0.78	27.86	Peak
2	187.140	38.06	-5.44	43.50	52.60	10.41	2.24	27.19	Peak
3	249.220	39.26	-6.74	46.00	50.43	12.97	2.68	26.82	Peak
4	665.350	39.90	-6.10	46.00	44.36	19.31	4.30	28.07	Peak
5	835.100	35.16	-10.84	46.00	37.71	20.19	4.84	27.58	Peak
6	1000.000	35.89	-38.11	74.00	34.96	22.50	5.47	27.04	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.6.9 Results for Radiated Emissions (1GHz~40GHz)

For Single Chain:


Final Test Date	Oct. 25, 2010	Test Site No.	03CH03-HY
Temperature	24.9°C	Humidity	54%
Test Engineer	Eddie	Configuration	802.11a Ch. 36 (Ant. A)

Horizontal

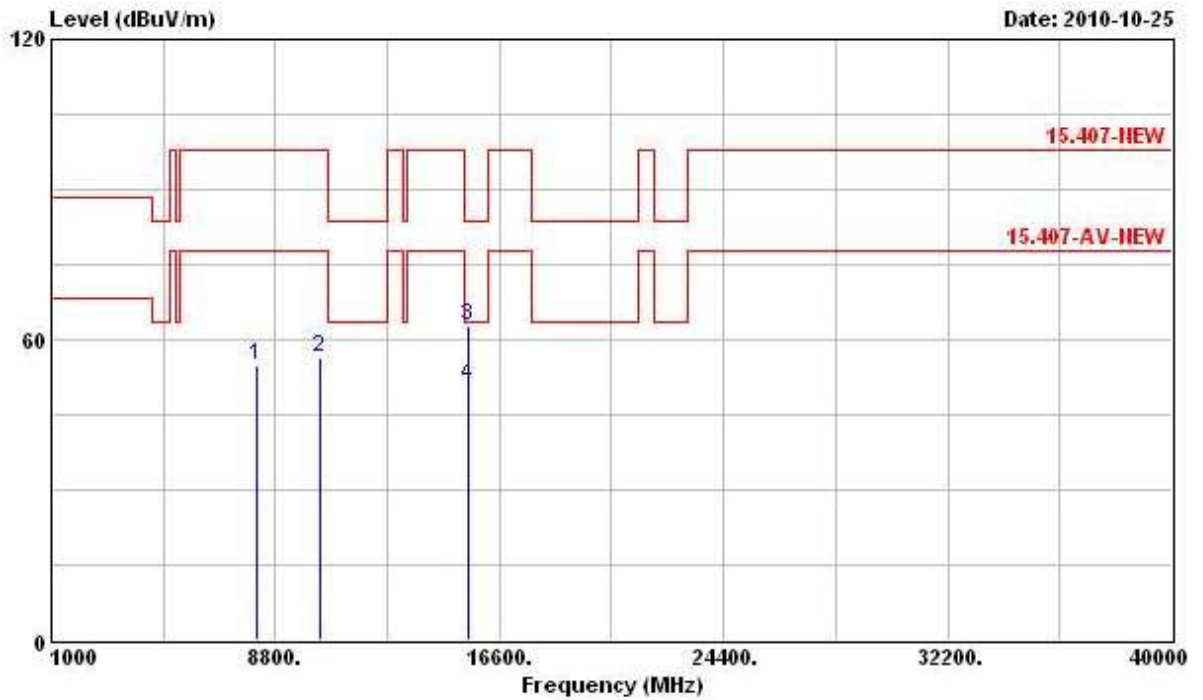

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8140.000	54.68	-23.16	77.84	44.89	38.28	5.84	34.33	PK
2	10360.000	56.54	-41.30	97.84	43.95	40.02	6.71	34.14	Peak
3	15540.000	62.95	-20.59	83.54	44.53	42.81	8.45	32.84	Peak
4	15540.000	50.91	-12.63	63.54	32.49	42.81	8.45	32.84	Average


Vertical

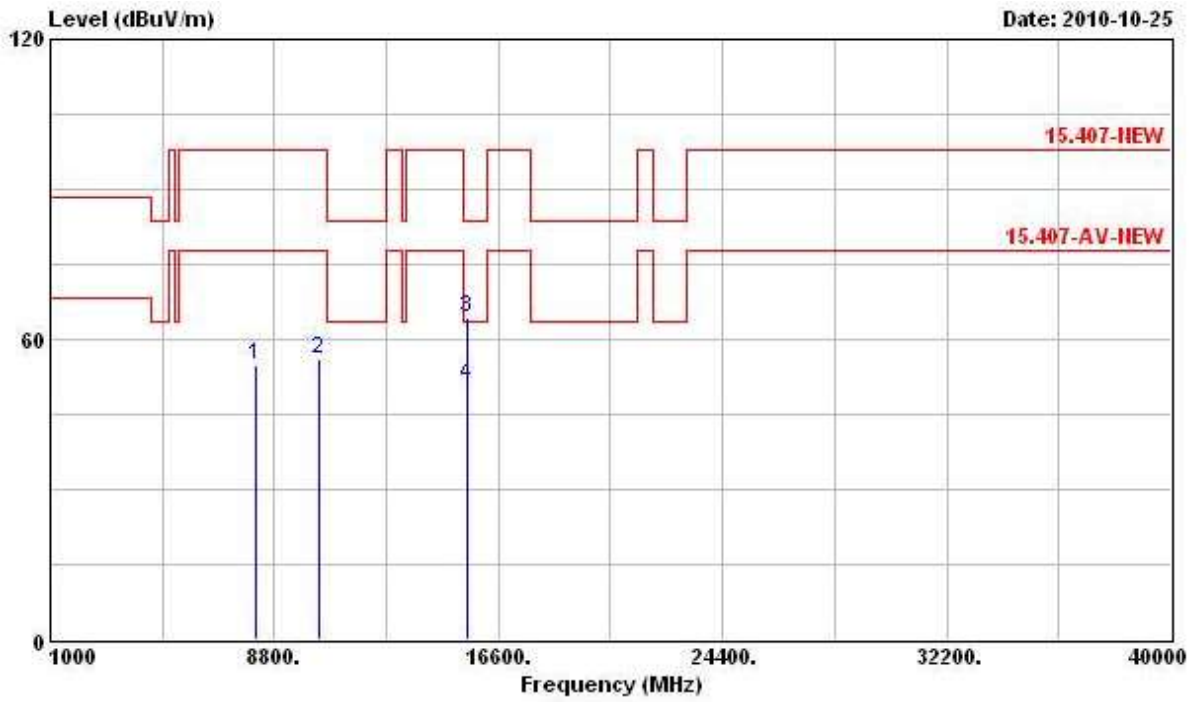

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8168.000	54.75	-43.09	97.84	44.92	38.30	5.85	34.32	Peak
2	10360.000	56.06	-41.78	97.84	43.47	40.02	6.71	34.14	Peak
3	15540.000	64.19	-19.35	83.54	45.77	42.81	8.45	32.84	Peak
4	15540.000	50.96	-12.58	63.54	32.54	42.81	8.45	32.84	Average


Final Test Date	Oct. 25, 2010	Test Site No.	03CH03-HY
Temperature	24.9°C	Humidity	54%
Test Engineer	Eddie	Configuration	802.11a Ch. 40 (Ant. A)

Horizontal

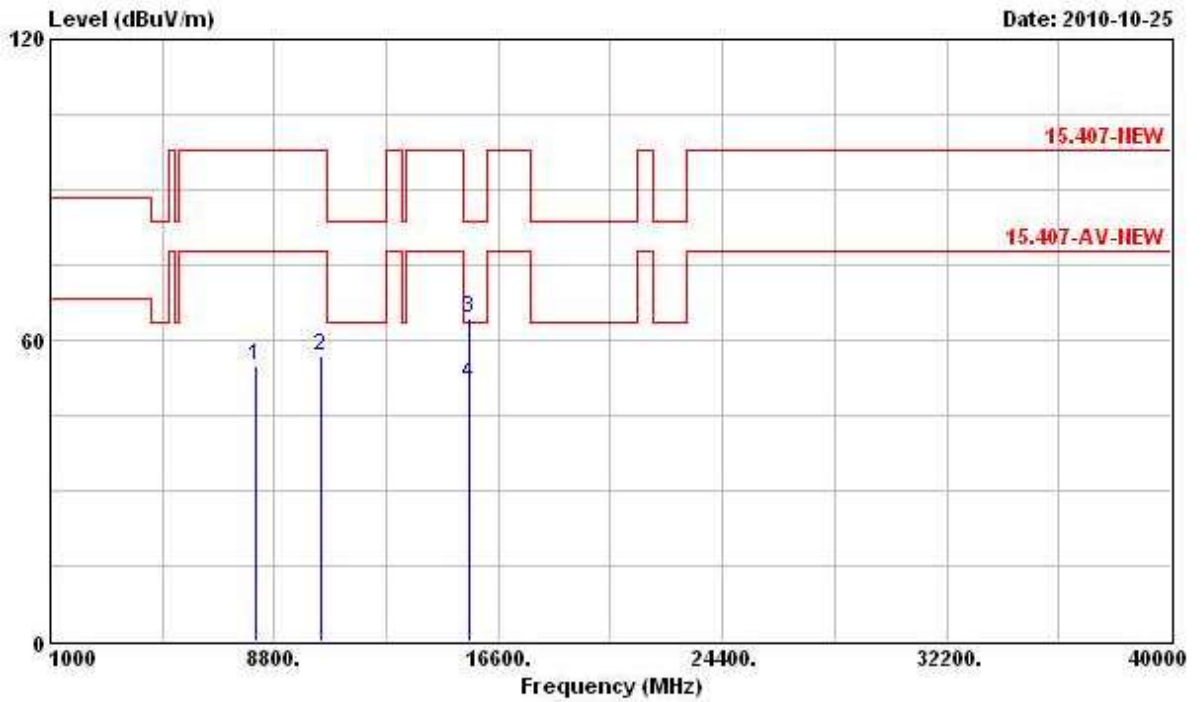

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8124.000	54.70	-23.14	77.84	44.92	38.27	5.84	34.33	PK
2	10400.000	56.65	-41.19	97.84	43.96	40.04	6.75	34.10	Peak
3	15600.000	64.32	-19.22	83.54	45.97	42.82	8.45	32.92	Peak
4	15600.000	51.14	-12.40	63.54	32.79	42.82	8.45	32.92	Average


Vertical

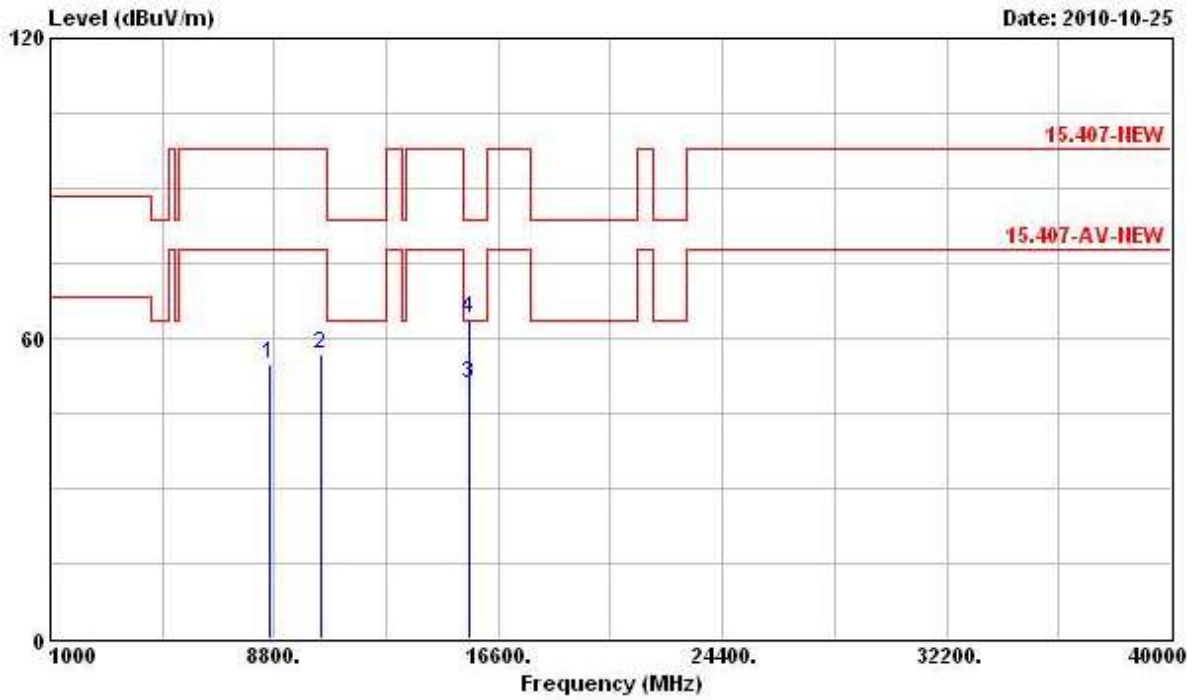

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8668.000	55.00	-42.84	97.84	45.00	38.37	6.02	34.39	Peak
2	10400.000	56.97	-40.87	97.84	44.28	40.04	6.75	34.10	Peak
3	15600.000	50.96	-12.58	63.54	32.61	42.82	8.45	32.92	Average
4	15600.000	63.99	-19.55	83.54	45.64	42.82	8.45	32.92	Peak

Final Test Date	Oct. 25, 2010	Test Site No.	03CH03-HY
Temperature	24.9°C	Humidity	54%
Test Engineer	Eddie	Configuration	802.11a Ch. 48 (Ant. A)


Horizontal

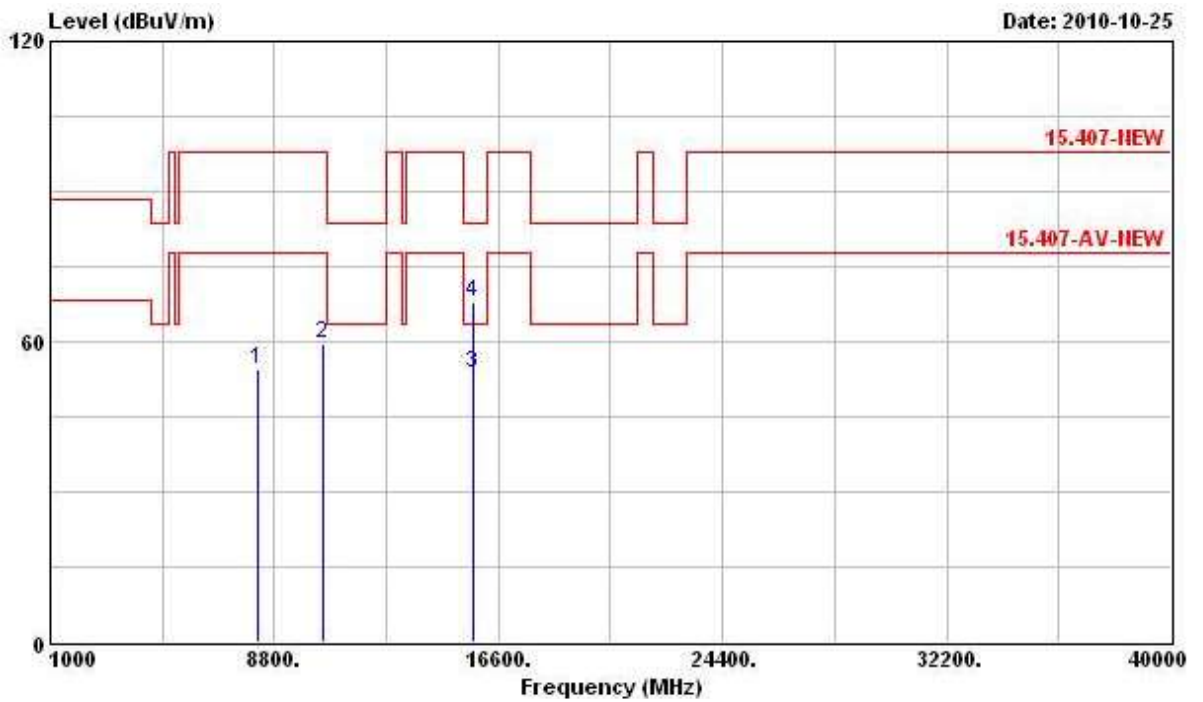

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8200.000	54.28	-23.56	77.84	44.41	38.32	5.86	34.31	PK
2	10480.000	59.41	-38.43	97.84	46.53	40.09	6.82	34.03	Peak
3	15720.000	53.64	-9.90	63.54	35.37	42.84	8.46	33.03	Average
4	15720.000	67.79	-15.75	83.54	49.52	42.84	8.46	33.03	Peak




Vertical

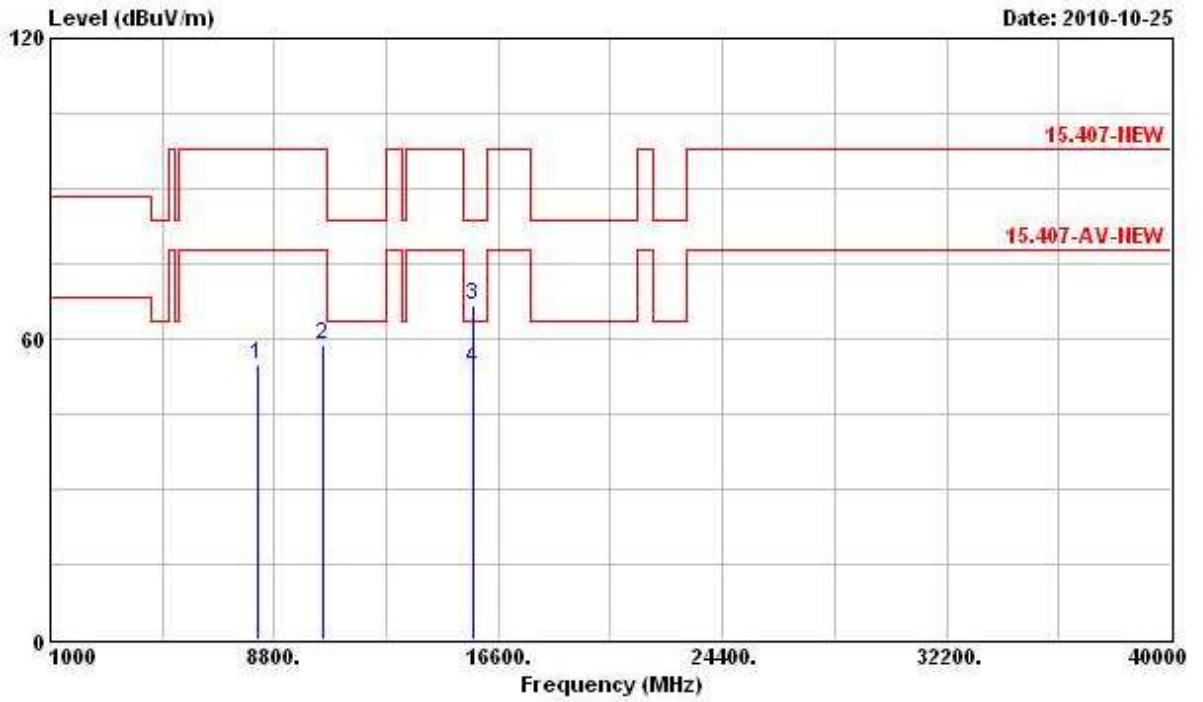

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8192.000	54.85	-22.99	77.84	45.00	38.31	5.85	34.31	PK
2	10480.000	58.90	-38.94	97.84	46.02	40.09	6.82	34.03	Peak
3	15720.000	66.87	-16.67	83.54	48.60	42.84	8.46	33.03	Peak
4	15720.000	53.91	-9.63	63.54	35.64	42.84	8.46	33.03	Average


<b>Final Test Date</b>	Oct. 25, 2010	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	24.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11a Ch. 52 (Ant. A)

**Horizontal**

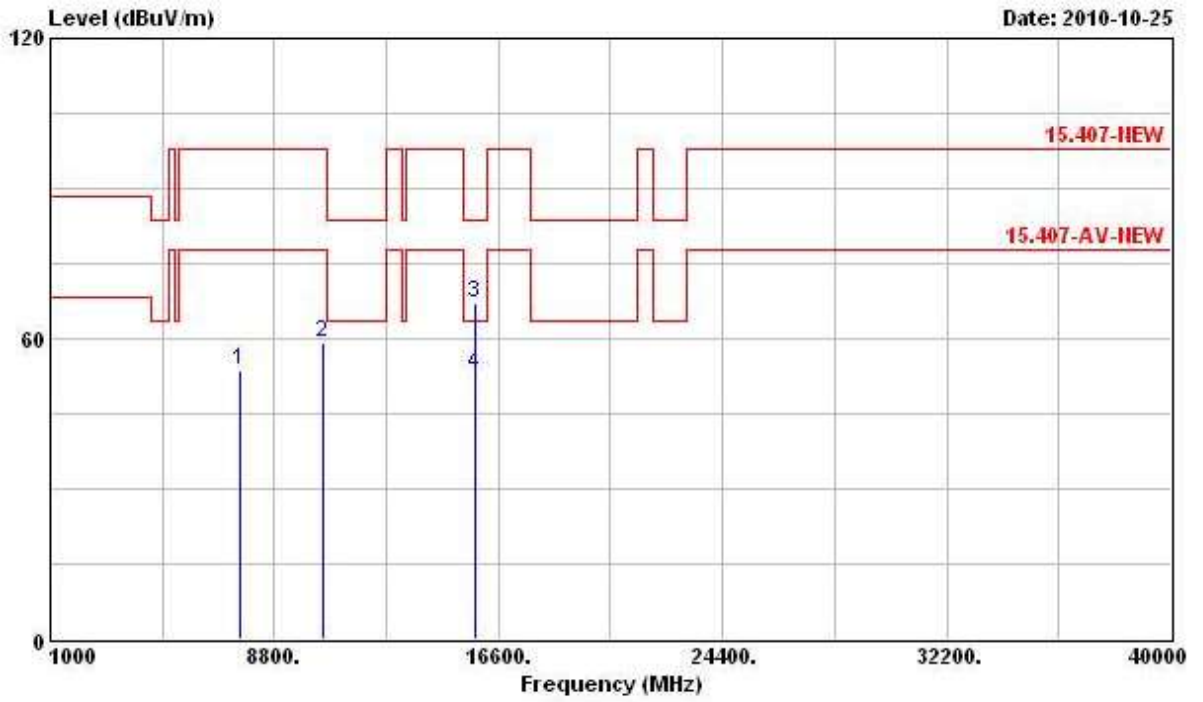

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7621.000	53.76	-24.08	77.84	44.41	37.97	5.69	34.31	PK
2	10520.000	59.23	-38.61	97.84	46.27	40.11	6.85	34.00	Peak
3	15780.000	67.06	-16.48	83.54	48.85	42.86	8.46	33.11	Peak
4	15780.000	53.04	-10.50	63.54	34.83	42.86	8.46	33.11	Average


Vertical

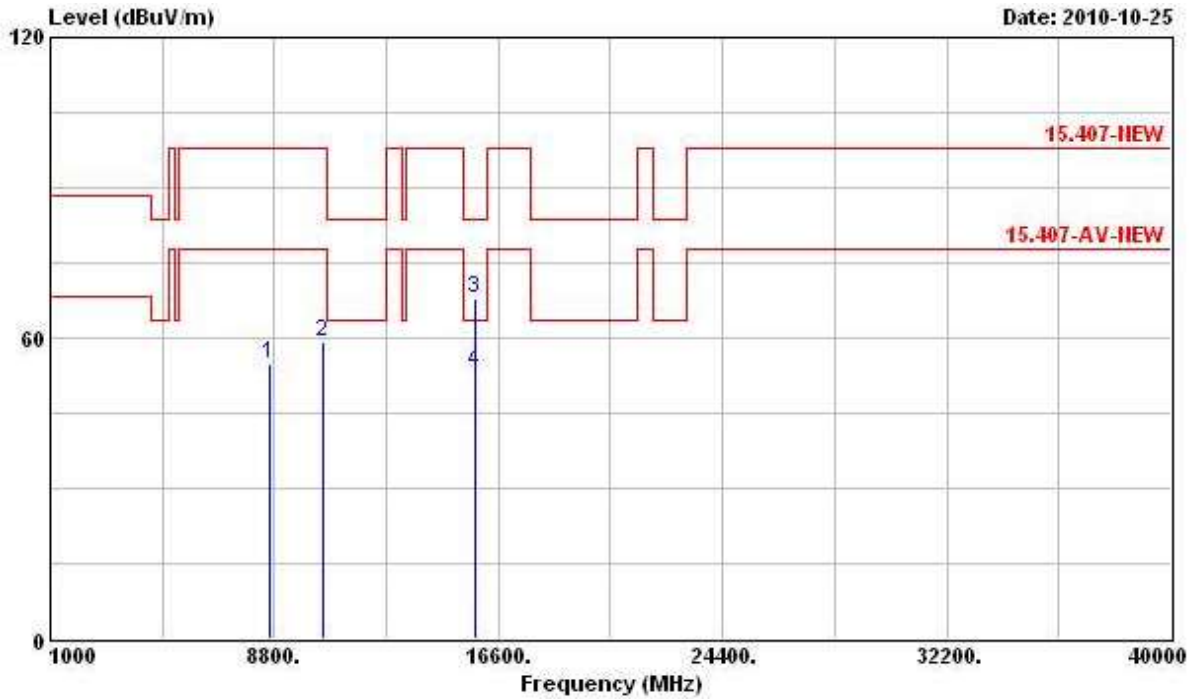

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Cable	Preamp	Remark
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB
1	8612.000	54.86	-42.98	97.84	44.80	38.41	5.99	34.34 Peak
2	10520.000	59.27	-38.57	97.84	46.31	40.11	6.85	34.00 Peak
3	15780.000	67.78	-15.76	83.54	49.57	42.86	8.46	33.11 Peak
4	15780.000	53.28	-10.26	63.54	35.07	42.86	8.46	33.11 Average


<b>Final Test Date</b>	Oct. 25, 2010	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	24.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11a Ch. 56 (Ant. A)

**Horizontal**

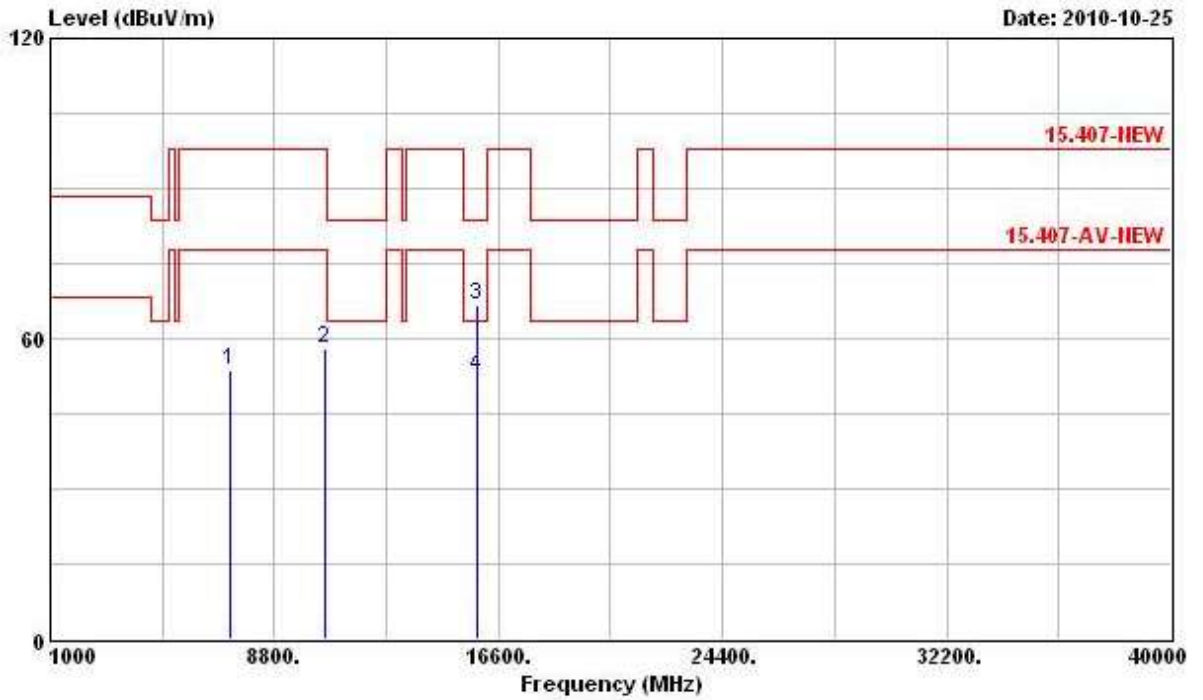

	<b>Freq</b>	<b>Level</b>	<b>Over Limit</b>	<b>Limit Line</b>	<b>ReadAntenna Level</b>	<b>Antenna Factor</b>	<b>Cable Loss</b>	<b>Preamp Factor</b>	<b>Remark</b>
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7288.000	53.56	-24.28	77.84	44.36	37.86	5.63	34.29	PK
2	10560.000	57.88	-39.96	97.84	44.81	40.13	6.88	33.94	Peak
3	15840.000	66.90	-16.64	83.54	48.73	42.87	8.46	33.16	Peak
4	15840.000	52.66	-10.88	63.54	34.49	42.87	8.46	33.16	Average


Vertical

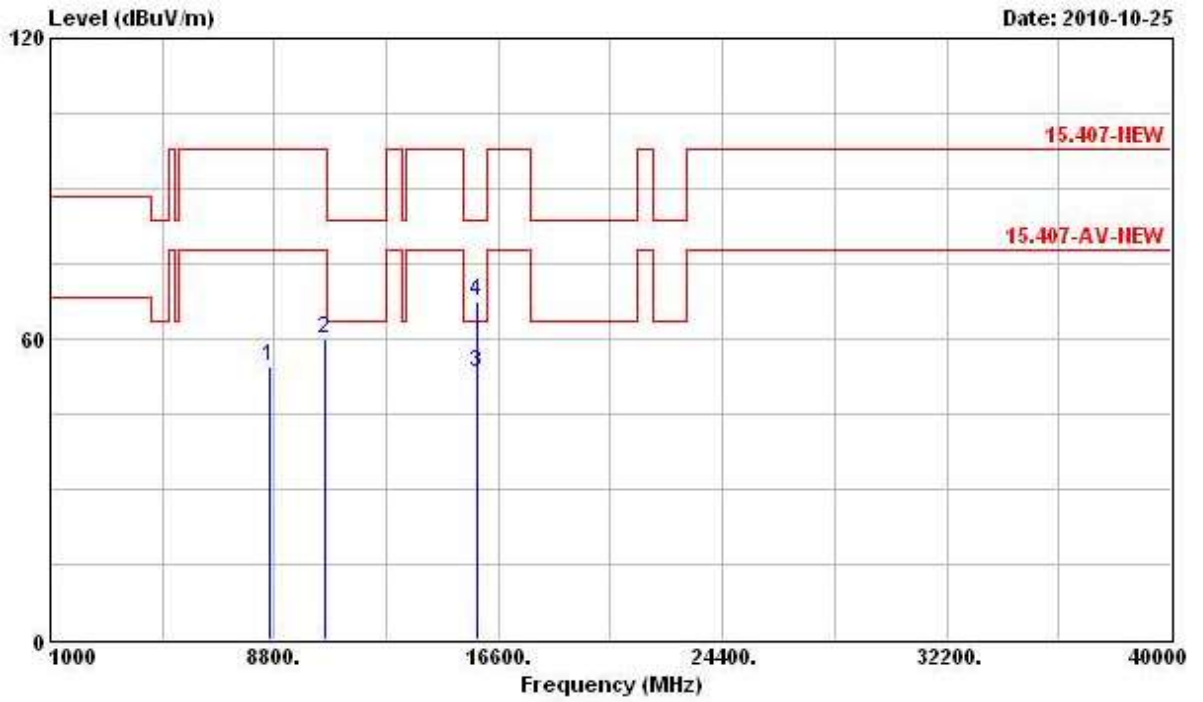

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8636.000	54.48	-43.36	97.84	44.42	38.39	6.01	34.34	Peak
2	10560.000	59.85	-37.99	97.84	46.78	40.13	6.88	33.94	Peak
3	15840.000	53.34	-10.20	63.54	35.17	42.87	8.46	33.16	Average
4	15840.000	67.34	-16.20	83.54	49.17	42.87	8.46	33.16	Peak


Final Test Date	Oct. 25, 2010	Test Site No.	03CH03-HY
Temperature	24.9°C	Humidity	54%
Test Engineer	Eddie	Configuration	802.11a Ch. 64 (Ant. A)

Horizontal

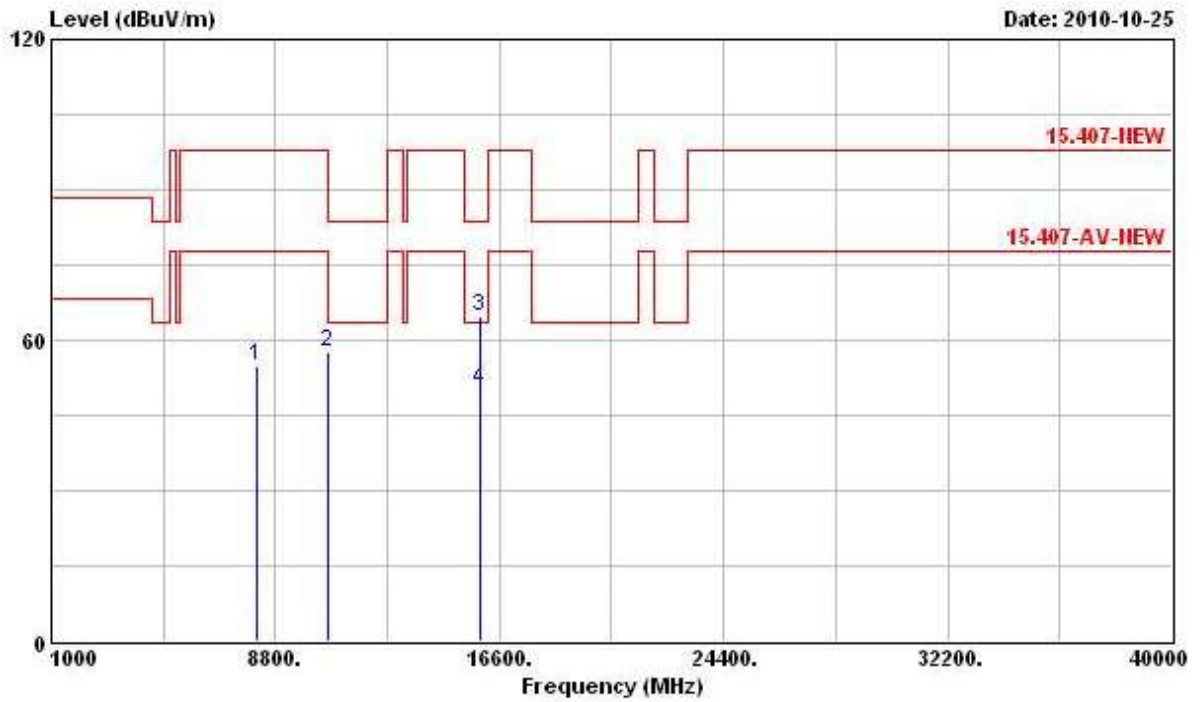

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8160.000	54.85	-22.99	77.84	45.03	38.29	5.85	34.32	PK
2	10640.000	57.61	-5.93	63.54	44.34	40.18	6.93	33.84	PK
3	15960.000	64.87	-18.67	83.54	46.80	42.89	8.47	33.29	Peak
4	15960.000	50.17	-13.37	63.54	32.10	42.89	8.47	33.29	Average


Vertical

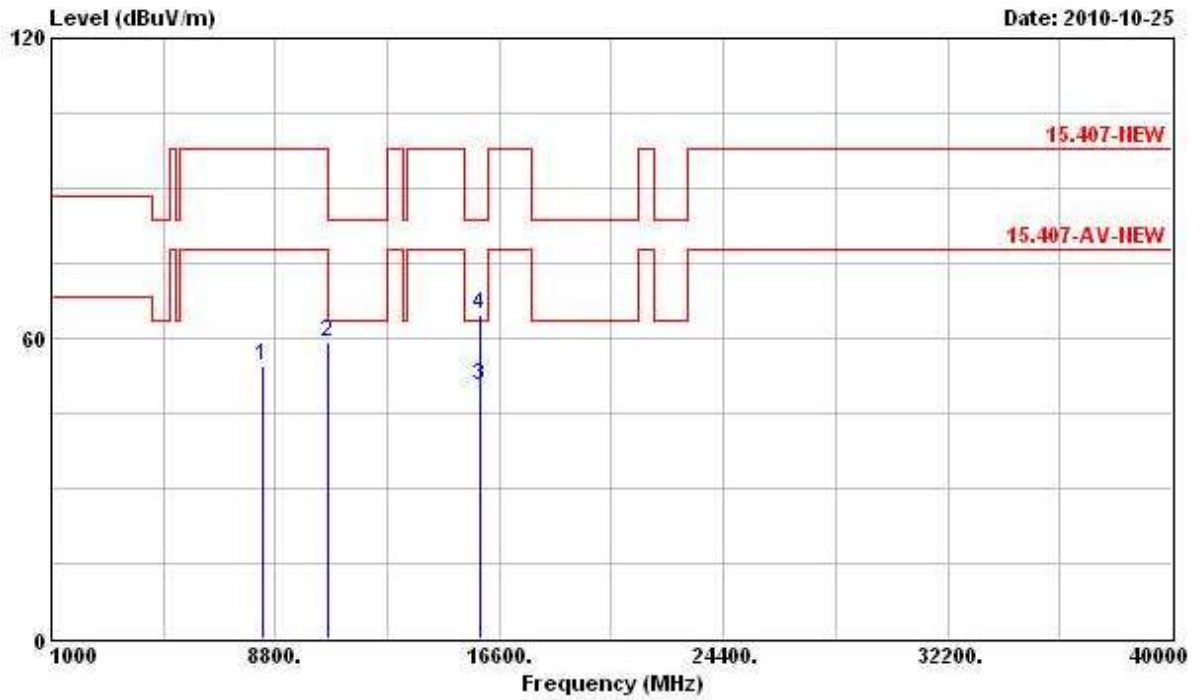

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8360.000	54.43	-23.41	77.84	44.35	38.42	5.91	34.25	PK
2	10640.000	59.22	-4.32	63.54	45.95	40.18	6.93	33.84	PK
3	15960.000	50.72	-12.82	63.54	32.65	42.89	8.47	33.29	Average
4	15960.000	64.71	-18.83	83.54	46.64	42.89	8.47	33.29	Peak

<b>Final Test Date</b>	Oct. 25, 2010	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	24.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11a Ch. 100 (Ant. A)


**Horizontal**

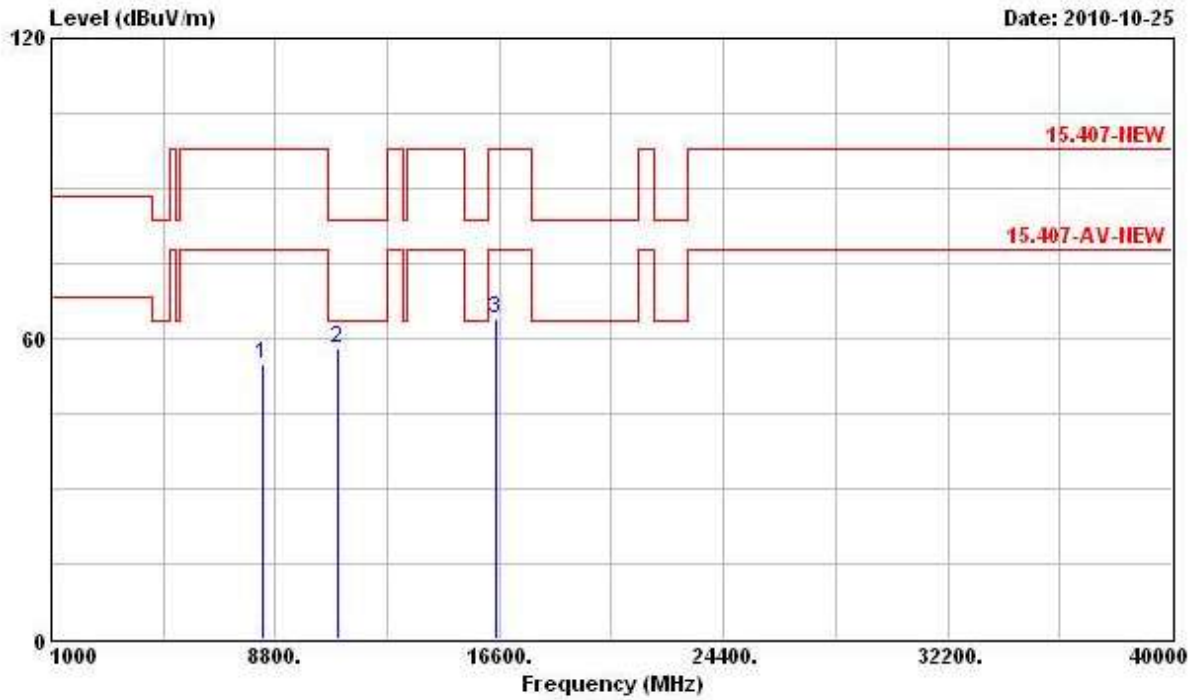

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8384.000	54.94	-22.90	77.84	44.84	38.43	5.91	34.24	PK
2	11000.000	58.02	-5.52	63.54	43.84	40.40	7.17	33.39	PK
3	16500.000	63.84	-34.00	97.84	44.88	43.50	8.24	32.78	Peak




Vertical

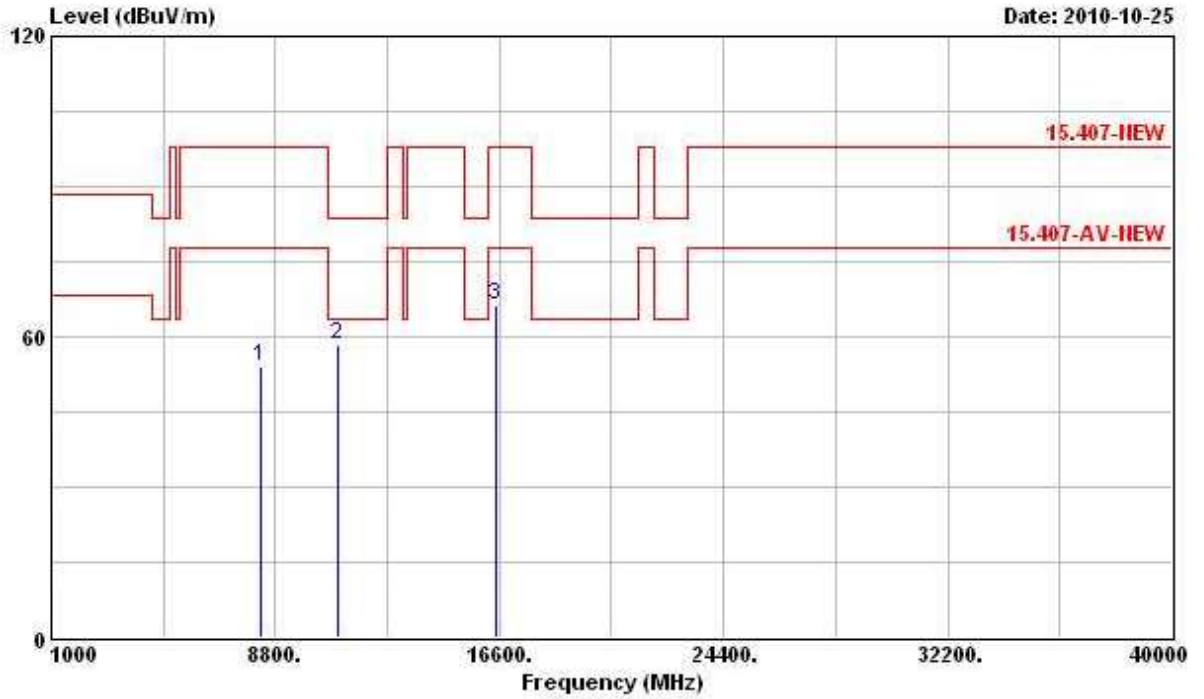

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8280.000	54.26	-23.58	77.84	44.28	38.37	5.89	34.28	PK
2	11000.000	58.49	-5.05	63.54	44.31	40.40	7.17	33.39	PK
3	16500.000	66.18	-31.66	97.84	47.22	43.50	8.24	32.78	Peak


<b>Final Test Date</b>	Oct. 25, 2010	<b>Test Site No.</b>	03CH03-HY
<b>Temperature</b>	24.9°C	<b>Humidity</b>	54%
<b>Test Engineer</b>	Eddie	<b>Configuration</b>	802.11a Ch. 116 (Ant. A)

**Horizontal**

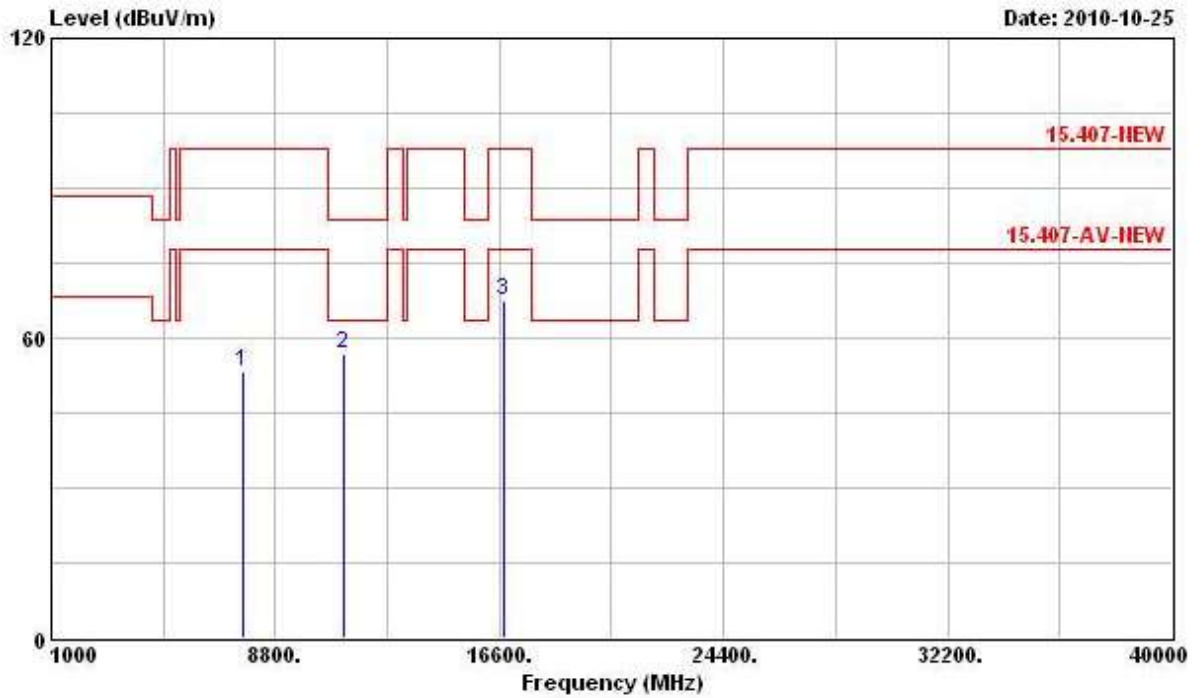

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7664.000	53.47	-24.37	77.84	44.08	38.00	5.71	34.32	PK
2	11160.000	56.67	-6.87	63.54	42.71	40.47	6.96	33.47	PK
3	16740.000	67.40	-30.44	97.84	47.89	43.60	8.47	32.56	Peak

Vertical

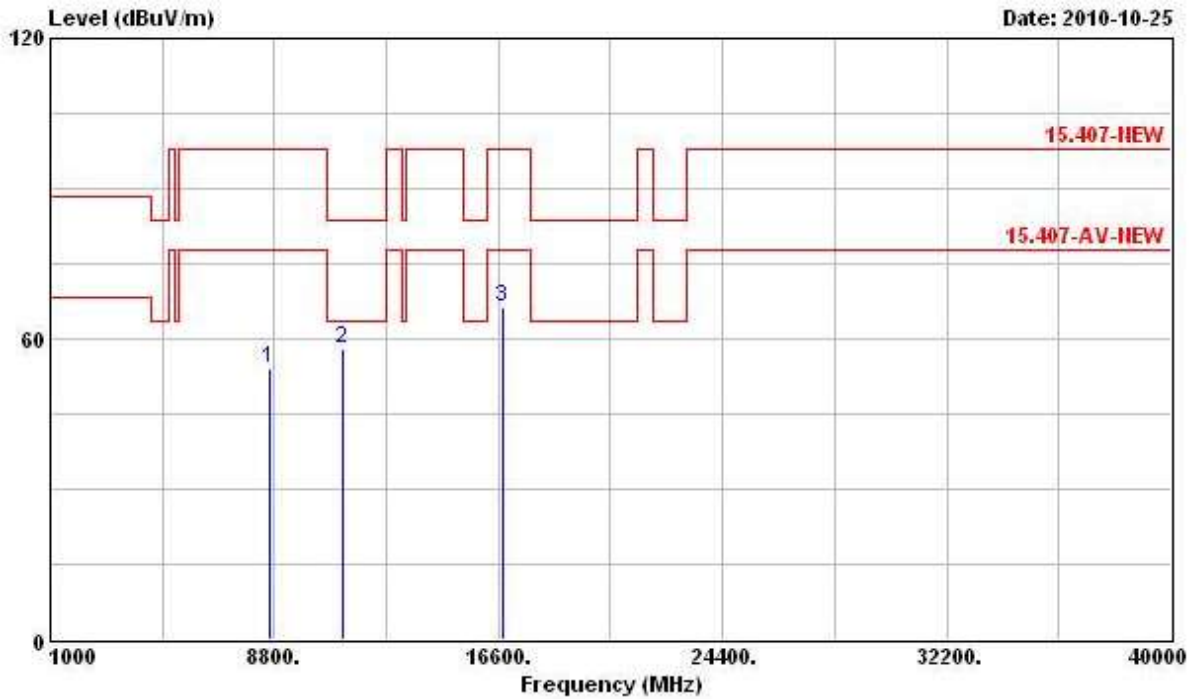

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8660.000	54.25	-43.59	97.84	44.23	38.37	6.01	34.36	Peak
2	11160.000	58.19	-5.35	63.54	44.23	40.47	6.96	33.47	PK
3	16740.000	66.38	-31.46	97.84	46.87	43.60	8.47	32.56	Peak