



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

TEST REPORT

FCC Standards : FCC 47CFR part 15 subpart C

Test Report No. : CTK-2016-00182

Date of Issue : 2016-02-18

FCC ID : RTQLPT200AR

Model/Type No. : LPT-200AR

Kind of Product : Tablet PC

Applicant : LG CNS CO.,LTD.

Applicant Address : FKI Tower, 24, Yeoui-daero, Yeongdeungpo-gu, Seoul, Korea, 07320

Manufacturer : ART&CORE Inc

Manufacturer Address : 44 Burim-ro 170beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Factory #1 : ARTVIEW CO.,LTD.

Factory Address : 5F, 44, burim-ro 170beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Contact Person : Jae hee Lee

Telephone : +82-2-2099-0167

Received Date : 2015-12-30

Test period : Start : 2016-01-20 End : 2016-01-25

Test Results : In Compliance Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang
Test Engineer
Date: 2016-02-18

Reviewed by

Young-Joon, Park
Technical Manager
Date: 2016-02-18



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
2016-02-18	Issued (CTK-2016-00182)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Test mode	4
1.2 EUT Operation Test Setup	4
1.3 Tested Frequency	4
1.4 EUT Exercise of Software	5
1.5 Device Modifications	5
1.6 Peripheral Devices	5
1.7 Configuration of System under Test	5
1.8 Calibration Details of Equipment Used for Measurement	5
1.9 Test Facility.....	6
1.10 Laboratory Accreditations and Listings	6
2.0 Summary of tests	7
2.1 Technical Characteristic Test	8
2.1.0 Duty Cycle	8
2.1.1 6dB Bandwidth	9
2.1.2 Maximum peak Conducted Output Power.....	12
2.1.3 Power Spectral Density	15
2.1.4 Band - edge	18
2.1.5 Field Strength of Emissions	23
2.1.6 AC Conducted Emissions.....	33
APPENDIX A – Test Equipment Used For Tests	36



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

1.0 General Product Description

Equipment model name : LPT-200AR
 Serial number : Prototype
 EUT condition : Pre-production, not damaged
 Antenna type : PCB antenna Gain 4.1 dBi
 Frequency Range : 2402 MHz – 2480 MHz
 RF output power : -4.07 dBm Peak Conducted
 Number of channels : 40
 Type of Modulation : GFSK (Bluetooth 4.1 - LE)
 Rated Channel spacing : 2 MHz
 Power Source : DC 22 V
 Hardware Rev : DS2 (2015-11-30)
 Software Rev : ALPS.L1.MP8.V2.7_ANC8127.SB.BRS.L1 (2015-12-15)
 Firmware Rev : 0x0104

1.1 Test mode

Test Item	Modulation	Data Rate
6 dB Bandwidth Maximum Output Power Conducted Spurious emission Band Edge Power Spectral Density Radiated Emissions Above 1GHz	Bluetooth low energy (GFSK)	1 Mbps
Radiated Emissions Below 1GHz AC Conducted Emissions	Nomal Mode	Auto

1.2 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

1.3 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2440	2480

1.4 EUT Exercise of Software

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. The software is using the android system to internal memory.

1.5 Device Modifications


The following modifications were necessary for compliance:

Not applicable

1.6 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	LG Electronics.	LGE-DMLGS1 (B)	703KIUP015110
AC ADAPTER	Dongguang Lite Power 2nd Plant	PA-1900-08	-

1.7 Configuration of System under Test

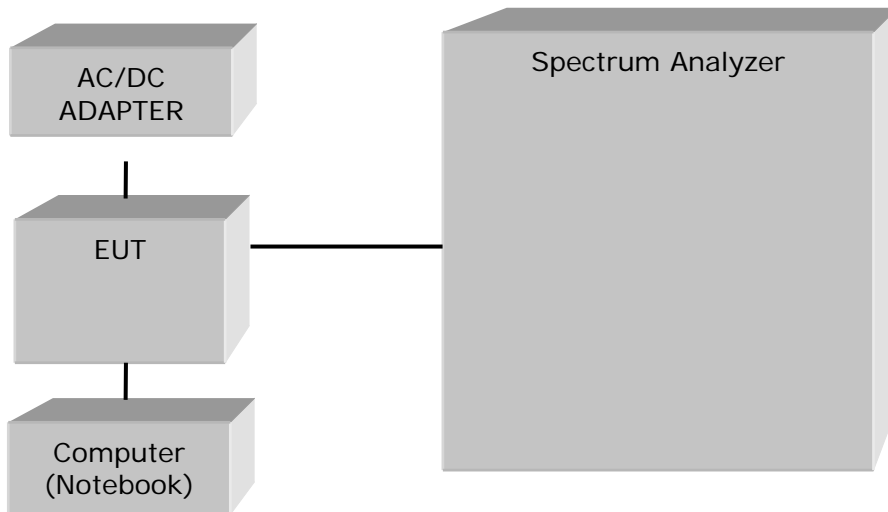

1.8 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

1.9 Test Facility

The measurement facility is located at 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500 kHz	Conducted	C
15.247(b)	Maximum Output Power	< 1 Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(e)	Transmitter Power Spectral Density	< 8 dBm @ 3 kHz		C
				C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:
- FCC Part 15.247, ANSI C63.10-2013

The tests were performed according to the method of measurements prescribed in
KDB No.558074 D01 DTS Meas Guidance v03r03



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1 Technical Characteristic Test

2.1.0 Duty Cycle

Duty Cycle	61.91 %
------------	---------

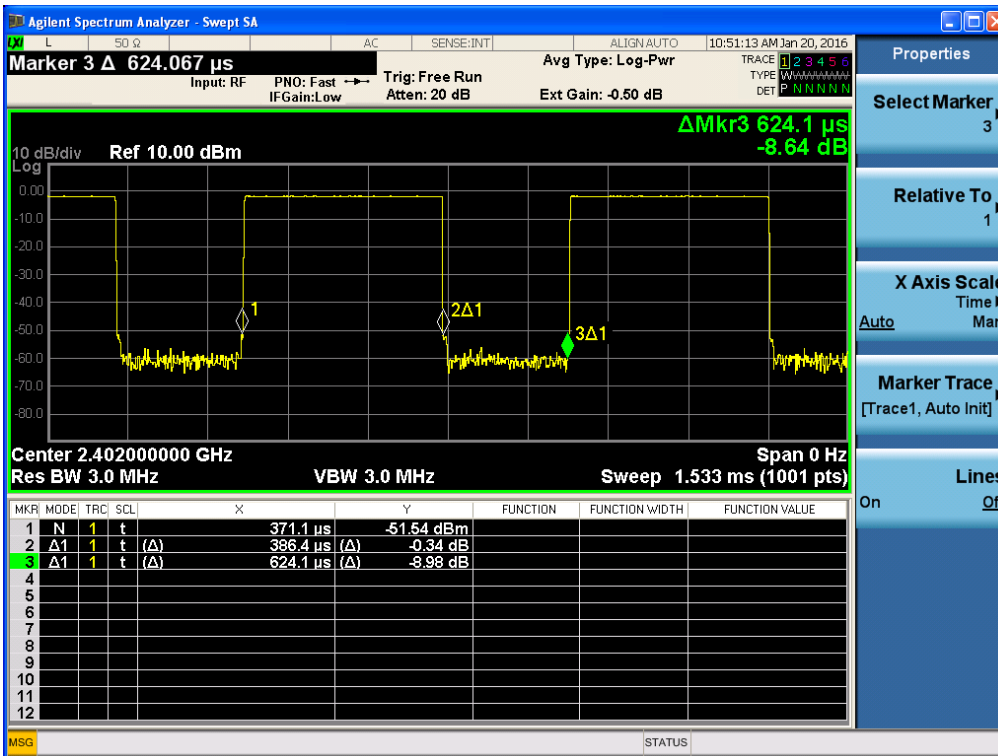



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.1 6dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 300 kHz (VBW ≥ 3 × RBW)

Sweep = auto

Trace = Max hold

Detector function = peak

Measurement Data:

Test mode : Continuous modulated carrier

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2402	0.705	Complies
2440	0.698	Complies
2480	0.697	Complies


Minimum Standard:

6 dB Bandwidth > 500kHz


See next pages for actual measured spectrum plots.



2402 MHz

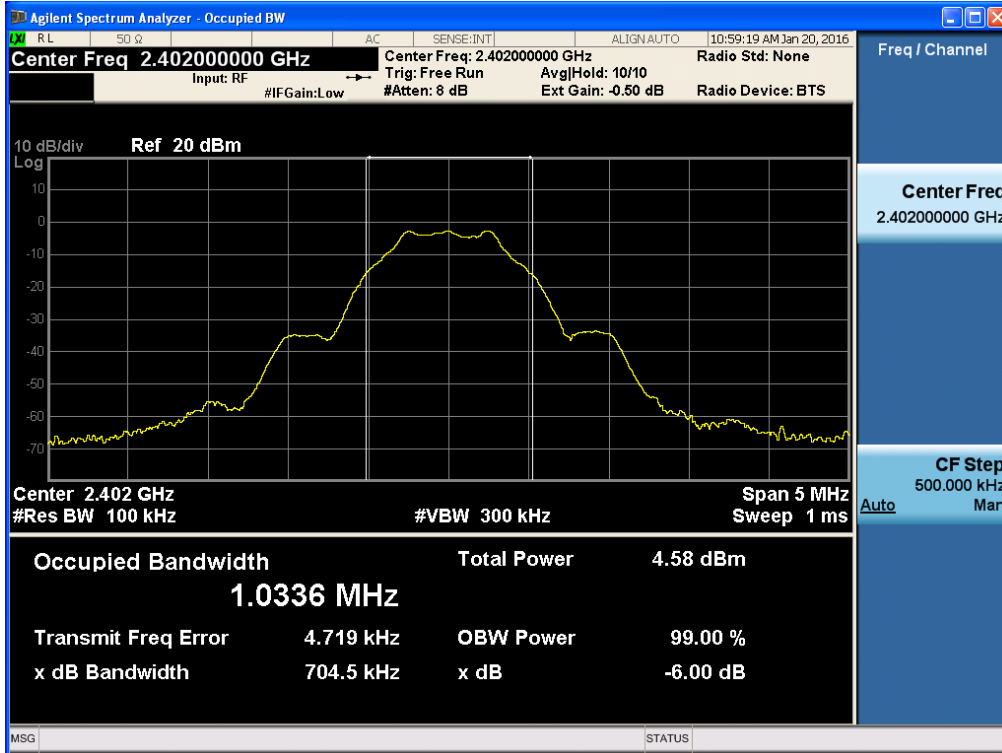

2440 MHz

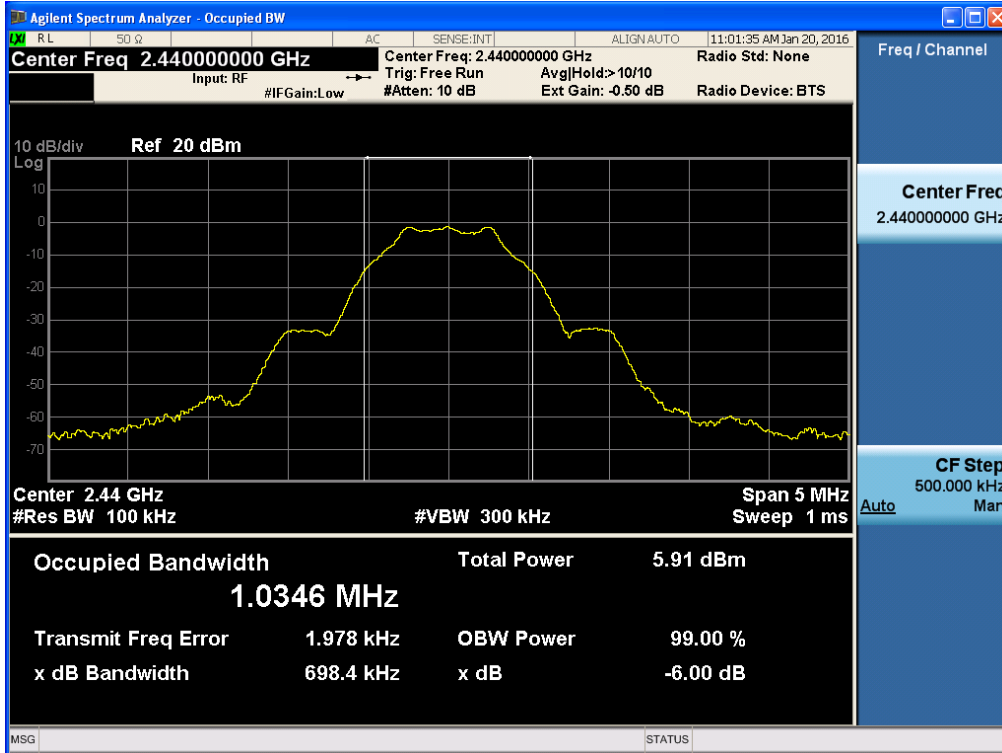



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2480 MHz

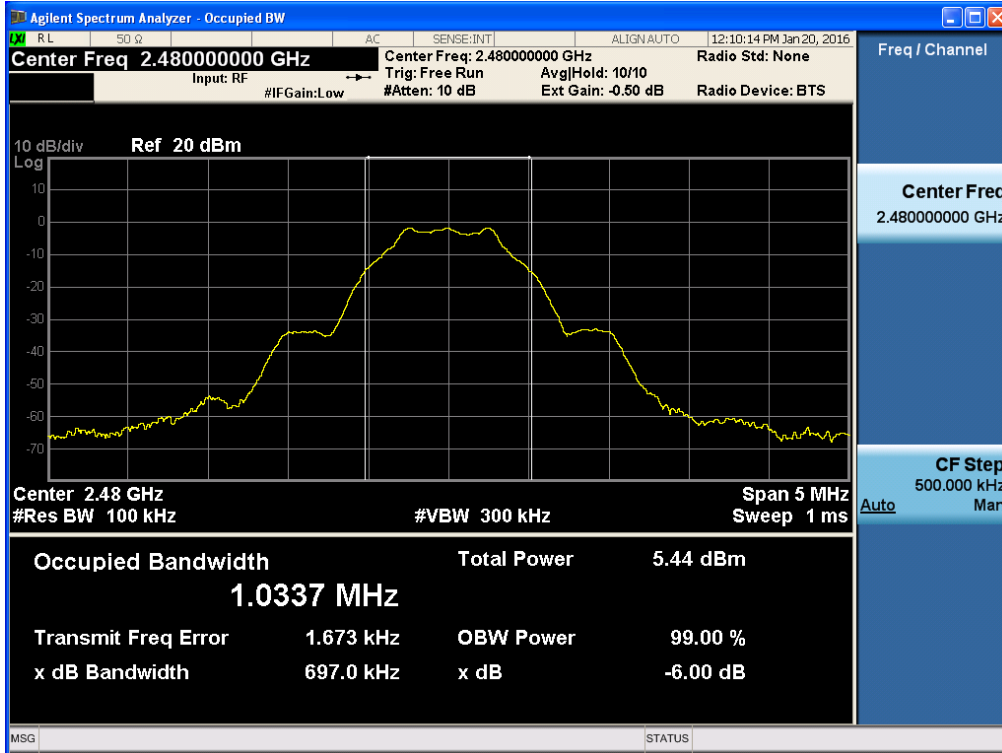

2.1.2 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

Maximum Peak Output Power from the EUT were measured according to the dictates power measurement procedure in section 9.1.1 of KDB No.558074 D01 DTS Meas Guidance v03r03.

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth
- b) Set the VBW \geq 3 x RBW
- c) Set the span \geq 3 x RBW
- d) Sweep time = auto couple
- e) Detector = peak
- e) Trace mode= max hold
- f) Allow trace to fully stabilize.
- g) Use peak marker function to determine the peak amplitude level.

Limit

< 1 W (30 dBm)

Test Results

Test mode : Continuous modulated carrier

Frequency (MHz)	Test results		
	Reading power(dBm)	Peak output power (mW)	Result
2402	-5.29	0.30	Complies
2440	-4.07	0.39	Complies
2480	-4.79	0.33	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2402 MHz

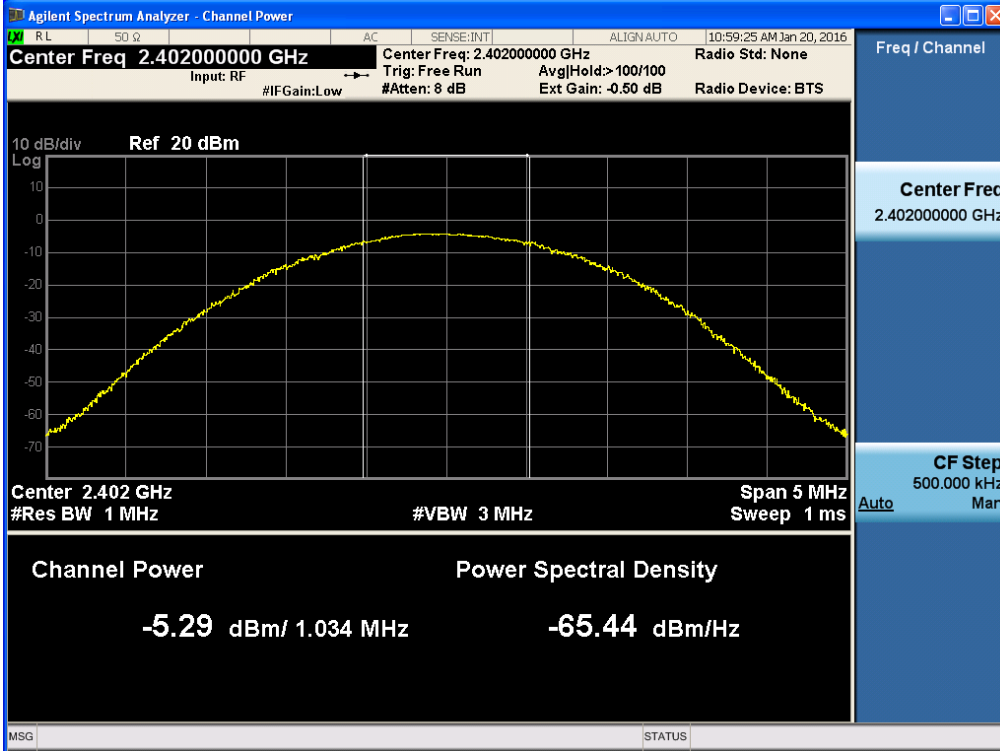

2440 MHz

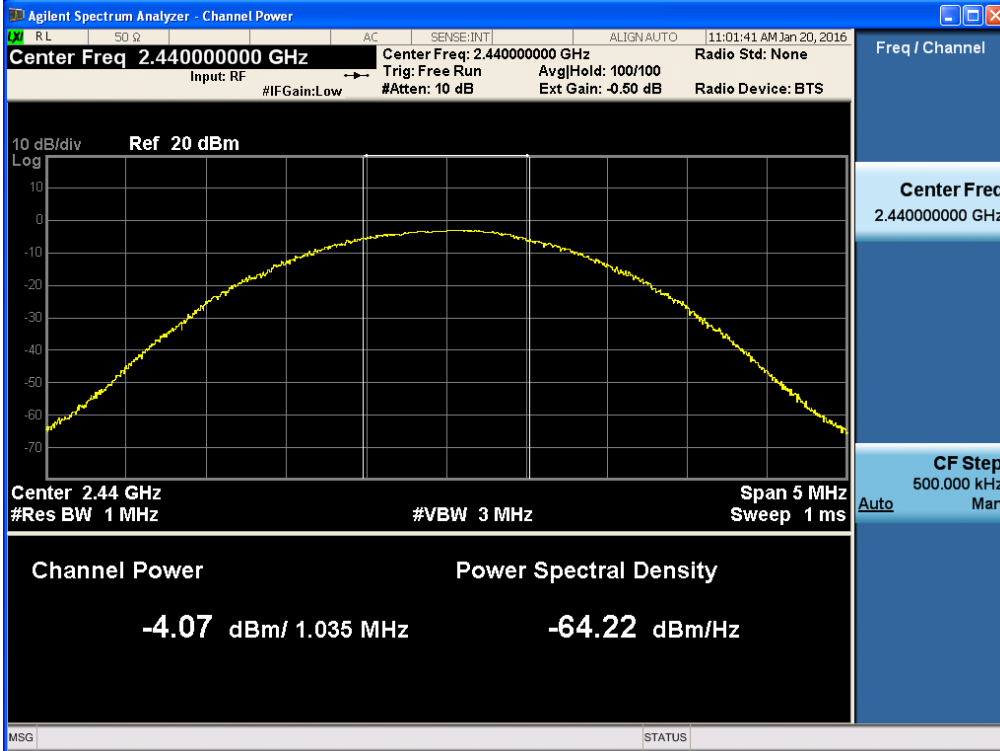



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2480 MHz

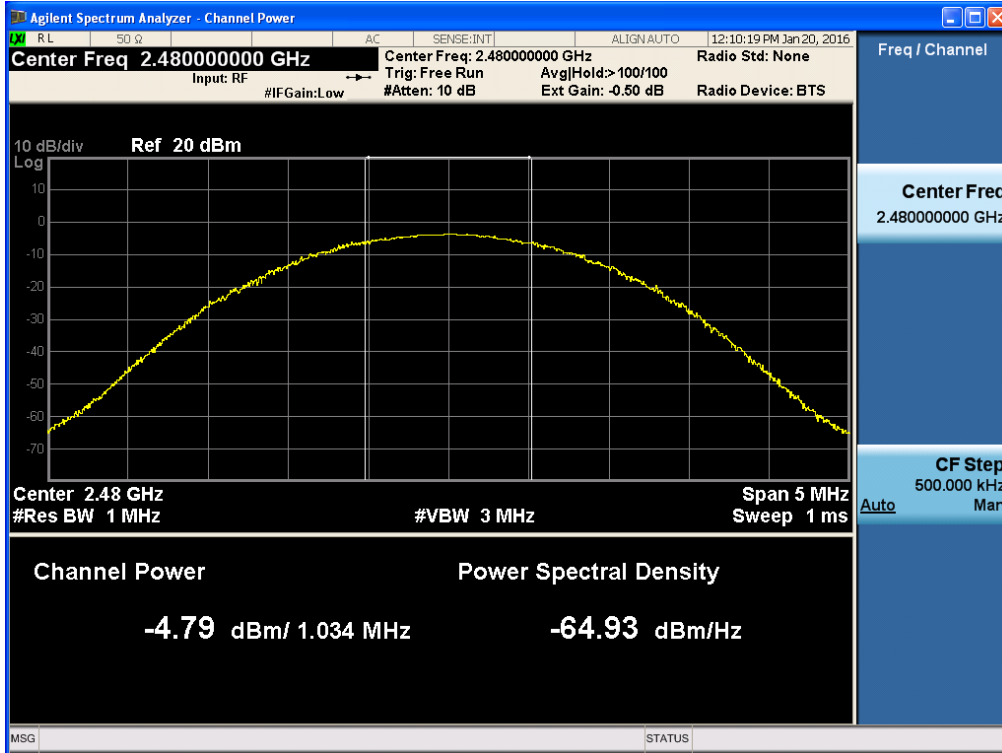



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.3 Power Spectral Density

Procedure:

Power Spectral Density from the EUT were measured according to the dictates PKPSD measurement procedure in section 10.2 of KDB No.558074 D01 DTS Meas Guidance v03r03.

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to : $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- d) Set the VBW $\geq 3 \times \text{RBW}$
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceed limit, reduce RBW(no less than 3 kHz) and repeat.

Test mode : Continuous modulated carrier

Frequency (MHz)	Test Results	
	dBm	Result
2402	-17.17	Complies
2440	-15.68	Complies
2480	-16.20	Complies

Minimum Standard:

Power Spectral Density	< 8dBm @ 3 kHz BW
------------------------	-------------------

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.
(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Power Density Measurement

2402 MHz

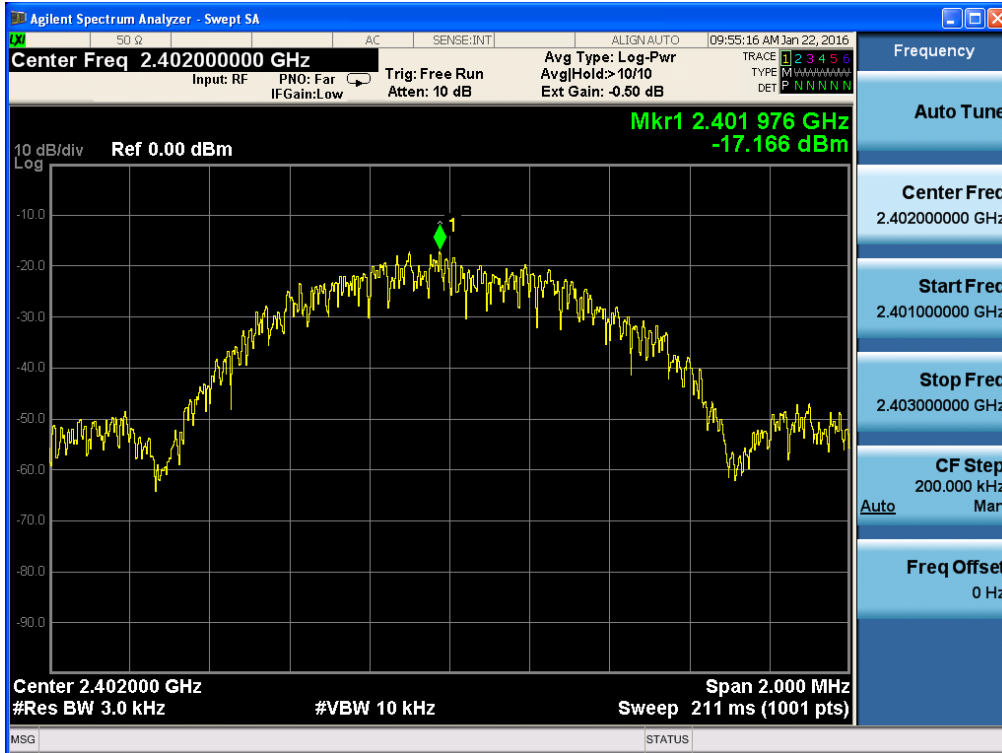

2440 MHz

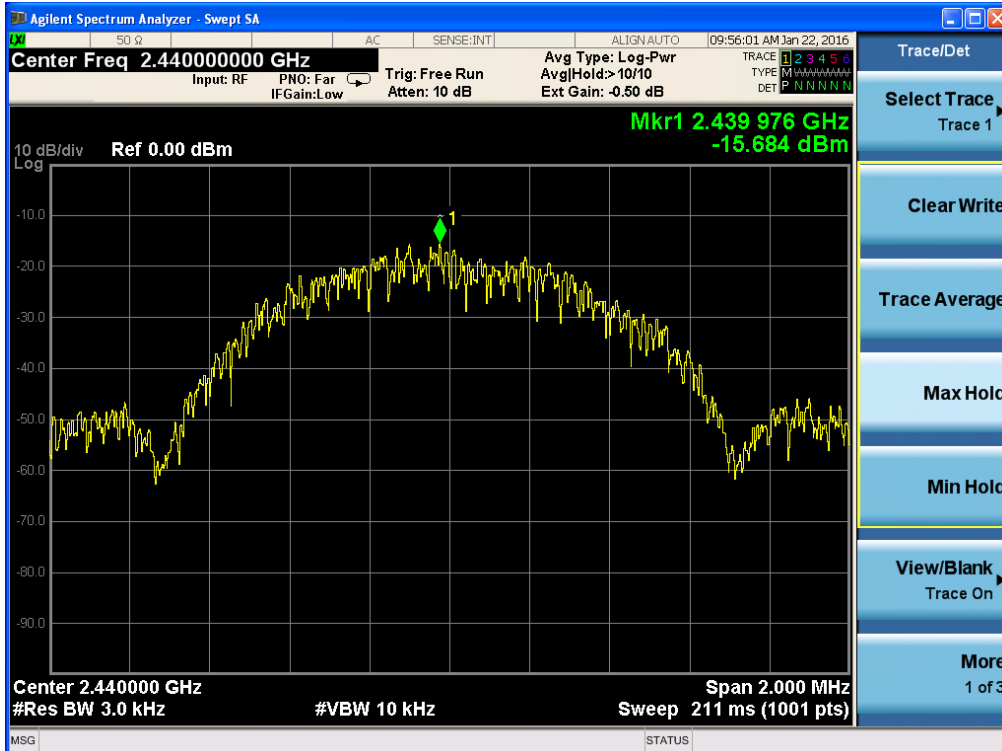



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2480 MHz

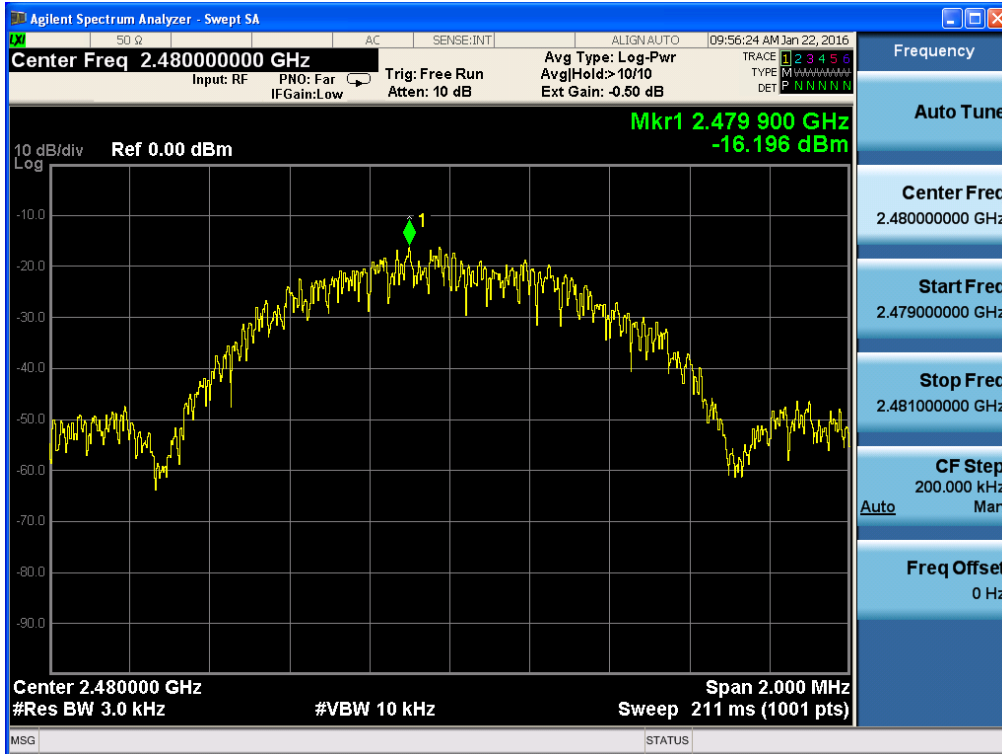





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

Band-edge Measurements

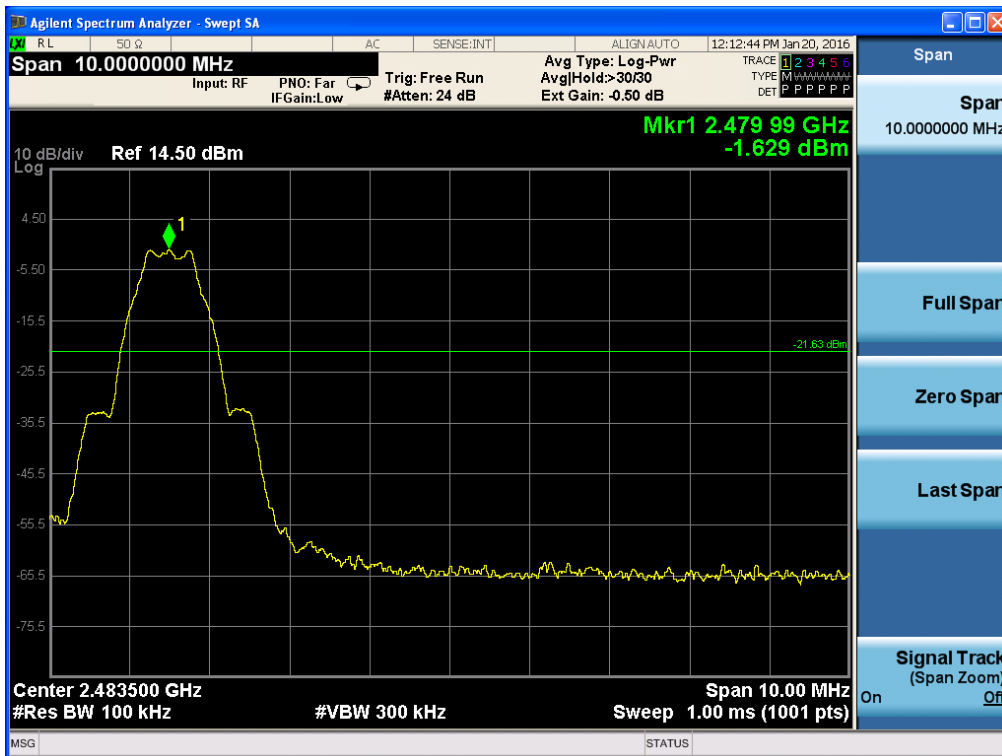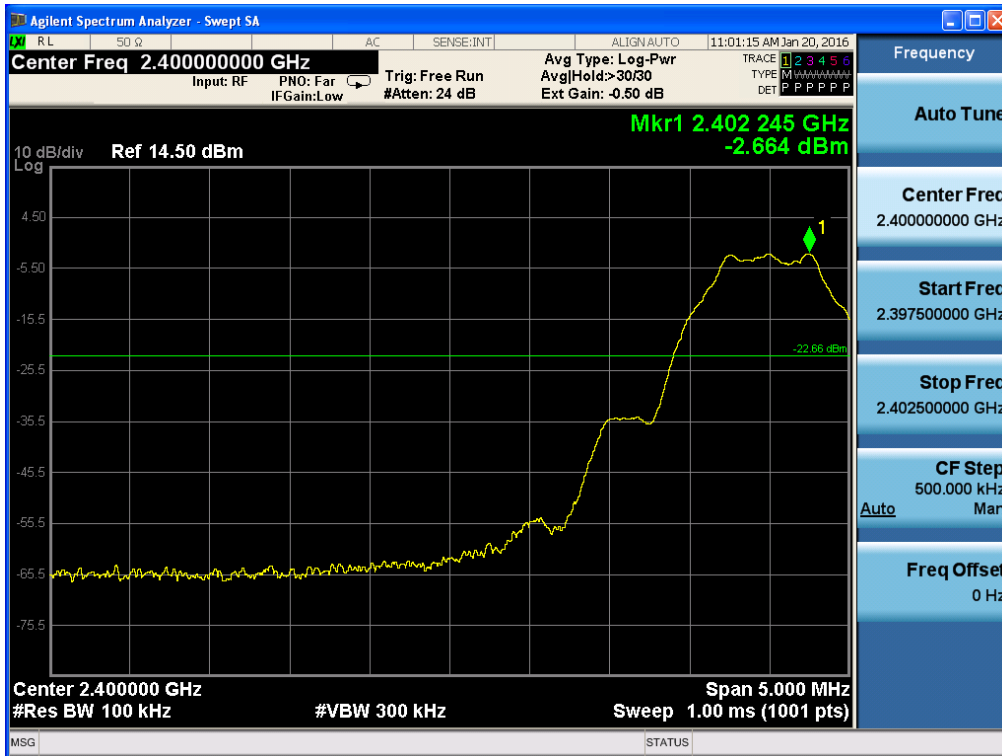

Band – edge (at 20 dB blow) – Low channel
Frequency Range = 30 MHz ~ 10th harmonic



**Band – edge (at 20 dB blow) – Mid channel
 Frequency Range = 30 MHz ~ 10th harmonic**



Band – edge (at 20 dB blow) – High channel
Frequency Range = 30 MHz ~ 10th harmonic





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

2.1.5 Field Strength of Emissions

Test Location

10 m SAC (test distance : 10 m, 3 m)

3 m SAC (test distance : 3 m)

Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10th harmonic)

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9 kHz for $f < 30$ MHz

VBW \geq RBW

Sweep = auto



Limit

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
¹ 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475-156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	² Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Deasurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 1 MHz for peak measurement and 10 Hz for average measurement.(Duty Cycle is > 98%,)
- 4) Duty Cycle is < 98%, VBW setting will need to > 1/T.

Test Setup:


- 1) For field strength of emissions from 9 kHz to 30 MHz

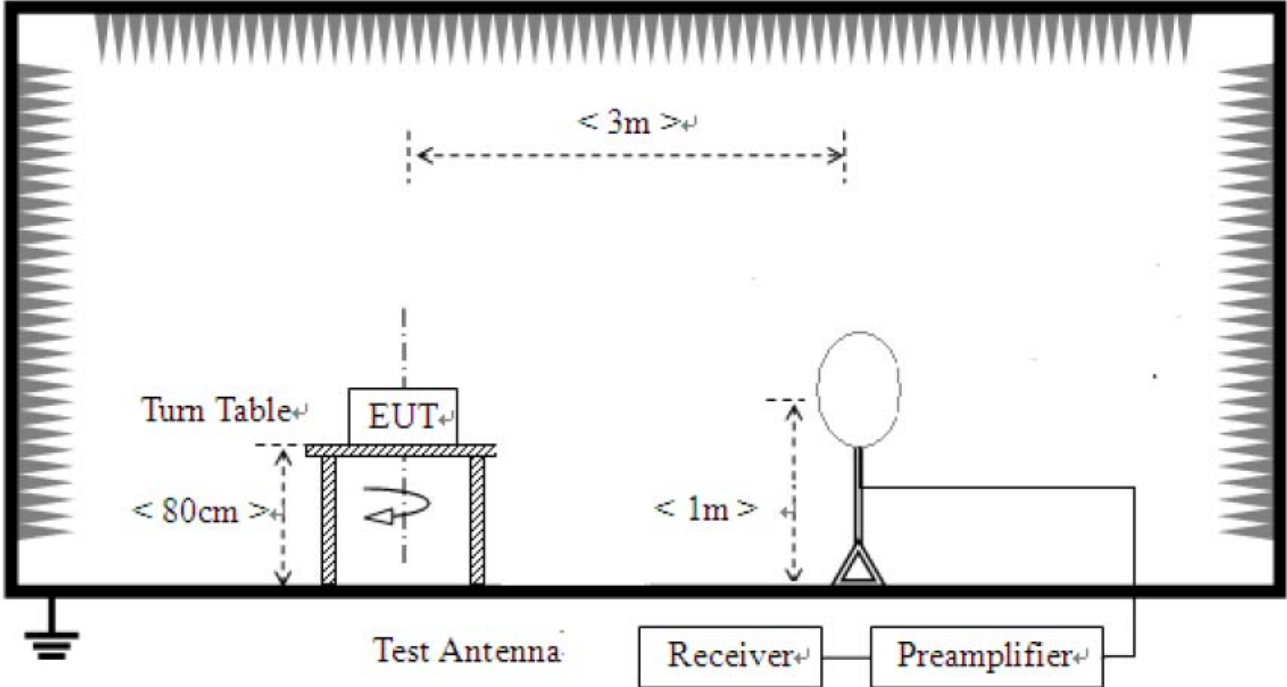

- 2) For field strength of emissions from 30 MHz to 1 GHz

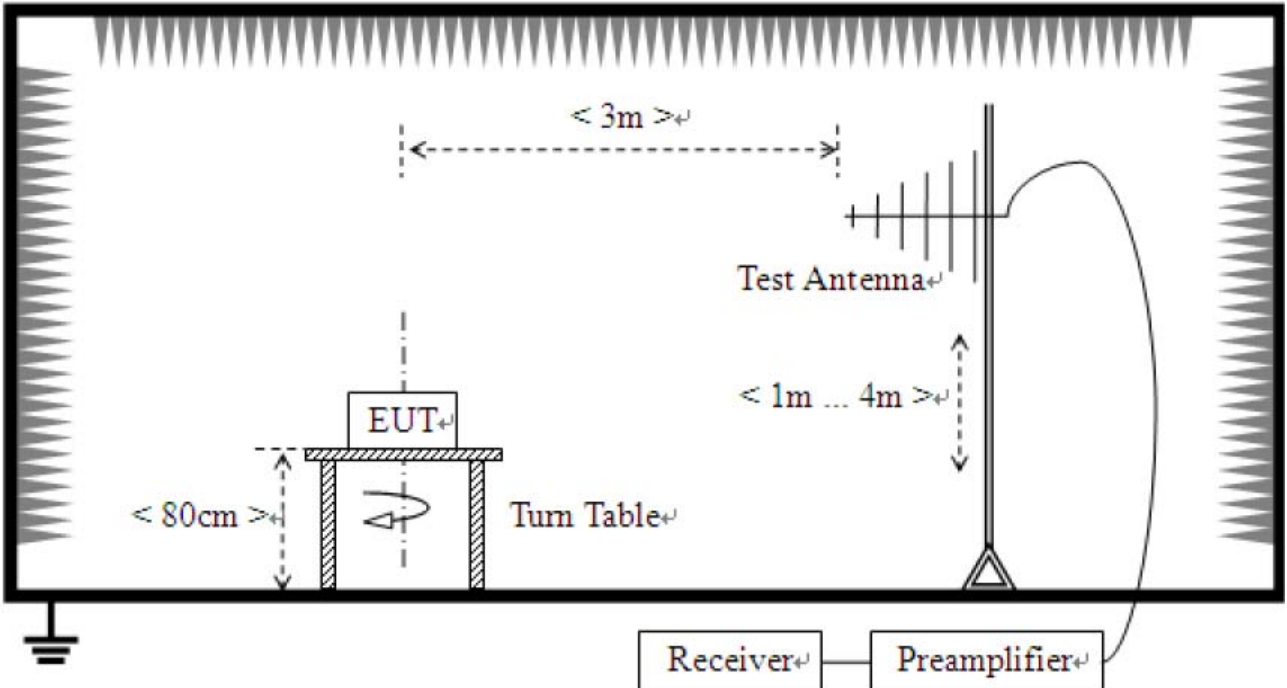

3) For field strength of emissions above 1 GHz

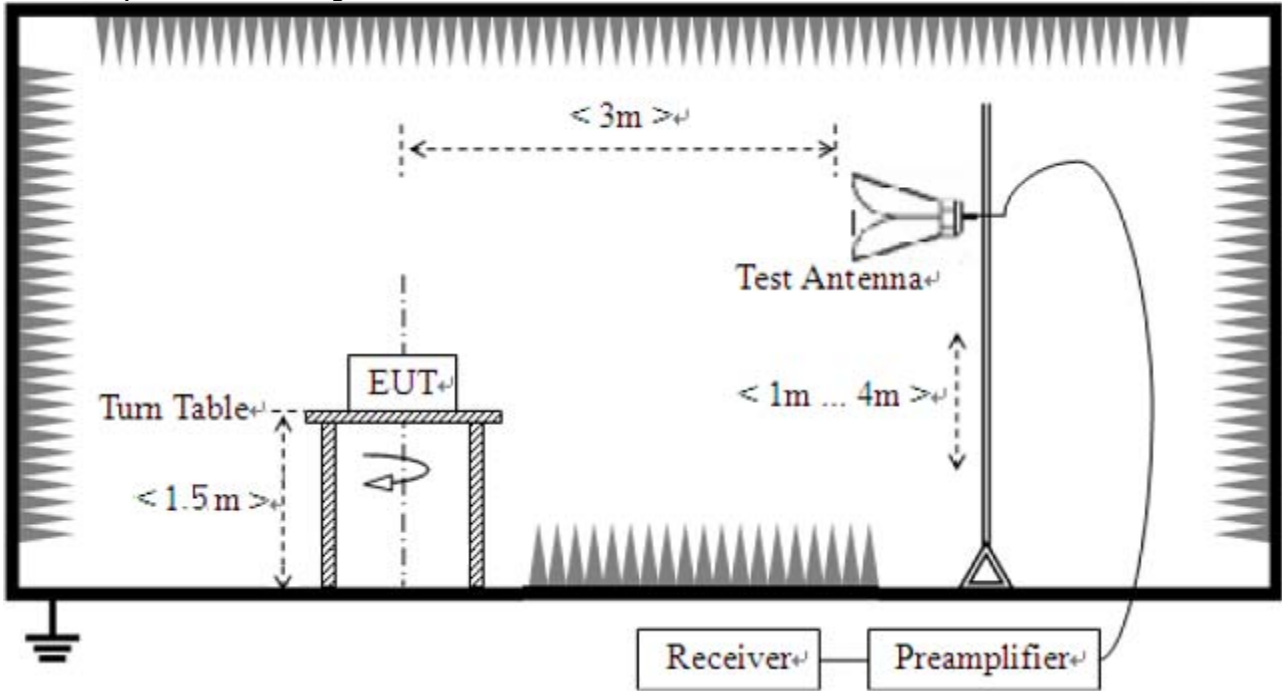

Test Results

1) 9 kHz to 30 MHz

Test mode : Continuous modulated carrier

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	9 kHz – 30 MHz
Test mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)



2) 30 MHz to 1 GHz

Test mode : Continuous modulated carrier


EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	Below 1000MHz
Mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
46.248	25.2	14.8	Quasi-Peak

Test Data

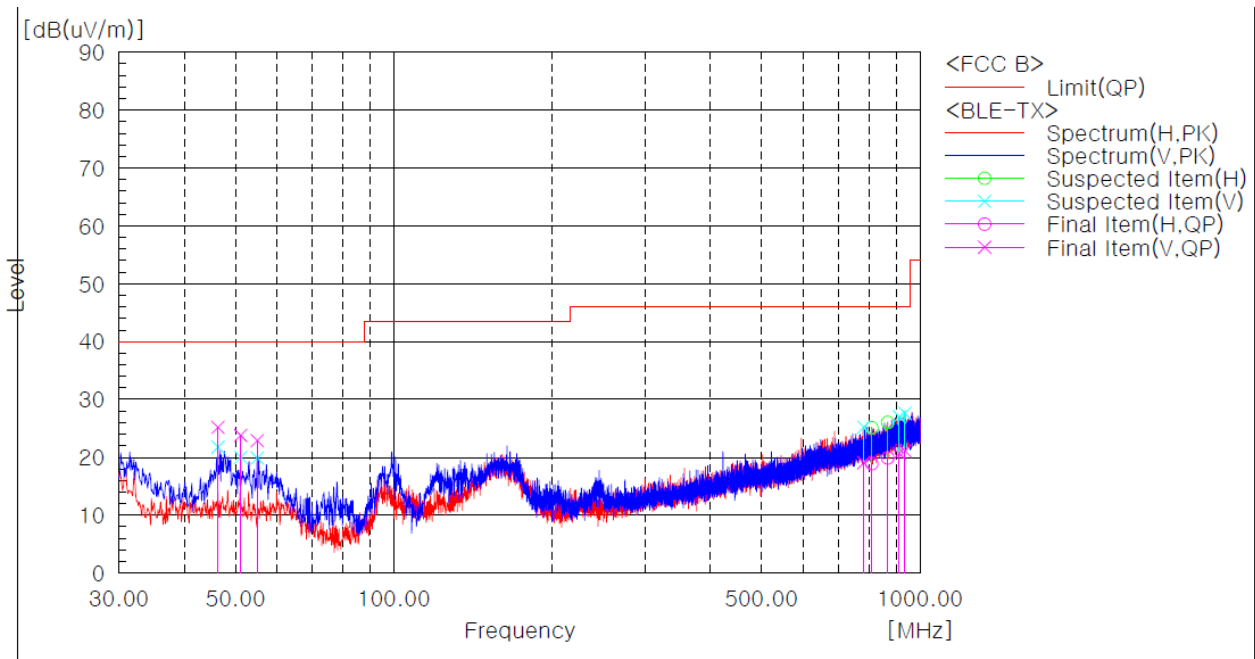

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Angle [deg]
1	46.248	V	40.0	-14.8	25.2	40.0	14.8	14.6
2	51.098	V	38.9	-15.1	23.8	40.0	16.2	176.4
3	54.978	V	37.6	-14.7	22.9	40.0	17.1	176.4
4	782.114	V	23.1	-4.0	19.1	46.0	26.9	211.9
5	810.001	H	22.6	-3.7	18.9	46.0	27.1	292.5
6	868.444	H	22.8	-2.9	19.9	46.0	26.1	17.3
7	912.700	V	22.6	-1.9	20.7	46.0	25.3	14.6
8	936.465	V	22.7	-1.6	21.1	46.0	24.9	63.5



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

3) above 1 GHz

Test mode : Continuous modulated carrier

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	1-25GHz
		Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

Low(2402 MHz)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
-----------------	-----	---------------------	---------------------	------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

No emissions were detected at a level greater than 20dB below limit.

Mid(2440 MHz)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
-----------------	-----	---------------------	---------------------	------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

No emissions were detected at a level greater than 20dB below limit.

High(2480 MHz)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
-----------------	-----	---------------------	---------------------	------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

No emissions were detected at a level greater than 20dB below limit.

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
-----------------	-----	---------------------	---------------------	------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------

No emissions were detected at a level greater than 20dB below limit.



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Results

1) 9 kHz to 30 MHz

Test mode : Receiver

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	9 kHz - 30 MHz
Test mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)



2) 30 MHz to 1 GHz

Test mode : Receiver


EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	Below 1000MHz
Mode	Continuous modulated carrier	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
45.641	25.2	14.8	Quasi-Peak

Test Data

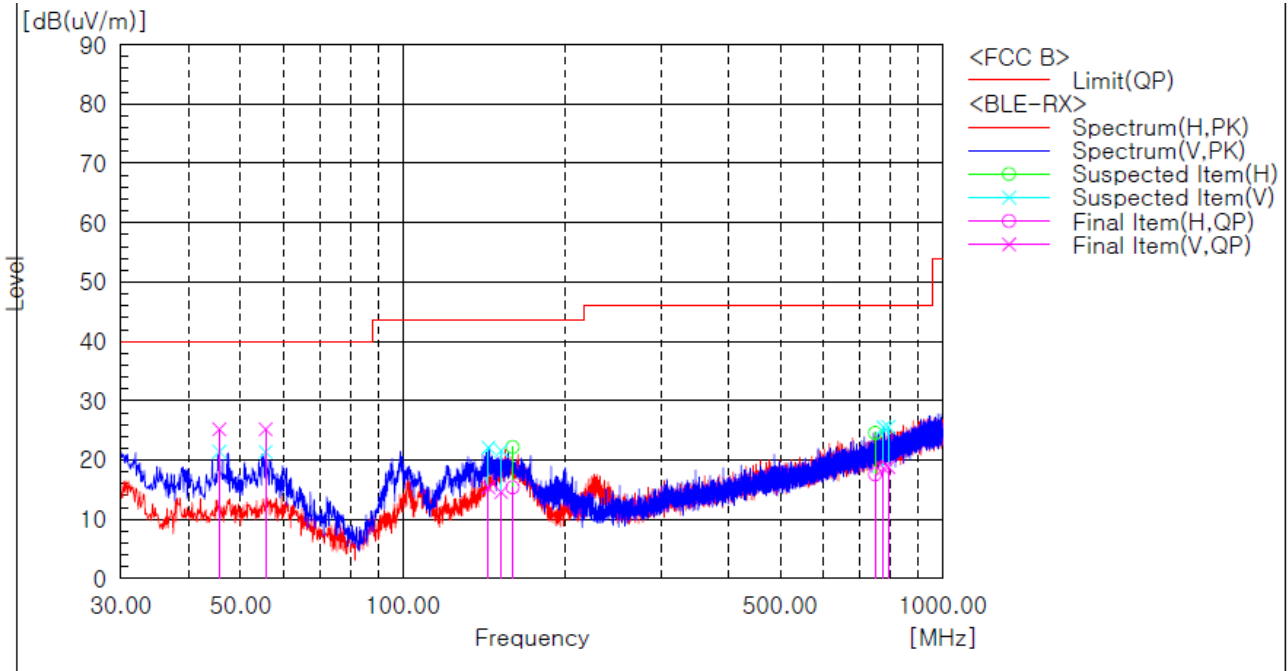

Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Angle [deg]
1	45.641	V	39.9	-14.7	25.2	40.0	14.8	142.7
2	55.584	V	39.8	-14.6	25.2	40.0	14.8	142.7
3	143.854	V	24.7	-9.3	15.4	43.5	28.1	14.4
4	151.978	V	22.1	-7.5	14.6	43.5	28.9	336.0
5	159.495	H	22.1	-6.7	15.4	43.5	28.1	16.4
6	749.619	H	22.0	-4.4	17.6	46.0	28.4	68.1
7	776.536	V	22.6	-4.0	18.6	46.0	27.4	102.2
8	792.056	V	22.6	-3.8	18.8	46.0	27.2	66.1



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

3) above 1 GHz

Test mode : Receiver

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	1-25GHz
		Detector function	Average / Peak

Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

Low(2402 MHz)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

Mid(2440 MHz)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

High(2480 MHz)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

2.1.6 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

Complies

Test mode : Continuous modulated carrier, High Channel(2480 MHz)

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.181500	51.4	13.0	Quasi-peak



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Test Data

[L1]

CISPR 22 Class B_L1

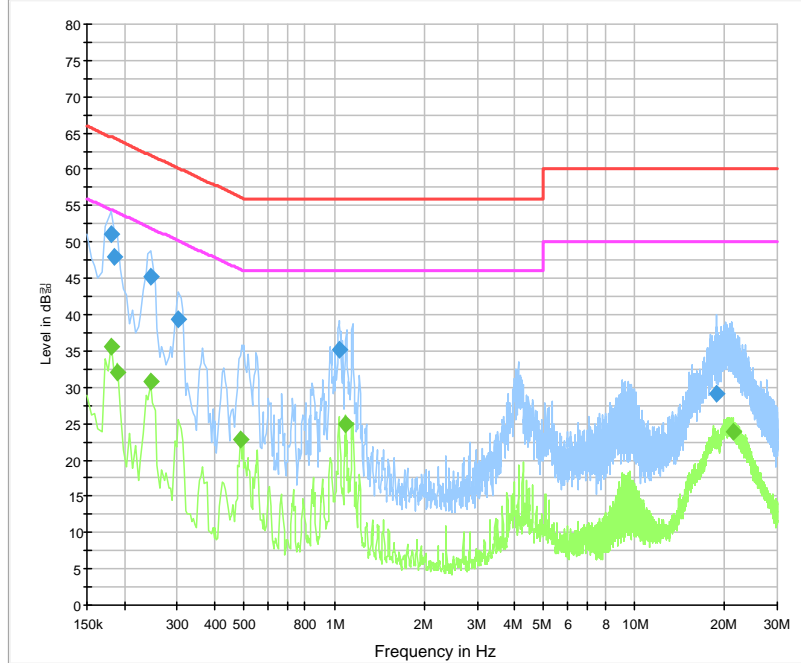

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.181500	51.1	1000.0	9.000	On	L1	9.8	13.3	64.4
0.186000	48.1	1000.0	9.000	On	L1	9.8	16.2	64.2
0.244500	45.2	1000.0	9.000	On	L1	9.6	16.8	61.9
0.303000	39.4	1000.0	9.000	On	L1	9.7	20.8	60.2
1.041000	35.2	1000.0	9.000	On	L1	9.7	20.8	56.0
18.712500	29.1	1000.0	9.000	On	L1	9.9	30.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.181500	35.6	1000.0	9.000	On	L1	9.8	18.9	54.4
0.190500	32.1	1000.0	9.000	On	L1	9.8	21.9	54.0
0.244500	30.7	1000.0	9.000	On	L1	9.6	21.2	51.9
0.487500	22.7	1000.0	9.000	On	L1	9.9	23.5	46.2
1.095000	25.0	1000.0	9.000	On	L1	9.7	21.0	46.0
21.367500	23.8	1000.0	9.000	On	L1	10.0	26.2	50.0




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

[NEUTRAL]

CISPR 22 Class B_N

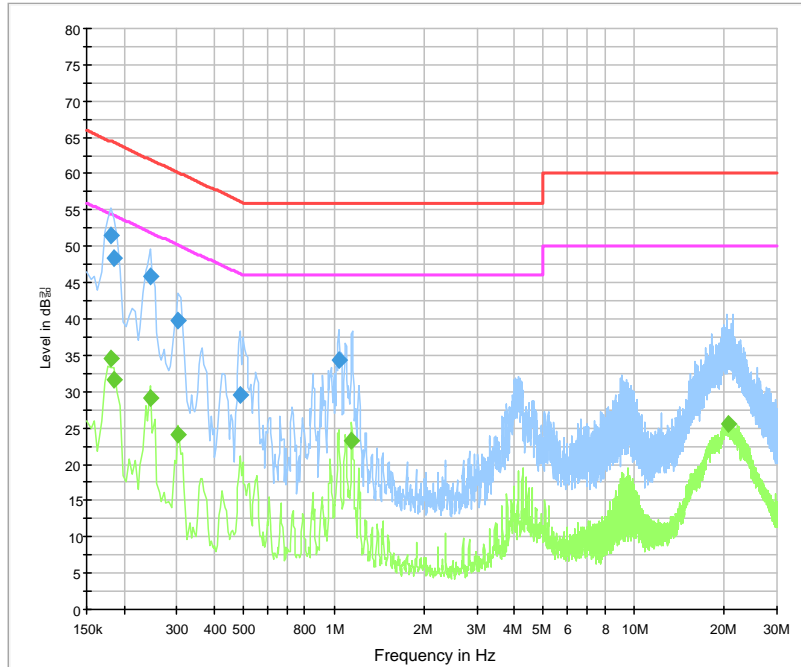

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.181500	51.4	1000.0	9.000	On	N	9.8	13.0	64.4
0.186000	48.4	1000.0	9.000	On	N	9.8	15.8	64.2
0.244500	45.9	1000.0	9.000	On	N	9.6	16.0	61.9
0.303000	39.9	1000.0	9.000	On	N	9.7	20.3	60.2
0.487500	29.6	1000.0	9.000	On	N	9.9	26.7	56.2
1.041000	34.3	1000.0	9.000	On	N	9.7	21.7	56.0

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.181500	34.5	1000.0	9.000	On	N	9.8	19.9	54.4
0.186000	31.7	1000.0	9.000	On	N	9.8	22.5	54.2
0.244500	29.2	1000.0	9.000	On	N	9.6	22.7	51.9
0.303000	24.0	1000.0	9.000	On	N	9.7	26.1	50.2
1.149000	23.2	1000.0	9.000	On	N	9.7	22.8	46.0
20.643000	25.5	1000.0	9.000	On	N	10.1	24.5	50.0



CTK Co., Ltd.
The First Leader of Global Regulatory Compliance

CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea
Tel: +82-31-339-9970 Fax: +82-31-624-9501
www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2015-11-02	2016-11-02
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2016-01-20	2017-01-20
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2015-11-02	2016-11-02
4	LISN	ENV216	Rohde & Schwarz	101760	2016-02-05	2017-02-05
5	EMI Test Receiver	Rohde & Schwarz	ENV216	100814	2015-11-02	2016-11-02
6	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2015-06-18	2017-06-18
7	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2014-05-19	2016-05-19
8	6dB Attenuator	R&S	DNF	272.4110.50-2	2015-11-03	2016-11-03
9	AMPLIFIER	SONOMA	310	291721	2016-02-02	2017-02-02
10	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2015-05-15	2016-05-15
11	PREAMPLIFIER	Agilent	8449B	3008A02307	2015-10-01	2016-10-01
12	Horn Antenna	ETS-Lindgren	3115	00078894	2015-09-02	2017-09-02
13	Horn Antenna	ETS-Lindgren	3116	00062504	2015-09-04	2017-09-04
14	Horn Antenna	ETS-Lindgren	3116	00062916	2015-04-30	2017-04-30
15	Horn Antenna	ETS-Lindgren	3117	00154525	2015-09-02	2017-09-02
16	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483 - 2375/2505 -50/10EE	2	2015-05-14	2016-05-14