



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## TEST REPORT

### FCC Standards : FCC 47CFR part 15 subpart C

Test Report No. : CTK-2016-00183

Date of Issue : 2016-02-18

FCC ID : RTQLPT200AR

Model/Type No. : LPT-200AR

Kind of Product : Tablet PC

Applicant : LG CNS CO.,LTD.

Applicant Address : FKI Tower, 24, Yeoui-daero, Yeongdeungpo-gu, Seoul, Korea, 07320

Manufacturer : ART&CORE Inc

Manufacturer Address : 44 Burim-ro 170beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Factory #1 : ARTVIEW CO.,LTD.

Factory Address : 5F, 44, burim-ro 170beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea

Contact Person : Jae hee Lee

Telephone : +82-2-2099-0167

Received Date : 2015-12-30

Test period : Start : 2016-01-21 End : 2016-01-25

Test Results :  In Compliance  Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by

Won-Jae, Hwang  
Test Engineer  
Date: 2016-02-18

Reviewed by

Young-Joon, Park  
Technical Manager  
Date: 2016-02-18



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## REPORT REVISION HISTORY

Date	Revision	Page No
2016-02-18	Issued (CTK-2016-00183)	All

*This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.*



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## TABLE OF CONTENTS

REPORT REVISION HISTORY .....	2
1.0 General Product Description .....	4
1.1 Tested Frequency .....	4
1.2 Tested Mode .....	4
1.3 EUT Operation Test Setup .....	5
1.4 EUT Exercise of Software .....	5
1.5 Device Modifications .....	5
1.6 Peripheral Devices .....	5
1.7 Configuration of System under Test .....	5
1.8 Calibration Details of Equipment Used for Measurement .....	6
1.9 Test Facility.....	6
1.10 Laboratory Accreditations and Listings .....	6
2.0 Summary of tests .....	7
2.1 Transmitter Requirements .....	8
2.1.1 Carrier Frequency Separation .....	8
2.1.2 Number of Hopping Frequencies .....	10
2.1.3 20 dB bandwidth .....	13
2.1.4 Time of Occupancy (Dwell Time) .....	19
2.1.5 Maximum peak Conducted Output Power.....	25
2.1.6 Band-edge.....	30
2.1.7 Field Strength of Emissions .....	41
2.1.8 AC Conducted Emissions.....	50
APPENDIX A – Test Equipment Used For Tests .....	53



## 1.0 General Product Description

Basic Model/Type No.	LPT-200AR
Serial number	Prototype
EUT condition	Pre-production, not damaged
Antenna type	PCB antenna      Gain 4.1 dBi
Frequency Range	2402 MHz - 2480 MHz
RF power	6.562 dBm Peak Conducted (GFSK) 5.432 dBm Peak Conducted (8-DPSK)
Number of channels	79
Channel Spacing	1 MHz
Channel Access Protocol	Frequency Hopping
Type of Modulation	GFSK(1 Mbps), DQPSK(2 Mbps), 8-DPSK(3 Mbps)
Power Source	DC 22 V
Hardware Rev	DS2 (2015-11-30)
Software Rev	ALPS.L1.MP8.V2.7_ANC8127.SB.BRS.L1 (2015-12-15)
Firmware Rev	0x0104

### 1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

### 1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH 5
Low, Mid, High	FHSS	8-DPSK	3DH 5

### 1.3 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

### 1.4 EUT Exercise of Software

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. The software is using the android system to internal memory.

### 1.5 Device Modifications


The following modifications was applied by the applicant:

Not applicable

### 1.6 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Note Computer	LG Electronics.	LGE-DMLGS1 (B)	703KIUP015110
AC ADAPTER	Dongguang Lite Power 2nd Plant	PA-1900-08	-

### 1.7 Configuration of System under Test

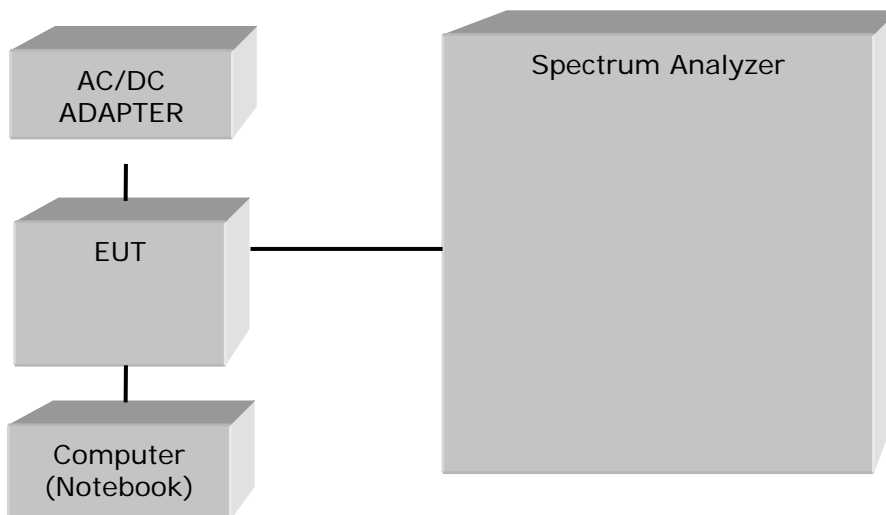



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

## CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com




### 1.8 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

### 1.9 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 1.10 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## 2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth	NA		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 0.125 Watts		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	15.209(a)	Radiated	C
15.207	AC Conducted Emissions	15.207(a)	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

- FCC Part 15.247, ANSI C63.10 -2013

The tests were performed according to the method of measurements prescribed in

DA 00-705.

## 2.1 Transmitter Requirements

### 2.1.1 Carrier Frequency Separation

#### Test Location

RF Test Room

#### Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 5 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ( $\geq 1\%$  of the span) Sweep = auto

VBW = 30 kHz ( $\geq$  RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

#### Limit

§15.247(a)(1) Frequency hopping system operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-third of 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### Test Results

##### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	995	645.1	25	Complies

##### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Channel	Adjacent Hopping Channel Separation (kHz)	Two-third of 20dB bandwidth (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	1005	856.7	25	Complies

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501


www.e-ctk.com

## Carrier Frequency Separation

Data Rate : GFSK

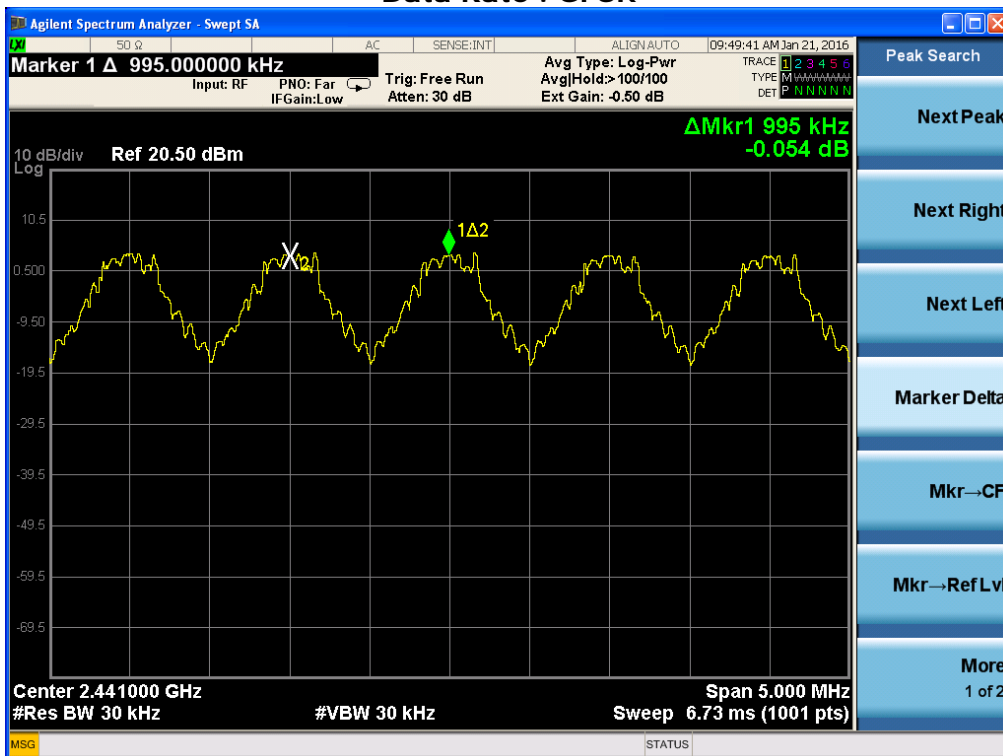

Data Rate : 8-DPSK

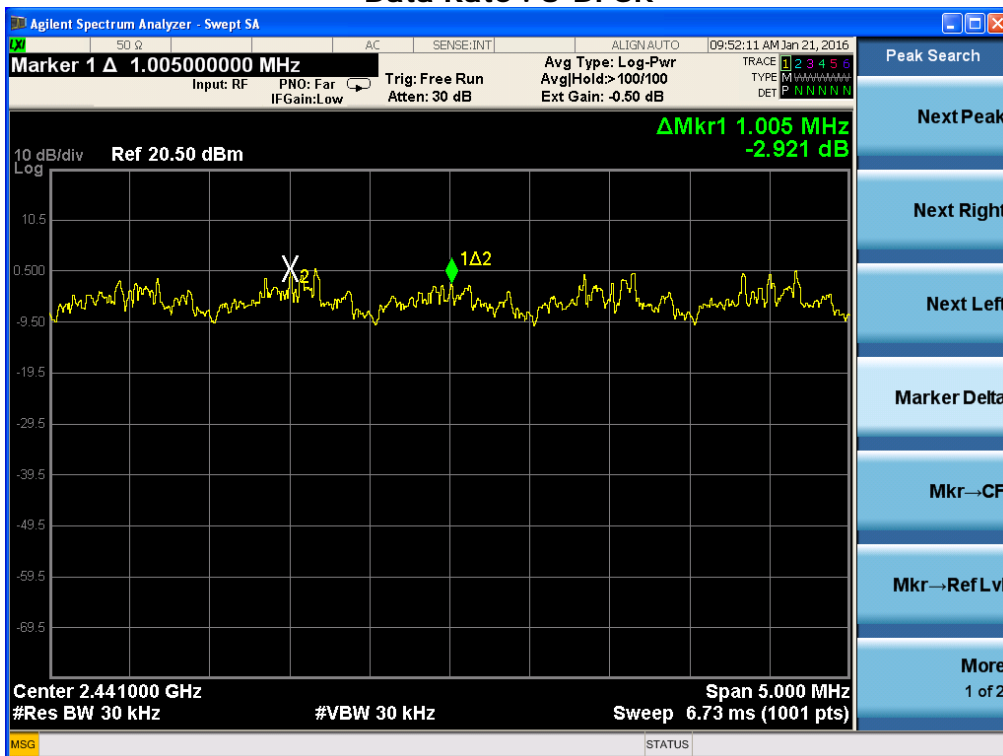





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Number of Hopping Frequencies(GFSK)

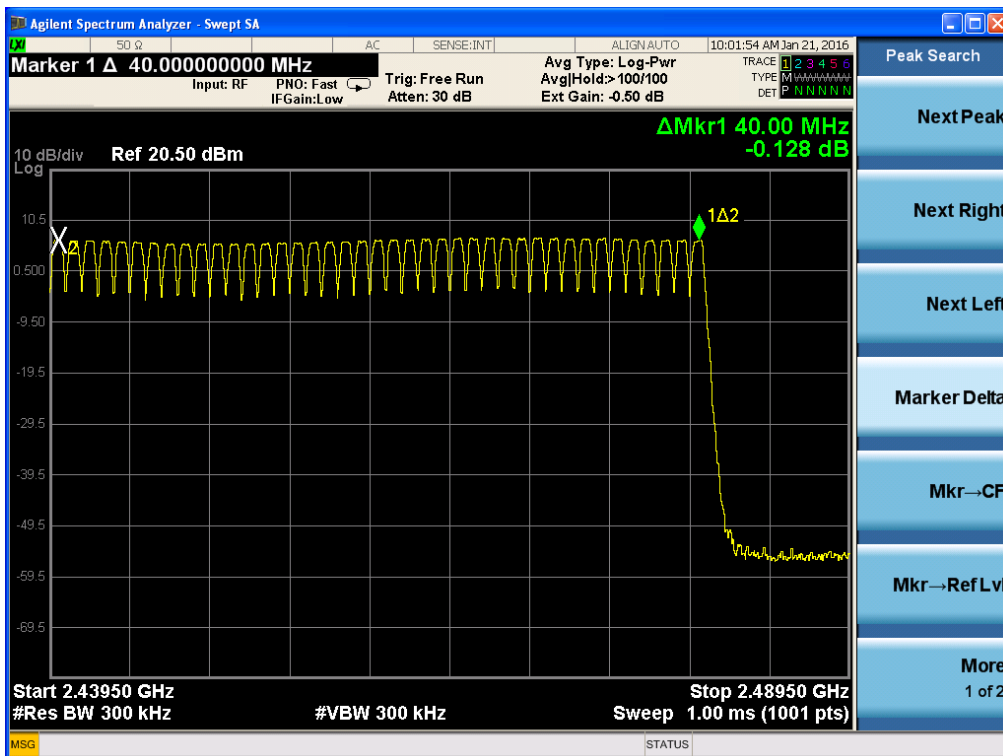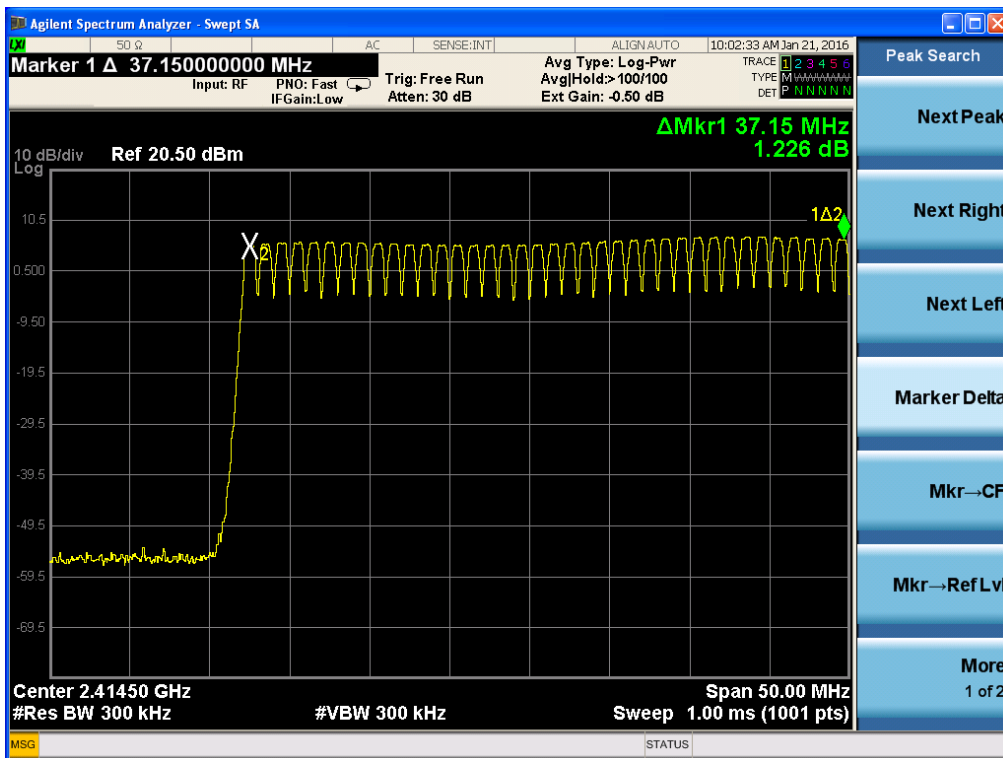





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## Number of Hopping Frequencies(8-DPSK)

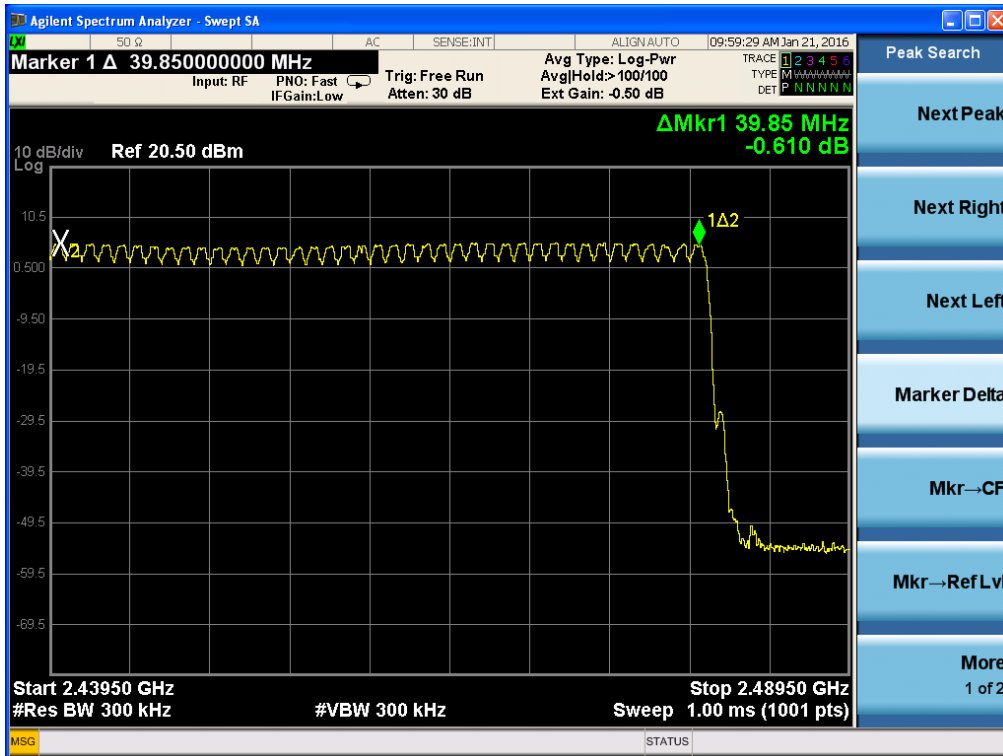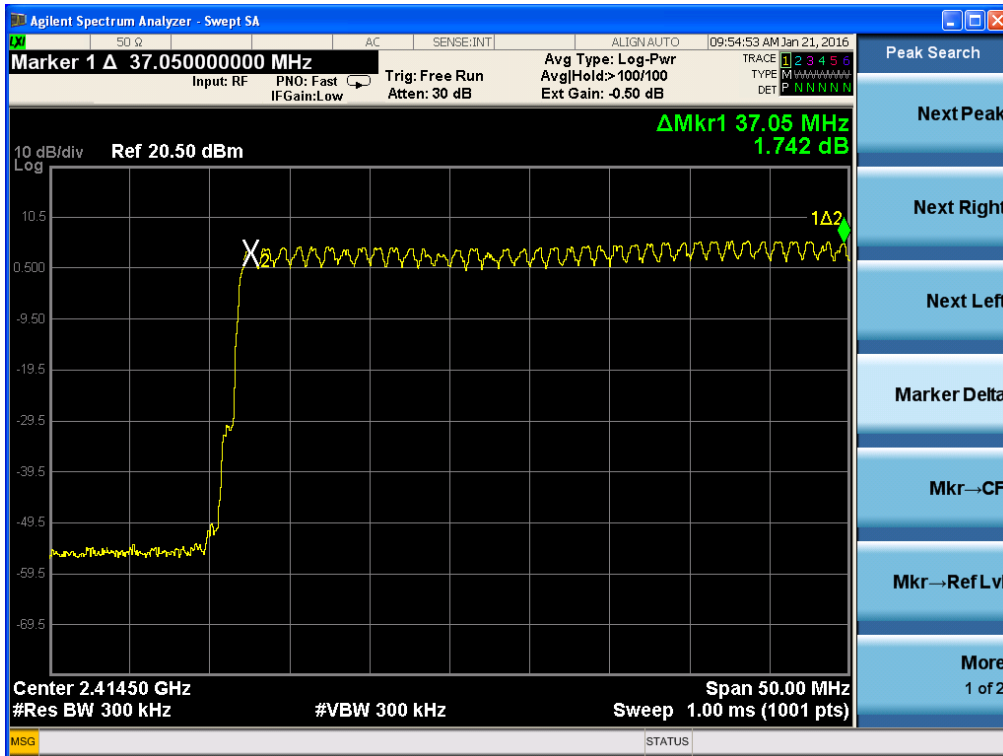

## 2.1.3 20 dB bandwidth

### Test Location

RF Test Room

### Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

#### The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ( $\geq 1\%$  of the span)

Sweep = auto

VBW = 30 kHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold



### Limit

Limit : N/A



**Test Results (20 dB bandwidth)**

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.968	Complies
2441	39	0.967	Complies
2480	78	0.969	Complies

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.285	Complies
2441	39	1.288	Complies
2480	78	1.285	Complies

**Test Results (Occupied Bandwidth)**

**Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	0.886	Complies
2441	39	0.884	Complies
2480	78	0.887	Complies

**Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)**

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2402	0	1.174	Complies
2441	39	1.185	Complies
2480	78	1.178	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## 20 dB Bandwidth, Occupied Bandwidth - GFSK

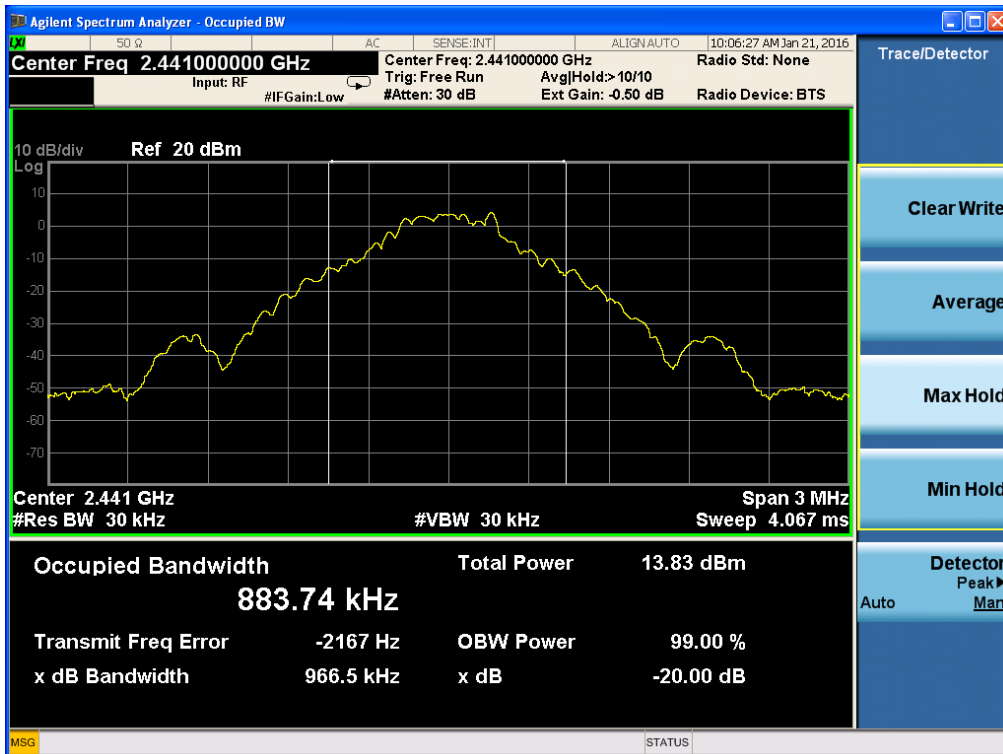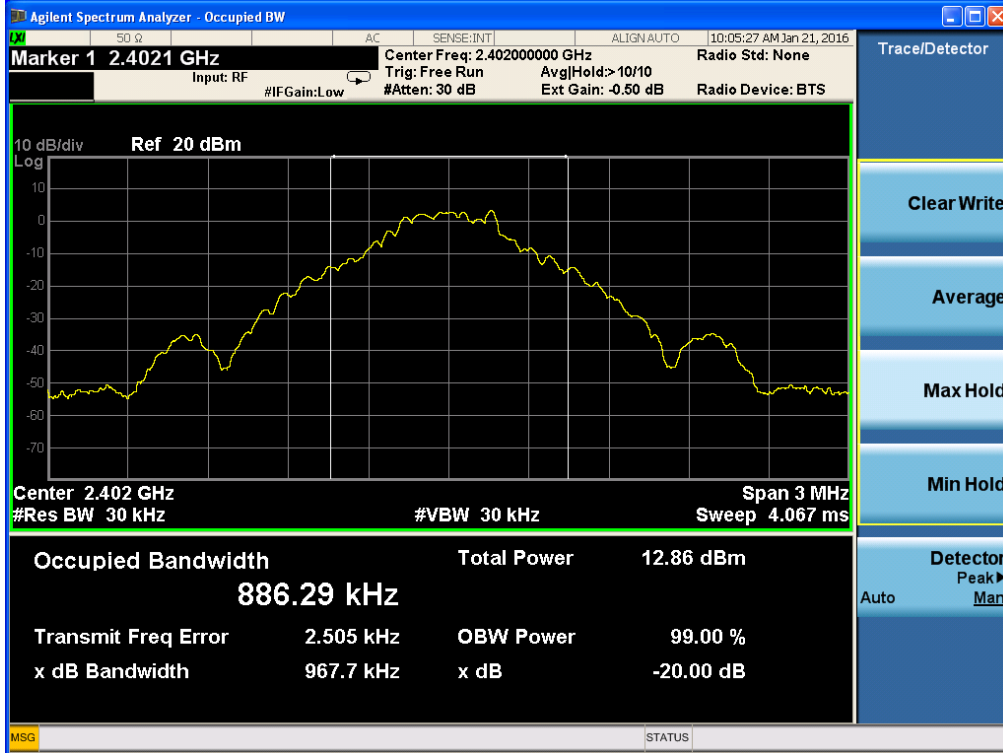




CTK Co., Ltd.

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea



Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

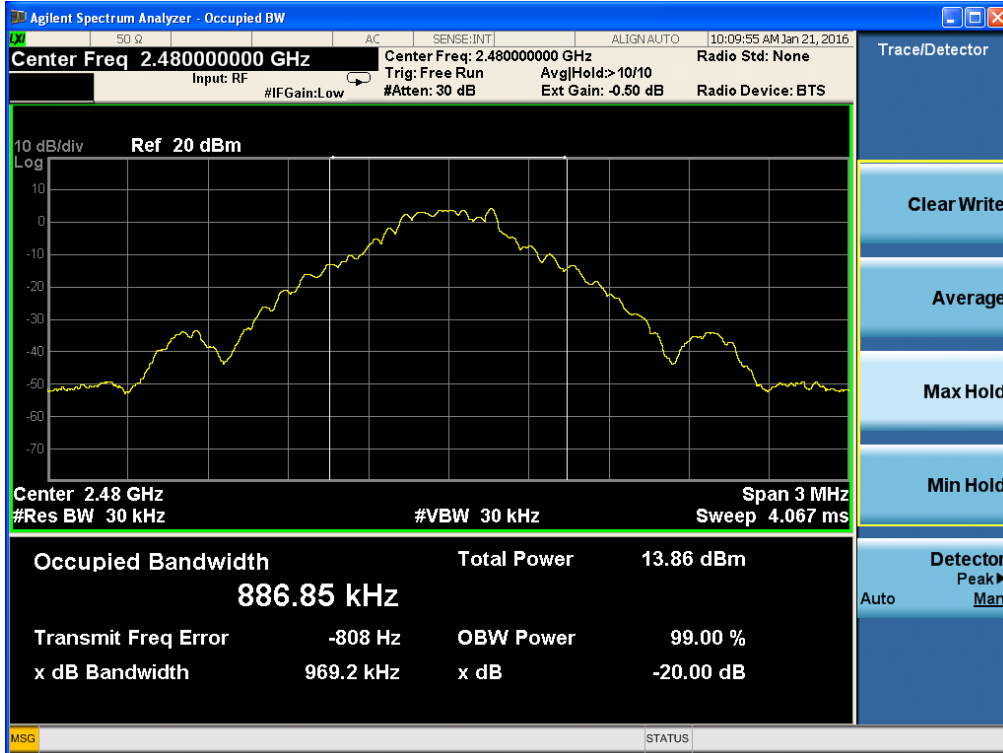



20 dB Bandwidth, Occupied Bandwidth – 8-DPSK

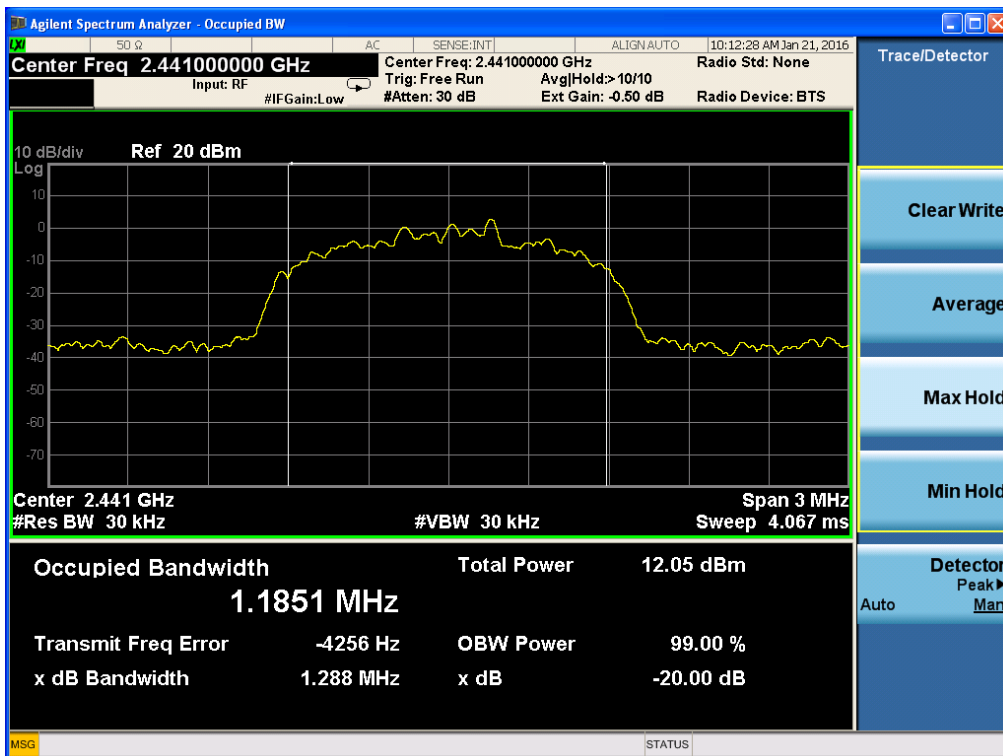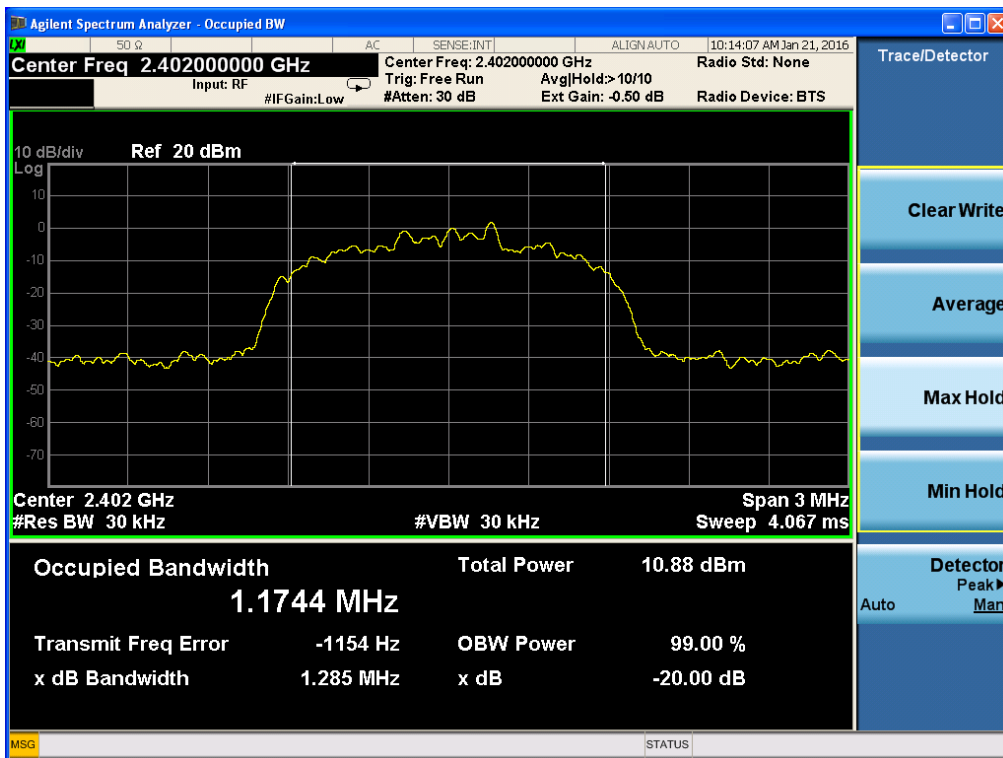




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

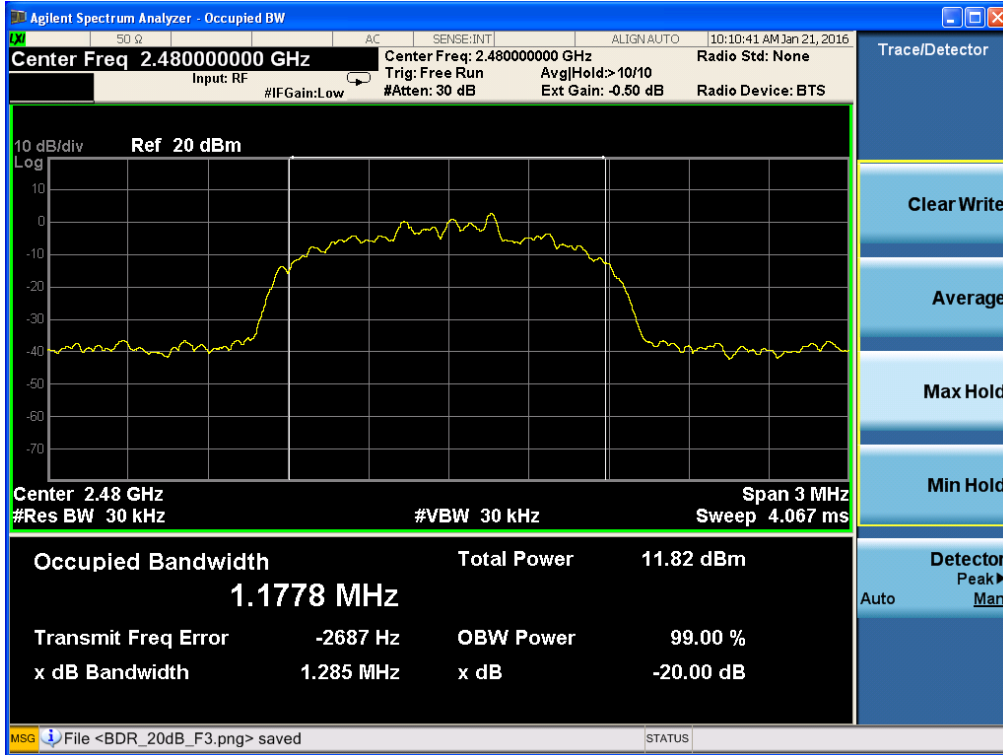

## 2.1.4 Time of Occupancy (Dwell Time)

### Test Location

RF Test Room

### Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in test setup without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of spectrum analyzer on any frequency be measured and set spectrum analyzer to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.
6. The LPT-200AR has 3 type of payload, DH1, DH3, DH5. The hopping rate is 1600 per second.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel



### Limit

§15.247(a)(1)(iii) For frequency hopping system operating in 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.



### Test Results

Time of occupancy on the TX channel in 31.6 sec = time domain slot length × hop rate ÷ number of hop per channel × 31.6

#### Test mode : GFSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	DH 1	0.410	131.2	Complies
	DH 3	1.661	265.8	Complies
	DH 5	2.888	308.1	Complies

DH1 Dwell time =  $0.410 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 131.2 \text{ ms}$

DH3 Dwell time =  $1.661 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 265.8 \text{ ms}$

DH5 Dwell time =  $2.888 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.1 \text{ ms}$

#### Test mode : 8-DPSK

Channel Frequency (MHz)	Packet Type	Dwell Time (ms)	Test Results	
			Time of occupancy on the TX channel in 31.6sec (ms)	Result
2441	3DH 1	0.410	131.2	Complies
	3DH 3	1.661	265.8	Complies
	3DH 5	2.888	308.1	Complies

3DH1 Dwell time =  $0.410 \text{ ms} \times (1600 \div 2) \div 79 \times 31.6 = 131.2 \text{ ms}$

3DH3 Dwell time =  $1.661 \text{ ms} \times (1600 \div 4) \div 79 \times 31.6 = 265.8 \text{ ms}$

3DH5 Dwell time =  $2.888 \text{ ms} \times (1600 \div 6) \div 79 \times 31.6 = 308.1 \text{ ms}$

See next pages for actual measured spectrum plots.




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## Time of Occupancy for PACKET Type DH1(GFSK)

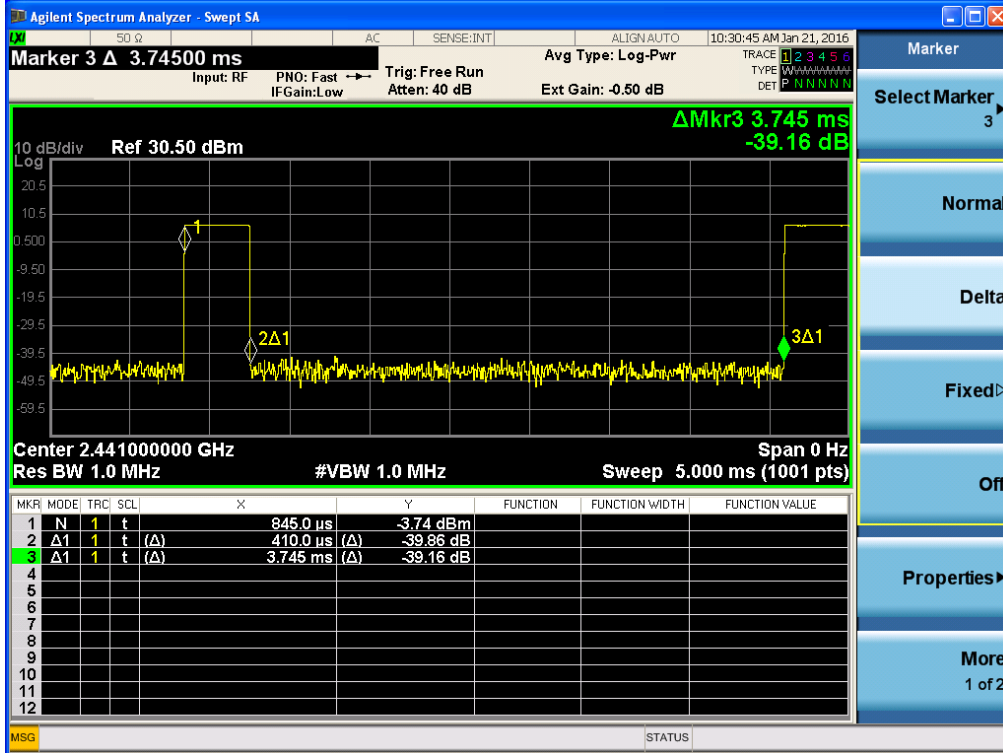

## Time of Occupancy for PACKET Type DH3(GFSK)

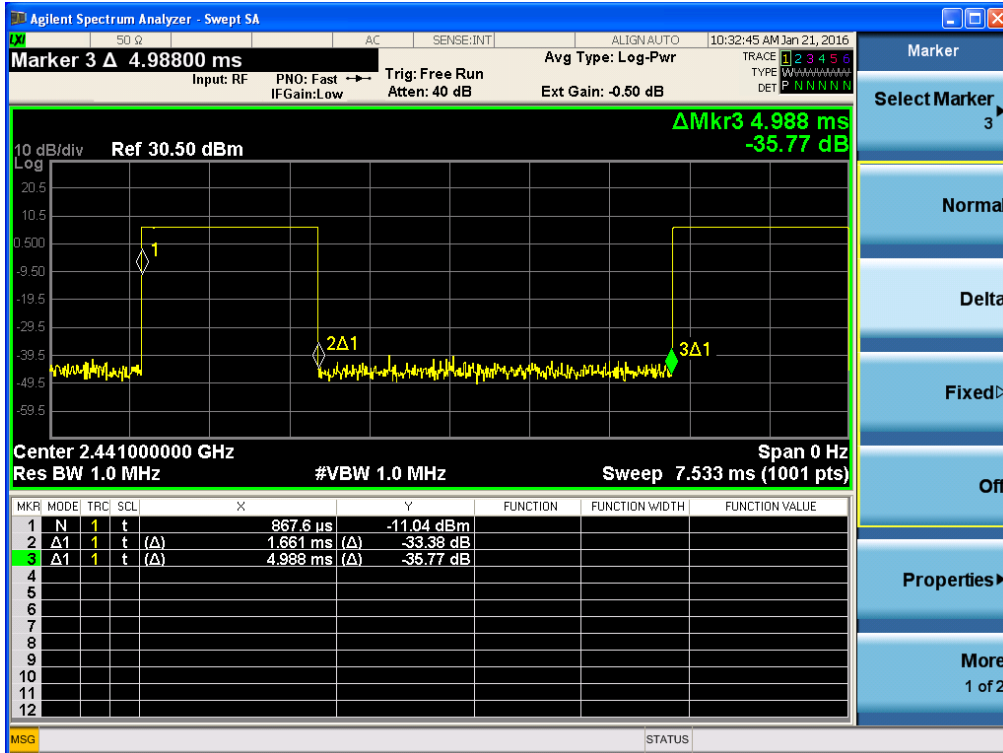




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## Time of Occupancy for PACKET Type DH5(GFSK)

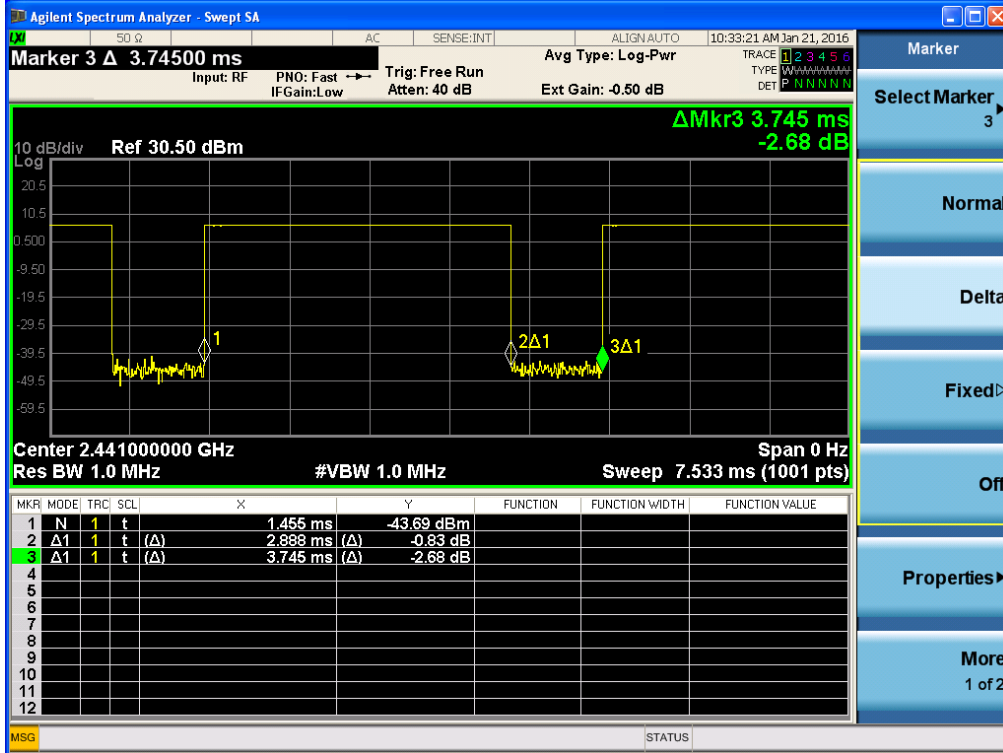



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Time of Occupancy for PACKET Type 3DH1 (8-DPSK)

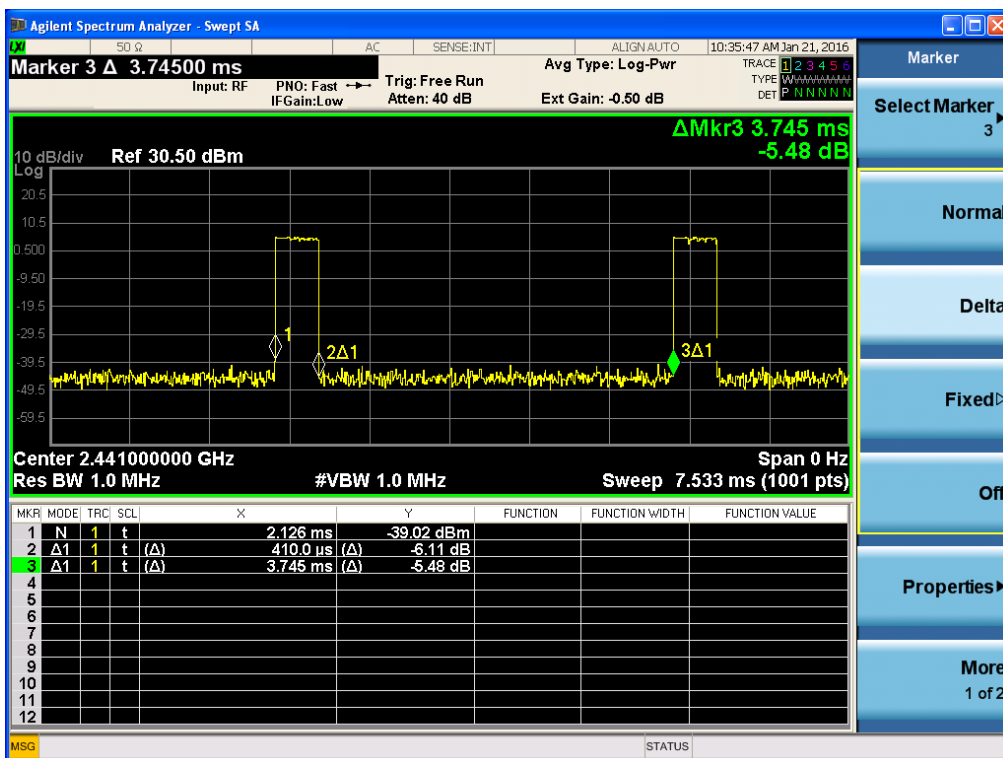

## Time of Occupancy for PACKET Type 3DH3 (8-DPSK)

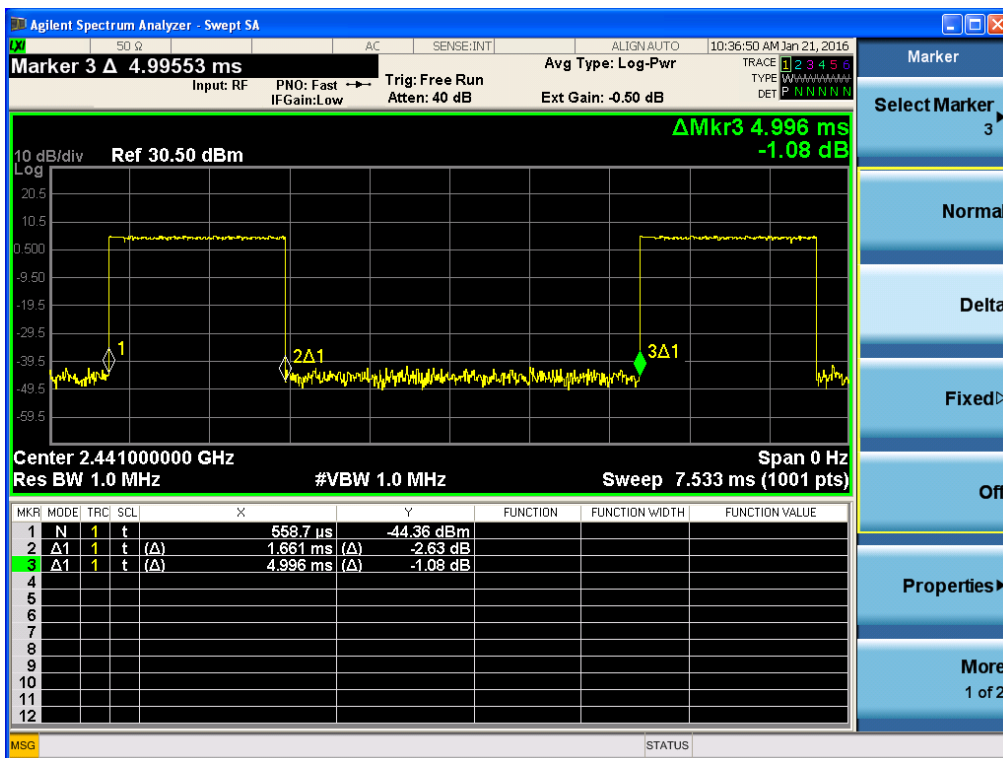




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## Time of Occupancy for PACKET Type 3DH5(8-DPSK)

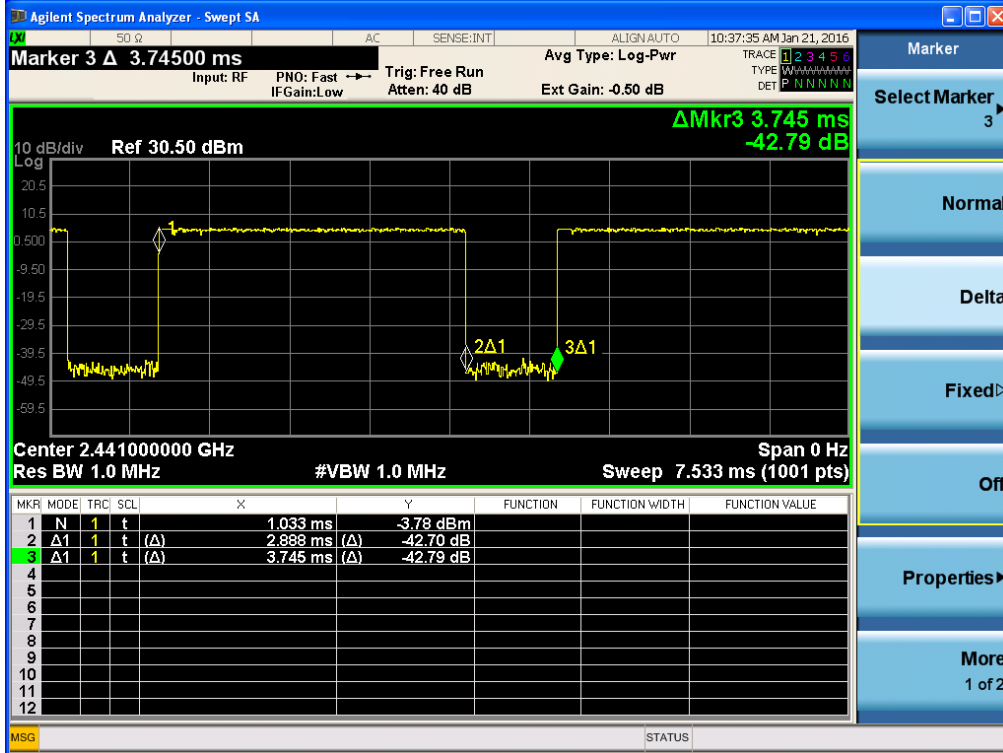



## 2.1.5 Maximum peak Conducted Output Power

### Test Location

RF Test Room

### Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz ( $\geq$  RBW)

Detector function = peak

Trace = max hold

Sweep = auto



### Limit

§5.247(b)(1) The Maximum Peak Output Power Measurement is 0.125 Watts for frequency hopping system operating in 2400-2483.5 MHz employing at least 15 Hopping channels.

### Test Results

#### Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	5.654	3.68	Complies
2441	39	6.562	4.53	Complies
2480	78	6.541	4.51	Complies

#### Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	4.358	2.73	Complies
2441	39	5.432	3.49	Complies
2480	78	5.347	3.43	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Maximum peak Conducted Output Power - GFSK

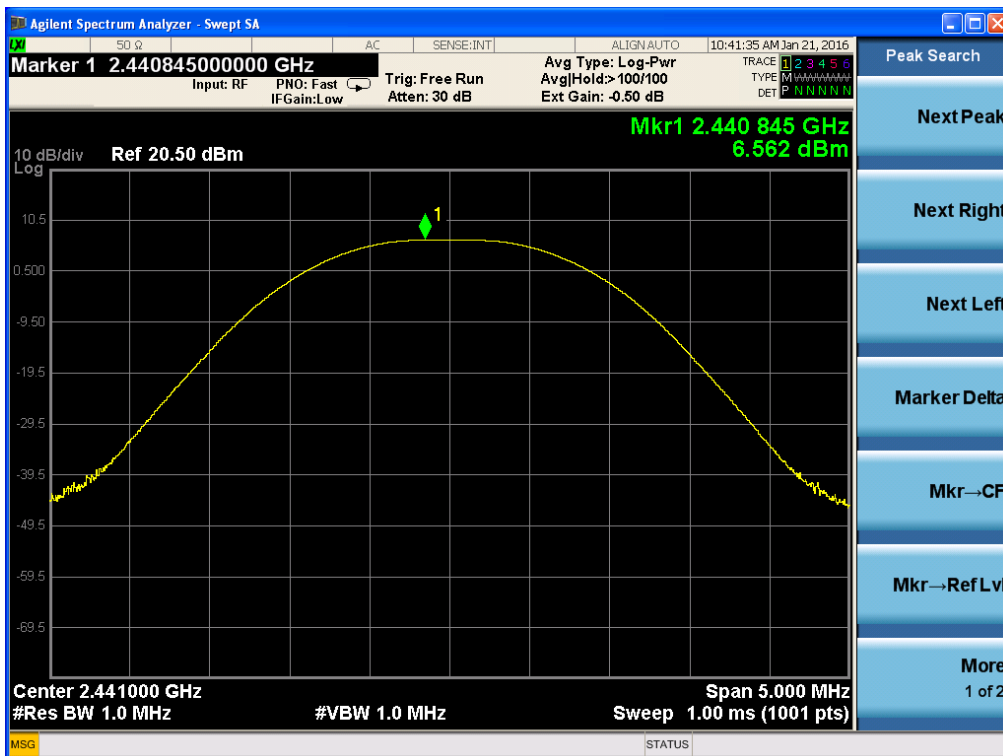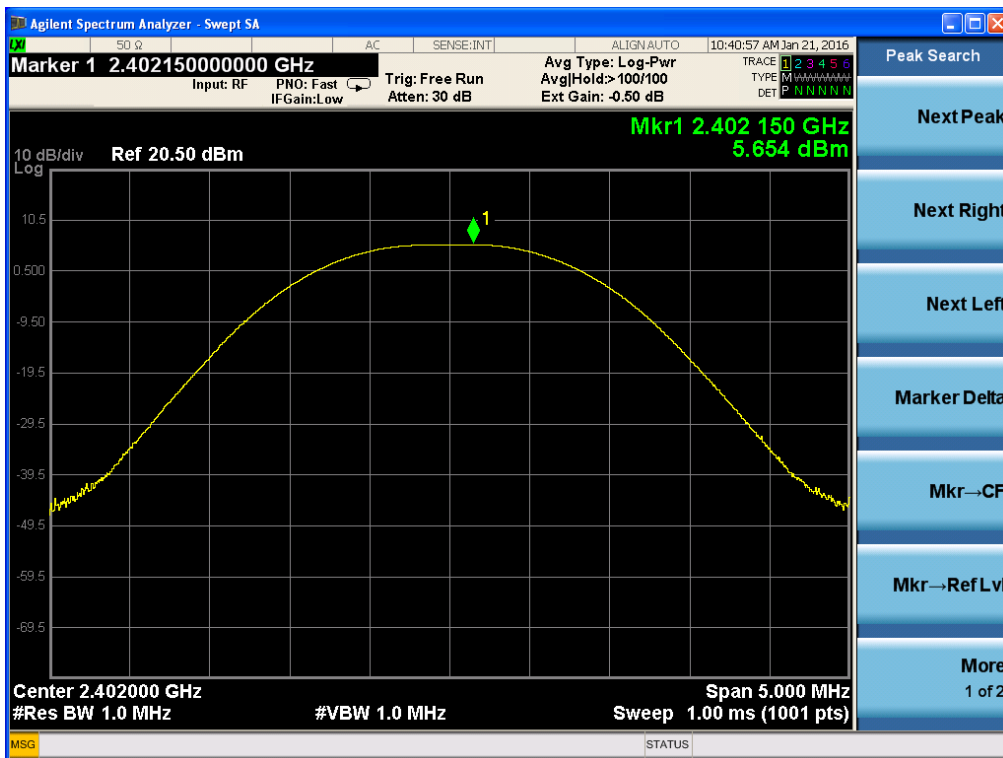




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

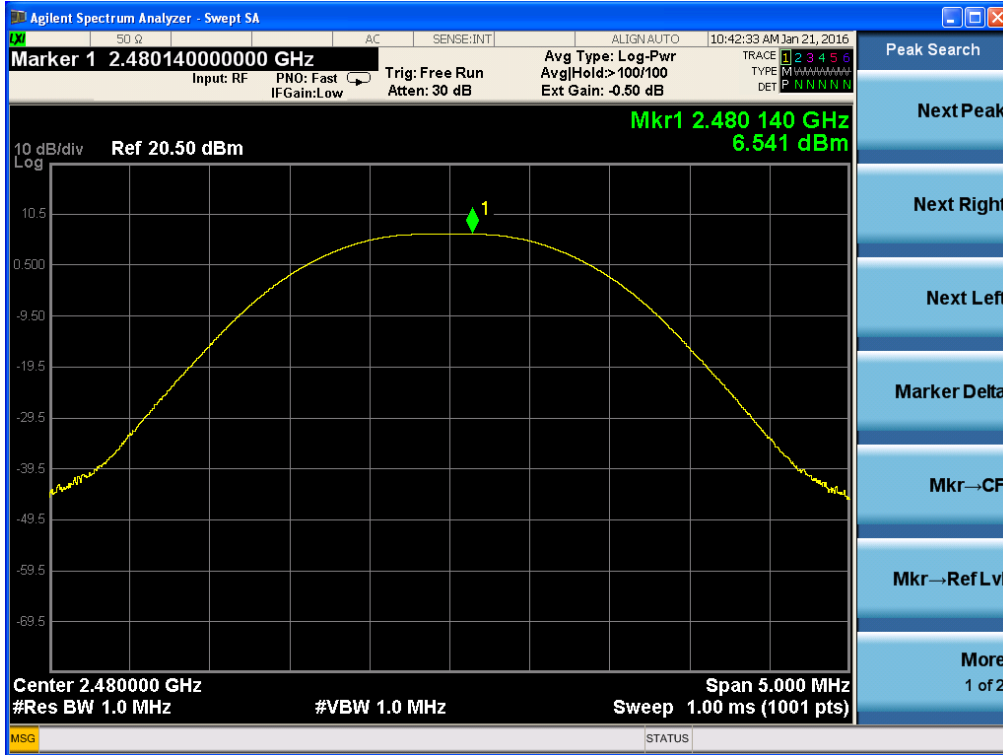



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Maximum peak Conducted Output Power – 8-DPSK

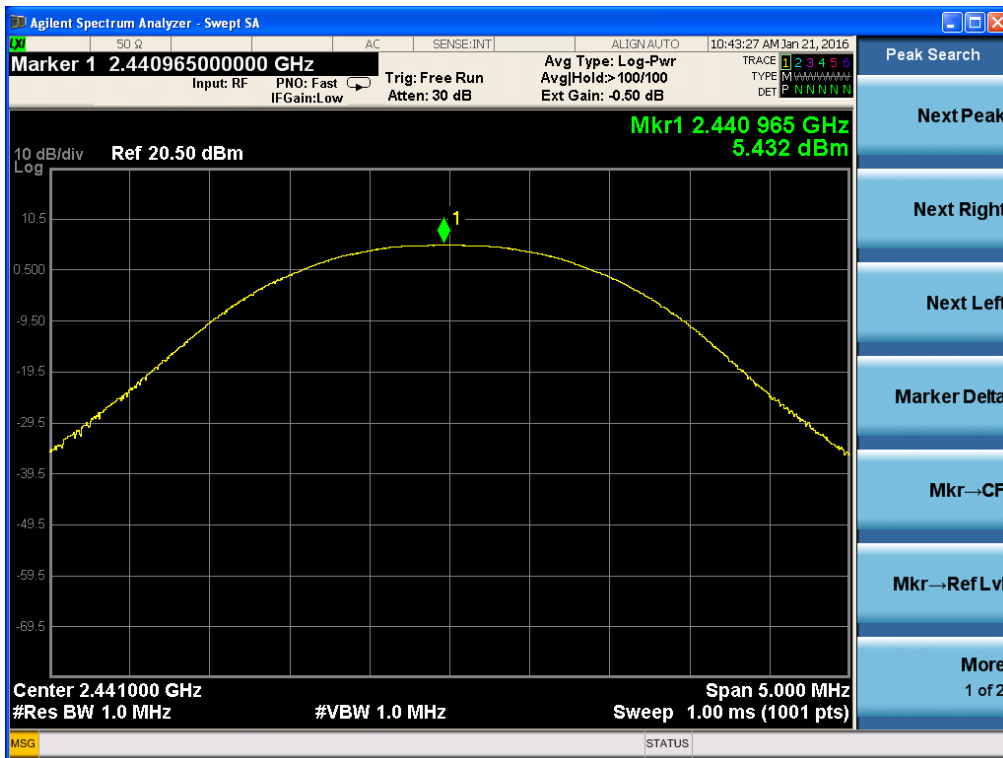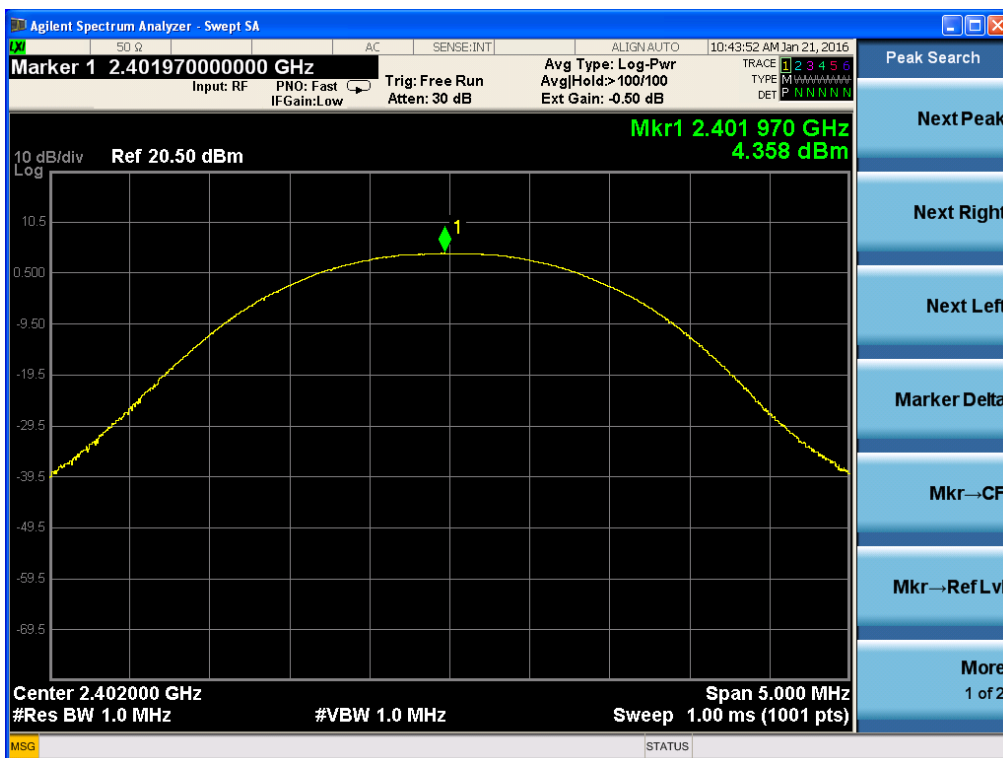




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

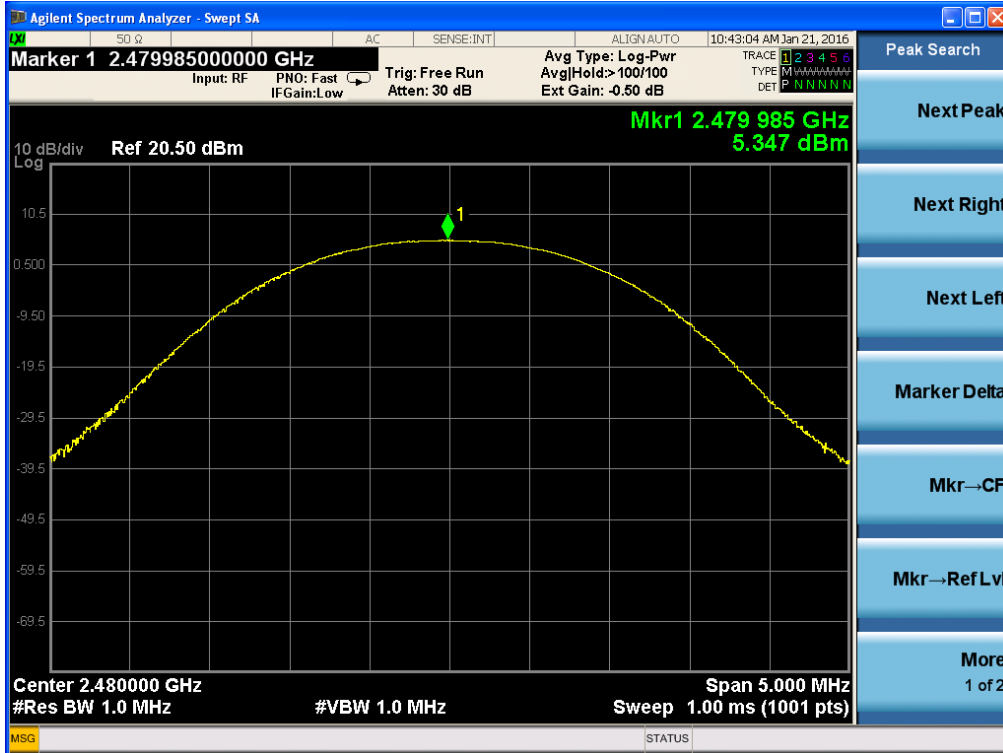

## 2.1.6 Band-edge

### Test Location

RF Test Room

### Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz ( $\geq$  RBW)

Span = 10 MHz

Trace = max hold

Detector function = peak

Sweep = auto



### Limit

> 20 dBc

### Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest level of the inband spectral density. Therefore the applying equipment meets the requirement.

See next pages for actual measured spectrum plots.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## Band – edge (with Hopping) - GFSK

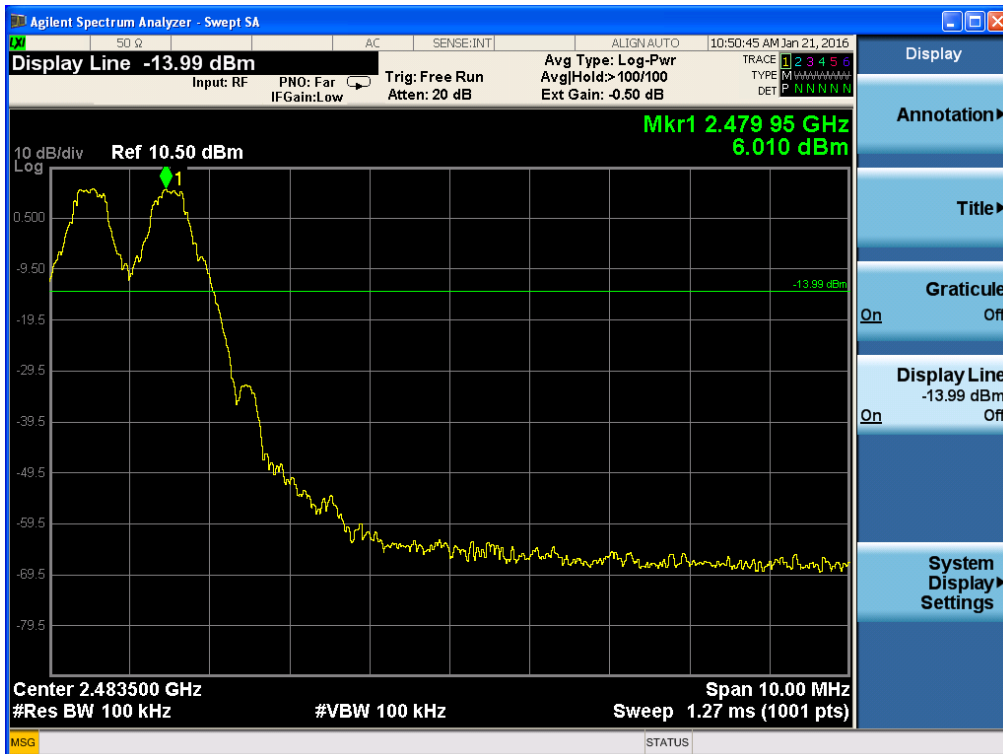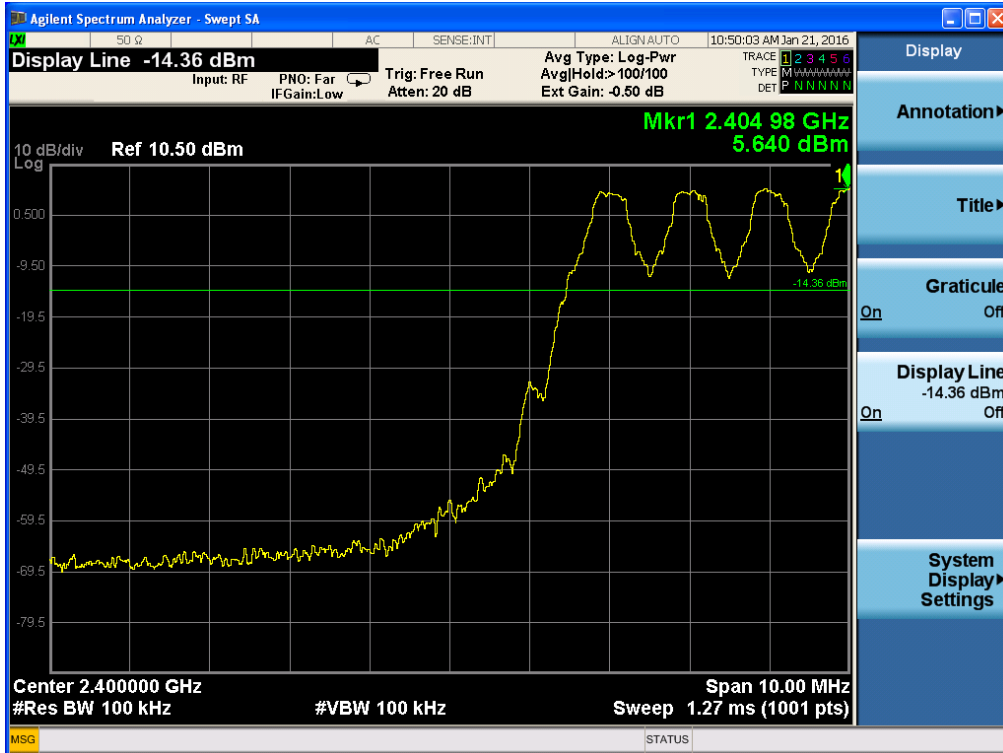





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## Band – edge (without Hopping) - GFSK

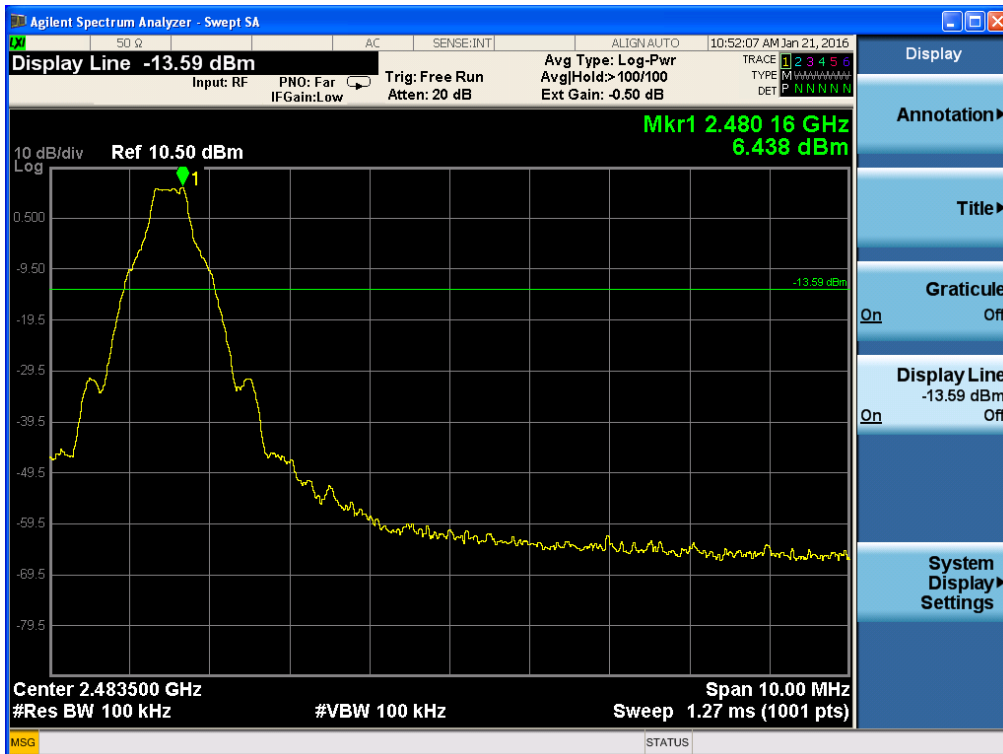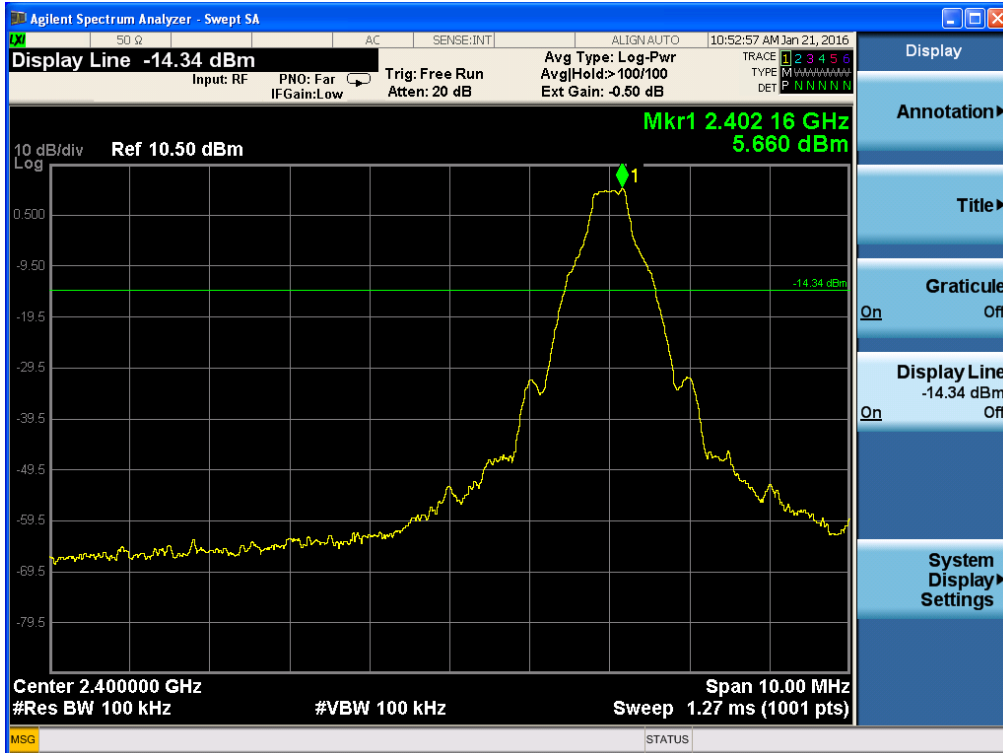





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance


# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Band – edge (with Hopping) – 8-DPSK

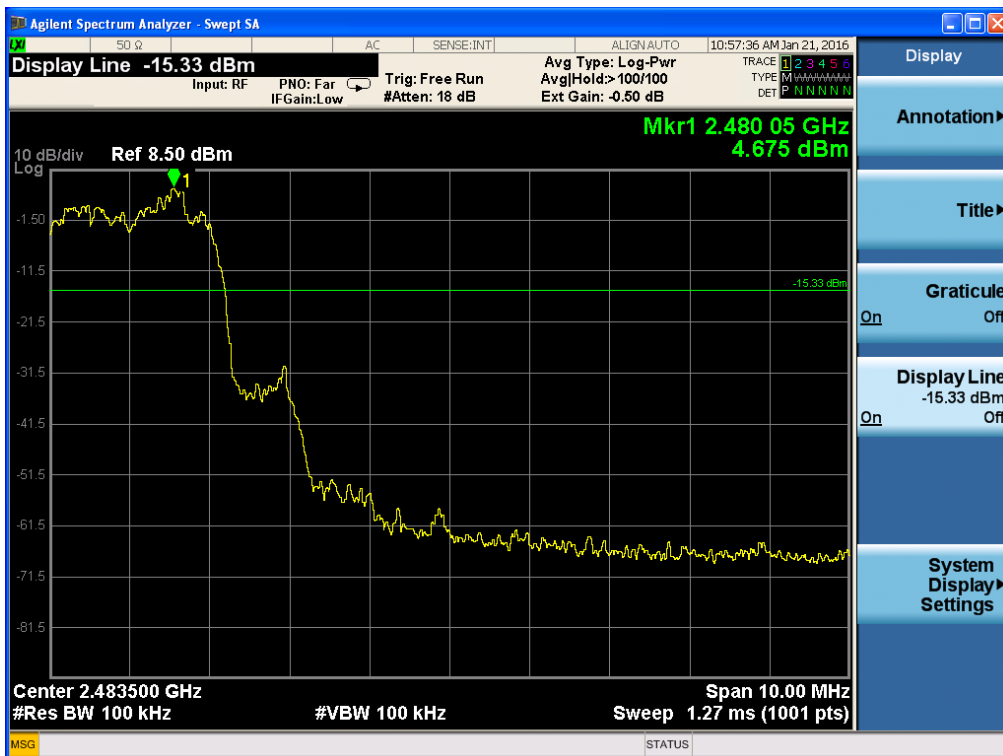



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Band – edge (without Hopping) – 8-DPSK

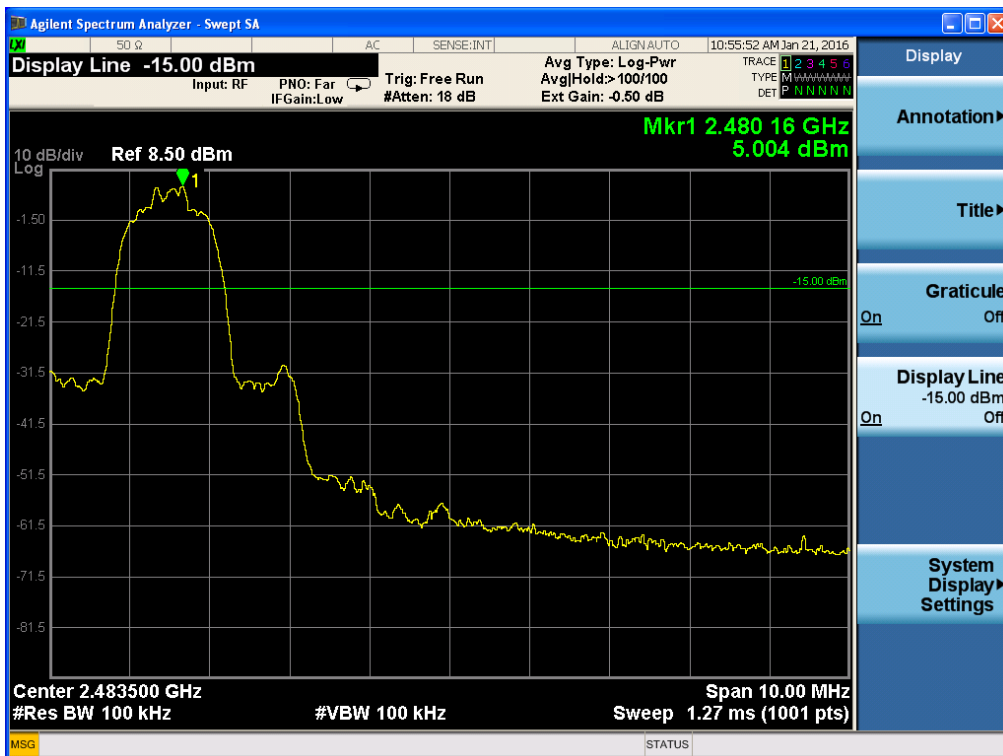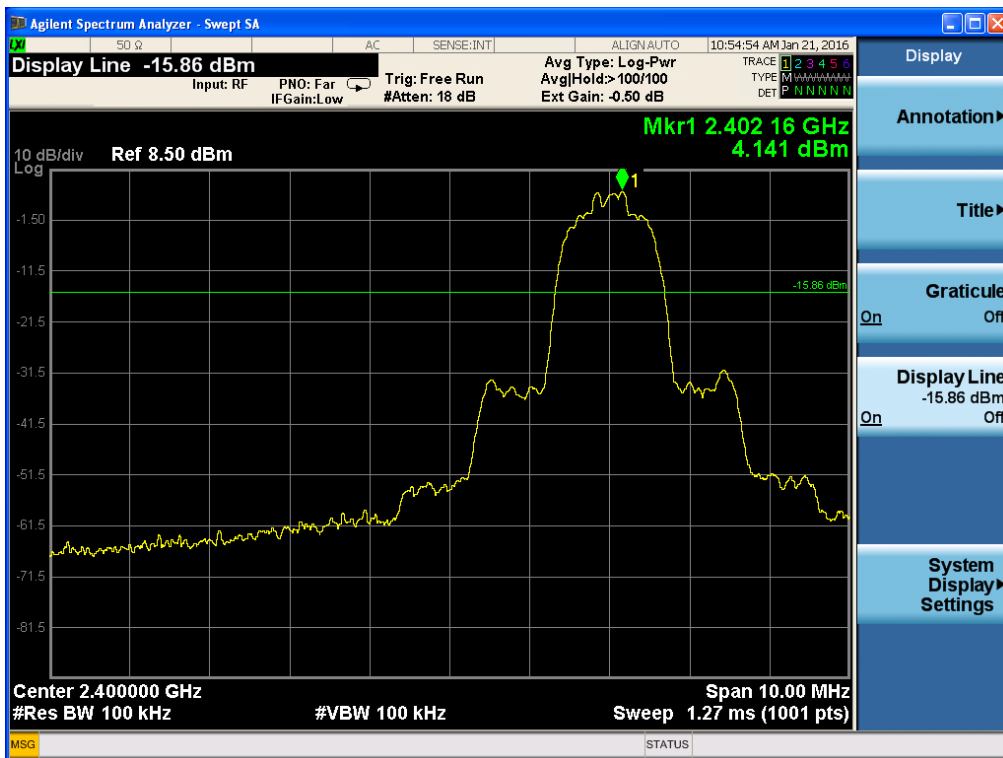



CTK Co., Ltd.



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

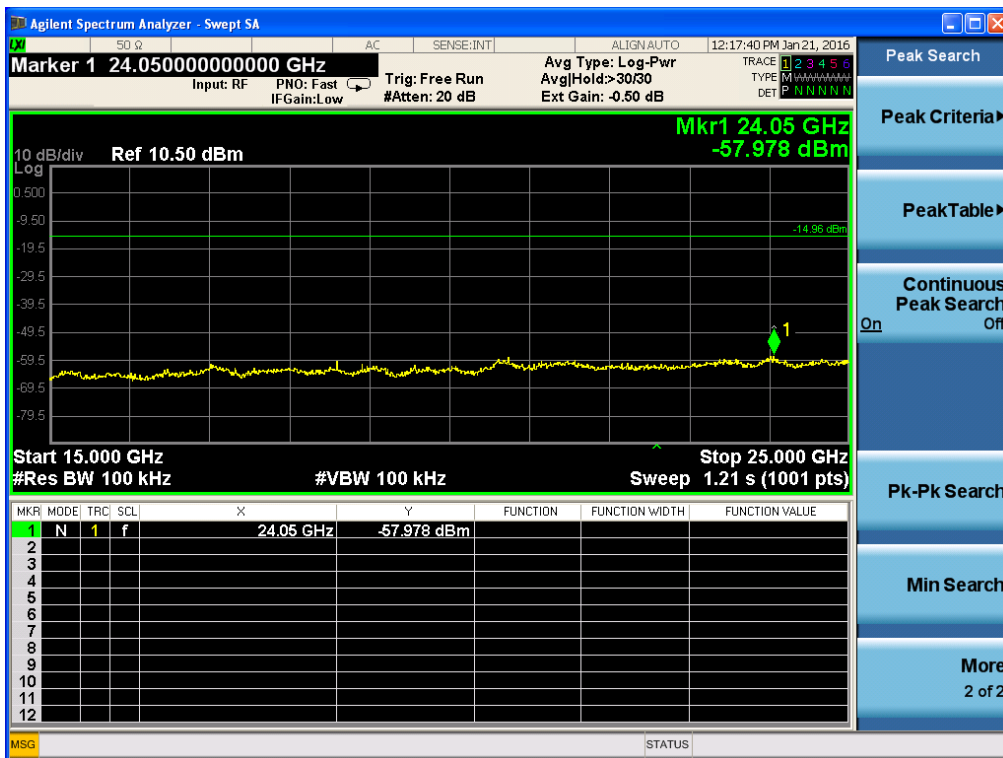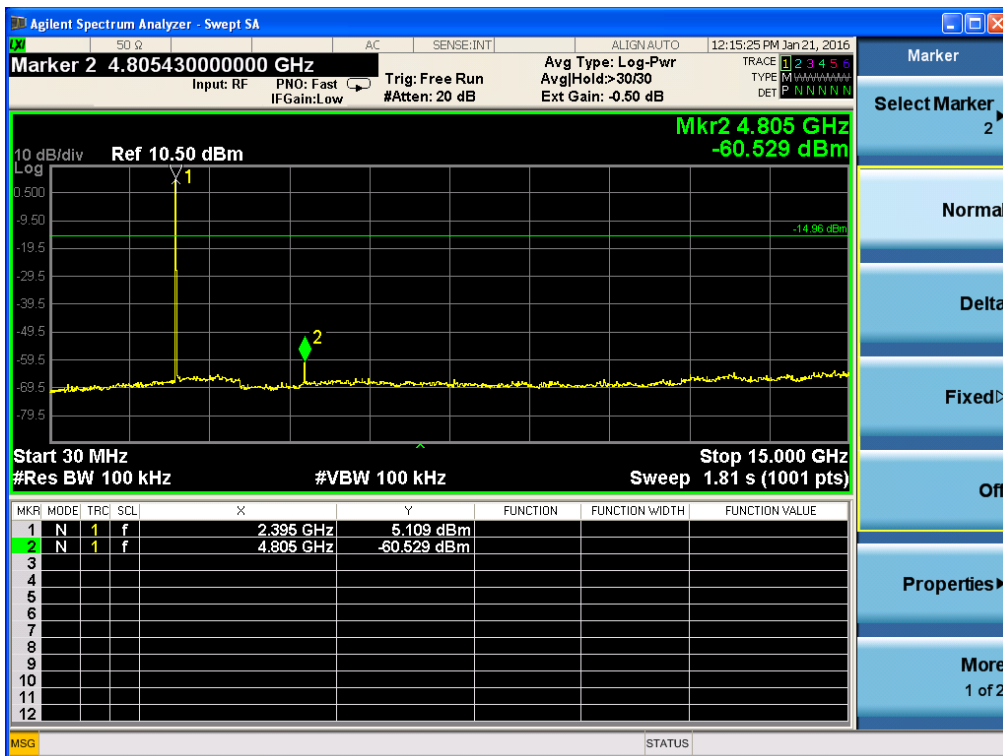





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

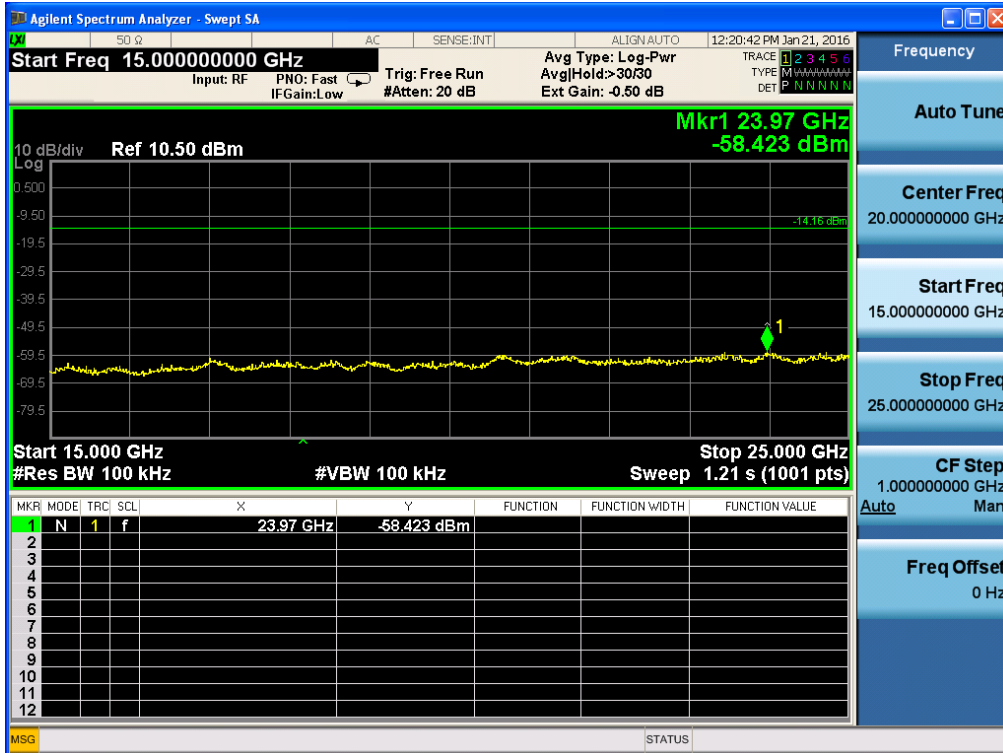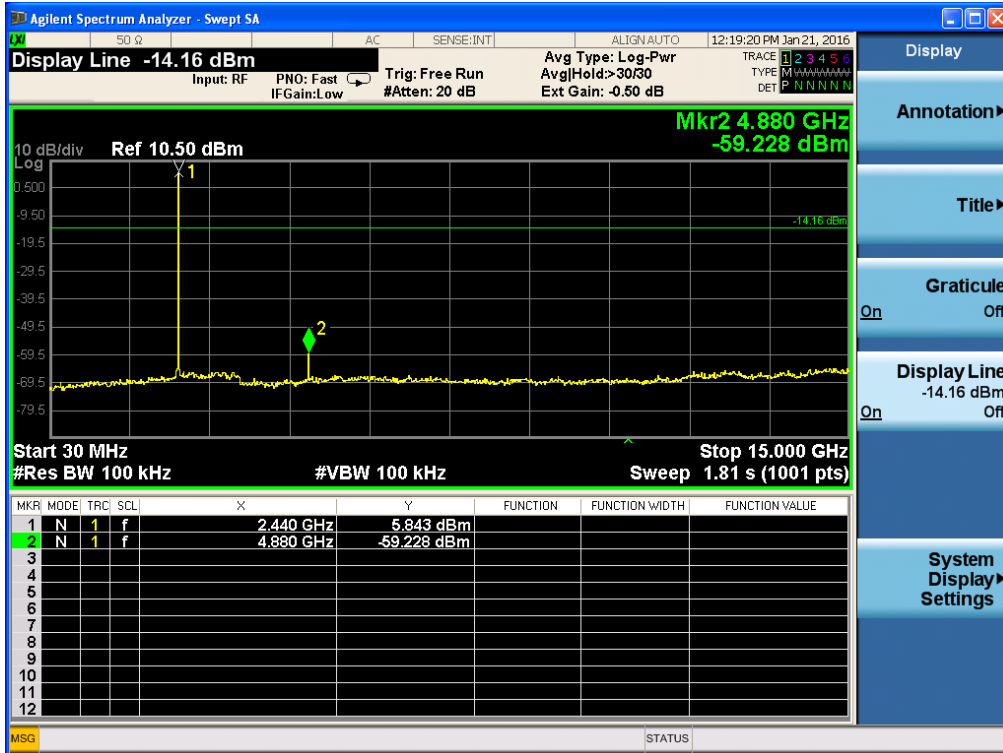



CTK Co., Ltd.



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – High channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(GFSK : Worst-Case)

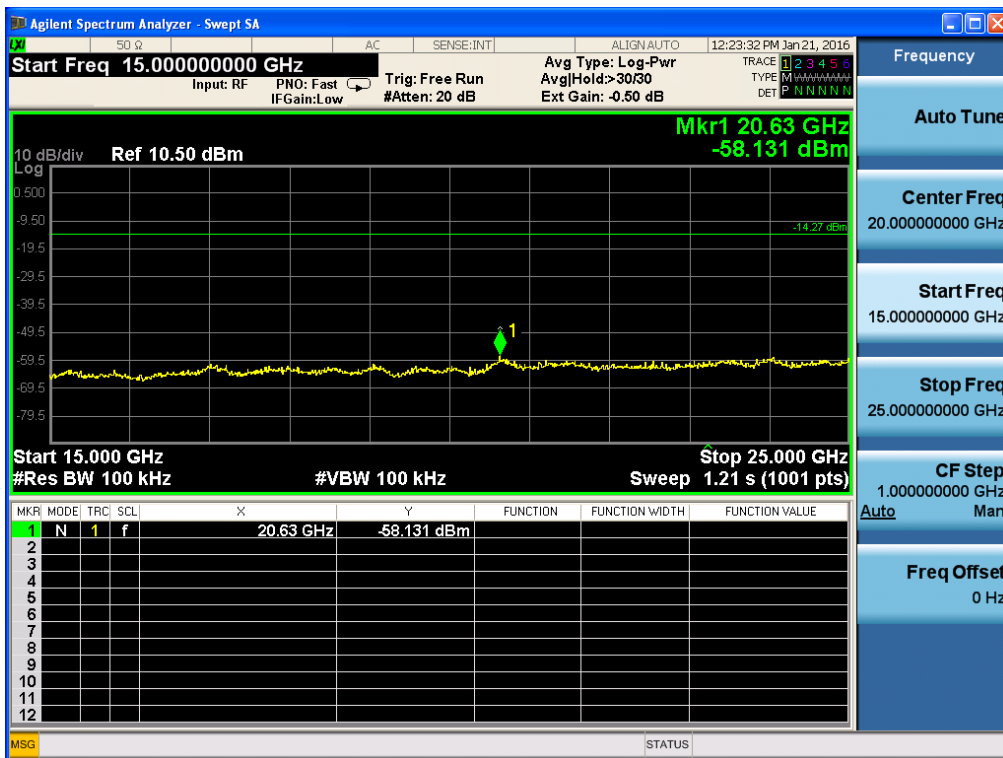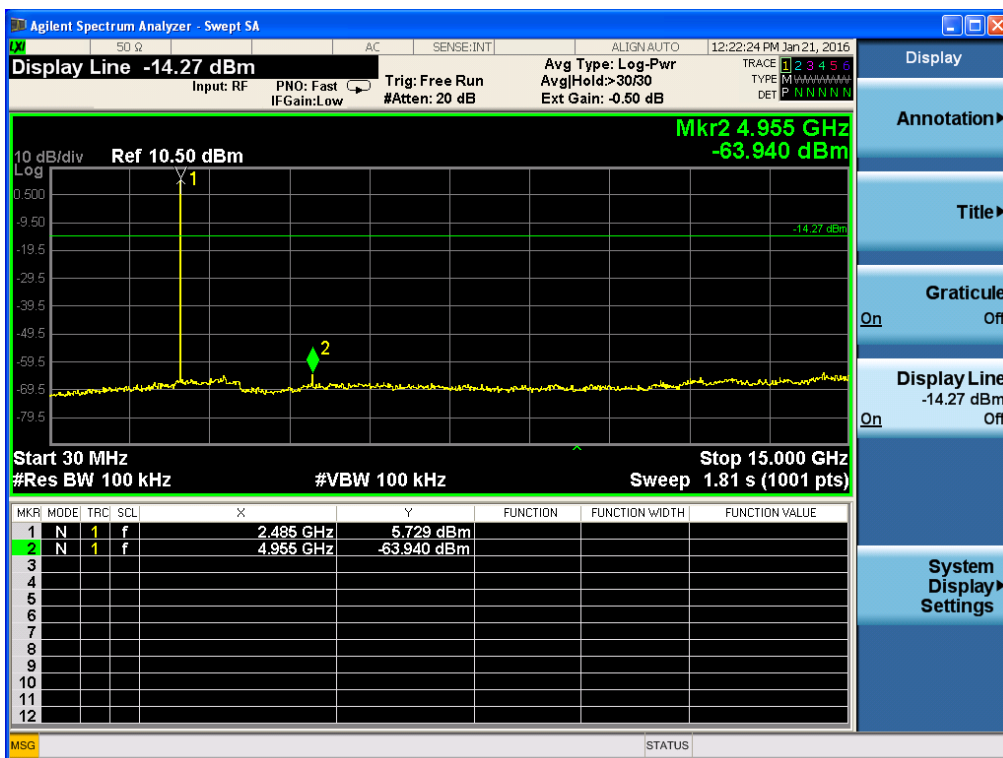



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(8-DPSK : Worst-Case)

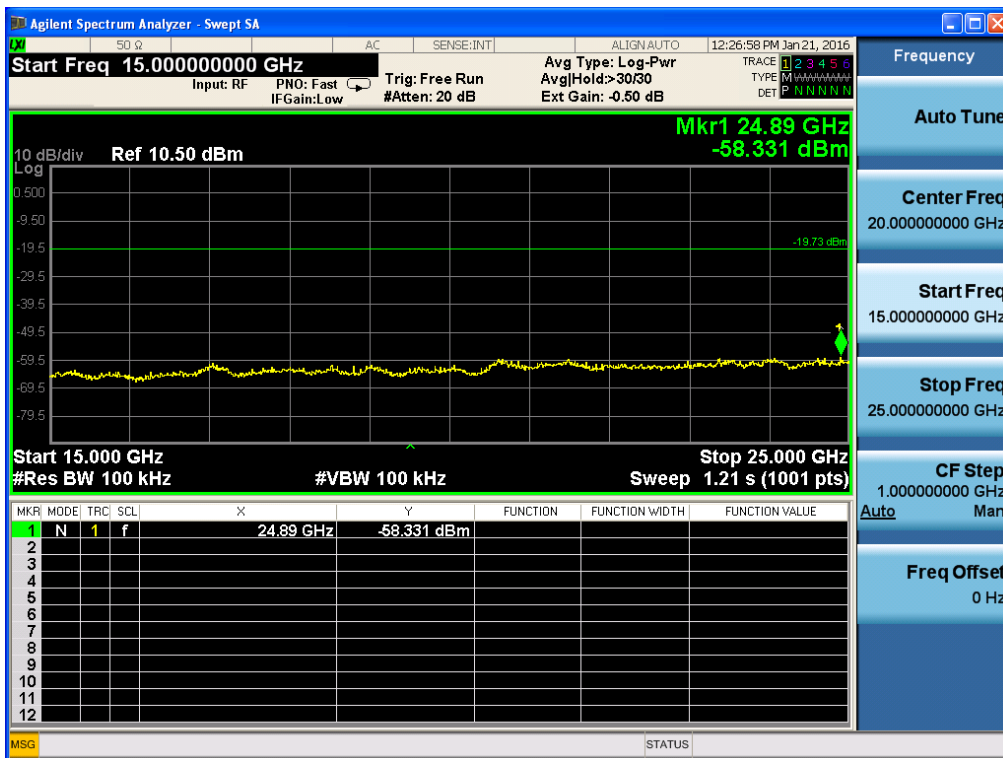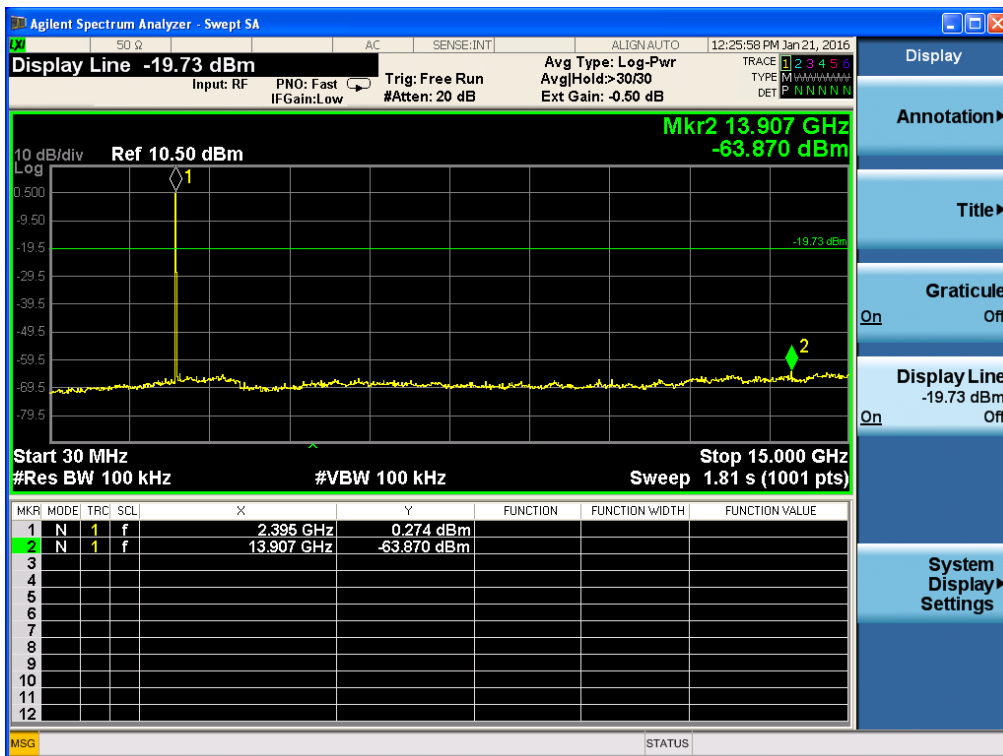



CTK Co., Ltd.



# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(8-DPSK : Worst-Case)

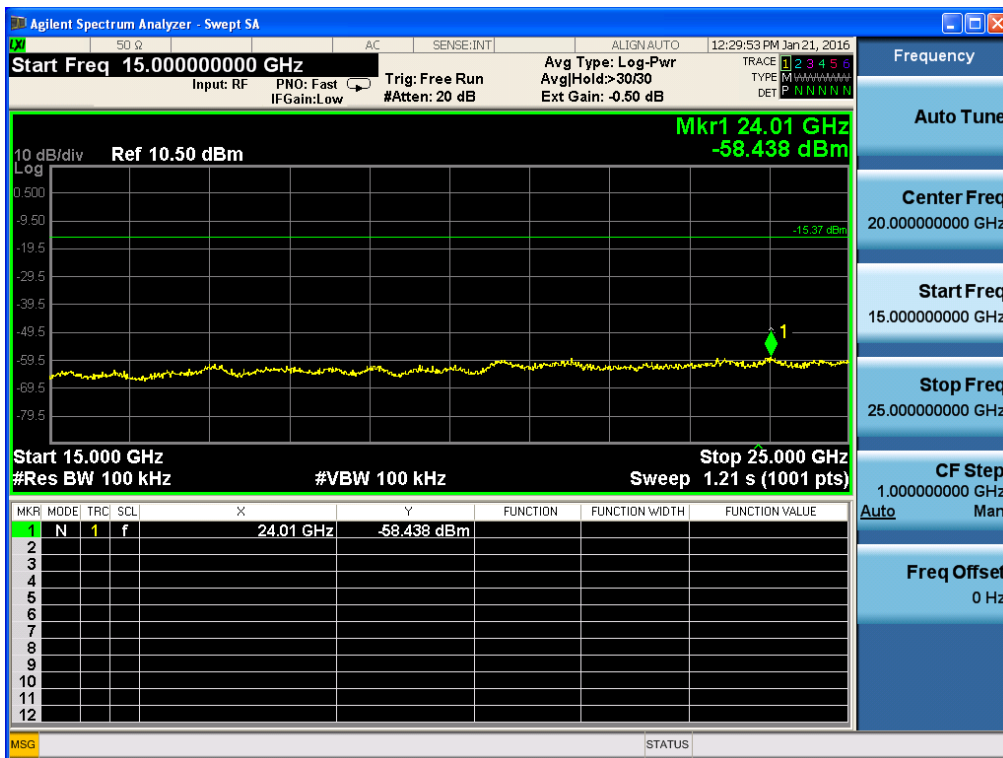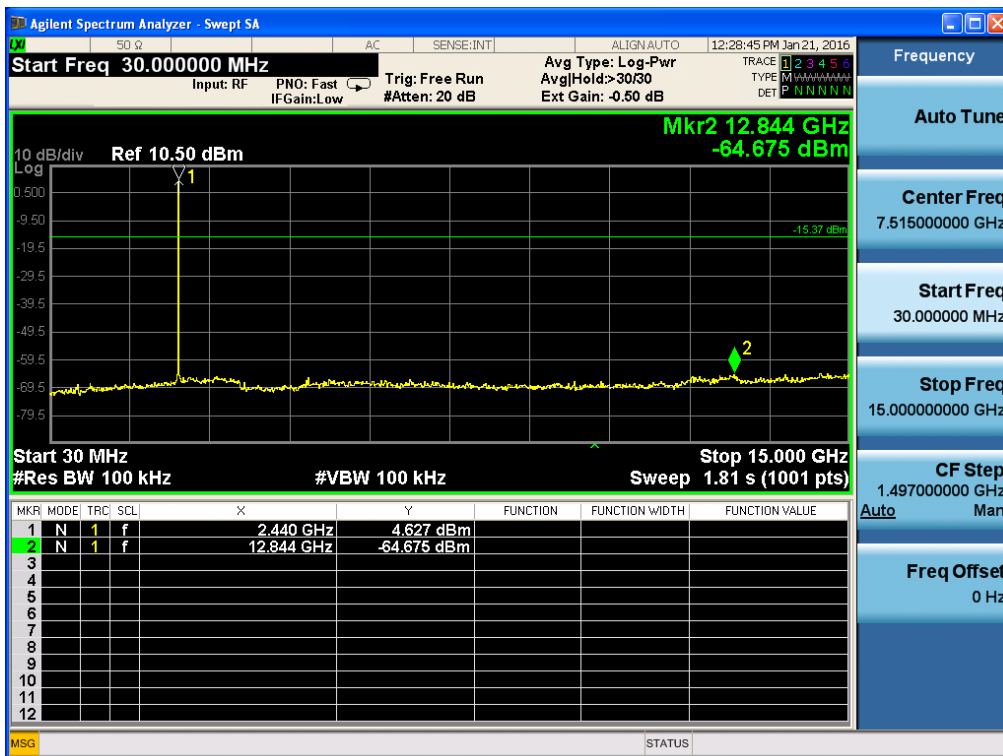







CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel  
Frequency Range = 30 MHz ~ 10<sup>th</sup> harmonic  
(8-DPSK : Worst-Case)

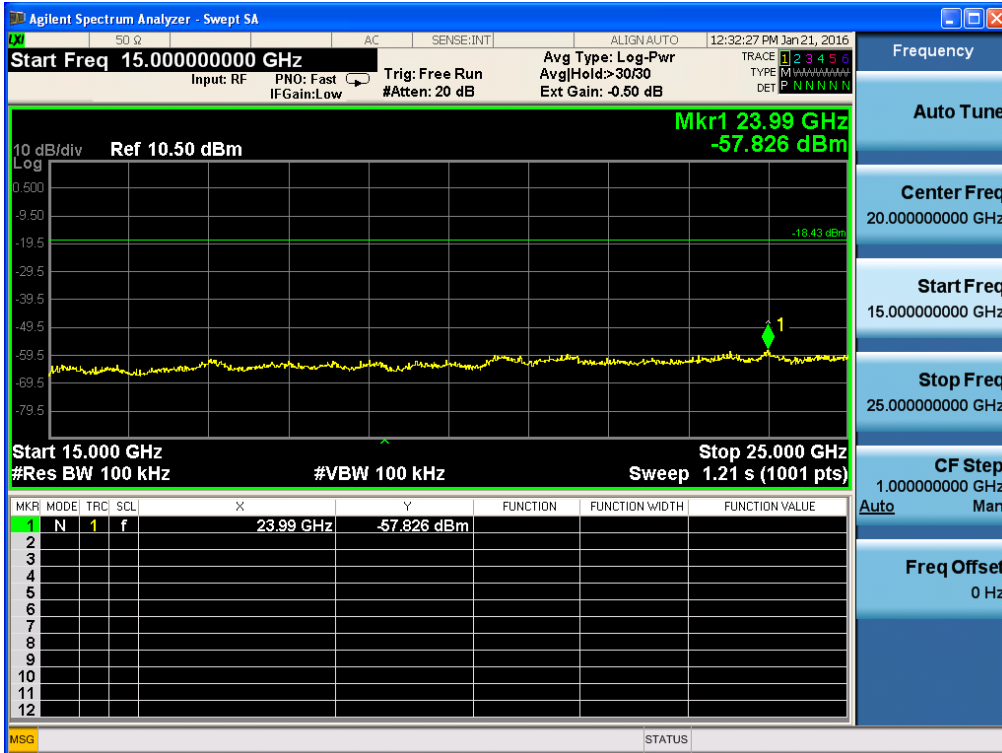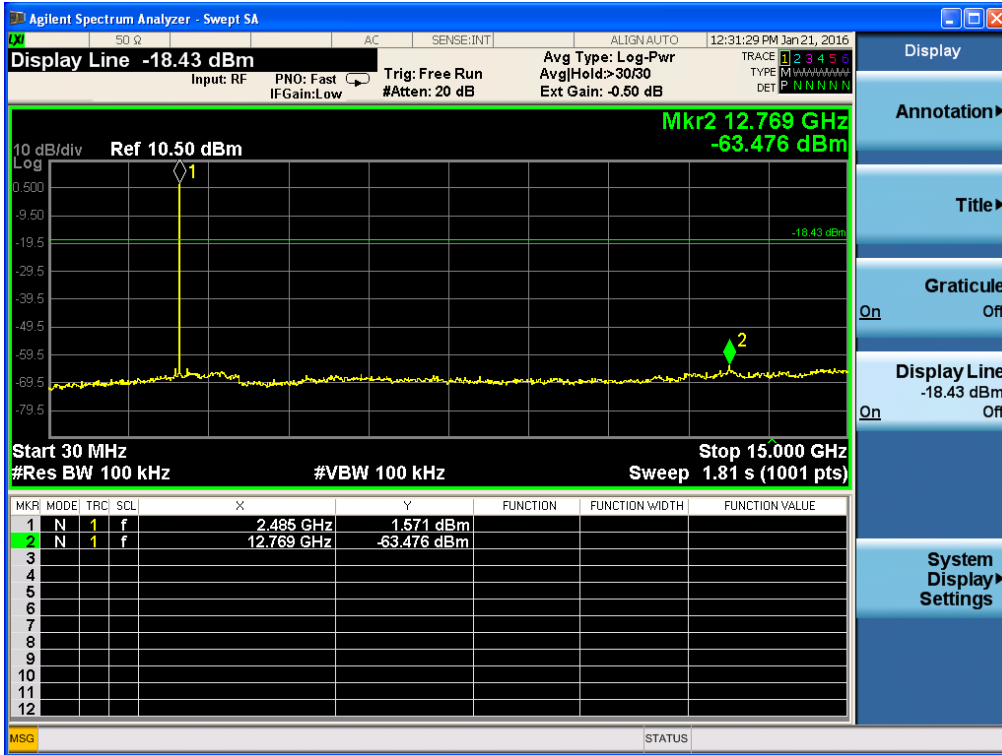





## 2.1.7 Field Strength of Emissions

### Test Location

10 m SAC (test distance :  10 m,  3 m)

3 m SAC (test distance : 3 m)

### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz

VBW  $\geq$  RBW

Sweep = auto

### Limit

#### - 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)

**Test Setup:**


1) For field strength of emissions from 9 kHz to 30 MHz

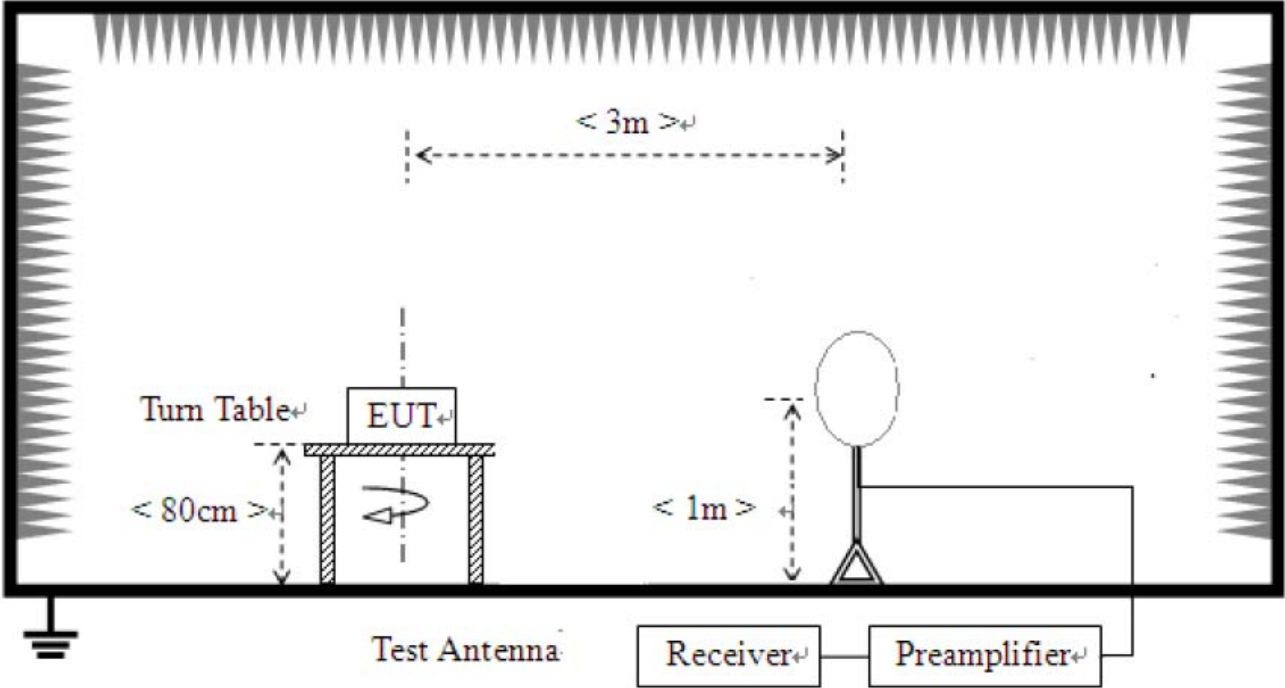

2) For field strength of emissions from 30 MHz to 1 GHz

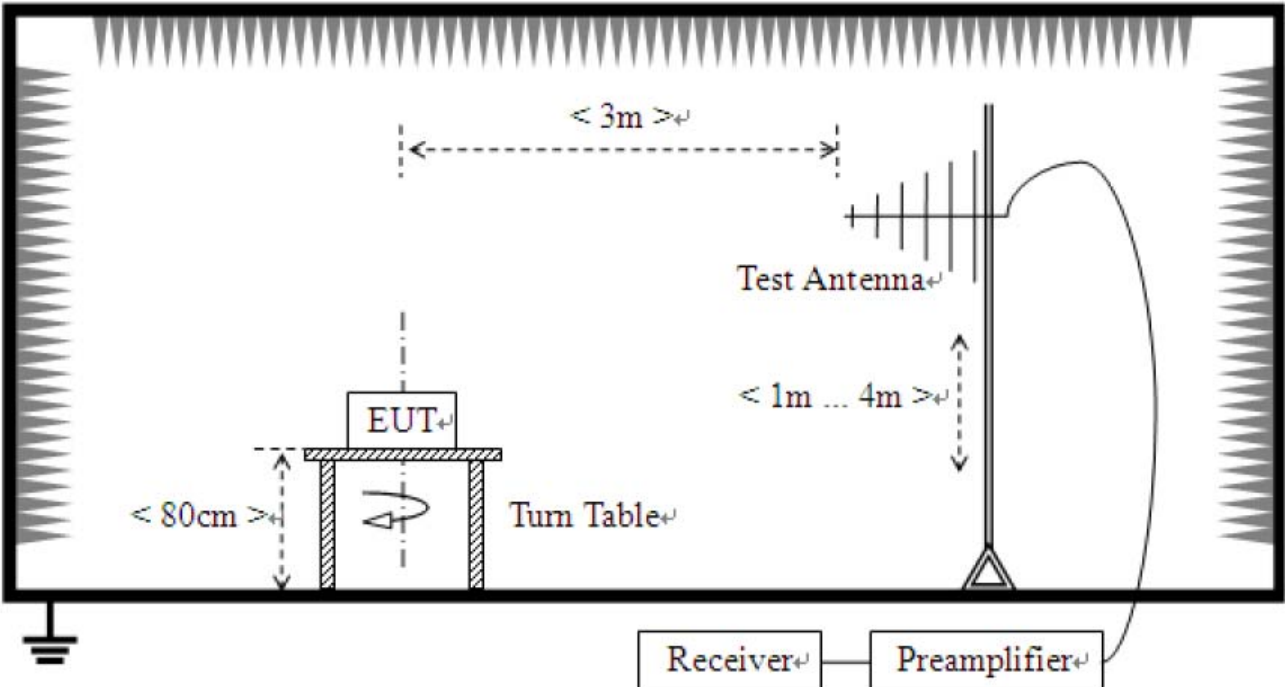

3) For field strength of emissions above 1 GHz

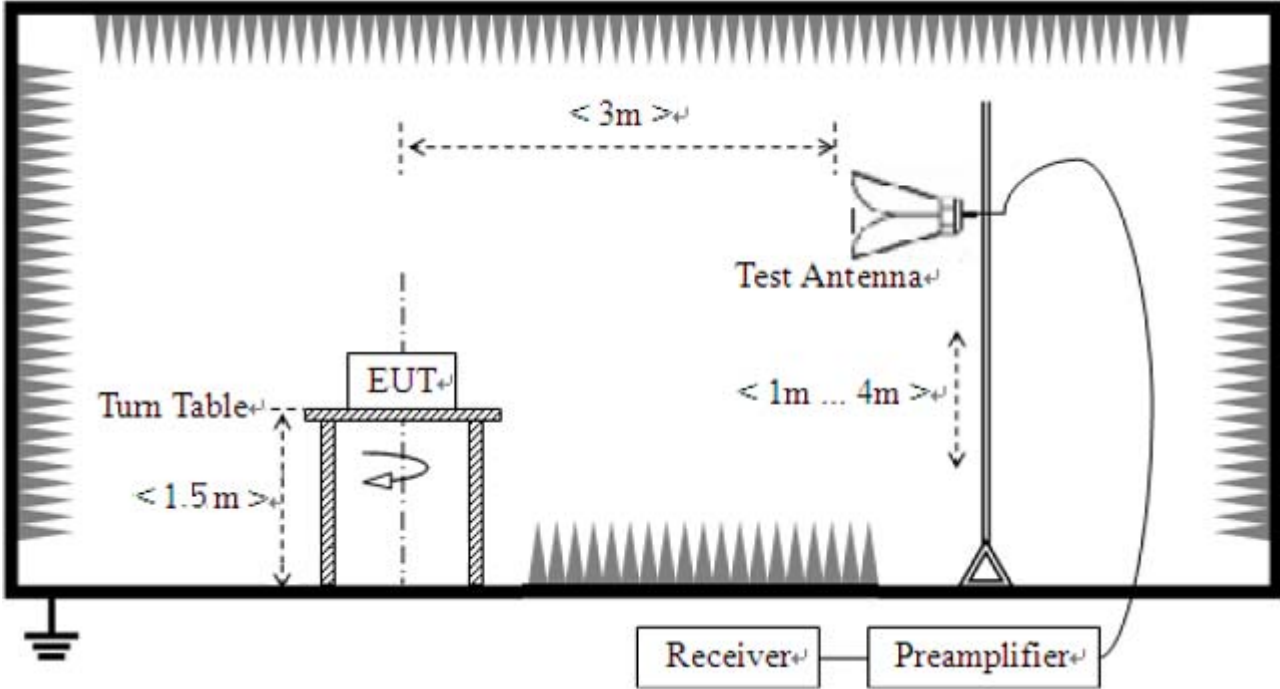

**Test Results**

**1) 9 kHz to 30 MHz**

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	9 kHz – 30 MHz
Test mode	GFSK, 8-DPSK	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

**Note :**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## 2) 30 MHz to 1 GHz


EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	Below 1000MHz
Test mode	GFSK Hopping	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
48.309	25.7	14.3	Quasi-Peak

### Test Data

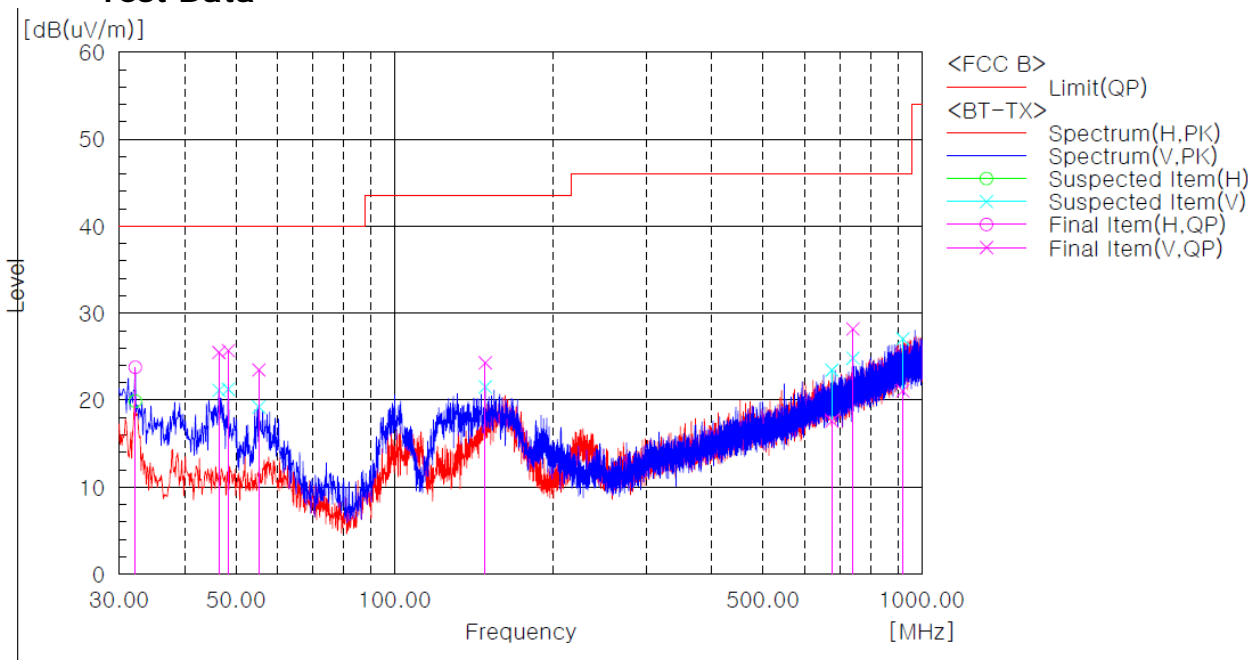

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Angle [deg]
1	32.183	H	40.0	-16.2	23.8	40.0	16.2	63.8
2	46.369	V	40.3	-14.8	25.5	40.0	14.5	13.4
3	48.309	V	40.7	-15.0	25.7	40.0	14.3	97.9
4	55.220	V	38.1	-14.6	23.5	40.0	16.5	97.9
5	148.461	V	32.5	-8.2	24.3	43.5	19.2	13.4
6	675.050	V	23.2	-5.6	17.6	46.0	28.4	285.5
7	740.283	V	32.8	-4.6	28.2	46.0	17.8	13.4
8	920.339	V	22.8	-1.7	21.1	46.0	24.9	97.9

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

### 3) above 1 GHz

Test mode : GFSK, CFG PKT Packet Type : 15 Packet Size : 339(DH5)

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	1-25GHz
		Detector function	Average / Peak

#### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBUV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

#### Test Data

##### Ch.0(Low Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

##### Ch.39(Mid Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

##### Ch.78(High Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

#### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Test mode : 8-DPSK, CFG PKT Packet Type : 31 Packet Size : 1021(3DH5)

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	1-25GHz
		Detector function	Average / Peak

### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBUV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

## Test Data

### Ch.0(Low Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

### Ch.39(Mid Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

### Ch.78(High Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

## Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Test Results

### 1) 9 kHz to 30 MHz

#### Test mode : Receiver

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	9 kHz – 30 MHz
Test mode	Receiver	Detector function	Quasi-Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

#### Note :

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## 2) 30 MHz to 1 GHz

Test mode : Receiver


EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	Below 1000MHz
Test mode	Receiver	Detector function	Quasi-Peak / Peak

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
46.611	26.2	13.8	Quasi-Peak

### Test Data

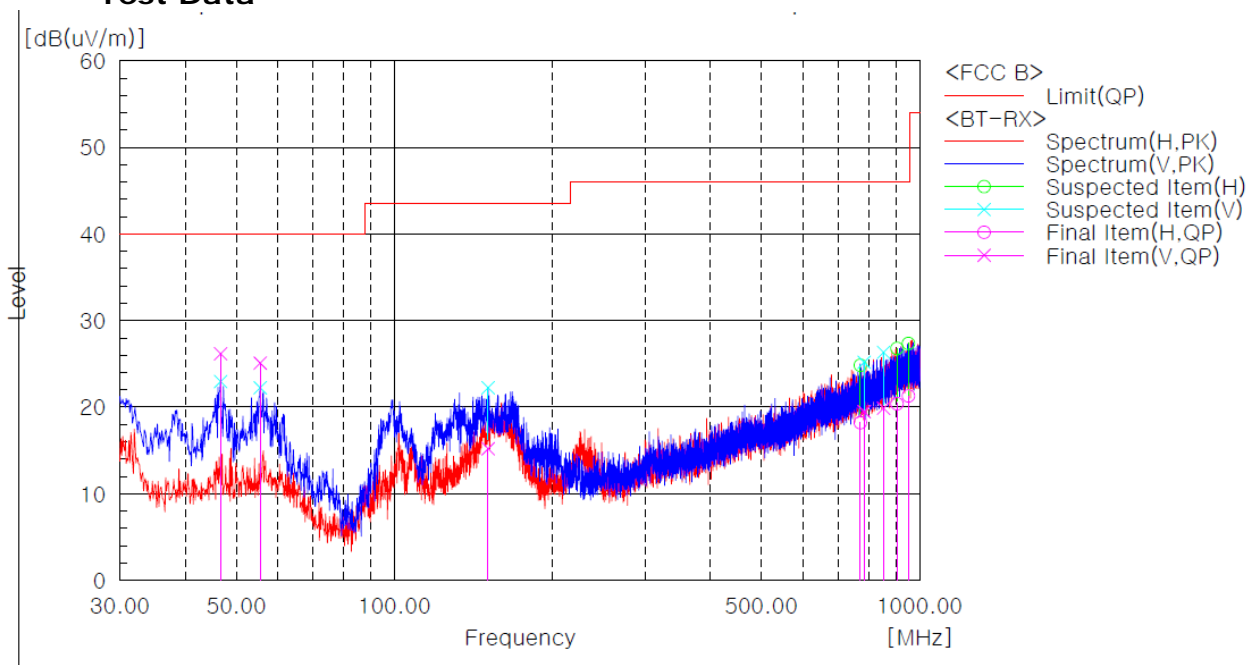

### Final Result

No.	Frequency [MHz]	(P)	Reading QP [dB(uV)]	c.f [dB(1/m)]	Result QP [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Angle [deg]
1	46.611	V	41.0	-14.8	26.2	40.0	13.8	176.1
2	55.463	V	39.7	-14.6	25.1	40.0	14.9	334.4
3	150.644	V	22.9	-7.7	15.2	43.5	28.3	4.1
4	770.838	H	22.3	-4.1	18.2	46.0	27.8	323.7
5	783.084	V	23.4	-3.9	19.5	46.0	26.5	219.6
6	853.409	V	23.0	-3.1	19.9	46.0	26.1	219.6
7	905.304	H	22.4	-2.0	20.4	46.0	25.6	211.3
8	951.621	H	22.7	-1.4	21.3	46.0	24.7	61.5

### Remark :

1. The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(X axis) and the worst case was recorded.





CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

### 3) above 1 GHz

#### Test mode : Receiver

EUT	Tablet PC	Measurement Detail	
Model	LPT-200AR	Frequency Range	1-25GHz
		Detector function	Average / Peak

#### Remarks

We have tested three mode (X, Y, Z). The worst mode (X axis) for final test.

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
No emissions were detected at a level greater than 20dB below limit.			

#### Test Data

##### Ch.0(Low Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

##### Ch.39(Mid Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

##### Ch.78(High Channel)

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										

#### Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	(P)	Reading AV [dB(uV)]	Reading PK [dB(uV)]	Factor [dB(1/m)]	Limit AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Level AV [dB(uV/m)]	Level PK [dB(uV/m)]	Margin AV [dB]	Margin PK [dB]
No emissions were detected at a level greater than 20dB below limit.										



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## 2.1.8 AC Conducted Emissions

### Test Location

Shielded Room

### Frequency Range of Measurement

150 kHz to 30 MHz

### Instrument Settings

IF Band Width: 9 kHz

### Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

### Limit

#### - 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Results

The requirements are:

Complies

#### Test mode : USB Charge

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
0.181500	54.4	10.0	Quasi-peak



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea


Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## Test Data

### [L1]

CISPR 22 Class B\_L1

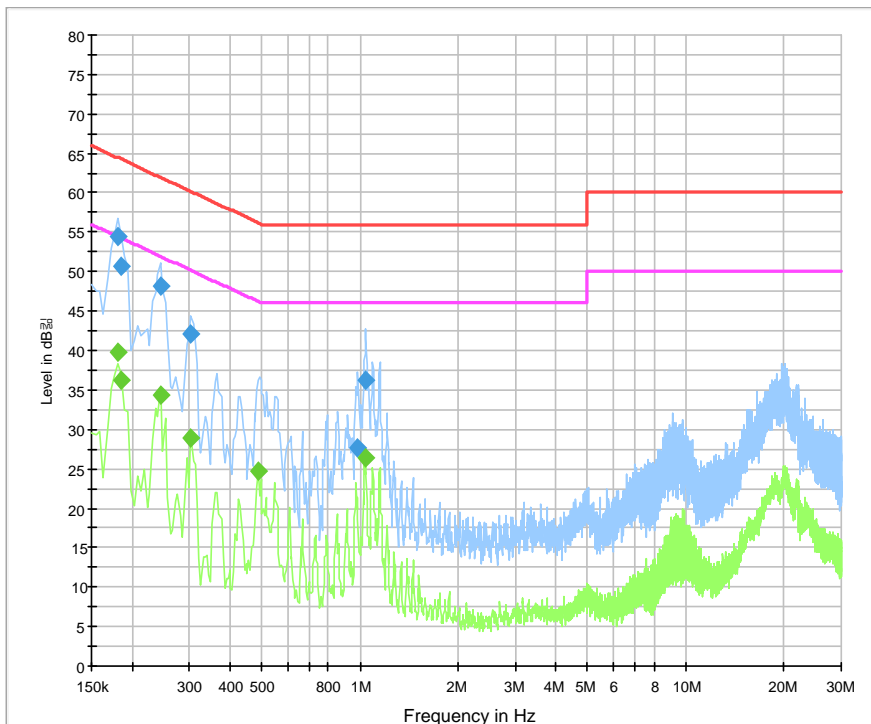

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	54.4	1000.0	9.000	On	L1	9.8	10.0	64.4
0.186000	50.7	1000.0	9.000	On	L1	9.8	13.5	64.2
0.244500	48.1	1000.0	9.000	On	L1	9.6	13.9	61.9
0.303000	42.1	1000.0	9.000	On	L1	9.7	18.0	60.2
0.987000	27.5	1000.0	9.000	On	L1	9.7	28.5	56.0
1.041000	36.1	1000.0	9.000	On	L1	9.7	19.9	56.0

## Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	39.9	1000.0	9.000	On	L1	9.8	14.5	54.4
0.186000	36.3	1000.0	9.000	On	L1	9.8	18.0	54.2
0.244500	34.3	1000.0	9.000	On	L1	9.6	17.7	51.9
0.303000	29.0	1000.0	9.000	On	L1	9.7	21.2	50.2
0.487500	24.6	1000.0	9.000	On	L1	9.9	21.6	46.2
1.041000	26.4	1000.0	9.000	On	L1	9.7	19.6	46.0




CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970 Fax: +82-31-624-9501  
www.e-ctk.com

## [NEUTRAL]

CISPR 22 Class B\_N

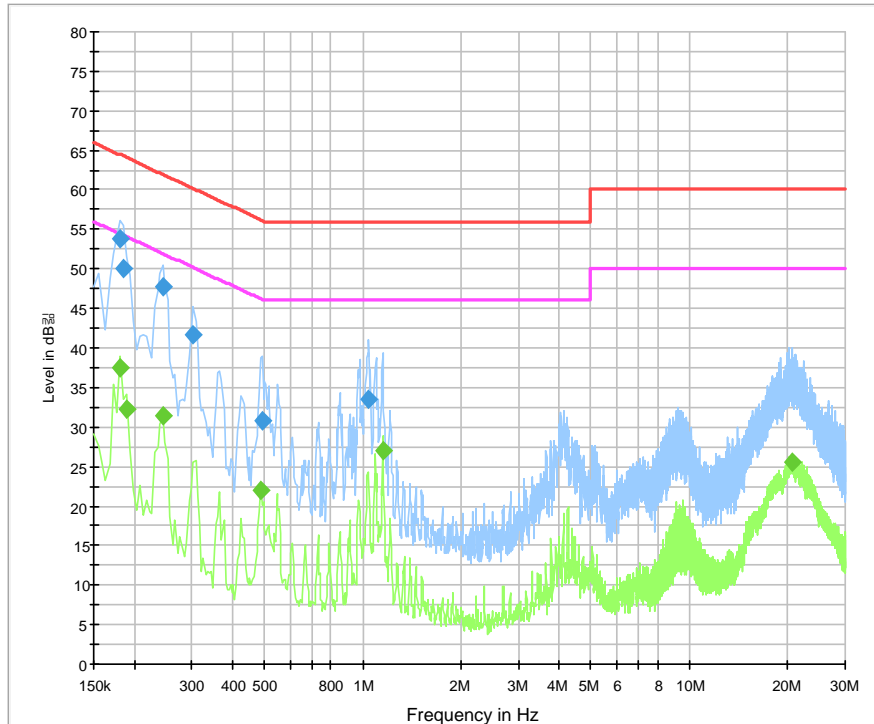

### Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	53.8	1000.0	9.000	On	N	9.8	10.6	64.4
0.186000	50.1	1000.0	9.000	On	N	9.8	14.1	64.2
0.244500	47.7	1000.0	9.000	On	N	9.6	14.3	61.9
0.303000	41.8	1000.0	9.000	On	N	9.7	18.4	60.2
0.492000	30.9	1000.0	9.000	On	N	9.9	25.3	56.1
1.045500	33.6	1000.0	9.000	On	N	9.7	22.4	56.0

### Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.181500	37.4	1000.0	9.000	On	N	9.8	17.0	54.4
0.190500	32.2	1000.0	9.000	On	N	9.8	21.8	54.0
0.244500	31.4	1000.0	9.000	On	N	9.6	20.5	51.9
0.487500	22.1	1000.0	9.000	On	N	9.9	24.1	46.2
1.153500	27.0	1000.0	9.000	On	N	9.7	19.0	46.0
20.760000	25.6	1000.0	9.000	On	N	10.1	24.4	50.0



CTK Co., Ltd.  
The Power Leader of Global Regulatory Compliance

# CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea

Tel: +82-31-339-9970 Fax: +82-31-624-9501

www.e-ctk.com

## APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2015-11-02	2016-11-02
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2016-01-20	2017-01-20
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100816	2015-11-02	2016-11-02
4	LISN	Rohde & Schwarz	ENV216	101760	2016-02-05	2017-02-05
5	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2015-11-02	2016-11-02
6	Trilog Broadband Antenna	SCHWARZBECK	VULB 9161 SE	9161-4133	2015-06-18	2017-06-18
7	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-126	2014-05-19	2016-05-19
8	6dB Attenuator	R&S	DNF	272.4110.50-2	2015-11-03	2016-11-03
9	AMPLIFIER	SONOMA	310	291721	2016-02-02	2017-02-02
10	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2015-05-15	2016-05-15
11	PREAMPLIFIER	Agilent	8449B	3008A02307	2015-10-01	2016-10-01
12	Horn Antenna	ETS-Lindgren	3115	00078894	2015-09-02	2017-09-02
13	Horn Antenna	ETS-Lindgren	3116	00062504	2015-09-04	2017-09-04
14	Horn Antenna	ETS-Lindgren	3116	00062916	2015-04-30	2017-04-30
15	Horn Antenna	ETS-Lindgren	3117	00154525	2015-09-02	2017-09-02
16	Band Reject Filter	Wainwright Instruments GmbH	WRCGV 2400/2483 - 2375/2505 -50/10EE	2	2015-05-14	2016-05-14