



FCC TEST REPORT (WLAN)

REPORT NO.: RF131112E09

MODEL NO.: SLE111GW

FCC ID: RU4-SLE111-ML

RECEIVED: Nov. 12, 2013

TESTED: Nov. 27 to Dec. 09, 2013

ISSUED: Dec. 16, 2013

APPLICANT: Metalligence Technology Corp.

ADDRESS: 2F, No. 1, Creation 3rd Rd., Science-based Industrial Park, Hsinchu 300, Taiwan, R.O.C

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT (WLAN)	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 Duty cycle of test signal.....	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
3.6 CONFIGURATION OF SYSTEM UNDER TEST	17
4. TEST TYPES AND RESULTS	19
4.1 CONDUCTED EMISSION MEASUREMENT	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	19
4.1.2 TEST INSTRUMENTS	19
4.1.3 TEST PROCEDURES	20
4.1.4 DEVIATION FROM TEST STANDARD	20
4.1.5 TEST SETUP	20
4.1.6 EUT OPERATING CONDITIONS	21
4.1.7 TEST RESULTS	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	24
4.2.2 TEST INSTRUMENTS	25
4.2.3 TEST PROCEDURES	26
4.2.4 DEVIATION FROM TEST STANDARD	26
4.2.5 TEST SETUP	27
4.2.6 EUT OPERATING CONDITIONS	27
4.2.7 TEST RESULTS	28
4.3 6dB BANDWIDTH MEASUREMENT	41
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	41
4.3.2 TEST INSTRUMENTS	41
4.3.3 TEST PROCEDURE	41
4.3.4 DEVIATION FROM TEST STANDARD	41
4.3.5 TEST SETUP	41
4.3.6 EUT OPERATING CONDITIONS	41
4.3.7 TEST RESULTS	42
4.4 CONDUCTED OUTPUT POWER MEASUREMENT	44
4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	44
4.4.2 INSTRUMENTS.....	44
4.4.3 TEST PROCEDURES	44
4.4.4 DEVIATION FROM TEST STANDARD	44
4.4.5 TEST SETUP	44
4.4.6 EUT OPERATING CONDITIONS	44
4.4.7 TEST RESULTS	45
4.5 AVERAGE OUTPUT POWER	46
4.5.1 FOR REFERENCE.....	46
4.5.2 TEST INSTRUMENTS	46
4.5.3 TEST PROCEDURES	46
4.5.4 TEST SETUP	46



A D T

4.5.5	EUT OPERATING CONDITIONS	46
4.5.6	TEST RESULTS	47
4.6	POWER SPECTRAL DENSITY MEASUREMENT	48
4.6.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	48
4.6.2	TEST INSTRUMENTS	48
4.6.3	TEST PROCEDURE	48
4.6.4	DEVIATION FROM TEST STANDARD	48
4.6.5	TEST SETUP	48
4.6.6	EUT OPERATING CONDITION	48
4.6.7	TEST RESULTS	49
4.7	CONDUCTED OUT-BAND EMISSION MEASUREMENT	51
4.7.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	51
4.7.2	TEST INSTRUMENTS	51
4.7.3	TEST PROCEDURE	51
4.7.4	DEVIATION FROM TEST STANDARD	52
4.7.5	TEST SETUP	52
4.7.6	EUT OPERATING CONDITION	52
4.7.7	TEST RESULTS	52
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	57
6.	INFORMATION ON THE TESTING LABORATORIES	58
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	59



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF131112E09	Original release	Dec. 16, 2013



1. CERTIFICATION

PRODUCT: Zigbee Gateway
BRAND NAME: Metalligence Technology Corporation
MODEL NO.: SLE111GW
TEST SAMPLE: MASS-PRODUCTION
APPLICANT: Metalligence Technology Corp.
TESTED: Nov. 27 to Dec. 09, 2013
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: SLE111GW) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Dec. 16, 2013
(Lori Chung, Specialist)

APPROVED BY :  , **DATE:** Dec. 16, 2013
(May Chen, Manager)



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.78dB at 16.16797MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.2dB at 4874.00MHz & 4924.00MHz & 2390.00MHz & 2483.50MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is RP SMA not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.43 dB
Radiated emissions (1GHz -6GHz)	3.72 dB
Radiated emissions (6GHz -18GHz)	4.00 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT (WLAN)

PRODUCT	Zigbee Gateway
MODEL NO.	SLE111GW
POWER SUPPLY	DC 12V from power adapter or DC 11.1V from battery
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n: up to 150Mbps
OPERATING FREQUENCY	2.412 ~ 2.462GHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
MAXIMUM OUTPUT POWER	802.11b: 82.035mW 802.11g: 179.473mW 802.11n (HT20): 177.419mW 802.11n (HT40): 47.643mW
ANTENNA TYPE	Please see NOTE
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x1

NOTE:

1. The EUT is a WLAN and Zigbee device.
2. The EUT could be supplied with a power adapter or a battery as the following table:

Item	Brand	Model No.	Spec.
Power adapter	APD	WA-24E12FU	AC I/P: 100-240V, 50-60Hz, 0.65A DC O/P: 12V, 2A DC output cable (unshielded, 1.6m)
Battery	WANSGLOORY CO., LTD	F-O-001061-ZS	DC 11.1V, 2200mA

3. The EUT incorporates a SISO function.

MODULATION MODE	TX/RX FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX
802.11n (HT40)	1TX/1RX

4. The antennas provided to the EUT, please refer to the following table:

WLAN								
Brand	Model	Antenna Type	Gain (dBi) (Exclude cable loss)	Cable Loss (dB)	Net Gain (dBi)	Connector Type	Cable Length (mm)	Frequency range (GHz to GHz)
Accton	120G00000053A	Dipole	2.43	0.9	1.53	RP SMA	275	2.412 ~ 2.4835
Zigbee								
Brand	Model	Antenna Type	Gain (dBi) (Exclude cable loss)	Cable Loss (dB)	Net Gain (dBi)	Connector Type	Cable Length (mm)	Frequency range (GHz to GHz)
Accton	120G00000053A	Dipole	2.43	0.5	1.93	RP SMA	130	2.400 ~ 2.4835

5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 7.
6. Spurious emission of the simultaneous operation (WLAN & Zigbee) has been evaluated and no non-compliance was found.
7. The EUT was pre-tested in chamber under the following modes:

Pre-test Mode	Description
Mode A	Adapter mode
Mode B	Battery mode

From the above modes, the radiated emissions worst case was found in **Mode B**. Therefore only the test data of the mode was recorded in this report.

8. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

11 channels are provided for 802.11b, 802.11g, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	-	√	√	√	√	Battery Mode
-	√	-	-	-	-	Adapter Mode

Where **PLC**: Power Line Conducted Emission

RE < 1G: Radiated Emission below 1GHz

RE ≥ 1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

OB: Conducted Out-Band Emission Measurement

NOTE: 1. "-" means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	6	OFDM	BPSK	6

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 54%RH	120Vac, 60Hz	Bear Lee
RE<1G	23deg. C, 65%RH	11.1Vdc from battery	Andy Ho
RE≥1G	22deg. C, 70%RH	11.1Vdc from battery	Tim Ho
APCM	25deg. C, 60%RH	11.1Vdc from battery	Robert Cheng
OB	25deg. C, 60%RH	11.1Vdc from battery	Robert Cheng

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance v03r01

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DUTY CYCLE OF TEST SIGNAL

If duty cycle of test signal is > 98 %, duty factor is not required.


If duty cycle of test signal is < 98%, duty factor shall be considered.

802.11b: Duty cycle = 8.185 ms/8.24 ms = 0.993

802.11g: Duty cycle = 1.359 ms/1.41 ms = 0.964, Duty factor = $10 * \log(1/0.964) = 0.2$

802.11n (HT20): Duty cycle = 1.267 ms/1.322 ms = 0.958, Duty factor = $10 * \log(1/0.958) = 0.2$

802.11n (HT40): Duty cycle = 0.631 ms/0.67 ms = 0.942, Duty factor = $10 * \log(1/0.942) = 0.3$

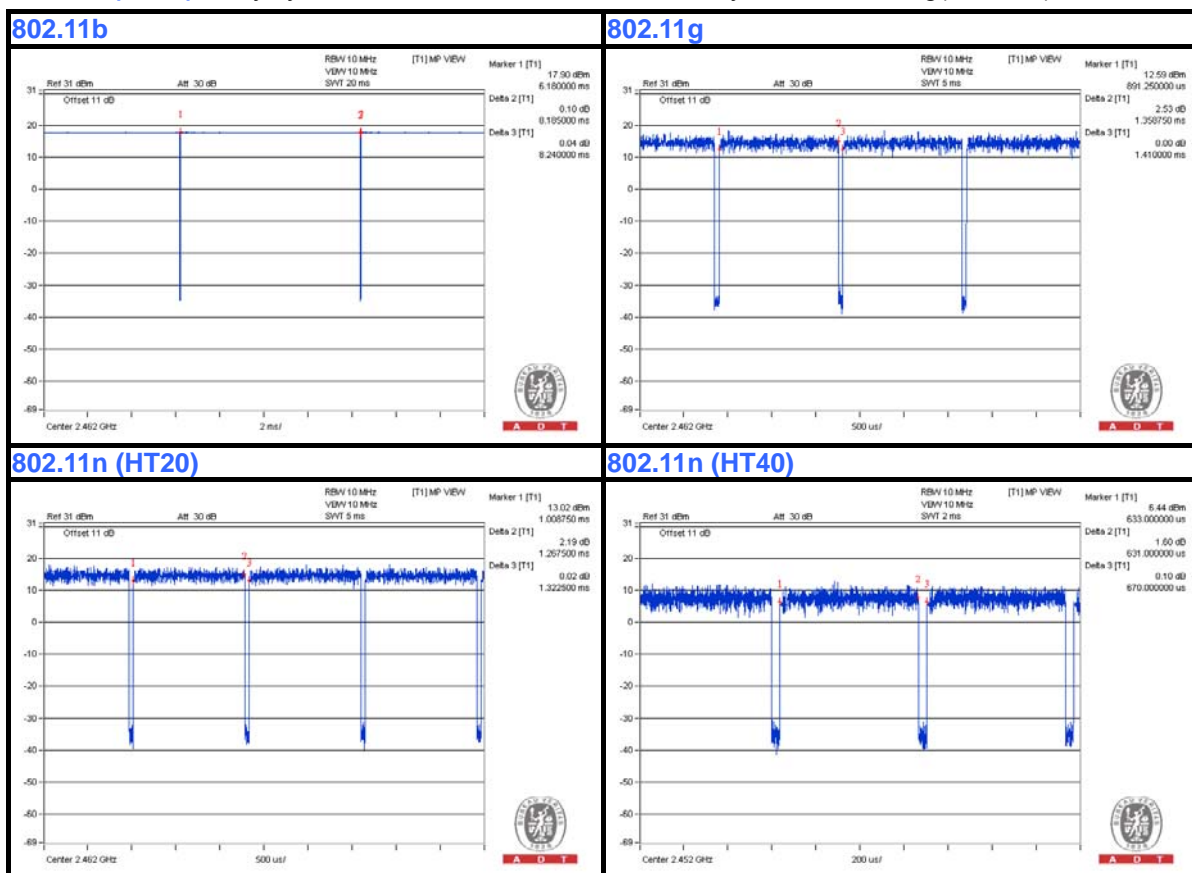



A D T

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
3	USB HDD	TDK	32G	NA	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)
2	UTP cable (10m)
3	NA


NOTE: All power cords of the above support units are non shielded (1.8m).

3.6 CONFIGURATION OF SYSTEM UNDER TEST

For conducted emissions test:

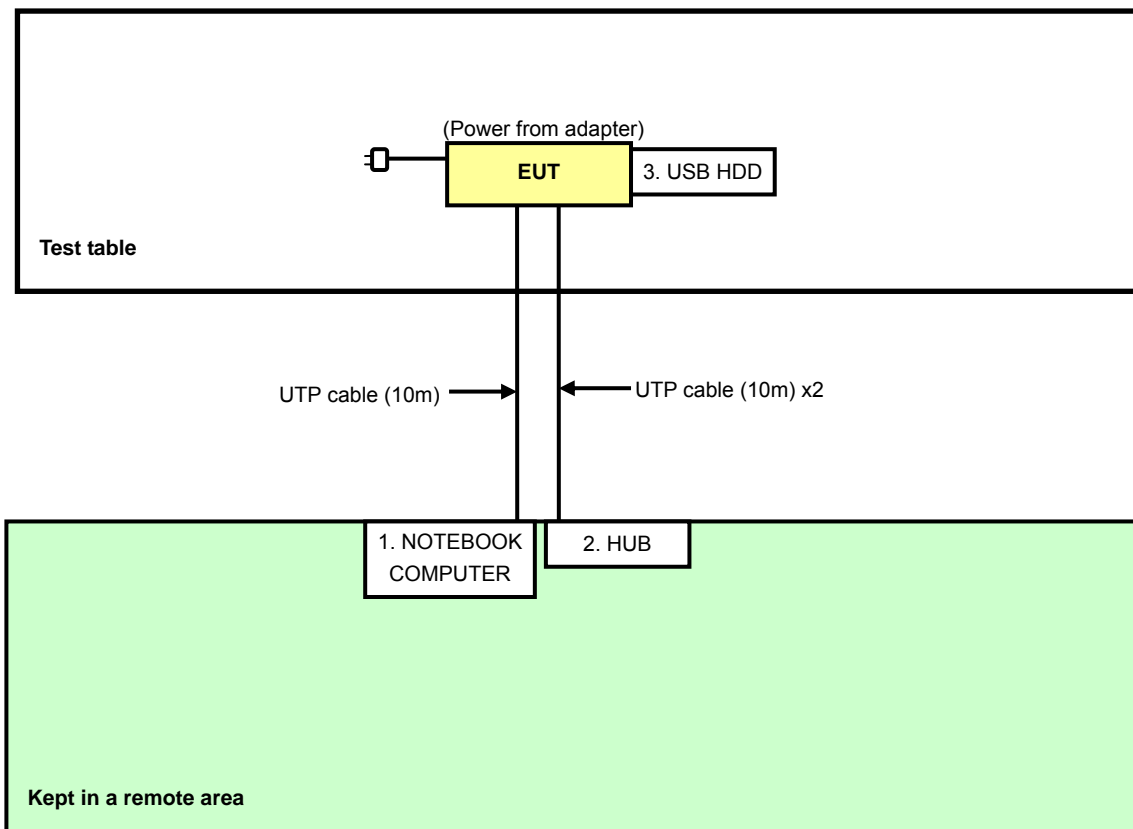

For other test items:

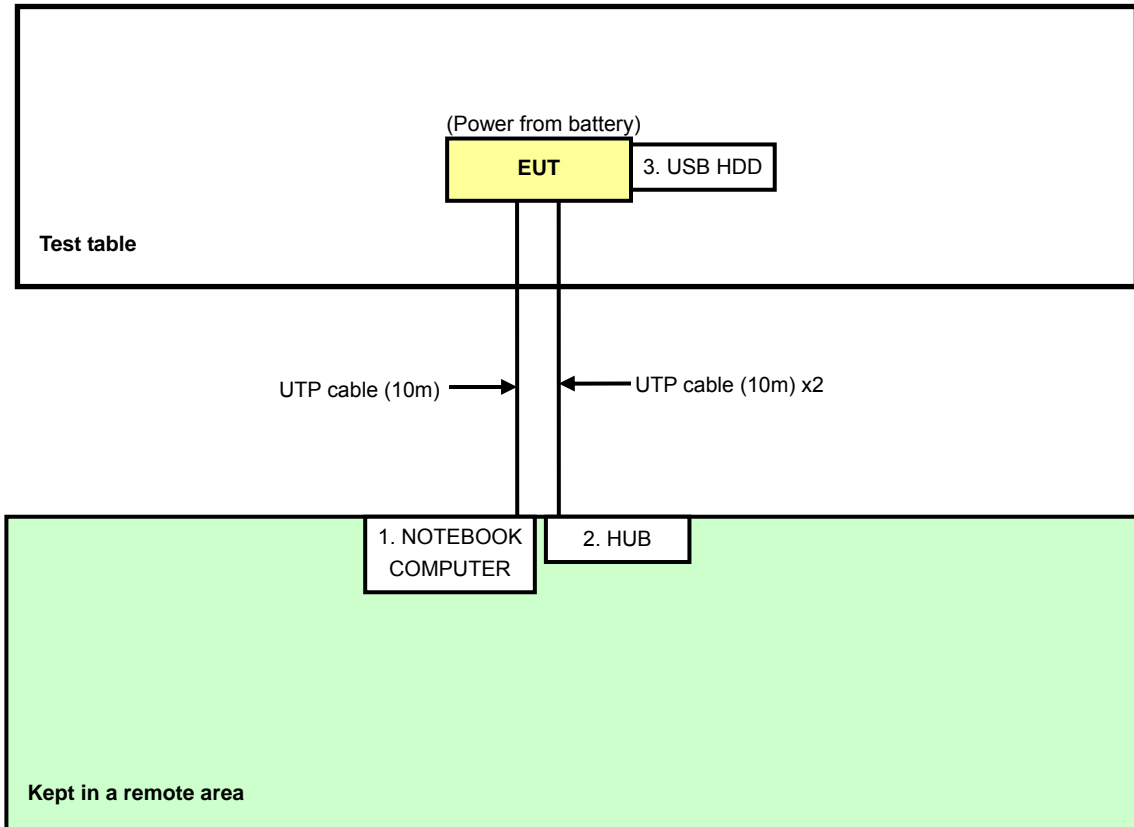



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Mar. 08, 2013	Mar. 07, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 05, 2013	Sep. 04, 2014
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 06, 2013	June 05, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 11, 2013	Mar. 10, 2014
50 ohms Terminator	50	EMC-03	Sep. 24, 2013	Sep. 23, 2014
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: Dec. 09, 2013

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE:

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

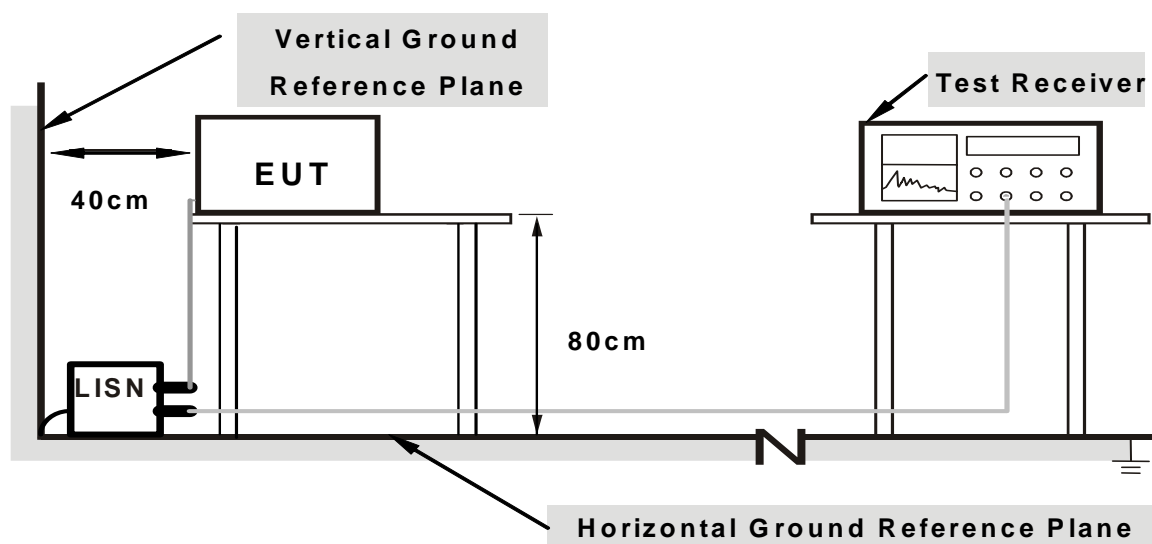

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

1. Placed the EUT on testing table.
2. Prepared computer system (support unit 1) to act as communication partners.
3. The communication partner ran test program “artgui.exe[Ver 2 23] and telnet [SLE111GW config.txt]” to enable EUT under transmission/receiving condition continuously.


4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.09	50.73	40.85	50.82	40.94	66.00	56.00	-15.18	-15.06
2	0.20469	0.11	42.75	31.80	42.86	31.91	63.42	53.42	-20.56	-21.51
3	0.46641	0.16	37.52	33.19	37.68	33.35	56.58	46.58	-18.89	-13.22
4	1.90234	0.26	26.34	19.90	26.60	20.16	56.00	46.00	-29.40	-25.84
5	9.93750	0.71	27.72	26.44	28.43	27.15	60.00	50.00	-31.57	-22.85
6	16.23047	0.99	40.24	39.49	41.23	40.48	60.00	50.00	-18.77	-9.52

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

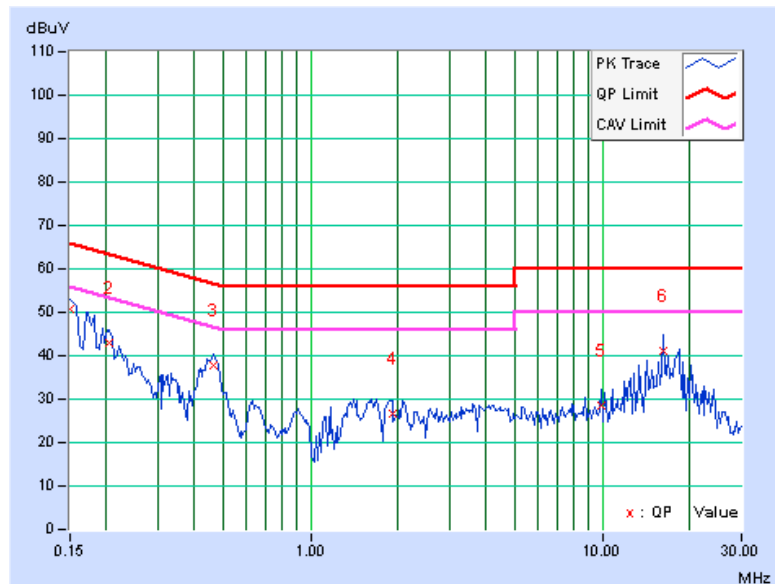


PHASE	Neutral (N)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	0.10	50.14	39.73	50.24	39.83	66.00	56.00	-15.76	-16.17
2	0.19687	0.11	42.26	29.84	42.37	29.95	63.74	53.74	-21.37	-23.79
3	0.45469	0.16	36.14	30.07	36.30	30.23	56.79	46.79	-20.49	-16.56
4	1.29688	0.21	27.35	22.01	27.56	22.22	56.00	46.00	-28.44	-23.78
5	8.71484	0.62	27.65	25.08	28.27	25.70	60.00	50.00	-31.73	-24.30
6	16.16797	0.97	40.43	40.25	41.40	41.22	60.00	50.00	-18.60	-8.78

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

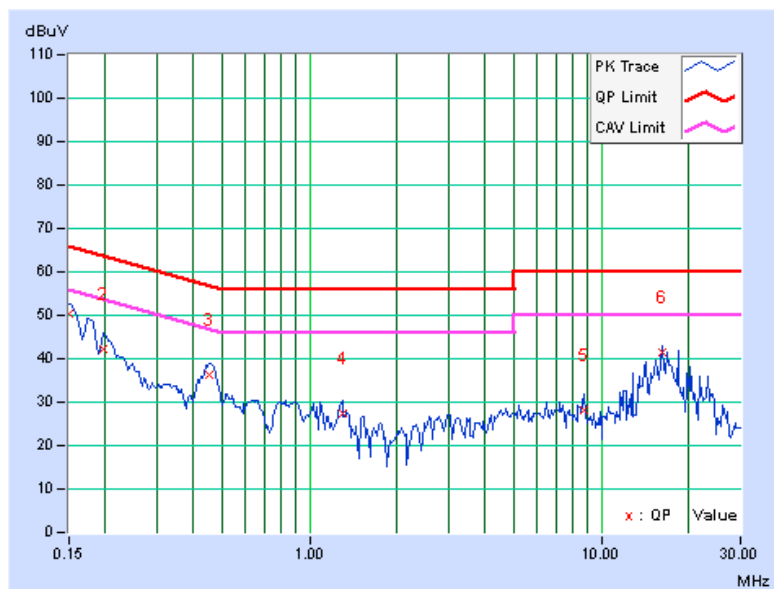

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB.



A D T

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
MXE EMI Receiver Agilent	N9038A	MY50010156	Jan. 16, 2013	Jan. 15, 2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-04	Nov. 13, 2013	Nov. 12, 2014
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Mar. 25, 2013	Mar. 24, 2014
RF Cable	NA	CHHCAB_001	Oct. 06, 2013	Oct. 05, 2014
Spectrum Analyzer R&S	FSV40	100964	Jul. 15, 2013	Jul. 14, 2014
Horn_Antenna AISl	AIH.8018	0000220091110	Nov. 26, 2013	Nov. 25, 2014
Pre-Amplifier Agilent	8449B	3008A01923	Oct. 29, 2013	Oct. 28, 2014
RF Cable	NA	RF104-205 RF104-207 RF104-202	Dec. 26, 2012	Dec. 25, 2013
Spectrum Analyzer Agilent	E4446A	MY48250253	Aug. 28, 2013	Aug. 27, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 13, 2013	Nov. 12, 2014
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 08, 2013	Oct. 07, 2014
Software	ADT_Radiated _V8.7.07	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: Nov. 27, 2013

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

<Frequency Range below 1GHz>

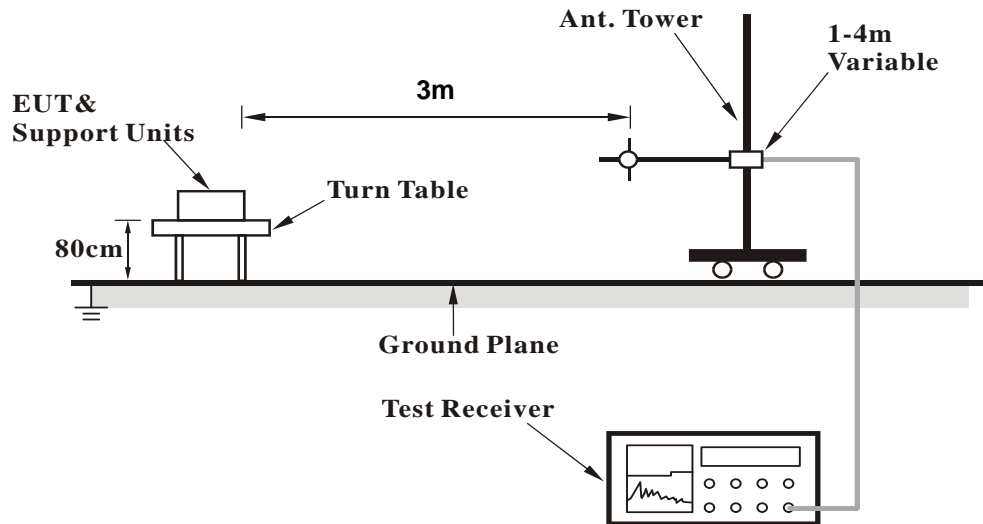

<Frequency Range above 1GHz>

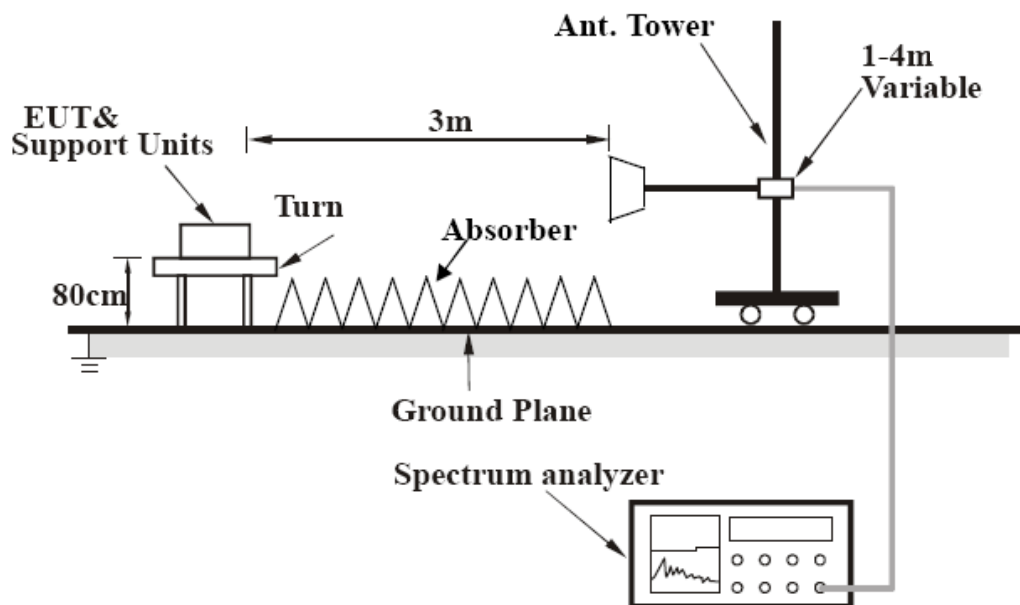

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11g

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	Below 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	56.82	29.5 QP	40.0	-10.5	1.50 H	0	42.76	-13.27
2	120.00	42.9 QP	43.5	-0.6	1.51 H	84	57.53	-14.60
3	240.01	37.6 QP	46.0	-8.4	1.00 H	346	51.49	-13.89
4	480.03	43.4 QP	46.0	-2.6	2.00 H	231	50.80	-7.39
5	675.00	35.7 QP	46.0	-10.3	1.00 H	360	39.20	-3.54
6	960.00	44.7 QP	46.0	-1.3	1.42 H	267	42.95	1.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	36.11	32.4 QP	40.0	-7.6	1.00 V	239	45.62	-13.22
2	120.01	42.3 QP	43.5	-1.2	1.01 V	313	56.93	-14.60
3	416.74	33.9 QP	46.0	-12.2	1.00 V	268	42.72	-8.87
4	480.03	40.2 QP	46.0	-5.8	1.00 V	26	47.62	-7.39
5	675.00	36.5 QP	46.0	-9.6	1.50 V	355	39.99	-3.54
6	960.04	50.4 QP	54.0	-3.6	1.00 V	165	48.67	1.74

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	53.3 PK	74.0	-20.7	1.00 H	24	19.77	33.53
2	2390.00	47.6 AV	54.0	-6.4	1.00 H	24	14.07	33.53
3	*2412.00	103.7 PK			1.00 H	24	70.11	33.59
4	*2412.00	100.4 AV			1.00 H	24	66.81	33.59
5	4824.00	55.1 PK	74.0	-18.9	1.61 H	223	11.92	43.18
6	4824.00	49.4 AV	54.0	-4.6	1.61 H	223	6.22	43.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.73 V	176	24.07	33.53
2	2390.00	52.3 AV	54.0	-1.7	1.73 V	176	18.77	33.53
3	*2412.00	107.1 PK			1.73 V	176	73.51	33.59
4	*2412.00	104.3 AV			1.73 V	176	70.71	33.59
5	4824.00	56.9 PK	74.0	-17.1	1.54 V	300	13.72	43.18
6	4824.00	53.5 AV	54.0	-0.5	1.54 V	300	10.32	43.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	48.0 PK	74.0	-26.0	1.00 H	21	14.47	33.53
2	2390.00	35.1 AV	54.0	-18.9	1.00 H	21	1.57	33.53
3	*2437.00	101.1 PK			1.00 H	21	67.43	33.67
4	*2437.00	98.3 AV			1.00 H	21	64.63	33.67
5	2483.50	48.2 PK	74.0	-25.8	1.00 H	21	14.39	33.81
6	2483.50	34.7 AV	54.0	-19.3	1.00 H	21	0.89	33.81
7	4874.00	55.3 PK	74.0	-18.7	1.66 H	207	12.06	43.24
8	4874.00	49.6 AV	54.0	-4.4	1.66 H	207	6.36	43.24
9	7311.00	57.7 PK	74.0	-16.3	1.73 H	205	9.63	48.07
10	7311.00	47.8 AV	54.0	-6.2	1.73 H	205	-0.27	48.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.1 PK	74.0	-24.9	1.10 V	272	15.57	33.53
2	2390.00	36.6 AV	54.0	-17.4	1.10 V	272	3.07	33.53
3	*2437.00	106.5 PK			1.10 V	272	72.83	33.67
4	*2437.00	103.9 AV			1.10 V	272	70.23	33.67
5	2483.50	49.9 PK	74.0	-24.1	1.10 V	272	16.09	33.81
6	2483.50	37.0 AV	54.0	-17.0	1.10 V	272	3.19	33.81
7	4874.00	56.6 PK	74.0	-17.4	1.97 V	286	13.36	43.24
8	4874.00	53.8 AV	54.0	-0.2	1.97 V	286	10.56	43.24
9	7311.00	58.5 PK	74.0	-15.5	1.16 V	151	10.43	48.07
10	7311.00	49.0 AV	54.0	-5.0	1.16 V	151	0.93	48.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.4 PK			1.07 H	187	66.66	33.74
2	*2462.00	97.7 AV			1.07 H	187	63.96	33.74
3	2483.50	52.0 PK	74.0	-22.0	1.07 H	187	18.19	33.81
4	2483.50	42.7 AV	54.0	-11.3	1.07 H	187	8.89	33.81
5	4924.00	54.6 PK	74.0	-19.4	1.63 H	212	11.33	43.27
6	4924.00	49.1 AV	54.0	-4.9	1.63 H	212	5.83	43.27
7	7386.00	57.3 PK	74.0	-16.7	1.79 H	200	8.90	48.40
8	7386.00	47.6 AV	54.0	-6.4	1.79 H	200	-0.80	48.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.9 PK			1.10 V	272	72.16	33.74
2	*2462.00	103.4 AV			1.10 V	272	69.66	33.74
3	2483.50	54.7 PK	74.0	-19.3	1.10 V	272	20.89	33.81
4	2483.50	47.2 AV	54.0	-6.8	1.10 V	272	13.39	33.81
5	4924.00	57.6 PK	74.0	-16.4	1.75 V	230	14.33	43.27
6	4924.00	53.8 AV	54.0	-0.2	1.75 V	230	10.53	43.27
7	7386.00	58.8 PK	74.0	-15.2	1.16 V	154	10.40	48.40
8	7386.00	49.3 AV	54.0	-4.7	1.16 V	154	0.90	48.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.00 H	22	38.00	33.50
2	2390.00	50.3 AV	54.0	-3.7	1.00 H	22	16.80	33.50
3	*2412.00	104.0 PK			1.00 H	22	70.40	33.60
4	*2412.00	92.4 AV			1.00 H	22	58.80	33.60
5	4824.00	56.3 PK	74.0	-17.7	1.92 H	234	13.20	43.10
6	4824.00	42.3 AV	54.0	-11.7	1.92 H	234	-0.80	43.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.7 PK	74.0	-0.3	1.40 V	170	40.17	33.53
2	2390.00	53.8 AV	54.0	-0.2	1.40 V	170	20.27	33.53
3	*2412.00	106.7 PK			1.40 V	170	73.11	33.59
4	*2412.00	94.7 AV			1.40 V	170	61.11	33.59
5	4824.00	59.3 PK	74.0	-14.7	1.61 V	256	16.12	43.18
6	4824.00	45.9 AV	54.0	-8.1	1.61 V	256	2.72	43.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.0 PK	74.0	-12.0	1.00 H	22	28.50	33.50
2	2390.00	41.6 AV	54.0	-12.4	1.00 H	22	8.10	33.50
3	*2437.00	106.6 PK			1.00 H	22	72.90	33.70
4	*2437.00	95.7 AV			1.00 H	22	62.00	33.70
5	2483.50	63.4 PK	74.0	-10.6	1.00 H	22	29.60	33.80
6	2483.50	42.0 AV	54.0	-12.0	1.00 H	22	8.20	33.80
7	4874.00	55.9 PK	74.0	-18.1	1.88 H	223	12.70	43.20
8	4874.00	42.0 AV	54.0	-12.0	1.88 H	223	-1.20	43.20
9	7311.00	61.0 PK	74.0	-13.0	1.29 H	303	12.90	48.10
10	7311.00	47.1 AV	54.0	-6.9	1.29 H	303	-1.00	48.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.39 V	171	35.17	33.53
2	2390.00	47.5 AV	54.0	-6.5	1.39 V	171	13.97	33.53
3	*2437.00	109.4 PK			1.39 V	171	75.73	33.67
4	*2437.00	100.1 AV			1.39 V	171	66.43	33.67
5	2483.50	73.2 PK	74.0	-0.8	1.39 V	171	39.39	33.81
6	2483.50	53.8 AV	54.0	-0.2	1.39 V	171	19.99	33.81
7	4874.00	59.3 PK	74.0	-14.7	1.66 V	265	16.06	43.24
8	4874.00	46.0 AV	54.0	-8.0	1.66 V	265	2.76	43.24
9	7311.00	62.8 PK	74.0	-11.2	1.00 V	214	14.73	48.07
10	7311.00	48.8 AV	54.0	-5.2	1.00 V	214	0.73	48.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.5 PK			1.00 H	22	64.80	33.70
2	*2462.00	87.9 AV			1.00 H	22	54.20	33.70
3	2483.50	64.4 PK	74.0	-9.6	1.00 H	22	30.60	33.80
4	2483.50	44.8 AV	54.0	-9.2	1.00 H	22	11.00	33.80
5	4924.00	56.4 PK	74.0	-17.6	1.91 H	225	13.10	43.30
6	4924.00	42.3 AV	54.0	-11.7	1.91 H	225	-1.00	43.30
7	7386.00	60.5 PK	74.0	-13.5	1.33 H	314	12.10	48.40
8	7386.00	46.6 AV	54.0	-7.4	1.33 H	314	-1.80	48.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.2 PK			1.39 V	170	71.46	33.74
2	*2462.00	93.7 AV			1.39 V	170	59.96	33.74
3	2483.50	73.5 PK	74.0	-0.5	1.39 V	170	39.69	33.81
4	2483.50	53.0 AV	54.0	-1.0	1.39 V	170	19.19	33.81
5	4924.00	59.1 PK	74.0	-14.9	1.68 V	271	15.83	43.27
6	4924.00	46.0 AV	54.0	-8.0	1.68 V	271	2.73	43.27
7	7386.00	62.3 PK	74.0	-11.7	1.00 V	200	13.90	48.40
8	7386.00	48.6 AV	54.0	-5.4	1.00 V	200	0.20	48.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.4 PK	74.0	-2.6	1.00 H	25	37.90	33.50
2	2390.00	50.9 AV	54.0	-3.1	1.00 H	25	17.40	33.50
3	*2412.00	101.5 PK			1.00 H	25	67.90	33.60
4	*2412.00	91.2 AV			1.00 H	25	57.60	33.60
5	4824.00	55.1 PK	74.0	-18.9	1.82 H	233	12.00	43.10
6	4824.00	41.9 AV	54.0	-12.1	1.82 H	233	-1.20	43.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.1 PK	74.0	-1.9	1.41 V	169	38.57	33.53
2	2390.00	53.8 AV	54.0	-0.2	1.41 V	169	20.27	33.53
3	*2412.00	105.3 PK			1.41 V	169	71.71	33.59
4	*2412.00	93.9 AV			1.41 V	169	60.31	33.59
5	4824.00	58.6 PK	74.0	-15.4	1.18 V	275	15.42	43.18
6	4824.00	44.6 AV	54.0	-9.4	1.18 V	275	1.42	43.18

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	1.00 H	25	34.70	33.50
2	2390.00	45.5 AV	54.0	-8.5	1.00 H	25	12.00	33.50
3	*2437.00	106.7 PK			1.00 H	25	73.00	33.70
4	*2437.00	95.3 AV			1.00 H	25	61.60	33.70
5	2483.50	67.4 PK	74.0	-6.6	1.00 H	25	33.60	33.80
6	2483.50	44.1 AV	54.0	-9.9	1.00 H	25	10.30	33.80
7	4874.00	55.0 PK	74.0	-19.0	1.80 H	224	11.80	43.20
8	4874.00	42.0 AV	54.0	-12.0	1.80 H	224	-1.20	43.20
9	7311.00	61.2 PK	74.0	-12.8	1.68 H	35	13.10	48.10
10	7311.00	47.1 AV	54.0	-6.9	1.68 H	35	-1.00	48.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.1 PK	74.0	-0.9	1.38 V	171	39.57	33.53
2	2390.00	50.8 AV	54.0	-3.2	1.38 V	171	17.27	33.53
3	*2437.00	109.7 PK			1.38 V	170	76.03	33.67
4	*2437.00	100.0 AV			1.38 V	170	66.33	33.67
5	2483.50	73.6 PK	74.0	-0.4	1.38 V	171	39.79	33.81
6	2483.50	53.8 AV	54.0	-0.2	1.38 V	171	19.99	33.81
7	4874.00	58.7 PK	74.0	-15.3	1.22 V	268	15.46	43.24
8	4874.00	44.7 AV	54.0	-9.3	1.22 V	268	1.46	43.24
9	7311.00	62.5 PK	74.0	-11.5	1.00 V	215	14.43	48.07
10	7311.00	48.9 AV	54.0	-5.1	1.00 V	215	0.83	48.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	100.0 PK			1.00 H	22	66.30	33.70
2	*2462.00	88.4 AV			1.00 H	22	54.70	33.70
3	2483.50	70.3 PK	74.0	-3.7	1.00 H	22	36.50	33.80
4	2483.50	50.9 AV	54.0	-3.1	1.00 H	22	17.10	33.80
5	4924.00	54.7 PK	74.0	-19.3	1.85 H	236	11.40	43.30
6	4924.00	41.6 AV	54.0	-12.4	1.85 H	236	-1.70	43.30
7	7386.00	61.1 PK	74.0	-12.9	1.63 H	48	12.70	48.40
8	7386.00	46.8 AV	54.0	-7.2	1.63 H	48	-1.60	48.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.0 PK			1.38 V	170	71.26	33.74
2	*2462.00	93.3 AV			1.38 V	170	59.56	33.74
3	2483.50	73.0 PK	74.0	-1.0	1.38 V	170	39.19	33.81
4	2483.50	53.8 AV	54.0	-0.2	1.38 V	170	19.99	33.81
5	4924.00	58.7 PK	74.0	-15.3	1.17 V	257	15.43	43.27
6	4924.00	44.8 AV	54.0	-9.2	1.17 V	257	1.53	43.27
7	7386.00	62.7 PK	74.0	-11.3	1.05 V	218	14.30	48.40
8	7386.00	49.1 AV	54.0	-4.9	1.05 V	218	0.70	48.40

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.00 H	25	33.40	33.50
2	2390.00	48.5 AV	54.0	-5.5	1.00 H	25	15.00	33.50
3	*2422.00	96.0 PK			1.00 H	25	62.40	33.60
4	*2422.00	83.8 AV			1.00 H	25	50.20	33.60
5	4844.00	46.5 PK	74.0	-27.5	1.00 H	115	3.30	43.20
6	4844.00	34.5 AV	54.0	-19.5	1.00 H	115	-8.70	43.20
7	7266.00	53.7 PK	74.0	-20.3	1.06 H	209	5.80	47.90
8	7266.00	40.2 AV	54.0	-13.8	1.06 H	209	-7.70	47.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	1.39 V	169	38.27	33.53
2	2390.00	53.6 AV	54.0	-0.4	1.39 V	169	20.07	33.53
3	*2422.00	100.5 PK			1.39 V	169	66.88	33.62
4	*2422.00	88.6 AV			1.39 V	169	54.98	33.62
5	4844.00	47.8 PK	74.0	-26.2	1.01 V	103	4.60	43.20
6	4844.00	34.2 AV	54.0	-19.8	1.01 V	103	-9.00	43.20
7	7266.00	54.7 PK	74.0	-19.3	1.04 V	190	6.79	47.91
8	7266.00	40.7 AV	54.0	-13.3	1.04 V	190	-7.21	47.91

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.5 PK	74.0	-10.5	1.00 H	21	30.00	33.50
2	2390.00	45.6 AV	54.0	-8.4	1.00 H	21	12.10	33.50
3	*2437.00	97.0 PK			1.00 H	21	63.30	33.70
4	*2437.00	85.4 AV			1.00 H	21	51.70	33.70
5	2483.50	63.7 PK	74.0	-10.3	1.00 H	21	29.90	33.80
6	2483.50	45.7 AV	54.0	-8.3	1.00 H	21	11.90	33.80
7	4874.00	46.0 PK	74.0	-28.0	1.00 H	115	2.80	43.20
8	4874.00	34.3 AV	54.0	-19.7	1.00 H	115	-8.90	43.20
9	7311.00	53.9 PK	74.0	-20.1	1.00 H	221	5.80	48.10
10	7311.00	40.4 AV	54.0	-13.6	1.00 H	221	-7.70	48.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.2 PK	74.0	-3.8	1.39 V	169	36.67	33.53
2	2390.00	49.6 AV	54.0	-4.4	1.39 V	169	16.07	33.53
3	*2437.00	102.9 PK			1.39 V	169	69.23	33.67
4	*2437.00	90.1 AV			1.39 V	169	56.43	33.67
5	2483.50	71.2 PK	74.0	-2.8	1.39 V	169	37.39	33.81
6	2483.50	53.4 AV	54.0	-0.6	1.39 V	169	19.59	33.81
7	4874.00	47.3 PK	74.0	-26.7	1.00 V	102	4.06	43.24
8	4874.00	33.9 AV	54.0	-20.1	1.00 V	102	-9.34	43.24
9	7311.00	54.5 PK	74.0	-19.5	1.00 V	205	6.43	48.07
10	7311.00	40.7 AV	54.0	-13.3	1.00 V	205	-7.37	48.07

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.7 PK			1.00 H	21	60.00	33.70
2	*2452.00	82.1 AV			1.00 H	21	48.40	33.70
3	2483.50	63.3 PK	74.0	-10.7	1.00 H	21	29.50	33.80
4	2483.50	44.6 AV	54.0	-9.4	1.00 H	21	10.80	33.80
5	4904.00	45.9 PK	74.0	-28.1	1.00 H	121	2.60	43.30
6	4904.00	34.1 AV	54.0	-19.9	1.00 H	121	-9.20	43.30
7	7356.00	53.1 PK	74.0	-20.9	1.05 H	209	4.80	48.30
8	7356.00	39.9 AV	54.0	-14.1	1.05 H	209	-8.40	48.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	98.7 PK			1.40 V	170	64.99	33.71
2	*2452.00	86.9 AV			1.40 V	170	53.19	33.71
3	2483.50	69.3 PK	74.0	-4.7	1.40 V	170	35.49	33.81
4	2483.50	53.4 AV	54.0	-0.6	1.40 V	170	19.59	33.81
5	4904.00	47.4 PK	74.0	-26.6	1.00 V	97	4.13	43.27
6	4904.00	34.0 AV	54.0	-20.0	1.00 V	97	-9.27	43.27
7	7356.00	54.5 PK	74.0	-19.5	1.00 V	210	6.23	48.27
8	7356.00	40.9 AV	54.0	-13.1	1.00 V	210	-7.37	48.27

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 06, 2013


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.11	0.5	PASS
6	2437	10.14	0.5	PASS
11	2462	10.14	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.35	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.39	0.5	PASS

802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.60	0.5	PASS
6	2437	17.32	0.5	PASS
11	2462	17.61	0.5	PASS

802.11n (HT40)


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.11	0.5	PASS
6	2437	36.05	0.5	PASS
9	2452	36.18	0.5	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH1

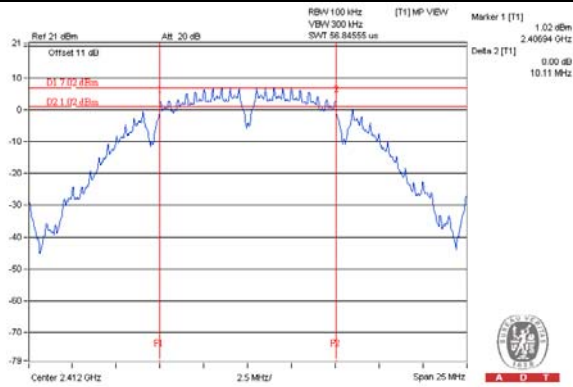


802.11g / CH1

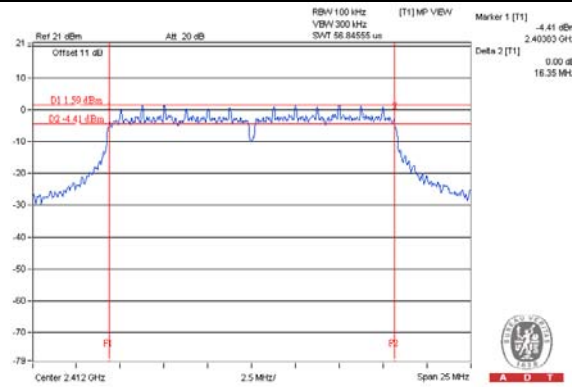

802.11n (HT20) / CH6

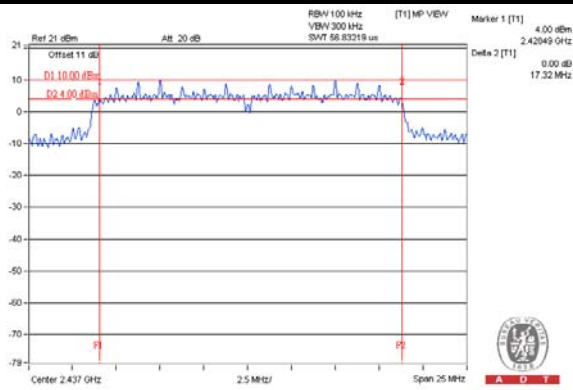

802.11n (HT40) / CH6

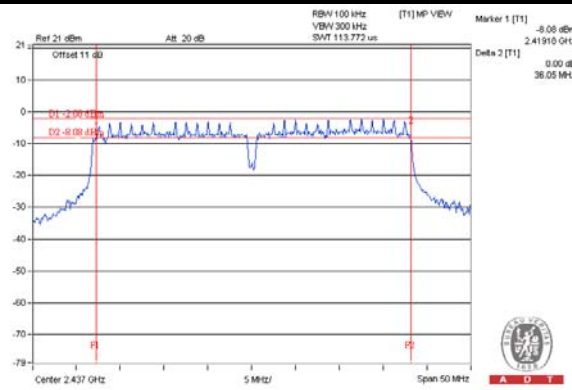

4.4 CONDUCTED OUTPUT POWER MEASUREMENT

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 20, 2013	May 19, 2014
Power Sensor	MA2411B	0738172	May 20, 2013	May 19, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 06, 2013


4.4.3 TEST PROCEDURES

The peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

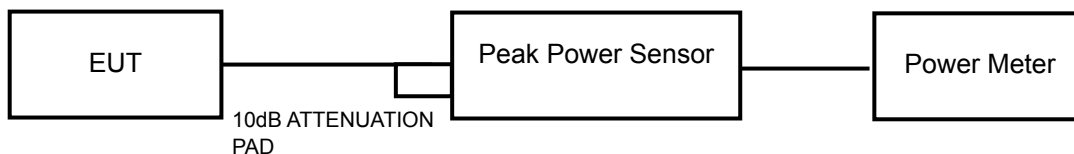

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.4.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	82.035	19.14	30	PASS
6	2437	70.632	18.49	30	PASS
11	2462	65.766	18.18	30	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	84.723	19.28	30	PASS
6	2437	179.473	22.54	30	PASS
11	2462	60.814	17.84	30	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
1	2412	70.146	18.46	30	PASS
6	2437	177.419	22.49	30	PASS
11	2462	62.087	17.93	30	PASS

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	PEAK POWER (mW)	PEAK POWER (dBm)	LIMIT (dBm)	PASS/FAIL
3	2422	31.117	14.93	30	PASS
6	2437	47.643	16.78	30	PASS
9	2452	26.182	14.18	30	PASS

4.5 AVERAGE OUTPUT POWER

4.5.1 FOR REFERENCE.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power Meter	ML2495A	0824006	May 20, 2013	May 19, 2014
Power Sensor	MA2411B	0738172	May 20, 2013	May 19, 2014


Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 06, 2013

4.5.3 TEST PROCEDURES

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.5.4 TEST SETUP

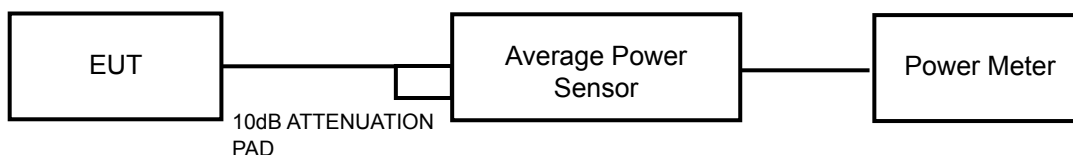

4.5.5 EUT OPERATING CONDITIONS

Same as Item 4.3.6



A D T

4.5.6 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	56.364	17.51
6	2437	48.306	16.84
11	2462	44.978	16.53

802.11g

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	26.122	14.17
6	2437	82.414	19.16
11	2462	17.100	12.33

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
1	2412	23.335	13.68
6	2437	82.985	19.19
11	2462	17.418	12.41

802.11n (HT40)

CHANNEL	FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)
3	2422	10.375	10.16
6	2437	17.258	12.37
9	2452	8.492	9.29

4.6 POWER SPECTRAL DENSITY MEASUREMENT

4.6.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 06, 2013


4.6.3 TEST PROCEDURE

1. Set the RBW = 30 kHz, VBW =100 kHz, Detector = power averaging (RMS).
2. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW
3. Sweep time = auto couple,
4. Employ trace averaging (RMS) mode over a minimum of 100 traces.
5. Use the peak marker function to determine the maximum amplitude level.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6



A D T

4.6.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-7.74	8	PASS
6	2437	-7.38	8	PASS
11	2462	-7.72	8	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-11.78	8	PASS
6	2437	-5.82	8	PASS
11	2462	-12.39	8	PASS

802.11n (HT20)

CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
1	2412	-12.71	8	PASS
6	2437	-4.58	8	PASS
11	2462	-12.83	8	PASS

802.11n (HT40)


CHANNEL	FREQUENCY (MHz)	PSD (dBm)	LIMIT (dBm)	PASS /FAIL
3	2422	-17.56	8	PASS
6	2437	-14.37	8	PASS
9	2452	-17.80	8	PASS




A D T

SPECTRUM PLOT OF WORST VALUE


802.11b / CH6

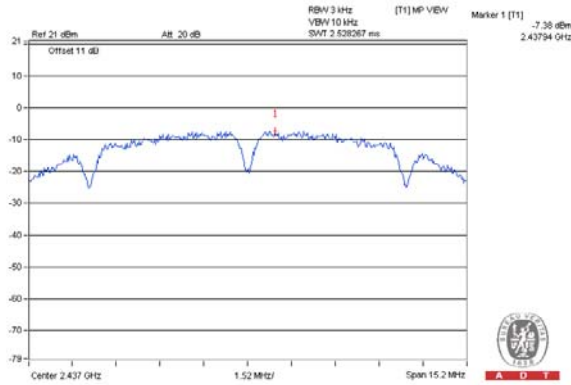


802.11g / CH6

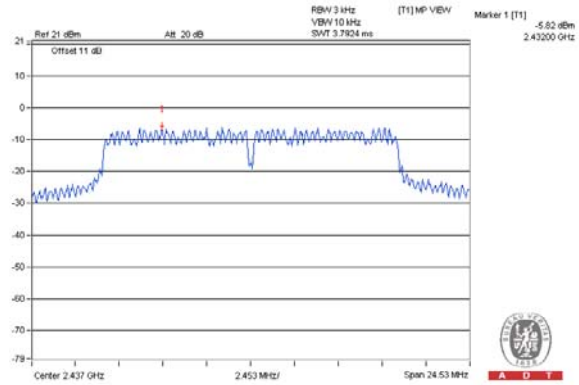

802.11n (HT20) / CH6

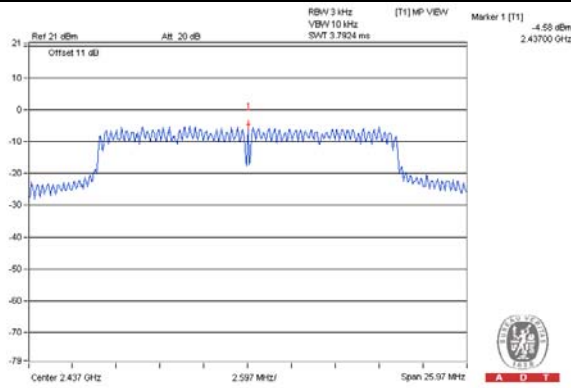

802.11n (HT40) / CH6

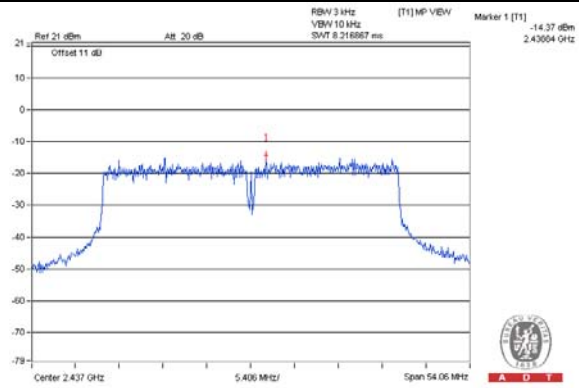

4.7 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.7.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100036	Jan. 21, 2013	Jan. 20, 2014

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Dec. 06, 2013

4.7.3 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

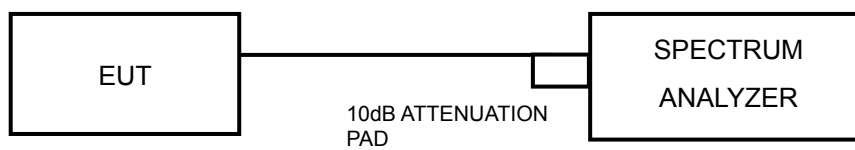

4.7.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.7.7 TEST RESULTS



The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

802.11b



CH 1

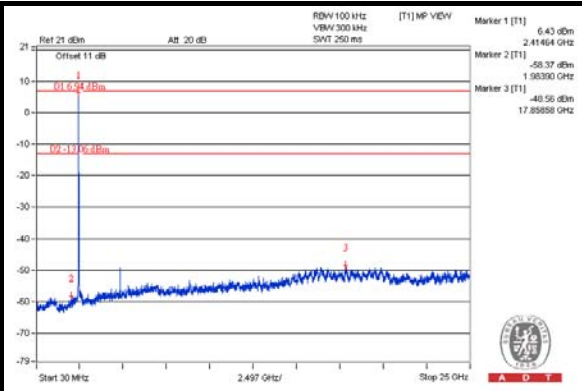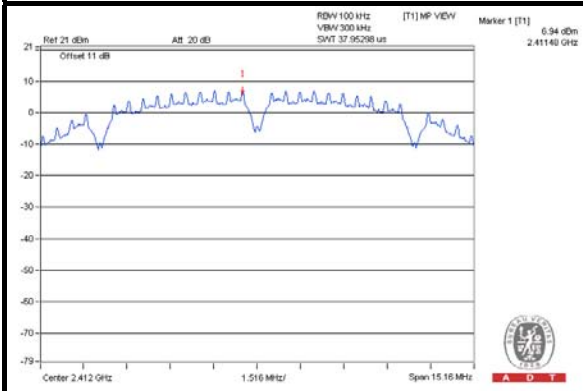


CH 6

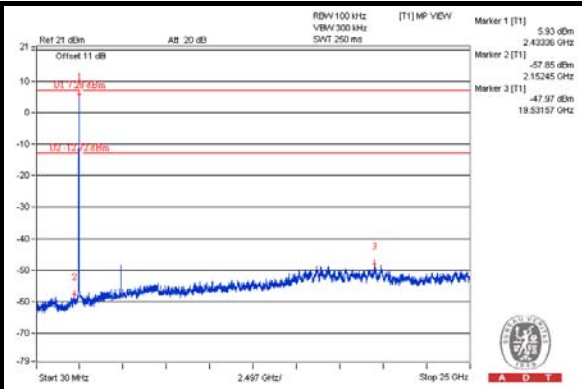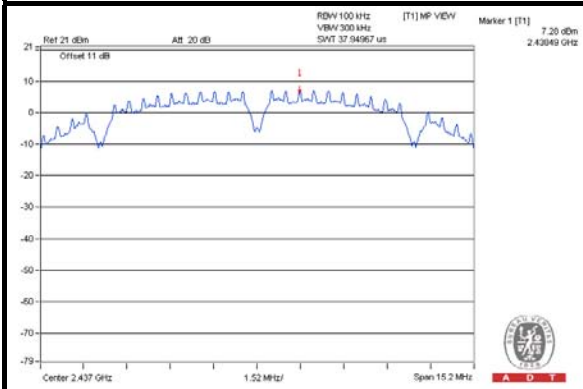


CH 11

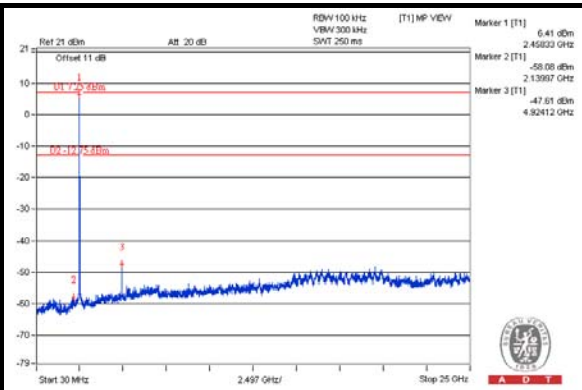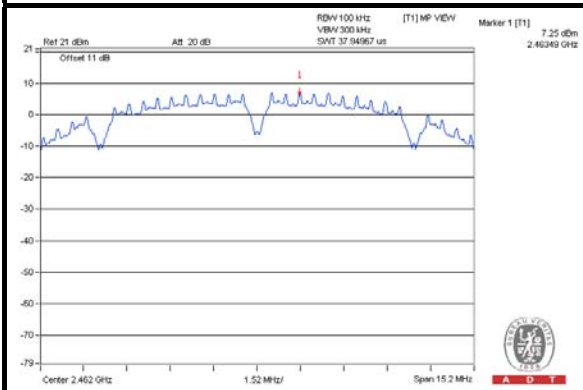

CH 1 Band edge

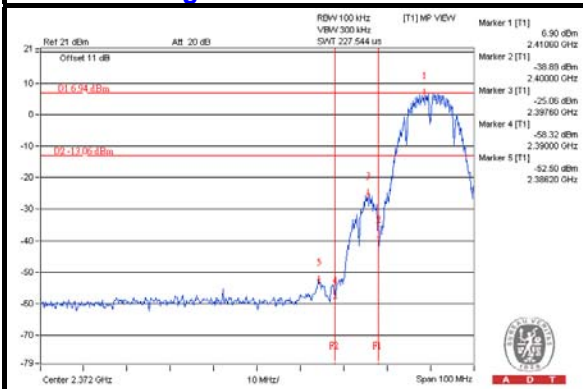

CH 11 Band edge


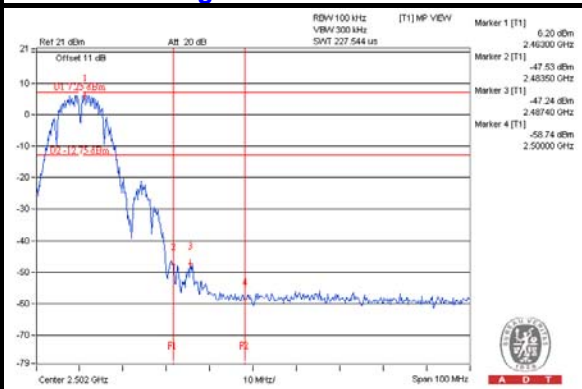






A D T

802.11g:



CH 1

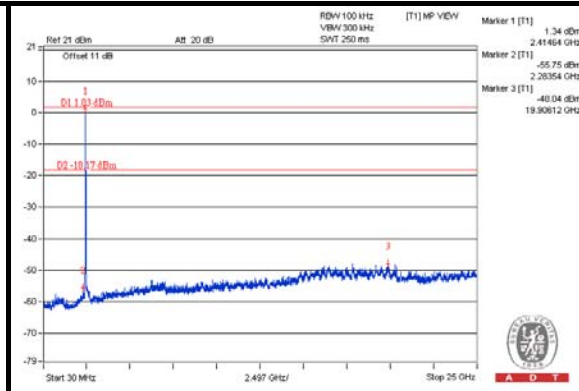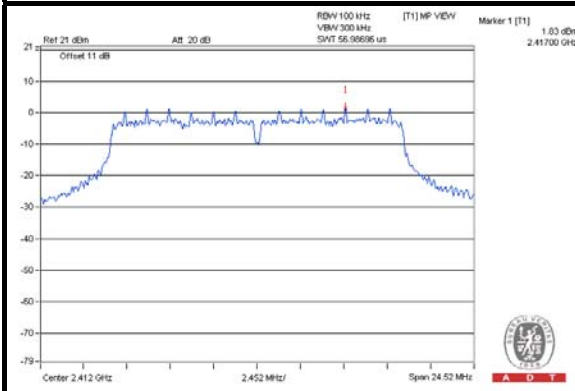


CH 6

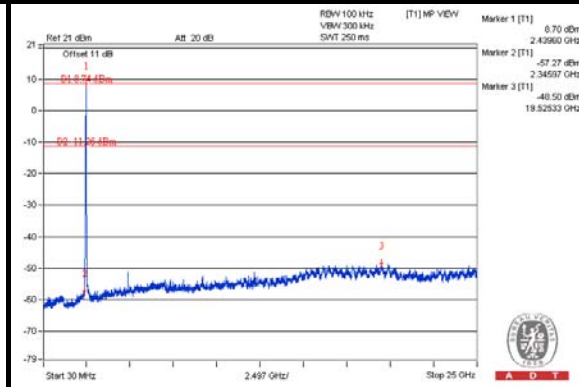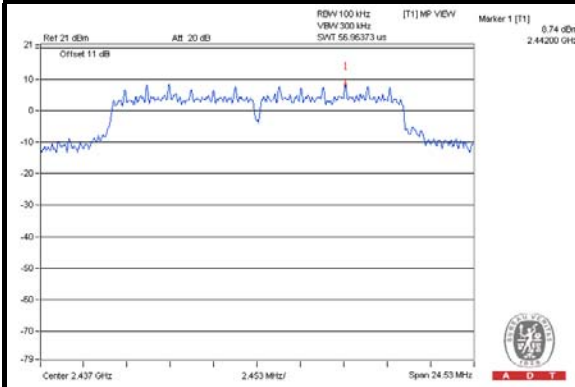


CH 11

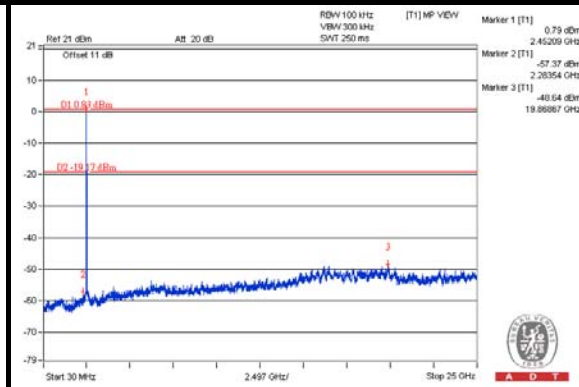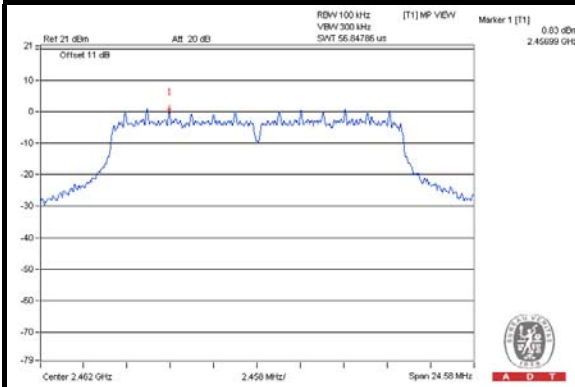

CH 1 Band edge

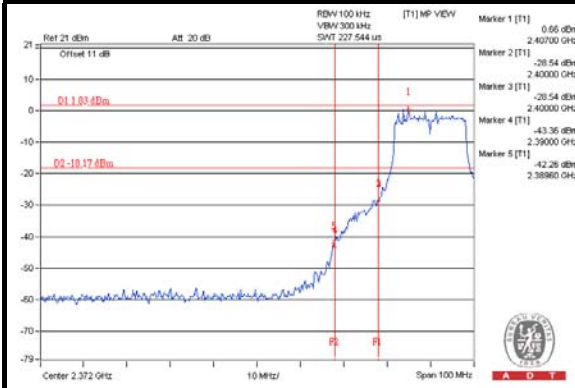

CH 11 Band edge


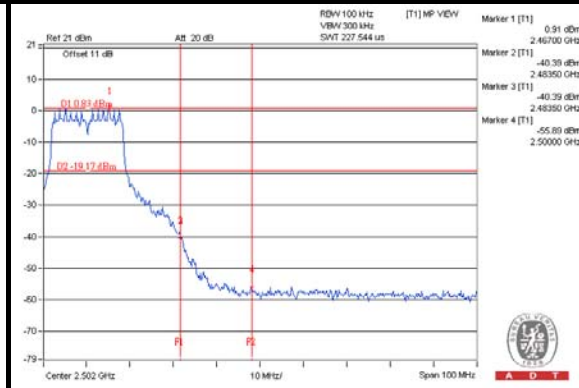






A D T

802.11n (HT20):



CH 1

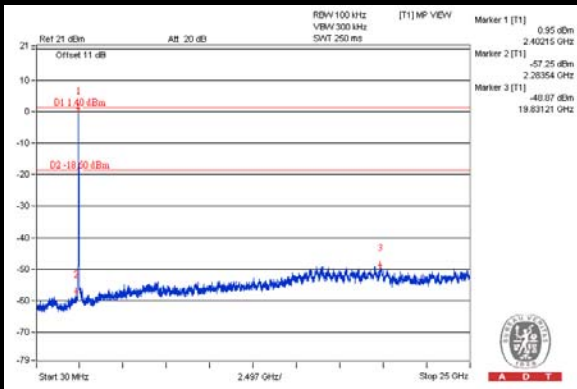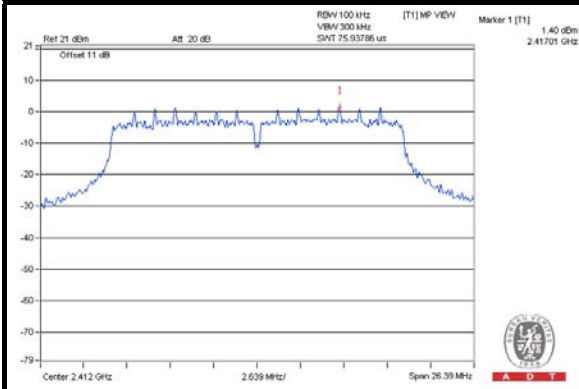


CH 6

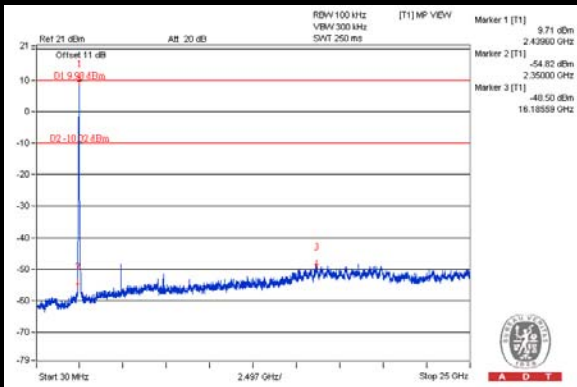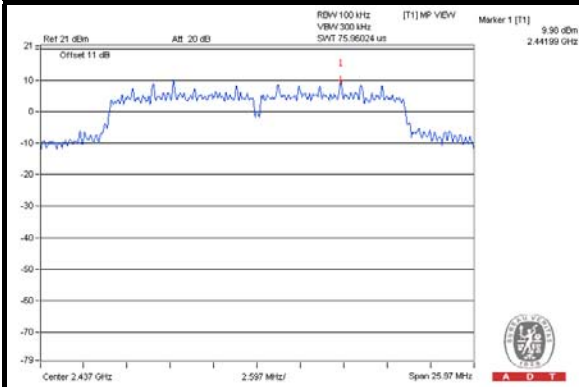


CH 11

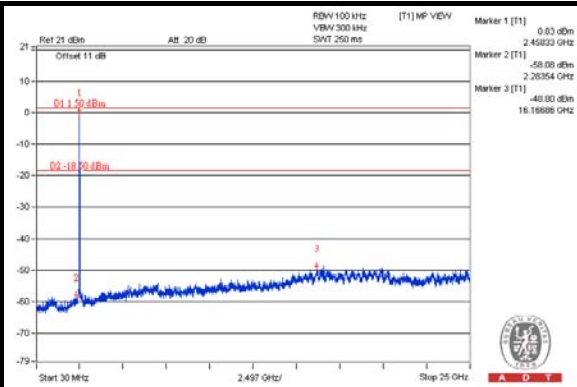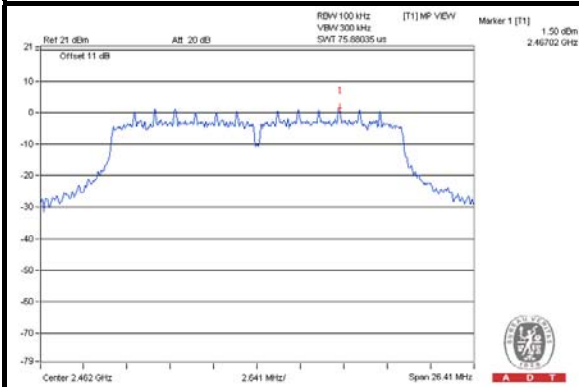

CH 1 Band edge

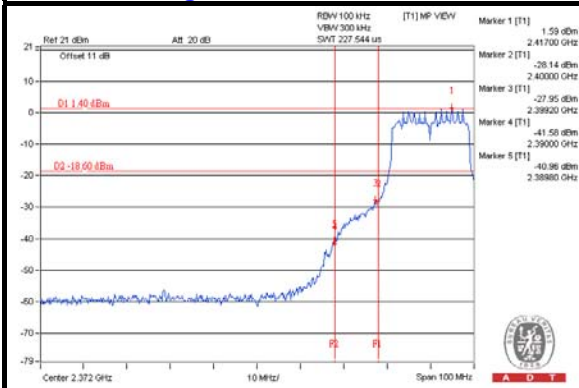

CH 11 Band edge


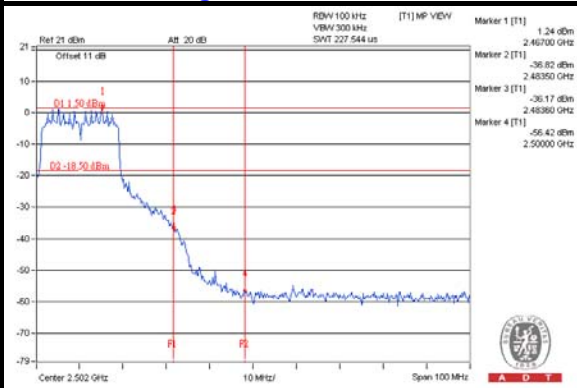






A D T

802.11n (HT40):



CH 3

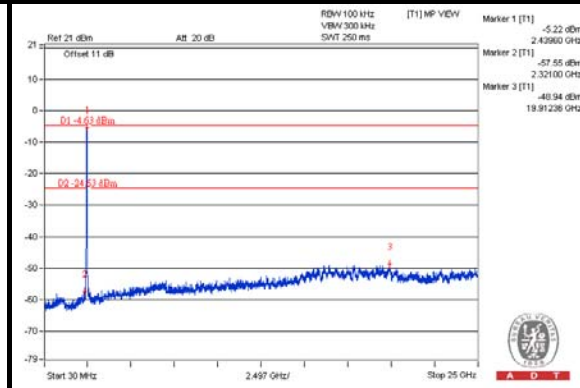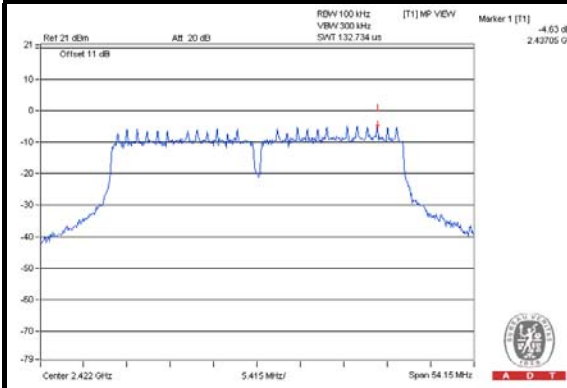


CH 6

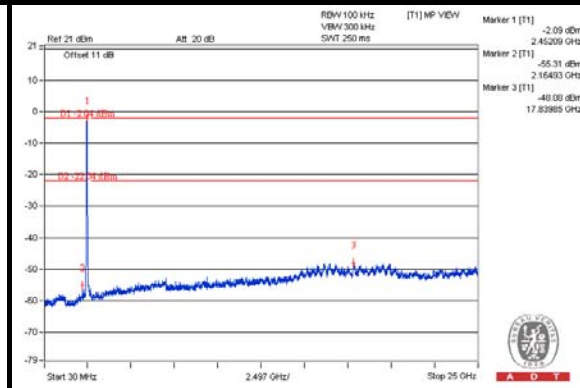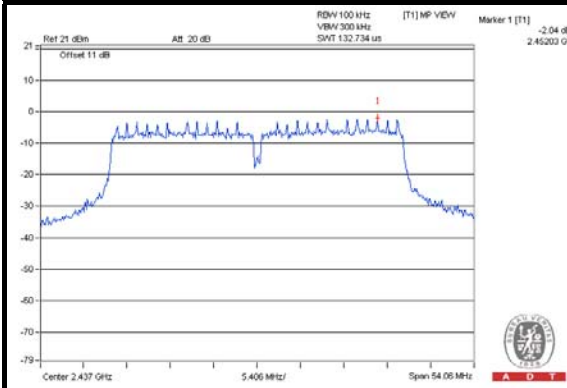


CH 9

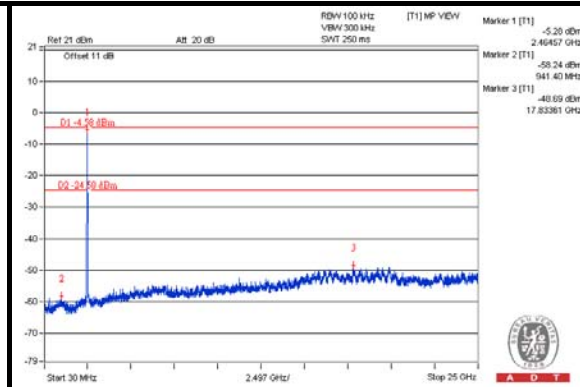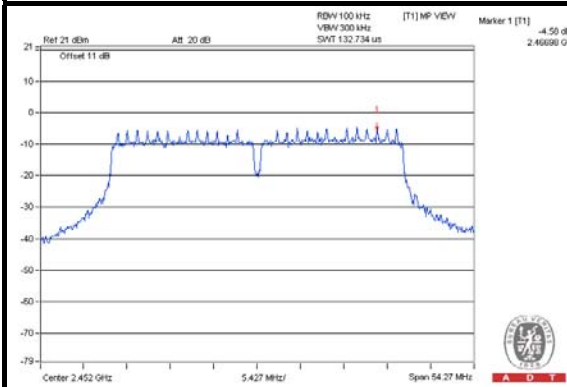

CH 3 Band edge

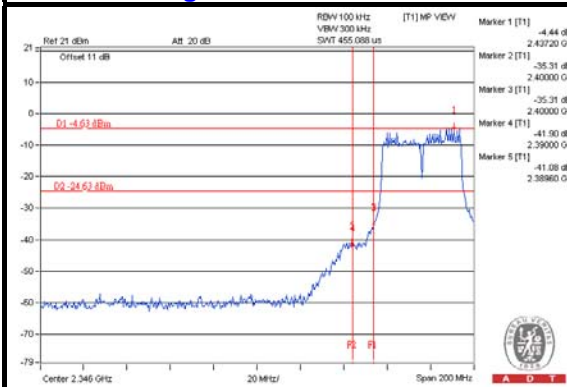

CH 9 Band edge

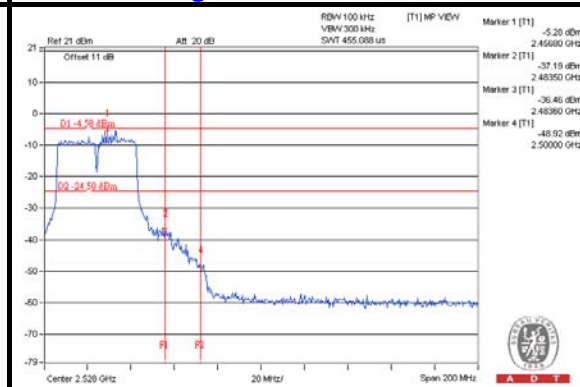

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---