



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>



Dates of Tests: March 2 ~ 9, 2007
 Test Report S/N: LR500190703C
 Test Site : LTA CO., LTD.

CERTIFICATIO OF COMPLIANCE

FCC ID.	RUSHPS
APPLICANT	HandyWave Co., Ltd.

FCC Classification	:	FHSS Sequence Spread Spectrum (FHSS)
Manufacturing Description	:	Wireless Serial Transceiver
Manufacturer	:	HandyWave Co., Ltd.
Model name	:	HPS
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003
Frequency Range	:	2402 ~ 2480MHz
RF power	:	12.42dBm - Conducted
Data of issue	:	March 12, 2007

This test report is issued under the authority of:

The test was supervised by:

 Dong -Min JUNG, Technical Manager

 Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 CARRIER FREQUENCY SEPARATION	6
3.2.2 NUMBER OF HOPPING FREQUENCIES	8
3.2.3 20 dB BANDWIDTH	13
3.2.4 TIME OF OCCUPANCY (Dwell Time)	16
3.2.5 TRANSMITTER OUTPUT POWER	19
3.2.6 BAND – EDGE (Conducted)	22
3.2.7 BAND - EDGE (Radiated)	36
3.2.8 FIELD STRENGTH OF HARMONICS	45
3.2.9 AC CONDUCTED EMISSIONS	48
APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	53

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2007-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2007-07-13	EMC accredited Lab.
FCC	U.S.A	610755	2008-03-28	FCC filing
VCCI	JAPAN	R2133, C2307	2008-06-22	VCCI registration
IC	CANADA	IC5799	2008-04-23	IC filing

2. Information's about test item

2-1 Client & Manufacturer

Company name : HandyWave Co., Ltd.
 Address : 202-4 Yatap-dong, Bundang-gu, Seongnam City,
 Kyunggi Province, 463-070, Korea
 TEL / FAX : +82-31-709-8900/ +82-31-708-9455

2-2 Equipment Under Test (EUT)

Trade name : Wireless Serial Transceiver
 FCC ID : RUSHPS
 Model name : HPS
 Serial number : Identical prototype
 Date of receipt : February 15, 2007
 EUT condition : Pre-production, not damaged
 Antenna type : Dipole Antenna Max Gain 2.0dBi (Left-handed SMA Connector)
 Frequency Range : 2402 ~ 2480MHz
 RF output power : 12.42 dBm - Conducted
 Number of channels : 79
 Duty cycle : 78.2 %
 Channel spacing : 1MHz
 Channel Access Protocol : Frequency Hopping
 Type of Modulation : GFSK
 Power Source : 5 ~ 30VDC by Main system

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
Notebook	Latitude D505	8N29F1S	DELL
-	-	-	-

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth	< 1 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.247(d)	Band Edge	< 54 dBuV (at 3m)	Radiated	C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)		C
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Carrier Frequency Separation

Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz (1% of the span or more) Sweep = auto

VBW = 30 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results		
Power	Carrier Frequency Separation (MHz)	Result
DC5V	1.013	Complies
DC30V	0.997	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup



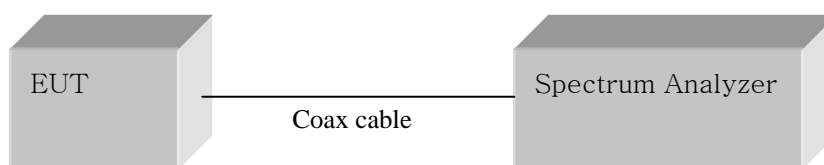


Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation – DC5V

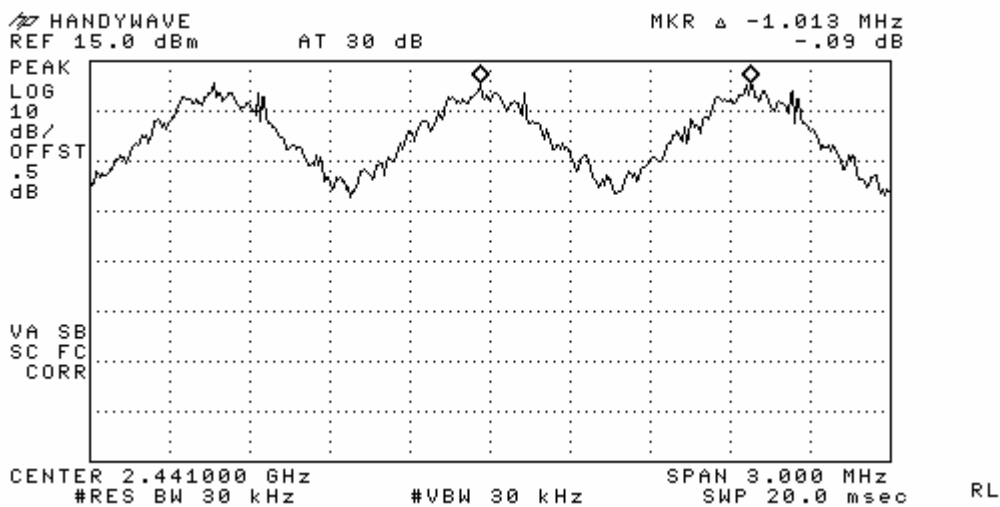

Carrier Frequency Separation – DC30V

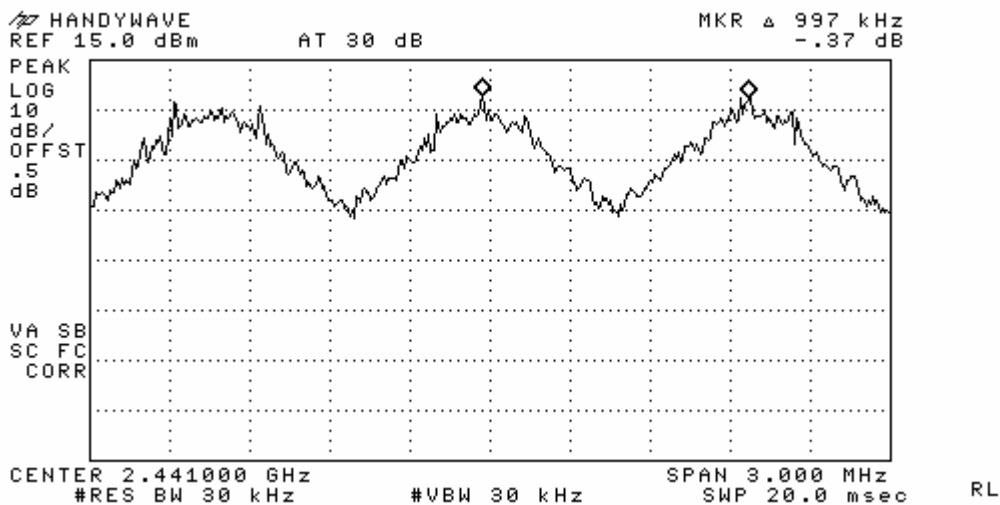

3.2.2 Number of Hopping Frequencies

Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5MHz, Stop = 2414.5 MHz

2: Start = 2414.5MHz, Stop = 2439.5 MHz

3: Start = 2439.5MHz, Stop = 2464.5 MHz

4: Start = 2464.5MHz, Stop = 2489.5 MHz

RBW = 300 kHz (1% of the span or more) Sweep = auto

VBW = 300 kHz (VBW \geq RBW) Detector function = peak

Trace = max hold Span = 25MHz

Measurement Data: Complies

Total number of Hopping Channels	DC5V	79
	DC30V	79

- See next pages for actual measured spectrum plots.



Minimum Standard:

At least 15 hops



Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)



Number of Hopping Frequencies – DC5V

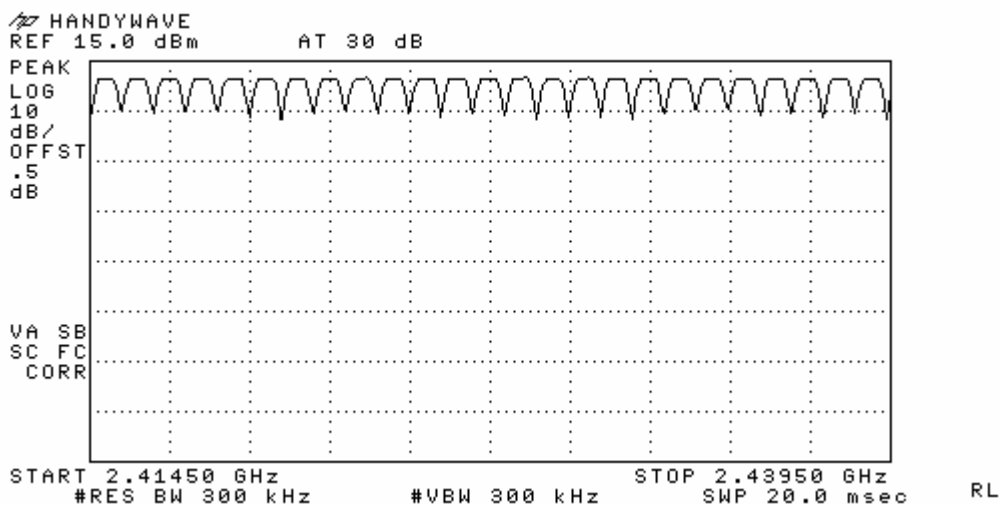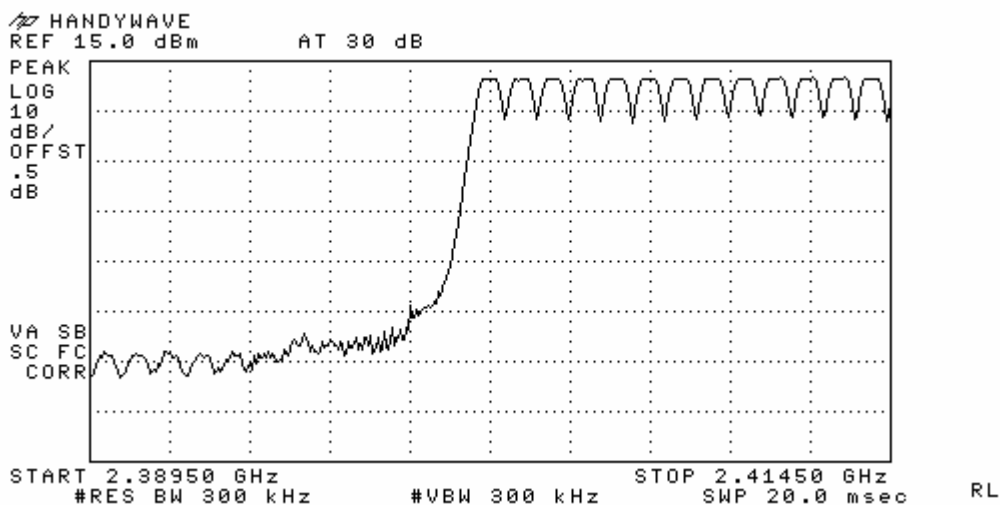



Number of Hopping Frequencies – DC5V

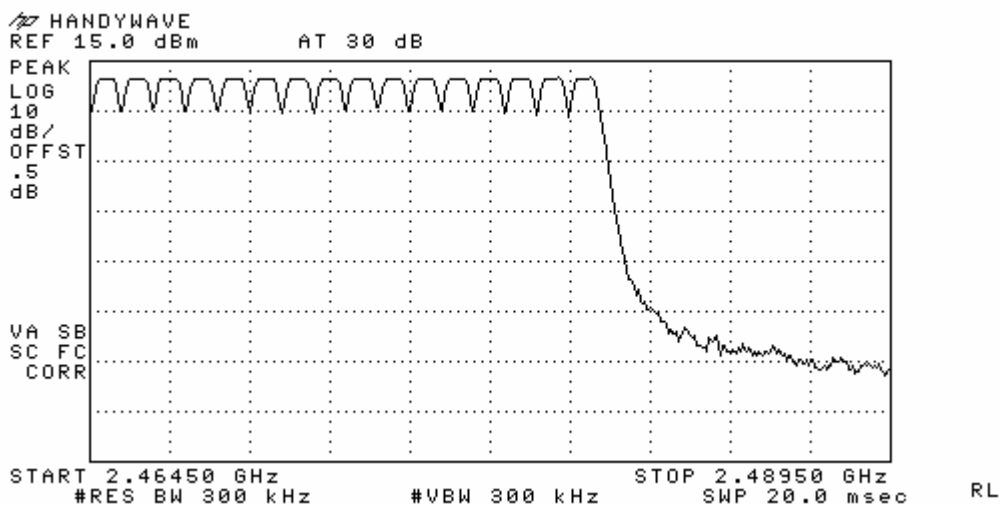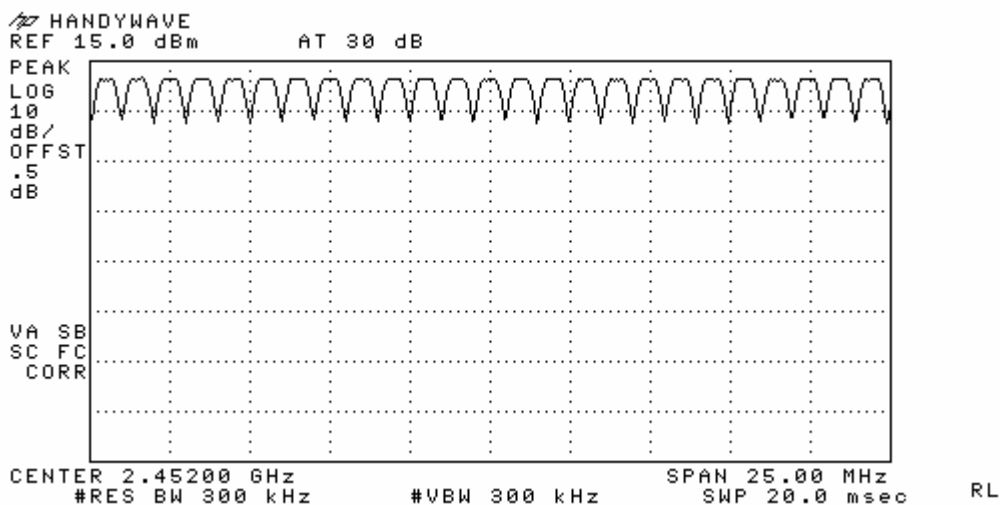

Number of Hopping Frequencies – DC30V

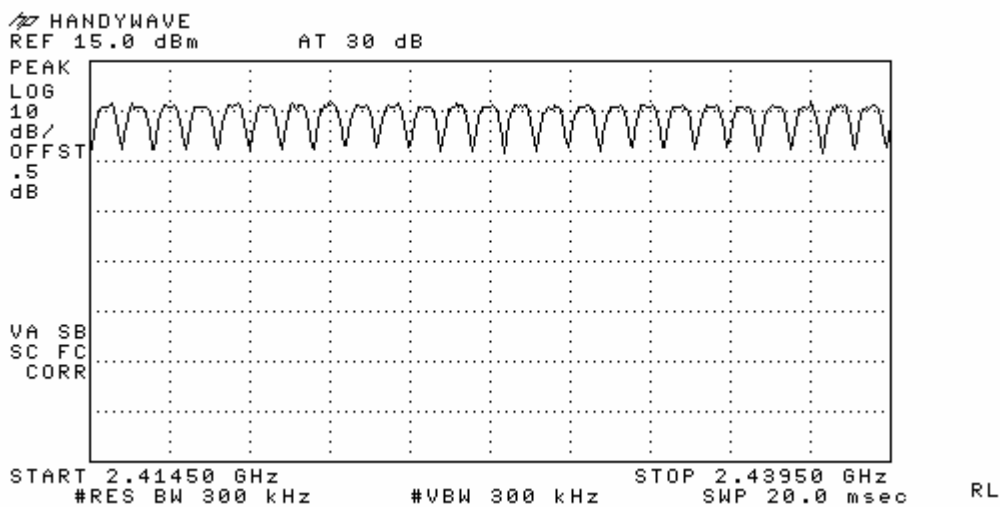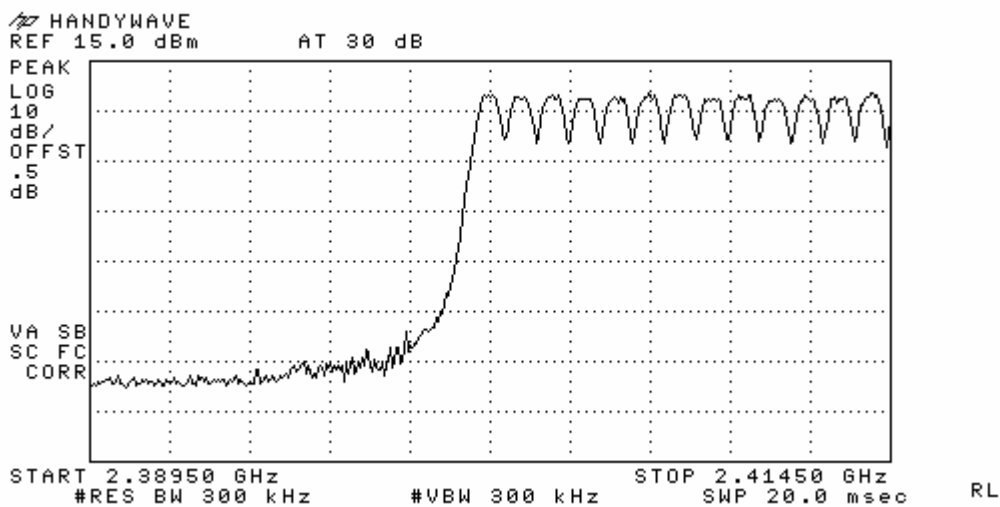

Number of Hopping Frequencies – DC30V

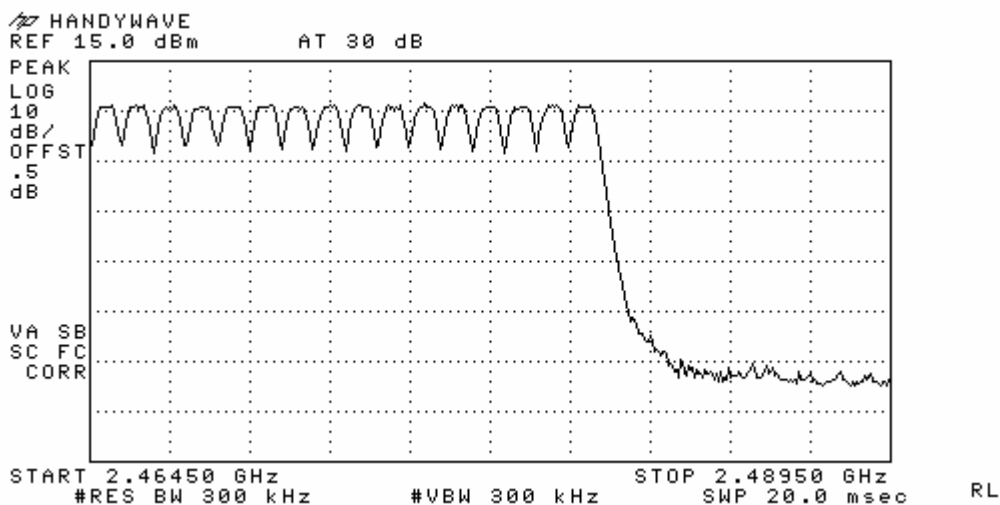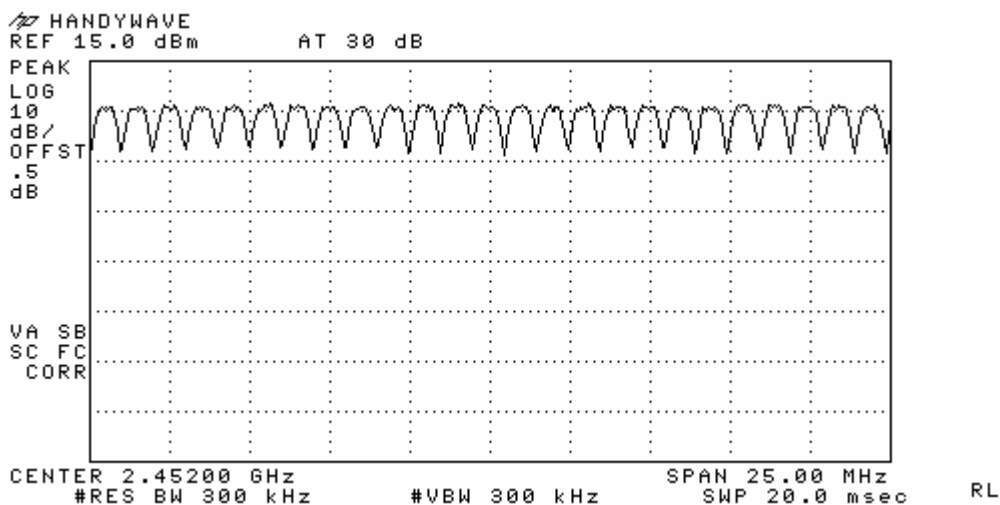

3.2.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Measurement Data:

Frequency (MHz)	Channel No.	Test Results – DC5V	
		Measured Bandwidth (MHz)	Result
2402	0	0.955	Complies
2441	39	0.955	Complies
2480	78	0.955	Complies

Frequency (MHz)	Channel No.	Test Results – DC30V	
		Measured Bandwidth (MHz)	Result
2402	0	0.950	Complies
2441	39	0.945	Complies
2480	78	0.935	Complies




- See next pages for actual measured spectrum plots.

Minimum Standard:




The transmitter shall have a maximum 20dB bandwidth of 1 MHz.

Measurement Setup: Same as the Chapter 3.2.1 (Figure 1)

20 dB Bandwidth – DC5V

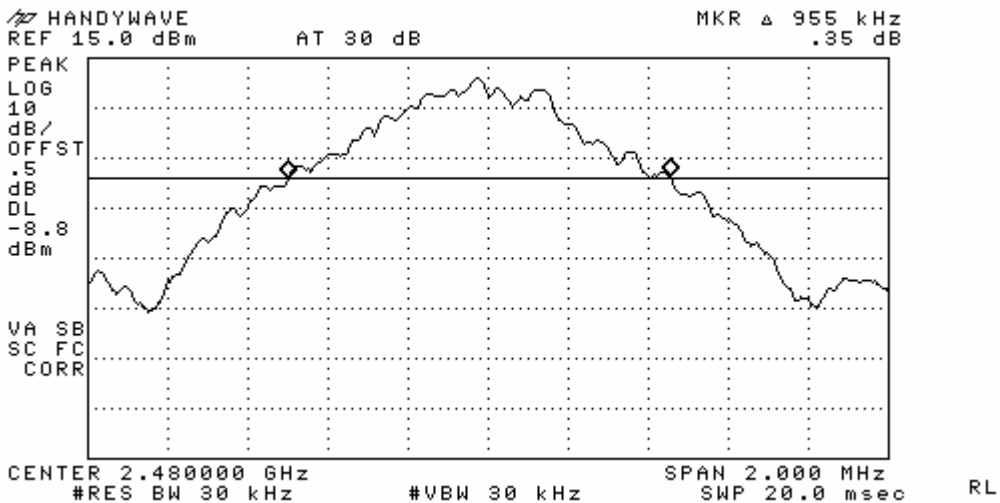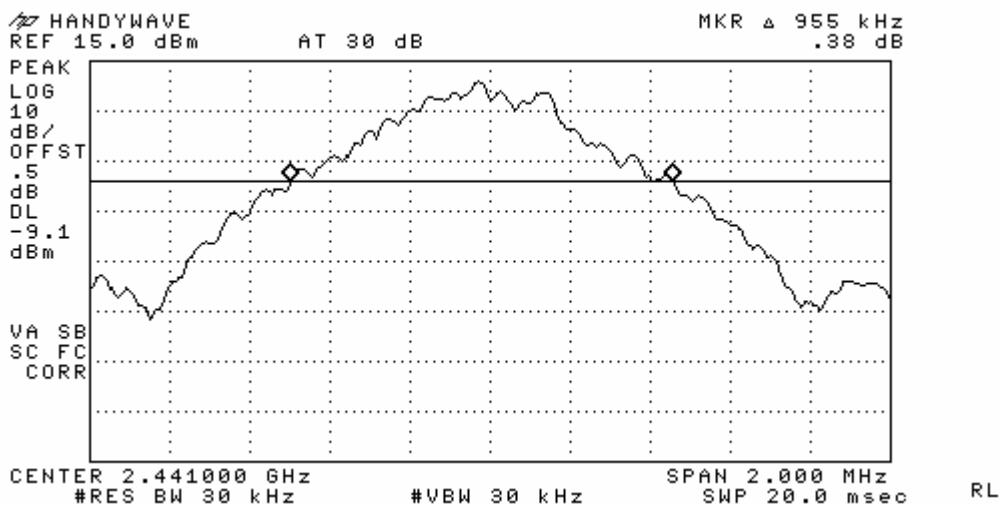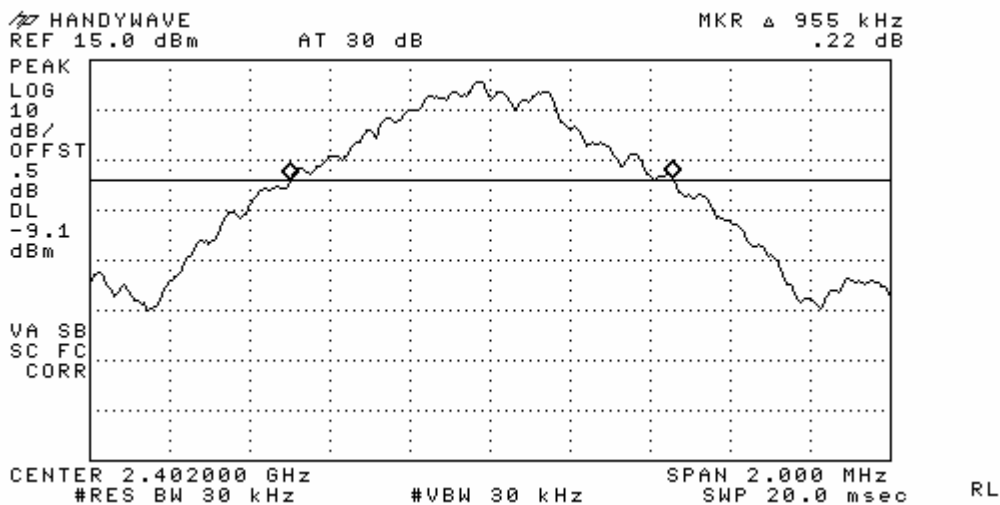

20 dB Bandwidth – DC30V

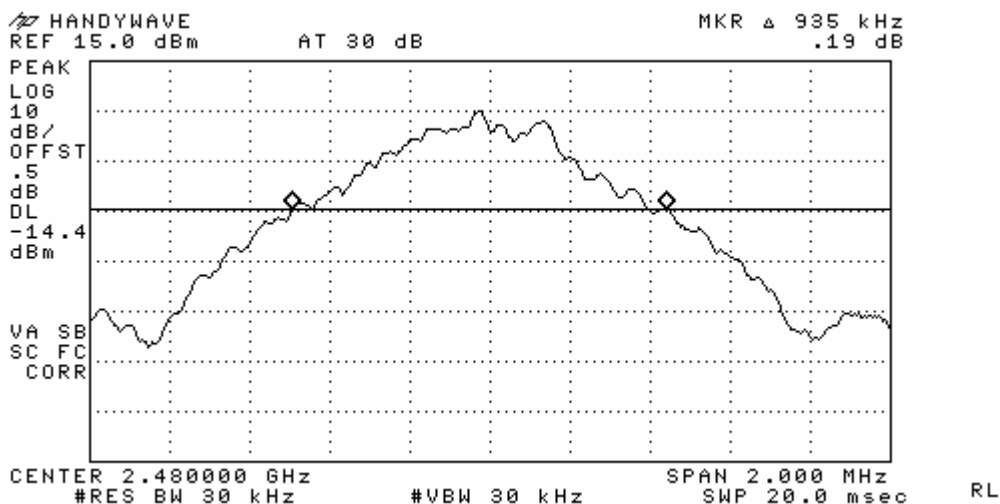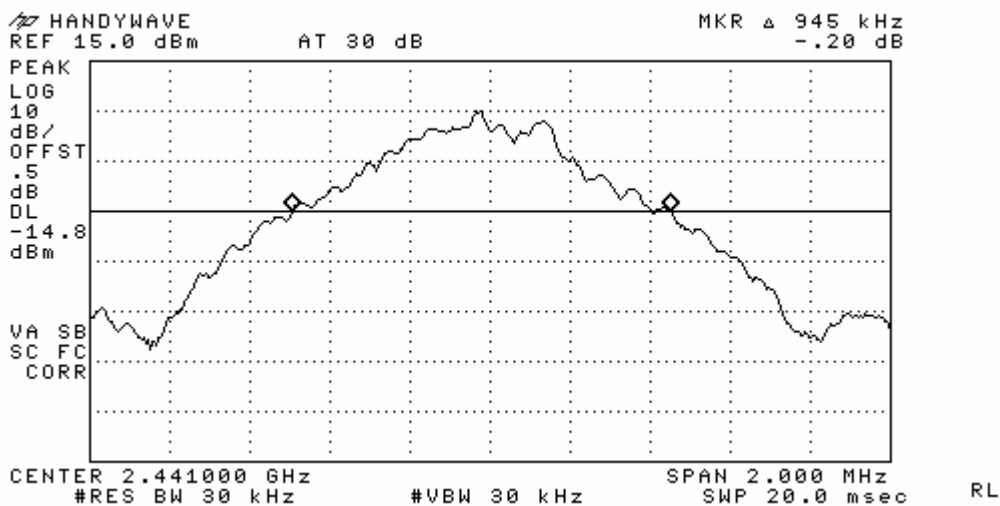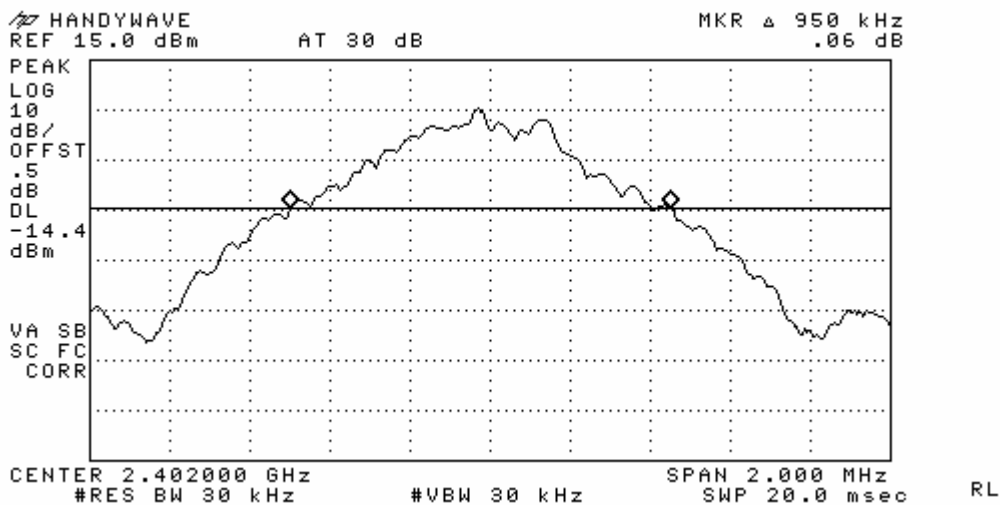

3.2.4 Time of Occupancy (Dwell Time)

Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW \geq RBW)

Trace = max hold

Detector function = peak

Measurement Data:

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results – DC5V	
			Dwell Time (ms)	Result
39	2441	DH 1	132.05	Complies
		DH 3	261.89	Complies
		DH 5	310.15	Complies

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results – DC30V	
			Dwell Time (ms)	Result
39	2441	DH 1	132.05	Complies
		DH 3	263.90	Complies
		DH 5	310.15	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

0.4 seconds within a 30 second period per any frequency


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


DH 1 – DC5V

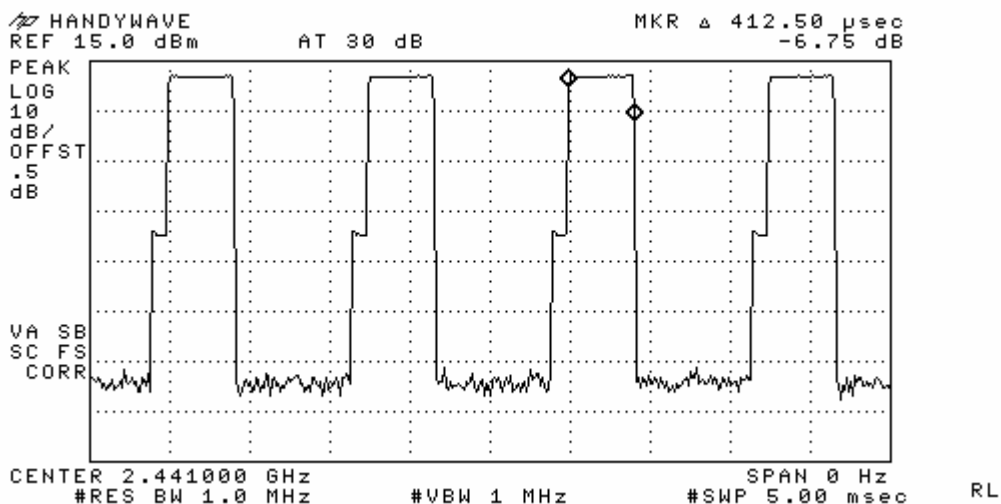


DH 3 – DC5V

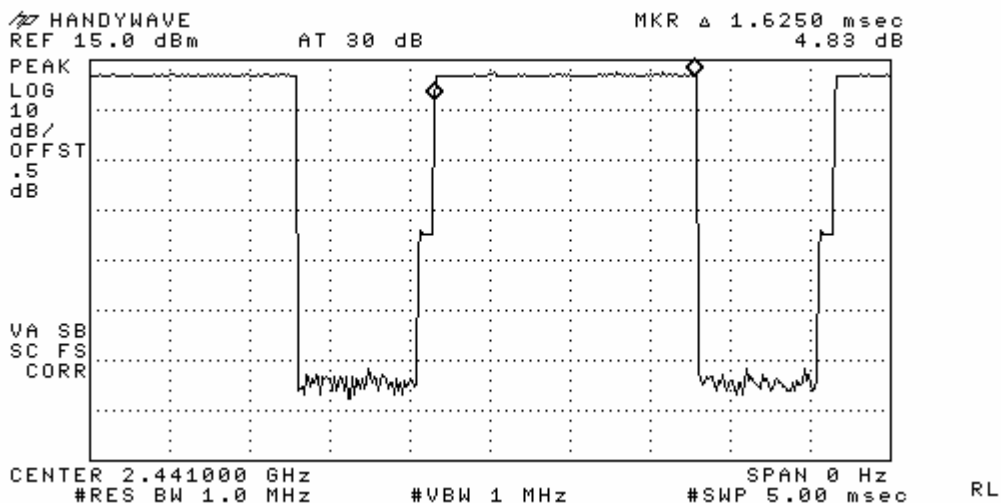


DH 5 – DC5V

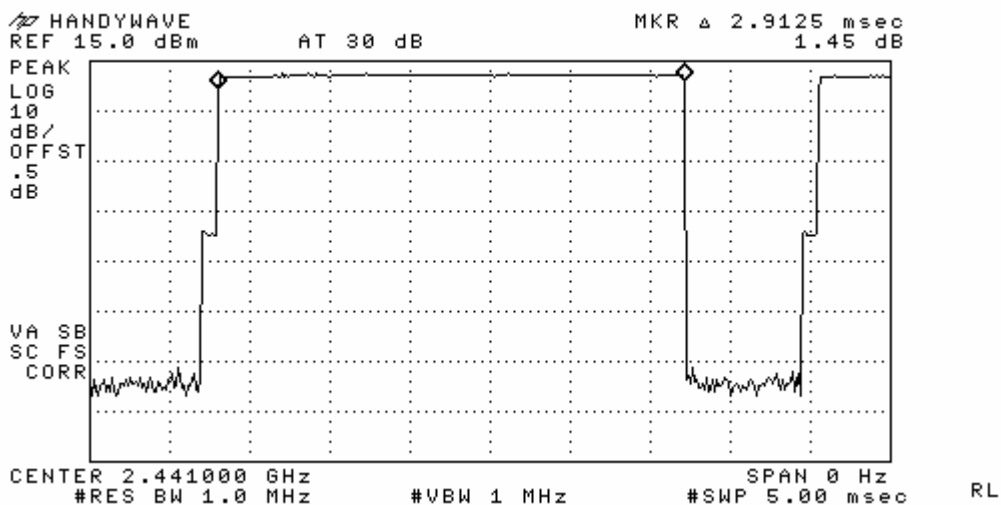


DH 1 – DC30V

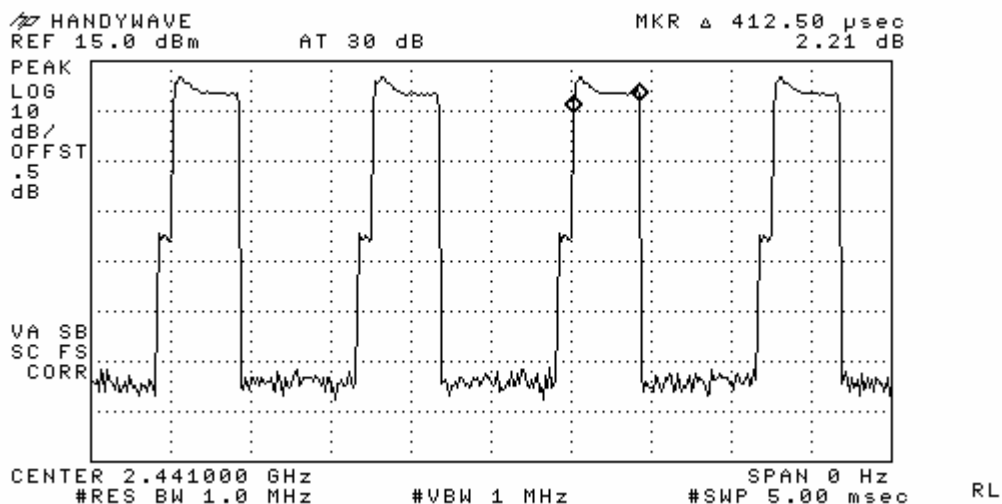

DH 3 – DC30V

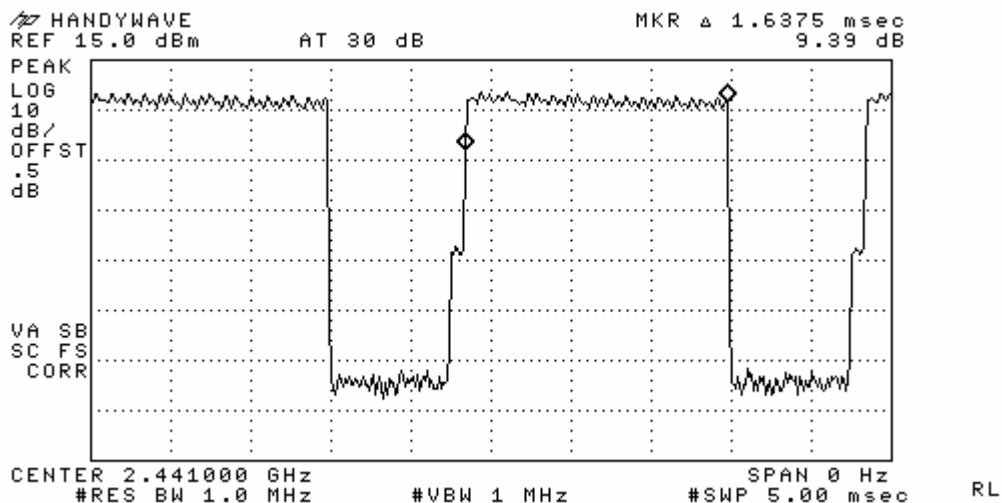

DH 5 – DC30V

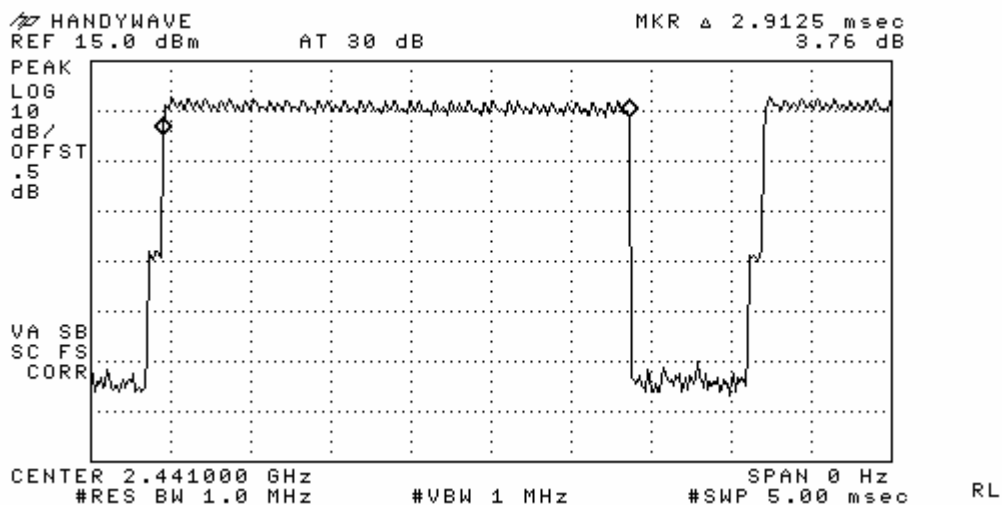

3.2.5 Transmitter Output Power

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data:

Frequency (MHz)	Ch.	Test Results - DC5V		
		dBm	mW	Result
2402	0	12.36	17.219	Complies
2441	39	12.42	17.458	Complies
2480	78	12.42	17.458	Complies

Frequency (MHz)	Ch.	Test Results - DC30V		
		dBm	mW	Result
2402	0	10.79	11.995	Complies
2441	39	11.94	15.631	Complies
2480	78	11.76	14.997	Complies


- See next pages for actual measured spectrum plots.

Minimum Standard:	< 1W
--------------------------	------


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Peak Output Power - DC5V

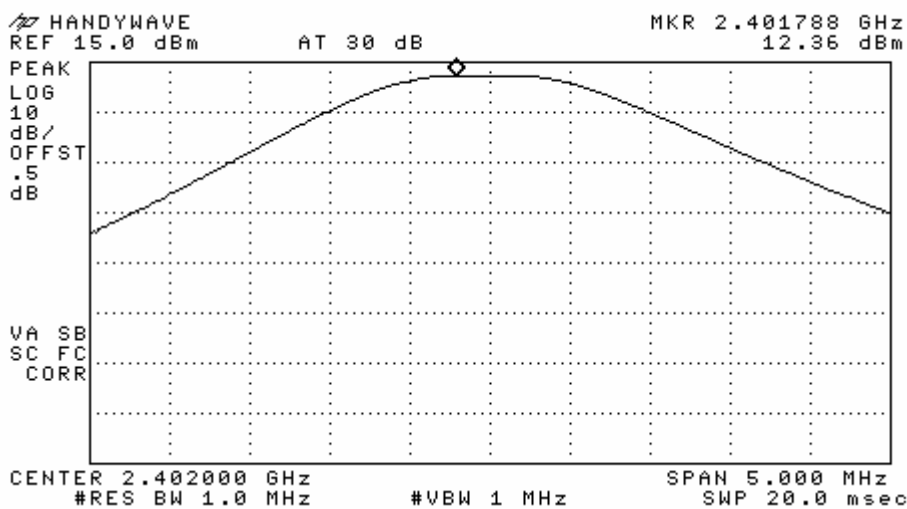

RL

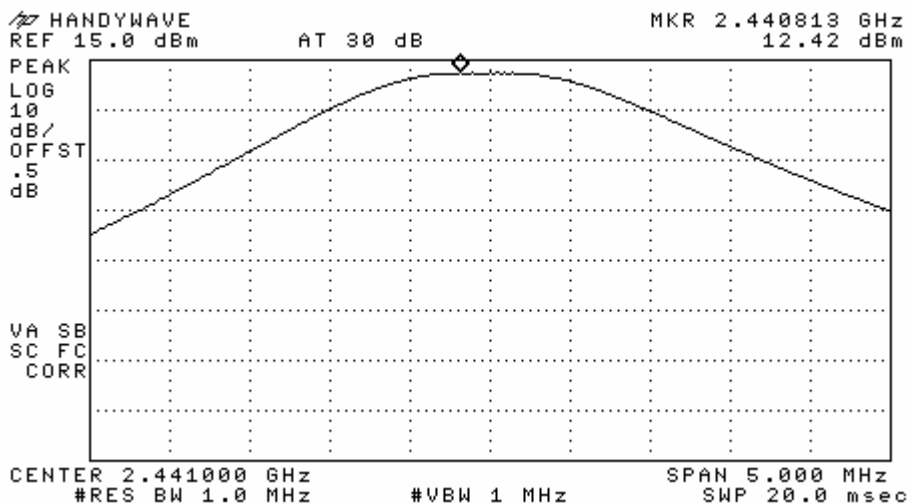


RL

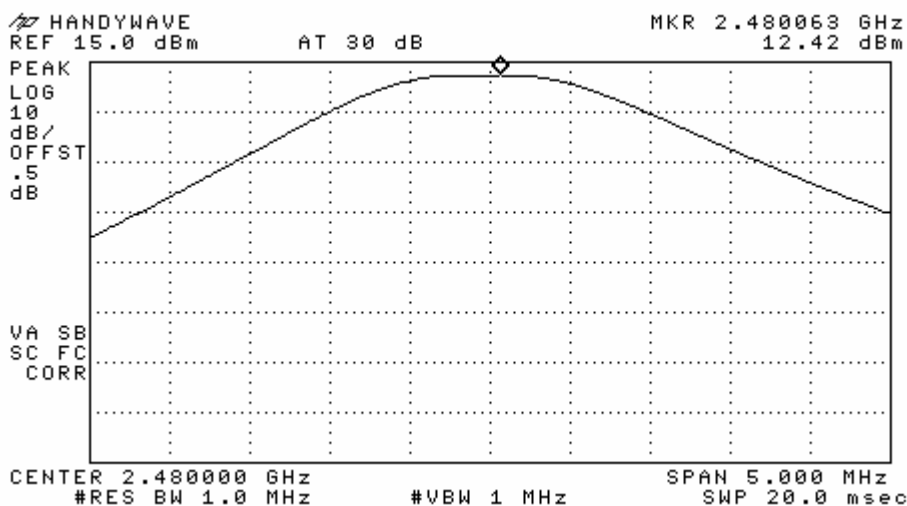


RL


Peak Output Power - DC30V

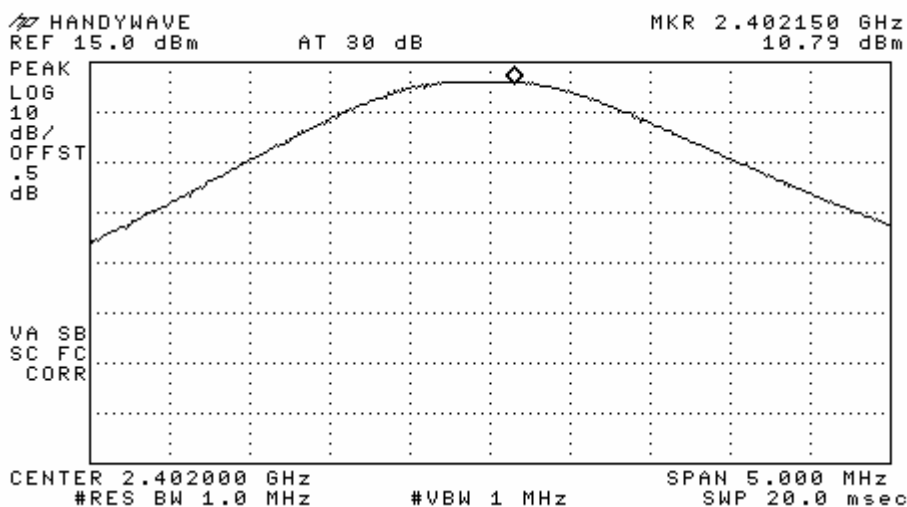

RL

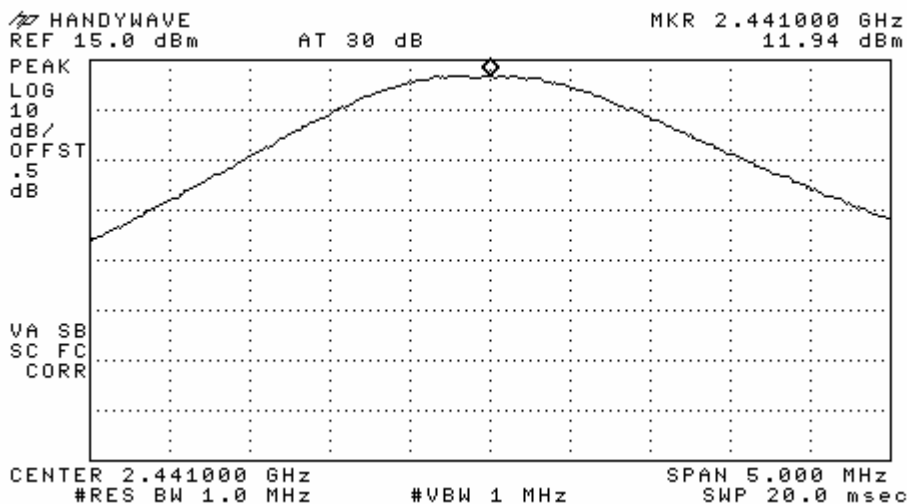

RL

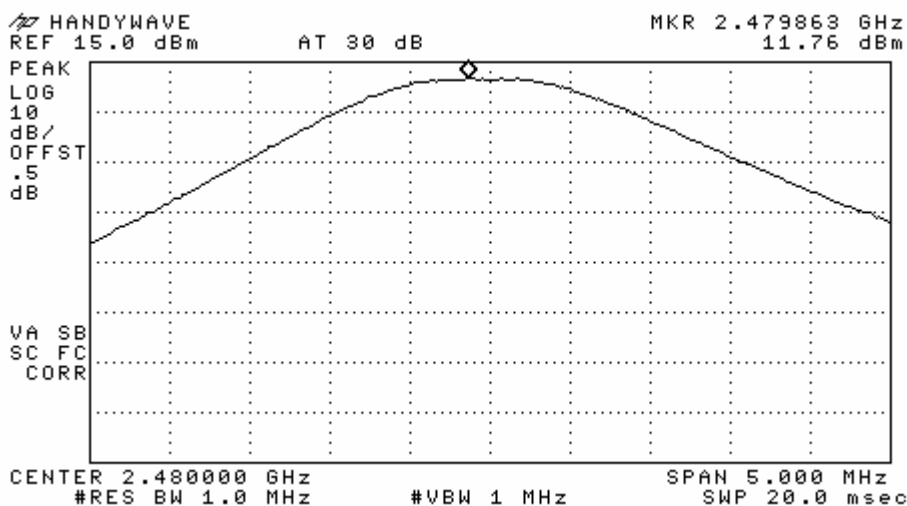

RL

3.2.6 Band Edge – Conducted Measurement

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 10 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Band - edge (with Hopping)

- DC5V

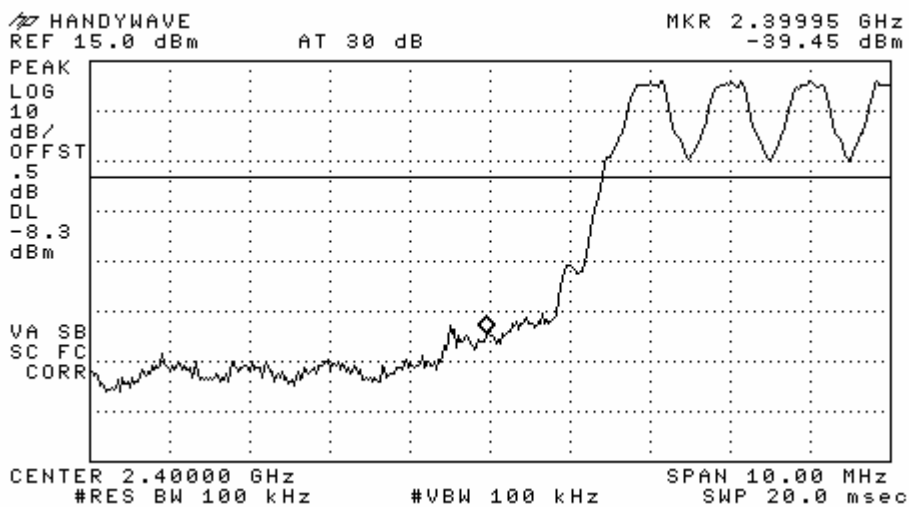

RL

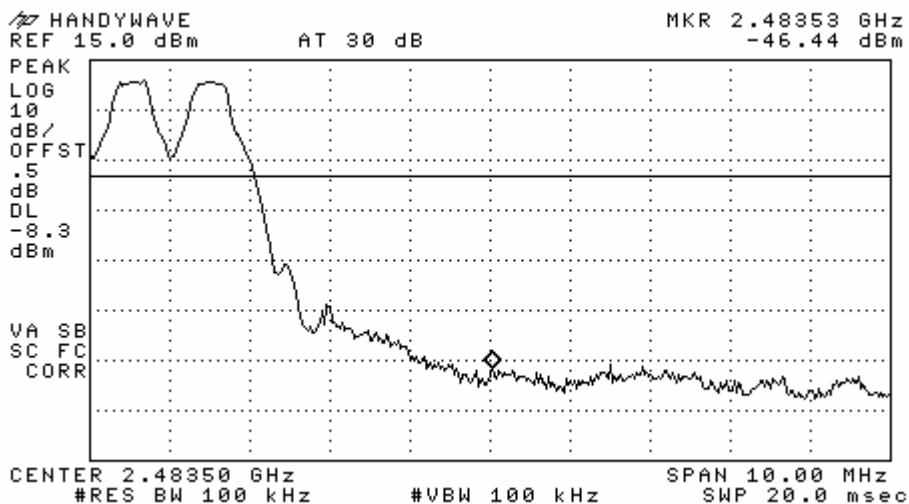

RL

3.2.7 Band Edge – Radiated Measurement-

Procedure:

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK: RBW = VBW = 1MHz, Sweep=Auto

Average: RBW = 1MHz, VBW=10Hz, Sweep=Auto

Measurement Distance: 3m

Polarization: Horizontal / Vertical

Measurement Data:


- Refer to the next page.

Minimum Standard: FCC Part 15.209(a)


Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

Band Edge – CH-LOW
Detector mode: PEAK / Polarity: Horizontal

- DC30V

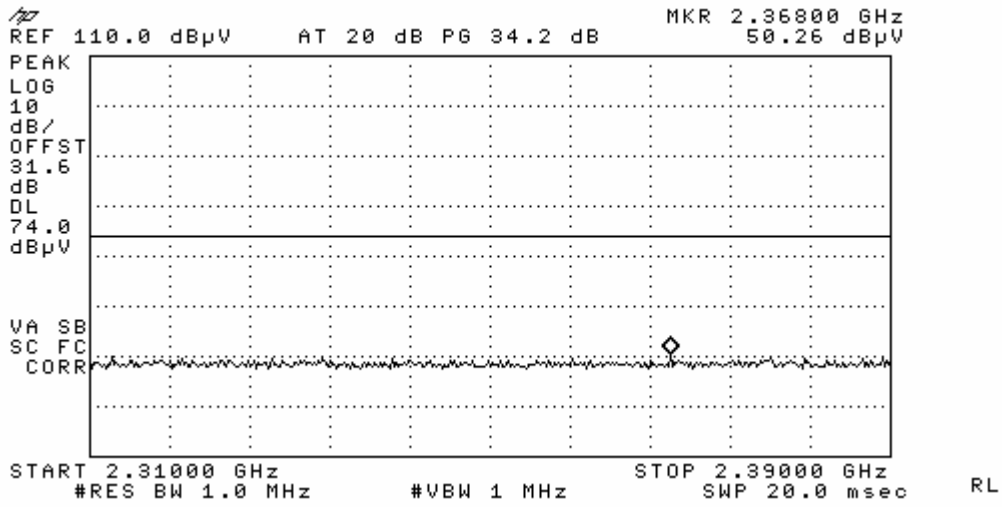

Band Edge – CH-LOW
Detector mode: Average / Polarity: Horizontal

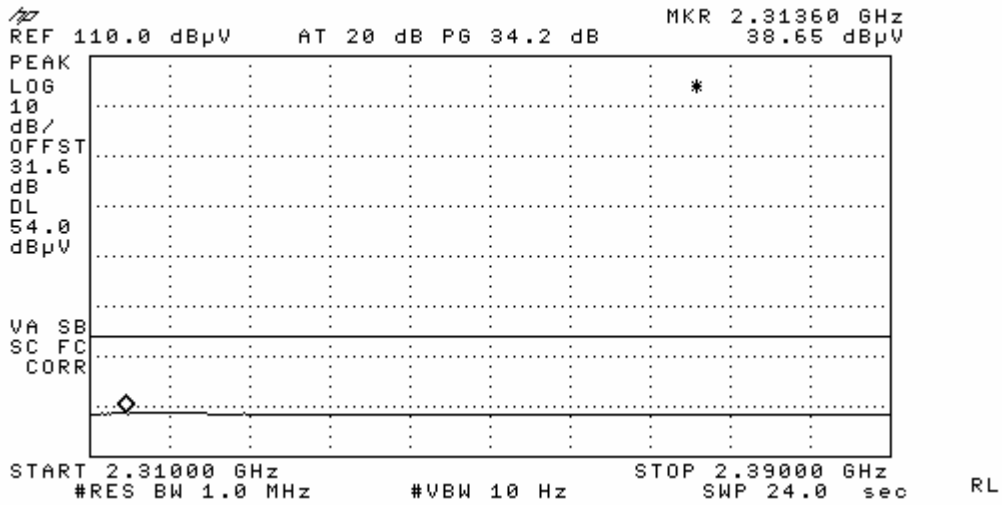

3.2.8 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = average

Trace = max hold

Sweep = auto

Measurement Data: Air link mode

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
4804	41.6	4882	43.2	4960	46.3
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			

Note: Emissions attenuated more than 20 dB below the permissible value are not reported.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500


** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: HPS Temp/Humi: 1 / 30
Test Mode : BT +DC 5V mode Tested by: B. S. KIM

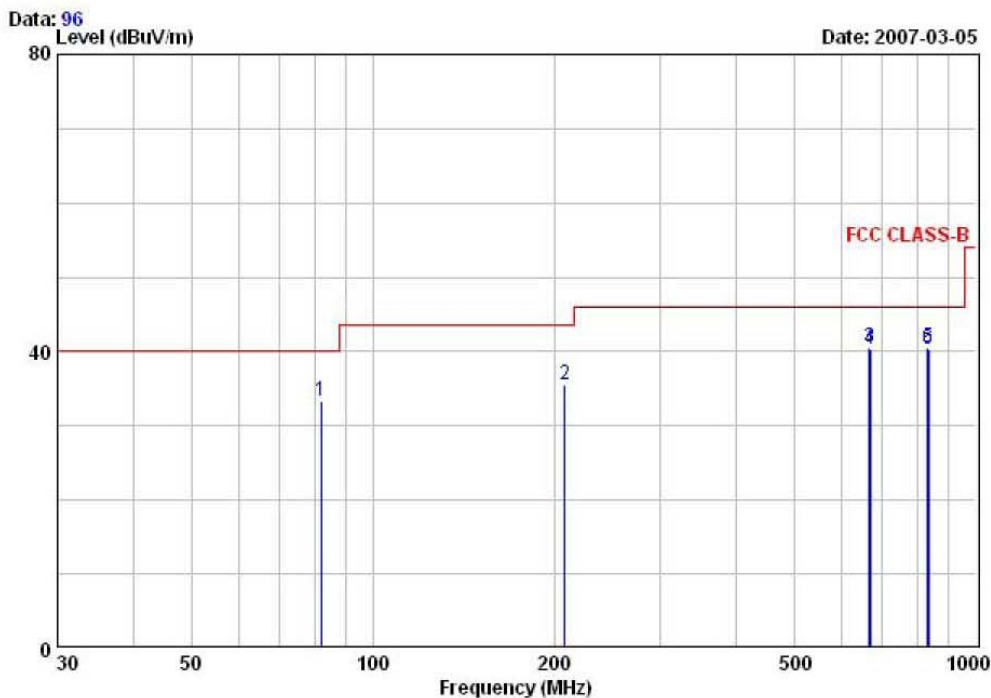


	Freq Reading(QP)		C.F Result (QP)		Limit	Margin	Height	Polarity
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	
1	82.05	52.10	-18.69	33.41	40.00	6.59	100	VERTICAL
2	208.45	43.20	-7.56	35.64	43.50	7.86	341	HORIZONTAL
3	665.81	44.60	-4.16	40.44	46.00	5.56	317	HORIZONTAL
4	668.25	44.50	-4.11	40.39	46.00	5.61	102	VERTICAL
5	831.57	41.60	-0.97	40.63	46.00	5.37	101	VERTICAL
6	835.41	41.20	-0.93	40.27	46.00	5.73	297	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: HPS
Temp/Humi: 1 / 30
Test Mode : BT +DC 30V mode
Tested by: B. S. KIM

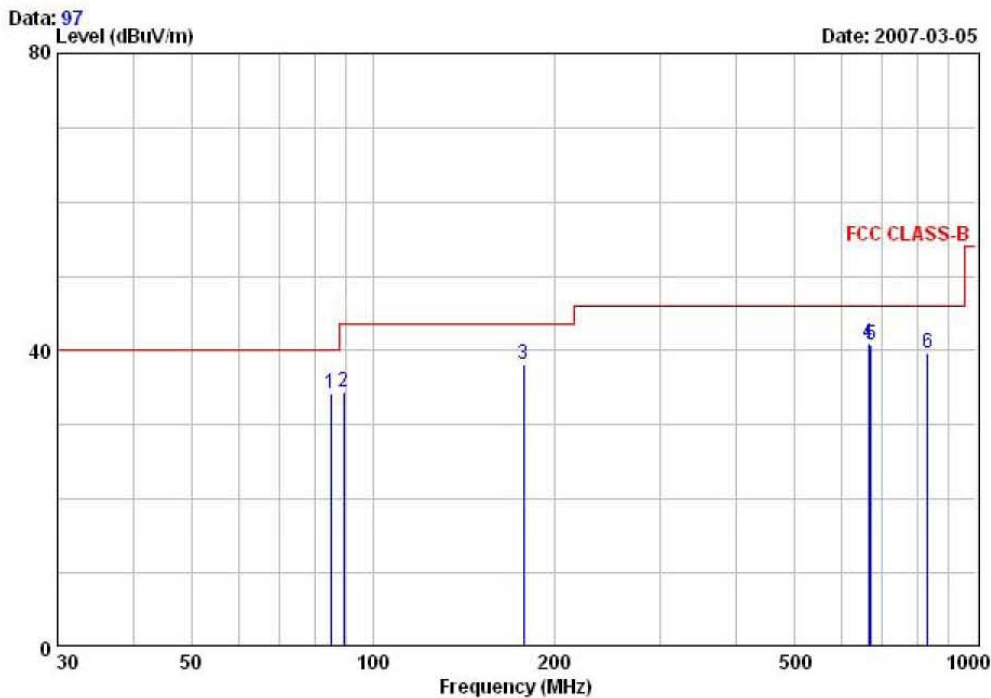

	Freq	Reading(QP)	C.F	Result(QP)	Limit	Margin	Height	Polarity
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	
1	85.15	52.30	-18.04	34.26	40.00	5.74	157	VERTICAL
2	89.57	51.70	-17.16	34.54	43.50	8.96	100	VERTICAL
3	177.57	46.80	-8.74	38.06	43.50	5.44	347	HORIZONTAL
4	663.48	45.10	-4.21	40.89	46.00	5.11	105	VERTICAL
5	669.19	44.80	-4.09	40.71	46.00	5.29	100	VERTICAL
6	830.78	40.70	-0.98	39.72	46.00	6.28	317	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.8 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency


AC Conducted Emissions –Line



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-323-6008
Fax: +82-31-323-6010

EUT / Model No. : HPS	Phase : LINE
Test Mode : BT mode (input 5)	Test Power : 120 / 60
Temp. / Humi. : 22 / 31	Test Engineer : B. S. KIM

Data: 354 File: E:\00_e3 EMI DATA\2007\LTA_Conduction_0703_1.EMI (354) Date: 2007-03-15

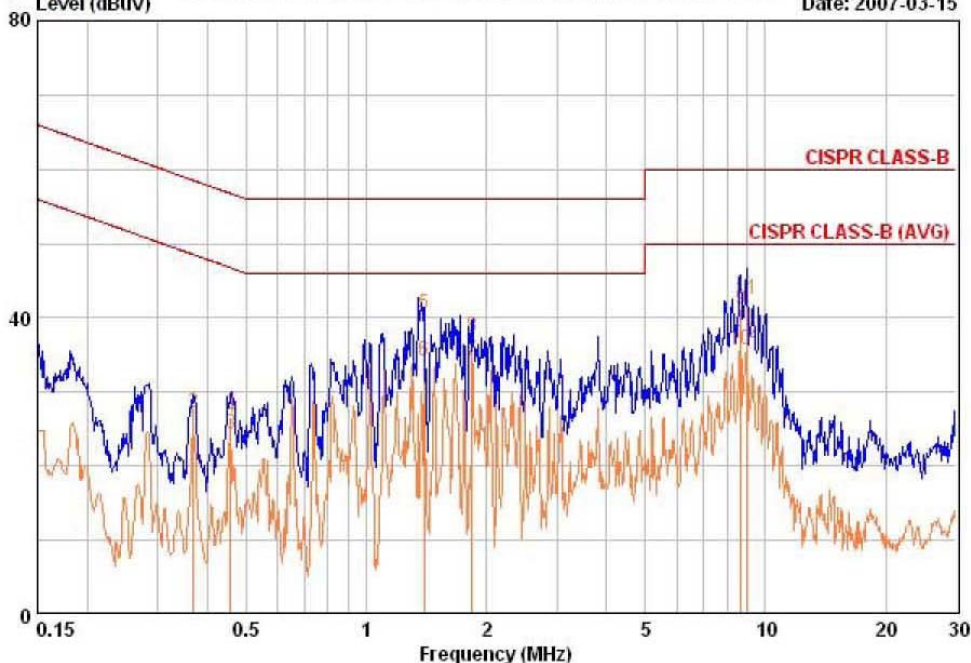

Freq MHz	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV	QP	AV
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.369	26.80	24.69	0.35	27.15	25.04	58.52	48.52	31.36	23.47
0.456	26.30	24.09	0.33	26.63	24.42	56.76	46.76	30.13	22.34
1.396	40.10	33.77	0.36	40.46	34.13	56.00	46.00	15.54	11.87
1.839	37.10	33.77	0.41	37.51	34.18	56.00	46.00	18.49	11.82
8.683	40.50	35.14	0.60	41.10	35.74	60.00	50.00	18.90	14.26
8.964	42.00	36.00	0.58	42.58	36.58	60.00	50.00	17.42	13.42

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions -Neutral



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-323-6008
Fax: +82-31-323-6010

EUT / Model No. : HPS	Phase : NEUTRAL
Test Mode : BT mode (input 5)	Test Power : 120 / 60
Temp./Humi. : 22 / 31	Test Engineer : B. S. KIM

Data: 352 File: E:\00_e3 EMI DATA\2007\LTA_Conduction_0703_1.EMI (352) Date: 2007-03-15

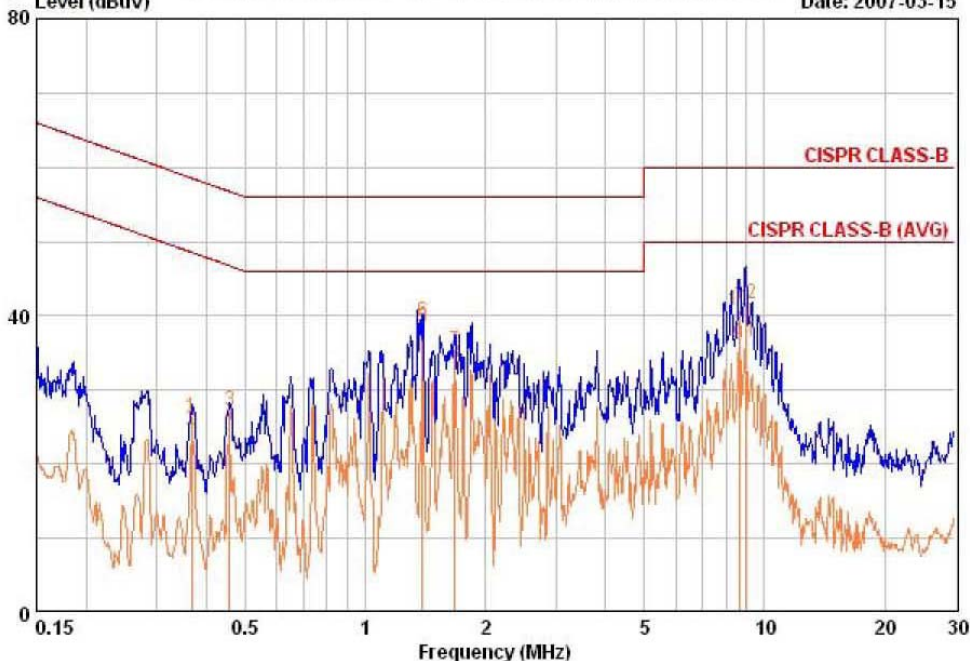

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.367	26.10	24.20	0.35	26.45	24.55	58.57	48.57	32.12	24.02
0.457	27.00	25.00	0.33	27.33	25.33	56.75	46.75	29.42	21.42
1.389	38.90	38.10	0.36	39.26	38.46	56.00	46.00	16.74	7.54
1.673	35.00	33.10	0.39	35.39	33.49	56.00	46.00	20.61	12.51
8.657	40.20	35.50	0.61	40.81	36.11	60.00	50.00	19.19	13.89
8.957	41.00	36.00	0.58	41.58	36.58	60.00	50.00	18.42	13.42

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions –Line



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-323-6008
Fax: +82-31-323-6010

EUT / Model No. : HPS	Phase : LINE
Test Mode : BT mode (input 30v)	Test Power : 120 / 60
Temp./Humi. : 22 / 31	Test Engineer : B.S.KIM

Data: 334 File: E:\00_e3 EMI DATA\2007\LTA_Conduction_0703_1.EMI (334) Date: 2007-03-15

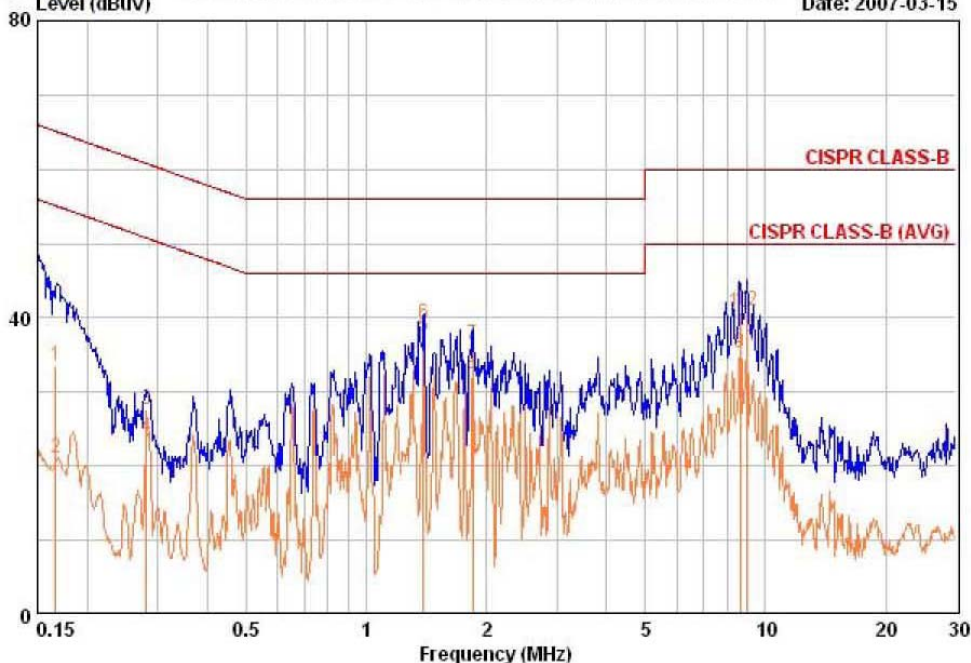

Freq MHz	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV		
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.167	33.20	20.70	0.45	33.65	21.15	65.11	55.11	31.46	33.96
0.281	27.50	23.80	0.26	27.76	24.06	60.79	50.79	33.02	26.72
1.388	38.80	37.20	0.36	39.16	37.56	56.00	46.00	16.84	8.44
1.849	35.90	32.00	0.41	36.31	32.41	56.00	46.00	19.69	13.59
8.646	40.20	34.60	0.61	40.81	35.21	60.00	50.00	19.19	14.79
8.956	40.40	35.60	0.58	40.98	36.18	60.00	50.00	19.02	13.82

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions -Neutral



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel. +82-31-323-6008
Fax: +82-31-323-6010

EUT / Model No. : HPS	Phase : NEUTRAL
Test Mode : BT mode (input 30)	Test Power : 120 / 60
Temp./Humi. : 22 / 31	Test Engineer : B. S. KIM

Data: 350 Level (dBuV) File: E:\00_e3 EMI DATA\2007\LTA_Conduction_0703_1.EMI (350) Date: 2007-03-15

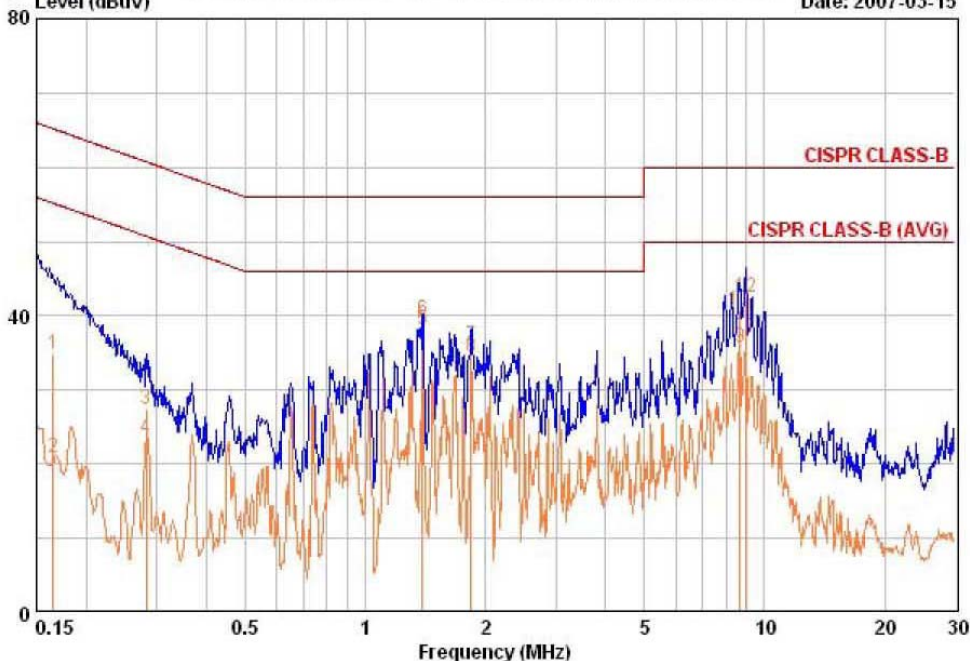

Freq MHz	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
	QP	AV		QP	AV	QP	AV		QP
	dBuV	dBuV	dB	dBuV	dBuV	dBuV	dBuV	dB	dB
0.165	34.40	20.50	0.46	34.86	20.96	65.21	55.21	30.34	34.24
0.282	27.30	23.20	0.26	27.56	23.46	60.76	50.76	33.19	27.29
1.391	39.00	37.80	0.36	39.36	38.16	56.00	46.00	16.64	7.84
1.843	35.60	34.00	0.41	36.01	34.41	56.00	46.00	19.99	11.59
8.668	40.10	35.20	0.61	40.71	35.81	60.00	50.00	19.29	14.19
8.955	42.00	36.70	0.58	42.58	37.28	60.00	50.00	17.42	12.72

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Mar-07
2	Signal Generater	8657A	3430U02049	HP	Dec-07
3	Attenuator (3dB)	8491A	37822	HP	Nov-07
4	Attenuator (3dB)	8491A	28881	HP	Nov-07
5	EMI Test Receiver	ESVD	843748/001	R&S	Jan-08
6	LISN	KNW-407	8-1430-1	Kyoritsu	Jan-08
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Jan-08
8	RF Amplifier	8447D	2949A02670	HP	Jan-08
9	RF Amplifier	8447D	2439A09058	HP	Jan-08
10	RF Amplifier	8449B	3008A02126	HP	Jun-07
11	Test Receiver	ESHS10	828404009	R&S	Jan-08
12	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	Feb-08
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Feb-08
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Feb-08
15	Horn Antenna	3115	00055005	ETS LINDGREN	Jun-07
16	Horn Antenna	BBHA 9120D	0499	Schwarzbeck	Jun-07
17	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-07
18	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-07
19	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-07
20	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-07
21	Spectrum Analyzer	8591E	3649A05888	HP	Jan-08
22	Spectrum Analyzer	8563E	3425A02505	HP	Jan-08
23	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Feb-08
24	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-07
25	RF Switch	MP59B	6200414971	ANRITSU	Jun-07
26	RF Switch	MP59B	6200438565	ANRITSU	Jun-07
27	Power Divider	11636A	6243	HP	Nov-07
28	DC Power Supply	6622A	3448A03079	HP	Oct-07
29	Attenuator (30dB)	11636A	6243	HP	Nov-07
30	Attenuator (10dB)	8491A	63196	HP	Nov-07
31	Power Meter	EPM-441A	GB32481702	HP	Apr-07
32	Power Sensor	8481A	2702A64048	HP	Apr-07
33	Audio Analyzer	8903B	3729A18901	HP	Nov-07
34	Modulation Analyzer	8901B	3749A05878	HP	Nov-07
35	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-07