



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

802.11 b/g FIXED WIRELESS NODE

MODEL NUMBER: SC3130

FCC ID: RV7-SC3130

REPORT NUMBER: 07U11263-2

ISSUE DATE: SEPTEMBER 24, 2007

Prepared for

**SKYPILOT NETWORKS INC.
2055 LAURELWOOD ROAD 2nd FLOOR
SANTA CLARA, CA 95054-2747**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, USA
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

| <u>Rev.</u> | <u>Issue Date</u> | <u>Revisions</u> | <u>Revised By</u> |
|-------------|-----------------------|--|-------------------|
| -- | 3/26/07 | Initial Issue based on CCS Report 06U10713-1B, dated April 12, 2007. | T. Chan |

TABLE OF CONTENTS

| | |
|--|-----------|
| 1. ATTESTATION OF TEST RESULTS..... | 4 |
| 2. TEST METHODOLOGY | 5 |
| 3. FACILITIES AND ACCREDITATION | 5 |
| 4. CALIBRATION AND UNCERTAINTY..... | 5 |
| 4.1. MEASURING INSTRUMENT CALIBRATION..... | 5 |
| 4.2. MEASUREMENT UNCERTAINTY..... | 5 |
| 5. EQUIPMENT UNDER TEST..... | 6 |
| 5.1. DESCRIPTION OF EUT..... | 6 |
| 5.2. MAXIMUM OUTPUT POWER..... | 6 |
| 5.3. DESCRIPTION OF AVAILABLE ANTENNAS..... | 6 |
| 5.4. SOFTWARE AND FIRMWARE..... | 6 |
| 5.5. WORST-CASE CONFIGURATION AND MODE..... | 6 |
| 5.6. DESCRIPTION OF 2.4 GHz BAND TEST SETUP..... | 7 |
| 6. TEST AND MEASUREMENT EQUIPMENT | 9 |
| 7. LIMITS AND RESULTS | 10 |
| 7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND..... | 10 |
| 7.1.1. 6 dB BANDWIDTH..... | 10 |
| 7.1.2. 99% BANDWIDTH..... | 17 |
| 7.1.3. PEAK OUTPUT POWER..... | 24 |
| 7.1.4. MAXIMUM PERMISSIBLE EXPOSURE..... | 32 |
| 7.1.5. AVERAGE POWER..... | 35 |
| 7.1.6. PEAK POWER SPECTRAL DENSITY..... | 36 |
| 7.1.7. CONDUCTED SPURIOUS EMISSIONS..... | 43 |
| <i>RADIATED EMISSIONS FOR 2400 TO 2483.5 MHz BAND.....</i> | <i>56</i> |
| <i>RADIATED EMISSIONS FOR 2400 TO 2483.5 MHz BAND.....</i> | <i>56</i> |
| 7.1.8. TRANSMITTER RADIATED SPURIOUS EMISSIONS..... | 56 |
| 7.1.9. TRANSMITTER ABOVE 1 GHz..... | 59 |
| 7.1.10. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz..... | 77 |
| 7.2. POWERLINE CONDUCTED EMISSIONS FOR 2400 - 2483.5 GHz BAND..... | 81 |
| 8. SETUP PHOTOS..... | 85 |

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SKYPILOT NETWORKS, INC.
2055 LAURELWOOD ROAD 2nd FLOOR
SANTA CLARA, CA 95054-2747

EUT DESCRIPTION: 802.11 a/b/g FIXED WIRELESS NODE

MODEL TESTED: SKYACCESS DUALBAND (2.4 GHz Band)

SERIAL NUMBER: 102

DATE TESTED: JUNE 06 - 13, 2006 (5.8 GHz Band)
DECEMBER 07 - 12, 2006 (2.4 GHz Band)

| APPLICABLE STANDARDS | |
|-----------------------|-------------------------|
| STANDARD | TEST RESULTS |
| FCC PART 15 SUBPART C | NO NON-COMPLIANCE NOTED |

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

WILLIAM ZHUANG
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER | UNCERTAINTY |
|-------------------------------------|----------------|
| Radiated Emission, 30 to 200 MHz | +/- 3.3 dB |
| Radiated Emission, 200 to 1000 MHz | +4.5 / -2.9 dB |
| Radiated Emission, 1000 to 2000 MHz | +4.5 / -2.9 dB |
| Power Line Conducted Emission | +/- 2.9 dB |

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

SkyAccess DualBand is a high-powered 802.11b/g access point that lets service providers and municipalities offer standard Wi-Fi to subscribers.

The model number was changed after testing commenced.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

| Frequency Range (MHz) | Mode | Output Power (dBm) | Output Power (mW) |
|-----------------------|---------|--------------------|-------------------|
| 2412 - 2462 | 802.11b | 18.16 | 65.46 |
| 2412 - 2462 | 802.11g | 23.43 | 220.29 |

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a dipole antenna with a maximum gain of 7.4 dBi in the 2.4 GHz band.

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was SpCpeSw, rev. 4.

5.5. WORST-CASE CONFIGURATION AND MODE

In our opinion the worst-case data rate is determined to be 1 Mb/s in the 802.1 b mode and 6 Mb/s in the 802.11g mode.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

| PERIPHERAL SUPPORT EQUIPMENT LIST | | | | |
|-----------------------------------|---------------------|------------|---------------|--------|
| Description | Manufacturer | Model | Serial Number | FCC ID |
| Laptop PC | QuickNote | A929 | GAYR22190154 | DoC |
| PC AC Adapter | Lite-on Electronics | PA-1900-05 | 250109400C | DoC |
| POE Adapter | SkyPilot | POE | 640-00009-01 | N/A |


I/O CABLES

| I/O CABLE LIST | | | | | | |
|----------------|------|----------------------|----------------|------------|--------------|---------|
| Cable No. | Port | # of Identical Ports | Connector Type | Cable Type | Cable Length | Remarks |
| 1 | LAN | 1 | RJ45 | Unshielded | 1m | N/A |
| 2 | LAN | 1 | RJ45 | Unshielded | 1m | N/A |
| 3 | AC | 1 | AC Power | Unshielded | 1.8m | N/A |

TEST SETUP

The EUT is outside a host laptop computer via an ethernet cable and POE Adaptor during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

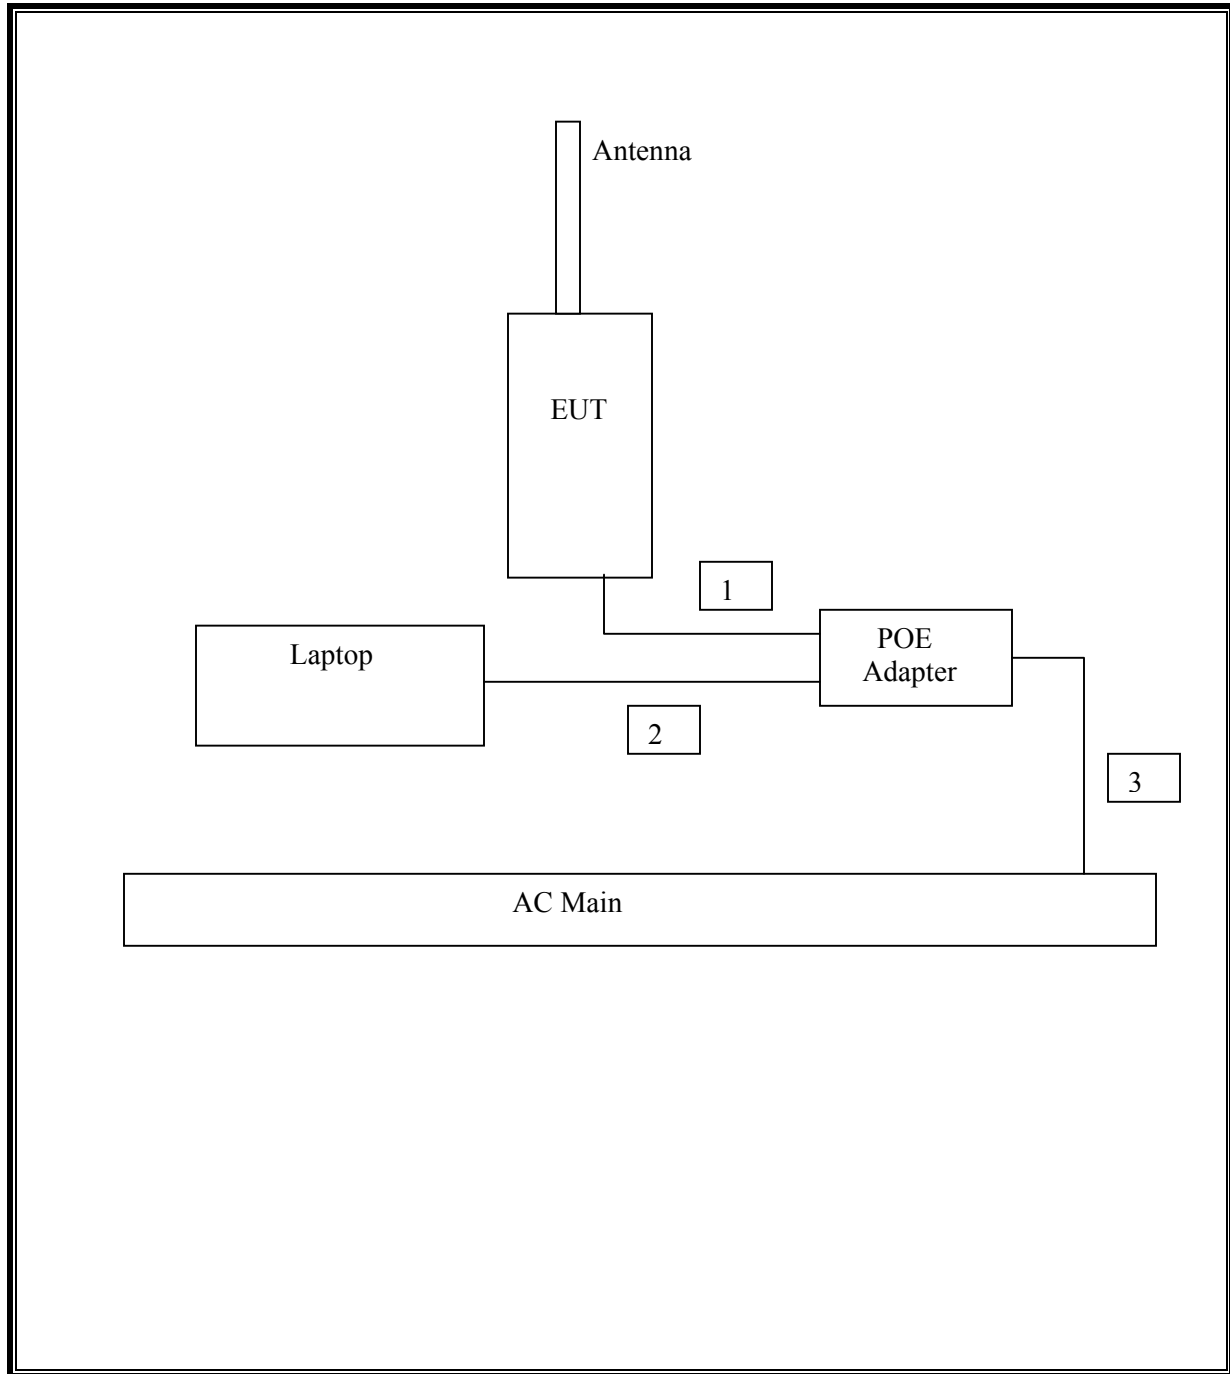

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized:

| TEST EQUIPMENT LIST | | | | |
|---------------------------------|----------------|------------------|---------------|-----------|
| Description | Manufacturer | Model | Serial Number | Cal Due |
| Spectrum Analyzer 3 Hz ~ 44 GHz | Agilent / HP | E4446A | MY43360112 | 5/3/2007 |
| Peak Power Meter | Agilent / HP | E4416A | GB41291160 | 12/2/2007 |
| Peak / Average Power Sensor | Agilent | E9327A | US40440755 | 12/2/2007 |
| LISN, 10 kHz ~ 30 MHz | FCC | LISN-50/250-25-2 | 2023 | 8/30/2007 |
| LISN, 10 kHz ~ 30 MHz | Solar | 8012-50-R-24-BNC | 8379443 | 8/30/2007 |
| EMI Test Receiver | R & S | ESHS 20 | 827129/006 | 6/3/2007 |
| EMI Receiver, 9 kHz ~ 2.9 GHz | Agilent / HP | 8542E | 3942A00286 | 2/4/2007 |
| RF Filter Section | Agilent / HP | 85420E | 3705A00256 | 2/4/2007 |
| Antenna, Bilog 30 MHz ~ 2 Ghz | Sunol Sciences | JB1 | A121003 | 9/3/2007 |
| Antenna, Horn 1 ~ 18 GHz | EMCO | 3115 | 9001-3245 | 4/22/2007 |
| Preamplifier, 1 ~ 26 GHz | Miteq | NSP2600-SP | 924342 | 9/2/2007 |

7. LIMITS AND RESULTS

7.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

7.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:


802.11b Mode


| Channel | Frequency (MHz) | 6 dB Bandwidth (kHz) | Minimum Limit (kHz) | Margin (kHz) |
|---------|-----------------|----------------------|---------------------|--------------|
| Low | 2412 | 12083.33 | 500 | 11583 |
| Middle | 2437 | 12083.33 | 500 | 11583 |
| High | 2462 | 12083.33 | 500 | 11583 |


802.11g Mode

| Channel | Frequency (MHz) | 6 dB Bandwidth (kHz) | Minimum Limit (kHz) | Margin (kHz) |
|---------|-----------------|----------------------|---------------------|--------------|
| Low | 2412 | 16416.67 | 500 | 15917 |
| Middle | 2437 | 16416.67 | 500 | 15917 |
| High | 2462 | 16416.67 | 500 | 15917 |


6 DB BANDWIDTH (802.11b MODE)

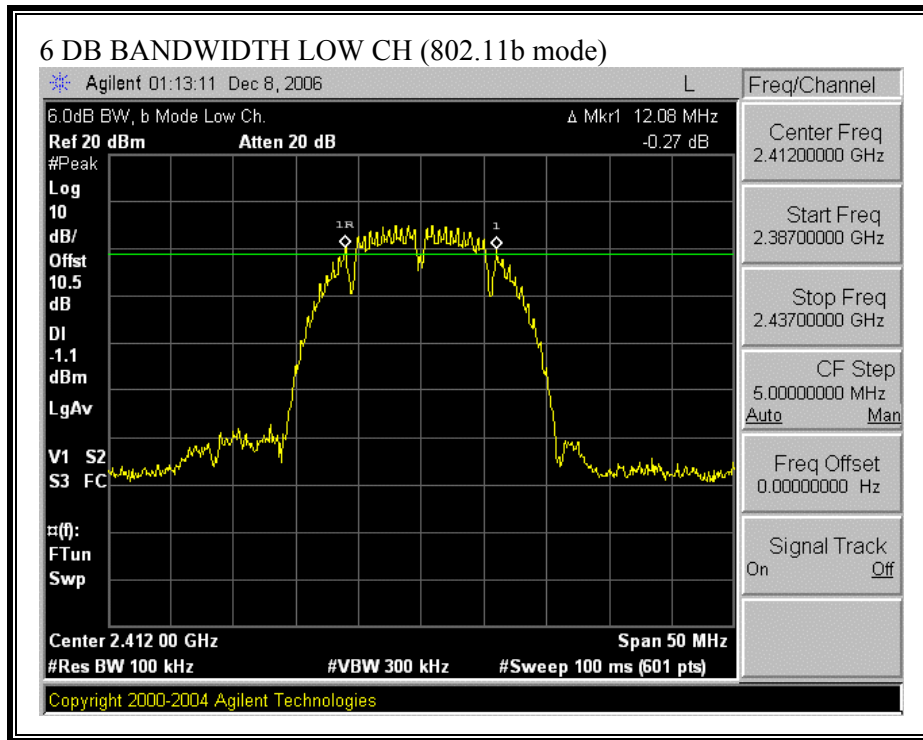


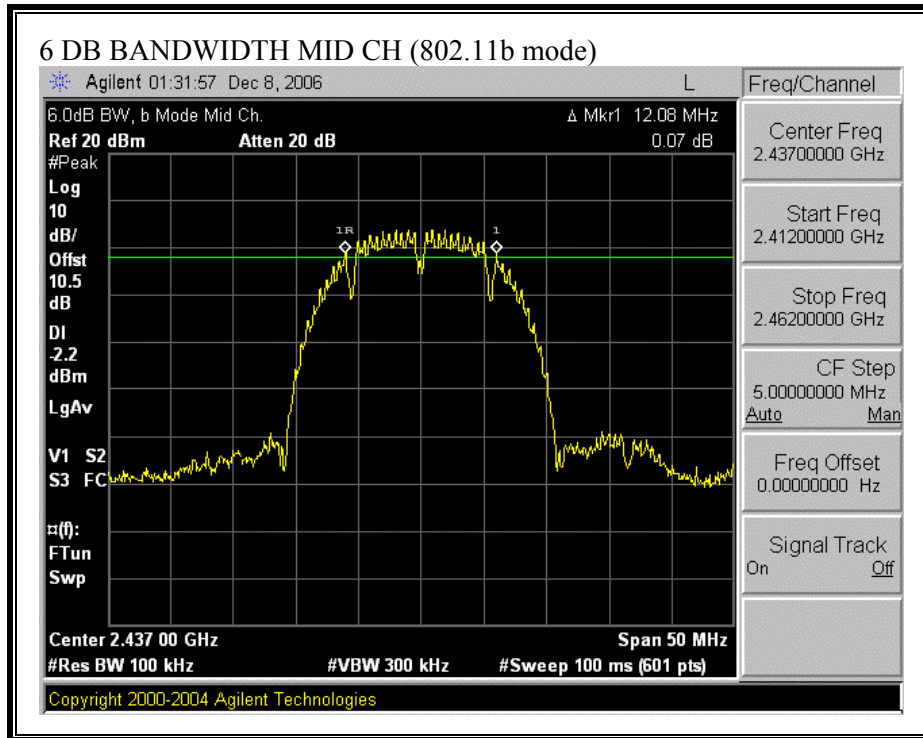


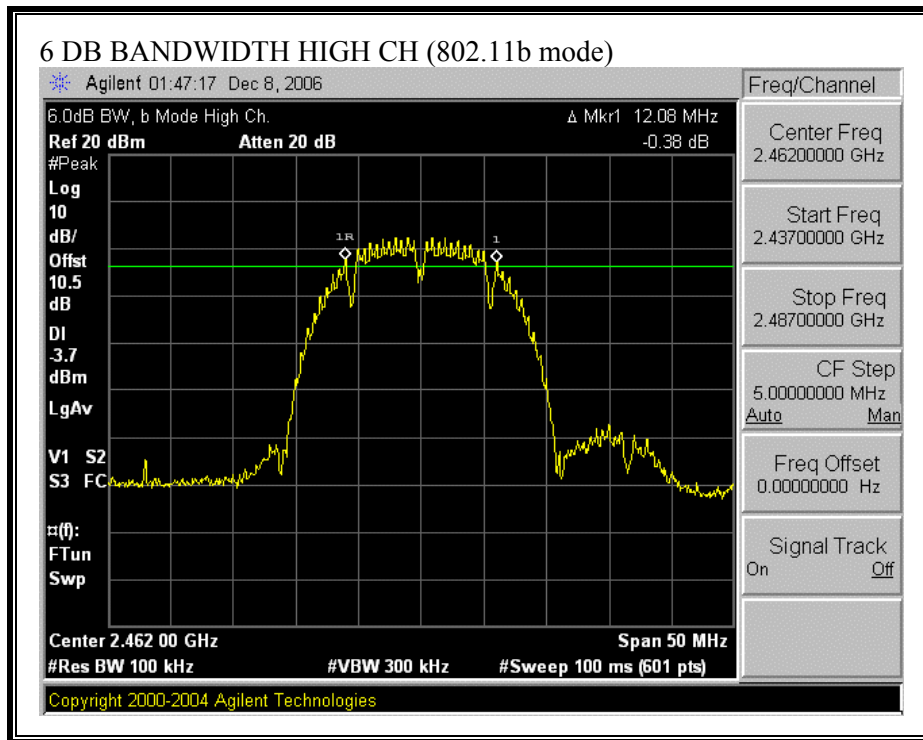

6 DB BANDWIDTH (802.11g MODE)

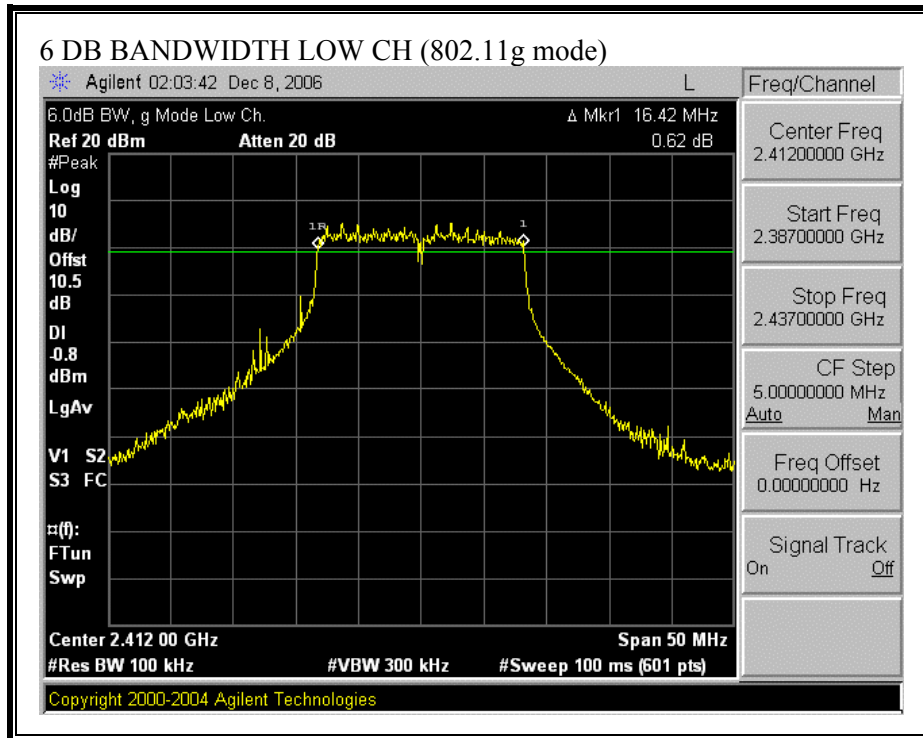

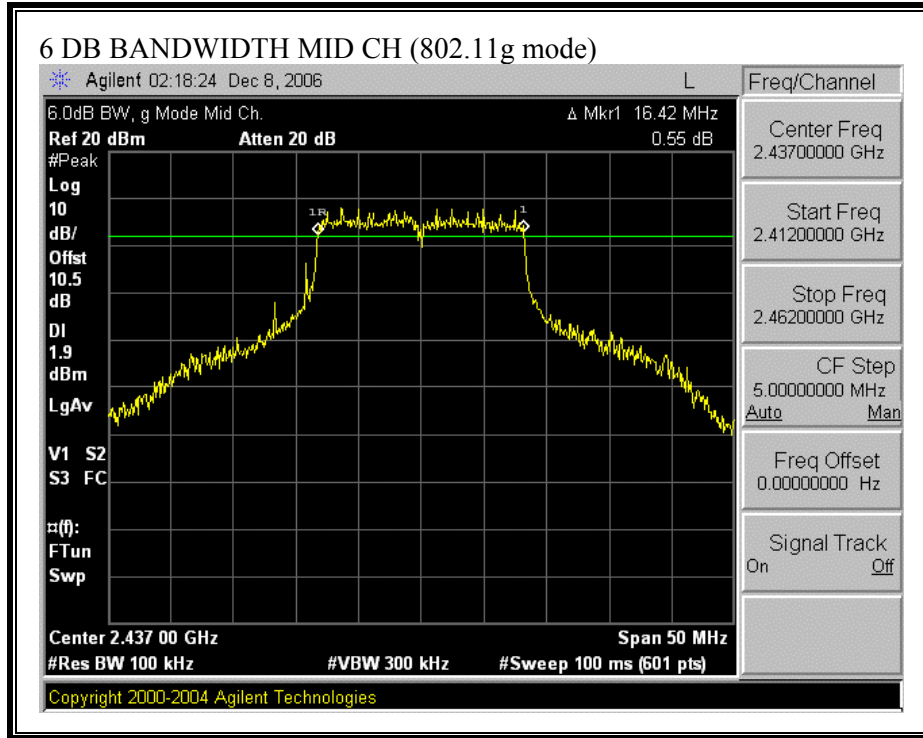

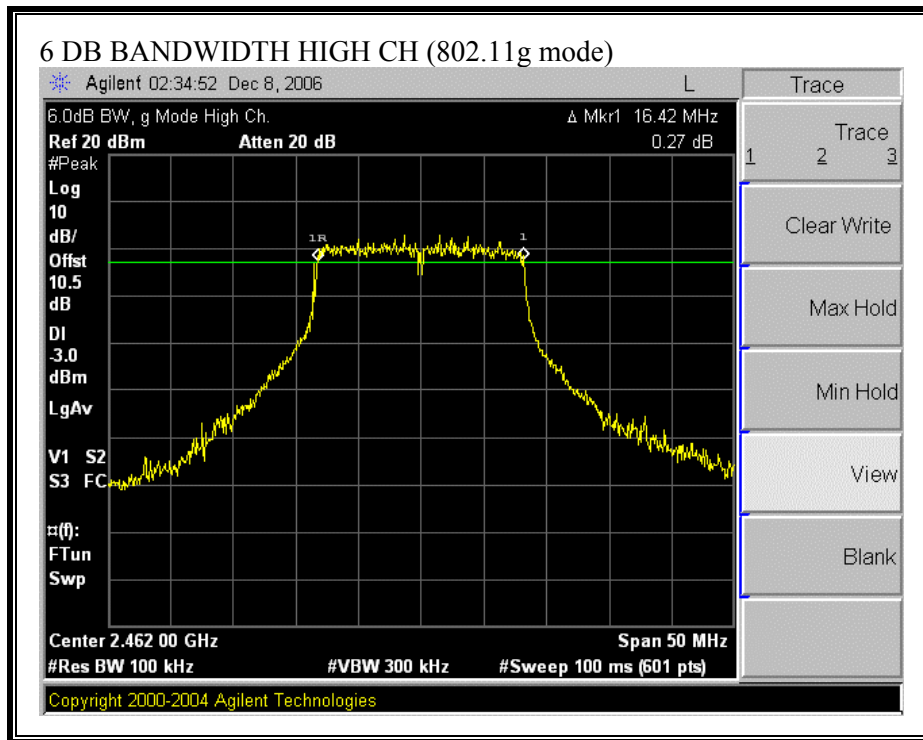

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:


802.11b Mode


| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2412 | 15.556 |
| Middle | 2437 | 15.545 |
| High | 2462 | 15.537 |


802.11g Mode

| Channel | Frequency (MHz) | 99% Bandwidth (MHz) |
|---------|-----------------|---------------------|
| Low | 2412 | 16.654 |
| Middle | 2437 | 16.777 |
| High | 2462 | 16.655 |


99% BANDWIDTH (802.11b MODE)

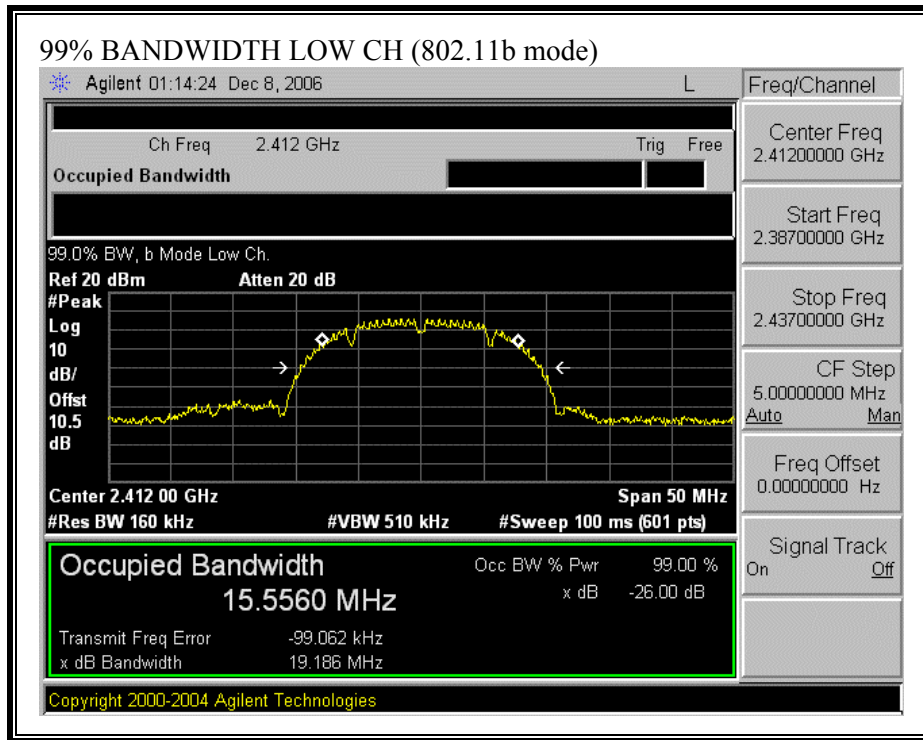


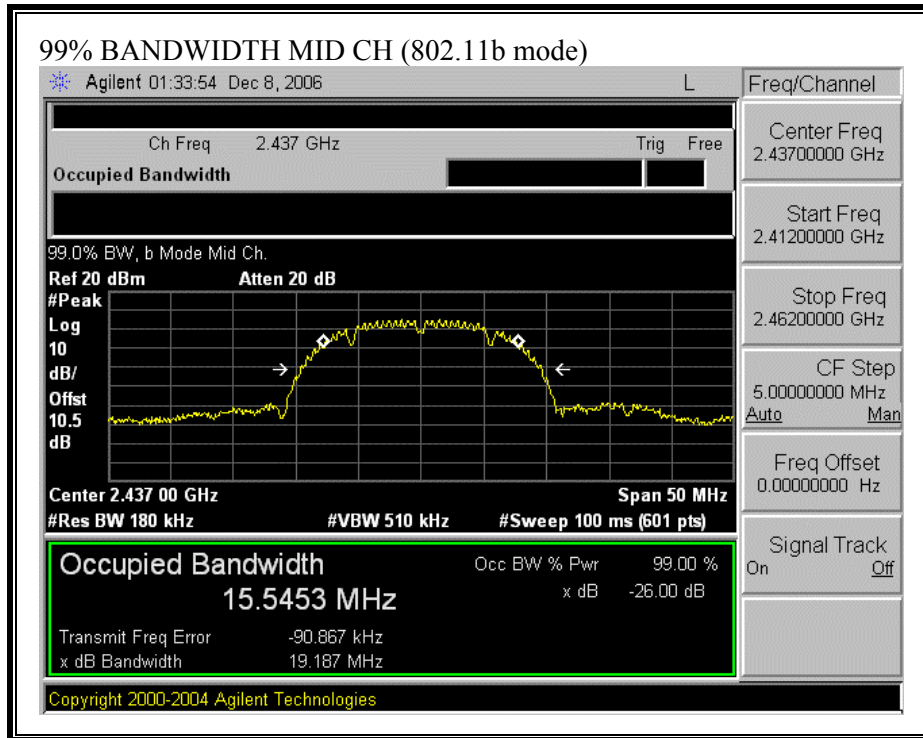


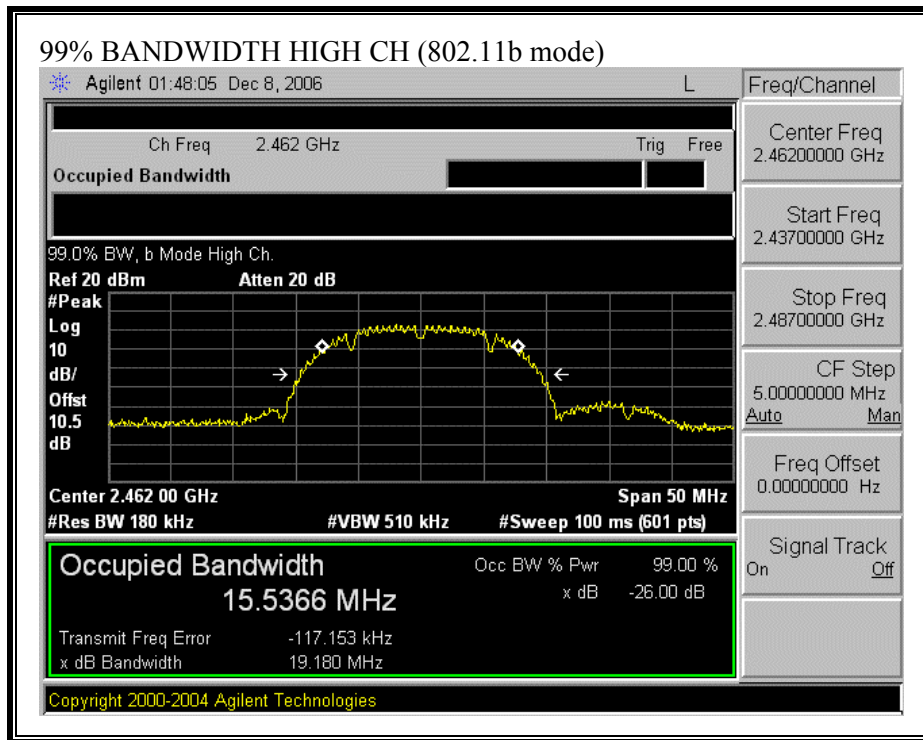

99% BANDWIDTH (802.11g MODE)

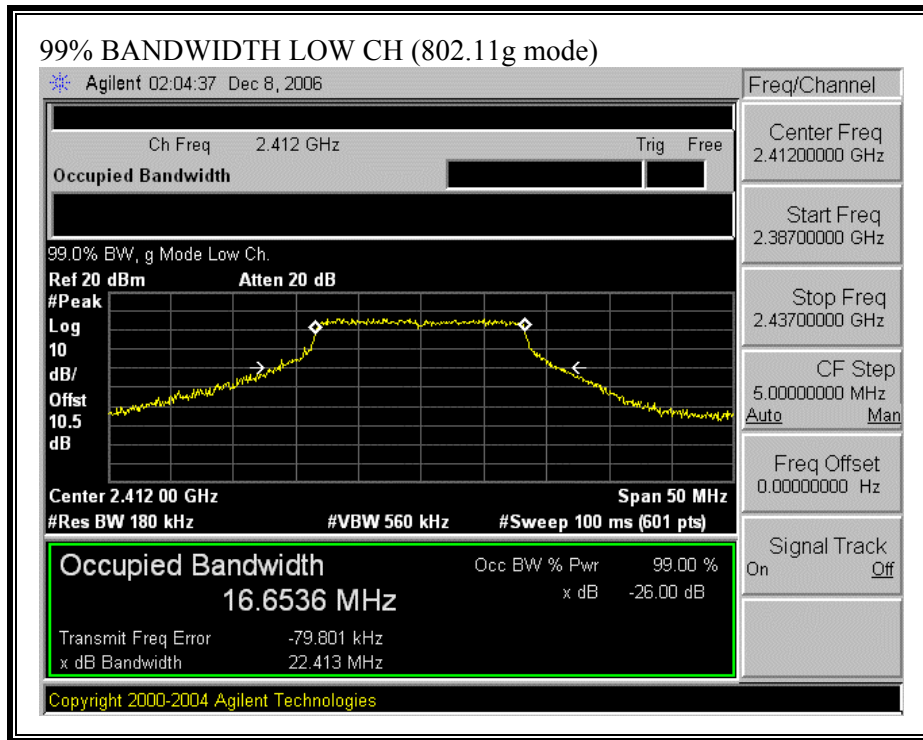

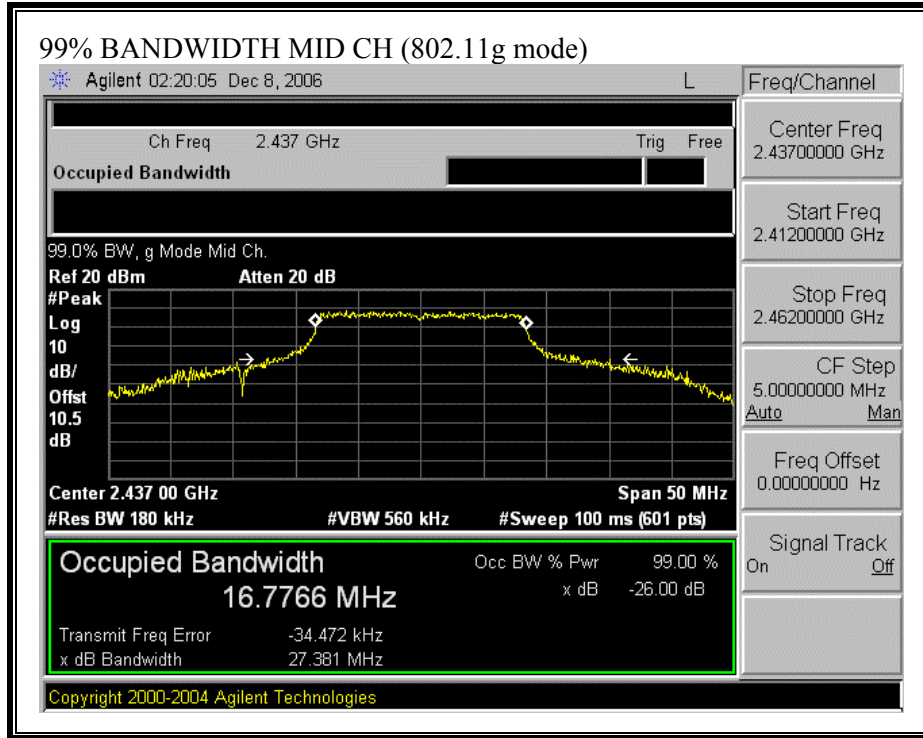

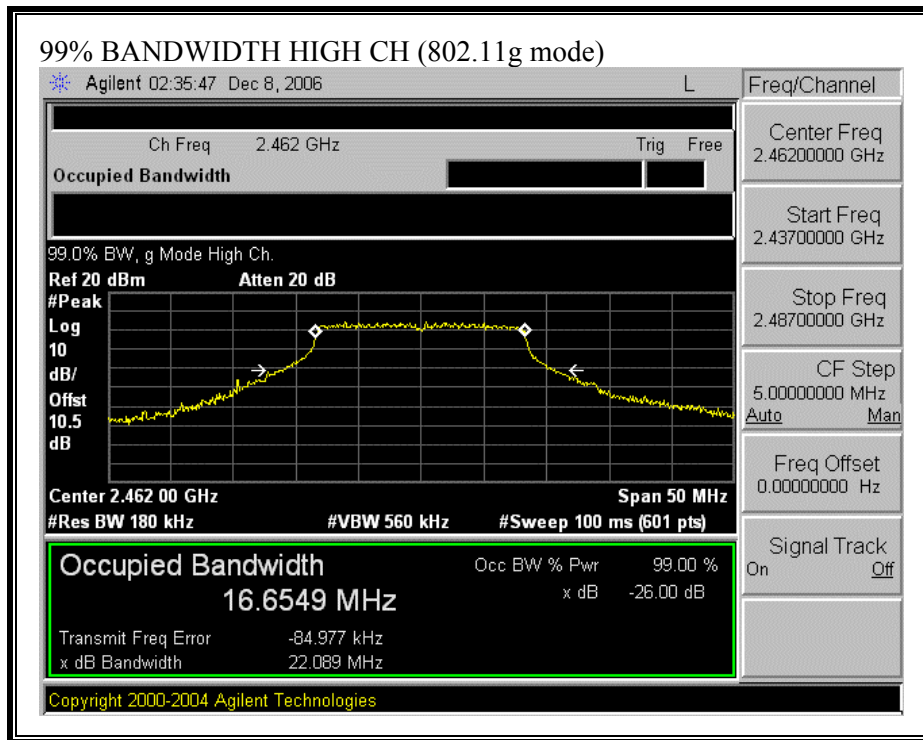

7.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 7.4 dBi exclusively for fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:


802.11b Mode


| Channel | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------|------------------------|-------------------------|--------------------|--------------------|
| Low | 2412 | 18.16 | 30 | -11.84 |
| Middle | 2437 | 17.11 | 30 | -12.89 |
| High | 2462 | 15.01 | 30 | -14.99 |


802.11g Mode

| Channel | Frequency (MHz) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|----------------|------------------------|-------------------------|--------------------|--------------------|
| Low | 2412 | 20.55 | 30 | -9.45 |
| Middle | 2437 | 23.43 | 30 | -6.57 |
| High | 2462 | 18.48 | 30 | -11.52 |


OUTPUT POWER (802.11b MODE)

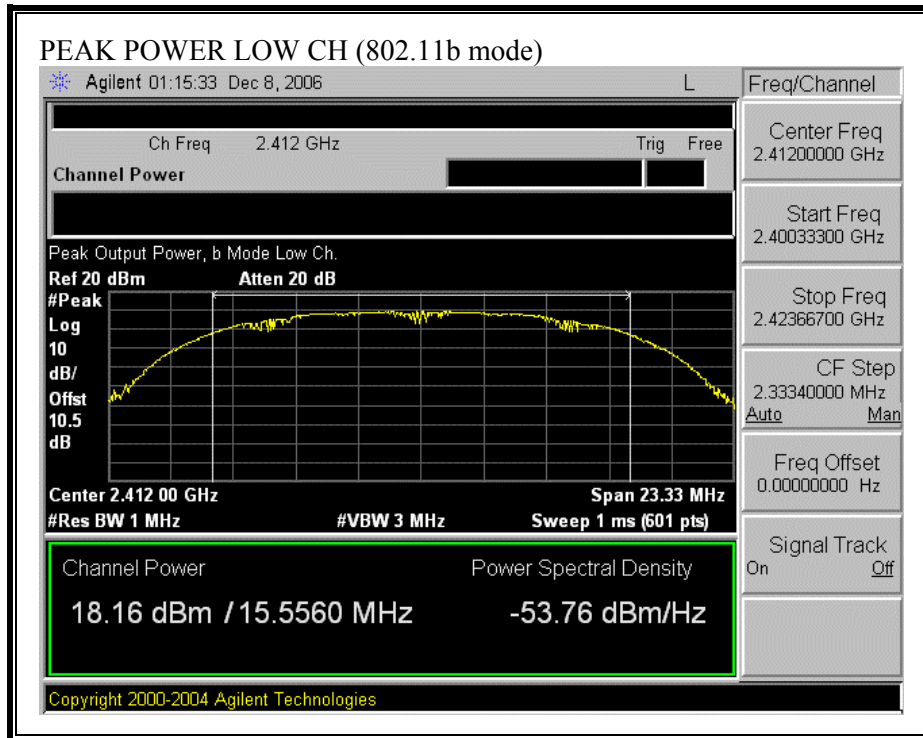


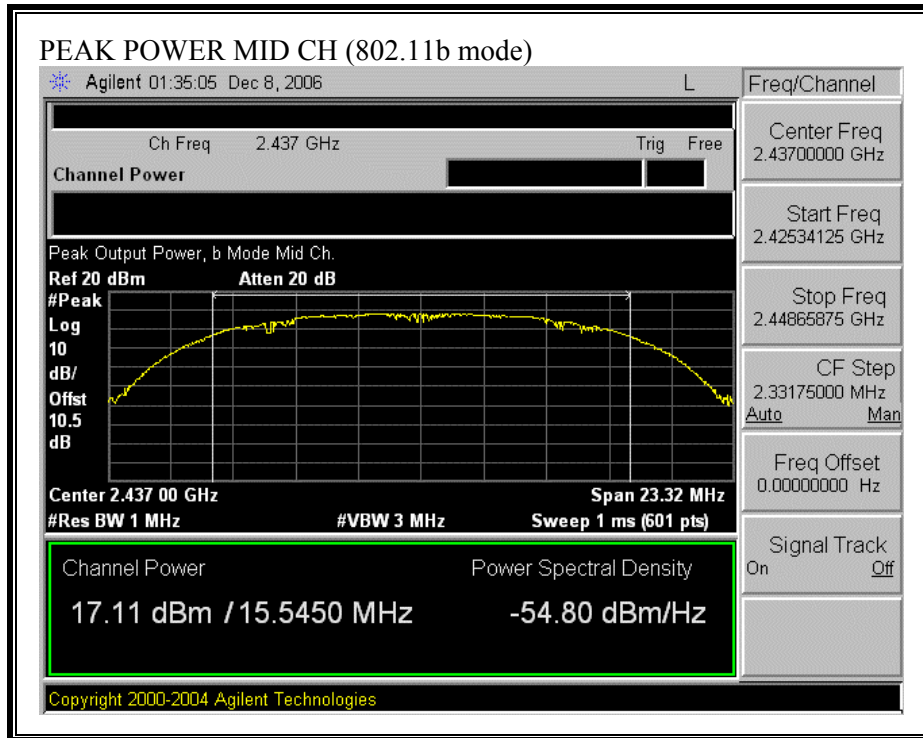


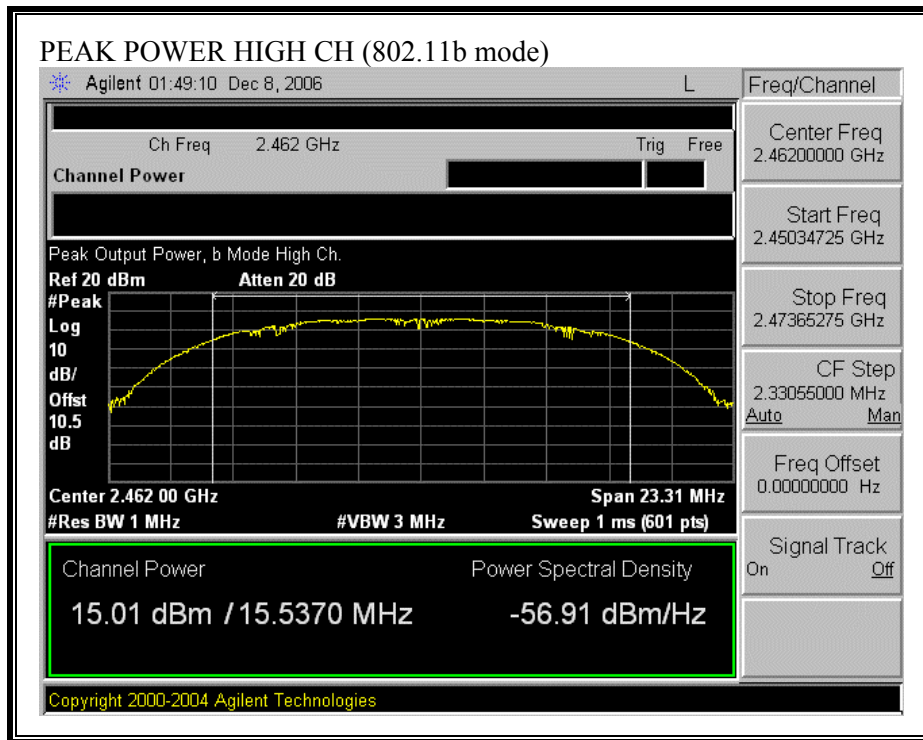

OUTPUT POWER (802.11g MODE)

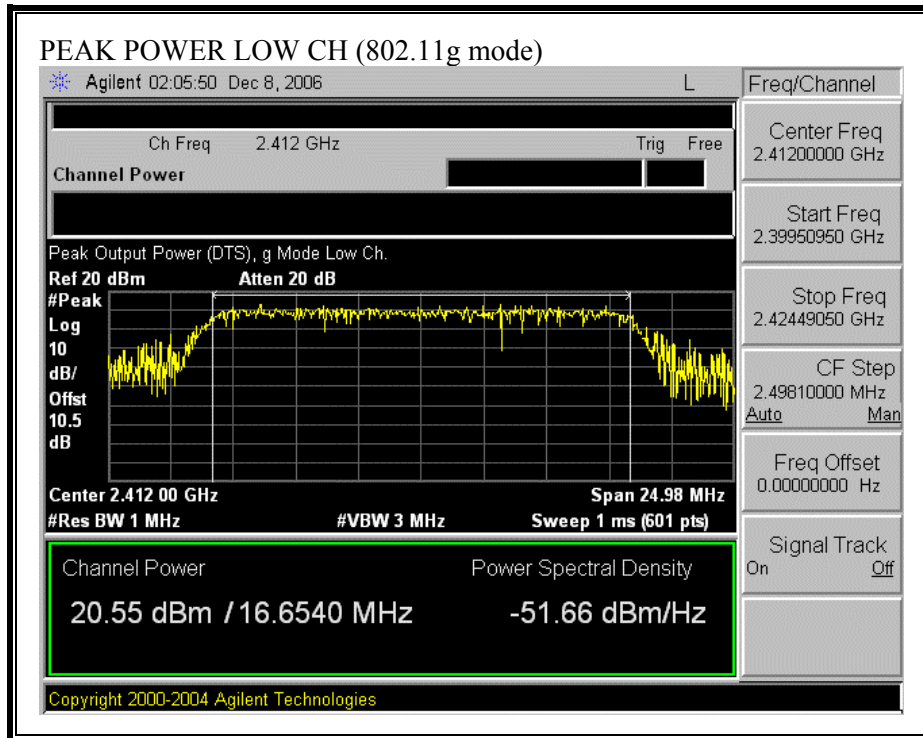

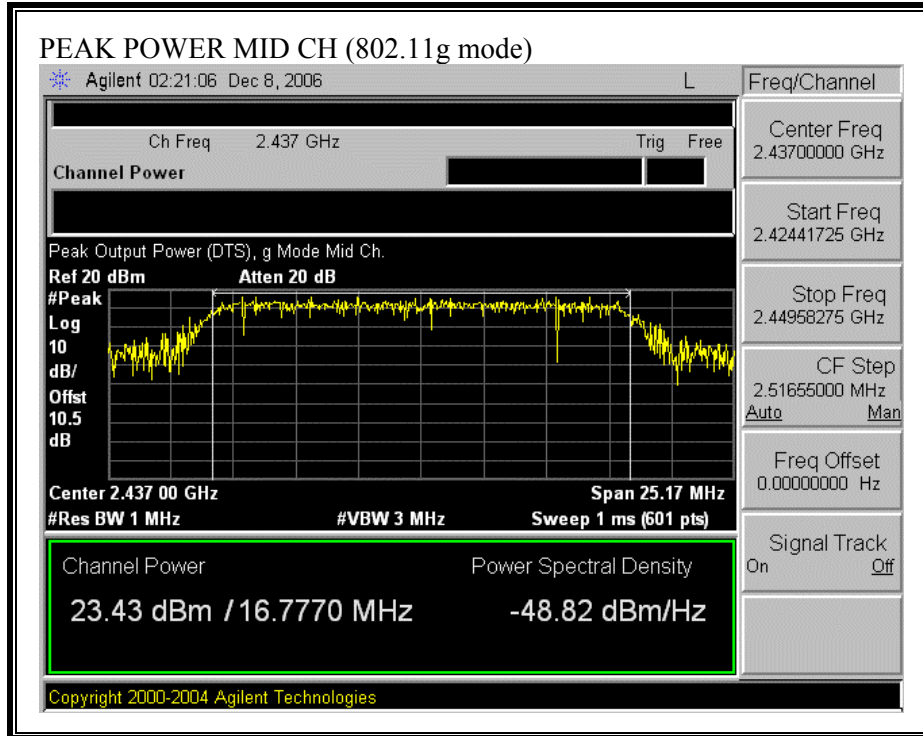

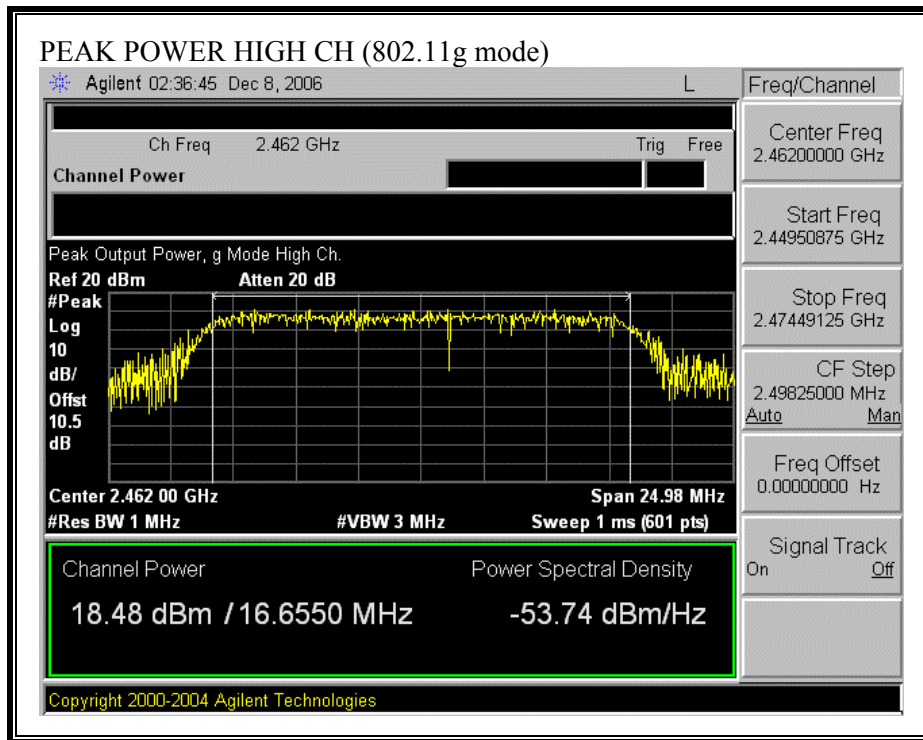

7.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3–3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0–30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30–300 | 61.4 | 0.163 | 1.0 | 6 |
| 300–1500 | | | f/300 | 6 |
| 1500–100,000 | | | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3–1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34–30 | 824/f | 2.19/f | *(180/f ²) | 30 |

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|-----------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| 30–300 | 27.5 | 0.073 | 0.2 | 30 |
| 300–1500 | | | f/1500 | 30 |
| 1500–100,000 | | | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

| Mode | MPE Distance (cm) | Output Power (dBm) | Antenna Gain (dBi) | Power Density (mW/cm²) |
|-------------|--------------------------|---------------------------|---------------------------|--|
| 802.11b | 20.0 | 18.16 | 7.40 | 0.07 |
| 802.11g | 20.0 | 23.43 | 7.40 | 0.24 |

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.5 dB (including 10 dB pad and 0.5 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low | 2412 | 14.70 |
| Middle | 2437 | 13.87 |
| High | 2462 | 12.33 |

802.11g Mode

| Channel | Frequency (MHz) | Power (dBm) |
|---------|-----------------|-------------|
| Low | 2412 | 15.42 |
| Middle | 2437 | 17.41 |
| High | 2462 | 12.45 |

7.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS

No non-compliance noted:


802.11b Mode


| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -4.22 | 8 | -12.22 |
| Middle | 2437 | -5.42 | 8 | -13.42 |
| High | 2462 | -7.86 | 8 | -15.86 |


802.11g Mode

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Margin (dB) |
|---------|-----------------|------------|-------------|-------------|
| Low | 2412 | -3.08 | 8 | -11.08 |
| Middle | 2437 | -1.37 | 8 | -9.37 |
| High | 2462 | -4.97 | 8 | -12.97 |


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

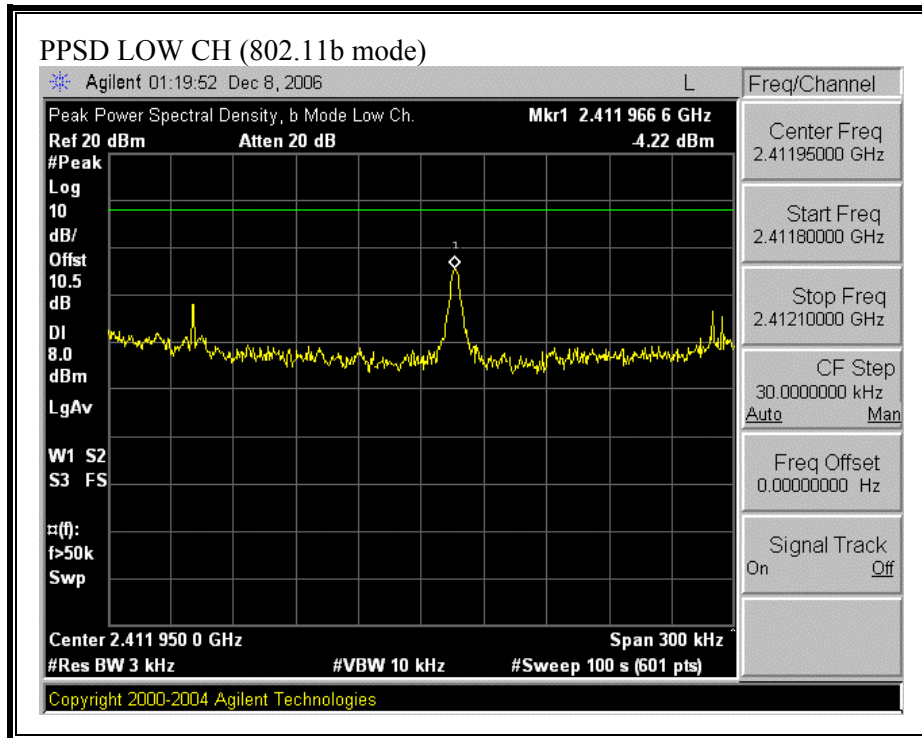


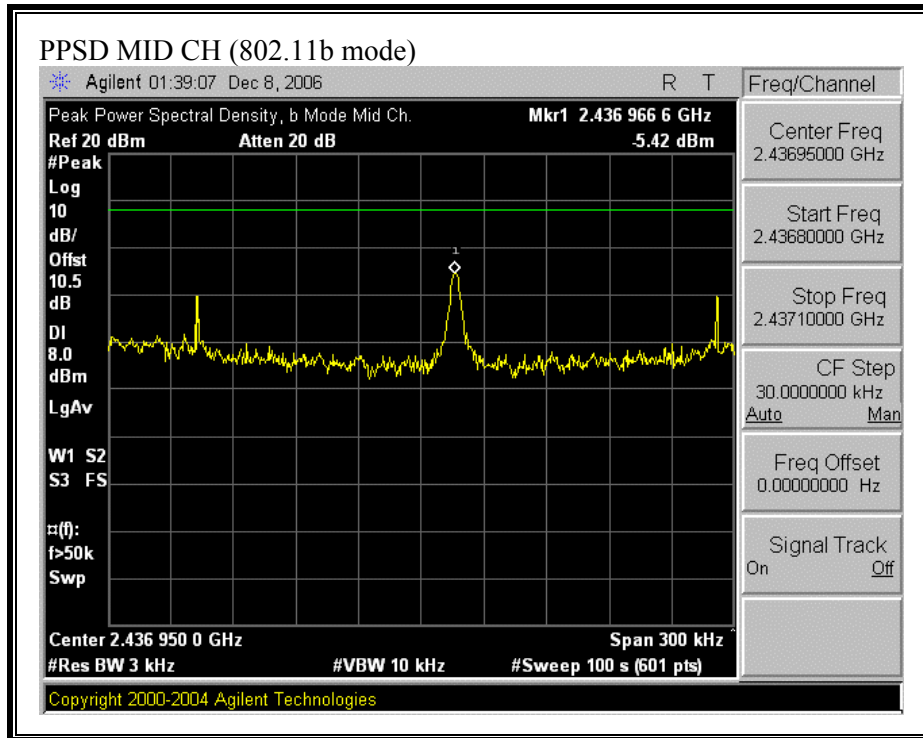


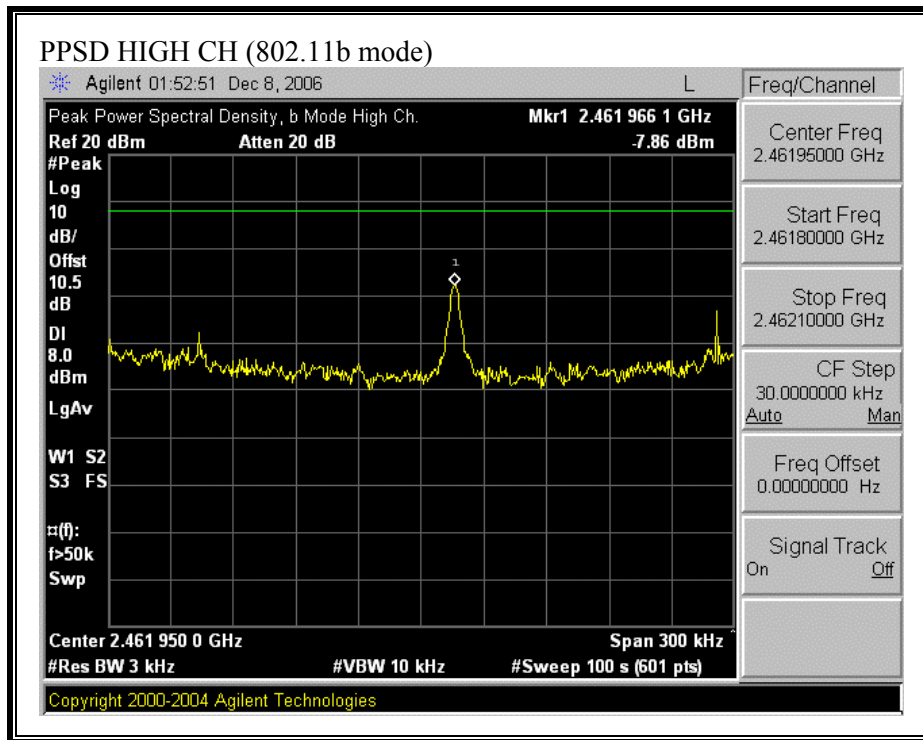

PEAK POWER SPECTRAL DENSITY (802.11g MODE)

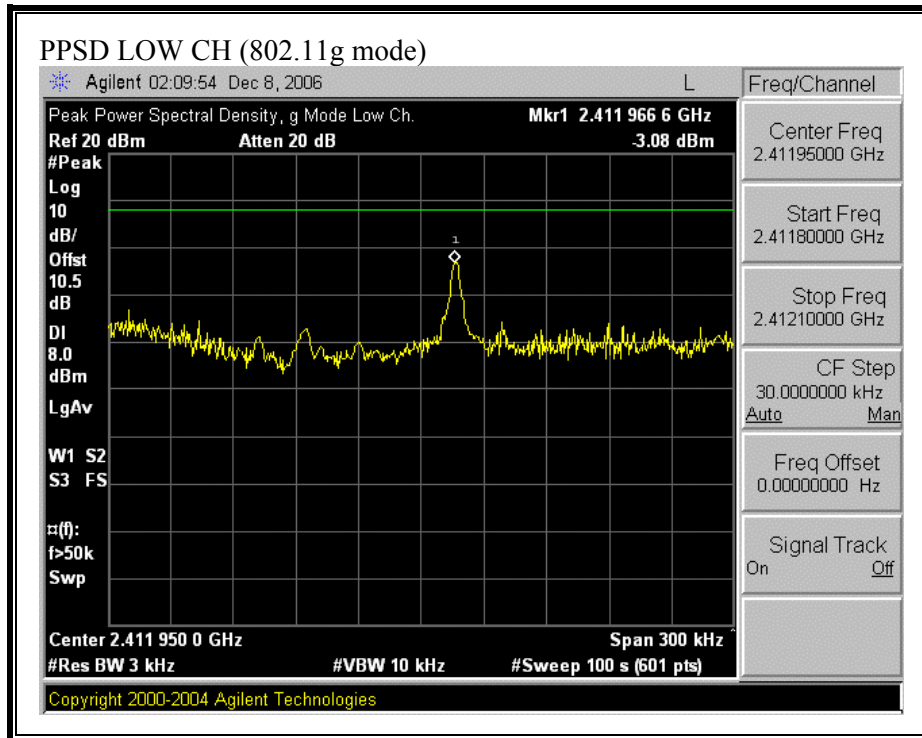

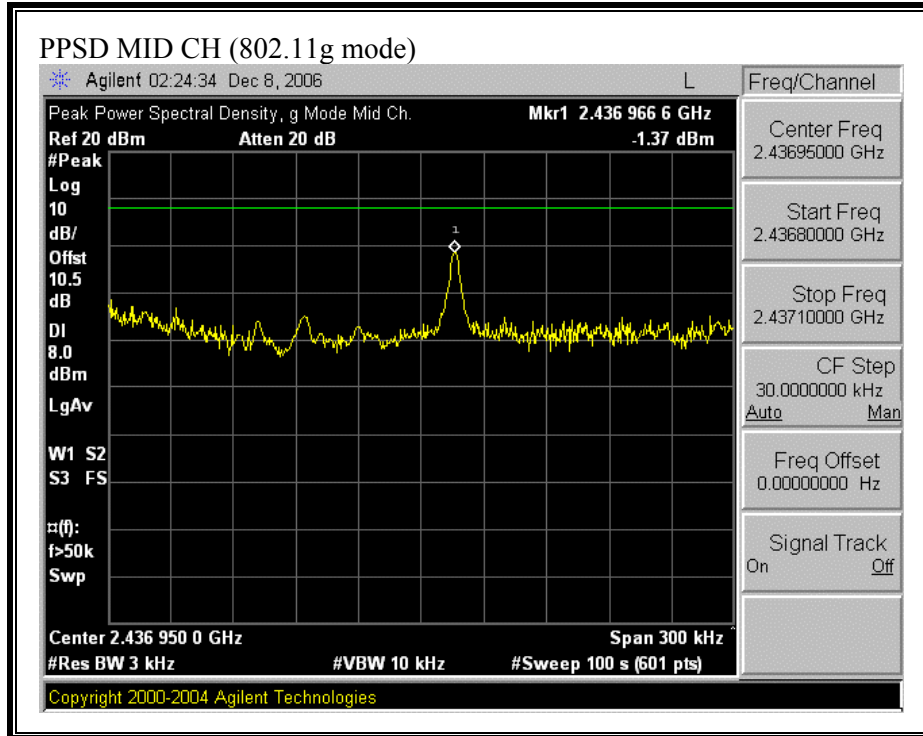

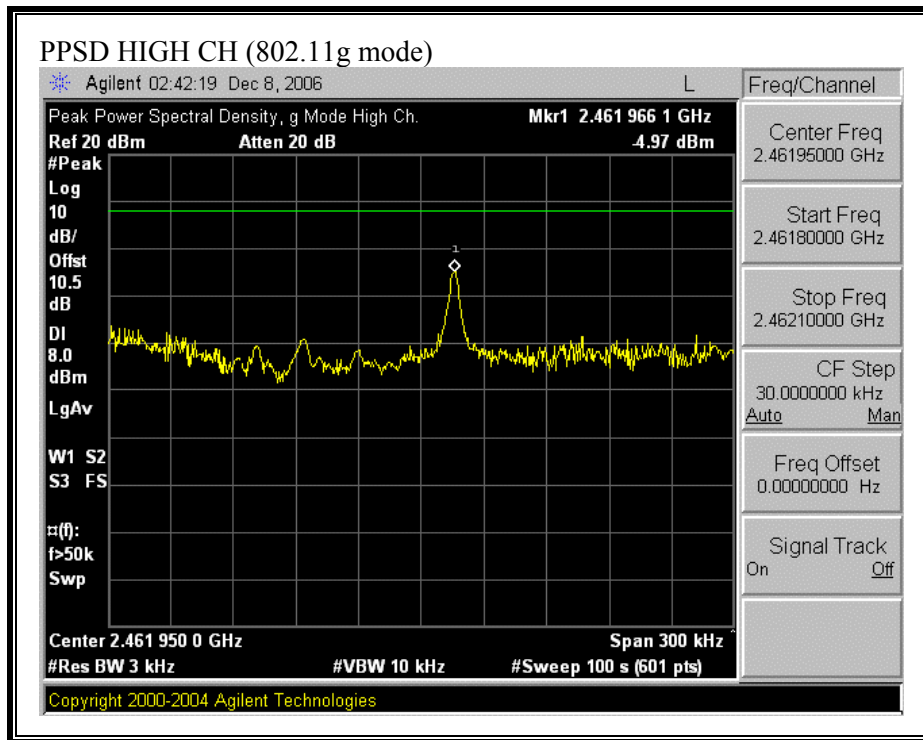

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

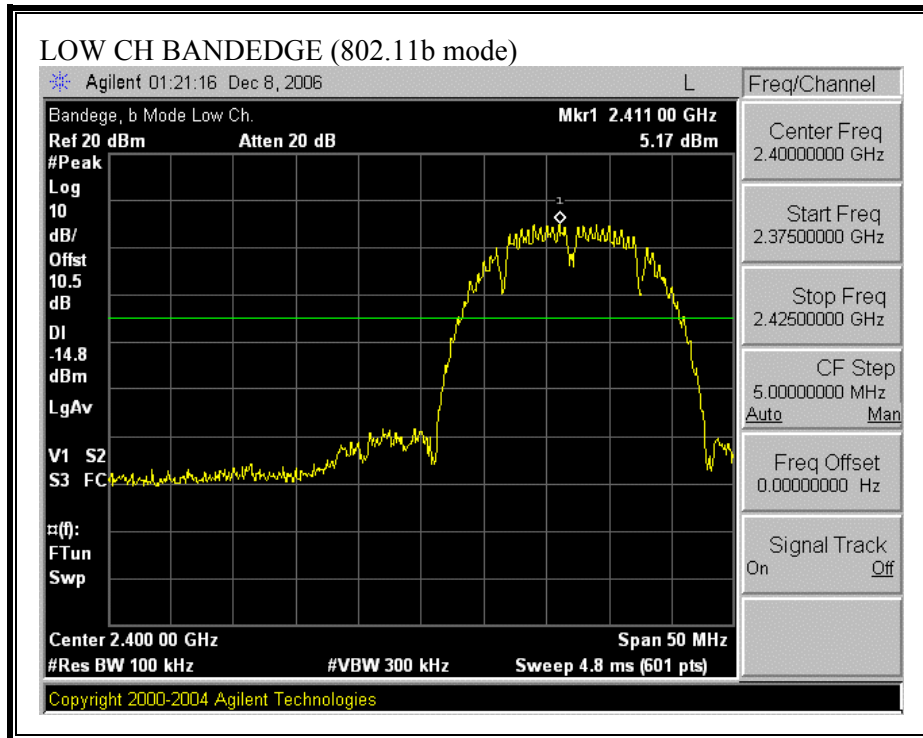

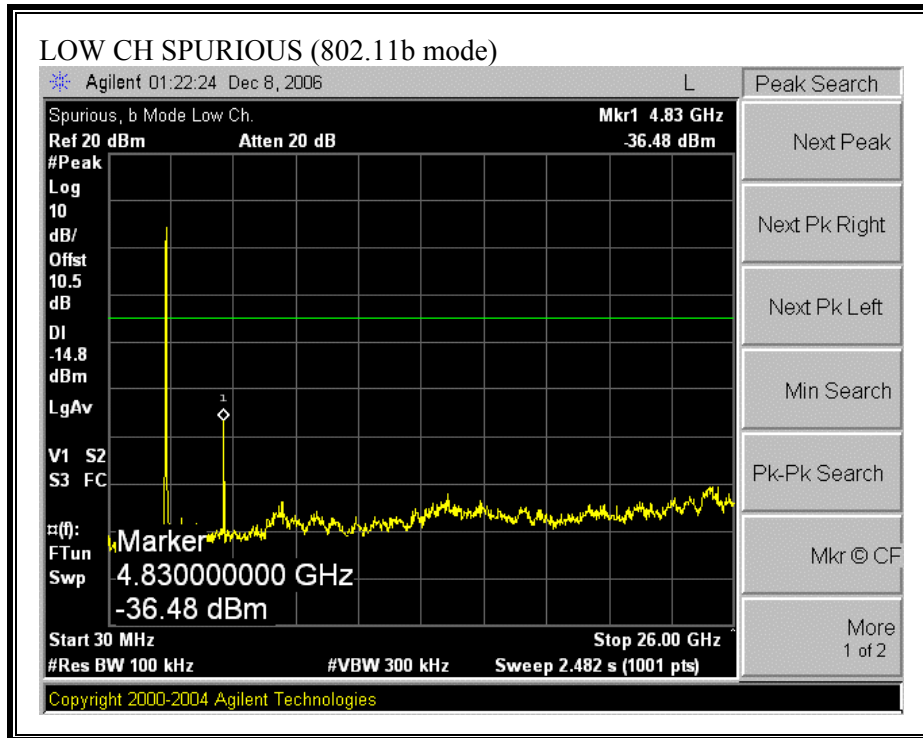



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

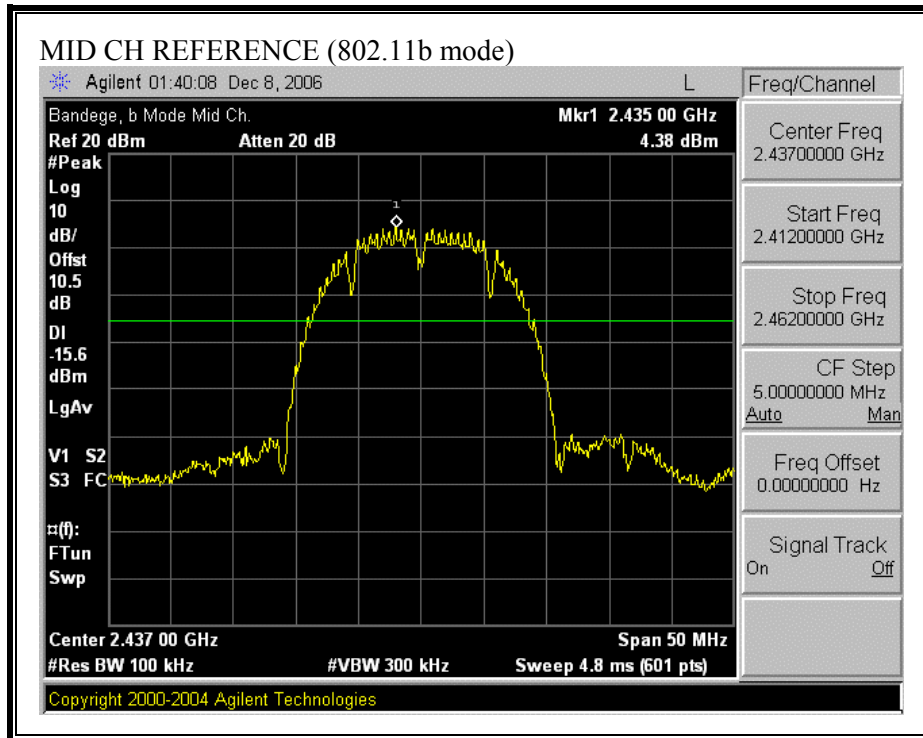

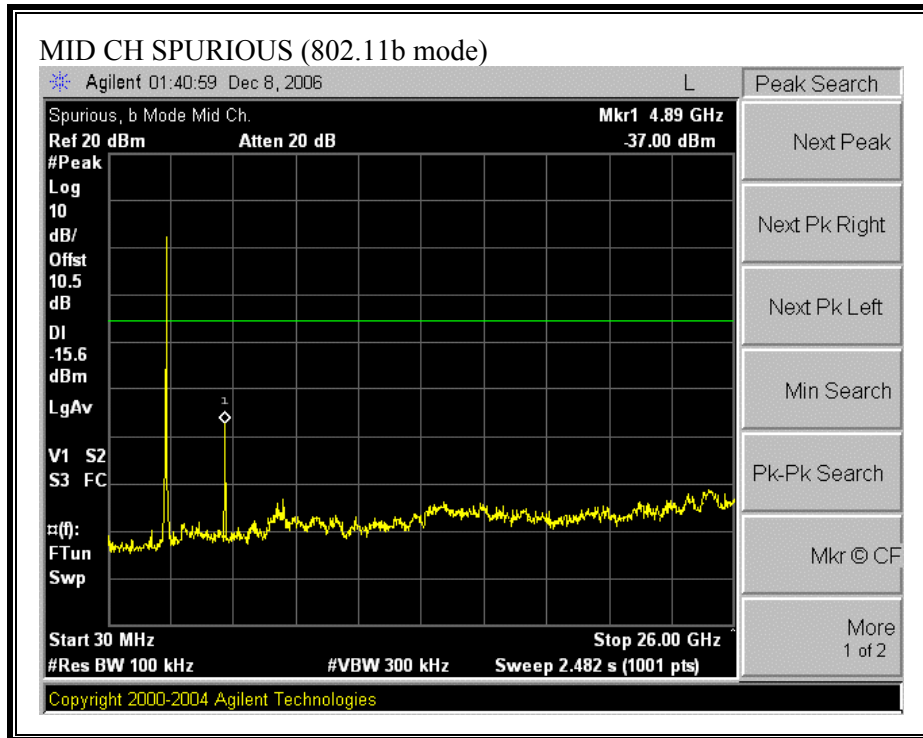



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

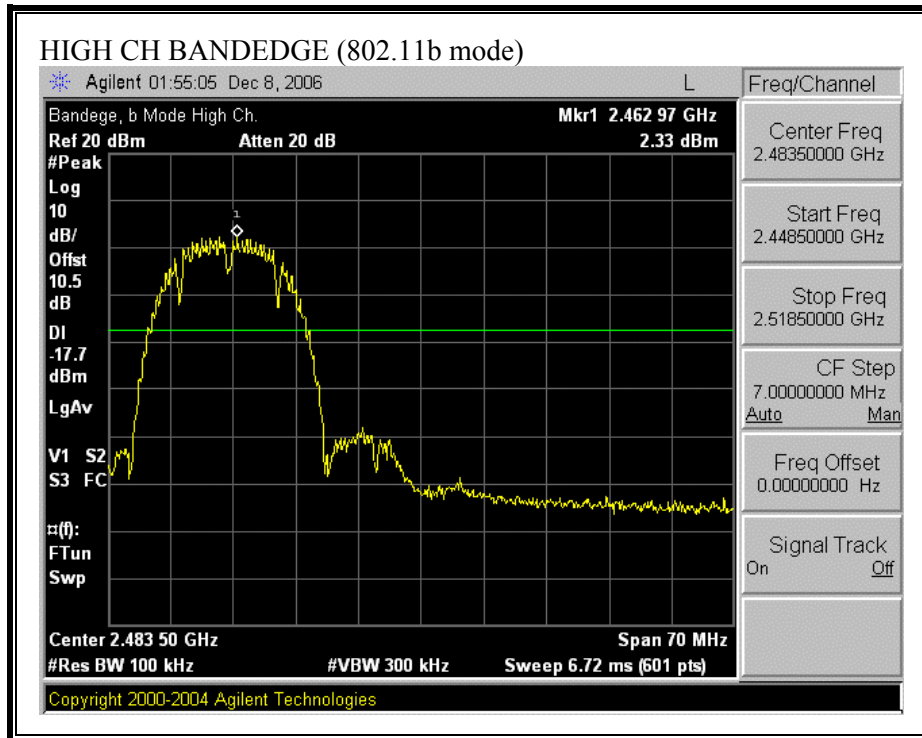

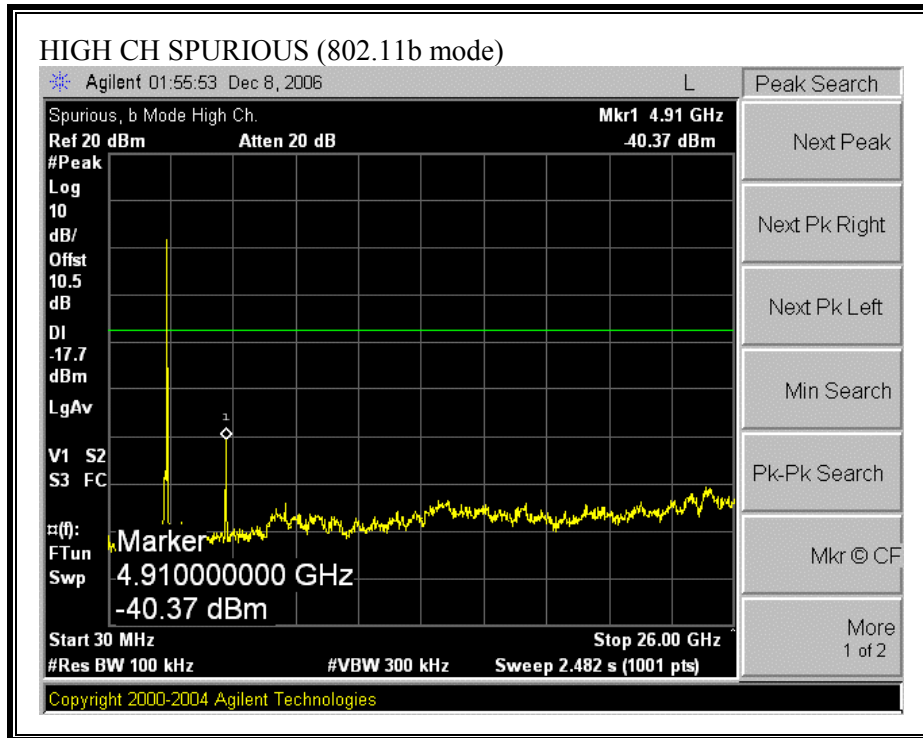



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

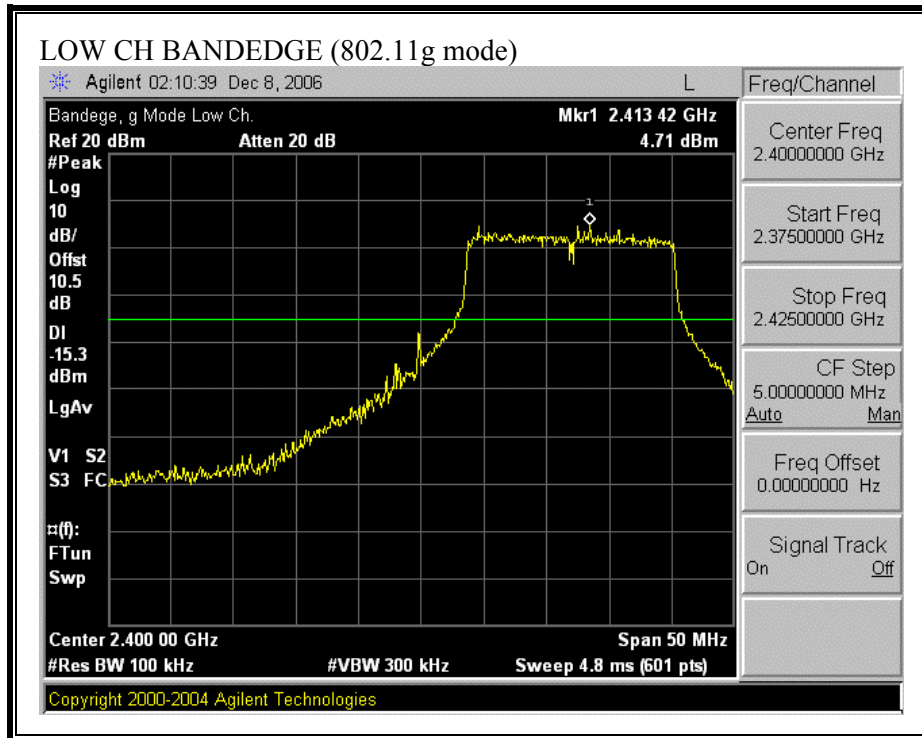

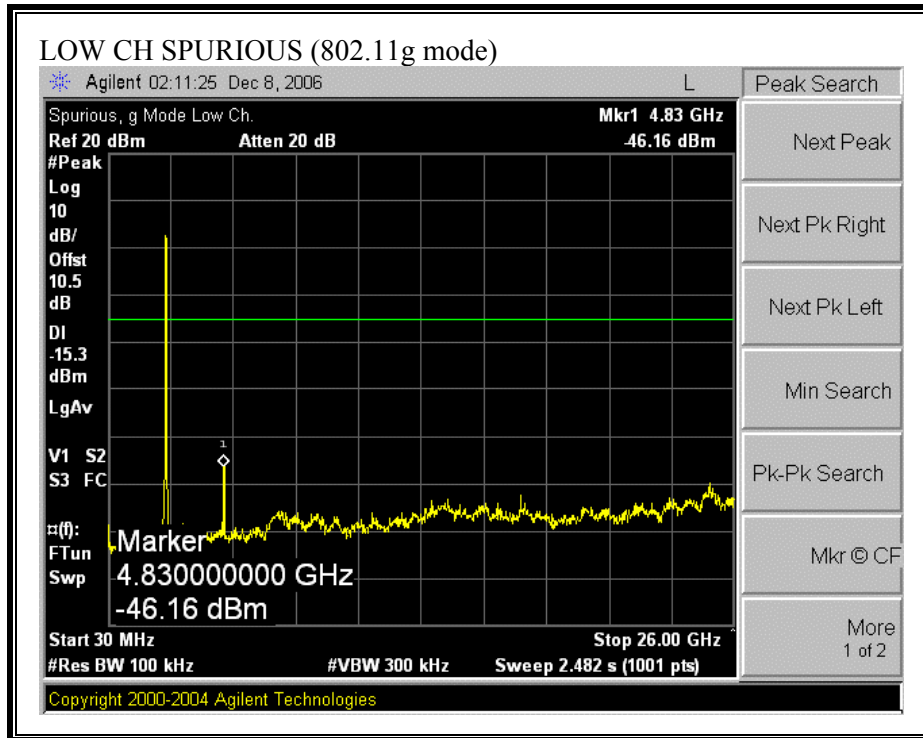



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

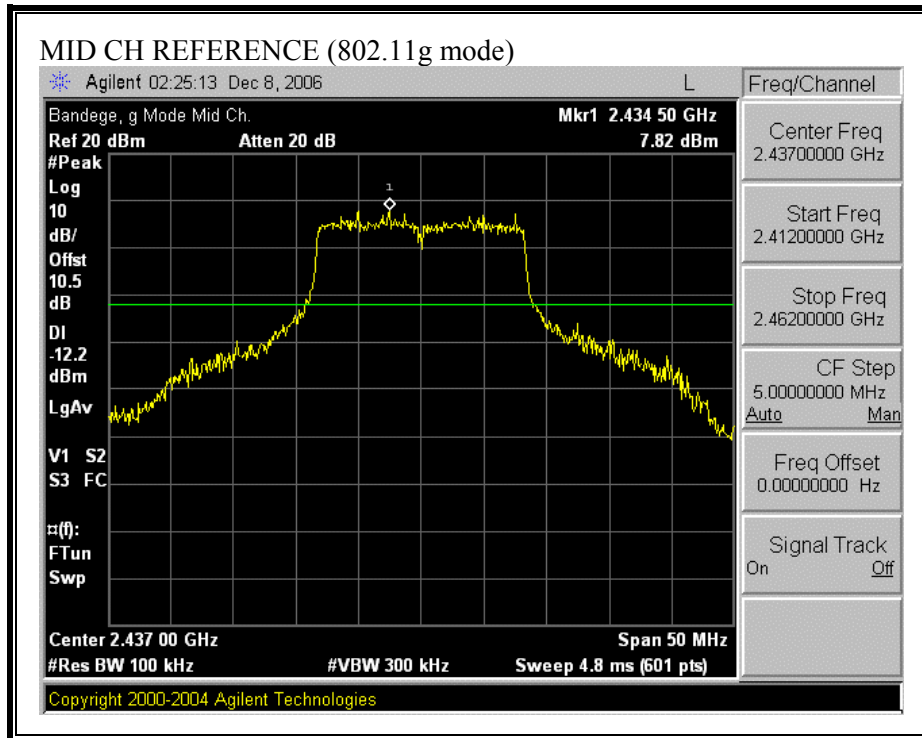

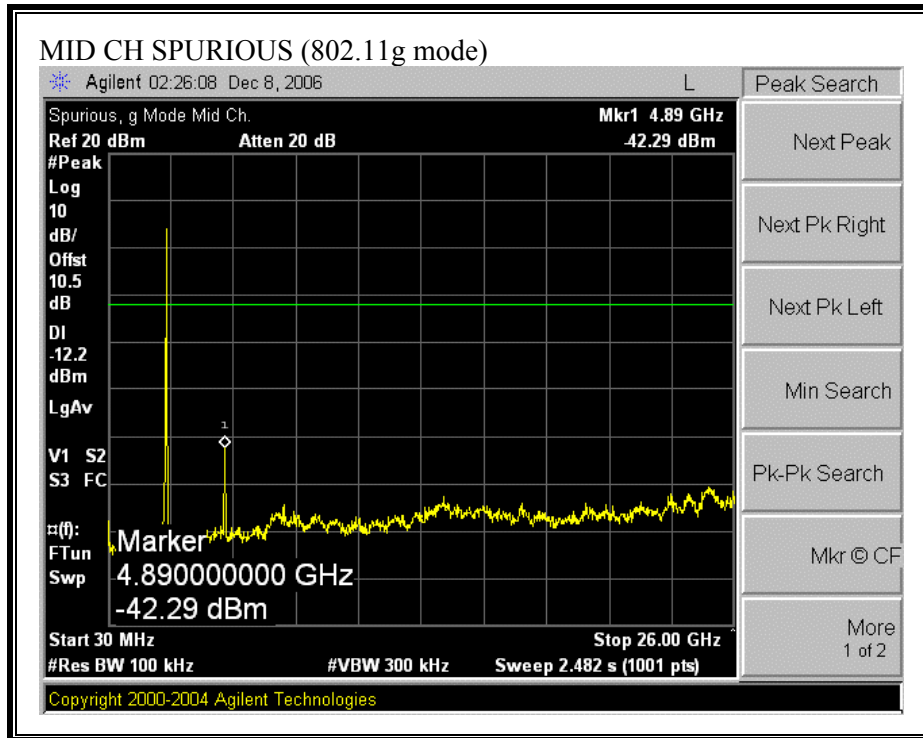

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

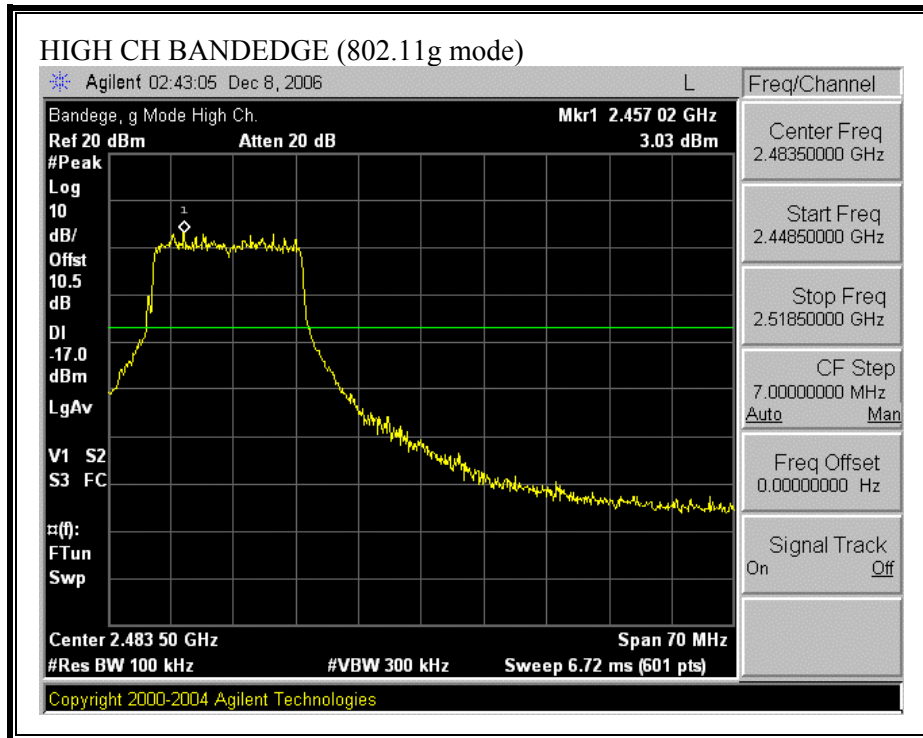

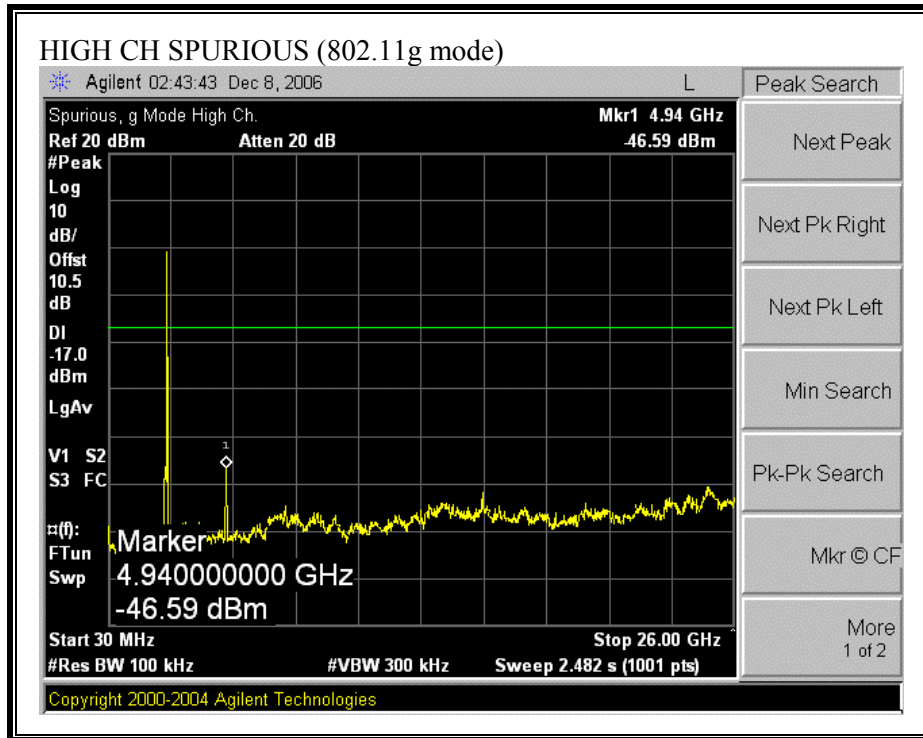

RADIATED EMISSIONS FOR 2400 TO 2483.5 MHz BAND

7.1.8. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 - 88 | 100 ** | 3 |
| 88 - 216 | 150 ** | 3 |
| 216 - 960 | 200 ** | 3 |
| Above 960 | 500 | 3 |

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.1.9. TRANSMITTER ABOVE 1 GHz


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

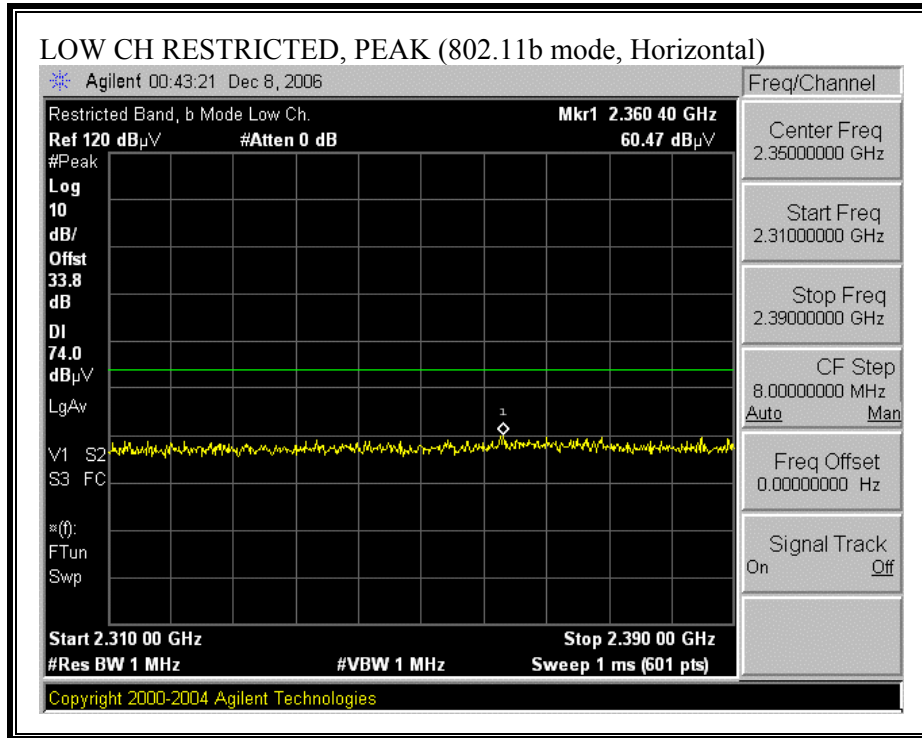

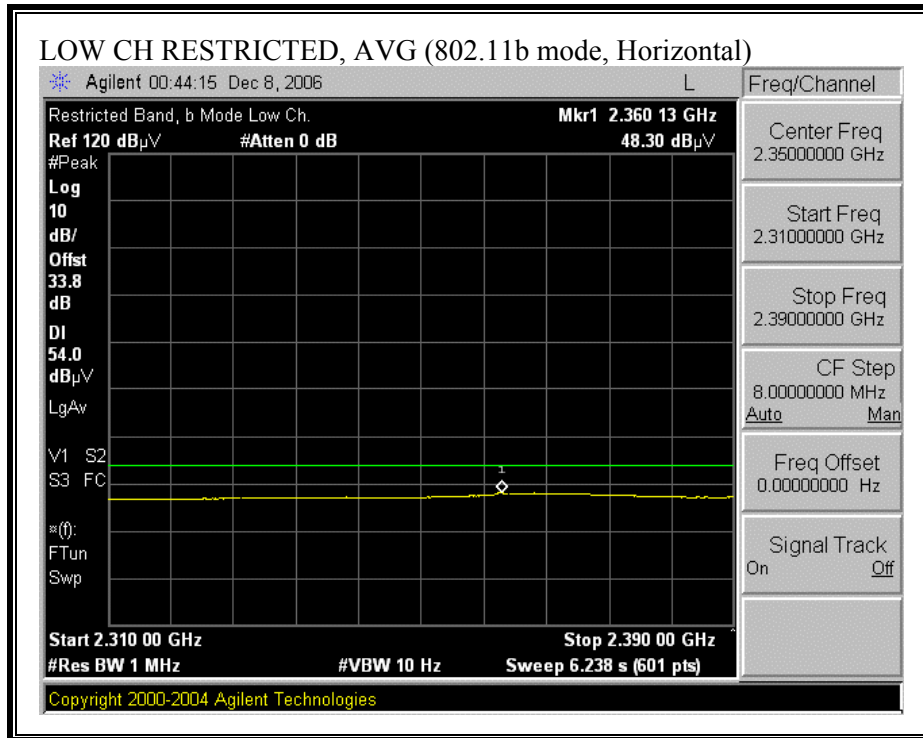



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

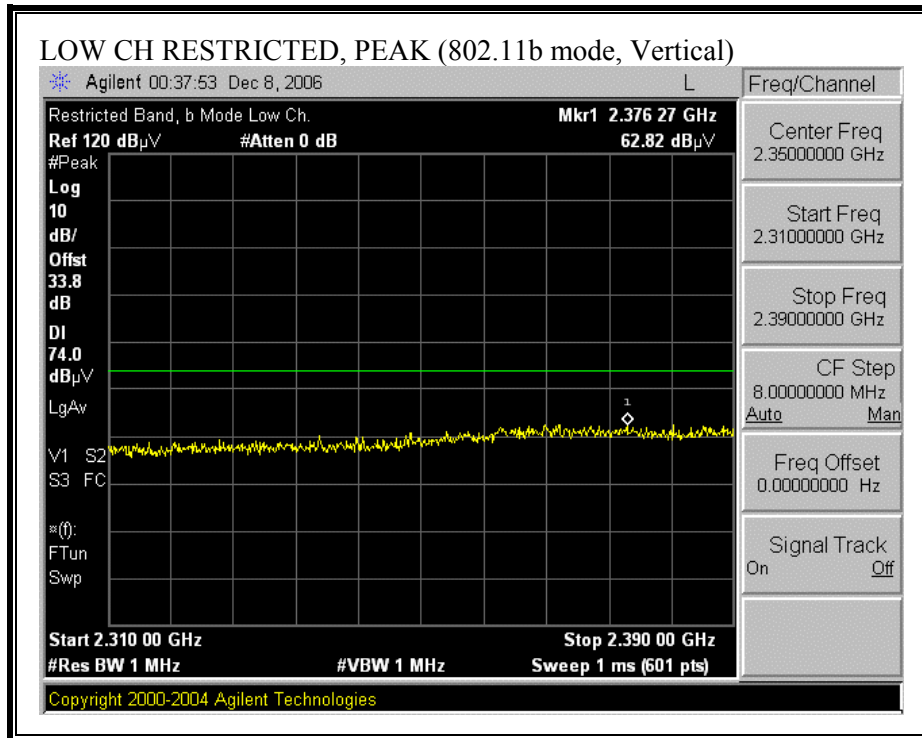

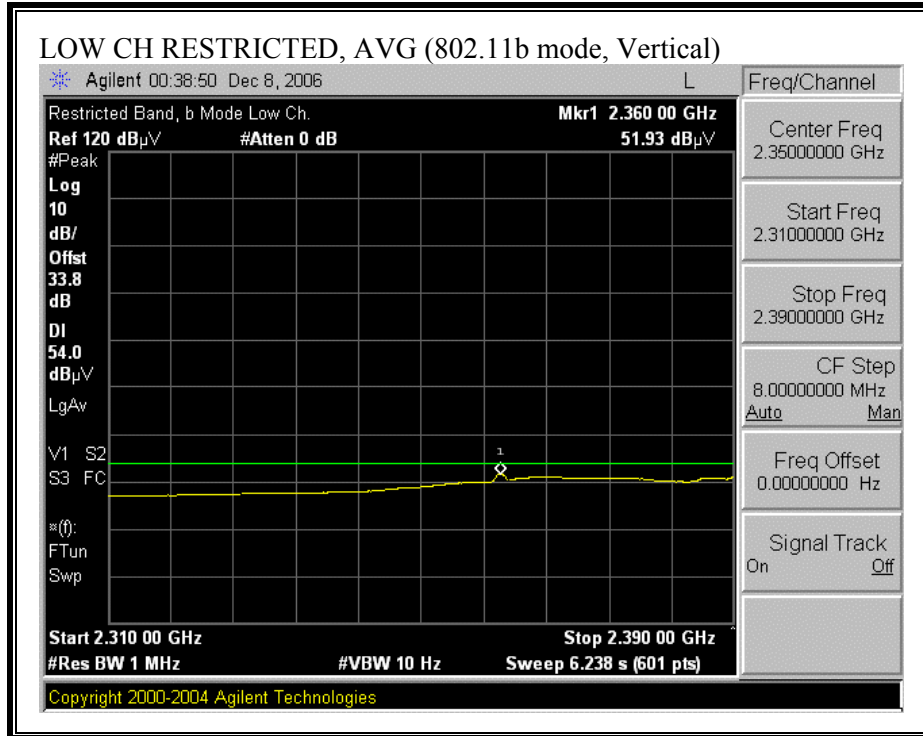



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

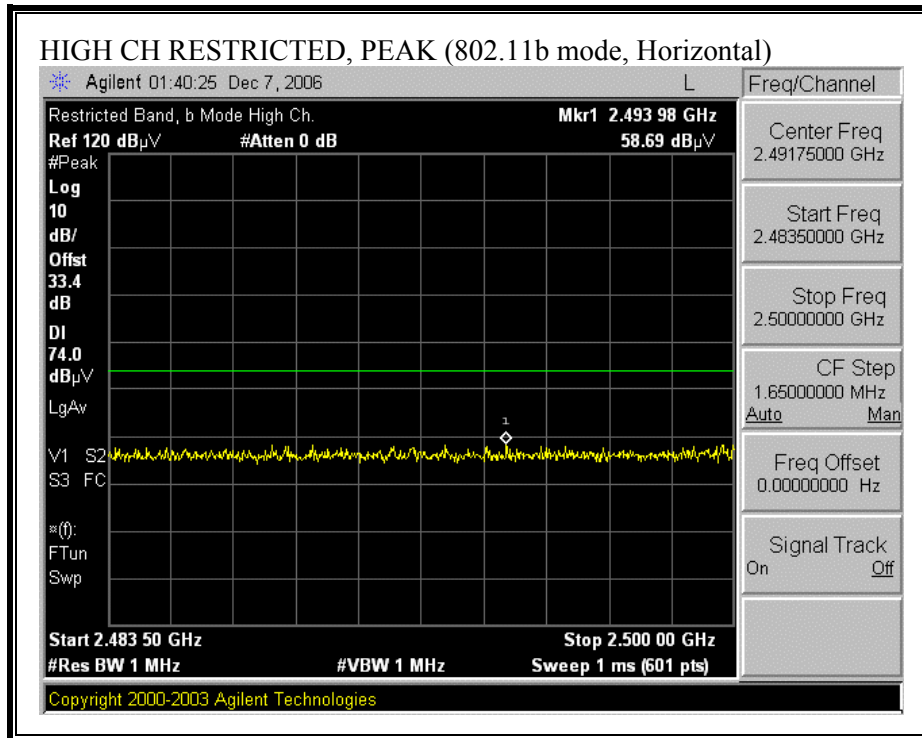

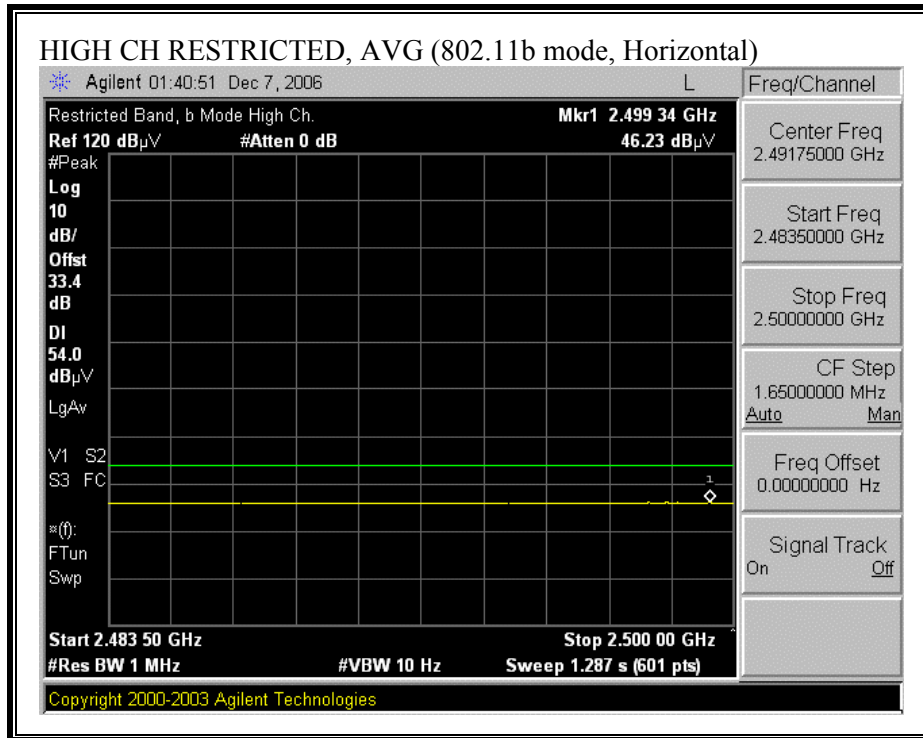

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

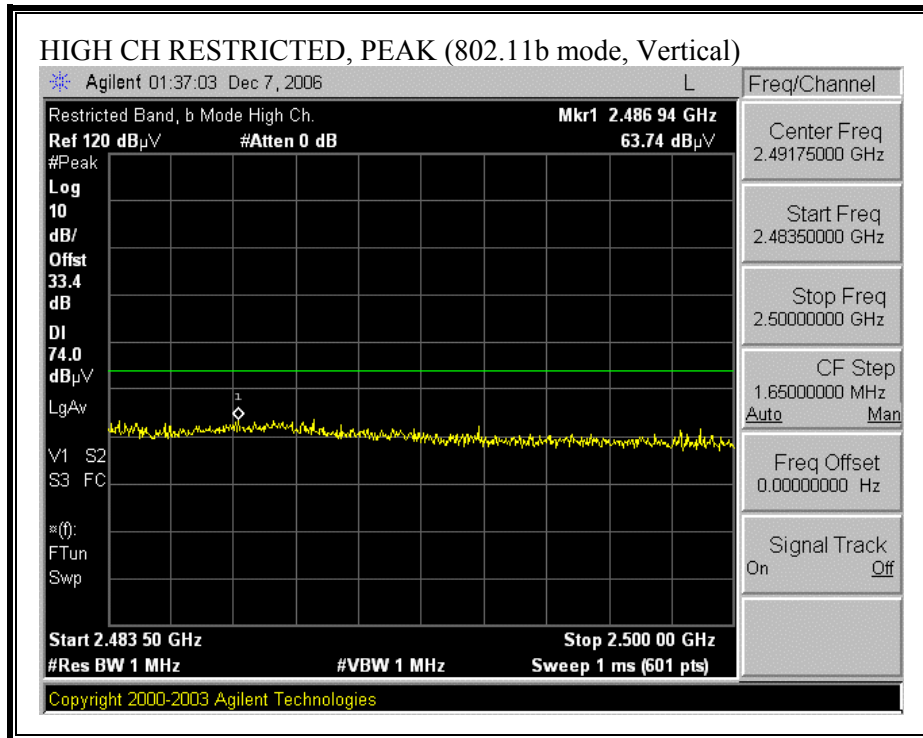


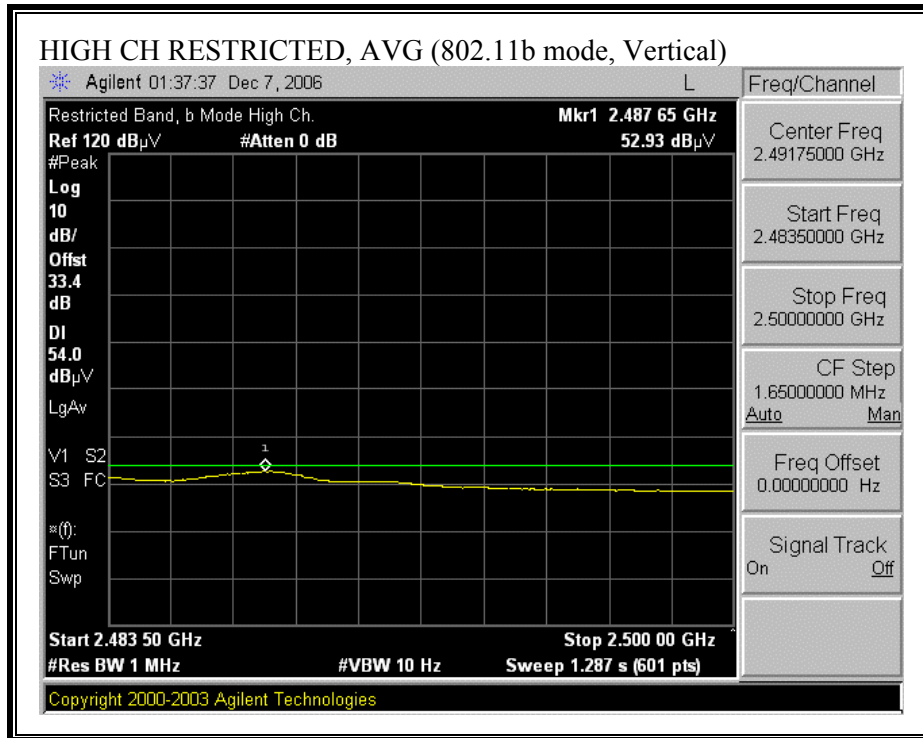


HARMONICS AND SPURIOUS EMISSIONS (b MODE)


| 12/08/06 High Frequency Measurement | | | | | | | | | | | | | | | |
|---|-----------------------|--------------|---------------|--------------------------------|-------|--------------------------------------|-----------|---------|-------------|------------|---------------|----------------|-----------|------------|-------------|
| Compliance Certification Services, Morgan Hill Open Field Site | | | | | | | | | | | | | | | |
| Test Engr: William Zhuang | | | | | | | | | | | | | | | |
| Project #: 06U10713 | | | | | | | | | | | | | | | |
| Company: Skypilot Networks | | | | | | | | | | | | | | | |
| EUT Descr.: 802.11 b/g Fixed Wireless Node | | | | | | | | | | | | | | | |
| EUT M/N: Skyconnector Outdoor SC1110 (FCC/IC ID: RV7-SC1110/5550A-SC1110) | | | | | | | | | | | | | | | |
| Test Target: FCC 15.247 | | | | | | | | | | | | | | | |
| Mode Oper: Tx b Mode | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | Amp | Preamp Gain | | Avg Lim Average Field Strength Limit | | | | | | | | | |
| Dist | Distance to Antenna | | D Corr | Distance Correct to 3 meters | | Pk Lim Peak Field Strength Limit | | | | | | | | | |
| Read | Analyzer Reading | | Avg | Average Field Strength @ 3 m | | Avg Mar Margin vs. Average Limit | | | | | | | | | |
| AF | Antenna Factor | | Peak | Calculated Peak Field Strength | | Pk Mar Margin vs. Peak Limit | | | | | | | | | |
| CL | Cable Loss | | HPF | High Pass Filter | | | | | | | | | | | |
| f GHz | Dist (m) | Read Pk dBuV | Read Avg dBuV | AF dB/m | CL dB | Amp dB | D Corr dB | Fltr dB | Peak dBuV/m | Avg dBuV/m | Pk Lim dBuV/m | Avg Lim dBuV/m | Pk Mar dB | Avg Mar dB | Notes (V/H) |
| Low Ch. Output Power: 14.7 dBm | | | | | | | | | | | | | | | |
| 4.824 | 3.0 | 54.2 | 52.3 | 33.7 | 3.6 | -36.5 | 0.0 | 0.0 | 55.0 | 53.1 | 74.0 | 54.0 | -19.0 | -0.9 | V |
| 7.236 | 3.0 | 48.8 | 42.5 | 35.2 | 4.3 | -36.2 | 0.0 | 0.0 | 52.0 | 45.7 | 74.0 | 54.0 | -22.0 | -8.3 | V |
| 4.824 | 3.0 | 52.5 | 50.3 | 33.7 | 3.6 | -36.5 | 0.0 | 0.0 | 53.3 | 51.1 | 74.0 | 54.0 | -20.7 | -2.9 | H |
| 7.236 | 3.0 | 44.3 | 35.9 | 35.2 | 4.3 | -36.2 | 0.0 | 0.0 | 47.5 | 39.1 | 74.0 | 54.0 | -26.5 | -14.9 | H |
| Mid Ch. Output Power: 13.5 dBm | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 54.5 | 52.6 | 33.7 | 3.6 | -36.5 | 0.0 | 0.0 | 55.4 | 53.5 | 74.0 | 54.0 | -18.6 | -0.5 | V |
| 7.311 | 3.0 | 45.2 | 36.9 | 35.2 | 4.3 | -36.2 | 0.0 | 0.0 | 48.4 | 40.1 | 74.0 | 54.0 | -25.6 | -13.9 | V |
| 4.874 | 3.0 | 51.6 | 49.1 | 33.7 | 3.6 | -36.5 | 0.0 | 0.0 | 52.5 | 49.9 | 74.0 | 54.0 | -21.6 | -4.1 | H |
| 7.311 | 3.0 | 44.6 | 36.4 | 35.2 | 4.3 | -36.2 | 0.0 | 0.0 | 47.8 | 39.6 | 74.0 | 54.0 | -26.2 | -14.4 | H |
| High Ch. Output Power: 12.3 dBm | | | | | | | | | | | | | | | |
| 4.924 | 3.0 | 54.9 | 52.7 | 33.8 | 3.6 | -36.5 | 0.0 | 0.0 | 55.8 | 53.6 | 74.0 | 54.0 | -18.2 | -0.4 | V |
| 7.386 | 3.0 | 46.2 | 38.2 | 35.2 | 4.3 | -36.2 | 0.0 | 0.0 | 49.4 | 41.4 | 74.0 | 54.0 | -24.6 | -12.6 | V |
| 4.924 | 3.0 | 51.0 | 47.8 | 33.8 | 3.6 | -36.5 | 0.0 | 0.0 | 51.8 | 48.7 | 74.0 | 54.0 | -22.2 | -5.3 | H |
| 7.386 | 3.0 | 44.1 | 34.3 | 35.2 | 4.3 | -36.2 | 0.0 | 0.0 | 47.4 | 37.6 | 74.0 | 54.0 | -26.6 | -16.4 | H |


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

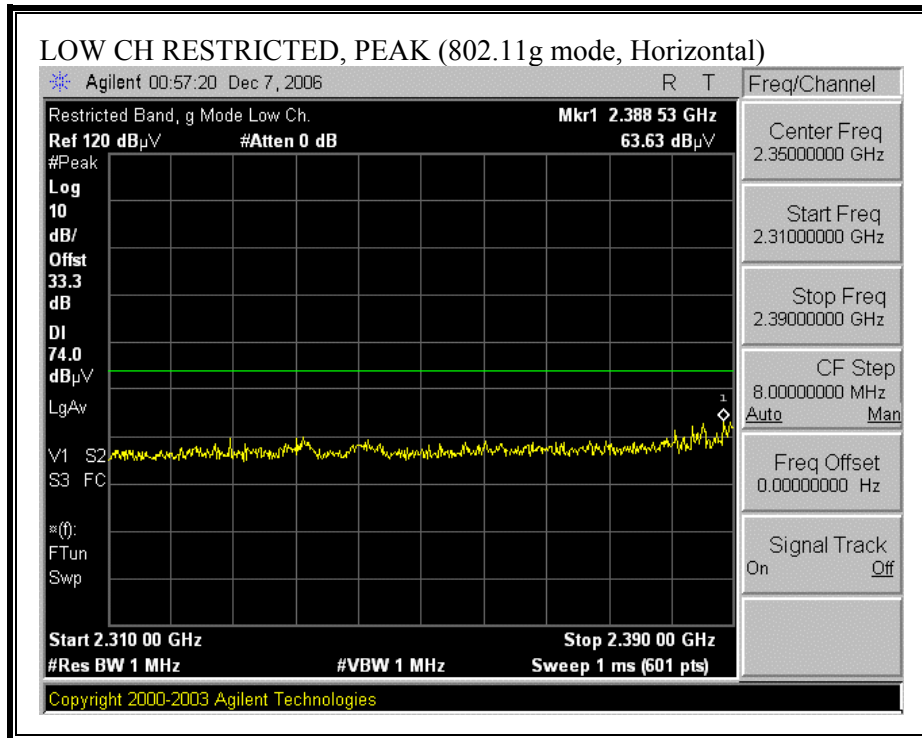

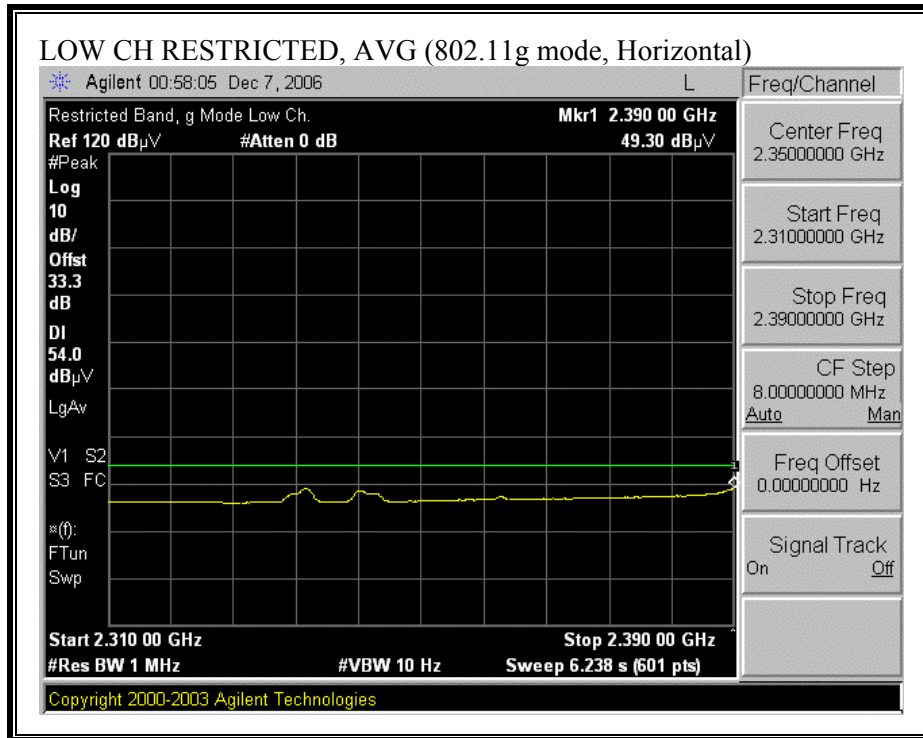



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

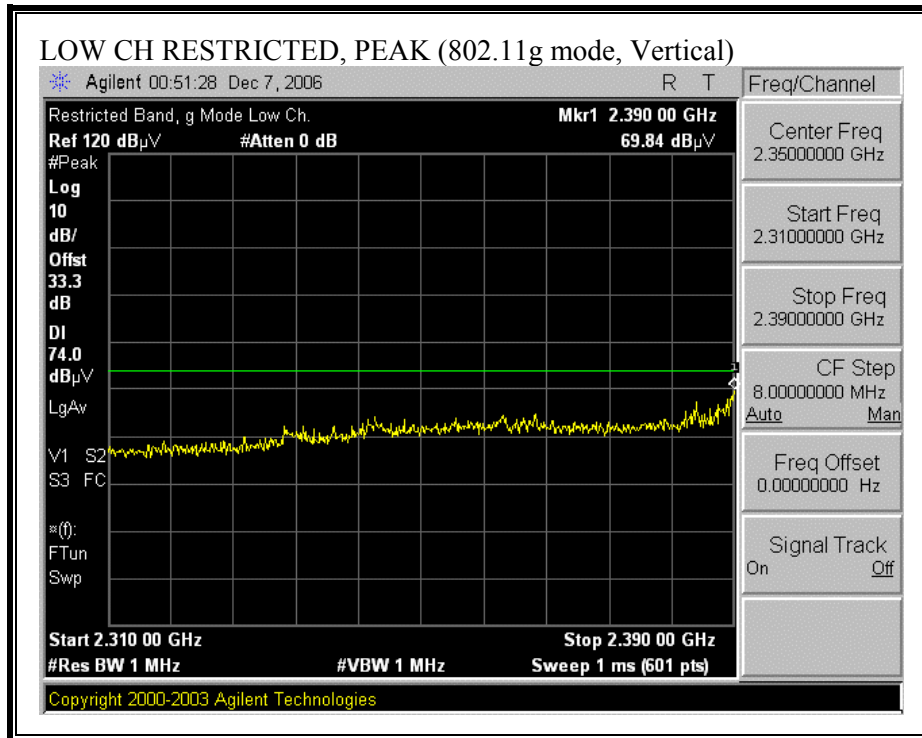

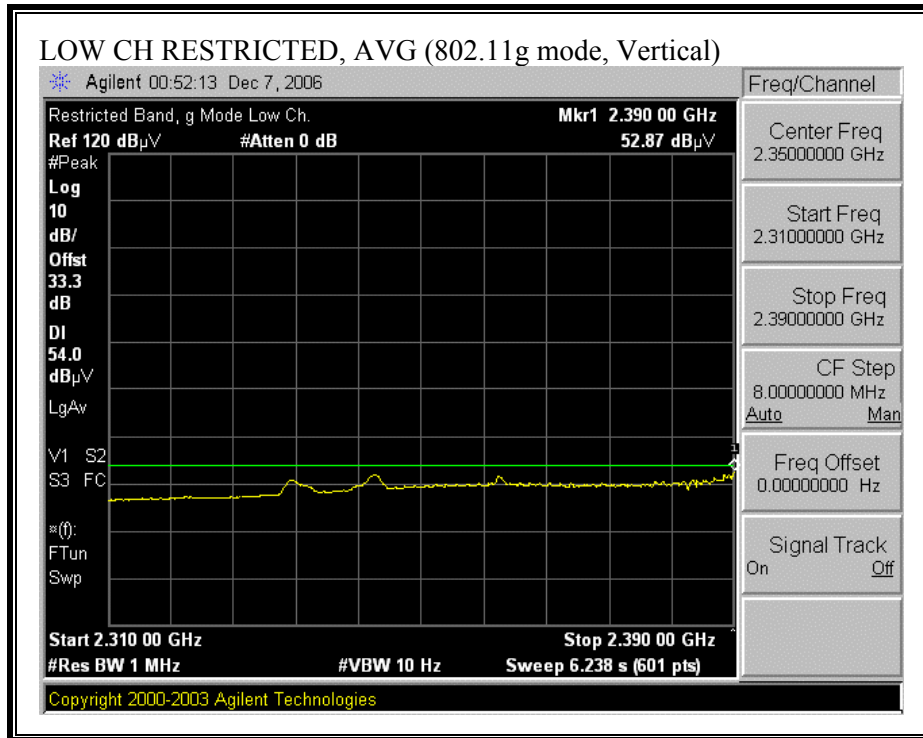



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

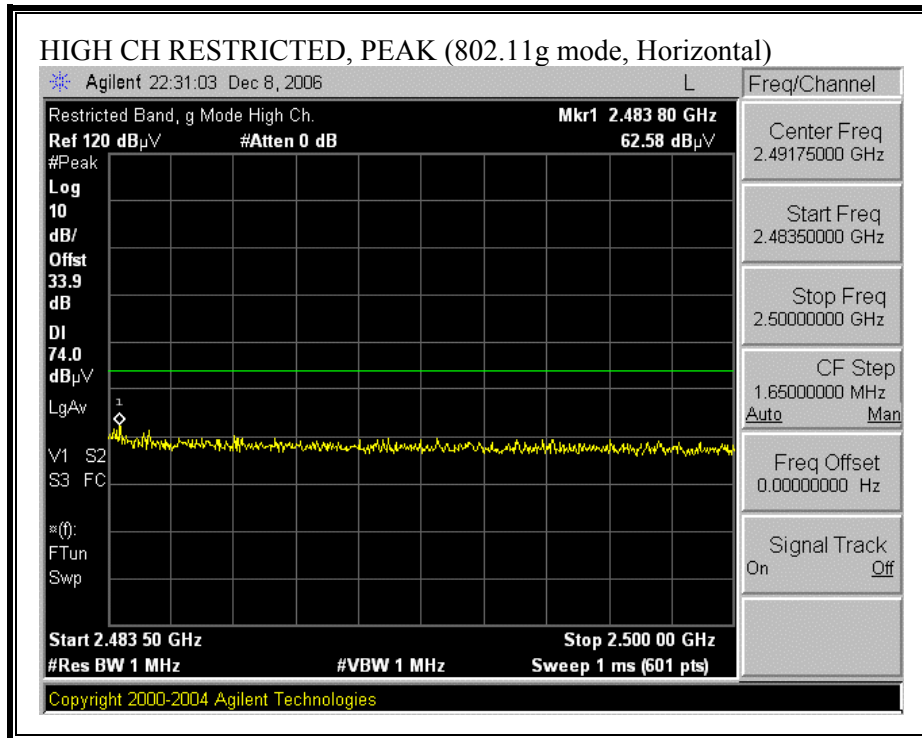

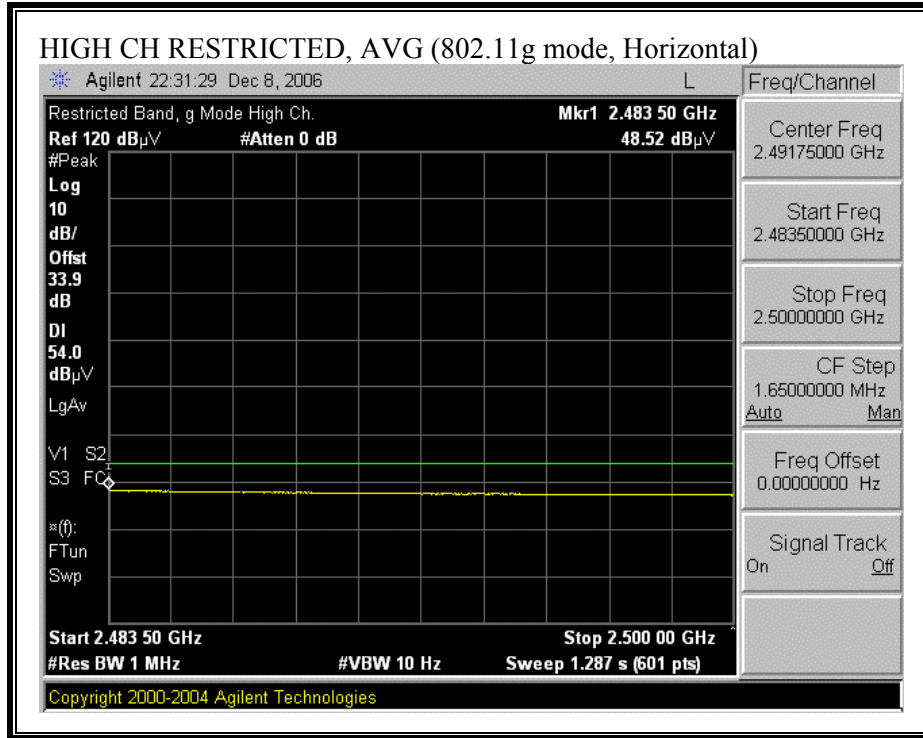

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

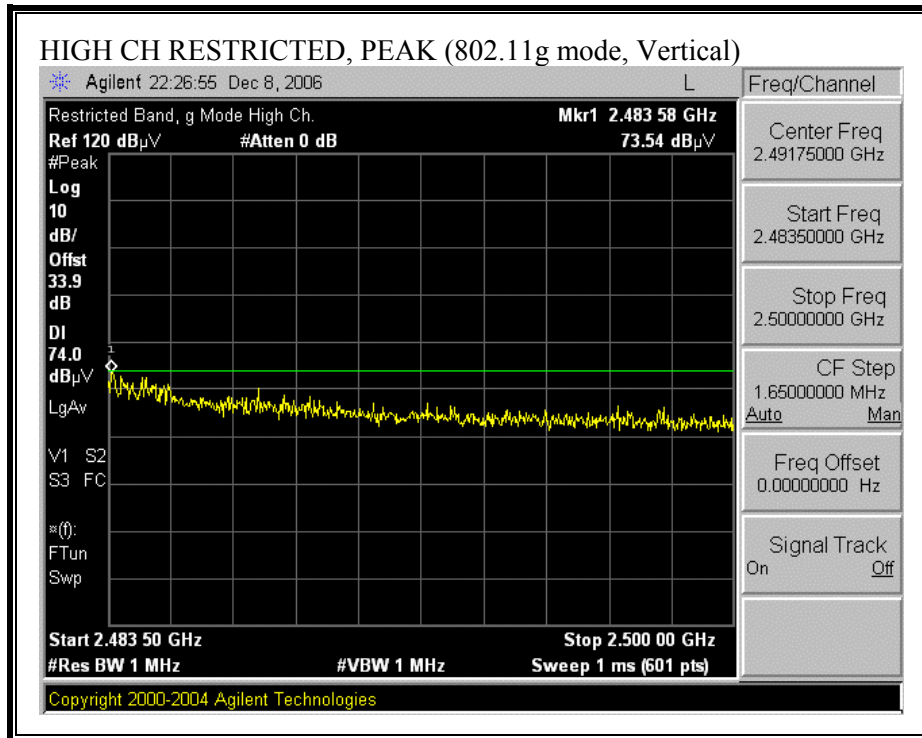

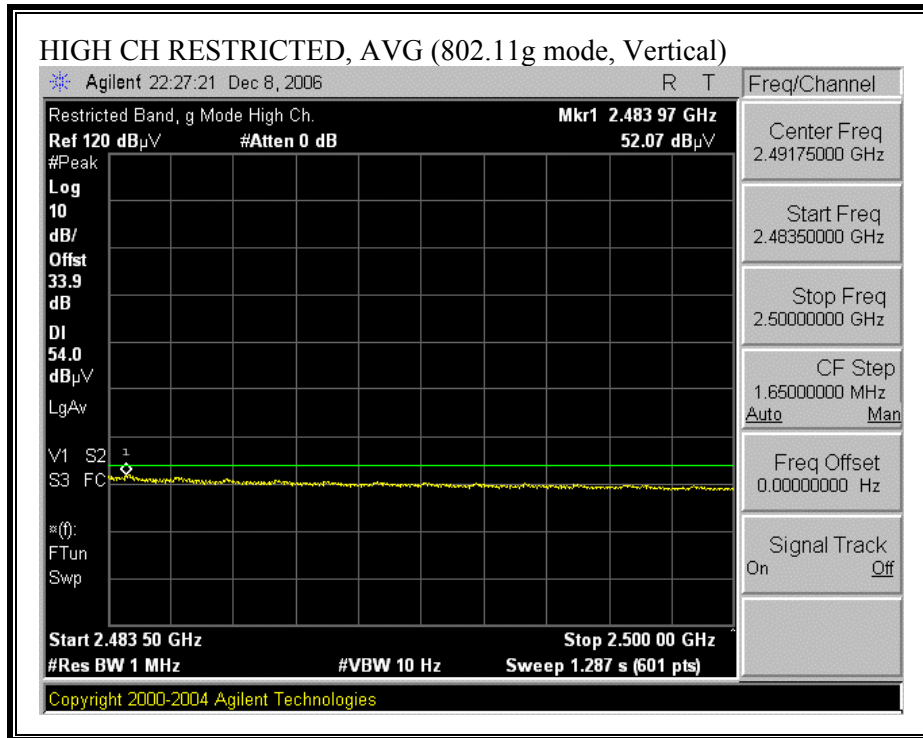


HARMONICS AND SPURIOUS EMISSIONS (g MODE)

| 12/08/06 High Frequency Measurement | | | | | | | | | | | | | | | | |
|---|-----------------------|---------|----------|------|-----|--------|--------------------------------|-----|--------|--------|--------|--------------------------------------|--------|---------|-------|--|
| Compliance Certification Services, Morgan Hill Open Field Site | | | | | | | | | | | | | | | | |
| Test Engr: William Zhuang | | | | | | | | | | | | | | | | |
| Project #: 06U10713 | | | | | | | | | | | | | | | | |
| Company: Skypilot Networks | | | | | | | | | | | | | | | | |
| EUT Descr.: 802.11 b/g Fixed Wireless Node | | | | | | | | | | | | | | | | |
| EUT M/N: Skyconnector Outdoor SC1110 (FCC/IC ID: RV7-SC1110/5550A-SC1110) | | | | | | | | | | | | | | | | |
| Test Target: FCC 15.247 | | | | | | | | | | | | | | | | |
| Mode Oper: Tx g Mode | | | | | | | | | | | | | | | | |
| f | Measurement Frequency | | | | | Amp | Preamp Gain | | | | | Avg Lim Average Field Strength Limit | | | | |
| Dist | Distance to Antenna | | | | | D Corr | Distance Correct to 3 meters | | | | | Pk Lim Peak Field Strength Limit | | | | |
| Read | Analyzer Reading | | | | | Avg | Average Field Strength @ 3 m | | | | | Avg Mar Margin vs. Average Limit | | | | |
| AF | Antenna Factor | | | | | Peak | Calculated Peak Field Strength | | | | | Pk Mar Margin vs. Peak Limit | | | | |
| CL | Cable Loss | | | | | HPF | High Pass Filter | | | | | | | | | |
| f | Dist | Read Pk | Read Avg | AF | CL | Amp | D Corr | Ftr | Peak | Avg | Pk Lim | Avg Lim | Pk Mar | Avg Mar | Notes | |
| GHz | (m) | dBuV | dBuV | dB/m | dB | dB | dB | dB | dBuV/m | dBuV/m | dBuV/m | dBuV/m | dB | dB | (V/H) | |
| Low Ch. Output Power: 15.4 dBm | | | | | | | | | | | | | | | | |
| 4.824 | 3.0 | 53.2 | 39.4 | 33.7 | 2.8 | -36.5 | 0.0 | 0.6 | 53.8 | 40.0 | 74.0 | 54.0 | -20.2 | -14.0 | V | |
| 7.236 | 3.0 | 48.8 | 35.7 | 35.2 | 3.3 | -36.2 | 0.0 | 0.6 | 51.7 | 38.6 | 74.0 | 54.0 | -22.4 | -15.4 | V | |
| 4.824 | 3.0 | 49.4 | 37.0 | 33.7 | 2.8 | -36.5 | 0.0 | 0.6 | 50.0 | 37.7 | 74.0 | 54.0 | -24.0 | -16.3 | H | |
| 7.236 | 3.0 | 45.3 | 32.9 | 35.2 | 3.3 | -36.2 | 0.0 | 0.6 | 48.2 | 35.8 | 74.0 | 54.0 | -25.8 | -18.2 | H | |
| Mid Ch. Output Power: 17.4 dBm | | | | | | | | | | | | | | | | |
| 4.874 | 3.0 | 55.9 | 42.1 | 33.7 | 2.8 | -36.5 | 0.0 | 0.6 | 56.6 | 42.8 | 74.0 | 54.0 | -17.4 | -11.2 | V | |
| 7.311 | 3.0 | 51.0 | 38.0 | 35.2 | 3.3 | -36.2 | 0.0 | 0.6 | 54.0 | 40.9 | 74.0 | 54.0 | -20.0 | -13.1 | V | |
| 4.874 | 3.0 | 50.0 | 37.1 | 33.7 | 2.8 | -36.5 | 0.0 | 0.6 | 50.6 | 37.8 | 74.0 | 54.0 | -23.4 | -16.2 | H | |
| 7.311 | 3.0 | 45.1 | 33.1 | 35.2 | 3.3 | -36.2 | 0.0 | 0.6 | 48.0 | 36.0 | 74.0 | 54.0 | -26.0 | -18.0 | H | |
| High Ch. Output Power: 12.4 dBm | | | | | | | | | | | | | | | | |
| 4.924 | 3.0 | 56.3 | 36.3 | 33.8 | 3.6 | -36.5 | 0.0 | 0.6 | 57.8 | 37.8 | 74.0 | 54.0 | -16.2 | -16.2 | V | |
| 7.386 | 3.0 | 49.2 | 33.3 | 35.2 | 4.3 | -36.2 | 0.0 | 0.6 | 53.1 | 37.2 | 74.0 | 54.0 | -20.9 | -16.8 | V | |
| 4.924 | 3.0 | 51.1 | 33.9 | 33.8 | 3.6 | -36.5 | 0.0 | 0.6 | 52.6 | 35.4 | 74.0 | 54.0 | -21.4 | -18.6 | H | |
| 7.386 | 3.0 | 43.4 | 31.0 | 35.2 | 4.3 | -36.2 | 0.0 | 0.6 | 47.3 | 34.9 | 74.0 | 54.0 | -26.7 | -19.1 | H | |

7.1.10. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

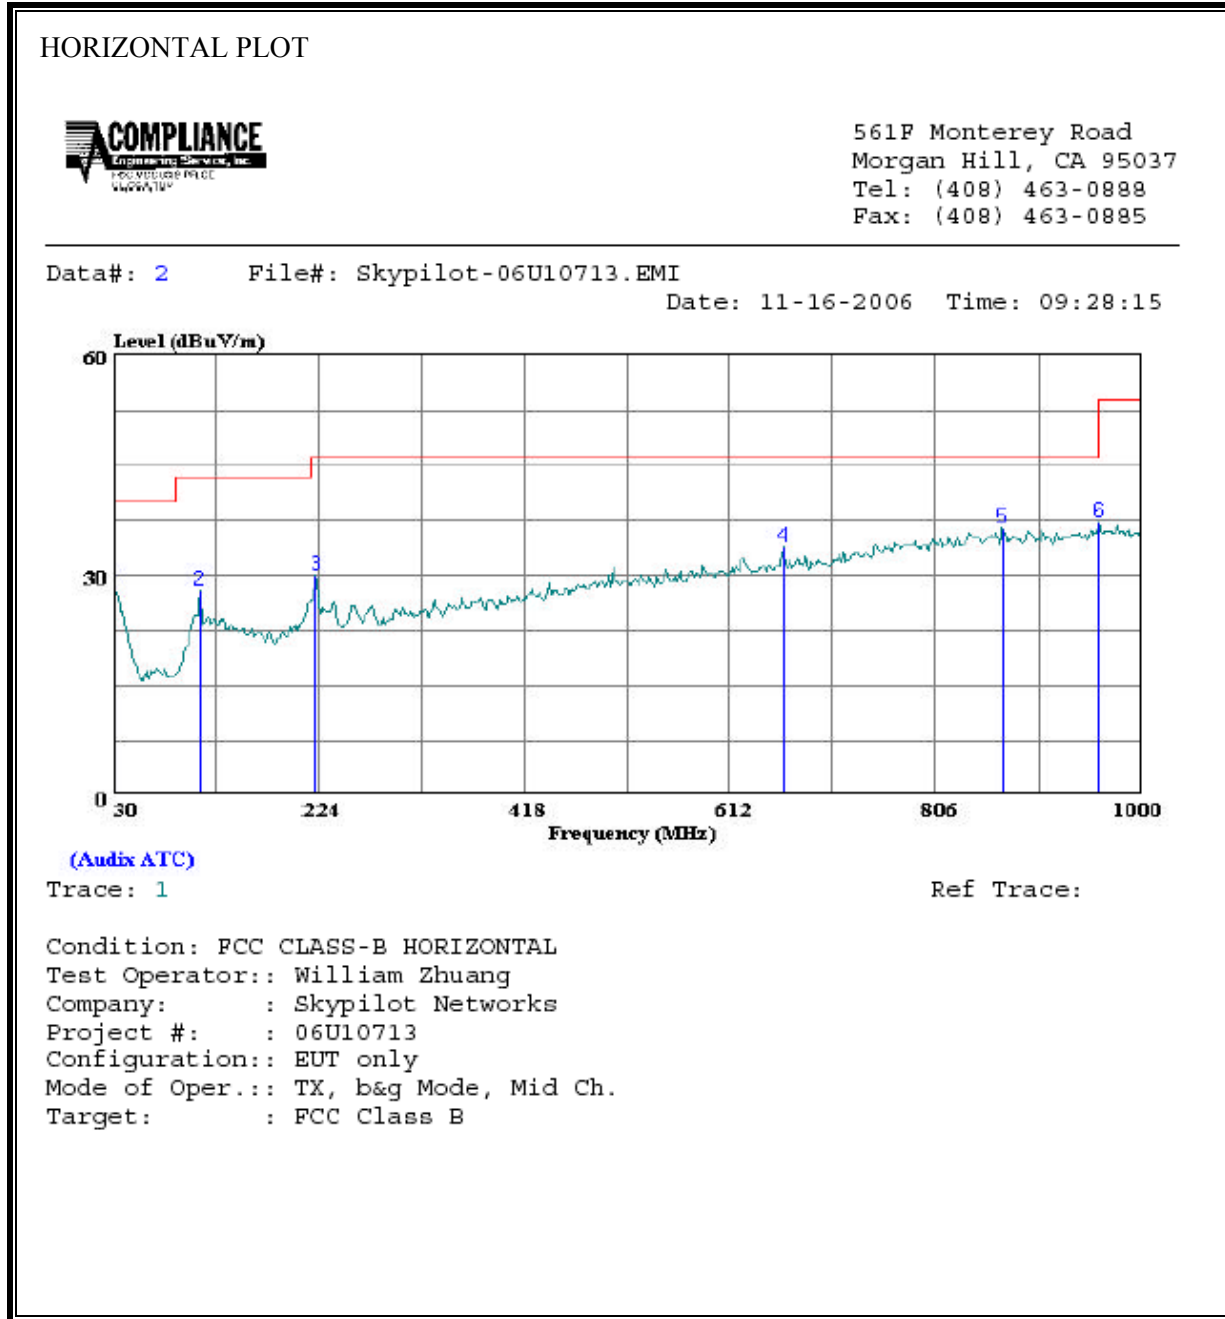

HORIZONTAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|--------|--------|------------|------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 31.940 | 7.38 | 19.94 | 27.32 | 40.00 | -12.68 | Peak |
| 2 | 111.480 | 13.93 | 13.82 | 27.75 | 43.50 | -15.75 | Peak |
| 3 | 221.090 | 17.19 | 12.67 | 29.86 | 46.00 | -16.14 | Peak |
| 4 | 662.440 | 11.23 | 22.57 | 33.80 | 46.00 | -12.20 | Peak |
| 5 | 869.050 | 10.75 | 25.50 | 36.25 | 46.00 | -9.75 | Peak |
| 6 | 960.230 | 10.56 | 26.56 | 37.12 | 54.00 | -16.88 | Peak |

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)


VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 4 File#: Skypilot-06U10713.EMI

Date: 11-16-2006 Time: 09:35:05

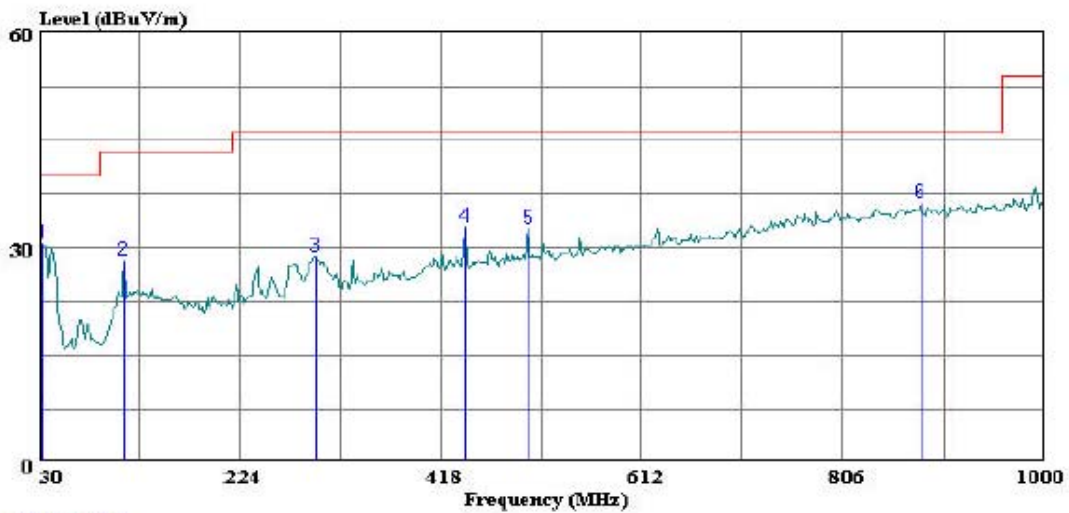

(Auxix ATC)

Trace: 3

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator:: William Zhuang
Company: : Skypilot Networks
Project #: : 06U10713
Configuration:: EUT only
Mode of Oper.:: TX, b&g Mode, Mid Ch.
Target: : FCC Class B

VERTICAL DATA

| | Freq | Read Level | Factor | Level | Limit Line | Over Limit | Remark |
|---|---------|------------|--------|--------|------------|------------|--------|
| | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | 33.880 | 11.55 | 19.05 | 30.60 | 40.00 | -9.40 | Peak |
| 2 | 111.480 | 14.20 | 13.82 | 28.02 | 43.50 | -15.48 | Peak |
| 3 | 297.720 | 13.09 | 15.59 | 28.68 | 46.00 | -17.32 | Peak |
| 4 | 441.280 | 13.74 | 19.02 | 32.76 | 46.00 | -13.24 | Peak |
| 5 | 502.390 | 12.30 | 20.24 | 32.54 | 46.00 | -13.46 | Peak |
| 6 | 880.690 | 10.42 | 25.71 | 36.13 | 46.00 | -9.87 | Peak |

7.2. POWERLINE CONDUCTED EMISSIONS FOR 2400 - 2483.5 GHz BAND

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

| Frequency of Emission (MHz) | Conducted Limit (dBuV) | |
|-----------------------------|------------------------|-----------------------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56 [*] | 56 to 46 [*] |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:

6 WORST EMISSIONS

| CONDUCTED EMISSIONS DATA (115VAC 60Hz) | | | | | | | | | |
|--|-----------|-----------|-----------|-------|-------|-------|---------|---------|---------|
| Freq. | Reading | | | Closs | Limit | FCC B | Margin | | Remark |
| (MHz) | PK (dBuV) | QP (dBuV) | AV (dBuV) | (dB) | QP | AV | QP (dB) | AV (dB) | L1 / L2 |
| 0.21 | 49.88 | -- | 41.18 | 0.00 | 63.17 | 53.17 | -13.29 | -11.99 | L1 |
| 0.35 | 49.50 | -- | 47.25 | 0.00 | 58.87 | 48.87 | -9.37 | -1.62 | L1 |
| 17.94 | 44.39 | -- | 35.97 | 0.00 | 60.00 | 50.00 | -15.61 | -14.03 | L1 |
| 0.21 | 48.80 | -- | 43.00 | 0.00 | 63.24 | 53.24 | -14.44 | -10.24 | L2 |
| 0.35 | 49.52 | -- | 47.60 | 0.00 | 58.92 | 48.92 | -9.40 | -1.32 | L2 |
| 18.33 | 43.88 | -- | 35.39 | 0.00 | 60.00 | 50.00 | -16.12 | -14.61 | L2 |
| 6 Worst Data | | | | | | | | | |

LINE 1 RESULTS

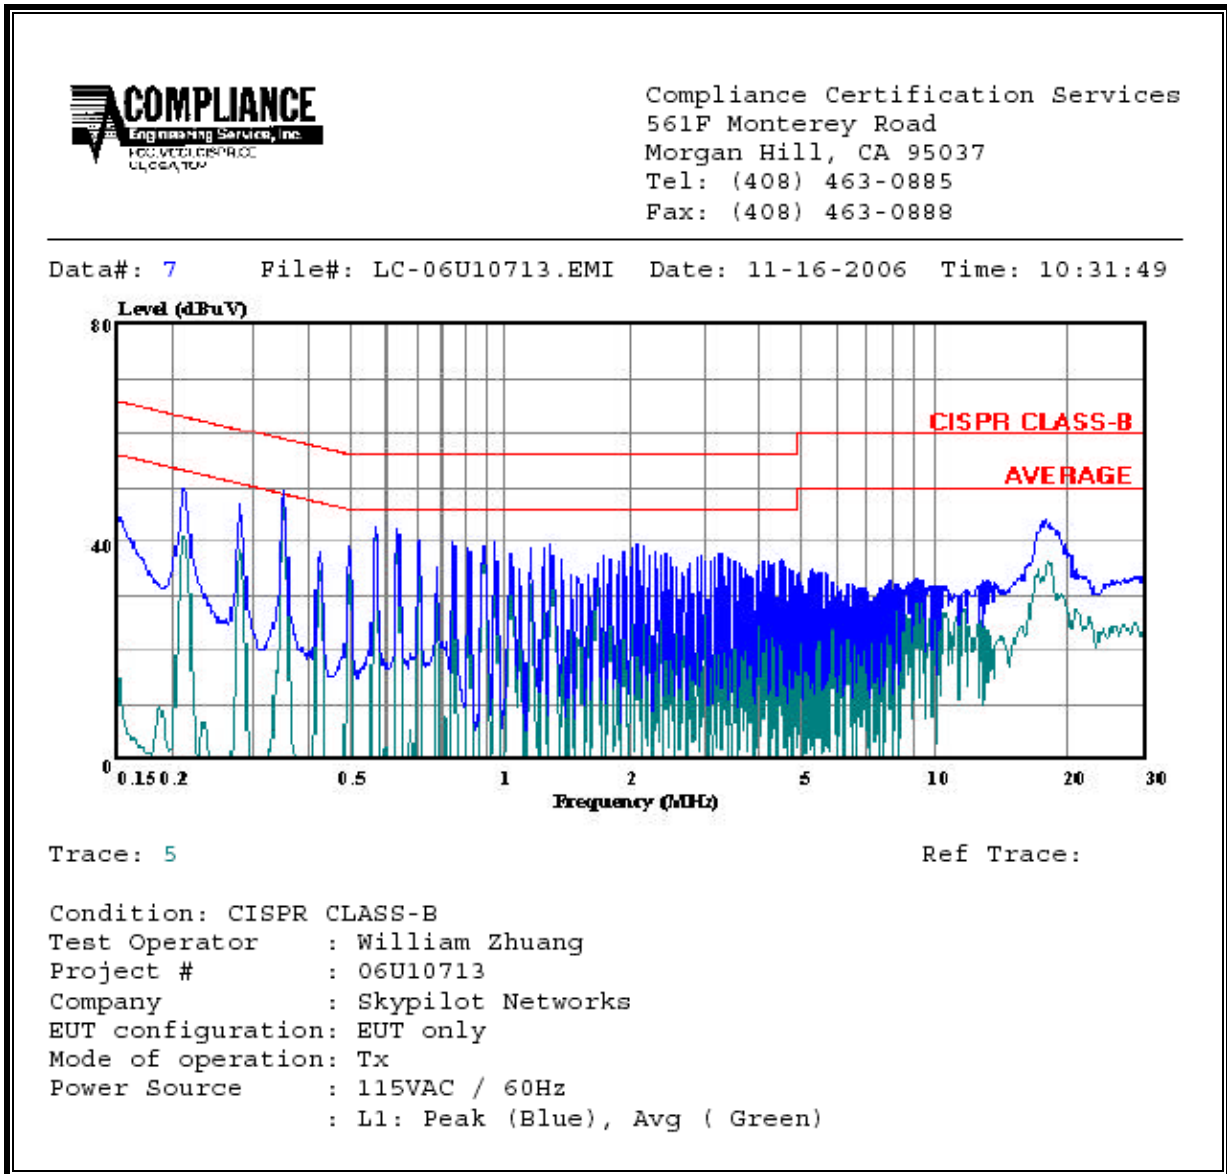

LINE 2 RESULTS

