

System Check_HSL_2450MHz

DUT: D2450V2-SN:804

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_20221020 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.16$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5°C

DASY Configuration:

- Electronics: DAE4 Sn855; Calibrated: 2022/4/21
- Probe: EX3DV4 - SN7400; ConvF(7.63, 7.63, 7.63) @ 2450 MHz; Calibrated: 2022/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -9.0, 31.0$
- Phantom: Right_Twin-SAM V4.0 (20deg probe tilt); Type: QD 000 P40 CC; Serial: TP-1467
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 21.5 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 101.8 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 25.9 W/kg

SAR(1 g) = 12.9 W/kg; SAR(10 g) = 6.13 W/kg

Maximum value of SAR (measured) = 21.0 W/kg

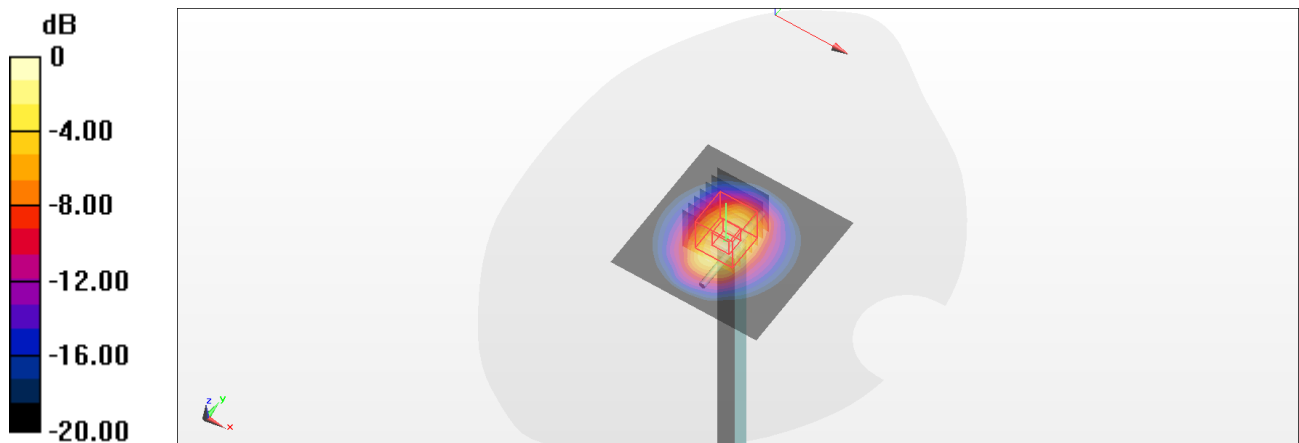

0 dB = 21.0 W/kg = 13.22 dBW/kg