

Inter**Lab**[®]

FCC Measurement/Technical Report on OEM Bluetooth Vehicular Device C1L

Report Reference: MDE_FAKT_1010_FCCb

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany
email: info@7Layers.de



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:
Markus Becker
Vorstand • Board:
Dr. H.-J. Meckelburg
Wilfried Klassmann

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT No.:
DE 203159652
TAX No. 147/5869/0385

Table of Contents

0	Summary	3
0.1	Technical Report Summary	3
0.2	Measurement Summary	4
1	Administrative Data	6
1.1	Testing Laboratory	6
1.2	Project Data	6
1.3	Applicant Data	6
1.4	Manufacturer Data	6
2	Test object Data	7
2.1	General EUT Description	7
2.2	EUT Main components	8
2.3	Ancillary Equipment	8
2.4	Auxiliary Equipment	8
2.5	EUT Setups	9
2.6	Operating Modes	9
2.7	Product labelling	9
3	Test Results	10
3.1	Spurious radiated emissions	10
3.2	Band edge compliance	16
4	Test Equipment	18
5	Photo Report	26
6	Setup Drawings	27
7	Annex measurement plots	28
7.1	Band edge compliance radiated	28
7.2	Radiated emissions ($f < 30$ MHz)	31
8	Inclusion of FCC / IC correlation statement	33

0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-09 Edition) and 15 (10-1-09 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000.

Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2003 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.

0.2 Measurement Summary

FCC Part 15, Subpart C		§ 15.207	
Conducted emissions (AC power line)			
The measurement was performed according to ANSI C63.4			
OP-Mode	Setup	Port	Final Result
		AC Port (power line)	2003 N/A
FCC Part 15, Subpart C		§ 15.247 (a) (1)	
Occupied bandwidth			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Temp ant.connector	10-1-09 Edition N/P
FCC Part 15, Subpart C		§ 15.247 (b) (1)	
Peak power output			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Temp ant.connector	10-1-09 Edition N/P
FCC Part 15, Subpart C		§ 15.247 (d)	
Spurious RF conducted emissions			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Temp ant.connector	10-1-09 Edition N/P
FCC Part 15, Subpart C		§ 15.247 (d), § 15.35 (b), § 15.209	
Spurious radiated emissions			
The measurement was performed according to ANSI C63.4			
OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_a01	Enclosure	2003 passed
op-mode 2	Setup_a01	Enclosure	passed
op-mode 3	Setup_a01	Enclosure	passed
op-mode 6	Setup_a01	Enclosure	passed
op-mode 7	Setup_a01	Enclosure	passed
op-mode 8	Setup_a01	Enclosure	passed
op-mode 10	Setup_a01	Enclosure	passed
op-mode 11	Setup_a01	Enclosure	passed
op-mode 12	Setup_a01	Enclosure	passed
FCC Part 15, Subpart C		§ 15.247 (d)	
Band edge compliance			
The measurement was performed according to FCC § 15.31 / ANSI C63.4			
OP-Mode	Setup	Port	Final Result
op-mode 3	Setup_a01	Enclosure	10-1-09 Edition / 2003 passed
op-mode 8	Setup_a01	Enclosure	passed
op-mode 12	Setup_a01	Enclosure	passed

1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716.

The test facility is also accredited by the following accreditation organisation:
- Deutscher Akkreditierungs Rat DAR-Registration no. DGA-PL-192/99-02

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell
Dipl.-Ing. Andreas Petz

Report Template Version: 2010-05-07

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Carsten Steinröder
Date of Test(s): 2010-10-07 to 2010-10-08
Date of Report: 2010-11-02

1.3 Applicant Data

Company Name: FAKT S.r.l.
Address: Via Lithos, 53
25086 Rezzato (BS)
Italy
Contact Person: Mr. Nicola Scartapacchio

1.4 Manufacturer Data

Company Name: please see applicant data
Address:
Contact Person:

2 Test object Data

2.1 General EUT Description

Equipment under Test	Bluetooth transceiver
Type Designation:	C1L
Kind of Device: (optional)	OEM Bluetooth Vehicular Device
Voltage Type:	DC (car battery)
Voltage level:	12 V
Modulation Type:	GFSK, 8DPSK, $\pi/4$ DQPSK

General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, the Bluetooth technology defines 79 RF channels spaced 1 MHz (2402 - 2480 MHz). The actual RF channel is chosen from a pseudo-random hopping sequence through the 79 channels. A channel is occupied for a defined amount of time slots, with a nominal slot length of 625 μ s. The maximum time slot length on one channel is defined by the packet type and is 0.625 ms for DH1 packets, 1.875 ms for DH3 and 3.125 ms for DH5. The nominal hop rate is 1600 hops/s for DH1, 1600/3 for DH3 and 1600/5 for DH5. All frequencies are equally used. The maximum nominal average time of occupancy is 0.4 s within a period of 79*0.4 seconds.

The basic data rate of 1 Mbps uses GFSK modulation and the enhanced data rate uses PSK modulation. For the enhanced data rate of 3 Mbps 8DPSK modulation and of 2 Mbps $\pi/4$ DQPSK modulation is used.

Bluetooth is using TDD (Time Division Duplex), which means that Transmitter and Receiver time slots are active alternately during testing. For DH1 packets the transmitter and receiver time slots alternate every 625 μ s.

Specific product description for the EUT:

The EUT is a Bluetooth Car Kit with hands-free and stereo audio functionality which uses Bluetooth technology to be connected to e.g. a mobile phone.

The EUT provides the following ports:

Ports

Enclosure
DC Port (power line)

The main components of the EUT are listed and described in Chapter 2.2.

2.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: DA060c01)	Bluetooth transceiver	C1L	-	01	01	2010-10-07

Remark: EUT A is equipped with an integral antenna (gain = 0.0 dBi).

NOTE: The short description is used to simplify the identification of the EUT in this test report.

2.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AE 1	DC cable	-	-	-	-	-

2.4 Auxiliary Equipment

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
-------------------	----------------------	------------------	------------	-----------	-----------	--------

2.5 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUTs	Description
Setup_a01	EUT A + AE 1	setup for radiated measurements

2.6 Operating Modes

This chapter describes the operating modes of the EUTs used for testing.

Op. Mode	Description of Operating Modes	Remarks
op-mode 1	The EUT transmits on 2402 MHz	Loopback mode, basic data rate 1 Mbps
op-mode 2	The EUT transmits on 2441 MHz	Loopback mode, basic data rate 1 Mbps
op-mode 3	The EUT transmits on 2480 MHz	Loopback mode, basic data rate 1 Mbps
op-mode 4	The EUT is in Hopping mode	The EUT is hopping on 79 channels, basic data rate 1 Mbps
op-mode 6	The EUT transmits on 2402 MHz	Loopback mode, enhanced data rate 3 Mbps
op-mode 7	The EUT transmits on 2441 MHz	Loopback mode, enhanced data rate 3 Mbps
op-mode 8	The EUT transmits on 2480 MHz	Loopback mode, enhanced data rate 3 Mbps
op-mode 10	The EUT transmits on 2402 MHz	Loopback mode, enhanced data rate, 2 Mbps
op-mode 11	The EUT transmits on 2441 MHz	Loopback mode, enhanced data rate, 2 Mbps
op-mode 12	The EUT transmits on 2480 MHz	Loopback mode, enhanced data rate, 2 Mbps

2.7 Product labelling

2.7.1 FCC ID label

Please refer to the documentation of the applicant.

2.7.2 Location of the label on the EUT

Please refer to the documentation of the applicant.

3 Test Results

3.1 Spurious radiated emissions

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: ANSI C 63.4, 2003

3.1.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 - 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 - 1000 MHz
- Frequency steps: 60 kHz

- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 μ s (BT Timing 1.25 ms)
- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to + 22.5 ° around the determined value
- Height variation range: -0.25 m to + 0.2 5m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

3.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$

3.1.3 Test Protocol

Temperature: 28 °C
 Air Pressure: 1020 hPa
 Humidity: 38 %

3.1.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
0°	-	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found therefore step 2 was not performed.

3.1.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	325	34.63			46			11.37	
Vertical + horizontal	4804		50.51	37.51		74	54	23.49	16.49

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2	Setup_a01	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	325	32.83			46			13.17	
Vertical + horizontal	4882		52.17	39.34		74	54	21.83	14.66

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
op-mode 3 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	325	35.85			46			10.15	
Vertical + horizontal	4960		53.41	39.76		74	54	20.59	14.24

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode **Setup** **Port**
op-mode 6 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	4804	-	45.96	33.26	-	74	54	28.04	20.74

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode **Setup** **Port**
op-mode 7 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	4882	-	47.91	34.24	-	74	54	26.09	19.76

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode **Setup** **Port**
op-mode 8 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	4960	-	42.14	31.09	-	74	54	31.86	22.91

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode **Setup** **Port**
op-mode 10 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	4804	-	45.83	33.14	-	74	54	28.17	20.86

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode **Setup** **Port**
op-mode 11 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	4882	-	48.41	34.20	-	74	54	25.59	19.80

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

Op. Mode **Setup** **Port**
op-mode 12 Setup_a01 Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	4960	-	42.53	32.68	-	74	54	31.47	21.32

Remark: No (further) spurious emissions in the range 20 dB below the limit found.
The measurement was performed from 1 GHz up to 8 GHz because no significant spurious emissions were found outside this frequency range in op-mode 1, 2 and 3.

3.1.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed
	op-mode 6	passed
	op-mode 7	passed
	op-mode 8	passed
	op-mode 10	passed
	op-mode 11	passed
	op-mode 12	passed

3.2 Band edge compliance

Standard FCC Part 15, 10-1-09 Edition Subpart C

The test was performed according to: ANSI C 63.4, 2003 FCC §15.31

3.2.1 Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

3.2.2 Test Requirements / Limits

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the **lower band edge** the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the **higher band edge** the limit is "specified in Section 15.209(a)".

3.2.3 Test Protocol

Radiated measurement

Temperature: 28 °C
 Air Pressure: 1020 hPa
 Humidity: 38 %

Op. Mode	Setup	Port
op-mode 3	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit Peak dBµV/m	Limit AV dBµV/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vertical + horizontal	51.44	37.35	74.00	54.00	22.56	16.65

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 8	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit Peak dBµV/m	Limit AV dBµV/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vertical + horizontal	50.12	37.11	74.00	54.00	23.88	16.89

Remark: Please see annex for the measurement plot.

Op. Mode	Setup	Port
op-mode 12	Setup_a01	Enclosure

Frequency MHz	Polarisation	Corrected value dBµV/m		Limit Peak dBµV/m	Limit AV dBµV/m	Delta to Peak limit/dB	Delta to AV limit dB
		Peak	AV				
2483.50	Vertical + horizontal	49.96	37.33	74.00	54.00	24.04	16.67

Remark: Please see annex for the measurement plot.

3.2.4 Test result: Band edge compliance

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 3	passed
	op-mode 8	passed
	op-mode 12	passed

4 Test Equipment

The calibration, hardware and software states are shown for the testing period.

Test Equipment Anechoic Chamber

Lab ID:	Lab 1		
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6		
	<i>Calibration Details</i>	<i>Last Execution</i>	<i>Next Exec.</i>
	IC renewal	2009/01/21	2011/01/20
	FCC renewal	2009/01/07	2011/01/06

Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m ³	none	Frankonia
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18		2009/01/07 2011/01/06
	ANSI C64.3 NSA		2009/01/21 2011/01/20
Controller Innco 2000	CO 2000	CO2000/328/12470 406/L	Innco innovative constructions GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

Test Equipment Auxiliary Equipment for Radiated emissions

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer		
Antenna mast	AS 620 P		HD GmbH		
Biconical dipole	VUBA 9117	9117108	Schwarzbeck	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2008/10/27	2013/10/26
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01- 2	Kabel Kusch	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02- 2	Rosenberger Micro-Coax	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2009/04/16	2012/04/15
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2009/04/28	2012/04/27
Dreheinheit	DE 325		HD GmbH		
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Path Calibration			2010/05/10	2010/11/09
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG	<i>Last Execution</i>	<i>Next Exec.</i>
	<i>Calibration Details</i>				
	Standard Calibration			2009/05/27	2012/05/26

Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/07 2011/10/06
Network Analyzer	E5071B	MY42200813	Agilent
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Calibration		2008/11/06 2010/11/06
	Standard Calibration		2009/11/11 2010/11/11
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH

Test Equipment Auxiliary Test Equipment

Lab ID:	Lab 1
<i>Manufacturer:</i>	see single devices
<i>Description:</i>	Single Devices for various Test Equipment
<i>Type:</i>	various
<i>Serial Number:</i>	none

Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 01 (Multimeter)	Voltcraft M-3860M	IJ096055	Conrad Electronics
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/10/07 2011/10/06
Digital Oscilloscope [SA2] (Aux)	TDS 784C	B021311	Tektronix GmbH
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2008/10/06 2011/10/05
Vector Signal Generator	SMIQ B3	832492/061	

Test Equipment Digital Signalling Devices

Lab ID: Lab 1
Description: Signalling equipment for various wireless technologies.

Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT CBT		100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2008/08/14 2011/08/13
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
Digital Radio Test Set	6103E	2359	Racal Instruments, Ltd.
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/02/16 2012/02/15
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04 Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22 Firmware: µP1 8v50 02.05.06 ---		2007/07/16
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/12/01 2011/11/30
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02 SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10, Firmware: µP1 8v40 01.12.05 ---		2007/01/02
SW: K62, K69		2008/11/03	
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2008/10/28 2011/10/27

Test Equipment Emission measurement devices

Lab ID: Lab 1
Description: Equipment for emission measurements
Serial Number: see single devices

Single Devices for Emission measurement devices

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Personal Computer	Dell	30304832059	Dell
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration ¹		2007/12/05 2010/12/04
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/12/03 2011/12/02

Test Equipment Multimeter 12

Lab ID: Lab 2
Description: Ex-Tech 520
Serial Number: 05157876

Single Devices for Multimeter 12

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/10/07 2011/10/06

¹ The device is not used for absolute measurements. A power meter (calibration interval is one year) is used for measurements of absolute values. Therefore the interval for the signal generator is set to three years according to manufacturer recommendation.

Test Equipment Regulatory Bluetooth RF Test Solution

Lab ID: Lab 2
Description: Regulatory Bluetooth RF Tests
Type: Bluetooth RF
Serial Number: 001

Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2010/06/21 2011/06/20
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2010/06/22 2011/06/21
Power Supply	NGSM 32/10	2725	
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2010/07/05 2011/07/04
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/24 2011/06/23
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2010/06/23 2013/06/20

Test Equipment Shielded Room 07

Lab ID: Lab 2
Description: Shielded Room 4m x 6m

Test Equipment T/H Logger 04

Lab ID: Lab 2
Description: Lufft Opus10
Serial Number: 7481

Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro DataloggerOpus10 THI (8152.00) 04 (Environ)		7481	Lufft Mess- und Regeltechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2009/01/23 2011/01/22

Test Equipment Temperature Chamber 01

Lab ID: Lab 2
Manufacturer: see single devices
Description: Temperature Chamber KWP 120/70
Type: Weiss
Serial Number: see single devices

Single Devices for Temperature Chamber 01

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Specific calibration		2010/03/16 2011/03/15

5 Photo Report



Photo 1: Setup for radiated measurements below 30 MHz


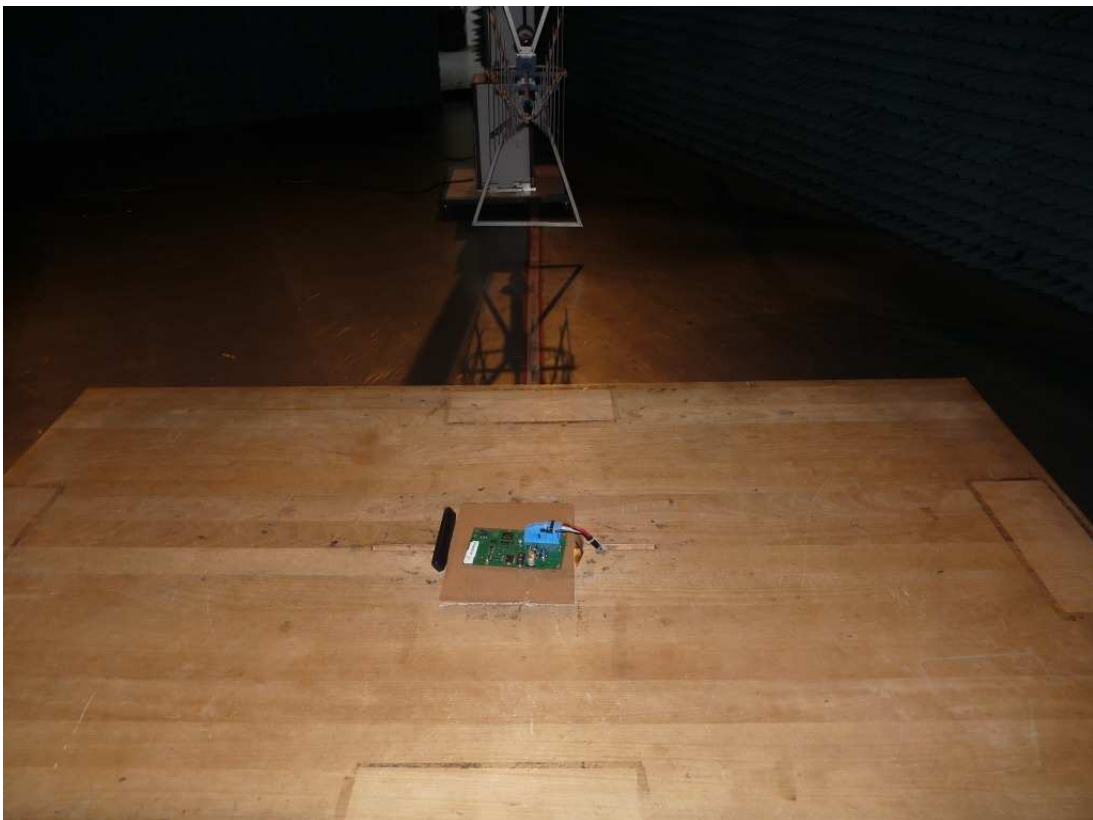


Photo 2: Setup for radiated measurements below 1 GHz



Photo 3: Setup for radiated measurements above 1 GHz

6 Setup Drawings

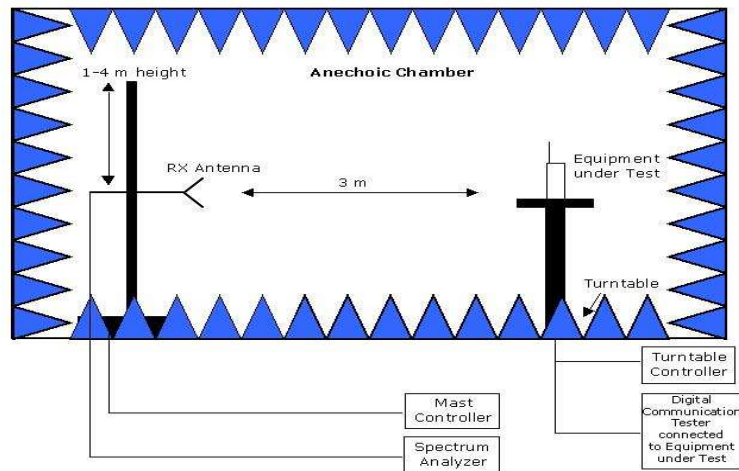

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber:
 Measurements below 1 GHz: Semi-anechoic, conducting ground plane.
 Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces


7 Annex measurement plots

7.1 Band edge compliance radiated

7.1.1 Band edge compliance radiated operating mode 3

Op. Mode

op-mode 3

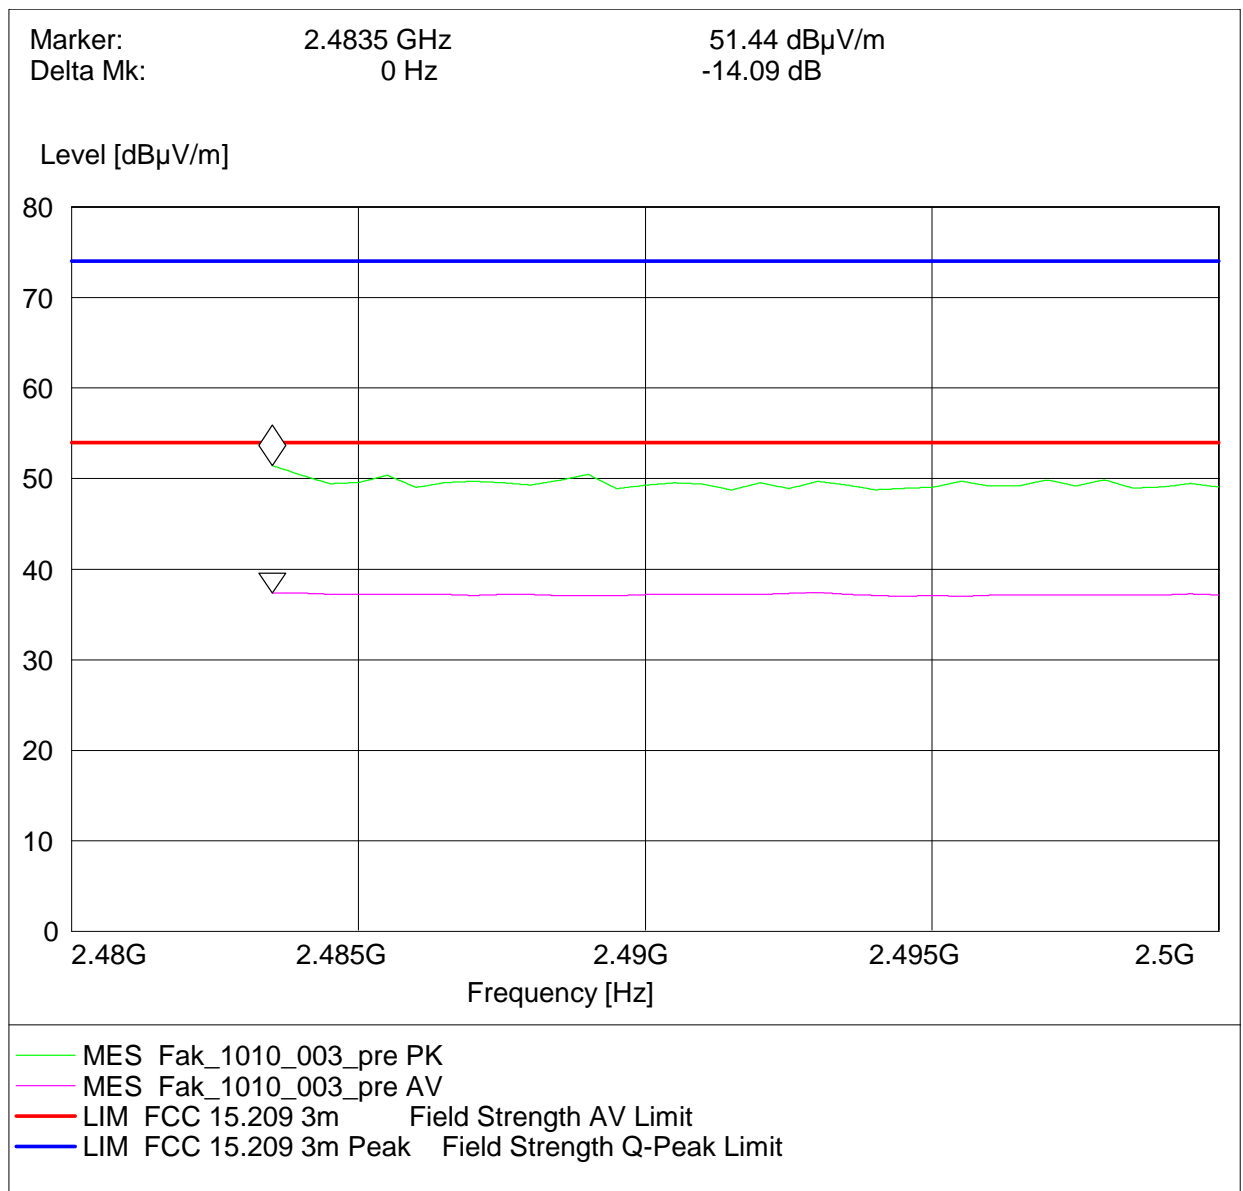


Radiated measurement (higher band edge)

7.1.2 Band edge compliance radiated operating mode 8

Op. Mode

op-mode 8

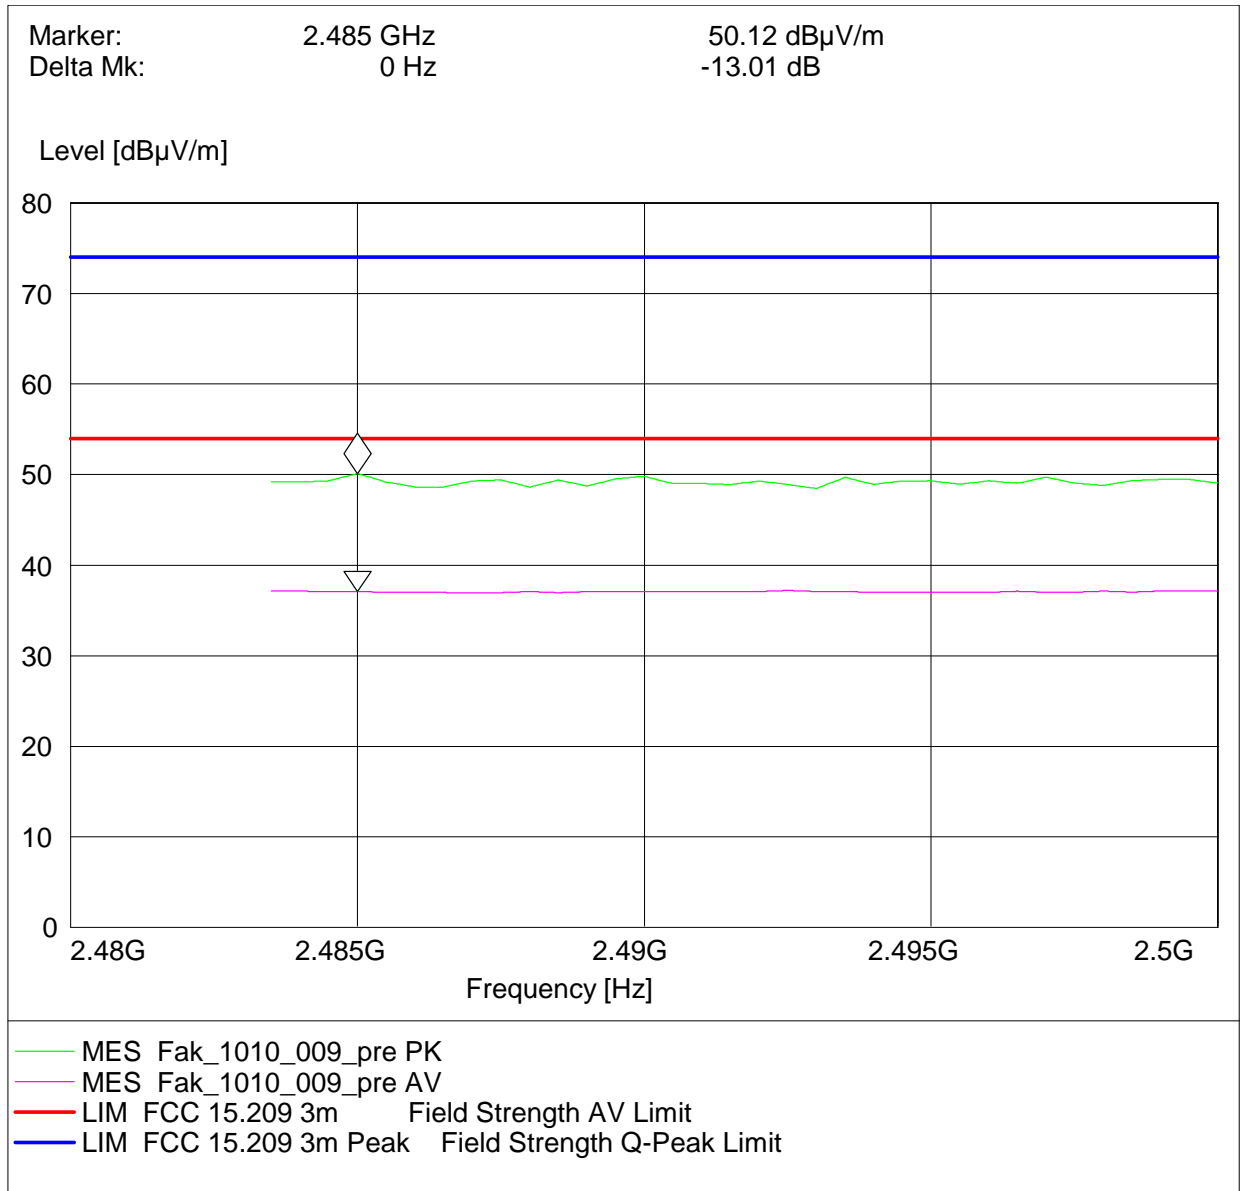


Radiated measurement (higher band edge)

7.1.3 Band edge compliance radiated operating mode 12

Op. Mode

op-mode 12

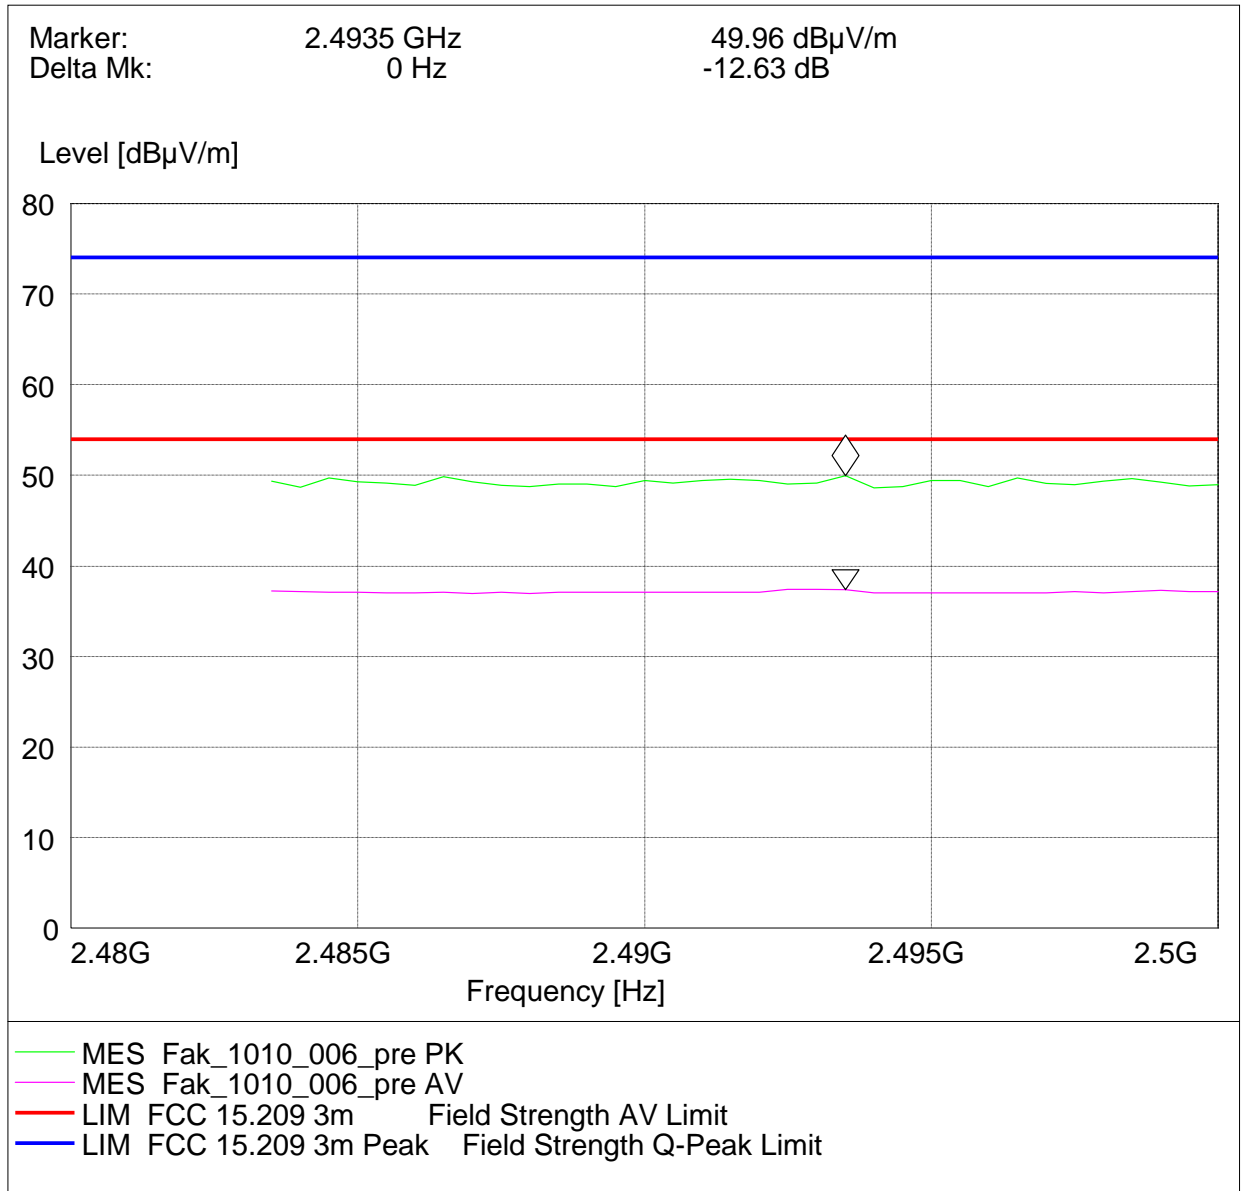


Radiated measurement (higher band edge)


7.2 Radiated emissions (f < 30 MHz)

Op. Mode

op-mode 1

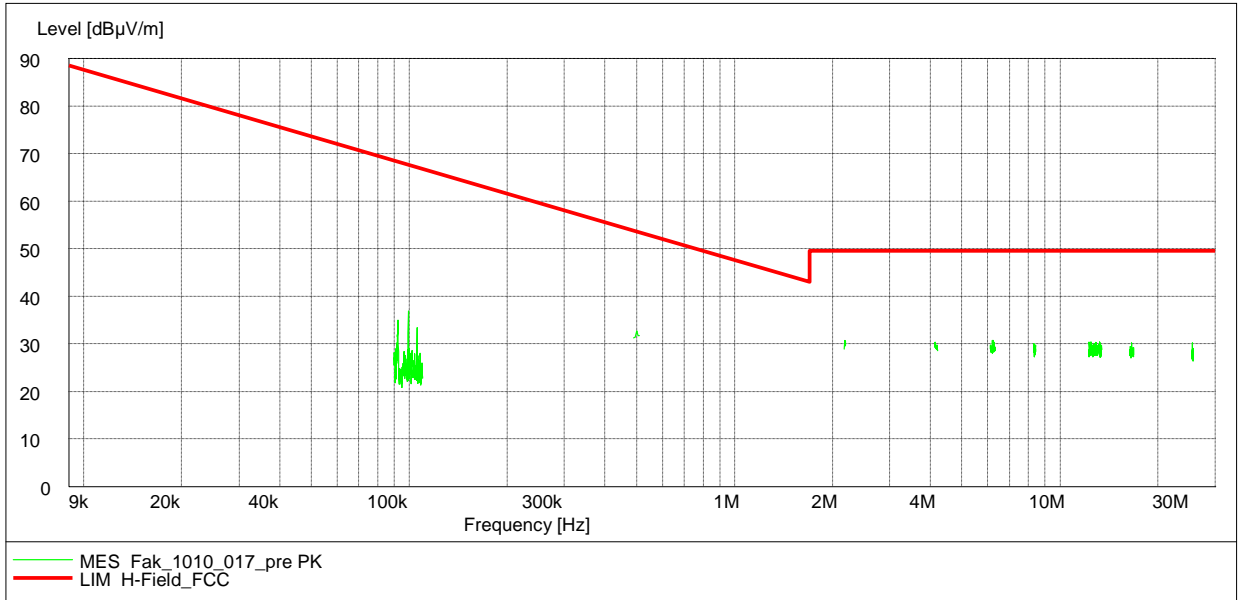


Antenna position 90°
EUT position front side

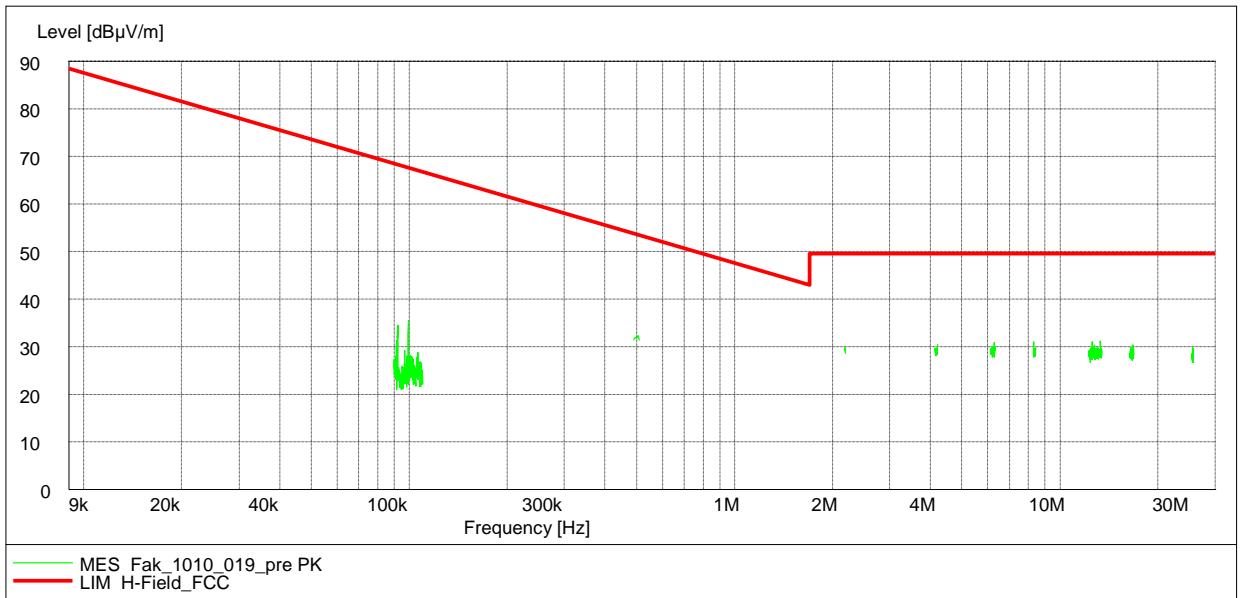


Antenna position 90°
EUT position right side

Op. Mode

op-mode 1

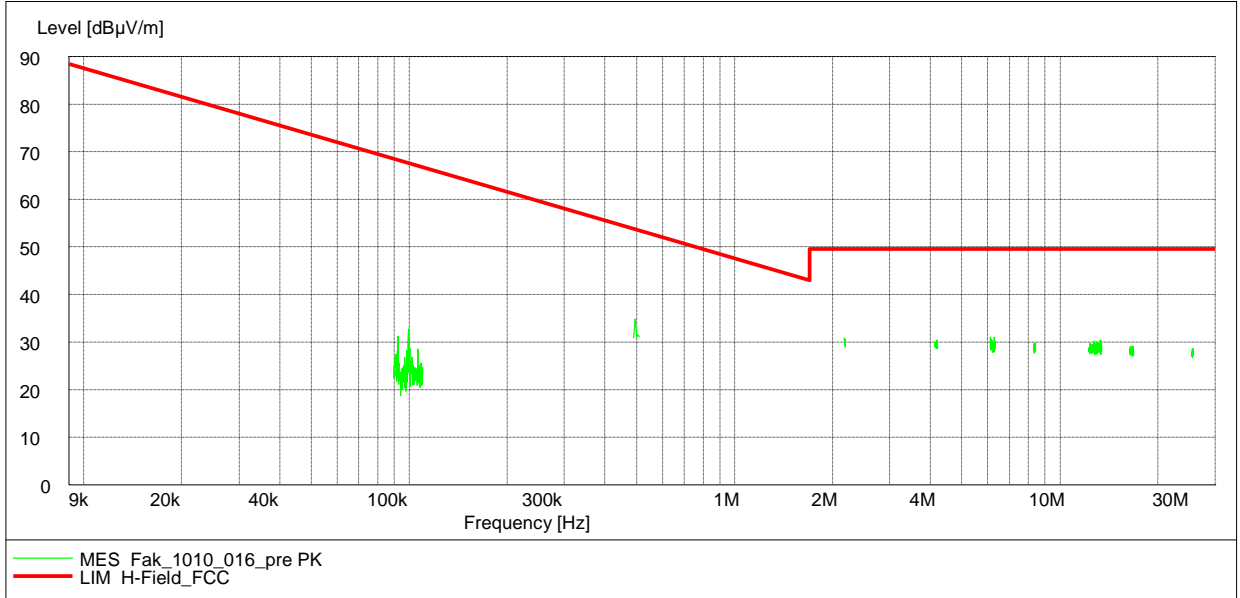

Antenna position 0°
EUT position front side

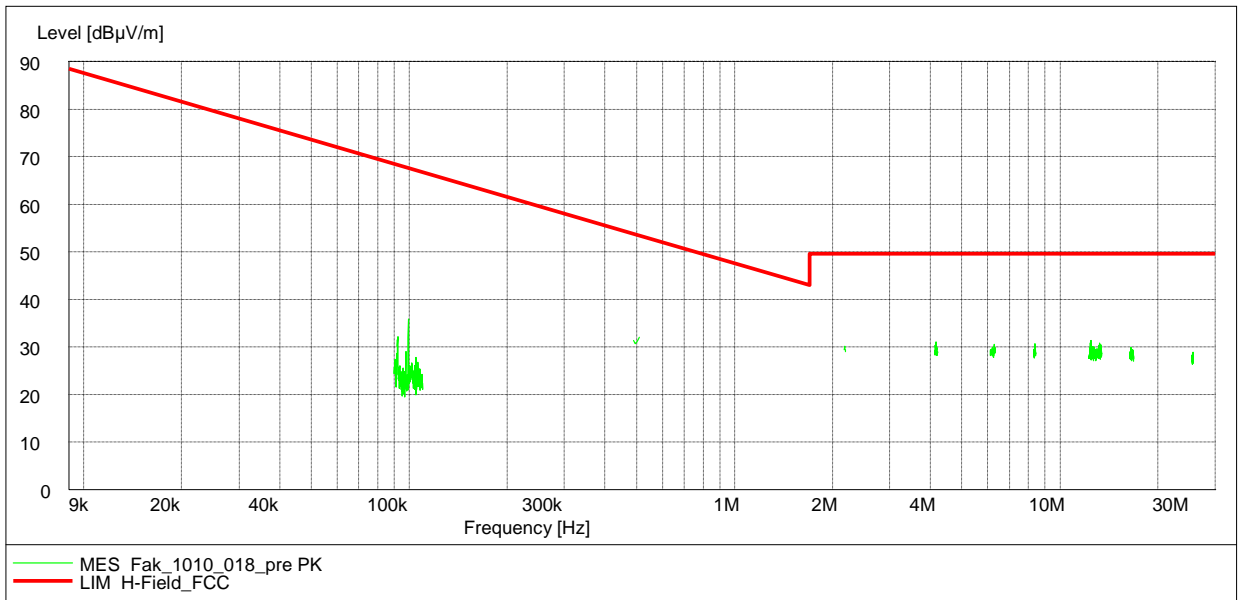

Antenna position 0°
EUT position right side

8 Inclusion of FCC / IC correlation statement

Correlation of measurement requirements for Bluetooth® equipment and Digital Apparatus from FCC and IC

Bluetooth® equipment

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen: 6; RSS-210: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen: 6; RSS-210: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210: A8.1
Antenna requirement	§ 15.203 / 15.204	RSS-Gen: 7.1.2

Digital Apparatus

Measurement	FCC reference	IC reference
Conducted Emissions (AC Power Line)	§15.107	ICES-003
Spurious Radiated Emissions	§15.109	ICES-003