

## FCC Test Report

**Report No.:** RF191030C08

**FCC ID:** RX3-WBU053VZ

**Test Model:** WBU053-VZ

**Received Date:** Oct. 30, 2019

**Test Date:** Nov. 05 ~ Nov. 24, 2019

**Issued Date:** Nov. 25, 2019

**Applicant:** Hon Hai Precision Industry Co., Ltd.

**Address:** No.151, Sec. 1, Nankan Rd., Lujhu Dist., Taoyuan County 33859, Taiwan  
(R.O.C.)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location (1):** B2F., No.215, Sec. 3, Beixin Rd., Xindian Dist., New Taipei City 231, Taiwan

**Test Location (2):** No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City  
33383, Taiwan

**FCC Registration /** 427177 / TW0011

**Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

## Table of Contents

<b>Release Control Record</b> .....	<b>4</b>
<b>1 Certificate of Conformity</b> .....	<b>5</b>
<b>2 Summary of Test Results</b> .....	<b>6</b>
2.1 Measurement Uncertainty .....	6
2.2 Modification Record .....	6
<b>3 General Information</b> .....	<b>7</b>
3.1 General Description of EUT .....	7
3.2 Description of Test Modes .....	8
3.2.1 Test Mode Applicability and Tested Channel Detail .....	9
3.3 Duty Cycle of Test Signal .....	11
3.4 Description of Support Units .....	12
3.4.1 Configuration of System under Test .....	12
3.5 General Description of Applied Standards and references .....	12
<b>4 Test Types and Results</b> .....	<b>13</b>
4.1 Radiated Emission and Bandedge Measurement .....	13
4.1.1 Limits of Radiated Emission and Bandedge Measurement .....	13
4.1.2 Test Instruments .....	14
4.1.3 Test Procedures .....	15
4.1.4 Deviation from Test Standard .....	16
4.1.5 Test Set Up .....	16
4.1.6 EUT Operating Conditions .....	17
4.1.7 Test Results .....	18
4.2 Conducted Emission Measurement .....	32
4.2.1 Limits of Conducted Emission Measurement .....	32
4.2.2 Test Instruments .....	32
4.2.3 Test Procedures .....	33
4.2.4 Deviation from Test Standard .....	33
4.2.5 Test Setup .....	33
4.2.6 EUT Operating Conditions .....	33
4.2.7 Test Results .....	34
4.3 6 dB Bandwidth Measurement .....	36
4.3.1 Limits of 6 dB Bandwidth Measurement .....	36
4.3.2 Test Setup .....	36
4.3.3 Test Instruments .....	36
4.3.4 Test Procedure .....	36
4.3.5 Deviation from Test Standard .....	36
4.3.6 EUT Operating Conditions .....	36
4.3.7 Test Results .....	37
4.4 Occupied Bandwidth Measurement .....	39
4.4.1 Test Setup .....	39
4.4.2 Test Instruments .....	39
4.4.3 Test Procedure .....	39
4.4.4 Deviation from Test Standard .....	39
4.4.5 EUT Operating Conditions .....	39
4.4.6 Test Results .....	40
4.5 Conducted Output Power Measurement .....	42
4.5.1 Limits of Conducted Output Power Measurement .....	42
4.5.2 Test Setup .....	42
4.5.3 Test Instruments .....	42
4.5.4 Test Procedures .....	42
4.5.5 Deviation from Test Standard .....	42
4.5.6 EUT Operating Conditions .....	42
4.5.7 Test Results .....	43

4.6	Power Spectral Density Measurement .....	45
4.6.1	Limits of Power Spectral Density Measurement.....	45
4.6.2	Test Setup.....	45
4.6.3	Test Instruments .....	45
4.6.4	Test Procedure .....	45
4.6.5	Deviation from Test Standard .....	45
4.6.6	EUT Operating Condition .....	45
4.6.7	Test Results .....	46
4.7	Conducted Out of Band Emission Measurement .....	52
4.7.1	Limits of Conducted Out of Band Emission Measurement.....	52
4.7.2	Test Setup.....	52
4.7.3	Test Instruments .....	52
4.7.4	Test Procedure .....	52
4.7.5	Deviation from Test Standard .....	52
4.7.6	EUT Operating Condition .....	52
4.7.7	Test Results .....	52
<b>5</b>	<b>Pictures of Test Arrangements.....</b>	<b>61</b>
	<b>Appendix – Information of the Testing Laboratories .....</b>	<b>62</b>

### Release Control Record

Issue No.	Description	Date Issued
RF191030C08	Original Release	Nov. 25, 2019

## 1 Certificate of Conformity

**Product:** Wireless Module

**Brand:** Foxconn

**Test Model:** WBU053-VZ

**Sample Status:** Engineering Sample

**Applicant:** Hon Hai Precision Industry Co., Ltd.

**Test Date:** Nov. 05 ~ Nov. 24, 2019

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Gina Liu, **Date:** Nov. 25, 2019  
Gina Liu / Specialist

**Approved by :** Dylan Chiou, **Date:** Nov. 25, 2019  
Dylan Chiou / Project Engineer

## 2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -22.08 dB at 24.574 MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	Pass	Meet the requirement of limit. Minimum passing margin is -0.8 dB at 2483.52 MHz.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150 kHz ~ 30 MHz	2.79 dB
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.0153 dB
	200 MHz ~ 1000 MHz	2.0224 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	1.0121 dB
	18 GHz ~ 40 GHz	1.1508 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT

<b>Product</b>	Wireless Module
<b>Brand</b>	Foxconn
<b>Test Model</b>	WBU053-VZ
<b>Status of EUT</b>	Engineering Sample
<b>Power Supply Rating</b>	4.5 ~ 5.5 Vdc
<b>Modulation Type</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>Modulation Technology</b>	DSSS, OFDM
<b>Transfer Rate</b>	802.11b: 11.0 / 5.5 / 2.0 / 1.0 Mbps 802.11g: 54.0 / 48.0 / 36.0 / 24.0 / 18.0 / 12.0 / 9.0 / 6.0 Mbps 802.11n: up to 300.0 Mbps
<b>Operating Frequency</b>	2412 ~ 2462 MHz
<b>Number of Channel</b>	11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40)
<b>Output Power (Peak)</b>	427.173 mW
<b>Antenna Type</b>	PCB antenna with 0.95 dBi gain (ANT0) / 0.62 dBi gain (ANT1)
<b>Antenna Connector</b>	N/A
<b>Accessory Device</b>	N/A
<b>Data Cable Supplied</b>	N/A

Note:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx Function
802.11b	2TX
802.11g	2TX
802.11n (HT20)	2TX
802.11n (HT40)	2TX

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

### 3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

7 channels are provided for 802.11n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437		



### 3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1 GHz      **RE<1G**: Radiated Emission below 1 GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE:** The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.  
**NOTE:** “-” means no effect.

#### **Radiated Emission Test (Above 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

#### **Radiated Emission Test (Below 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (HT40)	3 to 9	9	OFDM	BPSK	13.5

#### **Power Line Conducted Emission Test:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11n (HT40)	3 to 9	9	OFDM	BPSK	13.5

### **Bandedge Measurement:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 9	OFDM	BPSK	13.5

### **Antenna Port Conducted Measurement:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

### **Test Condition:**

Applicable To	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Harry Hsueh
RE<1G	25 deg. C, 65 % RH	120 Vac, 60 Hz	Harry Hsueh
PLC	25 deg. C, 65 % RH	120 Vac, 60 Hz	Jones Chang
APCM	25 deg. C, 65 % RH	5 Vdc	Gavin Wu


### 3.3 Duty Cycle of Test Signal

**802.11b:** Duty cycle of test signal is  $\geq 98\%$ , duty factor is not required.

**802.11g:** Duty cycle =  $1.39/1.428 = 0.973$ , Duty factor =  $10 * \log(1/0.973) = 0.12$

**802.11n (HT20):** Duty cycle =  $0.671/0.724 = 0.927$ , Duty factor =  $10 * \log(1/0.927) = 0.33$

**802.11n (HT40):** Duty cycle =  $0.348/0.383 = 0.909$ , Duty factor =  $10 * \log(1/0.909) = 0.42$

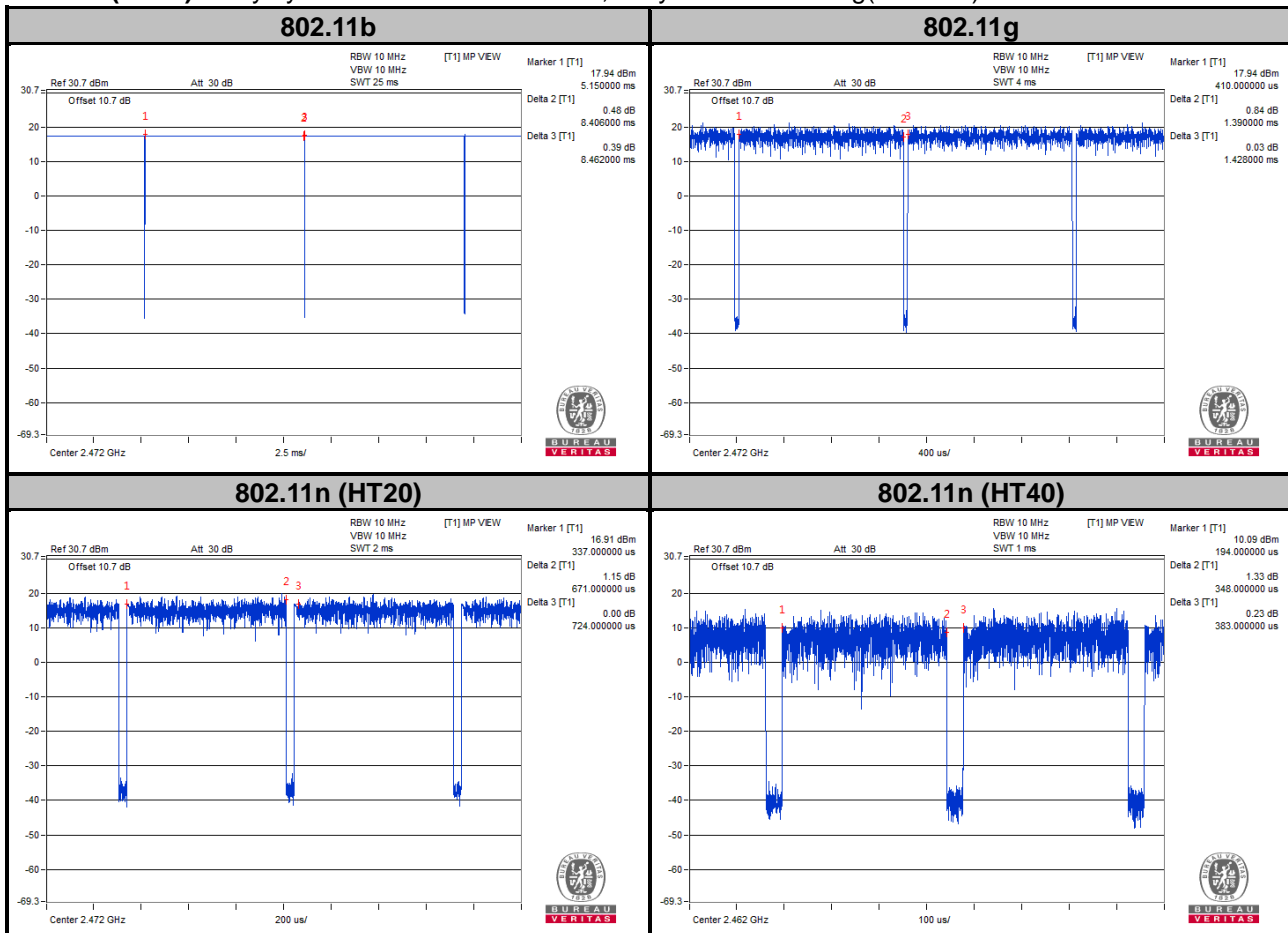

### 3.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	DC Power Supply	Topward	3303D	803136	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

#### 3.4.1 Configuration of System under Test

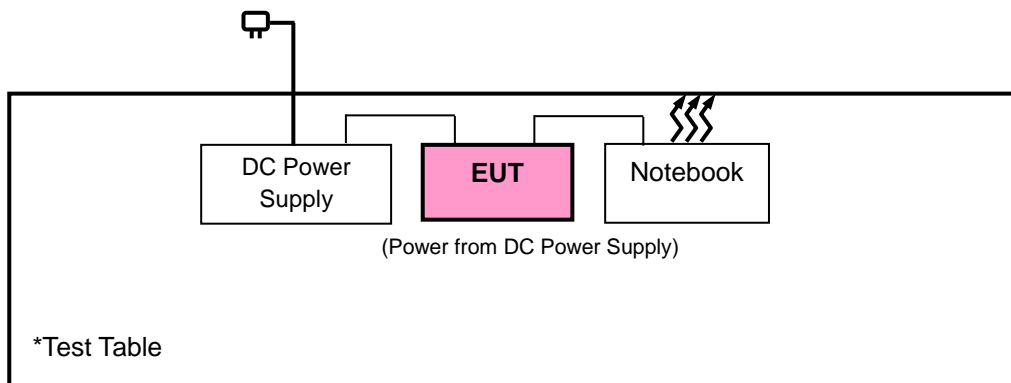

### 3.5 General Description of Applied Standards and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

#### FCC Part 15, Subpart E (15.407)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

#### References Test Guidance :

**KDB 558074 D01 Meas Guidance v05r02**

**KDB 662911 D01 Multiple Transmitter Output v02r01**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

## 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent Technologies	N9038A	MY52260177	Aug. 26, 2019	Aug. 25, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Apr. 15, 2019	Apr. 14, 2020
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 08, 2019	Oct. 07, 2020
BILOG Antenna SCHWARZBECK	VULB 9168	9168-616	Nov. 27, 2018	Nov. 26, 2019
HORN Antenna ETS-Lindgren	3117	00143293	Nov. 25, 2018	Nov. 24, 2019
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Nov. 25, 2018	Nov. 24, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
Loop Antenna	EM-6879	269	Sep. 16, 2019	Sep. 15, 2020
Preamplifier Agilent	310N	187226	Jun. 18, 2019	Jun. 17, 2020
Preamplifier Agilent	83017A	MY39501357	Jun. 18, 2019	Jun. 17, 2020
Power Meter Anritsu	ML2495A	1012010	Sep. 04, 2019	Sep. 03, 2020
Power Sensor Anritsu	MA2411B	1315050	Sep. 04, 2019	Sep. 03, 2020
RF signal cable ETS-LINDGREN	5D-FB	Cable-CH1-01(RFC -SMS-100-SMS-12 0+RFC-SMS-100-S MS-400)	Jun. 18, 2019	Jun. 17, 2020
RF signal cable ETS-LINDGREN	8D-FB	Cable-CH1-02(RFC -SMS-100-SMS-24)	Jun. 18, 2019	Jun. 17, 2020
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 8.130425b	NA	NA	NA
Antenna Tower MF	NA	NA	NA	NA
Turn Table MF	NA	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
DC Power Supply Topward	3303D	803136	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HsinTien Chamber 1.

#### 4.1.3 Test Procedures

##### **For Radiated Emission below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

##### **Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.

##### **For Radiated Emission above 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

##### **Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98 %) or 10 Hz (Duty cycle  $\geq$  98 %) for Average detection (AV) at frequency above 1 GHz.  
(11b: RBW = 1 MHz, VBW = 10 Hz ; 11g: RBW = 1 MHz, VBW = 1 kHz ;  
11n (HT20): RBW = 1 MHz, VBW = 1 kHz ; 11n (HT40): RBW = 1 MHz, VBW = 3 kHz)
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

<Radiated Emission below 30 MHz>

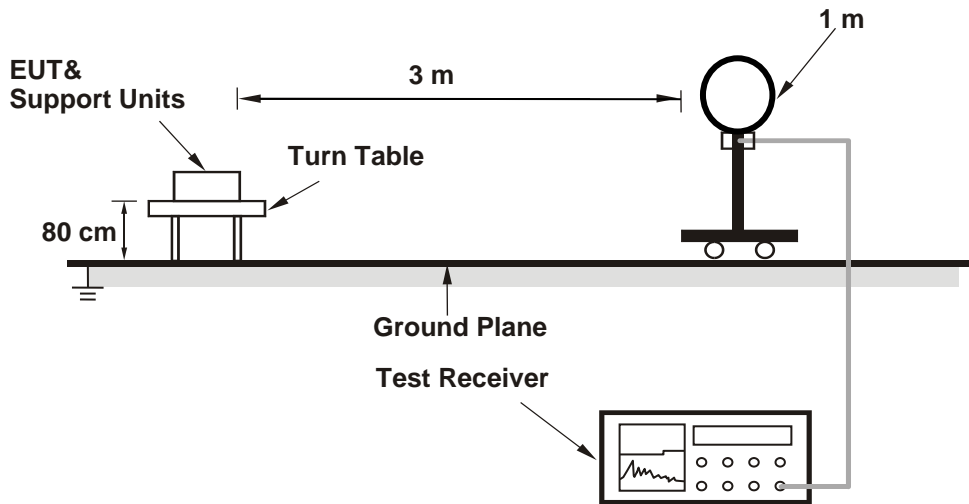


<Radiated Emission 30 MHz to 1 GHz>

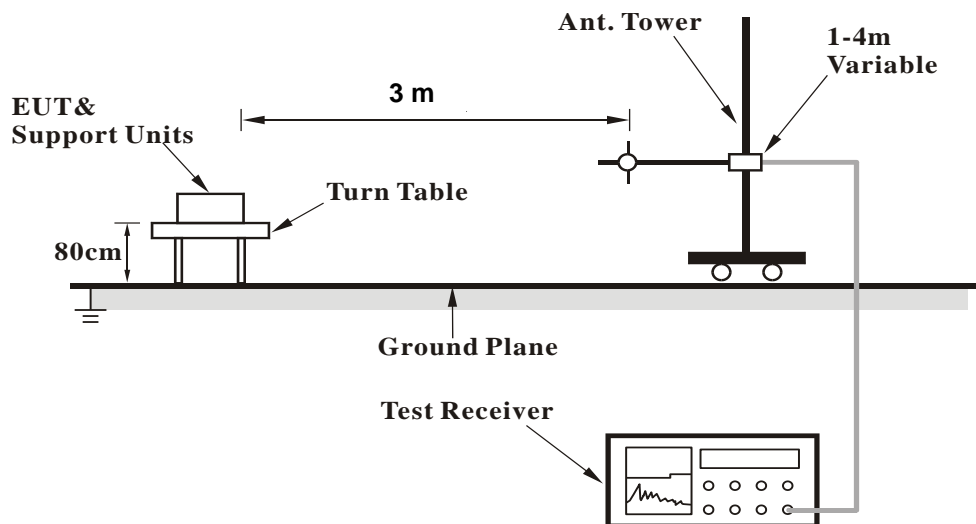



**<Radiated Emission above 1 GHz>**

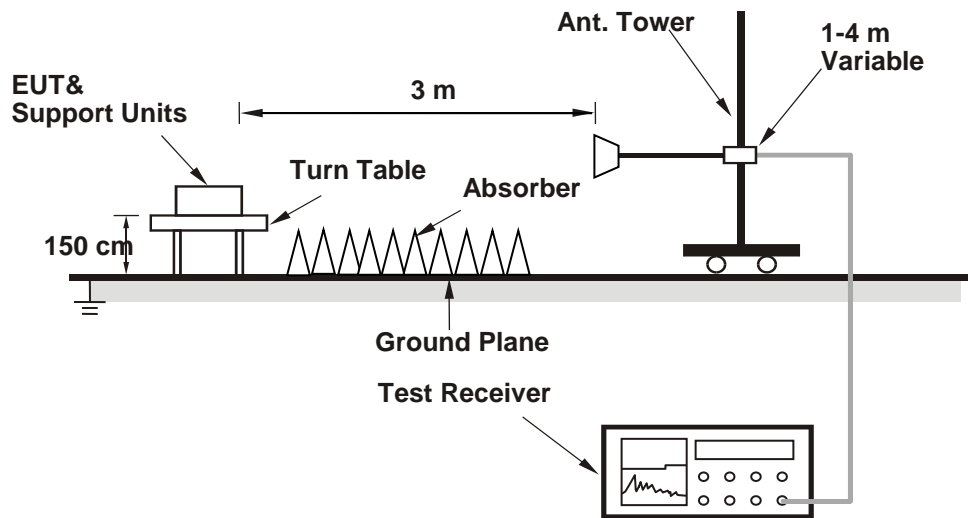

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**4.1.6 EUT Operating Conditions**

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results

Above 1 GHz Data :  
802.11b

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2387.22	40.84	36.35	4.49	54	-13.16	252	171	Average
2387.22	52.16	47.67	4.49	74	-21.84	252	171	Peak
2412	104.12	99.57	4.55			252	171	Average
2412	106.8	102.25	4.55			252	171	Peak
4824	49.44	39.15	10.29	54	-4.56	123	148	Average
4824	51.75	41.46	10.29	74	-22.25	123	148	Peak

Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.92	43.52	39.02	4.5	54	-10.48	287	303	Average
2389.92	53.02	48.52	4.5	74	-20.98	287	303	Peak
2412	106.57	102.02	4.55			287	303	Average
2412	109.04	104.49	4.55			287	303	Peak
4824	41.83	31.54	10.29	54	-12.17	132	307	Average
4824	46.83	36.54	10.29	74	-27.17	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2380.92	40.4	35.93	4.47	54	-13.6	252	171	Average
2380.92	51.82	47.35	4.47	74	-22.18	252	171	Peak
2437	103.29	98.7	4.59			252	171	Average
2437	106.07	101.48	4.59			252	171	Peak
2489.12	40.87	36.19	4.68	54	-13.13	252	171	Average
2489.12	52.01	47.33	4.68	74	-21.99	252	171	Peak
4874	52.78	42.57	10.21	54	-1.22	123	148	Average
4874	54.77	44.56	10.21	74	-19.23	123	148	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.39	40.72	36.23	4.49	54	-13.28	268	302	Average
2388.39	52.44	47.95	4.49	74	-21.56	268	302	Peak
2437	106.58	101.99	4.59			268	302	Average
2437	108.74	104.15	4.59			268	302	Peak
2485.48	41.21	36.55	4.66	54	-12.79	268	302	Average
2485.48	52.51	47.85	4.66	74	-21.49	268	302	Peak
4874	43.54	33.33	10.21	54	-10.46	132	307	Average
4874	49.09	38.88	10.21	74	-24.91	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	102.32	97.7	4.62			171	106	Average
2462	105.4	100.78	4.62			171	106	Peak
2487.92	42.1	37.42	4.68	54	-11.9	171	106	Average
2487.92	52.65	47.97	4.68	74	-21.35	171	106	Peak
4924	52.13	41.88	10.25	54	-1.87	123	148	Average
4924	54.34	44.09	10.25	74	-19.66	123	148	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	104.32	99.7	4.62			298	305	Average
2462	107.94	103.32	4.62			298	305	Peak
2483.72	43.05	38.39	4.66	54	-10.95	298	305	Average
2483.72	52.78	48.12	4.66	74	-21.22	298	305	Peak
4924	43.13	32.88	10.25	54	-10.87	132	307	Average
4924	48.91	38.66	10.25	74	-25.09	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

## 802.11g

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.92	47.07	42.57	4.5	54	-6.93	253	171	Average
2389.92	60.88	56.38	4.5	74	-13.12	253	171	Peak
2412	101.57	97.02	4.55			253	171	Average
2412	109.43	104.88	4.55			253	171	Peak
4824	43.55	33.26	10.29	54	-10.45	123	148	Average
4824	52.8	42.51	10.29	74	-21.2	123	148	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2390	47.5	43	4.5	54	-6.5	288	301	Average
2390	60.09	55.59	4.5	74	-13.91	288	301	Peak
2412	103.59	99.04	4.55			287	303	Average
2412	111.1	106.55	4.55			287	303	Peak
4824	41.57	31.28	10.29	54	-12.43	132	307	Average
4824	47.53	37.24	10.29	74	-26.47	132	307	Peak

## Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.29	40.65	36.16	4.49	54	-13.35	253	171	Average
2389.29	51.68	47.19	4.49	74	-22.32	253	171	Peak
2437	99.29	94.7	4.59			253	171	Average
2437	107.65	103.06	4.59			253	171	Peak
2485.44	41.19	36.53	4.66	54	-12.81	253	171	Average
2485.44	52.33	47.67	4.66	74	-21.67	253	171	Peak
4874	43.7	33.49	10.21	54	-10.3	123	148	Average
4874	51.69	41.48	10.21	74	-22.31	123	148	Peak

Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2383.17	41.76	37.29	4.47	54	-12.24	287	303	Average
2383.17	52.94	48.47	4.47	74	-21.06	287	303	Peak
2437	102.62	98.03	4.59			287	303	Average
2437	109.25	104.66	4.59			287	303	Peak
2485.08	41.9	37.24	4.66	54	-12.1	287	303	Average
2485.08	52.53	47.87	4.66	74	-21.47	287	303	Peak
4874	41.31	31.1	10.21	54	-12.69	132	307	Average
4874	47.8	37.59	10.21	74	-26.2	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	98.32	93.7	4.62			253	171	Average
2462	106.34	101.72	4.62			253	171	Peak
2483.52	51.78	47.12	4.66	54	-2.22	253	171	Average
2483.52	65.33	60.67	4.66	74	-8.67	253	171	Peak
4924	43.25	33	10.25	54	-10.75	123	148	Average
4924	52.45	42.2	10.25	74	-21.55	123	148	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	100.65	96.03	4.62			287	303	Average
2462	108.31	103.69	4.62			287	303	Peak
2483.72	52.91	48.25	4.66	54	-1.09	287	303	Average
2483.72	67	62.34	4.66	74	-7	287	303	Peak
4924	41.62	31.37	10.25	54	-12.38	132	307	Average
4924	48.95	38.7	10.25	74	-25.05	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

### 802.11n (HT20)

EUT Test Condition		Measurement Detail	
Channel	Channel 1	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.92	51.06	46.56	4.5	54	-2.94	253	171	Average
2389.92	64.55	60.05	4.5	74	-9.45	253	171	Peak
2412	97.12	92.57	4.55			253	171	Average
2412	105.07	100.52	4.55			253	171	Peak
4824	43.34	33.05	10.29	54	-10.66	123	148	Average
4824	51.14	40.85	10.29	74	-22.86	123	148	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.92	53.11	48.61	4.5	54	-0.89	287	303	Average
2389.92	66.77	62.27	4.5	74	-7.23	287	303	Peak
2412	99.23	94.68	4.55			287	303	Average
2412	107.84	103.29	4.55			287	303	Peak
4824	41.55	31.26	10.29	54	-12.45	132	307	Average
4824	48.09	37.8	10.29	74	-25.91	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2412 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.



EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2385.96	40.48	35.99	4.49	54	-13.52	253	171	Average
2385.96	51.79	47.3	4.49	74	-22.21	253	171	Peak
2437	98.29	93.7	4.59			253	171	Average
2437	106.93	102.34	4.59			253	171	Peak
2487.12	40.88	36.22	4.66	54	-13.12	253	171	Average
2487.12	52.58	47.92	4.66	74	-21.42	253	171	Peak
4874	42.62	32.41	10.21	54	-11.38	123	148	Average
4874	50.85	40.64	10.21	74	-23.15	123	148	Peak

Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2387.58	41.15	36.66	4.49	54	-12.85	287	303	Average
2387.58	51.92	47.43	4.49	74	-22.08	287	303	Peak
2437	100.29	95.7	4.59			287	303	Average
2437	108.4	103.81	4.59			287	303	Peak
2486.16	41.47	36.81	4.66	54	-12.53	287	303	Average
2486.16	52.55	47.89	4.66	74	-21.45	287	303	Peak
4874	41.48	31.27	10.21	54	-12.52	132	307	Average
4874	47.41	37.2	10.21	74	-26.59	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 11	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	97.32	92.7	4.62			253	172	Average
2462	105.86	101.24	4.62			253	172	Peak
2483.6	50.98	46.32	4.66	54	-3.02	253	172	Average
2483.6	66.14	61.48	4.66	74	-7.86	253	172	Peak
4924	42.48	32.23	10.25	54	-11.52	123	148	Average
4924	50.24	39.99	10.25	74	-23.76	123	148	Peak
Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2462	99.32	94.7	4.62			287	303	Average
2462	107.01	102.39	4.62			287	303	Peak
2483.52	53.06	48.4	4.66	54	-0.94	287	303	Average
2483.52	63.97	59.31	4.66	74	-10.03	287	303	Peak
4924	41.59	31.34	10.25	54	-12.41	132	307	Average
4924	47.55	37.3	10.25	74	-26.45	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2462 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

### 802.11n (HT40)

EUT Test Condition		Measurement Detail	
Channel	Channel 3	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

#### Antenna Polarity & Test Distance: Horizontal at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.74	49.89	45.4	4.49	54	-4.11	253	171	Average
2389.74	64.12	59.63	4.49	74	-9.88	253	171	Peak
2422	92.47	87.91	4.56			253	171	Average
2422	99.05	94.49	4.56			253	171	Peak
2495.24	41.4	36.73	4.67	54	-12.6	253	171	Average
2495.24	52.74	48.07	4.67	74	-21.26	253	171	Peak
4844	41.56	31.33	10.23	54	-12.44	123	148	Average
4844	46.76	36.53	10.23	74	-27.24	123	148	Peak

#### Antenna Polarity & Test Distance: Vertical at 3 m

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.3	53.1	48.61	4.49	54	-0.9	288	302	Average
2388.3	65.81	61.32	4.49	74	-8.19	288	302	Peak
2422	94.48	89.92	4.56			287	303	Average
2422	101.2	96.64	4.56			287	303	Peak
2484.92	41.51	36.85	4.66	54	-12.49	287	303	Average
2484.92	51.91	47.25	4.66	74	-22.09	287	303	Peak
4844	41.91	31.68	10.23	54	-12.09	132	307	Average
4844	47.99	37.76	10.23	74	-26.01	132	307	Peak

#### Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2422 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 6	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.92	48.87	44.37	4.5	54	-5.13	253	171	Average
2389.92	62.81	58.31	4.5	74	-11.19	253	171	Peak
2437	95.47	90.88	4.59			253	171	Average
2437	102.31	97.72	4.59			253	171	Peak
2484.6	45.19	40.53	4.66	54	-8.81	253	171	Average
2484.6	58.1	53.44	4.66	74	-15.9	253	171	Peak
4874	41.94	31.73	10.21	54	-12.06	123	148	Average
4874	45.28	35.07	10.21	74	-28.72	123	148	Peak

Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2389.47	52.94	48.45	4.49	54	-1.06	288	302	Average
2389.47	63.56	59.07	4.49	74	-10.44	288	302	Peak
2437	97.67	93.08	4.59			287	303	Average
2437	104.45	99.86	4.59			287	303	Peak
2484.2	47.82	43.16	4.66	54	-6.18	287	303	Average
2484.2	59.12	54.46	4.66	74	-14.88	287	303	Peak
4874	41.82	31.61	10.21	54	-12.18	132	307	Average
4874	45.32	35.11	10.21	74	-28.68	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2437 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

EUT Test Condition		Measurement Detail	
Channel	Channel 9	Frequency Range	1 GHz ~ 25 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Average (AV)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

Antenna Polarity & Test Distance: Horizontal at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2385.69	41.03	36.54	4.49	54	-12.97	253	171	Average
2385.69	51.54	47.05	4.49	74	-22.46	253	171	Peak
2452	93.3	88.7	4.6			253	171	Average
2452	100.56	95.96	4.6			253	171	Peak
2483.52	51.19	46.53	4.66	54	-2.81	253	171	Average
2483.52	67.77	63.11	4.66	74	-6.23	253	171	Peak
4904	42.14	32	10.14	54	-11.86	123	148	Average
4904	46.18	36.04	10.14	74	-27.82	123	148	Peak

Antenna Polarity & Test Distance: Vertical at 3 m								
Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
2388.84	41.49	37	4.49	54	-12.51	287	303	Average
2388.84	52.01	47.52	4.49	74	-21.99	287	303	Peak
2452	95.31	90.71	4.6			287	303	Average
2452	102.32	97.72	4.6			287	303	Peak
2483.52	53.2	48.54	4.66	54	-0.8	287	303	Average
2483.52	67.73	63.07	4.66	74	-6.27	287	303	Peak
4904	41.59	31.45	10.14	54	-12.41	132	307	Average
4904	45.91	35.77	10.14	74	-28.09	132	307	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value
- 2452 MHz: Fundamental frequency.
- The emission levels of other frequencies were very low against the limit.

**9 kHz ~ 30 MHz Data:**


The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

**30 MHz ~ 1 GHz Worst-Case Data:**


**802.11n (HT40)**

EUT Test Condition		Measurement Detail	
Channel	Channel 9	Frequency Range	30 MHz ~ 1 GHz
Input Power	120 Vac, 60 Hz	Detector Function	Peak (PK) Quasi-peak (QP)
Environmental Conditions	25 deg. C, 65 % RH	Tested By	Harry Hsueh

**Horizontal**

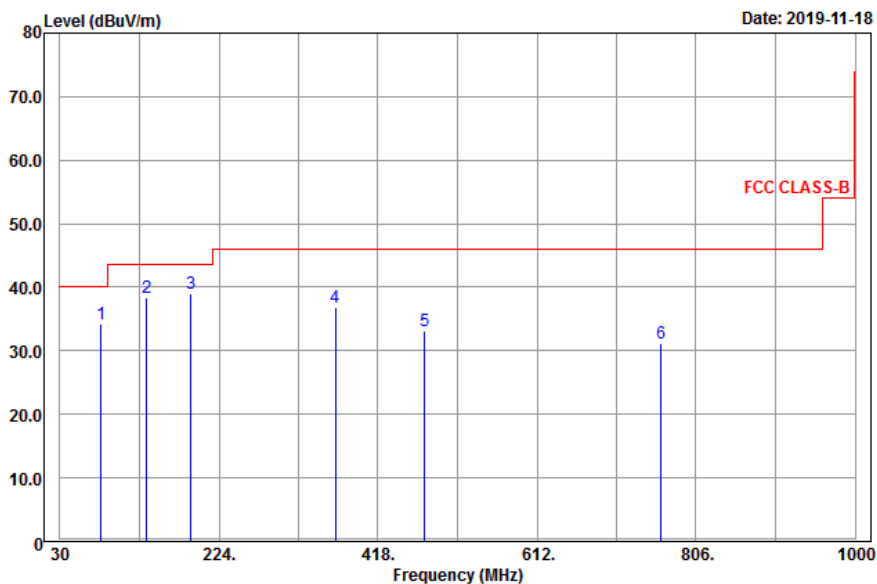

**Vertical**

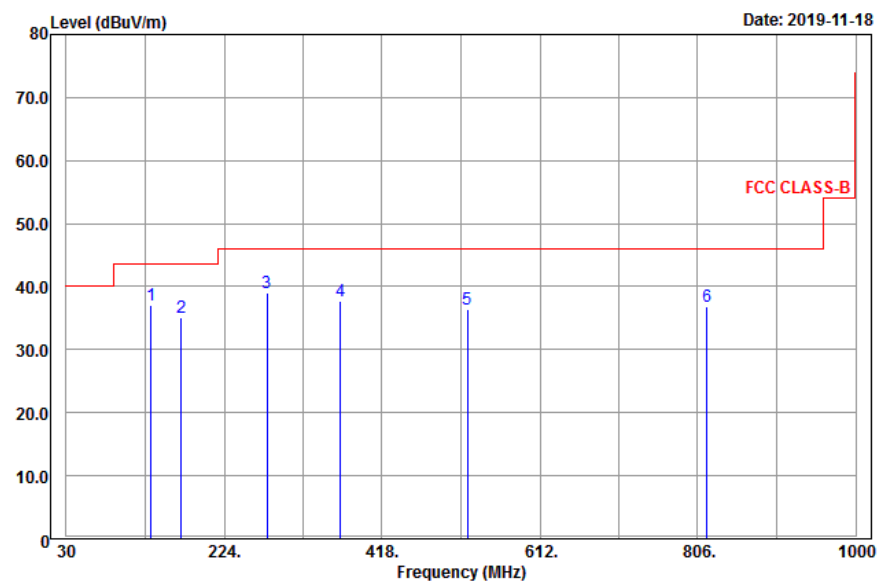

**Antenna Polarity & Test Distance: Horizontal at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
80.49	34.12	55.48	-21.36	40	-5.88	120	259	Peak
135.57	38.4	59.17	-20.77	43.5	-5.1	148	127	Peak
190.11	38.99	57.7	-18.71	43.5	-4.51	134	226	Peak
366.5	36.86	51.31	-14.45	46	-9.14	124	156	Peak
475	33.04	45.86	-12.82	46	-12.96	165	290	Peak
763.4	31.12	39.37	-8.25	46	-14.88	114	57	Peak

**Antenna Polarity & Test Distance: Vertical at 3 m**

Frequency (MHz)	Emission Level (dBuV/m)	Read Level (dBuV)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)	Remark
134.49	37.03	57.75	-20.72	43.5	-6.47	102	154	Peak
171.21	35.09	55.3	-20.21	43.5	-8.41	146	273	Peak
276.51	38.92	55.37	-16.45	46	-7.08	173	105	Peak
367.2	37.8	52.24	-14.44	46	-8.2	102	115	Peak
523.3	36.41	48.42	-12.01	46	-9.59	168	253	Peak
817.3	36.73	44.14	-7.41	46	-9.27	127	115	Peak

Remarks:

- Emission Level = Read Level + Factor  
Margin value = Emission level – Limit value.
- The emission levels of other frequencies were very low against the limit.

## 4.2 Conducted Emission Measurement

### 4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.  
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Dec. 10, 2018	Dec. 09, 2019
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Sep. 05, 2019	Sep. 04, 2020
LISN ROHDE & SCHWARZ (EUT)	ENV216	101826	Feb. 21, 2019	Feb. 20, 2020
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 22, 2019	Aug. 21, 2020
Software ADT	BV ADT_Cond_ V7.3.7.4	NA	NA	NA
DC power supply Keysight	U8002A	MY56330015	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
 2. The test was performed in HwaYa Shielded Room 1.  
 3. The VCCI Site Registration No. is C-12040.



#### 4.2.3 Test Procedures


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

**Note:** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

#### 4.2.4 Deviation from Test Standard

No deviation.

#### 4.2.5 Test Setup

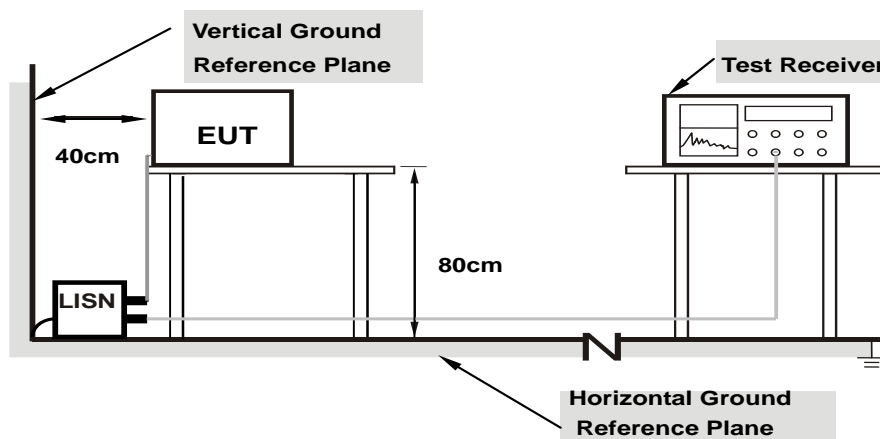

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.2.6 EUT Operating Conditions

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.


#### 4.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Jones Chang	Test Date	2019/11/24

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.67	23.99	1.25	33.66	10.92	65.57	55.57	-31.91	-44.65
2	0.18200	9.66	19.98	0.50	29.64	10.16	64.39	54.39	-34.75	-44.23
3	0.20600	9.66	15.82	1.55	25.48	11.21	63.37	53.37	-37.89	-42.16
4	15.09800	9.97	11.87	4.84	21.84	14.81	60.00	50.00	-38.16	-35.19
5	17.18200	9.97	14.07	6.18	24.04	16.15	60.00	50.00	-35.96	-33.85
6	24.57800	10.01	20.35	17.66	30.36	27.67	60.00	50.00	-29.64	-22.33

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

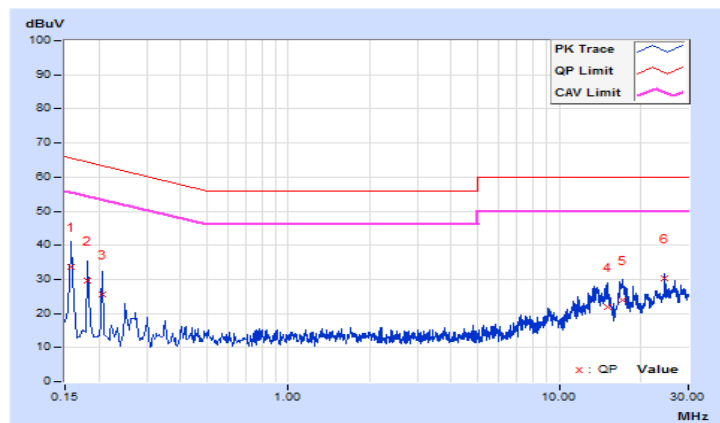


Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Input Power	120Vac, 60Hz	Environmental Conditions	25°C, 75%RH
Tested by	Jones Chang	Test Date	2019/11/24

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15800	9.64	24.03	1.74	33.67	11.38	65.57	55.57	-31.90	-44.19
2	0.18200	9.64	20.03	0.03	29.67	9.67	64.39	54.39	-34.72	-44.72
3	0.20600	9.64	15.84	0.34	25.48	9.98	63.37	53.37	-37.89	-43.39
4	13.09800	9.96	11.48	4.18	21.44	14.14	60.00	50.00	-38.56	-35.86
5	17.09000	10.02	13.74	5.94	23.76	15.96	60.00	50.00	-36.24	-34.04
<b>6</b>	<b>24.57400</b>	<b>10.09</b>	<b>20.19</b>	<b>17.83</b>	<b>30.28</b>	<b>27.92</b>	<b>60.00</b>	<b>50.00</b>	<b>-29.72</b>	<b>-22.08</b>

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

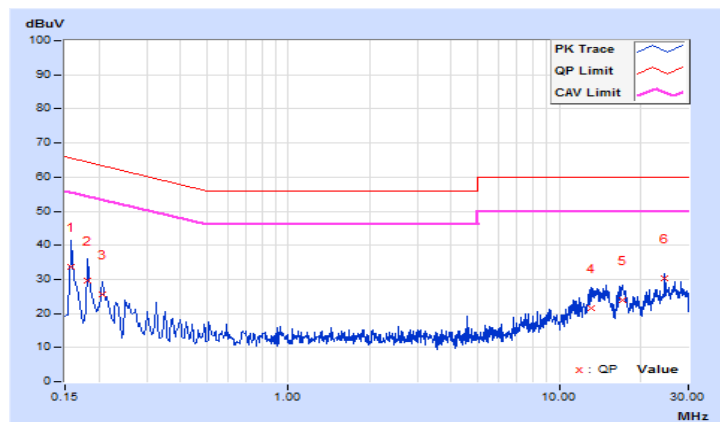


### 4.3 6 dB Bandwidth Measurement

#### 4.3.1 Limits of 6 dB Bandwidth Measurement

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 Test Setup

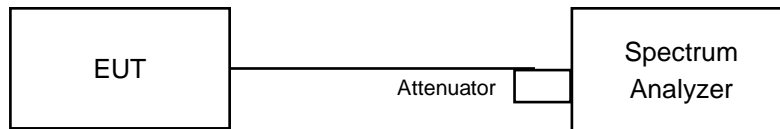

#### 4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

#### 4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz
- Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 4.3.5 Deviation from Test Standard

No deviation.

#### 4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.3.7 Test Results

## 802.11b

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	9.10	9.11	0.5	Pass
6	2437	9.12	8.58	0.5	Pass
11	2462	9.08	9.10	0.5	Pass

## 802.11g

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.16	15.13	0.5	Pass
6	2437	15.17	15.17	0.5	Pass
11	2462	15.18	15.18	0.5	Pass

## 802.11n (HT20)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
1	2412	15.16	15.76	0.5	Pass
6	2437	15.17	15.15	0.5	Pass
11	2462	15.17	15.73	0.5	Pass

## 802.11n (HT40)


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
3	2422	35.20	35.21	0.5	Pass
6	2437	35.22	35.22	0.5	Pass
9	2452	35.24	35.20	0.5	Pass

### Spectrum Plot of Worst Value


#### 802.11b

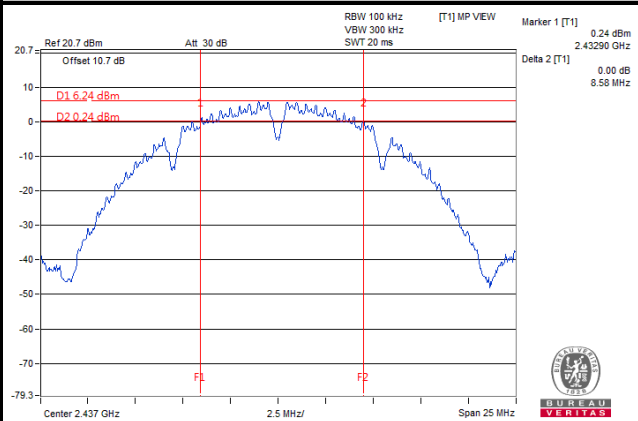


#### 802.11g

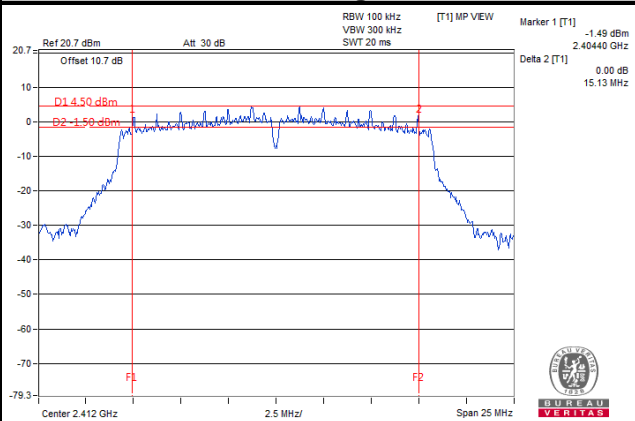

#### 802.11n (HT20)

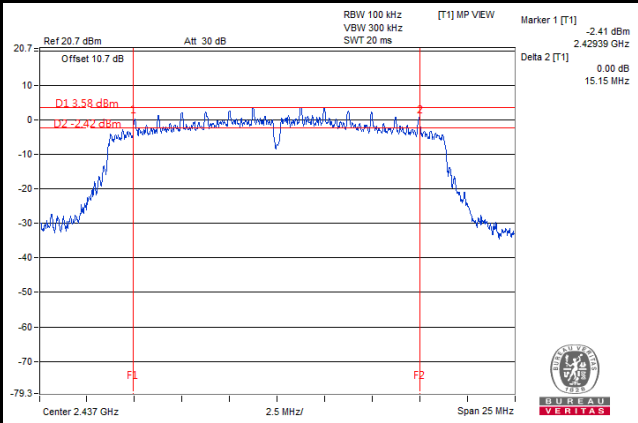


#### 802.11n (HT40)

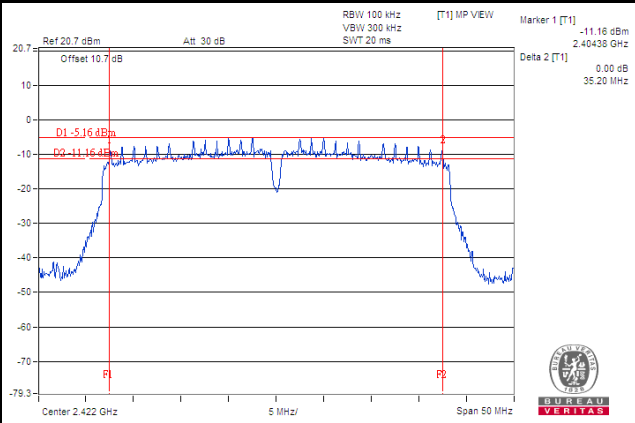

## 4.4 Occupied Bandwidth Measurement

### 4.4.1 Test Setup

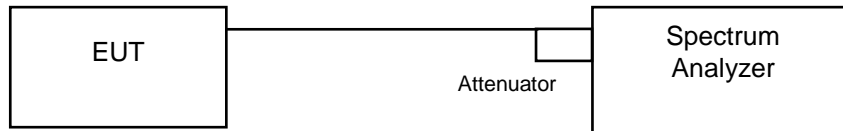

### 4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1 % to 5 % of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

### 4.4.4 Deviation from Test Standard

No deviation.

### 4.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

## 4.4.6 Test Results

## 802.11b

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	13.46	13.46	Pass
6	2437	13.56	13.65	Pass
11	2462	13.56	13.56	Pass

## 802.11g

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	16.73	16.44	Pass
6	2437	16.73	16.44	Pass
11	2462	16.83	16.44	Pass

## 802.11n (HT20)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
1	2412	17.60	17.60	Pass
6	2437	17.79	17.70	Pass
11	2462	17.69	17.60	Pass


## 802.11n (HT40)

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)		Pass / Fail
		Chain 0	Chain 1	
3	2422	36.34	36.35	Pass
6	2437	36.44	36.35	Pass
9	2452	36.34	36.35	Pass




### Spectrum Plot of Worst Value


**802.11b**

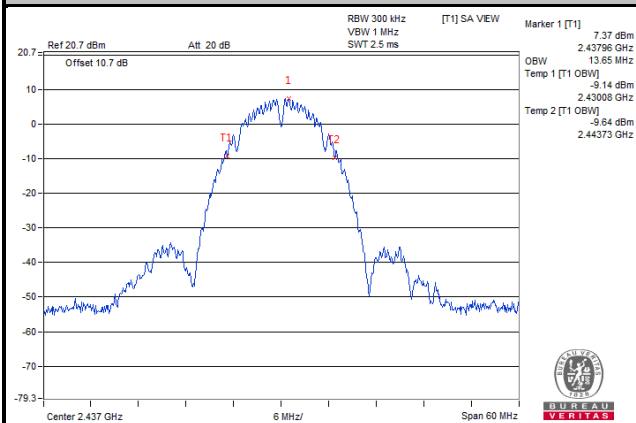


**802.11g**

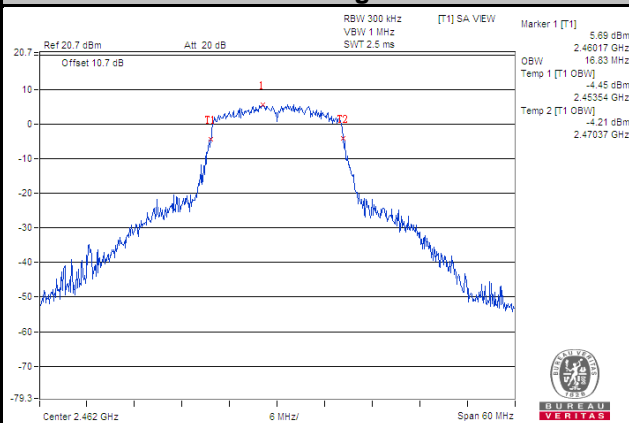

**802.11n (HT20)**

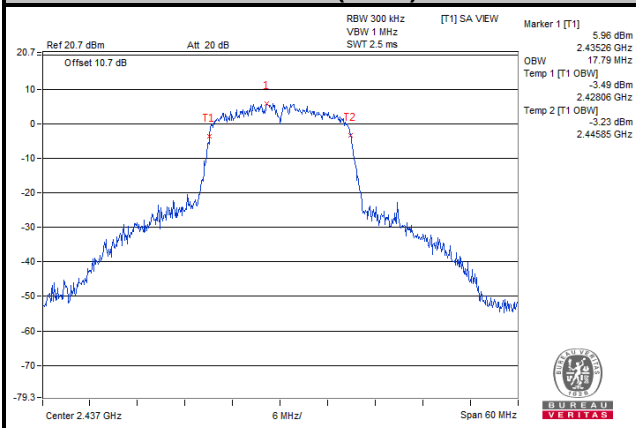

**802.11n (HT40)**

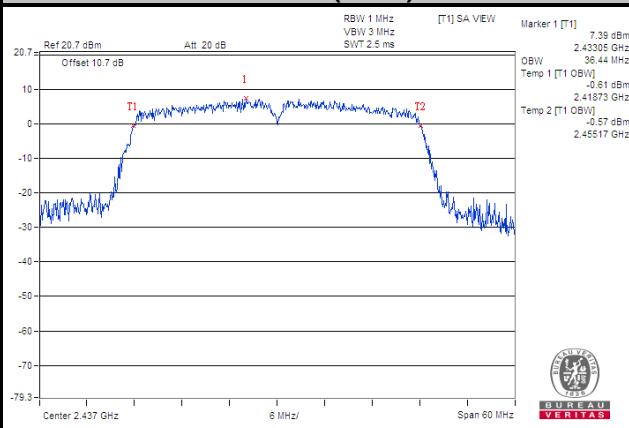

## 4.5 Conducted Output Power Measurement

### 4.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for NANT  $\leq$  4;

Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq$  40 MHz for any NANT;

Array Gain =  $5 \log(\text{NANT}/\text{NSS})$  dB or 3 dB, whichever is less for 20 MHz channel widths with NANT  $\geq$  5.

For power measurements on all other devices: Array Gain =  $10 \log(\text{NANT}/\text{NSS})$  dB.

### 4.5.2 Test Setup

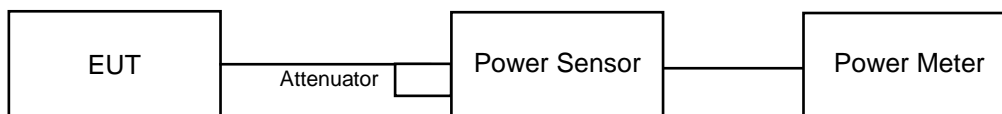

### 4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.5.4 Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

### 4.5.5 Deviation from Test Standard

No deviation.

### 4.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.5.7 Test Results

**Peak Power**

**802.11b**

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	17.25	16.97	102.862	20.12	30	Pass
6	2437	17.21	16.75	99.917	20.00	30	Pass
11	2462	16.89	16.37	92.216	19.65	30	Pass

**802.11g**

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	23.31	22.65	398.366	26.00	30	Pass
6	2437	23.65	22.91	427.173	26.31	30	Pass
11	2462	21.75	21.36	286.397	24.57	30	Pass

**802.11n (HT20)**

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	20.45	20.33	218.812	23.40	30	Pass
6	2437	21.46	21.73	288.895	24.61	30	Pass
11	2462	20.56	20.41	223.664	23.50	30	Pass

**802.11n (HT40)**

Channel	Frequency (MHz)	Peak Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	17.27	17.11	104.737	20.20	30	Pass
6	2437	20.87	20.26	228.35	23.59	30	Pass
9	2452	18.96	18.73	153.35	21.86	30	Pass

### Average Power

#### 802.11b

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	14.95	14.52	59.575	17.75	30	Pass
6	2437	15.08	14.65	61.385	17.88	30	Pass
11	2462	14.80	14.22	56.624	17.53	30	Pass

#### 802.11g

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	15.06	14.51	60.312	17.80	30	Pass
6	2437	15.06	14.52	60.377	17.81	30	Pass
11	2462	14.24	13.99	51.607	17.13	30	Pass

#### 802.11n (HT20)

Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
1	2412	12.48	12.33	34.801	15.42	30	Pass
6	2437	13.91	13.67	47.885	16.80	30	Pass
11	2462	12.65	12.45	35.987	15.56	30	Pass

#### 802.11n (HT40)


Channel	Frequency (MHz)	Average Power (dBm)		Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1				
3	2422	8.48	8.27	13.761	11.39	30	Pass
6	2437	12.83	12.57	37.259	15.71	30	Pass
9	2452	10.22	9.93	20.36	13.09	30	Pass

## 4.6 Power Spectral Density Measurement

### 4.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.6.2 Test Setup

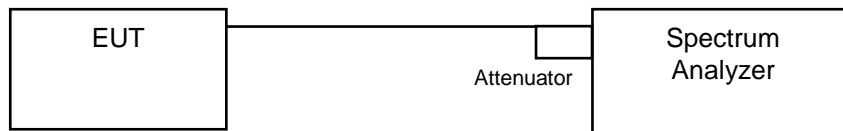

### 4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.6.4 Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d. Set the VBW  $\geq 3 \times \text{RBW}$ .
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.6.5 Deviation from Test Standard

No deviation.

### 4.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 Test Results

#### Peak Power

#### 802.11b

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-7.41	3.01	-4.40	8	Pass
	6	2437	-7.34	3.01	-4.33	8	Pass
	11	2462	-7.78	3.01	-4.77	8	Pass
1	1	2412	-7.91	3.01	-4.90	8	Pass
	6	2437	-7.70	3.01	-4.69	8	Pass
	11	2462	-8.01	3.01	-5.00	8	Pass

#### NOTE:

1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

#### 802.11g

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-10.31	3.01	-7.30	8	Pass
	6	2437	-10.21	3.01	-7.20	8	Pass
	11	2462	-11.69	3.01	-8.68	8	Pass
1	1	2412	-11.08	3.01	-8.07	8	Pass
	6	2437	-11.19	3.01	-8.18	8	Pass
	11	2462	-12.06	3.01	-9.05	8	Pass

#### NOTE:

1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### 802.11n (HT20)

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-12.97	3.01	-9.96	8	Pass
	6	2437	-12.35	3.01	-9.34	8	Pass
	11	2462	-13.62	3.01	-10.61	8	Pass
1	1	2412	-13.29	3.01	-10.28	8	Pass
	6	2437	-10.27	3.01	-7.26	8	Pass
	11	2462	-13.81	3.01	-10.80	8	Pass

**NOTE:**

1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### 802.11n (HT40)


TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-21.17	3.01	-18.16	8	Pass
	6	2437	-16.54	3.01	-13.53	8	Pass
	9	2452	-19.07	3.01	-16.06	8	Pass
1	3	2422	-21.08	3.01	-18.07	8	Pass
	6	2437	-15.79	3.01	-12.78	8	Pass
	9	2452	-18.19	3.01	-15.18	8	Pass

**NOTE:**


1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### Spectrum Plot of Worst Value


#### 802.11b

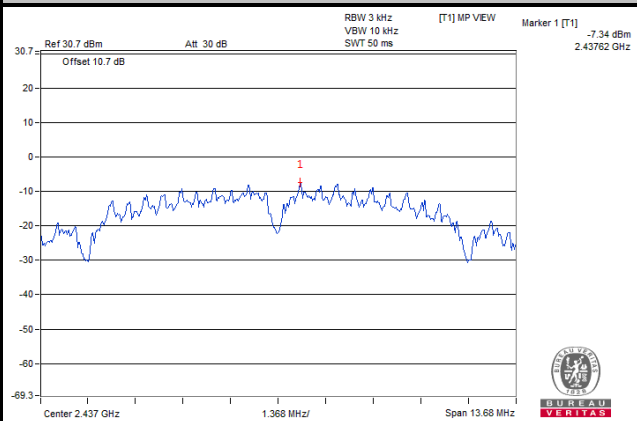


#### 802.11g

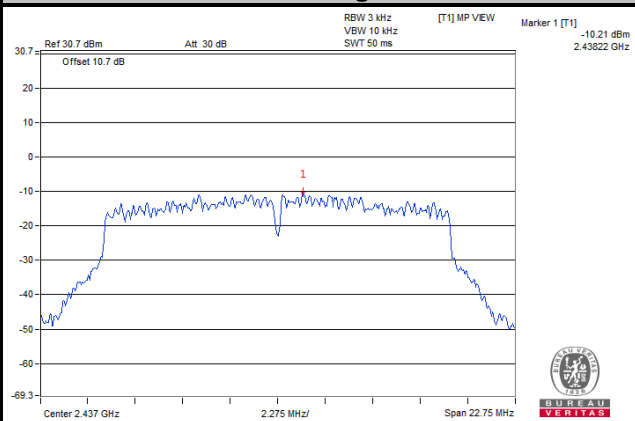

#### 802.11n (HT20)

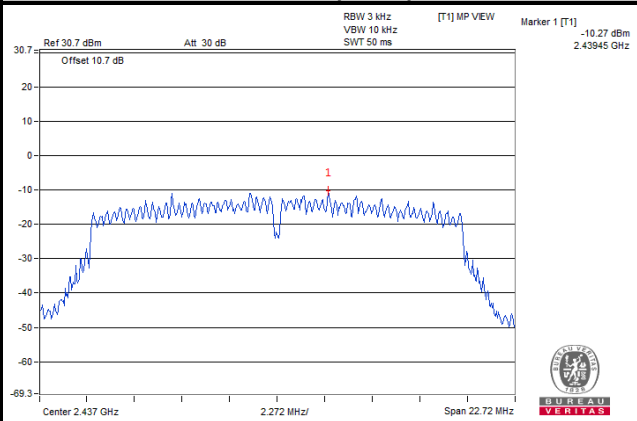

#### 802.11n (HT40)

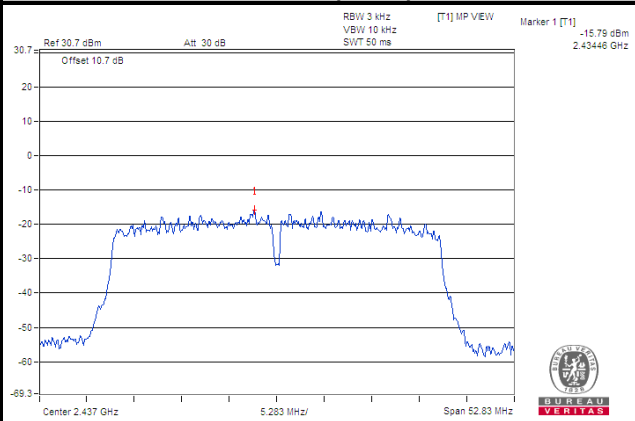



## Average Power

### 802.11b

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-12.51	3.01	-9.50	8	Pass
	6	2437	-12.03	3.01	-9.02	8	Pass
	11	2462	-12.51	3.01	-9.50	8	Pass
1	1	2412	-12.59	3.01	-9.58	8	Pass
	6	2437	-11.99	3.01	-8.98	8	Pass
	11	2462	-12.16	3.01	-9.15	8	Pass

#### NOTE:

1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### 802.11g

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-14.79	3.01	-11.66	8	Pass
	6	2437	-14.35	3.01	-11.22	8	Pass
	11	2462	-15.15	3.01	-12.02	8	Pass
1	1	2412	-14.41	3.01	-11.28	8	Pass
	6	2437	-14.22	3.01	-11.09	8	Pass
	11	2462	-15.32	3.01	-12.19	8	Pass

#### NOTE:

1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### 802.11n (HT20)

TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	1	2412	-17.84	3.01	-14.50	8	Pass
	6	2437	-15.92	3.01	-12.58	8	Pass
	11	2462	-17.11	3.01	-13.77	8	Pass
1	1	2412	-17.21	3.01	-13.87	8	Pass
	6	2437	-14.82	3.01	-11.48	8	Pass
	11	2462	-17.45	3.01	-14.11	8	Pass

**NOTE:**

1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### 802.11n (HT40)


TX Chain	Channel	Freq. (MHz)	PSD (dBm/3 kHz)	10 log (N=2) dB	Total PSD (dBm/3 kHz)	Limit (dBm/3 kHz)	Pass / Fail
0	3	2422	-25.37	3.01	-21.94	8	Pass
	6	2437	-20.72	3.01	-17.29	8	Pass
	9	2452	-23.69	3.01	-20.26	8	Pass
1	3	2422	-25.68	3.01	-22.25	8	Pass
	6	2437	-21.49	3.01	-18.06	8	Pass
	9	2452	-23.45	3.01	-20.02	8	Pass

**NOTE:**


1. Directional gain =  $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}] = 3.80 \text{ dBi} < 6 \text{ dBi}$ , so the limit no need to be reduced.
2. Method E) 2) c) of power density measurement of KDB 662911 is using for calculating total power density, Measure and add  $10 \log (N_{ANT}) \text{ dB}$ .

### Spectrum Plot of Worst Value


#### 802.11b

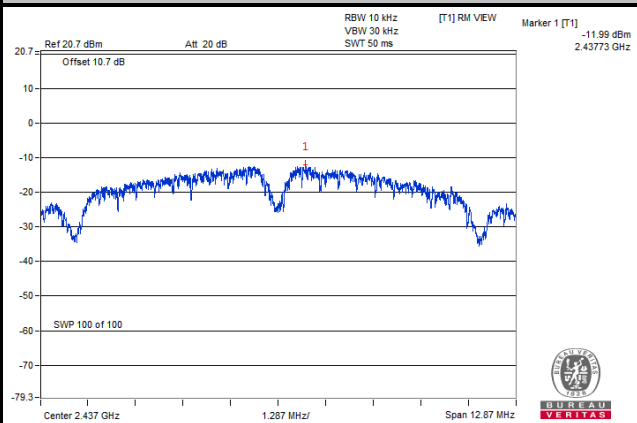


#### 802.11g

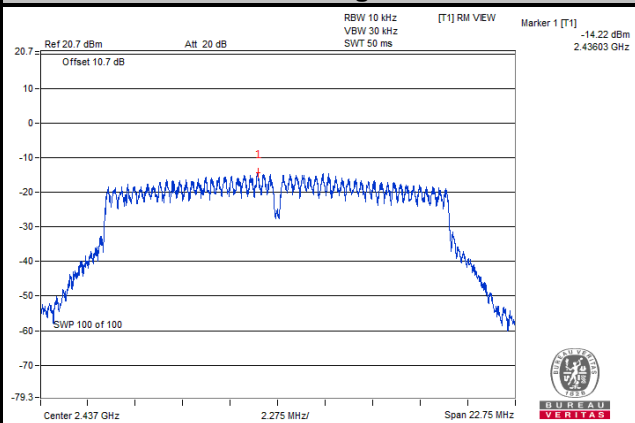

#### 802.11n (HT20)

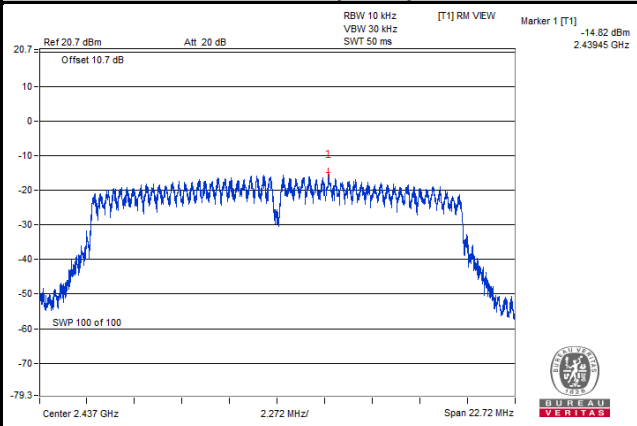

#### 802.11n (HT40)

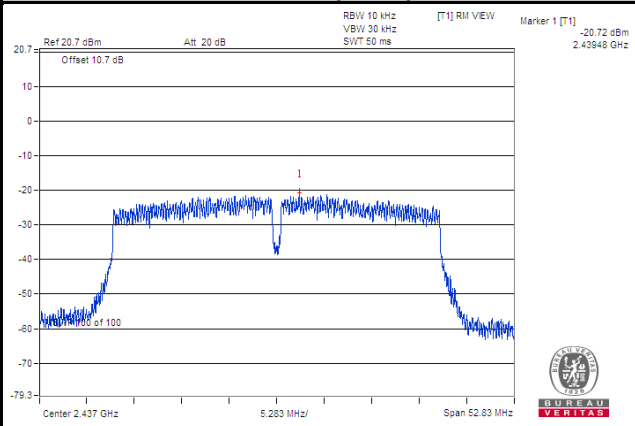


## 4.7 Conducted Out of Band Emission Measurement

### 4.7.1 Limits of Conducted Out of Band Emission Measurement

Below -20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

### 4.7.2 Test Setup

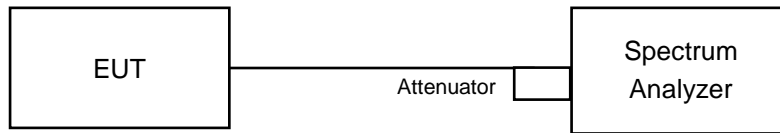

### 4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

### 4.7.4 Test Procedure

#### MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

#### MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

### 4.7.5 Deviation from Test Standard

No deviation.

### 4.7.6 EUT Operating Condition



The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

### 4.7.7 Test Results



The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20 dB offset below D1. It shows compliance with the requirement.

802.11b  
CHAIN 0



Ch 1

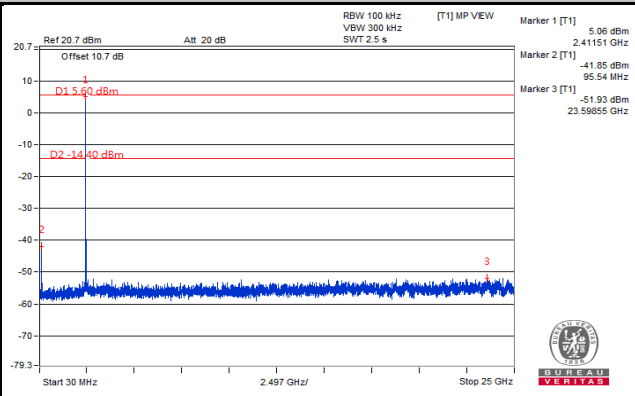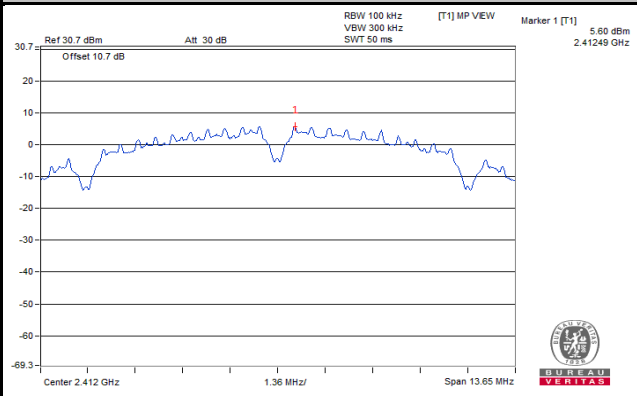


Ch 6

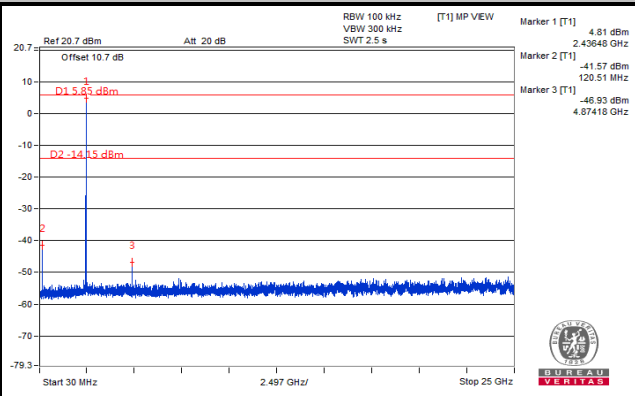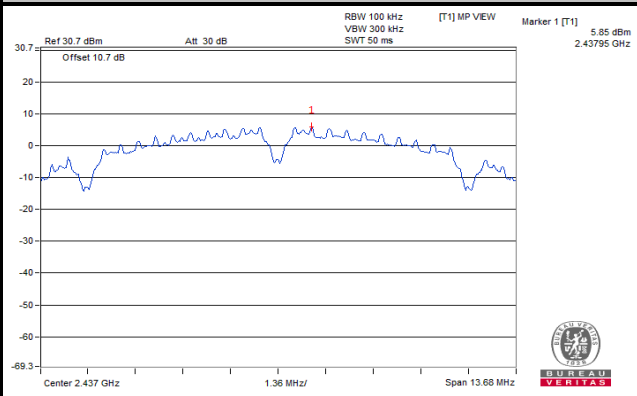


Ch 11

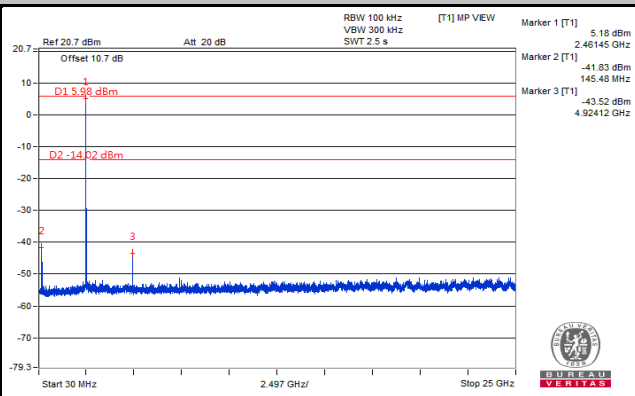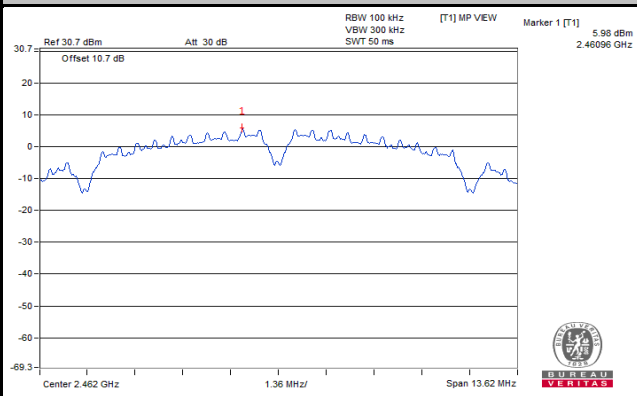

Ch 1 Band Edge


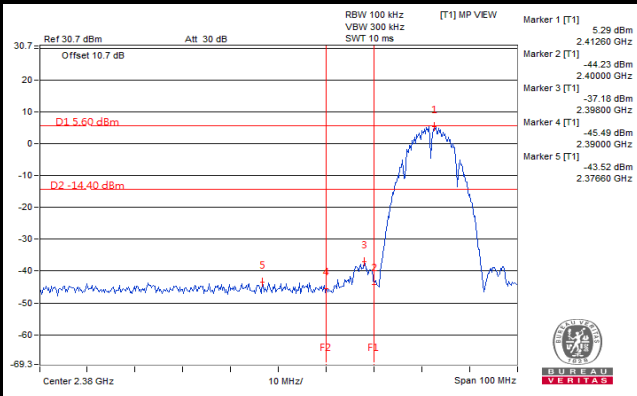


Ch 11 Band Edge


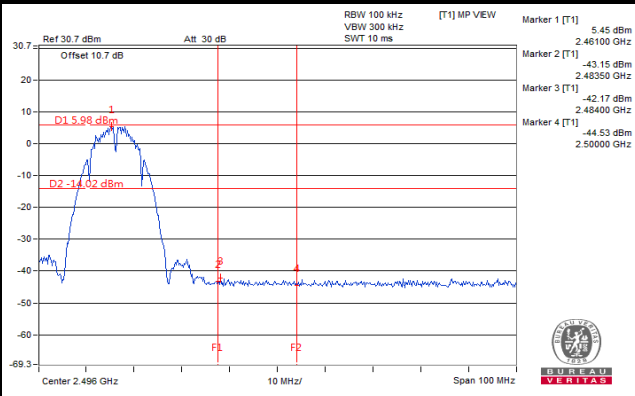


CHAIN 1



Ch 1

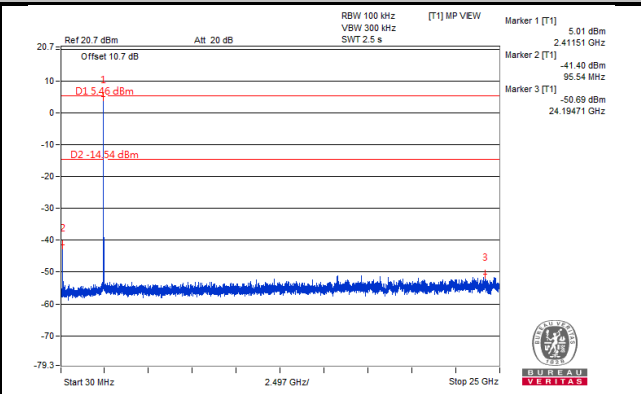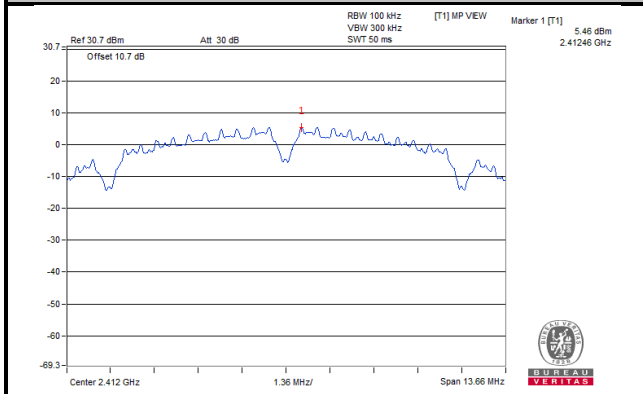


Ch 6

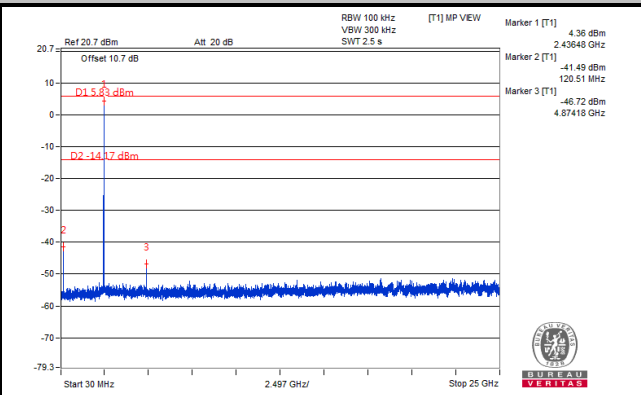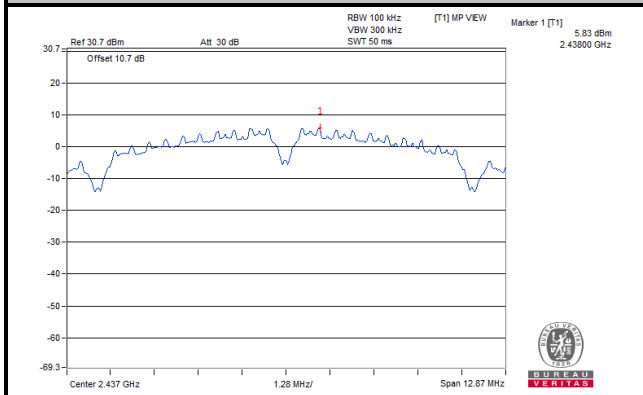


Ch 11

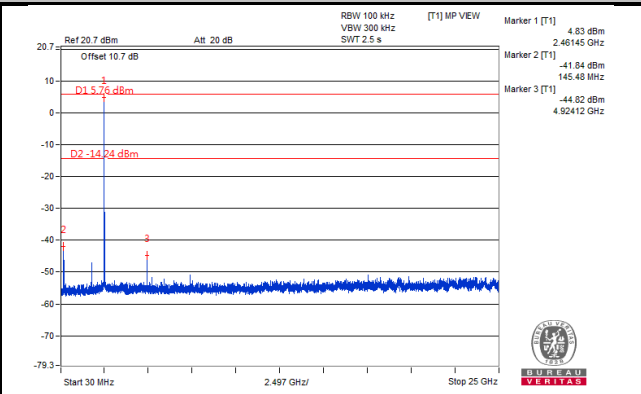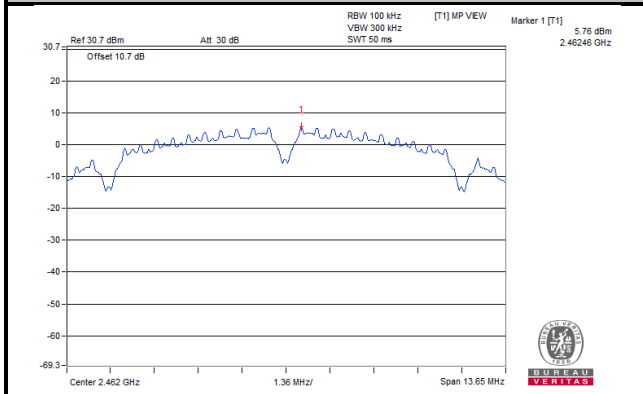

Ch 1 Band Edge


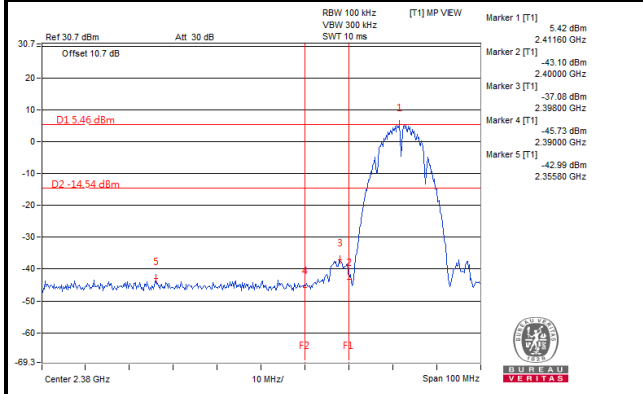


Ch 11 Band Edge


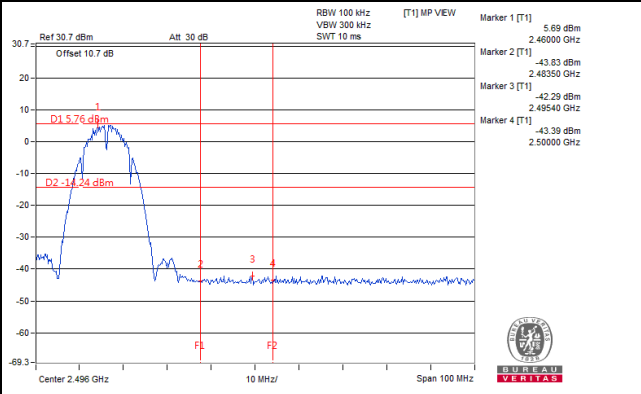


802.11g  
CHAIN 0



Ch 1

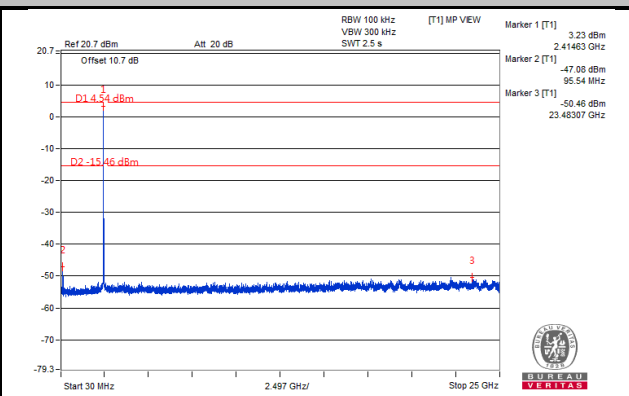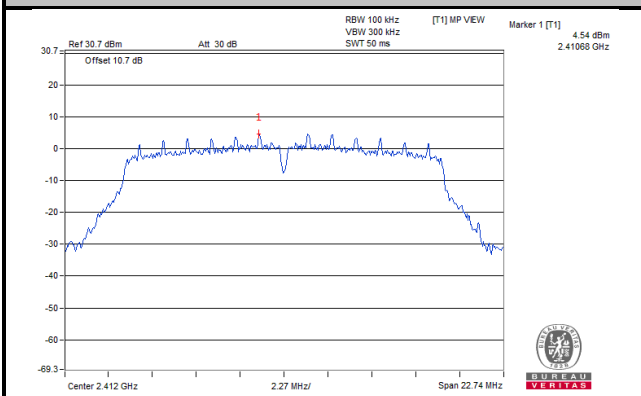


Ch 6

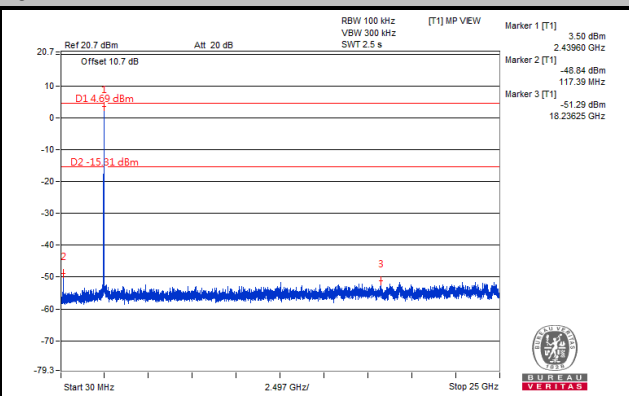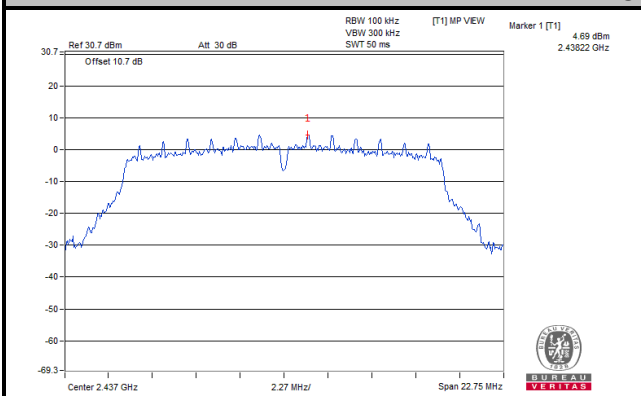


Ch 11

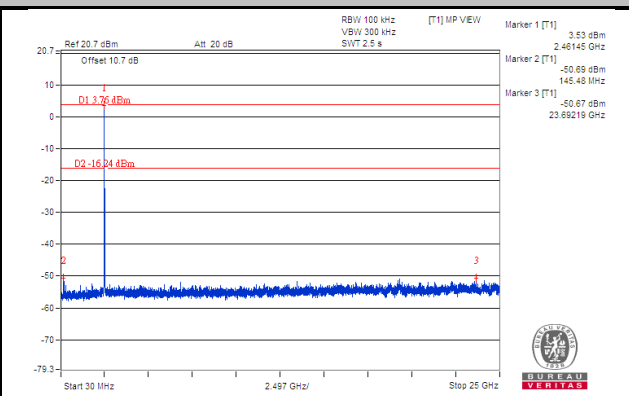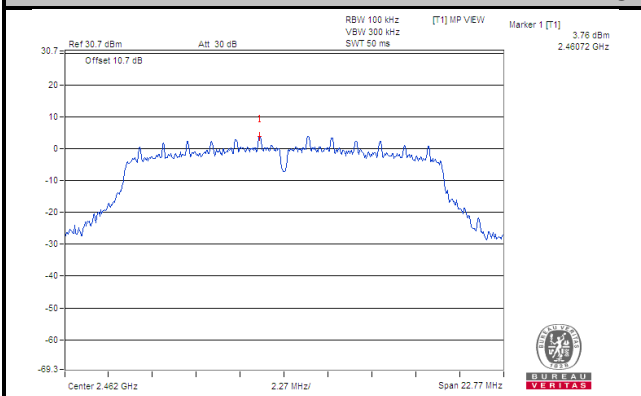

Ch 1 Band Edge


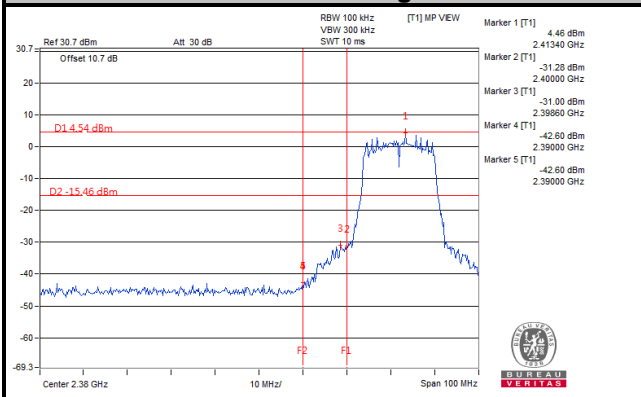


Ch 11 Band Edge


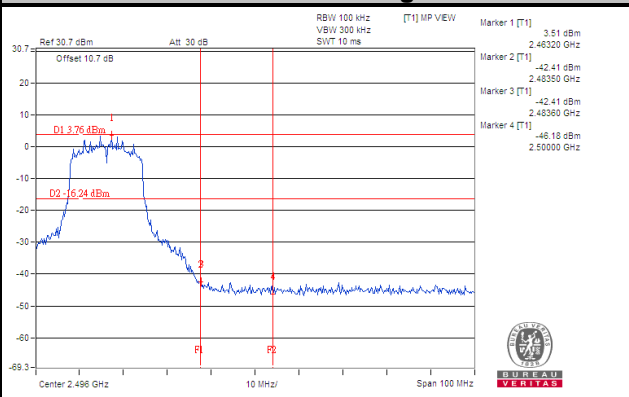


### CHAIN 1



#### Ch 1

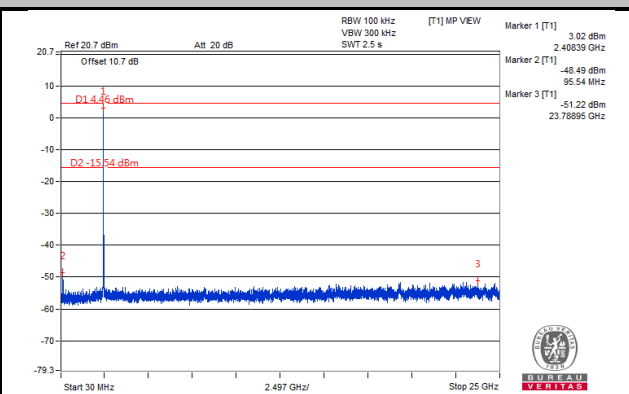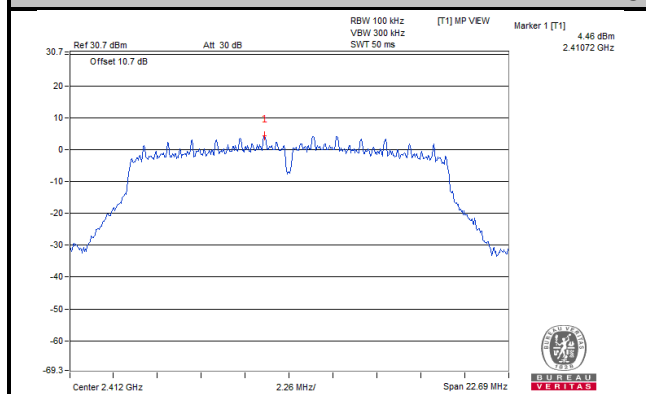


#### Ch 6

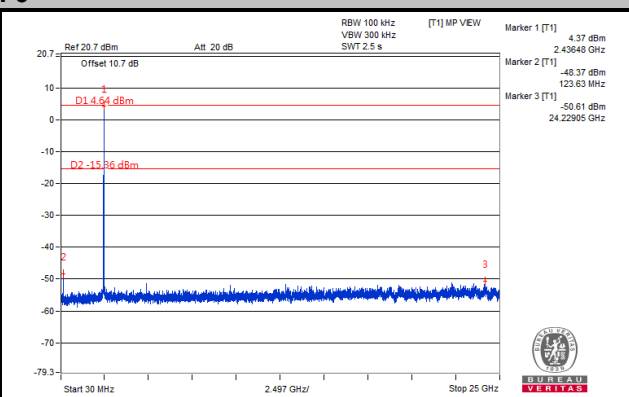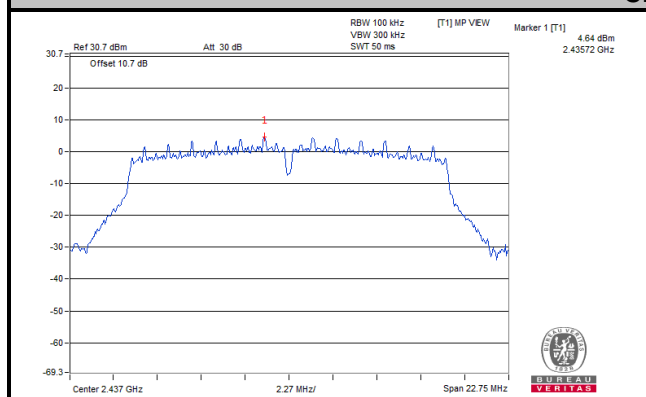


#### Ch 11

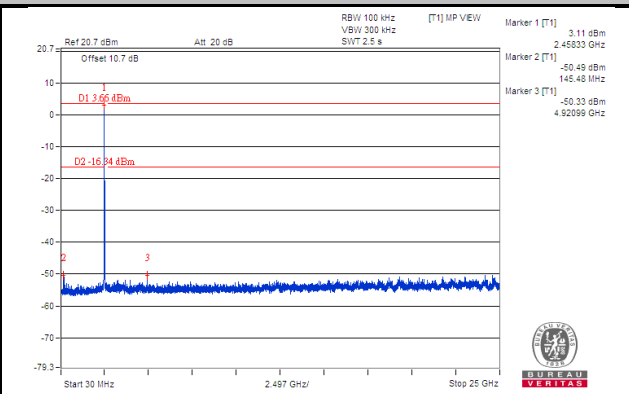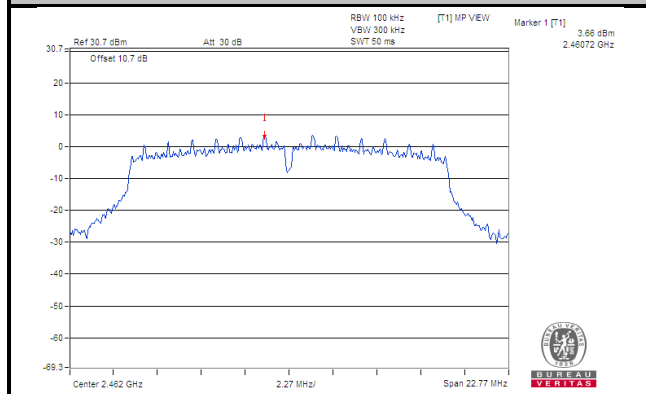

#### Ch 1 Band Edge

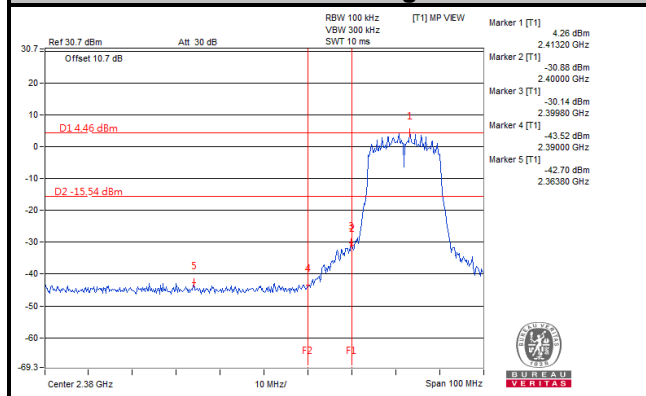



#### Ch 11 Band Edge

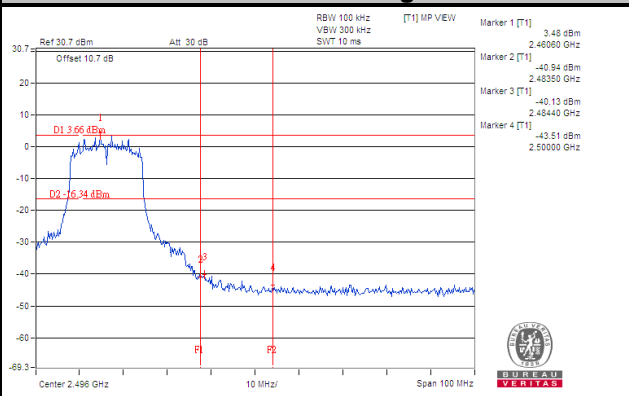





802.11n (HT20)  
CHAIN 0



Ch 1

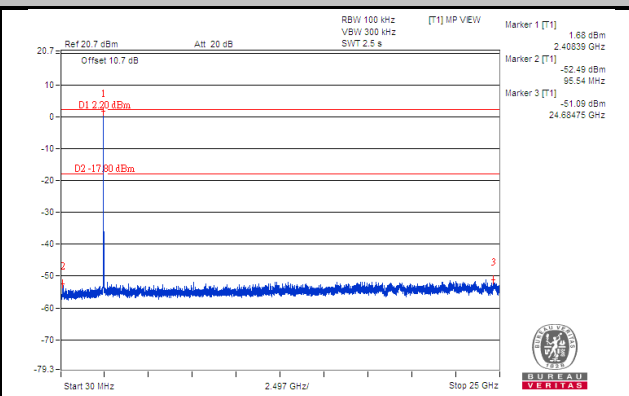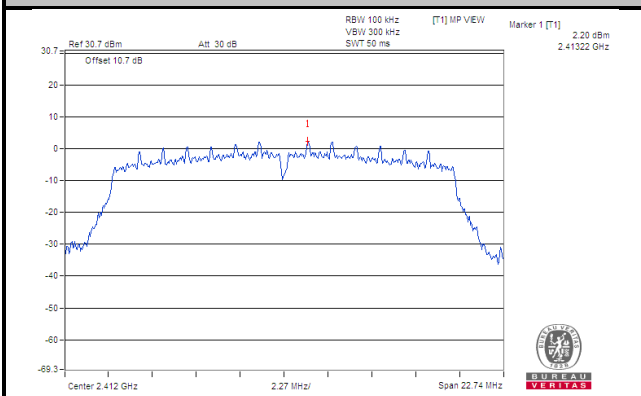


Ch 6

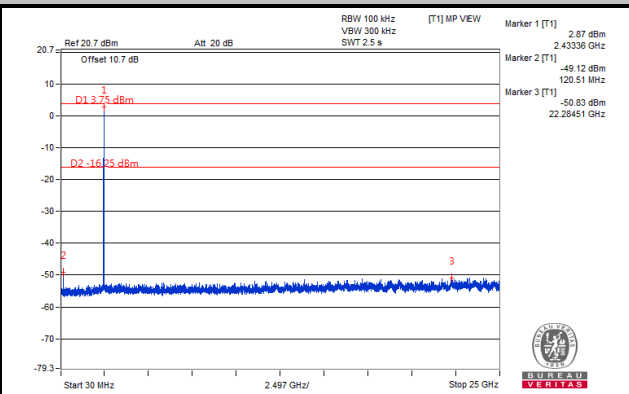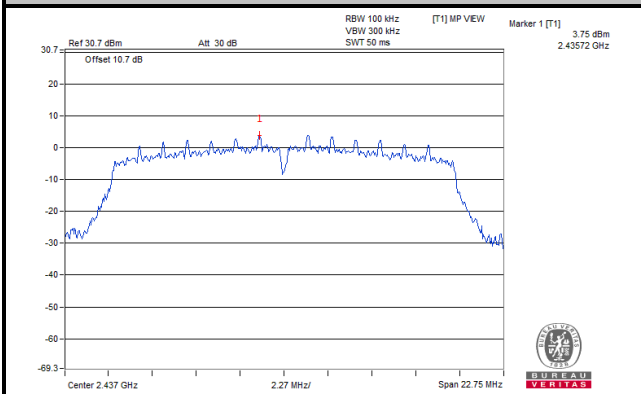


Ch 11

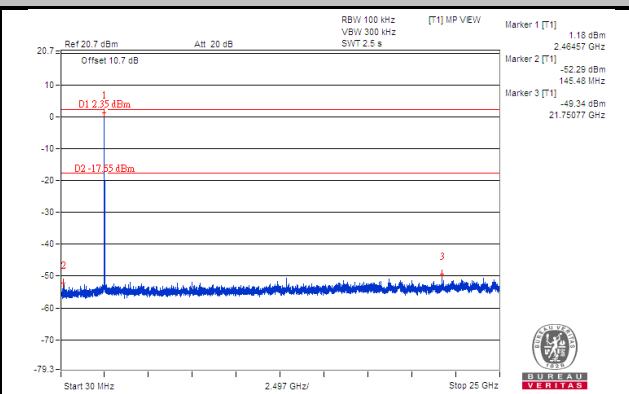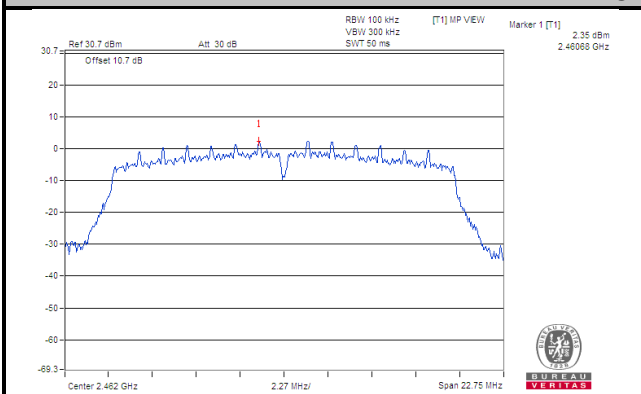

Ch 1 Band Edge


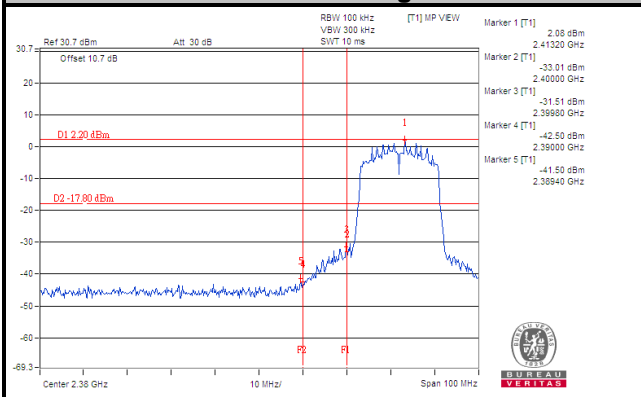


Ch 11 Band Edge


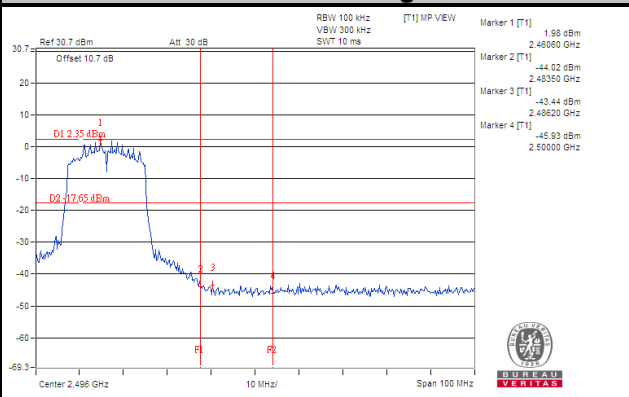


CHAIN 1



Ch 1

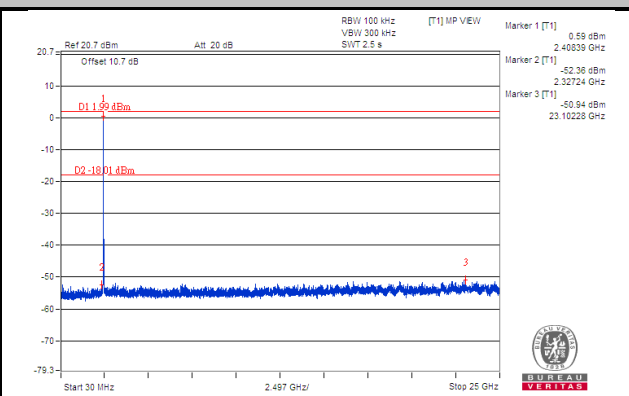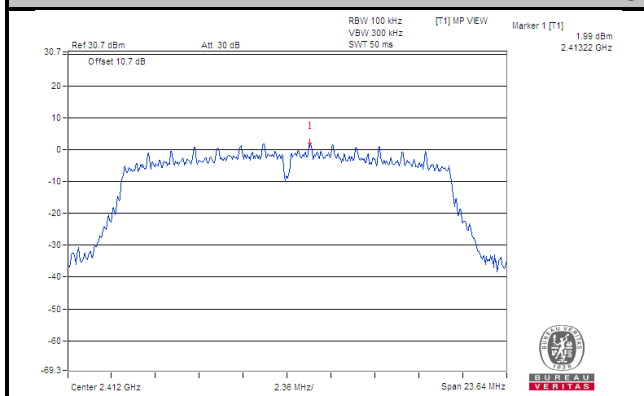


Ch 6

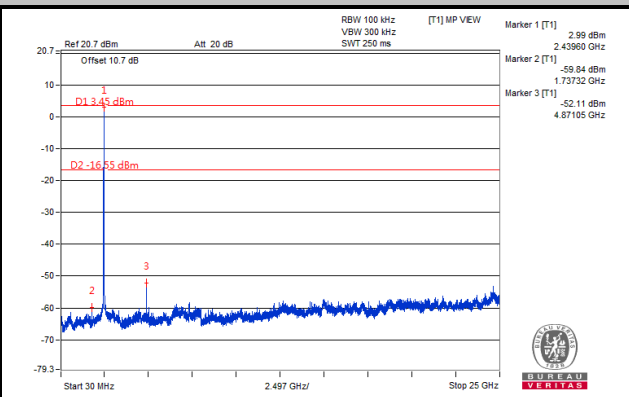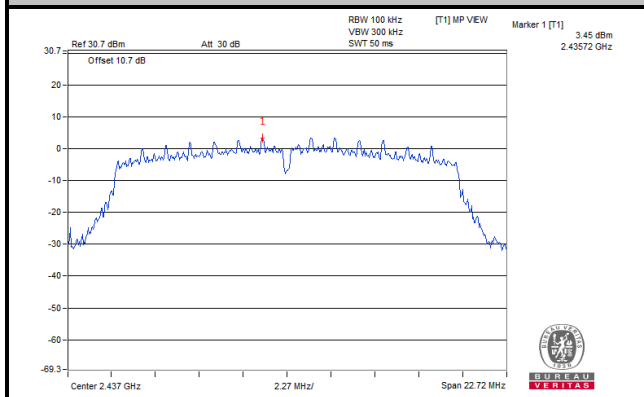


Ch 11

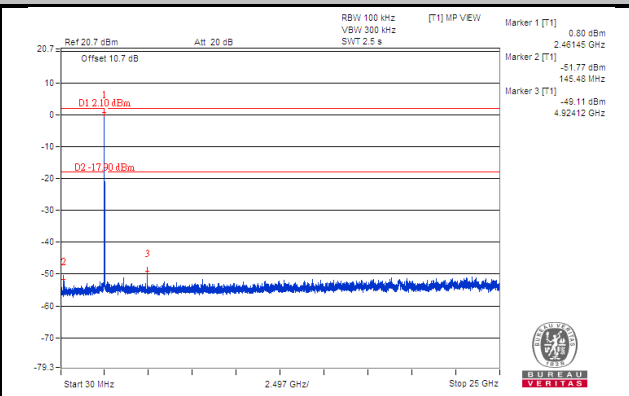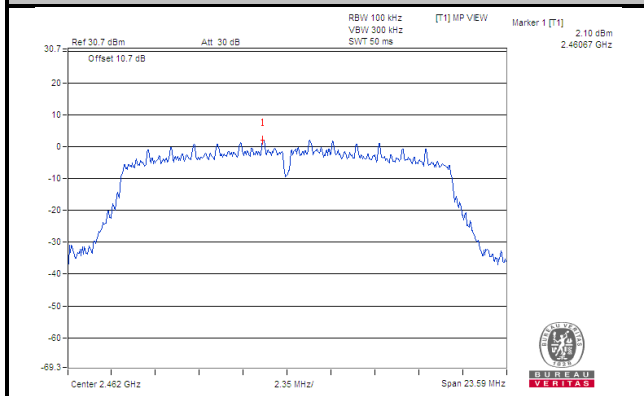

Ch 1 Band Edge


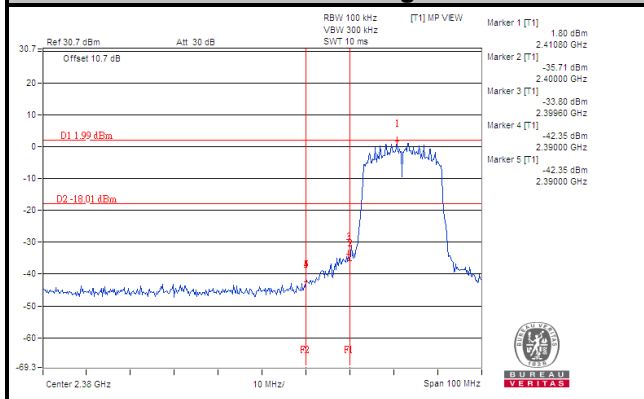


Ch 11 Band Edge


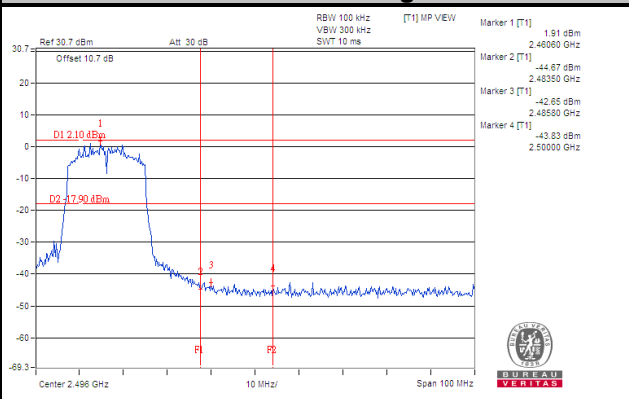


802.11n (HT40)  
CHAIN 0



Ch 3

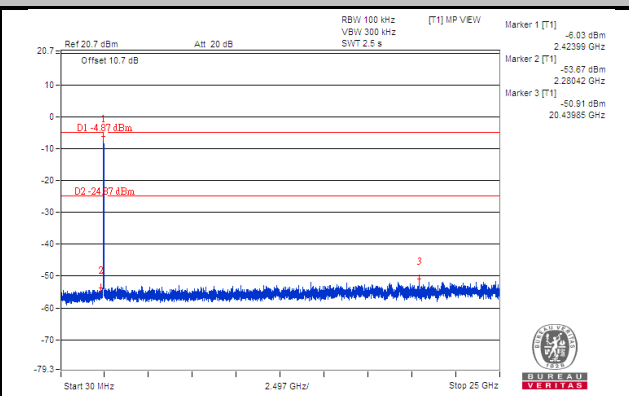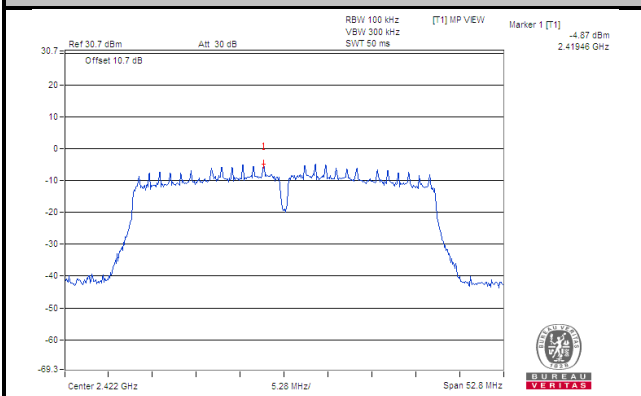


Ch 6

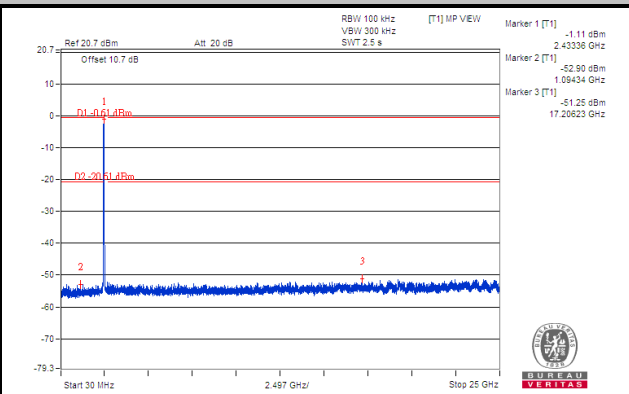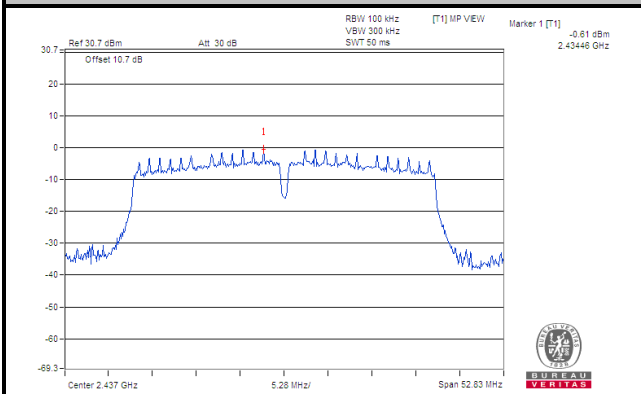


Ch 9

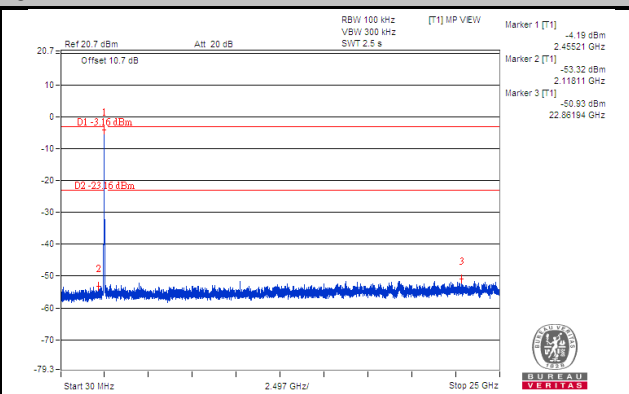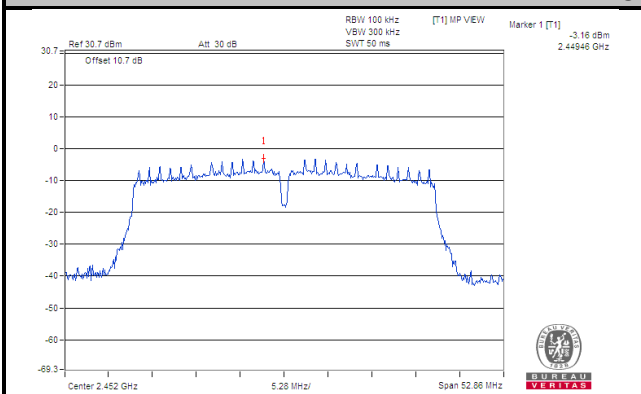

Ch 3 Band Edge


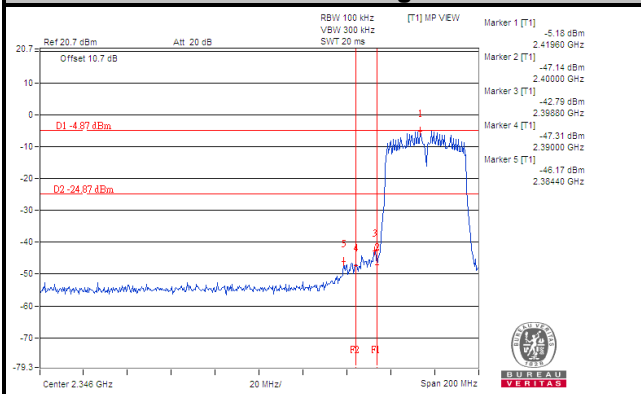


Ch 9 Band Edge


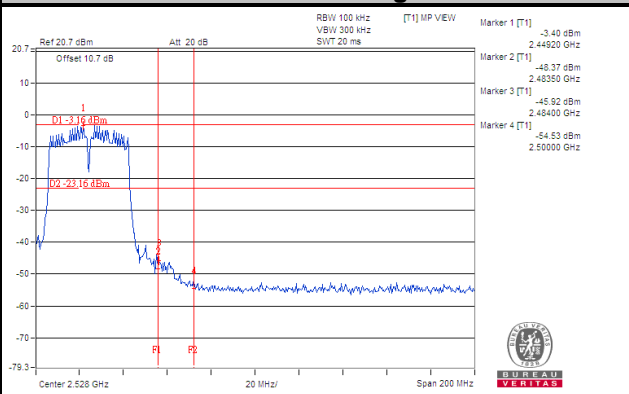


### CHAIN 1



#### Ch 3

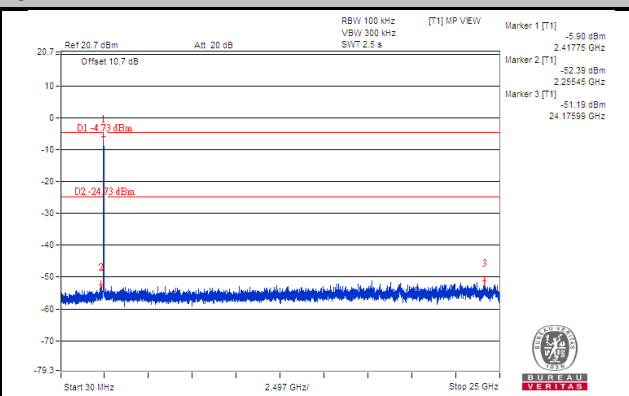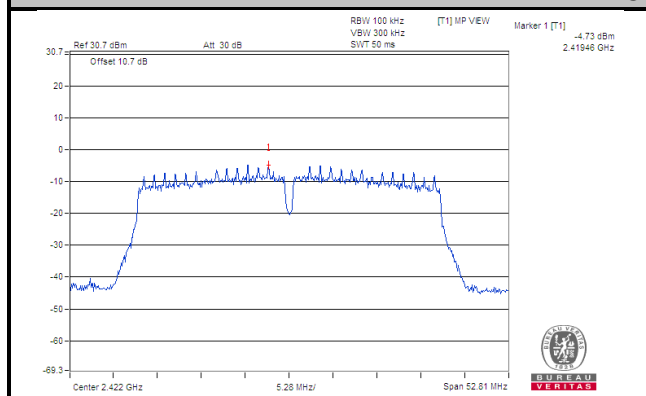


#### Ch 6

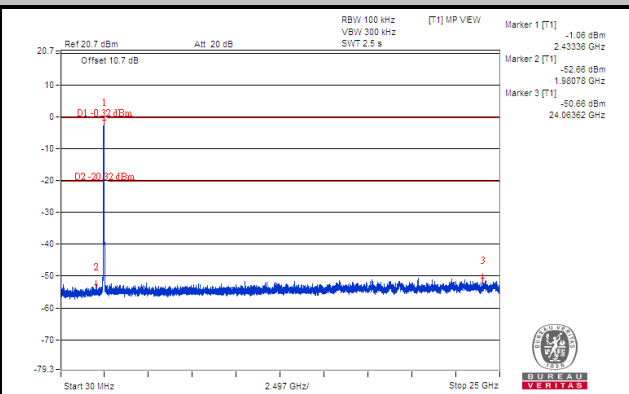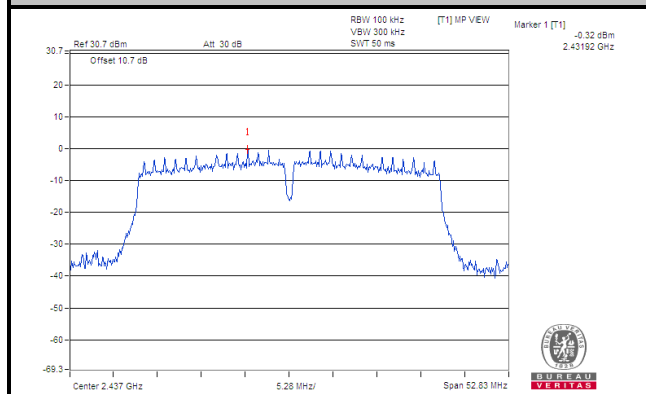


#### Ch 9

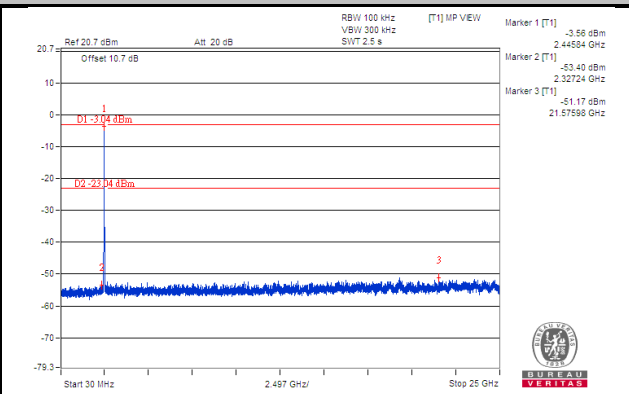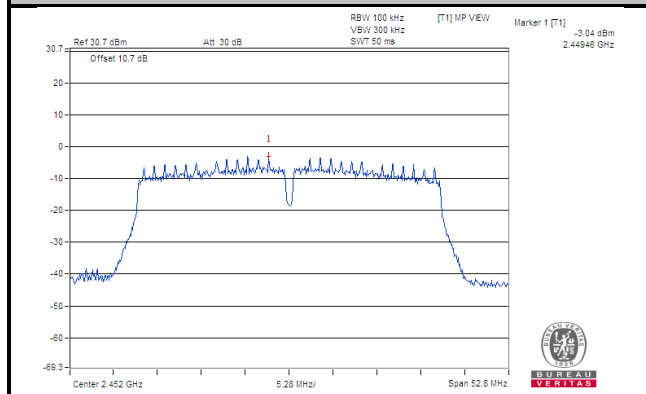

#### Ch 3 Band Edge

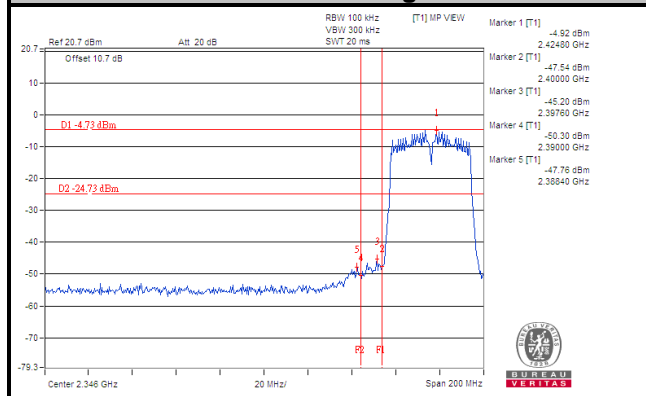

#### Ch 9 Band Edge

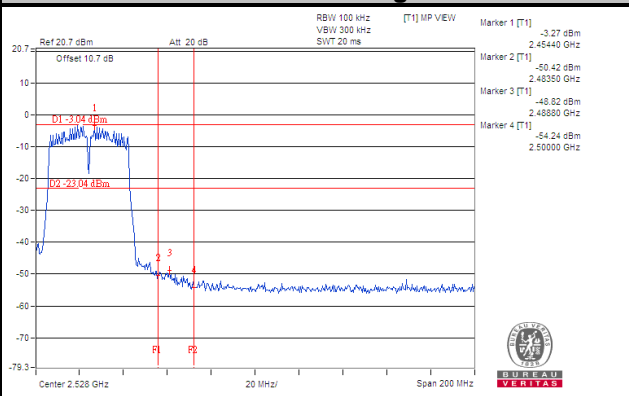

## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---