

FCC Radio Test Report

FCC ID : RX3-WBU058VZ
Equipment : IEEE 802.11 a/b/g/n/ac/ax 2x2+Bluetooth v5.2 Wireless Adapter
Brand Name : Foxconn
Model Name : WBU058-VZ
Applicant : Hon Hai Precision Industry Co., Ltd.
No.151, Sec. 1, Nankan Rd., Lujhu Dist., Taoyuan City 33859,
Taiwan
Manufacturer : Hon Hai Precision Industry Co., Ltd.
No.151, Sec. 1, Nankan Rd., Lujhu Dist., Taoyuan City 33859,
Taiwan
Standard : 47 CFR FCC Part 15.247

The product was received on Jan. 10, 2022, and testing was started from Jan. 17, 2022 and completed on Jan. 19, 2022. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT3

SUMMARY OF TEST RESULT4

1 GENERAL DESCRIPTION5

1.1 Information.....5

1.2 Testing Applied Standards7

1.3 Testing Location Information7

1.4 Measurement Uncertainty7

2 TEST CONFIGURATION OF EUT.....8

2.1 Test Channel Mode8

2.2 The Worst Case Measurement Configuration.....9

2.3 Support Equipment.....10

2.4 Test Setup Diagram11

3 TRANSMITTER TEST RESULT12

3.1 AC Power-line Conducted Emissions12

3.2 20dB Bandwidth and Carrier Frequency Separation.....14

3.3 Maximum Conducted Output Power15

3.4 Number of Hopping Frequencies and Hopping Bandedge16

3.5 Time of Occupancy (Dwell Time)17

3.6 Emissions in Non-restricted Frequency Bands18

3.7 Emissions in Restricted Frequency Bands.....19

4 TEST EQUIPMENT AND CALIBRATION DATA.....22

APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS

APPENDIX B. TEST RESULTS OF 20DB BANDWIDTH AND CARRIER FREQUENCY SEPARATION

APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER

APPENDIX D. TEST RESULTS OF NUMBER OF HOPPING FREQUENCIES AND HOPPING BANDEDGE

APPENDIX E. TEST RESULTS OF TIME OF OCCUPANCY (DWELL TIME)

APPENDIX F. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

APPENDIX G. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS

APPENDIX H. TEST PHOTOS

PHOTOGRAPHS OF EUT V01



Summary of Test Result

| Report Clause | Ref. Std. Clause | Test Items | Result (PASS/FAIL) | Remark |
|---------------|------------------|--|--------------------|--------|
| 1.1.2 | 15.203 | Antenna Requirement | PASS | - |
| 3.1 | 15.207 | AC Power-line Conducted Emissions | PASS | - |
| 3.2 | 15.247(a) | 20dB Bandwidth | PASS | - |
| 3.2 | 15.247(a) | Carrier Frequency Separation | PASS | - |
| 3.3 | 15.247(b) | Maximum Conducted Output Power | PASS | - |
| 3.4 | 15.247(a) | Number of Hopping Frequencies and Hopping Bandedge | PASS | - |
| 3.5 | 15.247(a) | Time of Occupancy (Dwell Time) | PASS | - |
| 3.6 | 15.247(d) | Emissions in Non-restricted Frequency Bands | PASS | - |
| 3.7 | 15.247(d) | Emissions in Restricted Frequency Bands | PASS | - |

| |
|--|
| Declaration of Conformity: |
| The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers. |
| Comments and explanations: |
| None |

Reviewed by: Ben Tseng

Report Producer: Jenny Yang

1 General Description

1.1 Information

1.1.1 RF General Information

| Frequency Range (MHz) | Bluetooth Version | Ch. Frequency (MHz) | Channel Number |
|-----------------------|-------------------|---------------------|----------------|
| 2400-2483.5 | BR / EDR | 2402-2480 | 0-78 [79] |

| Band | Mode | BWch (MHz) | Nant |
|---------------|---------------|------------|------|
| 2.4-2.4835GHz | BT-BR(1Mbps) | 1 | 1TX |
| 2.4-2.4835GHz | BT-EDR(2Mbps) | 1 | 1TX |
| 2.4-2.4835GHz | BT-EDR(3Mbps) | 1 | 1TX |

| | | | |
|-------|---|--|--|
| Note: | | | |
| ◆ | Bluetooth BR uses a GFSK (1Mbps). | | |
| ◆ | Bluetooth EDR uses a combination of $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps). | | |
| ◆ | Bluetooth BR/EDR uses a system using FHSS modulation. | | |
| ◆ | BWch is the nominal channel bandwidth. | | |

1.1.2 Antenna Information

| Ant. | Brand | Model Name | Antenna Type | Connector |
|------|---------|------------|--------------|-----------|
| 1 | Foxconn | - | PCB | N/A |
| 2 | Foxconn | - | PCB | N/A |
| 3 | Foxconn | - | PCB | N/A |
| 4 | Foxconn | - | PCB | N/A |

| Ant. | Port | Gain (dBi) | | | | | | | | | BT |
|------|------|------------|---------|----------|----------|---------|---------|---------|---------|---------|------|
| | | 2.4G | 5G | | | | 6G | | | | |
| | | | U-NII-1 | U-NII-2A | U-NII-2C | U-NII-3 | U-NII-5 | U-NII-6 | U-NII-7 | U-NII-8 | |
| 1 | 1 | 1.00 | 2.50 | 2.68 | 3.07 | 2.75 | 4.35 | 4.35 | 4.43 | 4.02 | - |
| 2 | 2 | 0.77 | 0.89 | 1.68 | 3.67 | 3.67 | 3.37 | 3.85 | 5.77 | 5.78 | - |
| 3 | 2 | - | - | - | - | - | - | - | - | - | 2.83 |
| 4 | 1 | - | - | - | - | - | - | - | - | - | 2.97 |

Note 1: The EUT has four antennas.



For 2.4GHz function:

For IEEE 802.11 b/g/n/ax mode (2TX/2RX)

Ant. 1 (port 1) and Ant. 2 (port 2) could transmit/receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Support diversity function and pre-tested on each single chain, the worst case was Ant. 4(port 1) and it was recorded in this test report.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode (2TX/2RX)

Ant. 1 (port 1) and Ant. 2 (port 2) could transmit/receive simultaneously.

1.1.3 EUT Information

| Operational Condition | |
|-------------------------------------|---|
| EUT Power Type | From Test Fixture |
| EUT Function | <input checked="" type="checkbox"/> Point-to-multipoint <input type="checkbox"/> Point-to-point |
| Type of EUT | |
| <input checked="" type="checkbox"/> | Stand-alone |
| <input type="checkbox"/> | Combined (EUT where the radio part is fully integrated within another device) |
| | Combined Equipment - Brand Name / Model No.: ... |
| <input type="checkbox"/> | Plug-in radio (EUT intended for a variety of host systems) |
| | Host System - Brand Name / Model No.: ... |
| <input type="checkbox"/> | Other: |

1.1.4 Mode Test Duty Cycle

| Mode | DC | DCF(dB) | T(s) | VBW(Hz) ≥ 1/T |
|--------------------------|-------|---------|--------|---------------|
| BT-BR(1Mbps)_1TX(Port1) | 0.739 | 1.31 | 2.881m | 1k |
| BT-EDR(2Mbps)_1TX(Port1) | 0.74 | 1.31 | 2.885m | 1k |
| BT-EDR(3Mbps)_1TX(Port1) | 0.741 | 1.3 | 2.887m | 1k |

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ◆ 47 CFR FCC Part 15
- ◆ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF:

- ◆ KDB 558074 D01 v05r02
- ◆ KDB 414788 D01 v01r01

1.3 Testing Location Information

| Test Lab. : Sporton International Inc. Hsinhua Laboratory | | | | |
|---|-----------------------------|---|----------------------|-------------------------|
| <input checked="" type="checkbox"/> | Hsinhua (TAF: 3785) | ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.) | | |
| | | TEL: 886-3-327-3456 | FAX: 886-3-327-0973 | |
| Test site Designation No. TW3785 with FCC. | | | | |
| Test Condition | Test Site No. | Test Engineer | Test Environment | Test Date |
| AC Conduction | CO04-HY | Jack Tang | 20.9~21.9°C / 54~57% | 19/Jan/2022 |
| RF Conducted | TH06-HY | Yuna Lin | 22.1~26.2°C / 52~60% | 18/Jan/2022~19/Jan/2022 |
| Radiated | 03CH02-HY | Lego Lin | 20.2~23.8°C / 55~60% | 17/Jan/2022~19/Jan/2022 |
| <input type="checkbox"/> | Wen 33rd.St. (TAF: 3785) | ADD: No.14-1, Ln. 19, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) | | |
| | | TEL: 886-3-318-0787 | FAX: 886-3-318-0287 | |
| Test site Designation No. TW0008 with FCC. | | | | |

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

| Test Items | Uncertainty | Remark |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz) | 0.9 dB | Confidence levels of 95% |
| Radiated Emission (9kHz ~ 30MHz) | 2.4 dB | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 3.7 dB | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz) | 3.6 dB | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 3.5 dB | Confidence levels of 95% |
| Conducted Emission | 1.0 dB | Confidence levels of 95% |
| Temperature | 0.41 °C | Confidence levels of 95% |
| Humidity | 3.4 % | Confidence levels of 95% |



2 Test Configuration of EUT




2.1 Test Channel Mode

| Test Software Version | WCN_Combo_Tool v2.20.36.0 |
|--------------------------|---------------------------|
| Mode | Power Setting |
| BT-BR(1Mbps)_1TX(Port1) | - |
| 2402MHz | 8 |
| 2440MHz | 8 |
| 2480MHz | 8 |
| BT-EDR(2Mbps)_1TX(Port1) | - |
| 2402MHz | 10 |
| 2440MHz | 10 |
| 2480MHz | 11 |
| BT-EDR(3Mbps)_1TX(Port1) | - |
| 2402MHz | 10 |
| 2440MHz | 10 |
| 2480MHz | 11 |

2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests | |
|---|---|
| Tests Item | AC power-line conducted emissions |
| Condition | AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz |
| Operating Mode | CTX |
| 1 | Test Fixture mode |

| The Worst Case Mode for Following Conformance Tests | |
|---|--|
| Tests Item | 20dB Bandwidth Carrier Frequency Separation Maximum Conducted Output Power Number of Hopping Frequencies Hopping Bandedge Time of Occupancy (Dwell Time) Emissions in Non-restricted Frequency Bands |
| Test Condition | Conducted measurement at transmit chains <input checked="" type="checkbox"/> Non-adaptive frequency hopping systems (Non-AFH) <input checked="" type="checkbox"/> adaptive frequency hopping systems (AFH) |
| Non-AFH Mode configuration was found to be the worst case and measured during the test. | |

| The Worst Case Mode for Following Conformance Tests | | | |
|---|---|--|---|
| Tests Item | Emissions in Restricted Frequency Bands | | |
| Test Condition | Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. | | |
| Operating Mode < 1GHz | CTX | | |
| 1 | Test Fixture mode | | |
| Operating Mode > 1GHz | CTX | | |
| Orthogonal Planes of EUT | X Plane | Y Plane | Z Plane |
| |  |  |  |
| Worst Planes of EUT | V | | |



| The Worst Case Mode for Following Conformance Tests | |
|---|------------------------------------|
| Tests Item | Simultaneous Transmission Analysis |
| Operating Mode | CTX |
| 1 | Bluetooth+WLAN 2.4GHz |
| 2 | Bluetooth+WLAN 5GHz |
| 3 | Bluetooth+WLAN 6GHz |

Refer to Sporton Test Report No.: FA211002 for Co-location RF Exposure Evaluation.

2.3 Support Equipment


| Support Equipment – AC Conduction | | | | | |
|-----------------------------------|----------------|------------|------------|--------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID | Remark |
| 1 | Notebook | HP | 5220M | - | - |
| 2 | Adapter for NB | HP | PPP012L-E | - | - |

| Support Equipment – Conducted | | | | | |
|-------------------------------|----------------|------------|------------|--------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID | Remark |
| 1 | Fixture | - | - | - | - |
| 2 | Notebook | DELL | E5410 | - | - |
| 3 | Adapter for NB | DELL | HA65NM130 | - | - |

| Support Equipment – Radiated | | | | | |
|------------------------------|----------------|------------|------------|--------|--------|
| No. | Equipment | Brand Name | Model Name | FCC ID | Remark |
| 1 | Notebook | HP | 5220M | - | - |
| 2 | Adapter for NB | HP | PPP012L-E | - | - |


2.4 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test

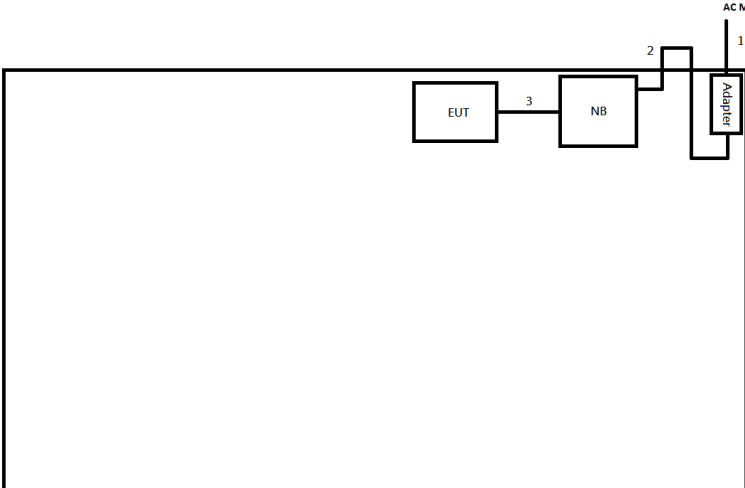

| Item | Connection | Shielded | Length(m) | Remark |
|------|----------------|----------|-----------|--------|
| 1 | AC Power cable | No | 1.8 | - |
| 2 | DC Power cable | No | 1.5 | - |
| 3 | Fixture cable | No | 0.1 | - |

Test Setup Diagram - Radiated Test

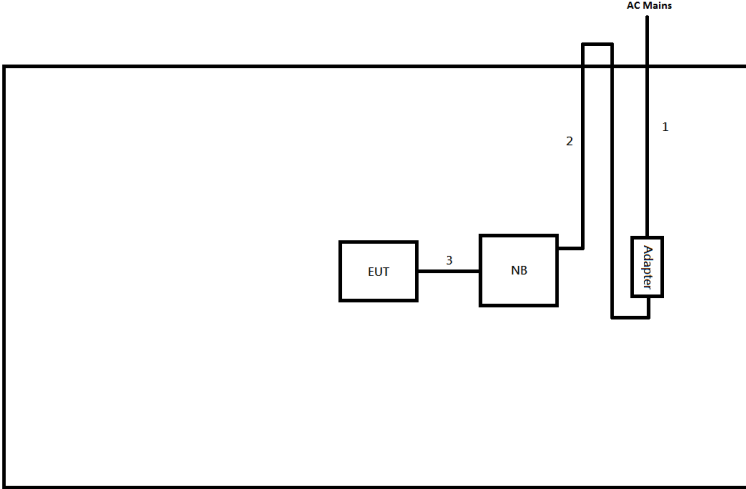

| Item | Connection | Shielded | Length(m) | Remark |
|------|----------------|----------|-----------|--------|
| 1 | AC Power cable | No | 1.8 | - |
| 2 | DC Power cable | No | 1.5 | - |
| 3 | Fixture cable | No | 0.1 | - |



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit | | |
|---|------------|-----------|
| Frequency Emission (MHz) | Quasi-Peak | Average |
| 0.15-0.5 | 66 - 56 * | 56 - 46 * |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


| Test Method |
|--|
| ▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

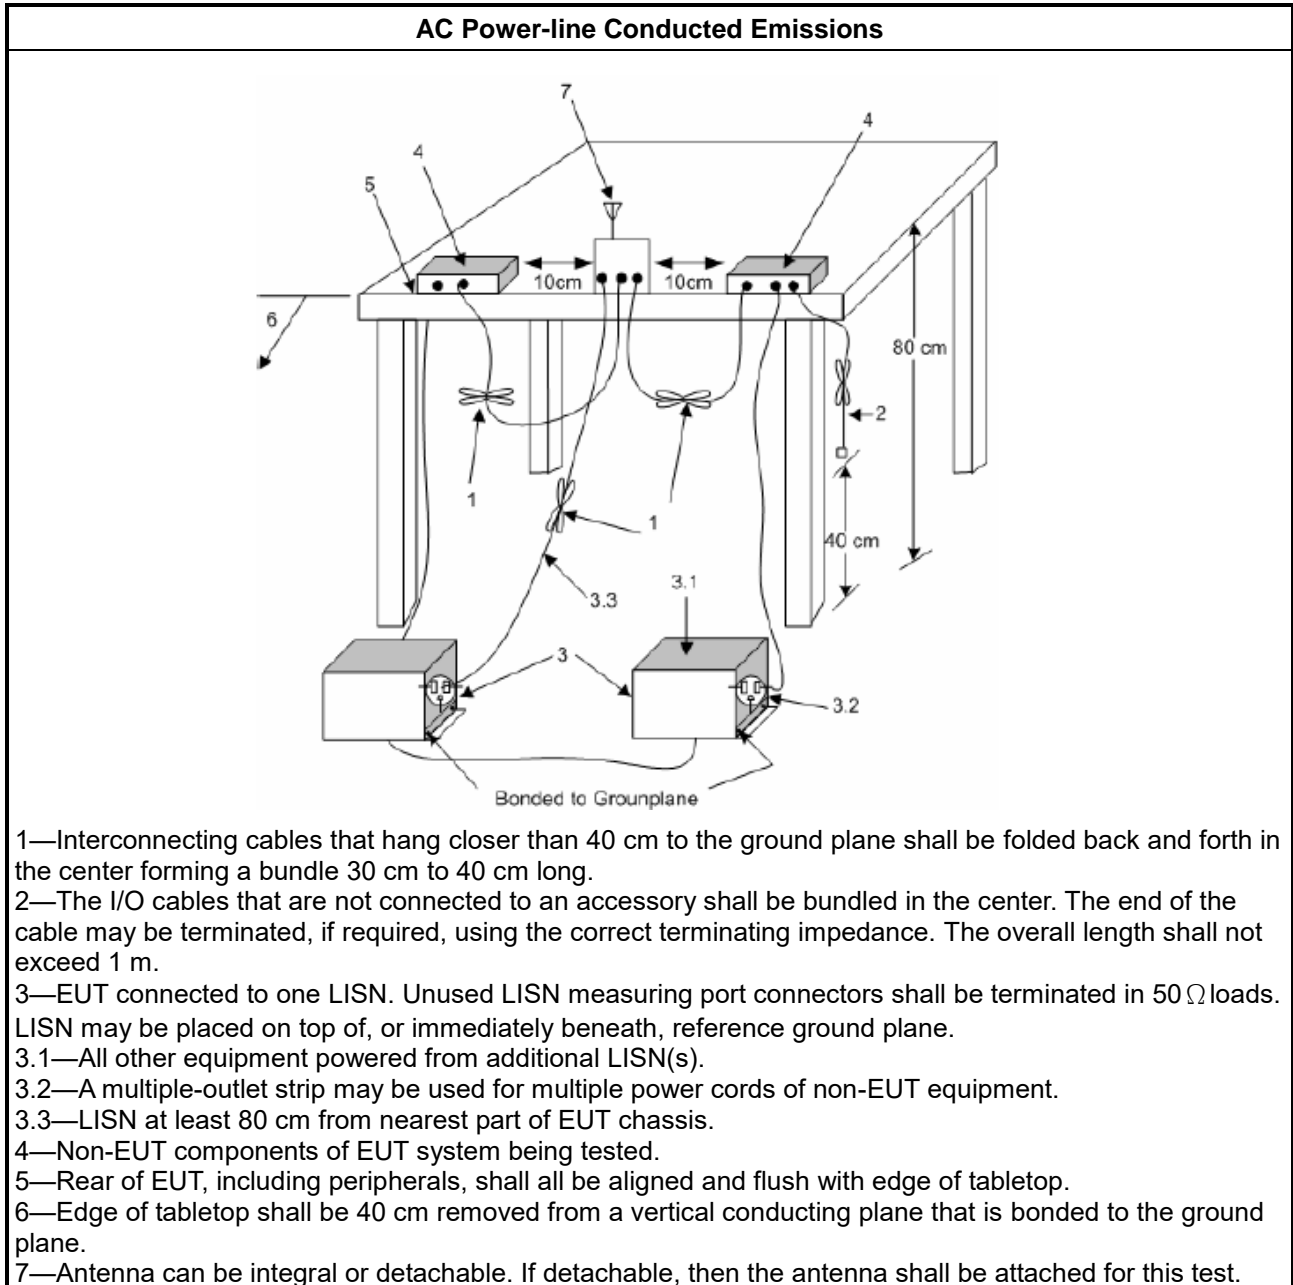

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 20dB Bandwidth and Carrier Frequency Separation

3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

| 20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems | |
|---|---|
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> $N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz). |
| | <ul style="list-style-type: none"> $75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3, 25 kHz). |
| N: Number of Hopping Frequencies; ChS: Hopping Channel Separation | |


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 6.9.2 for 20 dB bandwidth measurement. |
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.2 for carrier frequency separation measurement. |

3.2.4 Test Setup

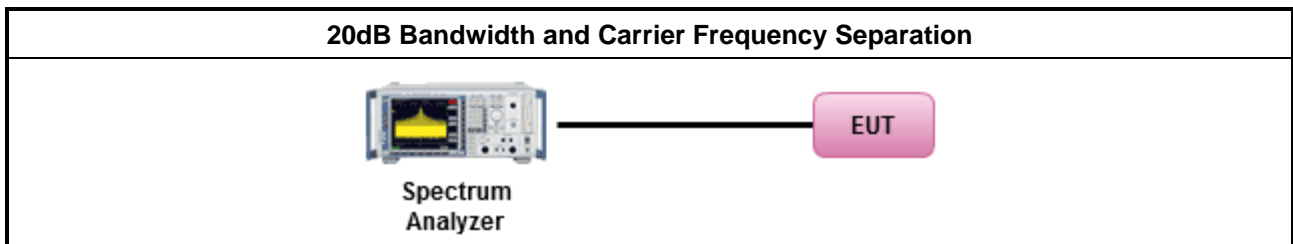

3.2.5 Test Result of 20dB Bandwidth

Refer as Appendix B

3.2.6 Test Result of Carrier Frequency Separation

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit | |
|---|---|
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> $N \geq 75$; Power 30dBm; EIRP 36dBm |
| | <ul style="list-style-type: none"> $75 > N \geq 15$; Power 21dBm; EIRP 27dBm |
| N: Number of Hopping Frequencies | |


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.5 for output power measurement. |

3.3.4 Test Setup

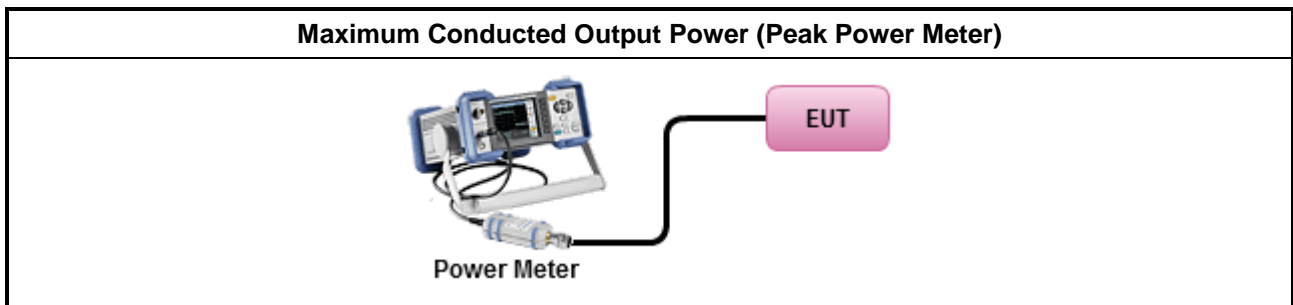

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Number of Hopping Frequencies and Hopping Bandedge

3.4.1 Number of Hopping Frequencies Limit

| Number of Hopping Frequencies Limit | |
|--|--|
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> $N \geq 75$ and $ChS \geq MAX$ (20 dB bandwidth, 25 kHz). |
| | <ul style="list-style-type: none"> $75 > N \geq 15$ and $ChS \geq MAX$ (20 dB bandwidth 2/3,25 kHz). |
| N: Number of Hopping Frequencies; ChS : Hopping Channel Separation | |

3.4.2 Hopping Bandedge Limit

Refer clause 3.6.1 and clause 3.7.1


3.4.3 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.4 Test Procedures

| Test Method |
|--|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.3 for number of hopping frequencies measurement. |
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.6 for hopping frequencies Bandedge measurement. |

3.4.5 Test Setup

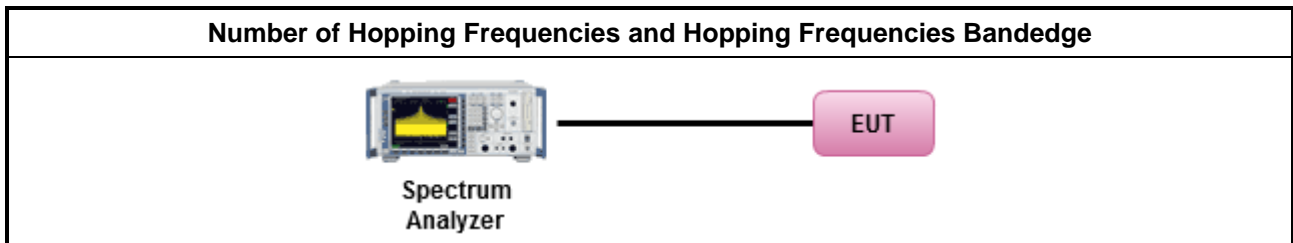

3.4.6 Test Result of Number of Hopping Frequencies

Refer as Appendix D

3.4.7 Test Result of Number of Hopping Frequencies Bandedge

Refer as Appendix D

3.5 Time of Occupancy (Dwell Time)

3.5.1 Time of Occupancy (Dwell Time) Limit

| Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems | |
|---|--|
| <ul style="list-style-type: none"> 2400-2483.5 MHz Band: | |
| | <ul style="list-style-type: none"> $N \geq 75$; 0.4s in $N \times 0.4$ period |
| | <ul style="list-style-type: none"> $75 > N \geq 15$; 0.4s in $N \times 0.4$ period |
| N: Number of Hopping Frequencies | |


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

| Test Method | |
|--|--|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.4 for dwell time measurement. | |
| <ul style="list-style-type: none"> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle. | |
| | <ul style="list-style-type: none"> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel. |

3.5.4 Test Setup

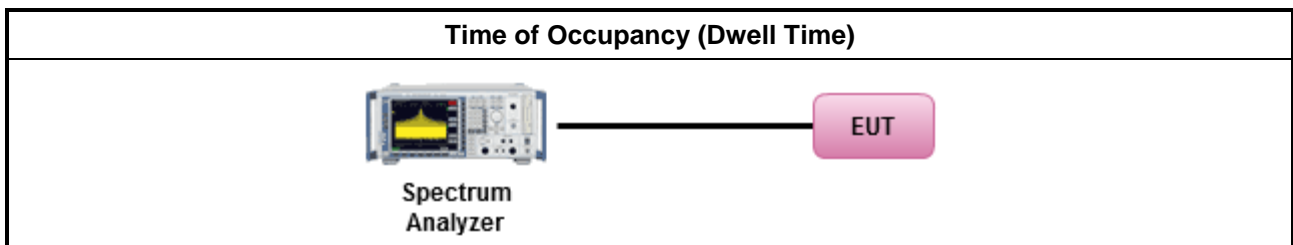

3.5.5 Test Result of Time of Occupancy (Dwell Time)

Refer as Appendix E

3.6 Emissions in Non-restricted Frequency Bands

3.6.1 Emissions in Non-restricted Frequency Bands Limit

| Un-restricted Band Emissions Limit | |
|---|------------|
| RF output power procedure | Limit (dB) |
| Peak output power procedure | 20 |
| Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level. | |


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

| Test Method |
|---|
| <ul style="list-style-type: none"> Refer as ANSI C63.10-2013, clause 7.8.8 for unwanted emissions into non-restricted bands. |

3.6.4 Test Setup

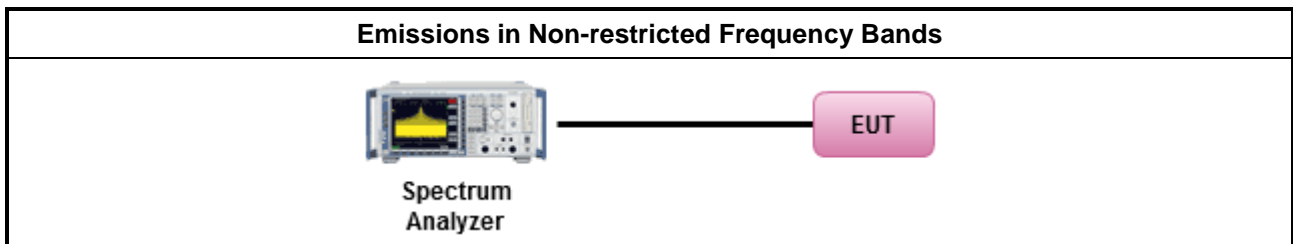

3.6.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix F

3.7 Emissions in Restricted Frequency Bands

3.7.1 Emissions in Restricted Frequency Bands Limit

| Restricted Band Emissions Limit | | | |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz) | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490 | 2400/F(kHz) | 48.5 - 13.8 | 300 |
| 0.490~1.705 | 24000/F(kHz) | 33.8 - 23 | 30 |
| 1.705~30.0 | 30 | 29 | 30 |
| 30~88 | 100 | 40 | 3 |
| 88~216 | 150 | 43.5 | 3 |
| 216~960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.7.3 Test Procedures


| Test Method | |
|-------------|---|
| ▪ | The average emission levels shall be measured in [hopping duty factor]. |
| ▪ | Refer as ANSI C63.10; clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band. |
| ▪ | For the transmitter unwanted emissions shall be measured using following options below: |
| ▪ | Refer as ANSI C63.10, clause 4.1.4.2.1 QP value. |
| ▪ | Refer as ANSI C63.10, clause 4.1.4.2.2 measurement procedure peak. |
| ▪ | Refer as ANSI C63.10, clause 4.1.4.2.4 average value of hopping pulsed emissions. |
| ▪ | KDB 414788 Open-Field Test Sites and Chamber Correlation Justification. |
| ▪ | Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field. |
| ▪ | Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result. |


3.7.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.7.5 Test Setup

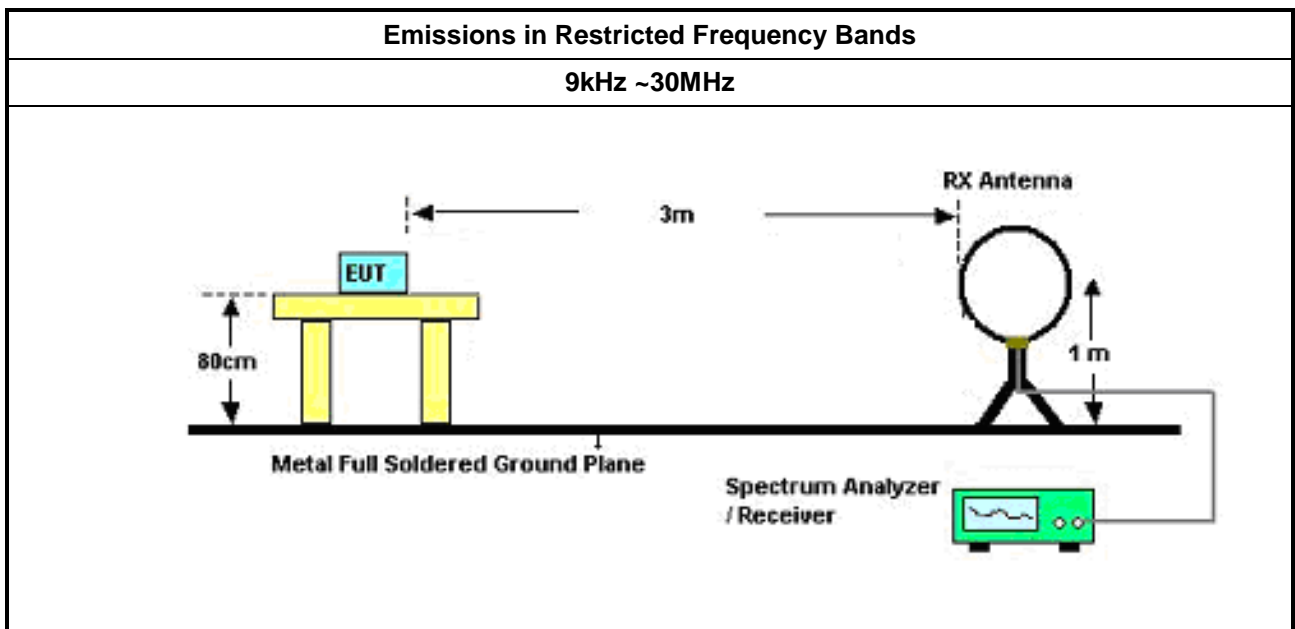

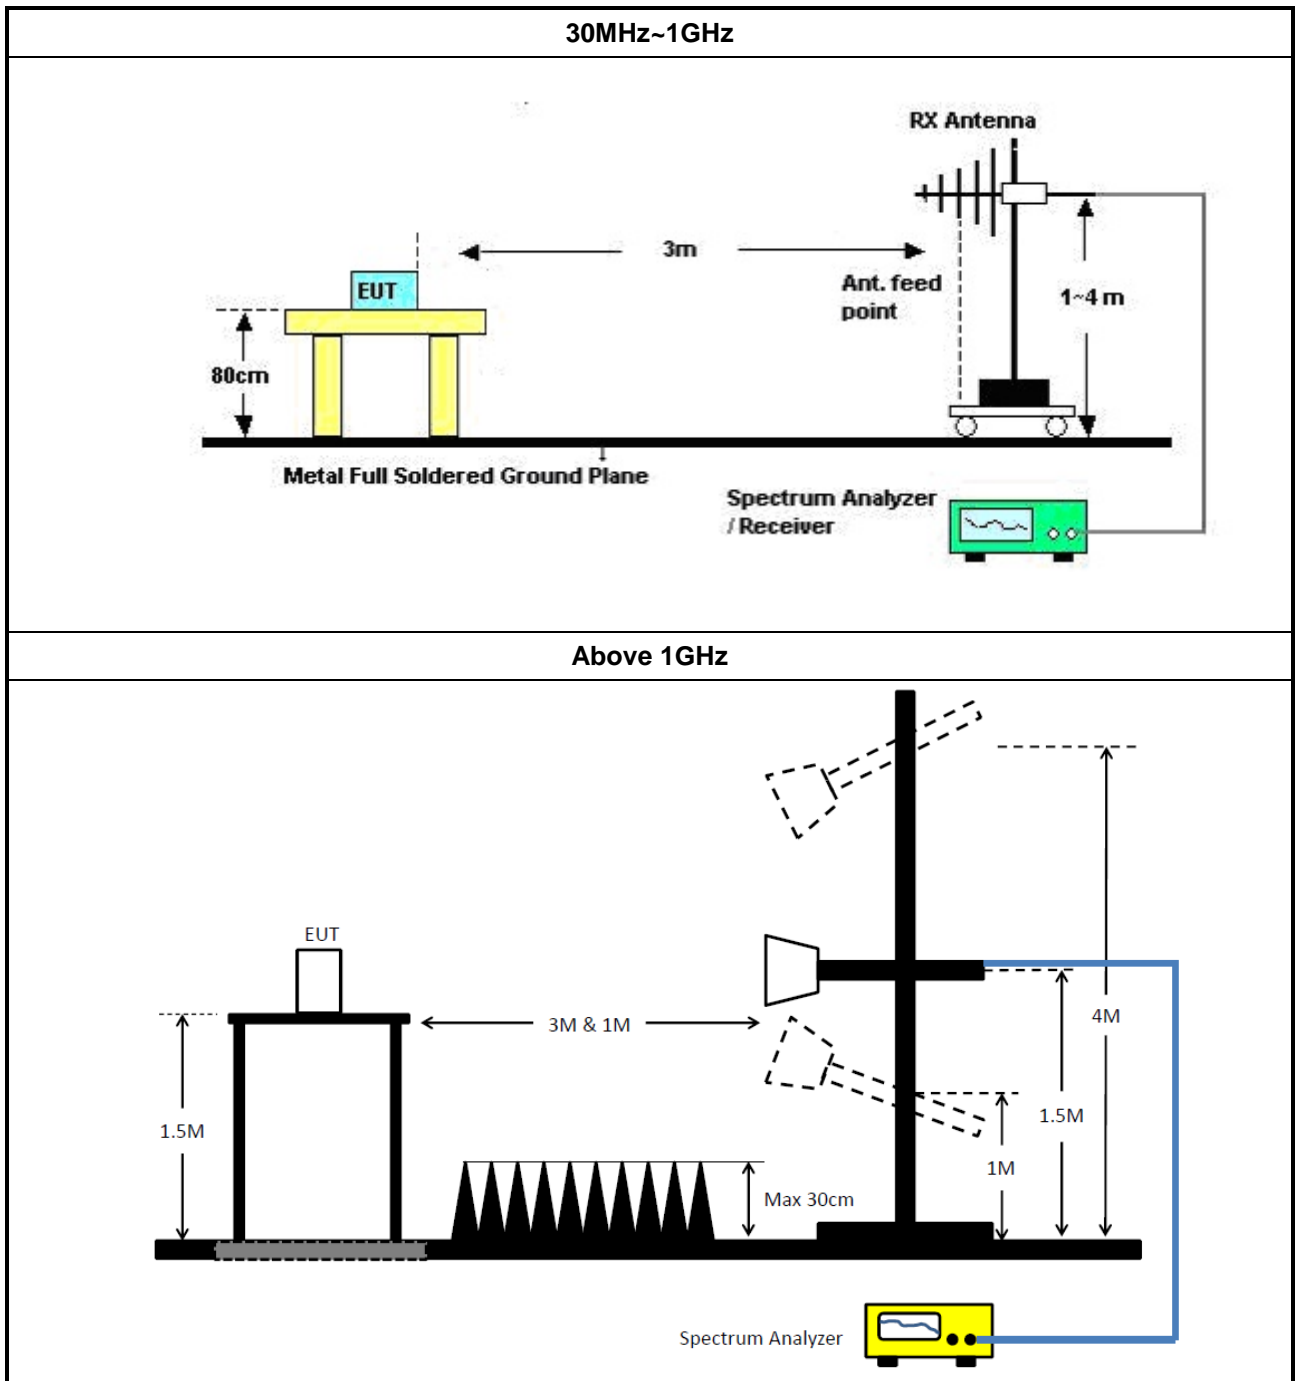

3.7.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.7.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix G



4 Test Equipment and Calibration Data

Instrument for AC Conduction

| Instrument | Manufacturer /Brand | Model No. | Serial No. | Spec. | Calibration Date | Calibration Due Date |
|--------------------------------|---------------------|-------------|---------------|---------------|------------------|----------------------|
| EMI Test Receiver | R&S | ESR3 | 102051 | 9kHz ~ 3.6GHz | 21/May/2021 | 20/May/2022 |
| LISN | R&S | ENV216 | 101295 | 9kHz ~ 30MHz | 12/Jan/2022 | 11/Jan/2023 |
| RF Cable 5m | TITAN | TITAN | CO04-cable-01 | 9kHz~200MHz | 03/Mar/2021 | 02/Mar/2022 |
| Impuls Begrenzer Pulse Limiter | SCHWARZBECK | VTSD 9561-F | 9561-F041 | 9kHz ~ 30MHz | 26/Oct/2021 | 25/Oct/2022 |
| Software | Sporton | SENSE-EMI | V5.10.7.14 | - | NCR | NCR |

NCR: No Calibration Required

Instrument for Conducted Test

| Instrument | Manufacturer /Brand | Model No. | Serial No. | Spec. | Calibration Date | Calibration Due Date |
|--------------------------|---------------------|------------|------------|--------------|------------------|----------------------|
| Signal Analyzer | R&S | FSV 40 | 101029 | 10Hz~40GHz | 20/Oct/2021 | 19/Oct/2022 |
| SMB100A Signal Generator | R&S | SMB100A | 181147 | 100kHz~40GHz | 21/Oct/2021 | 20/Oct/2022 |
| Pulse Sensor | Anritsu | MA2411B | 1027452 | 300MHz~40GHz | 25/Mar/2021 | 24/Mar/2022 |
| Power Meter | Anritsu | ML2495A | 1124009 | 300MHz~40GHz | 25/Mar/2021 | 24/Mar/2022 |
| SENSE-15247_FS | Sporton | V5.10.7.13 | N/A | N/A | N/A | N/A |

Instrument for Radiated Test

| Instrument | Manufacturer /Brand | Model No. | Serial No. | Spec. | Calibration Date | Calibration Due Date |
|----------------------------------|---------------------|------------------------|----------------------|------------------|------------------|----------------------|
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH02-HY | 30MHz~1GHz 3m | 02/Aug/2021 | 01/Aug/2022 |
| 3m Semi Anechoic Chamber | SIDT FRANKONIA | SAC-3M | 03CH02-HY | 1GHz~18GHz 3m | 01/Aug/2021 | 31/Jul/2022 |
| Signal Analyzer | R&S | FSP40 | 100593 | 9kHz~40GHz | 12/Mar/2021 | 11/Mar/2022 |
| Amplifier | Agilent | 8447D | 2944A11149 | 100kHz~1.3GHz | 29/Jun/2021 | 28/Jun/2022 |
| Microwave Preamplifier | Agilent | 8449B | 3008A02373 | 1GHz~26.5GHz | 03/Nov/2021 | 02/Nov/2022 |
| Bilog Antenna & 5dB Attenuator | SCHAFFNER / MTJ | CBL 6112B / MTJ6102-05 | 2723 / 2 | 30MHz~1GHz | 04/Sep/2021 | 03/Sep/2022 |
| Double Ridged Guide Horn Antenna | SCHWARZBEC | BBHA 9120 D | BBHA 9120 D 01543 | 1GHz~18GHz | 04/Jun/2021 | 03/Jun/2022 |
| RF Cable | MVE | 400LL | MVE-1-0802 | 9kHz~30MHz | 05/May/2021 | 04/May/2022 |
| RF Cable | MVE | 400LL | MVE-1-0802 | 30MHz~1GHz | 05/May/2021 | 04/May/2022 |
| RF Cable-R03m | HUBER+SUHNER | SUCOFLEX104 | 805193/4+805192/4 | 1GHz~40GHz | 06/Apr/2021 | 05/Apr/2022 |
| Broadband Horn Antenna | SCHWARZBECK | BBHA 9170 | BBHA 9170221 | 15GHz~40GHz | 11/Mar/2021 | 10/Mar/2022 |
| Loop Antenna | TESEQ | HLA 6120 | 31244 | 9kHz~30MHz | 16/Mar/2021 | 15/Mar/2022 |
| EMI Test Receiver | R&S | ESR3 | 102052 | 9kHz~3.6GHz | 19/Apr/2021 | 18/Apr/2022 |
| SENSE-15247_FS | Sporton | V5.10.7.13 | N/A | N/A | N/A | N/A |



Summary


| Mode | Result | Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Condition |
|--------|--------|------|-----------|--------------|--------------|-------------|-----------|
| Mode 1 | Pass | QP | 184.605k | 46.65 | 64.28 | -17.63 | Line |



Mode config


| Mode | Result | Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Condition | Comments |
|--------|--------|------|-----------|--------------|--------------|-------------|-----------|----------|
| Mode 1 | Pass | QP | 184.605k | 46.65 | 64.28 | -17.63 | Line | - |
| Mode 1 | Pass | AV | 184.605k | 32.02 | 54.28 | -22.26 | Line | - |
| Mode 1 | Pass | QP | 255.079k | 38.32 | 61.58 | -23.26 | Line | - |
| Mode 1 | Pass | AV | 255.079k | 25.73 | 51.58 | -25.85 | Line | - |
| Mode 1 | Pass | QP | 521.206k | 16.85 | 56.00 | -39.15 | Line | - |
| Mode 1 | Pass | AV | 521.206k | 13.45 | 46.00 | -32.55 | Line | - |
| Mode 1 | Pass | QP | 2.843M | 24.62 | 56.00 | -31.38 | Line | - |
| Mode 1 | Pass | AV | 2.843M | 20.99 | 46.00 | -25.01 | Line | - |
| Mode 1 | Pass | QP | 4.797M | 22.48 | 56.00 | -33.52 | Line | - |
| Mode 1 | Pass | AV | 4.797M | 16.16 | 46.00 | -29.84 | Line | - |
| Mode 1 | Pass | QP | 27.895M | 19.03 | 60.00 | -40.97 | Line | - |
| Mode 1 | Pass | AV | 27.895M | 16.79 | 50.00 | -33.21 | Line | - |
| Mode 1 | Pass | QP | 153.024k | 38.42 | 65.83 | -27.41 | Neutral | - |
| Mode 1 | Pass | AV | 153.024k | 19.20 | 55.83 | -36.63 | Neutral | - |
| Mode 1 | Pass | QP | 183.87k | 36.41 | 64.30 | -27.89 | Neutral | - |
| Mode 1 | Pass | AV | 183.87k | 21.34 | 54.30 | -32.96 | Neutral | - |
| Mode 1 | Pass | QP | 245.097k | 31.44 | 61.93 | -30.49 | Neutral | - |
| Mode 1 | Pass | AV | 245.097k | 17.40 | 51.93 | -34.53 | Neutral | - |
| Mode 1 | Pass | QP | 375.703k | 28.70 | 58.37 | -29.67 | Neutral | - |
| Mode 1 | Pass | AV | 375.703k | 17.88 | 48.37 | -30.49 | Neutral | - |
| Mode 1 | Pass | QP | 3.18M | 24.04 | 56.00 | -31.96 | Neutral | - |
| Mode 1 | Pass | AV | 3.18M | 20.05 | 46.00 | -25.95 | Neutral | - |
| Mode 1 | Pass | QP | 28.344M | 30.47 | 60.00 | -29.53 | Neutral | - |
| Mode 1 | Pass | AV | 28.344M | 26.79 | 50.00 | -23.21 | Neutral | - |

Conducted Emissions at Powerline_Mode 1

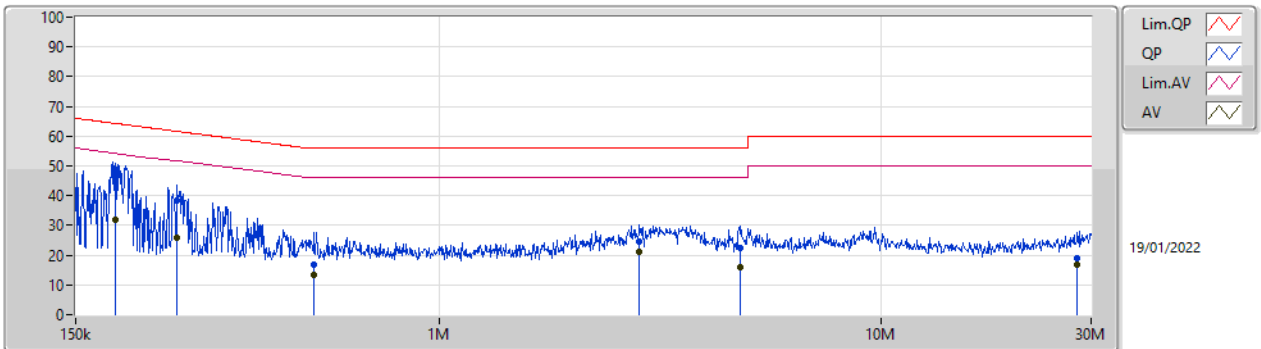

| Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Factor (dB) | Condition | Comment | Raw (dBuV) | LISN (dB) | CL (dB) | AT (dB) |
|------|-----------|--------------|--------------|-------------|-------------|-----------|---------|------------|-----------|---------|---------|
| QP | 184.605k | 46.65 | 64.28 | -17.63 | 19.56 | Line | - | 27.09 | 9.61 | 0.04 | 9.91 |
| AV | 184.605k | 32.02 | 54.28 | -22.26 | 19.56 | Line | - | 12.46 | 9.61 | 0.04 | 9.91 |
| QP | 255.079k | 38.32 | 61.58 | -23.26 | 19.57 | Line | - | 18.75 | 9.61 | 0.05 | 9.91 |
| AV | 255.079k | 25.73 | 51.58 | -25.85 | 19.57 | Line | - | 6.16 | 9.61 | 0.05 | 9.91 |
| QP | 521.206k | 16.85 | 56.00 | -39.15 | 19.58 | Line | - | -2.73 | 9.60 | 0.07 | 9.91 |
| AV | 521.206k | 13.45 | 46.00 | -32.55 | 19.58 | Line | - | -6.13 | 9.60 | 0.07 | 9.91 |
| QP | 2.843M | 24.62 | 56.00 | -31.38 | 19.67 | Line | - | 4.95 | 9.63 | 0.12 | 9.92 |
| AV | 2.843M | 20.99 | 46.00 | -25.01 | 19.67 | Line | - | 1.32 | 9.63 | 0.12 | 9.92 |
| QP | 4.797M | 22.48 | 56.00 | -33.52 | 19.70 | Line | - | 2.78 | 9.63 | 0.15 | 9.92 |
| AV | 4.797M | 16.16 | 46.00 | -29.84 | 19.70 | Line | - | -3.54 | 9.63 | 0.15 | 9.92 |
| QP | 27.895M | 19.03 | 60.00 | -40.97 | 19.74 | Line | - | -0.71 | 9.47 | 0.33 | 9.94 |
| AV | 27.895M | 16.79 | 50.00 | -33.21 | 19.74 | Line | - | -2.95 | 9.47 | 0.33 | 9.94 |

Conducted Emissions at Powerline_Mode 1

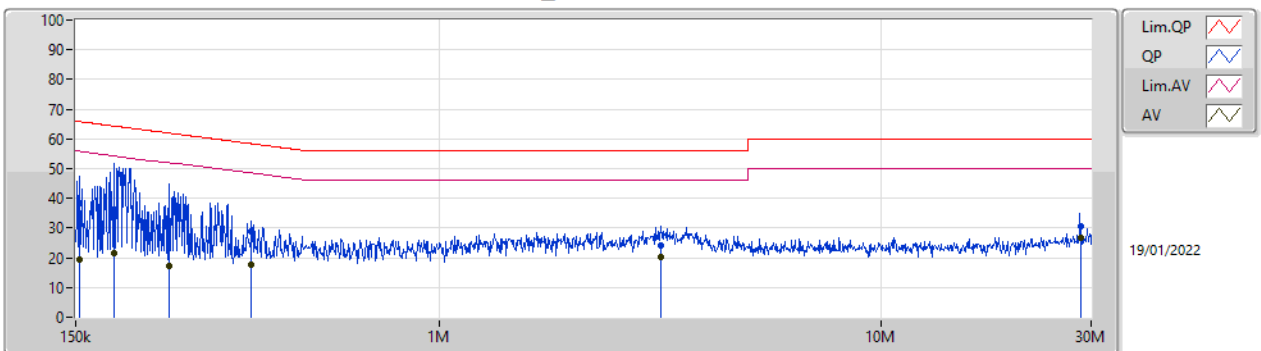

| Type | Freq (Hz) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Factor (dB) | Condition | Comment | Raw (dBuV) | LISN (dB) | CL (dB) | AT (dB) |
|------|-----------|--------------|--------------|-------------|-------------|-----------|---------|------------|-----------|---------|---------|
| QP | 153.024k | 38.42 | 65.83 | -27.41 | 19.54 | Neutral | - | 18.88 | 9.59 | 0.04 | 9.91 |
| AV | 153.024k | 19.20 | 55.83 | -36.63 | 19.54 | Neutral | - | -0.34 | 9.59 | 0.04 | 9.91 |
| QP | 183.87k | 36.41 | 64.30 | -27.89 | 19.54 | Neutral | - | 16.87 | 9.59 | 0.04 | 9.91 |
| AV | 183.87k | 21.34 | 54.30 | -32.96 | 19.54 | Neutral | - | 1.80 | 9.59 | 0.04 | 9.91 |
| QP | 245.097k | 31.44 | 61.93 | -30.49 | 19.55 | Neutral | - | 11.89 | 9.59 | 0.05 | 9.91 |
| AV | 245.097k | 17.40 | 51.93 | -34.53 | 19.55 | Neutral | - | -2.15 | 9.59 | 0.05 | 9.91 |
| QP | 375.703k | 28.70 | 58.37 | -29.67 | 19.55 | Neutral | - | 9.15 | 9.58 | 0.06 | 9.91 |
| AV | 375.703k | 17.88 | 48.37 | -30.49 | 19.55 | Neutral | - | -1.67 | 9.58 | 0.06 | 9.91 |
| QP | 3.18M | 24.04 | 56.00 | -31.96 | 19.66 | Neutral | - | 4.38 | 9.61 | 0.13 | 9.92 |
| AV | 3.18M | 20.05 | 46.00 | -25.95 | 19.66 | Neutral | - | 0.39 | 9.61 | 0.13 | 9.92 |
| QP | 28.344M | 30.47 | 60.00 | -29.53 | 19.92 | Neutral | - | 10.55 | 9.65 | 0.33 | 9.94 |
| AV | 28.344M | 26.79 | 50.00 | -23.21 | 19.92 | Neutral | - | 6.87 | 9.65 | 0.33 | 9.94 |



Summary

| Mode | Max-N dB (Hz) | Max-OBW (Hz) | ITU-Code | Min-N dB (Hz) | Min-OBW (Hz) |
|--------------------------|------------------|-----------------|----------|------------------|-----------------|
| 2.4-2.4835GHz | - | - | - | - | - |
| BT-BR(1Mbps)_1TX(Port1) | 798.75k | 762.119k | 762KF1D | 797.5k | 759.62k |
| BT-EDR(2Mbps)_1TX(Port1) | 1.316M | 1.187M | 1M19G1D | 1.311M | 1.184M |
| BT-EDR(3Mbps)_1TX(Port1) | 1.296M | 1.203M | 1M20G1D | 1.281M | 1.192M |

Max-N dB = Maximum 20dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 20dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth



Result

| Mode | Result | Limit (Hz) | Port 1-N dB (Hz) | Port 1-OBW (Hz) |
|--------------------------|--------|------------|------------------|-----------------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | Inf | 797.5k | 762.119k |
| 2440MHz | Pass | Inf | 798.75k | 759.62k |
| 2480MHz | Pass | Inf | 797.5k | 760.87k |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | Inf | 1.311M | 1.187M |
| 2440MHz | Pass | Inf | 1.316M | 1.184M |
| 2480MHz | Pass | Inf | 1.315M | 1.187M |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | Inf | 1.284M | 1.196M |
| 2440MHz | Pass | Inf | 1.296M | 1.192M |
| 2480MHz | Pass | Inf | 1.281M | 1.203M |


Port X-N dB = Port X 20dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

BT-BR(1Mbps)_1TX(Port1)

EBW-FS

2402MHz

18/01/2022

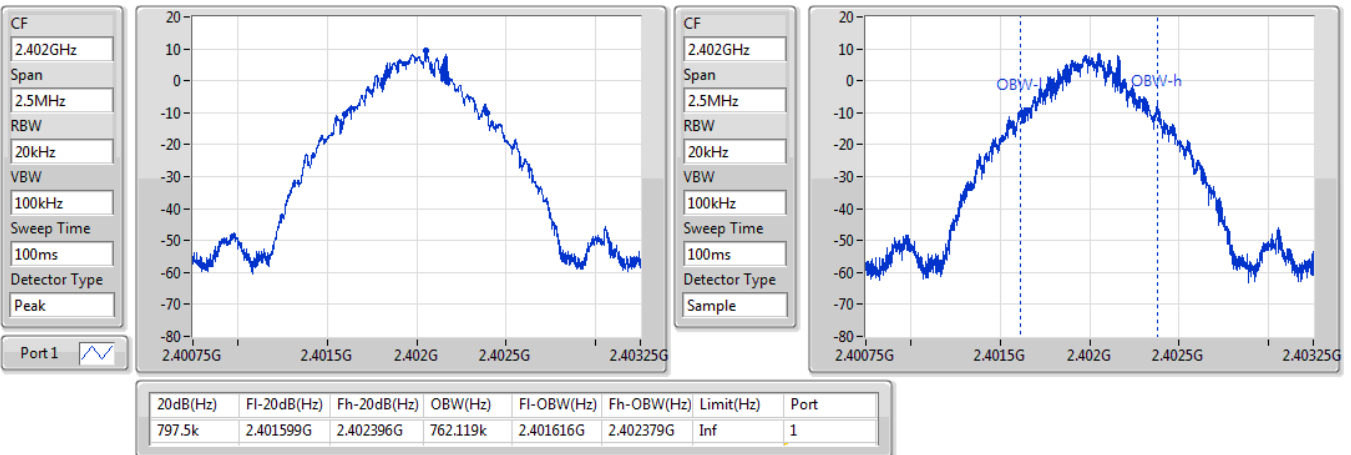




BT-BR(1Mbps)_1TX(Port1)



EBW-FS



2440MHz

18/01/2022

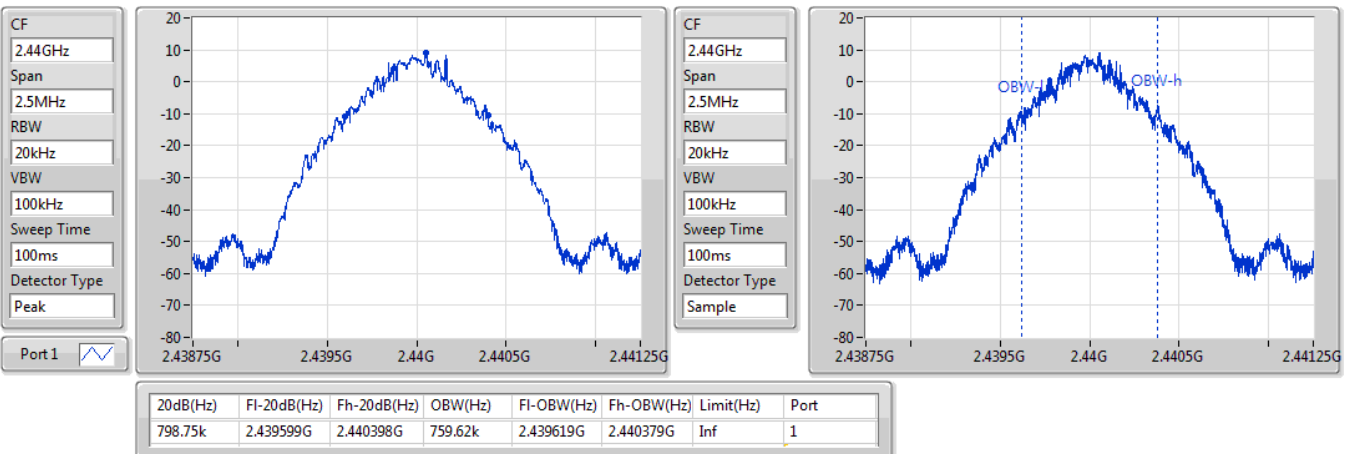

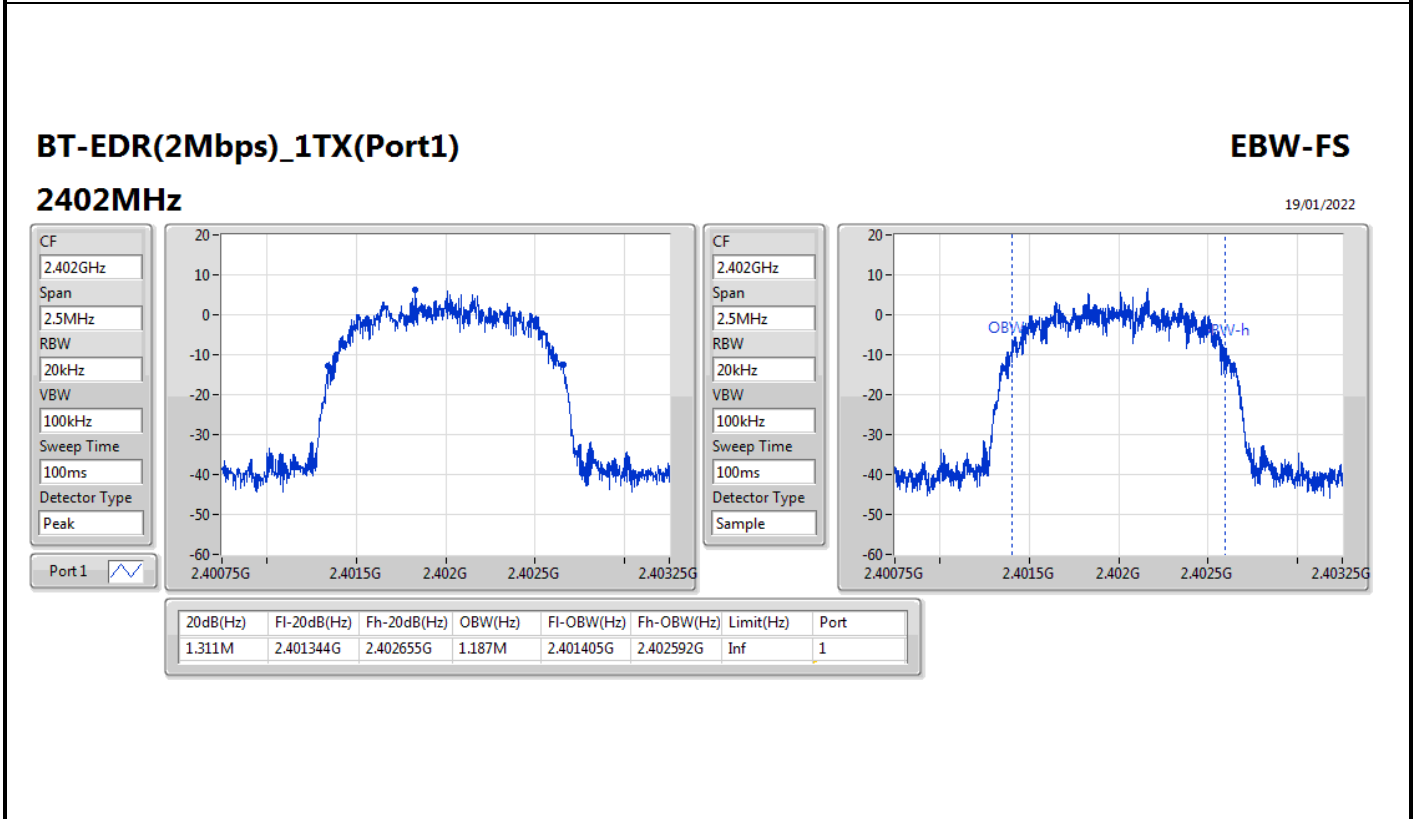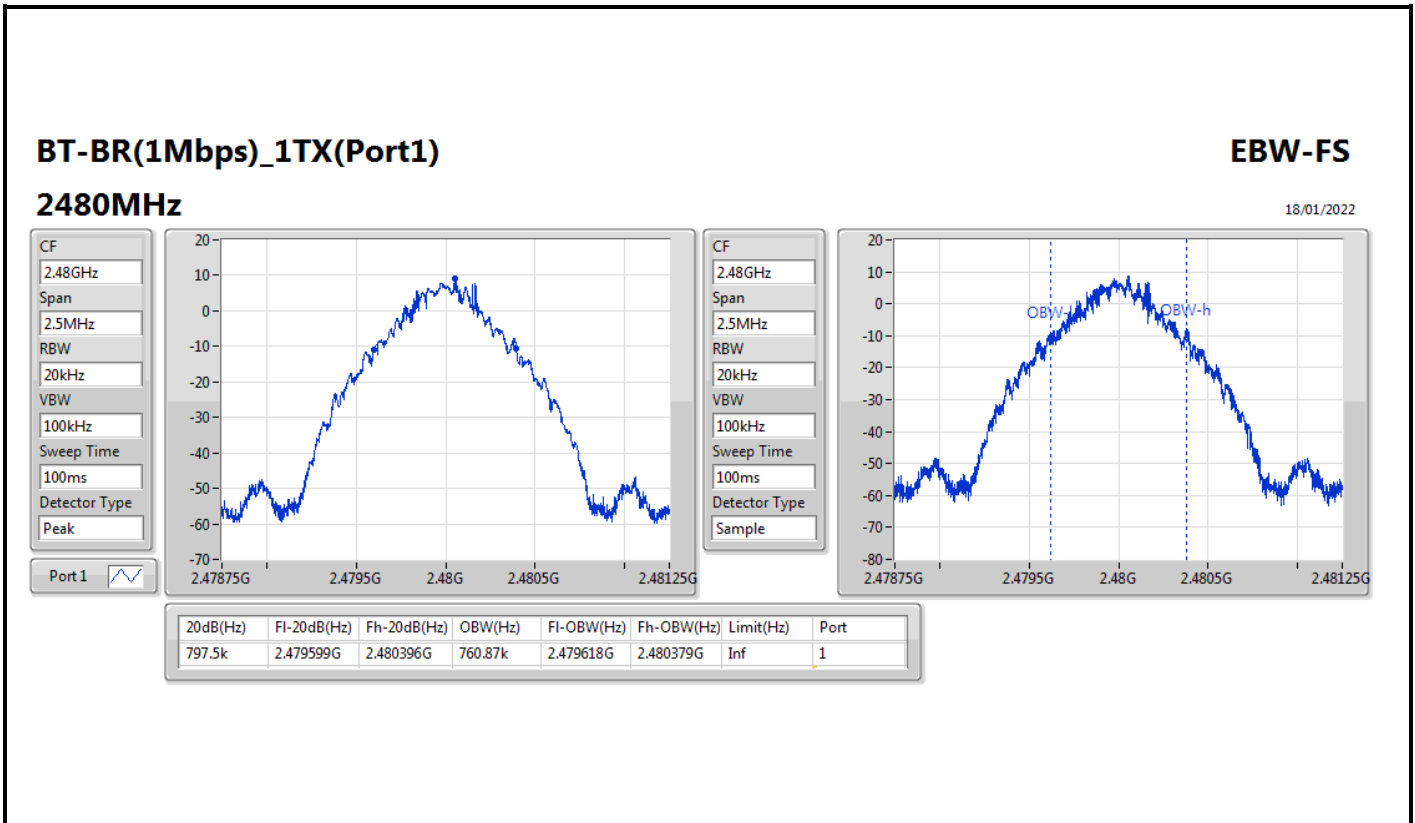

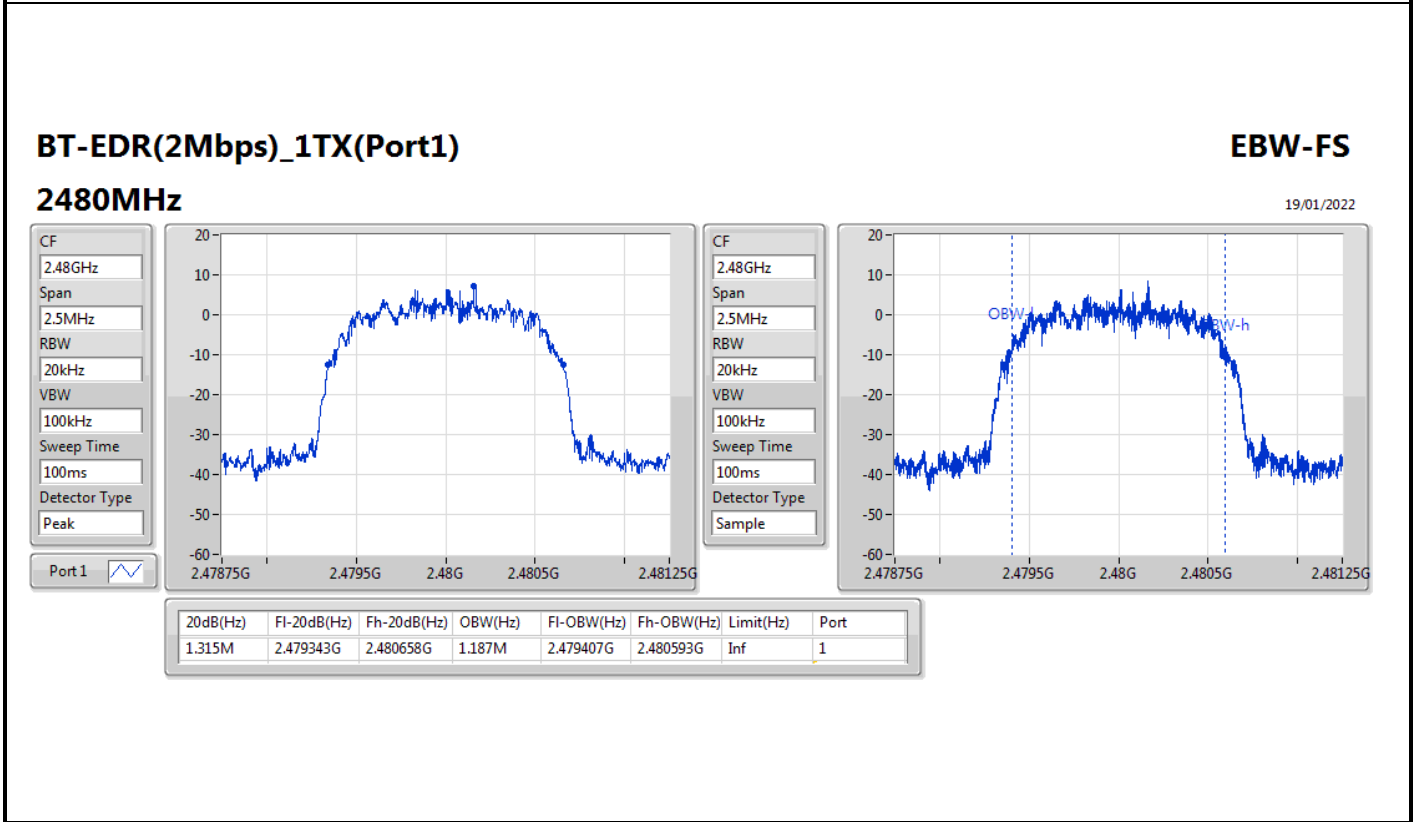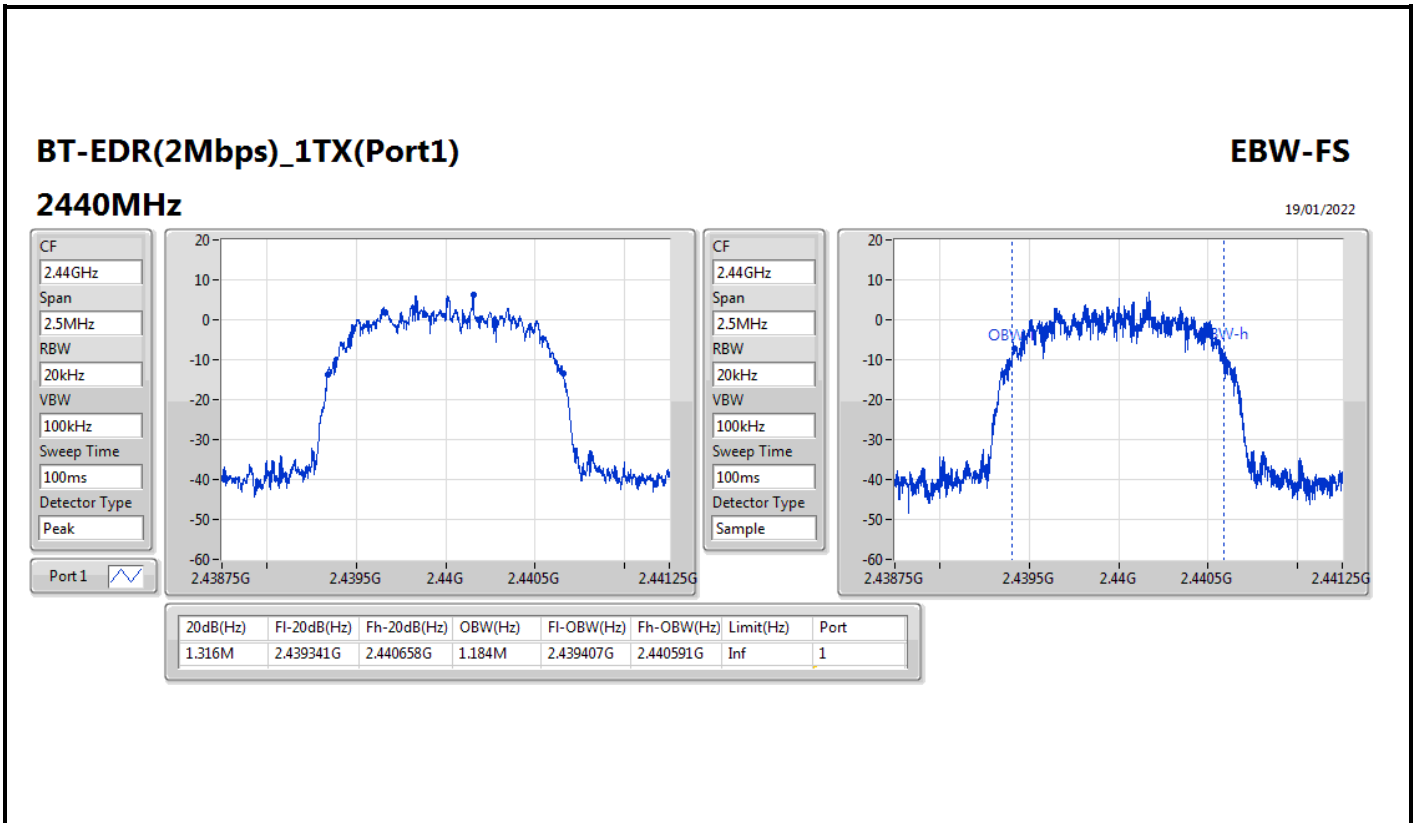

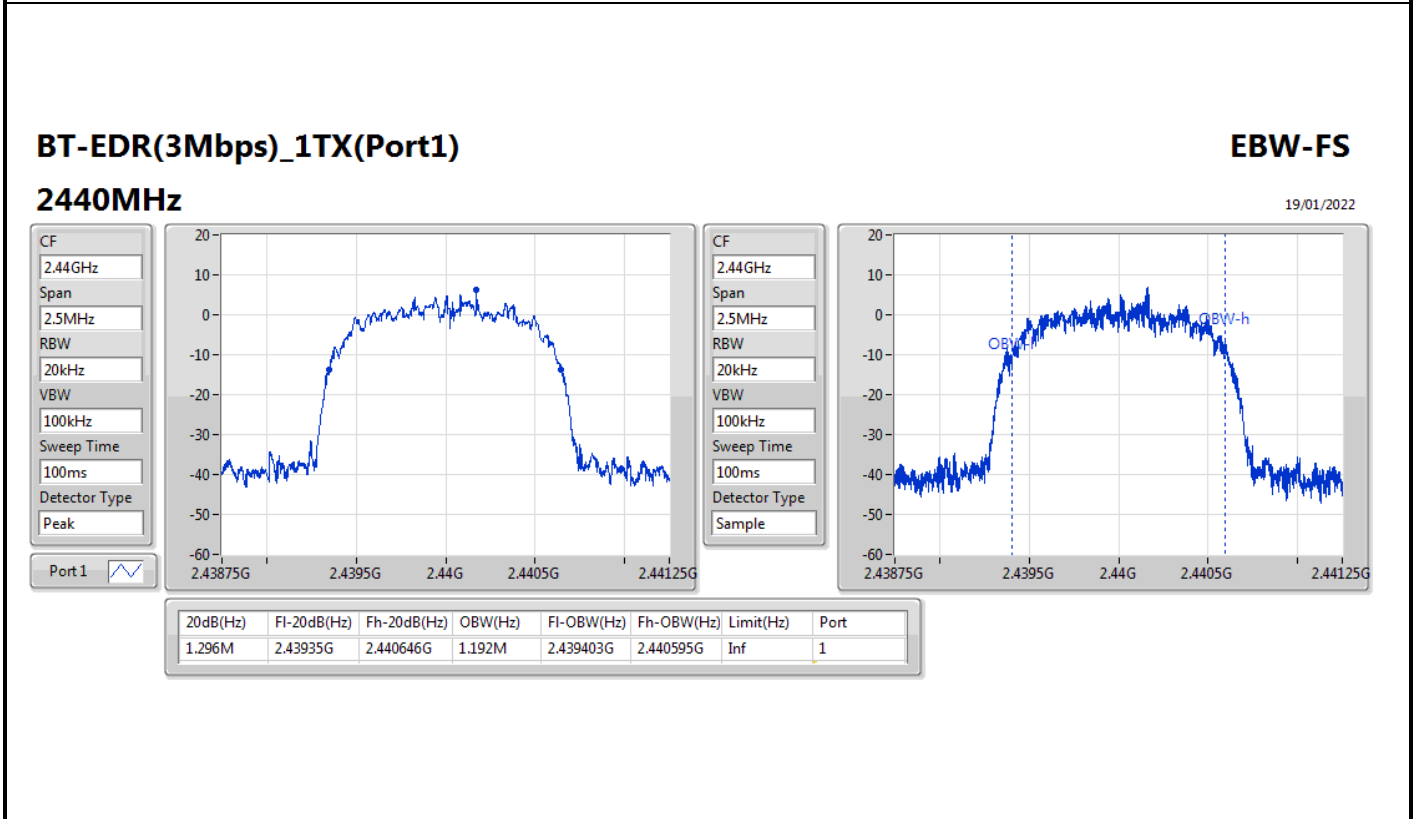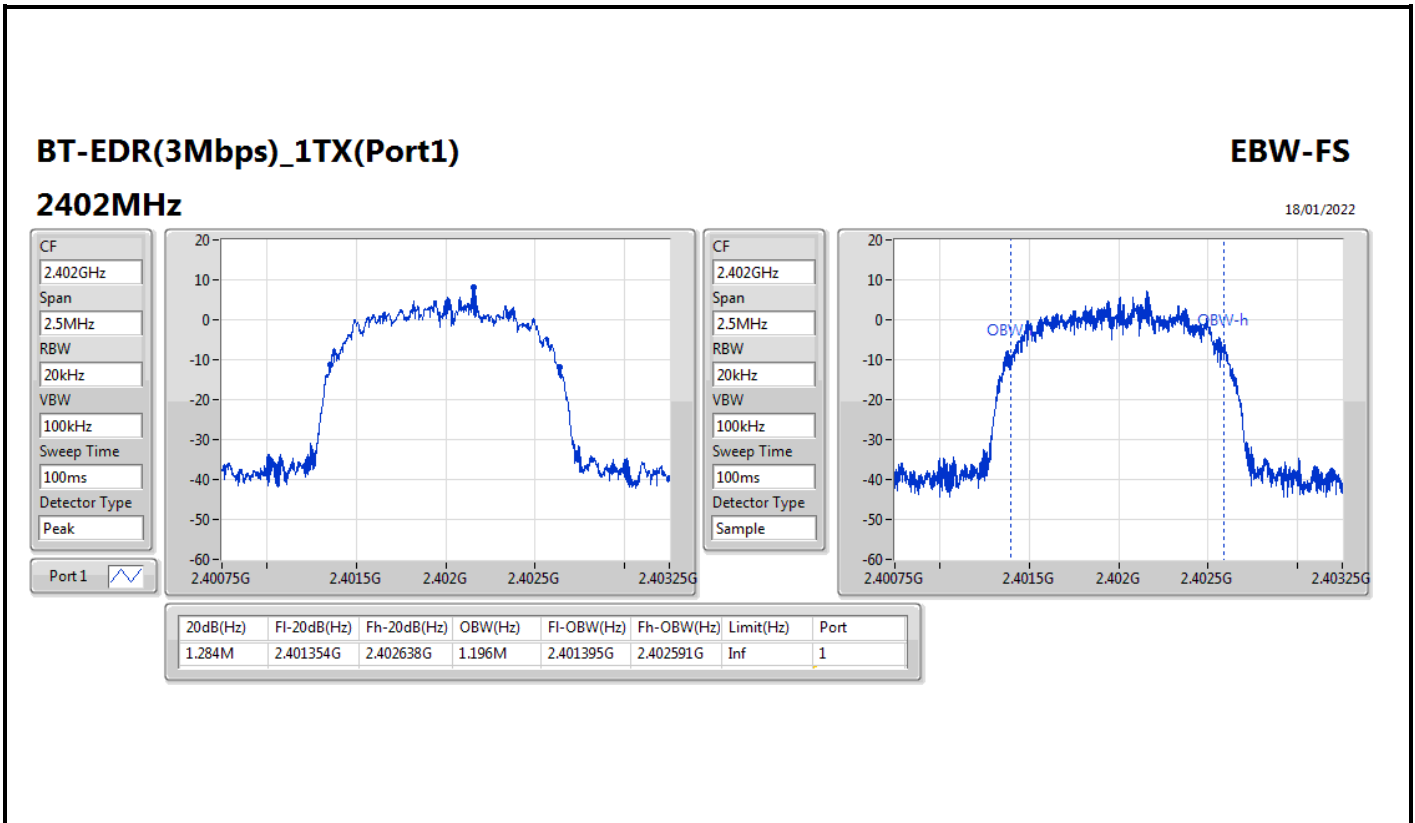


BT-EDR(3Mbps)_1TX(Port1)

EBW-FS


2480MHz

19/01/2022

CF
2.48GHz
Span
2.5MHz
RBW
20kHz
VBW
100kHz
Sweep Time
100ms
Detector Type
Peak

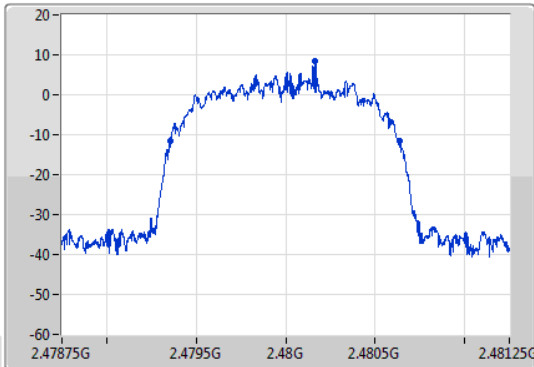

CF
2.48GHz
Span
2.5MHz
RBW
20kHz
VBW
100kHz
Sweep Time
100ms
Detector Type
Sample

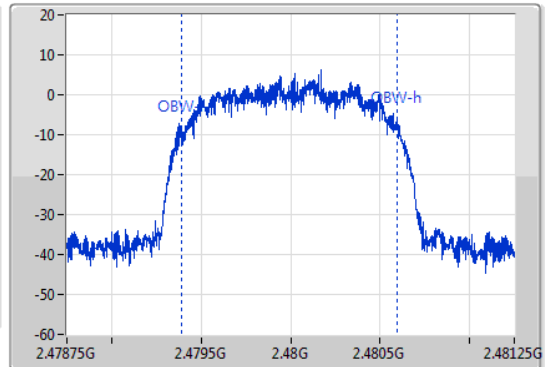

| 20dB(Hz) | Fl-20dB(Hz) | Fh-20dB(Hz) | OBW(Hz) | Fl-OBW(Hz) | Fh-OBW(Hz) | Limit(Hz) | Port |
|----------|-------------|-------------|---------|------------|------------|-----------|------|
| 1.281M | 2.479355G | 2.480636G | 1.203M | 2.479393G | 2.480596G | Inf | 1 |



Summary

| Mode | Max-Space (Hz) | Min-Space (Hz) |
|--------------------------|-------------------|-------------------|
| 2.4-2.4835GHz | - | - |
| BT-BR(1Mbps)_1TX(Port1) | 1.002M | 999k |
| BT-EDR(2Mbps)_1TX(Port1) | 1.002M | 1.0005M |
| BT-EDR(3Mbps)_1TX(Port1) | 1.0035M | 1.0005M |



Result

| Mode | Result | F _l (Hz) | F _h (Hz) | Ch.Space (Hz) | Limit (Hz) |
|--------------------------|--------|------------------------|------------------------|------------------|---------------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - | - |
| 2402MHz | Pass | 2.40216G | 2.403159G | 999k | 531.135k |
| 2440MHz | Pass | 2.44016G | 2.44116G | 1.0005M | 531.9675k |
| 2480MHz | Pass | 2.47916G | 2.480162G | 1.002M | 531.135k |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - | - | - |
| 2402MHz | Pass | 2.40216G | 2.403162G | 1.002M | 868.464k |
| 2440MHz | Pass | 2.44016G | 2.441162G | 1.002M | 867.798k |
| 2480MHz | Pass | 2.479161G | 2.480162G | 1.0005M | 873.126k |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - | - | - |
| 2402MHz | Pass | 2.40216G | 2.403162G | 1.002M | 855.144k |
| 2440MHz | Pass | 2.440155G | 2.441159G | 1.0035M | 863.136k |
| 2480MHz | Pass | 2.479158G | 2.480159G | 1.0005M | 854.478k |


BT-BR(1Mbps)_1TX(Port1)

Channel Separation-FS

2.402G/2.403GHz

18/01/2022



Port 1 

Ch Freq
2.402G/2.403G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak


| Fl(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|----------|----------|--------------|-----------|
| 2.40216G | 2.40315G | 999k | 531.135k |


BT-BR(1Mbps)_1TX(Port1)

Channel Separation-FS

2.44G/2.441GHz

18/01/2022

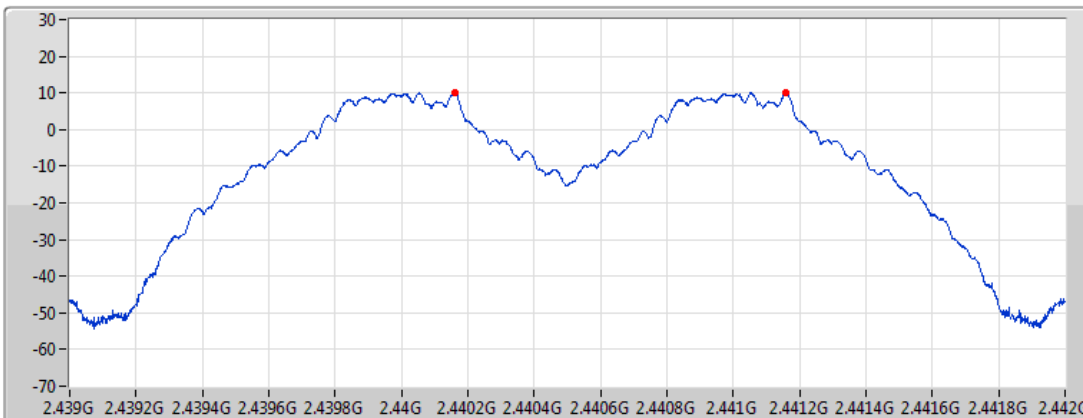

Port 1 

Ch Freq
2.44G/2.441G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak

| Fl(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|----------|----------|--------------|-----------|
| 2.44016G | 2.44116G | 1.0005M | 531.9675k |


BT-BR(1Mbps)_1TX(Port1)

Channel Separation-FS

2.48G/2.479GHz

18/01/2022



Port 1 

Ch Freq
2.48G/2.479G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak

| F1(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|----------|----------|--------------|-----------|
| 2.47916G | 2.48016G | 1.002M | 531.135k |


BT-EDR(2Mbps)_1TX(Port1)

Channel Separation-FS

2.402G/2.403GHz

18/01/2022



Port 1 

Ch Freq
2.402G/2.403G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak


| F1(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|----------|----------|--------------|-----------|
| 2.40216G | 2.40316G | 1.002M | 868.464k |


BT-EDR(2Mbps)_1TX(Port1)

Channel Separation-FS

2.44G/2.441GHz

18/01/2022

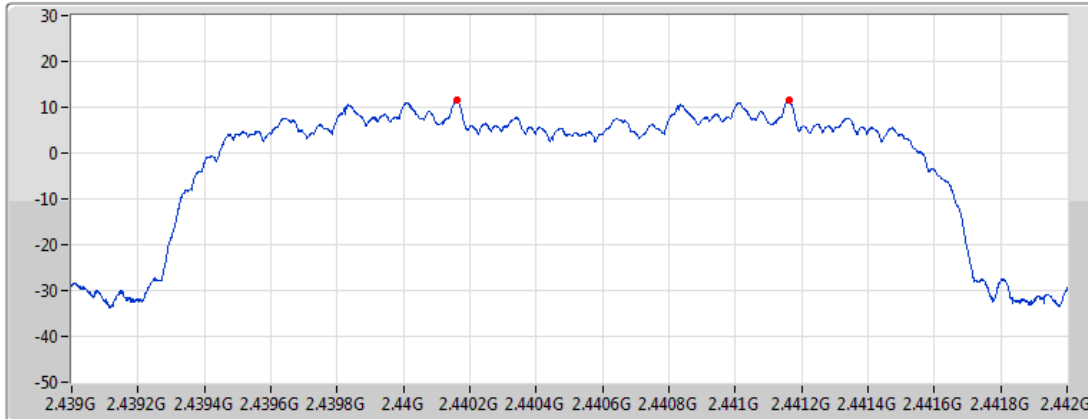

Port 1 

Ch Freq
2.44G/2.441G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak

| F1(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|----------|-----------|--------------|-----------|
| 2.44016G | 2.441162G | 1.002M | 867.798k |


BT-EDR(2Mbps)_1TX(Port1)

Channel Separation-FS

2.48G/2.479GHz

18/01/2022



Port 1 

Ch Freq
2.48G/2.479G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak

| F1(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|-----------|-----------|--------------|-----------|
| 2.479161G | 2.480162G | 1.0005M | 873.126k |


BT-EDR(3Mbps)_1TX(Port1)

Channel Separation-FS

2.402G/2.403GHz

18/01/2022



Port 1 

Ch Freq
2.402G/2.403G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak


| Ff(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|----------|-----------|--------------|-----------|
| 2.40216G | 2.403162G | 1.002M | 855.144k |


BT-EDR(3Mbps)_1TX(Port1)

Channel Separation-FS

2.44G/2.441GHz

18/01/2022

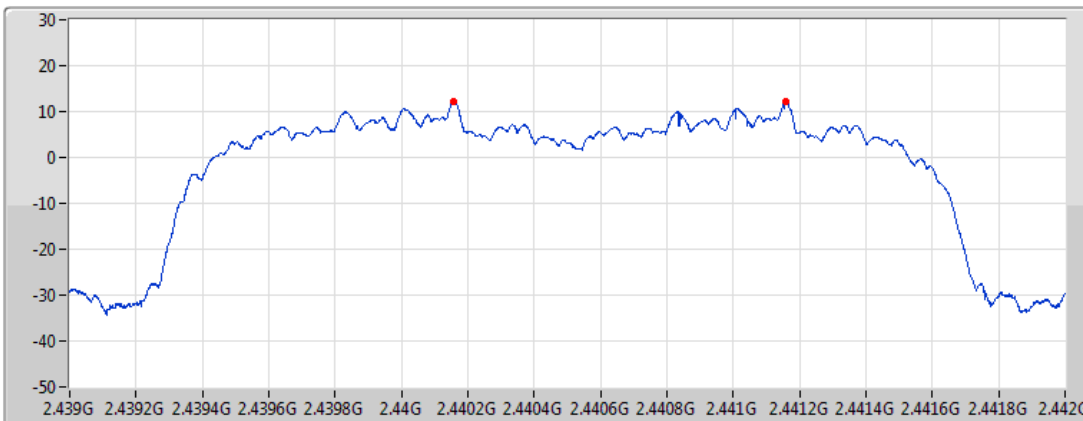

Port 1 

Ch Freq
2.44G/2.441G

Span
3MHz

RBW
30kHz

VBW
100kHz

Sweep
100ms

Detector
Peak

| Ff(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|-----------|-----------|--------------|-----------|
| 2.440155G | 2.441159G | 1.0035M | 863.136k |

BT-EDR(3Mbps)_1TX(Port1)

Channel Separation-FS

2.48G/2.479GHz

18/01/2022



| F1(Hz) | Fh(Hz) | Ch.Space(Hz) | Limit(Hz) |
|-----------|-----------|--------------|-----------|
| 2.479158G | 2.480159G | 1.0005M | 854.478k |



Summary

| Mode | Power (dBm) | Power (W) |
|--------------------------|-------------|-----------|
| 2.4-2.4835GHz | - | - |
| BT-BR(1Mbps)_1TX(Port1) | 13.04 | 0.02014 |
| BT-EDR(2Mbps)_1TX(Port1) | 14.66 | 0.02924 |
| BT-EDR(3Mbps)_1TX(Port1) | 14.78 | 0.03006 |



Result

| Mode | Result | Gain (dBi) | Power (dBm) | Power Limit (dBm) |
|--------------------------|--------|------------|-------------|-------------------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | 2.97 | 12.97 | 21.00 |
| 2440MHz | Pass | 2.97 | 13.04 | 21.00 |
| 2480MHz | Pass | 2.97 | 12.72 | 21.00 |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | 2.97 | 14.45 | 21.00 |
| 2440MHz | Pass | 2.97 | 14.28 | 21.00 |
| 2480MHz | Pass | 2.97 | 14.66 | 21.00 |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | 2.97 | 14.65 | 21.00 |
| 2440MHz | Pass | 2.97 | 14.52 | 21.00 |
| 2480MHz | Pass | 2.97 | 14.78 | 21.00 |

DG = Directional Gain; Port X = Port X output power



Summary

| Mode | Power (dBm) | Power (W) |
|--------------------------|-------------|-----------|
| 2.4-2.4835GHz | - | - |
| BT-BR(1Mbps)_1TX(Port1) | 12.78 | 0.01897 |
| BT-EDR(2Mbps)_1TX(Port1) | 12.89 | 0.01945 |
| BT-EDR(3Mbps)_1TX(Port1) | 12.89 | 0.01945 |



Result

| Mode | Result | Gain (dBi) | Power (dBm) | Power Limit (dBm) |
|--------------------------|--------|------------|-------------|-------------------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | 2.97 | 12.78 | 21.00 |
| 2440MHz | Pass | 2.97 | 12.57 | 21.00 |
| 2480MHz | Pass | 2.97 | 12.16 | 21.00 |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | 2.97 | 12.40 | 21.00 |
| 2440MHz | Pass | 2.97 | 12.08 | 21.00 |
| 2480MHz | Pass | 2.97 | 12.89 | 21.00 |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - | - |
| 2402MHz | Pass | 2.97 | 12.36 | 21.00 |
| 2440MHz | Pass | 2.97 | 12.05 | 21.00 |
| 2480MHz | Pass | 2.97 | 12.89 | 21.00 |

DG = Directional Gain; Port X = Port X output power





Summary

| Mode | Max-Hop No |
|--------------------------|------------|
| 2.4-2.4835GHz | - |
| BT-BR(1Mbps)_1TX(Port1) | 79 |
| BT-EDR(2Mbps)_1TX(Port1) | 79 |
| BT-EDR(3Mbps)_1TX(Port1) | 79 |



Result

| Mode | Result | Hopping No | Limit |
|--------------------------|--------|------------|-------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - |
| 2440MHz | Pass | 79 | 15 |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - |
| 2440MHz | Pass | 79 | 15 |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - |
| 2440MHz | Pass | 79 | 15 |

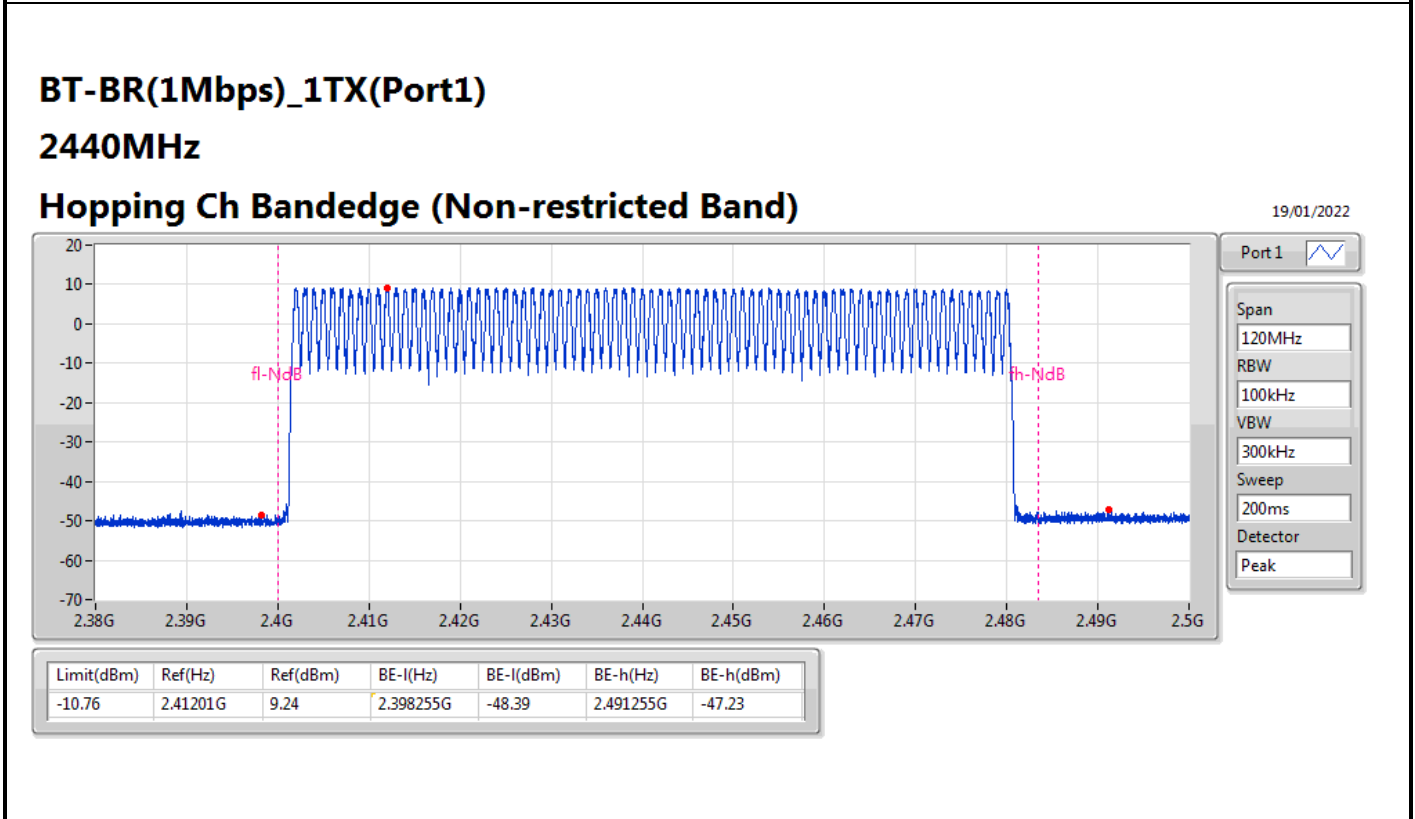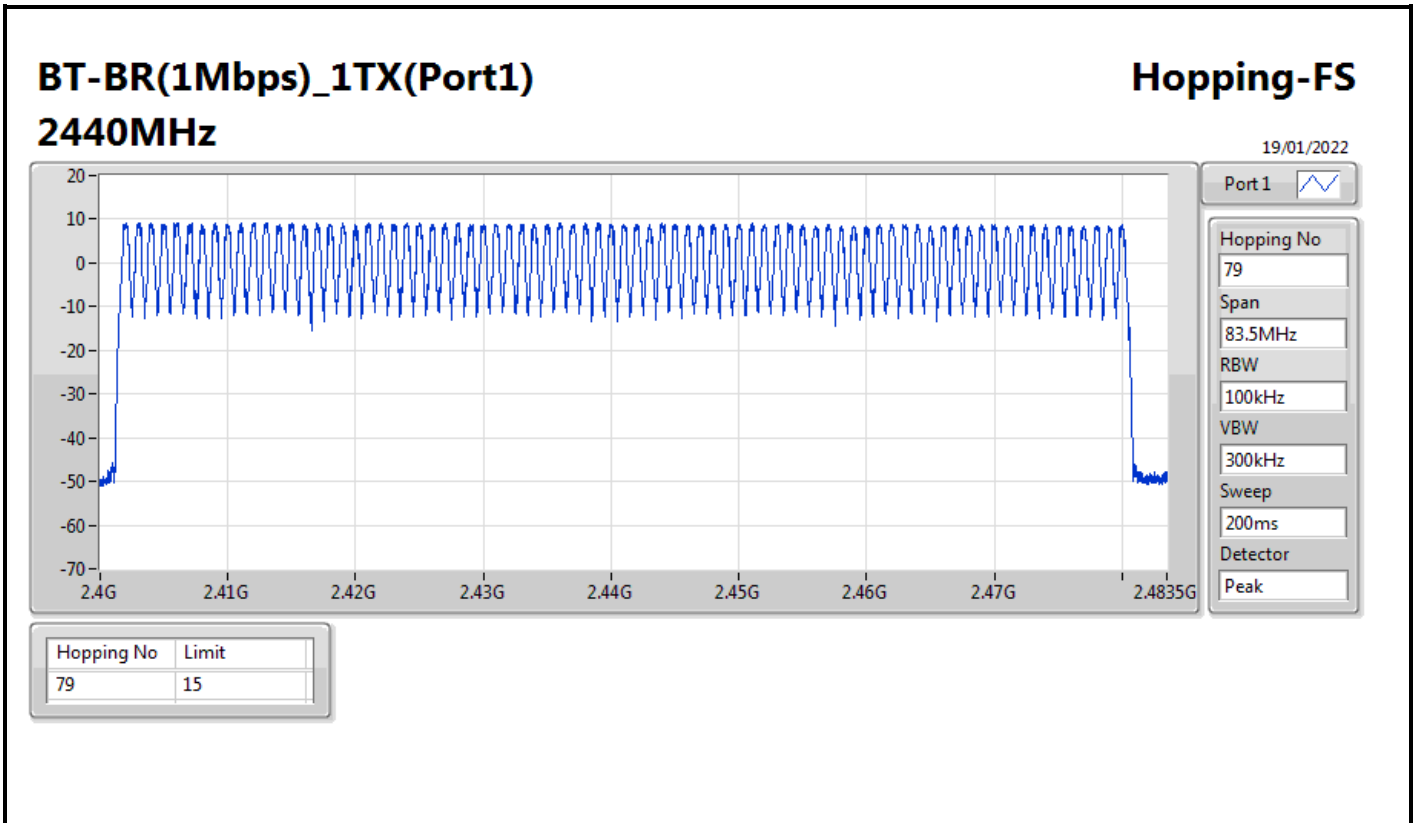


BT-BR(1Mbps)_1TX(Port1)

2440MHz

Hopping Ch Bandedge (Restricted Band)

19/01/2022

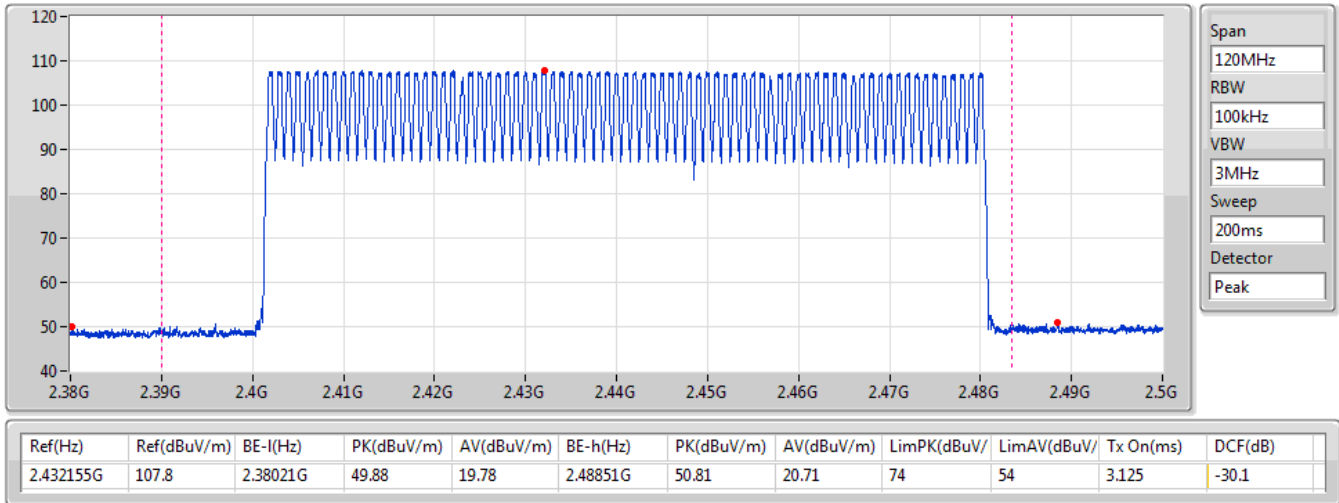


BT-EDR(2Mbps)_1TX(Port1)

2440MHz

Hopping-FS

19/01/2022

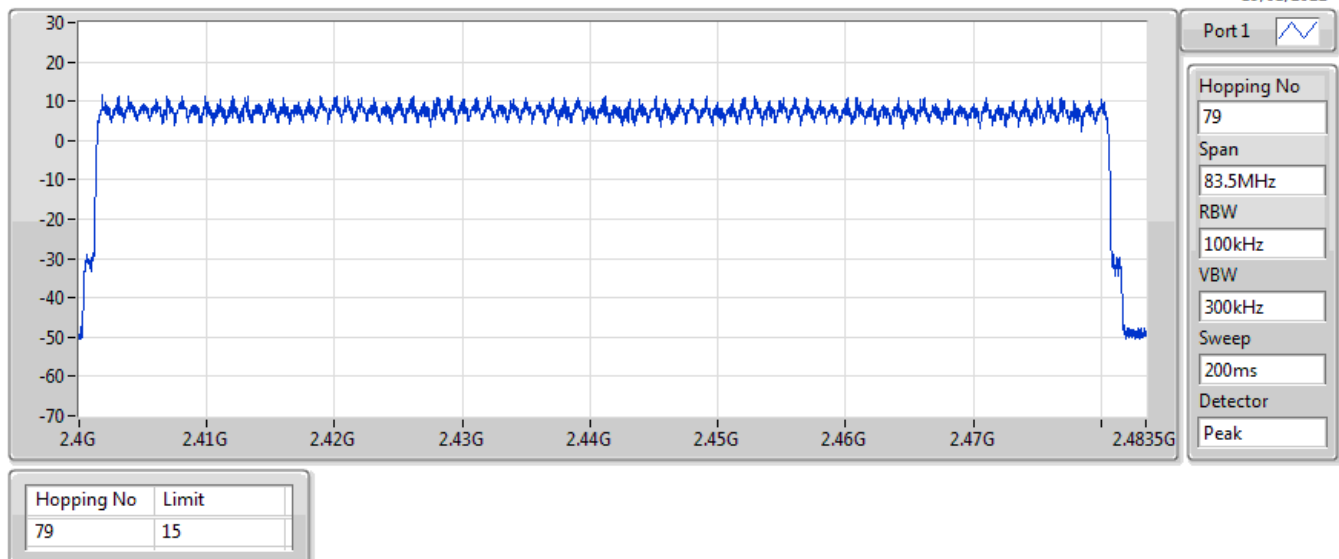


BT-EDR(2Mbps)_1TX(Port1)

2440MHz

Hopping Ch Bandedge (Non-restricted Band)

19/01/2022

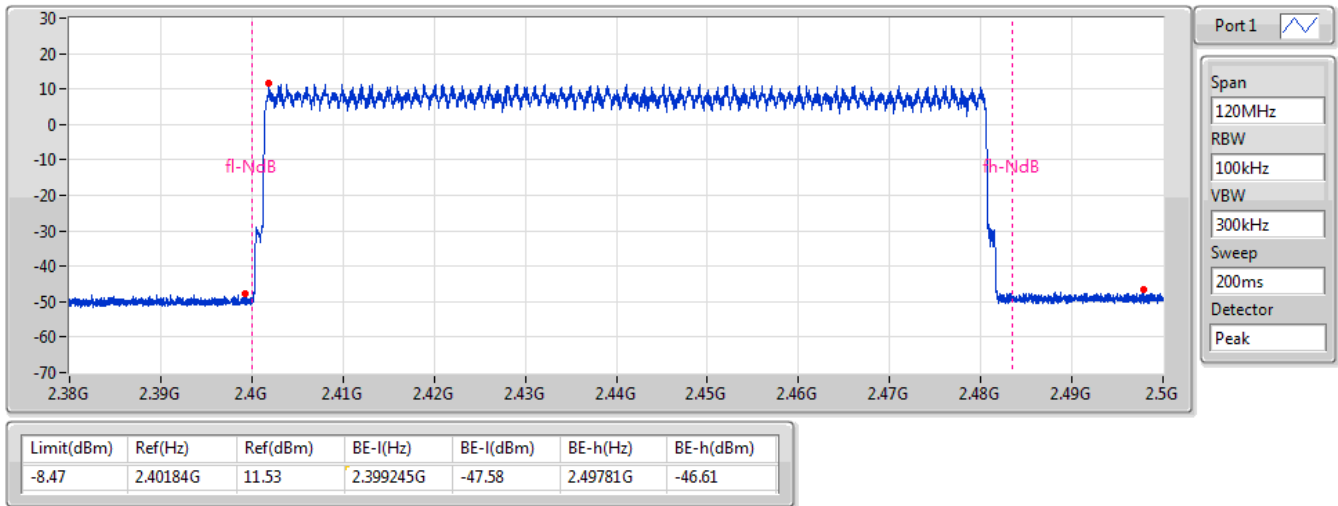


BT-EDR(2Mbps)_1TX(Port1)

2440MHz

Hopping Ch Bandedge (Restricted Band)


19/01/2022

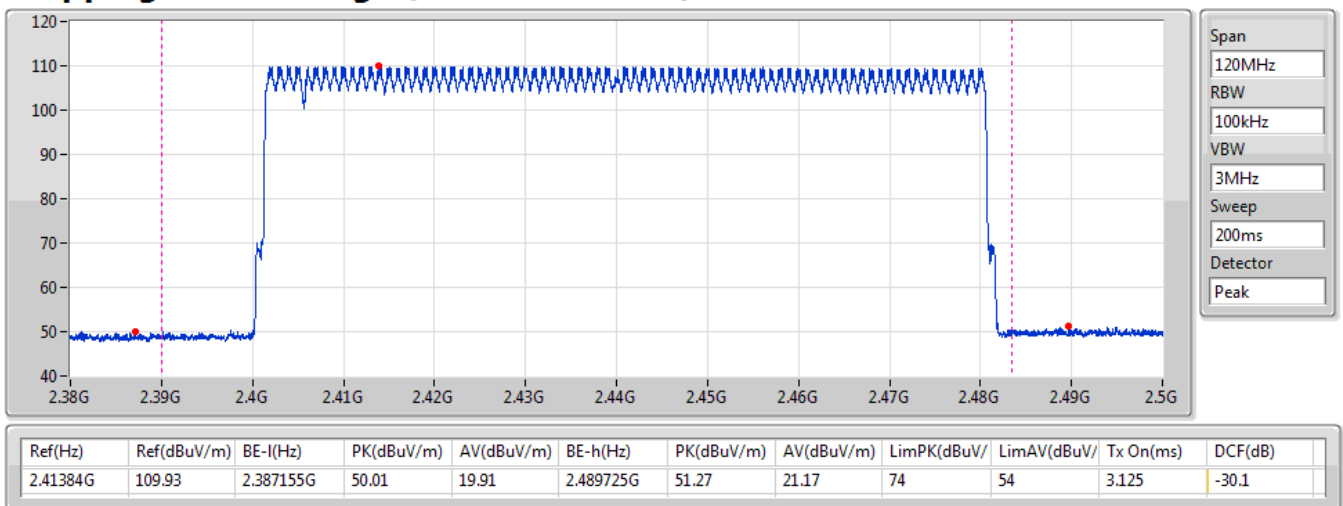

BT-EDR(3Mbps)_1TX(Port1)
2440MHz

Hopping-FS

19/01/2022

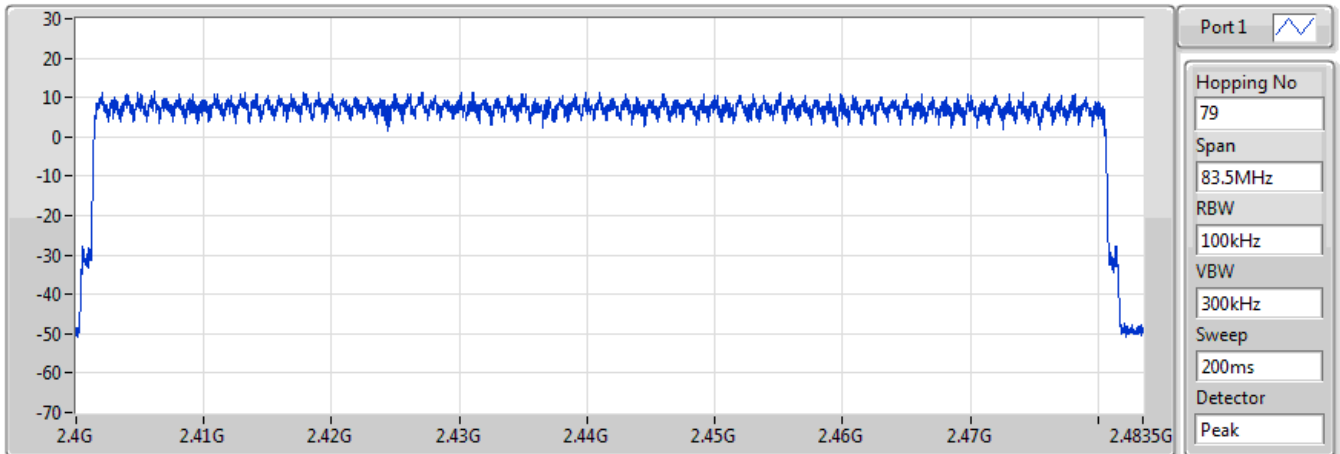


| Hopping No | Limit |
|------------|-------|
| 79 | 15 |

BT-EDR(3Mbps)_1TX(Port1)
2440MHz

Hopping Ch Bandedge (Non-restricted Band)

19/01/2022

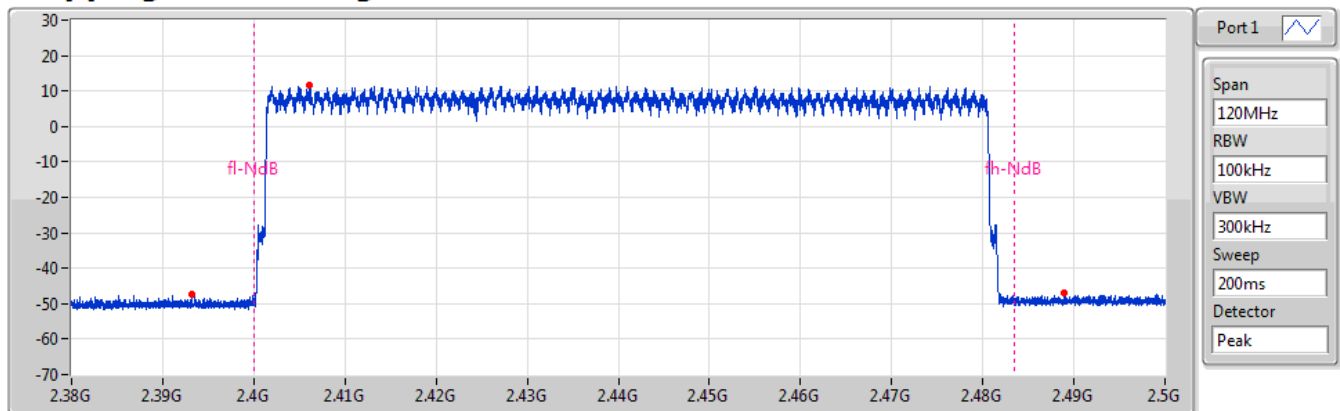


| Limit(dBm) | Ref(Hz) | Ref(dBm) | BE-l(Hz) | BE-l(dBm) | BE-h(Hz) | BE-h(dBm) |
|------------|----------|----------|-----------|-----------|----------|-----------|
| -8.48 | 2.40616G | 11.52 | 2.393215G | -47.51 | 2.4889G | -47.07 |

BT-EDR(3Mbps)_1TX(Port1)

2440MHz

Hopping Ch Bandedge (Restricted Band)

19/01/2022

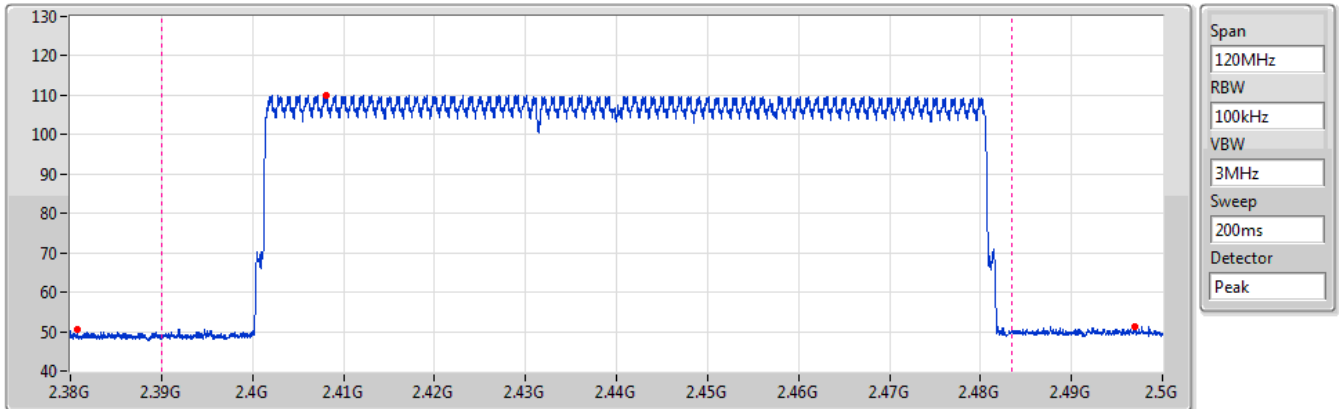

| Ref(Hz) | Ref(dBuV/m) | BE-l(Hz) | PK(dBuV/m) | AV(dBuV/m) | BE-h(Hz) | PK(dBuV/m) | AV(dBuV/m) | LimPK(dBuV/ | LimAV(dBuV/ | Tx On(ms) | DCF(dB) |
|-----------|-------------|-----------|------------|------------|-----------|------------|------------|-------------|-------------|-----------|---------|
| 2.408155G | 110.01 | 2.380735G | 50.48 | 20.38 | 2.496985G | 51.41 | 21.31 | 74 | 54 | 3.125 | -30.1 |





Summary



| Mode | Max-Dwell (s) |
|--------------------------|------------------|
| 2.4-2.4835GHz | - |
| BT-BR(1Mbps)_1TX(Port1) | 307.3278m_DH5 |
| BT-EDR(2Mbps)_1TX(Port1) | 307.8075m_DH5 |
| BT-EDR(3Mbps)_1TX(Port1) | 308.04735m_DH5 |





Result

| Mode | Result | Period (s) | Dwell (s) | Limit (s) | Tx On (s) |
|--------------------------|--------|------------|---------------------|-----------|-----------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - | - |
| 2440MHz | Pass | 31.6 | 307.3278m_DH5 | 400m | 2.883m |
| 2440MHz | Pass | 8 | 153.6639m_DH5-AFH | 400m | 2.883m |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - | - | - |
| 2440MHz | Pass | 31.6 | 307.8075m_DH5 | 400m | 2.8875m |
| 2440MHz | Pass | 8 | 153.917075m_DH5-AFH | 400m | 2.88775m |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - | - | - |
| 2440MHz | Pass | 31.6 | 308.04735m_DH5 | 400m | 2.88975m |
| 2440MHz | Pass | 8 | 154.023675m_DH5-AFH | 400m | 2.88975m |

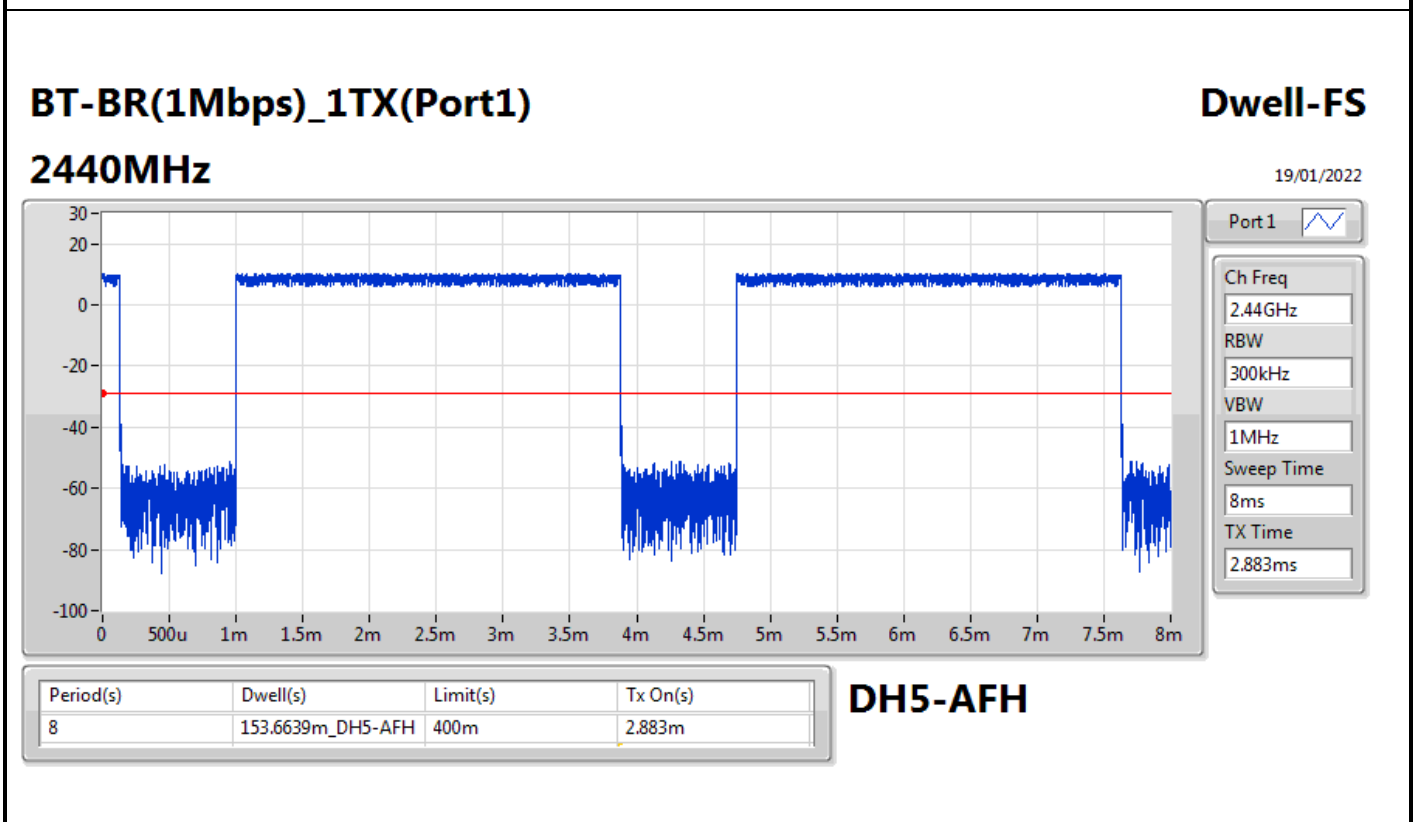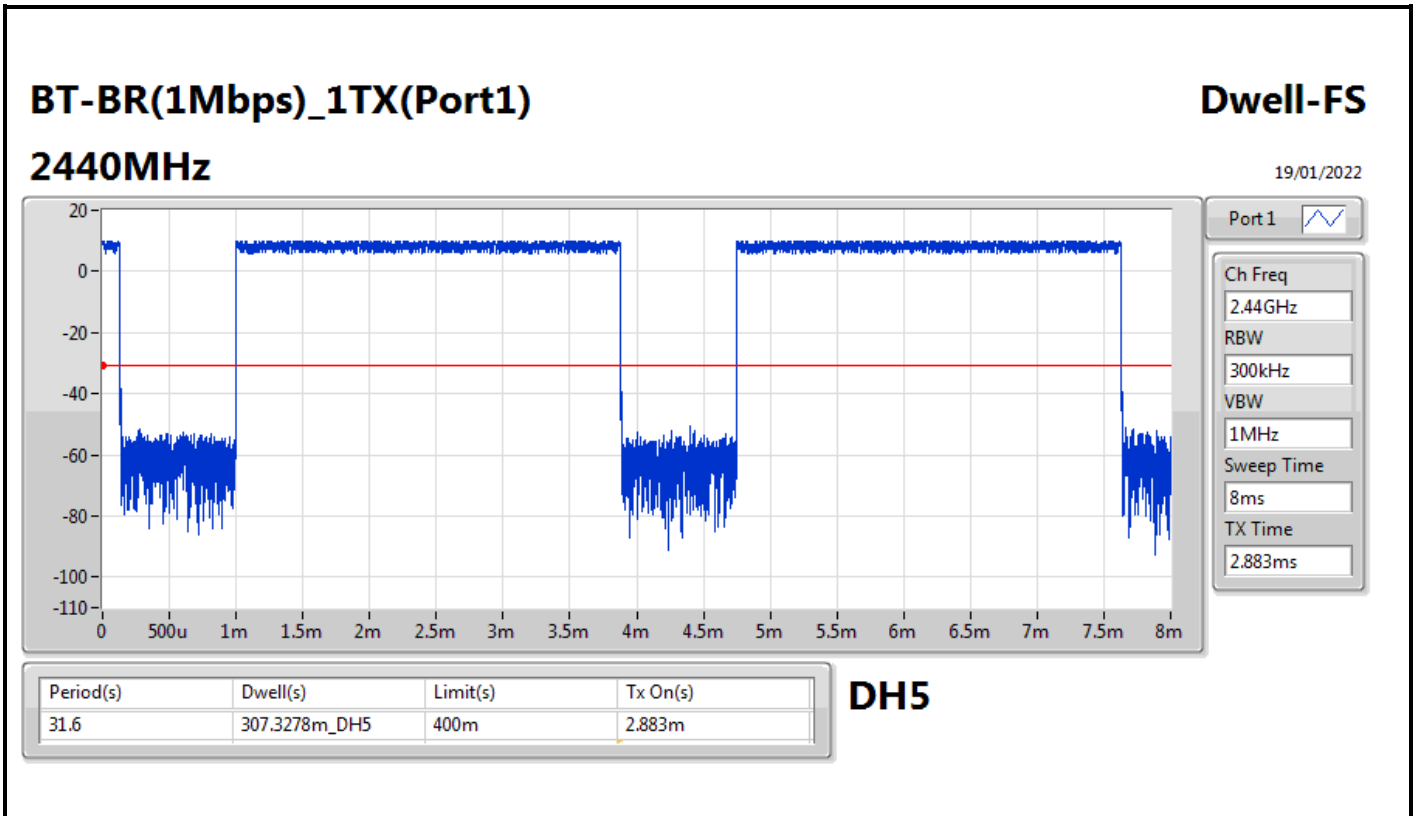

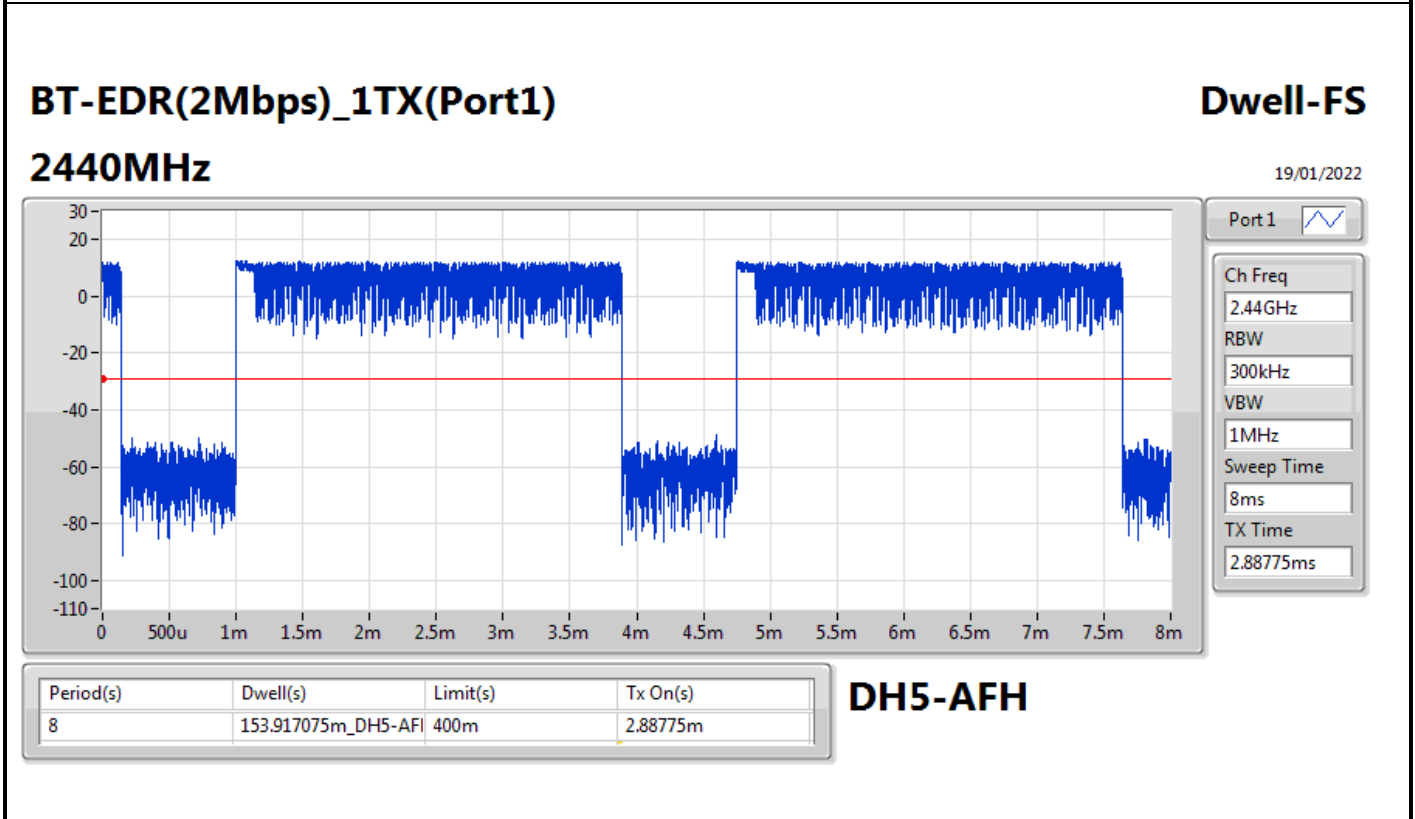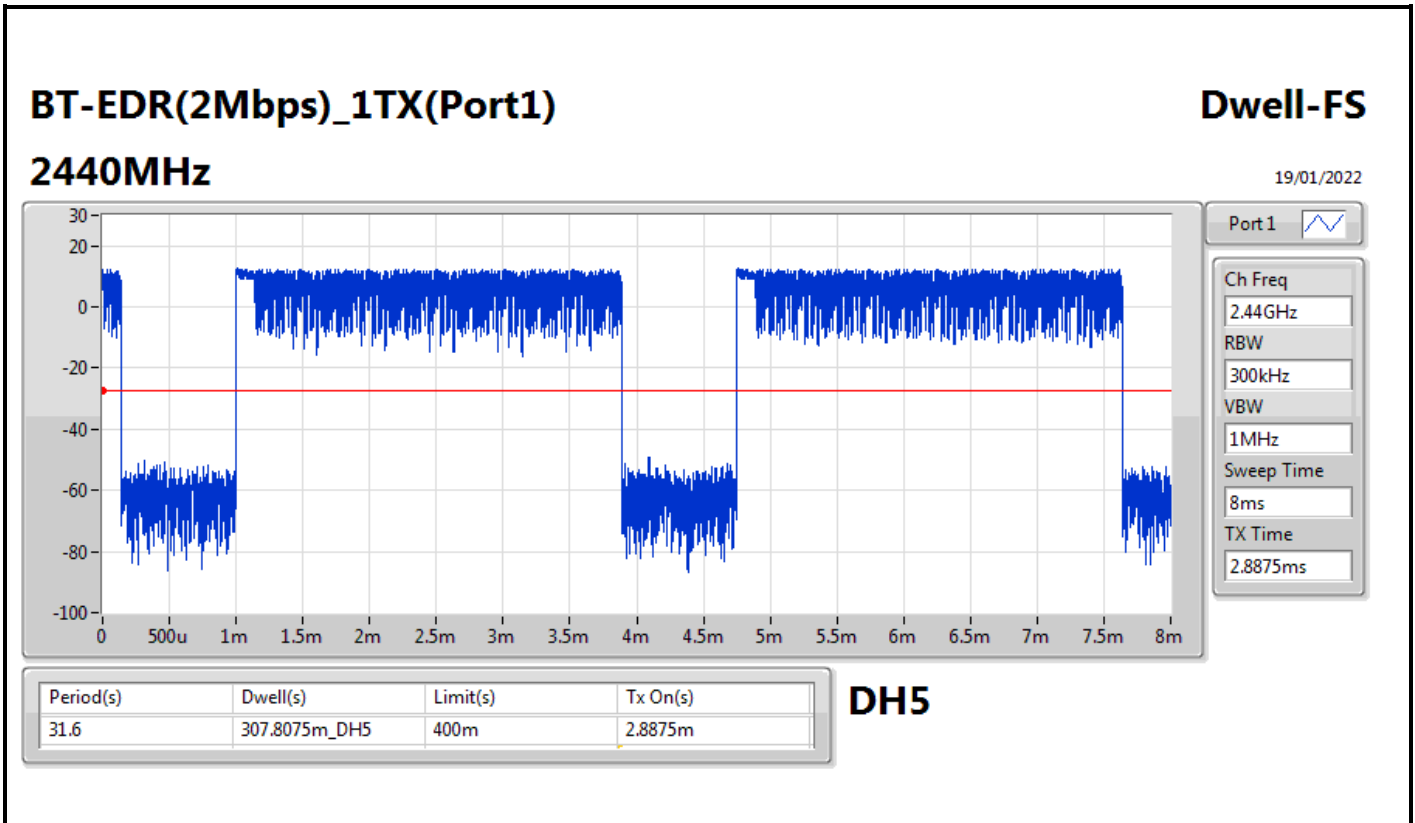

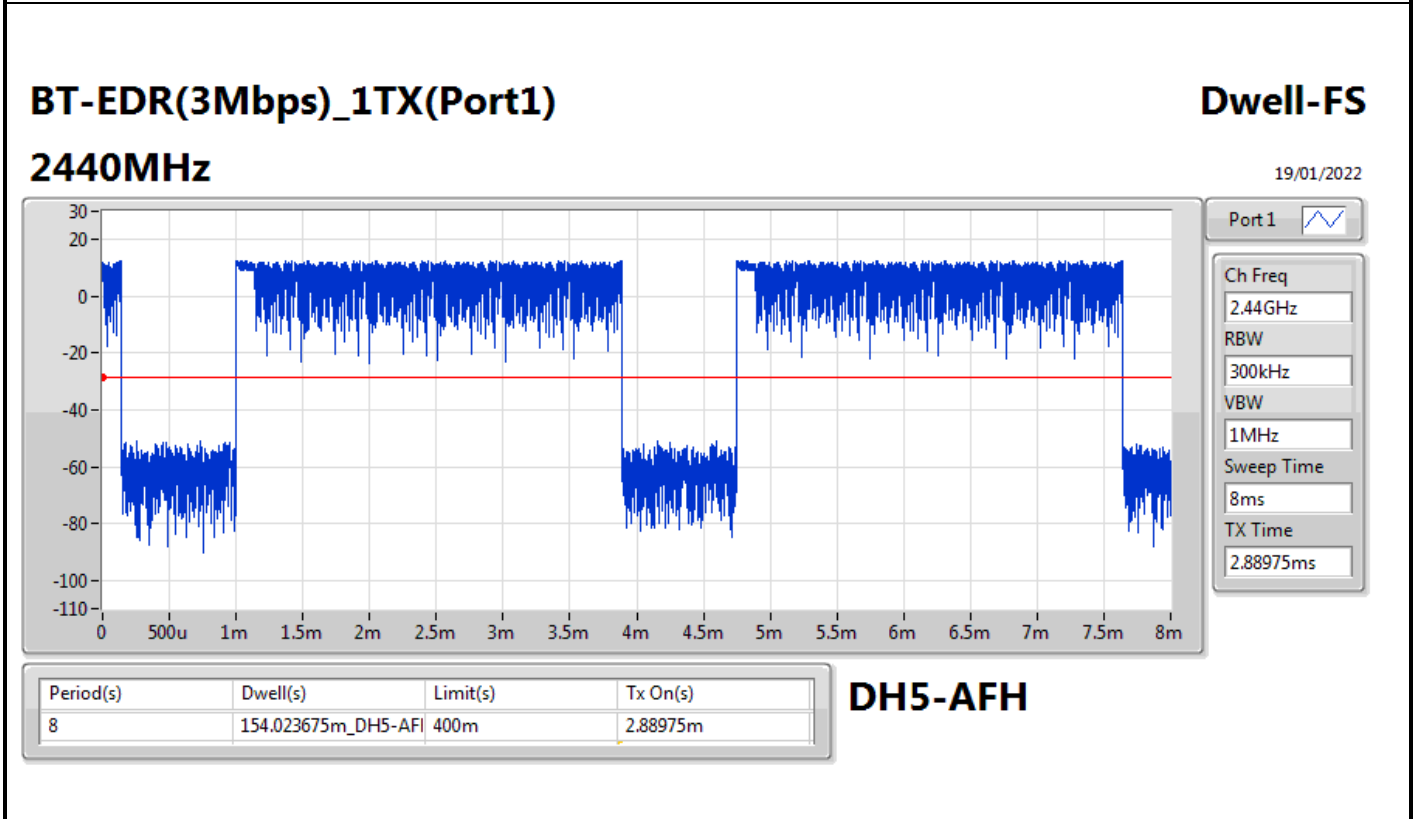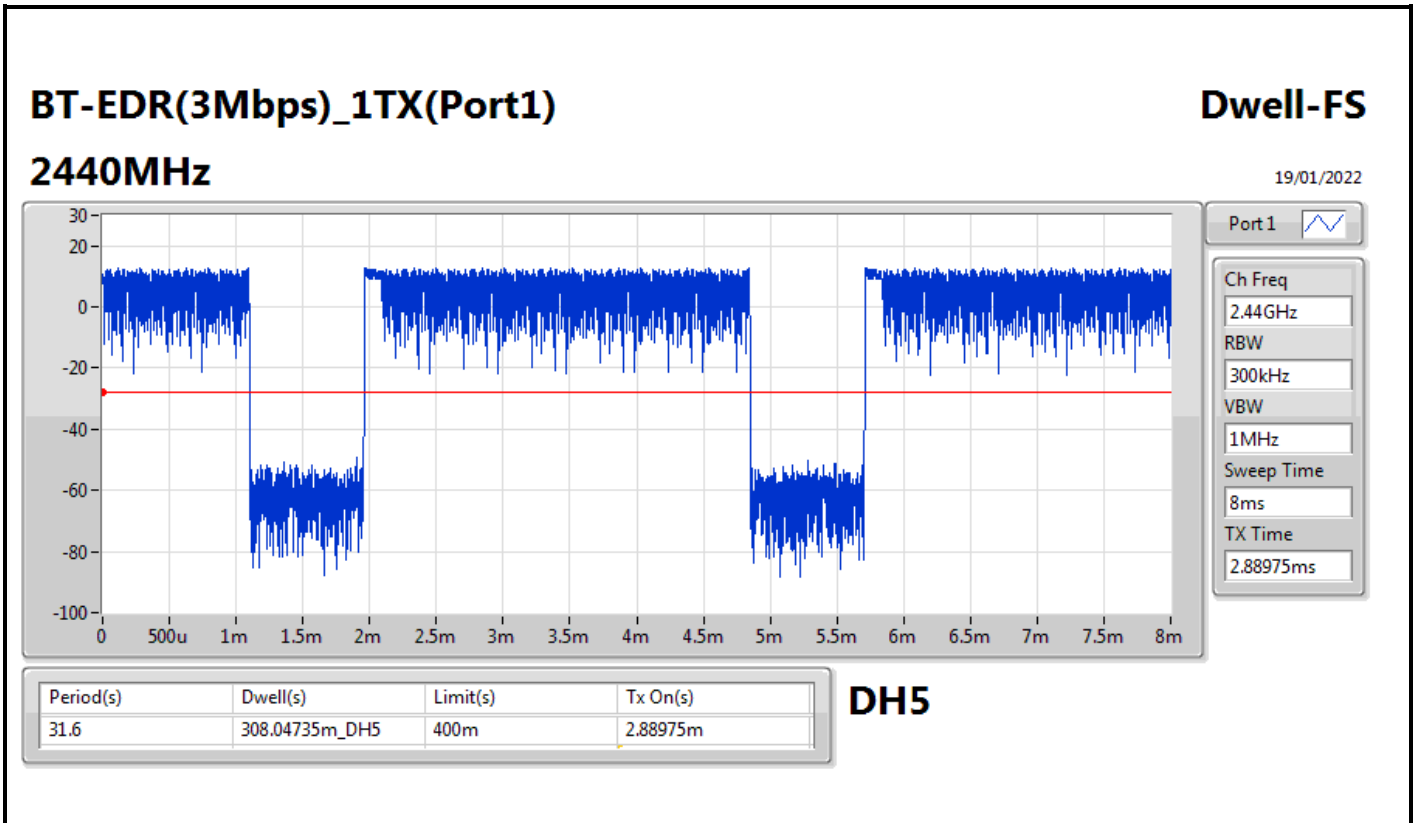





Summary



| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Port |
|--------------------------|--------|----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| 2.4-2.4835GHz | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| BT-BR(1Mbps)_1TX(Port1) | Pass | 2.47999G | 11.88 | -8.12 | 793.75M | -52.55 | 2.39518G | -51.71 | 2.4835G | -52.74 | 2.48732G | -49.87 | 24.71317G | -39.11 | 1 |
| BT-EDR(2Mbps)_1TX(Port1) | Pass | 2.40196G | 11.04 | -8.96 | 792.87M | -53.75 | 2.4G | -52.47 | 2.4G | -52.10 | 2.49938G | -53.45 | 15.22527G | -42.17 | 1 |
| BT-EDR(3Mbps)_1TX(Port1) | Pass | 2.40196G | 11.66 | -8.34 | 906.84M | -50.63 | 2.3998G | -50.86 | 2.4G | -51.28 | 2.50004G | -52.74 | 15.25902G | -40.66 | 1 |







Result

| Mode | Result | Ref (Hz) | Ref (dBm) | Limit (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Freq (Hz) | Level (dBm) | Port |
|--------------------------|--------|----------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|-------------|------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.40196G | 12.05 | -7.95 | 2.09389G | -52.84 | 2.39981G | -50.24 | 2.4G | -51.80 | 2.49728G | -50.78 | 24.84534G | -38.76 | 1 |
| 2440MHz | Pass | 2.44016G | 12.41 | -7.59 | 2.10916G | -51.35 | 2.39821G | -50.85 | 2.4835G | -52.80 | 2.49641G | -50.22 | 15.20559G | -39.17 | 1 |
| 2480MHz | Pass | 2.47999G | 11.88 | -8.12 | 793.75M | -52.55 | 2.39518G | -51.71 | 2.4835G | -52.74 | 2.48732G | -49.87 | 24.71317G | -39.11 | 1 |
| BT-EDR(2Mbps)_1TX(Port1) | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.40196G | 11.04 | -8.96 | 792.87M | -53.75 | 2.4G | -52.47 | 2.4G | -52.10 | 2.49938G | -53.45 | 15.22527G | -42.17 | 1 |
| 2440MHz | Pass | 2.44016G | 11.17 | -8.83 | 673.9M | -53.57 | 2.39017G | -54.65 | 2.4835G | -57.75 | 2.4899G | -53.54 | 24.68505G | -42.35 | 1 |
| 2480MHz | Pass | 2.48008G | 11.37 | -8.63 | 859.84M | -53.88 | 2.3926G | -54.50 | 2.4835G | -54.89 | 2.48375G | -53.24 | 15.14091G | -41.62 | 1 |
| BT-EDR(3Mbps)_1TX(Port1) | - | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | 2.40196G | 11.66 | -8.34 | 906.84M | -50.63 | 2.3998G | -50.86 | 2.4G | -51.28 | 2.50004G | -52.74 | 15.25902G | -40.66 | 1 |
| 2440MHz | Pass | 2.44016G | 11.32 | -8.68 | 908.61M | -53.98 | 2.39237G | -54.52 | 2.4835G | -56.20 | 2.48988G | -53.36 | 24.74129G | -42.34 | 1 |
| 2480MHz | Pass | 2.4802G | 11.46 | -8.54 | 785.53M | -53.76 | 2.39425G | -54.70 | 2.4835G | -56.24 | 2.49656G | -52.91 | 24.91283G | -42.57 | 1 |

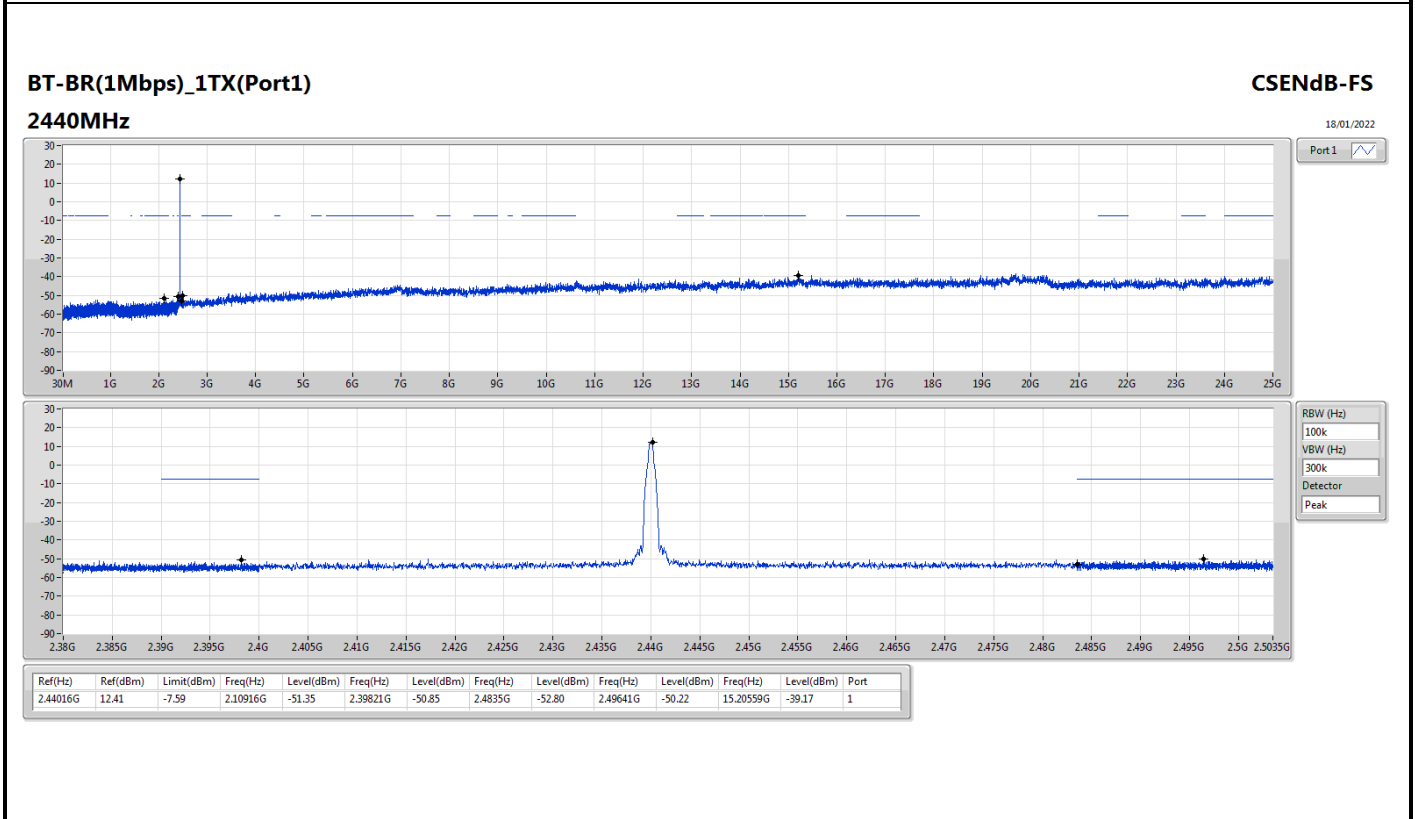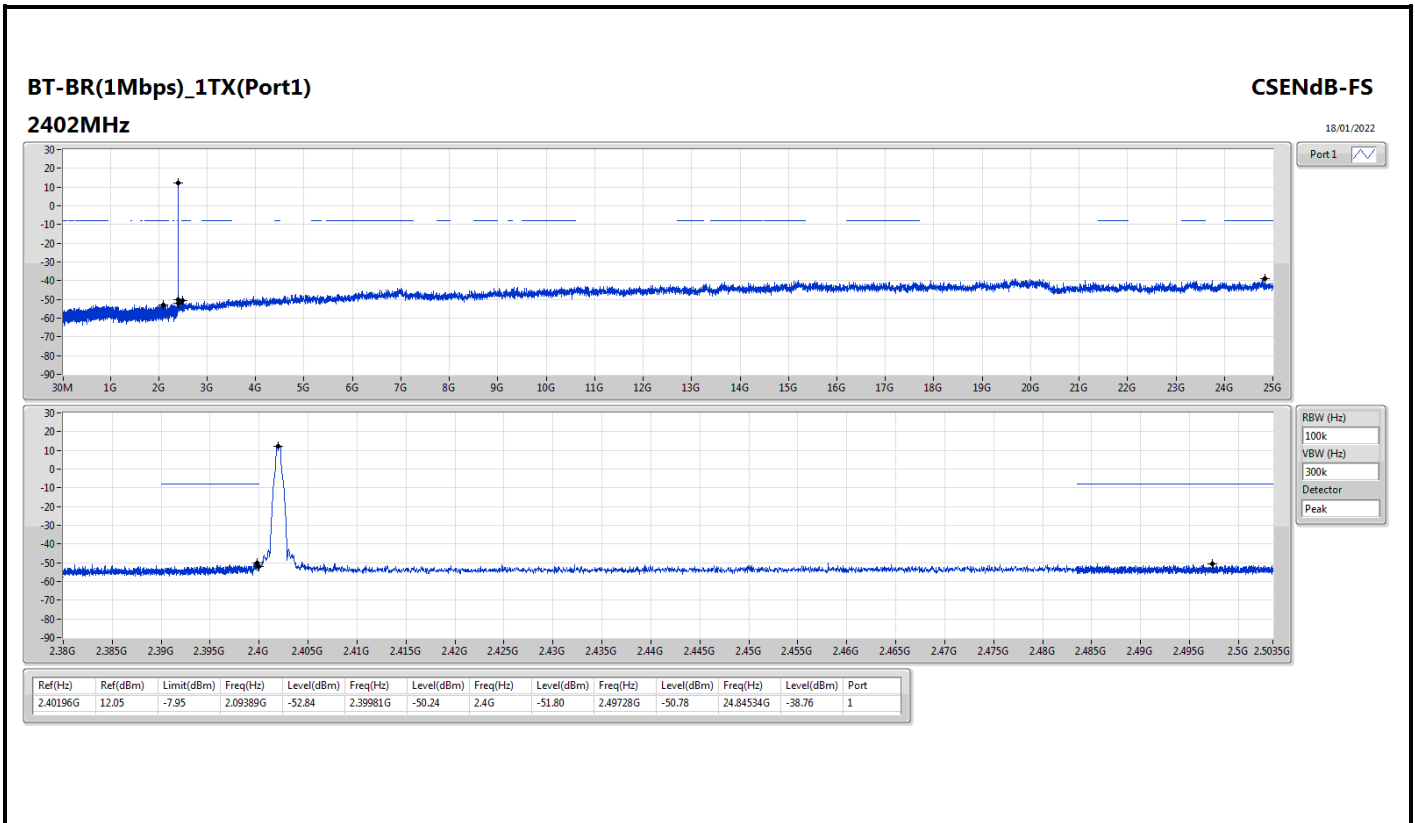

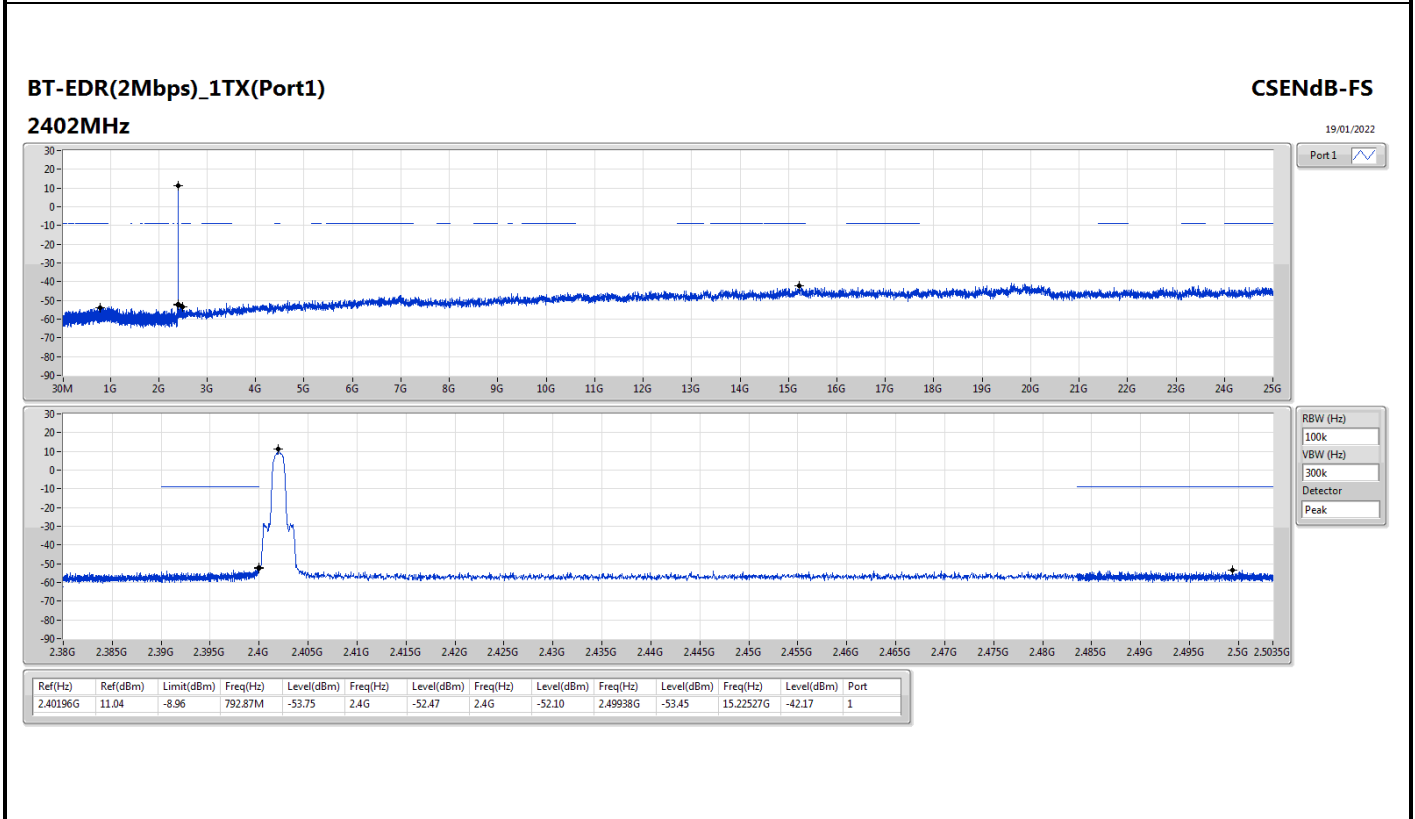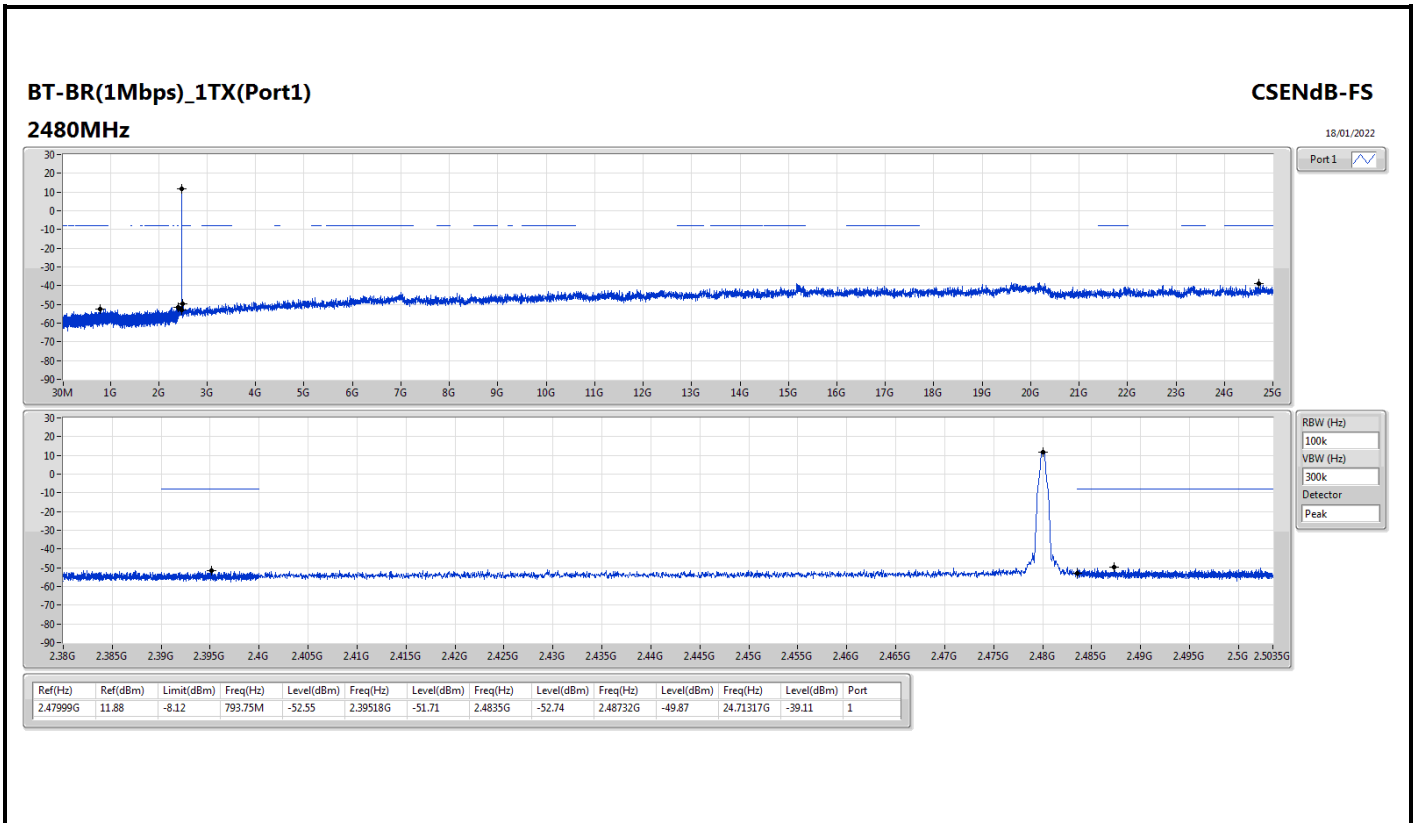

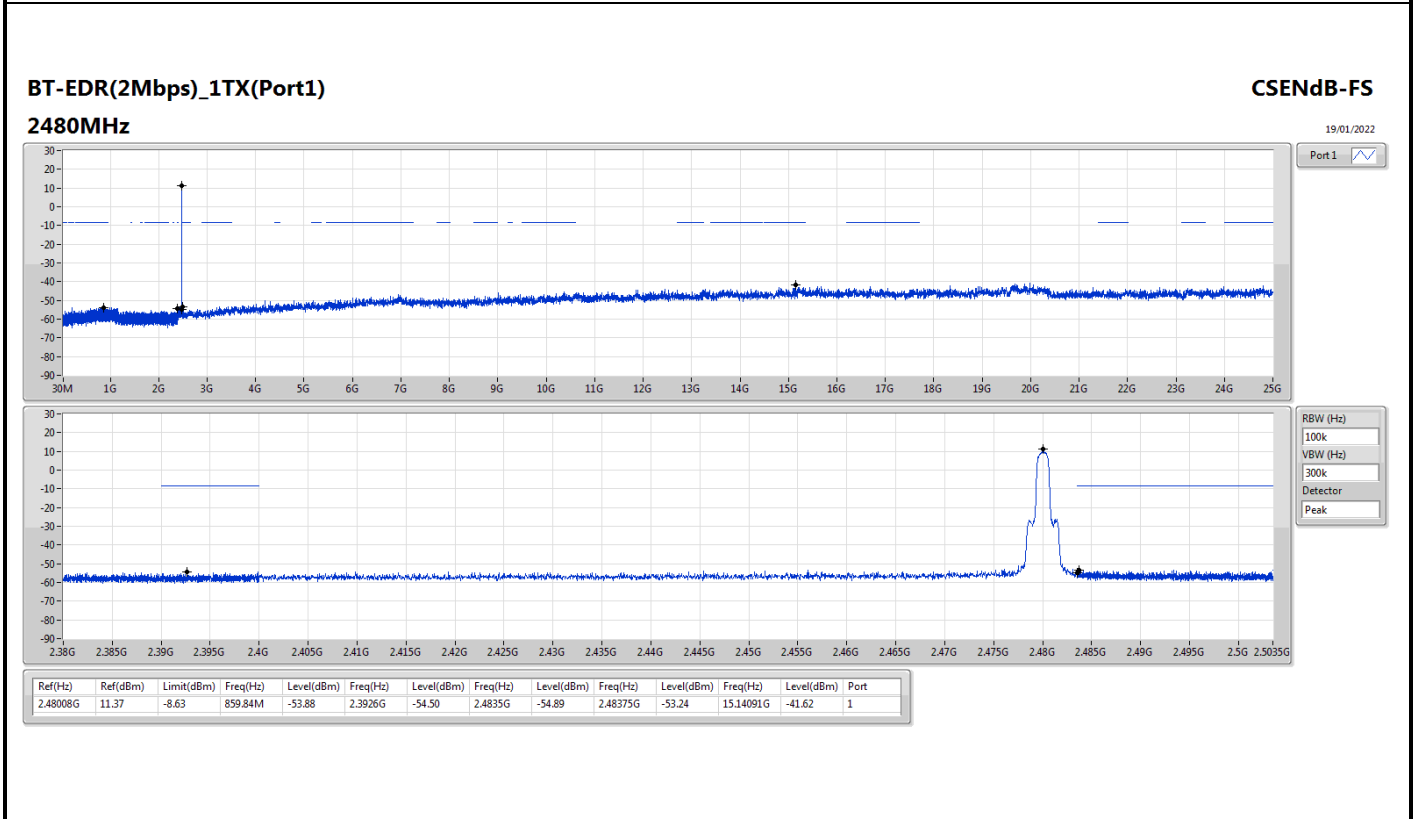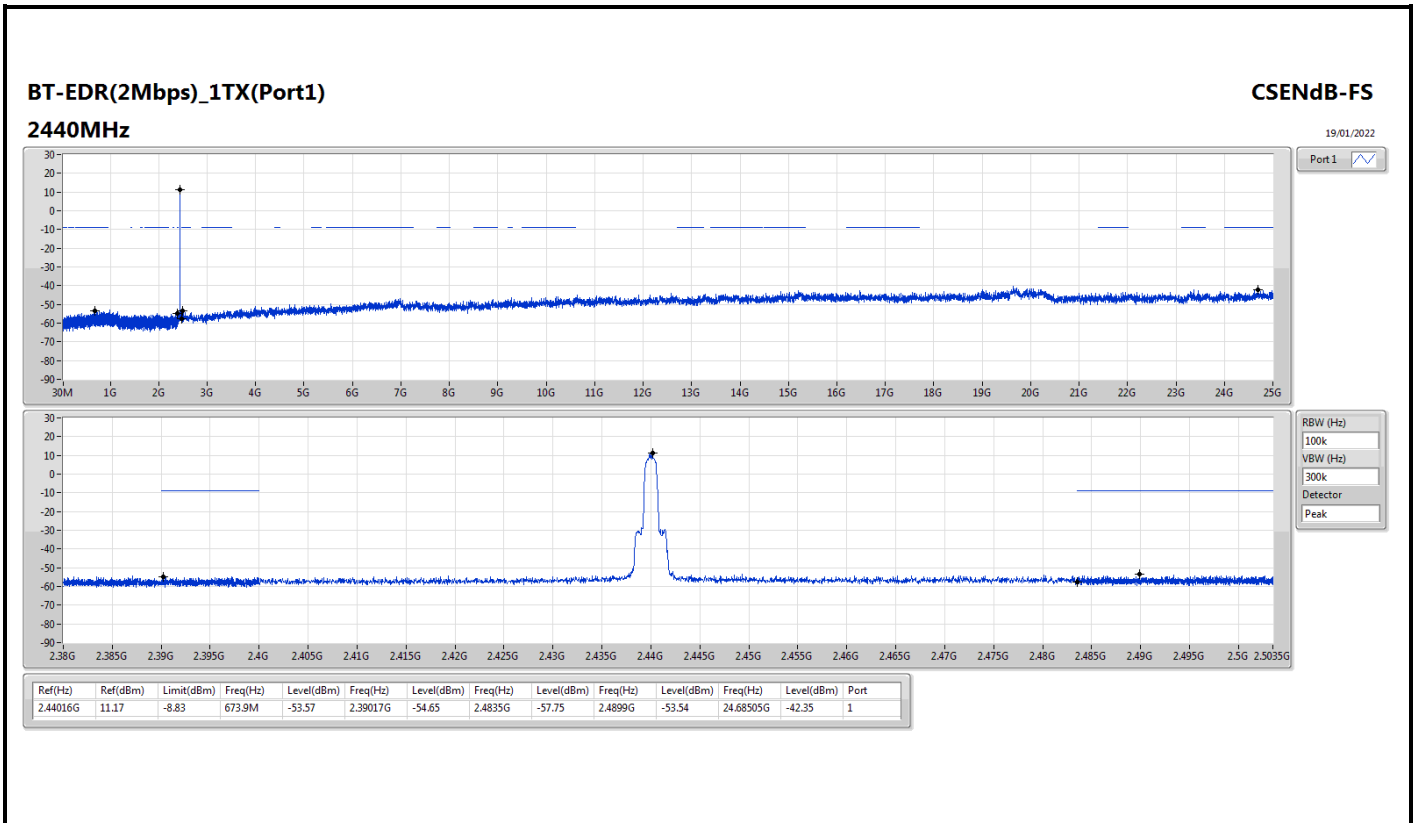

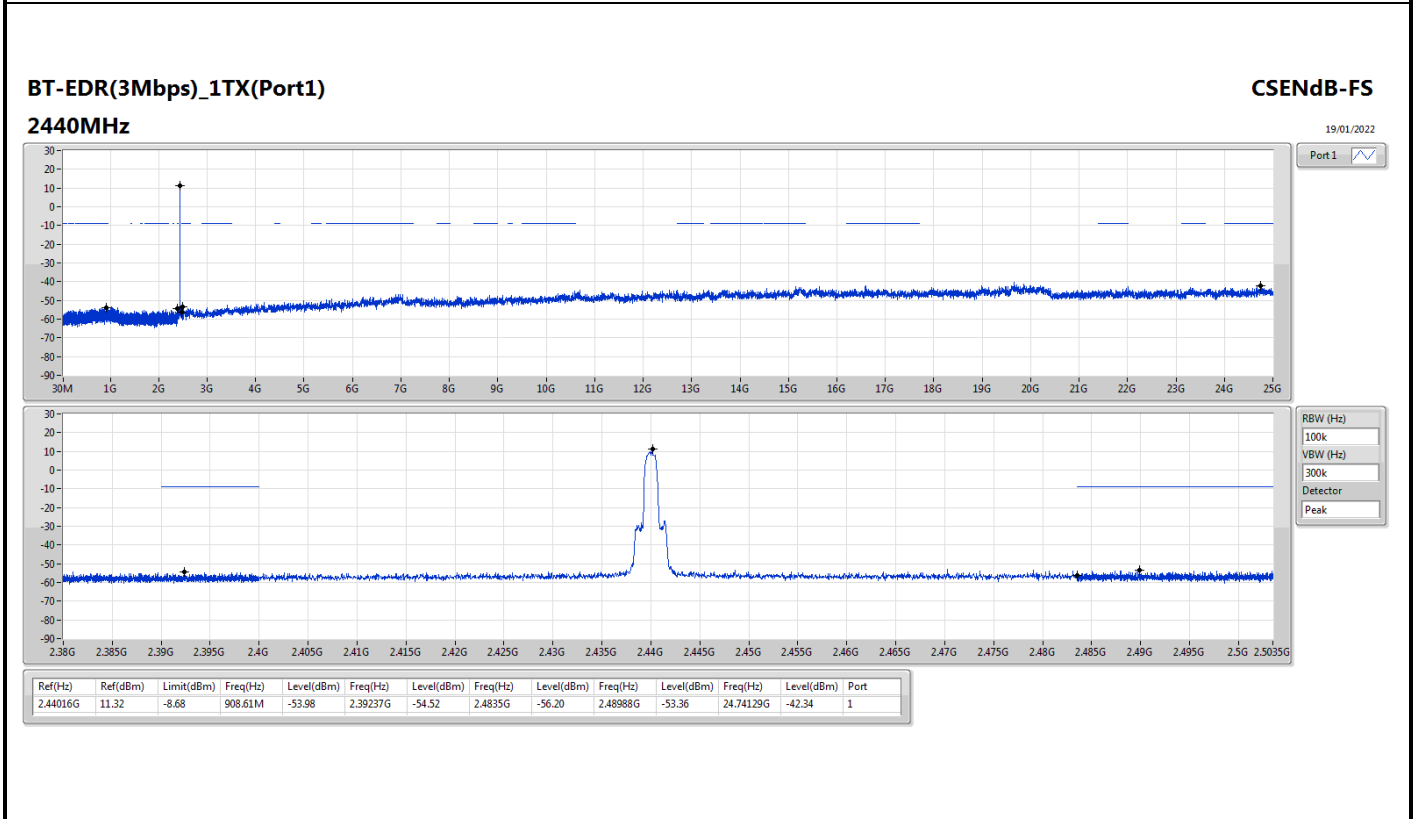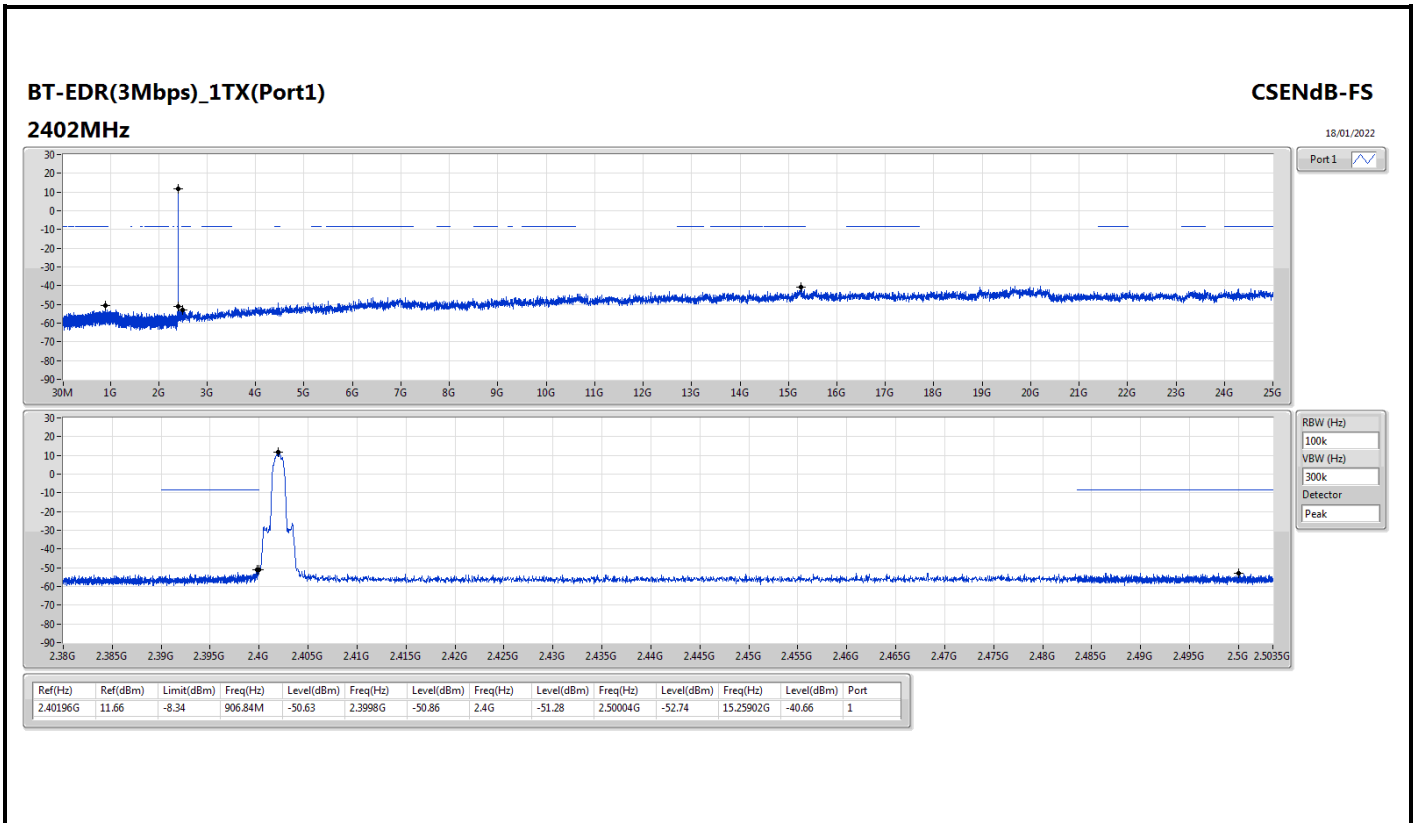




BT-EDR(3Mbps)_1TX(Port1)


CSENdB-FS

2480MHz

19/01/2022

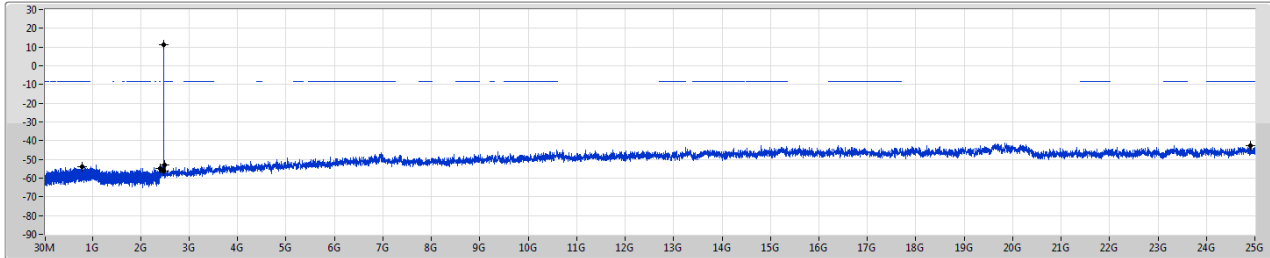

Port1

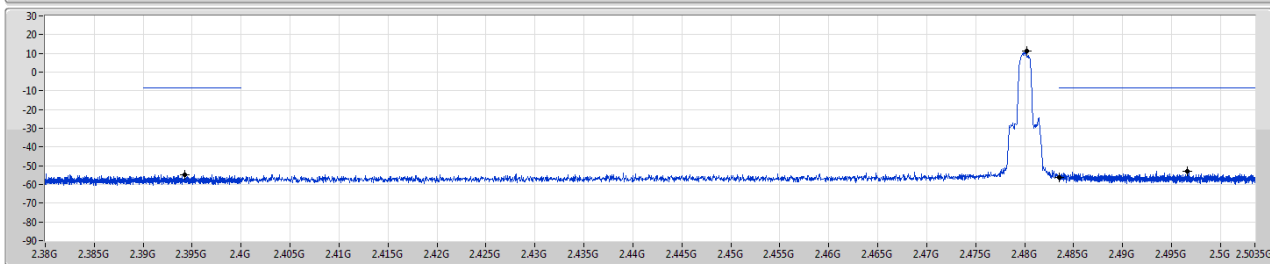

RBW (Hz) 100k
 VBW (Hz) 300k
 Detector Peak

| Ref(Hz) | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Port |
|---------|----------|------------|----------|------------|----------|------------|----------|------------|----------|------------|-----------|------------|------|
| 2.4802G | 11.46 | -8.54 | 785.53M | -53.76 | 2.39425G | -54.70 | 2.4835G | -56.24 | 2.49656G | -52.91 | 24.91283G | -42.57 | 1 |



Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|-------------------------|--------|------|-----------|----------------|----------------|-------------|----------|------------|-------------|------------|----------|
| 2.4-2.4835GHz | - | - | - | - | - | - | - | - | - | - | - |
| BT-BR(1Mbps)_1TX(Port1) | Pass | PK | 245.34M | 40.98 | 46.00 | -5.02 | 3 | Horizontal | 0 | 1.00 | - |




Result

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|-------------------------|--------|------|-----------|----------------|----------------|-------------|----------|------------|-------------|------------|----------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - | - | - | - | - | - | - | - |
| 2440MHz | Pass | PK | 138.64M | 28.08 | 43.50 | -15.42 | 3 | Vertical | 360 | 1.00 | - |
| 2440MHz | Pass | PK | 241.46M | 33.73 | 46.00 | -12.27 | 3 | Vertical | 360 | 1.00 | - |
| 2440MHz | Pass | PK | 371.44M | 33.03 | 46.00 | -12.97 | 3 | Vertical | 360 | 1.00 | - |
| 2440MHz | Pass | PK | 482.02M | 33.75 | 46.00 | -12.25 | 3 | Vertical | 360 | 1.00 | - |
| 2440MHz | Pass | PK | 705.12M | 31.53 | 46.00 | -14.47 | 3 | Vertical | 360 | 1.00 | - |
| 2440MHz | Pass | PK | 885.54M | 36.82 | 46.00 | -9.18 | 3 | Vertical | 360 | 1.00 | - |
| 2440MHz | Pass | PK | 150.28M | 35.28 | 43.50 | -8.22 | 3 | Horizontal | 0 | 1.00 | - |
| 2440MHz | Pass | PK | 245.34M | 40.98 | 46.00 | -5.02 | 3 | Horizontal | 0 | 1.00 | - |
| 2440MHz | Pass | PK | 264.74M | 38.30 | 46.00 | -7.70 | 3 | Horizontal | 0 | 1.00 | - |
| 2440MHz | Pass | PK | 371.44M | 35.19 | 46.00 | -10.81 | 3 | Horizontal | 0 | 1.00 | - |
| 2440MHz | Pass | PK | 480.08M | 38.43 | 46.00 | -7.57 | 3 | Horizontal | 0 | 1.00 | - |
| 2440MHz | Pass | PK | 885.54M | 37.88 | 46.00 | -8.12 | 3 | Horizontal | 0 | 1.00 | - |

BT-BR(1Mbps)_1TX(Port1)


2440MHz_Test Fixture

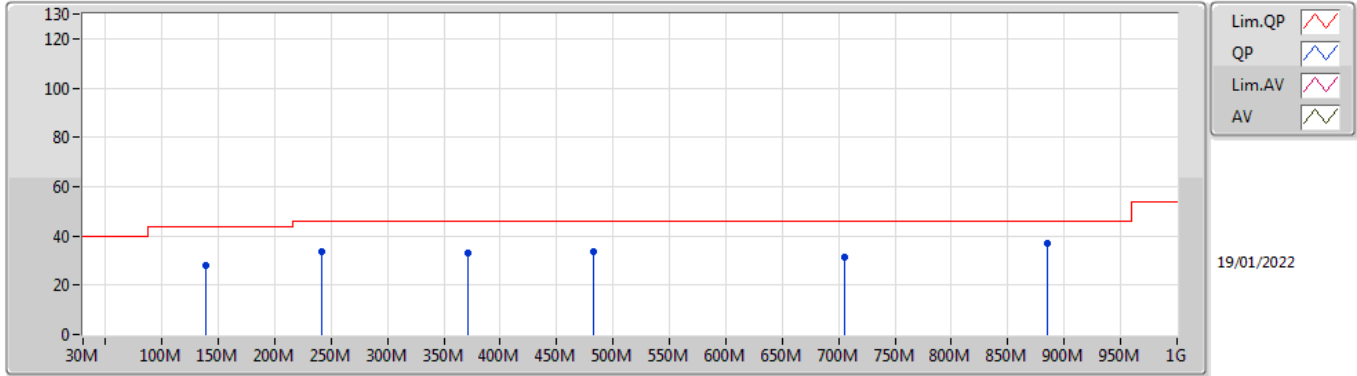

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| PK | 138.64M | 28.08 | 43.50 | -15.42 | -9.54 | 3 | Vertical | 360 | 1.00 | - | 37.62 | 16.44 | 1.63 | 27.61 |
| PK | 241.46M | 33.73 | 46.00 | -12.27 | -8.33 | 3 | Vertical | 360 | 1.00 | - | 42.06 | 16.62 | 2.12 | 27.07 |
| PK | 371.44M | 33.03 | 46.00 | -12.97 | -4.88 | 3 | Vertical | 360 | 1.00 | - | 37.91 | 20.01 | 2.63 | 27.52 |
| PK | 482.02M | 33.75 | 46.00 | -12.25 | -2.56 | 3 | Vertical | 360 | 1.00 | - | 36.31 | 22.67 | 3.02 | 28.25 |
| PK | 705.12M | 31.53 | 46.00 | -14.47 | -0.41 | 3 | Vertical | 360 | 1.00 | - | 31.94 | 24.20 | 3.61 | 28.22 |
| PK | 885.54M | 36.82 | 46.00 | -9.18 | 2.14 | 3 | Vertical | 360 | 1.00 | - | 34.68 | 25.62 | 4.08 | 27.56 |

BT-BR(1Mbps)_1TX(Port1)

2440MHz_Test Fixture

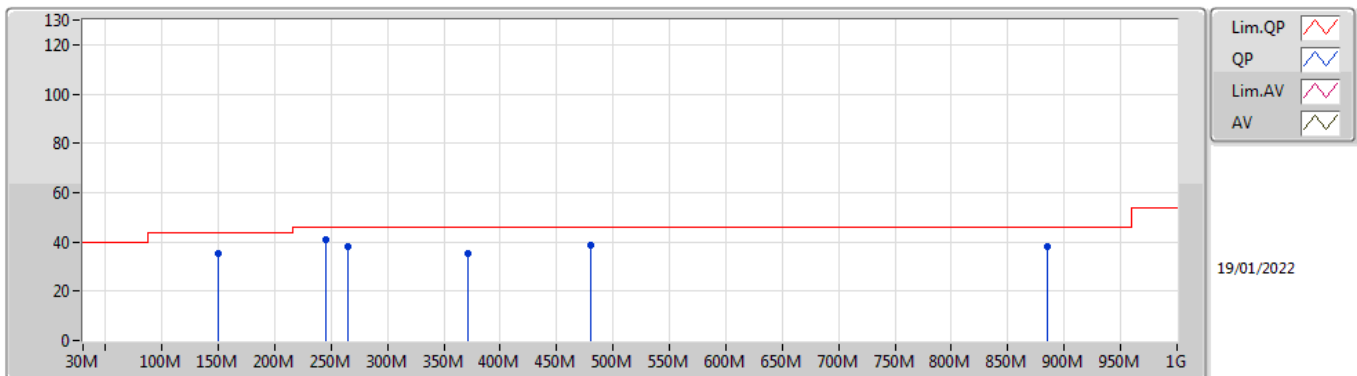

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| PK | 150.28M | 35.28 | 43.50 | -8.22 | -10.25 | 3 | Horizontal | 0 | 1.00 | - | 45.53 | 15.60 | 1.71 | 27.56 |
| PK | 245.34M | 40.98 | 46.00 | -5.02 | -7.89 | 3 | Horizontal | 0 | 1.00 | - | 48.87 | 17.03 | 2.13 | 27.05 |
| PK | 264.74M | 38.30 | 46.00 | -7.70 | -6.23 | 3 | Horizontal | 0 | 1.00 | - | 44.53 | 18.59 | 2.21 | 27.03 |
| PK | 371.44M | 35.19 | 46.00 | -10.81 | -4.88 | 3 | Horizontal | 0 | 1.00 | - | 40.07 | 20.01 | 2.63 | 27.52 |
| PK | 480.08M | 38.43 | 46.00 | -7.57 | -2.61 | 3 | Horizontal | 0 | 1.00 | - | 41.04 | 22.62 | 3.01 | 28.24 |
| PK | 885.54M | 37.88 | 46.00 | -8.12 | 2.14 | 3 | Horizontal | 0 | 1.00 | - | 35.74 | 25.62 | 4.08 | 27.56 |



Summary

| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|-------------------------|--------|------|-----------|----------------|----------------|-------------|----------|-----------|-------------|------------|----------|
| 2.4-2.4835GHz | - | - | - | - | - | - | - | - | - | - | - |
| BT-BR(1Mbps)_1TX(Port1) | Pass | PK | 2.369G | 59.44 | 74.00 | -14.56 | 3 | Vertical | 272 | 1.26 | - |
| BT-EDR(3Mbps) | Pass | PK | 2.4835G | 59.08 | 74.00 | -14.92 | 3 | Vertical | 273 | 1.00 | - |



Result


| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|-------------------------|--------|------|-----------|----------------|----------------|-------------|----------|------------|-------------|------------|----------|
| BT-BR(1Mbps)_1TX(Port1) | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | AV | 2.369G | 36.94 | 54.00 | -17.06 | 3 | Vertical | 272 | 1.26 | - |
| 2402MHz | Pass | AV | 2.402G | 85.03 | Inf | -Inf | 3 | Vertical | 272 | 1.26 | - |
| 2402MHz | Pass | PK | 2.369G | 59.44 | 74.00 | -14.56 | 3 | Vertical | 272 | 1.26 | - |
| 2402MHz | Pass | PK | 2.402G | 107.53 | Inf | -Inf | 3 | Vertical | 272 | 1.26 | - |
| 2402MHz | Pass | AV | 2.3588G | 36.69 | 54.00 | -17.31 | 3 | Horizontal | 204 | 1.00 | - |
| 2402MHz | Pass | AV | 2.402G | 86.76 | Inf | -Inf | 3 | Horizontal | 204 | 1.00 | - |
| 2402MHz | Pass | PK | 2.3588G | 59.19 | 74.00 | -14.81 | 3 | Horizontal | 204 | 1.00 | - |
| 2402MHz | Pass | PK | 2.402G | 109.26 | Inf | -Inf | 3 | Horizontal | 204 | 1.00 | - |
| 2402MHz | Pass | AV | 4.80447G | 20.80 | 54.00 | -33.20 | 3 | Vertical | 93 | 1.09 | - |
| 2402MHz | Pass | PK | 4.80447G | 43.30 | 74.00 | -30.70 | 3 | Vertical | 93 | 1.09 | - |
| 2402MHz | Pass | AV | 4.8041G | 21.14 | 54.00 | -32.86 | 3 | Horizontal | 151 | 1.51 | - |
| 2402MHz | Pass | PK | 4.8041G | 43.64 | 74.00 | -30.36 | 3 | Horizontal | 151 | 1.51 | - |
| 2440MHz | Pass | AV | 2.3772G | 36.09 | 54.00 | -17.91 | 3 | Vertical | 270 | 1.13 | - |
| 2440MHz | Pass | AV | 2.44G | 80.71 | Inf | -Inf | 3 | Vertical | 270 | 1.13 | - |
| 2440MHz | Pass | AV | 2.4892G | 35.64 | 54.00 | -18.36 | 3 | Vertical | 270 | 1.13 | - |
| 2440MHz | Pass | PK | 2.3772G | 58.59 | 74.00 | -15.41 | 3 | Vertical | 270 | 1.13 | - |
| 2440MHz | Pass | PK | 2.44G | 103.21 | Inf | -Inf | 3 | Vertical | 270 | 1.13 | - |
| 2440MHz | Pass | PK | 2.4892G | 58.14 | 74.00 | -15.86 | 3 | Vertical | 270 | 1.13 | - |
| 2440MHz | Pass | AV | 2.3744G | 35.67 | 54.00 | -18.33 | 3 | Horizontal | 360 | 1.14 | - |
| 2440MHz | Pass | AV | 2.44G | 82.19 | Inf | -Inf | 3 | Horizontal | 360 | 1.14 | - |
| 2440MHz | Pass | AV | 2.4936G | 35.20 | 54.00 | -18.80 | 3 | Horizontal | 360 | 1.14 | - |
| 2440MHz | Pass | PK | 2.3744G | 58.17 | 74.00 | -15.83 | 3 | Horizontal | 360 | 1.14 | - |
| 2440MHz | Pass | PK | 2.44G | 104.69 | Inf | -Inf | 3 | Horizontal | 360 | 1.14 | - |
| 2440MHz | Pass | PK | 2.4936G | 57.70 | 74.00 | -16.30 | 3 | Horizontal | 360 | 1.14 | - |
| 2440MHz | Pass | AV | 4.87968G | 21.18 | 54.00 | -32.82 | 3 | Vertical | 94 | 1.49 | - |
| 2440MHz | Pass | PK | 4.87968G | 43.68 | 74.00 | -30.32 | 3 | Vertical | 94 | 1.49 | - |
| 2440MHz | Pass | AV | 4.87912G | 20.25 | 54.00 | -33.75 | 3 | Horizontal | 154 | 1.50 | - |
| 2440MHz | Pass | PK | 4.87912G | 42.75 | 74.00 | -31.25 | 3 | Horizontal | 154 | 1.50 | - |
| 2480MHz | Pass | AV | 2.48G | 83.10 | Inf | -Inf | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | AV | 2.487G | 35.97 | 54.00 | -18.03 | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | PK | 2.48G | 105.60 | Inf | -Inf | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | PK | 2.487G | 58.47 | 74.00 | -15.53 | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | AV | 2.4802G | 83.33 | Inf | -Inf | 3 | Horizontal | 193 | 1.52 | - |
| 2480MHz | Pass | AV | 2.4835G | 36.53 | 54.00 | -17.47 | 3 | Horizontal | 193 | 1.52 | - |
| 2480MHz | Pass | PK | 2.4802G | 105.83 | Inf | -Inf | 3 | Horizontal | 193 | 1.52 | - |
| 2480MHz | Pass | PK | 2.4835G | 59.03 | 74.00 | -14.97 | 3 | Horizontal | 193 | 1.52 | - |
| 2480MHz | Pass | AV | 4.96044G | 23.34 | 54.00 | -30.66 | 3 | Vertical | 93 | 1.12 | - |
| 2480MHz | Pass | PK | 4.96044G | 45.84 | 74.00 | -28.16 | 3 | Vertical | 93 | 1.12 | - |
| 2480MHz | Pass | AV | 4.96026G | 22.03 | 54.00 | -31.97 | 3 | Horizontal | 335 | 2.61 | - |
| 2480MHz | Pass | PK | 4.96026G | 44.53 | 74.00 | -29.47 | 3 | Horizontal | 335 | 2.61 | - |
| BT-EDR(3Mbps) | - | - | - | - | - | - | - | - | - | - | - |
| 2402MHz | Pass | AV | 2.3844G | 36.15 | 54.00 | -17.85 | 3 | Vertical | 273 | 1.26 | - |
| 2402MHz | Pass | AV | 2.4018G | 85.25 | Inf | -Inf | 3 | Vertical | 273 | 1.26 | - |
| 2402MHz | Pass | PK | 2.3844G | 58.65 | 74.00 | -15.35 | 3 | Vertical | 273 | 1.26 | - |
| 2402MHz | Pass | PK | 2.4018G | 107.75 | Inf | -Inf | 3 | Vertical | 273 | 1.26 | - |
| 2402MHz | Pass | AV | 2.3814G | 35.89 | 54.00 | -18.11 | 3 | Horizontal | 351 | 1.00 | - |
| 2402MHz | Pass | AV | 2.4018G | 86.76 | Inf | -Inf | 3 | Horizontal | 351 | 1.00 | - |
| 2402MHz | Pass | PK | 2.3814G | 58.39 | 74.00 | -15.61 | 3 | Horizontal | 351 | 1.00 | - |
| 2402MHz | Pass | PK | 2.4018G | 109.26 | Inf | -Inf | 3 | Horizontal | 351 | 1.00 | - |
| 2402MHz | Pass | AV | 4.80258G | 20.37 | 54.00 | -33.63 | 3 | Vertical | 94 | 1.09 | - |
| 2402MHz | Pass | PK | 4.80258G | 42.87 | 74.00 | -31.13 | 3 | Vertical | 94 | 1.09 | - |
| 2402MHz | Pass | AV | 4.80386G | 20.61 | 54.00 | -33.39 | 3 | Horizontal | 174 | 1.00 | - |
| 2402MHz | Pass | PK | 4.80386G | 43.11 | 74.00 | -30.89 | 3 | Horizontal | 174 | 1.00 | - |
| 2440MHz | Pass | AV | 2.3752G | 35.68 | 54.00 | -18.32 | 3 | Vertical | 291 | 1.05 | - |
| 2440MHz | Pass | AV | 2.44G | 83.22 | Inf | -Inf | 3 | Vertical | 291 | 1.05 | - |
| 2440MHz | Pass | AV | 2.4996G | 36.29 | 54.00 | -17.71 | 3 | Vertical | 291 | 1.05 | - |
| 2440MHz | Pass | PK | 2.3752G | 58.18 | 74.00 | -15.82 | 3 | Vertical | 291 | 1.05 | - |
| 2440MHz | Pass | PK | 2.44G | 105.72 | Inf | -Inf | 3 | Vertical | 291 | 1.05 | - |
| 2440MHz | Pass | PK | 2.4996G | 58.79 | 74.00 | -15.21 | 3 | Vertical | 291 | 1.05 | - |
| 2440MHz | Pass | AV | 2.348G | 36.00 | 54.00 | -18.00 | 3 | Horizontal | 352 | 1.50 | - |



| Mode | Result | Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comments |
|---------|--------|------|-----------|----------------|----------------|-------------|----------|------------|-------------|------------|----------|
| 2440MHz | Pass | AV | 2.44G | 84.96 | Inf | -Inf | 3 | Horizontal | 352 | 1.50 | - |
| 2440MHz | Pass | AV | 2.4872G | 35.17 | 54.00 | -18.83 | 3 | Horizontal | 352 | 1.50 | - |
| 2440MHz | Pass | PK | 2.348G | 58.50 | 74.00 | -15.50 | 3 | Horizontal | 352 | 1.50 | - |
| 2440MHz | Pass | PK | 2.44G | 107.46 | Inf | -Inf | 3 | Horizontal | 352 | 1.50 | - |
| 2440MHz | Pass | PK | 2.4872G | 57.67 | 74.00 | -16.33 | 3 | Horizontal | 352 | 1.50 | - |
| 2440MHz | Pass | AV | 4.88147G | 20.88 | 54.00 | -33.12 | 3 | Vertical | 93 | 1.50 | - |
| 2440MHz | Pass | PK | 4.88147G | 43.38 | 74.00 | -30.62 | 3 | Vertical | 93 | 1.50 | - |
| 2440MHz | Pass | AV | 4.8797G | 21.57 | 54.00 | -32.43 | 3 | Horizontal | 167 | 1.00 | - |
| 2440MHz | Pass | PK | 4.8797G | 44.07 | 74.00 | -29.93 | 3 | Horizontal | 167 | 1.00 | - |
| 2480MHz | Pass | AV | 2.48G | 84.83 | Inf | -Inf | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | AV | 2.4835G | 36.58 | 54.00 | -17.42 | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | PK | 2.48G | 107.33 | Inf | -Inf | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | PK | 2.4835G | 59.08 | 74.00 | -14.92 | 3 | Vertical | 273 | 1.00 | - |
| 2480MHz | Pass | AV | 2.4798G | 84.73 | Inf | -Inf | 3 | Horizontal | 188 | 1.50 | - |
| 2480MHz | Pass | AV | 2.4835G | 36.56 | 54.00 | -17.44 | 3 | Horizontal | 188 | 1.50 | - |
| 2480MHz | Pass | PK | 2.4798G | 107.23 | Inf | -Inf | 3 | Horizontal | 188 | 1.50 | - |
| 2480MHz | Pass | PK | 2.4835G | 59.06 | 74.00 | -14.94 | 3 | Horizontal | 188 | 1.50 | - |
| 2480MHz | Pass | AV | 4.95998G | 22.86 | 54.00 | -31.14 | 3 | Vertical | 93 | 1.03 | - |
| 2480MHz | Pass | PK | 4.95998G | 45.36 | 74.00 | -28.64 | 3 | Vertical | 93 | 1.03 | - |
| 2480MHz | Pass | AV | 4.96025G | 21.72 | 54.00 | -32.28 | 3 | Horizontal | 27 | 2.89 | - |
| 2480MHz | Pass | PK | 4.96025G | 44.22 | 74.00 | -29.78 | 3 | Horizontal | 27 | 2.89 | - |

BT-BR(1Mbps)_1TX(Port1)


2402MHz_TX

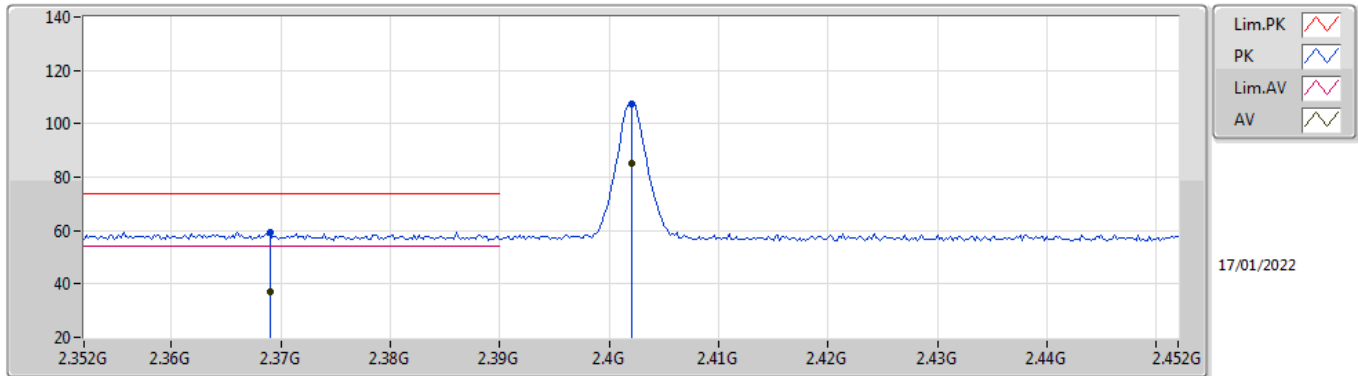

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.369G | 36.94 | 54.00 | -17.06 | 35.01 | 3 | Vertical | 272 | 1.26 | - | 1.93 | 27.76 | 7.25 | - |
| AV | 2.402G | 85.03 | Inf | -Inf | 34.95 | 3 | Vertical | 272 | 1.26 | - | 50.08 | 27.69 | 7.26 | - |
| PK | 2.369G | 59.44 | 74.00 | -14.56 | 35.01 | 3 | Vertical | 272 | 1.26 | - | 24.43 | 27.76 | 7.25 | - |
| PK | 2.402G | 107.53 | Inf | -Inf | 34.95 | 3 | Vertical | 272 | 1.26 | - | 72.58 | 27.69 | 7.26 | - |


BT-BR(1Mbps)_1TX(Port1)

2402MHz_TX

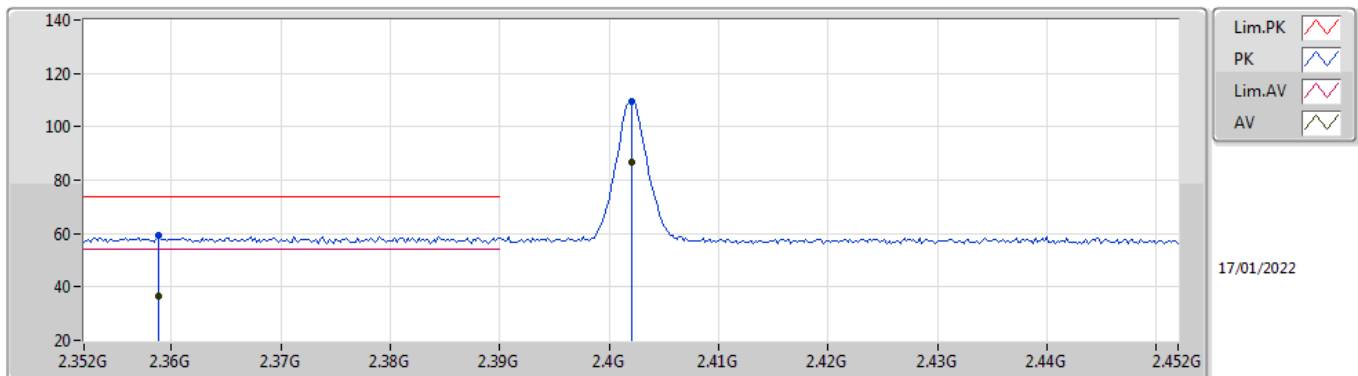


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.3588G | 36.69 | 54.00 | -17.31 | 35.02 | 3 | Horizontal | 204 | 1.00 | - | 1.67 | 27.78 | 7.24 | - |
| AV | 2.402G | 86.76 | Inf | -Inf | 34.95 | 3 | Horizontal | 204 | 1.00 | - | 51.81 | 27.69 | 7.26 | - |
| PK | 2.3588G | 59.19 | 74.00 | -14.81 | 35.02 | 3 | Horizontal | 204 | 1.00 | - | 24.17 | 27.78 | 7.24 | - |
| PK | 2.402G | 109.26 | Inf | -Inf | 34.95 | 3 | Horizontal | 204 | 1.00 | - | 74.31 | 27.69 | 7.26 | - |

BT-BR(1Mbps)_1TX(Port1)
2402MHz_TX

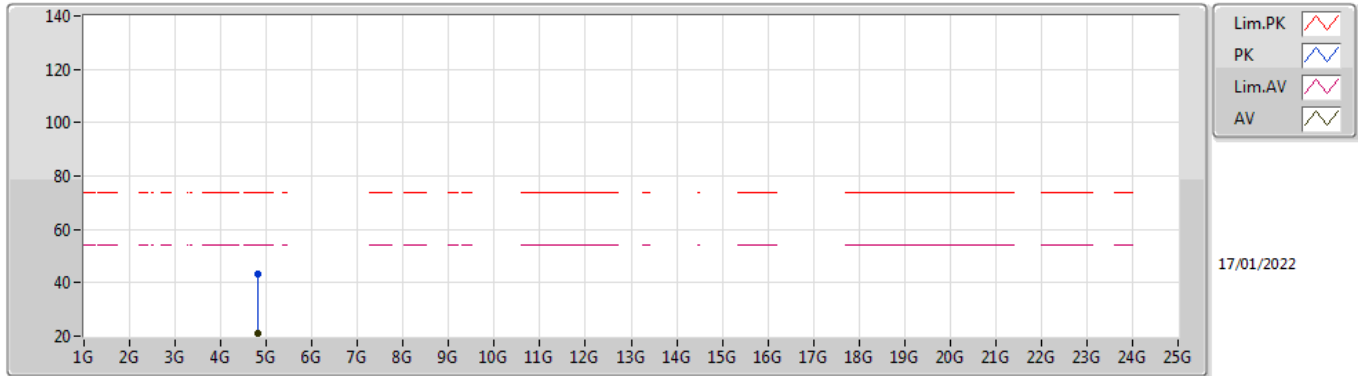

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.80447G | 20.80 | 54.00 | -33.20 | 5.82 | 3 | Vertical | 93 | 1.09 | - | 14.98 | 31.11 | 8.90 | 34.19 |
| PK | 4.80447G | 43.30 | 74.00 | -30.70 | 5.82 | 3 | Vertical | 93 | 1.09 | - | 37.48 | 31.11 | 8.90 | 34.19 |


BT-BR(1Mbps)_1TX(Port1)
2402MHz_TX

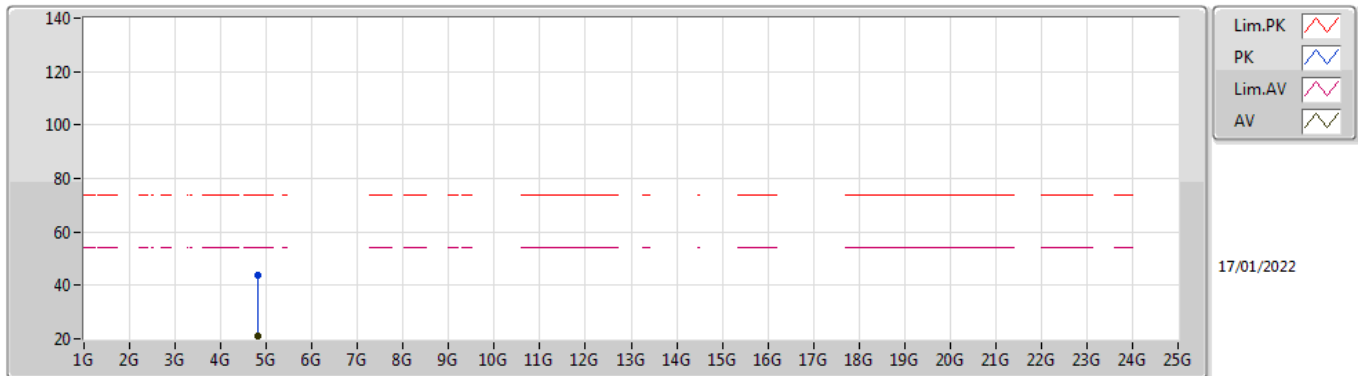

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.8041G | 21.14 | 54.00 | -32.86 | 5.82 | 3 | Horizontal | 151 | 1.51 | - | 15.32 | 31.11 | 8.90 | 34.19 |
| PK | 4.8041G | 43.64 | 74.00 | -30.36 | 5.82 | 3 | Horizontal | 151 | 1.51 | - | 37.82 | 31.11 | 8.90 | 34.19 |

BT-BR(1Mbps)_1TX(Port1)


2440MHz_TX

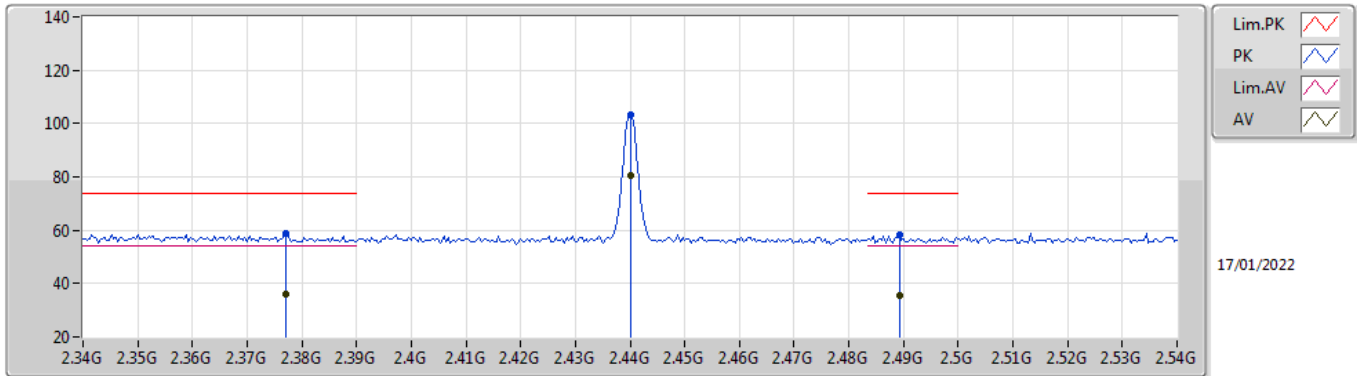

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.3772G | 36.09 | 54.00 | -17.91 | 35.00 | 3 | Vertical | 270 | 1.13 | - | 1.09 | 27.75 | 7.25 | - |
| AV | 2.44G | 80.71 | Inf | -Inf | 34.75 | 3 | Vertical | 270 | 1.13 | - | 45.96 | 27.46 | 7.29 | - |
| AV | 2.4892G | 35.64 | 54.00 | -18.36 | 34.73 | 3 | Vertical | 270 | 1.13 | - | 0.91 | 27.40 | 7.33 | - |
| PK | 2.3772G | 58.59 | 74.00 | -15.41 | 35.00 | 3 | Vertical | 270 | 1.13 | - | 23.59 | 27.75 | 7.25 | - |
| PK | 2.44G | 103.21 | Inf | -Inf | 34.75 | 3 | Vertical | 270 | 1.13 | - | 68.46 | 27.46 | 7.29 | - |
| PK | 2.4892G | 58.14 | 74.00 | -15.86 | 34.73 | 3 | Vertical | 270 | 1.13 | - | 23.41 | 27.40 | 7.33 | - |


BT-BR(1Mbps)_1TX(Port1)

2440MHz_TX

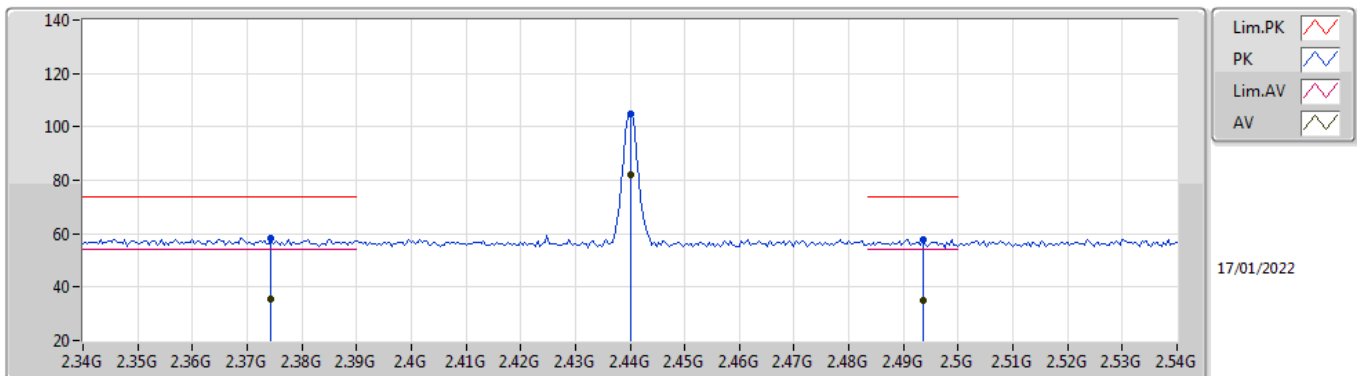


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.3744G | 35.67 | 54.00 | -18.33 | 35.00 | 3 | Horizontal | 360 | 1.14 | - | 0.67 | 27.75 | 7.25 | - |
| AV | 2.44G | 82.19 | Inf | -Inf | 34.75 | 3 | Horizontal | 360 | 1.14 | - | 47.44 | 27.46 | 7.29 | - |
| AV | 2.4936G | 35.20 | 54.00 | -18.80 | 34.73 | 3 | Horizontal | 360 | 1.14 | - | 0.47 | 27.40 | 7.33 | - |
| PK | 2.3744G | 58.17 | 74.00 | -15.83 | 35.00 | 3 | Horizontal | 360 | 1.14 | - | 23.17 | 27.75 | 7.25 | - |
| PK | 2.44G | 104.69 | Inf | -Inf | 34.75 | 3 | Horizontal | 360 | 1.14 | - | 69.94 | 27.46 | 7.29 | - |
| PK | 2.4936G | 57.70 | 74.00 | -16.30 | 34.73 | 3 | Horizontal | 360 | 1.14 | - | 22.97 | 27.40 | 7.33 | - |

BT-BR(1Mbps)_1TX(Port1)
2440MHz_TX

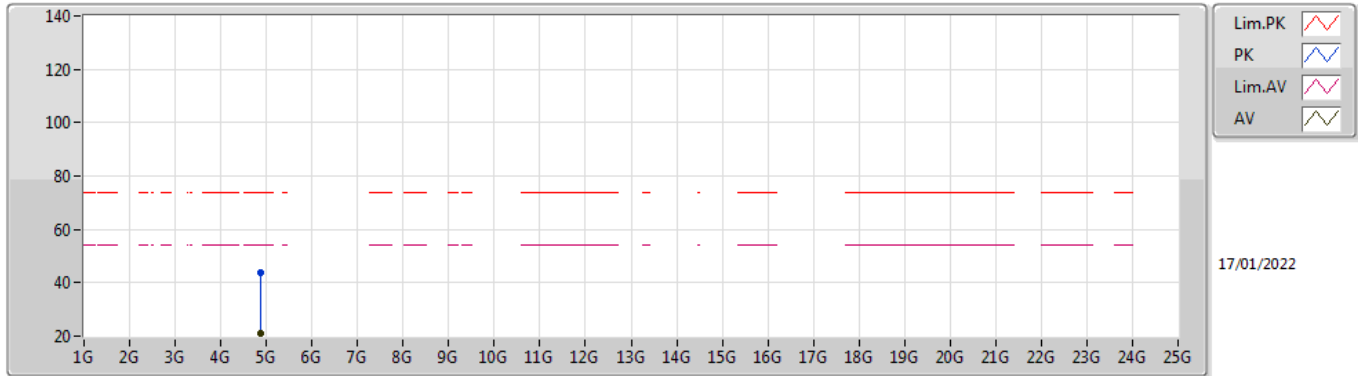

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.87968G | 21.18 | 54.00 | -32.82 | 6.00 | 3 | Vertical | 94 | 1.49 | - | 15.18 | 31.20 | 8.96 | 34.16 |
| PK | 4.87968G | 43.68 | 74.00 | -30.32 | 6.00 | 3 | Vertical | 94 | 1.49 | - | 37.68 | 31.20 | 8.96 | 34.16 |


BT-BR(1Mbps)_1TX(Port1)
2440MHz_TX

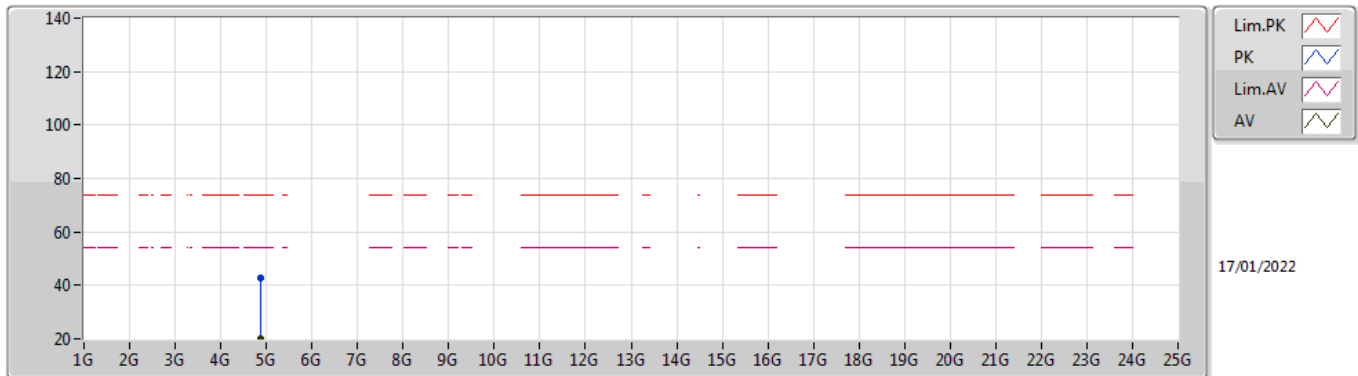

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.87912G | 20.25 | 54.00 | -33.75 | 6.00 | 3 | Horizontal | 154 | 1.50 | - | 14.25 | 31.20 | 8.96 | 34.16 |
| PK | 4.87912G | 42.75 | 74.00 | -31.25 | 6.00 | 3 | Horizontal | 154 | 1.50 | - | 36.75 | 31.20 | 8.96 | 34.16 |

BT-BR(1Mbps)_1TX(Port1)


2480MHz_TX

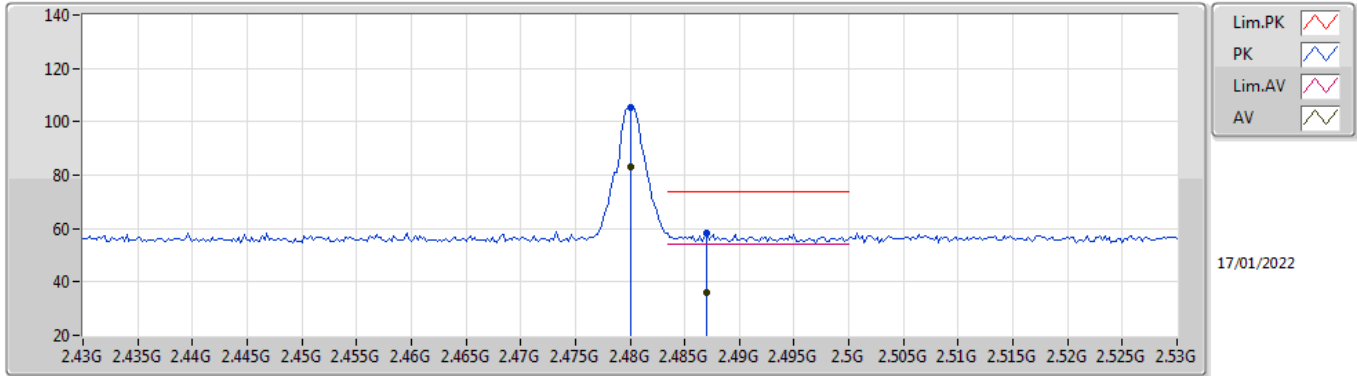

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.48G | 83.10 | Inf | -Inf | 34.72 | 3 | Vertical | 273 | 1.00 | - | 48.38 | 27.40 | 7.32 | - |
| AV | 2.487G | 35.97 | 54.00 | -18.03 | 34.73 | 3 | Vertical | 273 | 1.00 | - | 1.24 | 27.40 | 7.33 | - |
| PK | 2.48G | 105.60 | Inf | -Inf | 34.72 | 3 | Vertical | 273 | 1.00 | - | 70.88 | 27.40 | 7.32 | - |
| PK | 2.487G | 58.47 | 74.00 | -15.53 | 34.73 | 3 | Vertical | 273 | 1.00 | - | 23.74 | 27.40 | 7.33 | - |


BT-BR(1Mbps)_1TX(Port1)

2480MHz_TX

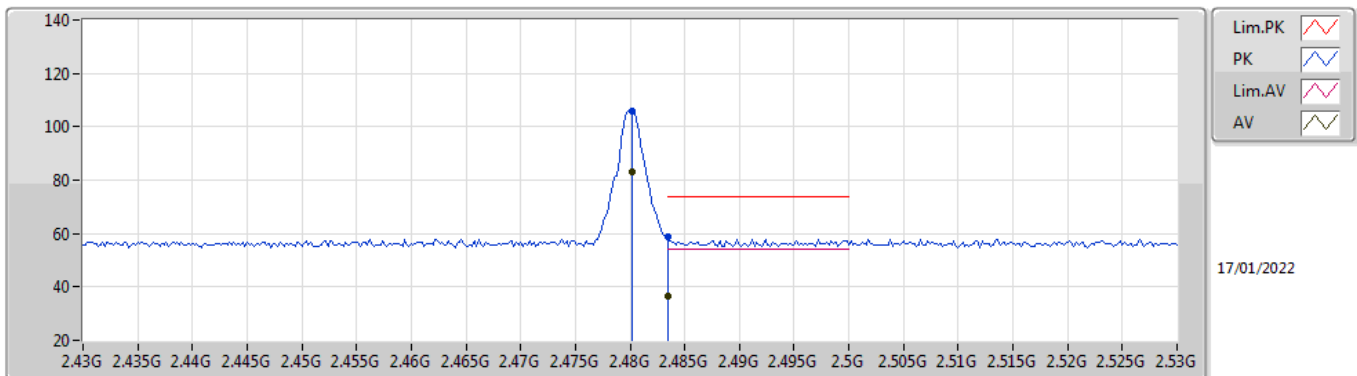


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.4802G | 83.33 | Inf | -Inf | 34.72 | 3 | Horizontal | 193 | 1.52 | - | 48.61 | 27.40 | 7.32 | - |
| AV | 2.4835G | 36.53 | 54.00 | -17.47 | 34.73 | 3 | Horizontal | 193 | 1.52 | - | 1.80 | 27.40 | 7.33 | - |
| PK | 2.4802G | 105.83 | Inf | -Inf | 34.72 | 3 | Horizontal | 193 | 1.52 | - | 71.11 | 27.40 | 7.32 | - |
| PK | 2.4835G | 59.03 | 74.00 | -14.97 | 34.73 | 3 | Horizontal | 193 | 1.52 | - | 24.30 | 27.40 | 7.33 | - |

BT-BR(1Mbps)_1TX(Port1)
2480MHz_TX

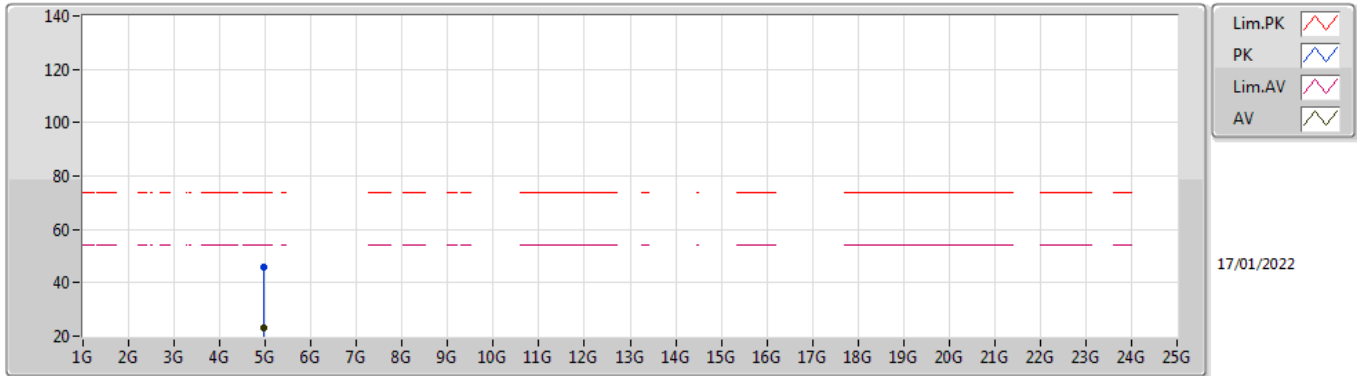

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.96044G | 23.34 | 54.00 | -30.66 | 6.32 | 3 | Vertical | 93 | 1.12 | - | 17.02 | 31.42 | 9.02 | 34.12 |
| PK | 4.96044G | 45.84 | 74.00 | -28.16 | 6.32 | 3 | Vertical | 93 | 1.12 | - | 39.52 | 31.42 | 9.02 | 34.12 |


BT-BR(1Mbps)_1TX(Port1)
2480MHz_TX

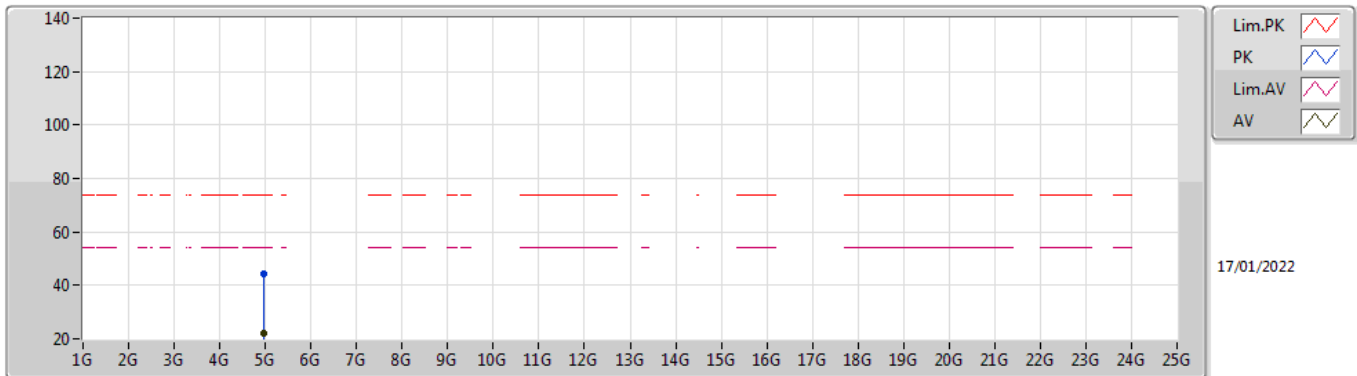

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.96026G | 22.03 | 54.00 | -31.97 | 6.32 | 3 | Horizontal | 335 | 2.61 | - | 15.71 | 31.42 | 9.02 | 34.12 |
| PK | 4.96026G | 44.53 | 74.00 | -29.47 | 6.32 | 3 | Horizontal | 335 | 2.61 | - | 38.21 | 31.42 | 9.02 | 34.12 |

BT-EDR(3Mbps)


2402MHz_TX

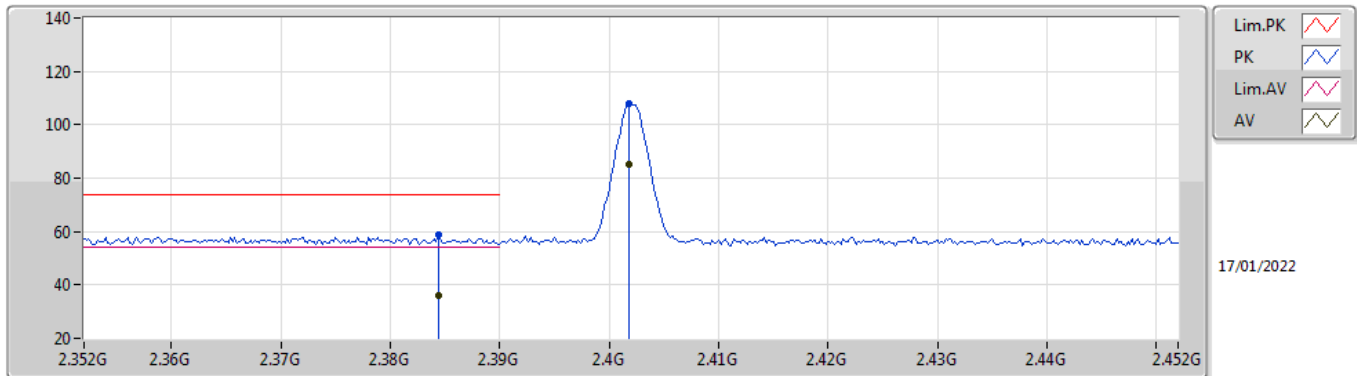

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.3844G | 36.15 | 54.00 | -17.85 | 34.98 | 3 | Vertical | 273 | 1.26 | - | 1.17 | 27.73 | 7.25 | - |
| AV | 2.4018G | 85.25 | Inf | -Inf | 34.95 | 3 | Vertical | 273 | 1.26 | - | 50.30 | 27.69 | 7.26 | - |
| PK | 2.3844G | 58.65 | 74.00 | -15.35 | 34.98 | 3 | Vertical | 273 | 1.26 | - | 23.67 | 27.73 | 7.25 | - |
| PK | 2.4018G | 107.75 | Inf | -Inf | 34.95 | 3 | Vertical | 273 | 1.26 | - | 72.80 | 27.69 | 7.26 | - |


BT-EDR(3Mbps)

2402MHz_TX

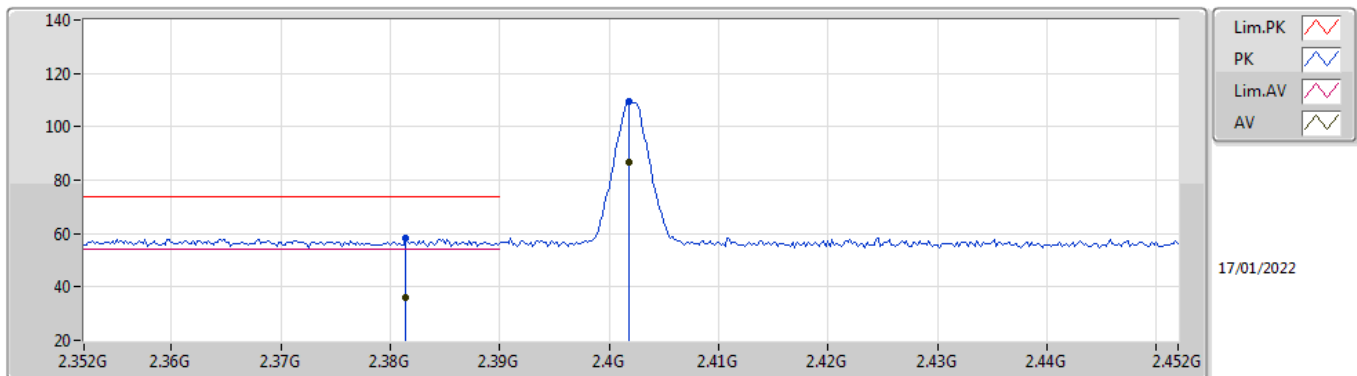


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.3814G | 35.89 | 54.00 | -18.11 | 34.99 | 3 | Horizontal | 351 | 1.00 | - | 0.90 | 27.74 | 7.25 | - |
| AV | 2.4018G | 86.76 | Inf | -Inf | 34.95 | 3 | Horizontal | 351 | 1.00 | - | 51.81 | 27.69 | 7.26 | - |
| PK | 2.3814G | 58.39 | 74.00 | -15.61 | 34.99 | 3 | Horizontal | 351 | 1.00 | - | 23.40 | 27.74 | 7.25 | - |
| PK | 2.4018G | 109.26 | Inf | -Inf | 34.95 | 3 | Horizontal | 351 | 1.00 | - | 74.31 | 27.69 | 7.26 | - |

BT-EDR(3Mbps)
2402MHz_TX

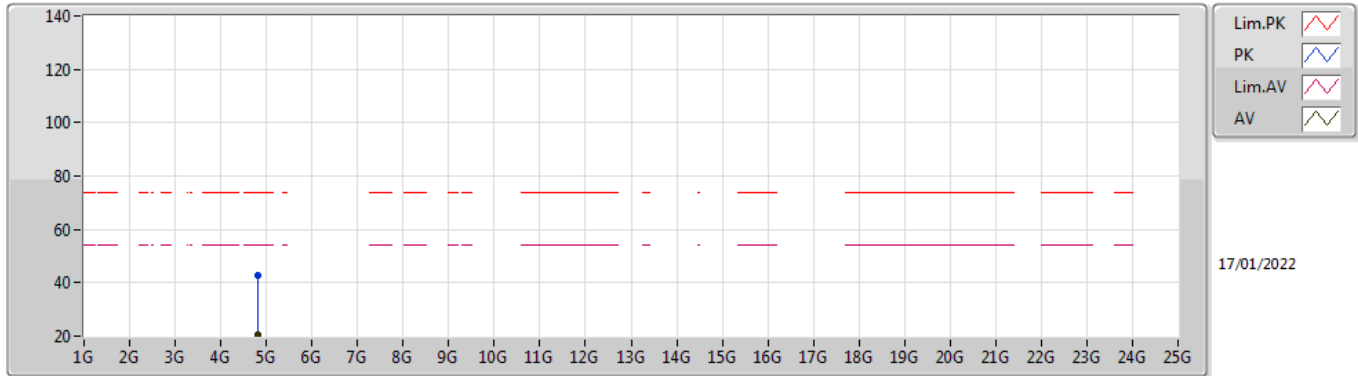

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.80258G | 20.37 | 54.00 | -33.63 | 5.82 | 3 | Vertical | 94 | 1.09 | - | 14.55 | 31.11 | 8.90 | 34.19 |
| PK | 4.80258G | 42.87 | 74.00 | -31.13 | 5.82 | 3 | Vertical | 94 | 1.09 | - | 37.05 | 31.11 | 8.90 | 34.19 |


BT-EDR(3Mbps)
2402MHz_TX

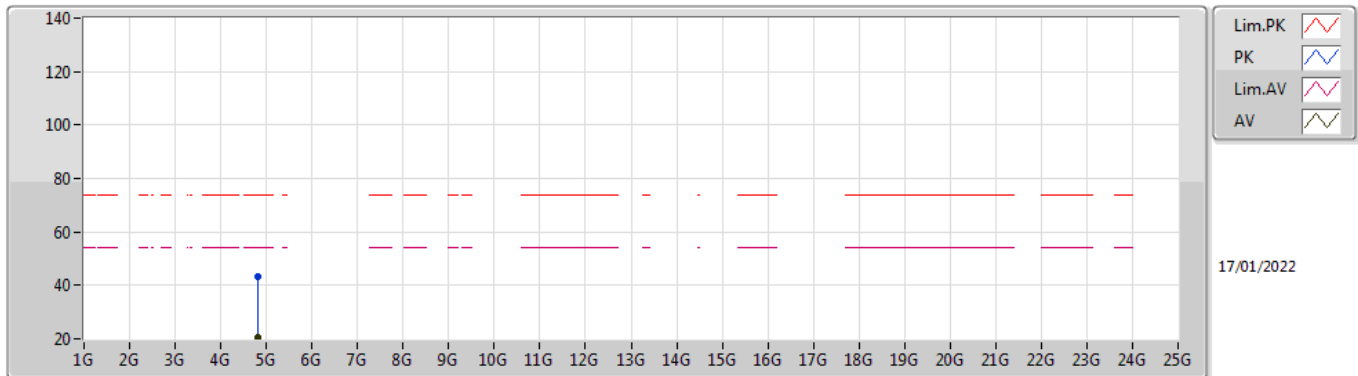

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.80386G | 20.61 | 54.00 | -33.39 | 5.82 | 3 | Horizontal | 174 | 1.00 | - | 14.79 | 31.11 | 8.90 | 34.19 |
| PK | 4.80386G | 43.11 | 74.00 | -30.89 | 5.82 | 3 | Horizontal | 174 | 1.00 | - | 37.29 | 31.11 | 8.90 | 34.19 |

BT-EDR(3Mbps)


2440MHz_TX

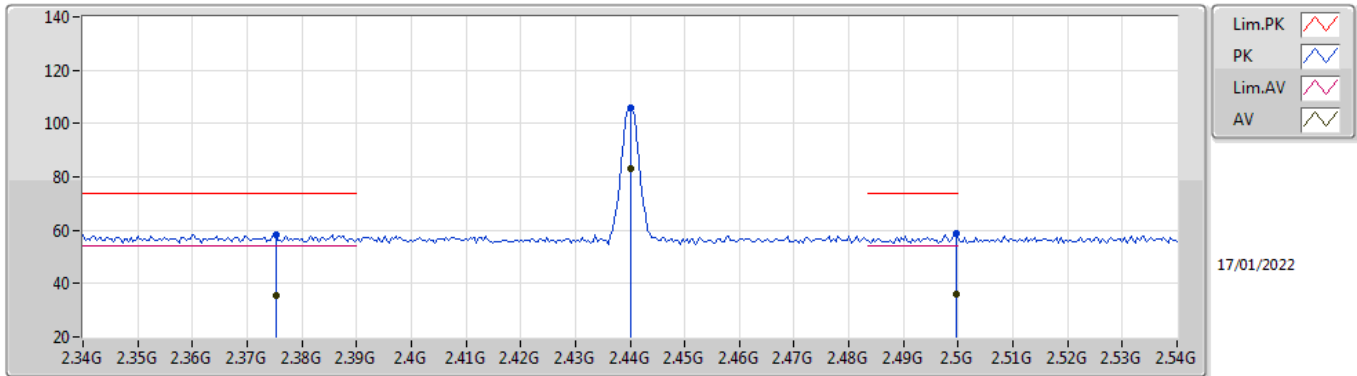

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.3752G | 35.68 | 54.00 | -18.32 | 35.00 | 3 | Vertical | 291 | 1.05 | - | 0.68 | 27.75 | 7.25 | - |
| AV | 2.44G | 83.22 | Inf | -Inf | 34.75 | 3 | Vertical | 291 | 1.05 | - | 48.47 | 27.46 | 7.29 | - |
| AV | 2.4996G | 36.29 | 54.00 | -17.71 | 34.74 | 3 | Vertical | 291 | 1.05 | - | 1.55 | 27.40 | 7.34 | - |
| PK | 2.3752G | 58.18 | 74.00 | -15.82 | 35.00 | 3 | Vertical | 291 | 1.05 | - | 23.18 | 27.75 | 7.25 | - |
| PK | 2.44G | 105.72 | Inf | -Inf | 34.75 | 3 | Vertical | 291 | 1.05 | - | 70.97 | 27.46 | 7.29 | - |
| PK | 2.4996G | 58.79 | 74.00 | -15.21 | 34.74 | 3 | Vertical | 291 | 1.05 | - | 24.05 | 27.40 | 7.34 | - |


BT-EDR(3Mbps)

2440MHz_TX

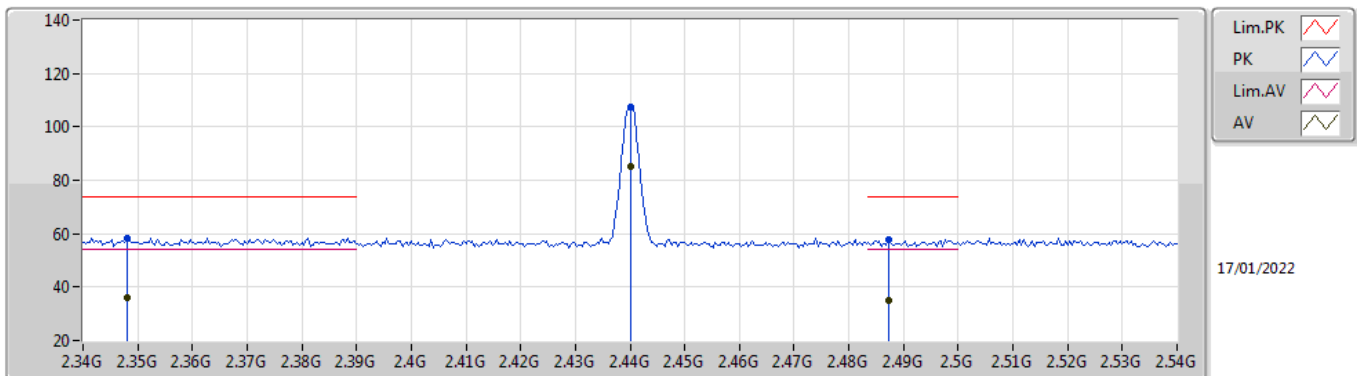


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.348G | 36.00 | 54.00 | -18.00 | 35.04 | 3 | Horizontal | 352 | 1.50 | - | 0.96 | 27.80 | 7.24 | - |
| AV | 2.44G | 84.96 | Inf | -Inf | 34.75 | 3 | Horizontal | 352 | 1.50 | - | 50.21 | 27.46 | 7.29 | - |
| AV | 2.4872G | 35.17 | 54.00 | -18.83 | 34.73 | 3 | Horizontal | 352 | 1.50 | - | 0.44 | 27.40 | 7.33 | - |
| PK | 2.348G | 58.50 | 74.00 | -15.50 | 35.04 | 3 | Horizontal | 352 | 1.50 | - | 23.46 | 27.80 | 7.24 | - |
| PK | 2.44G | 107.46 | Inf | -Inf | 34.75 | 3 | Horizontal | 352 | 1.50 | - | 72.71 | 27.46 | 7.29 | - |
| PK | 2.4872G | 57.67 | 74.00 | -16.33 | 34.73 | 3 | Horizontal | 352 | 1.50 | - | 22.94 | 27.40 | 7.33 | - |

BT-EDR(3Mbps)
2440MHz_TX

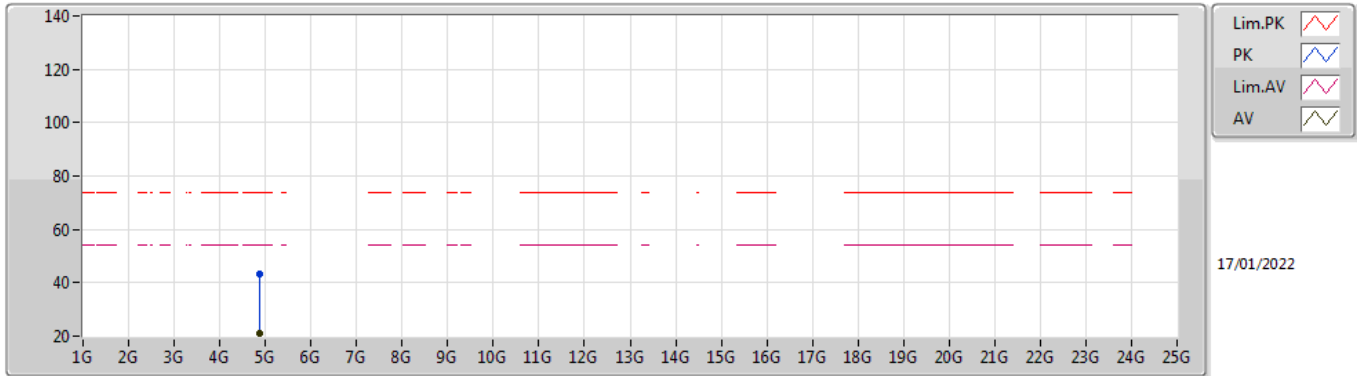

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.88147G | 20.88 | 54.00 | -33.12 | 6.00 | 3 | Vertical | 93 | 1.50 | - | 14.88 | 31.20 | 8.96 | 34.16 |
| PK | 4.88147G | 43.38 | 74.00 | -30.62 | 6.00 | 3 | Vertical | 93 | 1.50 | - | 37.38 | 31.20 | 8.96 | 34.16 |


BT-EDR(3Mbps)
2440MHz_TX

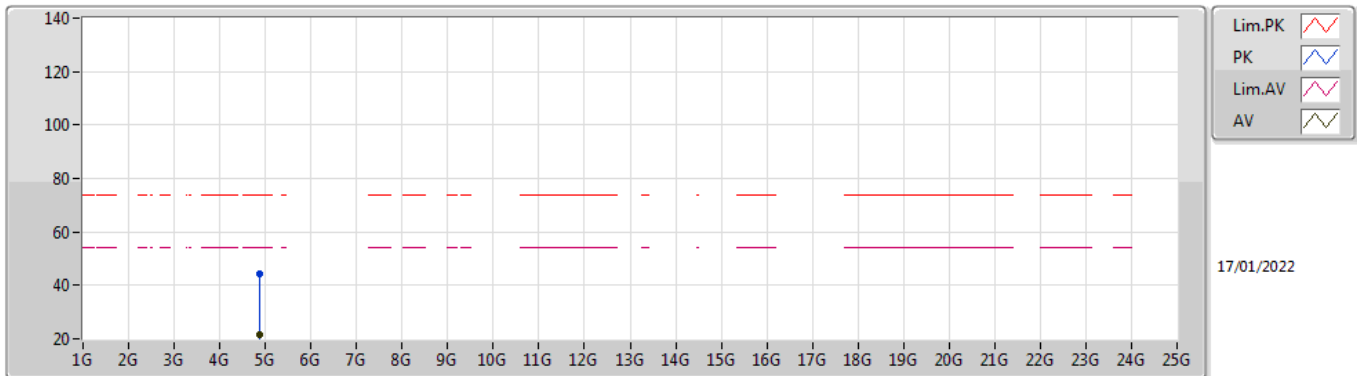

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.8797G | 21.57 | 54.00 | -32.43 | 6.00 | 3 | Horizontal | 167 | 1.00 | - | 15.57 | 31.20 | 8.96 | 34.16 |
| PK | 4.8797G | 44.07 | 74.00 | -29.93 | 6.00 | 3 | Horizontal | 167 | 1.00 | - | 38.07 | 31.20 | 8.96 | 34.16 |

BT-EDR(3Mbps)


2480MHz_TX

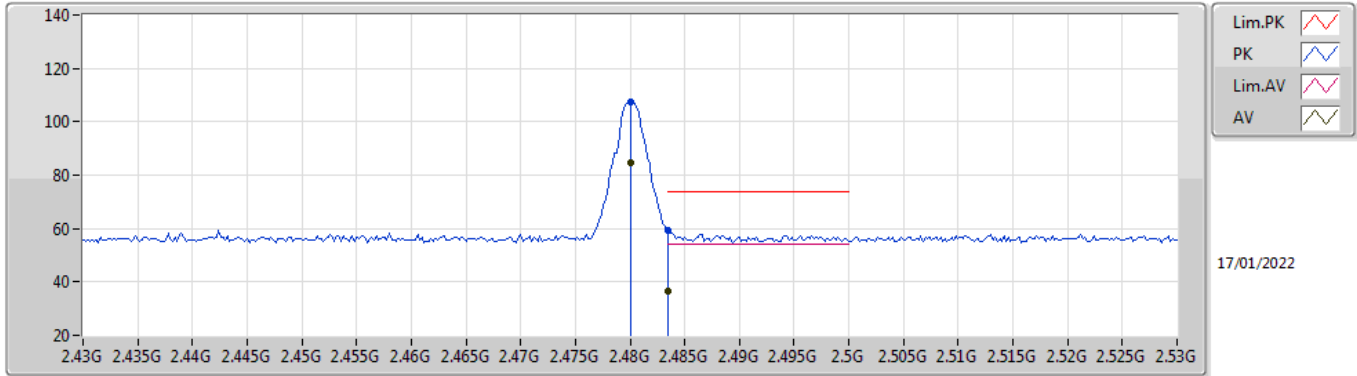

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.48G | 84.83 | Inf | -Inf | 34.72 | 3 | Vertical | 273 | 1.00 | - | 50.11 | 27.40 | 7.32 | - |
| AV | 2.4835G | 36.58 | 54.00 | -17.42 | 34.73 | 3 | Vertical | 273 | 1.00 | - | 1.85 | 27.40 | 7.33 | - |
| PK | 2.48G | 107.33 | Inf | -Inf | 34.72 | 3 | Vertical | 273 | 1.00 | - | 72.61 | 27.40 | 7.32 | - |
| PK | 2.4835G | 59.08 | 74.00 | -14.92 | 34.73 | 3 | Vertical | 273 | 1.00 | - | 24.35 | 27.40 | 7.33 | - |


BT-EDR(3Mbps)

2480MHz_TX

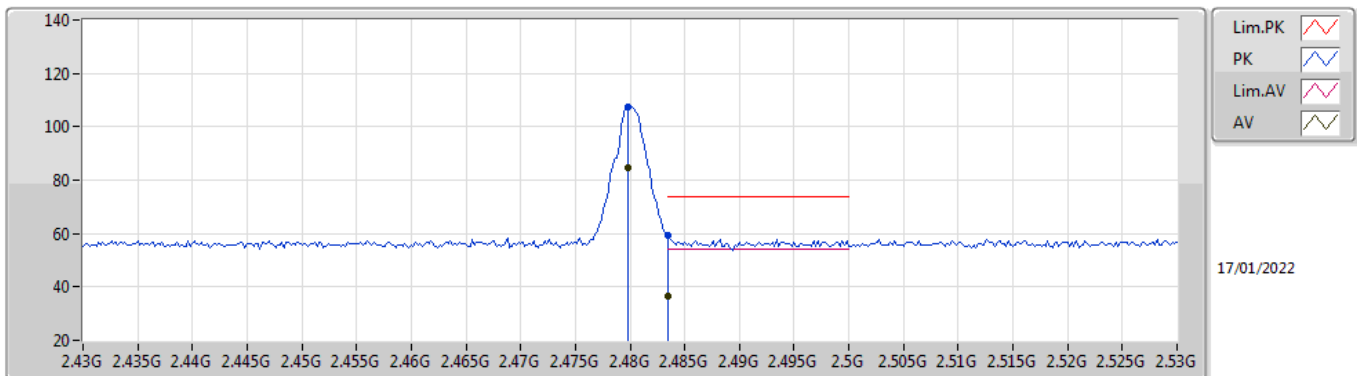


| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 2.4798G | 84.73 | Inf | -Inf | 34.72 | 3 | Horizontal | 188 | 1.50 | - | 50.01 | 27.40 | 7.32 | - |
| AV | 2.4835G | 36.56 | 54.00 | -17.44 | 34.73 | 3 | Horizontal | 188 | 1.50 | - | 1.83 | 27.40 | 7.33 | - |
| PK | 2.4798G | 107.23 | Inf | -Inf | 34.72 | 3 | Horizontal | 188 | 1.50 | - | 72.51 | 27.40 | 7.32 | - |
| PK | 2.4835G | 59.06 | 74.00 | -14.94 | 34.73 | 3 | Horizontal | 188 | 1.50 | - | 24.33 | 27.40 | 7.33 | - |

BT-EDR(3Mbps)
2480MHz_TX

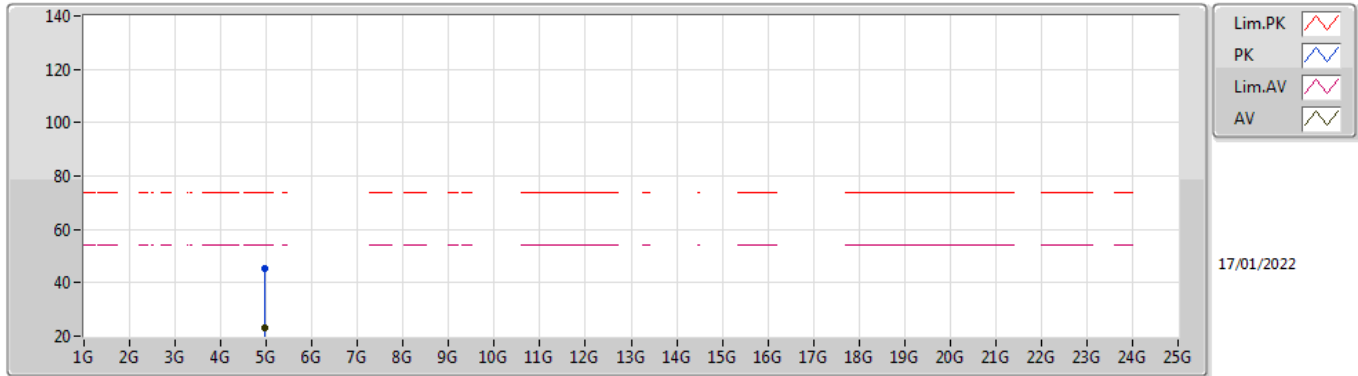

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|-----------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.95998G | 22.86 | 54.00 | -31.14 | 6.32 | 3 | Vertical | 93 | 1.03 | - | 16.54 | 31.42 | 9.02 | 34.12 |
| PK | 4.95998G | 45.36 | 74.00 | -28.64 | 6.32 | 3 | Vertical | 93 | 1.03 | - | 39.04 | 31.42 | 9.02 | 34.12 |

BT-EDR(3Mbps)
2480MHz_TX

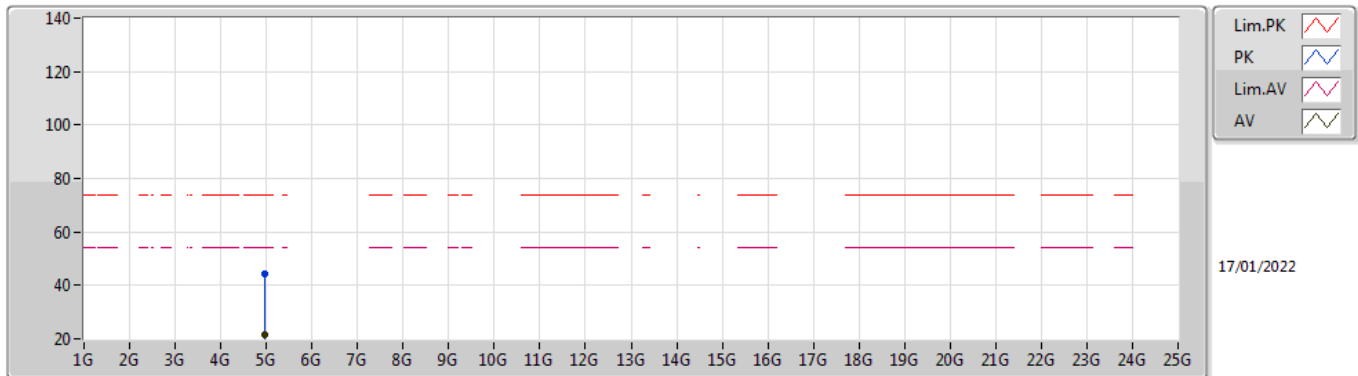

| Type | Freq (Hz) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Factor (dB) | Dist (m) | Condition | Azimuth (°) | Height (m) | Comment | Raw (dBuV) | AF (dB) | CL (dB) | PA (dB) |
|------|-----------|----------------|----------------|-------------|-------------|----------|------------|-------------|------------|---------|------------|---------|---------|---------|
| AV | 4.96025G | 21.72 | 54.00 | -32.28 | 6.32 | 3 | Horizontal | 27 | 2.89 | - | 15.40 | 31.42 | 9.02 | 34.12 |
| PK | 4.96025G | 44.22 | 74.00 | -29.78 | 6.32 | 3 | Horizontal | 27 | 2.89 | - | 37.90 | 31.42 | 9.02 | 34.12 |