



## FCC 47 CFR PART 15 SUBPART C

### TEST REPORT

For

Wireless PCI Card

**Model:**  
**WP72RL1**

**Trade Name: PRO-NETS / Speed Com+ / Jet Com**

*Issued to*

**PRO-NETS TECHNOLOGY CORPORATION**  
7F, No.95, Li-De St., Chung Ho City 235, Taipei, Taiwan R.O.C.

*Issued by*

**Compliance Certification Services Inc.**  
No. 11, Wu-Gong 6<sup>th</sup> Rd., Wugu Industrial Park,  
Taipei Hsien 248, Taiwan (R.O.C.)  
<http://www.ccsrf.com>  
[service@ccsrf.com](mailto:service@ccsrf.com)



---

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



# TABLE OF CONTENTS

- 1. TEST RESULT CERTIFICATION.....3**
- 2. EUT DESCRIPTION .....4**
- 3. TEST METHODOLOGY .....5**
  - 3.1 EUT CONFIGURATION .....5
  - 3.2 EUT EXERCISE.....5
  - 3.3 GENERAL TEST PROCEDURES.....5
  - 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....6
  - 3.5 DESCRIPTION OF TEST MODES .....7
- 4. INSTRUMENT CALIBRATION.....8**
  - 4.1 MEASURING INSTRUMENT CALIBRATION .....8
  - 4.2 MEASUREMENT EQUIPMENT USED .....9
  - 4.3 MEASUREMENT UNCERTAINTY .....10
- 5. FACILITIES AND ACCREDITATIONS .....11**
  - 5.1 FACILITIES .....11
  - 5.2 EQUIPMENT.....11
  - 5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....12
- 6. SETUP OF EQUIPMENT UNDER TEST .....13**
  - 6.1 SETUP CONFIGURATION OF EUT.....13
  - 6.2 SUPPORT EQUIPMENT .....13
- 7. FCC PART 15.247 REQUIREMENTS.....14**
  - 7.1 6DB BANDWIDTH.....14
  - 7.2 PEAK POWER.....22
  - 7.3 BAND EDGES MEASUREMENT .....24
  - 7.4 PEAK POWER SPECTRAL DENSITY .....41
  - 7.5 SPURIOUS EMISSIONS.....49
  - 7.6 RADIATED EMISSIONS .....56
  - 7.7 POWERLINE CONDUCTED EMISSIONS.....73
- APPENDIX I RADIO FREQUENCY EXPOSURE.....76**
- APPENDIX II PHOTOGRAPHS OF TEST SETUP .....79**
- APPENDIX 1 - PHOTOGRAPHS OF EUT**



# 1. TEST RESULT CERTIFICATION

**Applicant:** PRO-NETS TECHNOLOGY CORPORATION  
7F, No.95, Li-De St., Chung Ho City 235, Taipei, Taiwan R.O.C.

**Equipment Under Test:** Wireless PCI Card

**Trade Name:** PRO-NETS / Speed Com+ / Jet Com

**Model:** WP72RL1

**Date of Test:** June 28 ~ 30, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

---

Rex Lai  
Section Manager  
Compliance Certification Services Inc.

---

Gina Lo  
Section Manager  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Wireless PCI Card
<b>Trade Name</b>	PRO-NETS / Speed Com+ / Jet Com
<b>Model Number</b>	WP72RL1
<b>Model Discrepancy</b>	N/A
<b>Power Rating</b>	Power form host device.
<b>Frequency Range</b>	2412 ~ 2462 MHz
<b>Transmit Power</b>	IEEE 802.11b mode: 10.12 dBm IEEE 802.11g mode: 14.88 dBm draft 802.11n Standard-20 MHz Channel mode: 12.83 dBm draft 802.11n Wide-40 MHz Channel mode: 13.72 dBm
<b>Modulation Technique</b>	IEEE 802.11b mode: DSSS (1, 2, 5.5 and 11 Mbps) IEEE 802.11g mode: OFDM (6, 9, 12, 18, 24, 36, 48 and 54 Mbps) draft 802.11n Standard-20 MHz Channel mode: OFDM (6.5, 7.22, 13, 14.44, 19.5, 21.67, 26, 28.89, 39, 43.33, 52, 57.78, 58.5, 65.0, 72.22Mbps) draft 802.11n Wide-40 MHz Channel mode: OFDM (13.5, 15, 27, 30, 40.5, 45, 54, 60, 81, 90, 108, 120, 121.5, 135, 150Mbps)
<b>Number of Channels</b>	IEEE 802.11b/g mode: 11 Channels draft 802.11n Standard-20 MHz Channel mode: 11 Channels draft 802.11n Wide-40 MHz Channel mode: 7 Channels
<b>Antenna Specification</b>	Dipole Antenna / Gain: 2dBi

### Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **RXZ-WP72RL1** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

#### **3.1 EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2 EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3 GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



### **3.5 DESCRIPTION OF TEST MODES**

The EUT (model: WP72RL1) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

#### **IEEE 802.11b mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

#### **IEEE 802.11g mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

#### **draft 802.11n Standard-20 MHz Channel mode:**

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

#### **draft 802.11n Wide-40 MHz Channel mode:**

Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing.



## **4. INSTRUMENT CALIBRATION**

### **4.1 MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.





## 4.2 MEASUREMENT EQUIPMENT USED

### Equipment Used for Emissions Measurement

*Remark: Each piece of equipment is scheduled for calibration once a year.*

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	03/03/2011
Spectrum Analyzer	R&S	FSEK30	100264	04/13/2011
Power Meter	Agilent	E4416A	GB41291611	06/27/2011
Power Sensor	Agilent	E9327A	US40441097	06/27/2011

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	10/26/2010
EMI Test Receiver	R&S	ESCI	100064	02/04/2011
Pre-Amplifier	Mini-Circuits	ZFL-1000LN	SF350700823	01/13/2011
Pre-Amplifier	MITEQ	AFS44-00102650-42-10P-44	1415367	11/20/2010
Bilog Antenna	Sunol Sciences	JB3	A030105	09/11/2010
Horn Antenna	EMCO	3117	00055165	12/07/2010
Loop Antenna	EMCO	6502	8905/2356	05/27/2011
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Site NSA	CCS	N/A	N/A	12/31/2010
Test S/W	EZ-EMC (CCS-3A1RE)			

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESHS30	828144/003	12/06/2010
LISN	EMCO	3825/2	9106-1809	05/02/2011
LISN	SCHAFFNER	NNB 41	03/10013	12/03/2010



### 4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.6202
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0606
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9979
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5790
3M Semi Anechoic Chamber / 8G~18G	+/- 2.5928
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7212
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9520

**Remark:** *This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.*



## 5. FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

### 5.2 EQUIPMENT




Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	PC	HP	dx7510	SGH947PR2D	FCC DoC	N/A	Unshielded, 1.8m
2	LCD Monitor	DELL	2407WFPb	CN-0FC255-46633-675-22TJS	FCC DoC	Shielded, 1.8m with 2 cores	Unshielded, 1.8m
3	USB Mouse	DELL	MO56UO	408031121	FCC DoC	Shielded, 1.8m	N/A
4	USB Mouse	GIGABYTE	GK-KM6150	094425000872	FCC DoC	Shielded, 1.5m	N/A
5	USB Keyboard	DELL	Sk-8115	N/A	FCC DoC	Shielded, 1.8m	N/A
6	USB Keyboard	GIGABYTE	GK-KM6150	094425002032	FCC DoC	Shielded, 1.6m	N/A
7	Printer	EPSON	STYLUS C60	DR3K039633	FCC DoC	Shielded, 1.8m	Unshielded, 1.8m
8	Modem	ACEEX	DM-1414	0405026757	IFAXDM1414	Shielded, 1.8m	Unshielded, 1.8m

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1 6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### TEST RESULTS

*No non-compliance noted*



**Test Data**

**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	10000	>500	PASS
Mid	2437	10000		PASS
High	2462	10250		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16500		PASS
High	2462	16500		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16420	>500	PASS
Mid	2437	16330		PASS
High	2462	16330		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	6dB Bandwidth (kHz)	Limit (kHz)	Result
Low	2422	33250	>500	PASS
Mid	2437	33250		PASS
High	2452	33330		PASS




### IEEE 802.11b mode

### 6dB Bandwidth (CH Low)

Agilent

R T

Δ Mkr1 10.00 MHz  
3.07 dB

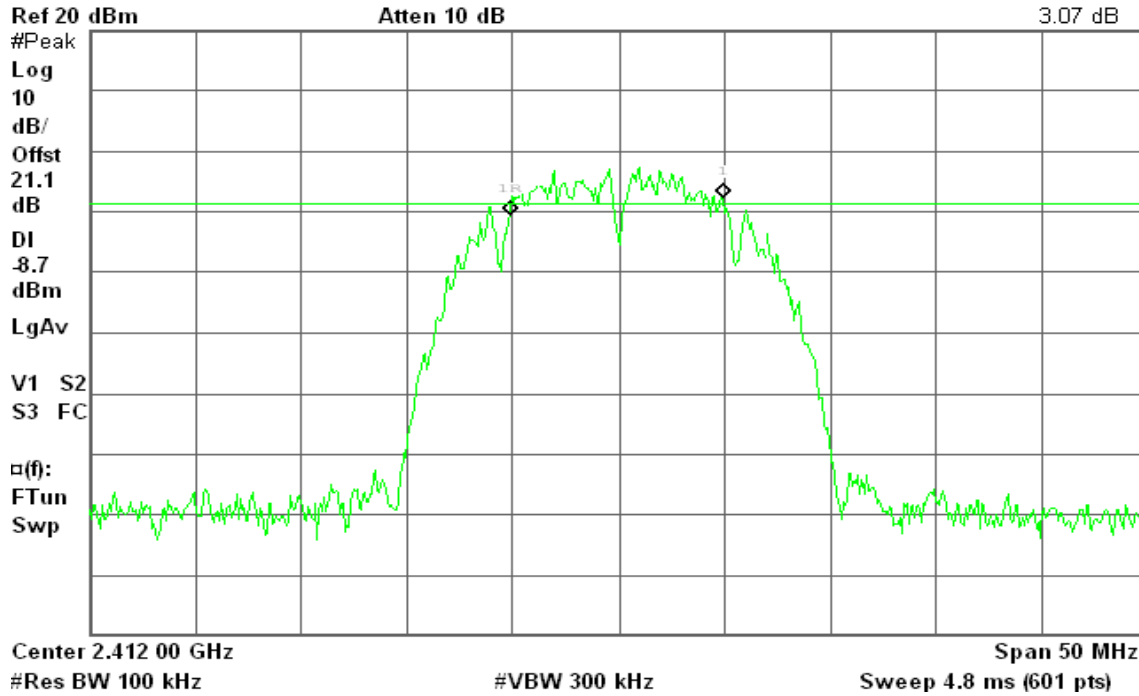


### 6dB Bandwidth (CH Mid)

Agilent

R T

Δ Mkr1 10.00 MHz  
-0.40 dB

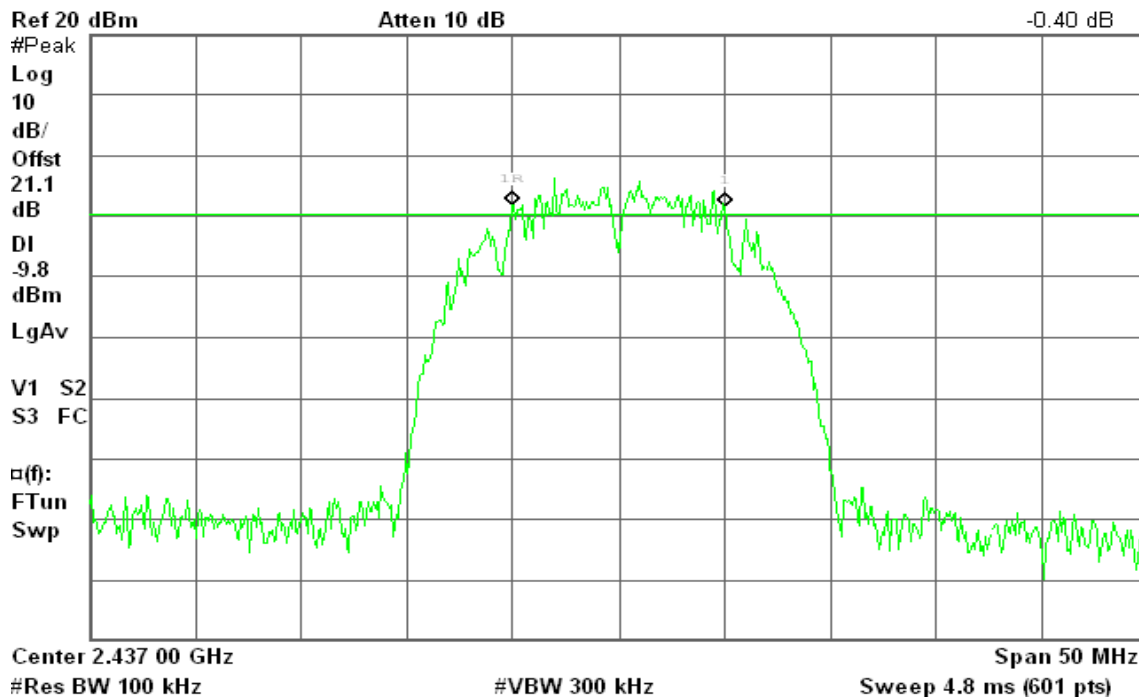






### 6dB Bandwidth (CH High)

Agilent

R L

Δ Mkr1 10.25 MHz  
0.73 dB

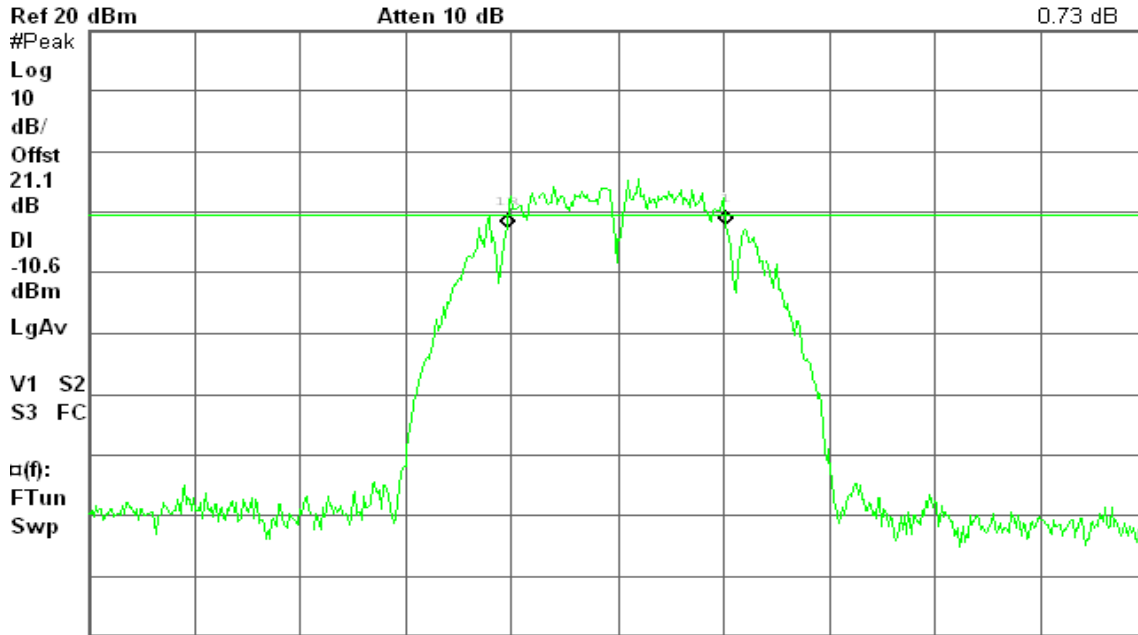

Center 2.462 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)


### IEEE 802.11g mode

### 6dB Bandwidth (CH Low)

Agilent

R T

Δ Mkr1 16.50 MHz  
0.06 dB

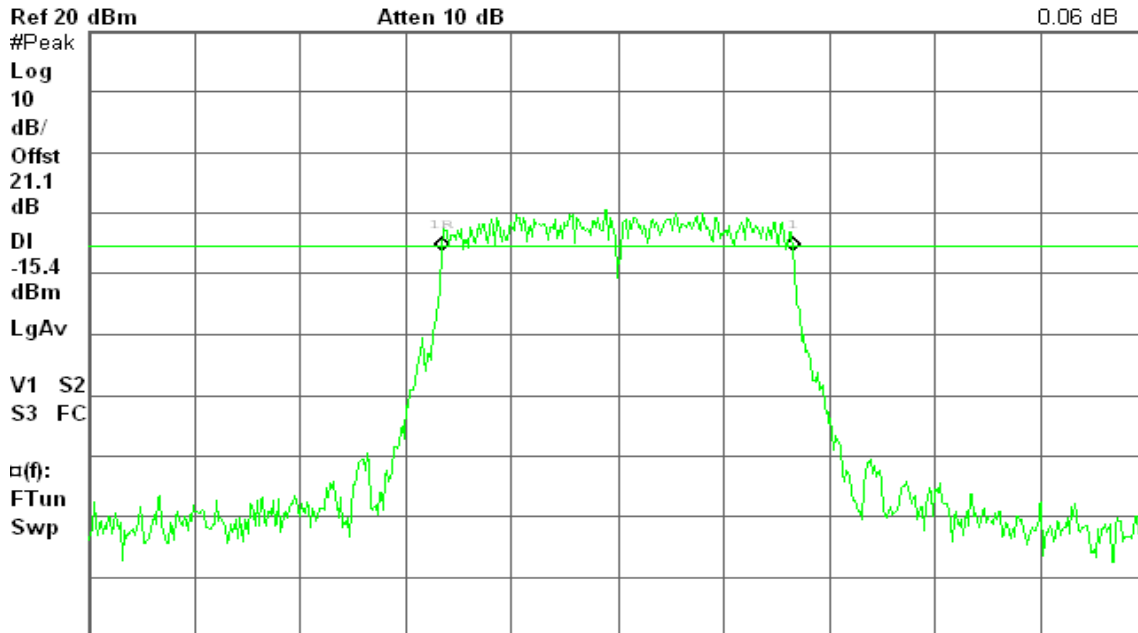

Center 2.412 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)




### 6dB Bandwidth (CH Mid)

Agilent

R T

Δ Mkr1 16.50 MHz  
-0.53 dB

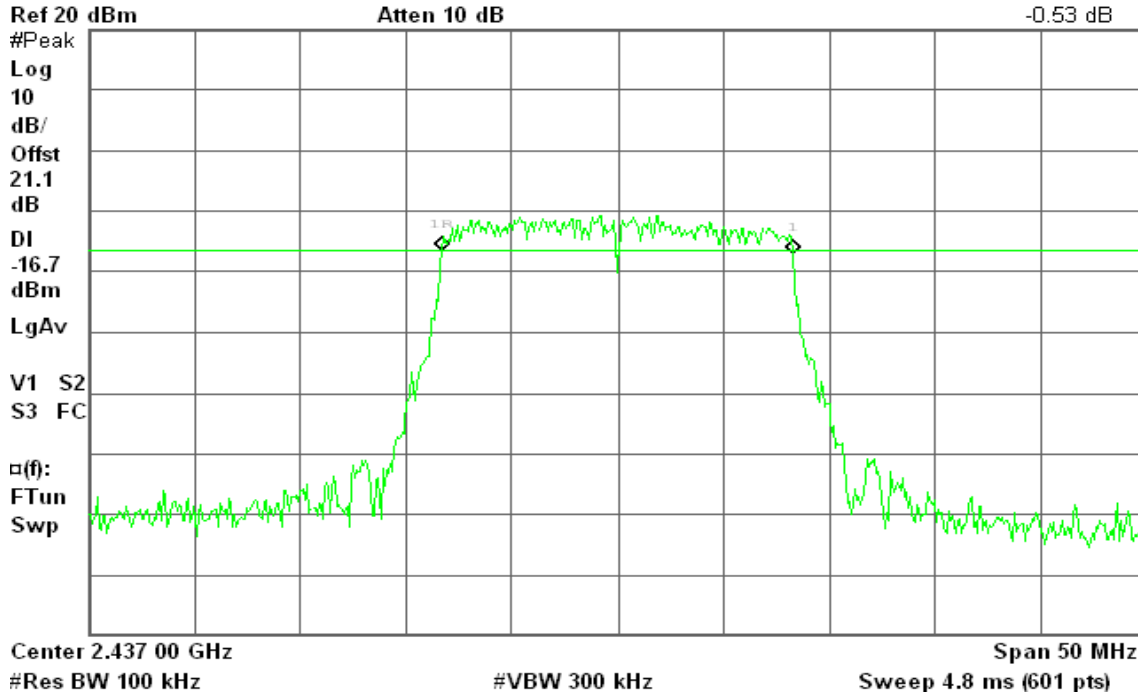


### 6dB Bandwidth (CH High)

Agilent

R T


Δ Mkr1 16.50 MHz  
-0.49 dB

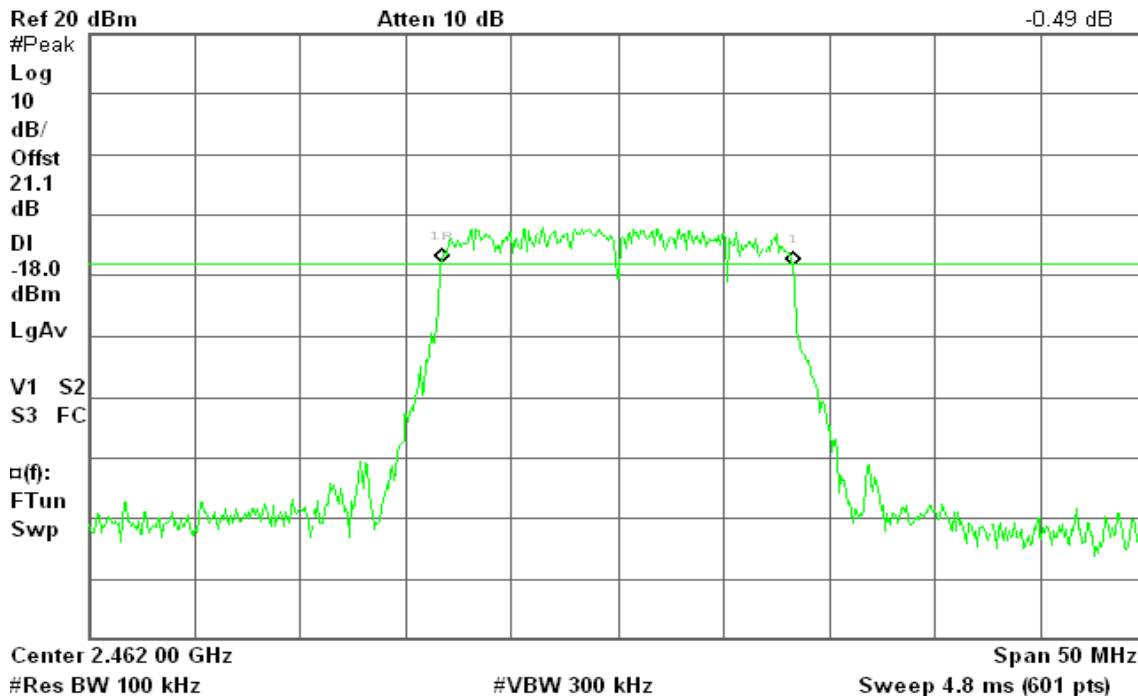




### draft 802.11n Standard-20 MHz Channel mode

### 6dB Bandwidth (CH Low)

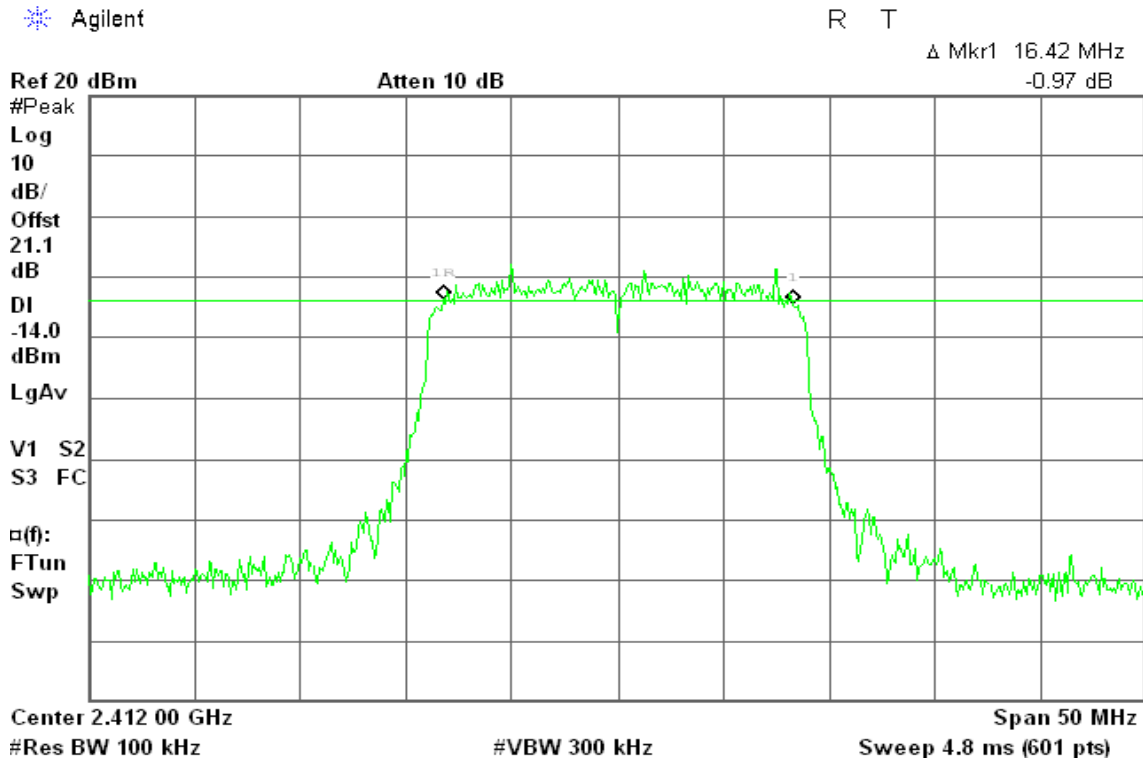

### 6dB Bandwidth (CH Mid)

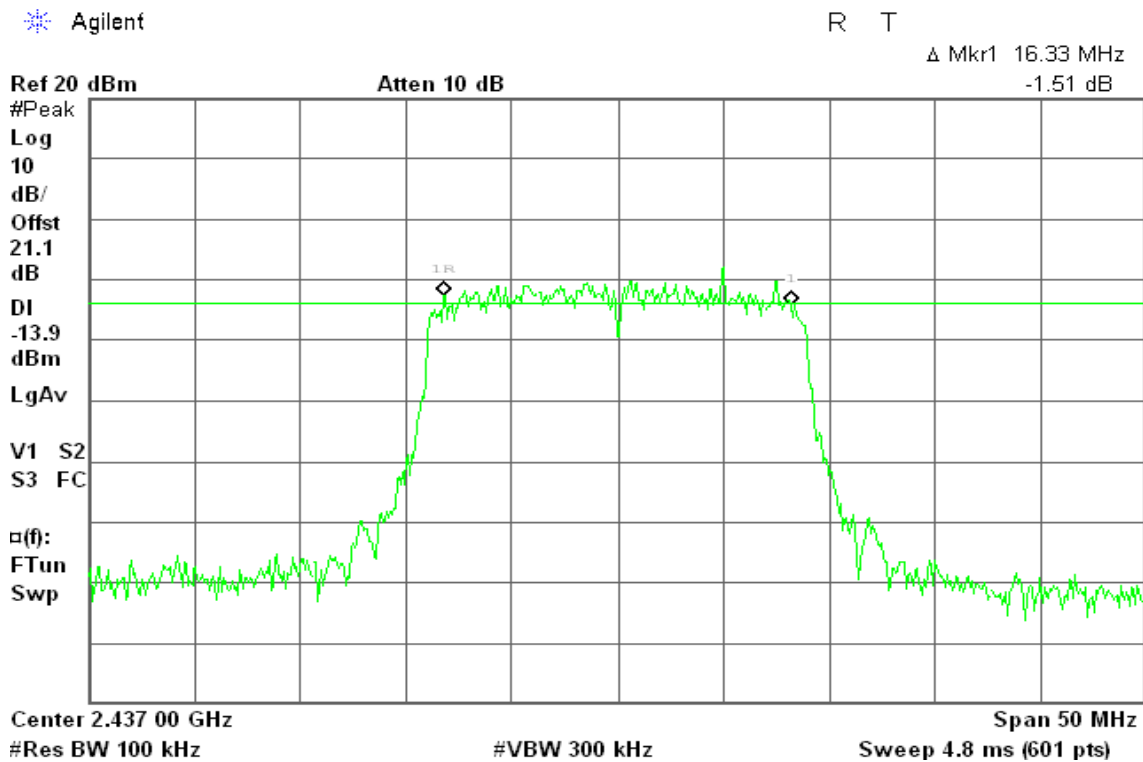




### 6dB Bandwidth (CH High)

Agilent

R T

Δ Mkr1 16.33 MHz  
-0.19 dB

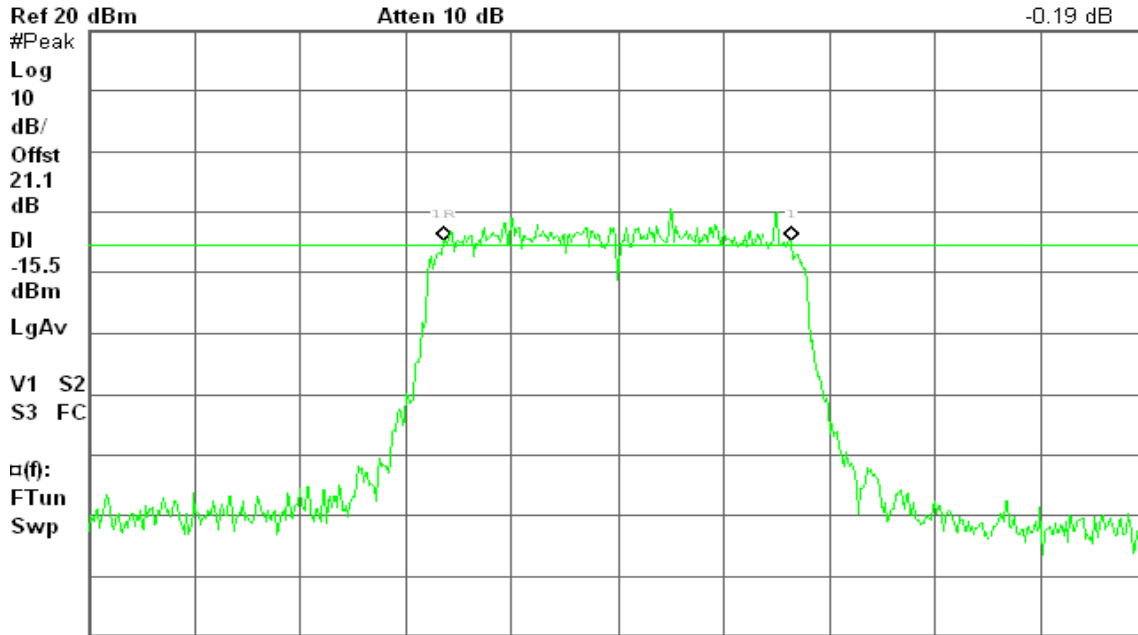

Center 2.462 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)


draft 802.11n Wide-40 MHz Channel mode

### 6dB Bandwidth (CH Low)

Agilent

R L

Δ Mkr1 33.25 MHz  
-0.22 dB

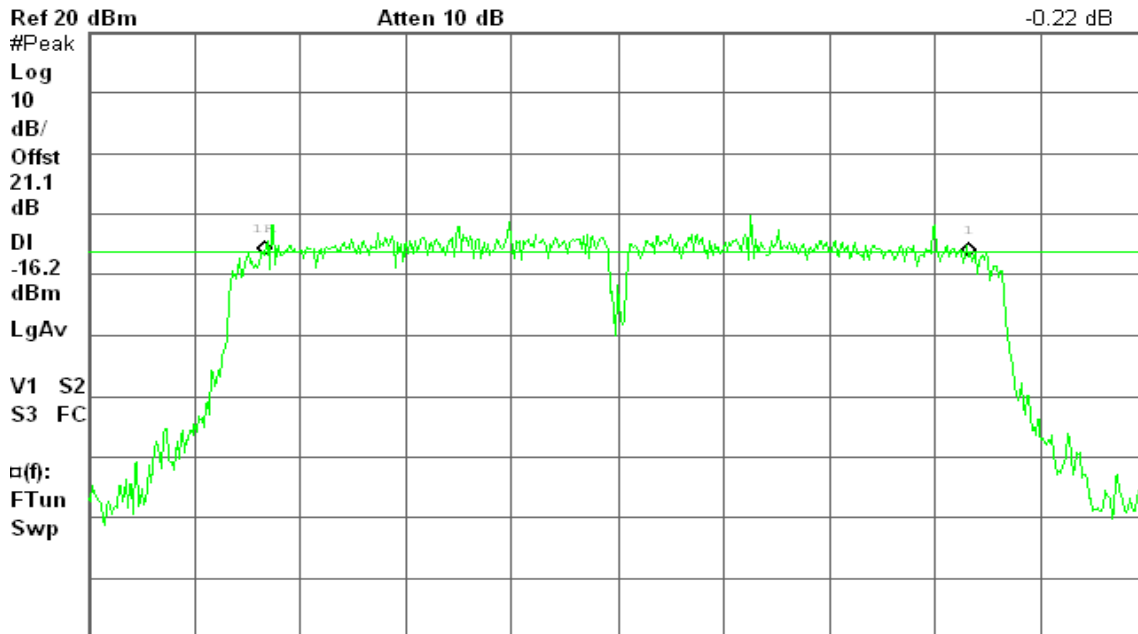

Center 2.422 00 GHz Span 50 MHz  
#Res BW 100 kHz #VBW 300 kHz Sweep 4.8 ms (601 pts)




### 6dB Bandwidth (CH Mid)

Agilent

R L

Δ Mkr1 33.25 MHz  
-0.49 dB

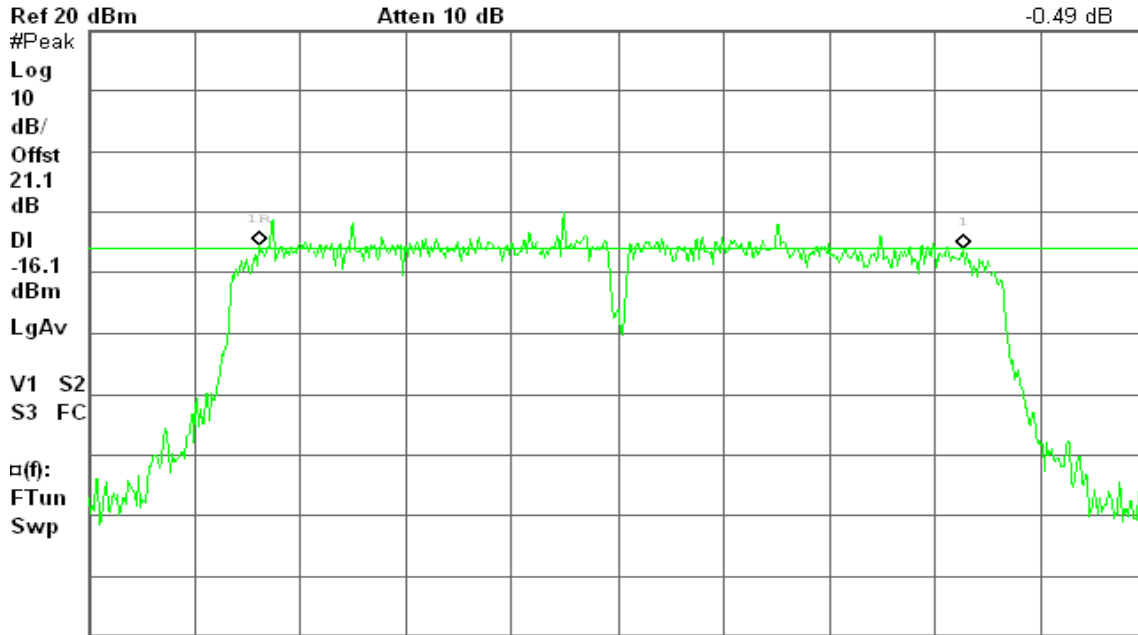

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz


Sweep 4.8 ms (601 pts)

### 6dB Bandwidth (CH High)

Agilent

R T

Δ Mkr1 33.33 MHz  
0.95 dB

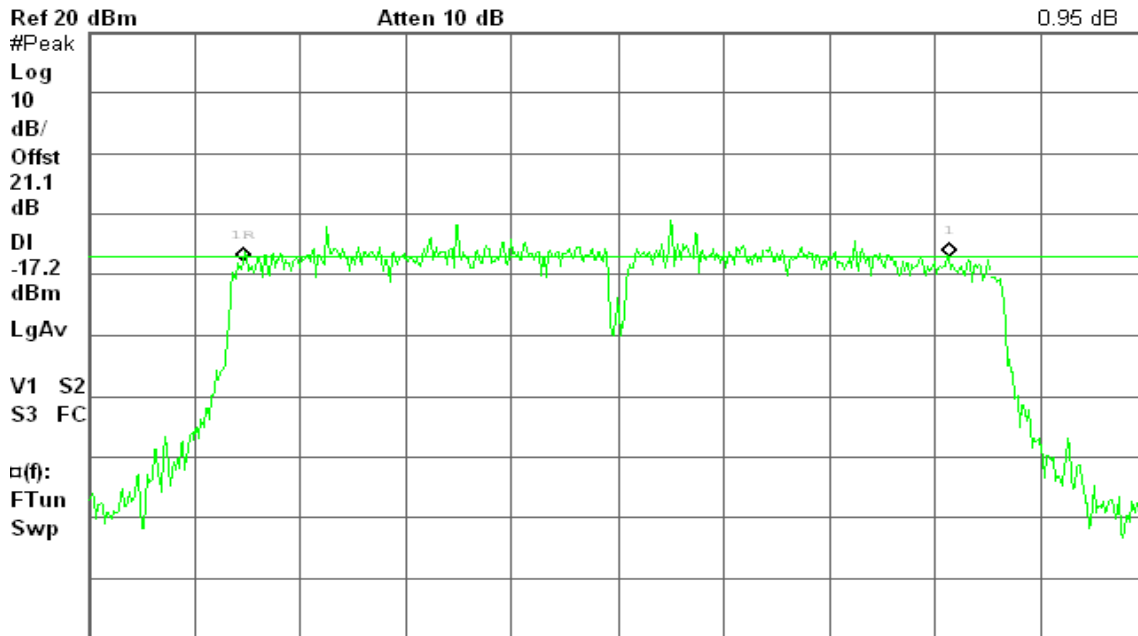

Center 2.452 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 4.8 ms (601 pts)


## 7.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### Test Configuration

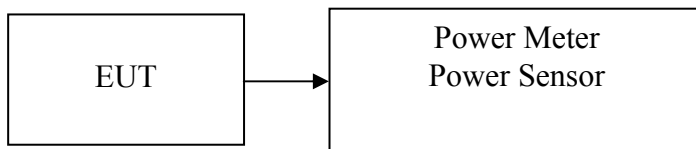

### TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	10.12	0.0103	1.00	PASS
Mid	2437	9.31	0.0085		PASS
High	2462	8.14	0.0065		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.88	0.0308	1.00	PASS
Mid	2437	13.62	0.0230		PASS
High	2462	12.56	0.0180		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	12.83	0.0192	1.00	PASS
Mid	2437	12.55	0.0180		PASS
High	2462	10.52	0.0113		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**


Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2422	13.72	0.0236	1.00	PASS
Mid	2437	13.16	0.0207		PASS
High	2452	12.39	0.0173		PASS

## 7.3 BAND EDGES MEASUREMENT

### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

### Test Configuration

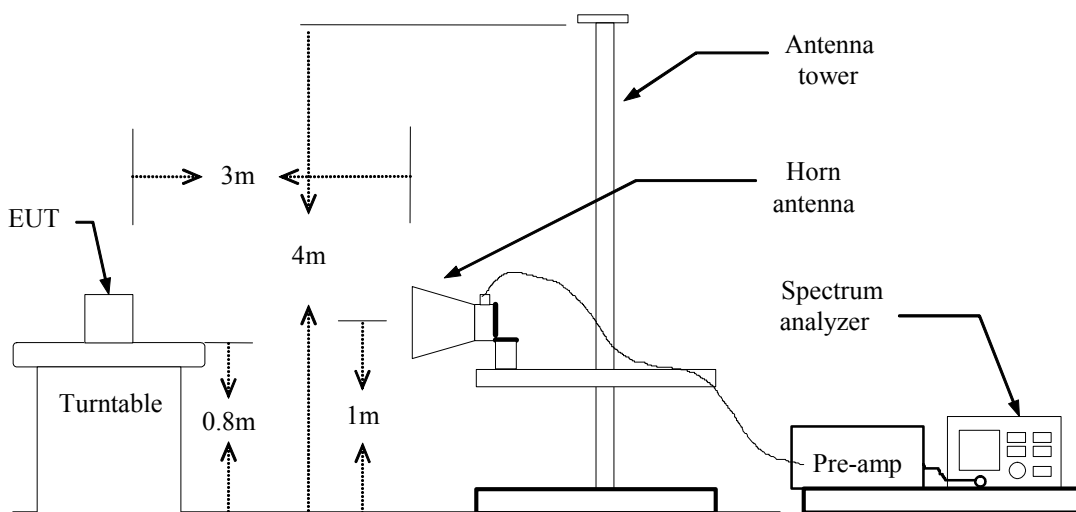

### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### TEST RESULTS

Refer to attach spectrum analyzer data chart.





### Band Edges (IEEE 802.11b mode / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 16:03:28 Jun 28, 2010

R T

Mkr1 2.371 2 GHz  
60.03 dBμV

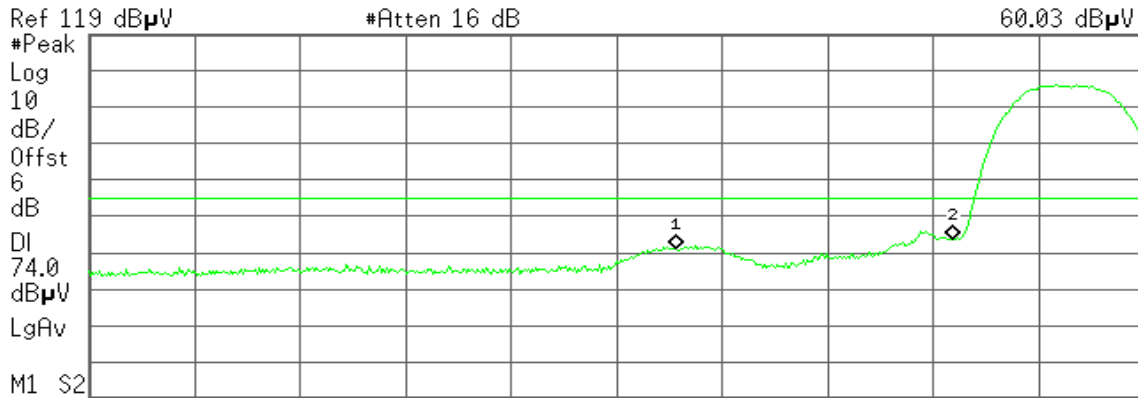

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.371 2 GHz	60.03 dBμU
2	(1)	Freq	2.400 0 GHz	62.69 dBμU


Detector mode: Average

Polarity: Vertical

Agilent 16:03:02 Jun 28, 2010

R T

Mkr1 2.371 2 GHz  
52.83 dBμV

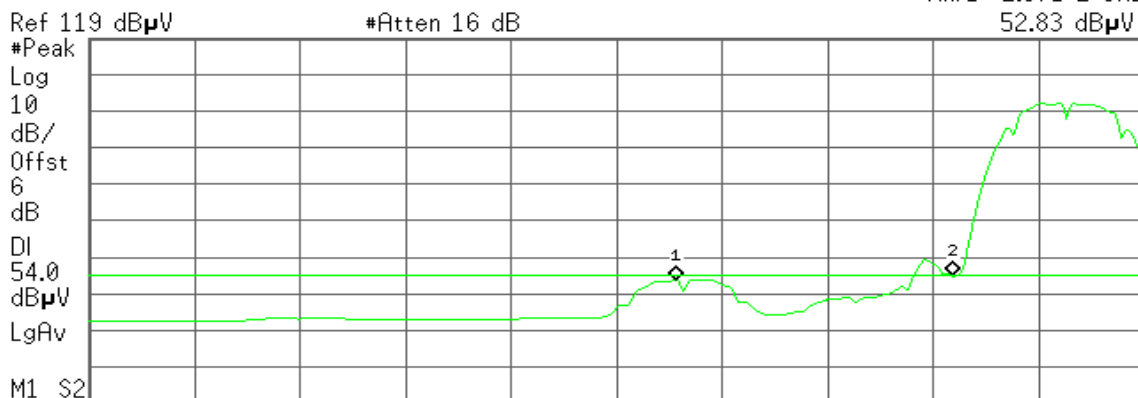

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.371 2 GHz	52.83 dBμU
2	(1)	Freq	2.400 0 GHz	53.83 dBμU




Detector mode: Peak

Polarity: Horizontal

Agilent 16:11:31 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
53.13 dBµV

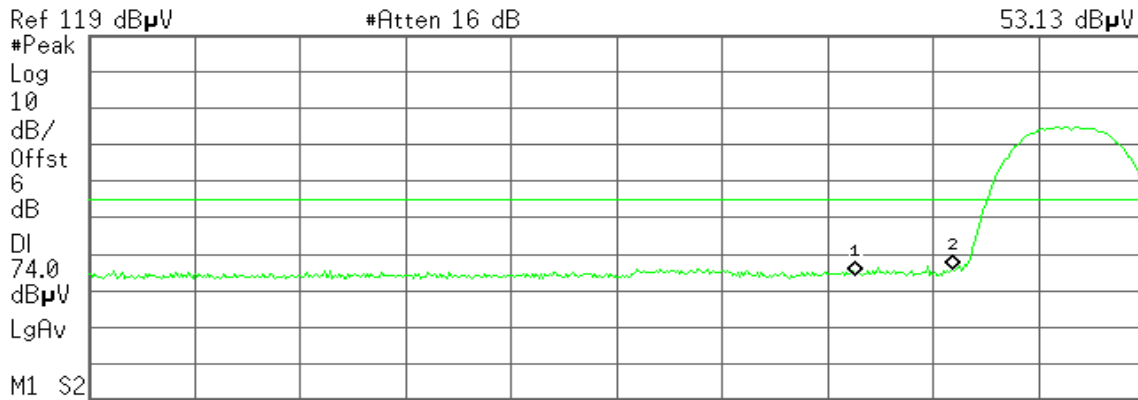

Start 2.310 0 GHz Stop 2.420 0 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	53.13 dBµU
2	(1)	Freq	2.400 0 GHz	54.86 dBµU


Detector mode: Average

Polarity: Horizontal

Agilent 16:12:07 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
41.46 dBµV

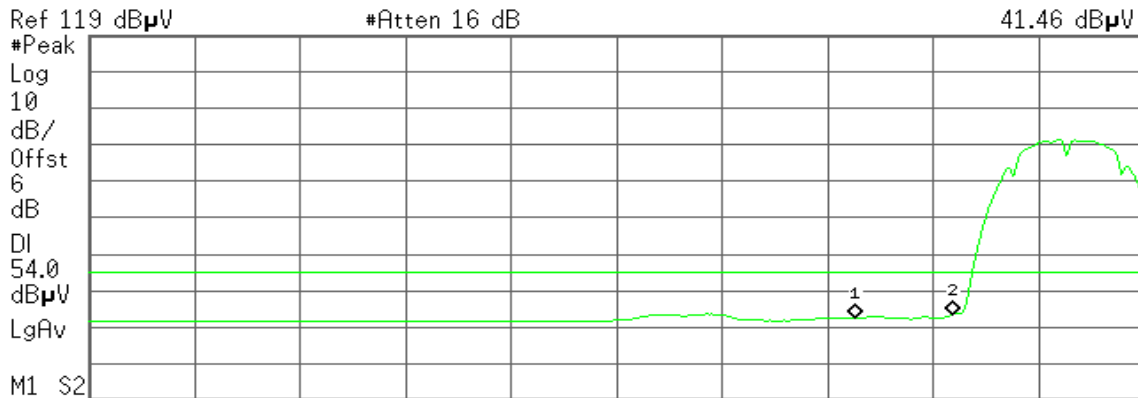

Start 2.310 0 GHz Stop 2.420 0 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	41.46 dBµU
2	(1)	Freq	2.400 0 GHz	42.56 dBµU



### Band Edges (IEEE 802.11b mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 16:43:10 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
56.03 dB $\mu$ V

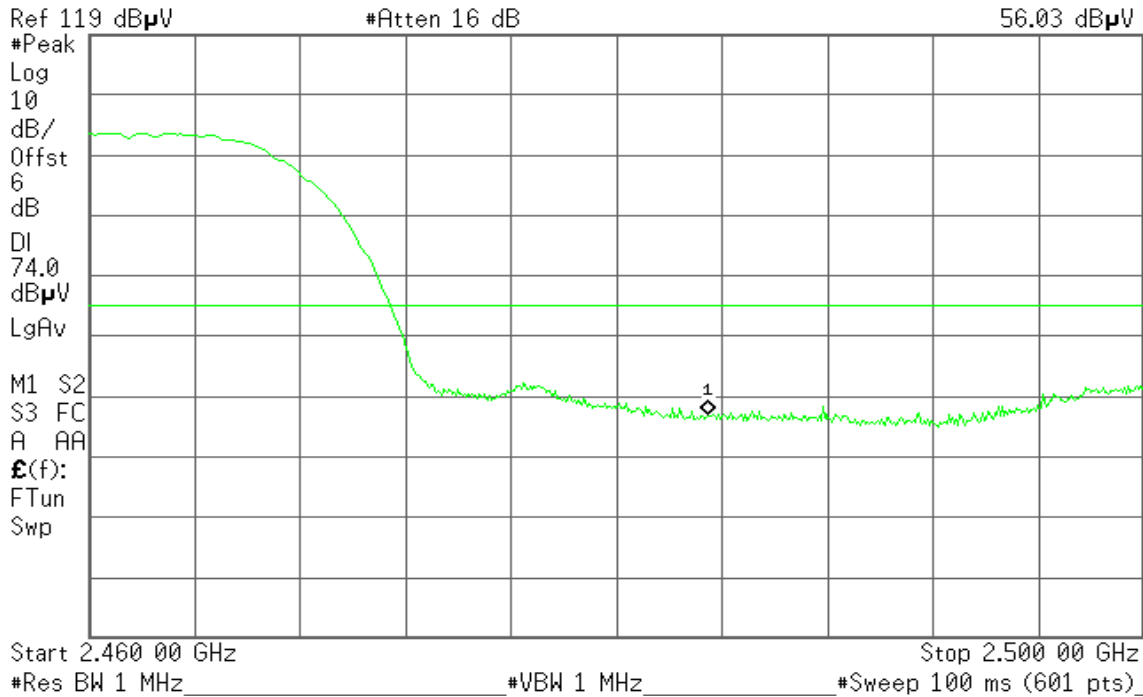


Detector mode: Average

Polarity: Vertical

Agilent 16:43:44 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
43.88 dB $\mu$ V

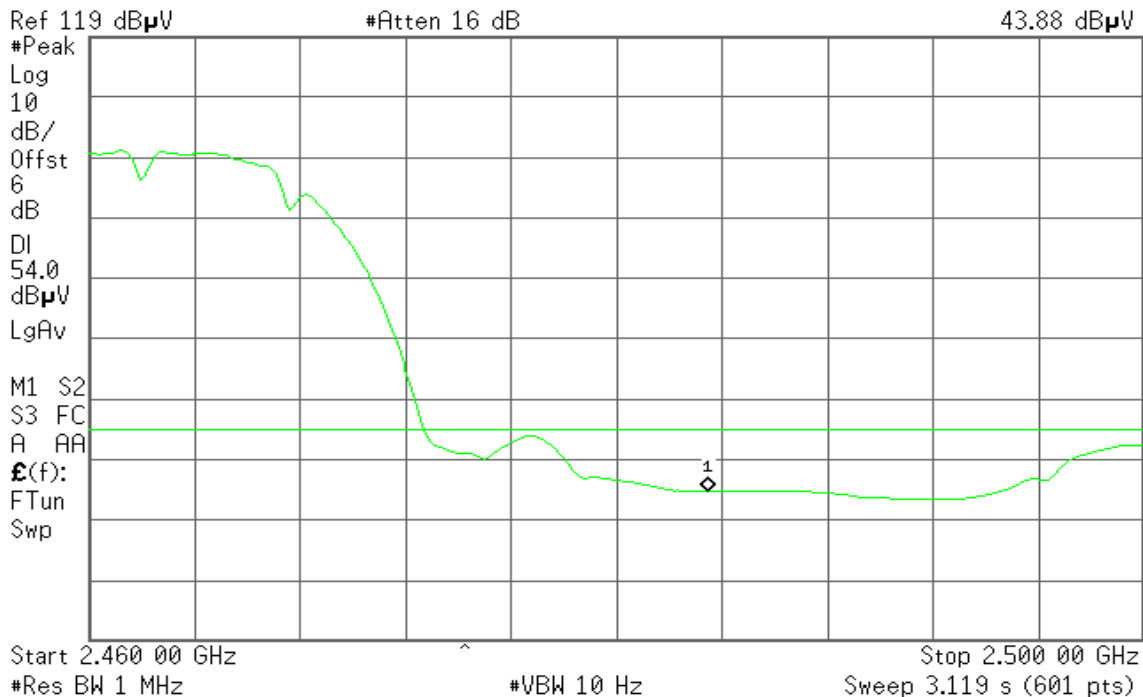




Detector mode: Peak

Polarity: Horizontal

Agilent 16:51:16 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
54.33 dBμV

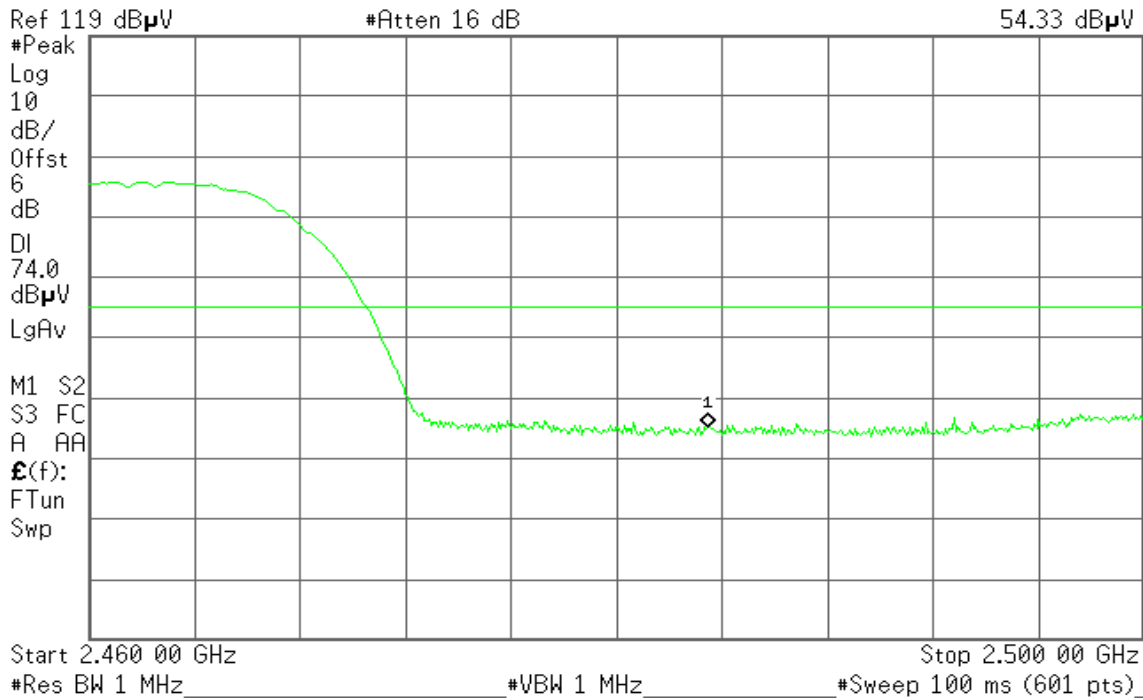


Detector mode: Average

Polarity: Horizontal

Agilent 16:51:51 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
41.42 dBμV

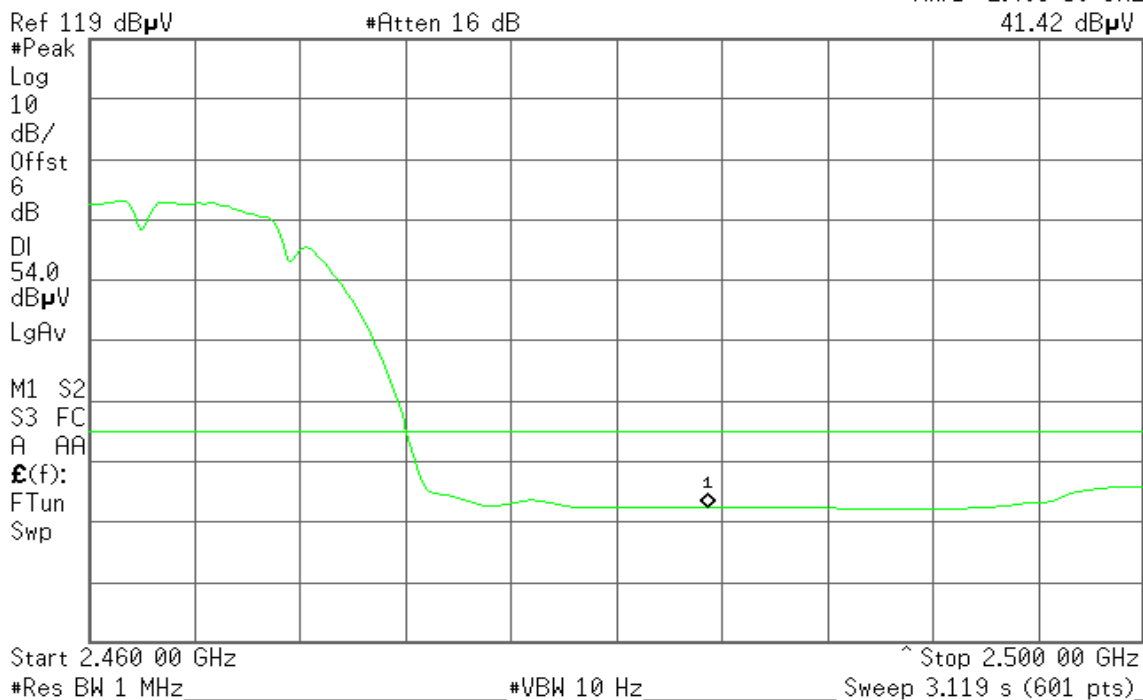




### Band Edges (IEEE 802.11g mode / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 17:39:26 Jun 28, 2010

R T

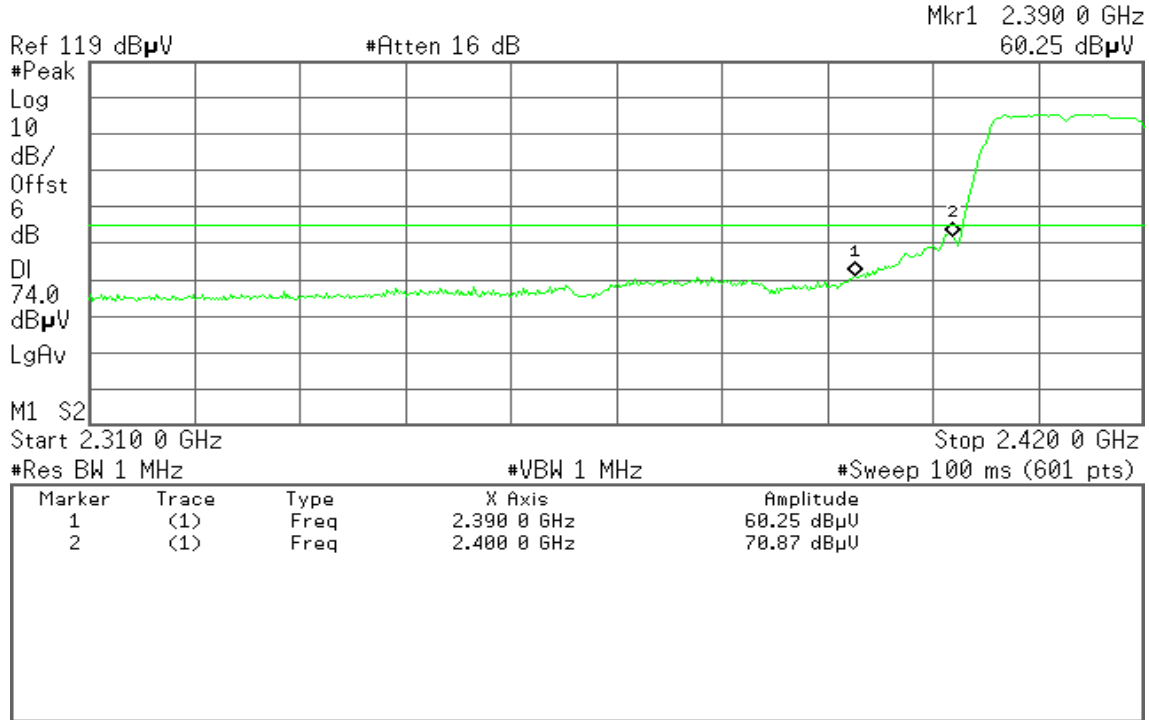


Detector mode: Average

Polarity: Vertical

Agilent 17:40:02 Jun 28, 2010

R T

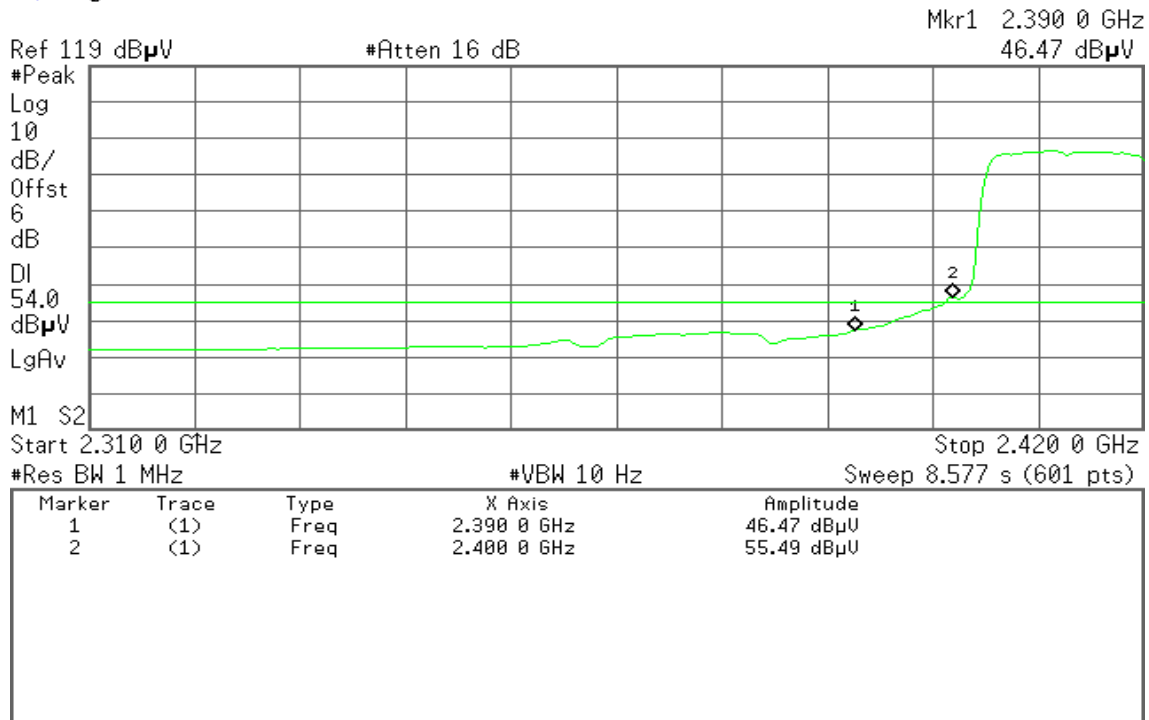




Detector mode: Peak

Polarity: Horizontal

Agilent 17:35:18 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
53.53 dBµV

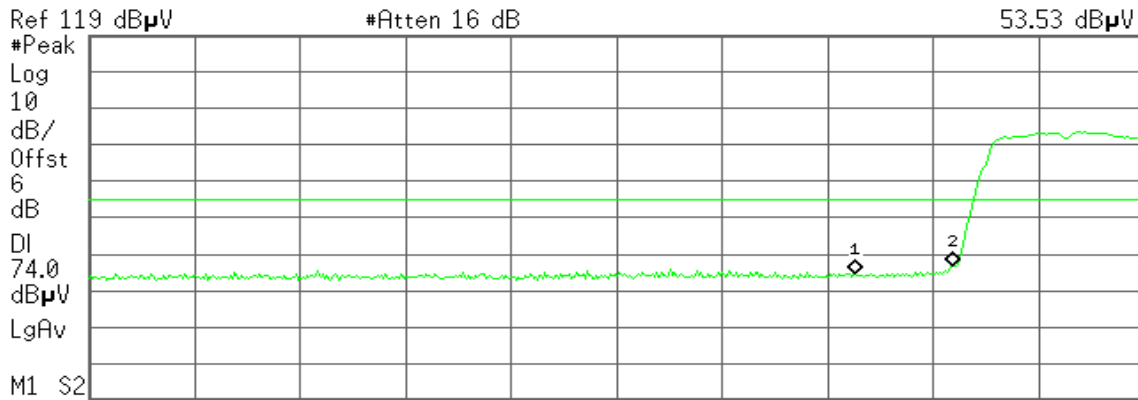

Start 2.310 0 GHz Stop 2.420 0 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	53.53 dBµU
2	(1)	Freq	2.400 0 GHz	55.81 dBµU


Detector mode: Average

Polarity: Horizontal

Agilent 17:35:50 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
41.20 dBµV

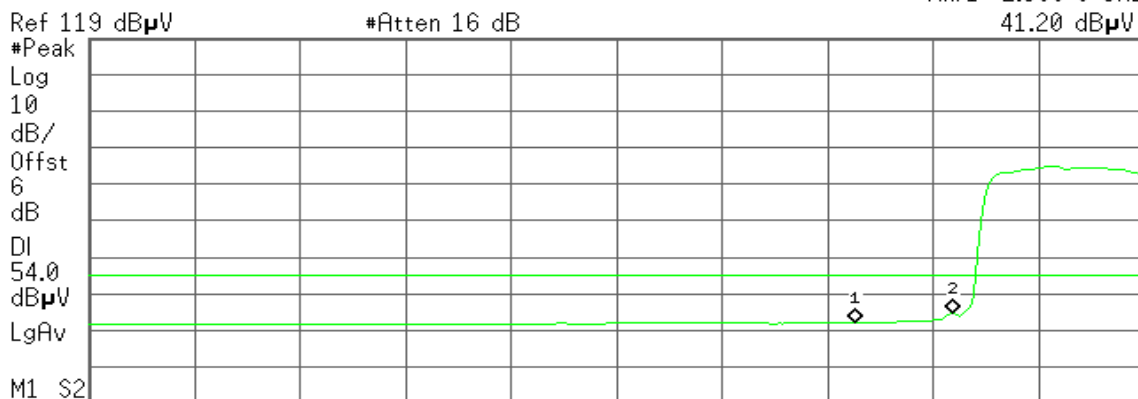

Start 2.310 0 GHz Stop 2.420 0 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	41.20 dBµU
2	(1)	Freq	2.400 0 GHz	43.66 dBµU



### Band Edges (IEEE 802.11g mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:53:02 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
56.60 dB $\mu$ V

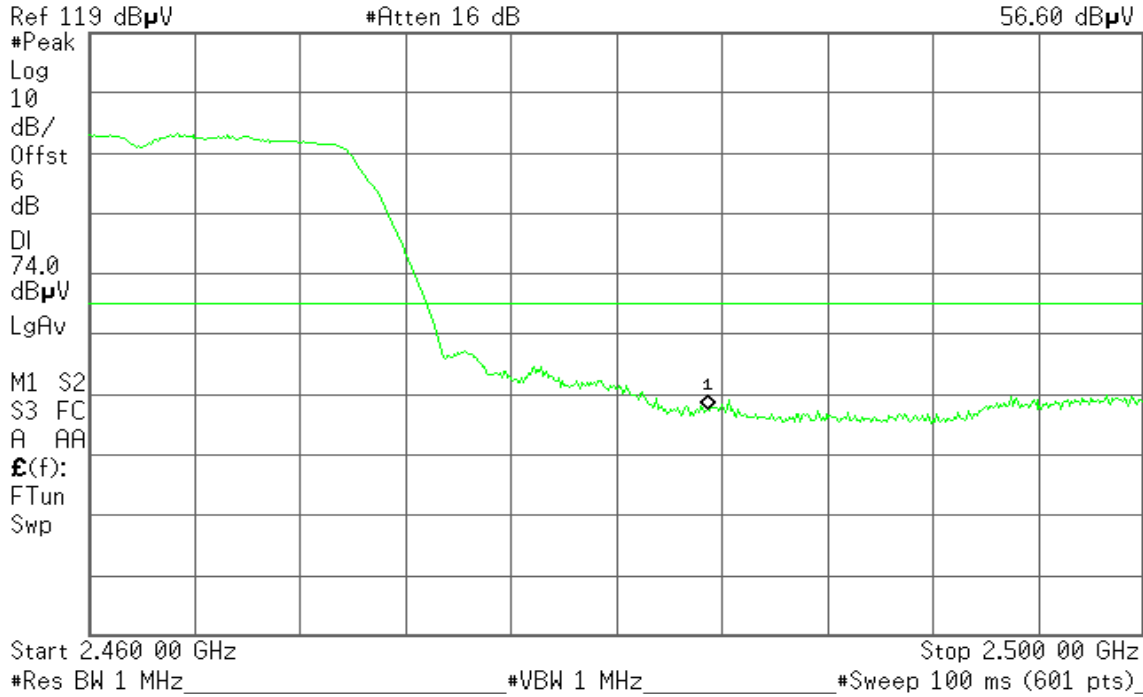


Detector mode: Average

Polarity: Vertical

Agilent 17:53:27 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
44.72 dB $\mu$ V

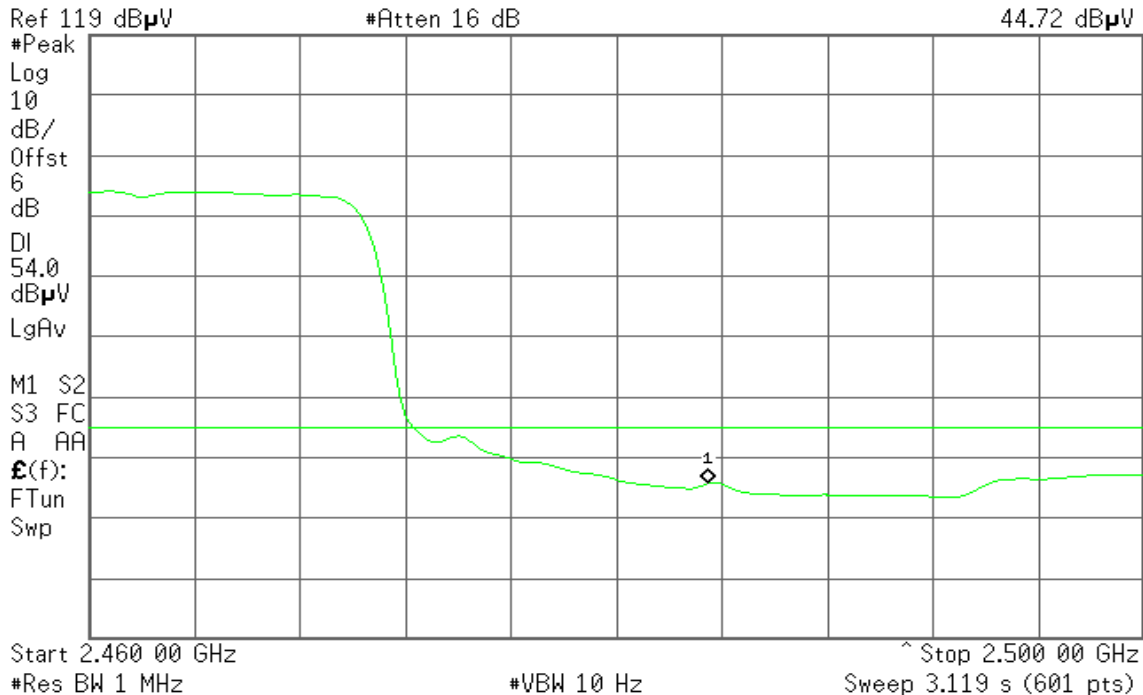




Detector mode: Peak

Polarity: Horizontal

Agilent 17:51:13 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
53.31 dBμV

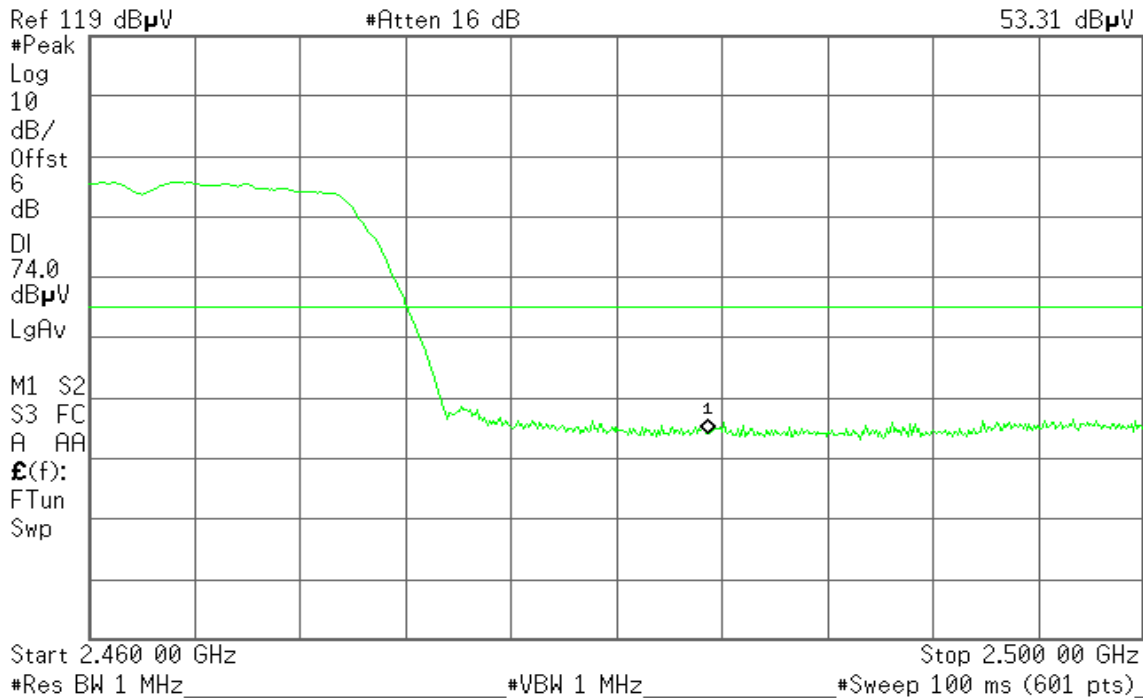


Detector mode: Average

Polarity: Horizontal

Agilent 17:51:52 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
41.58 dBμV

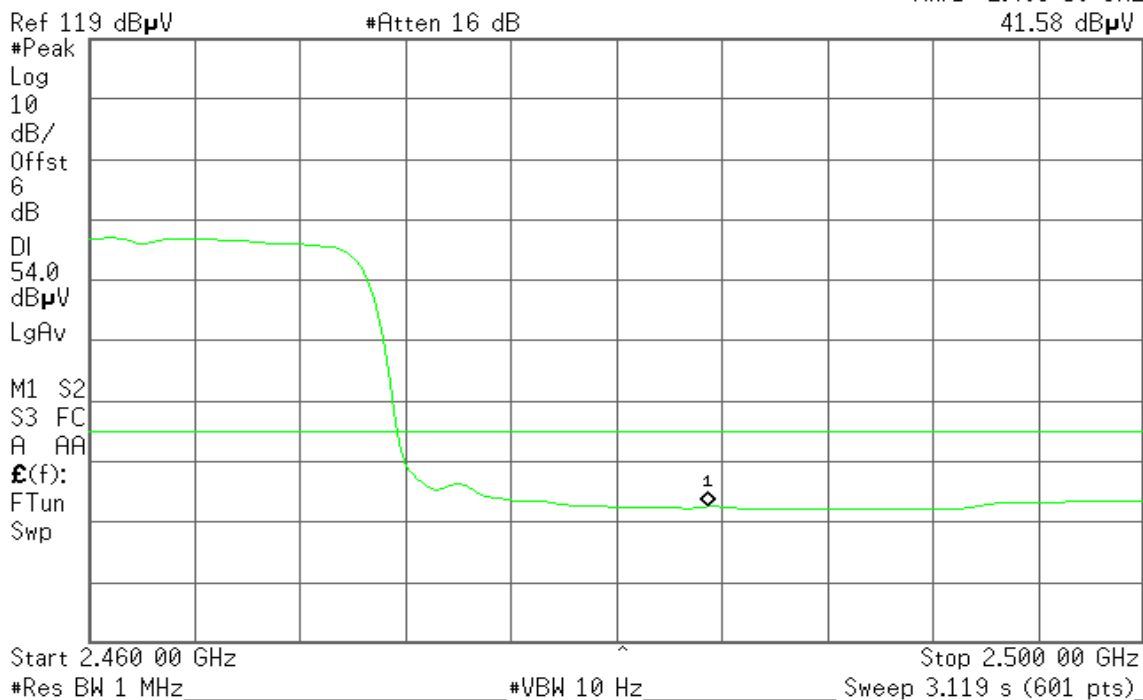






**Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH Low)**

**Detector mode: Peak**

**Polarity: Vertical**

Agilent 20:12:24 Jun 28, 2010

R T

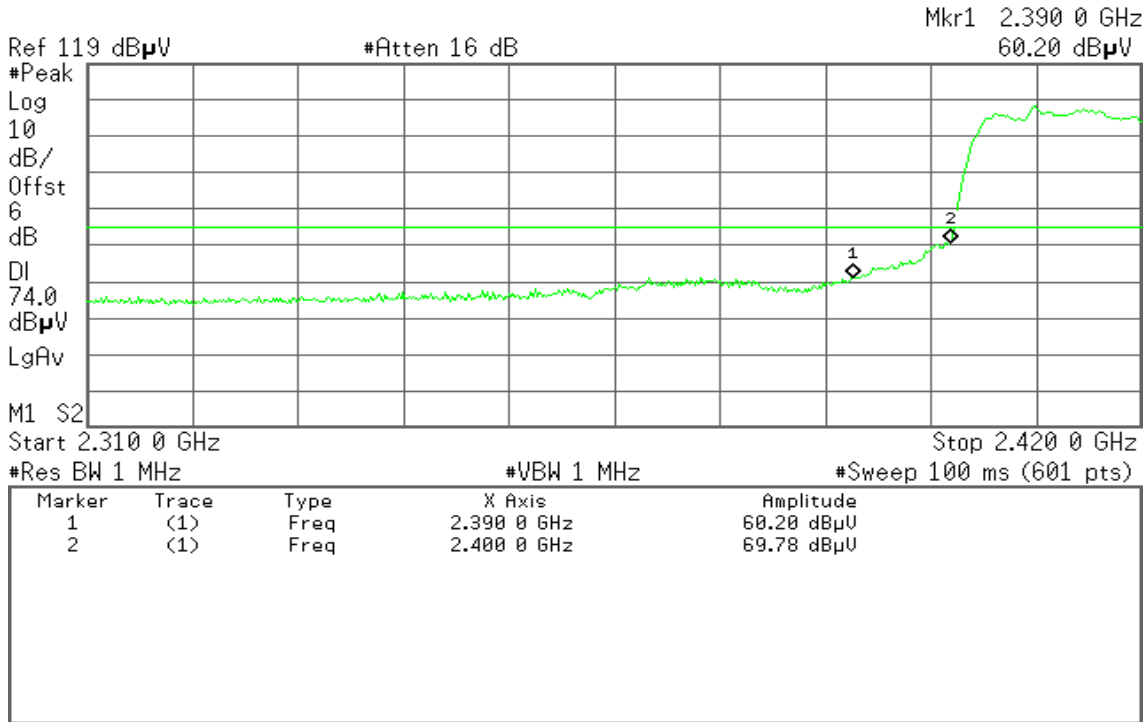


**Detector mode: Average**

**Polarity: Vertical**

Agilent 20:12:58 Jun 28, 2010

R T

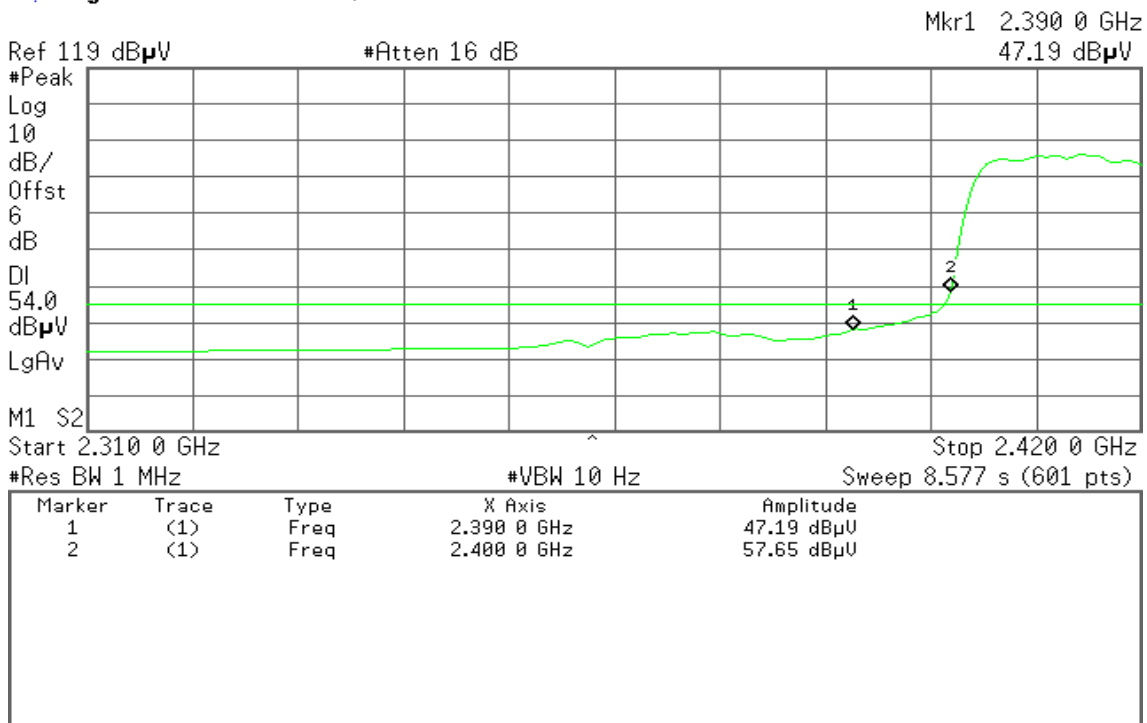




Detector mode: Peak

Polarity: Horizontal

Agilent 20:17:47 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
53.32 dBµV

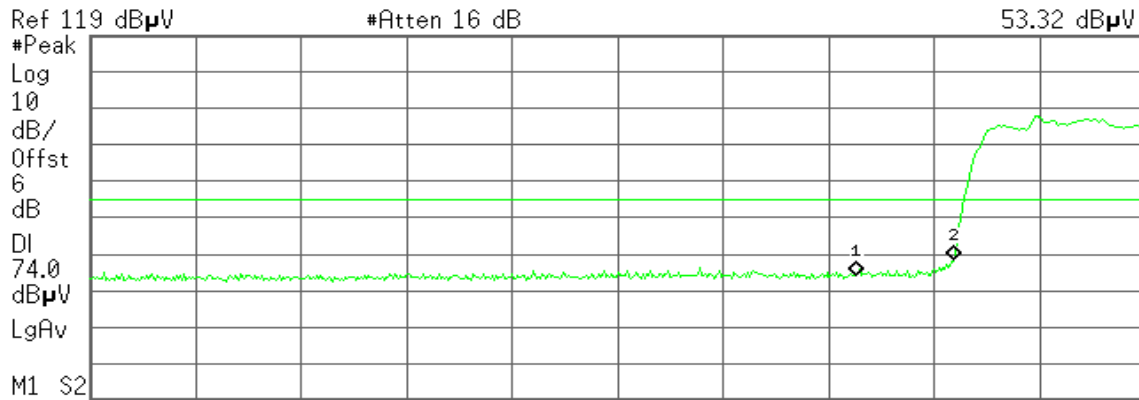

Start 2.310 0 GHz Stop 2.420 0 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	53.32 dBµU
2	(1)	Freq	2.400 0 GHz	57.30 dBµU


Detector mode: Average

Polarity: Horizontal

Agilent 20:18:16 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
41.59 dBµV

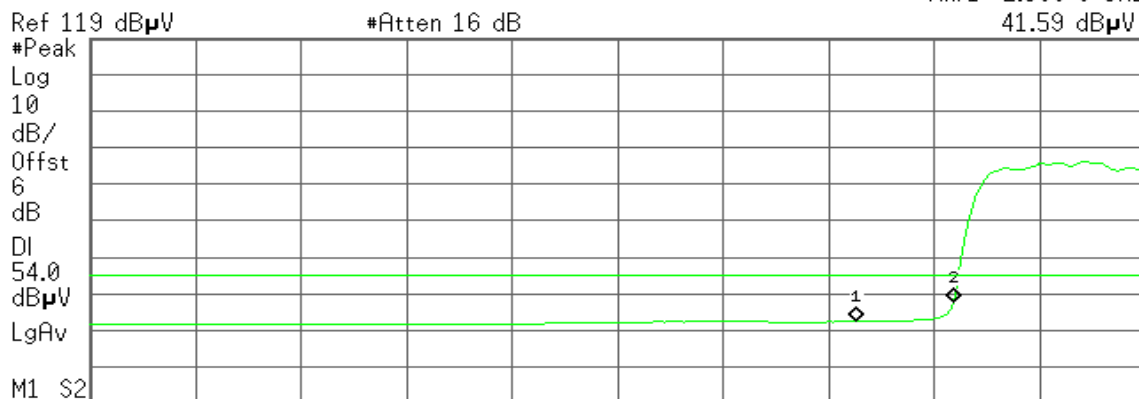

Start 2.310 0 GHz Stop 2.420 0 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	41.59 dBµU
2	(1)	Freq	2.400 0 GHz	46.80 dBµU



### Band Edges (draft 802.11n Standard-20 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 20:43:25 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
55.17 dBμV

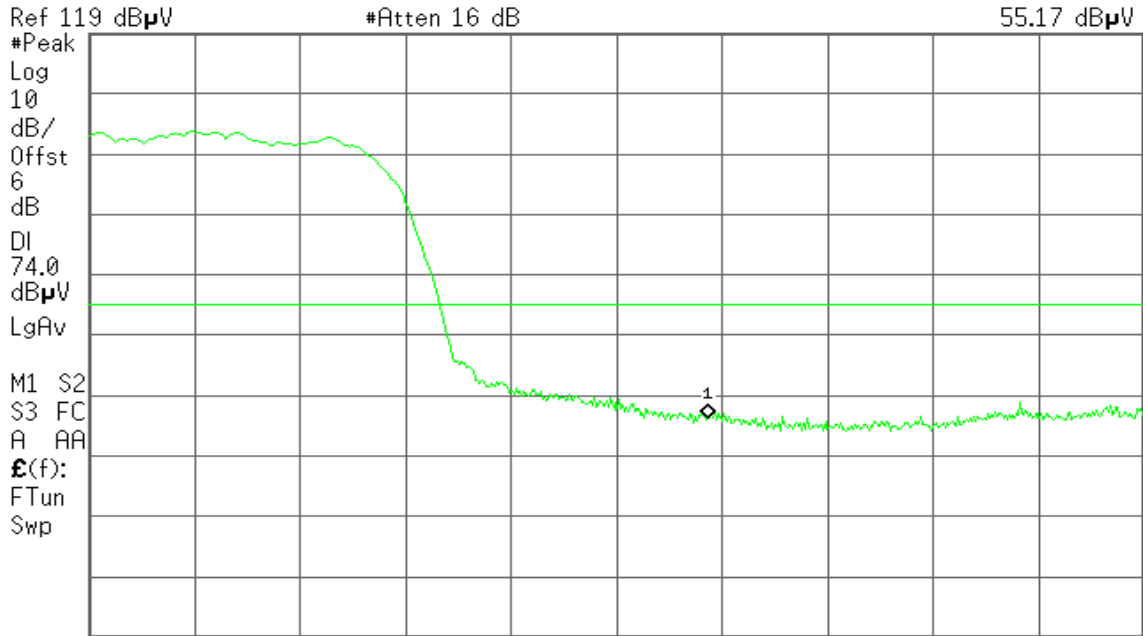

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)


Detector mode: Average

Polarity: Vertical

Agilent 20:43:49 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
43.69 dBμV

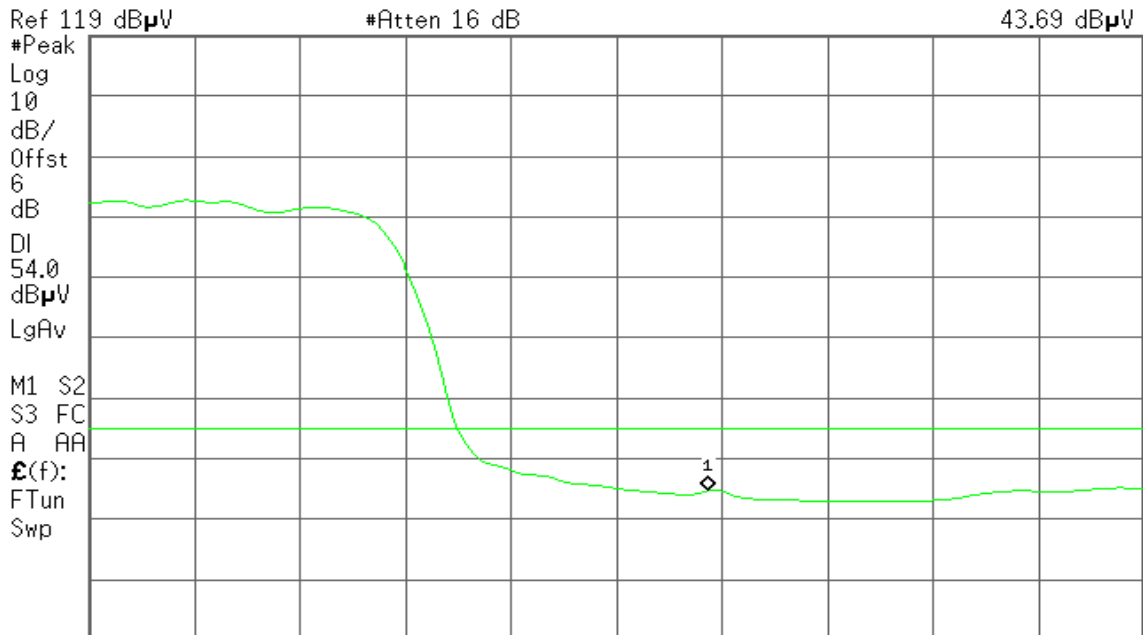

Start 2.460 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.119 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 20:38:59 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
54.41 dBμV

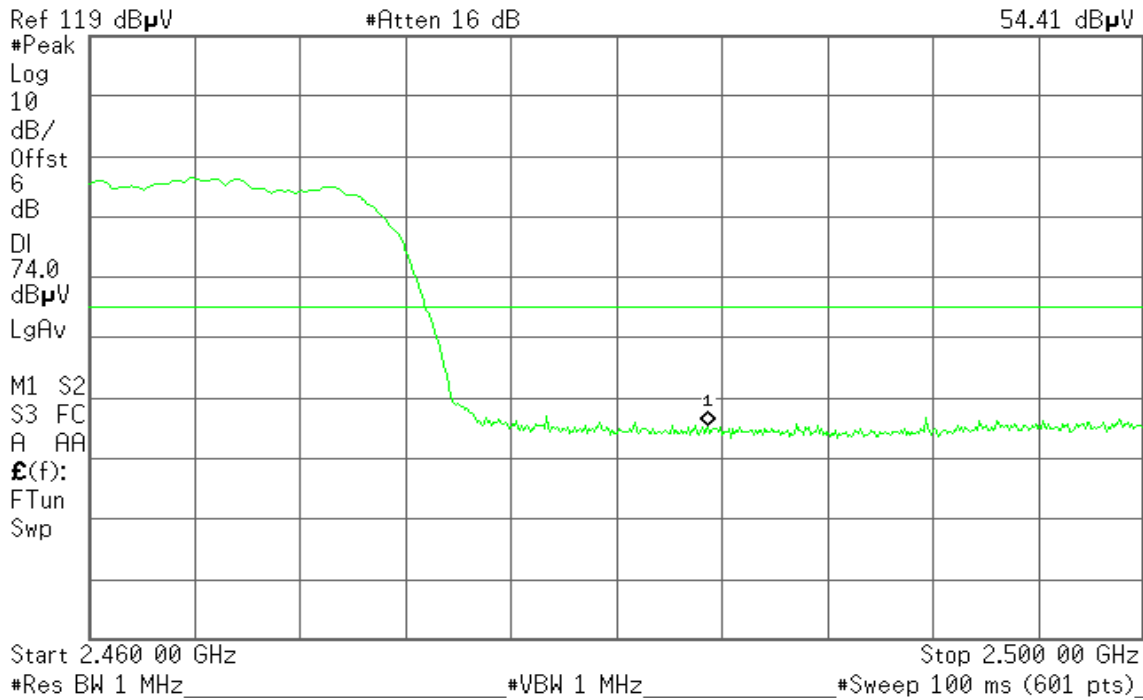


Detector mode: Average

Polarity: Horizontal

Agilent 20:39:37 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
41.53 dBμV

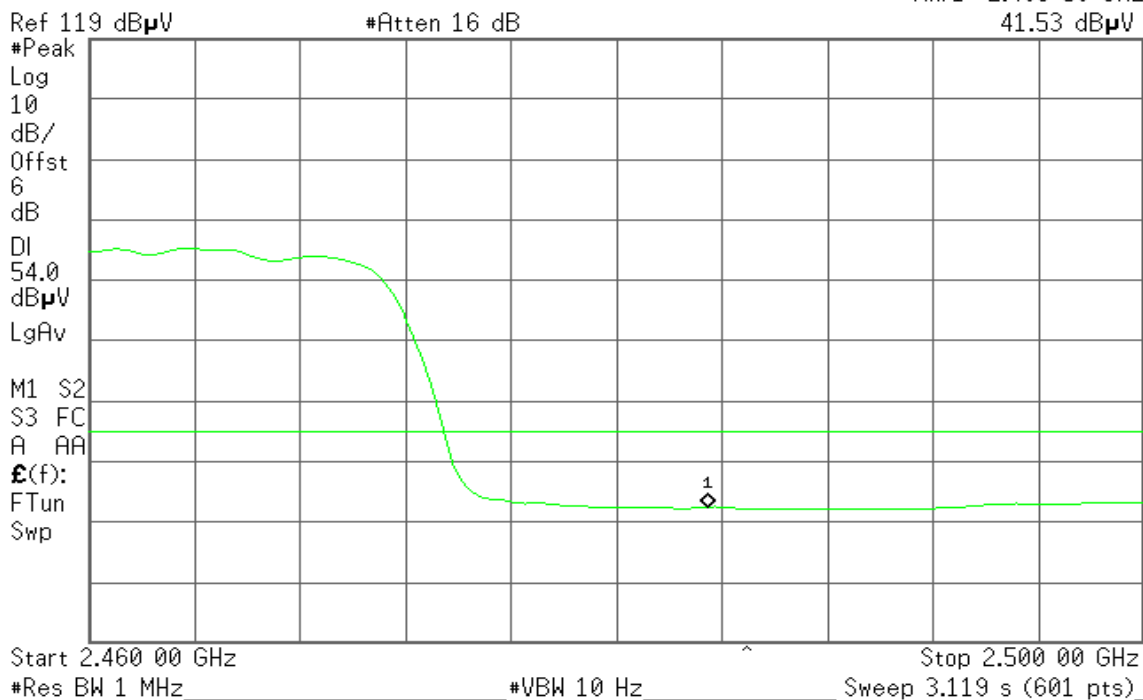



**Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH Low)**


**Detector mode: Peak**

**Polarity: Vertical**

Agilent 19:27:29 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
62.74 dBµV

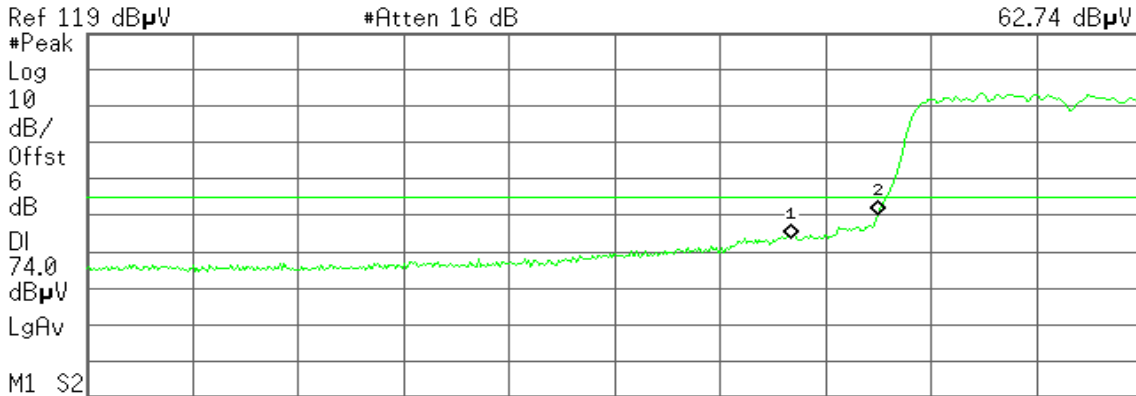

Start 2.310 0 GHz Stop 2.430 0 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	62.74 dBµU
2	(1)	Freq	2.400 0 GHz	69.23 dBµU


**Detector mode: Average**

**Polarity: Vertical**

Agilent 19:28:29 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
49.26 dBµV

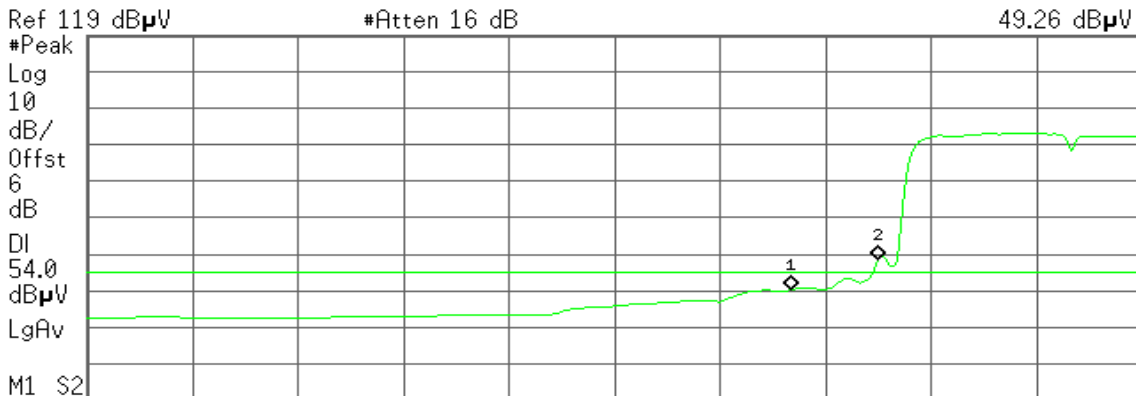

Start 2.310 0 GHz Stop 2.430 0 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 9.357 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	49.26 dBµU
2	(1)	Freq	2.400 0 GHz	57.35 dBµU




Detector mode: Peak

Polarity: Horizontal

Agilent 19:15:38 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
53.93 dBµV

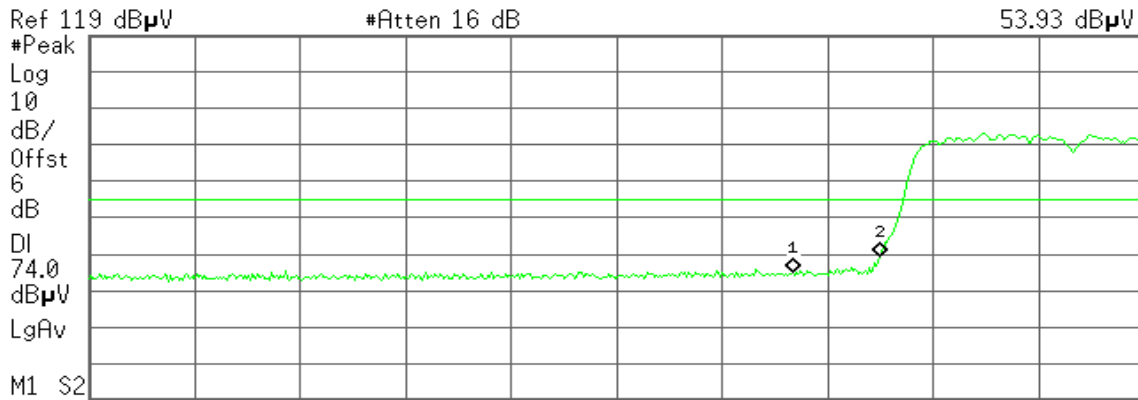

#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	53.93 dBµU
2	(1)	Freq	2.400 0 GHz	58.42 dBµU


Detector mode: Average

Polarity: Horizontal

Agilent 19:15:11 Jun 28, 2010

R T

Mkr1 2.390 0 GHz  
41.66 dBµV

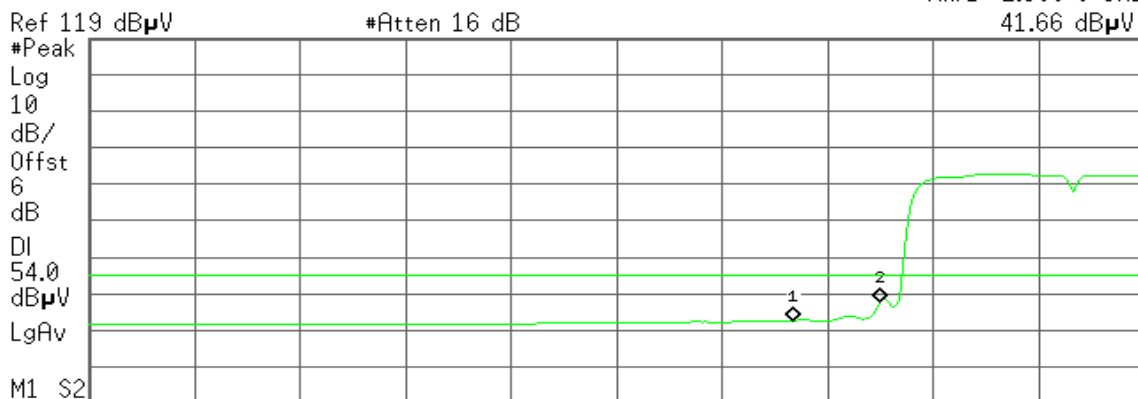

#Res BW 1 MHz #VBW 10 Hz Sweep 9.357 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.390 0 GHz	41.66 dBµU
2	(1)	Freq	2.400 0 GHz	46.68 dBµU



### Band Edges (draft 802.11n Wide-40 MHz Channel mode / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 19:50:40 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
58.19 dBμV

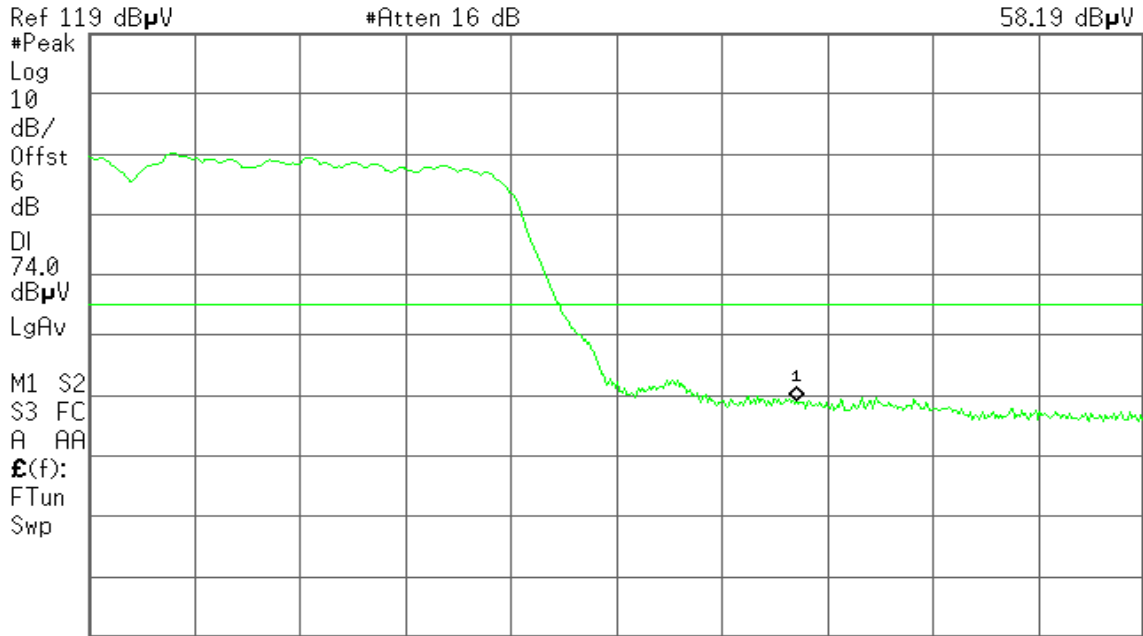

Start 2.450 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 1 MHz #Sweep 100 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent 19:51:07 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
45.29 dBμV



Start 2.450 00 GHz Stop 2.500 00 GHz  
#Res BW 1 MHz #VBW 10 Hz Sweep 3.899 s (601 pts)




Detector mode: Peak

Polarity: Horizontal

Agilent 19:45:53 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
54.19 dBμV

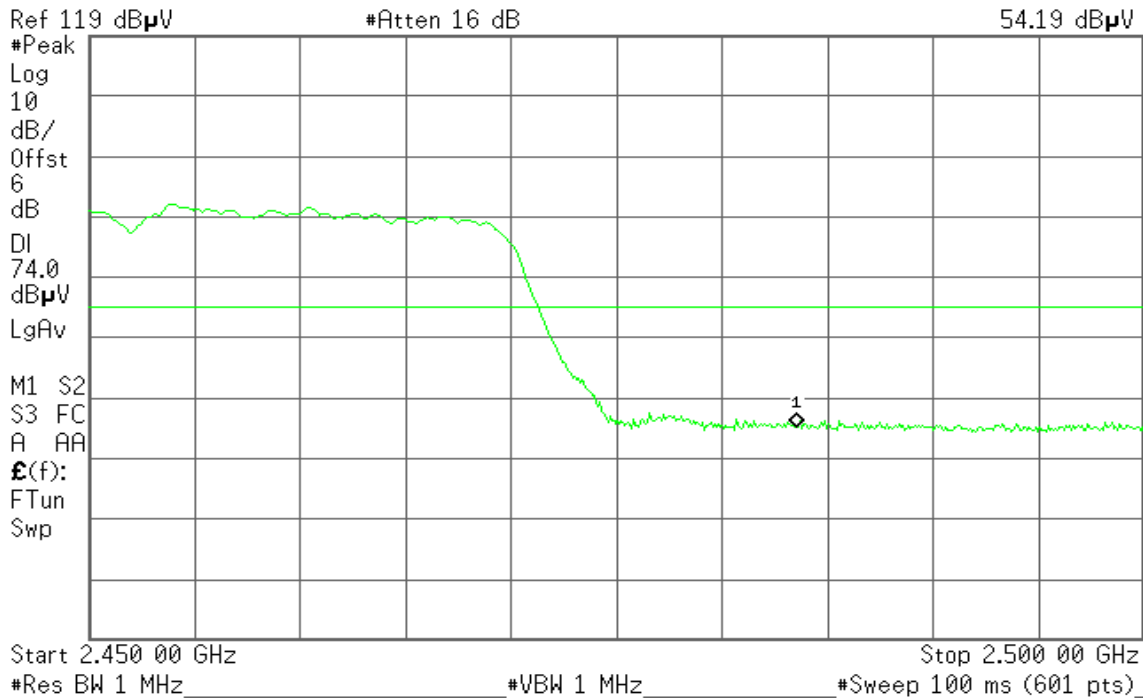


Detector mode: Average

Polarity: Horizontal

Agilent 19:46:18 Jun 28, 2010

R T

Mkr1 2.483 50 GHz  
41.85 dBμV

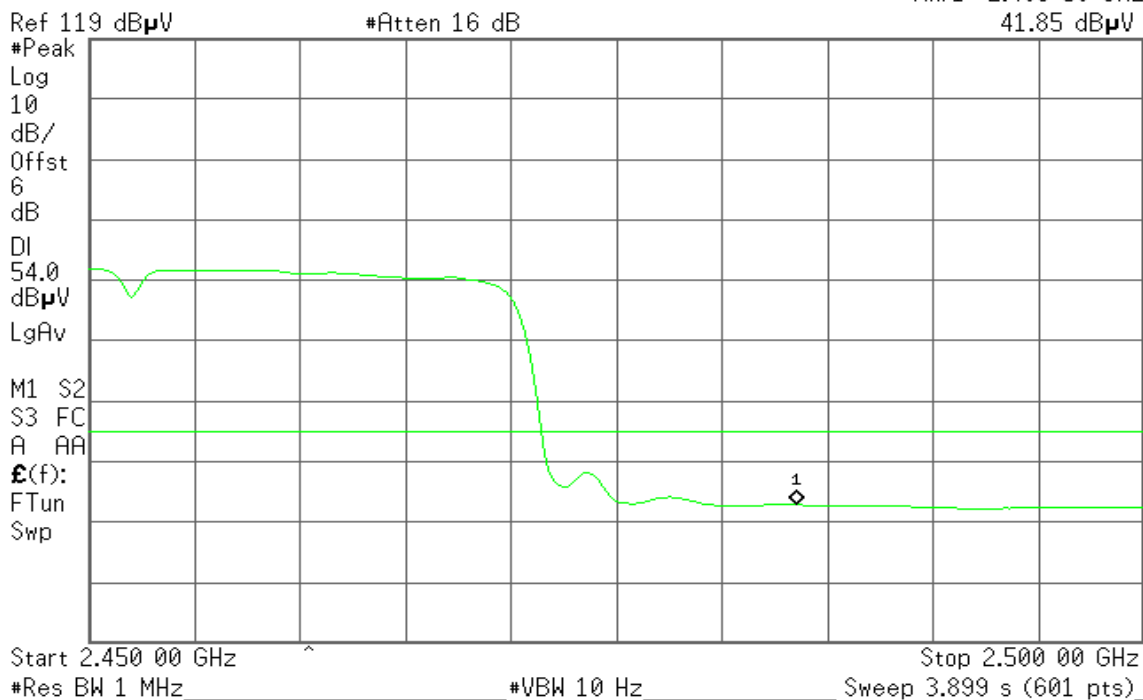




## 7.4 PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

**TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-7.72	8.00	PASS
Mid	2437	-5.72		PASS
High	2462	-8.24		PASS

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-22.20	8.00	PASS
Mid	2437	-22.55		PASS
High	2462	-23.90		PASS

**Test mode: draft 802.11n Standard-20 MHz Channel mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-21.61	8.00	PASS
Mid	2437	-22.88		PASS
High	2462	-23.56		PASS

**Test mode: draft 802.11n Wide-40 MHz Channel mode**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2422	-24.66	8.00	PASS
Mid	2437	-24.96		PASS
High	2452	-26.51		PASS



### Test Plot

IEEE 802.11b mode


PPSD (CH Low)

Agilent

R T

Mkr1 2.414 735 4 GHz

-7.72 dBm

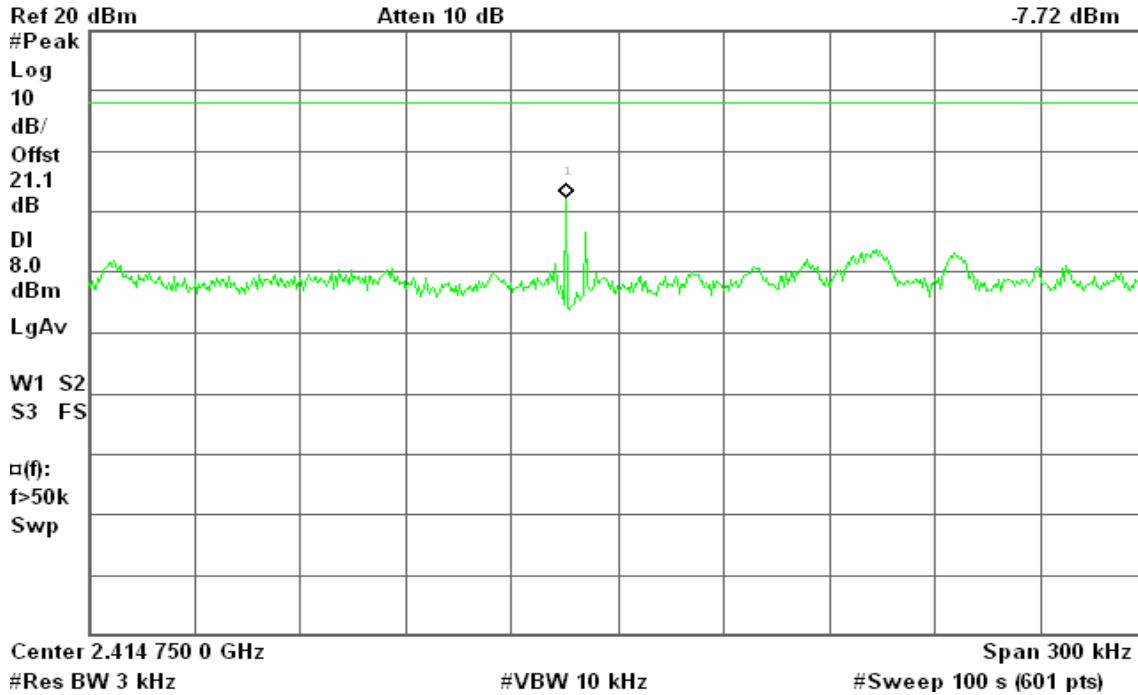


PPSD (CH Mid)

Agilent

R T

Mkr1 2.436 236 2 GHz

-5.72 dBm

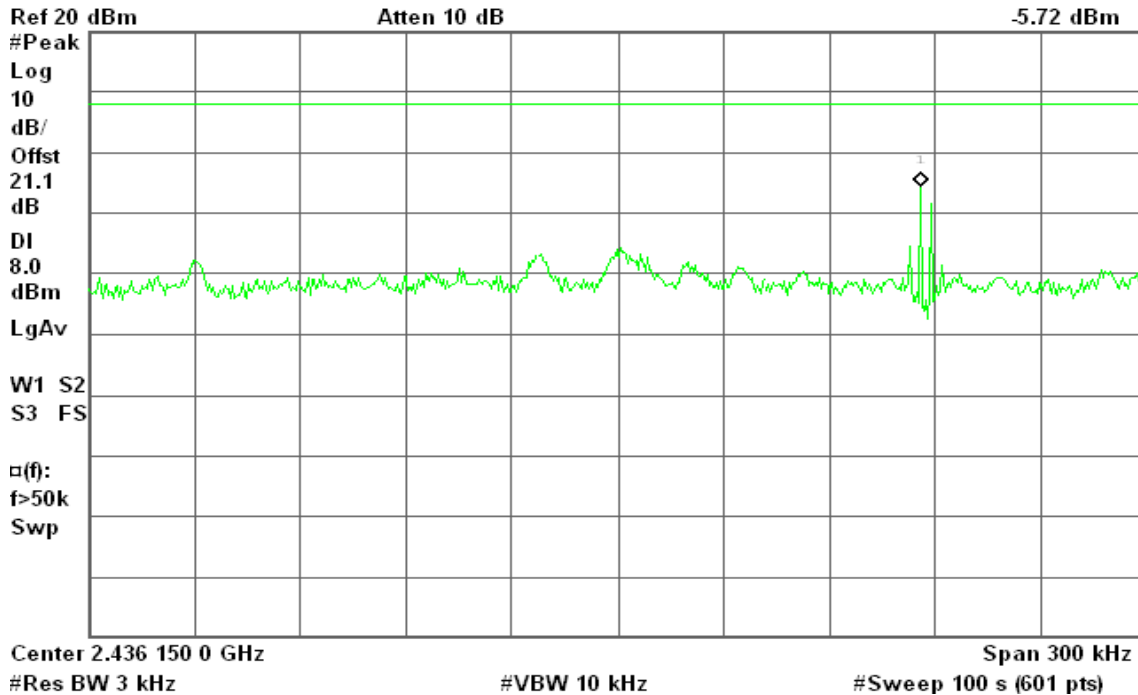




### PPSD (CH High)

Agilent

R T

Mkr1 2.458 736 4 GHz  
-8.24 dBm

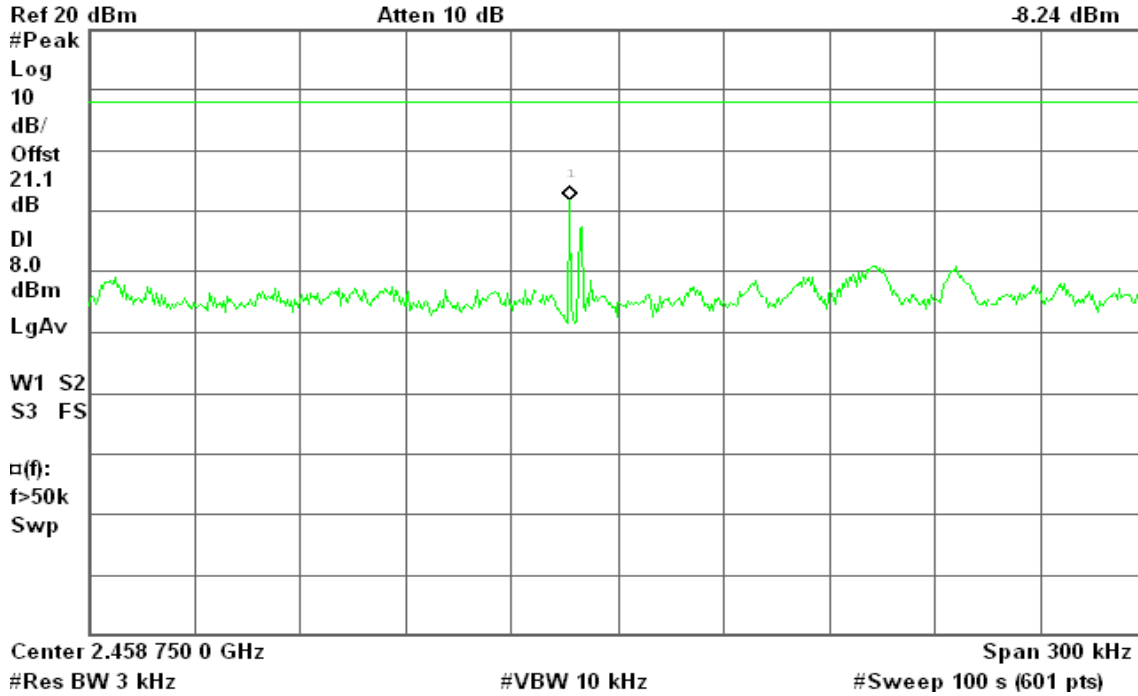


### IEEE 802.11g mode

### PPSD (CH Low)

Agilent

R T

Mkr1 2.415 368 0 GHz  
-22.20 dBm

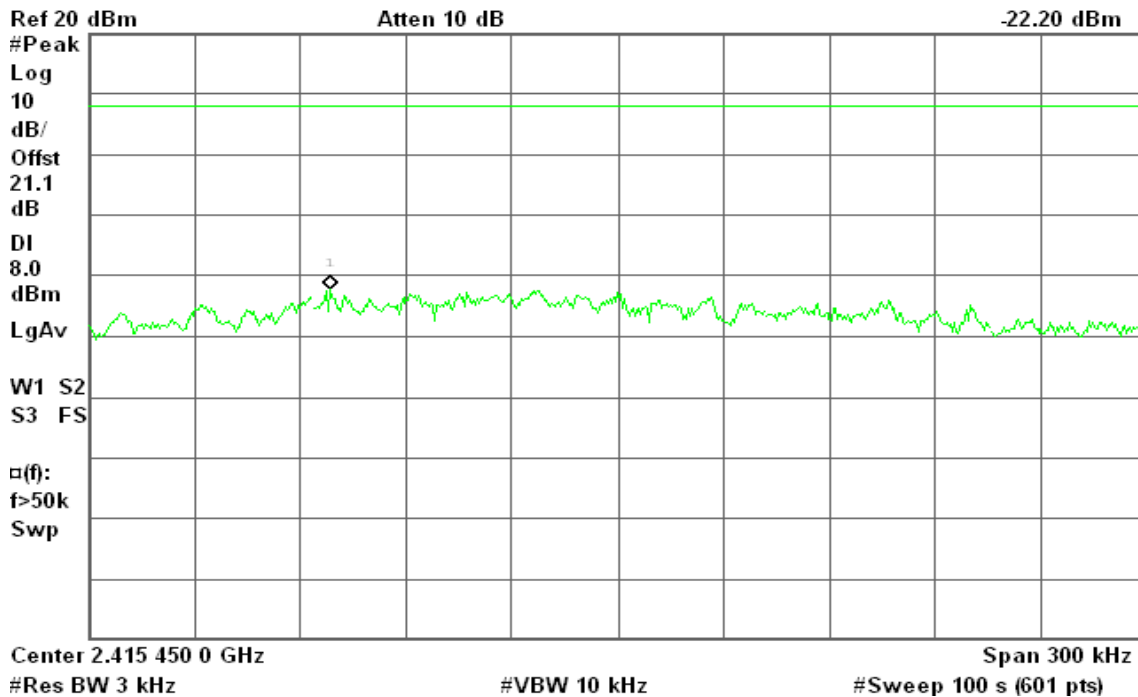




### PPSD (CH Mid)

Agilent

R T

Mkr1 2.437 926 9 GHz  
-22.55 dBm

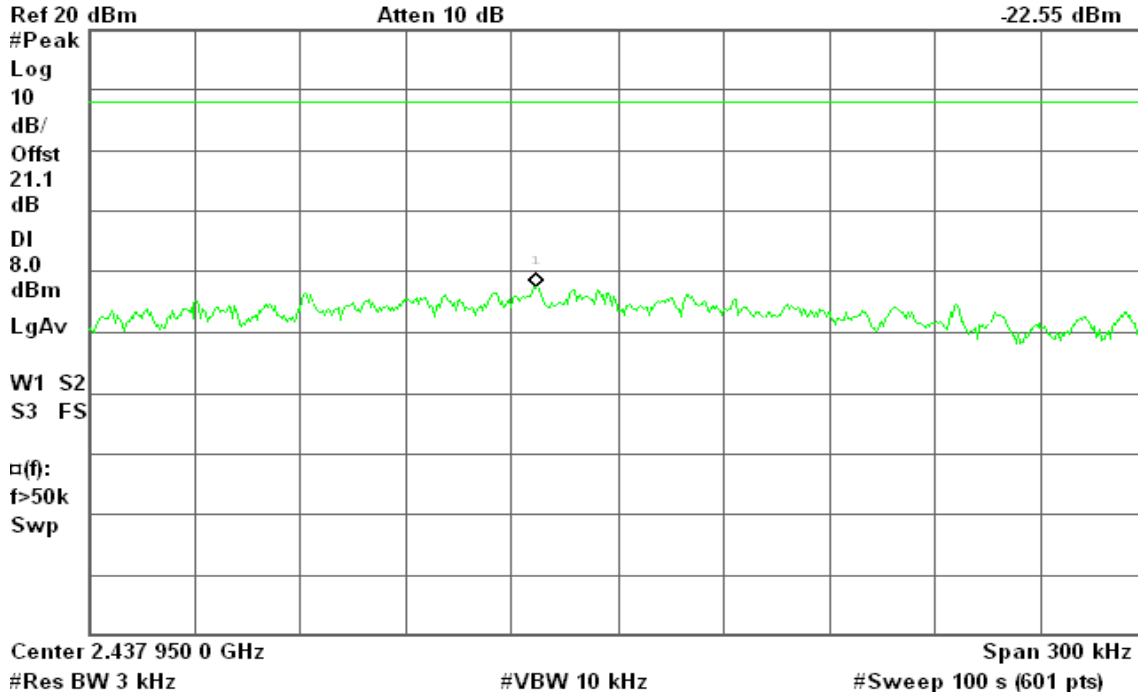


### PPSD (CH High)

Agilent

R L


Mkr1 2.462 925 9 GHz  
-23.90 dBm

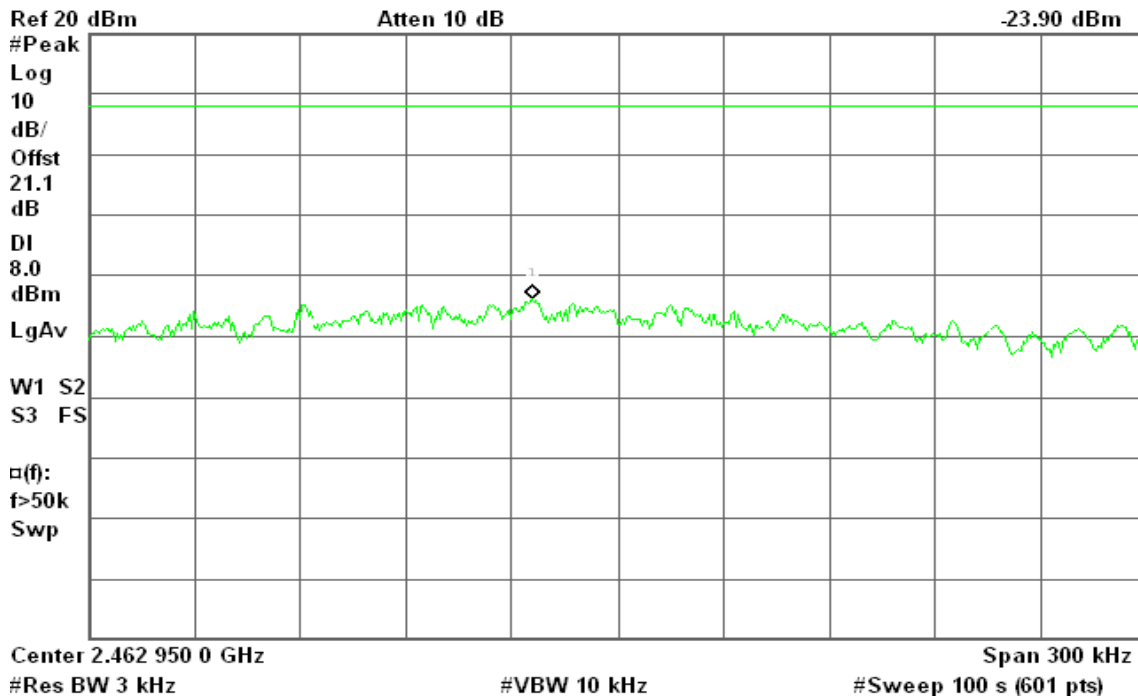




### draft 802.11n Standard-20 MHz Channel mode

### PPSD (CH Low)

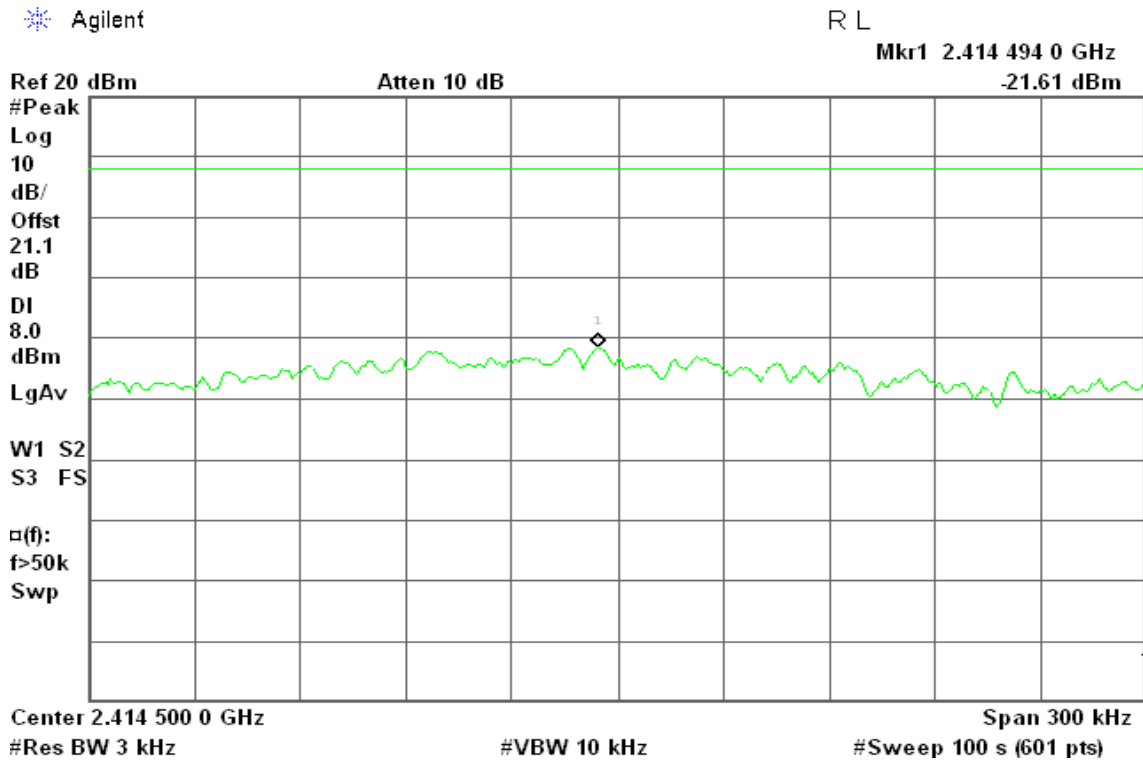

### PPSD (CH Mid)

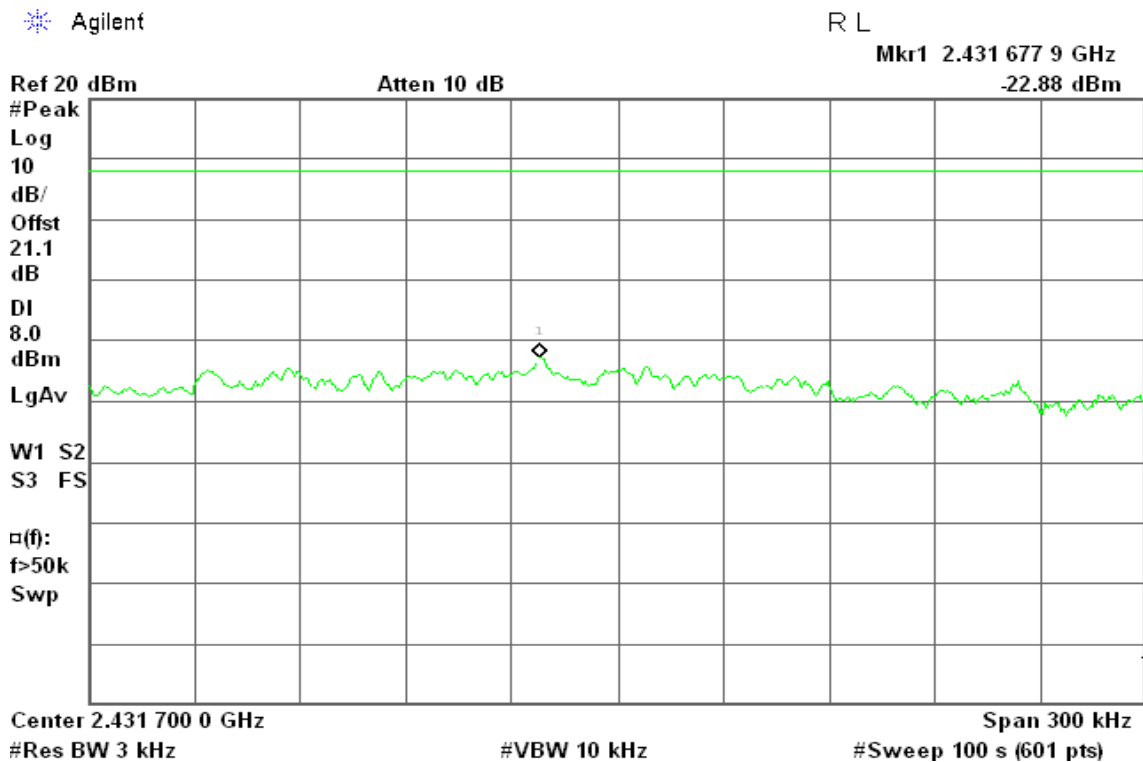




### PPSD (CH High)

Agilent

R T

Mkr1 2.459 820 6 GHz  
-23.56 dBm

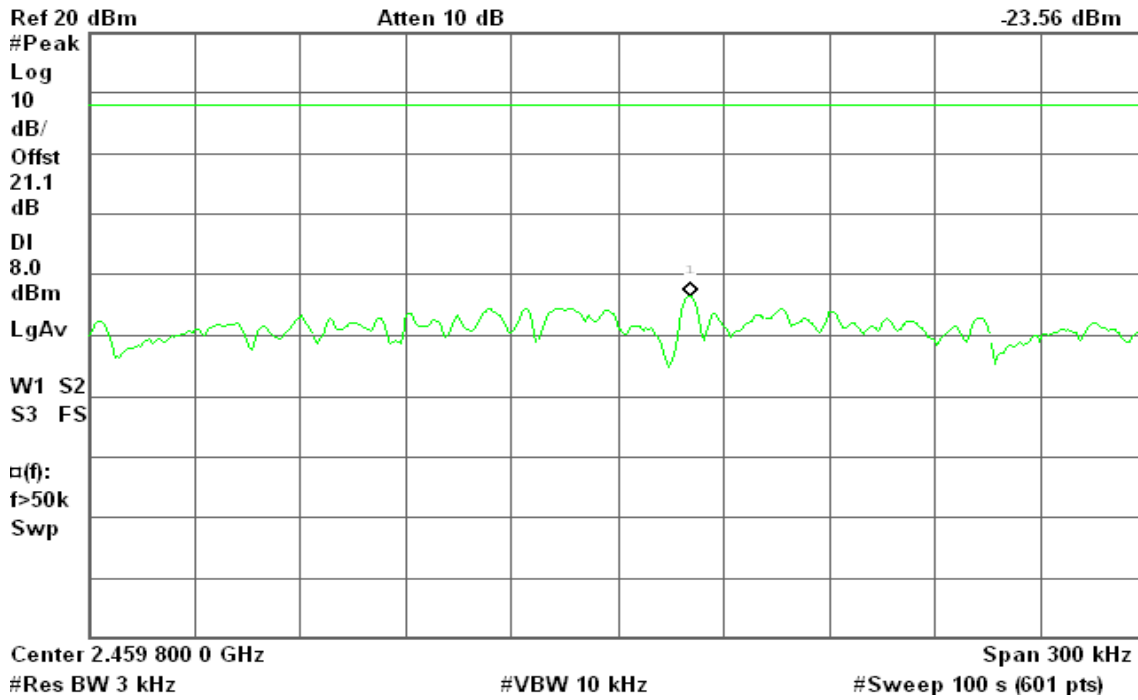


### draft 802.11n Wide-40 MHz Channel mode

### PPSD (CH Low)

Agilent

R T

Mkr1 2.425 744 0 GHz  
-24.66 dBm

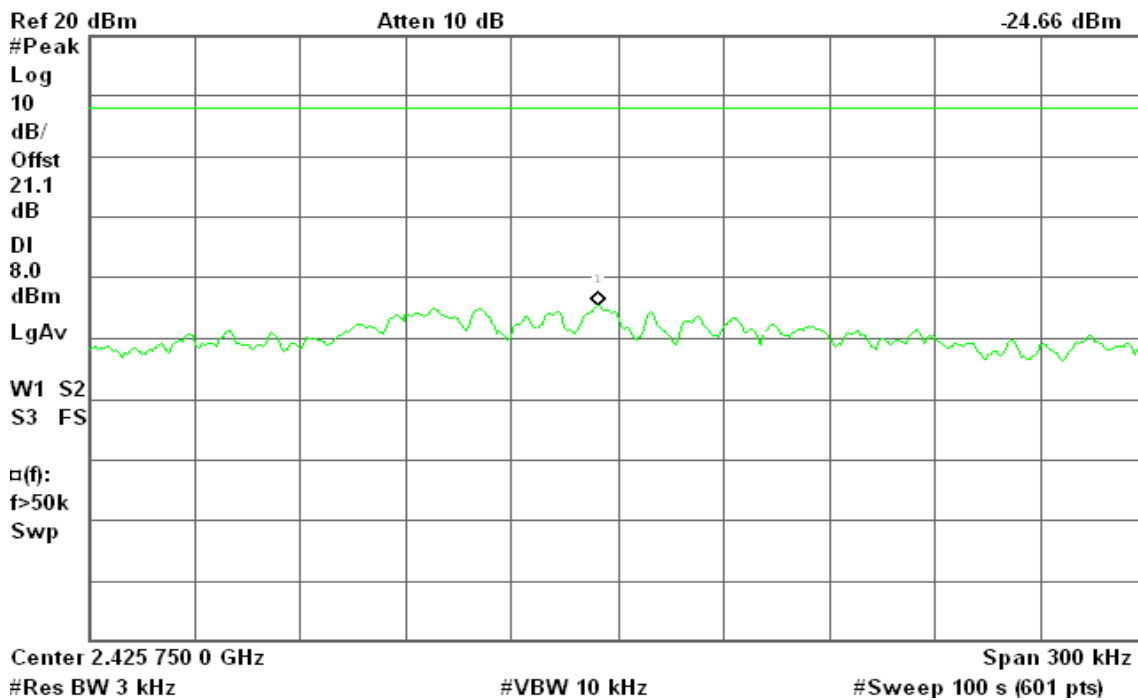




### PPSD (CH Mid)

Agilent

R T

Mkr1 2.434 793 0 GHz  
-24.96 dBm

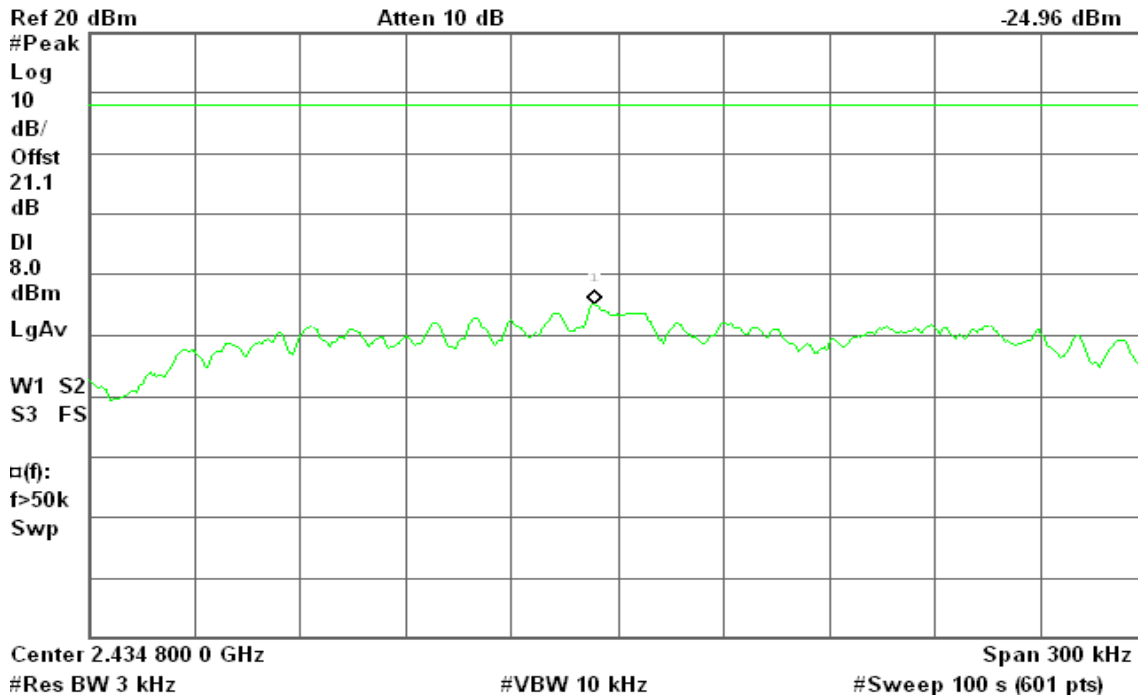


### PPSD (CH High)

Agilent

R T

Mkr1 2.455 448 5 GHz  
-26.51 dBm

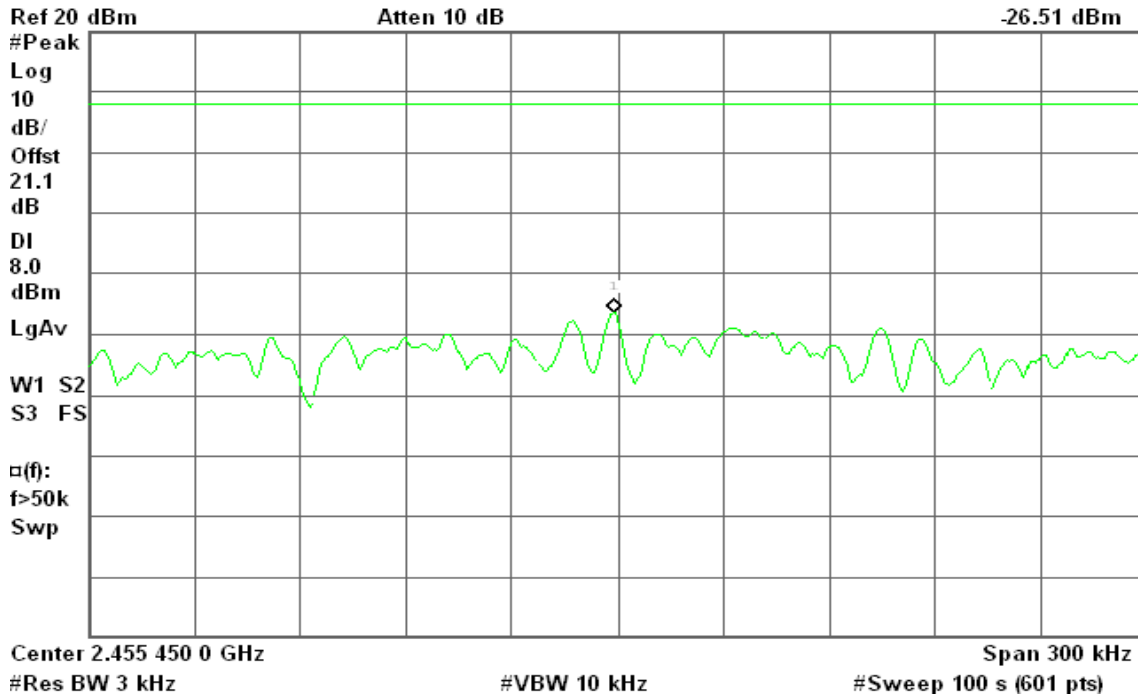




## 7.5 SPURIOUS EMISSIONS

### 7.5.1 Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration

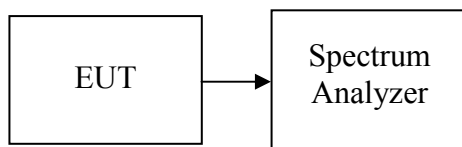

#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS

*No non-compliance noted*



**Test Plot**


**IEEE 802.11b mode**

**CH Low**

Agilent

R T

Mkr1 2.42 GHz  
-3.61 dBm

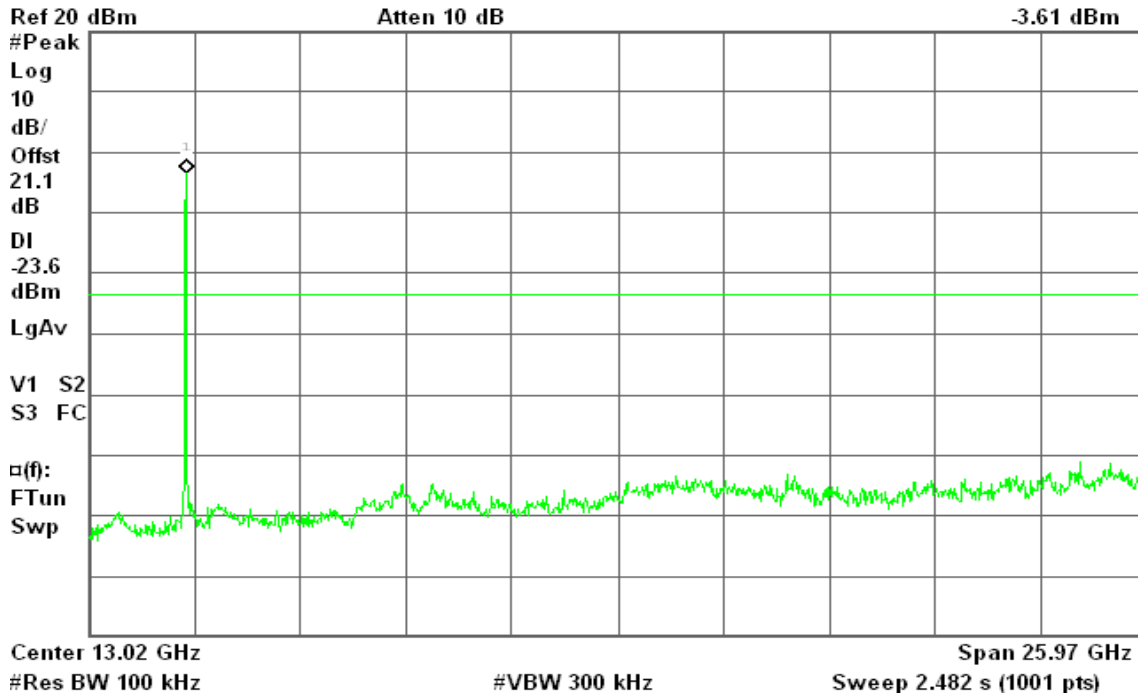


**CH Mid**

Agilent

R T

Mkr1 2.45 GHz  
-3.62 dBm

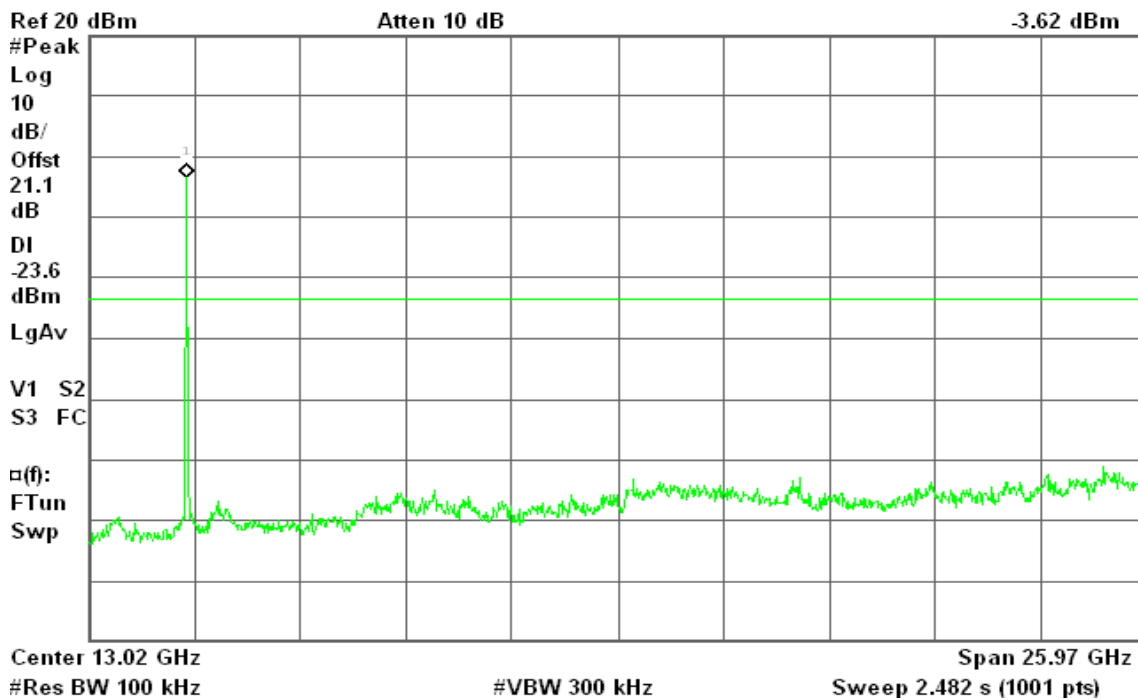




### CH High

Agilent

R T

Mkr1 2.47 GHz  
-4.91 dBm

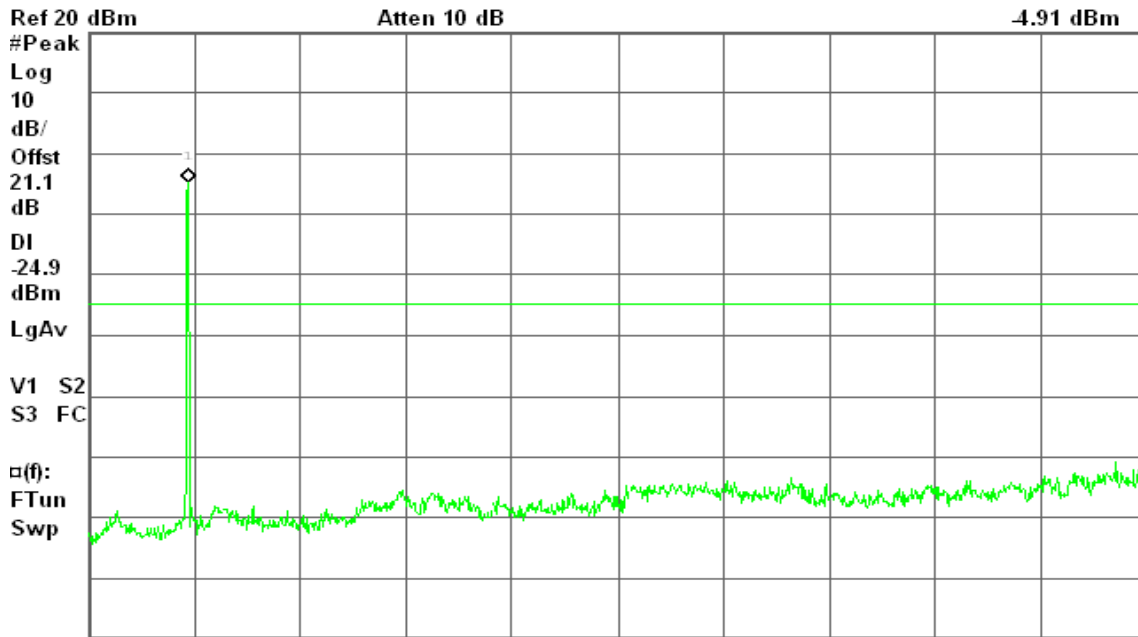

Center 13.02 GHz  
#Res BW 100 kHz

#VBW 300 kHz

Span 25.97 GHz  
Sweep 2.482 s (1001 pts)


### IEEE 802.11g mode

### CH Low

Agilent

R T

Mkr1 2.42 GHz  
-10.53 dBm

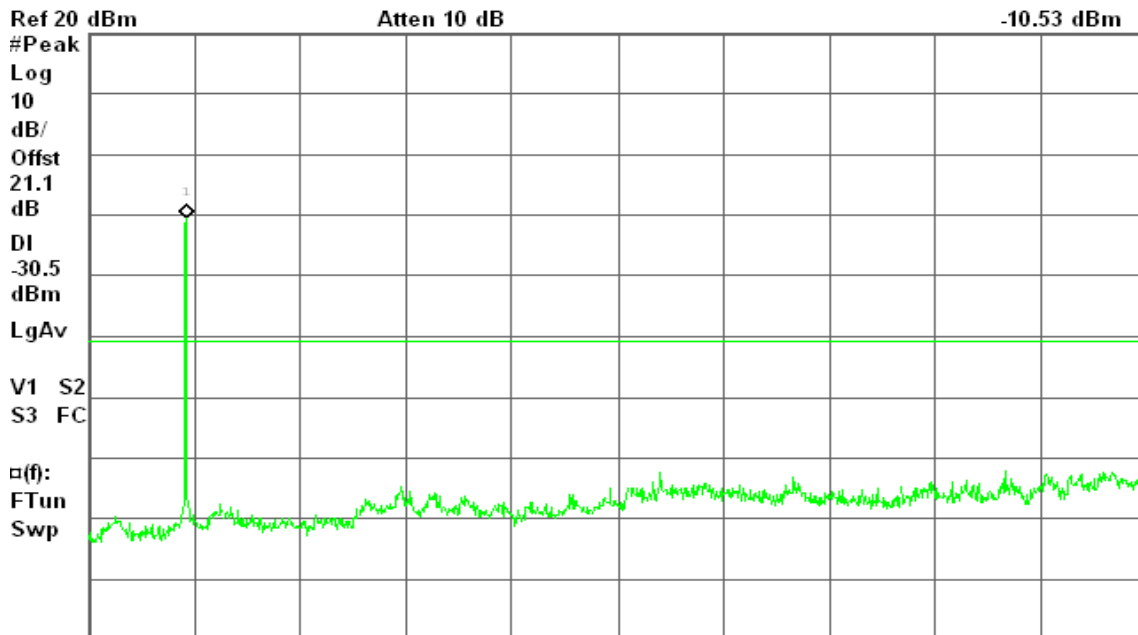

Center 13.02 GHz  
#Res BW 100 kHz

#VBW 300 kHz

Span 25.97 GHz  
Sweep 2.482 s (1001 pts)




### CH Mid

Agilent

R T

Mkr1 2.45 GHz  
-10.57 dBm

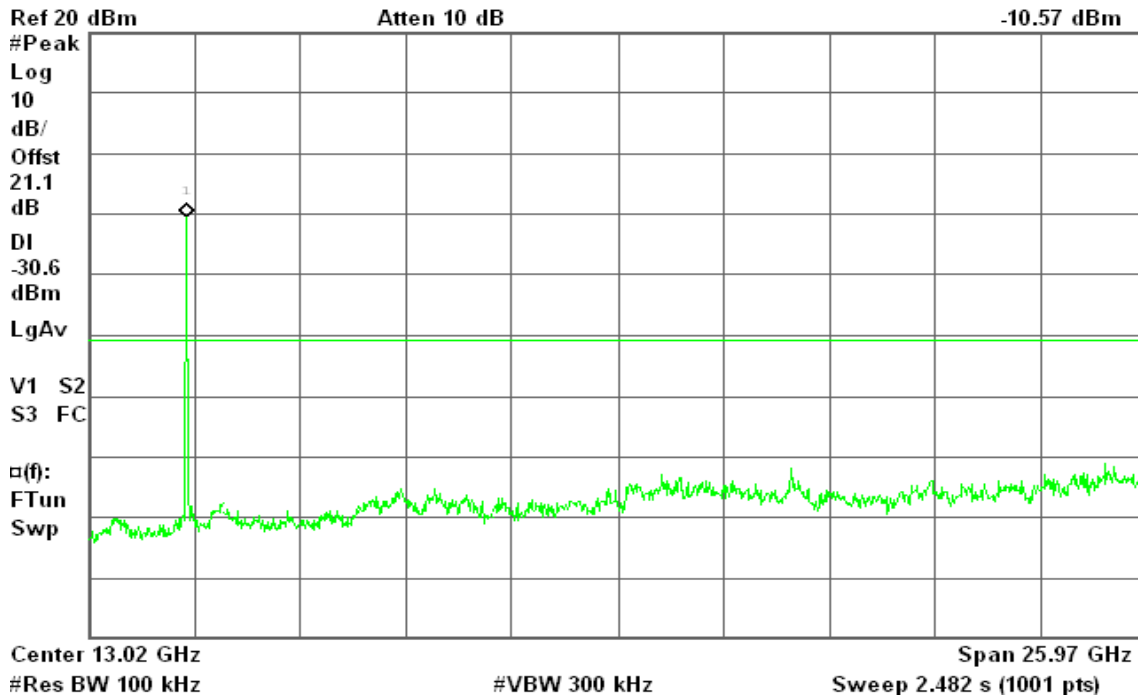


### CH High

Agilent

R T

Mkr1 2.47 GHz  
-12.18 dBm

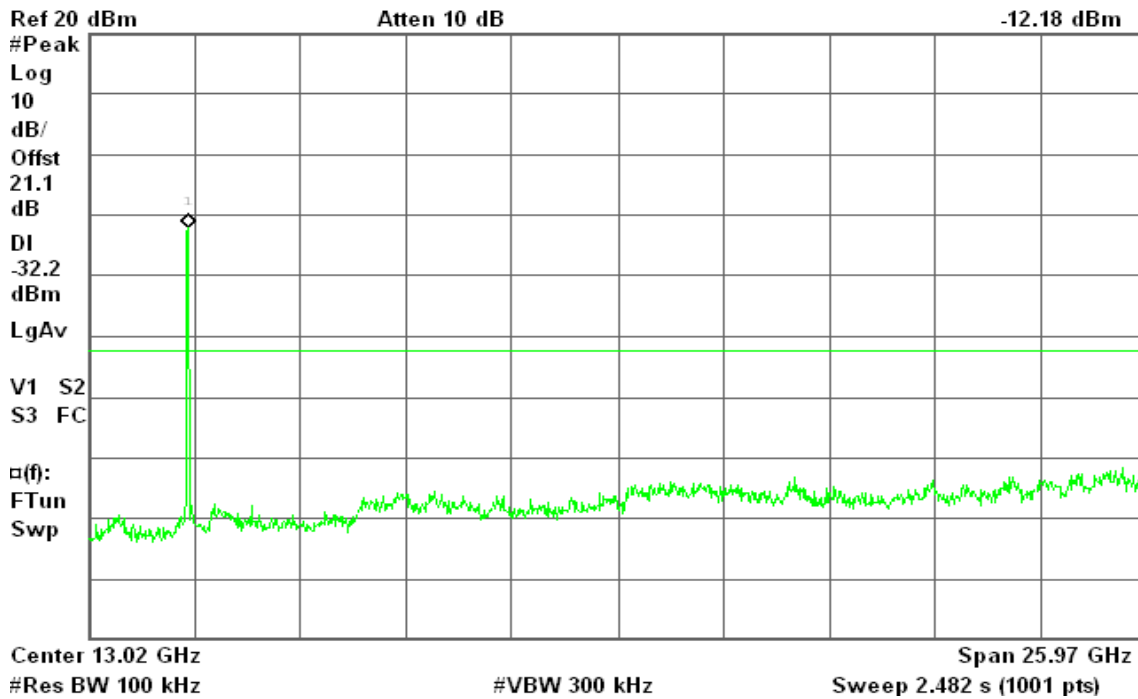




### draft 802.11n Standard-20 MHz Channel mode

#### CH Low

Agilent

R T

Mkr1 2.42 GHz  
-9.69 dBm

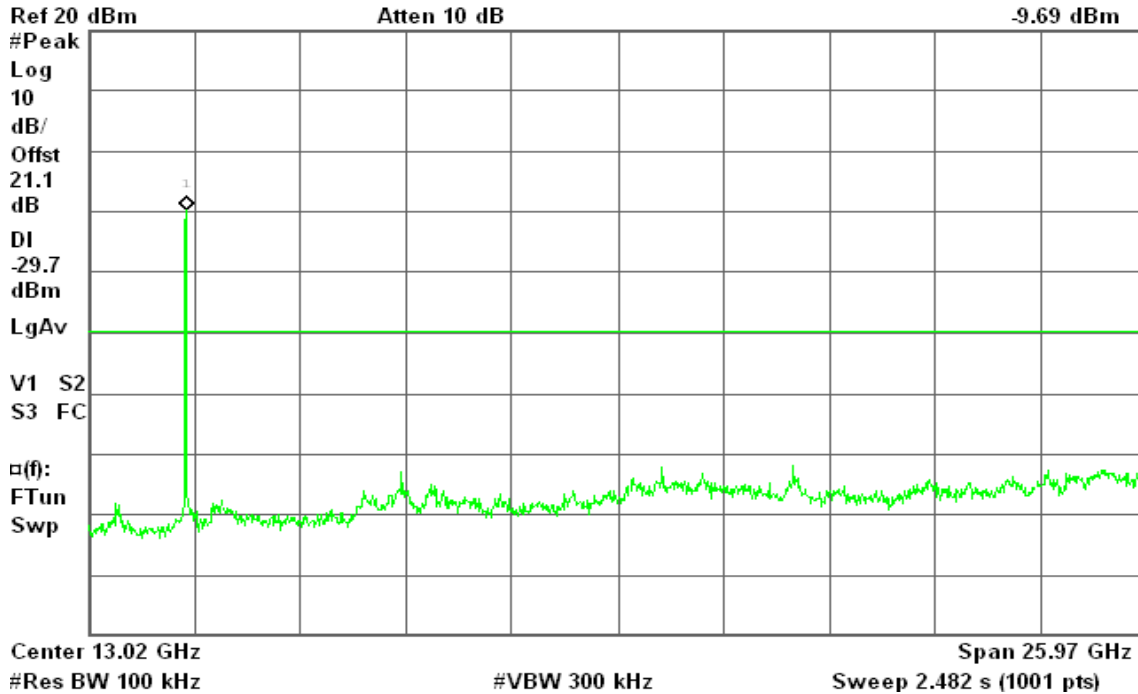


#### CH Mid

Agilent

R L

Mkr1 2.45 GHz  
-7.46 dBm

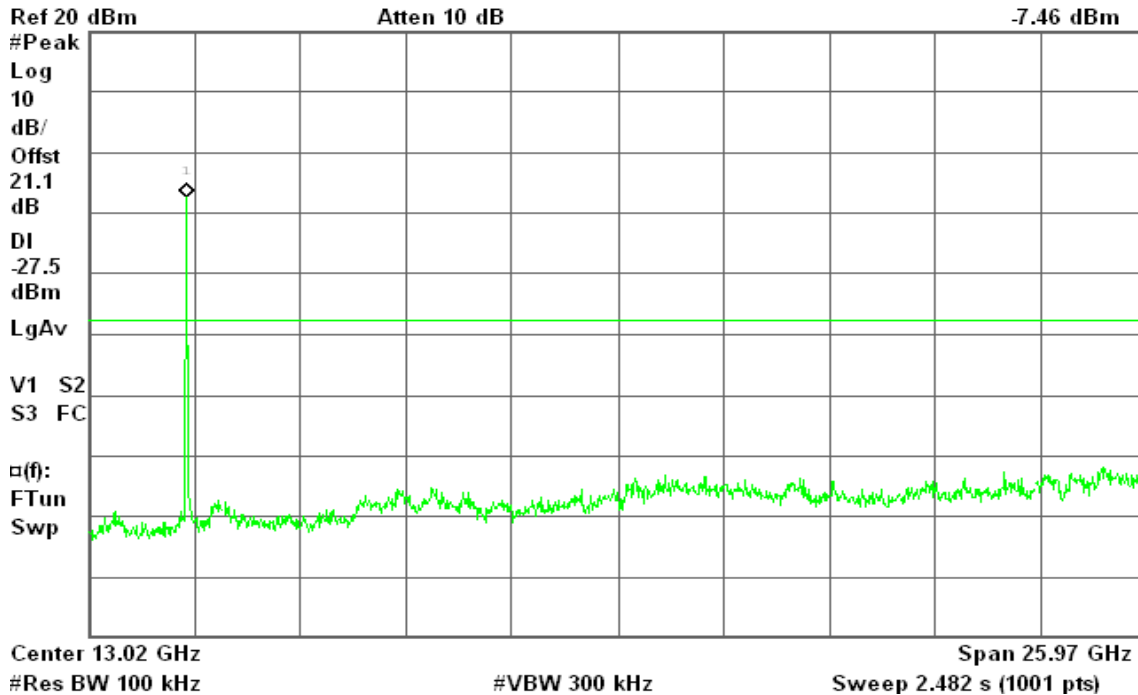




### CH High

Agilent

R T

Mkr1 2.47 GHz  
-7.87 dBm

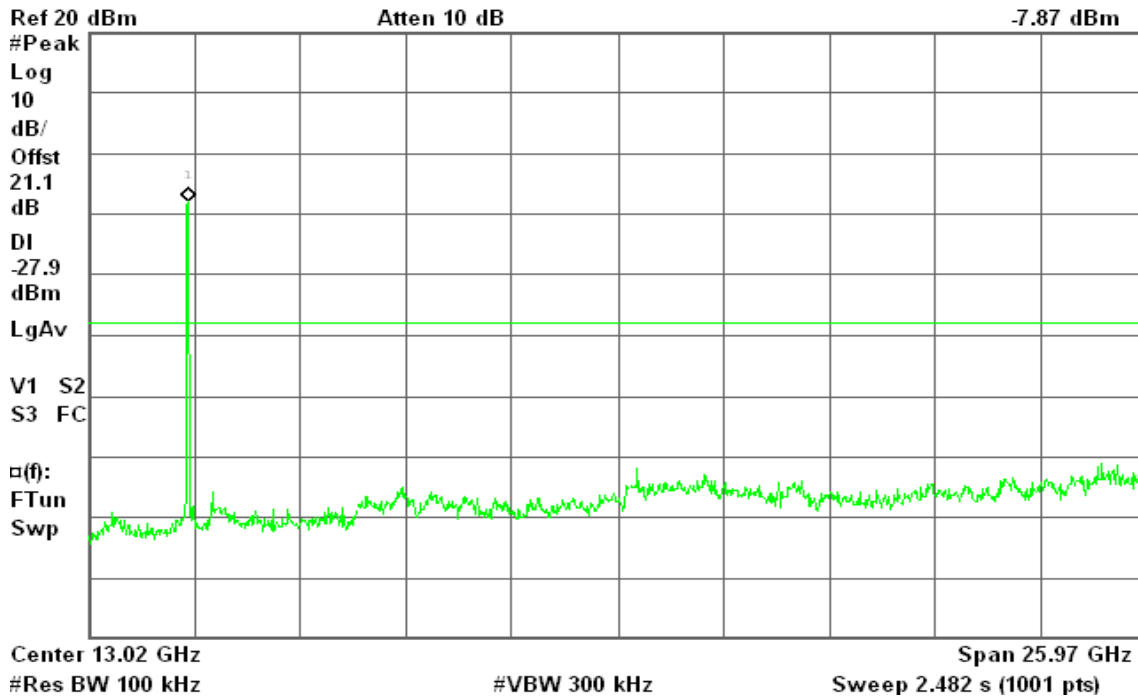


### draft 802.11n Wide-40 MHz Channel mode

### CH Low

Agilent

R T

Mkr1 2.42 GHz  
-10.41 dBm

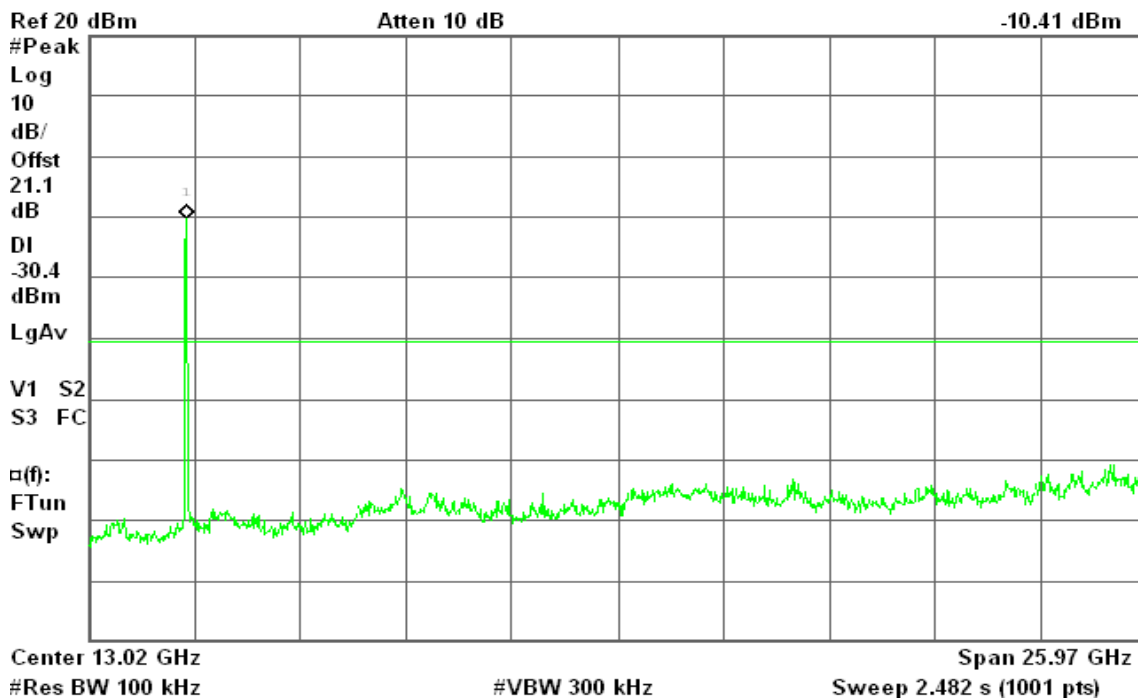




### CH Mid

Agilent


R T

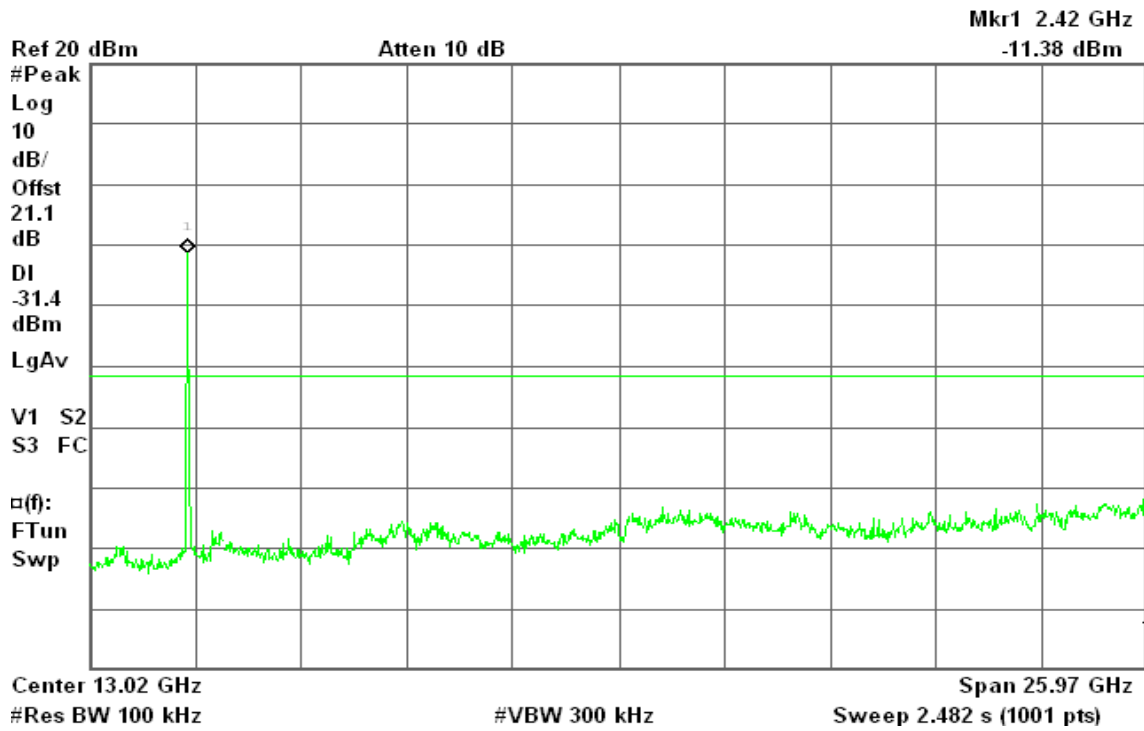

### CH High

Agilent

R T

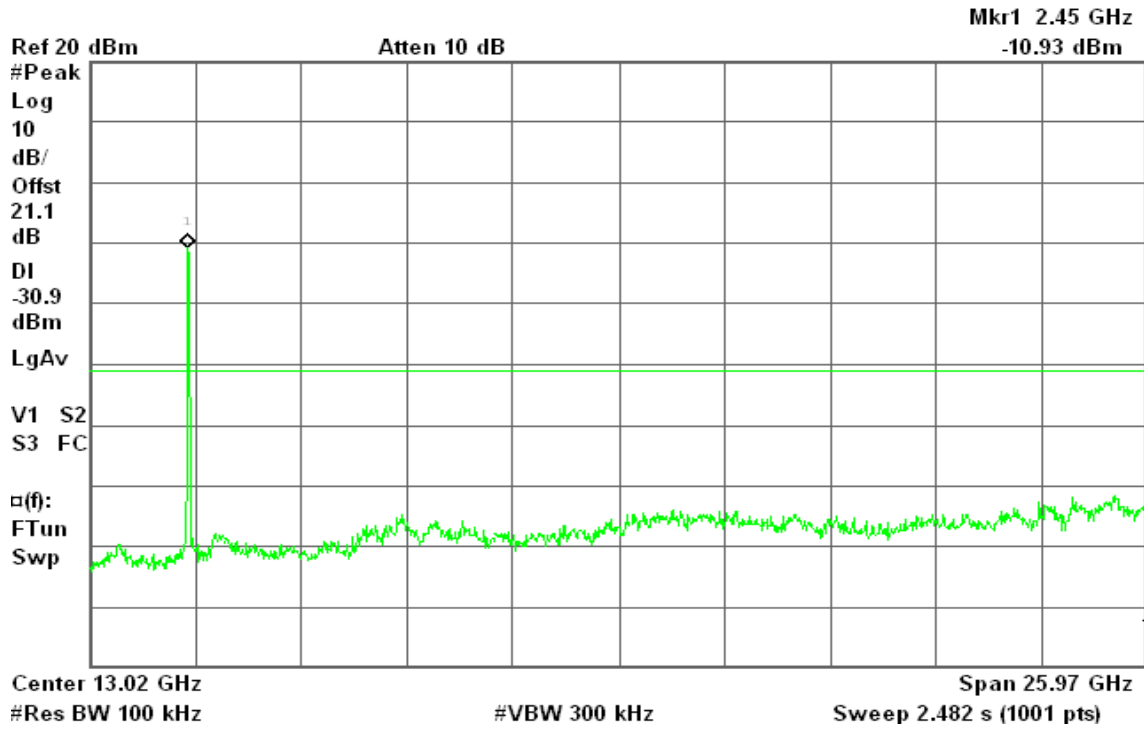



## 7.6 RADIATED EMISSIONS

### LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




### Test Configuration


#### 9kHz ~ 30MHz

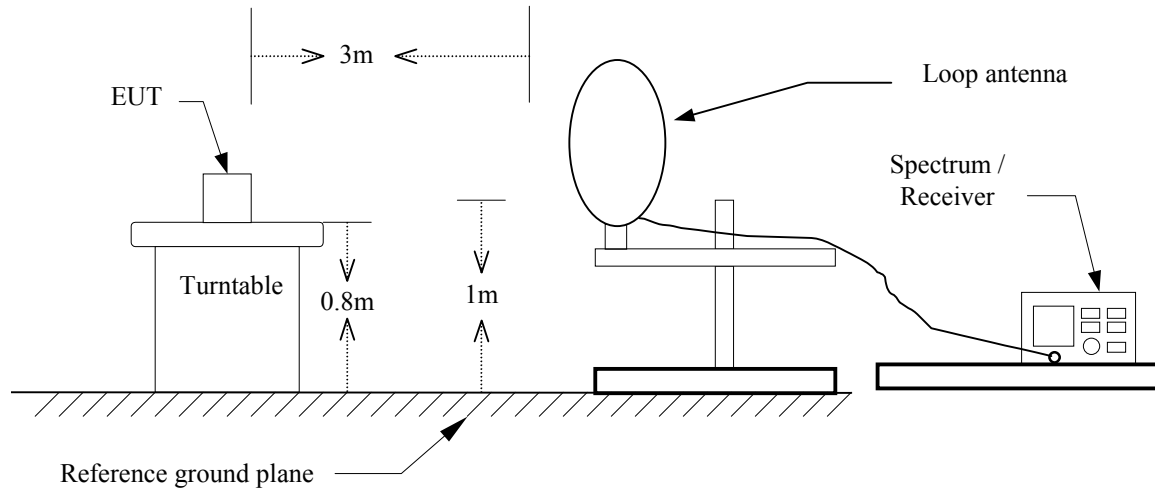

#### 30MHz ~ 1GHz

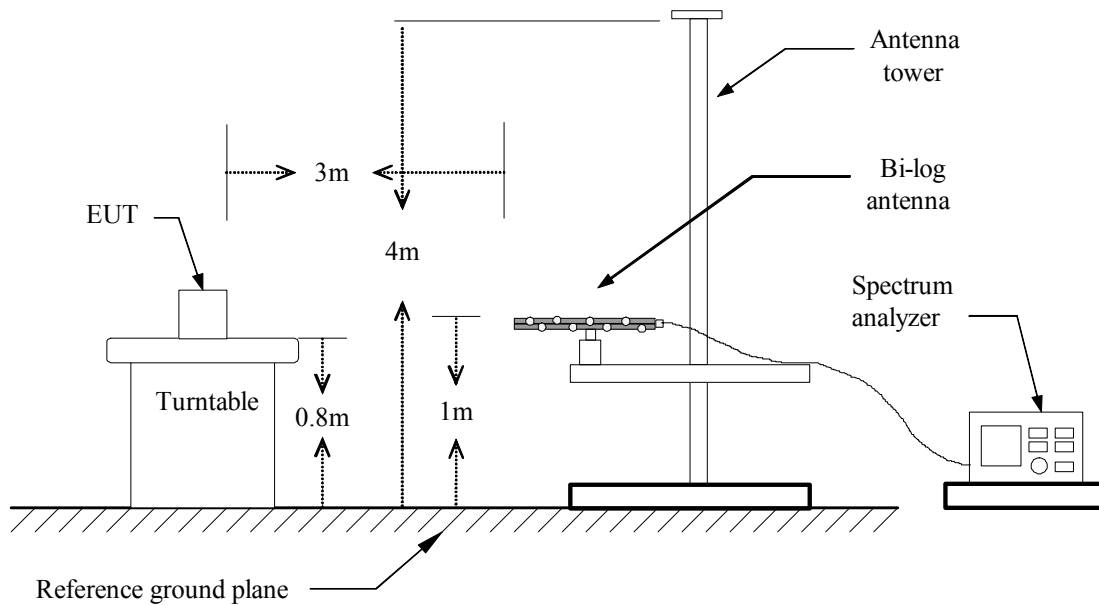

### Above 1 GHz

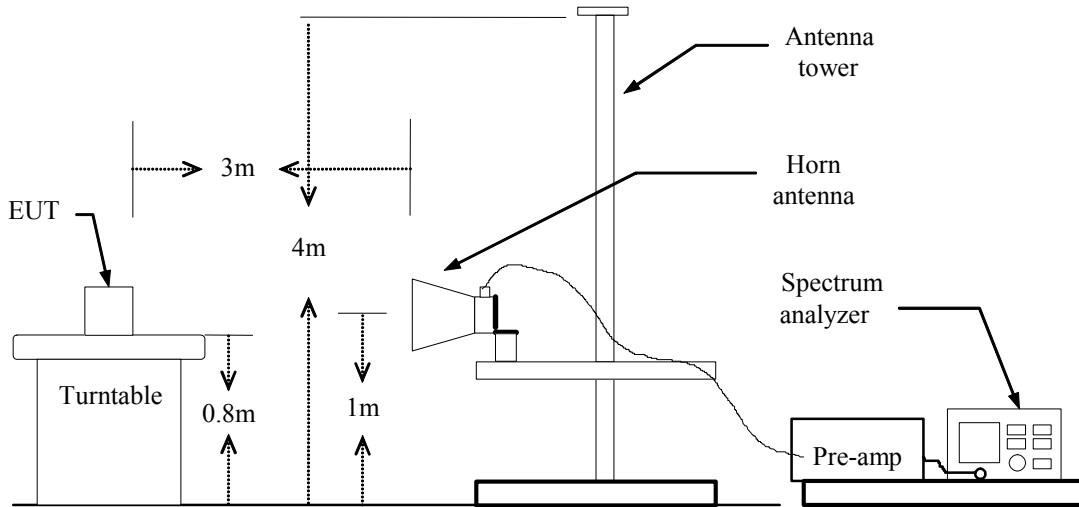





## TEST RESULTS

### Below 1GHz

**Operation Mode:** Normal Link**Test Date:** June 28, 2010**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 51% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
39.70	V	38.20	-9.01	29.19	40.00	-10.81	QP
46.17	V	45.36	-13.06	32.30	40.00	-7.70	QP
118.92	V	40.84	-9.75	31.09	43.50	-12.41	Peak
296.75	V	37.04	-9.27	27.77	46.00	-18.23	Peak
481.05	V	35.93	-5.42	30.52	46.00	-15.48	Peak
647.57	V	33.63	-2.95	30.68	46.00	-15.32	Peak
44.55	H	45.22	-12.19	33.04	40.00	-6.96	Peak
118.92	H	47.83	-9.75	38.09	43.50	-5.41	Peak
215.92	H	40.13	-11.15	28.98	43.50	-14.52	Peak
288.67	H	38.55	-9.36	29.19	46.00	-16.81	Peak
481.05	H	33.01	-5.42	27.60	46.00	-18.40	Peak
744.57	H	34.65	-1.90	32.75	46.00	-13.25	Peak

**Remark:**

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz)
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** June 28, 2010**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	59.45	---	-8.77	50.68	---	74.00	54.00	-3.32	Peak
2370.00	V	64.05	56.20	-3.05	61.00	53.15	74.00	54.00	-0.85	AVG
2450.00	V	63.35	54.88	-2.81	60.54	52.07	74.00	54.00	-1.93	AVG
N/A										
1736.67	H	58.34	---	-6.58	51.76	---	74.00	54.00	-2.24	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11b / CH Mid

Test Date: June 28, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1303.33	V	58.20	---	-9.09	49.11	---	74.00	54.00	-4.89	Peak
1500.00	V	59.84	---	-8.76	51.08	---	74.00	54.00	-2.92	Peak
2396.67	V	65.02	56.23	-2.97	62.05	53.26	74.00	54.00	-0.74	AVG
2473.33	V	62.34	55.20	-2.74	59.60	52.46	74.00	54.00	-1.54	AVG
N/A										
1710.00	H	58.38	---	-6.82	51.55	---	74.00	54.00	-2.45	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** June 28, 2010**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1113.33	V	59.84	---	-9.40	50.44	---	74.00	54.00	-3.56	Peak
1496.67	V	59.59	---	-8.77	50.83	---	74.00	54.00	-3.17	Peak
2420.00	V	65.72	56.40	-2.90	62.82	53.50	74.00	54.00	-0.50	AVG
2500.00	V	61.59	52.52	-2.66	58.93	49.86	74.00	54.00	-4.14	AVG
N/A										
1796.67	H	57.80	---	-6.02	51.78	---	74.00	54.00	-2.22	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** June 28, 2010**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.54	---	-8.76	50.78	---	74.00	54.00	-3.22	Peak
N/A										
1690.00	H	57.11	---	-7.01	50.11	---	74.00	54.00	-3.89	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Operation Mode: TX / IEEE 802.11g / CH Mid

Test Date: June 28, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1493.33	V	59.61	---	-8.77	50.84	---	74.00	54.00	-3.16	Peak
N/A										
1863.33	H	57.36	---	-5.41	51.95	---	74.00	54.00	-2.05	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** June 28, 2010**Temperature:** 23°C**Tested by:** Wolf Huang**Humidity:** 51 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1500.00	V	59.67	---	-8.76	50.91	---	74.00	54.00	-3.09	Peak
4900.00	V	50.13	---	1.15	51.28	---	74.00	54.00	-2.72	Peak
N/A										
1743.33	H	57.63	---	-6.52	51.11	---	74.00	54.00	-2.89	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Low

Test Date: June 28, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	59.34	---	-8.77	50.57	---	74.00	54.00	-3.43	Peak
N/A										
1566.67	H	58.50	---	-8.15	50.35	---	74.00	54.00	-3.65	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH Mid

Test Date: June 28, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	58.49	---	-8.77	49.73	---	74.00	54.00	-4.27	Peak
2400.00	V	62.46	49.59	-2.96	59.51	46.63	74.00	54.00	-7.37	AVG
N/A										
1796.67	H	57.20	---	-6.02	51.18	---	74.00	54.00	-2.82	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / draft 802.11n Standard-20 MHz Channel mode / CH High

Test Date: June 28, 2010

Temperature: 23°C

Tested by: Wolf Huang

Humidity: 51 % RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	59.65	---	-8.77	50.89	---	74.00	54.00	-3.11	Peak
2416.67	V	63.35	50.39	-2.91	60.44	47.48	74.00	54.00	-6.52	AVG
N/A										
1776.67	H	57.65	---	-6.21	51.44	---	74.00	54.00	-2.56	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode / CH Low **Test Date:** June 28, 2010  
**Temperature:** 23°C **Tested by:** Wolf Huang  
**Humidity:** 51 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	59.47	---	-8.77	50.70	---	74.00	54.00	-3.30	Peak
N/A										
1716.67	H	58.46	---	-6.76	51.70	---	74.00	54.00	-2.30	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode / CH Mid **Test Date:** June 28, 2010  
**Temperature:** 23°C **Tested by:** Wolf Huang  
**Humidity:** 51 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	60.25	---	-8.77	51.49	---	74.00	54.00	-2.51	Peak
N/A										
1536.67	H	59.30	---	-8.42	50.87	---	74.00	54.00	-3.13	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Operation Mode:** TX / draft 802.11n Wide-40 MHz Channel mode / CH High **Test Date:** June 28, 2010  
**Temperature:** 23°C **Tested by:** Wolf Huang  
**Humidity:** 51 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1496.67	V	58.74	---	-8.77	49.97	---	74.00	54.00	-4.03	Peak
N/A										
1416.67	H	60.48	---	-8.90	51.59	---	74.00	54.00	-2.41	Peak
N/A										

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin > 20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### Test Data

**Operation Mode:** Normal Link                      **Test Date:** June 30, 2010  
**Temperature:** 26°C                                      **Tested by:** Jerry Lin  
**Humidity:** 60% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.2100	37.76	27.56	0.04	37.80	27.60	63.21	53.21	-25.41	-25.61	L1
0.2800	26.77	22.27	0.03	26.80	22.30	60.82	50.82	-34.02	-28.52	L1
0.3500	22.97	20.97	0.03	23.00	21.00	58.96	48.96	-35.96	-27.96	L1
6.4800	16.06	13.96	0.04	16.10	14.00	60.00	50.00	-43.90	-36.00	L1
13.0100	32.29	29.59	0.11	32.40	29.70	60.00	50.00	-27.60	-20.30	L1
19.4900	12.42	7.92	0.08	12.50	8.00	60.00	50.00	-47.50	-42.00	L1
0.2100	39.93	29.33	0.17	40.10	29.50	63.21	53.21	-23.11	-23.71	L2
0.2800	30.73	25.53	0.17	30.90	25.70	60.82	50.82	-29.92	-25.12	L2
0.3500	25.44	22.84	0.16	25.60	23.00	58.96	48.96	-33.36	-25.96	L2
6.4481	17.41	14.61	0.19	17.60	14.80	60.00	50.00	-42.40	-35.20	L2
13.0300	15.44	7.44	0.26	15.70	7.70	60.00	50.00	-44.30	-42.30	L2
19.4861	12.39	6.69	0.21	12.60	6.90	60.00	50.00	-47.40	-43.10	L2


### **Remark:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



### Test Plots

#### Conducted emissions (Line 1)

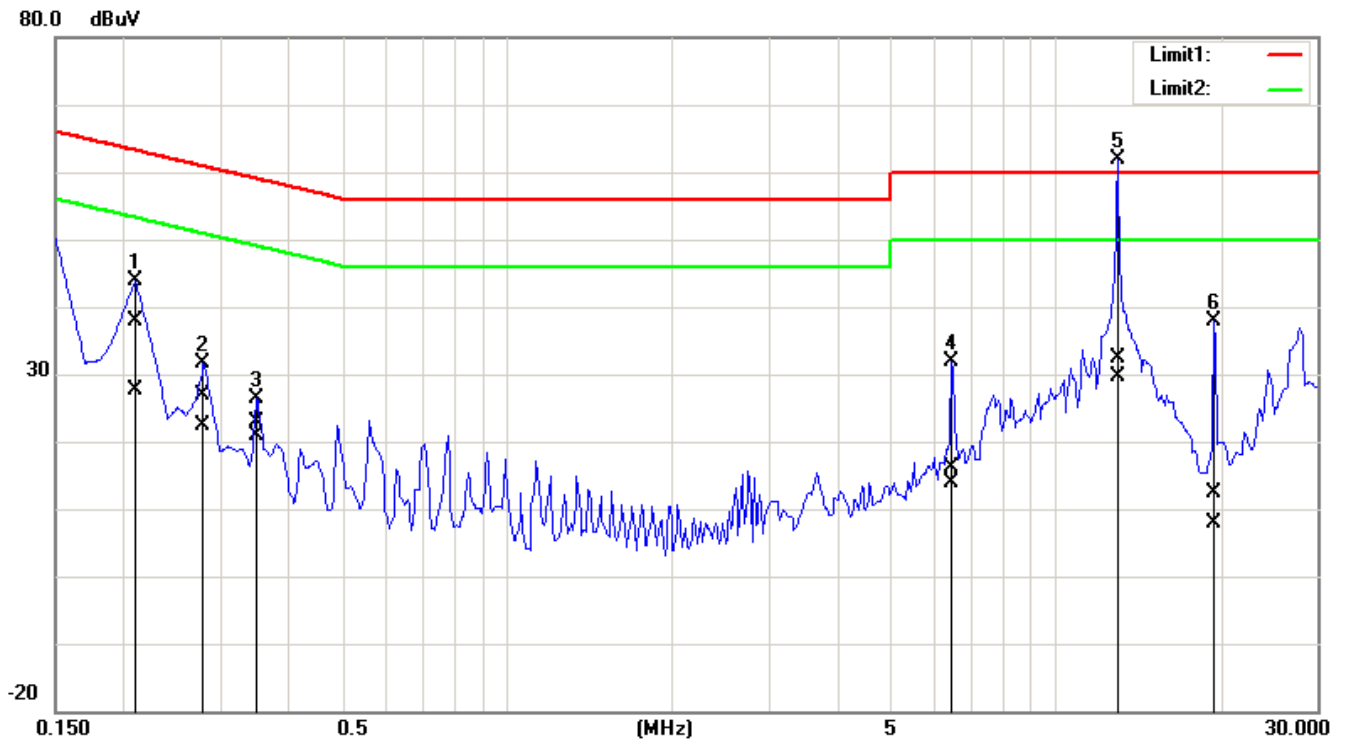

#### Conducted emissions (Line 2)

