

**FCC TEST REPORT**  
**for**  
**WIRELESS USB DONGLE**  
**Model No.: WU81RL / ENUWI-N**

of

Applicant: **Pro-Nets Technology Corporation**  
Address: **7F, No.95, Lide St., Chung Ho City,  
TAIPEI 235, TAIWAN, R.O.C**

Tested and Prepared  
by



**ETS Product Service (Taiwan) Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679**

**A2LA Accredited No.: 1983.02**

**PTCRB Accredited Type Certification Test House**

**FCC ID: RXZ-WU81RL**

**Report No.: W6M20710-8577-C-1**

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

## TABLE OF CONTENTS

<b>1</b>	<b>GENERAL INFORMATION</b>	<b>3</b>
1.1	NOTES	3
1.2	TESTING LABORATORY	4
1.2.1	Location	4
1.2.2	Details of accreditation status	4
1.3	DETAILS OF APPROVAL HOLDER	4
1.4	APPLICATION DETAILS	5
1.5	GENERAL INFORMATION OF TEST ITEM	5
1.6	TEST STANDARDS	6
<b>2</b>	<b>TECHNICAL TEST</b>	<b>7</b>
2.1	SUMMARY OF TEST RESULTS	7
2.2	TEST ENVIRONMENT	7
2.3	TEST EQUIPMENT LIST	8
2.4	GENERAL TEST PROCEDURE	10
<b>3</b>	<b>TEST RESULTS (ENCLOSURE)</b>	<b>12</b>
3.1	PEAK OUTPUT POWER (TRANSMITTER)	13
3.2	EQUIVALENT ISOTROPIC RADIATED POWER	15
3.3	RF EXPOSURE COMPLIANCE REQUIREMENTS	15
3.4	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS	16
3.5	SPURIOUS EMISSIONS (TX)	17
3.6	RADIATED EMISSION ON THE BAND EDGE	25
3.7	MINIMUM 6 dB BANDWIDTH	26
3.8	PEAK POWER SPECTRAL DENSITY	27
3.9	RADIATED EMISSION FROM DIGITAL PART	28
3.10	POWER LINE CONDUCTED EMISSION	29
	<b>APPENDIX</b>	<b>31</b>

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

**1 General Information**

**1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the ETS Product Service (Taiwan) Co., Ltd.

**Specific Conditions:**

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.


The test sample is able to work according IEEE 802.11 b/g/n.

This report is related to FCC Part 15 C (DSSS and OFDM device).

**Tester:**

October 26, 2007

Jay Chaing



Date

ETS-Lab.


Name

Signature

**Technical responsibility for area of testing:**

October 26, 2007

Steven Chuang



Date

ETS

Name

Signature

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS  
No.5-1, Shuang Sing Village,  
LiShuei Rd., Wanli Township,  
Taipei County 207, Taiwan (R.O.C.)

Company  
ETS Product Service (Taiwan) Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.  
Tel : 886-2-66068877  
Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

#### **Accredited testing laboratory**

**A2LA accredited number: 1983.02**

**FCC filed test laboratory Reg. No. 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679**

**PTCRB Accredited Type Certification Test House**

## **1.3 Details of approval holder**

Name:	Pro-Nets Technology Corporation
Street:	7F, No. 95, Lide St, Chung Ho City
Town:	Taipei 235
Country:	Taiwan R.O.C.
Telephone:	+886-2-8221-8385
Fax :	+886-2-3234-5818

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

**1.4 Application details**

Date of receipt of test item : October 09, 2007  
 Date of test : from October 10, 2007 to October 24, 2007

**1.5 General information of Test item**

Type of test item : WIRELESS USB DONGLE  
 Model Number : WU81RL / ENUWI-N  
 Brand Name : PRO-NETS,Speed Com+,Jet Com,Medilink,Encore  
 Hardware : Ver:2.0  
 Software : D-1.0.4.0\_VA-1.0.5.0\_RU-2.0.3.0\_  
 VA-1.0.15.0\_AU\_1.2.0.0\_VA-1.0.0.0\_080207  
 Multi-listing model number : without  
 Photos : see Appendix

**Technical data**

Frequency band : 2.4 GHz – 2.4835 GHz

**11b, 11g, 11n 20MHz**

Frequency ( ch 1 or A) : 2.412 GHz  
 Frequency ( ch 6 or B) : 2.437 GHZ  
 Frequency ( ch 11 or C) : 2.462 GHz

**11n 40MHz**

Frequency ( ch 1 or A) : 2.422 GHz  
 Frequency ( ch 4 or B) : 2.437 GHZ  
 Frequency ( ch 7 or C) : 2.452 GHz

Number of Channels : 11b, 11g, 11n 20MHz: 11  
 11n 40MHz: 7

Operation modes : duplex

Modulation Type : DSSS / OFDM

Fixed point-to-point operation :  Yes /  No

Type of Antenna : Printed Antenna

Antenna gain : 0.5 dBi

Power supply : 5 Vdc from PC

Emission designator : 11b: DSSS: 16M2G1D  
 11g: OFDM: 17M1W7D  
 11n 20MHz: OFDM: 18M2W7D  
 11n 40MHz: OFDM: 36M3W7D

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Host device: none

Classification :

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input checked="" type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>

**Transmitter**

**Unom**

**Mode A (DSSS)**

Power ( ch 1 or A) : Conducted: 23.61 dBm  
 Power ( ch 6 or B) : Conducted: 23.96 dBm  
 Power ( ch 11 or C) : Conducted: 24.25 dBm

**Mode B (OFDM)**

Power ( ch 1 or A) : Conducted: 22.09 dBm  
 Power ( ch 6 or B) : Conducted: 22.49 dBm  
 Power ( ch 11 or C) : Conducted: 22.83 dBm

**Mode C (OFDM)**

Power ( ch 1 or A) : Conducted: 22.47 dBm  
 Power ( ch 6 or B) : Conducted: 22.49 dBm  
 Power ( ch 11 or C) : Conducted: 22.78 dBm

**Mode D (OFDM)**

Power ( ch 1 or A) : Conducted: 22.05 dBm  
 Power ( ch 4 or B) : Conducted: 22.33 dBm  
 Power ( ch 7 or C) : Conducted: 22.71 dBm

**Manufacturer:** (if applicable)

Name : ./.  
 Street : ./.  
 Town : ./.  
 Country : ./.

**1.6 Test standards**

Technical standard : FCC RULES PART 15 SUBPART B / SUBPART C § 15.247 (2007-09)

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



**or**

The deviations as specified in 2.5 were ascertained in the course of the tests performed.



### **2.2 Test environment**

Temperature	: 23 °C
Relative humidity content	: 20 ... 75 %
Air pressure	: 86 ... 103 kPa
Power supply	: 5 Vdc from PC
Extreme conditions parameters	: --

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

**2.3 Test Equipment List**

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2007/10/15	2008/10/14
ETSTW-CE 002	PREREULATOR MODE DC POWER SUPPLY	None	None		Function Test	
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2007/10/15	2008/10/14
ETSTW-CE 005	Line-Impedance Stabilisation Network	NNBM 8126D	137	Schwarzbeck	2007/10/15	2008/10/14
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	In House Certificate	
ETSTW-CE 008	ABSORBING CLAMP	MDS 21	3469	Schwarzbeck	2007/10/23	2009/10/22
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2007/8/2	2008/8/1
ETSTW-CE 013	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T4-02	20242	FCC	2005/12/8	2007/12/7
ETSTW-CE 014	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T2-02	20241	FCC	2005/12/7	2007/12/6
ETSTW-CE 015	CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK	FCC-TLISN-T8-02	20307	FCC	2006/11/7	2008/11/6
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2006/11/21	2007/11/20
ETSTW-RE 002	Function Generator	33220A	MY43004982	Agilent	2007/10/13	2009/10/12
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2007/10/19	2008/10/18
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2006/10/30	2007/10/29
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2007/10/11	2008/10/12
ETSTW-RE 010	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070181	MOTECH	Function Test	
ETSTW-RE 011	PROGRAMMABLE LINEAR POWER SUPPLY	LPS-305	30503070165	MOTECH	Function Test	
ETSTW-RE 017	Log-Periodic Antenna	HL025	352886/001	R&S	2006/5/4	2008/5/3
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2004/11/8	2007/11/7
ETSTW-RE 020	MICROWAVE HORN ANTENNA	AT4002A	306915	AR	Function Test	
ETSTW-RE 021	SWEEP GENERATOR	SWM05	835130/010	R&S	2007/10/9	2008/10/8
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	EMCO	In House Certificate	
ETSTW-RE 028	Log-Periodic DipoleArray Antenna	3148	34429	EMCO	2006/5/26	2008/5/25
ETSTW-RE 029	Biconical Antenna	3109	33524	EMCO	2006/5/26	2008/5/25
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2006/5/3	2008/5/2
ETSTW-RE 032	Millivoltmeter	URV 55	849086/013	R&S	2007/10/9	2008/10/8
ETSTW-RE 033	WaveRunner 6000A Serise Oscilloscope	WAVERUNNER 6100A	LCRY0604P14508	LeCroy	2007/7/9	2008/7/8
ETSTW-RE 034	Power Sensor	URV5-Z4	839313/006	R&S	2007/10/16	2008/10/15
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2007/1/11	2009/1/10
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2006/5/8	2008/5/7
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2006/5/29	2008/5/28



Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

ETSTW-RE 048	Triple Loop Antenna	HXYZ 9170	HXYZ 9170-134	Schwarzbeck	2005/3/22	2008/3/21
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2007/5/2	2009/5/1
ETSTW-RE 055	SPECTRUM ANALYZER	FSU-26	200074	R&S	2007/7/16	2008/7/15
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2007/7/2	2009/7/1

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

## 2.4 General Test Procedure

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2003 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m

The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2000 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by ETS Product Service (Taiwan) Co., Ltd. at the registered open field test site located at No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.) The Registration Number: 930600.

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor =  $20 \log(\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

**3 Test results (enclosure)**

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent radiated Power	15.247(b)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge Measurement	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Minimum 6 dB Bandwidth	15.247(a)(2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Peak Power Spectral Density	15.247(d)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Digital Part	15.109	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

**Note:**

1. This EUT incorporates a MIMO function with IEEE 802.11b, 802.11g, and 802.11n draft 2.0. Physically, this EUT includes two transmitters and two receivers with two incoherent streams. This device uses multiplexing and also employ cyclic delay diversity to improve range and throughput, and this device simultaneously operates on two adjacent channels.
2. This EUT is 2\*2 spatial MIMO (2Tx&2Rx) without beam forming function. That operates dual chain configuration. The Pre-test was performed to determine the worst case mode from all possible combinations between all available modulations, data rates, bandwidths, and spatial stream modes.
3. The worst case mode was base on the investigations by measuring the peak and average power according to the description above. The detail of chosen mode for full testing are as below:

Mode	Available channel	Chosen Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1,6,11	DSSS	DBPSK	1
802.11g	1 to 11	1,6,11	OFDM	BPSK	6
Draft 802.11n (20MHz)	1 to 11	1,6,11	OFDM	BPSK	6.5
Draft 802.11n (40MHz)	1 to 7	1,4,7	OFDM	BPSK	13.5

4. Because both antennas operate simultaneously, when performed the relevant conducted measurement(ex. RF output power, peak power spectral density....and so on), we basically use a splitter to combine each antenna port in order to get the total measuring results.

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

**3.1 Peak Output Power (transmitter)**

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Mode A

Test condition		Conducted Power		
		Channel A	Channel B	Channel C
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\text{ V}$	[dBm]	[dBm]	[dBm]
		23.61	23.96	24.25

Mode B

Test condition		Conducted Power		
		Channel A	Channel B	Channel C
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\text{ V}$	[dBm]	[dBm]	[dBm]
		22.09	22.49	22.83

Mode C

Test condition		Conducted Power		
		Channel A	Channel B	Channel C
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\text{ V}$	[dBm]	[dBm]	[dBm]
		22.47	22.49	22.78

Mode D

Test condition		Conducted Power		
		Channel A	Channel B	Channel C
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\text{ V}$	[dBm]	[dBm]	[dBm]
		22.05	22.33	22.71

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Mode A

Test condition $T_{nom} = \text{-- } ^\circ\text{C}, V_{nom} = \text{-- } \text{V}$	Signal Field strength TX highest power mode dB $\mu$ V/m
Frequency [MHz]	--
--	

Mode B

Test condition $T_{nom} = \text{-- } ^\circ\text{C}, V_{nom} = \text{-- } \text{V}$	Signal Field strength TX highest power mode dB $\mu$ V/m
Frequency [MHz]	--
--	

Mode C

Test condition $T_{nom} = \text{-- } ^\circ\text{C}, V_{nom} = \text{-- } \text{V}$	Signal Field strength TX highest power mode dB $\mu$ V/m
Frequency [MHz]	--
--	

Mode D

Test condition $T_{nom} = \text{-- } ^\circ\text{C}, V_{nom} = \text{-- } \text{V}$	Signal Field strength TX highest power mode dB $\mu$ V/m
Frequency [MHz]	--
--	

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain  $> 6$  dBi and using fixed point-to-point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 073 ETSTW-RE 74

Explanation: The diagrams for the peak output power measurements are included in Appendix.

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### 3.2 Equivalent isotropic radiated power

FCC Rule: 15.247(b)(3)

EIRP = max. conducted output power + antenna gain  
 EIRP = 24.25 dBm + 0.5 dBi  
 = 24.75 dBm

Limit: EIRP = +36 dBm for Antenna gain <6dBi

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 021  
 ETSTW-RE 028 ETSTW-RE 030 ETSTW-RE 043 ETSTW-RE 044

### 3.3 RF Exposure Compliance Requirements

FCC OET Bulletin 65 Edition 97.01 determines the equations for predicting RF fields and applicable limits.

The prediction for power density in the far-field but will over-predict power density in the near field, where it could be used for walking a “worst case” or conservative prediction.

$$S = \frac{PG}{4\pi R^2}$$

S – Power Density

P – Output power ERP

R – Distance

D – Cable Loss

AG – Antenna Gain G = AG-D

Item	Unit	Value	Remarks
P	mW	266.07251	Peak value
D	dB		
AG	dBi	0.5	
G		1.2	Calculated Value
R	cm	20	Assumed value
S	mW/cm <sup>2</sup>	0.063	Calculated value

Limits:

Limit for General Population / Uncontrolled Exposure	
Frequency (MHz)	Power Density (mW/cm <sup>2</sup> )
1500 – 100.000	1,0

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

**3.4 Transmitter Radiated Emissions in Restricted Bands**

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency  $\leq$  1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency  $>$  1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency  $>$  1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction =  $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: see attached diagrams in Appendix.



Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### 3.5 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(c), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction =  $20 \log(\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Note: No duty cycle correction was added to the reading of EUT.

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028  
ETSTW-RE 029 ETSTW-RE 030 ETSTW-RE 042 ETSTW-RE 043  
ETSTW-RE 044

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits. If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Duty-Cycle Correction Factor".

**Summary table with radiated data of the test plots**

Model: WU81RL/ENUWI-N Date: 2007/10/15  
 Mode: 802.11b ch1 Temperature: 26 °C Engineer: Derek  
 Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3218.437	51.75	---	-2.17	49.58	---	74.00	54.00	-24.42	240	150	
4825.651	45.78	---	-1.30	44.48	---	74.00	54.00	-29.52	240	150	
6436.874	57.73	---	4.06	61.79	---	74.00	54.00	-12.21	240	150	
7238.477	45.65	---	1.86	47.51	---	74.00	54.00	-26.49	240	150	
9648.000	25.10	---	25.06	44.16	---	74.00	54.00	-29.84	240	150	
12060.000	24.02	---	29.44	41.46	---	74.00	54.00	-32.54	240	150	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3218.437	46.81	---	-2.17	44.64	---	74.00	54.00	-29.36	240	150	
4817.635	44.45	---	-1.30	43.15	---	74.00	54.00	-30.85	240	150	
6436.874	58.48	---	4.06	62.54	---	74.00	54.00	-11.46	240	150	
7238.477	45.22	---	1.86	47.08	---	74.00	54.00	-26.92	240	150	
9648.000	24.62	---	25.06	43.68	---	74.00	54.00	-30.32	240	150	
12060.000	24.34	---	29.44	41.78	---	74.00	54.00	-32.22	240	150	

Mode: 802.11b ch6

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	51.10	---	-1.95	49.15	---	74.00	54.00	-24.85	240	150	
4873.748	44.97	---	-1.30	43.67	---	74.00	54.00	-30.33	240	150	
6501.002	56.18	---	4.50	60.68	---	74.00	54.00	-13.32	240	150	
7311.000	44.08	---	1.82	45.90	---	74.00	54.00	-28.10	240	150	
9748.000	24.92	---	24.94	43.86	---	74.00	54.00	-30.14	240	150	
12185.000	25.25	---	29.74	42.99	---	74.00	54.00	-31.01	240	150	

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	45.97	---	-1.95	44.02	---	74.00	54.00	-29.98	240	150	
4873.748	42.91	---	-1.30	41.61	---	74.00	54.00	-32.39	240	150	
6501.002	57.77	---	4.50	62.27	---	74.00	54.00	-11.73	240	150	
7311.000	44.25	---	1.82	46.07	---	74.00	54.00	-27.93	240	150	
9748.000	25.39	---	24.94	44.33	---	74.00	54.00	-29.67	240	150	
12185.000	24.84	---	29.74	42.58	---	74.00	54.00	-31.42	240	150	

Mode: 802.11b ch11

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3282.565	48.30	---	-1.72	46.58	---	74.00	54.00	-27.42	240	150	
4921.844	42.64	---	-1.21	41.43	---	74.00	54.00	-32.57	240	150	
6565.130	48.93	---	4.70	53.63	---	74.00	54.00	-20.37	240	150	
7386.000	43.39	---	1.97	45.36	---	74.00	54.00	-28.64	240	150	
9848.000	24.71	---	25.49	44.20	---	74.00	54.00	-29.80	240	150	
12310.000	25.40	---	30.04	43.44	---	74.00	54.00	-30.56	240	150	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3282.565	45.42	---	-1.72	43.70	---	74.00	54.00	-30.30	240	150	
4924.000	38.99	---	-1.20	37.79	---	74.00	54.00	-36.21	240	150	
6565.130	47.39	---	4.70	52.09	---	74.00	54.00	-21.91	240	150	
7386.000	43.50	---	1.97	45.47	---	74.00	54.00	-28.53	240	150	
9848.000	24.89	---	25.49	44.38	---	74.00	54.00	-29.62	240	150	
12310.000	25.23	---	30.04	43.27	---	74.00	54.00	-30.73	240	150	

Mode: 802.11g ch1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3214.429	51.40	---	-2.20	49.20	---	74.00	54.00	-24.80	240	150	
4825.651	42.00	---	-1.30	40.70	---	74.00	54.00	-33.30	240	150	
6436.874	57.41	---	4.06	61.47	---	74.00	54.00	-12.53	240	150	
7236.000	43.20	---	1.86	45.06	---	74.00	54.00	-28.94	240	150	
9648.000	24.37	---	25.06	43.43	---	74.00	54.00	-30.57	240	150	
12060.000	24.71	---	29.44	42.15	---	74.00	54.00	-31.85	240	150	

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3218.437	47.58	---	-2.17	45.41	---	74.00	54.00	-28.59	240	150	
4833.667	42.08	---	-1.30	40.78	---	74.00	54.00	-33.22	240	150	
6436.874	57.01	---	4.06	61.07	---	74.00	54.00	-12.93	240	150	
7236.000	43.3	---	1.86	45.16	---	74.00	54.00	-28.84	240	150	
9648.000	24.27	---	25.06	43.33	---	74.00	54.00	-30.67	240	150	
12060.000	25.10	---	29.44	42.54	---	74.00	54.00	-31.46	240	150	

Mode: 802.11g ch6

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	51.26	---	-1.95	49.31	---	74.00	54.00	-24.69	240	150	
4873.748	42.24	---	-1.30	40.94	---	74.00	54.00	-33.06	240	150	
6501.002	57.37	---	4.50	61.87	---	74.00	54.00	-12.13	240	150	
7311.000	43.68	---	1.82	45.50	---	74.00	54.00	-28.50	240	150	
9748.000	24.67	---	24.94	43.61	---	74.00	54.00	-30.39	240	150	
12185.000	24.82	---	29.74	42.56	---	74.00	54.00	-31.44	240	150	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	47.17	---	-1.95	45.22	---	74.00	54.00	-28.78	240	150	
4881.764	42.37	---	-1.30	41.07	---	74.00	54.00	-32.93	240	150	
6501.002	57.00	---	4.50	61.50	---	74.00	54.00	-12.50	240	150	
7311.000	43.43	---	1.82	45.25	---	74.00	54.00	-28.75	240	150	
9748.000	24.44	---	24.94	43.38	---	74.00	54.00	-30.62	240	150	
12185.000	25.06	---	29.74	42.80	---	74.00	54.00	-31.20	240	150	

Mode: 802.11g ch11

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3282.565	50.67	---	-1.72	48.95	---	74.00	54.00	-25.05	240	150	
4905.812	41.50	---	-1.28	40.22	---	74.00	54.00	-33.78	240	150	
6565.130	54.60	---	4.70	59.30	---	74.00	54.00	-14.70	240	150	
7386.000	43.93	---	1.97	45.90	---	74.00	54.00	-28.10	240	150	
9848.000	24.62	---	25.49	44.11	---	74.00	54.00	-29.89	240	150	
12310.000	25.13	---	30.04	43.17	---	74.00	54.00	-30.83	240	150	

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3282.565	46.01	---	-1.72	44.29	---	74.00	54.00	-29.71	240	150	
4921.844	41.89	---	-1.21	40.68	---	74.00	54.00	-33.32	240	150	
6565.130	55.60	---	4.70	60.30	---	74.00	54.00	-13.70	240	150	
7386.000	43.93	---	1.97	45.90	---	74.00	54.00	-28.10	240	150	
9848.000	24.51	---	25.49	44.00	---	74.00	54.00	-30.00	240	150	
12310.000	24.37	---	30.04	42.41	---	74.00	54.00	-31.59	240	150	

Mode: 802.11n(20MHz) ch1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3218.437	51.41	---	-2.17	49.24	---	74.00	54.00	-24.76	240	150	
4817.635	42.20	---	-1.30	40.90	---	74.00	54.00	-33.10	240	150	
6436.874	58.27	---	4.06	62.33	---	74.00	54.00	-11.67	240	150	
7236.000	43.32	---	1.86	45.18	---	74.00	54.00	-28.82	240	150	
9648.000	24.21	---	25.06	43.27	---	74.00	54.00	-30.73	240	150	
12060.000	24.52	---	29.44	41.96	---	74.00	54.00	-32.04	240	150	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3214.429	45.55	---	-2.20	43.35	---	74.00	54.00	-30.65	240	150	
4825.651	42.68	---	-1.30	41.38	---	74.00	54.00	-32.62	240	150	
6436.874	58.93	---	4.06	62.99	---	74.00	54.00	-11.01	240	150	
7236.000	43.52	---	1.86	45.38	---	74.00	54.00	-28.62	240	150	
9648.000	24.27	---	25.06	43.33	---	74.00	54.00	-30.67	240	150	
12060.000	24.26	---	29.44	41.70	---	74.00	54.00	-32.30	240	150	

Mode: 802.11n(20MHz) ch6

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	51.42	---	-1.95	49.47	---	74.00	54.00	-24.53	240	150	
4865.732	42.29	---	-1.30	40.99	---	74.00	54.00	-33.01	240	150	
6501.002	56.73	---	4.50	61.23	---	74.00	54.00	-12.77	240	150	
7311.000	44.30	---	1.82	46.12	---	74.00	54.00	-27.88	240	150	
9748.000	24.91	---	24.94	43.85	---	74.00	54.00	-30.15	240	150	
12185.000	24.64	---	29.74	42.38	---	74.00	54.00	-31.62	240	150	

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	47.47	---	-1.95	45.52	---	74.00	54.00	-28.48	240	150	
4873.748	41.90	---	-1.30	40.60	---	74.00	54.00	-33.40	240	150	
6501.002	57.59	---	4.50	62.09	---	74.00	54.00	-11.91	240	150	
7311.000	43.98	---	1.82	45.8	---	74.00	54.00	-28.2	240	150	
9748.000	24.18	---	24.94	43.12	---	74.00	54.00	-30.88	240	150	
12185.000	26.30	---	29.74	44.04	---	74.00	54.00	-29.96	240	150	

Mode: 802.11n(20MHz) ch11

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3282.565	50.85	---	-1.72	49.13	---	74.00	54.00	-24.87	240	150	
4921.844	41.52	---	-1.21	40.31	---	74.00	54.00	-33.69	240	150	
6565.130	54.37	---	4.70	59.07	---	74.00	54.00	-14.93	240	150	
7386.000	43.01	---	1.97	44.98	---	74.00	54.00	-29.02	240	150	
9848.000	24.31	---	25.49	43.80	---	74.00	54.00	-30.20	240	150	
12310.000	25.05	---	30.04	43.09	---	74.00	54.00	-30.91	240	150	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3282.565	46.27	---	-1.72	44.55	---	74.00	54.00	-29.45	240	150	
4921.844	42.52	---	-1.21	41.31	---	74.00	54.00	-32.69	240	150	
6565.130	55.84	---	4.70	60.54	---	74.00	54.00	-13.46	240	150	
7386.000	43.78	---	1.97	45.75	---	74.00	54.00	-28.25	240	150	
9848.000	24.52	---	25.49	44.01	---	74.00	54.00	-29.99	240	150	
12310.000	25.11	---	30.04	43.15	---	74.00	54.00	-30.85	240	150	

Mode: 802.11n(40MHz) ch1

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3230.461	46.27	---	-2.09	44.18	---	74.00	54.00	-29.82	240	150	
4844.000	41.15	---	-1.30	39.85	---	74.00	54.00	-34.15	240	150	
6460.922	58.09	---	4.23	62.32	---	74.00	54.00	-11.68	240	150	
7266.000	42.89	---	1.83	44.72	---	74.00	54.00	-29.28	240	150	
9688.000	24.77	---	24.78	43.55	---	74.00	54.00	-30.45	240	150	
12110.000	24.84	---	29.56	42.40	---	74.00	54.00	-31.60	240	150	

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3230.461	51.52	---	-2.09	49.43	---	74.00	54.00	-24.57	240	150	
4844.000	40.37	---	-1.30	39.07	---	74.00	54.00	-34.93	240	150	
6460.922	58.99	---	4.23	63.22	---	74.00	54.00	-10.78	240	150	
7266.000	42.77	---	1.83	44.60	---	74.00	54.00	-29.40	240	150	
9688.000	24.39	---	24.78	43.17	---	74.00	54.00	-30.83	240	150	
12110.000	24.53	---	29.56	42.09	---	74.00	54.00	-31.91	240	150	

Mode: 802.11n(40MHz) ch4

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	51.65	---	-1.95	49.7	---	74.00	54.00	-24.30	240	150	
4865.732	41.25	---	-1.30	39.95	---	74.00	54.00	-34.05	240	150	
6501.002	57.08	---	4.50	61.58	---	74.00	54.00	-12.42	240	150	
7326.653	45.12	---	1.85	46.97	---	74.00	54.00	-27.03	240	150	
9748.000	24.87	---	24.94	43.81	---	74.00	54.00	-30.19	240	150	
12185.000	24.92	---	29.74	42.66	---	74.00	54.00	-31.34	240	150	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3250.501	45.88	---	-1.95	43.93	---	74.00	54.00	-30.07	240	150	
4873.748	41.04	---	-1.30	39.74	---	74.00	54.00	-34.26	240	150	
6501.002	57.53	---	4.50	62.03	---	74.00	54.00	-11.97	240	150	
7310.621	44.52	---	1.82	46.34	---	74.00	54.00	-27.66	240	150	
9748.000	26.19	---	24.94	45.13	---	74.00	54.00	-28.87	240	150	
12185.000	25.89	---	29.74	43.63	---	74.00	54.00	-30.37	240	150	

Mode: 802.11n(40MHz) ch7

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3270.541	50.25	---	-1.81	48.44	---	74.00	54.00	-25.56	240	150	
4884.000	40.25	---	-1.30	38.95	---	74.00	54.00	-35.05	240	150	
6541.082	56.01	---	4.62	60.63	---	74.00	54.00	-13.37	240	150	
7326.000	43.21	---	1.85	45.06	---	74.00	54.00	-28.94	240	150	
9768.000	24.40	---	25.04	43.44	---	74.00	54.00	-30.56	240	150	
12210.000	25.22	---	29.80	43.02	---	74.00	54.00	-30.98	240	150	

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
	Peak	Ave.		Peak	Ave.	Peak	Ave.				
3270.541	47.08	---	-1.81	45.27	---	74.00	54.00	-28.73	240	150	
4884.000	40.24	---	-1.30	38.94	---	74.00	54.00	-35.06	240	150	
6541.082	56.76	---	4.62	61.38	---	74.00	54.00	-12.62	240	150	
7326.000	43.36	---	1.85	45.21	---	74.00	54.00	-28.79	240	150	
9768.000	25.01	---	25.04	44.05	---	74.00	54.00	-29.95	240	150	
12210.000	24.80	---	29.80	42.60	---	74.00	54.00	-31.40	240	150	

- Note**
1. Correction Factor = Antenna factor + Cable loss - Pre-amplifier
  2. The formula of measured value as: Test Result = Reading + Correction Factor
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. See attached diagrams in Appendix.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028  
 ETSTW-RE029 ETSTW-RE 030 ETSTW-RE 042 ETSTW-RE 043  
 ETSTW-RE 044



Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### 3.6 Radiated Emission on the band edge

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

#### Mode A

Test conditions		Attenuation at or outside band-edges	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\ V$	39.61 dB	49.88 dB

#### Mode B

Test conditions		Attenuation at or outside band-edges	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\ V$	32.02 dB	42.91 dB

#### Mode C

Test conditions		Attenuation at or outside band-edges	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\ V$	32.68 dB	41.37 dB

#### Mode D

Test conditions		Attenuation at or outside band-edges	
		Lower Band-edge	Upper Band-edge
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5\ V$	32.46 dB	39.27 dB

#### Limit:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028 ETSTW-RE 030  
 ETSTW-RE 043 ETSTW-RE 044

Explanation: Please see attached diagram as appendix.

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### 3.7 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.

Mode A

Test conditions		6 dB Bandwidth		
		Channel 1	Channel 6	Channel 11
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 5 V	10.929487179 MHz	10.929487179 MHz	10.929487179 MHz

Mode B

Test conditions		6 dB Bandwidth		
		Channel 1	Channel 6	Channel 11
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 5 V	16.666666667 MHz	16.666666667 MHz	16.666666667 MHz

Mode C

Test conditions		6 dB Bandwidth		
		Channel 1	Channel 6	Channel 11
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 5 V	17.820512821 MHz	17.820512821 MHz	17.788461538 MHz

Mode D

Test conditions		6 dB Bandwidth		
		Channel 1	Channel 4	Channel 7
T <sub>nom</sub> = 23°C	V <sub>nom</sub> = 5 V	34.487179487 MHz	34.487179487 MHz	35.576923077 MHz

**Limits:**

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 055

Explanation: see attached diagrams in Appendix.

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### 3.8 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.  
 The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.

#### Mode A

Test conditions		Peak Power Spectral Density (3 kHz)		
		Channel 1 [dBm]	Channel 6 [dBm]	Channel 11 [dBm]
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5 V$	-7.70	-7.35	-7.07

#### Mode B

Test conditions		Peak Power Spectral Density (3 kHz)		
		Channel 1 [dBm]	Channel 6 [dBm]	Channel 11 [dBm]
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5 V$	-11.92	-11.53	-11.42

#### Mode C

Test conditions		Peak Power Spectral Density (3 kHz)		
		Channel 1 [dBm]	Channel 6 [dBm]	Channel 11 [dBm]
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5 V$	-12.86	-12.78	-12.27

#### Mode D

Test conditions		Peak Power Spectral Density (3 kHz)		
		Channel 1 [dBm]	Channel 4 [dBm]	Channel 7 [dBm]
$T_{nom} = 23^{\circ}C$	$V_{nom} = 5 V$	-14.36	-13.97	-14.78

#### Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483,5	8
5725-5850	8

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 055

Explanation: see attached diagrams in Appendix.

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

**3.9 Radiated Emission from Digital Part**

According to FCC part 15.109 (g), digital devices may be shown to comply with the standards contained in Third Edition of the International Special Committee on Radio Interference (CISPR), Pub. 22, “Information Technology Equipment - Radio Disturbance Characteristics - Limits and Methods of Measurement”.

Model: WU81RL / ENUWI-N Date: 2007/10/16  
 Mode: Temperature: 26.00 °C Engineer: Derek  
 Polarization: Horizontal Humidity: 60.00 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
123.066	1.10	peak	13.63	14.73	30.00	-15.27	280	300	
166.353	2.69	peak	15.15	17.84	30.00	-12.16	150	325	
299.459	5.58	peak	15.23	20.81	37.00	-16.19	175	335	
500.601	3.34	peak	19.82	23.16	37.00	-13.84	150	100	
720.842	0.61	peak	24.01	24.62	37.00	-12.38	30	120	
960.721	-3.64	peak	27.24	23.60	37.00	-13.40	250	110	

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)	Note
123.066	3.43	peak	13.63	17.06	30.00	-12.94	200	105	
166.894	13.01	peak	15.12	28.13	30.00	-1.87	250	150	
299.459	4.33	peak	15.23	19.56	37.00	-17.44	240	140	
534.269	-0.89	peak	20.39	19.50	37.00	-17.50	200	310	
732.064	-3.58	peak	24.28	20.70	37.00	-16.30	245	350	
991.583	-5.55	peak	27.34	21.79	37.00	-15.21	150	325	

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Reading + Correction Factor
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. See attached diagrams in Appendix.

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 003 ETSTW-RE 004 ETSTW-RE 017 ETSTW-RE 028 ETSTW-RE 029 ETSTW-RE 030 ETSTW-RE 042 ETSTW-RE 043 ETSTW-RE 044

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### 3.10 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dBµV)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

Model: WU81RL / ENUWI-N Date: 2007/10/19  
 Mode: Temperature: 26 °C Engineer: Derek  
 Polarization: N Humidity: 60 %

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)	Note
	QP	Ave.		QP	Ave.	QP	Ave.		
0.1522	39.63	10.87	10.10	49.73	20.97	65.88	55.88	-16.15	
0.1998	44.12	34.09	10.10	54.22	44.19	63.62	53.62	-9.40	
0.5350	30.84	--	10.10	40.94	--	56.00	--	-15.06	
1.5400	25.33	--	10.10	35.43	--	56.00	--	-20.57	
5.5	23.68	--	10.10	33.78	--	60	--	-26.22	
14.75	32.16	--	10.10	42.26	--	60	--	-17.74	

Polarization: L1

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV)		Limit (dBuV)		Margin (dB)	Note
	QP	Ave.		QP	Ave.	QP	Ave.		
0.1504	40.17	12.81	10.10	50.27	22.91	65.98	55.98	-15.71	
0.2029	43.16	34.43	10.10	53.26	44.53	63.49	53.49	-8.96	
0.5400	30.79	--	10.10	40.89	--	56.00	--	-15.11	
1.5400	25.89	--	10.10	35.99	--	56.00	--	-20.01	
5.5556	22.99	--	10.10	33.09	--	60.00	--	-26.91	
14.6111	32.08	--	10.10	42.18	--	60.00	--	-17.82	

- Note**
1. The formula of measured value as: **Test Result = Reading + Correction Factor**
  2. The **Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
  3. **Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
  4. **All not in the table noted test results are more than 20 dB below the relevant limits.**
  5. **See attached diagrams as appendix.**

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

**Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001 ETSTW-CE 003 ETSTW-CE 004 ETSTW-CE 006  
ETSTW-CE 011

Explanation: see attached diagrams in Appendix.

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

## **Appendix**

### **A Measurement diagrams**


1. Peak Output Power
2. Spurious Emissions radiated
3. Band Edge Measurement
4. Minimum 6dB Bandwidth
5. Peak Power Spectral Density
6. Radiated Emission from Digital Part
7. Power Line Conducted Emission

### **B Photos**

1. External Photos
2. Internal Photos
3. Set Up Photo of Radiated Emission
4. Set Up Photo of Conducted Emission

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL


### Peak Output Power

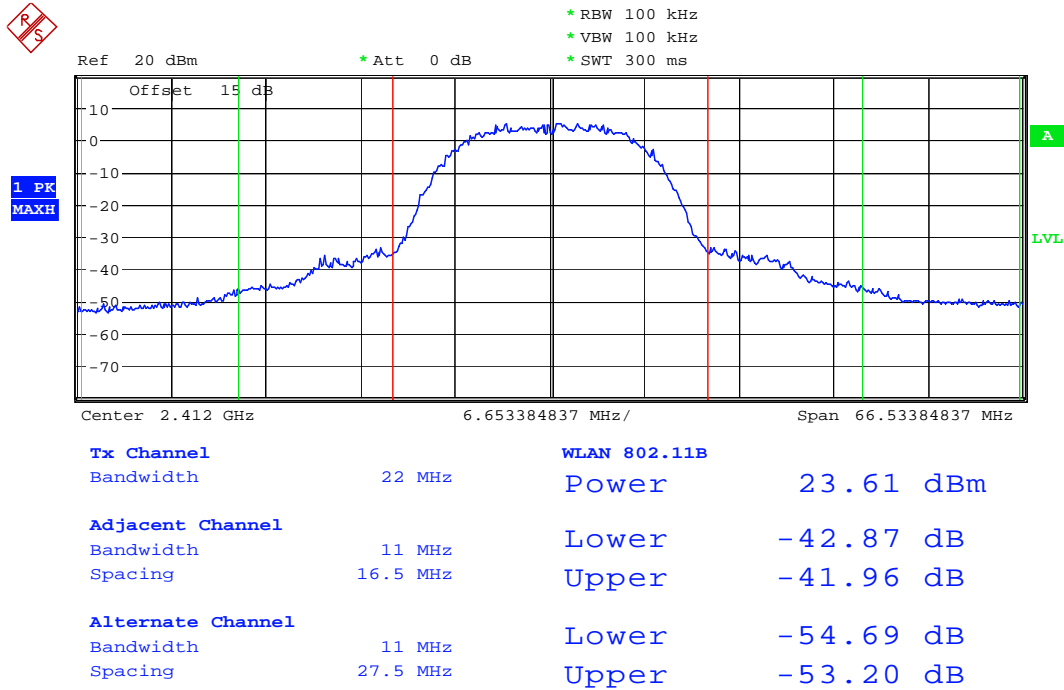

MAX OUTPUT POWER 802.11B CH1  
 Date: 18.OCT.2007 15:03:03



Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

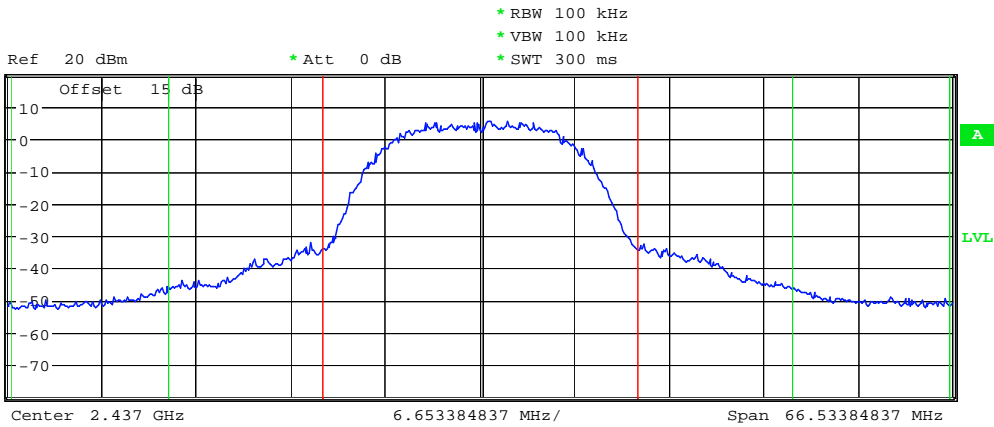


<b>Tx Channel</b>		<b>WLAN 802.11B</b>	
Bandwidth	22 MHz	Power	23.96 dBm
<b>Adjacent Channel</b>		Lower	-42.96 dB
Bandwidth	11 MHz	Upper	-42.03 dB
Spacing	16.5 MHz		
<b>Alternate Channel</b>		Lower	-54.29 dB
Bandwidth	11 MHz	Upper	-53.80 dB
Spacing	27.5 MHz		

MAX OUTPUT POWER 802.11B CH6

Date: 18.OCT.2007 15:03:30

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

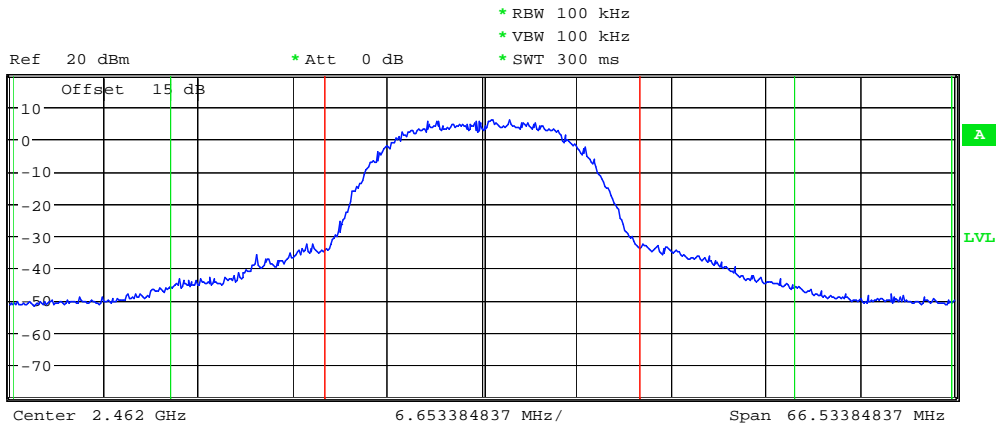


<b>Tx Channel</b>		<b>WLAN 802.11B</b>	
Bandwidth	22 MHz	Power	24.25 dBm
<b>Adjacent Channel</b>		Lower	-42.87 dB
Bandwidth	11 MHz	Upper	-41.70 dB
Spacing	16.5 MHz		
<b>Alternate Channel</b>		Lower	-53.96 dB
Bandwidth	11 MHz	Upper	-53.47 dB
Spacing	27.5 MHz		

MAX OUTPUT POWER 802.11B CH11

Date: 18.OCT.2007 15:03:57

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

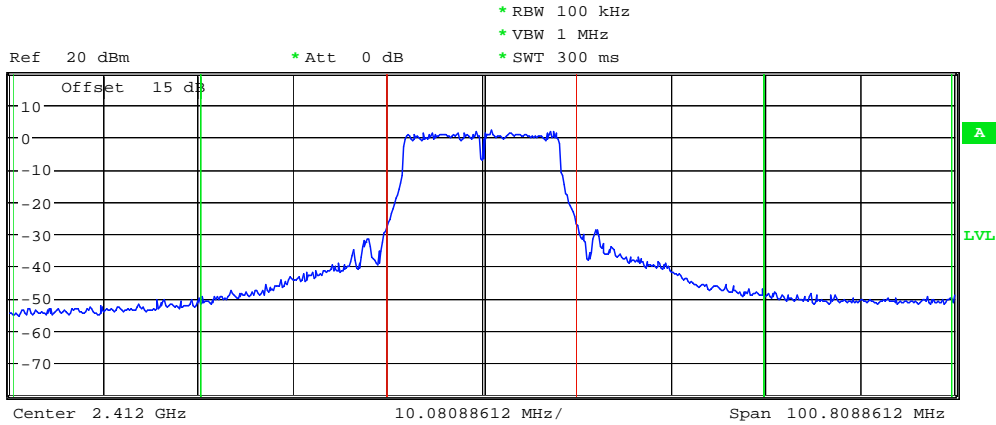


<b>Tx Channel</b>			
Bandwidth	20 MHz	Power	22.09 dBm
<b>Adjacent Channel</b>			
Bandwidth	20 MHz	Lower	-38.94 dB
Spacing	20 MHz	Upper	-36.71 dB
<b>Alternate Channel</b>			
Bandwidth	20 MHz	Lower	-52.76 dB
Spacing	40 MHz	Upper	-49.97 dB

MAX OUTPUT POWER 802.11G CH1

Date: 18.OCT.2007 15:05:50

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

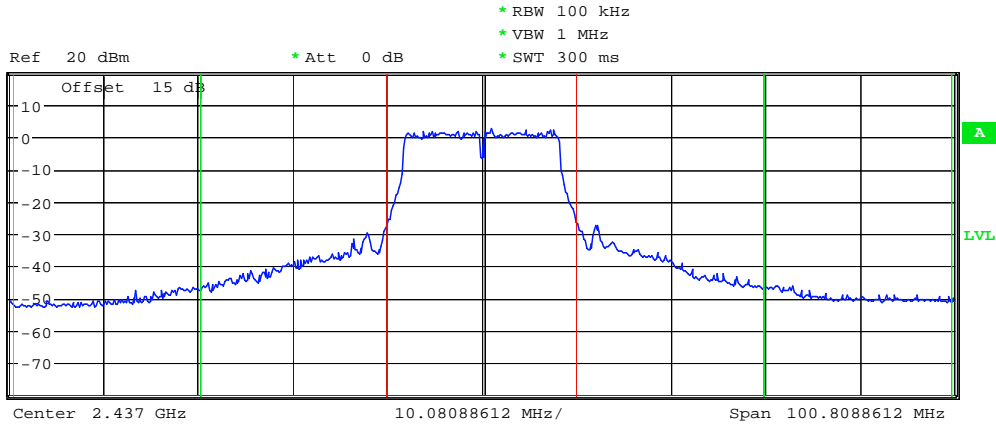


<b>Tx Channel</b>			
Bandwidth	20 MHz	Power	22.49 dBm
<b>Adjacent Channel</b>			
Bandwidth	20 MHz	Lower	-37.03 dB
Spacing	20 MHz	Upper	-35.56 dB
<b>Alternate Channel</b>			
Bandwidth	20 MHz	Lower	-50.19 dB
Spacing	40 MHz	Upper	-49.27 dB

MAX OUTPUT POWER 802.11G CH6

Date: 18.OCT.2007 15:05:35

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

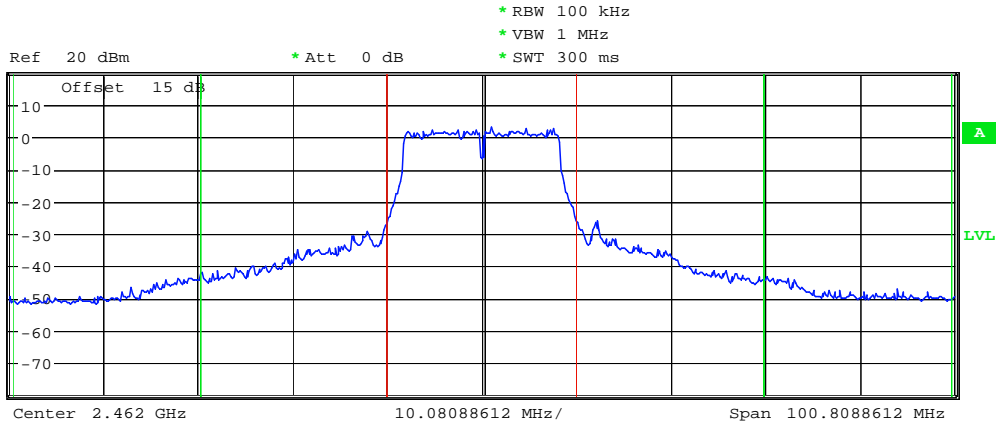


<b>Tx Channel</b>			
Bandwidth	20 MHz	Power	22.83 dBm
<b>Adjacent Channel</b>			
Bandwidth	20 MHz	Lower	-35.86 dB
Spacing	20 MHz	Upper	-34.98 dB
<b>Alternate Channel</b>			
Bandwidth	20 MHz	Lower	-48.44 dB
Spacing	40 MHz	Upper	-48.23 dB

MAX OUTPUT POWER 802.11G CH11

Date: 18.OCT.2007 15:05:12

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

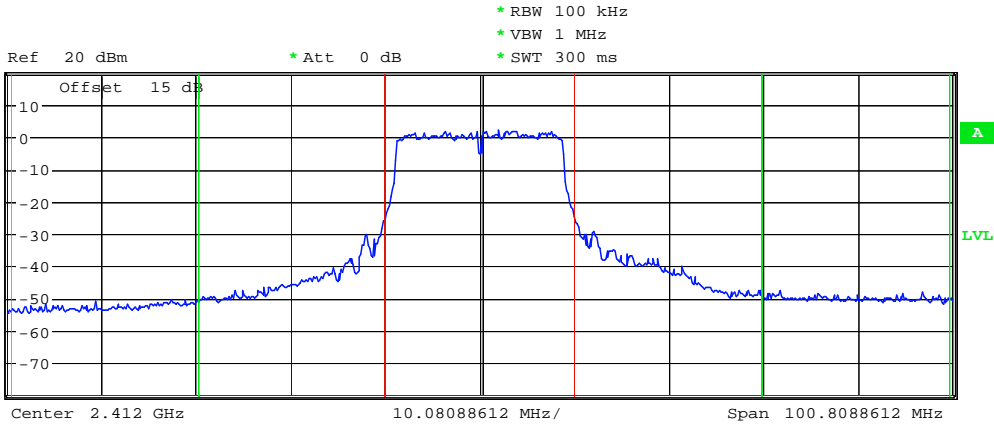


<b>Tx Channel</b>			
Bandwidth	20 MHz	Power	22.47 dBm
<b>Adjacent Channel</b>			
Bandwidth	20 MHz	Lower	-38.30 dB
Spacing	20 MHz	Upper	-36.45 dB
<b>Alternate Channel</b>			
Bandwidth	20 MHz	Lower	-52.64 dB
Spacing	40 MHz	Upper	-49.90 dB

MAX OUTPUT POWER 802.11N20MHz CH1

Date: 18.OCT.2007 15:06:33

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

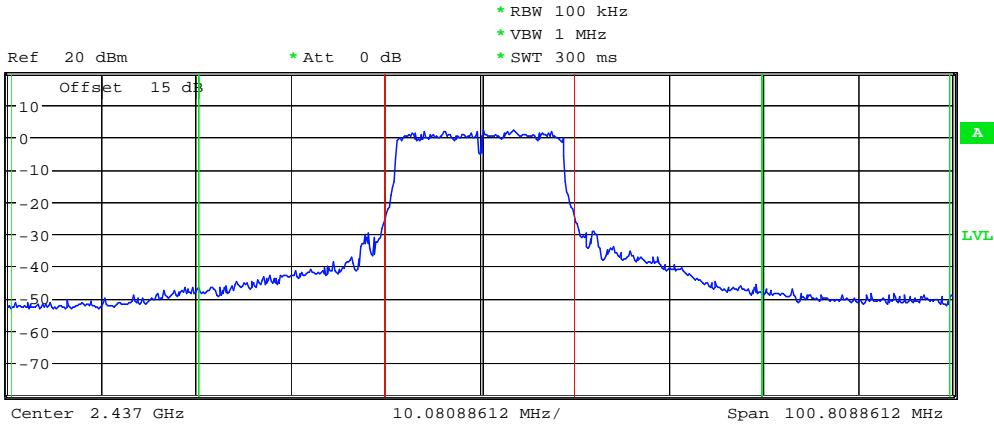


<b>Tx Channel</b>			
Bandwidth	20 MHz	Power	22.49 dBm
<b>Adjacent Channel</b>			
Bandwidth	20 MHz	Lower	-37.79 dB
Spacing	20 MHz	Upper	-36.19 dB
<b>Alternate Channel</b>			
Bandwidth	20 MHz	Lower	-50.70 dB
Spacing	40 MHz	Upper	-49.85 dB

MAX OUTPUT POWER 802.11N20MHz CH6

Date: 18.OCT.2007 15:06:50

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

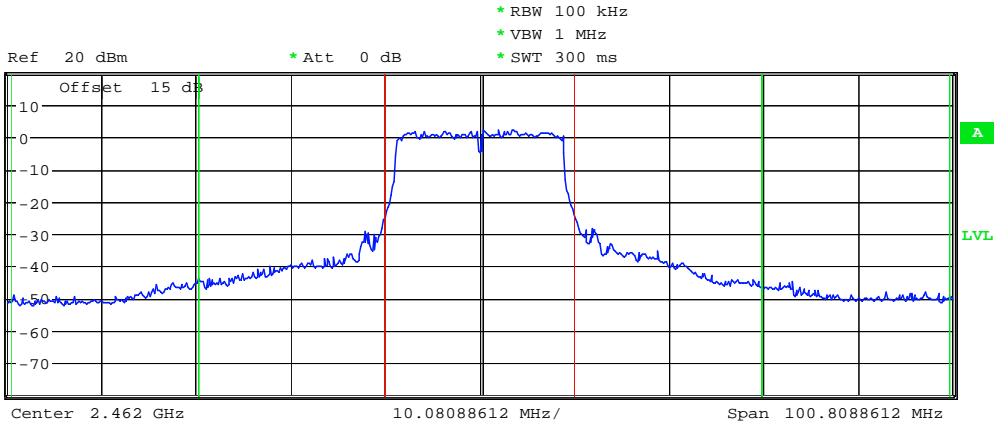


<b>Tx Channel</b>			
Bandwidth	20 MHz	Power	22.78 dBm
<b>Adjacent Channel</b>			
Bandwidth	20 MHz	Lower	-37.04 dB
Spacing	20 MHz	Upper	-35.71 dB
<b>Alternate Channel</b>			
Bandwidth	20 MHz	Lower	-49.36 dB
Spacing	40 MHz	Upper	-49.07 dB

MAX OUTPUT POWER 802.11N20MHz CH11

Date: 18.OCT.2007 15:07:17



Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

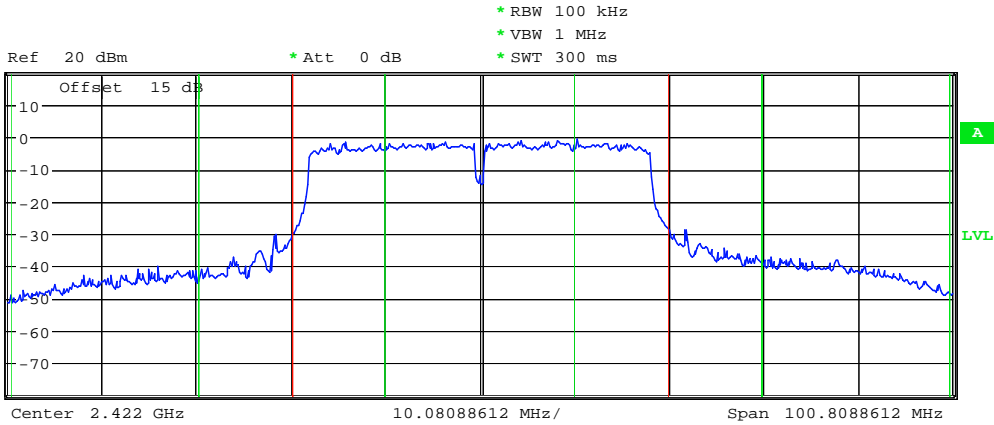


<b>Tx Channel</b>		Power	22.05 dBm
Bandwidth	40 MHz		
<b>Adjacent Channel</b>		Lower	-6.96 dB
Bandwidth	20 MHz	Upper	-6.27 dB
Spacing	20 MHz		
<b>Alternate Channel</b>		Lower	-44.38 dB
Bandwidth	20 MHz	Upper	-40.77 dB
Spacing	40 MHz		

MAX OUTPUT POWER 802.11N40MHz CH1

Date: 18.OCT.2007 15:09:03

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

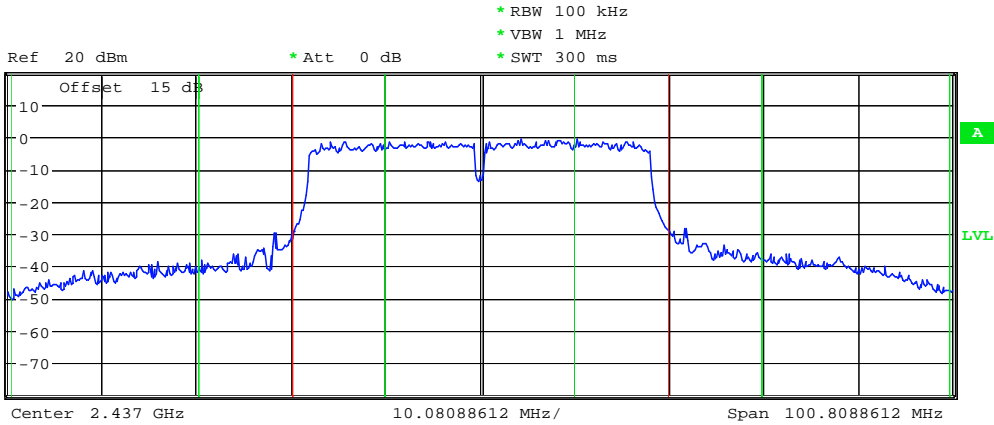


Tx Channel			
Bandwidth	40 MHz	Power	22.33 dBm
Adjacent Channel			
Bandwidth	20 MHz	Lower	-6.89 dB
Spacing	20 MHz	Upper	-6.28 dB
Alternate Channel			
Bandwidth	20 MHz	Lower	-42.76 dB
Spacing	40 MHz	Upper	-40.30 dB

MAX OUTPUT POWER 802.11N40MHz CH4

Date: 18.OCT.2007 15:08:45

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

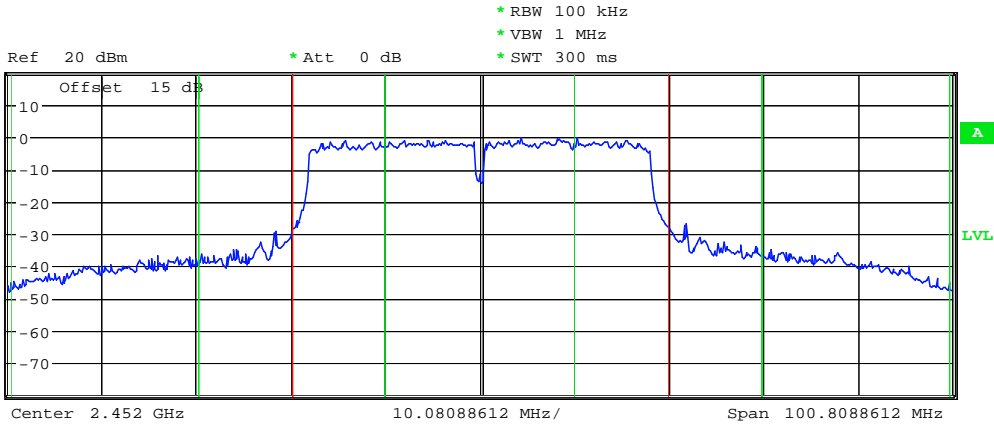



<b>Tx Channel</b>		Power	22.71 dBm
Bandwidth	40 MHz		
<b>Adjacent Channel</b>		Lower	-6.89 dB
Bandwidth	20 MHz	Upper	-6.31 dB
Spacing	20 MHz		
<b>Alternate Channel</b>		Lower	-41.09 dB
Bandwidth	20 MHz	Upper	-39.41 dB
Spacing	40 MHz		

MAX OUTPUT POWER 802.11N40MHz CH7

Date: 18.OCT.2007 15:08:25

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### Spurious Emissions radiated 11B\_Ch1 Antenna Polarization H

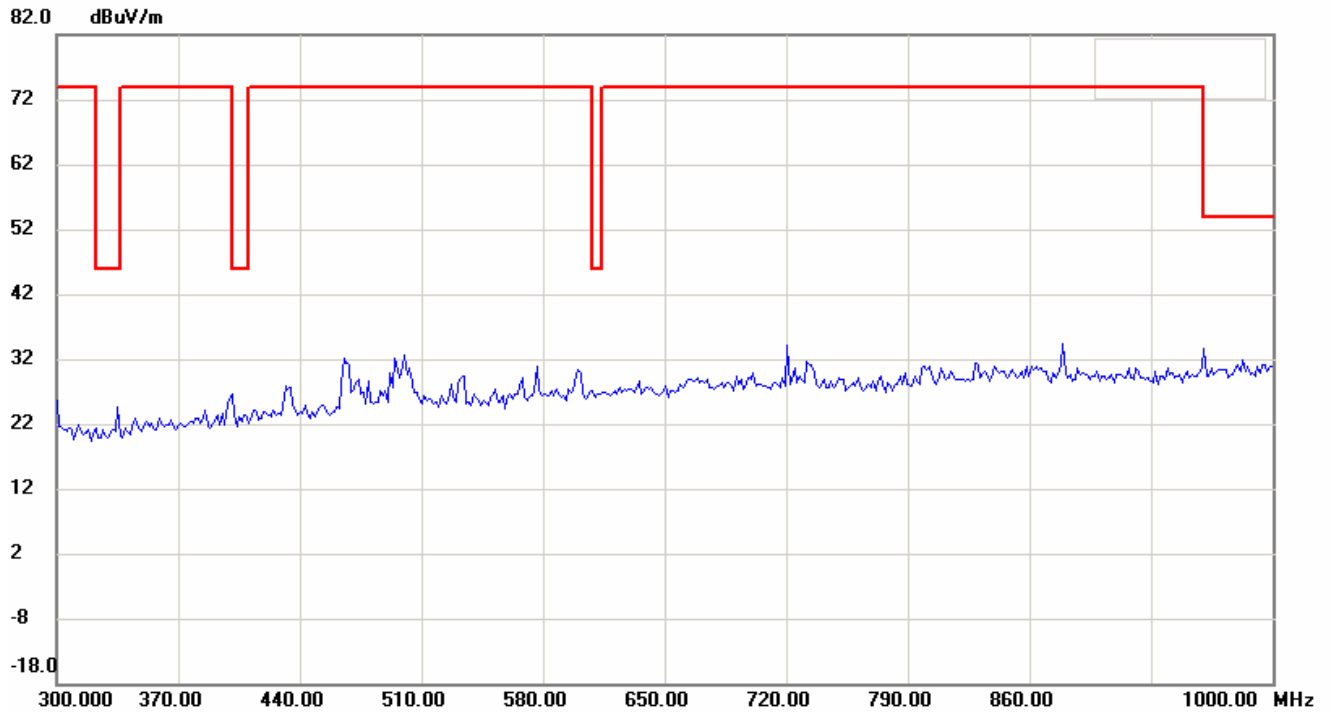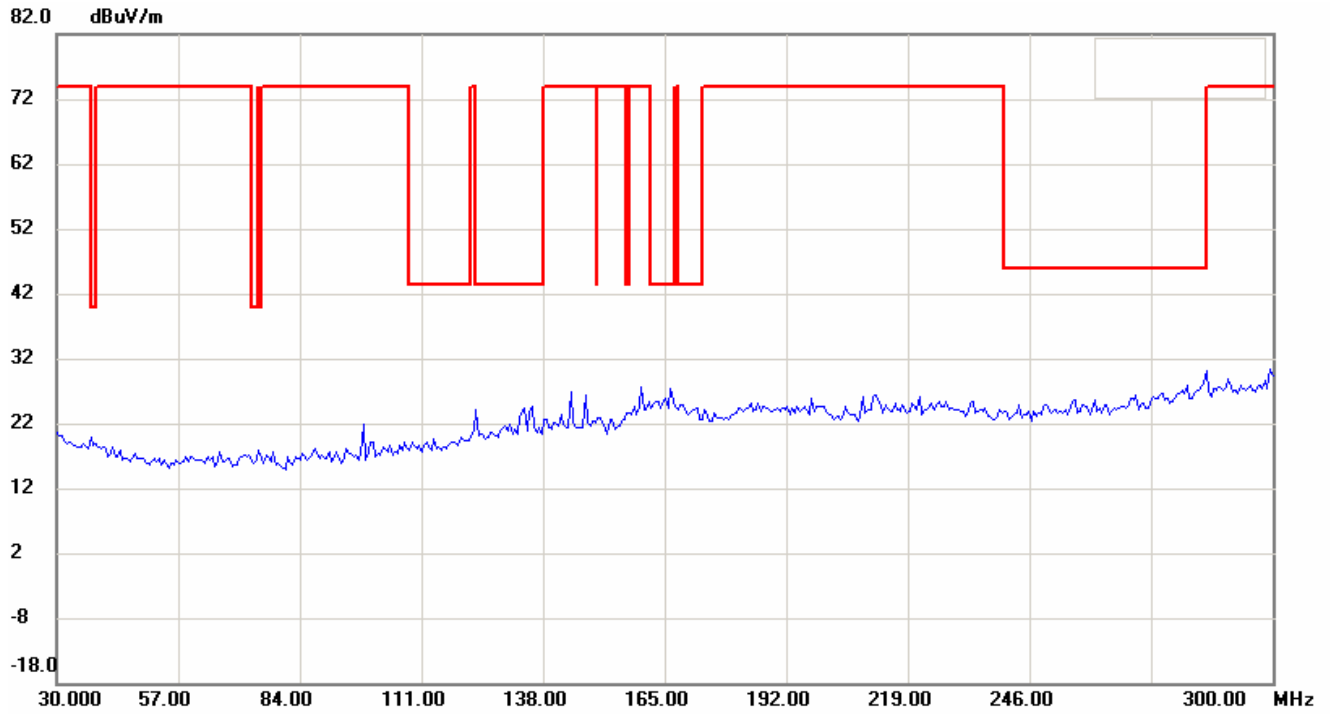


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

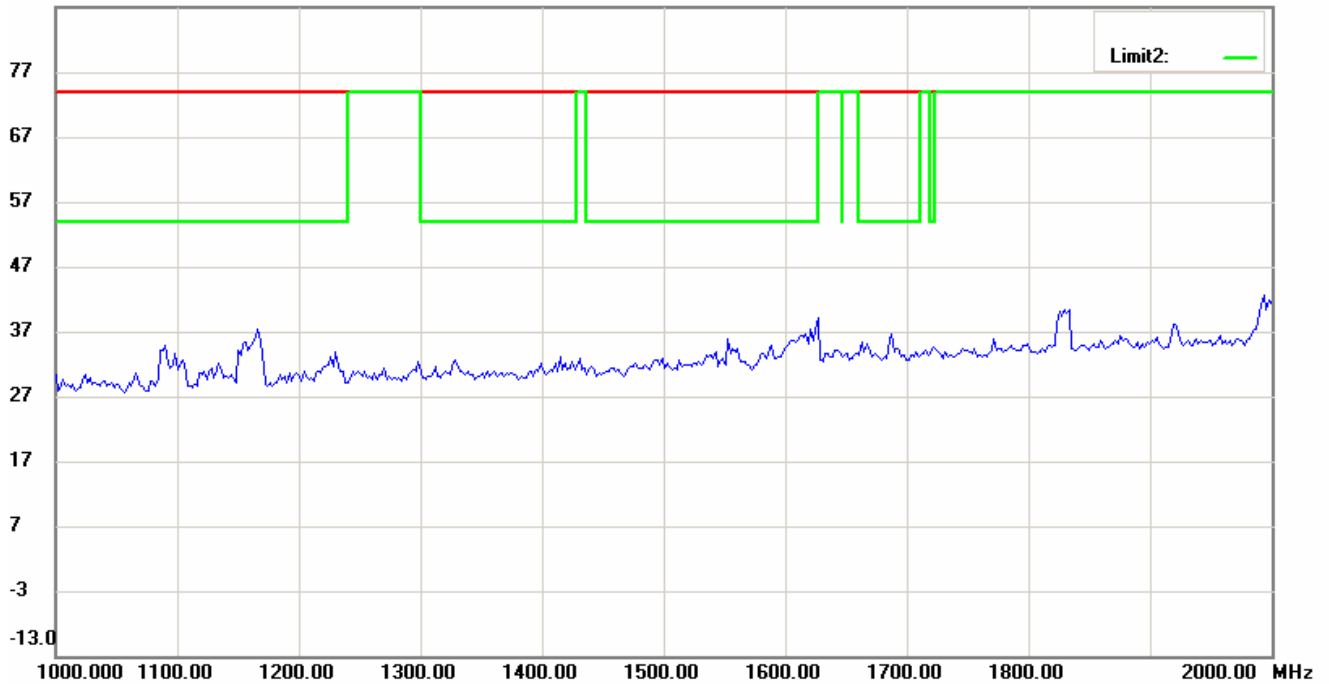


87.0 dBuV/m

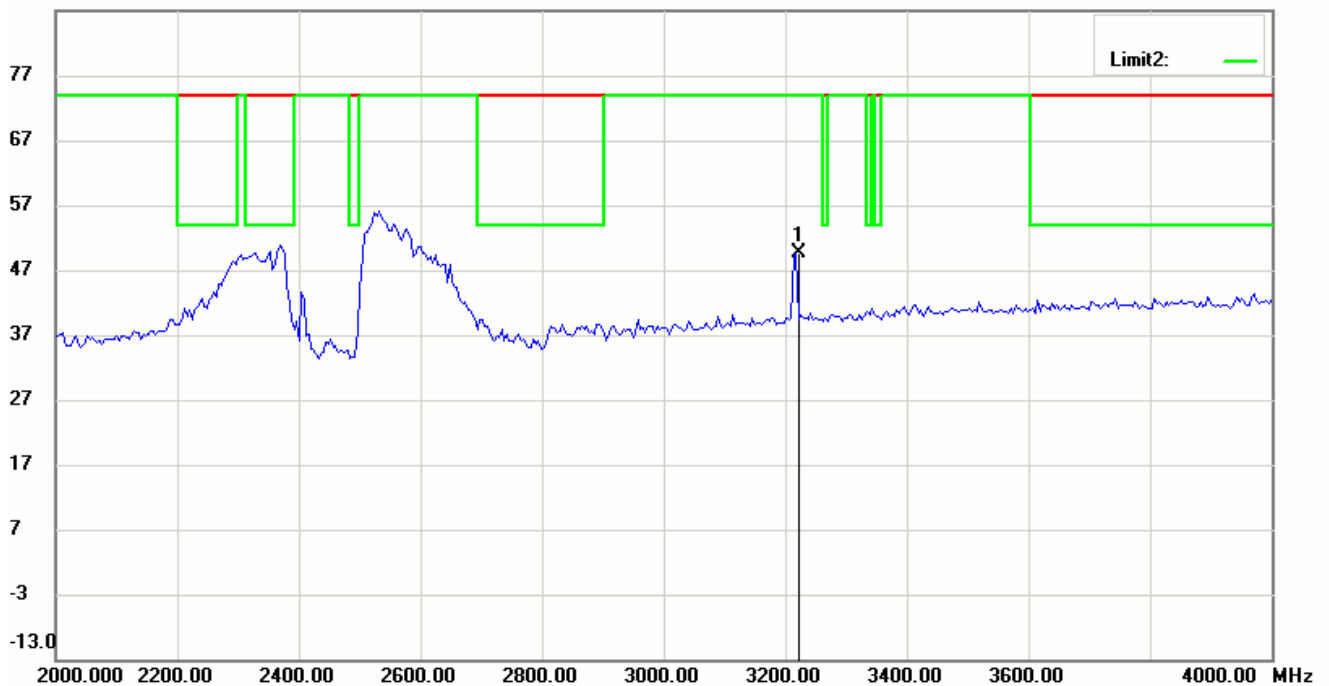


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

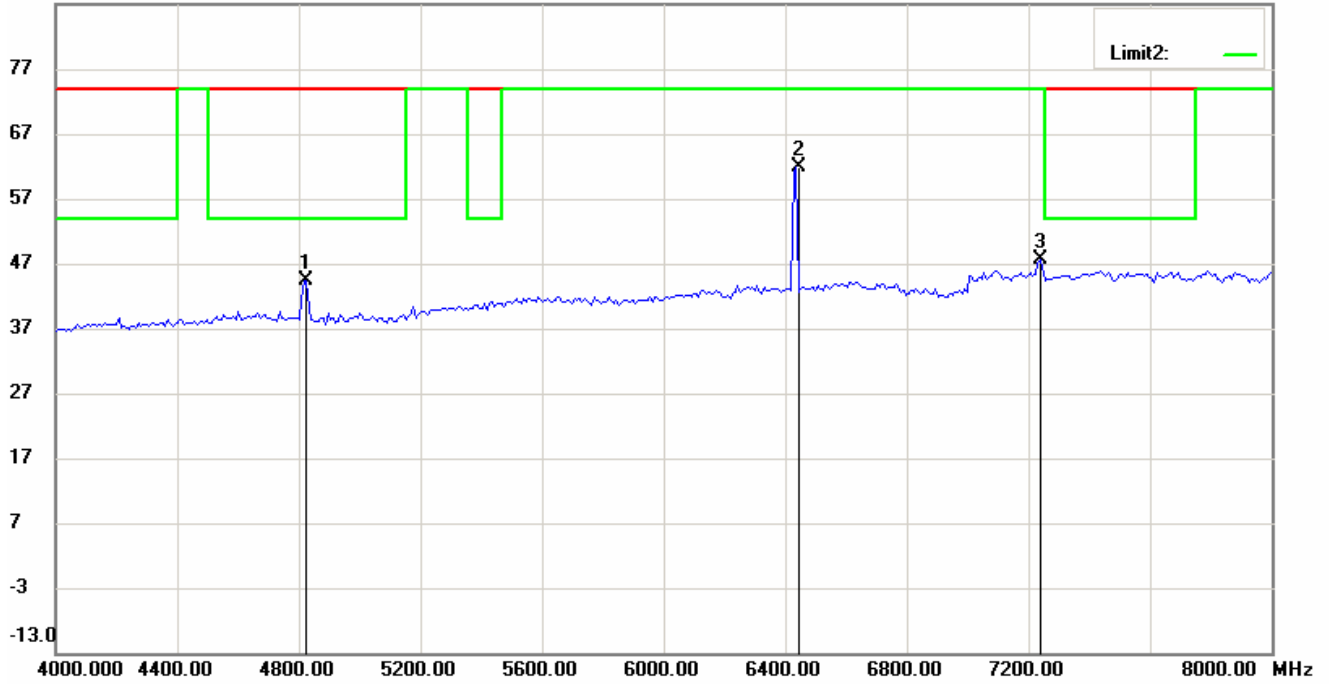


87.0 dBuV/m

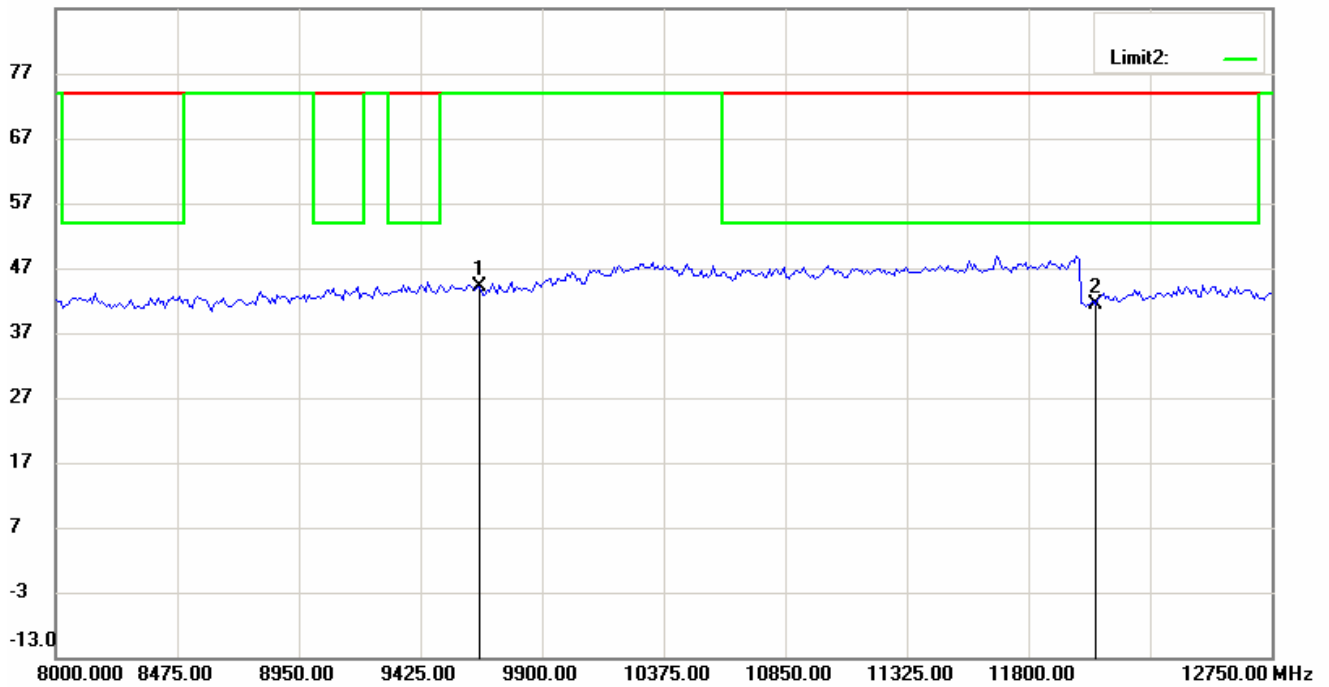


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


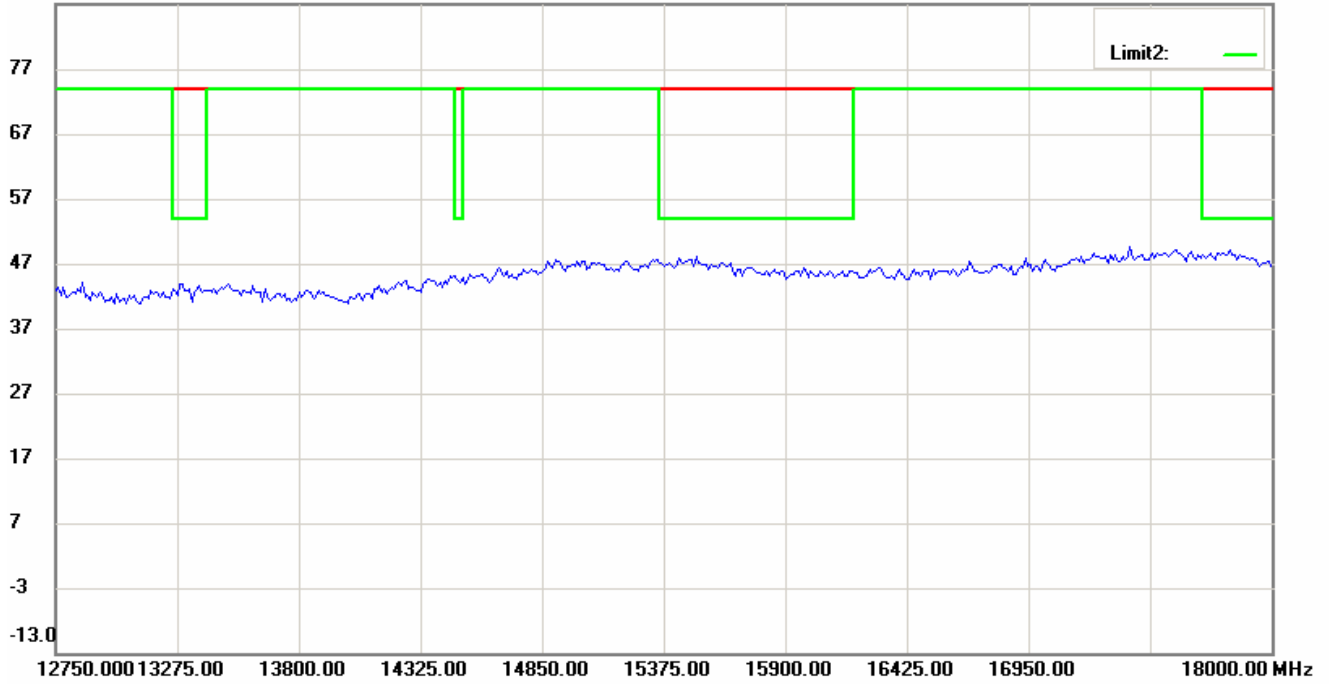


87.0 dBuV/m

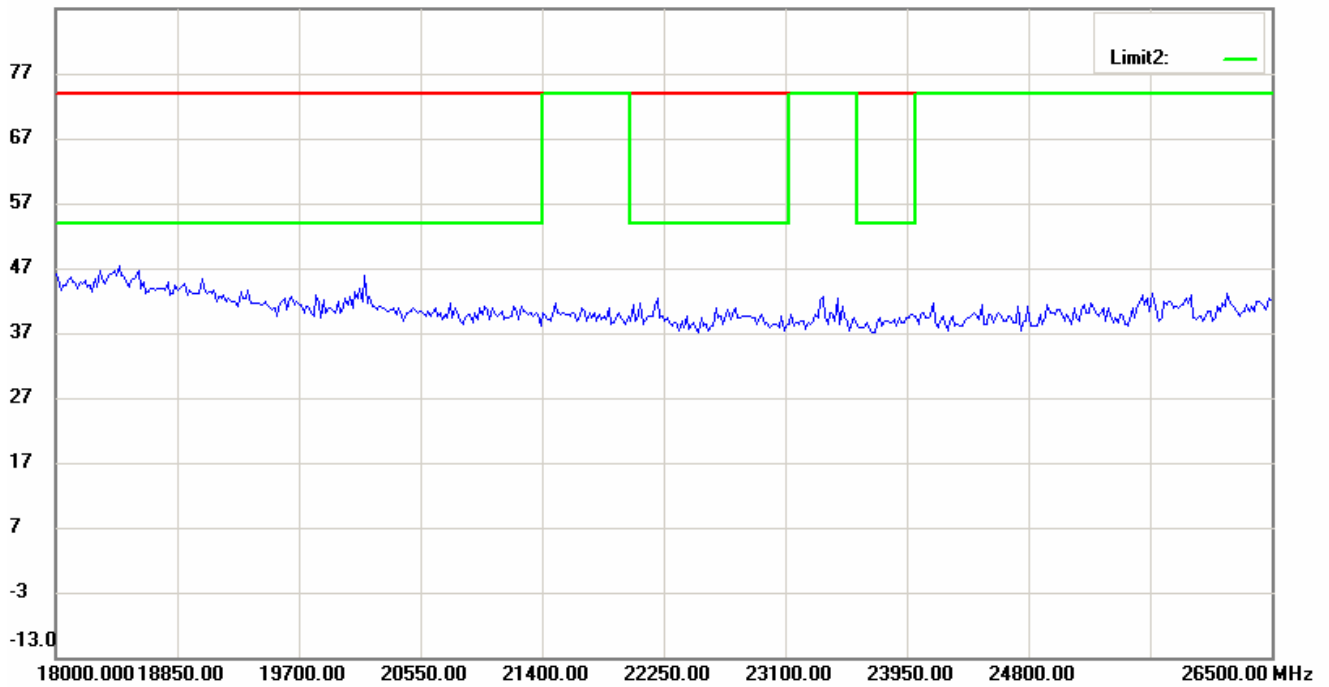

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

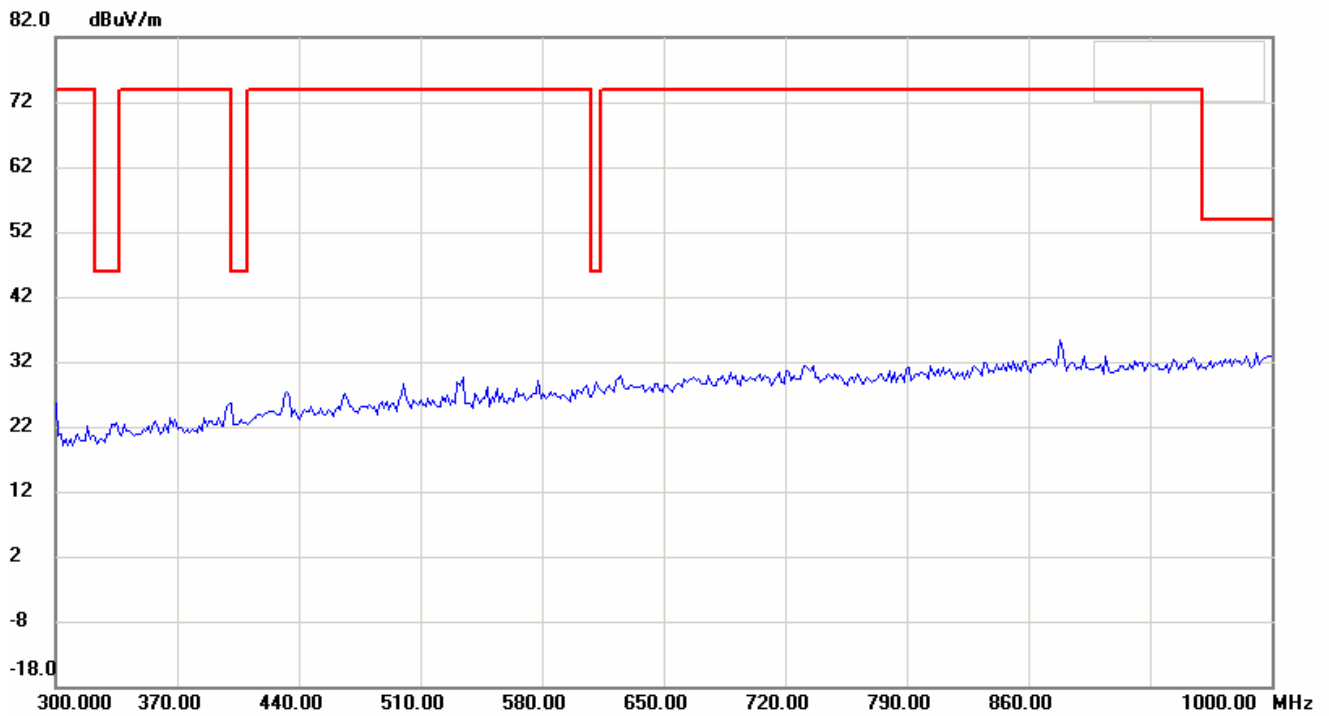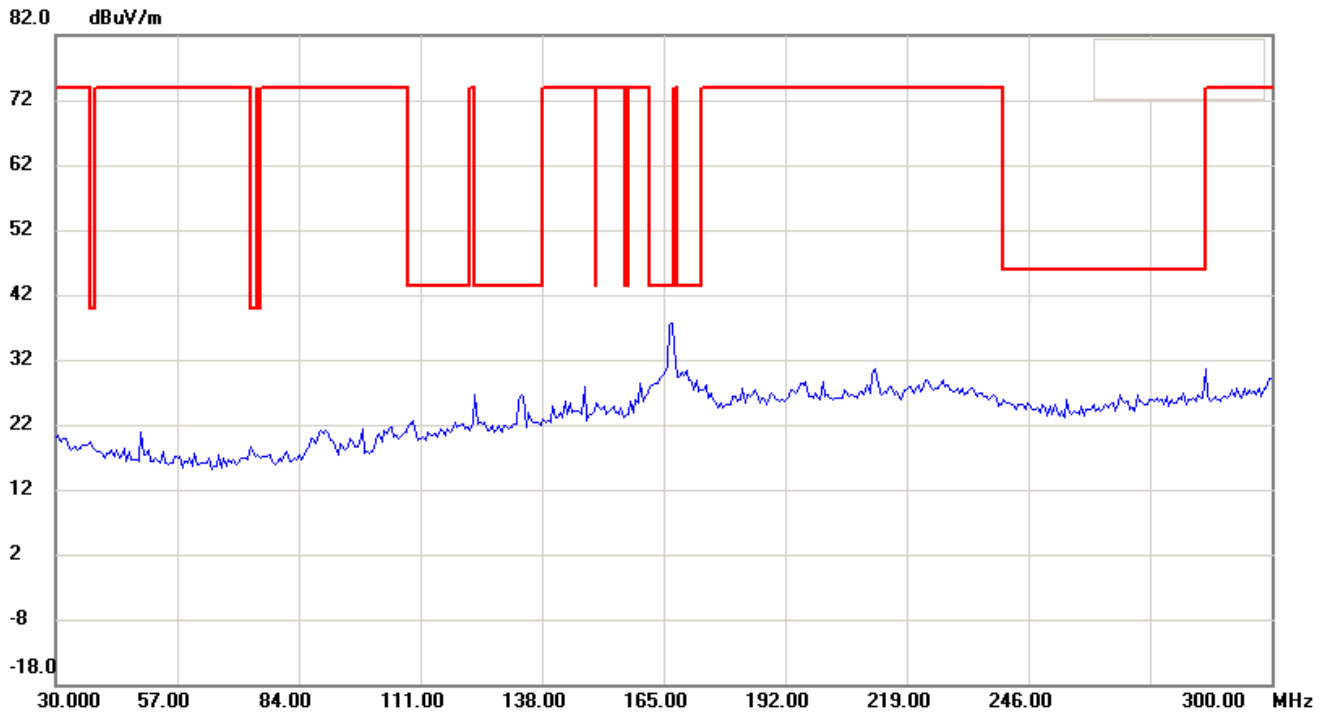





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

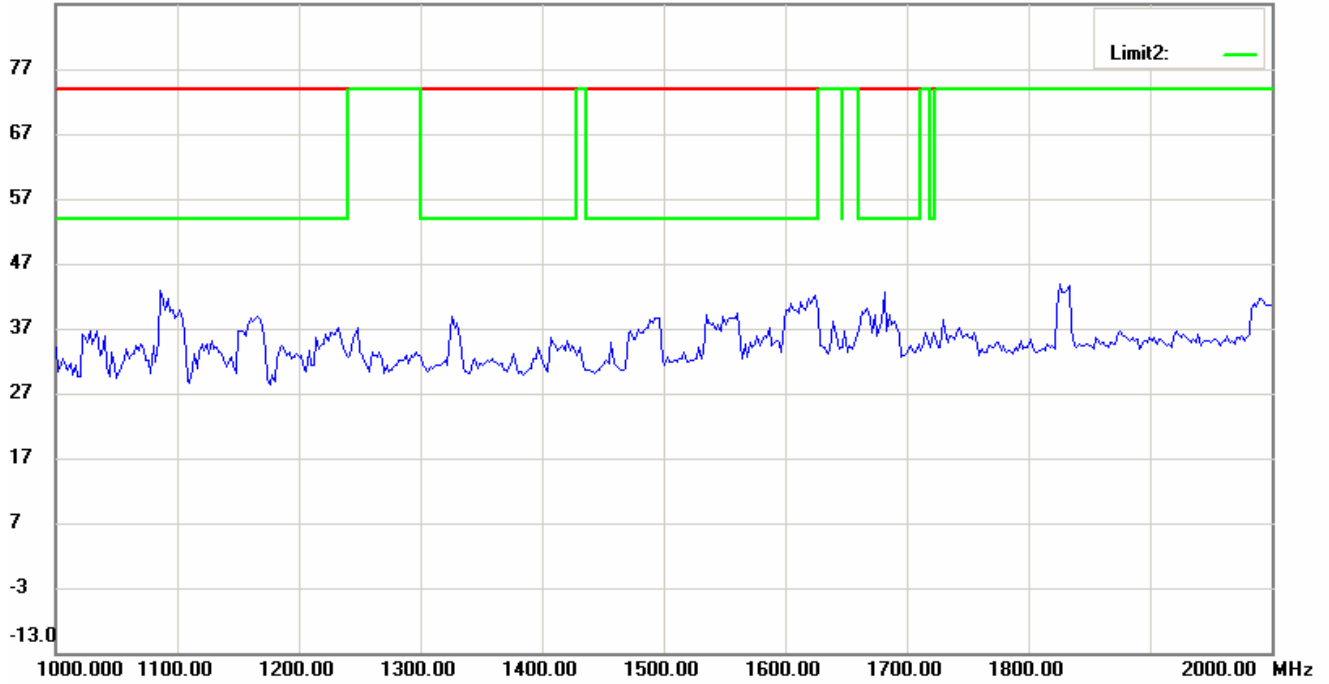



87.0 dBuV/m

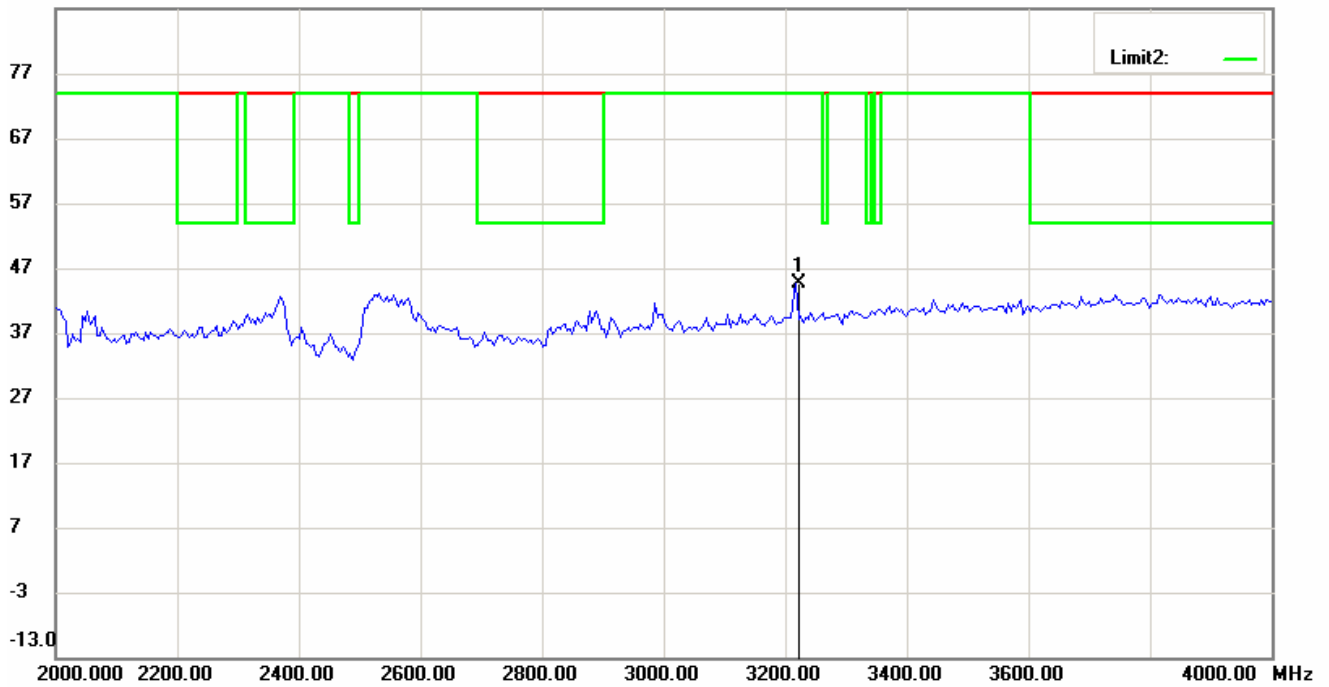

Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL


87.0 dBuV/m

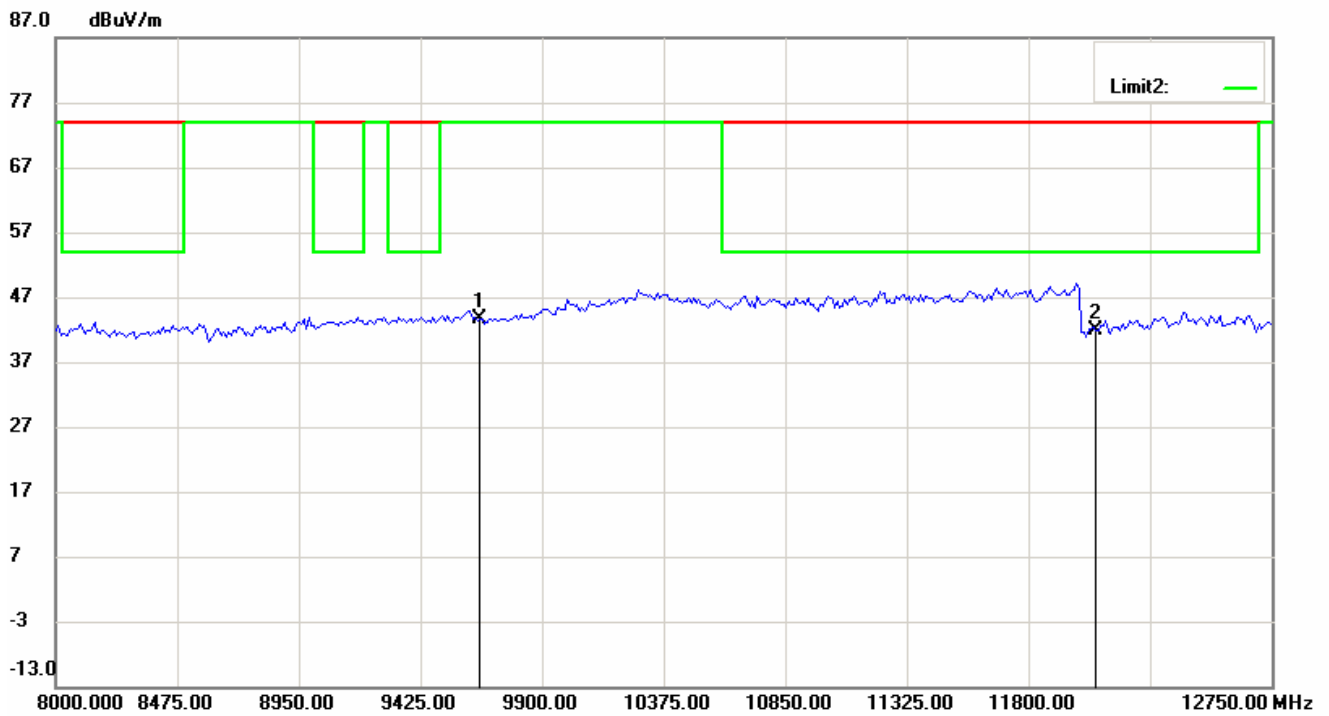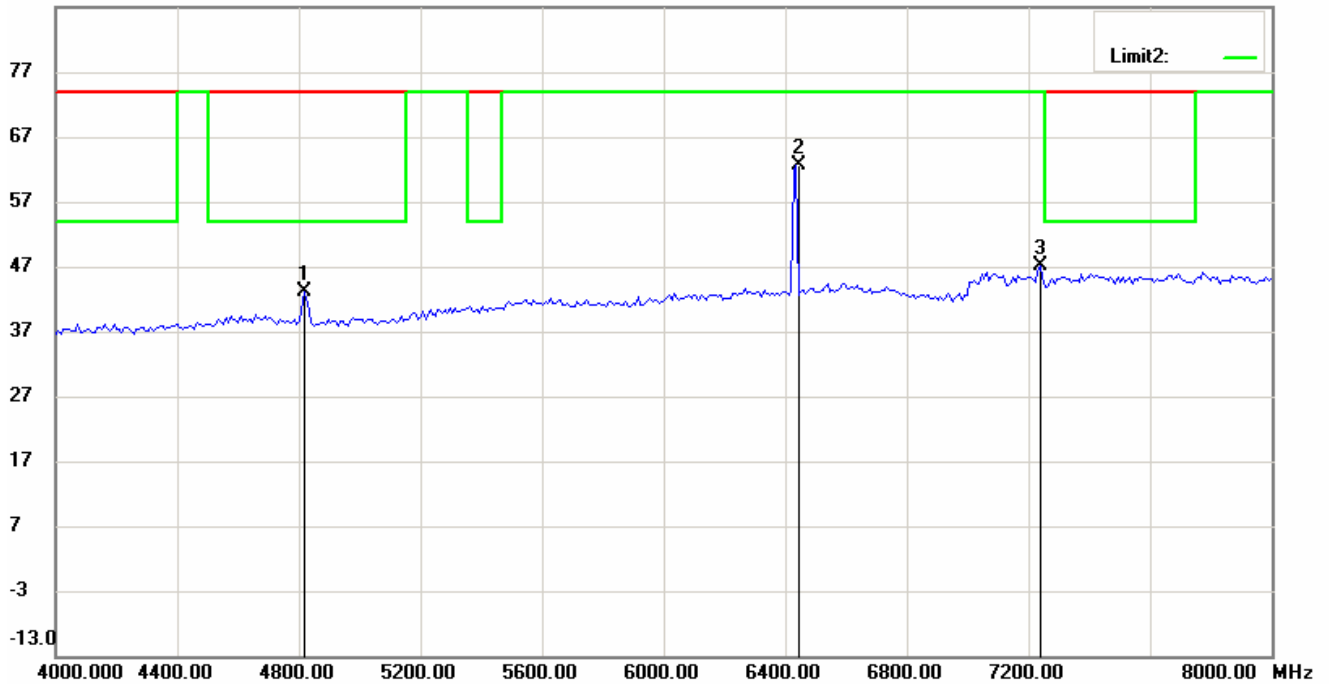


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


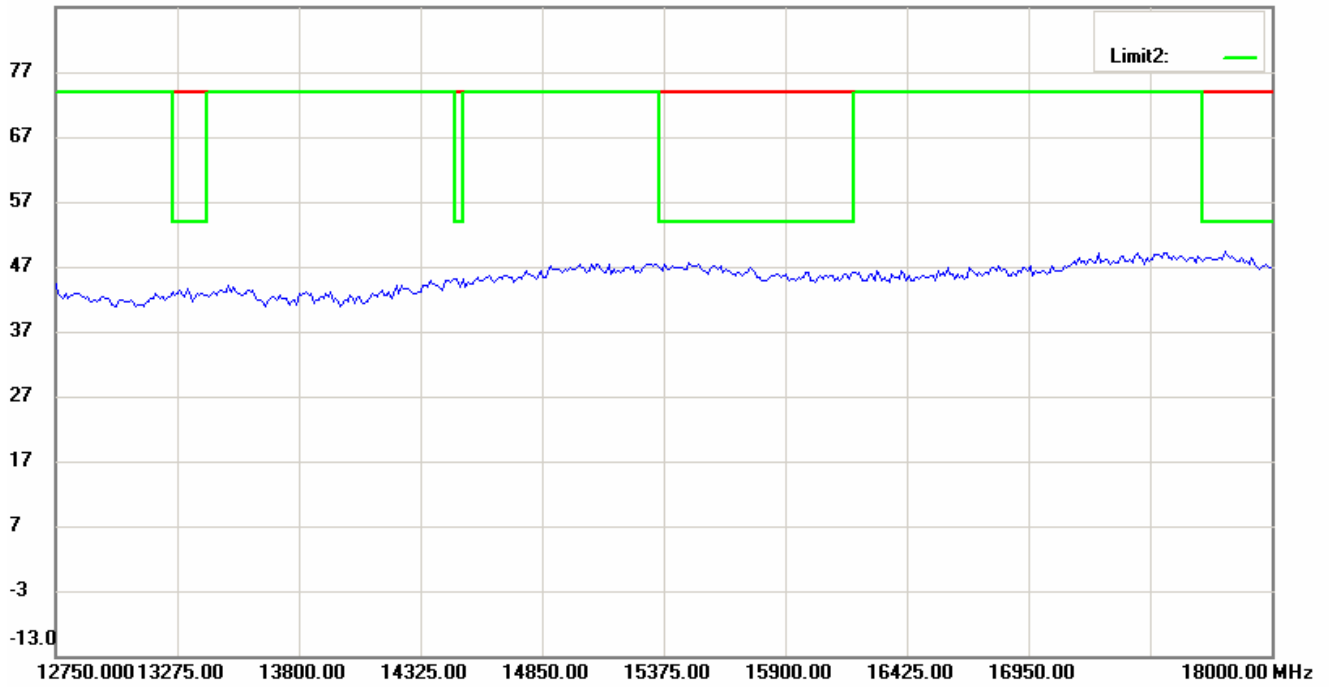


87.0 dBuV/m

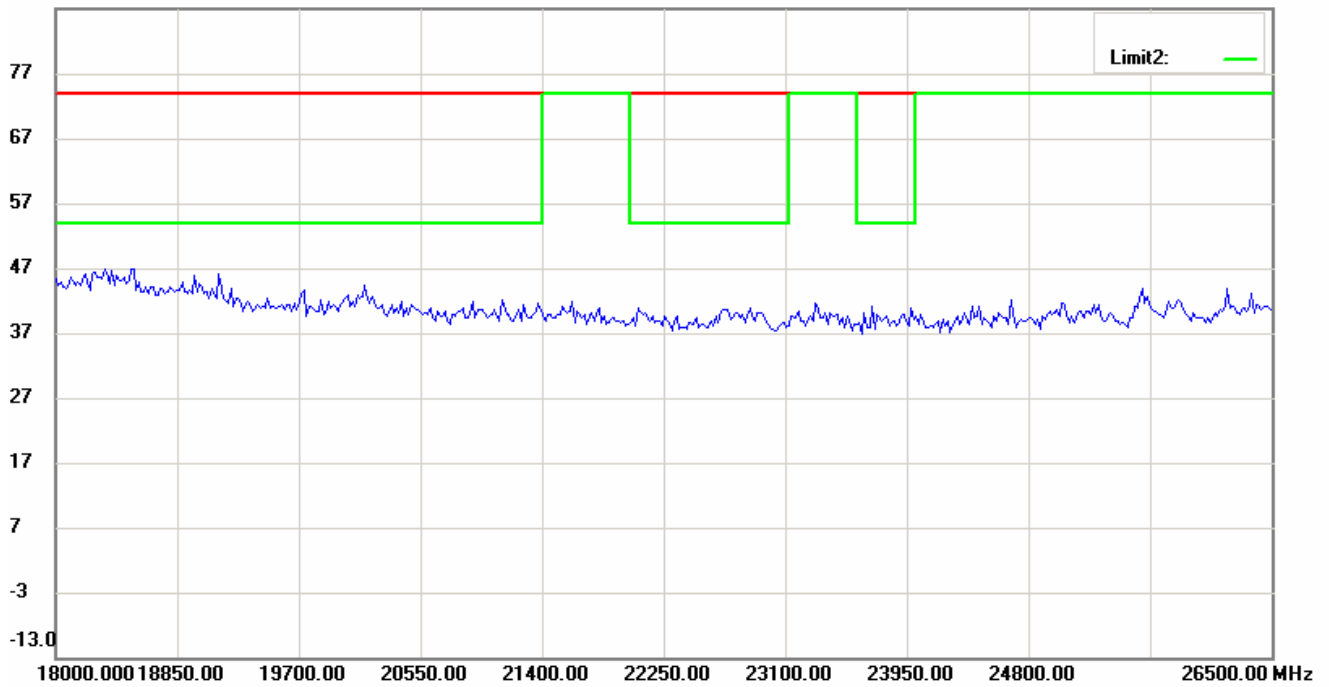

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11B\_Ch6 Antenna Polarization H

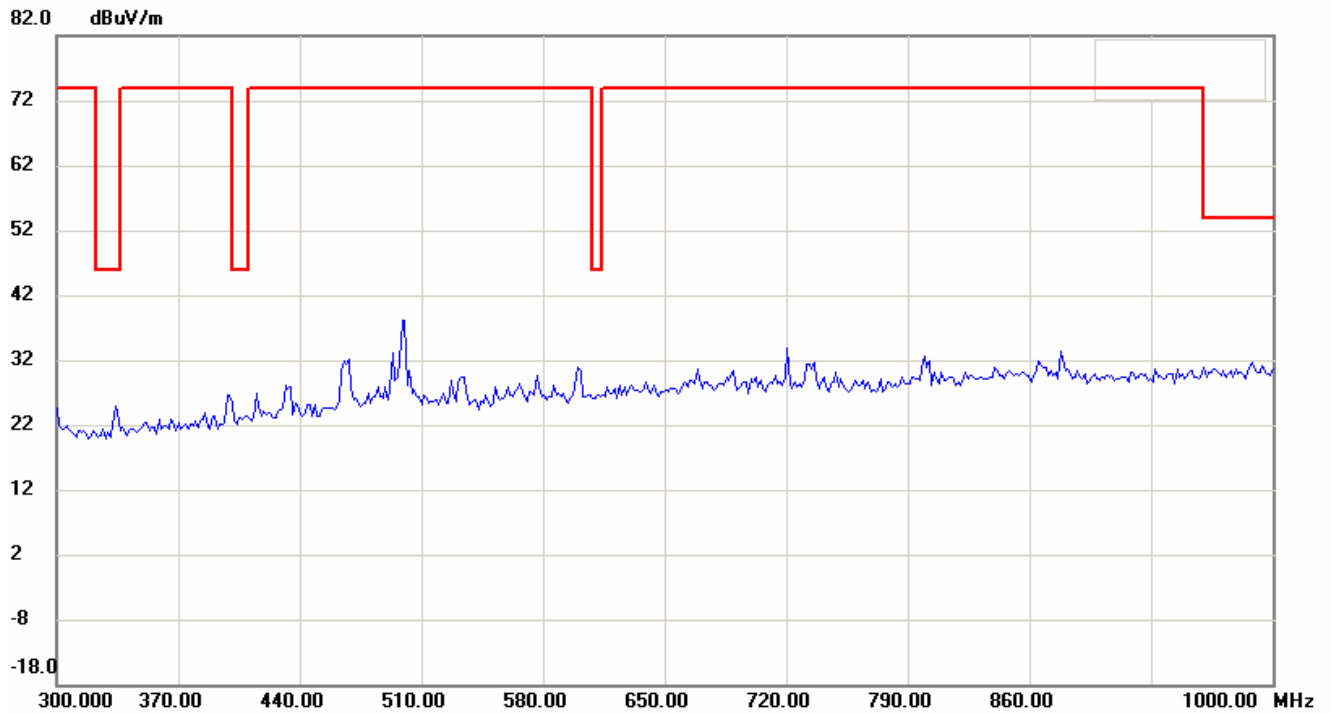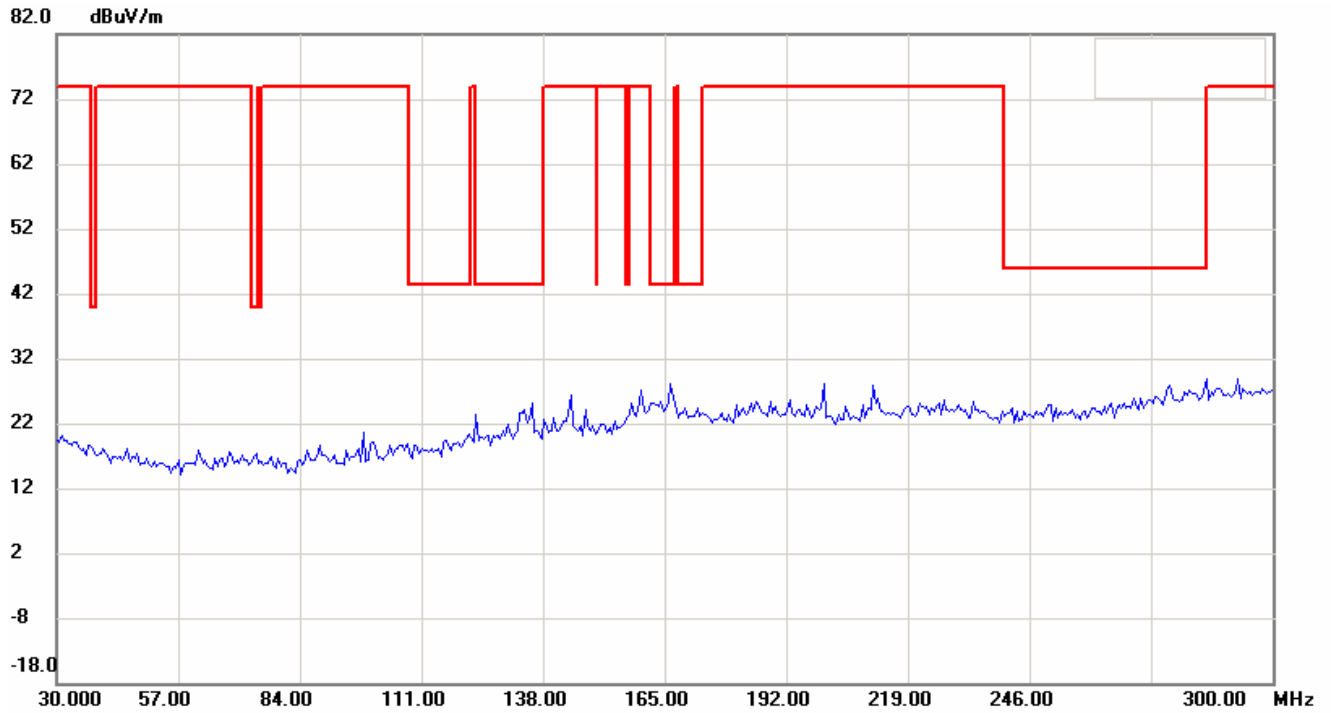


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

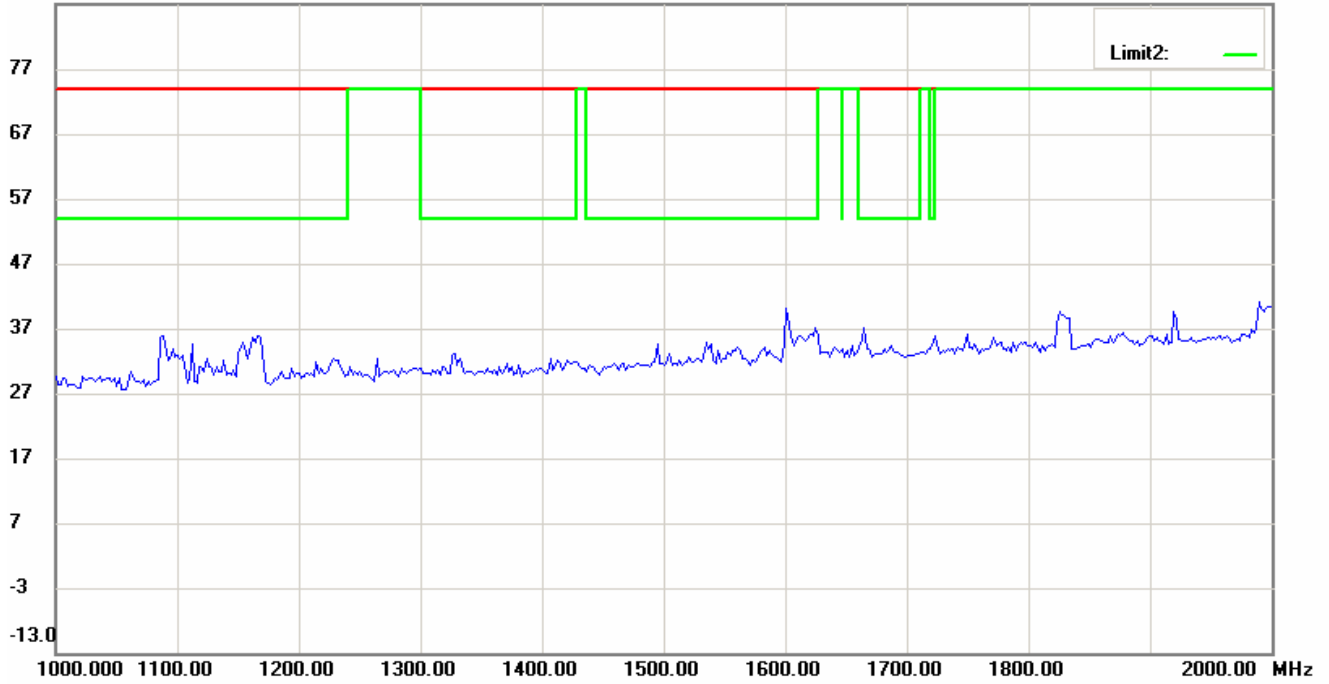


87.0 dBuV/m

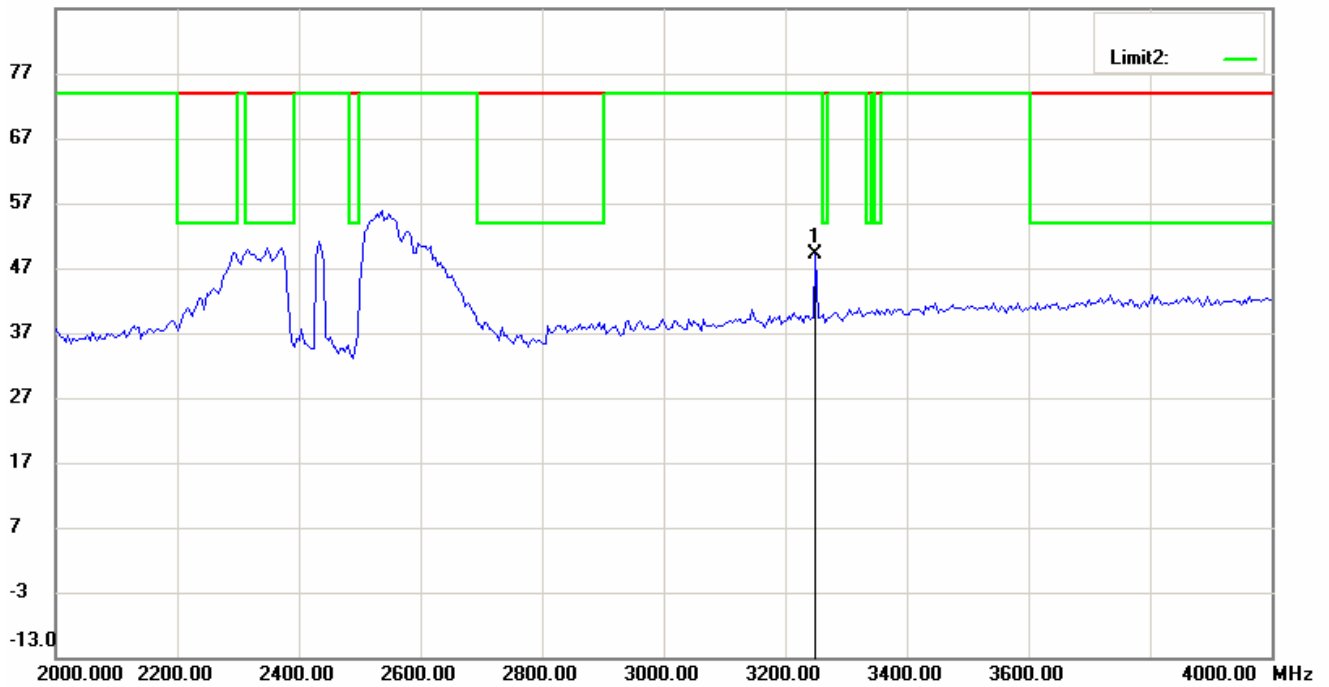


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

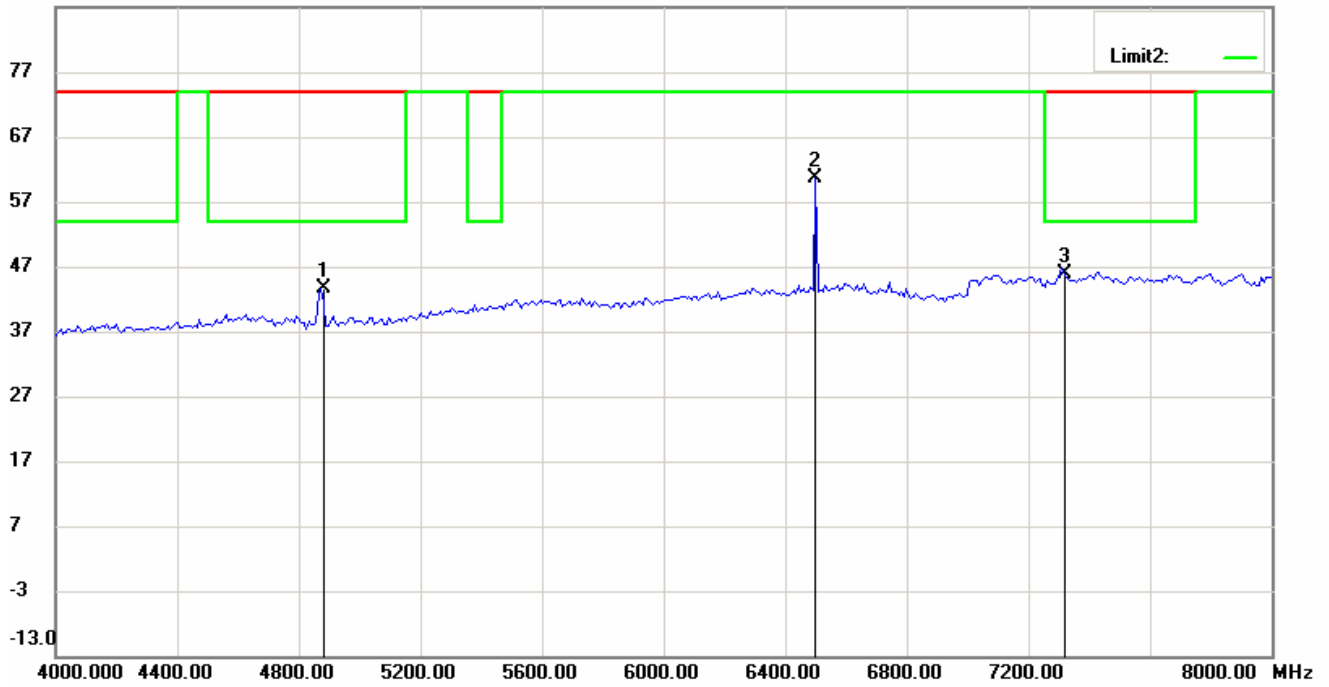


87.0 dBuV/m

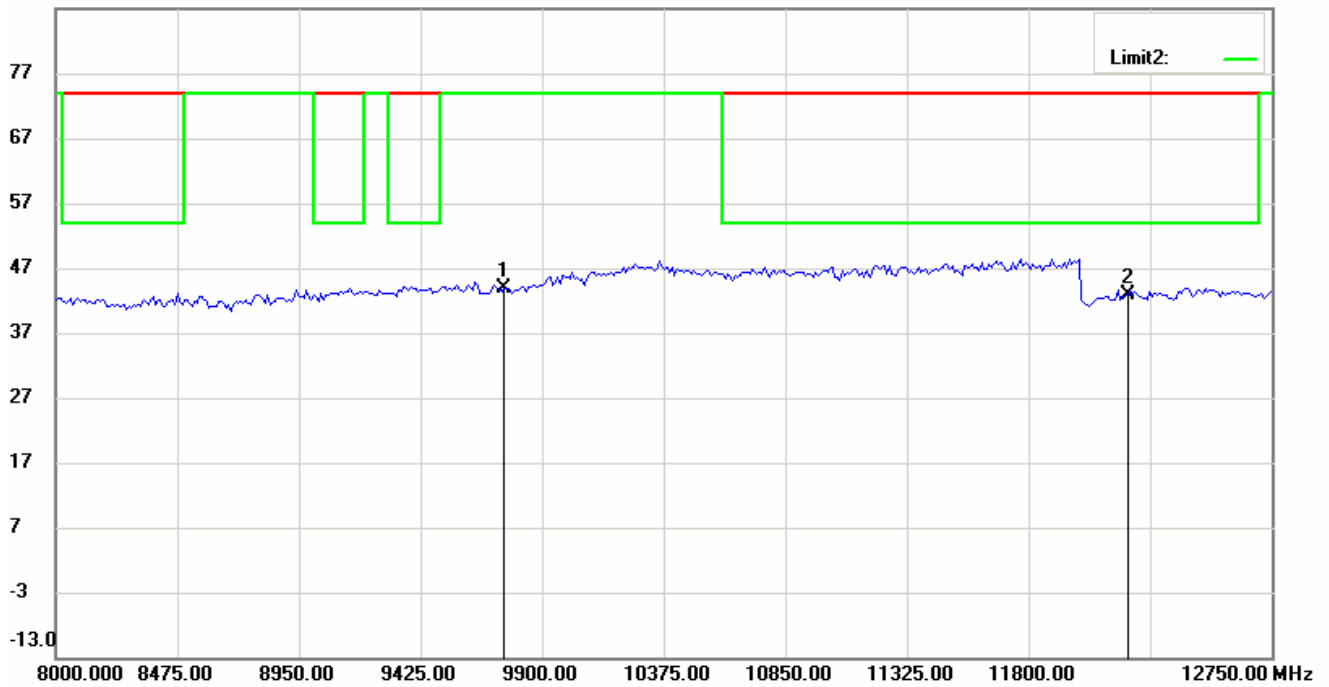


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


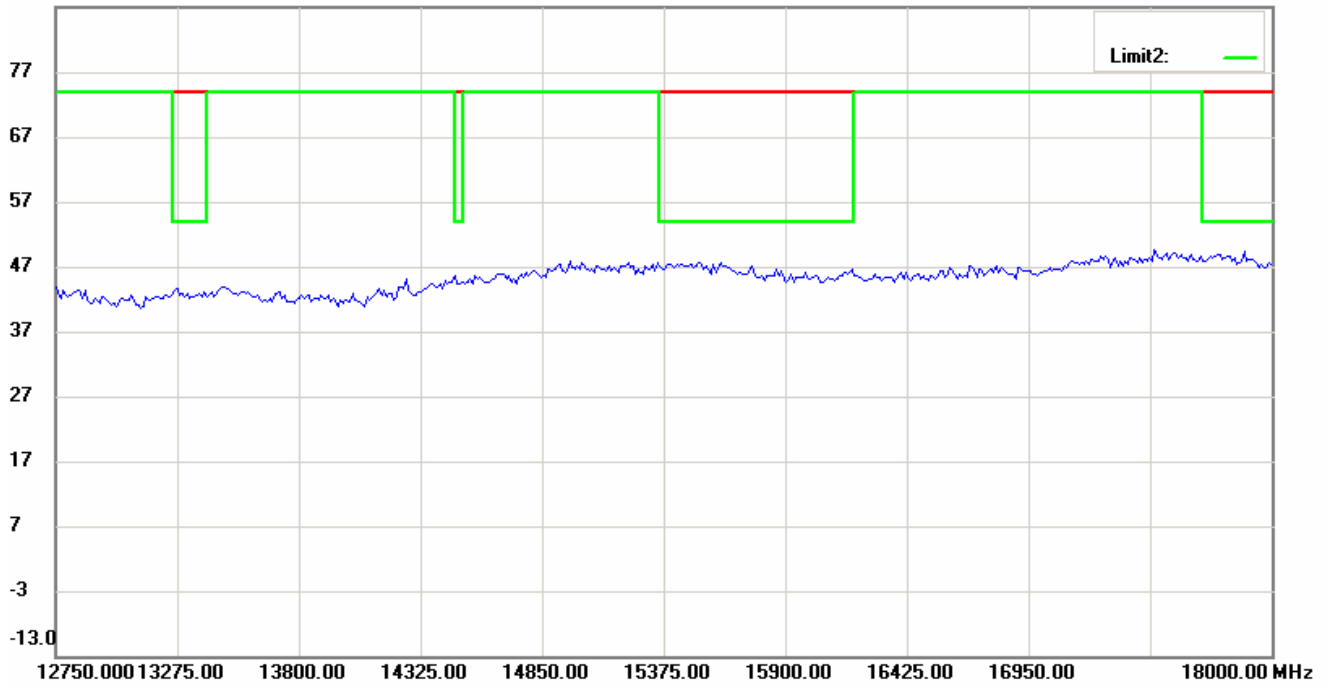


87.0 dBuV/m

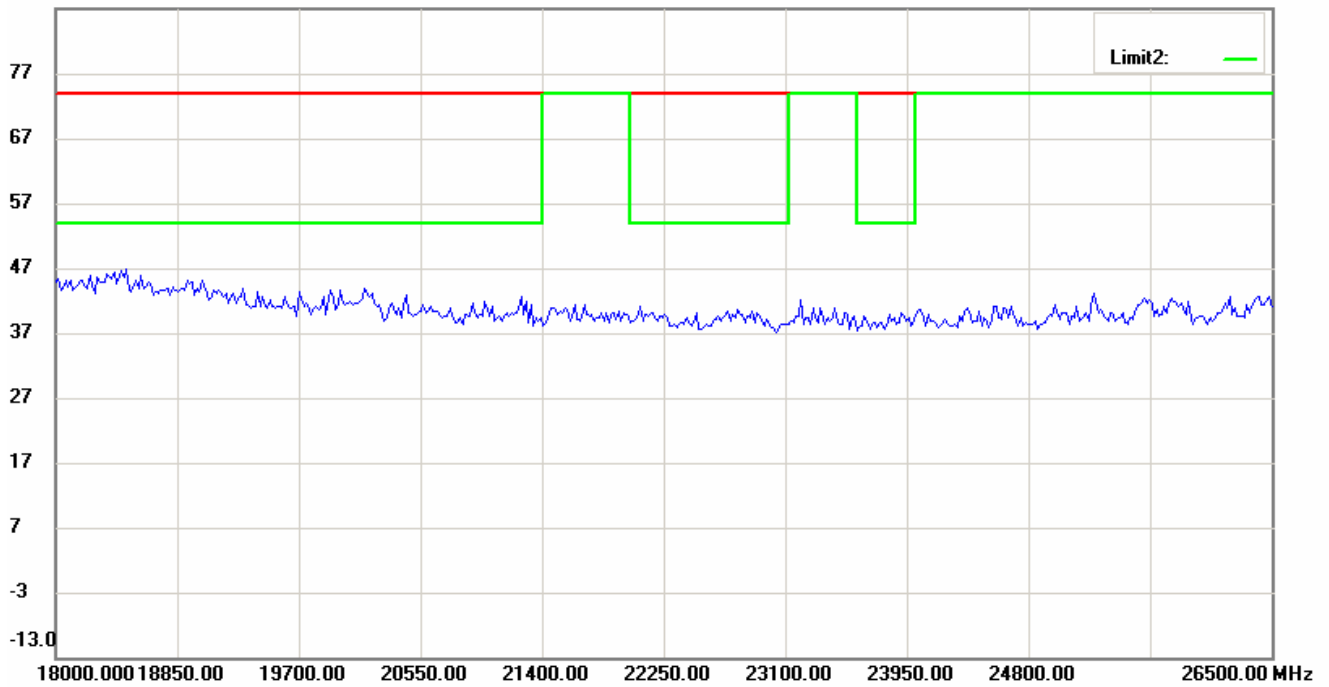

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

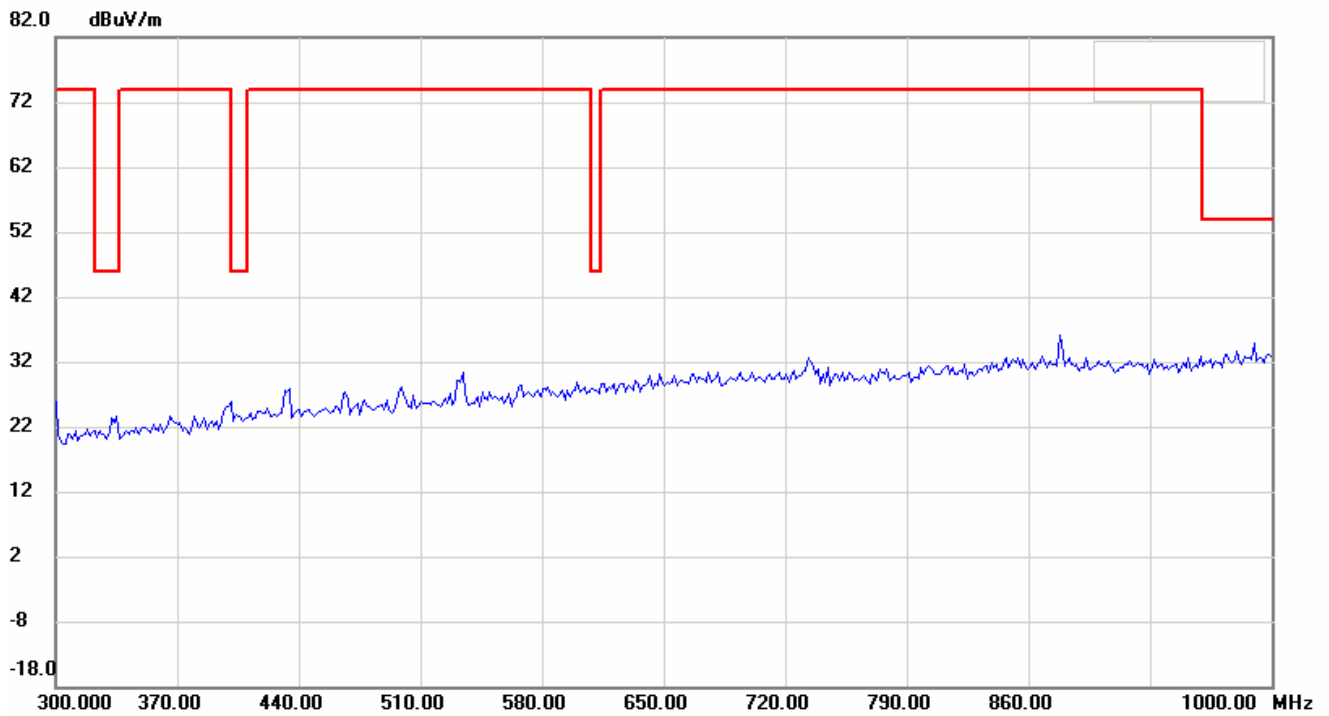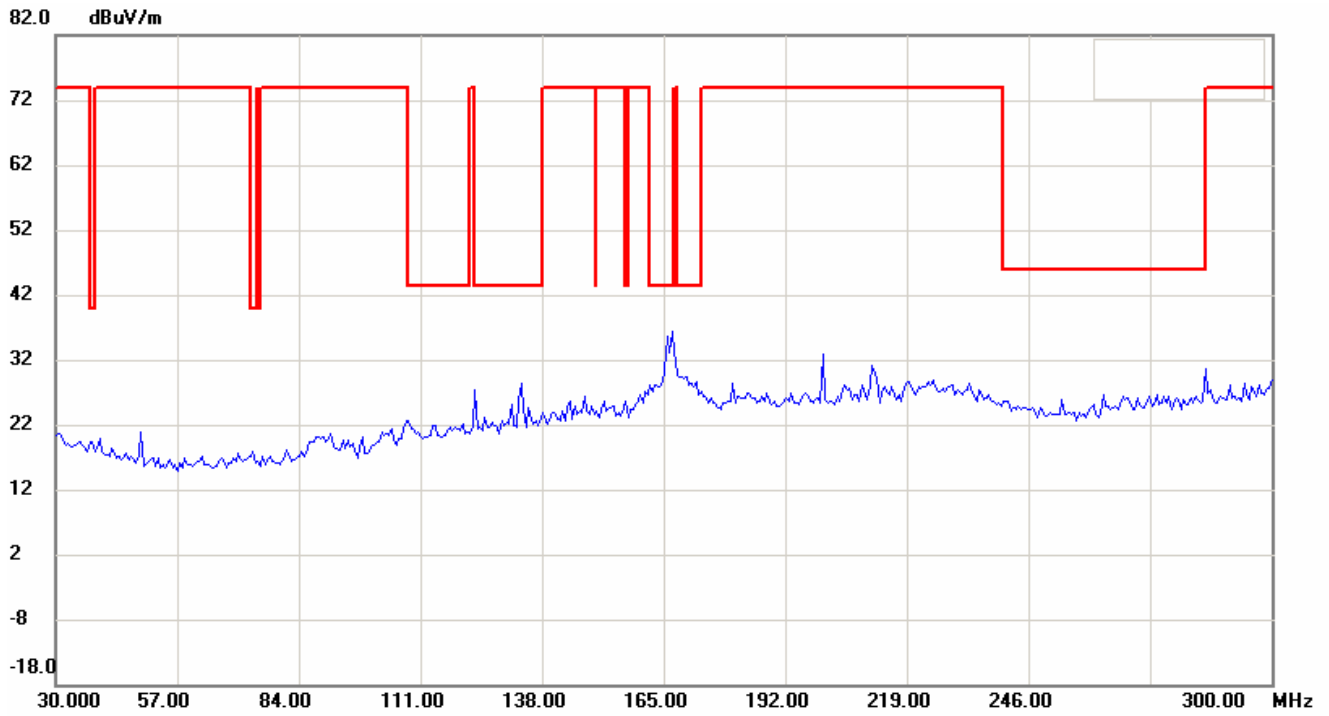





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

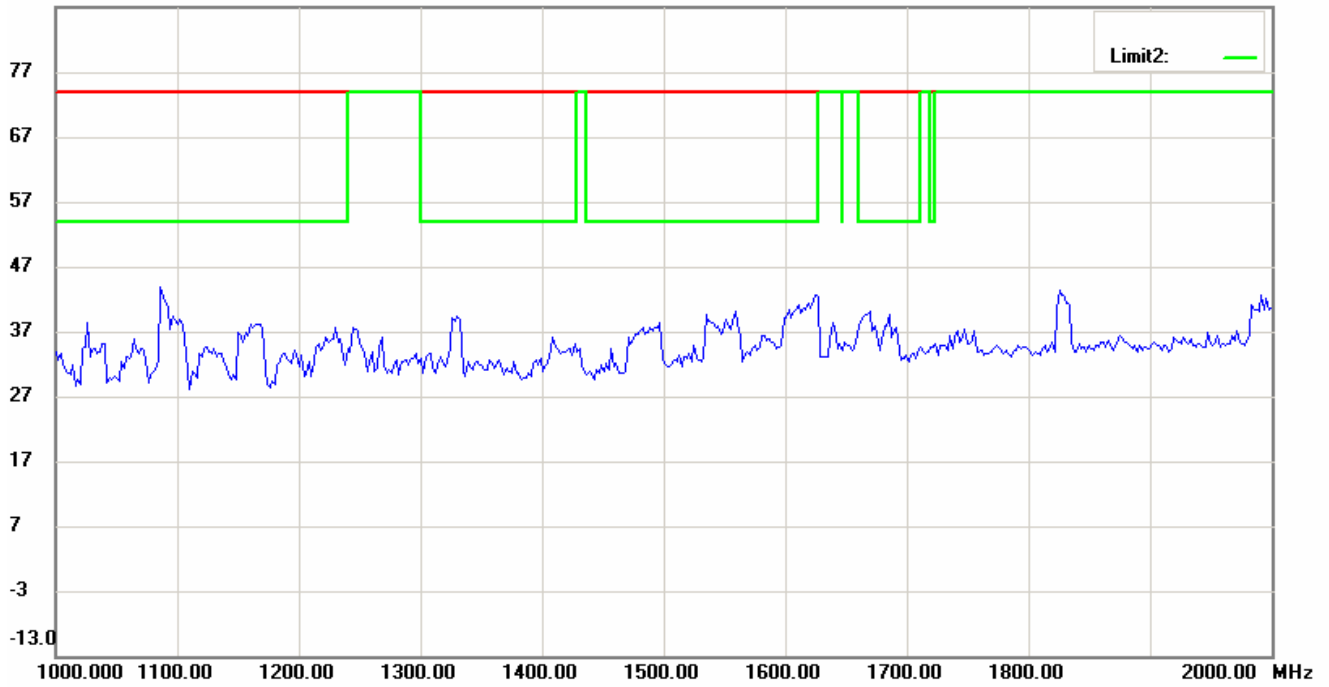


87.0 dBuV/m

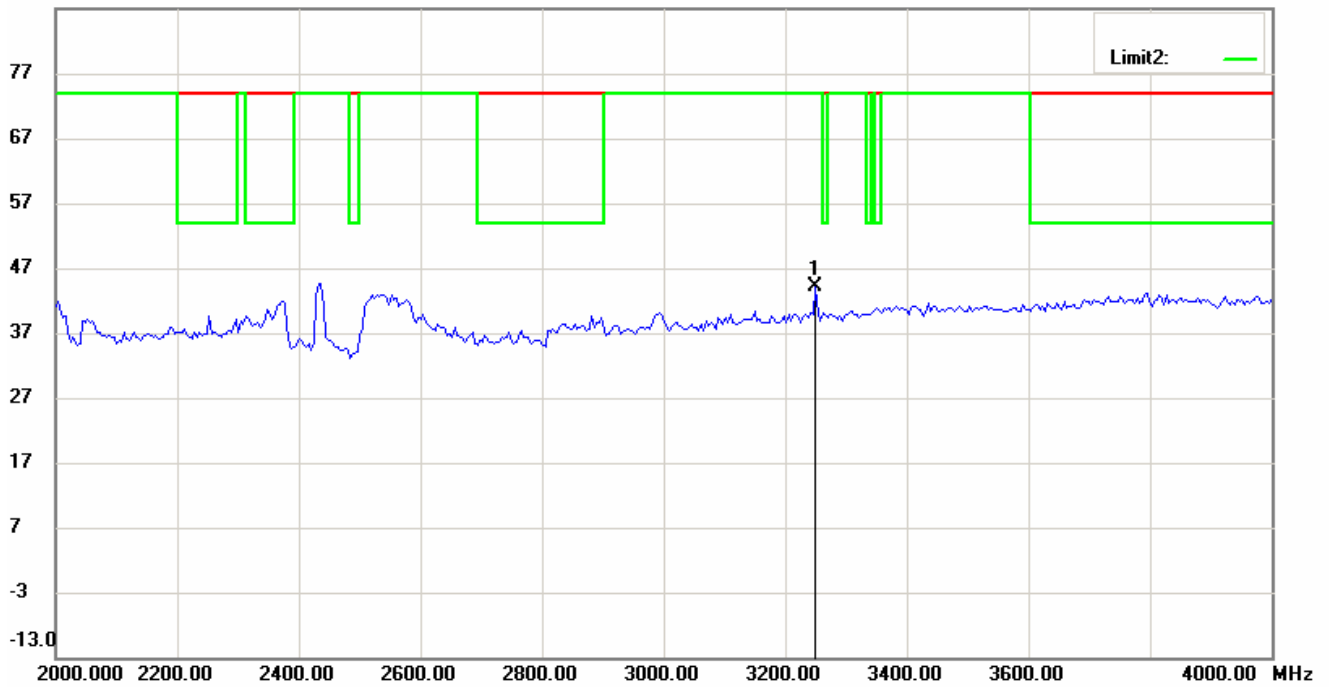


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

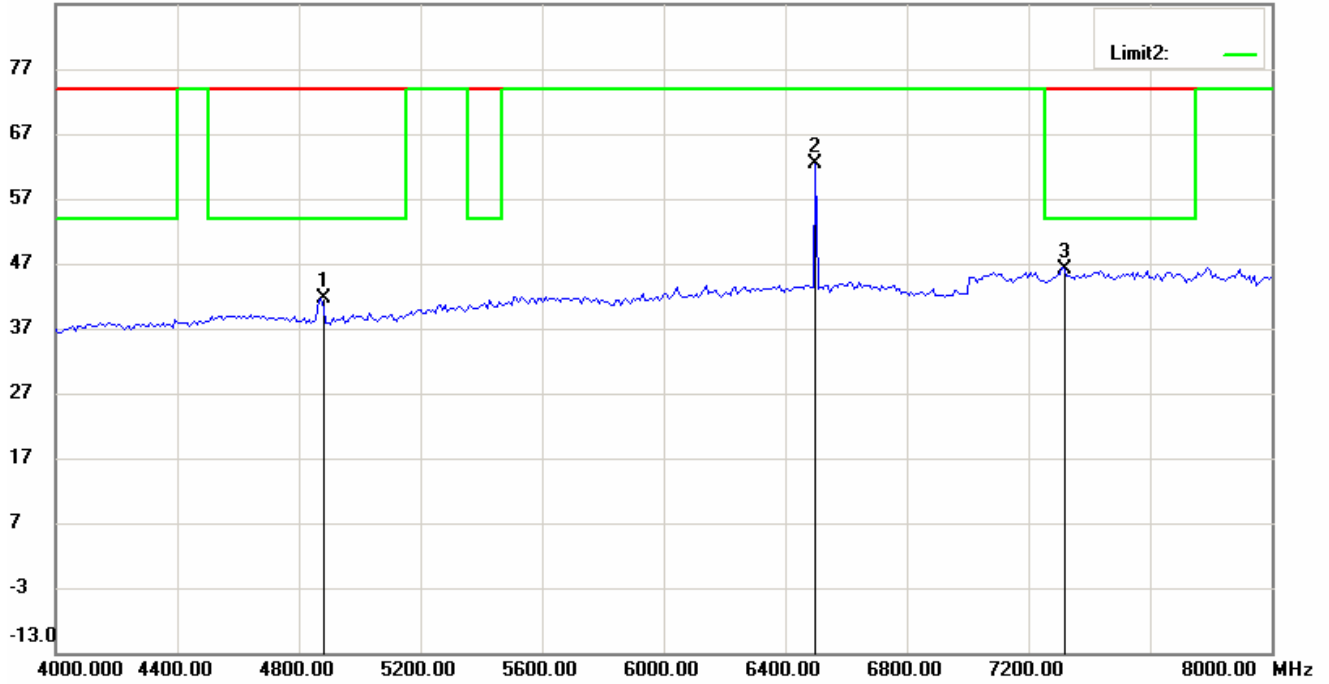


87.0 dBuV/m

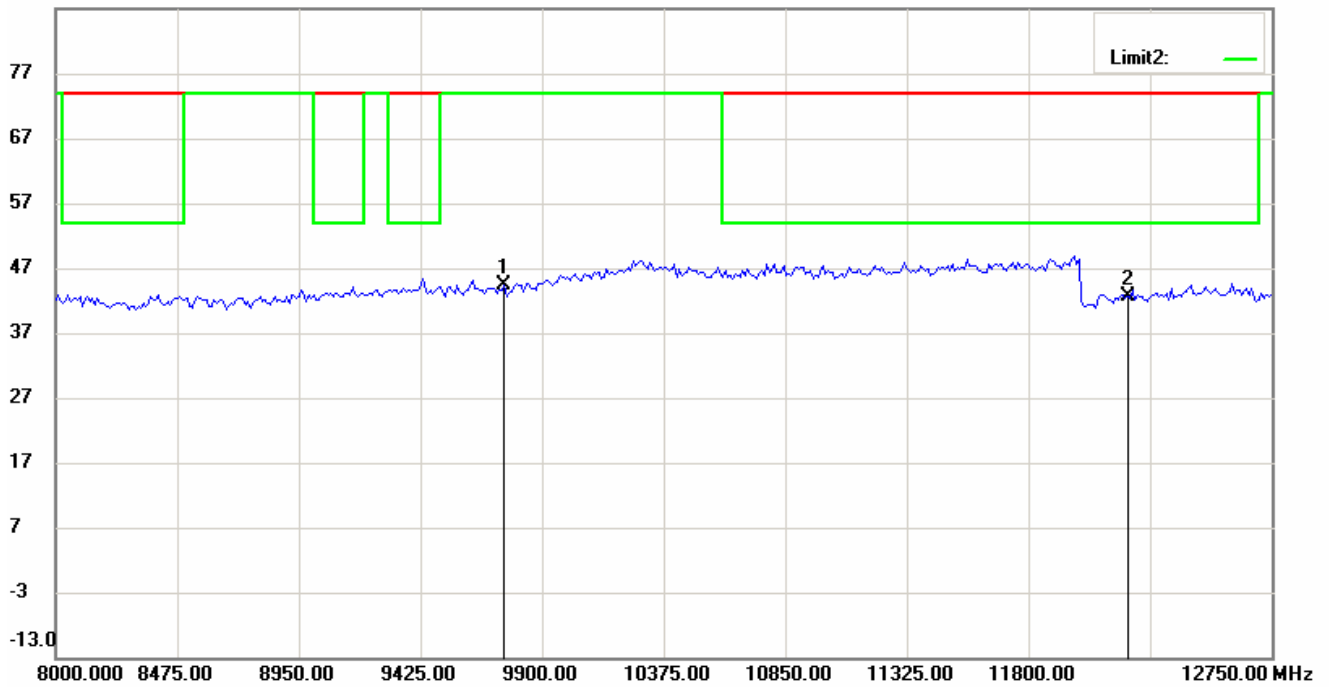


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


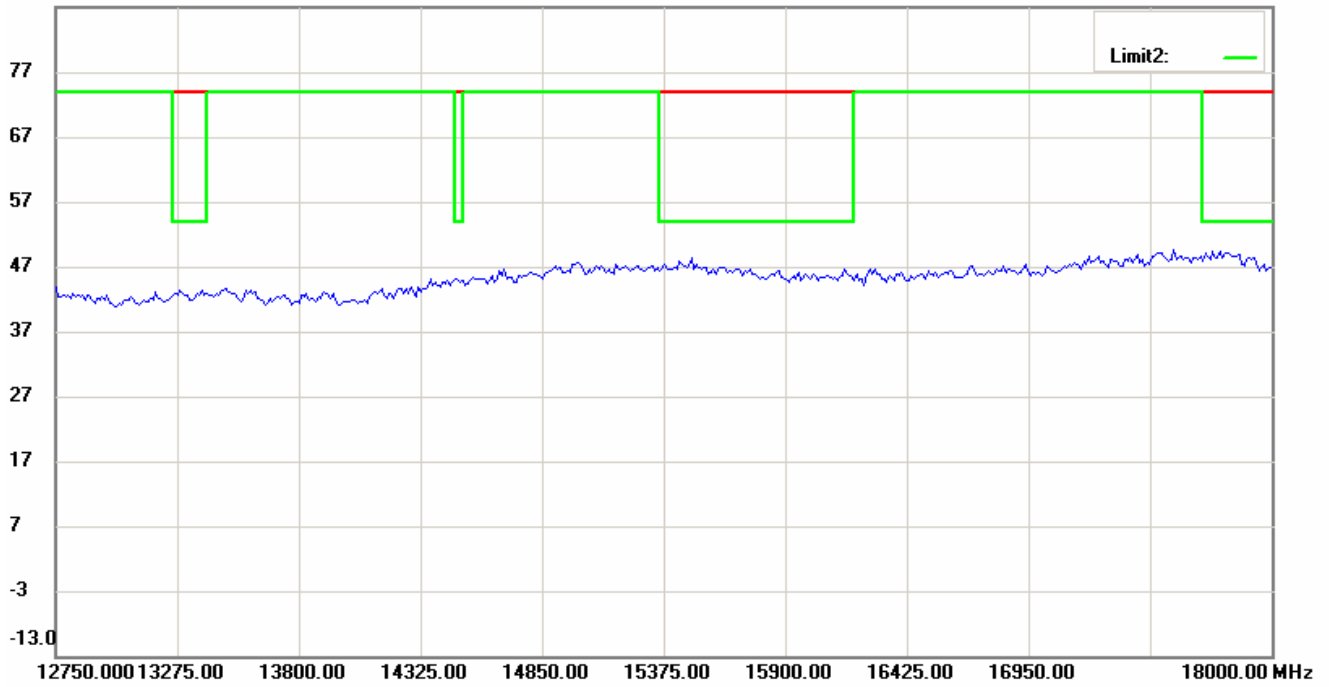


87.0 dBuV/m

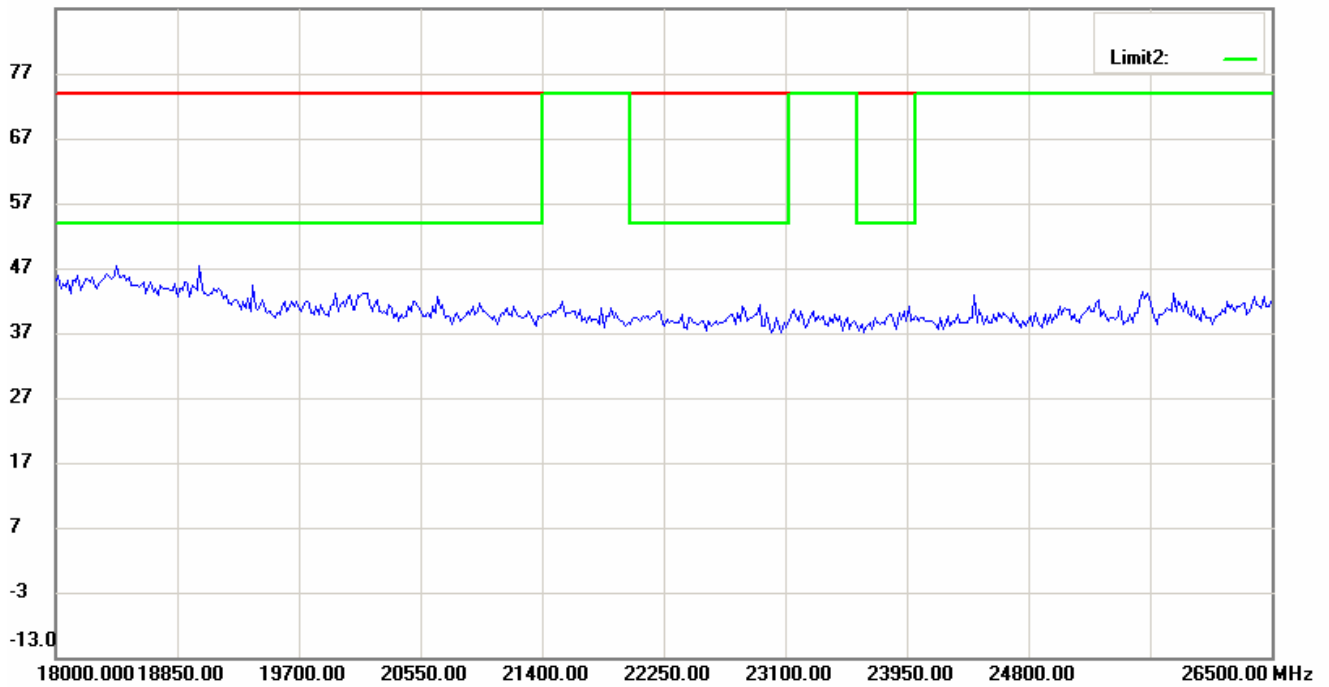

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11B\_Ch11 Antenna Polarization H

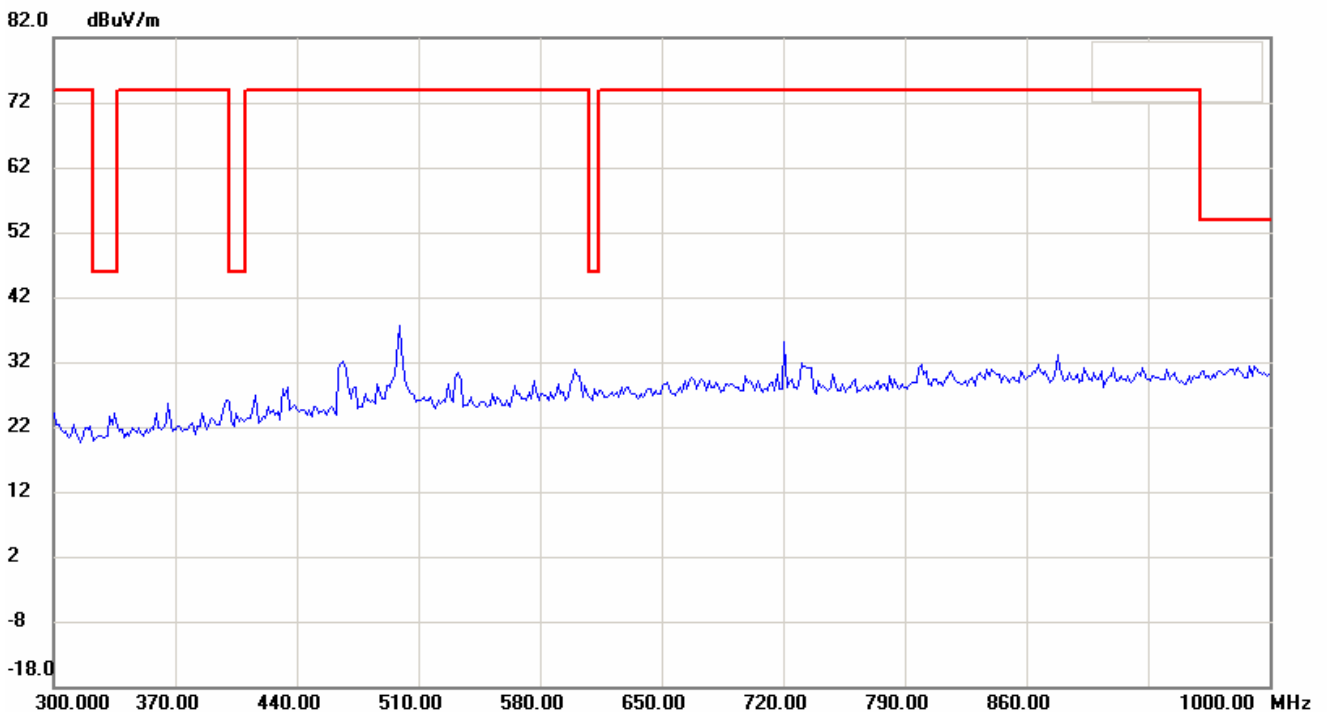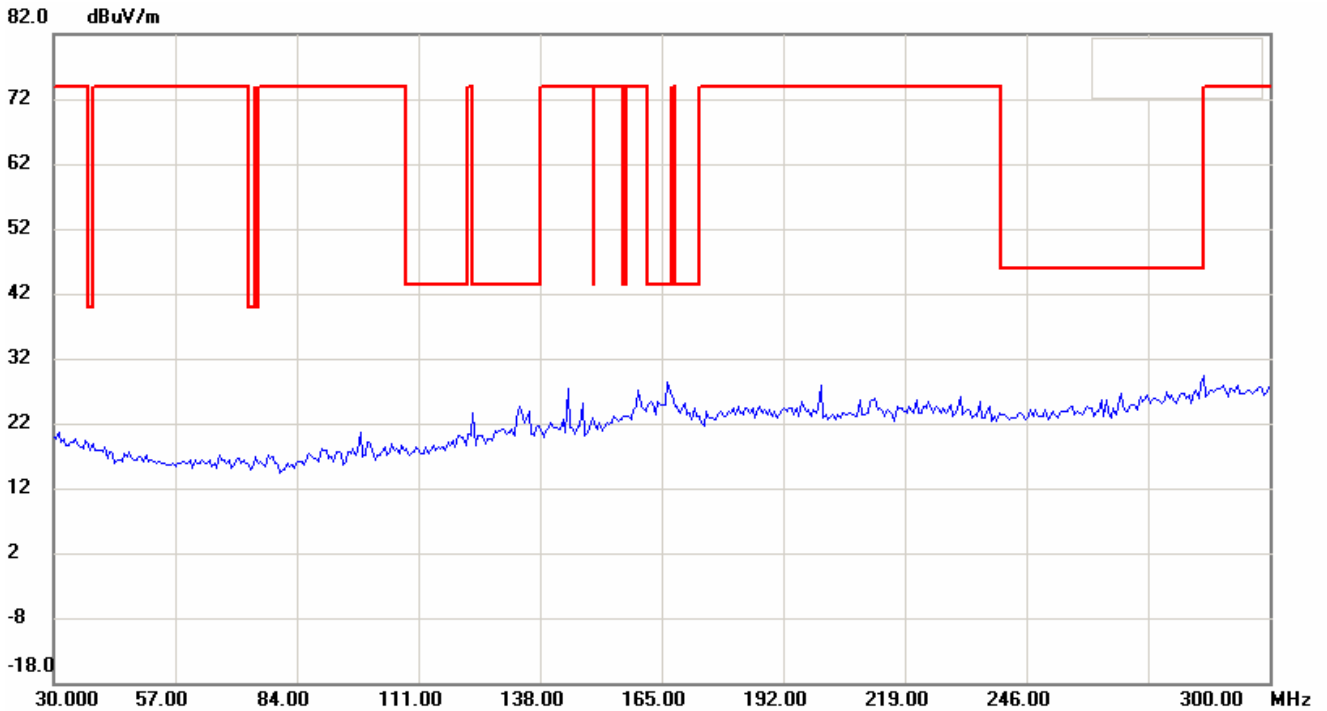


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

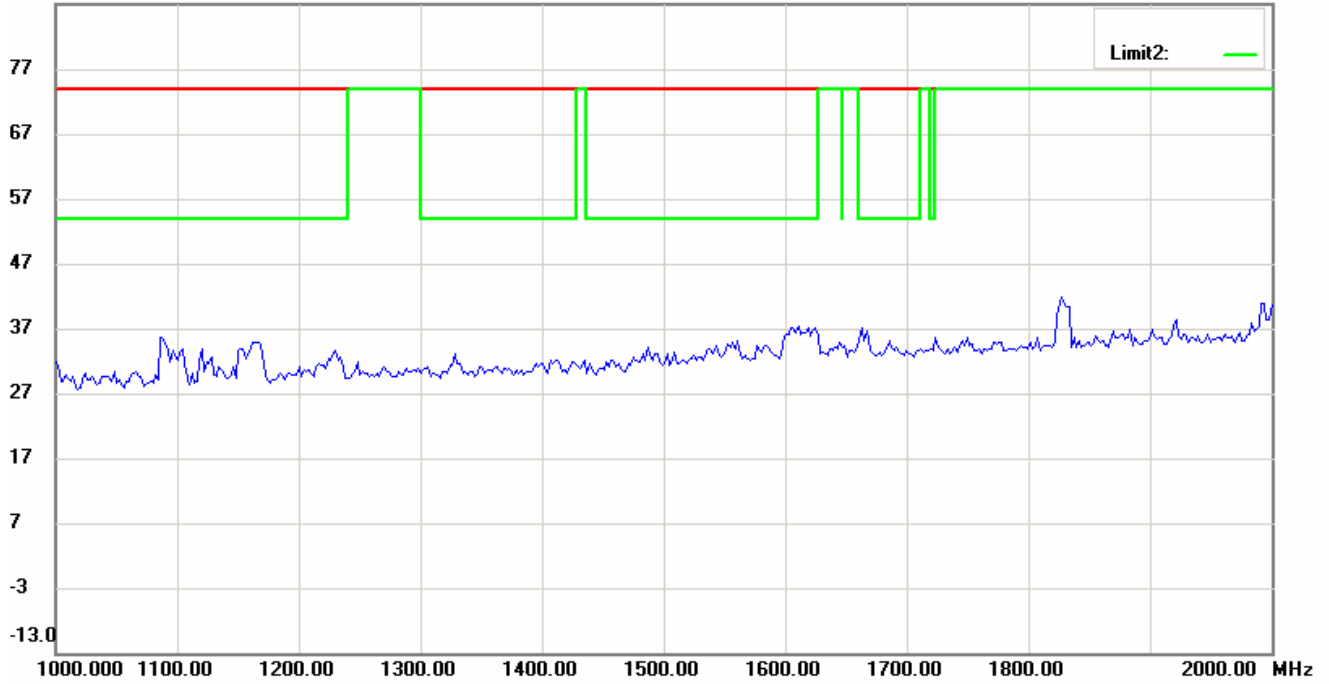


87.0 dBuV/m

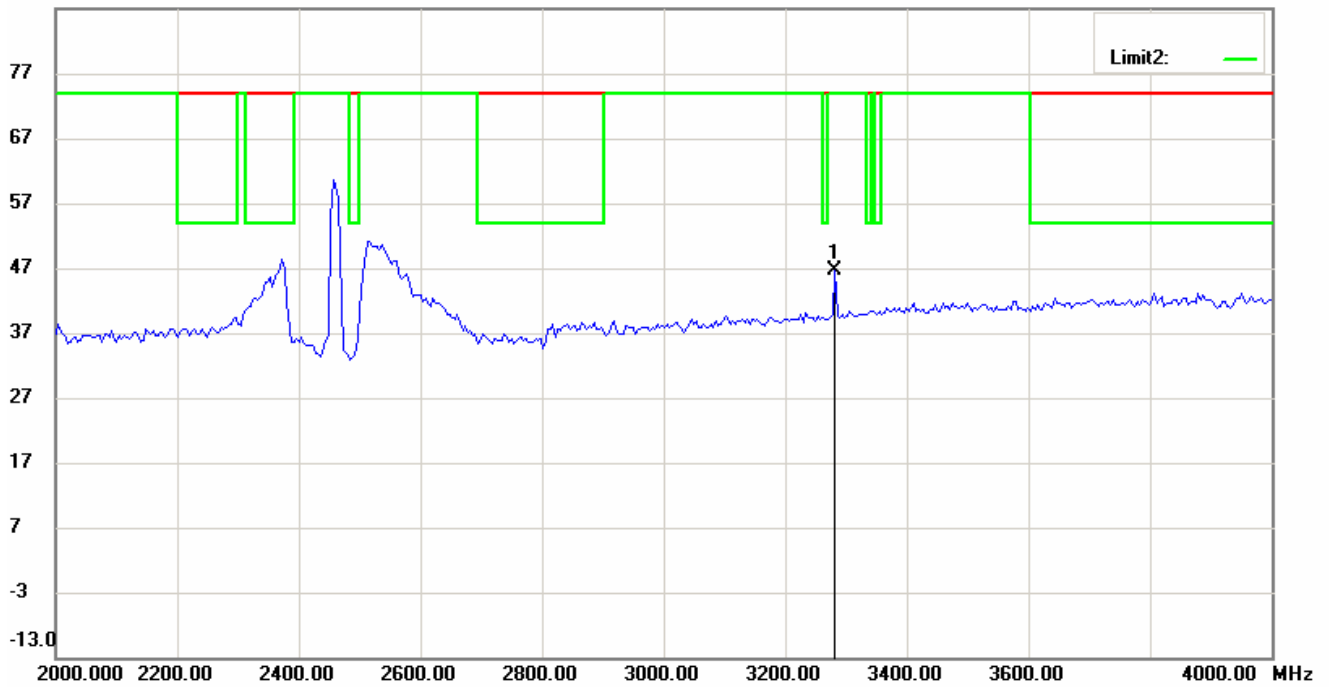


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

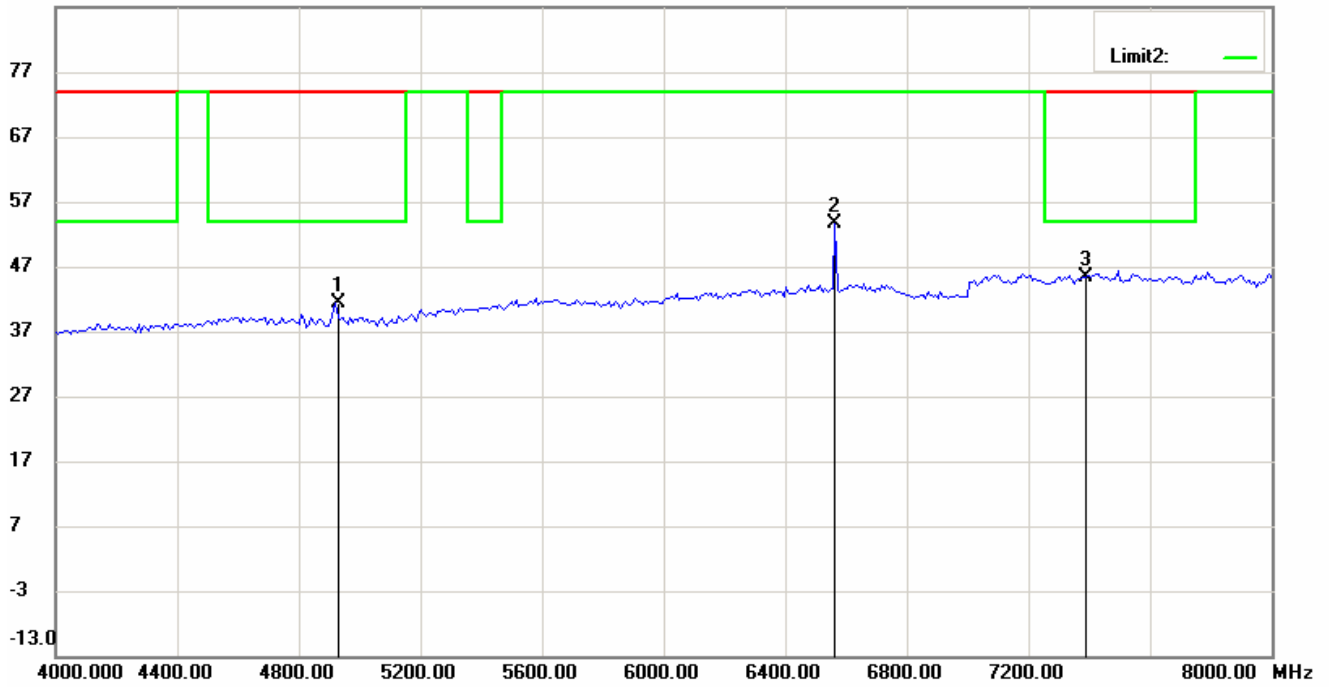


87.0 dBuV/m

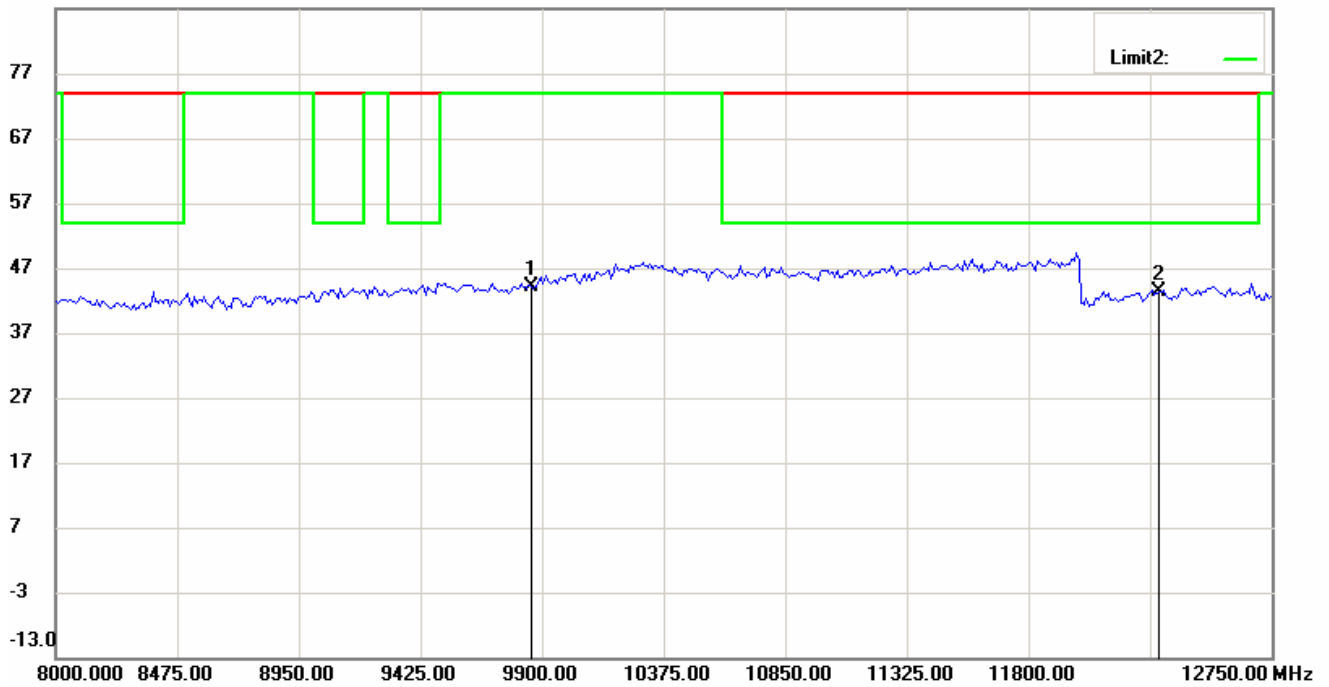


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


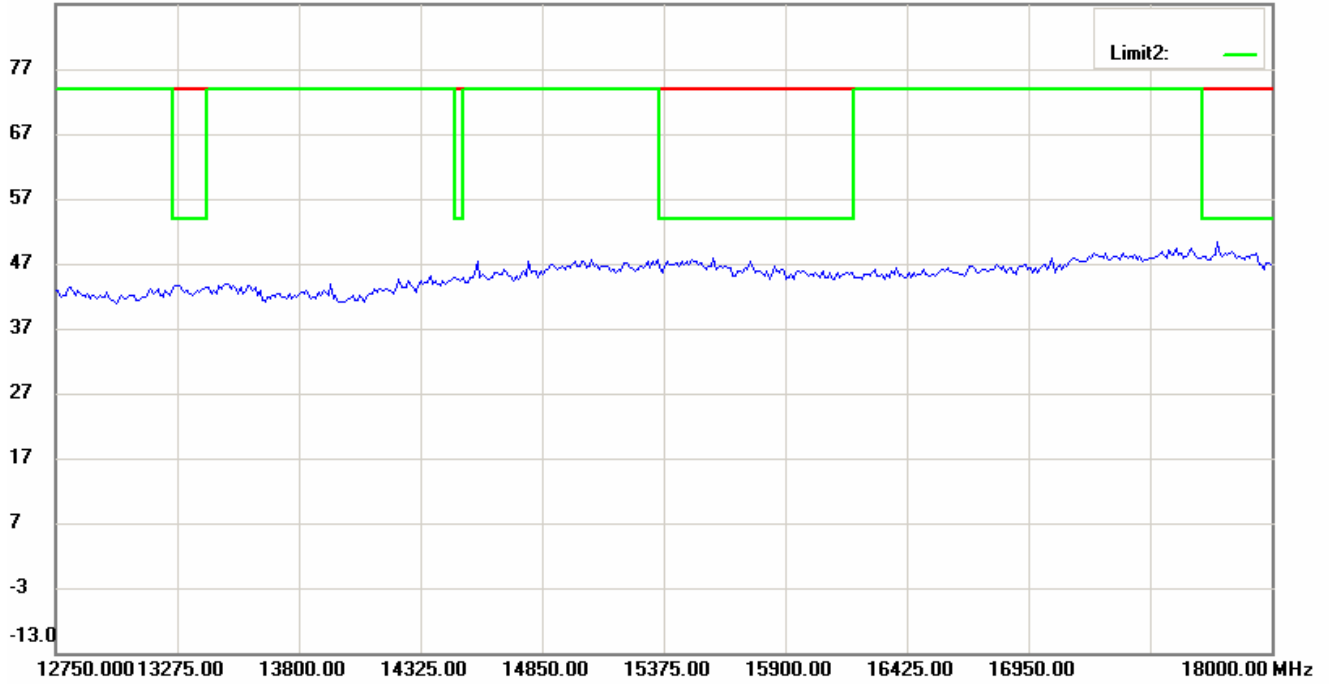


87.0 dBuV/m

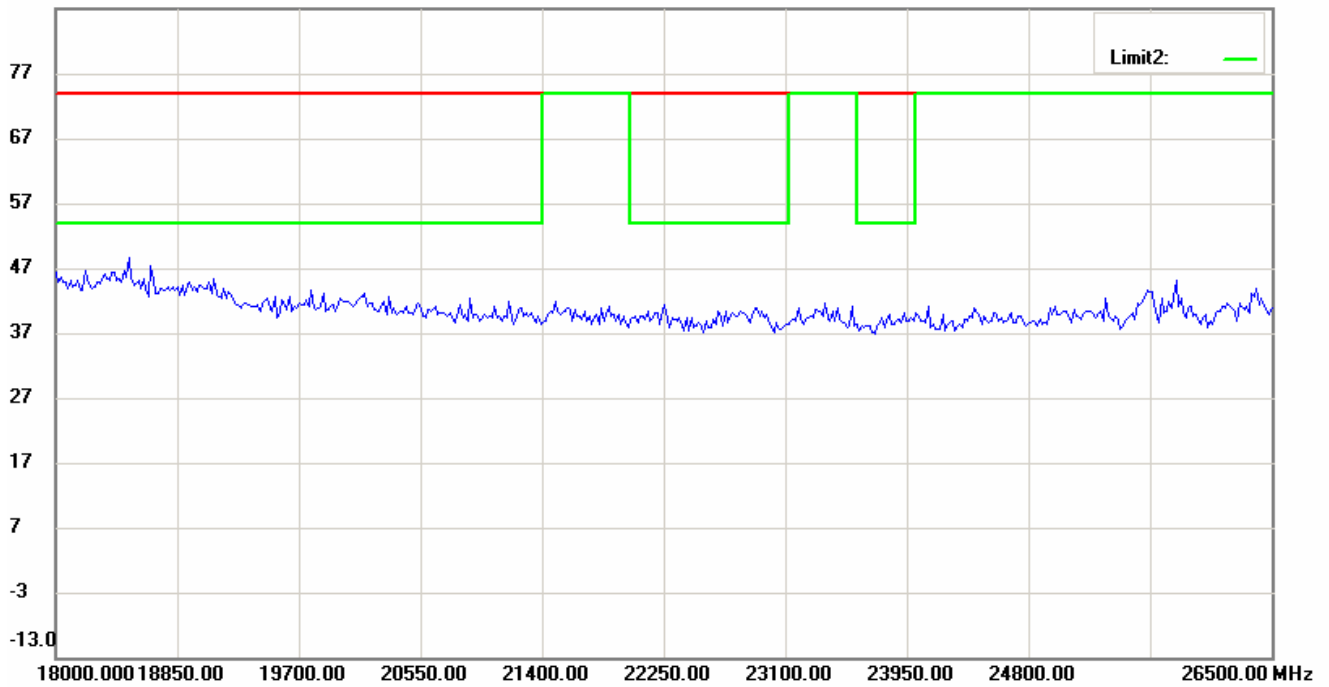

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

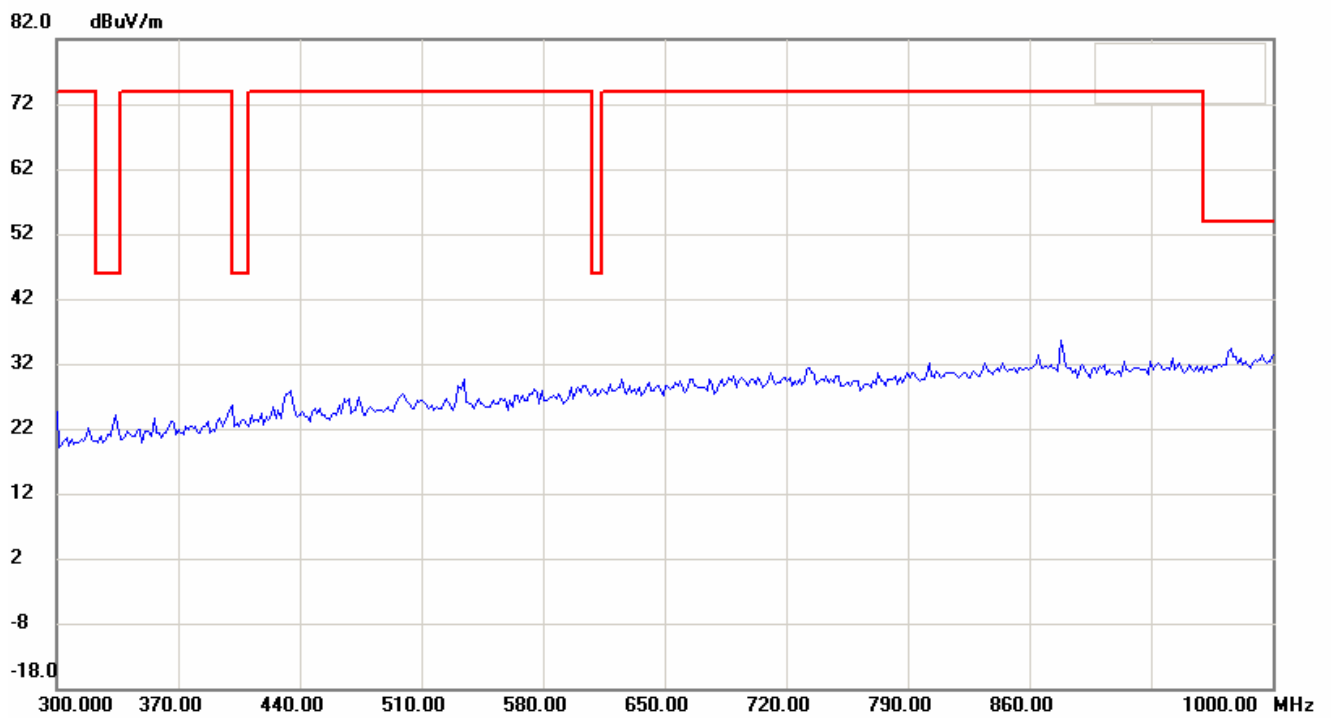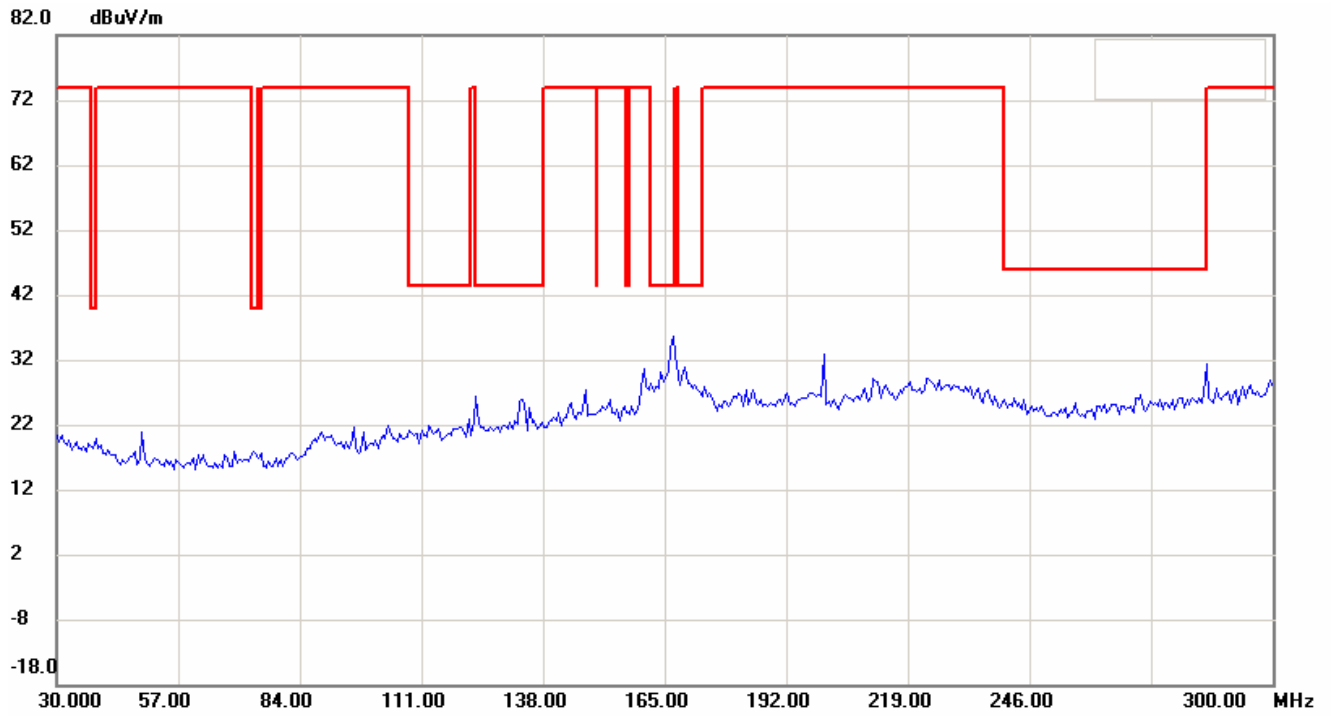





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

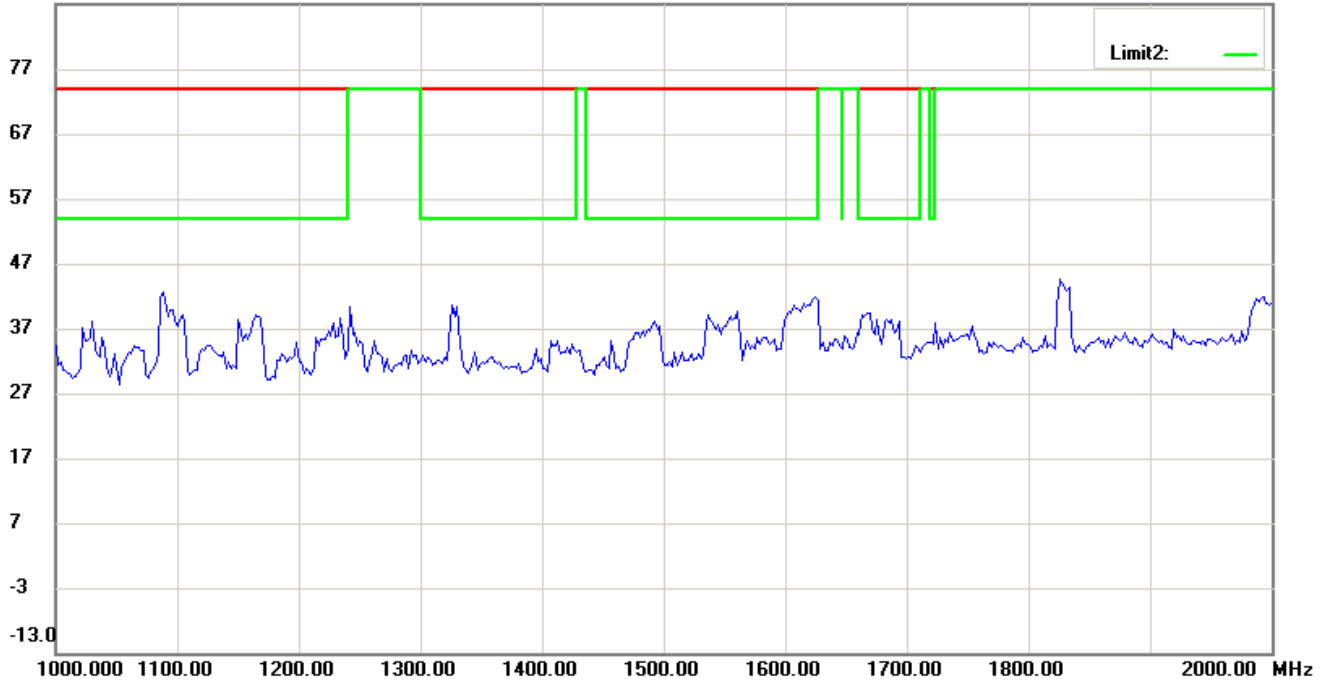


87.0 dBuV/m

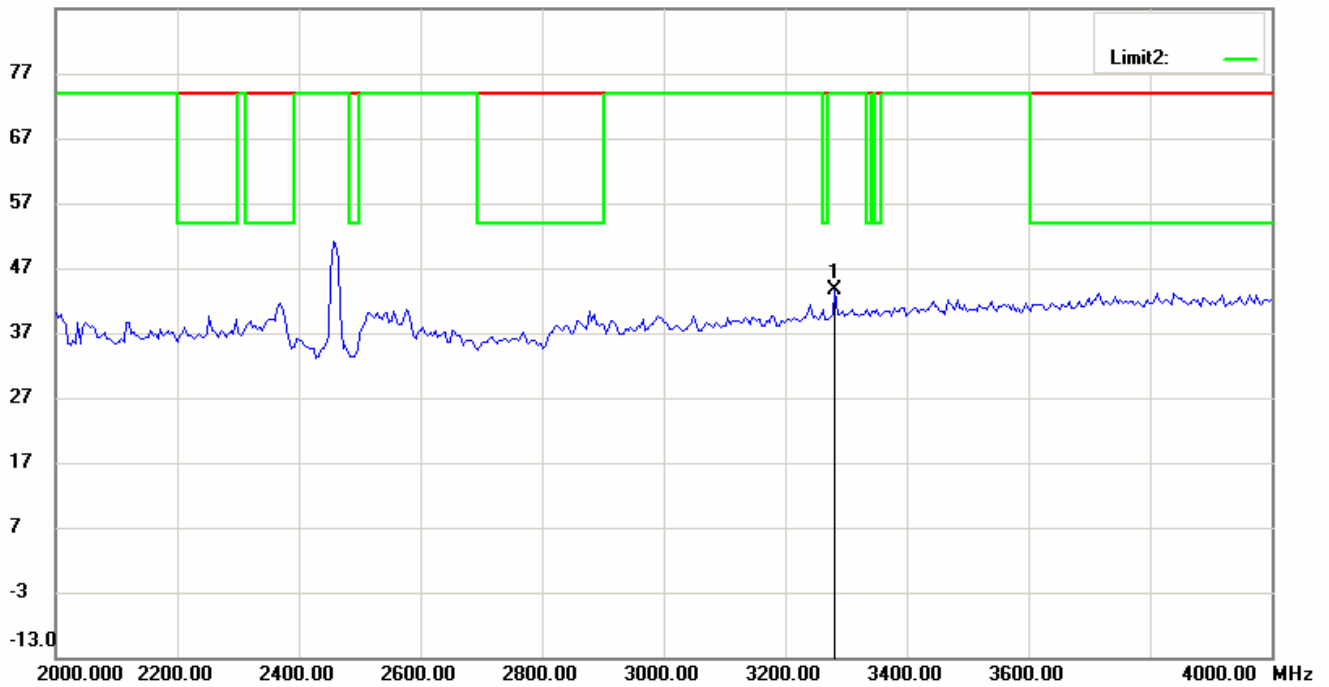


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

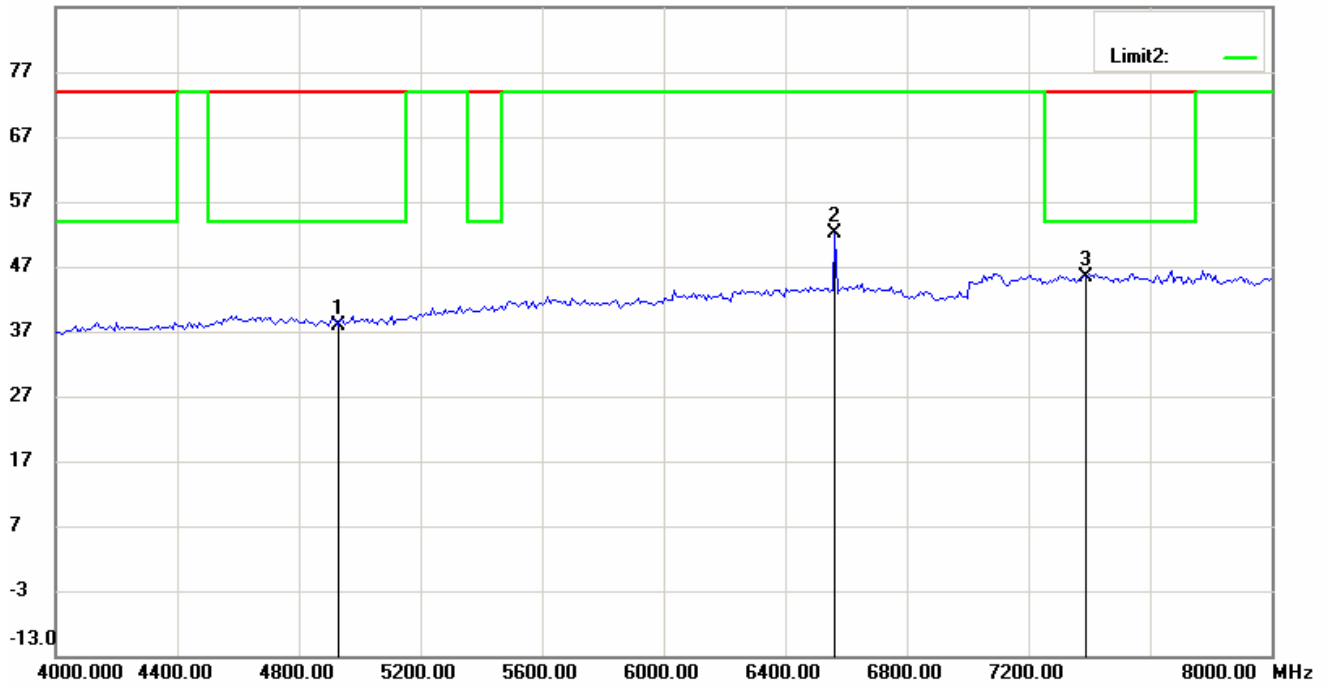


87.0 dBuV/m

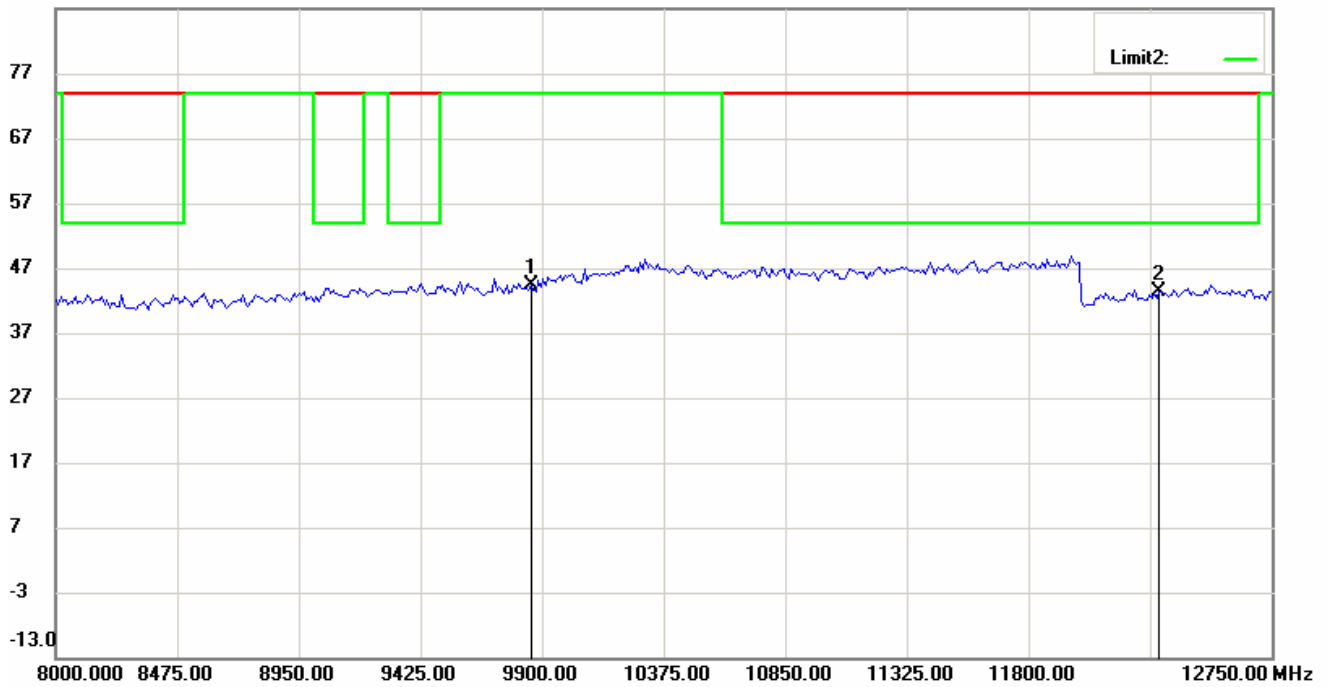


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


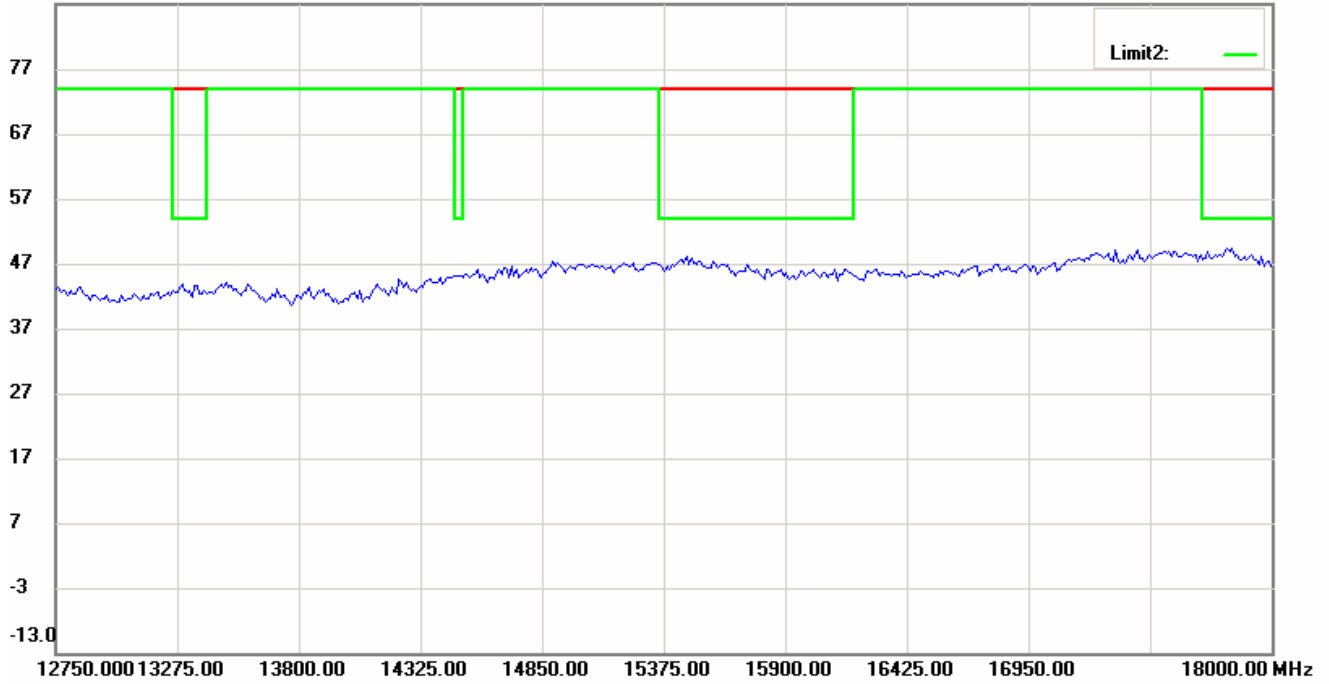


87.0 dBuV/m

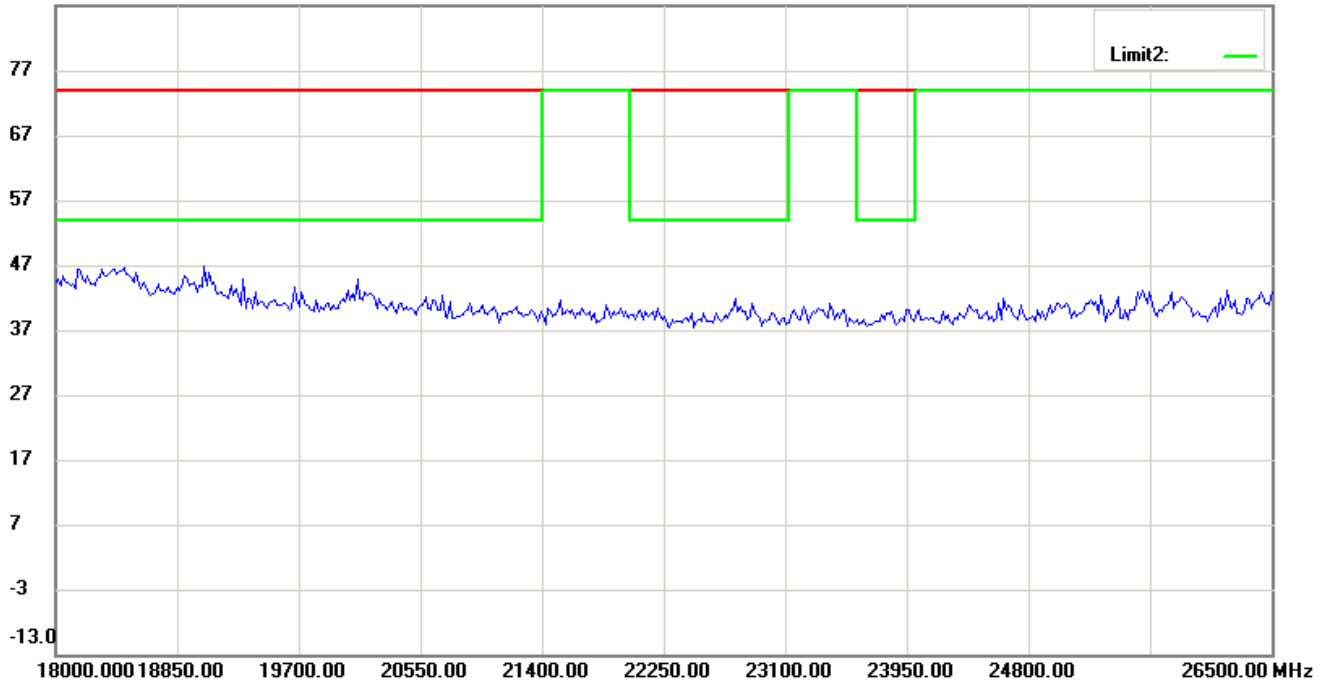

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11G\_Ch1 Antenna Polarization H

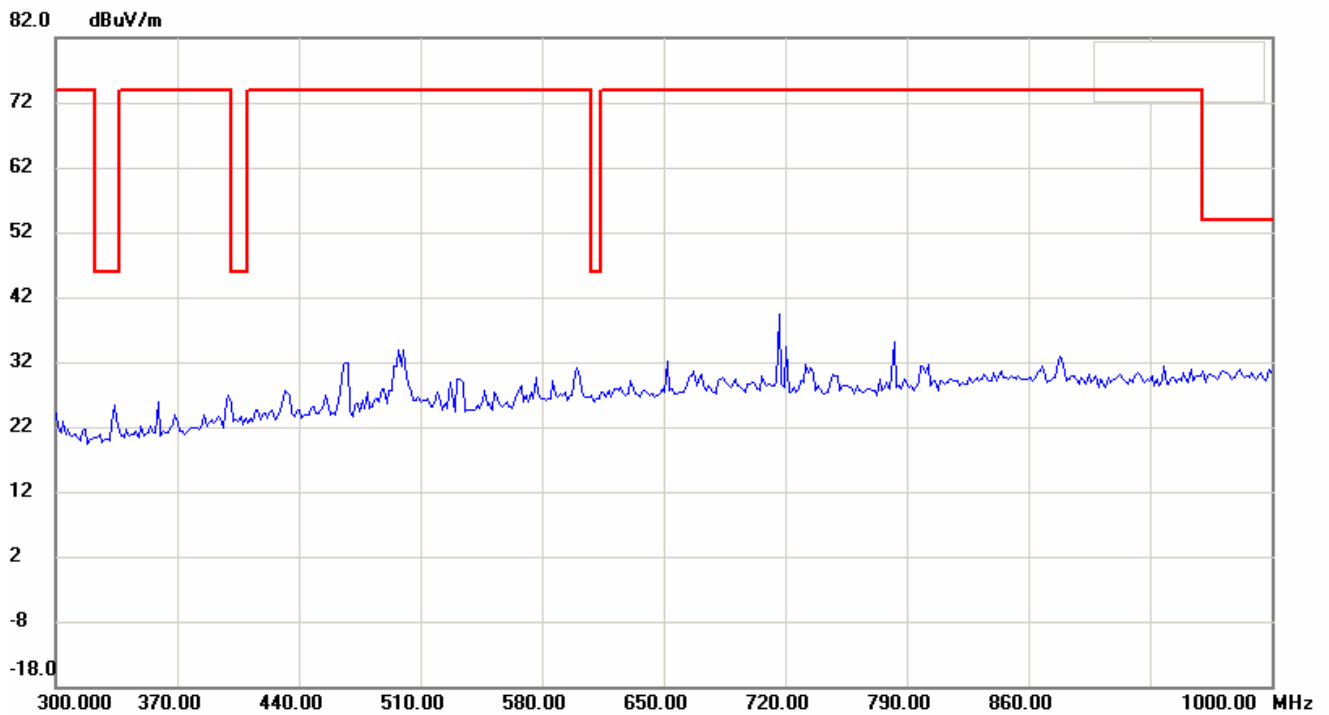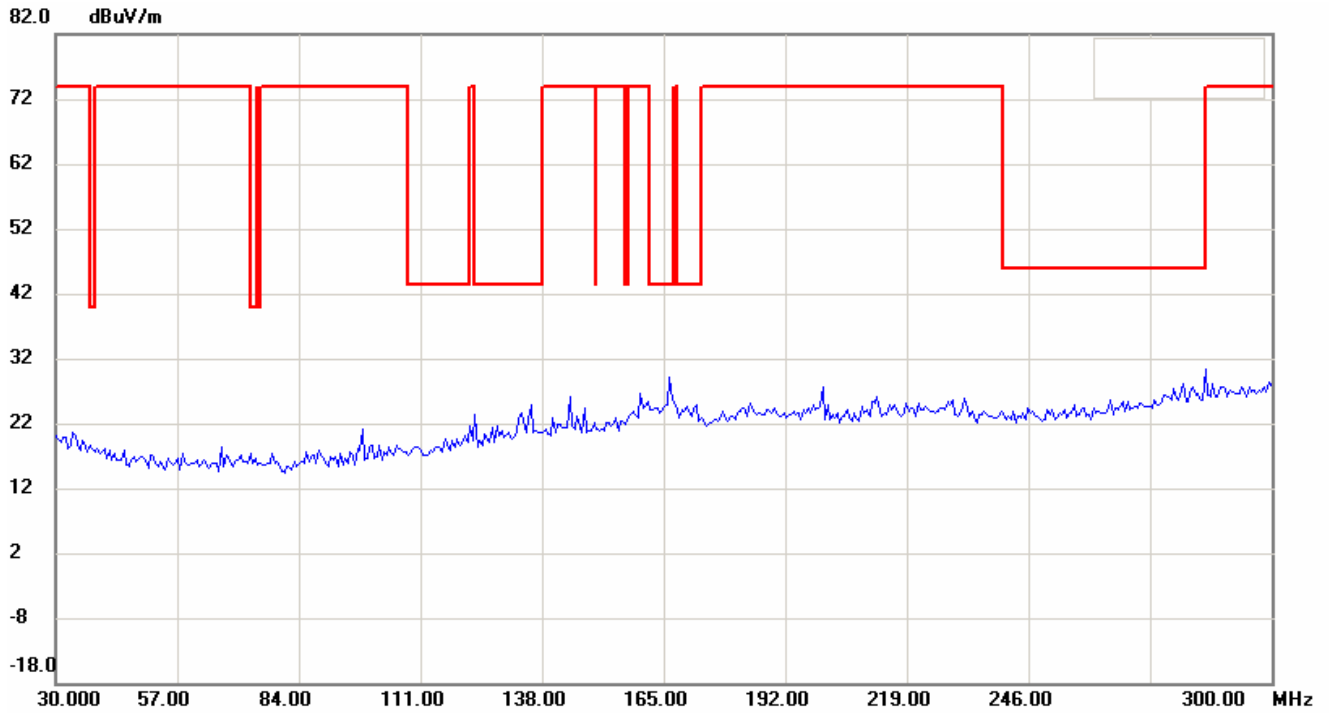


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

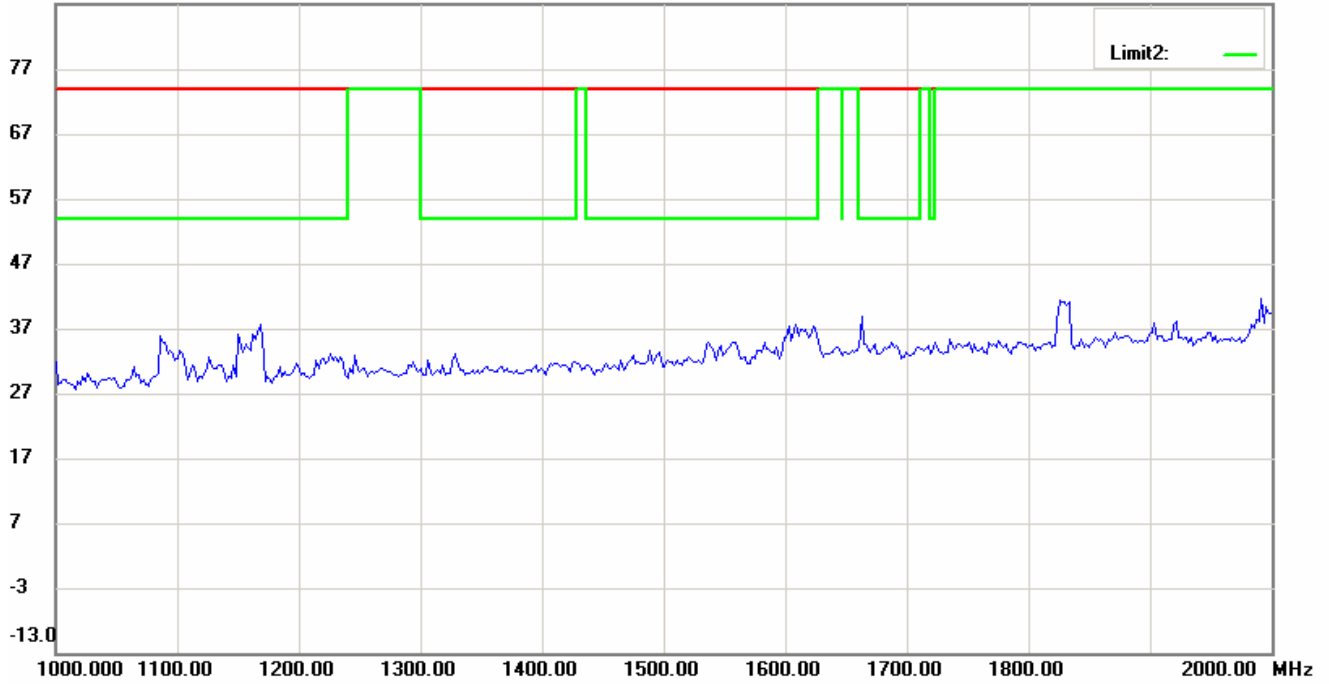


87.0 dBuV/m

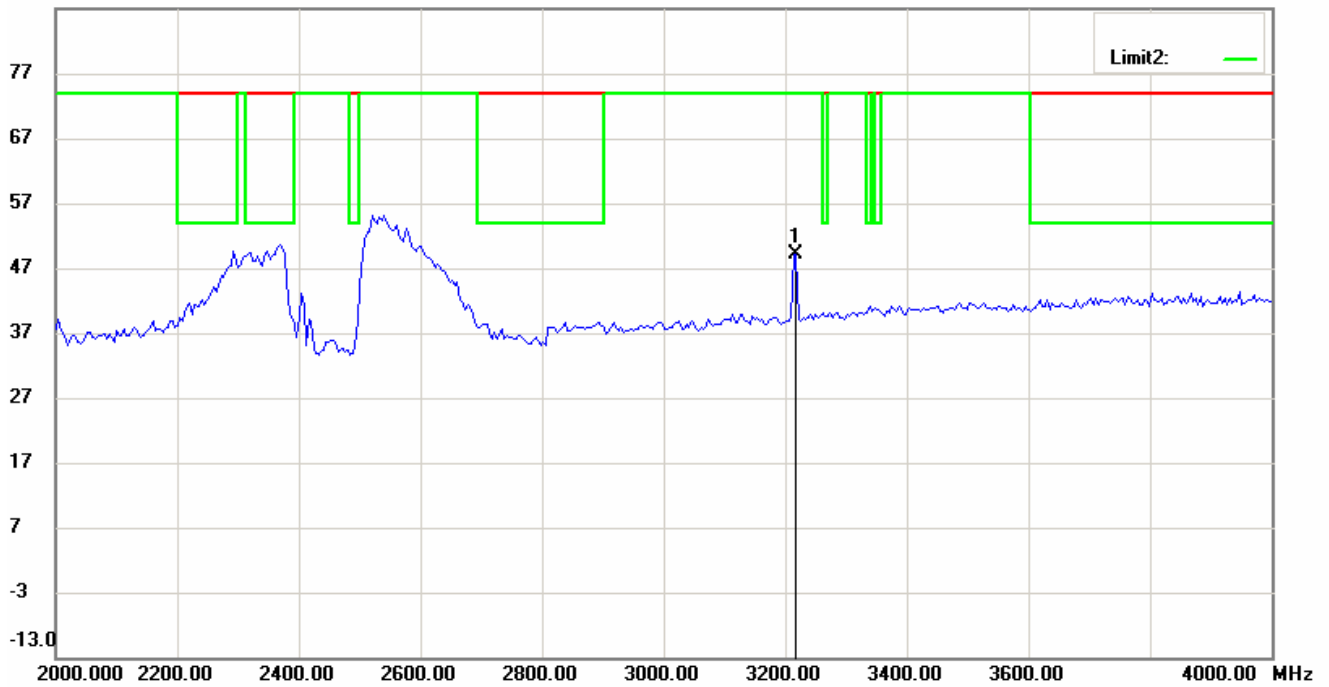


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

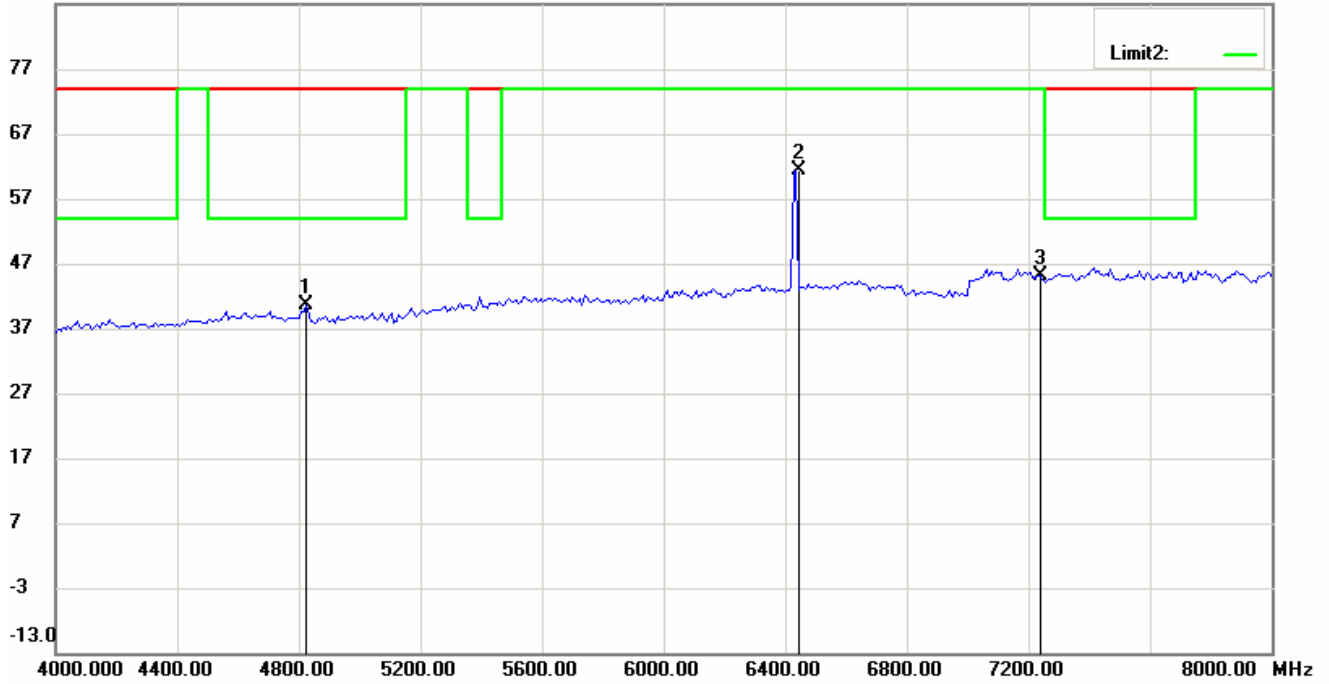


87.0 dBuV/m

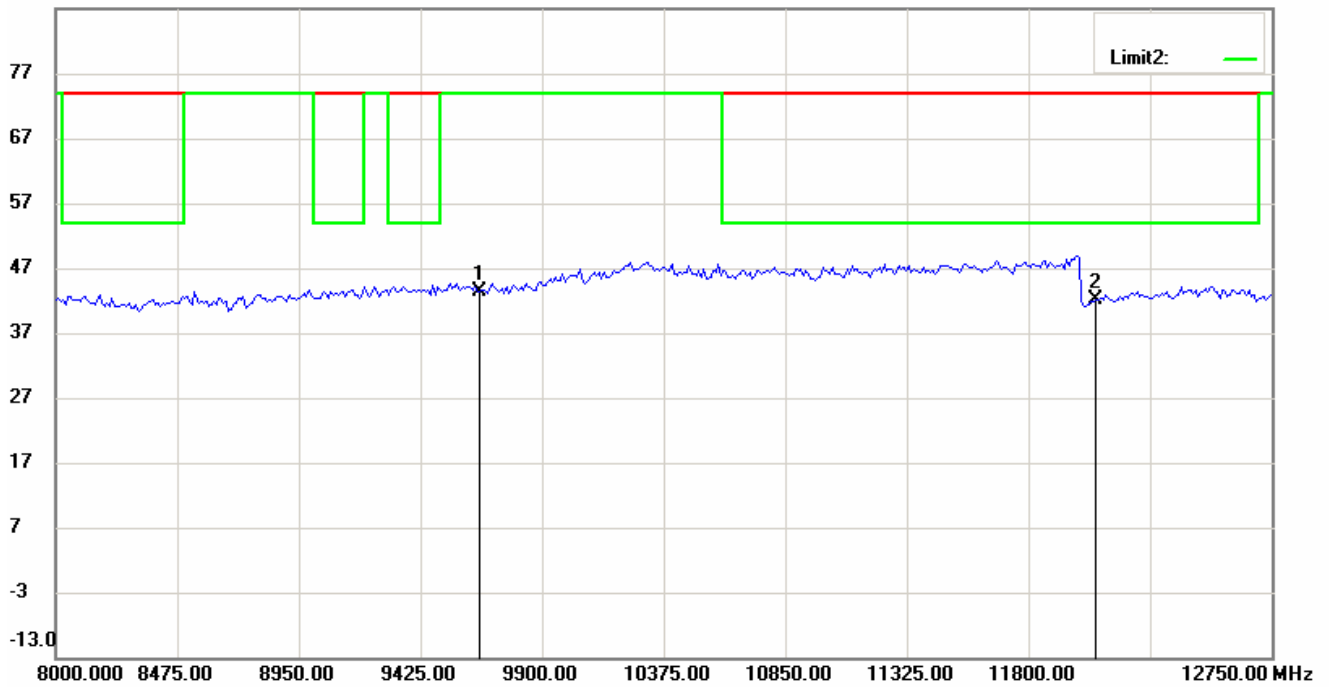


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


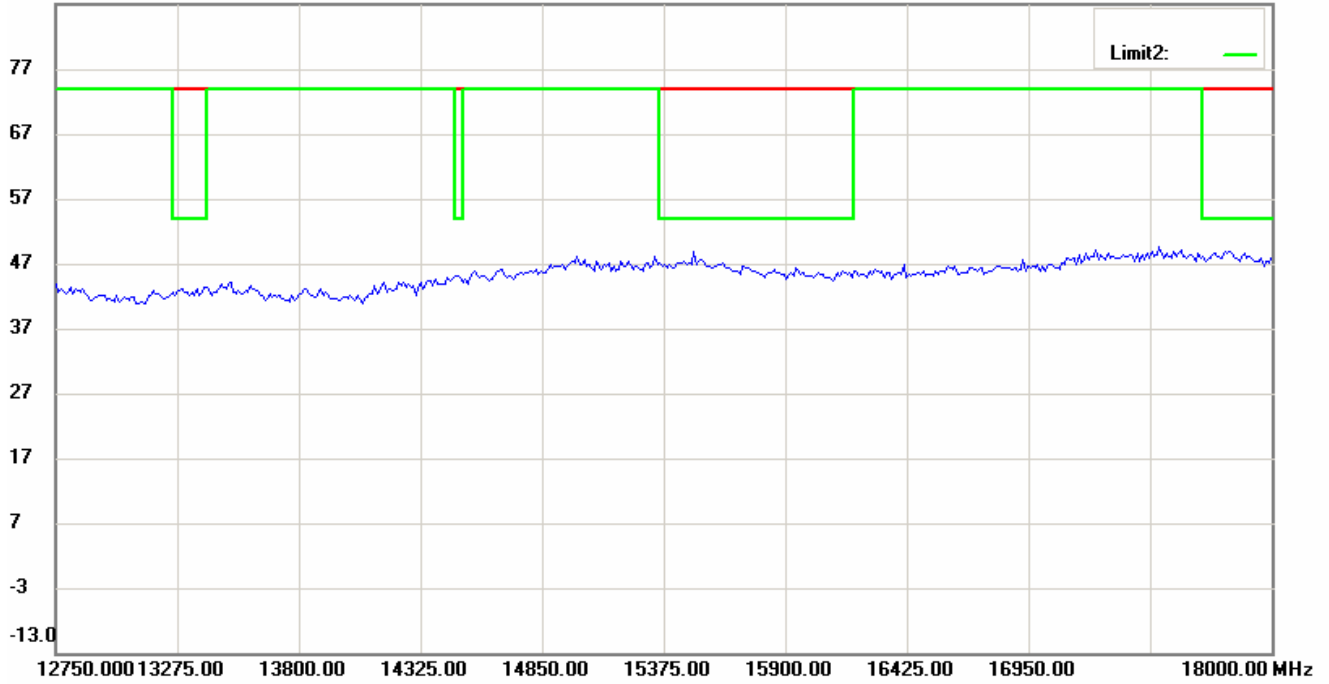


87.0 dBuV/m

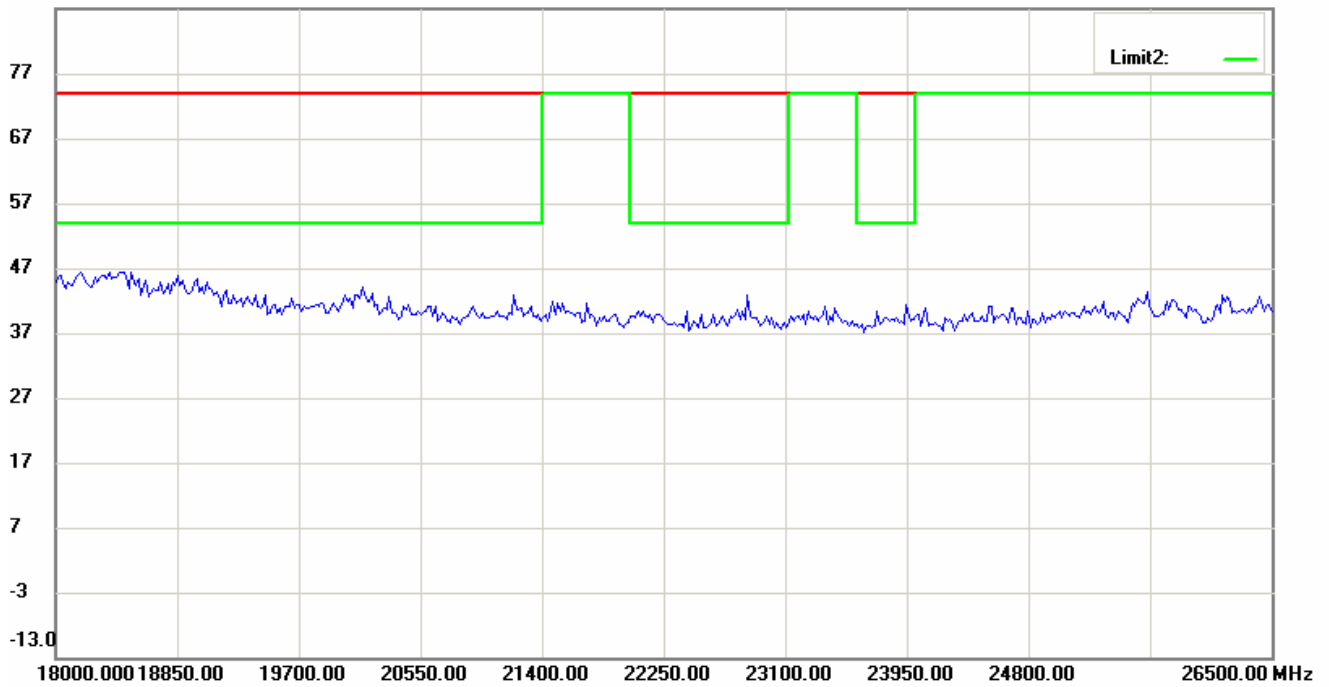

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

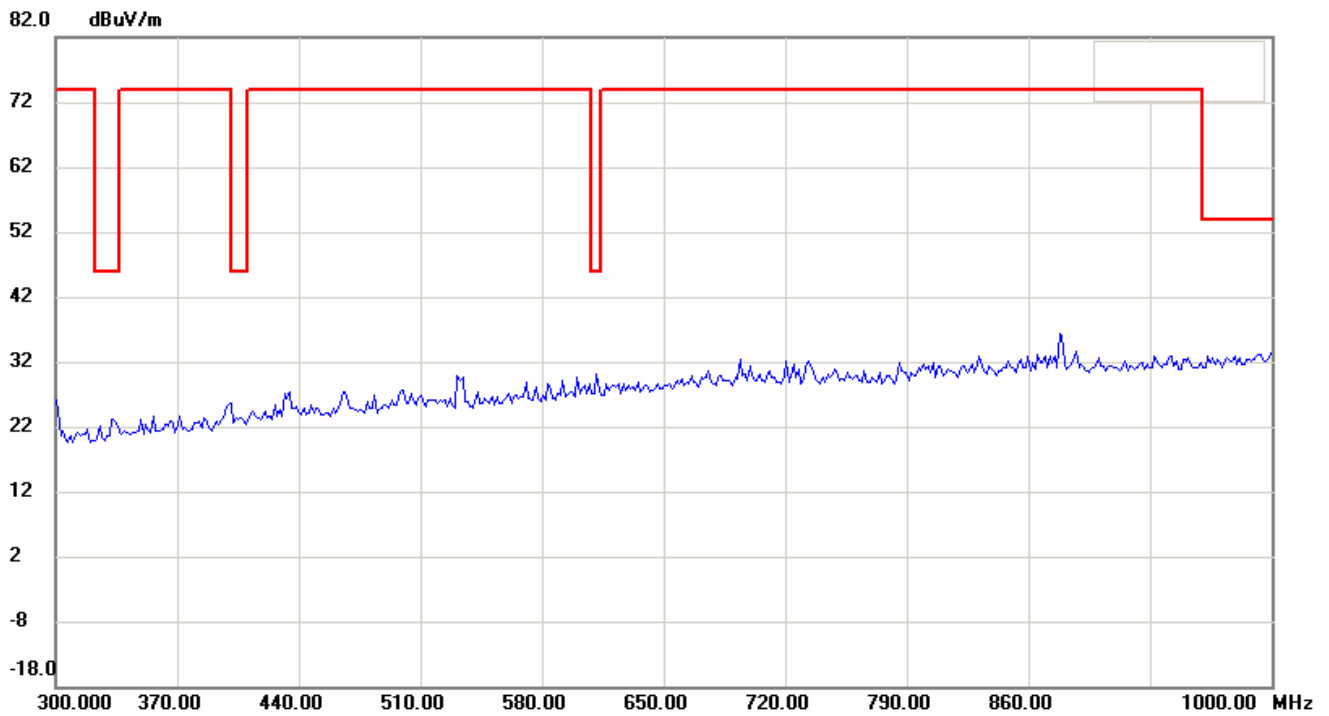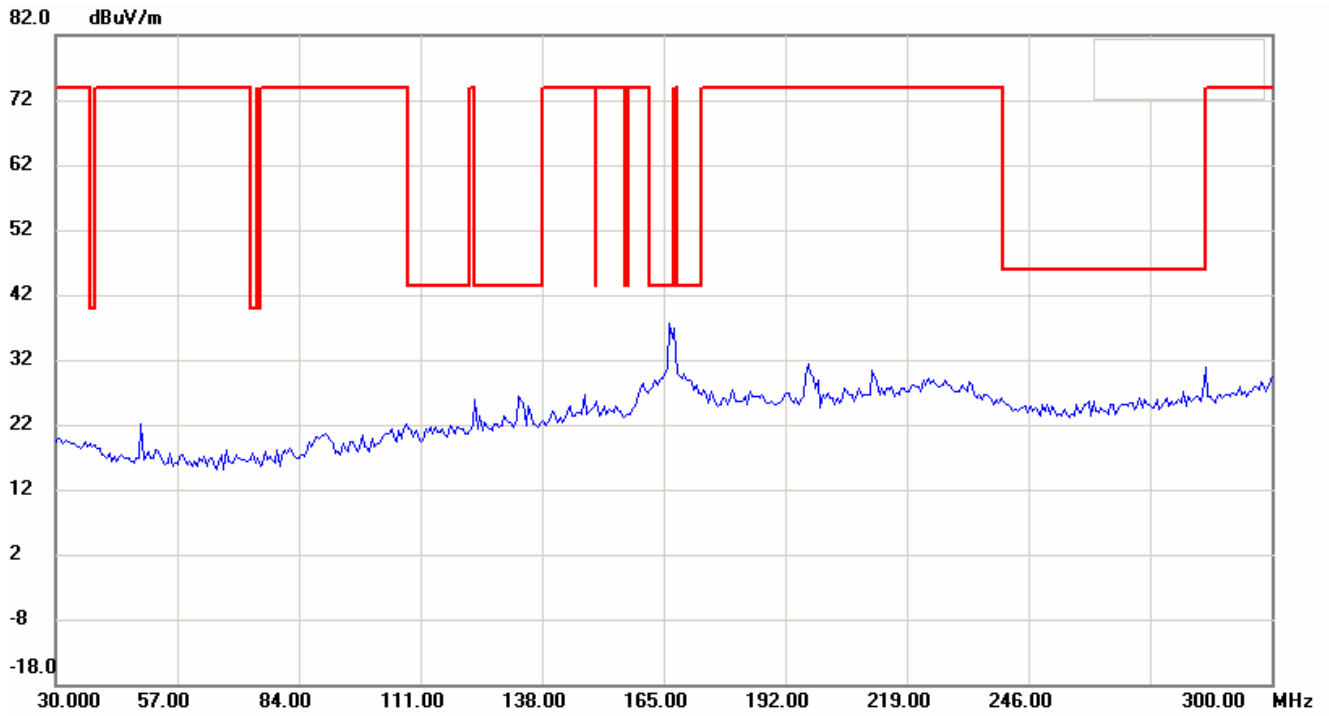





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

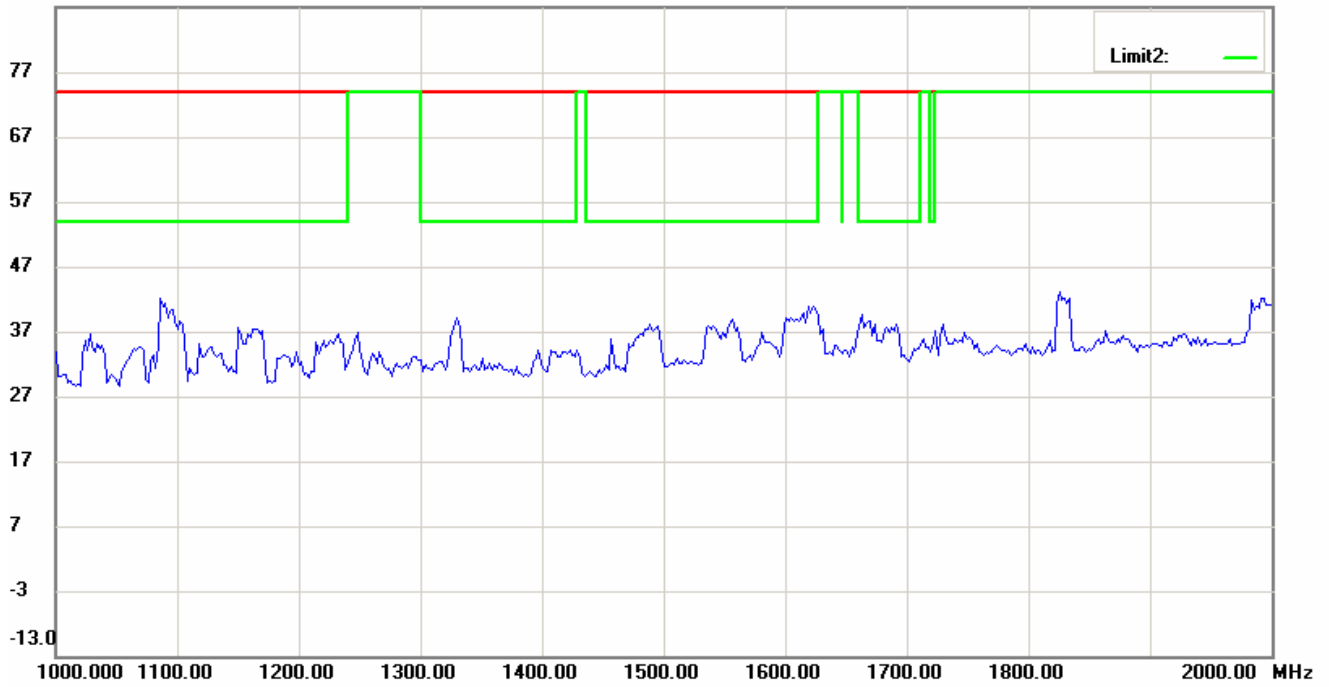


87.0 dBuV/m

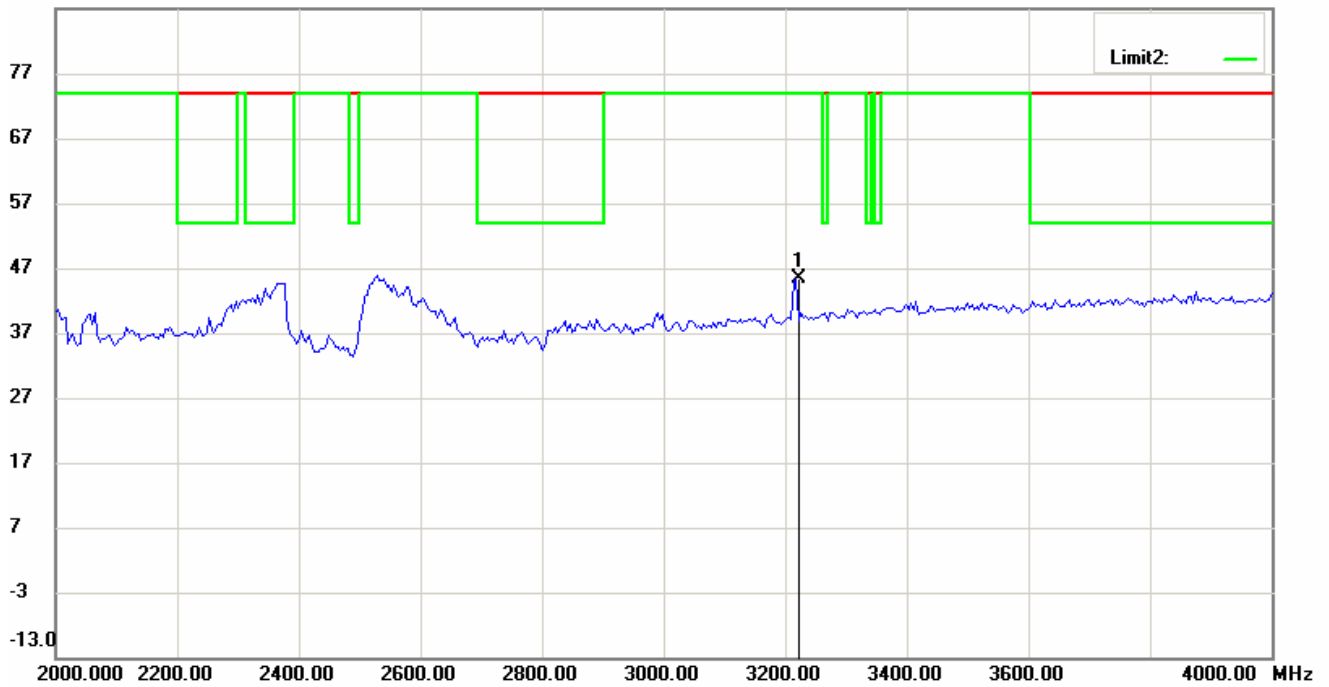


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

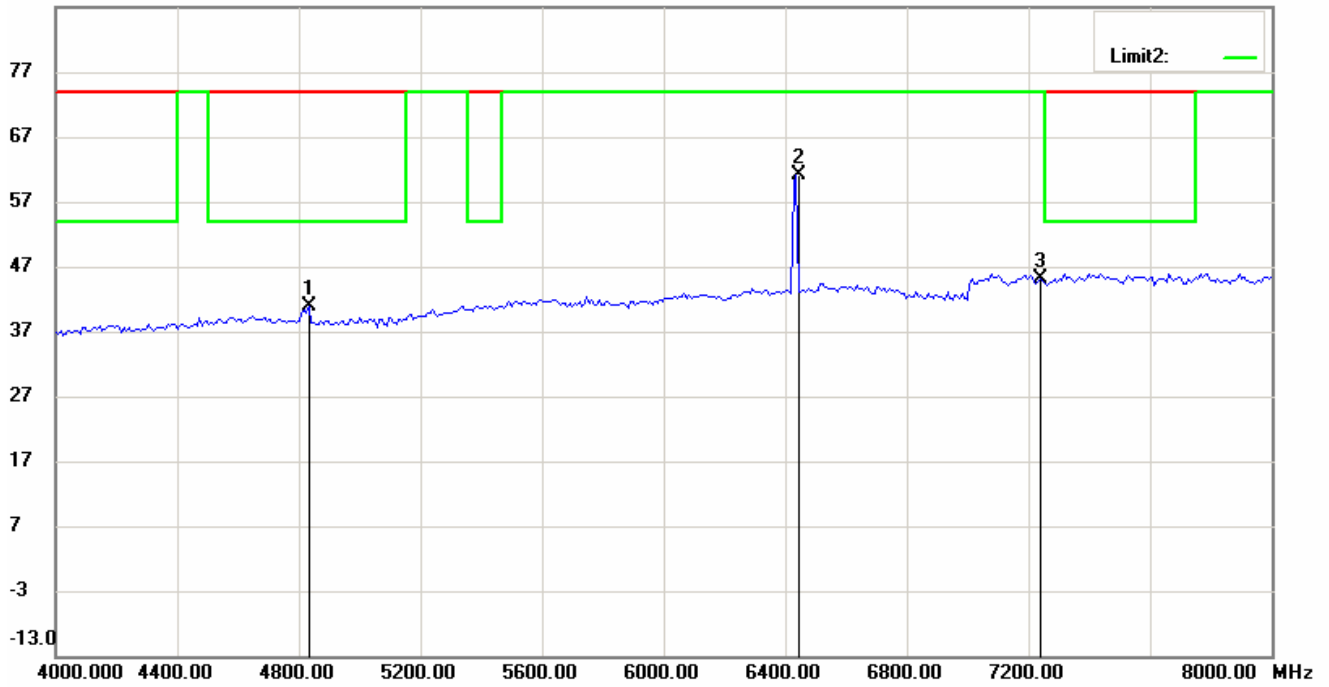


87.0 dBuV/m

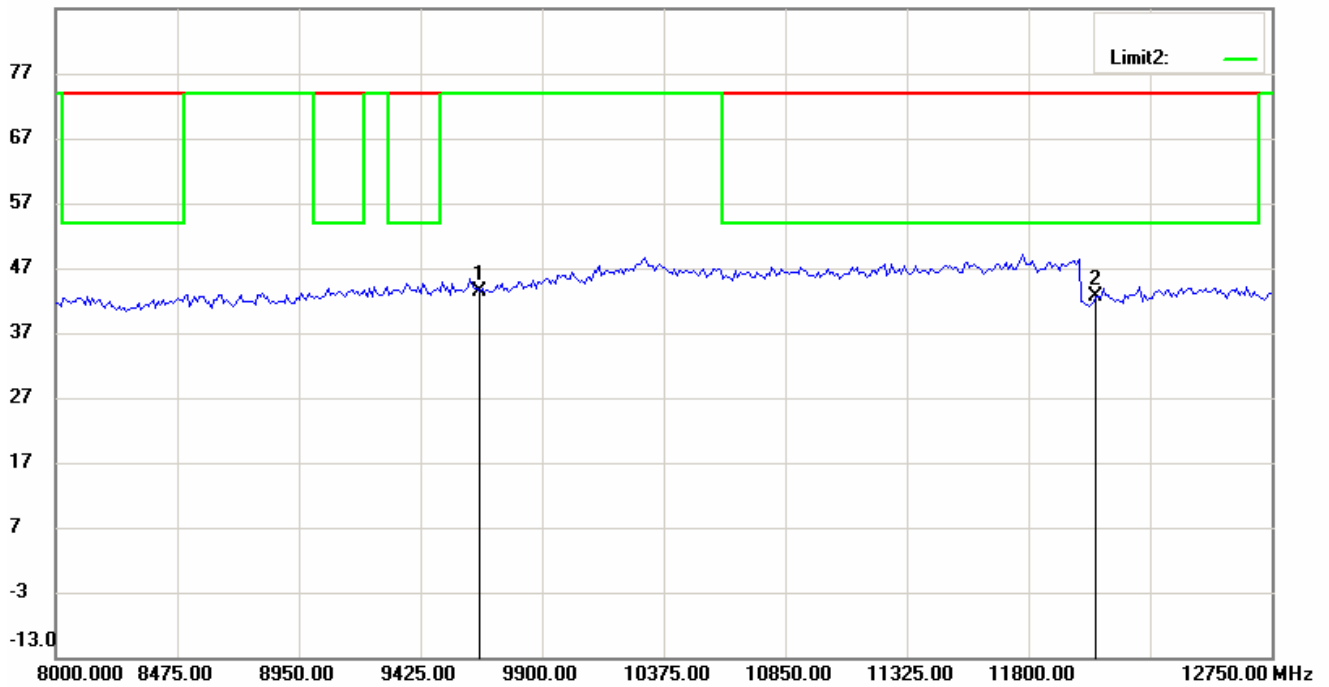


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


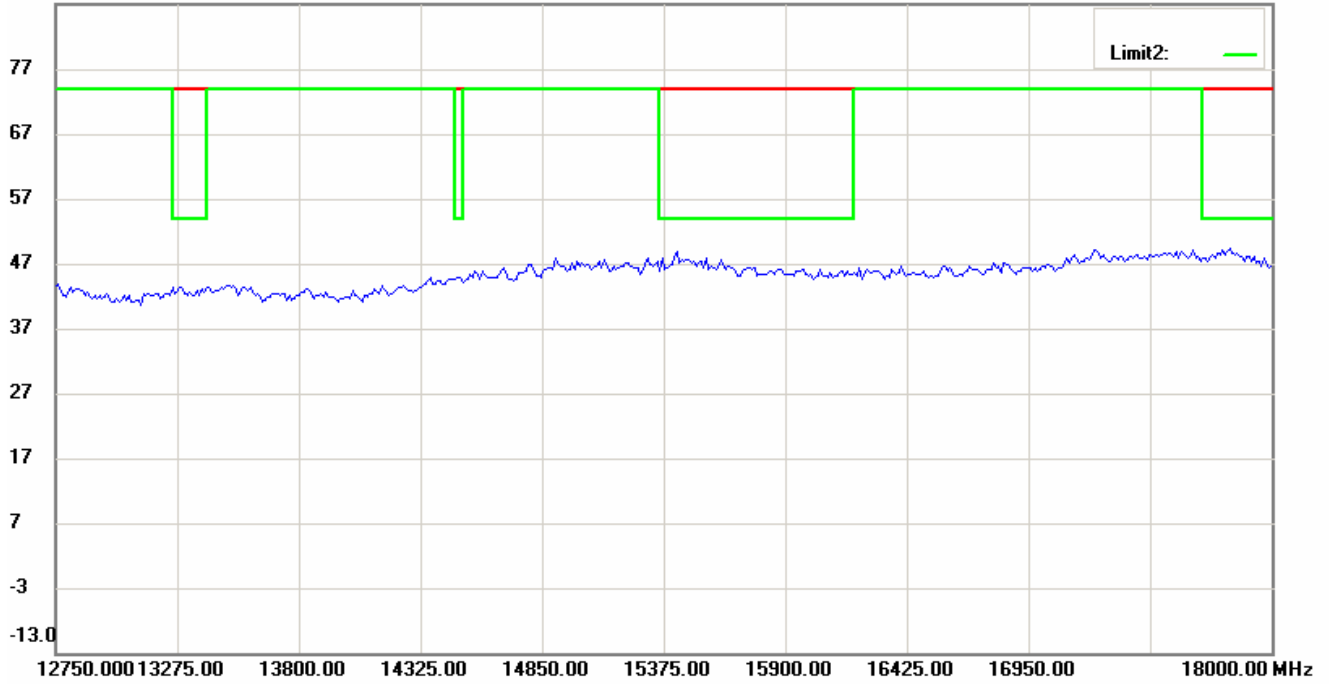


87.0 dBuV/m

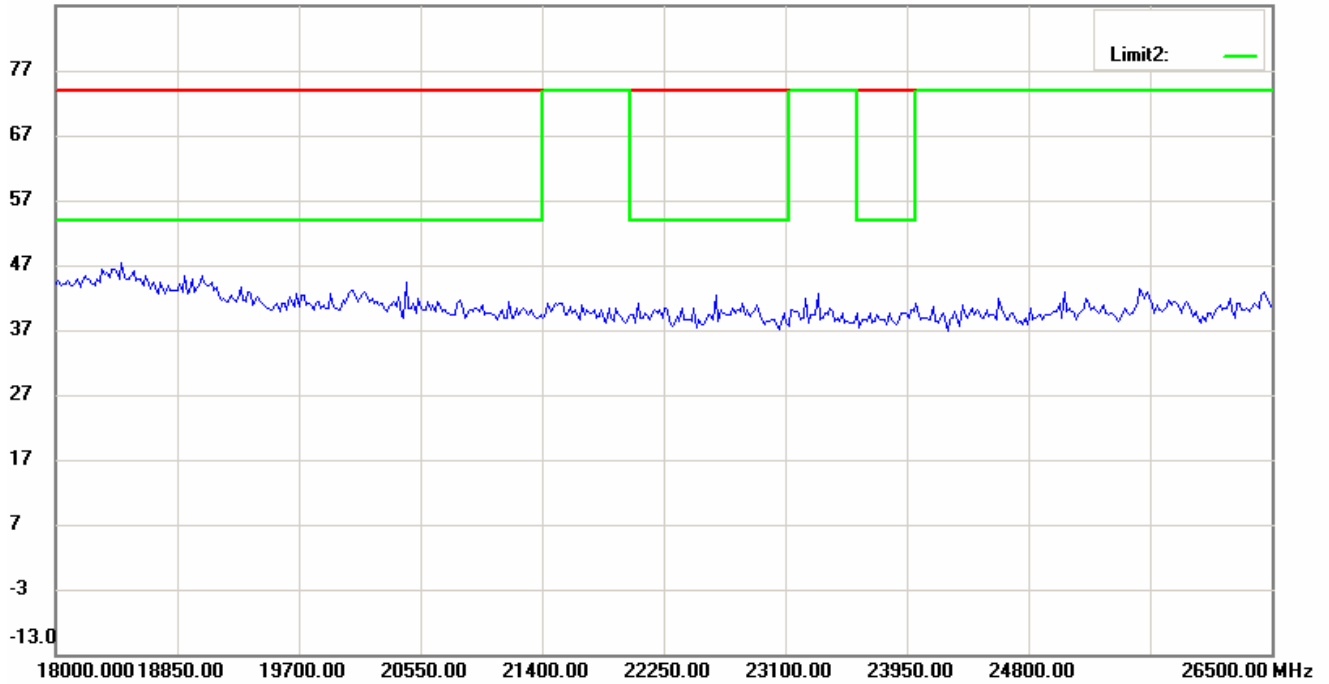

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11G\_Ch6 Antenna Polarization H

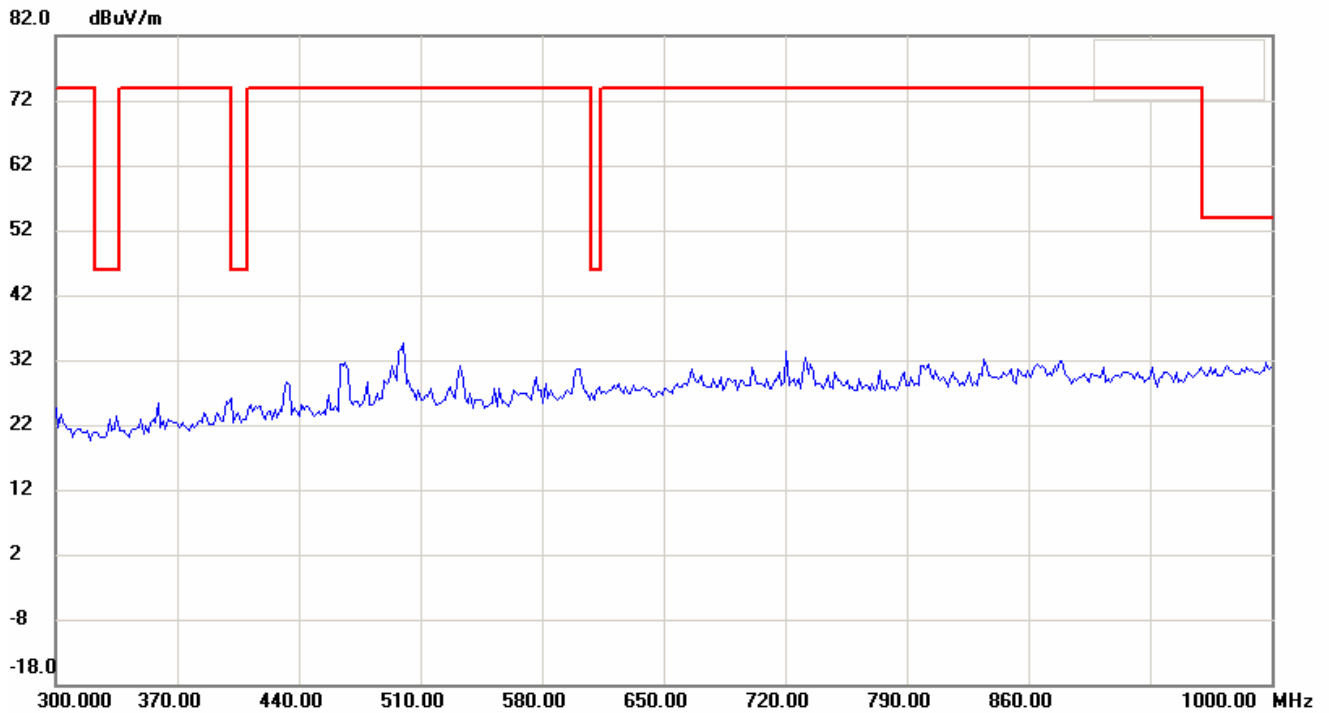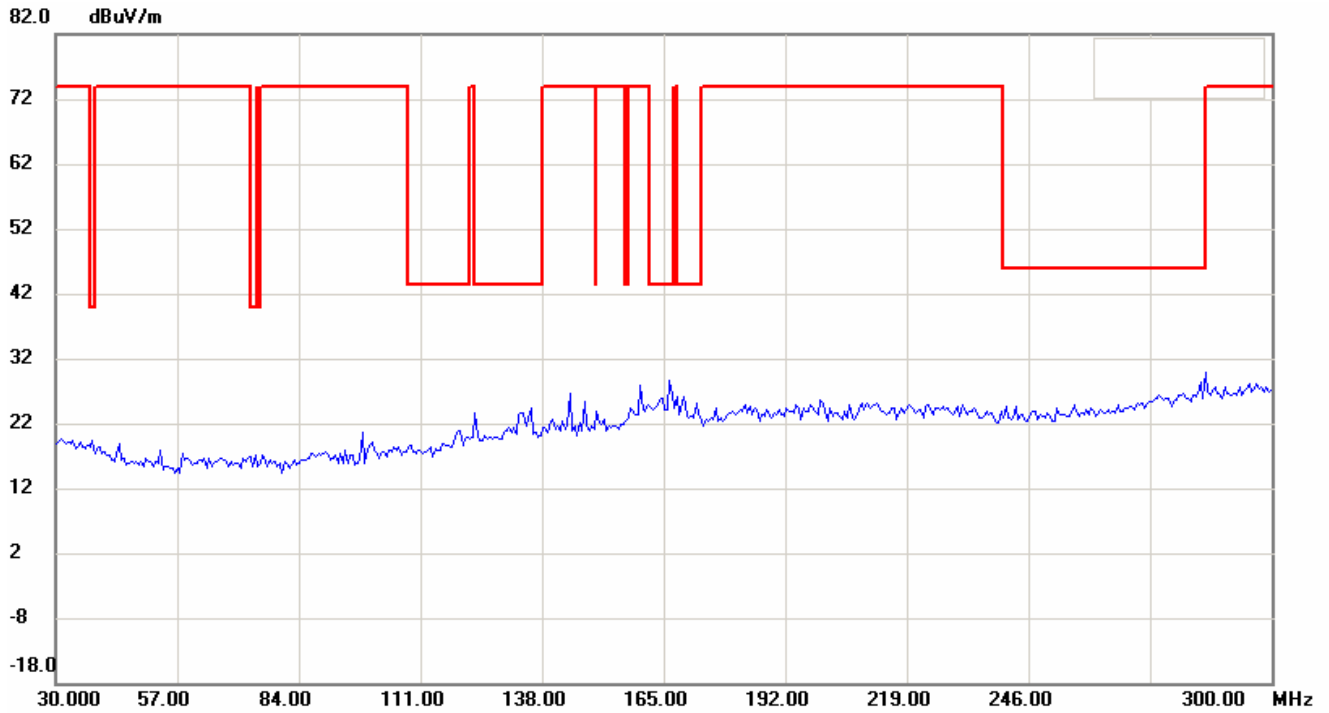


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

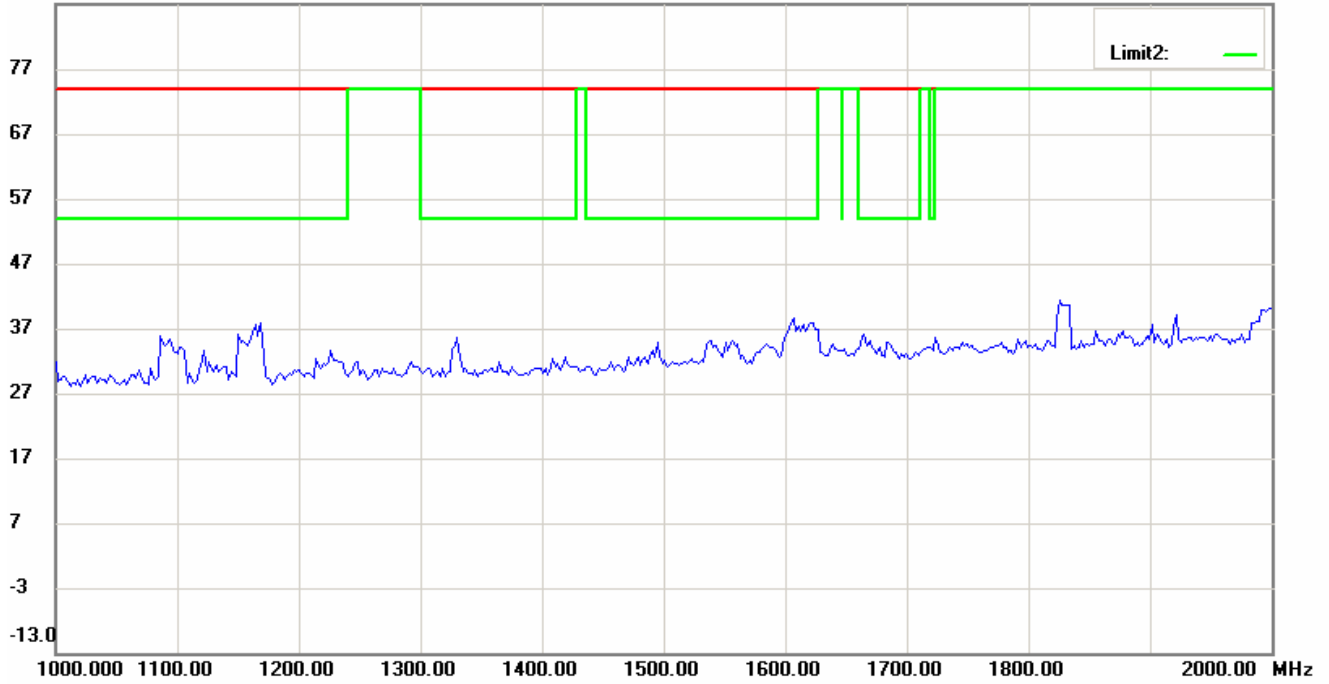


87.0 dBuV/m

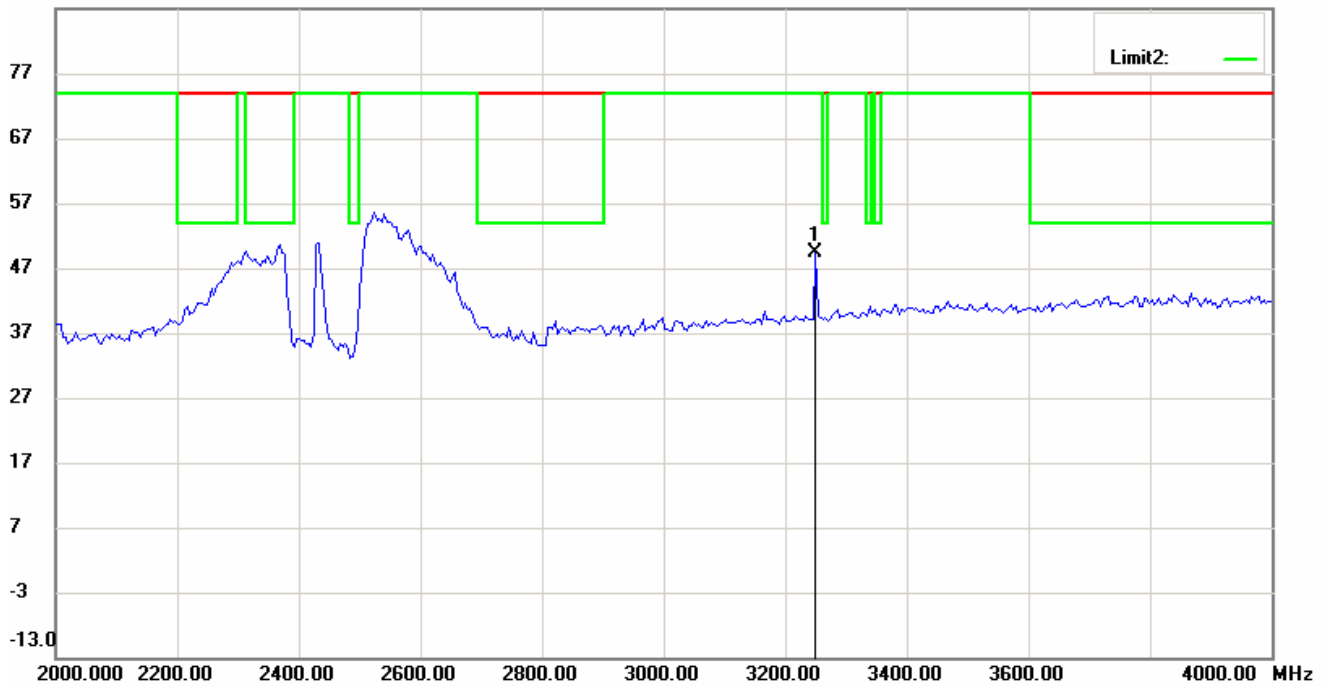


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

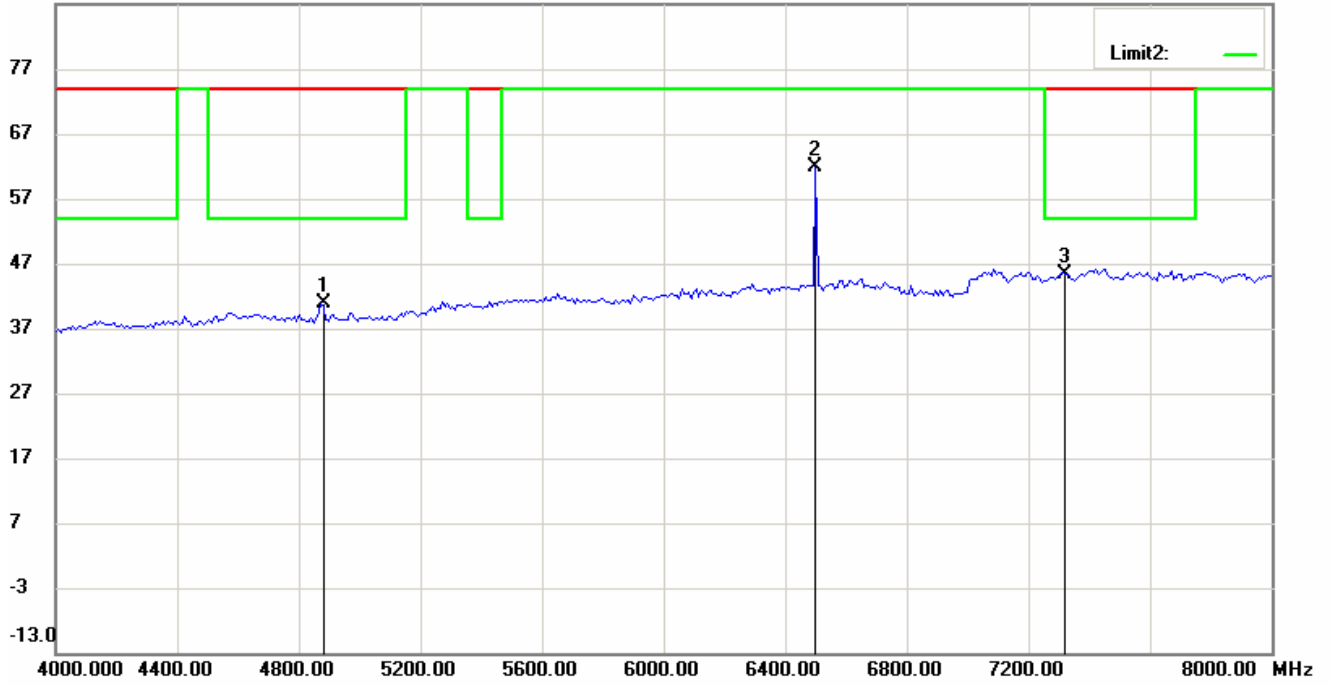


87.0 dBuV/m

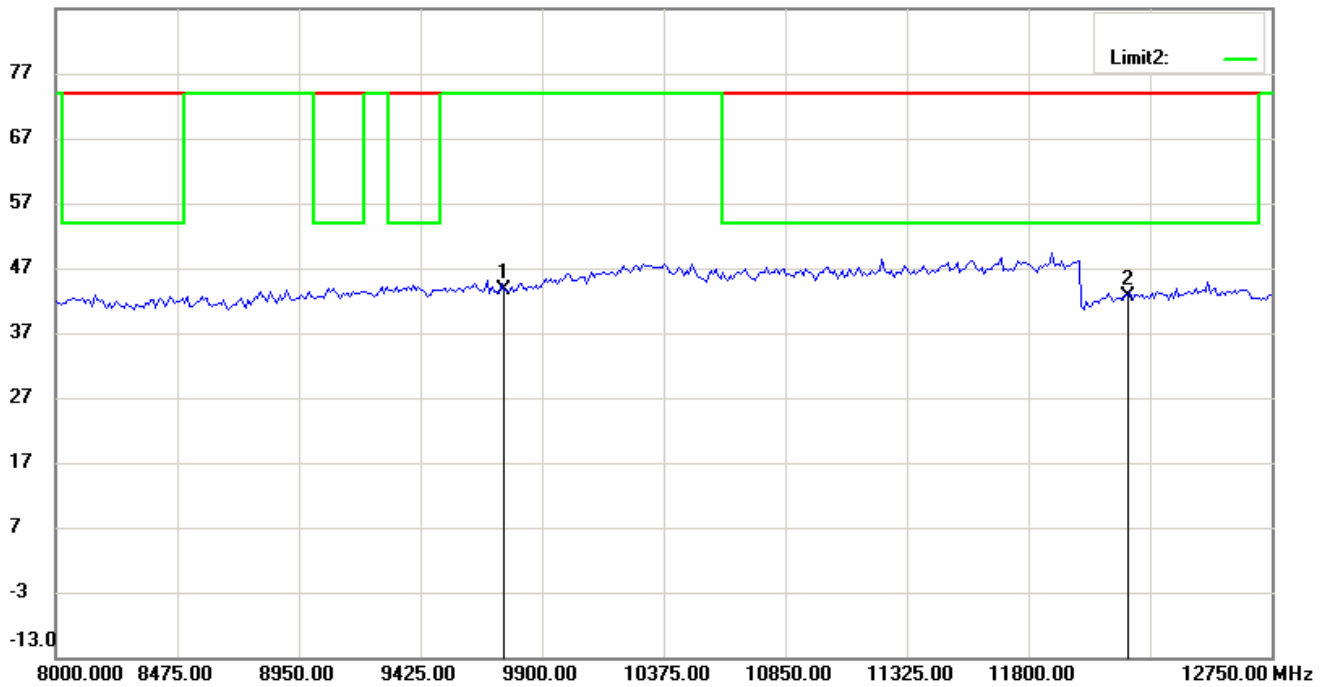


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

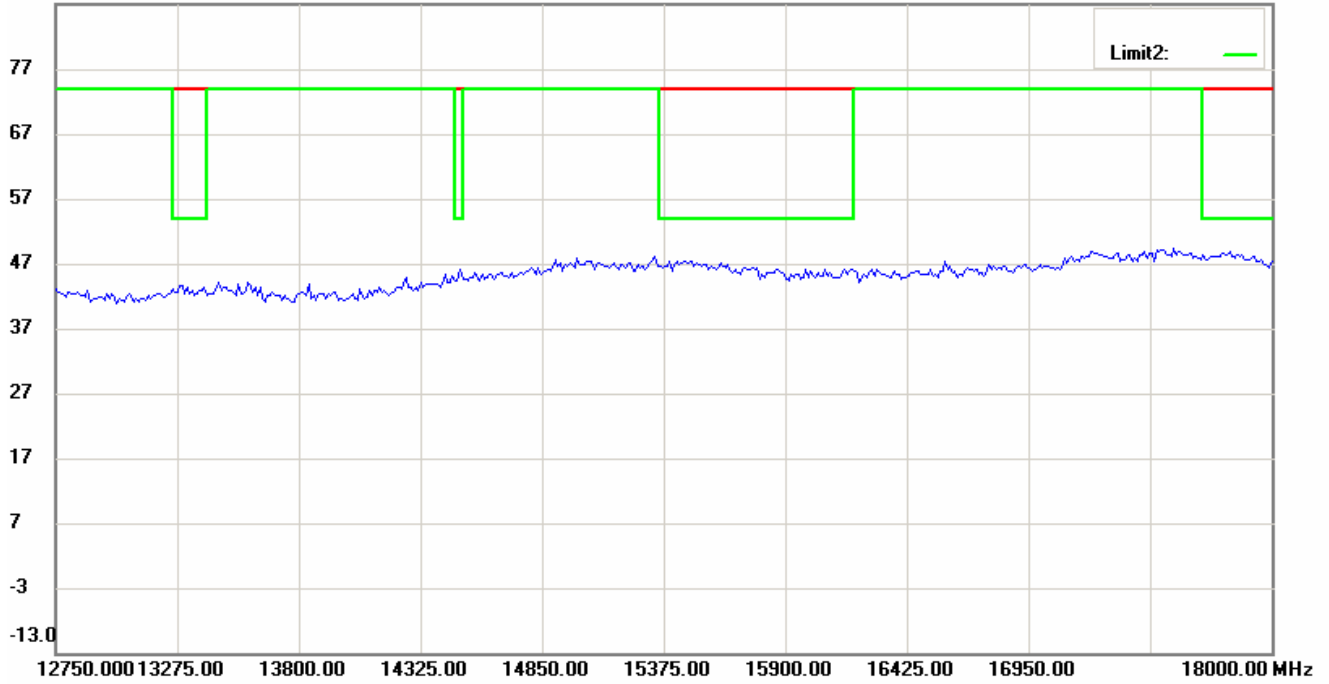

87.0 dBuV/m

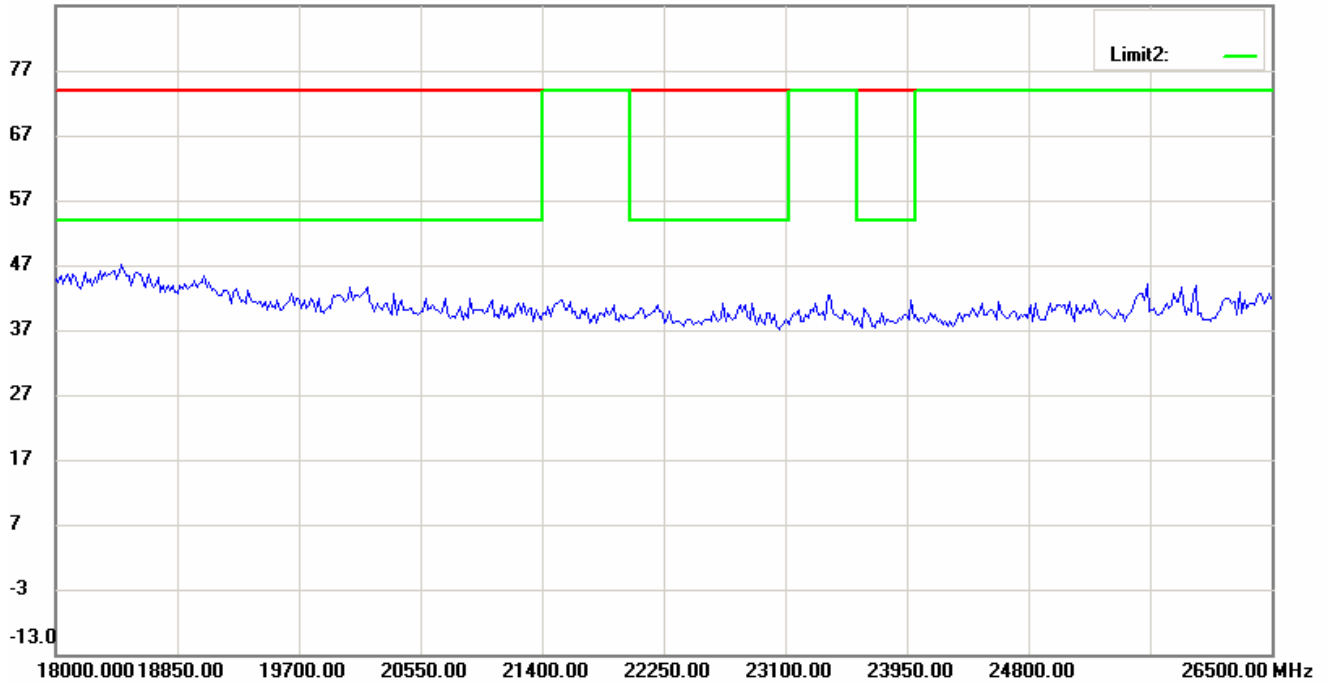







Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

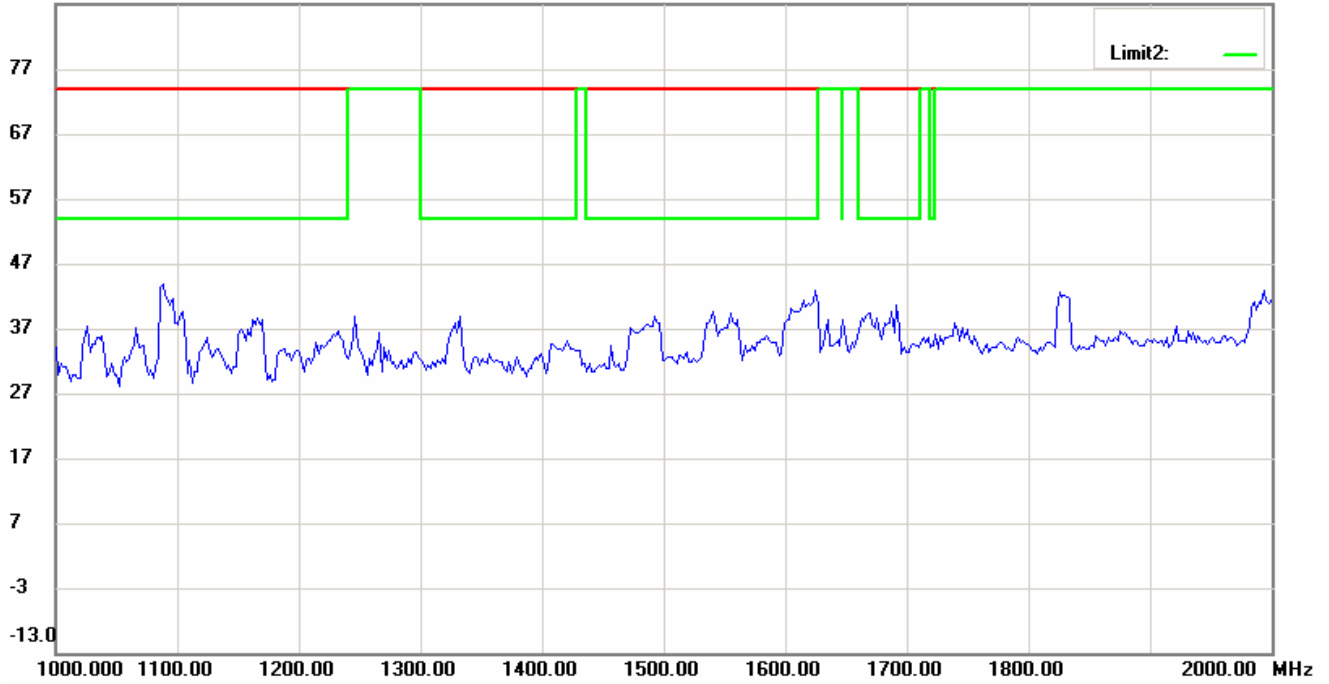


87.0 dBuV/m

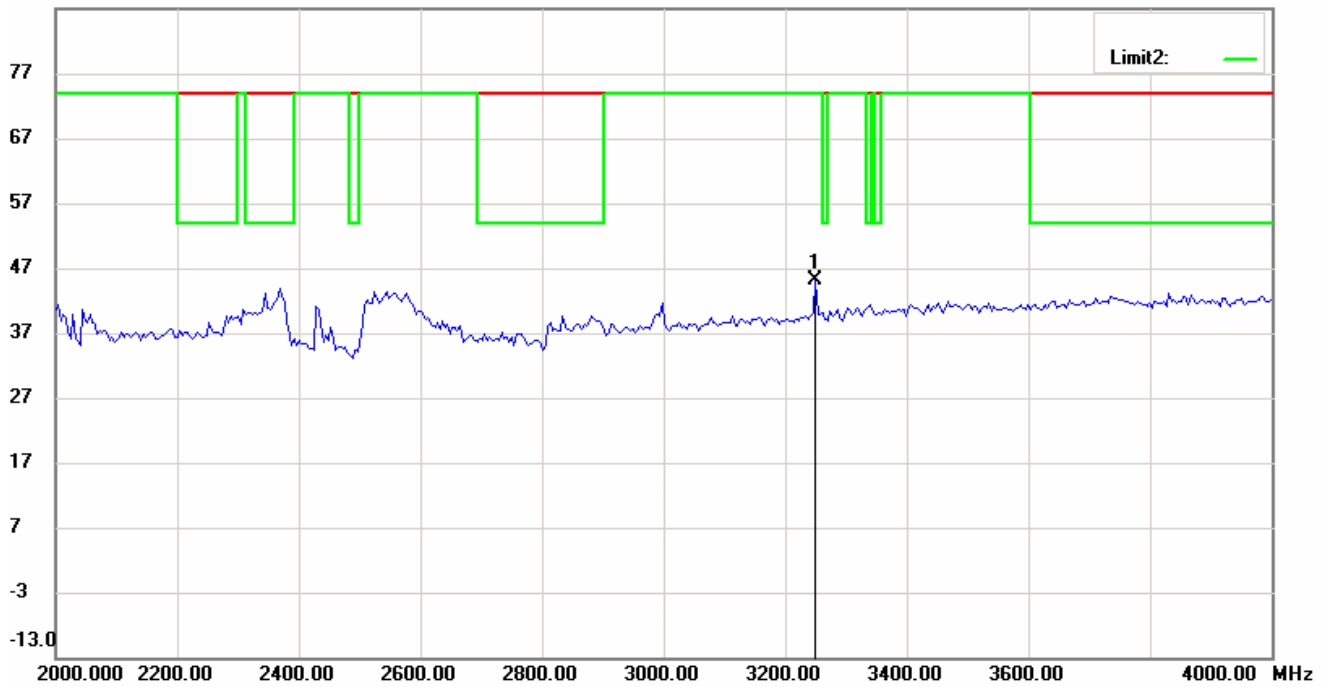


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

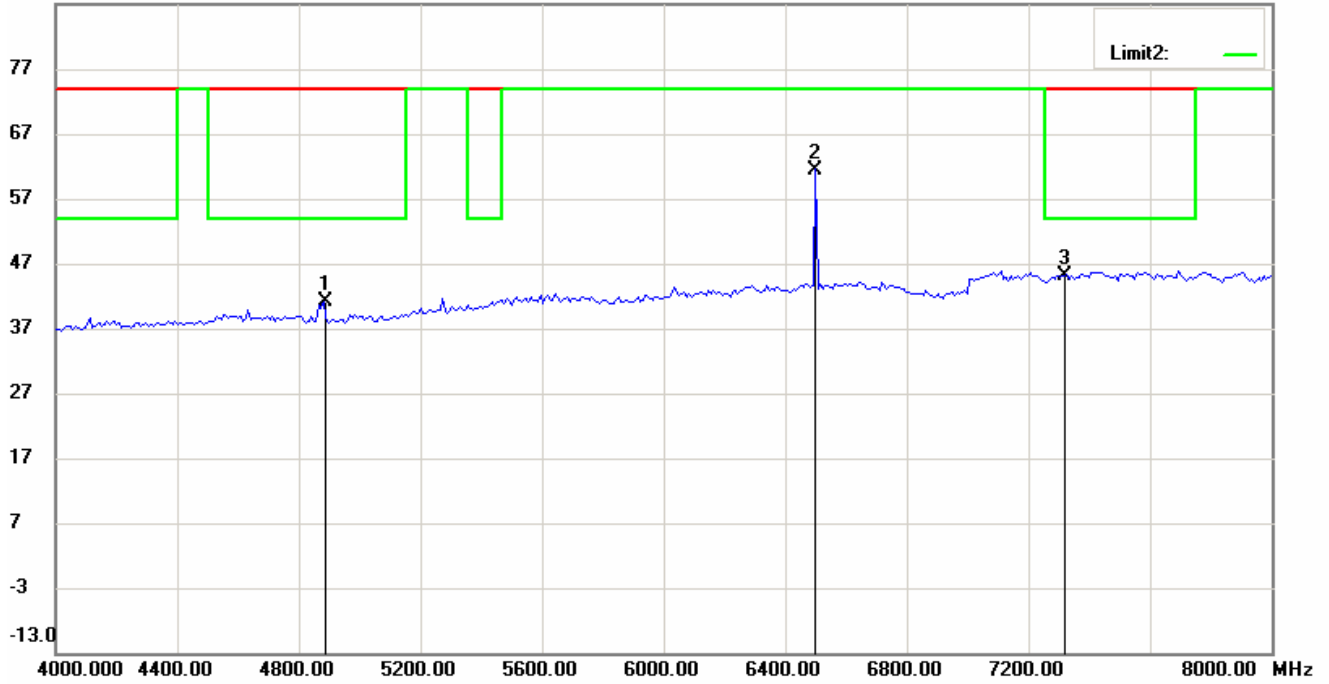


87.0 dBuV/m

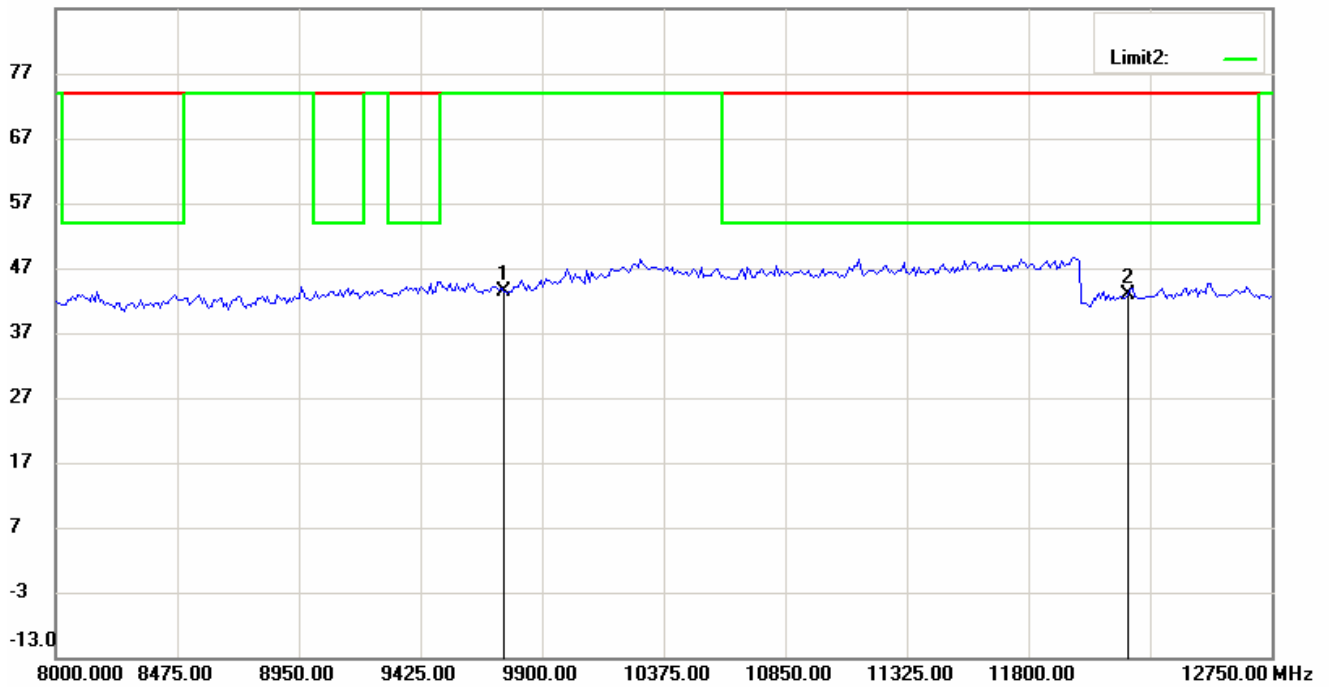


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


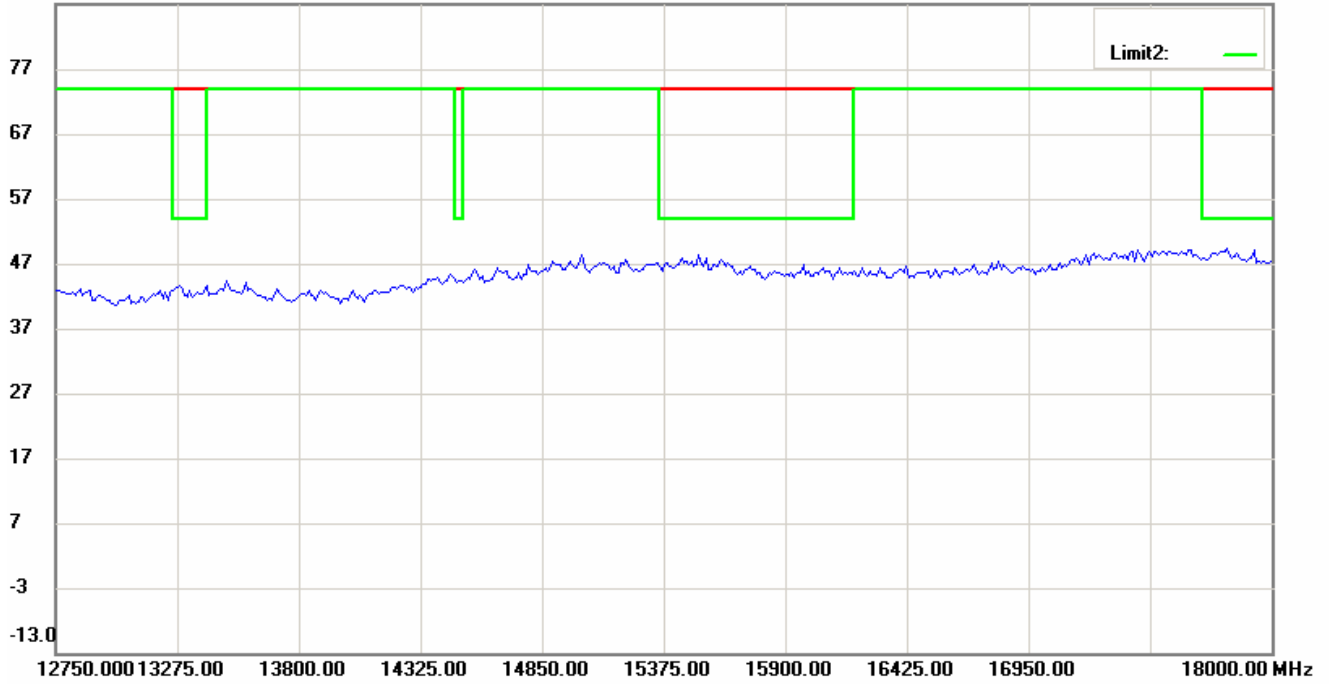


87.0 dBuV/m

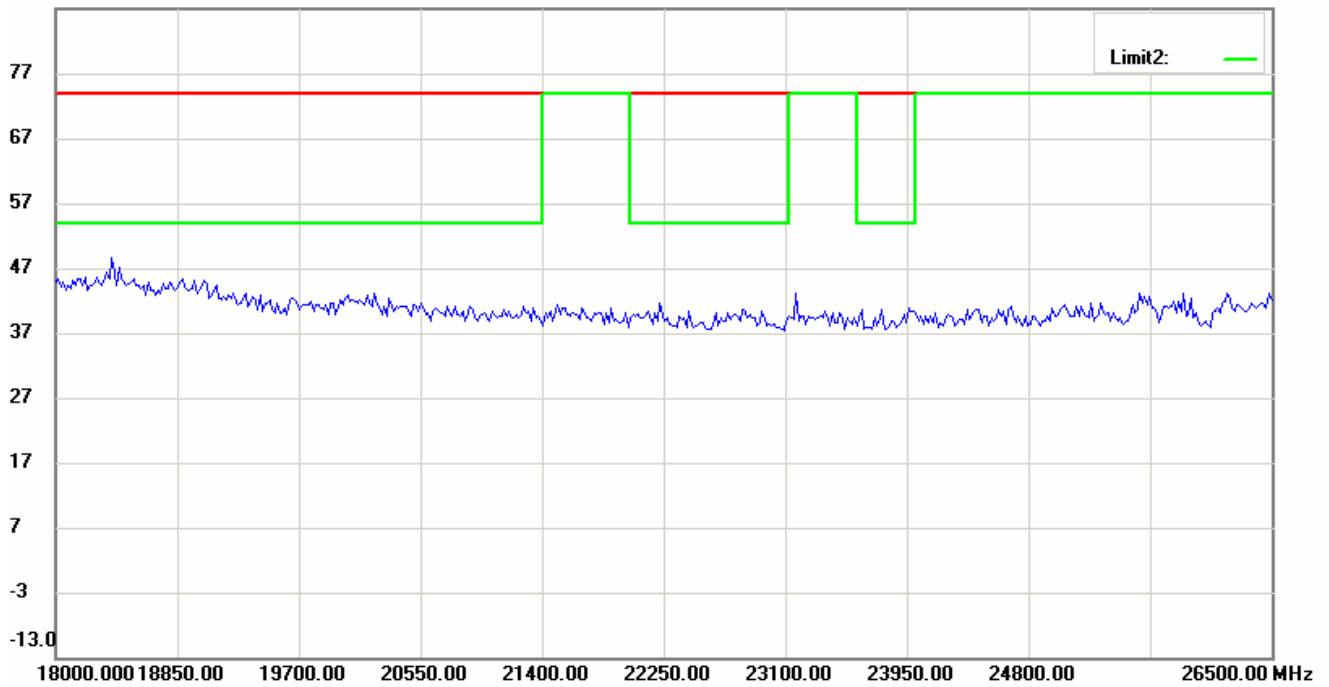

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11G\_Ch11 Antenna Polarization H

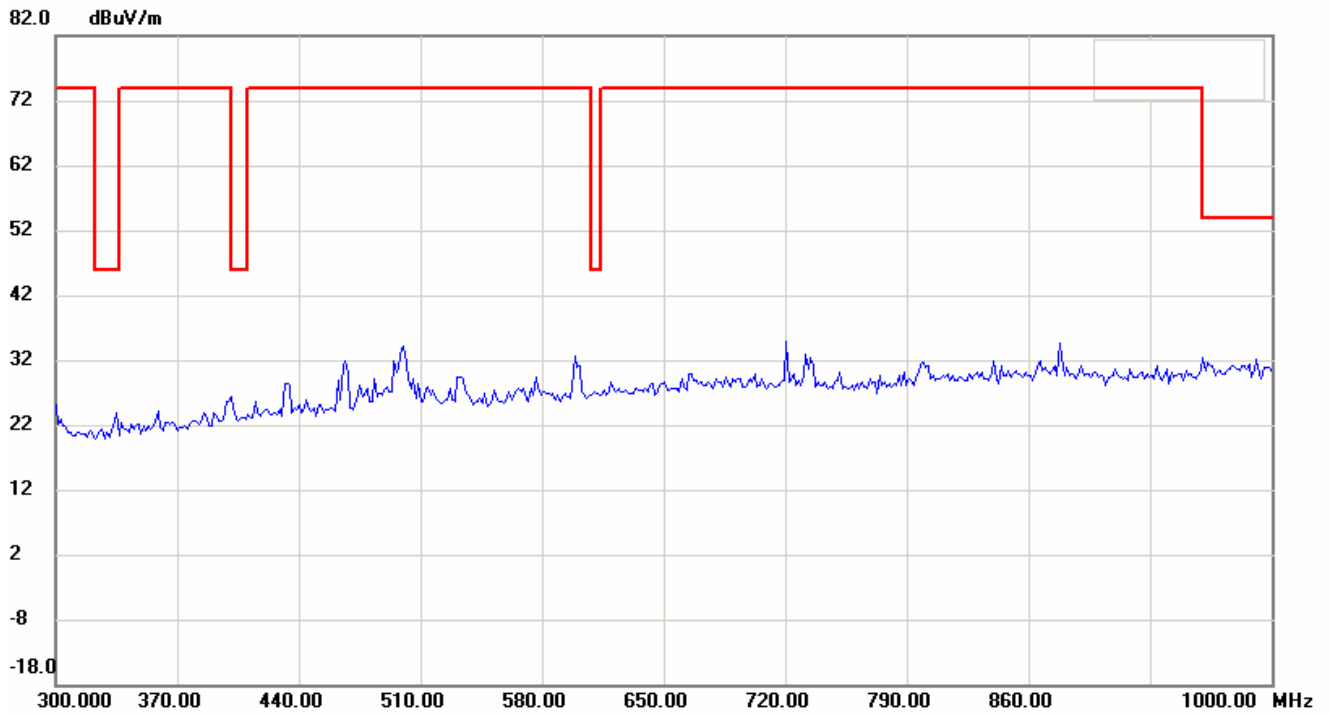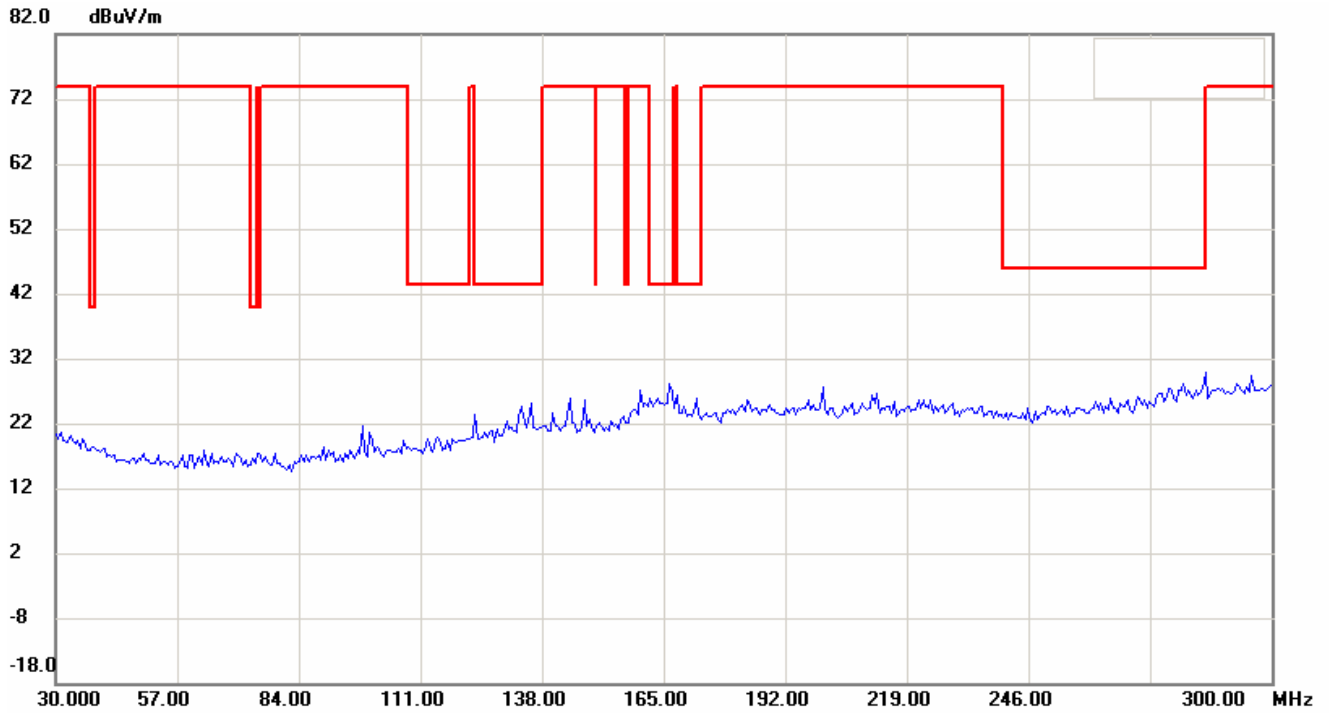


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

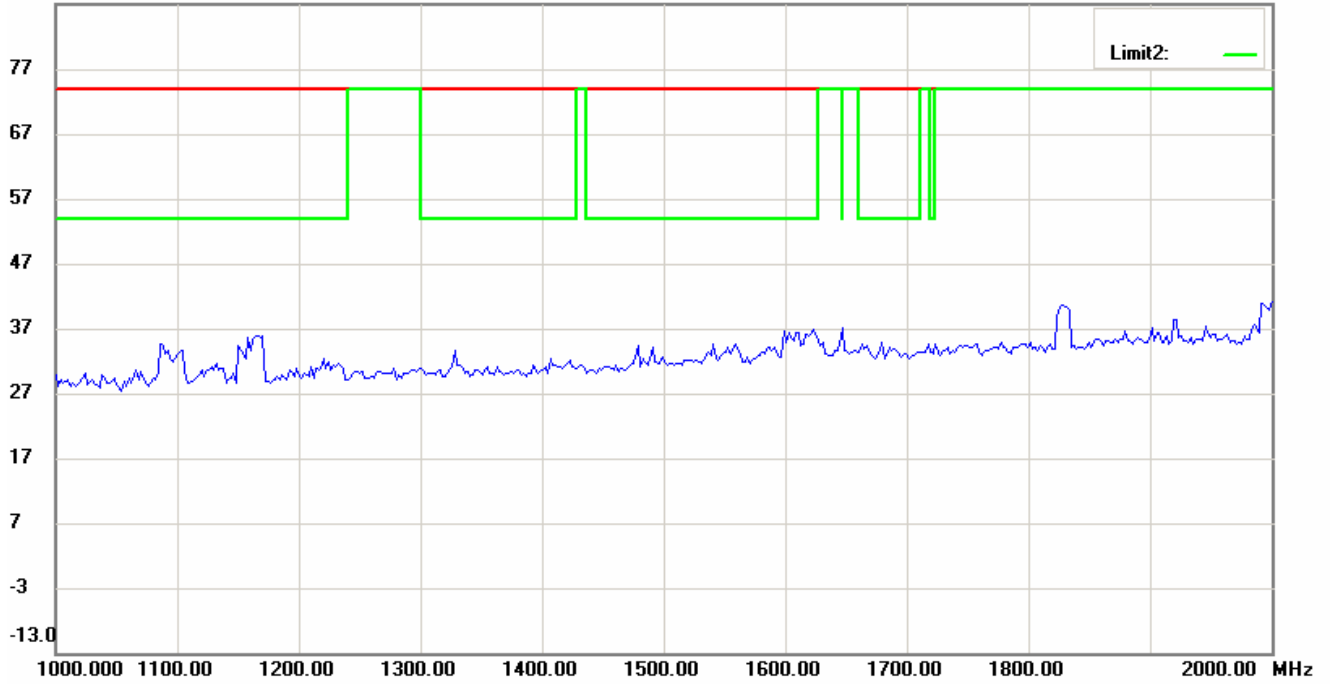


87.0 dBuV/m

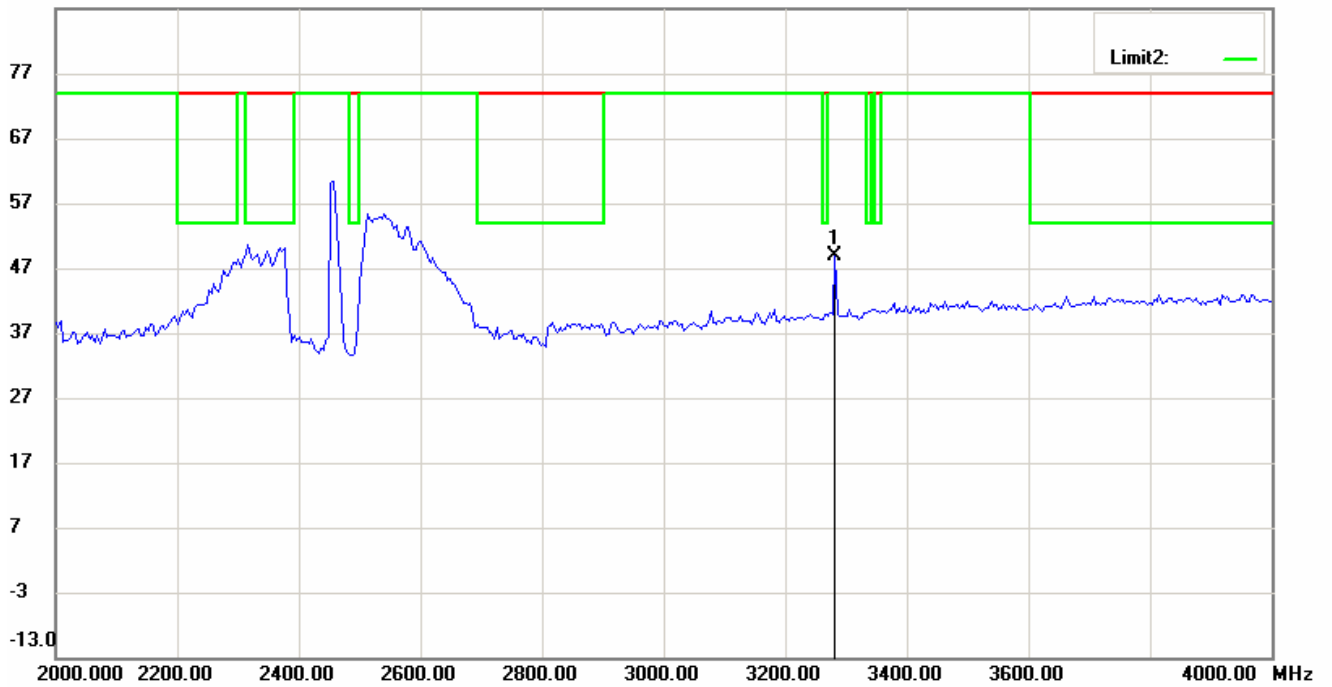


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

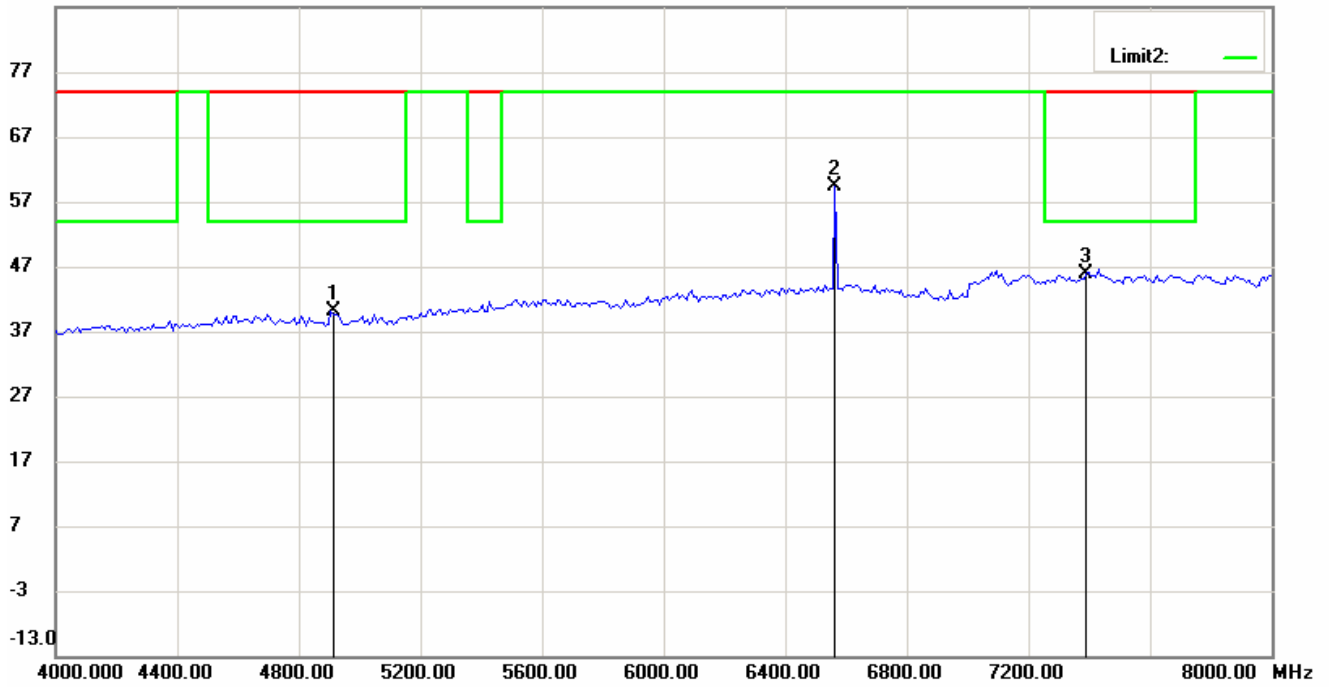


87.0 dBuV/m

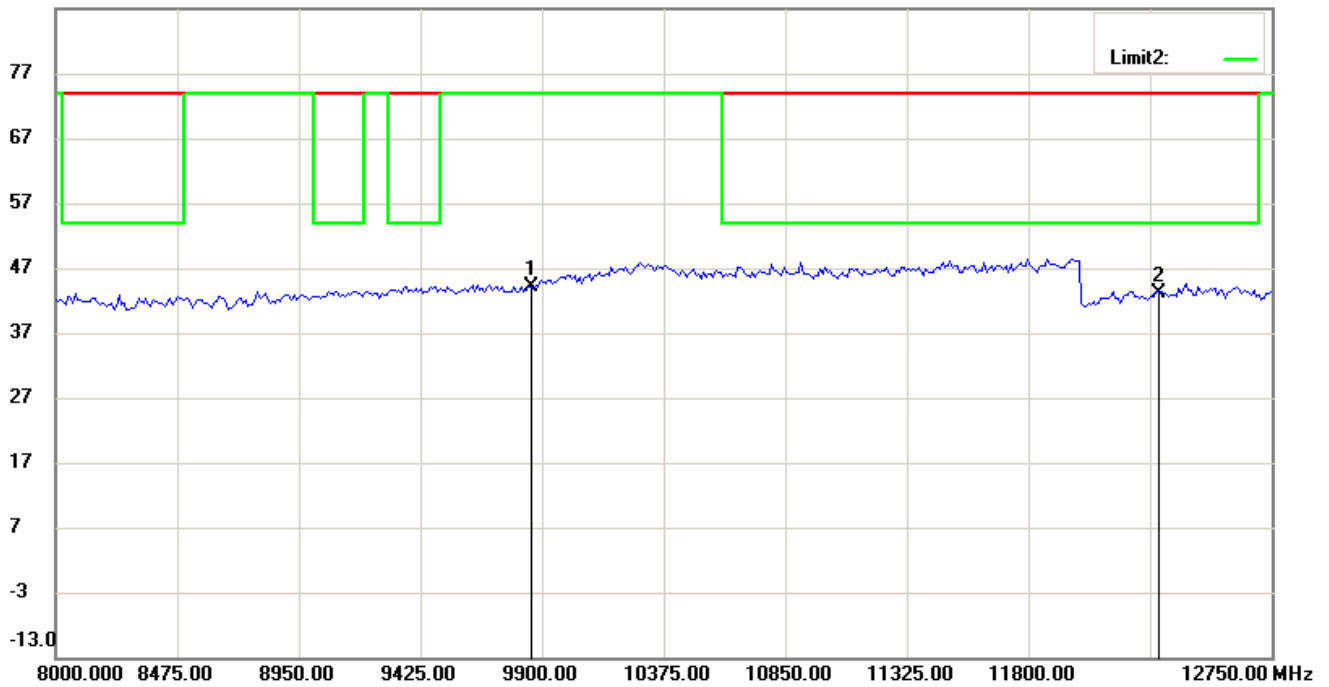


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


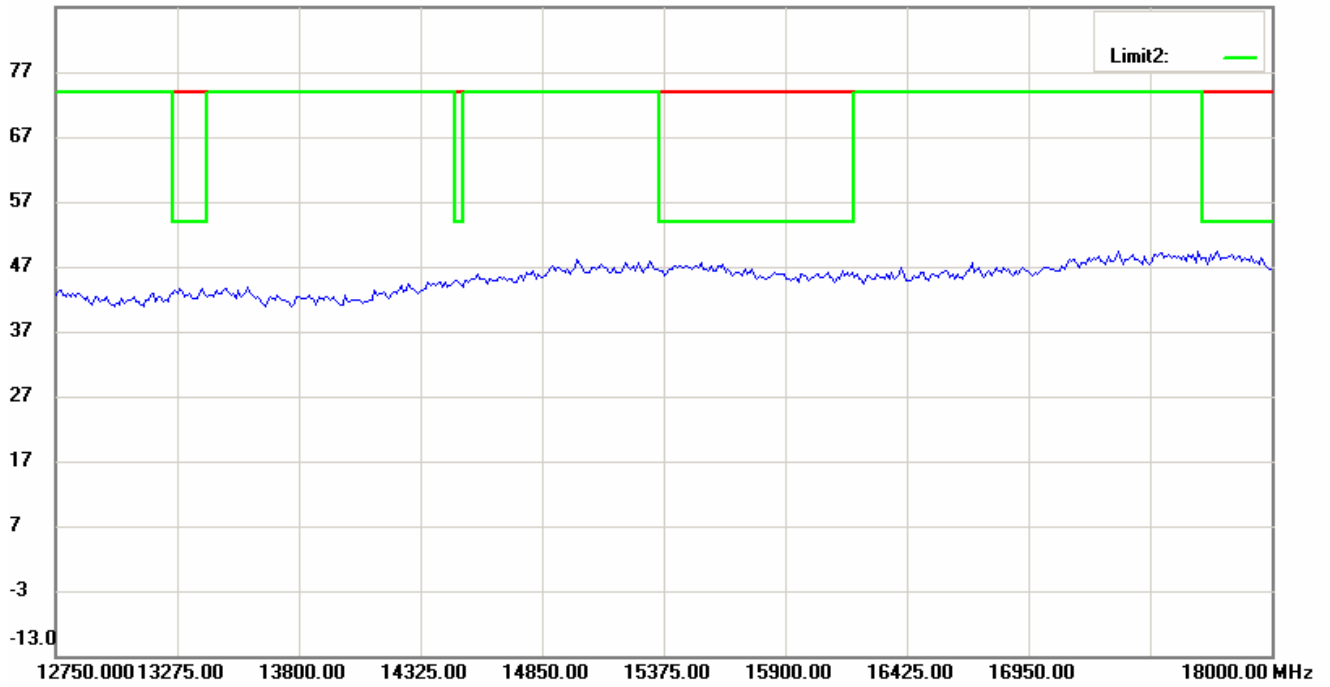


87.0 dBuV/m

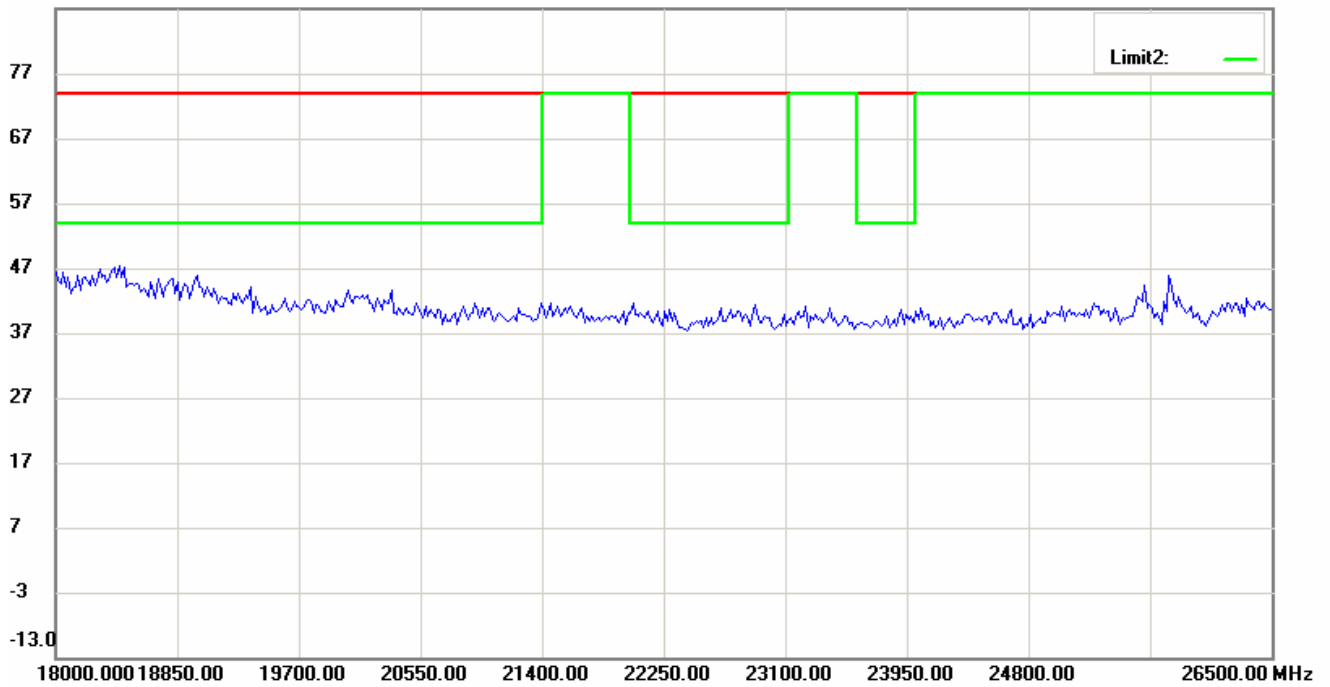

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

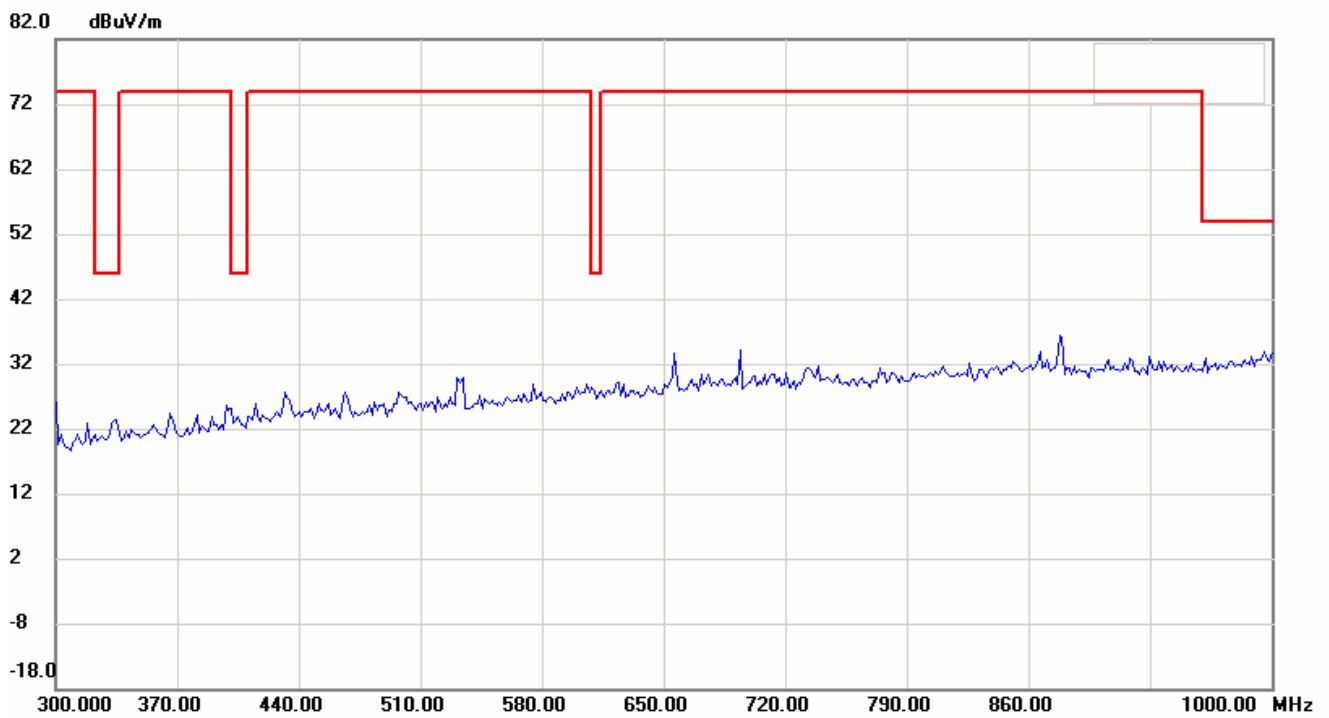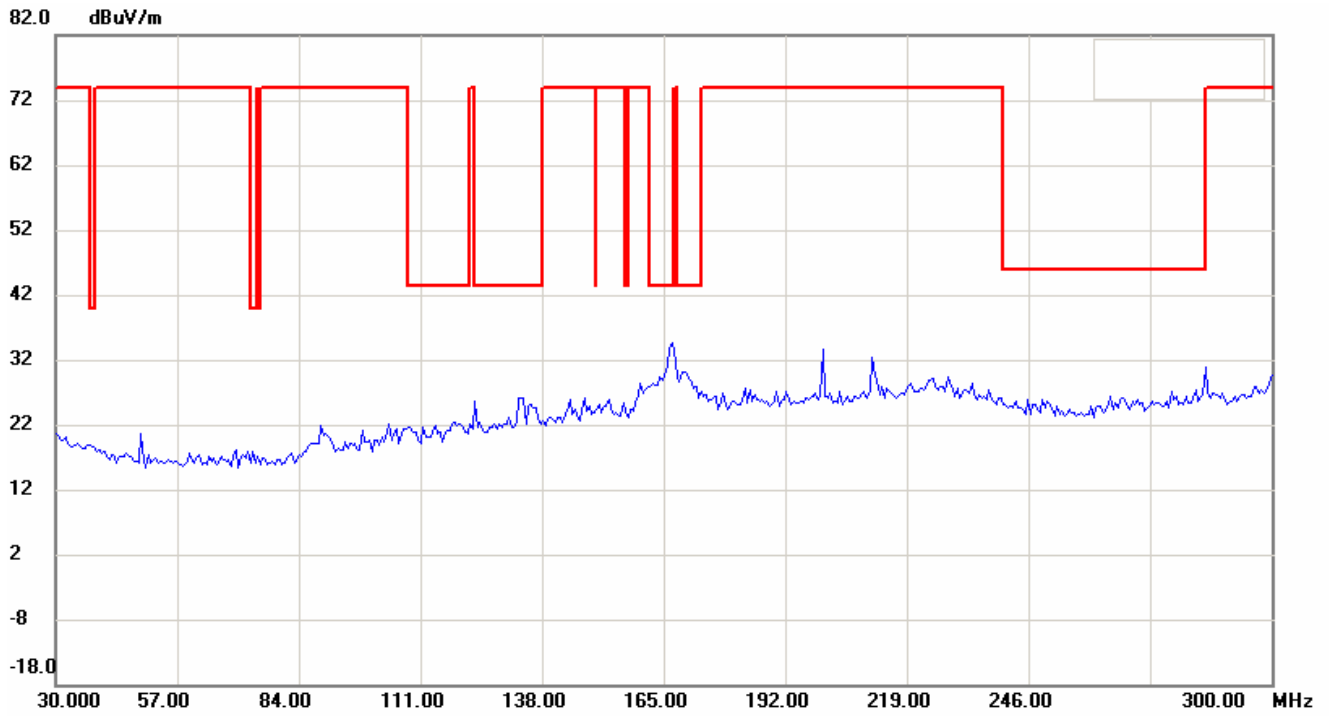





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

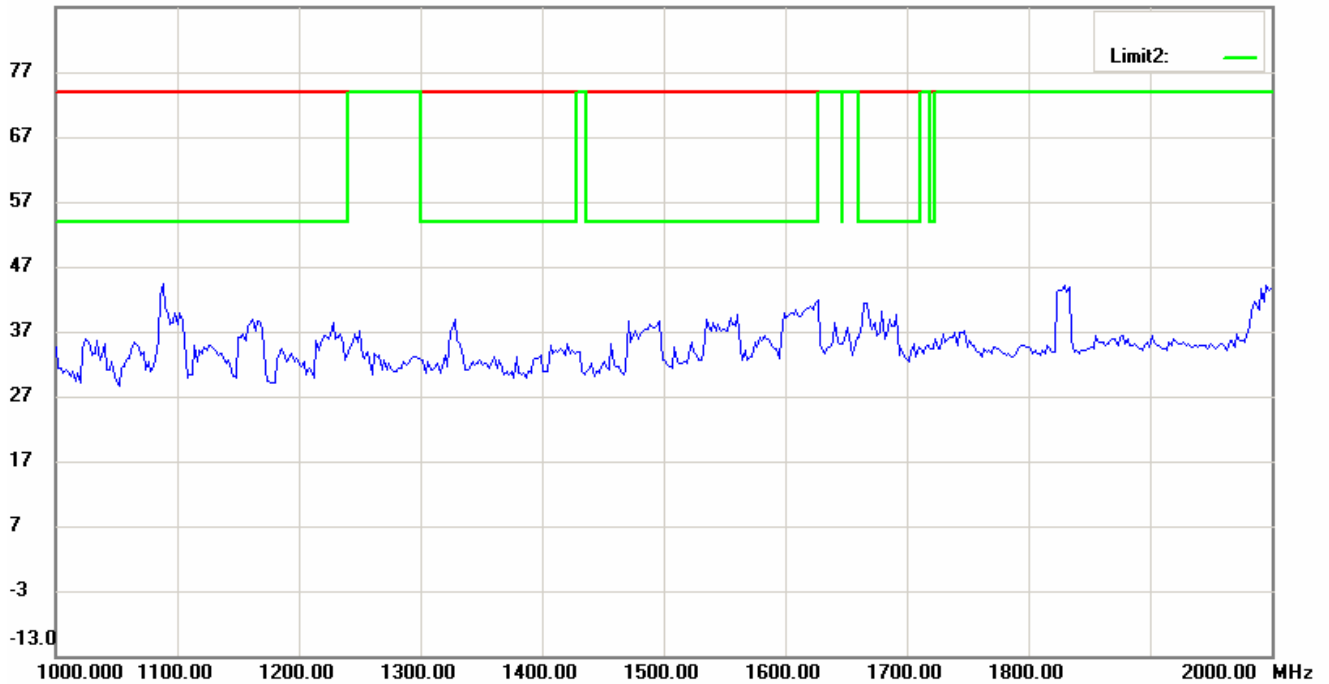


87.0 dBuV/m

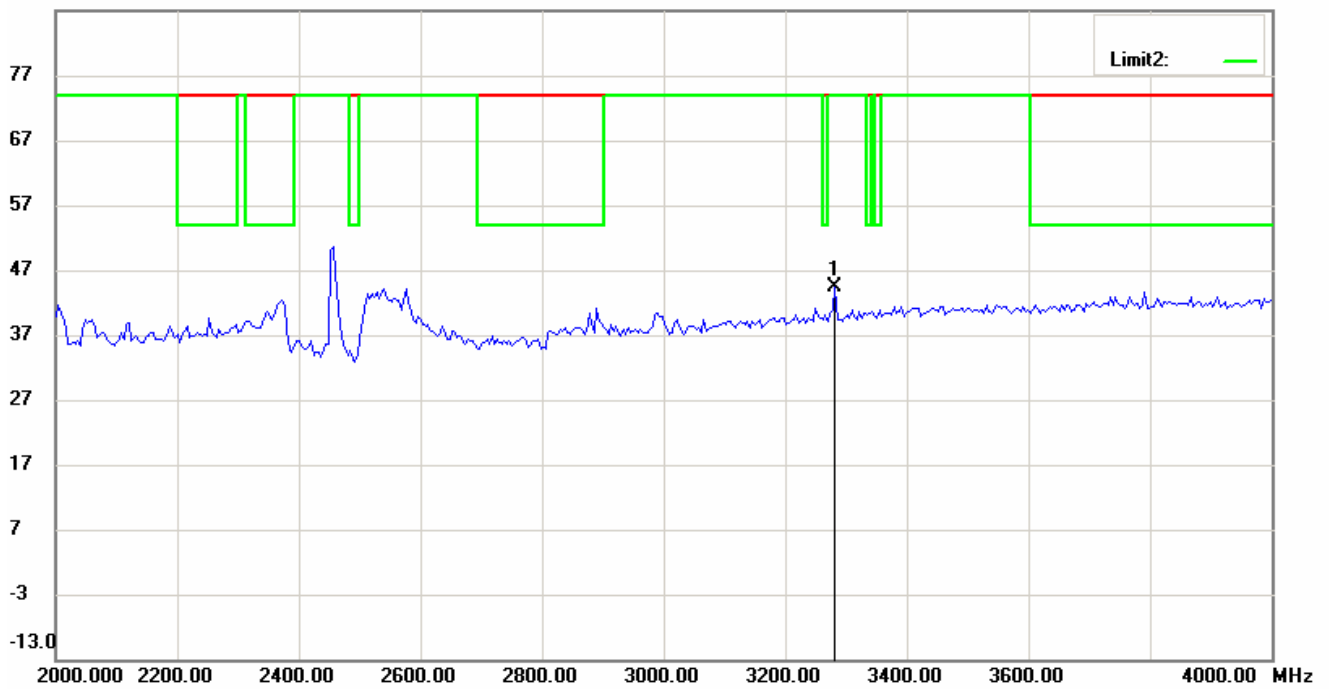


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

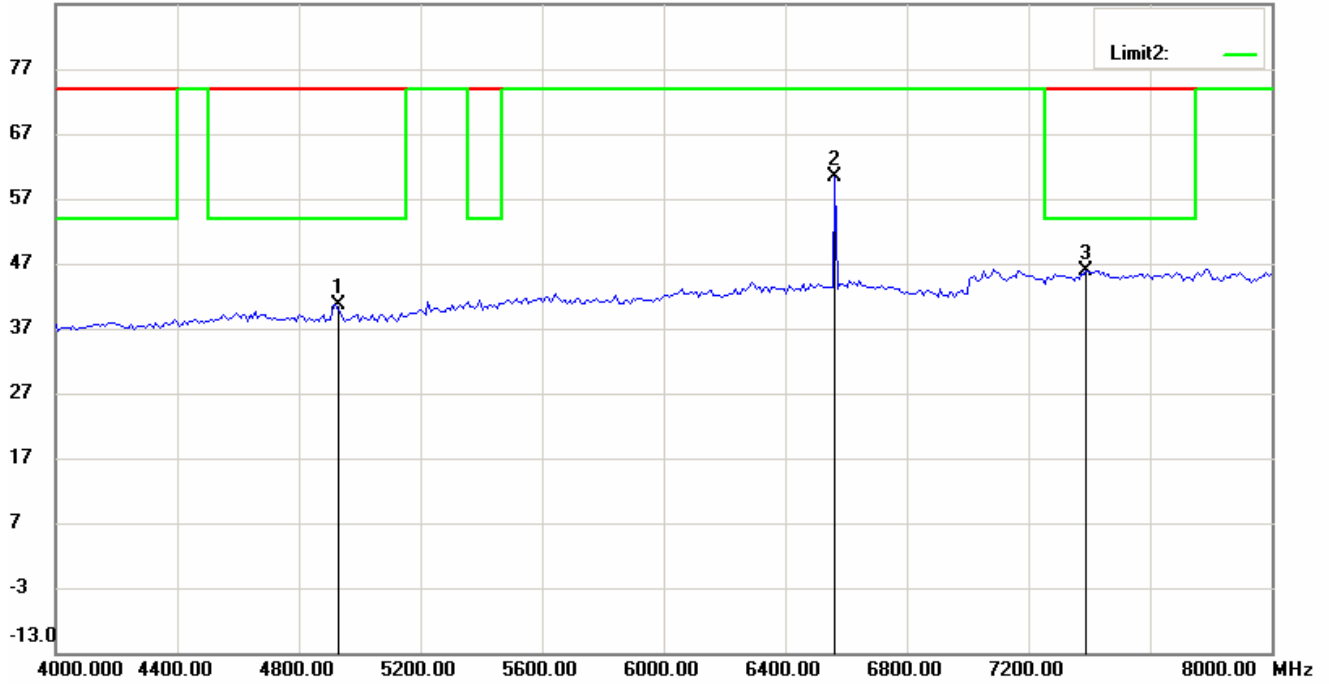


87.0 dBuV/m

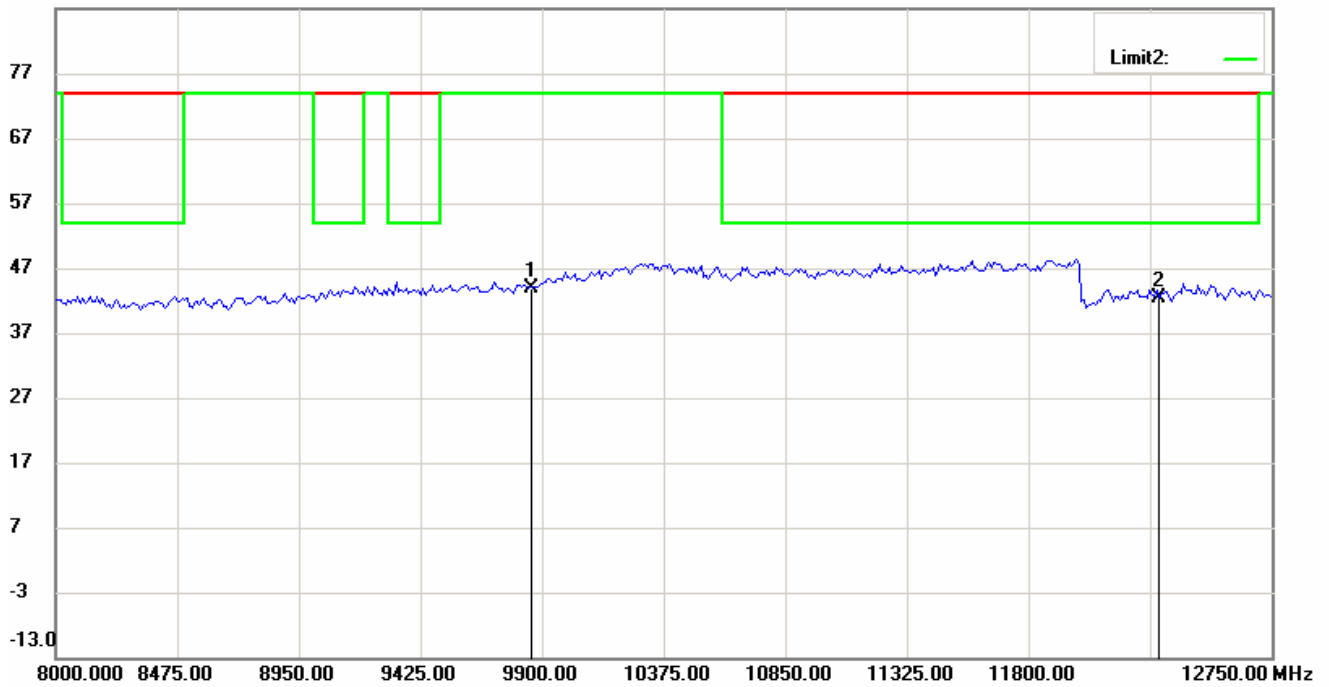


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


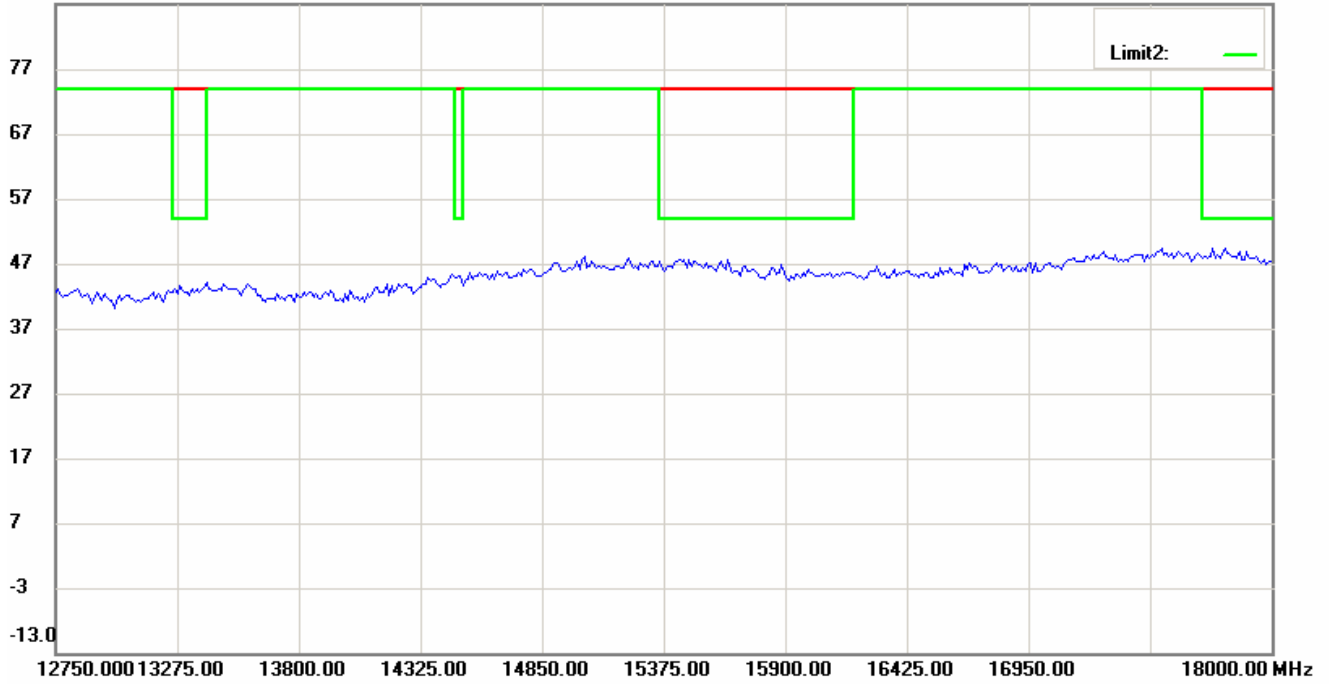


87.0 dBuV/m

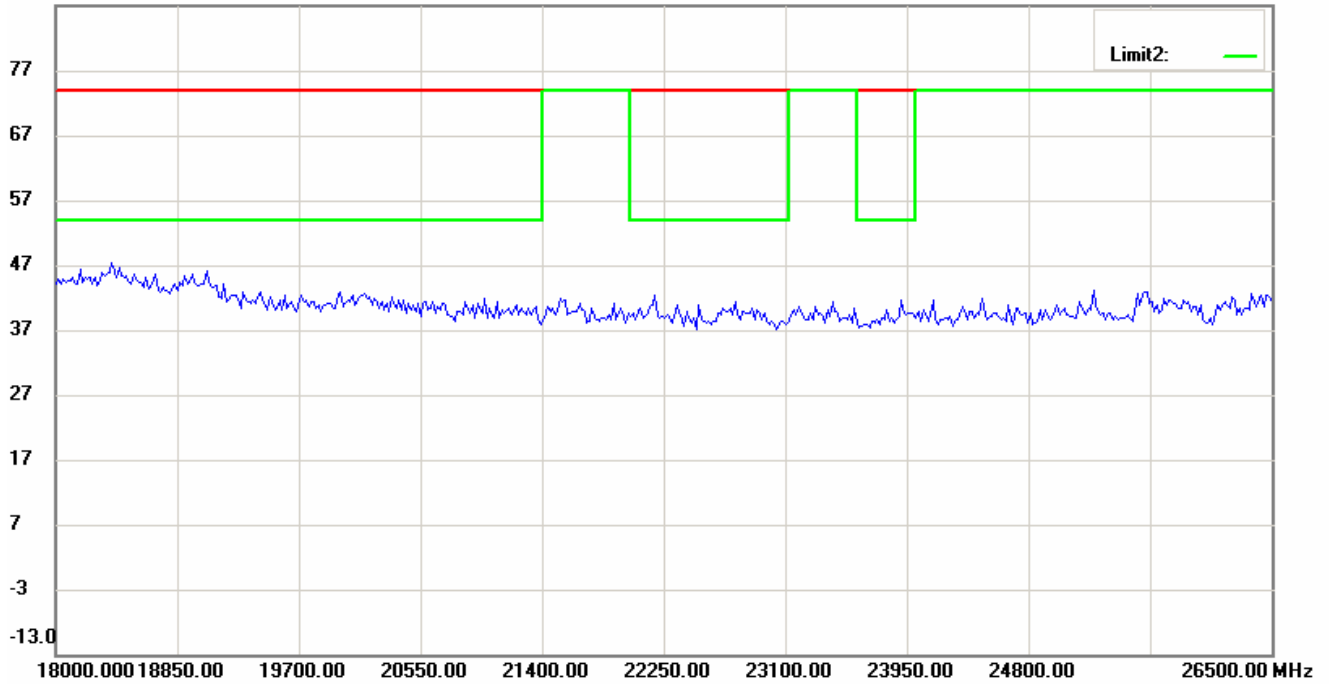

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11n(20MHz)\_Ch1 Antenna Polarization H

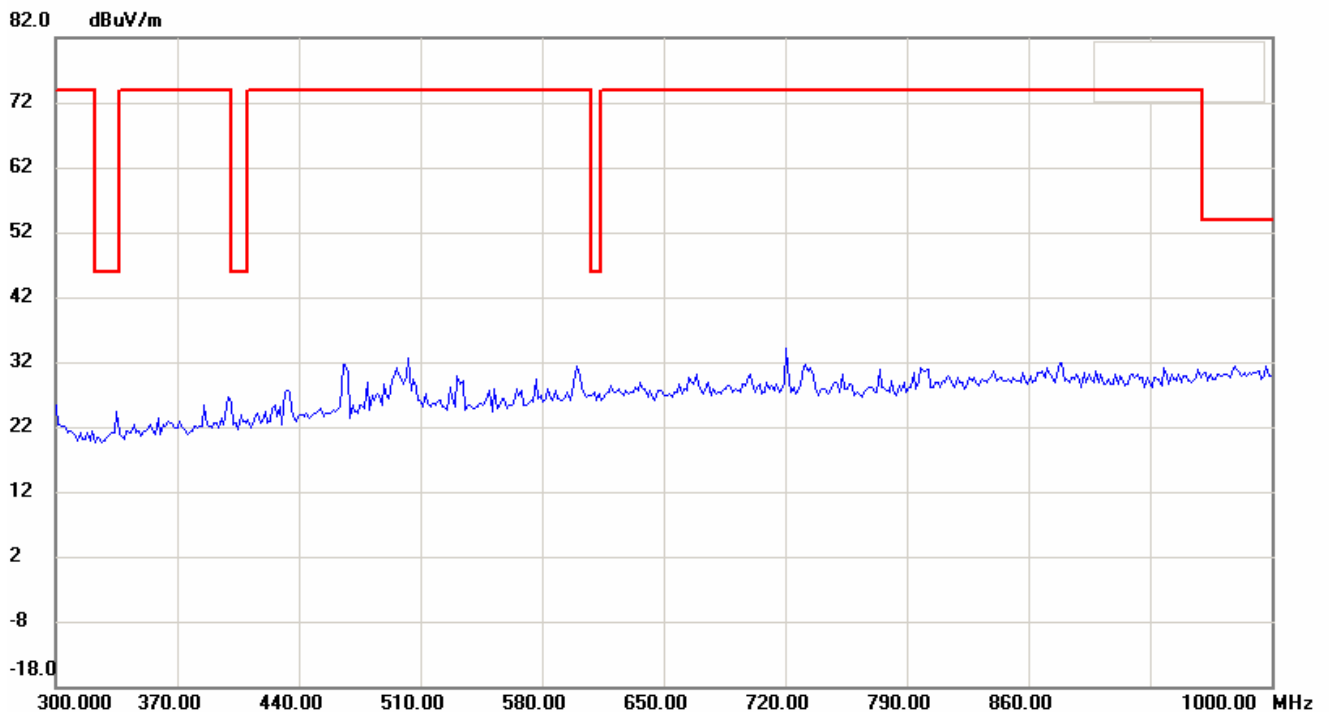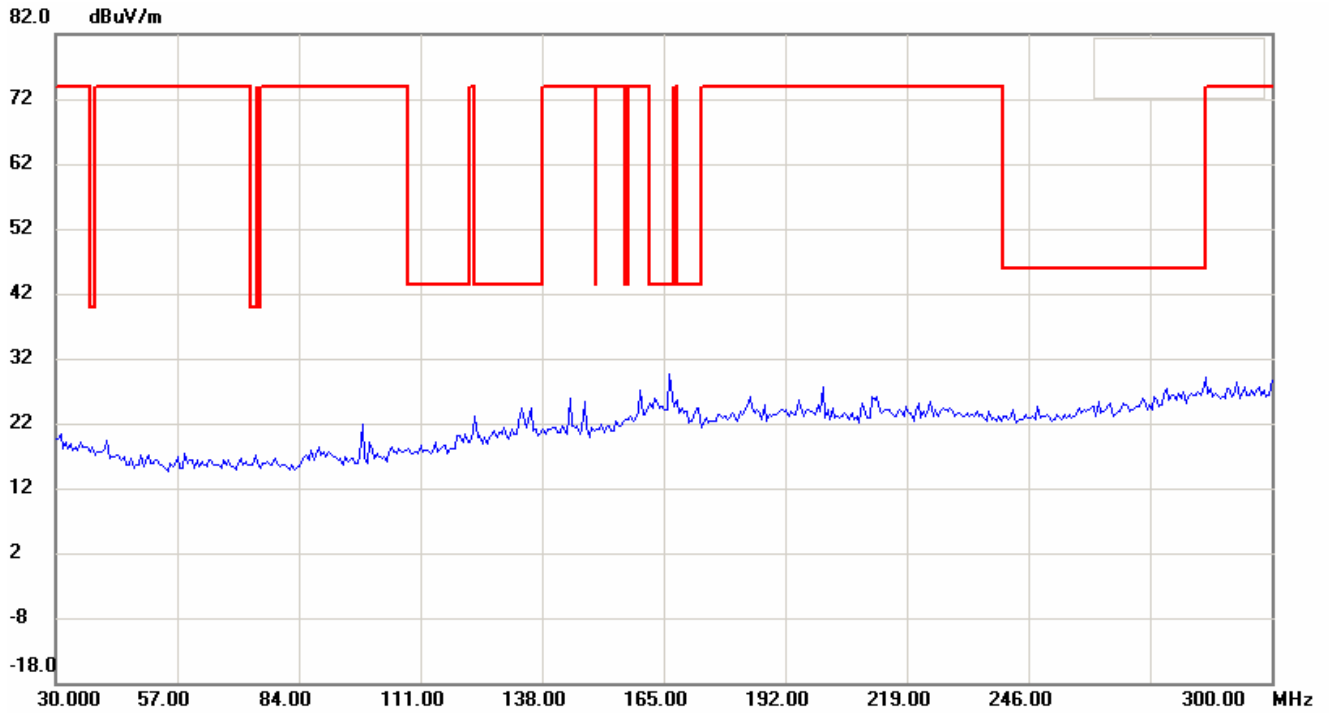


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

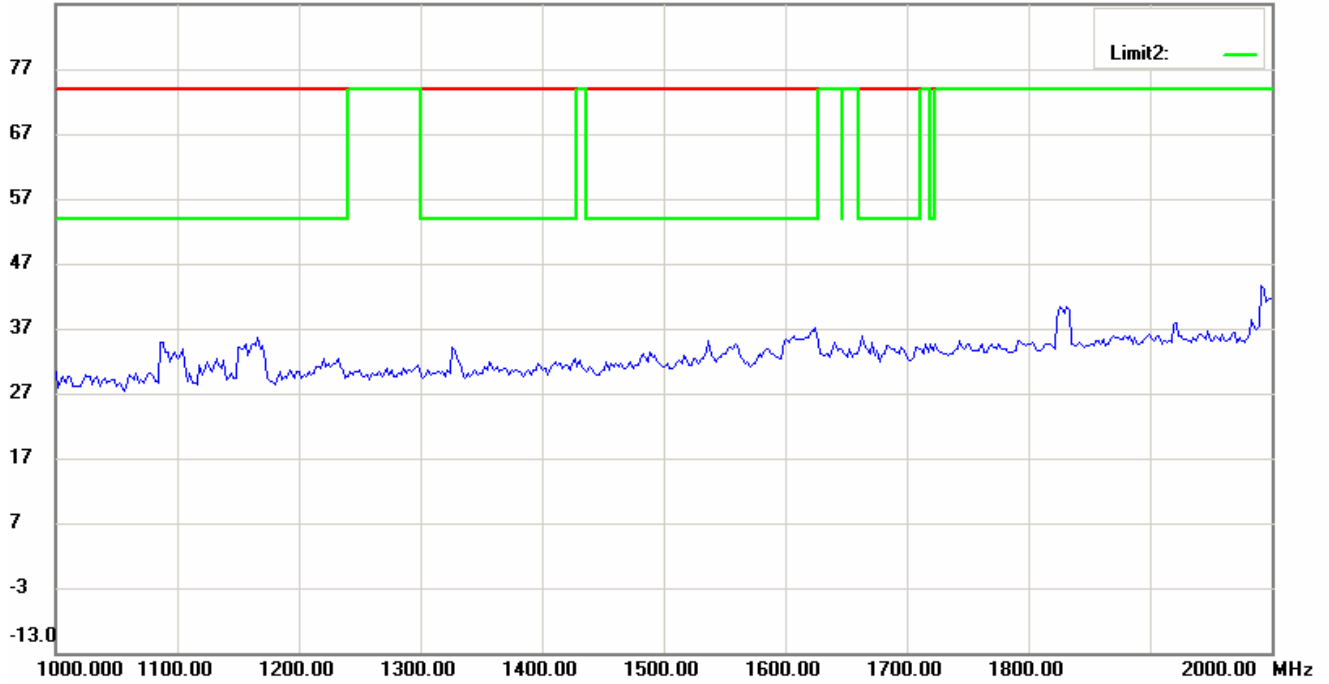


87.0 dBuV/m

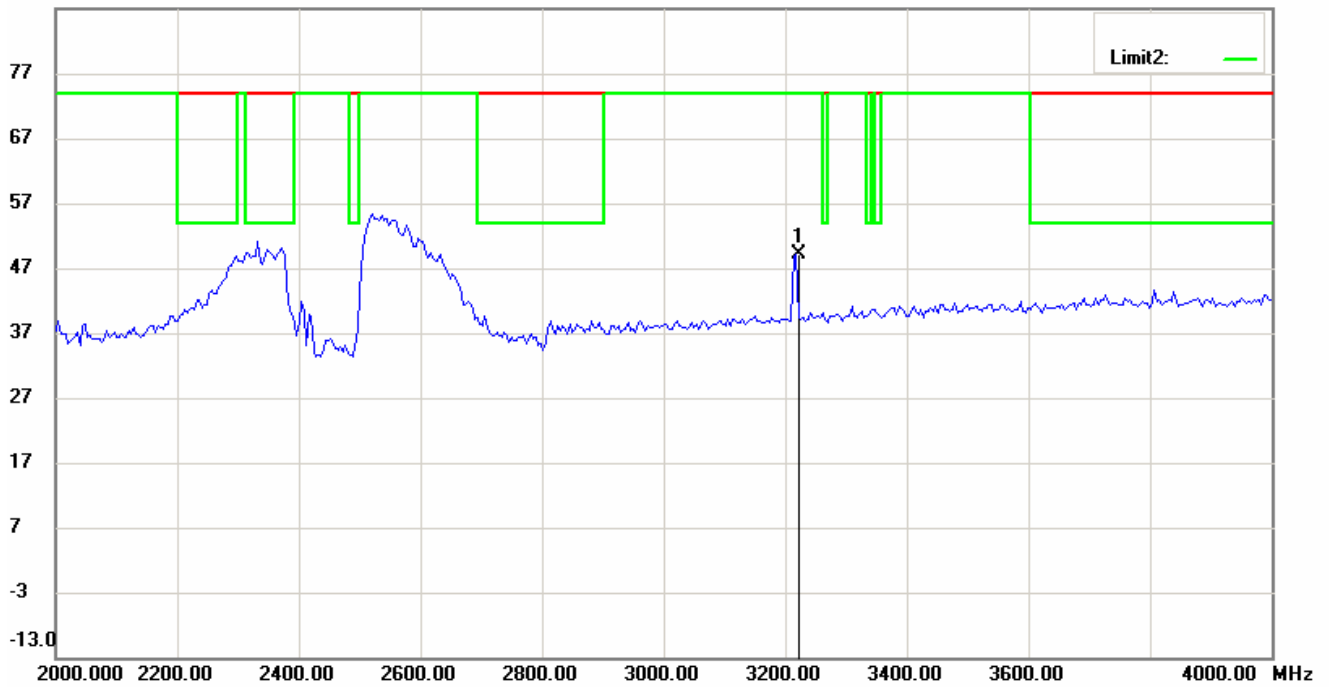


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

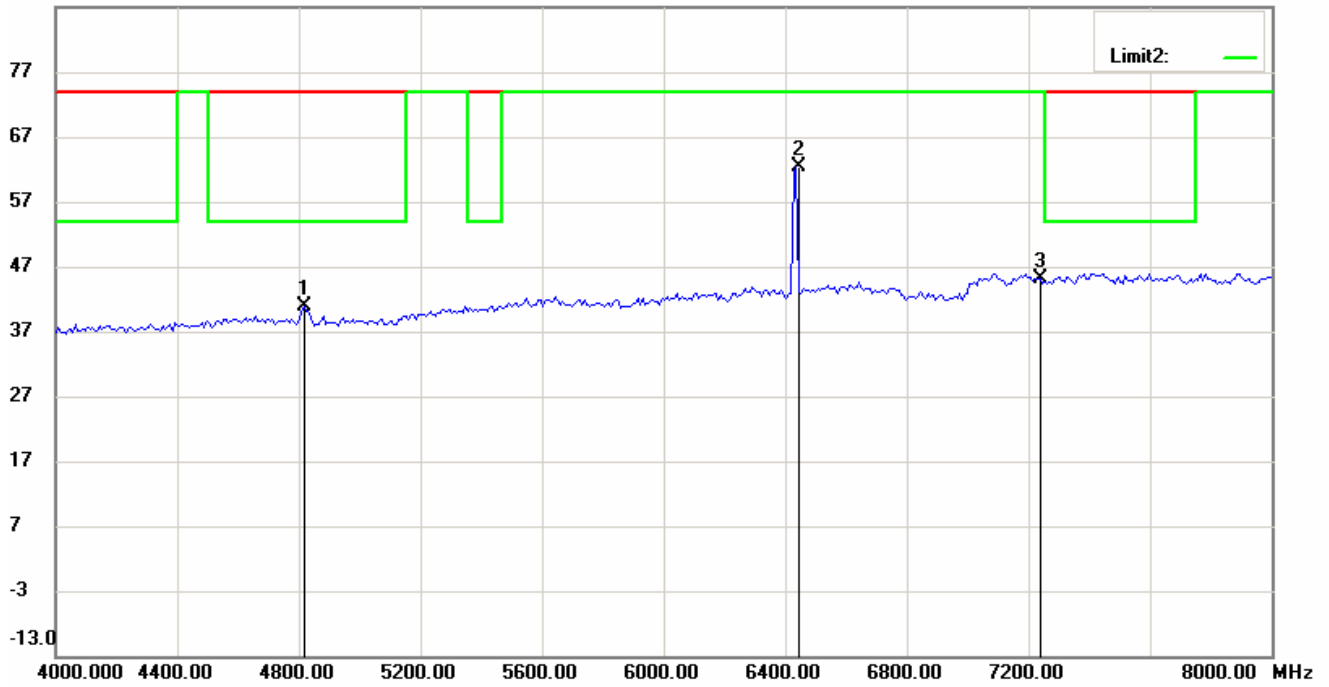


87.0 dBuV/m

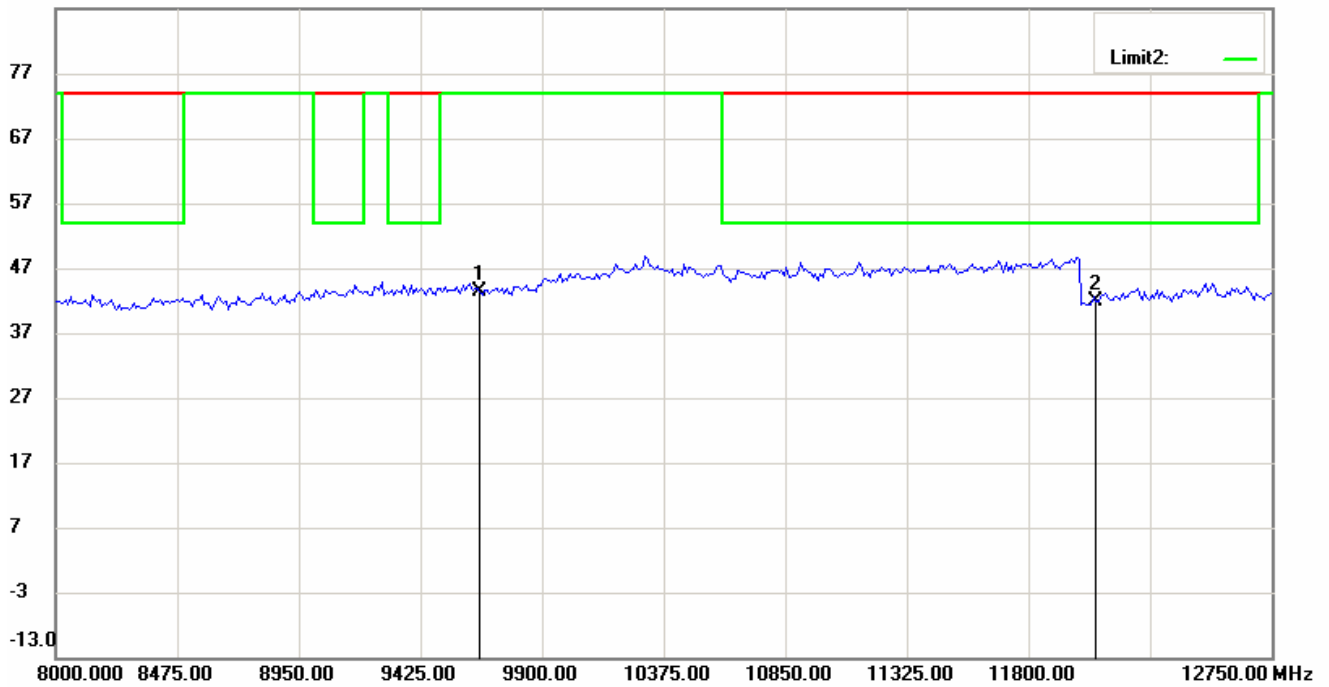


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


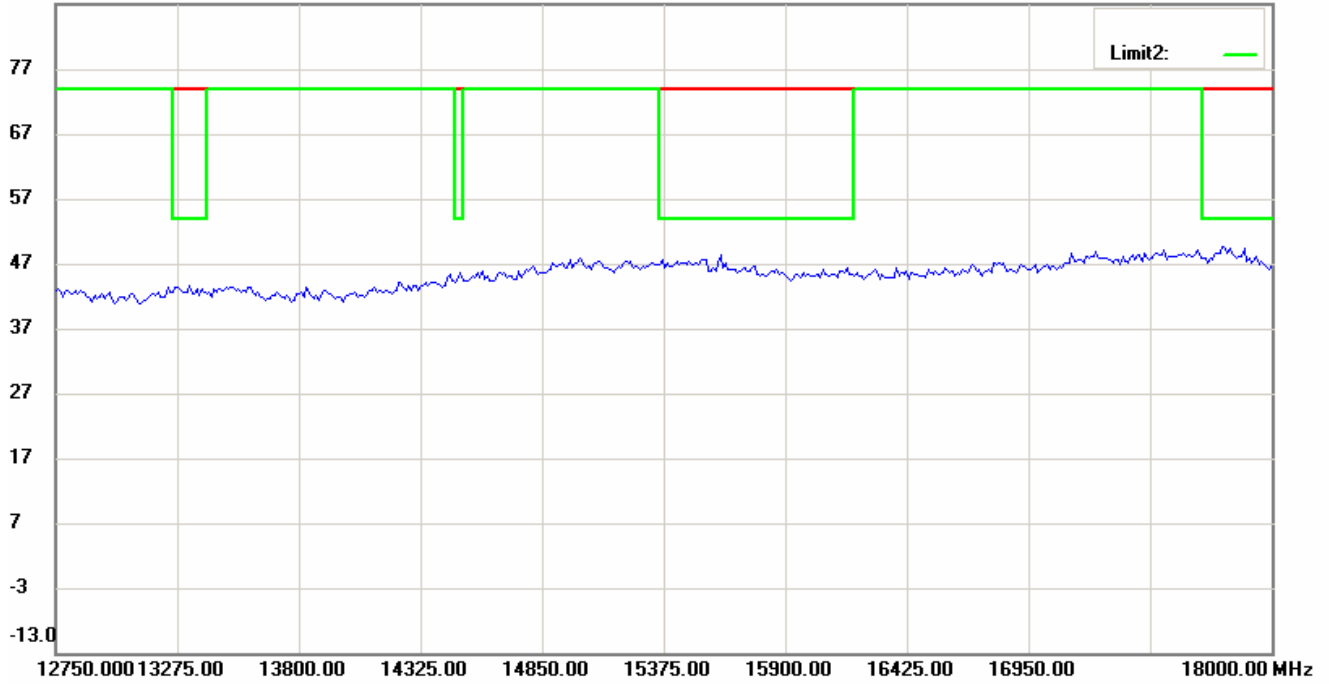


87.0 dBuV/m

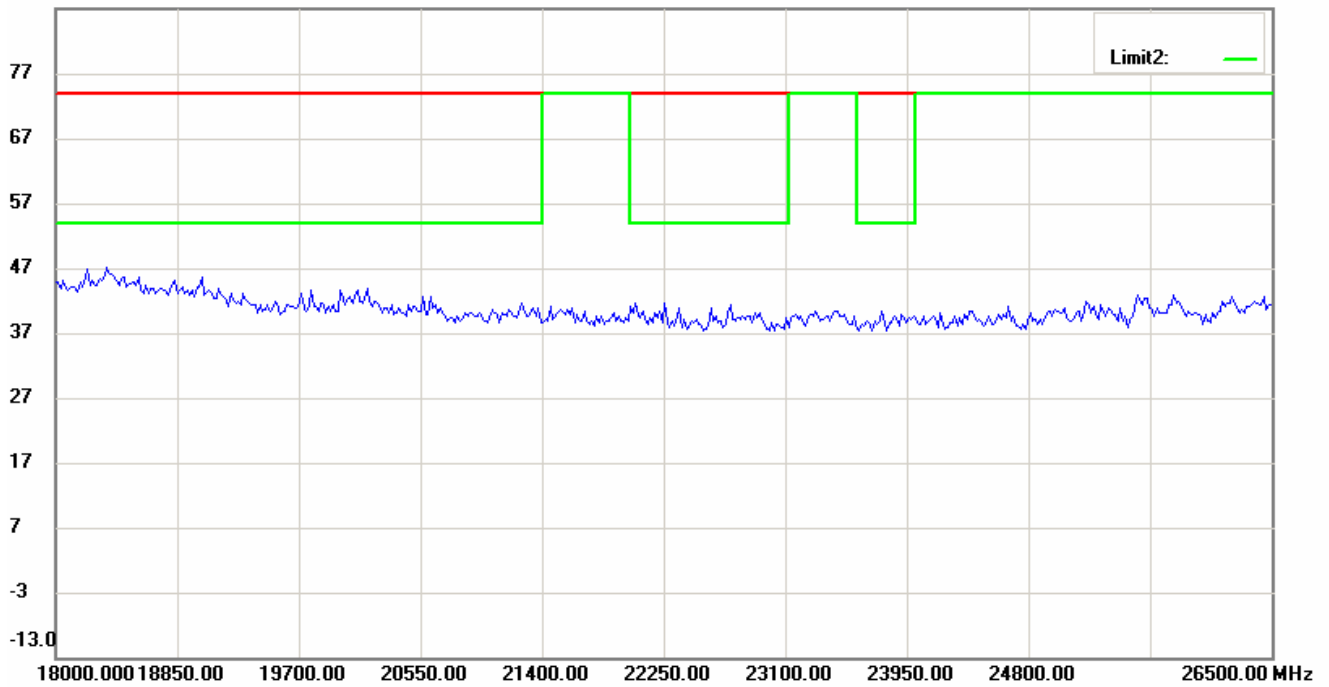

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

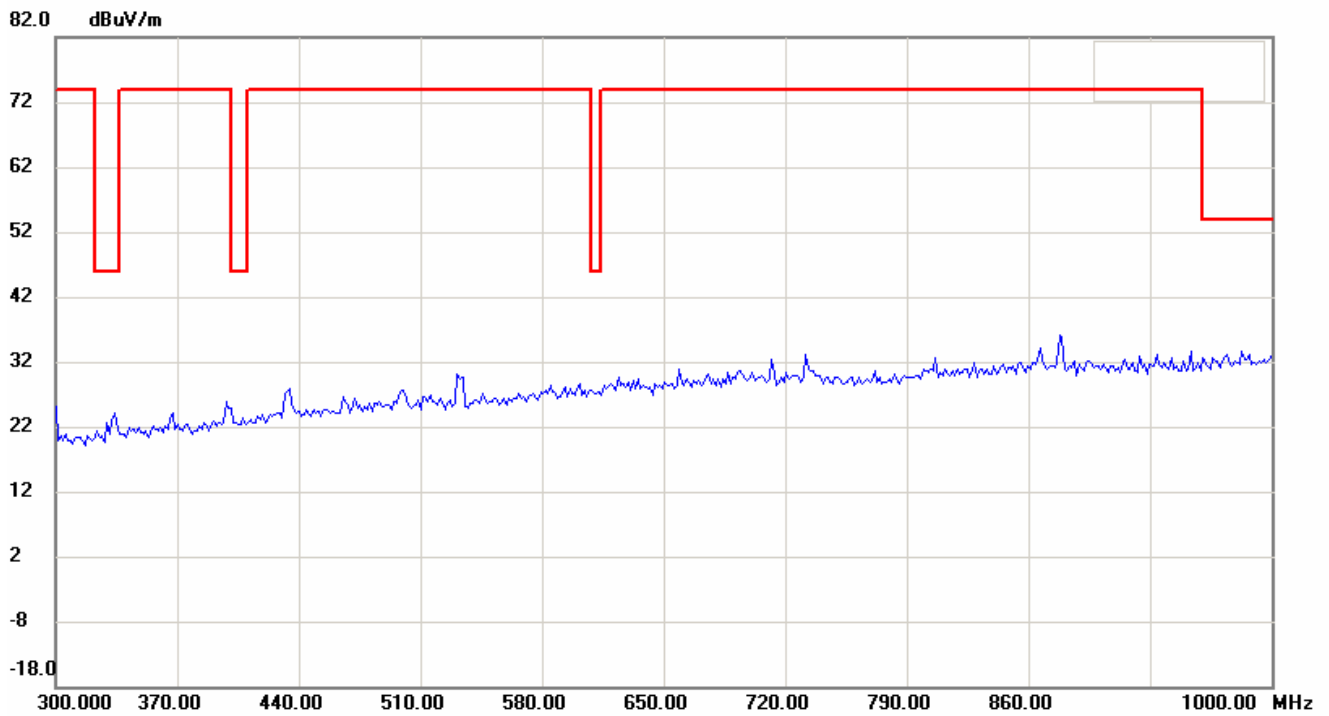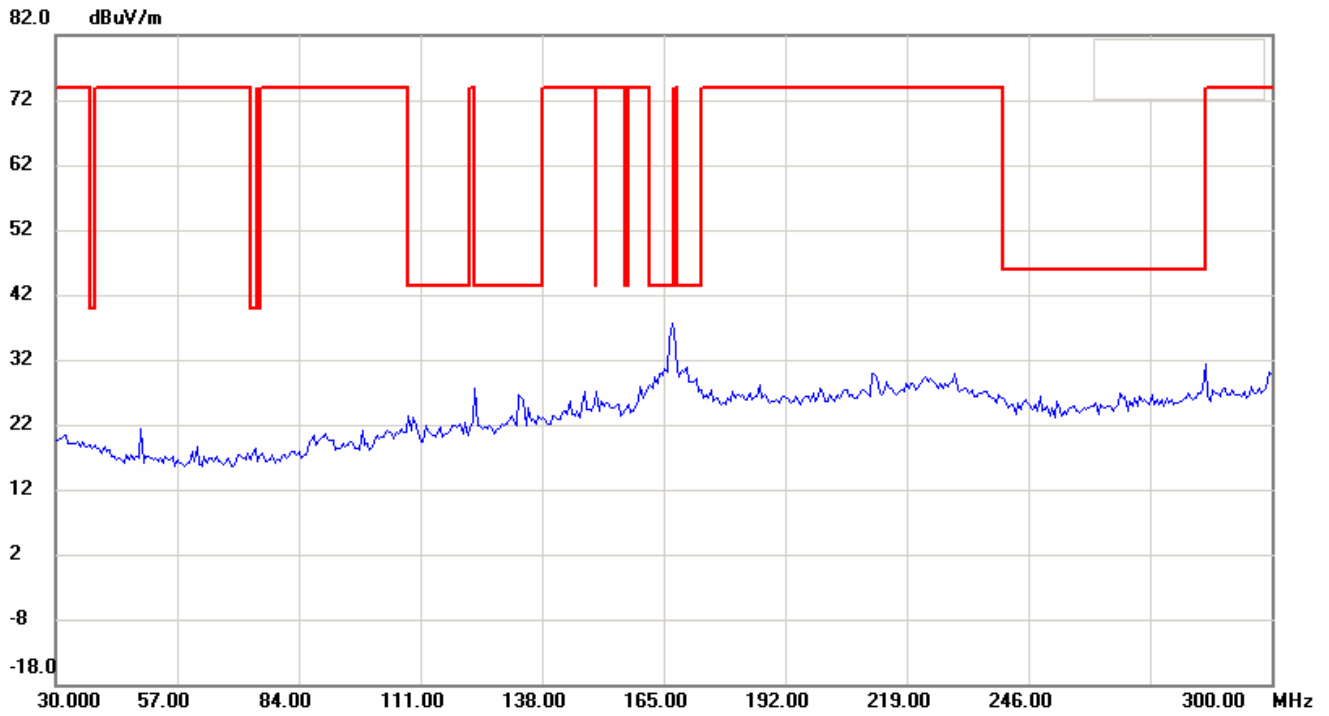





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

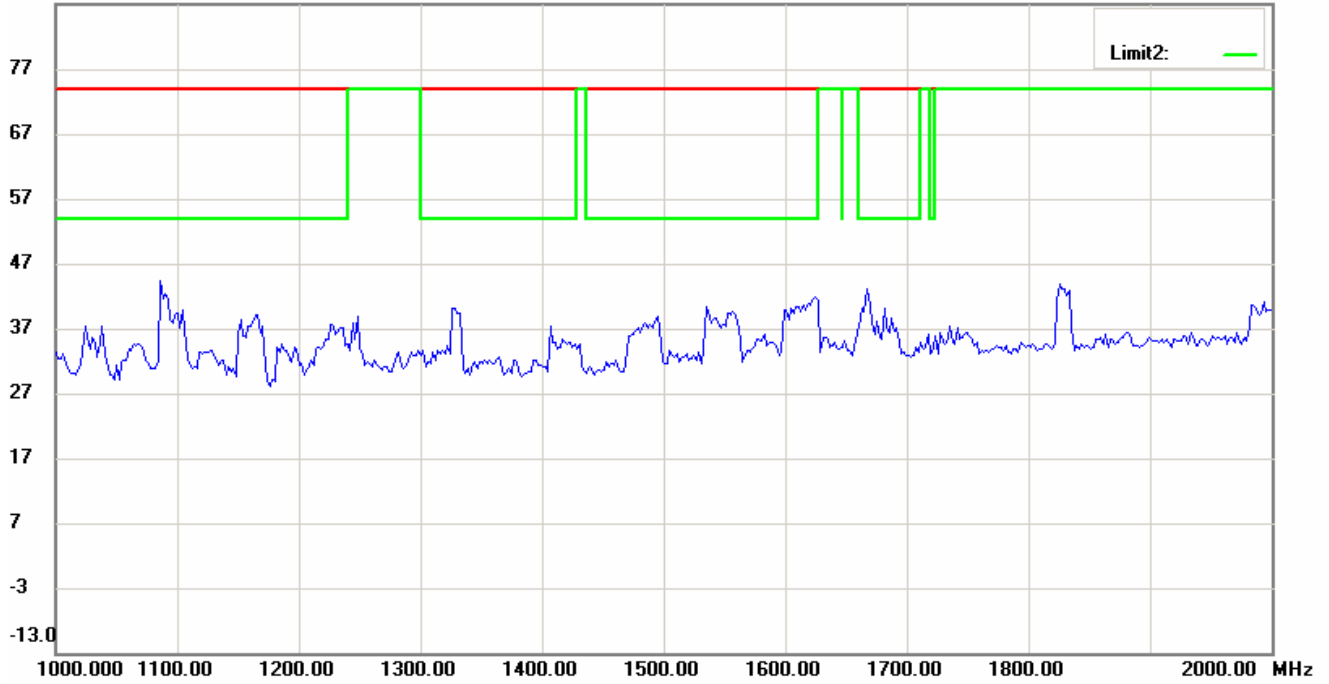


87.0 dBuV/m

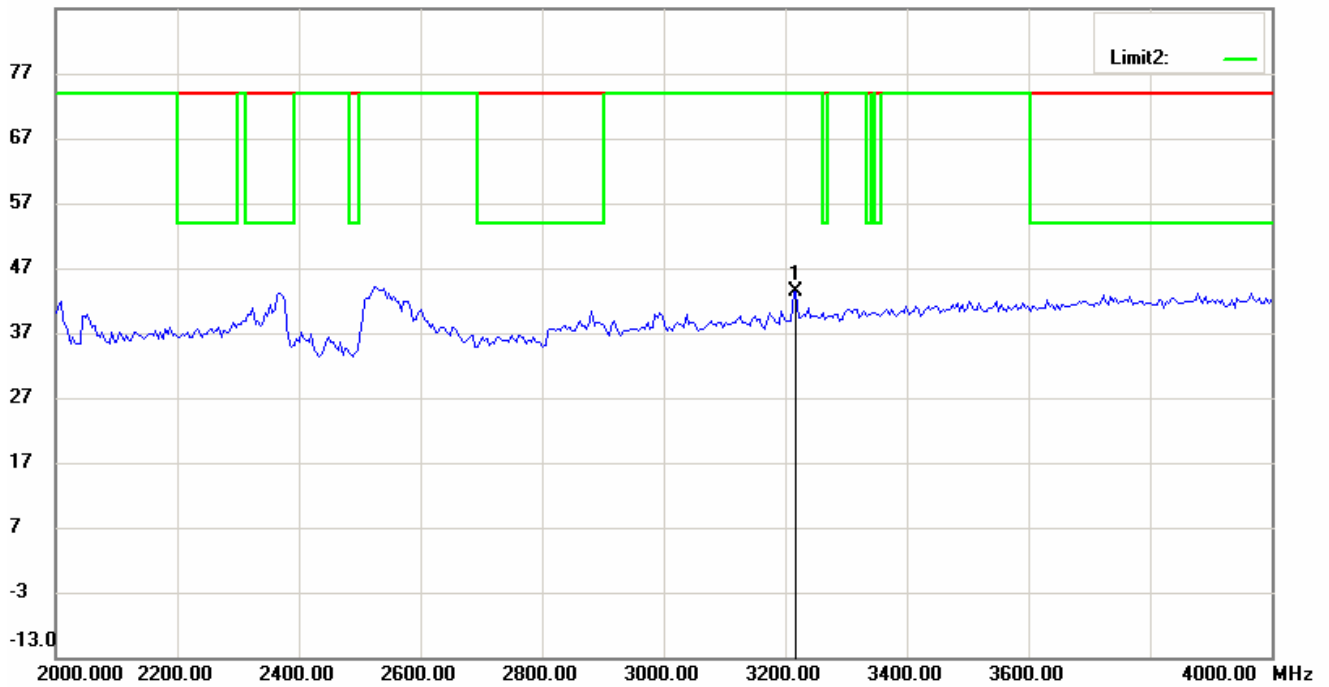


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

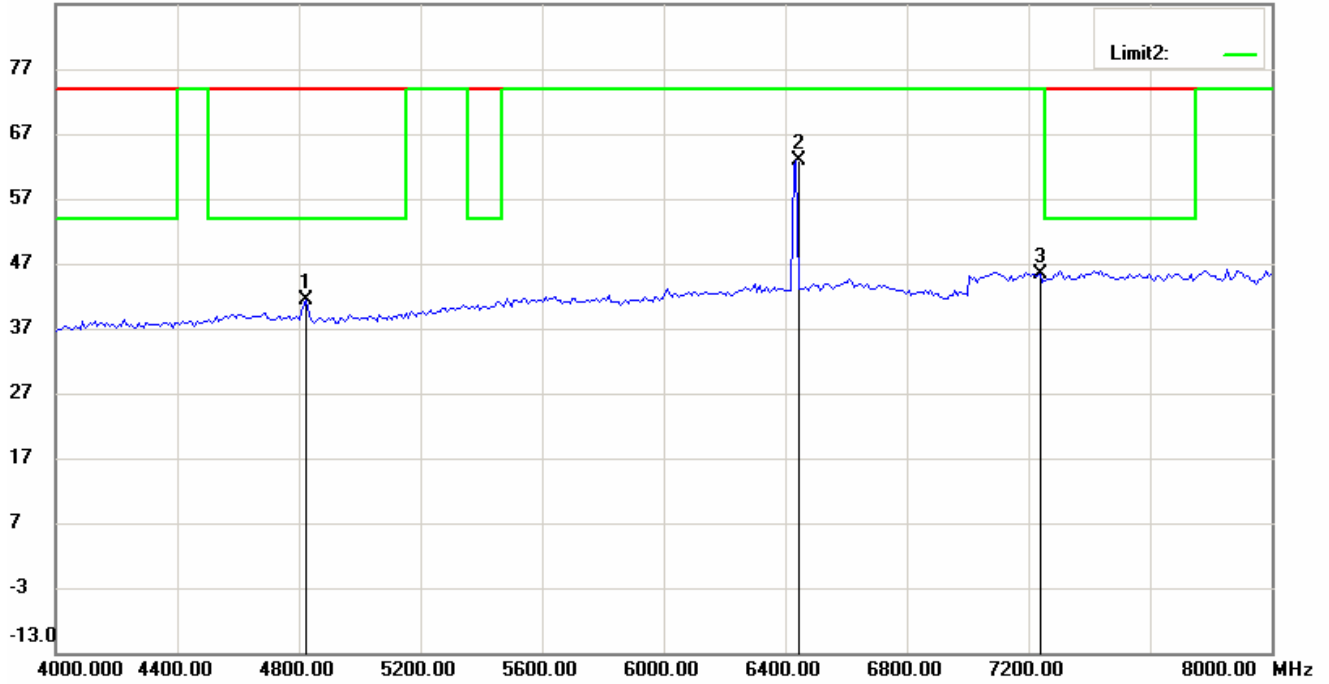


87.0 dBuV/m

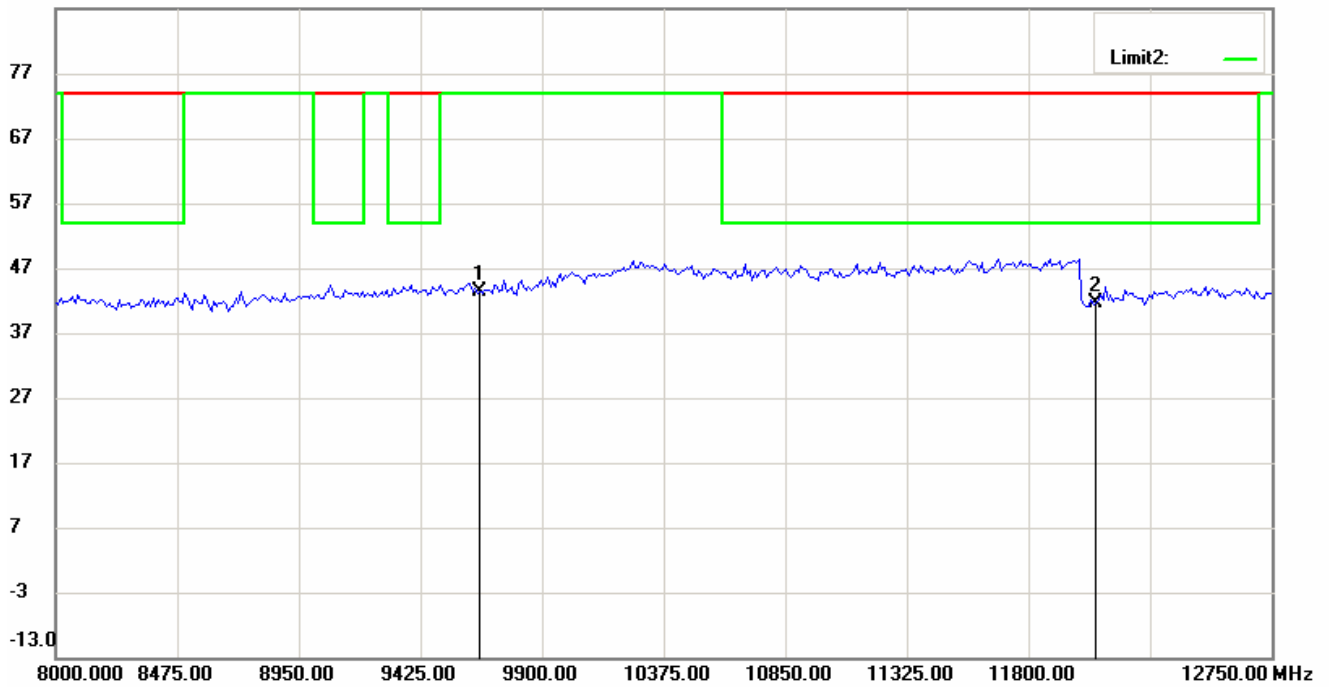


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


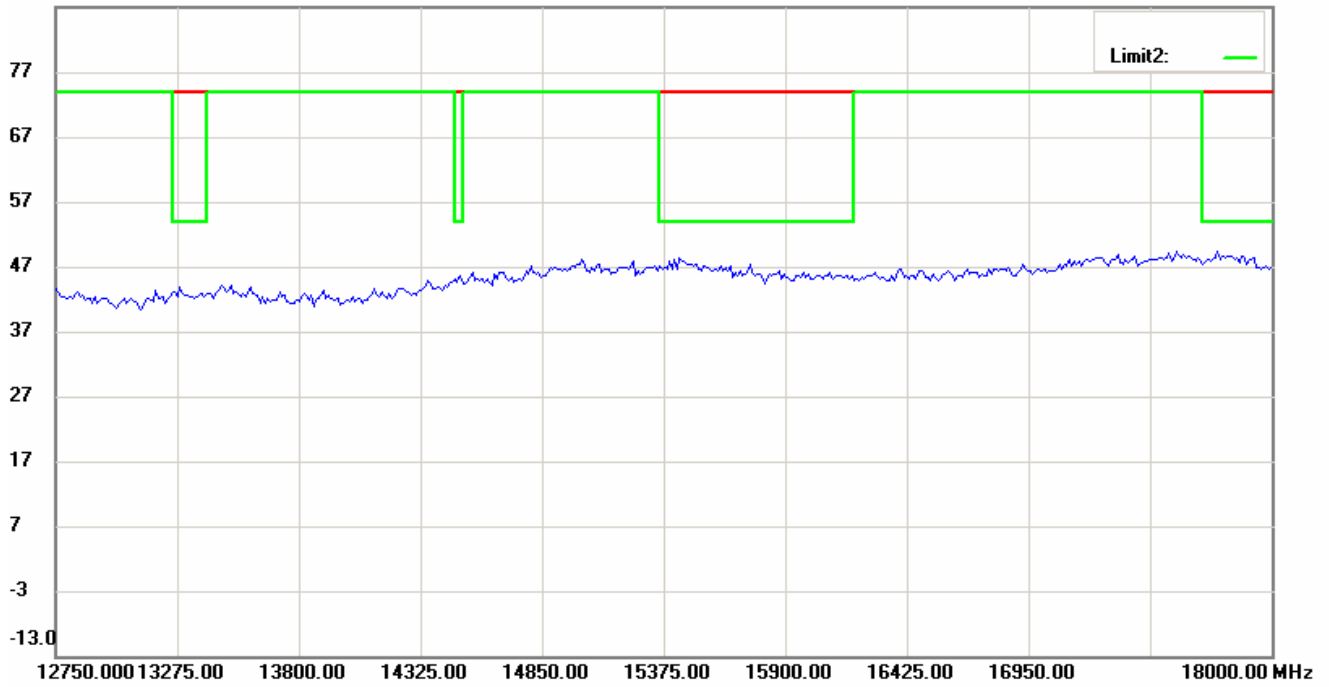


87.0 dBuV/m

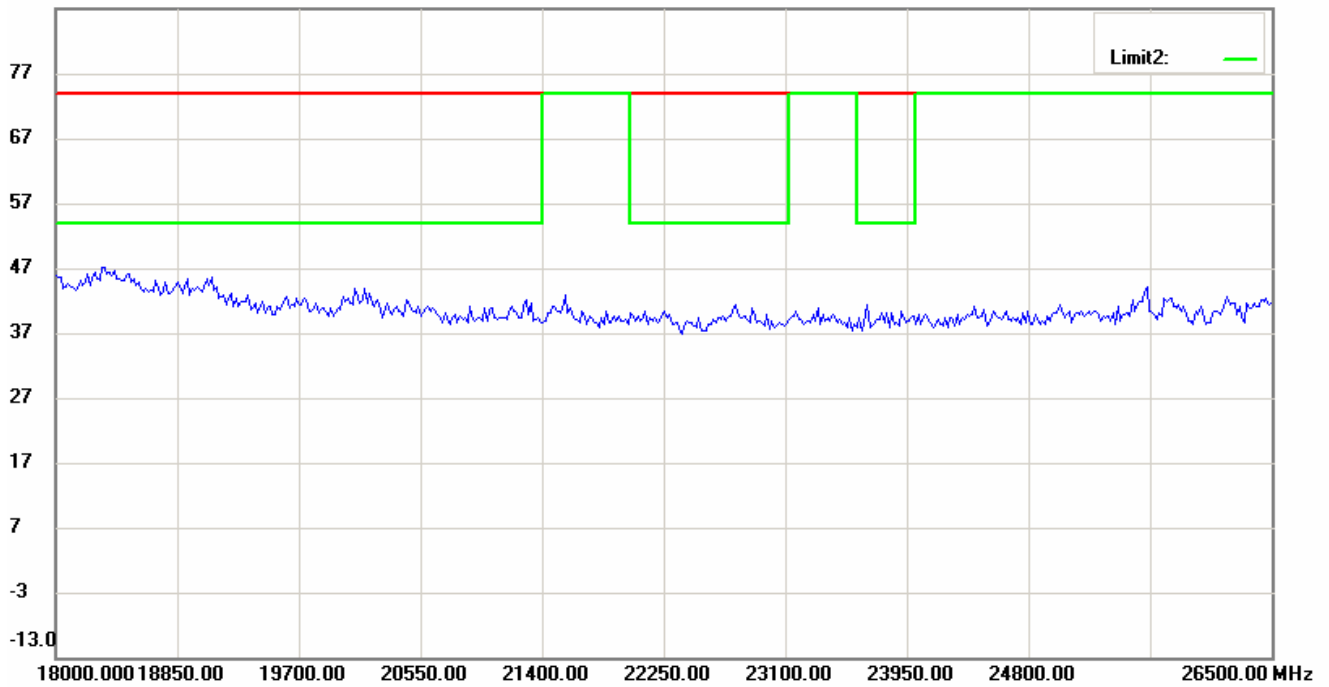

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11n(20MHz)\_Ch6 Antenna Polarization H

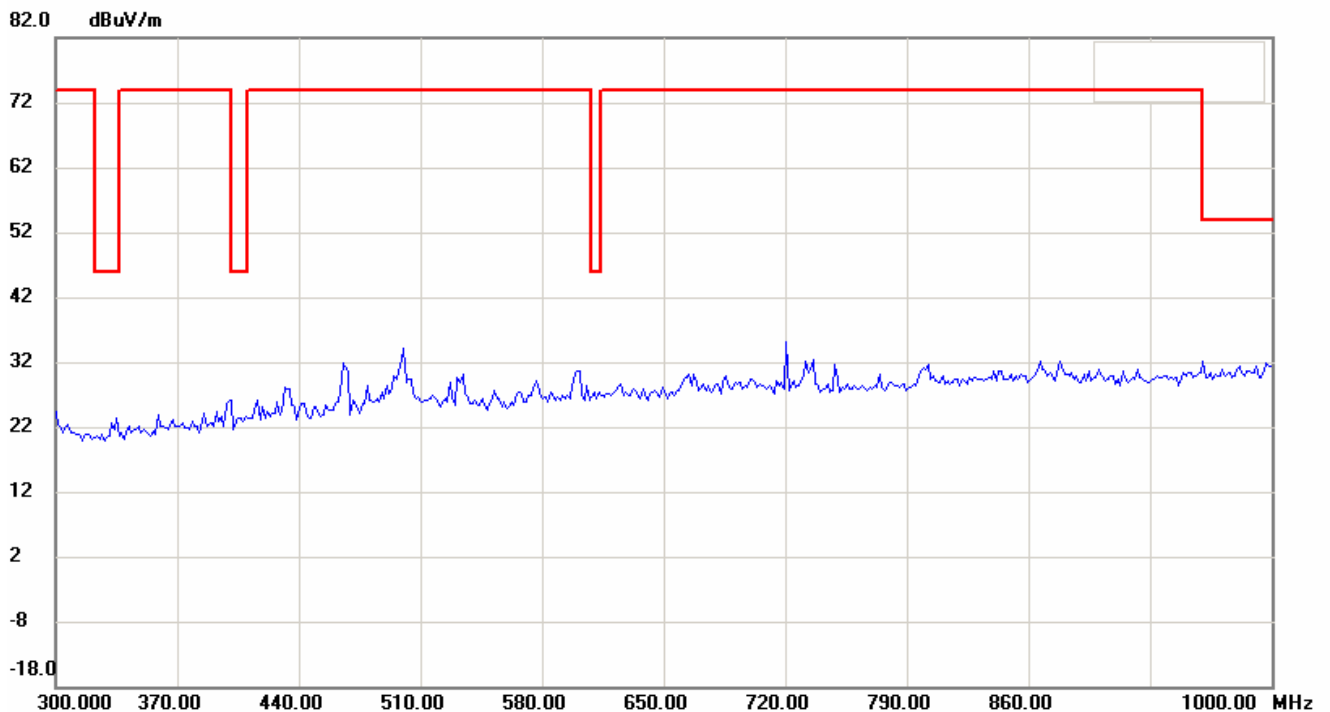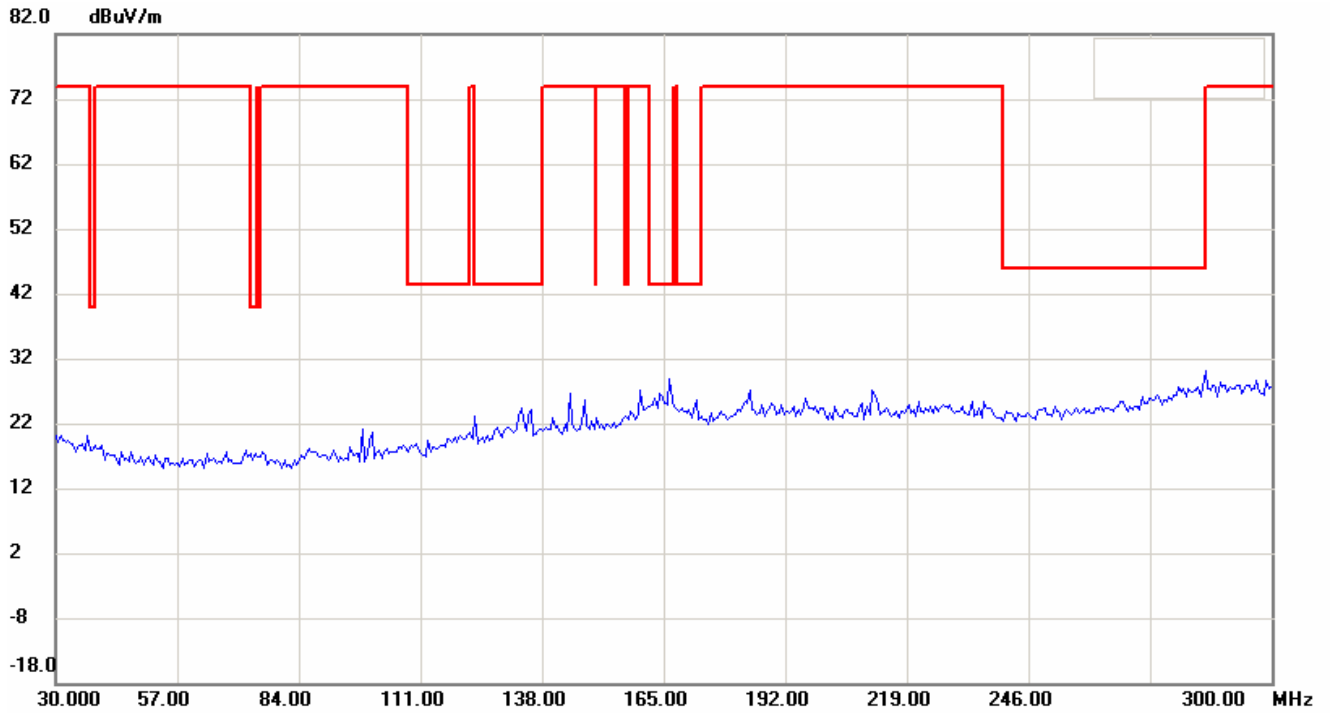


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

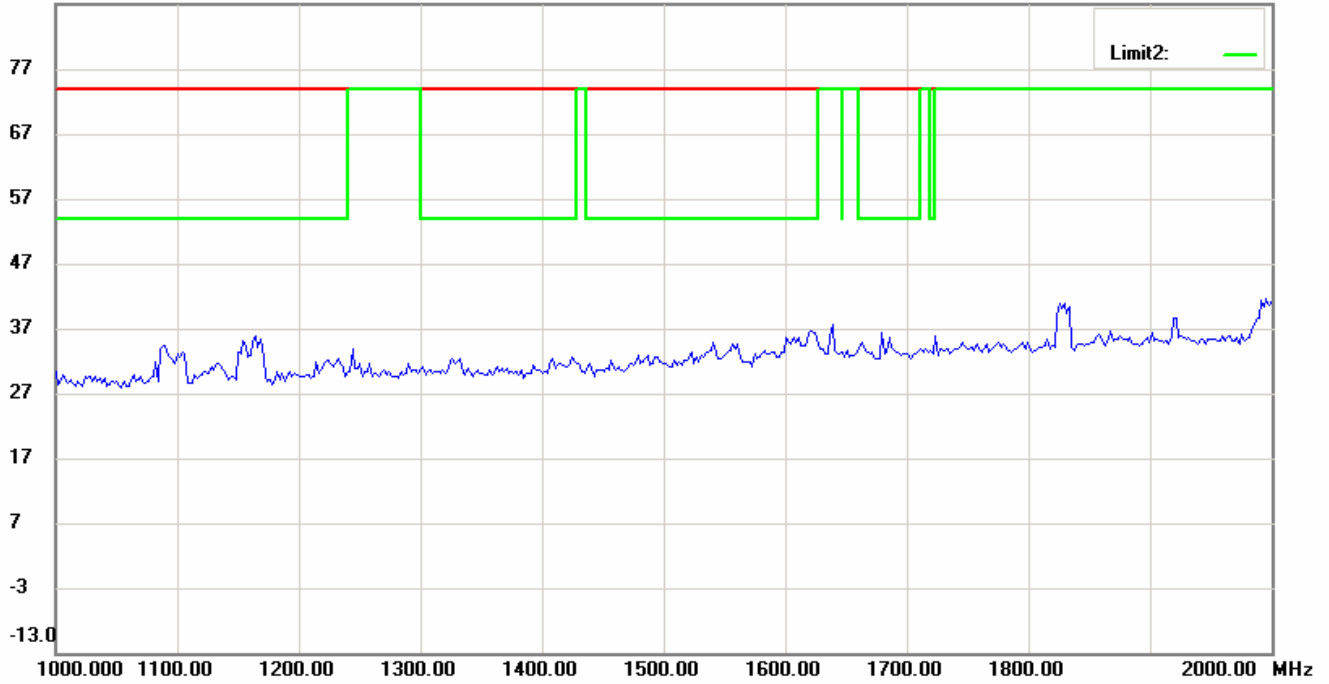


87.0 dBuV/m

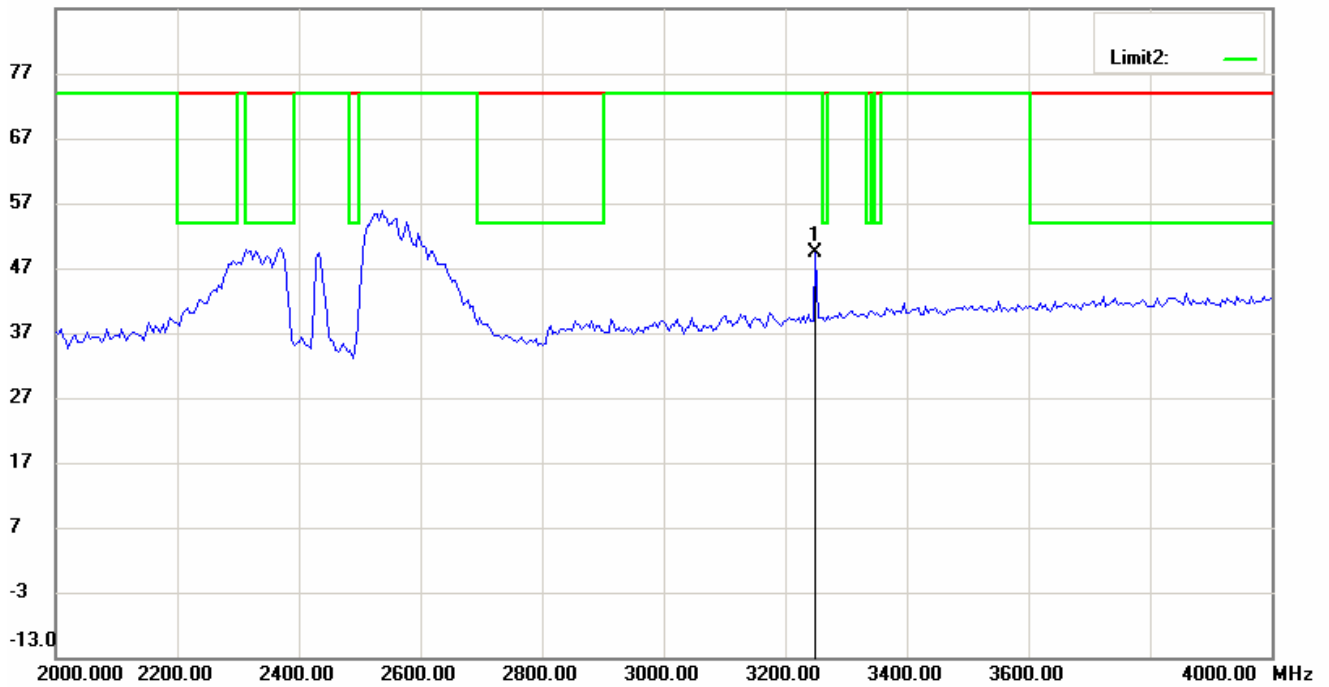


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

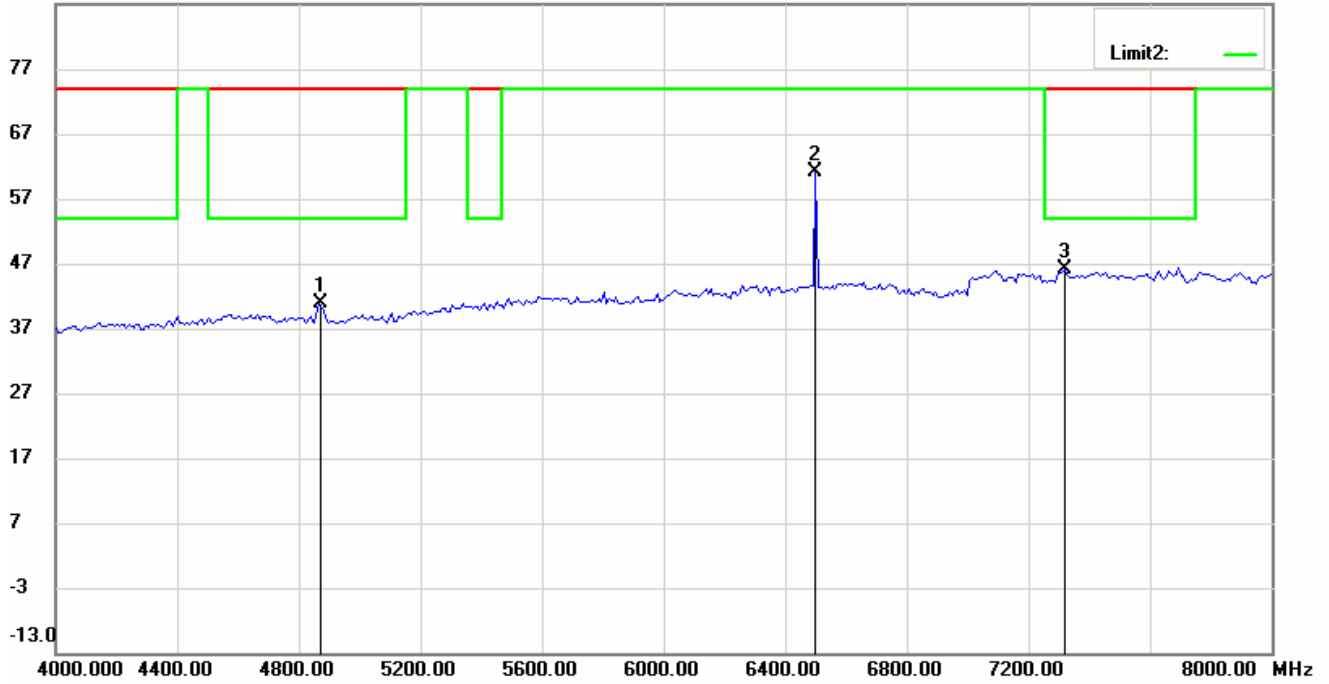


87.0 dBuV/m

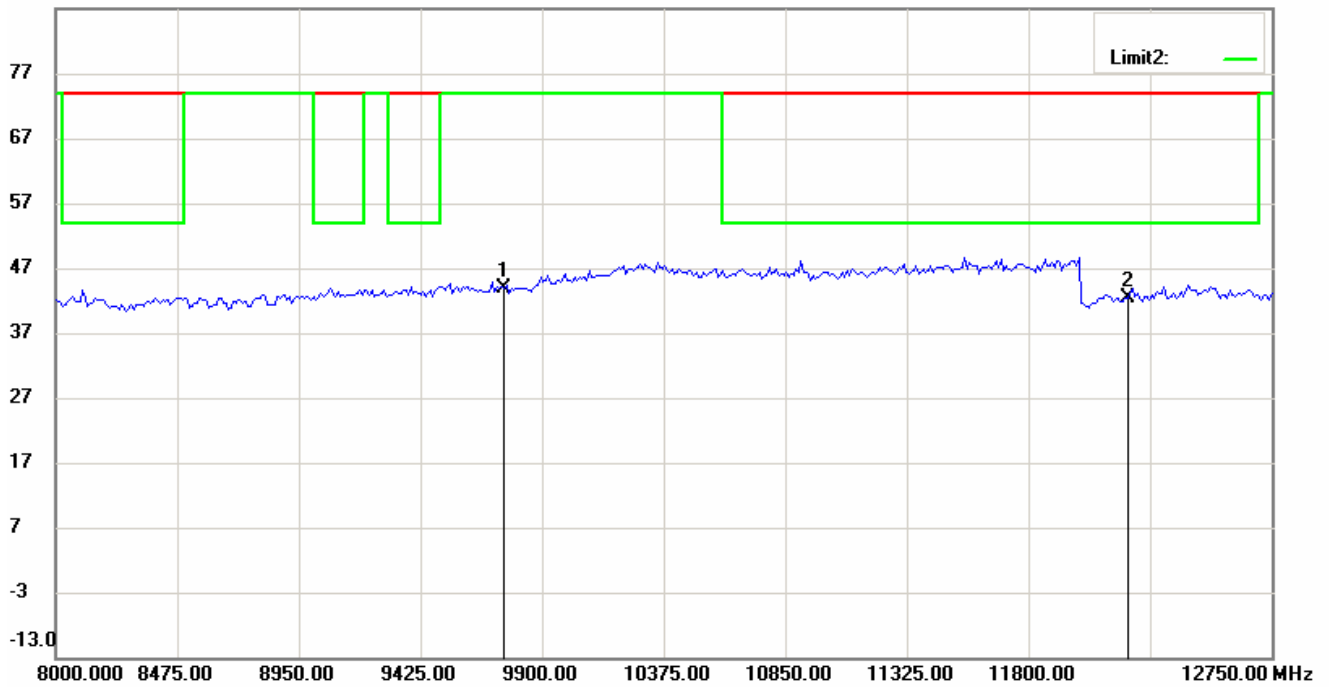


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


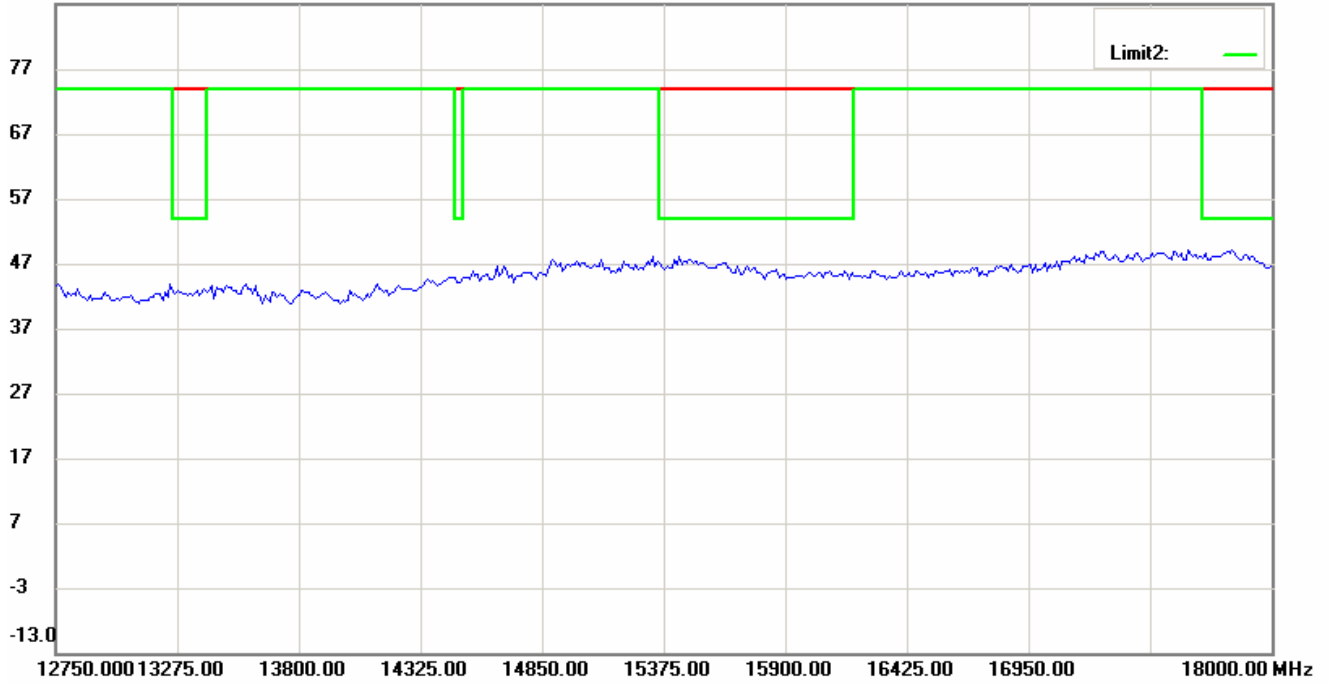


87.0 dBuV/m

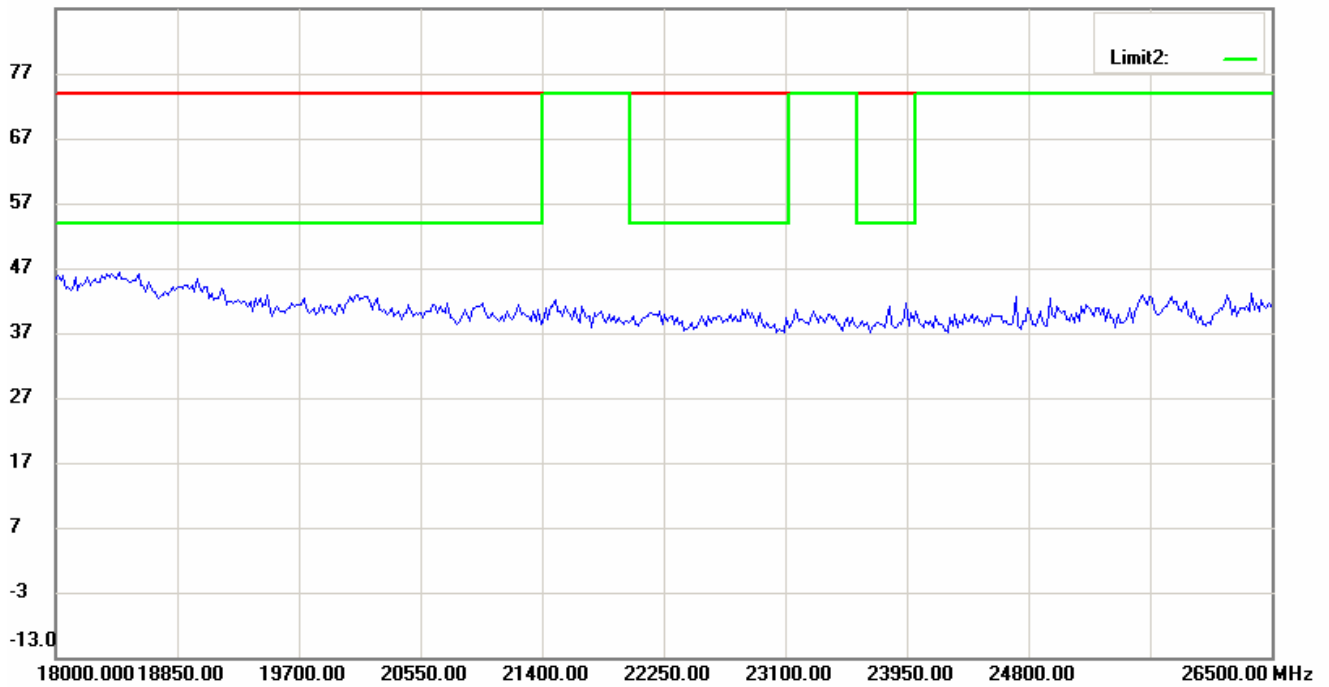

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

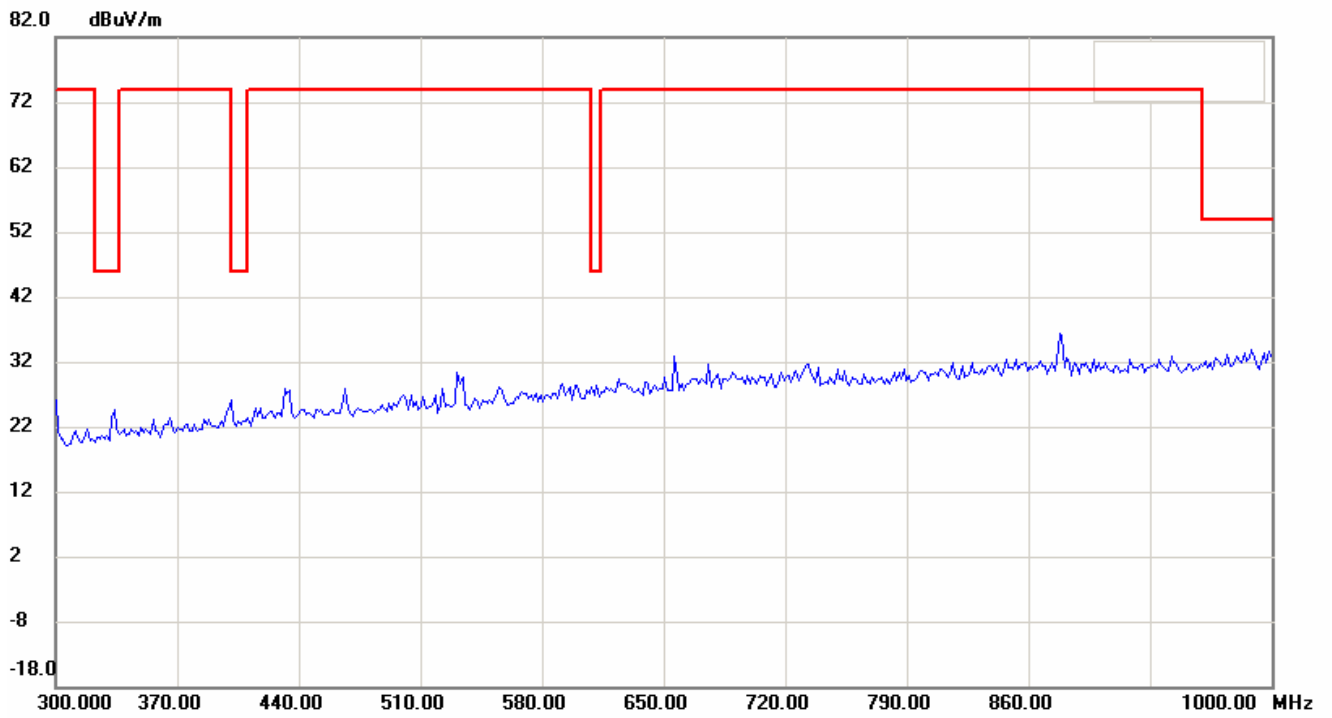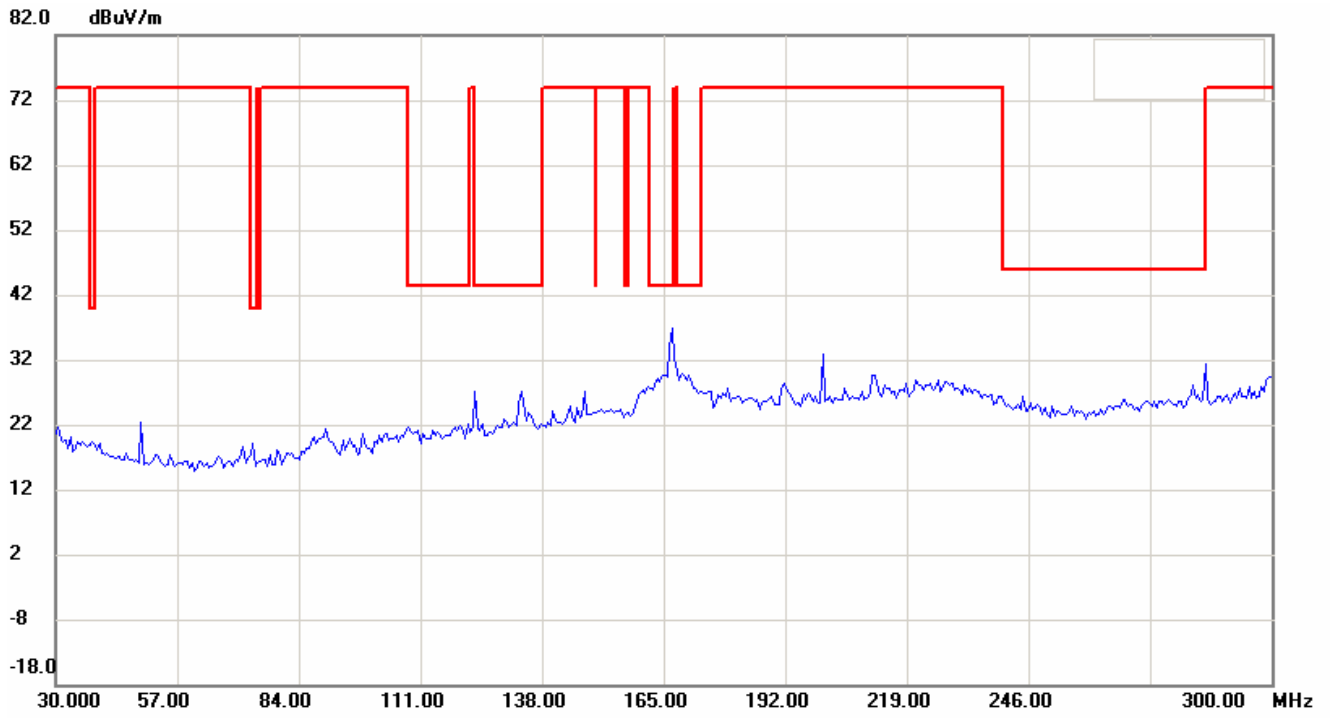





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

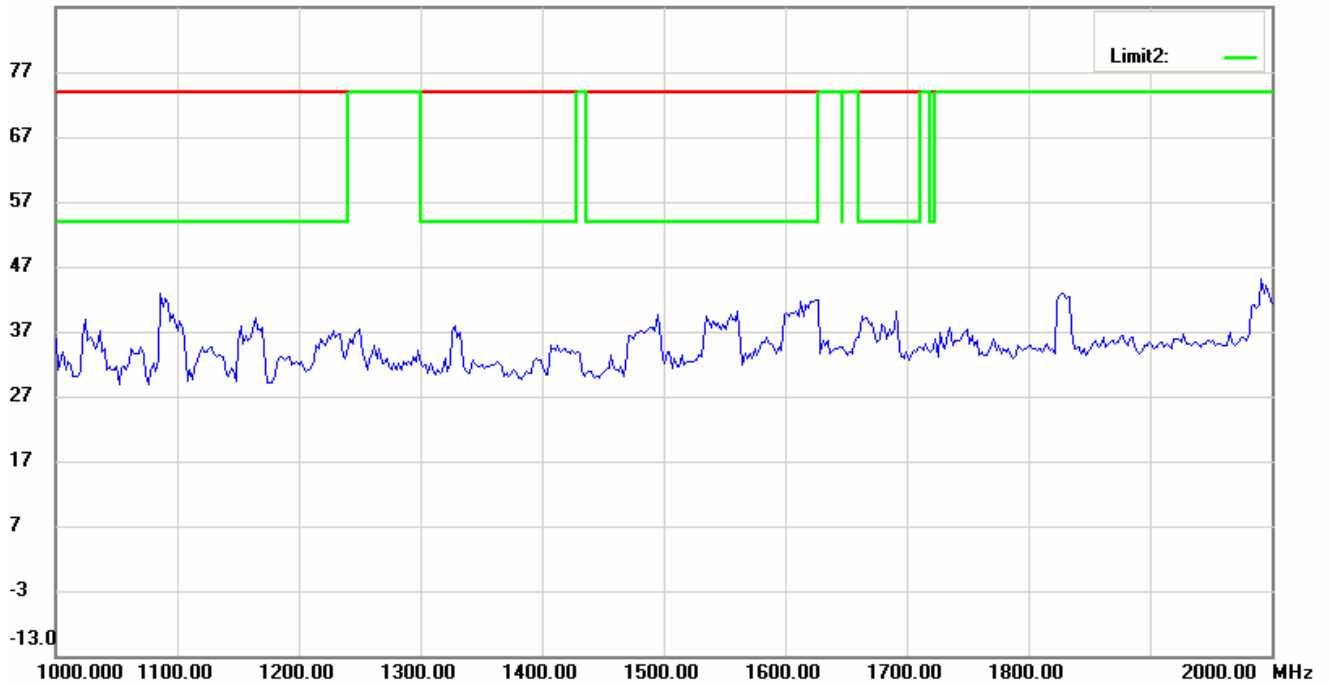


87.0 dBuV/m

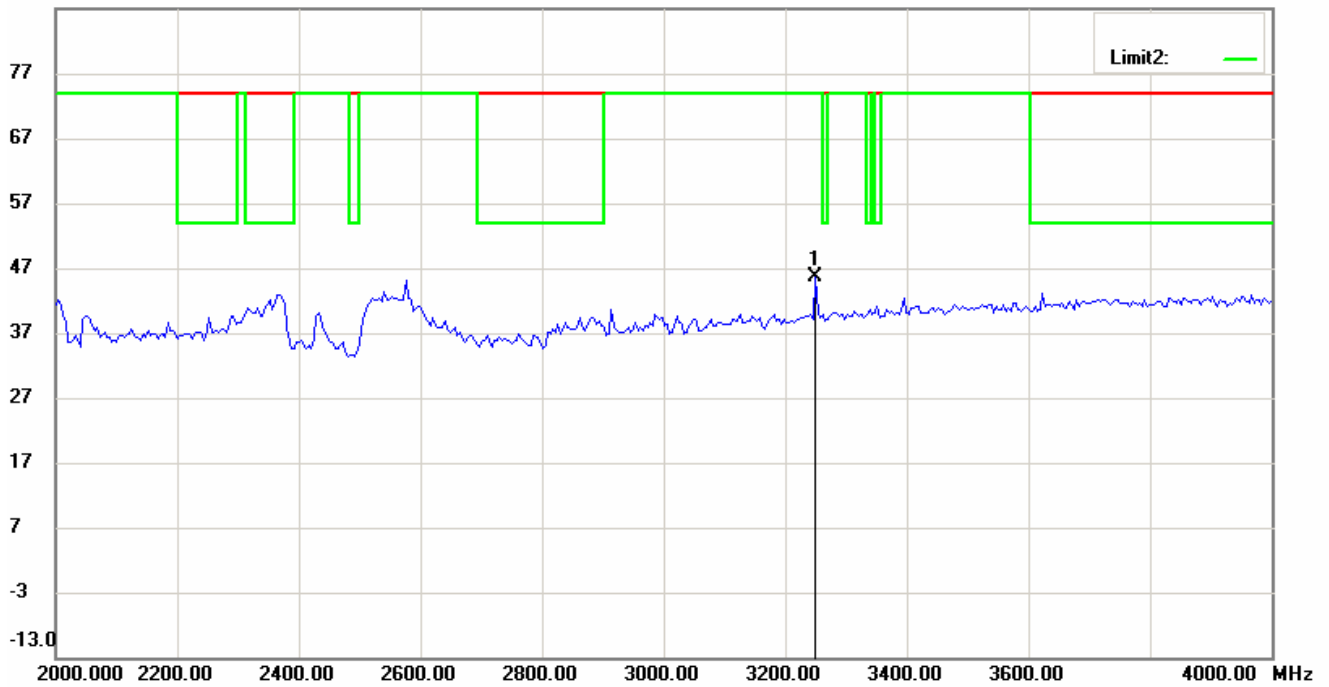


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

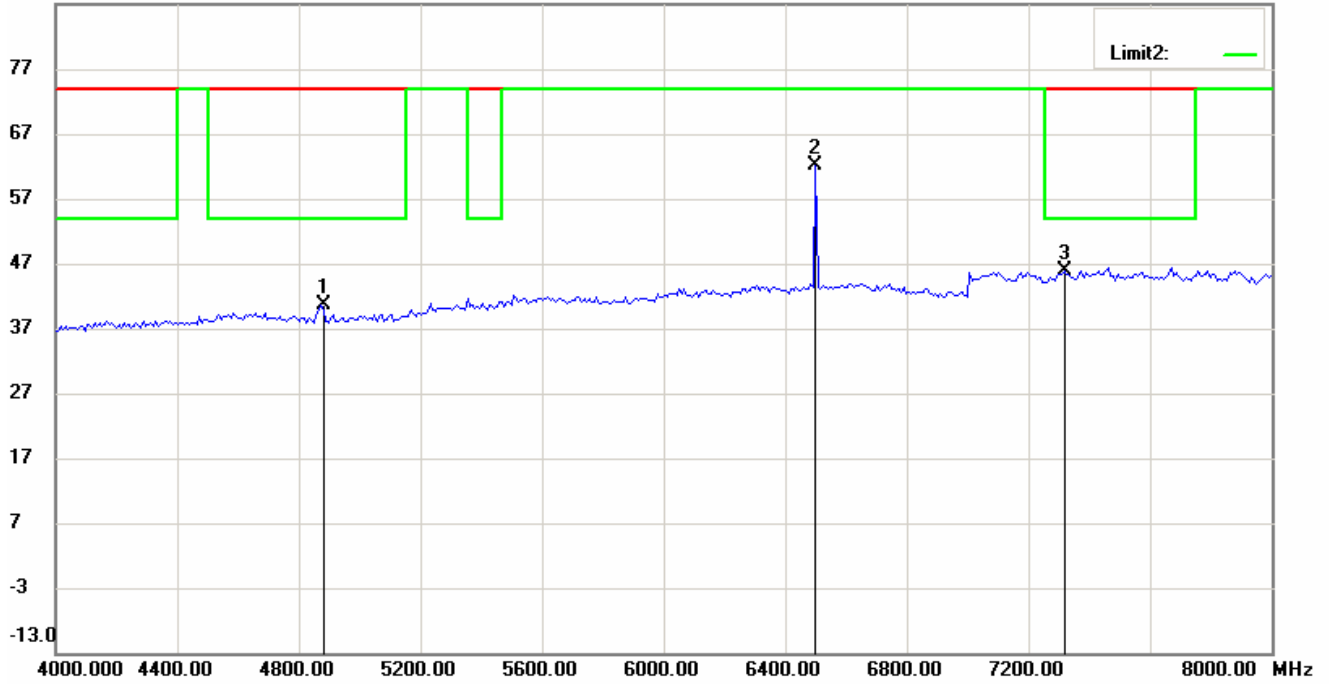


87.0 dBuV/m

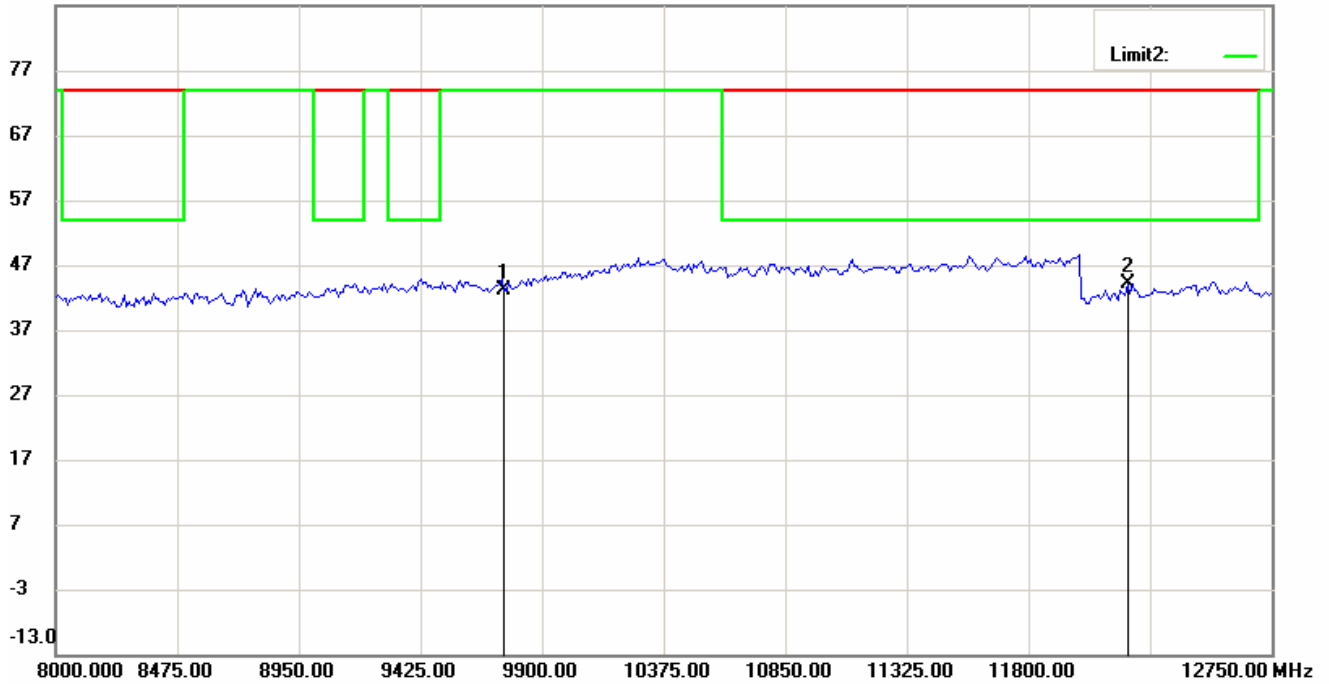


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


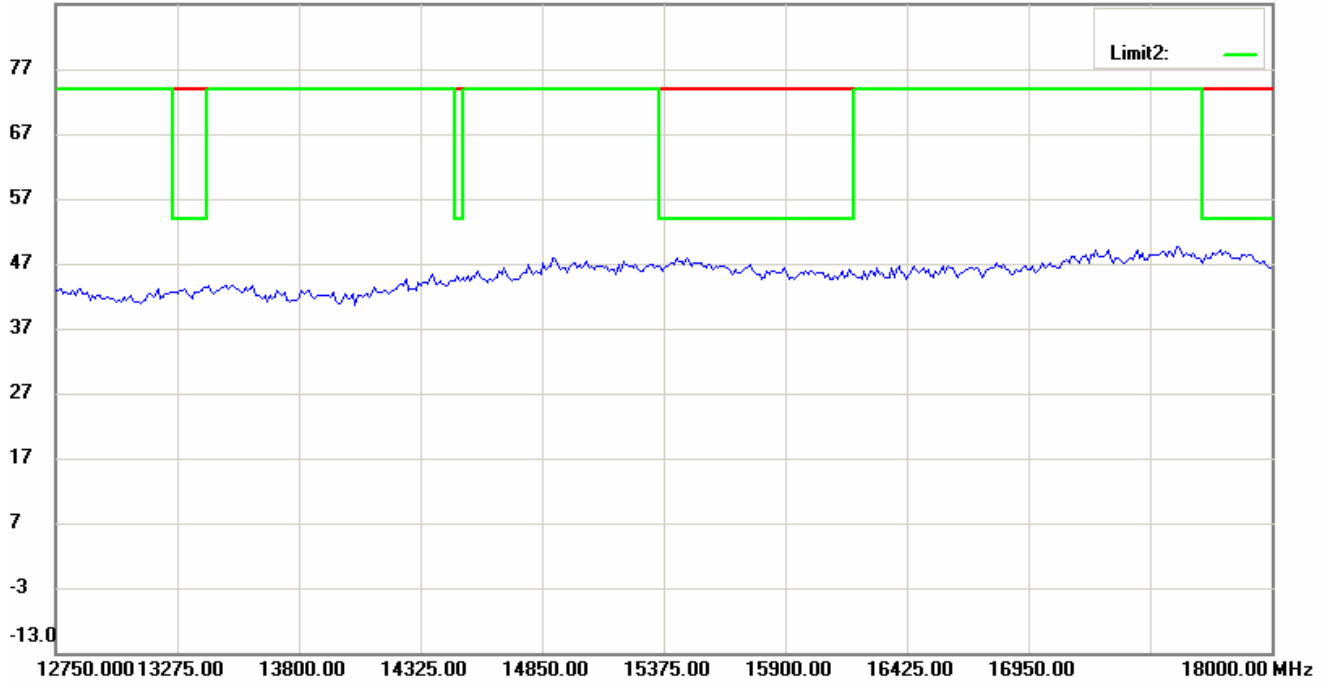


87.0 dBuV/m

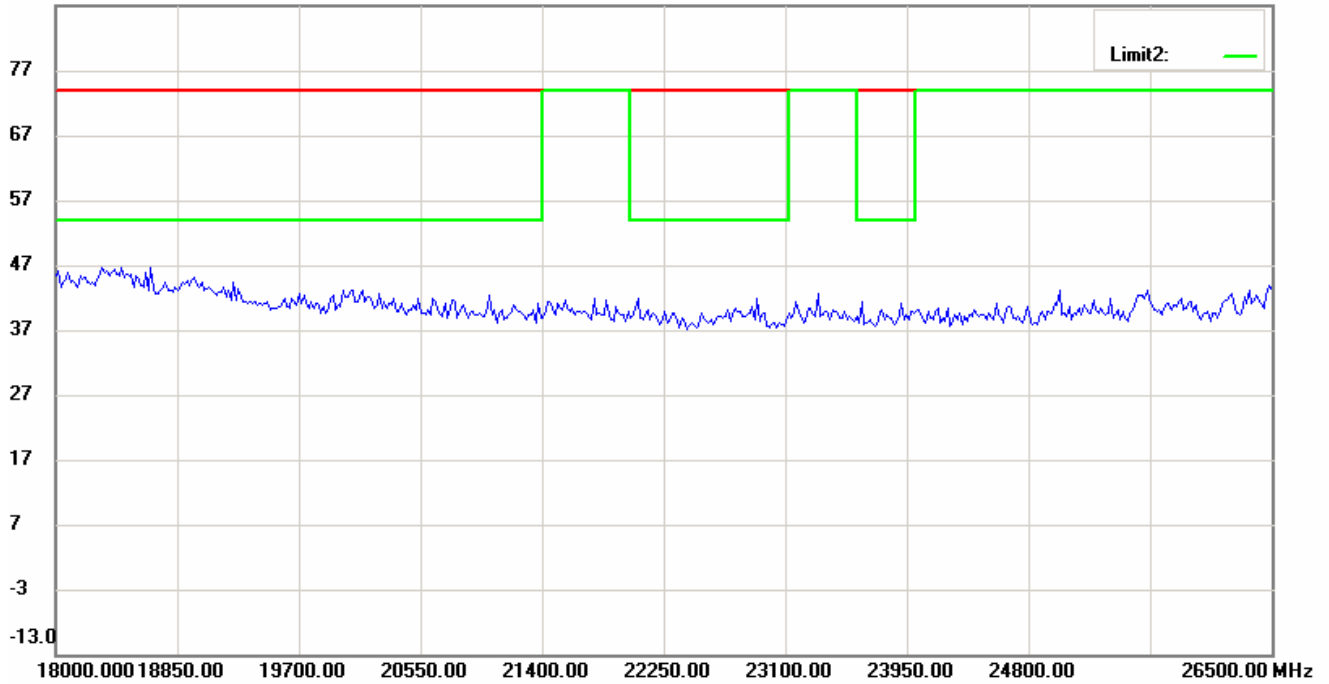

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11n(20MHz)\_Ch11 Antenna Polarization H

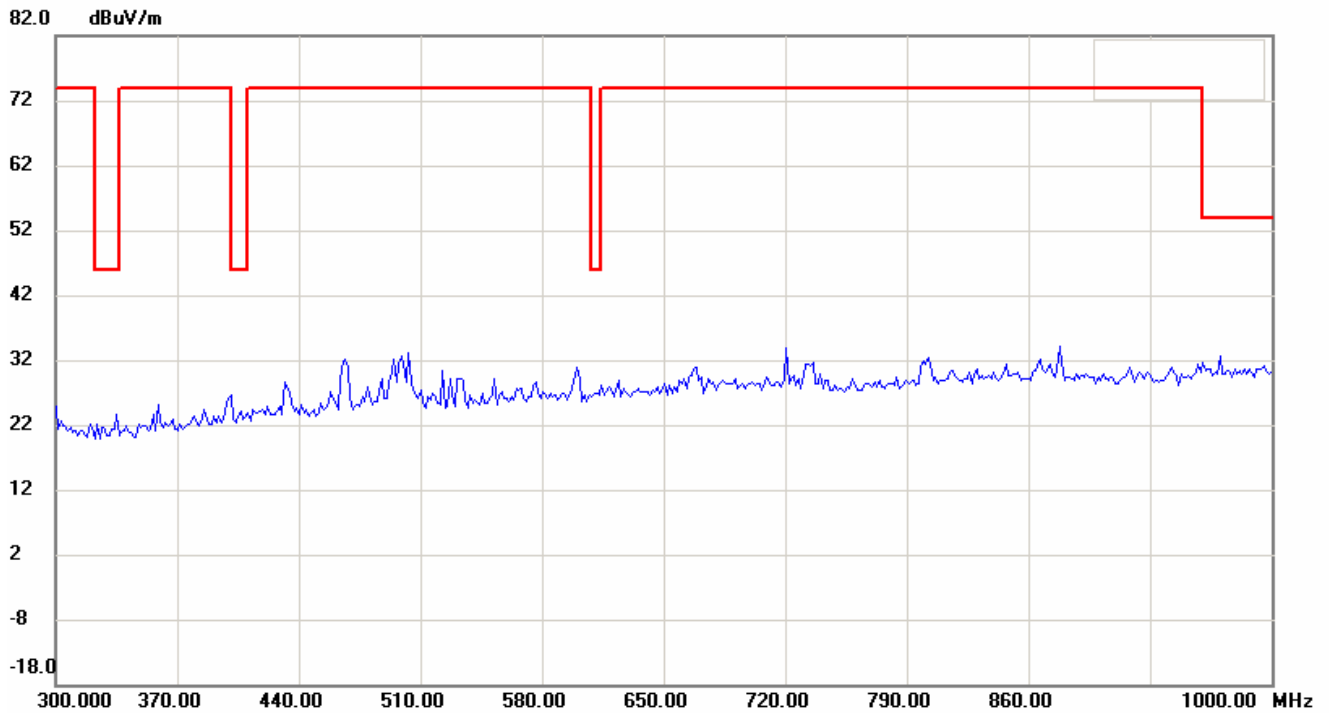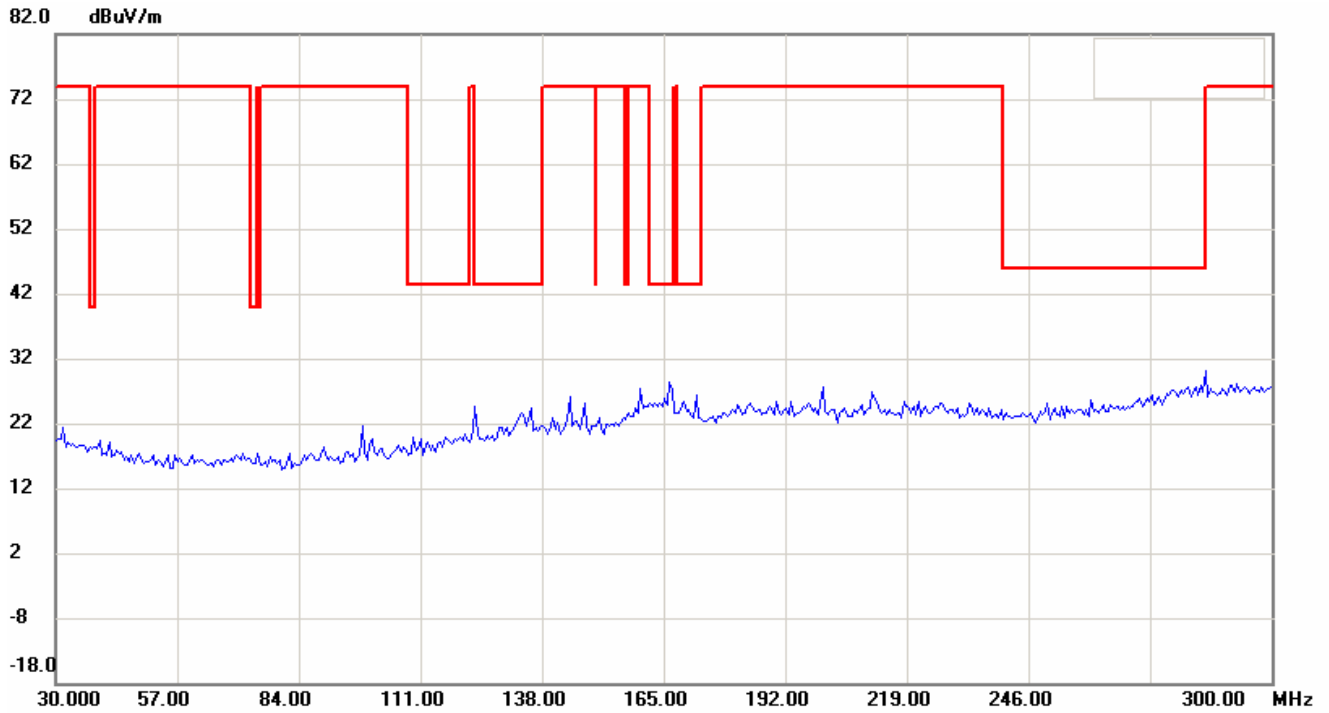


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

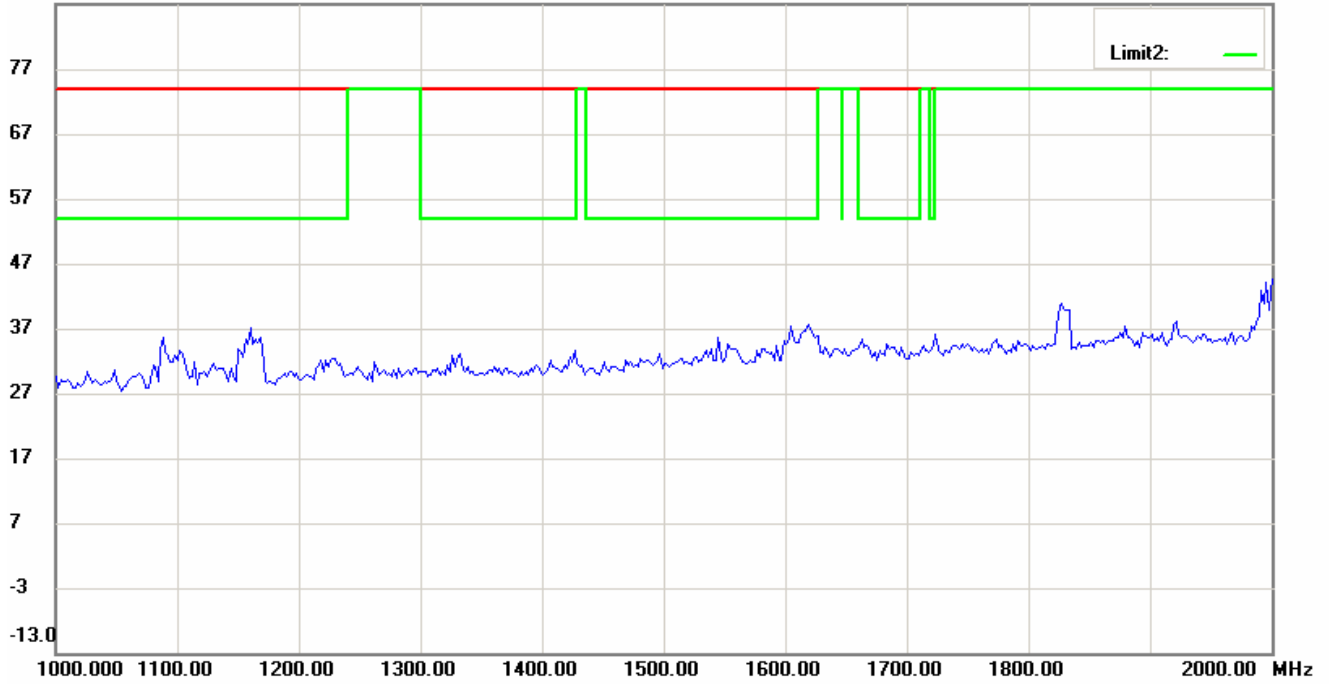


87.0 dBuV/m

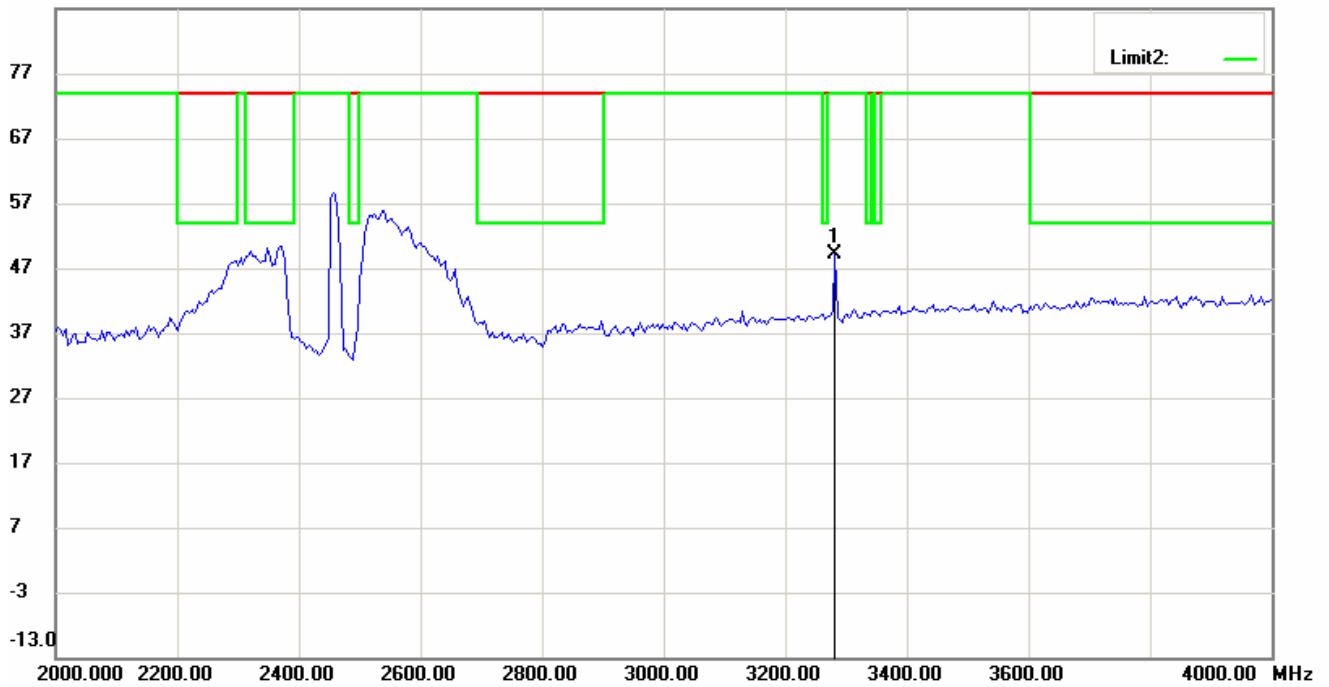


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

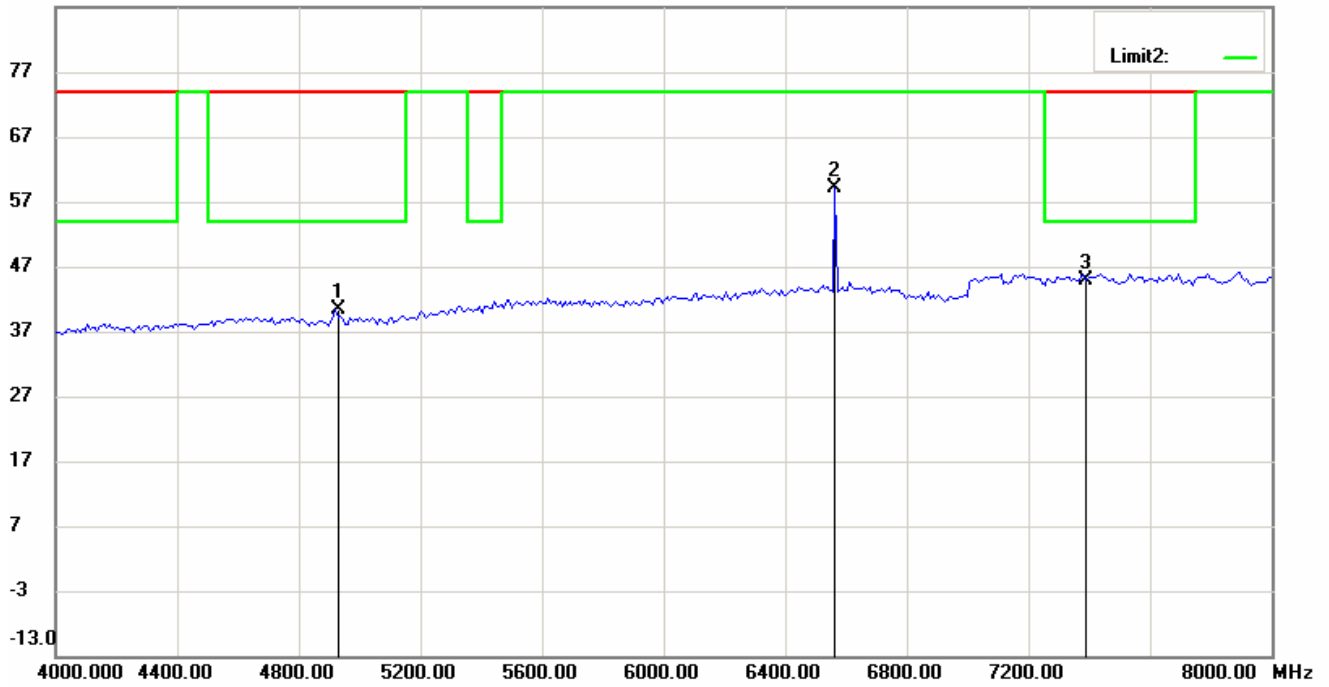


87.0 dBuV/m

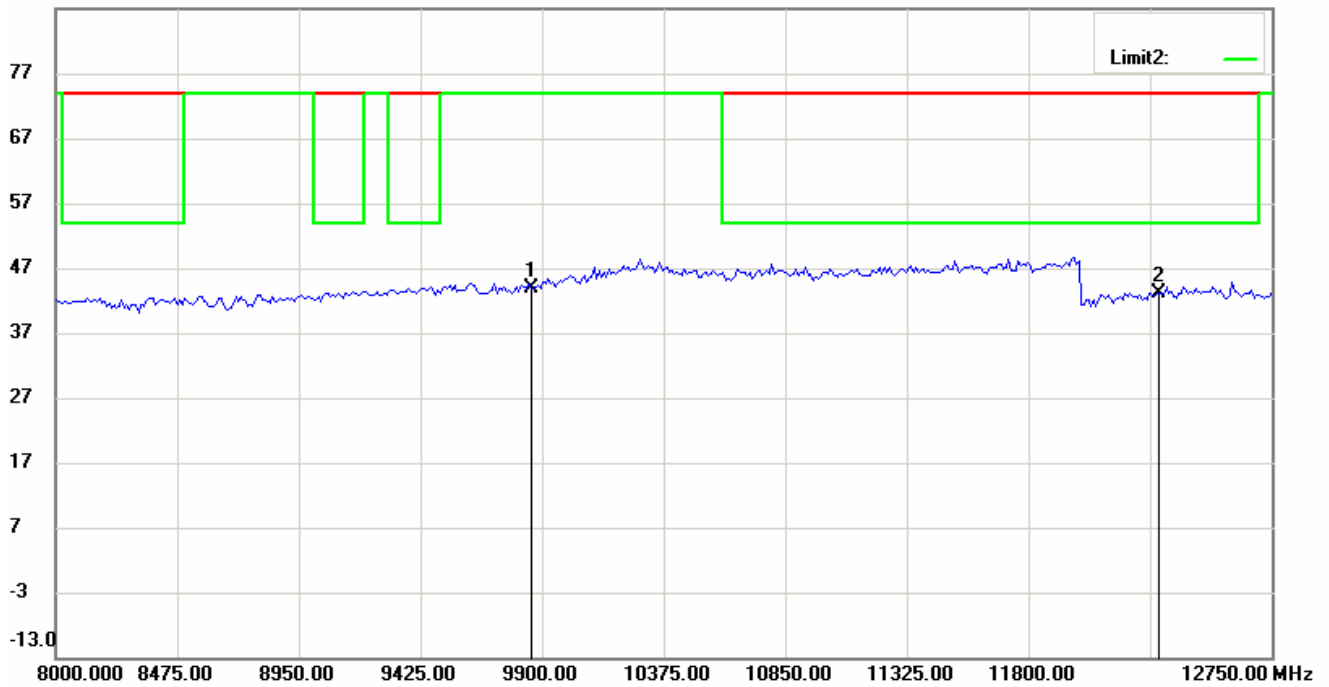


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


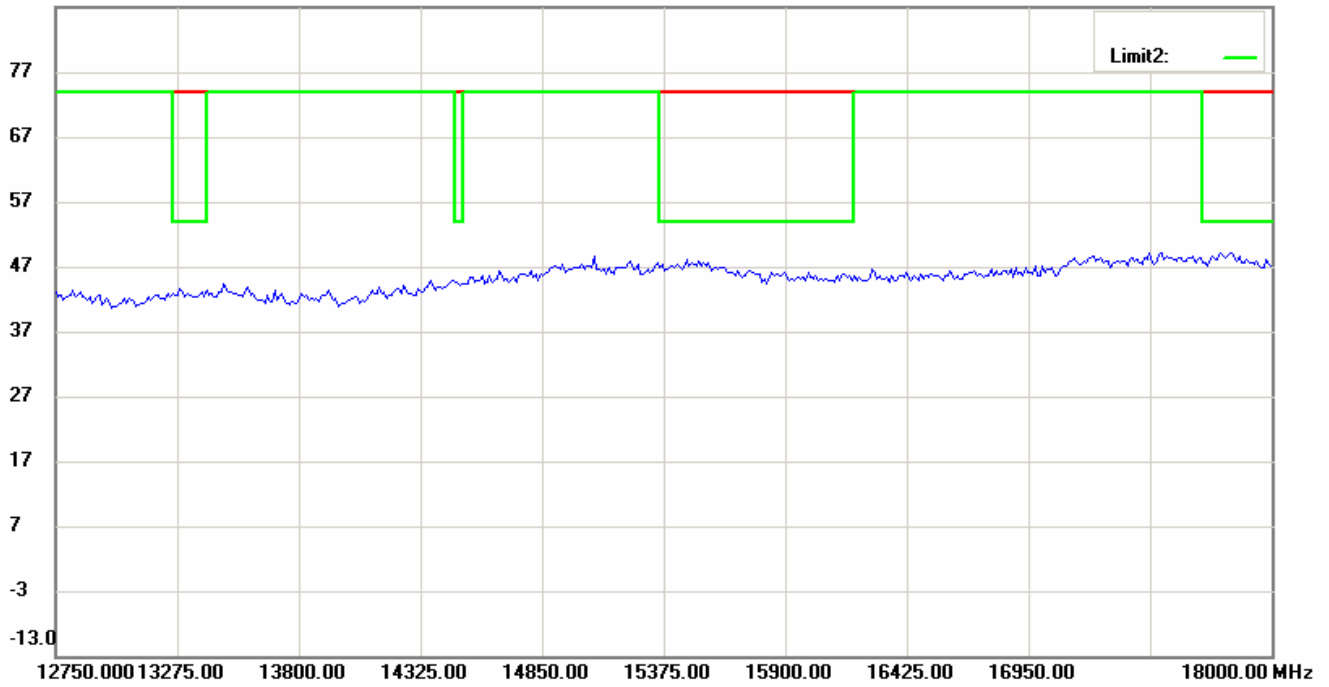


87.0 dBuV/m

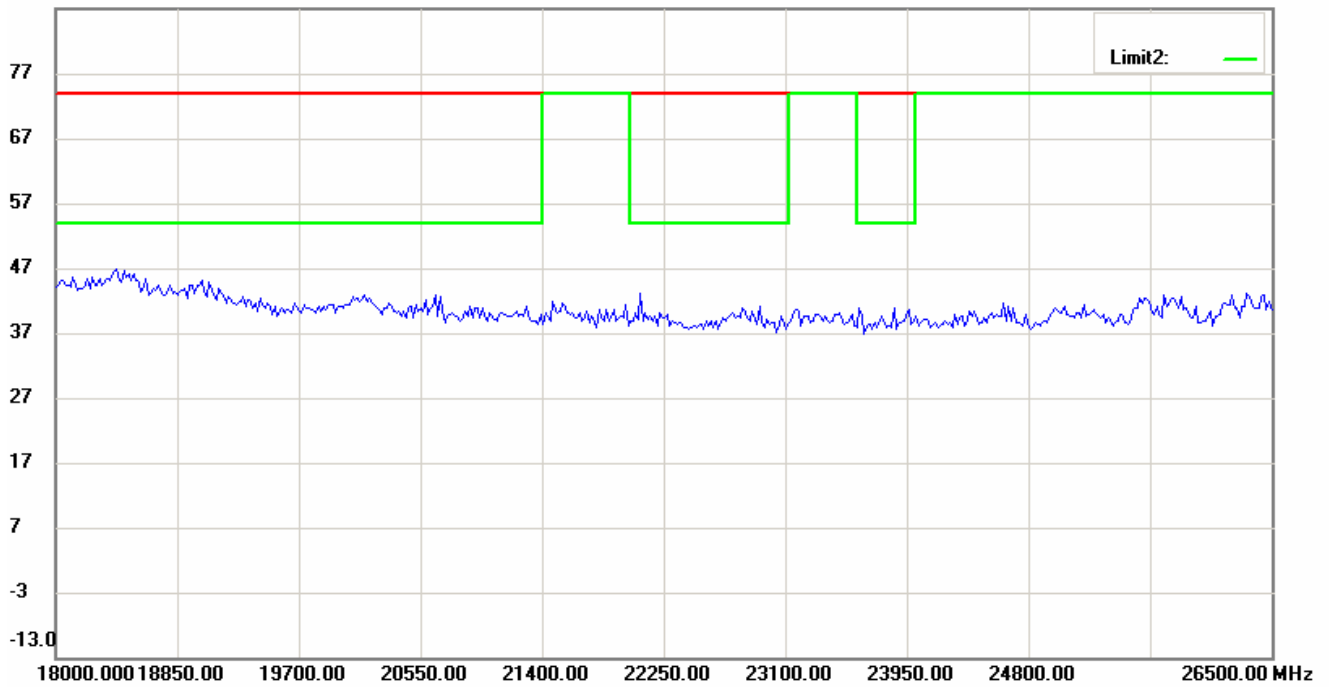

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

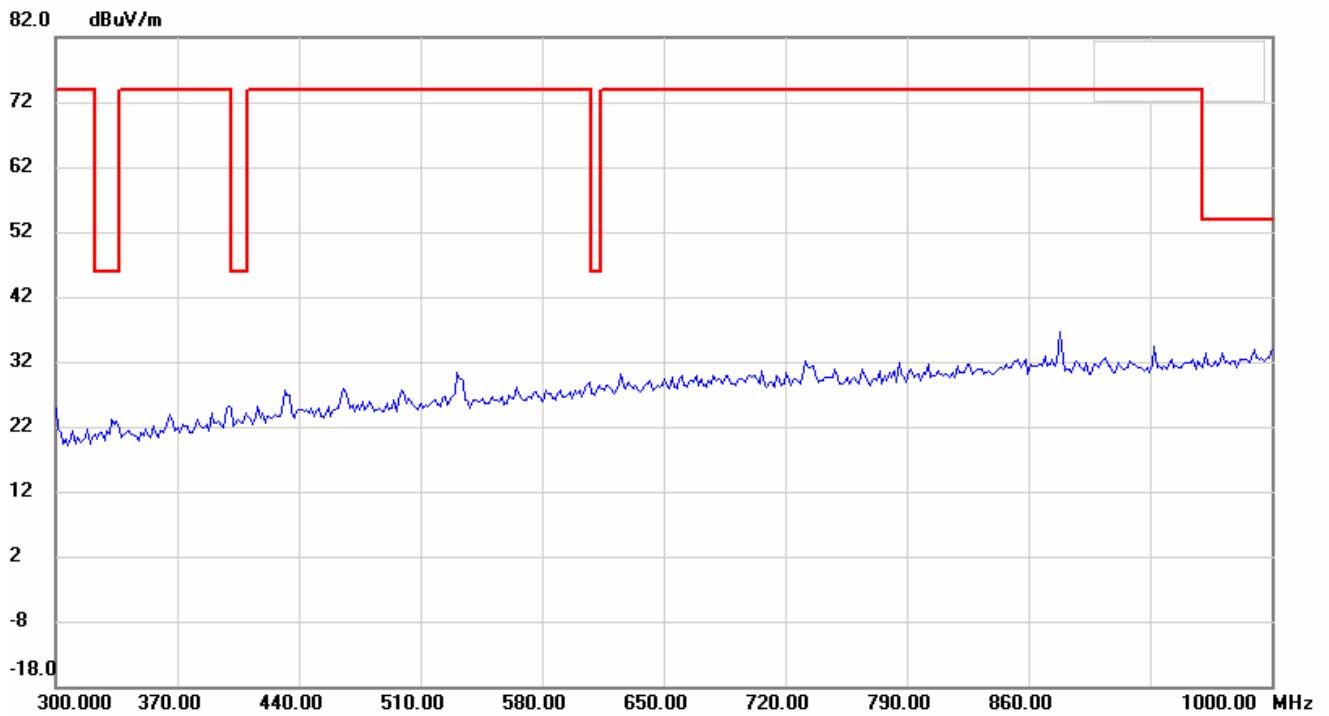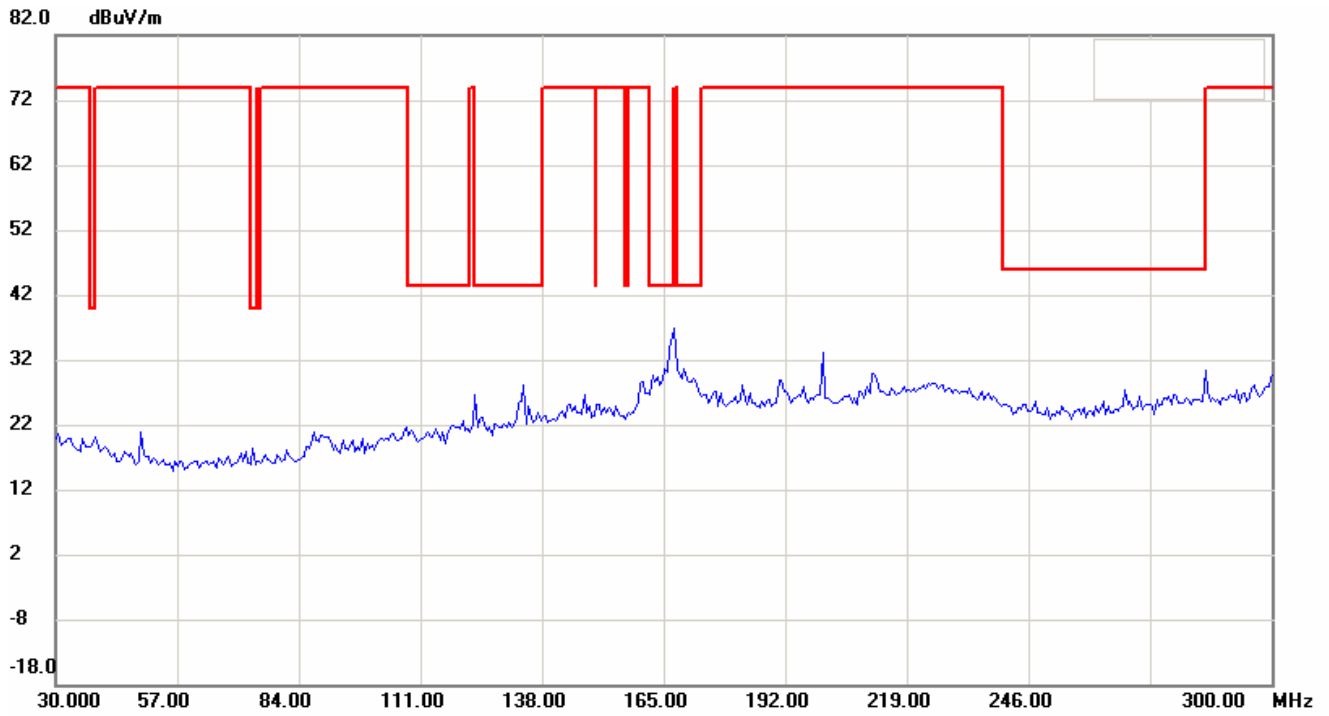





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

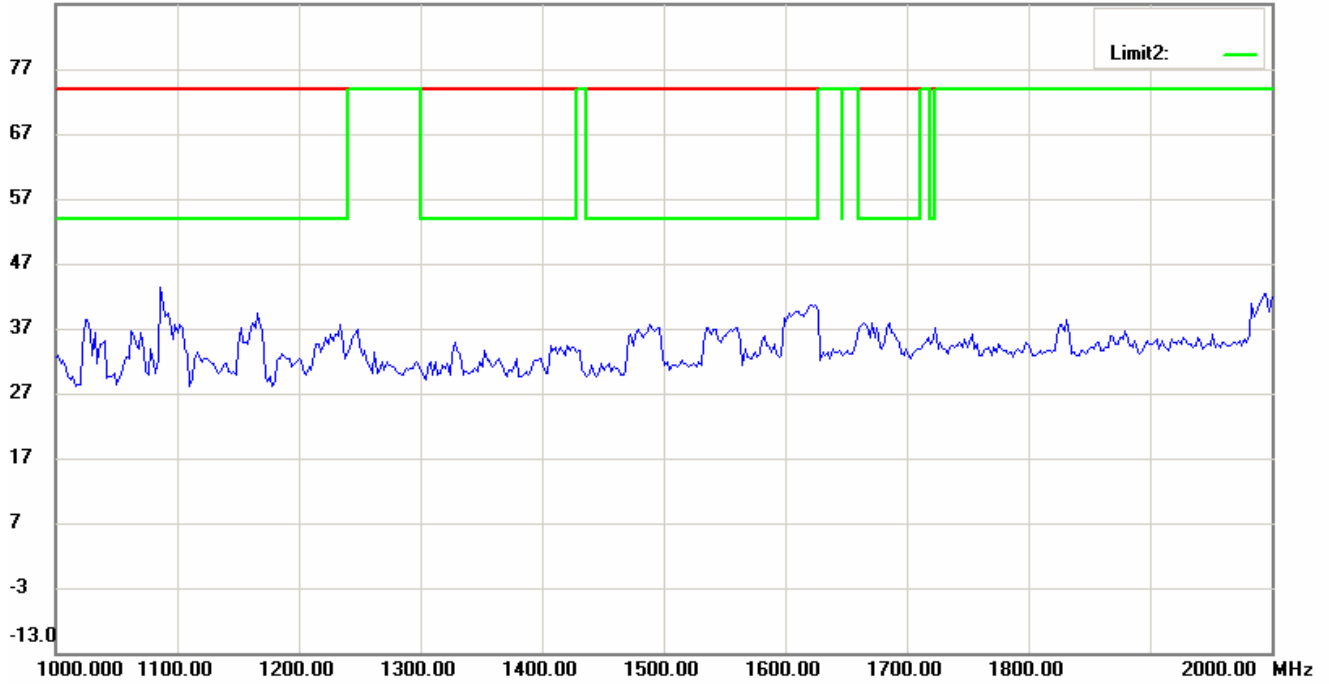


87.0 dBuV/m

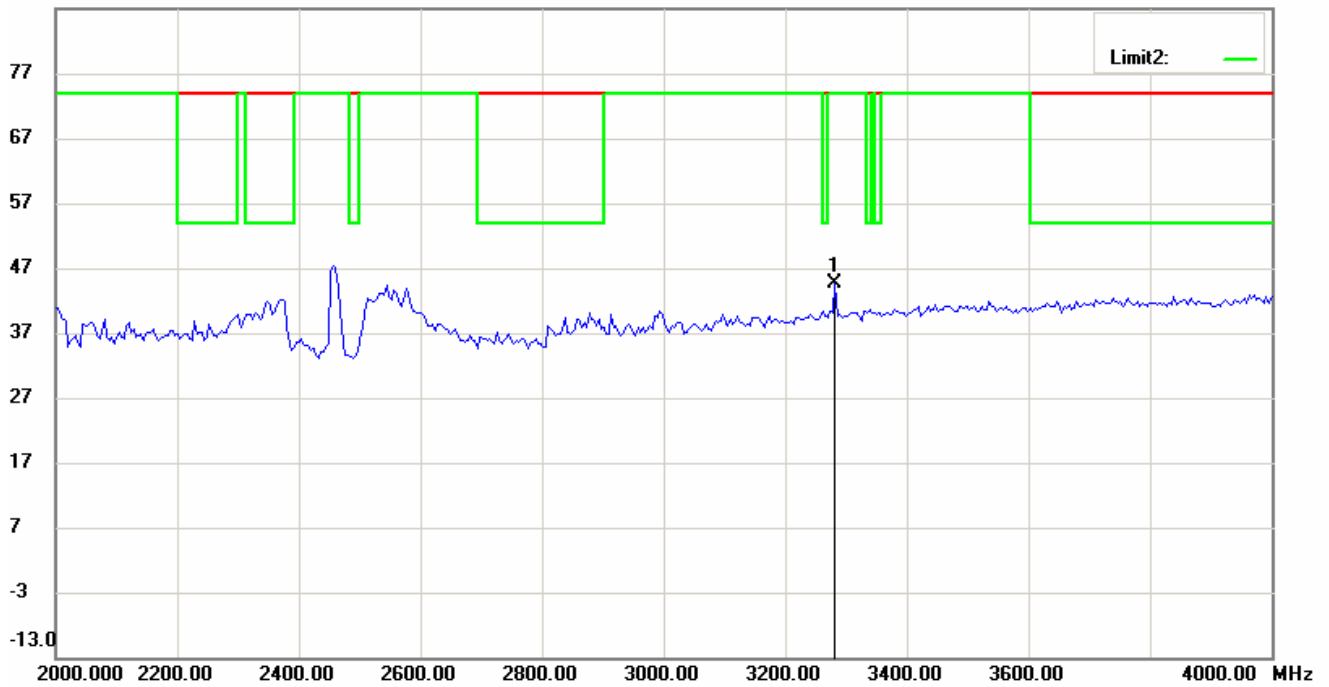


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

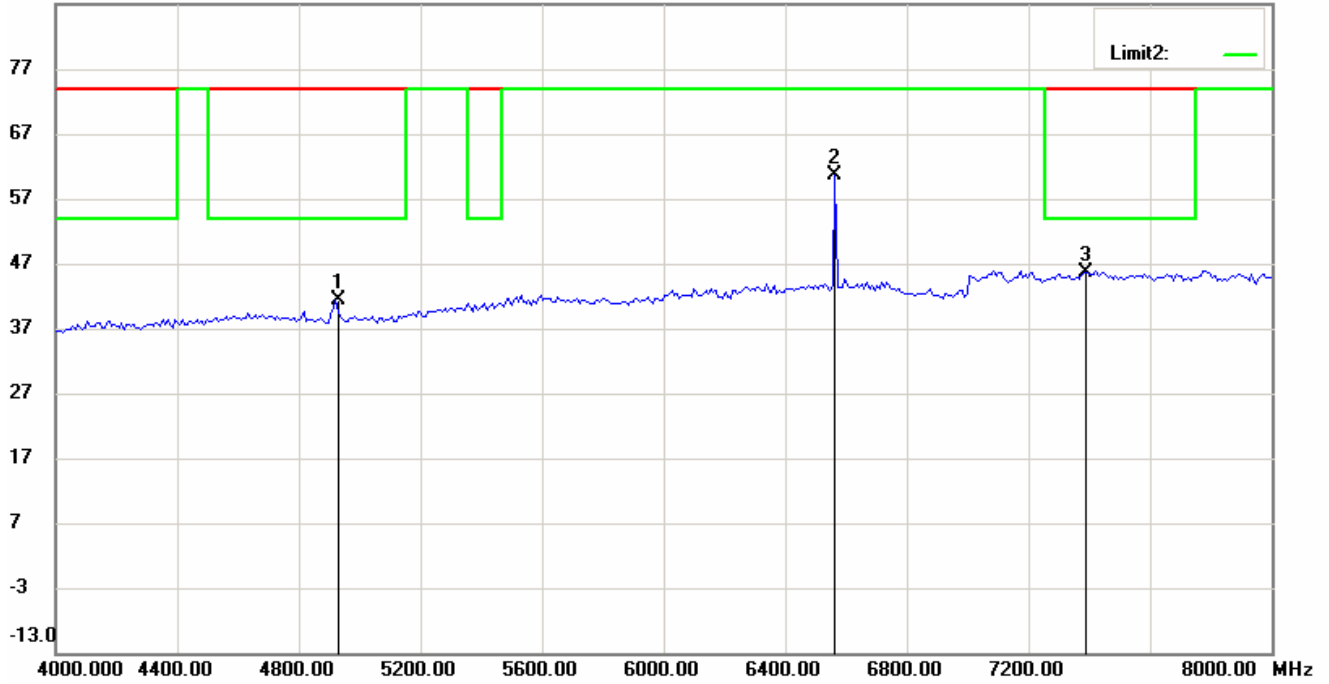


87.0 dBuV/m

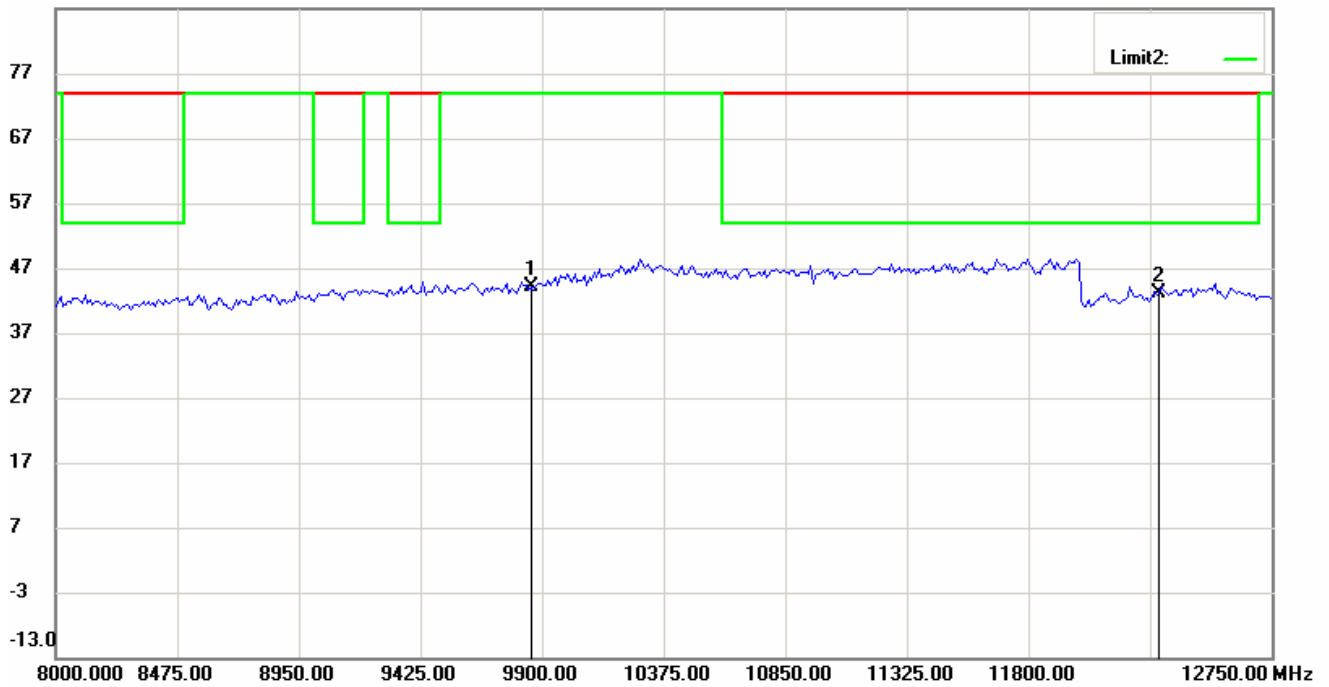


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


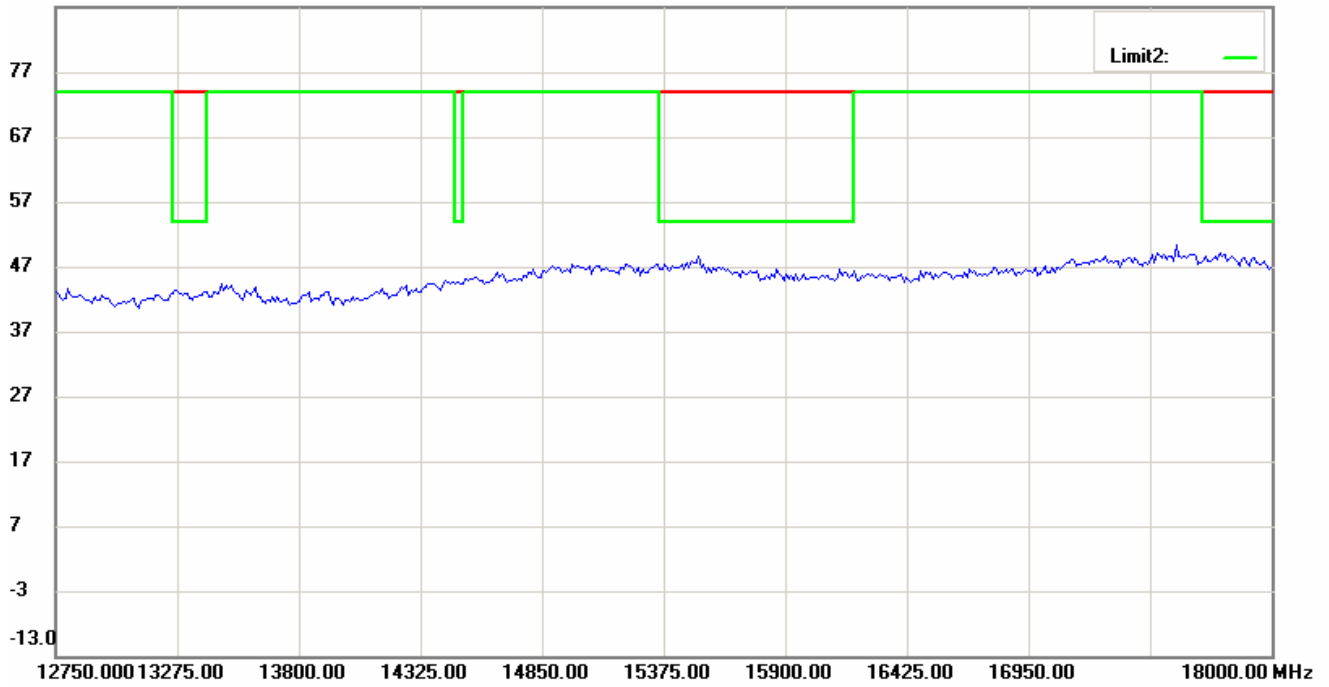


87.0 dBuV/m

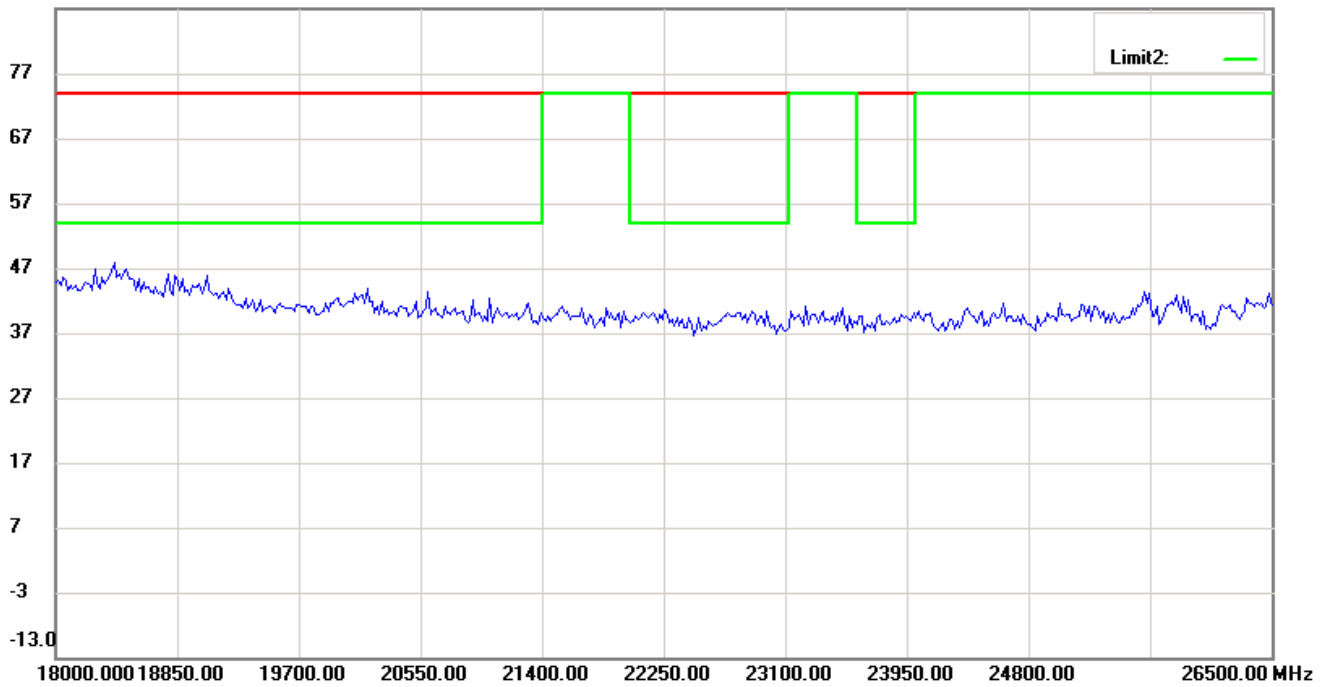

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11n(40MHz)\_Ch1 Antenna Polarization H

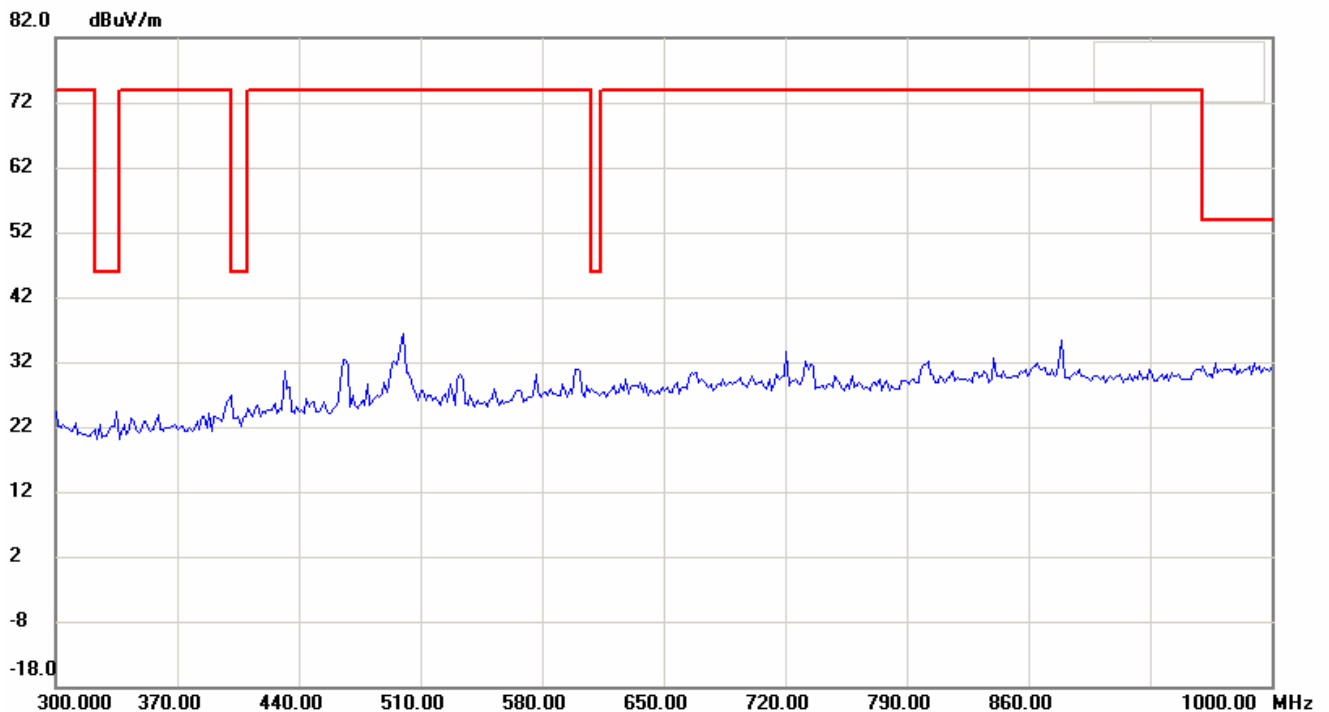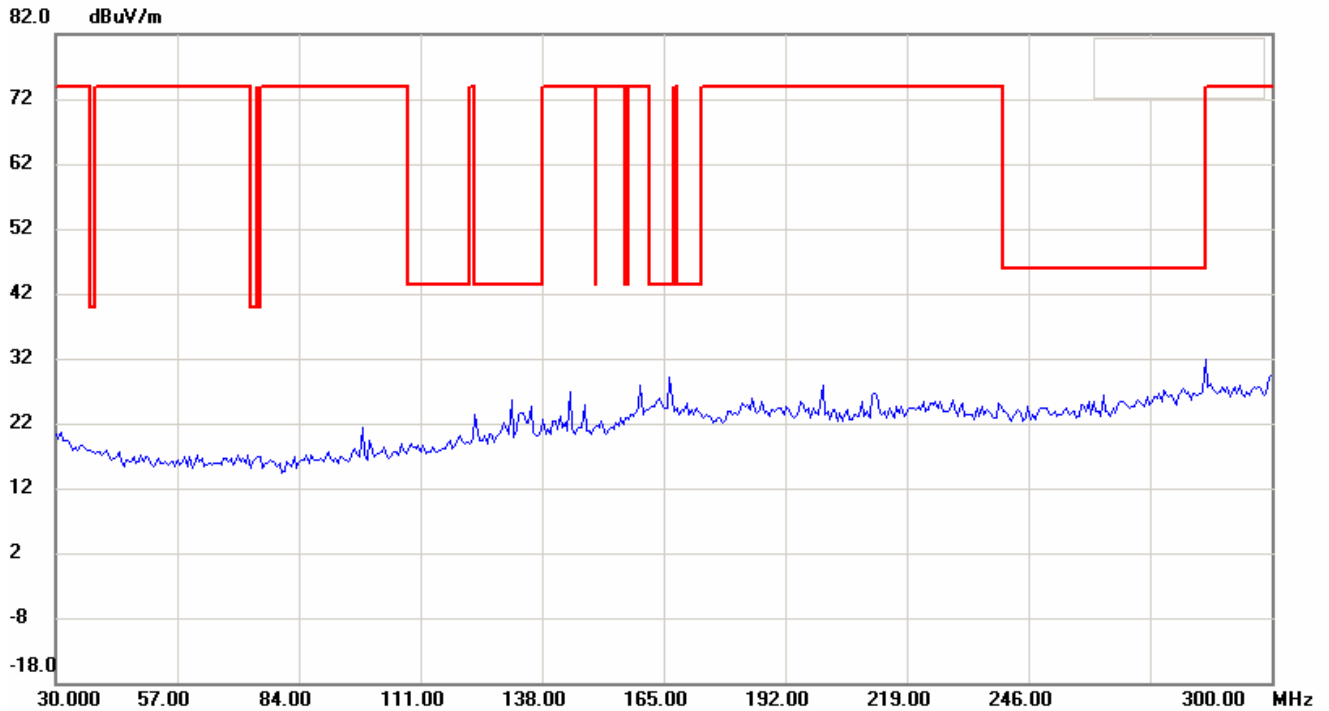


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

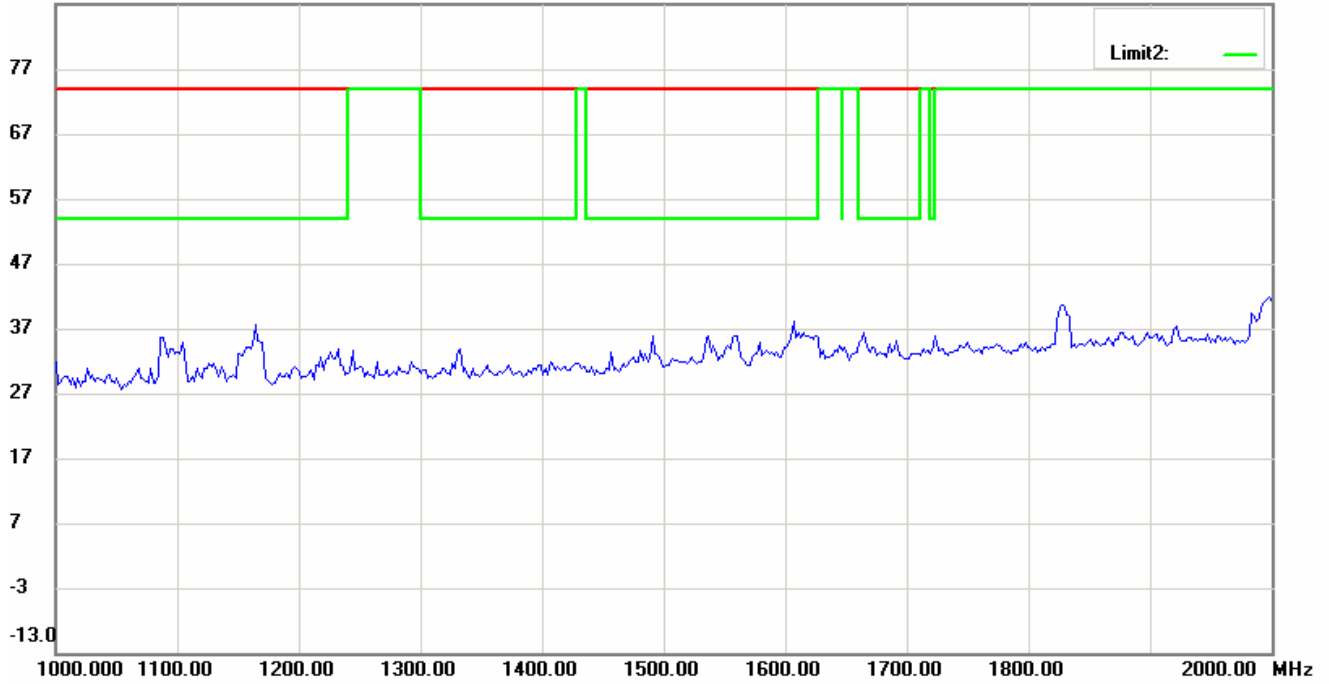


87.0 dBuV/m

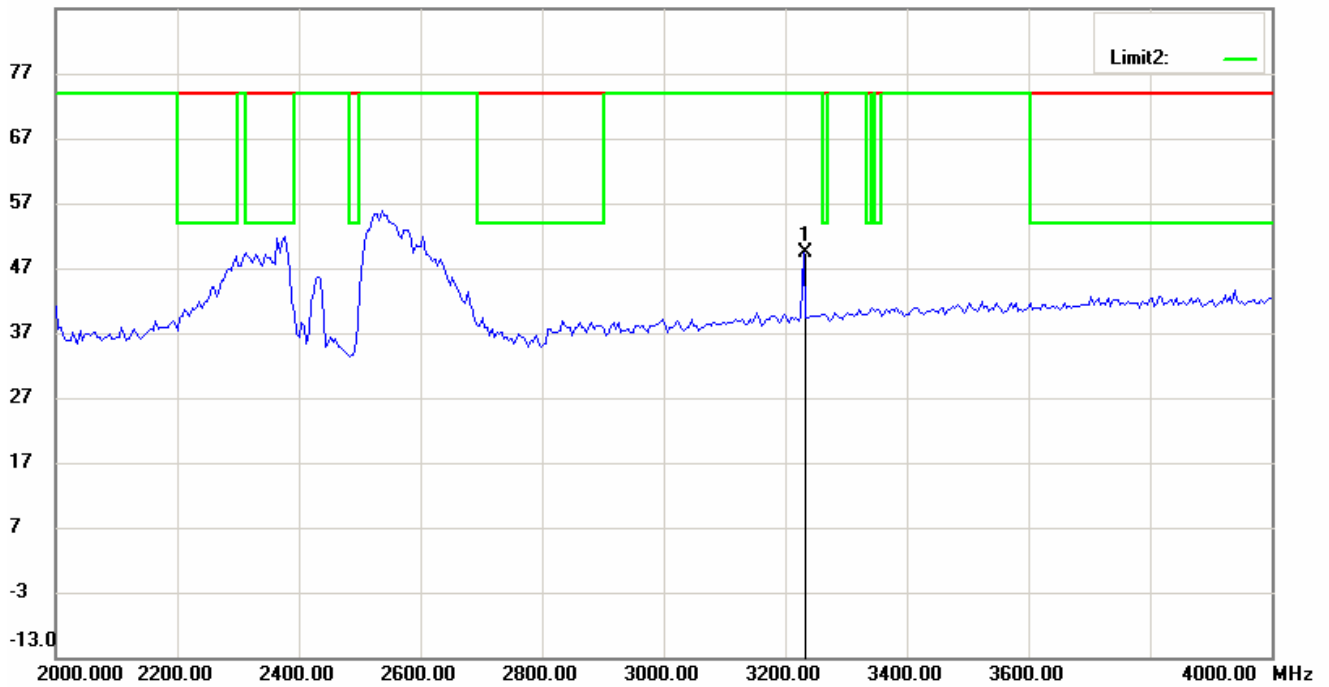


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

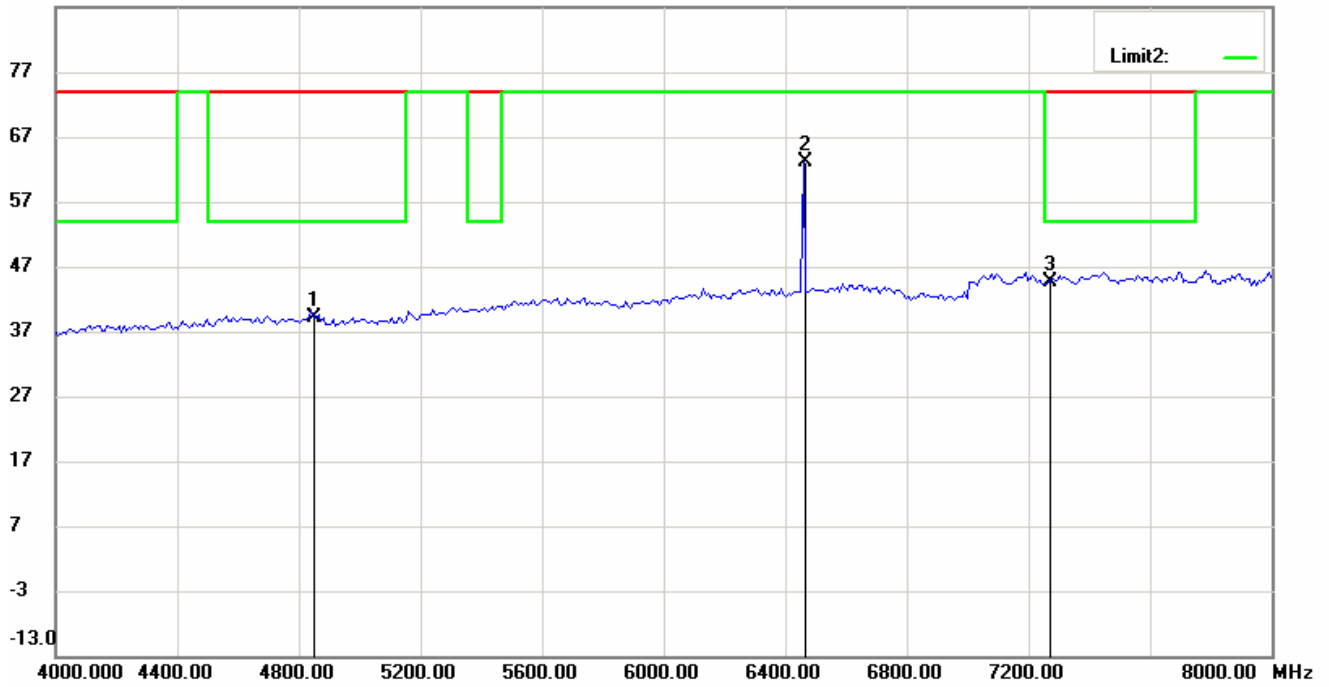


87.0 dBuV/m

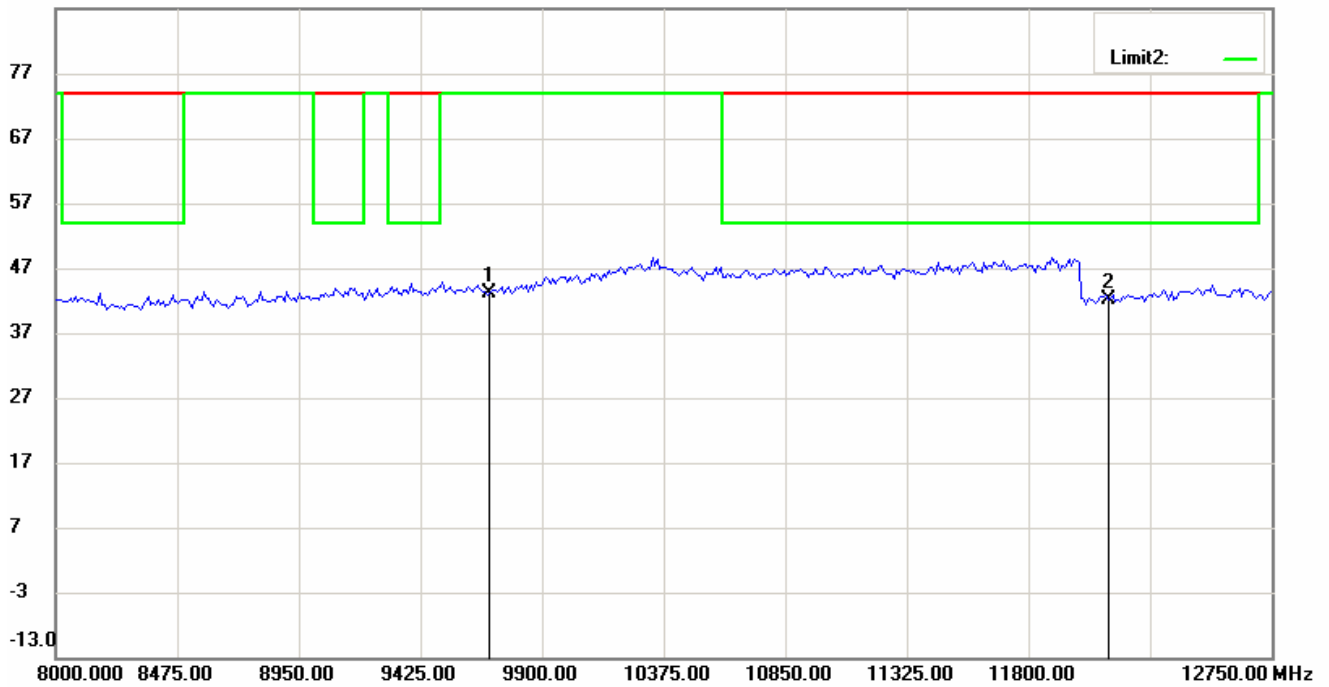


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


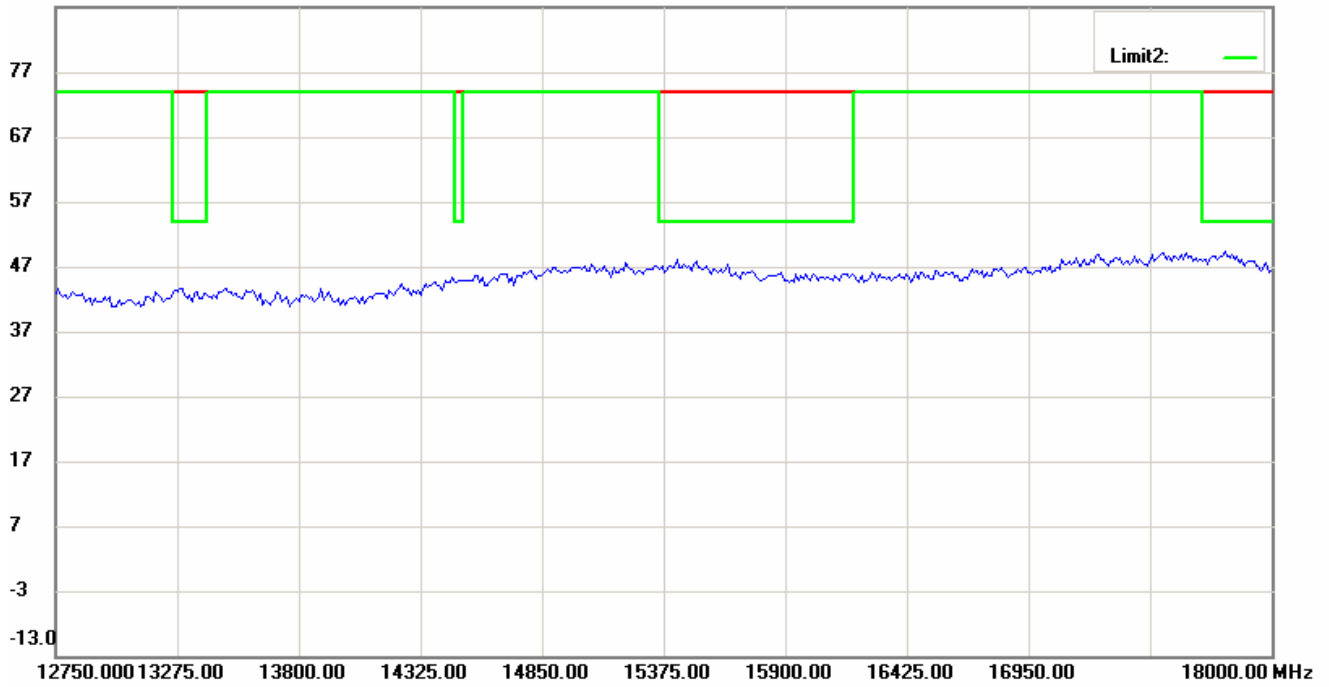


87.0 dBuV/m

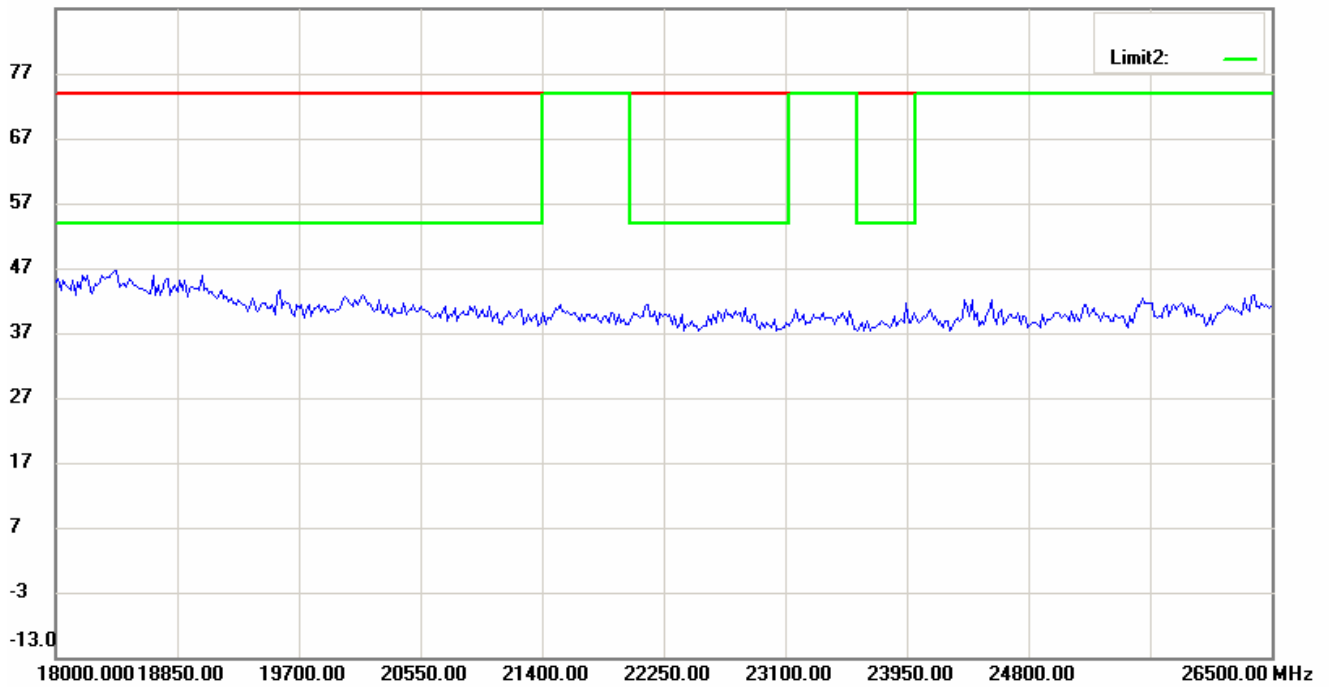

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Antenna Polarization V

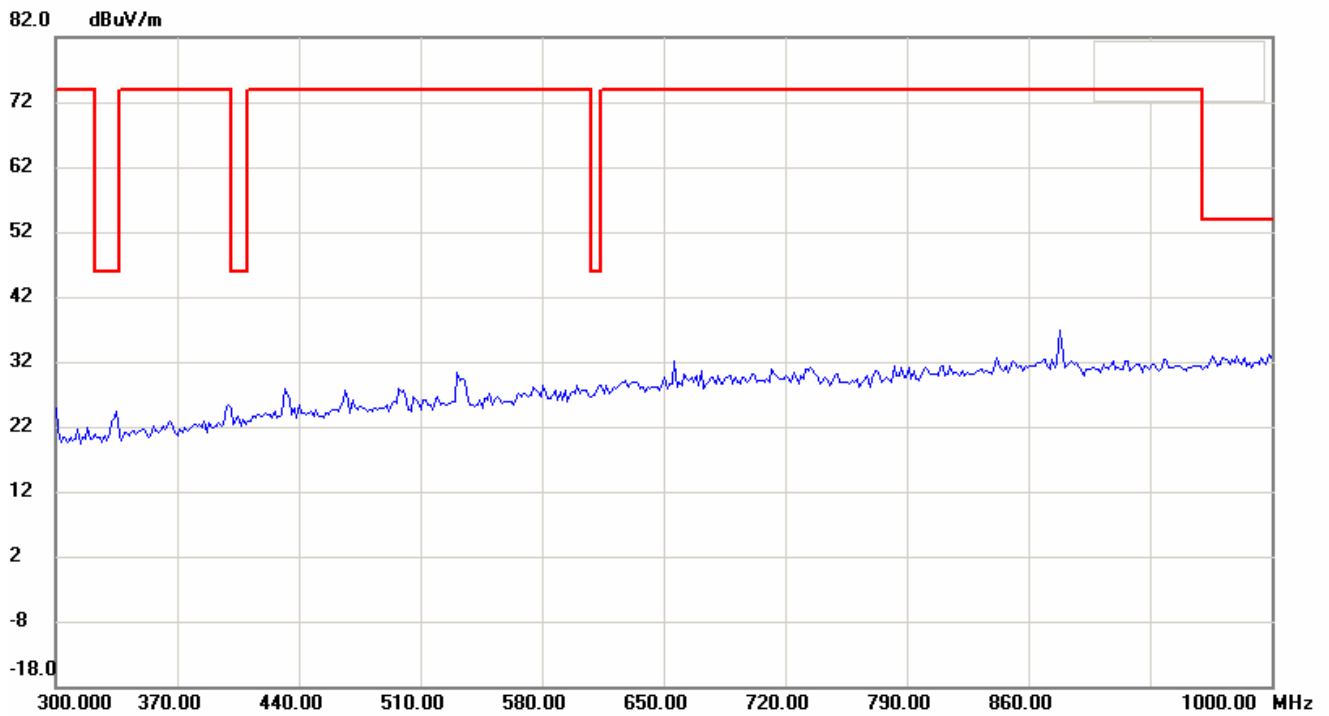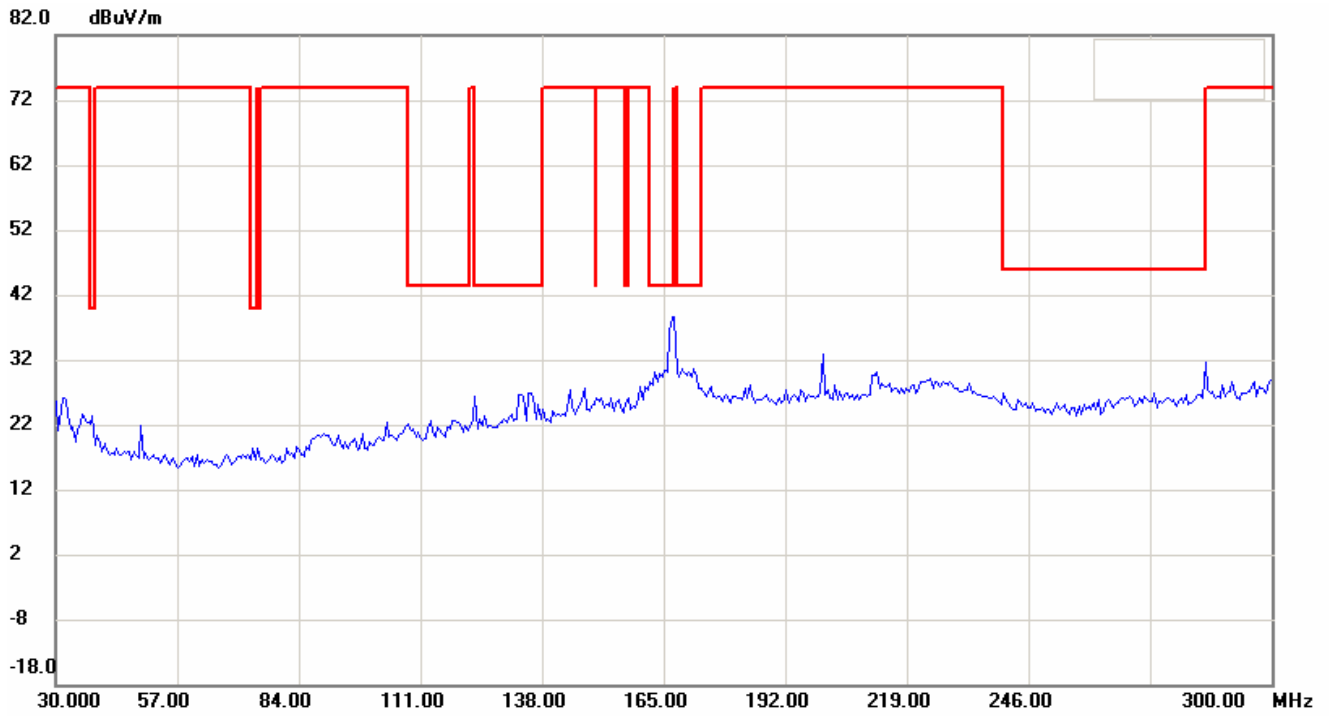





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

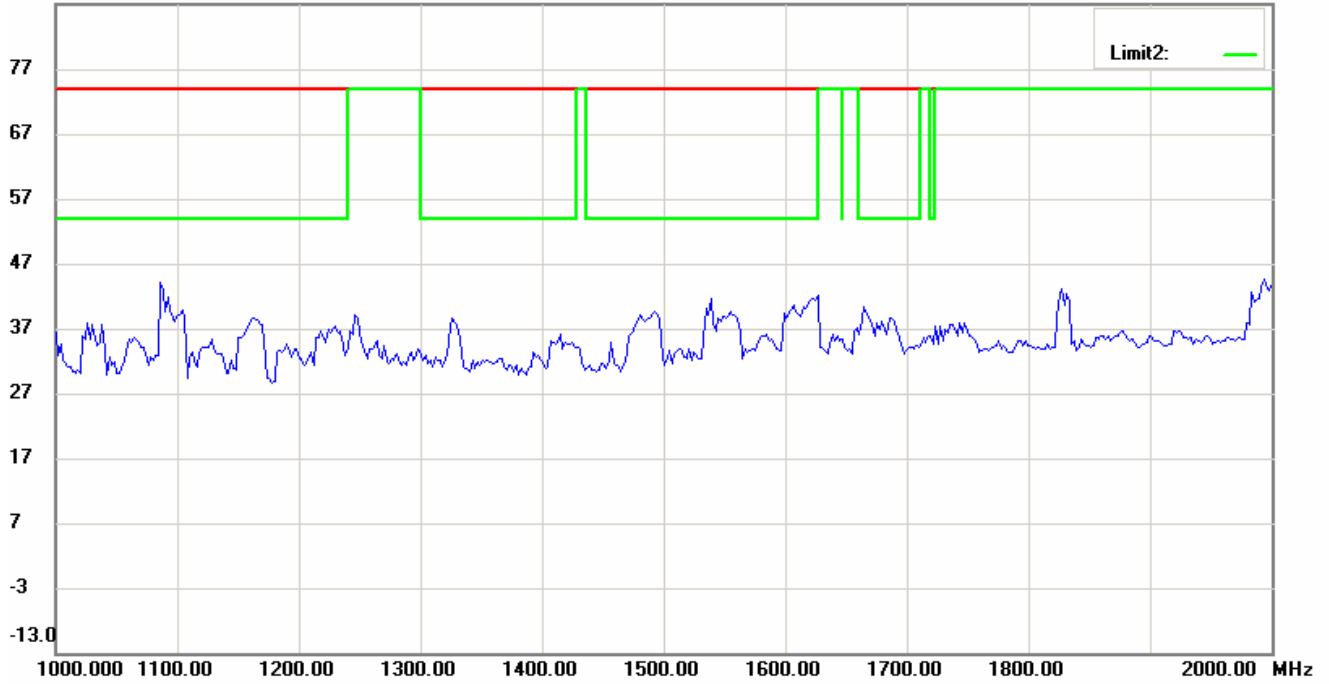


87.0 dBuV/m

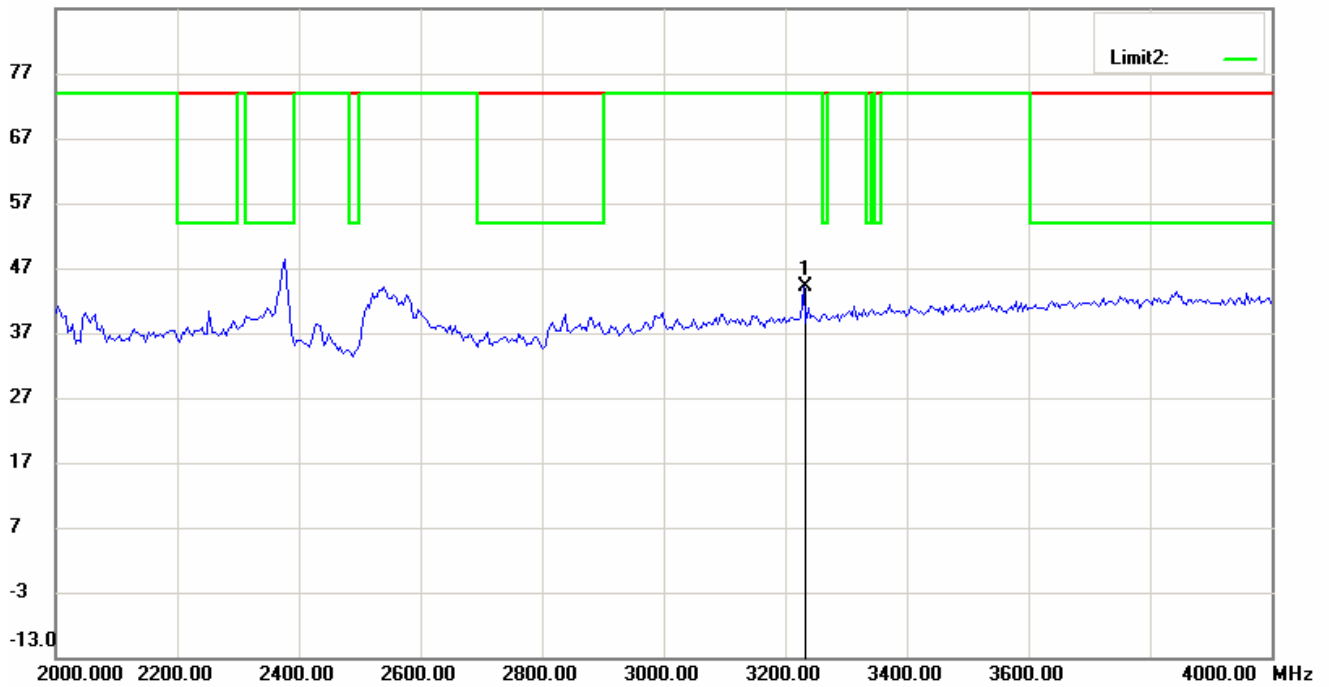


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

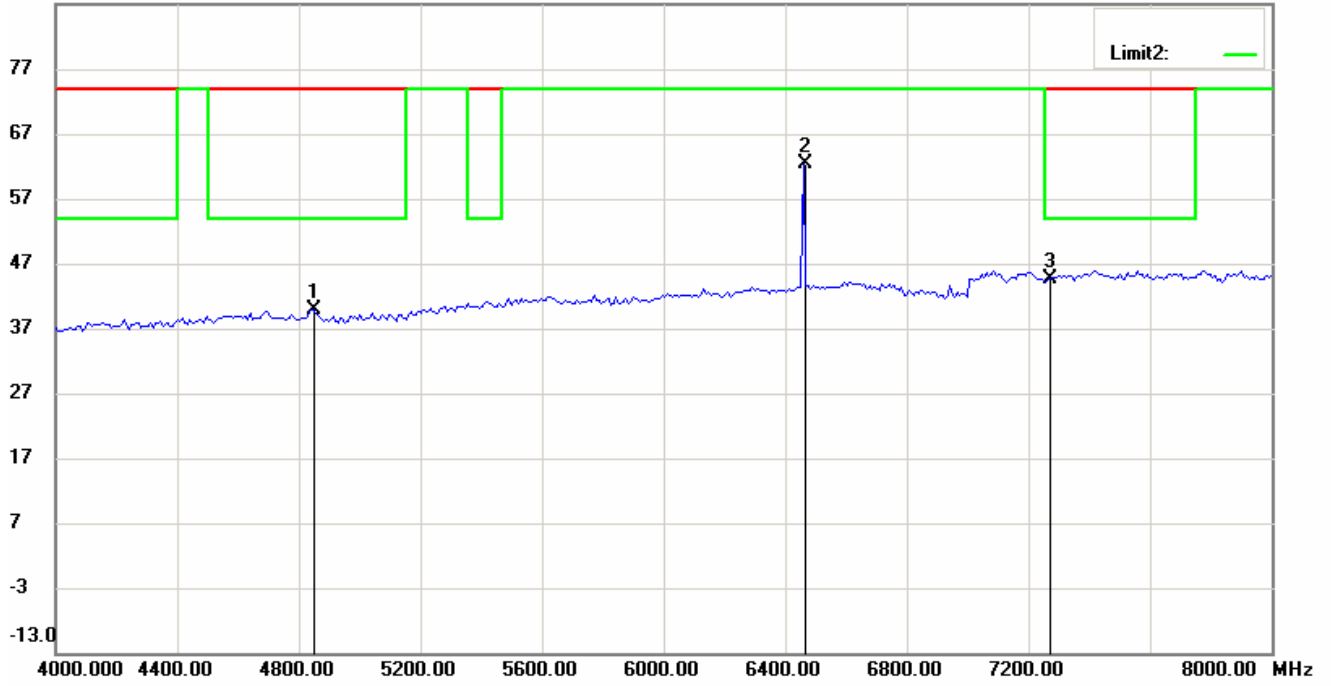


87.0 dBuV/m

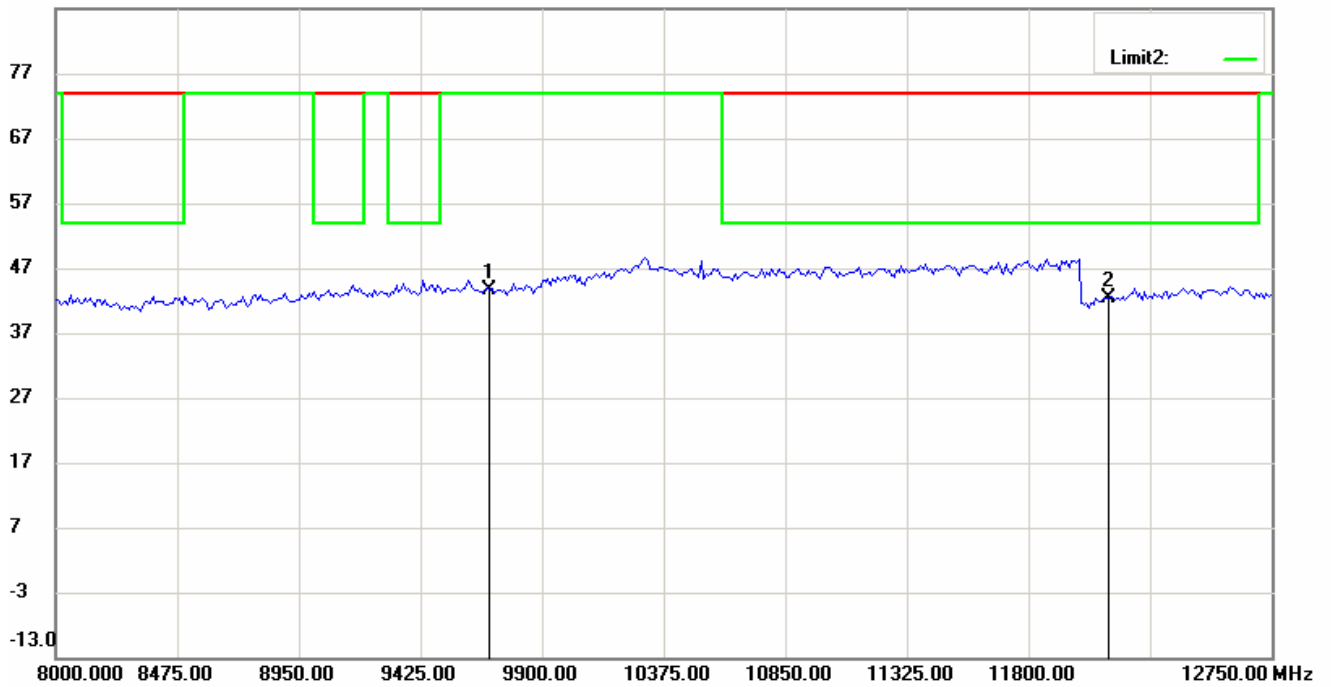


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

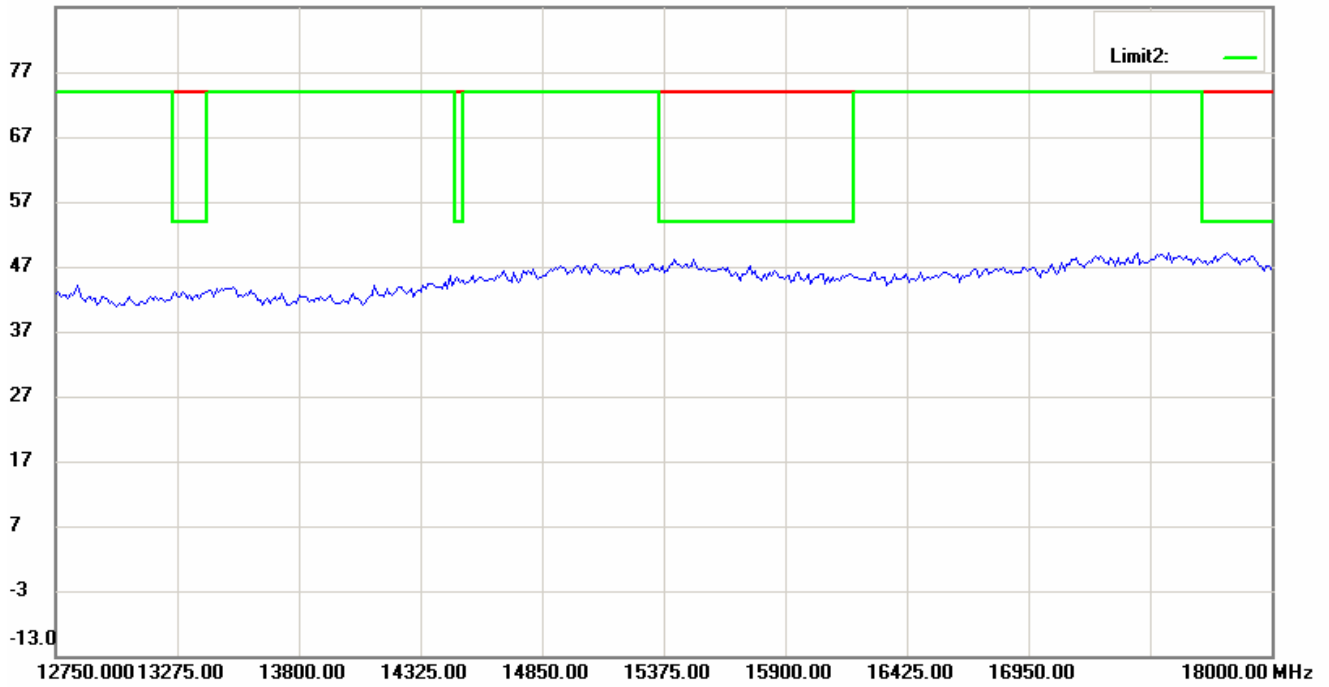

87.0 dBuV/m


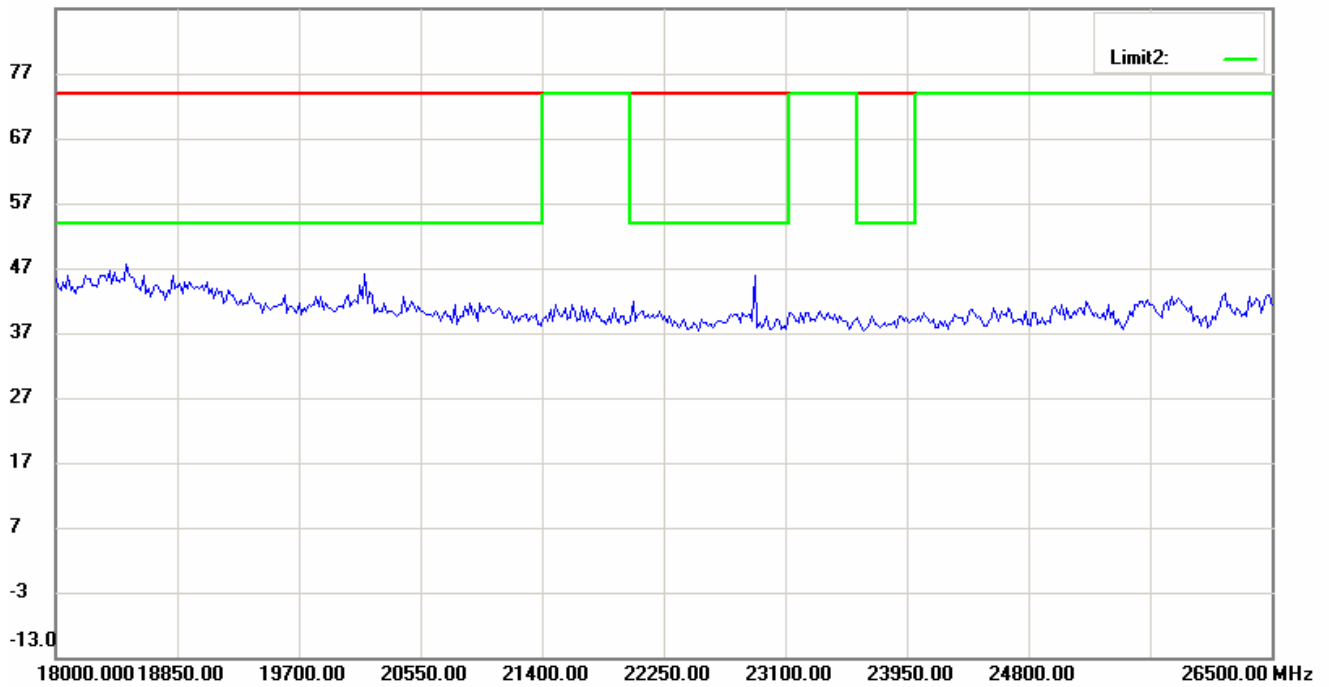


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

11n(40MHz)\_Ch4


### Antenna Polarization H

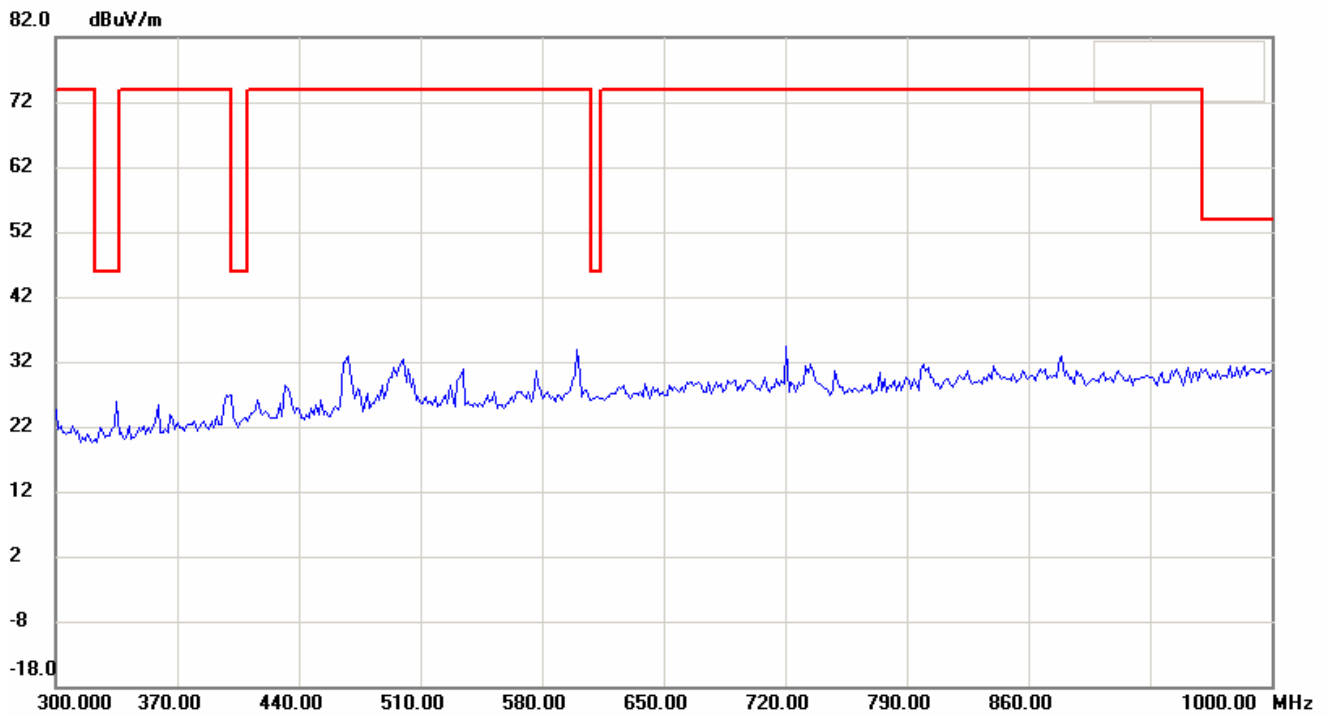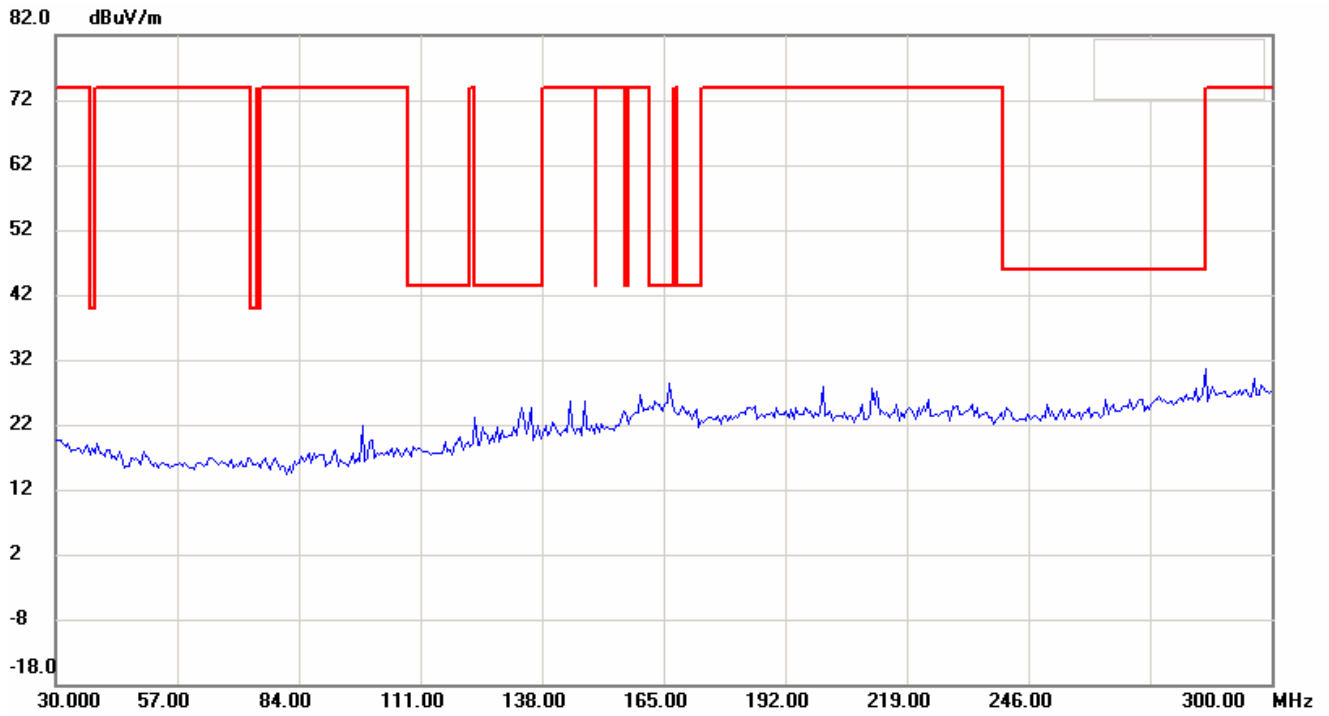


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

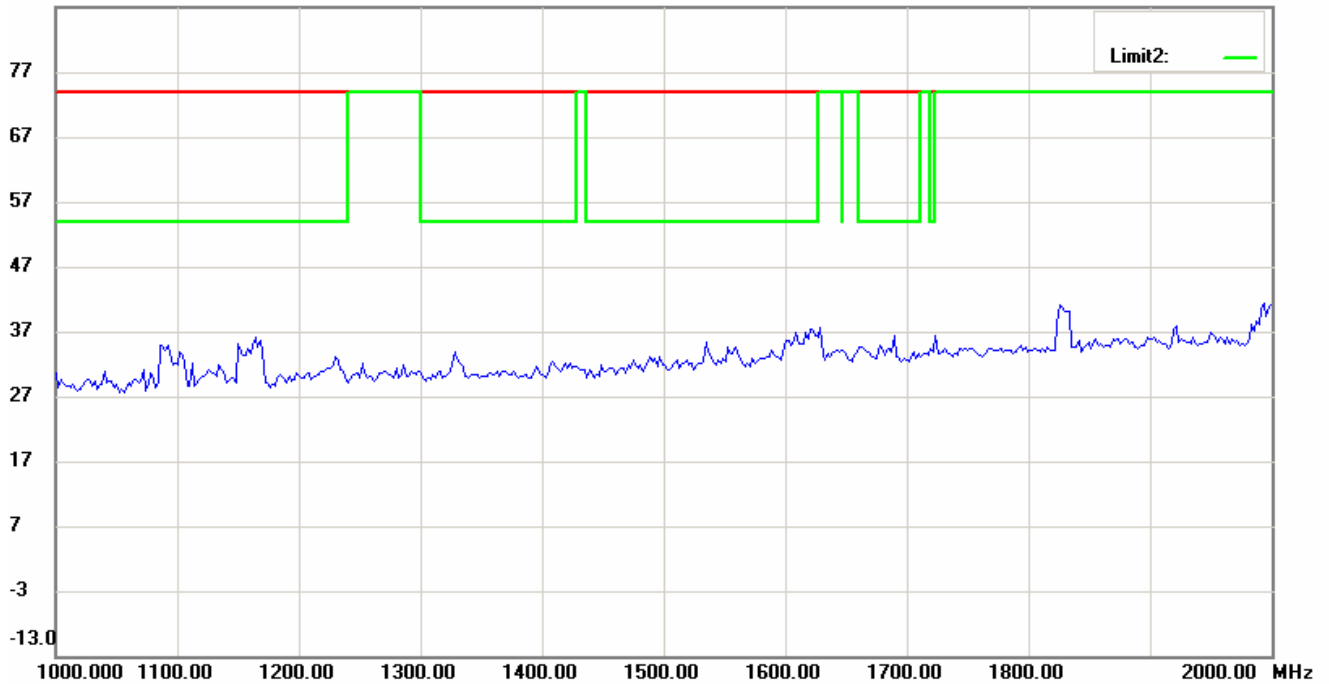


87.0 dBuV/m

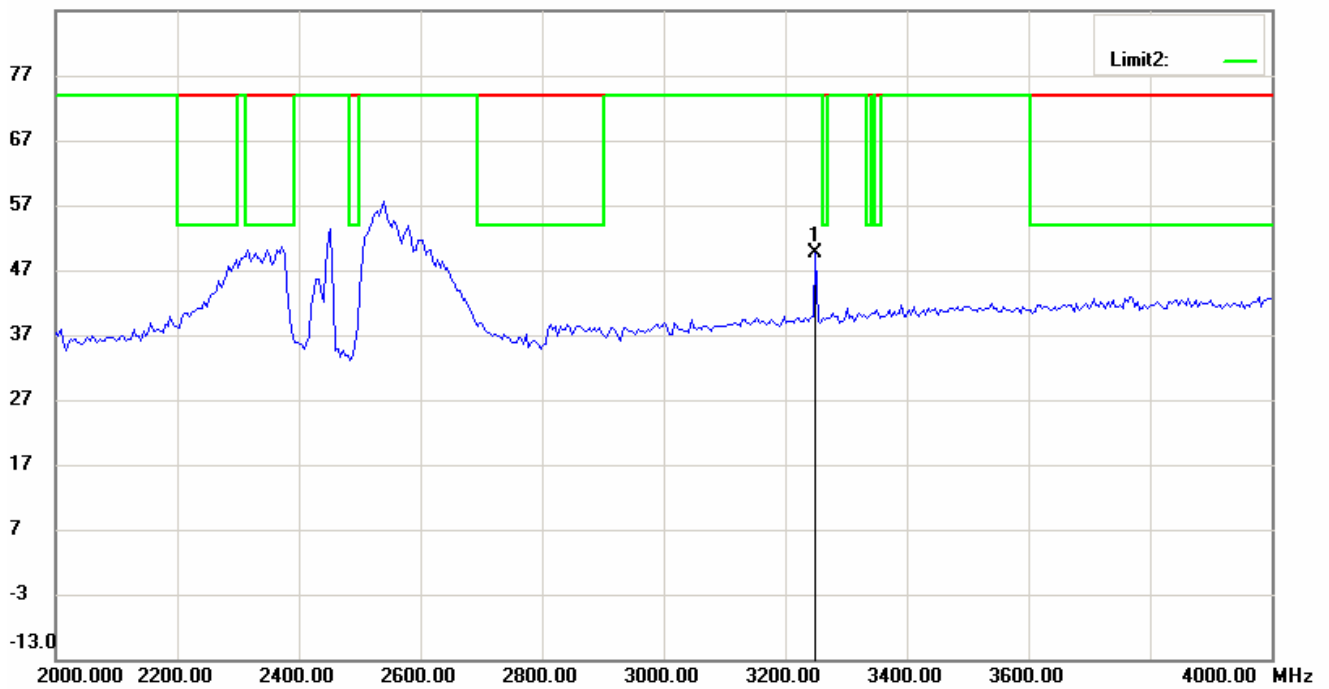


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

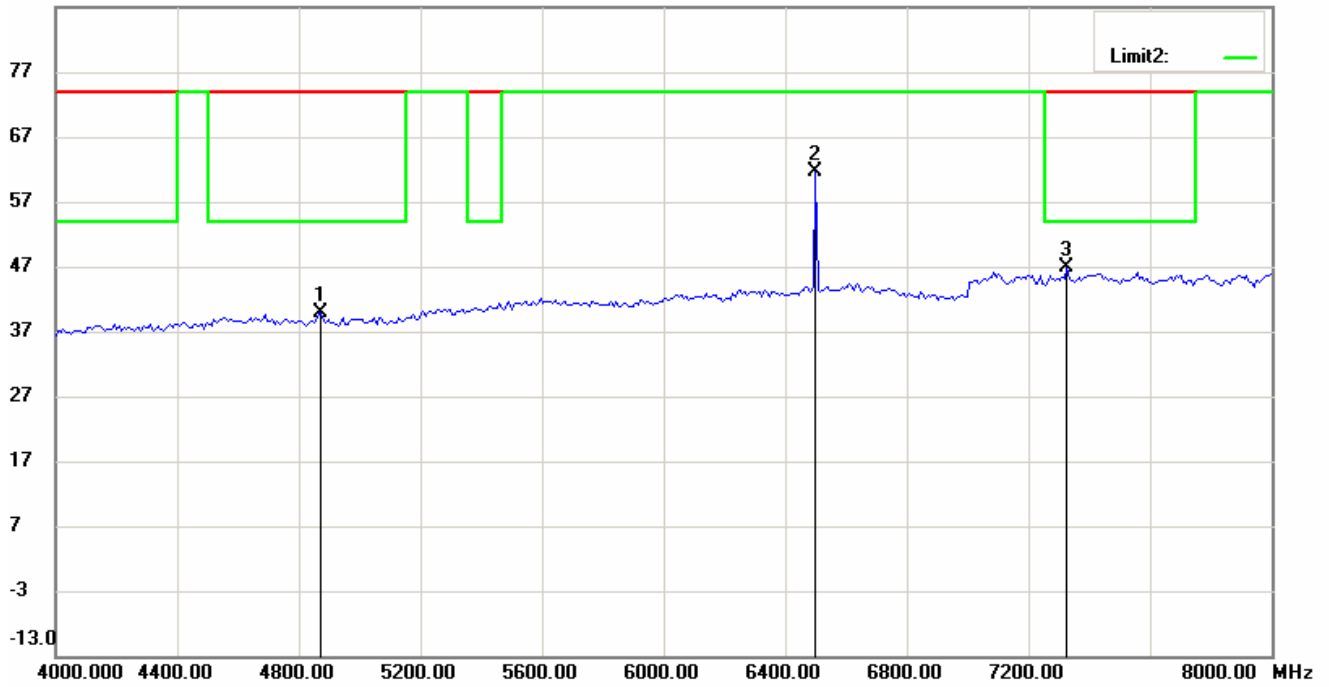


87.0 dBuV/m

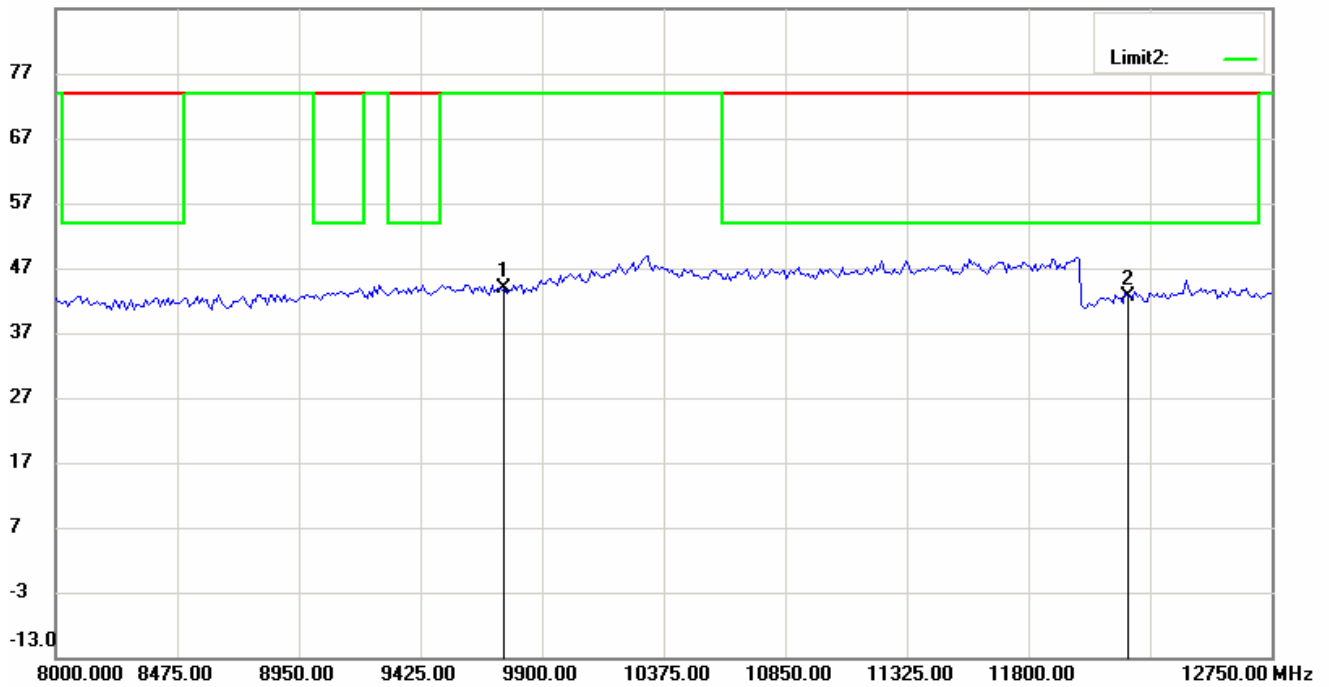


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

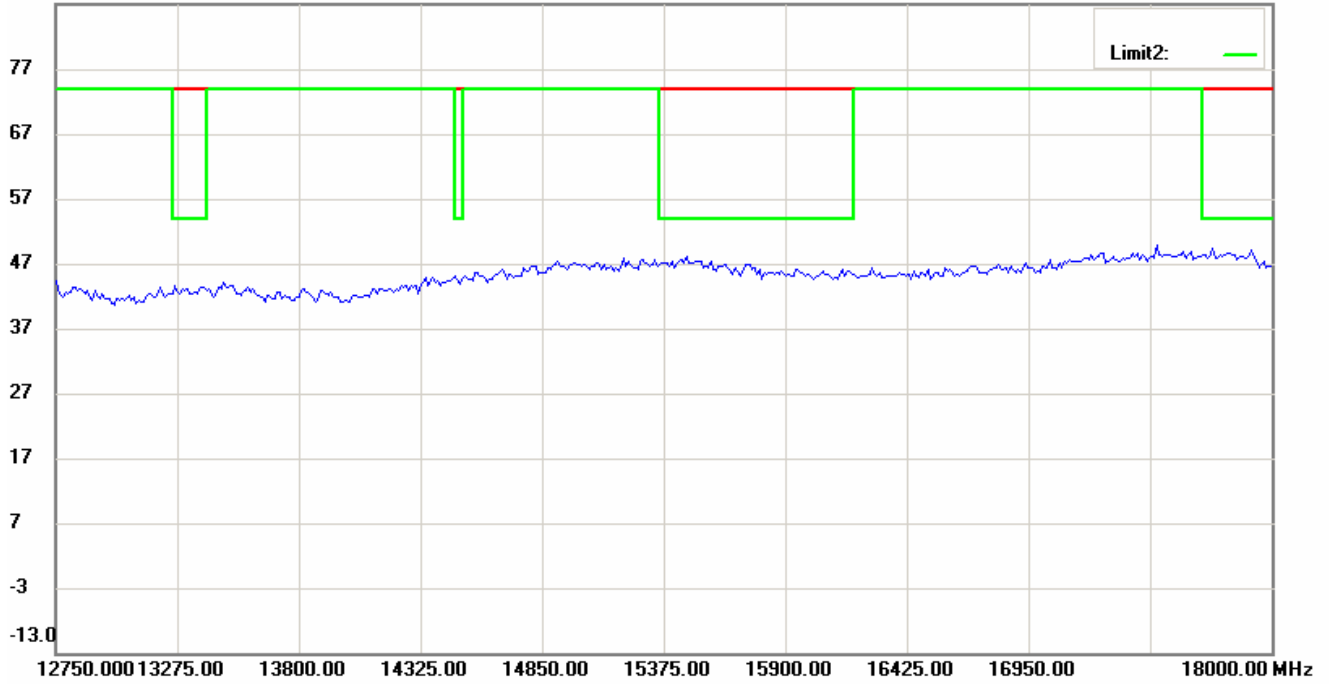



87.0 dBuV/m

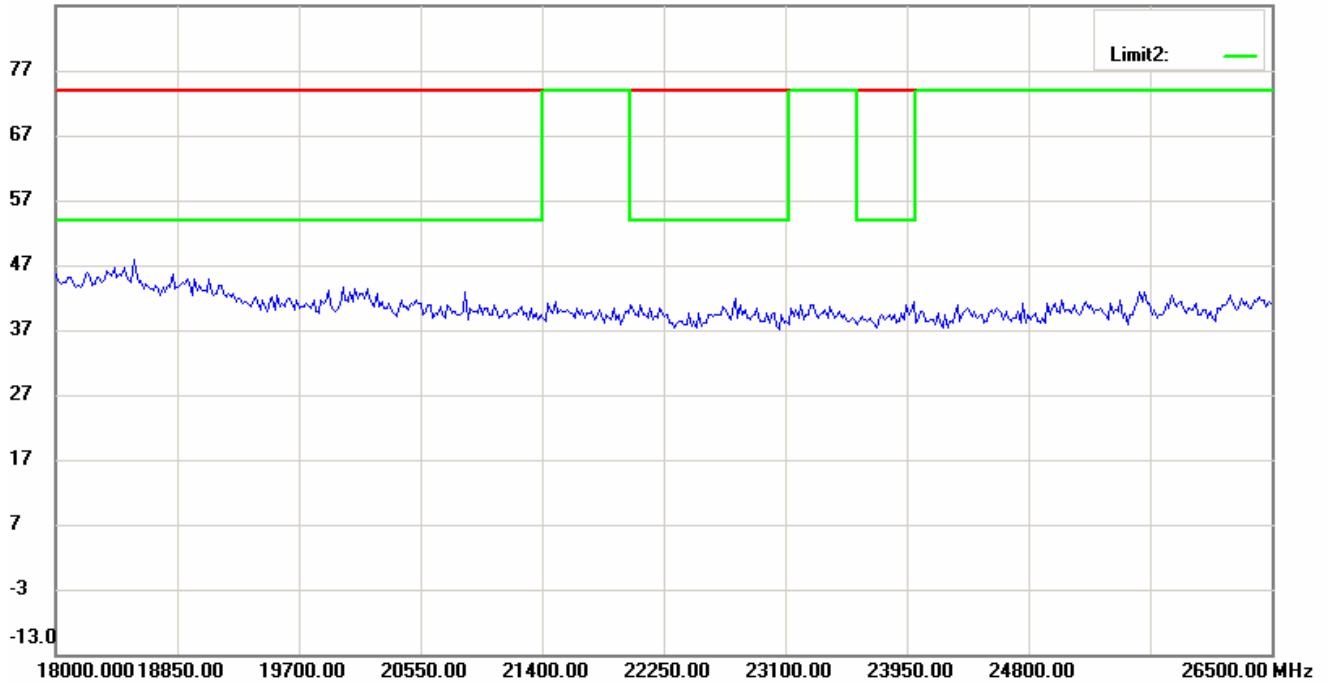

Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

### Antenna Polarization V

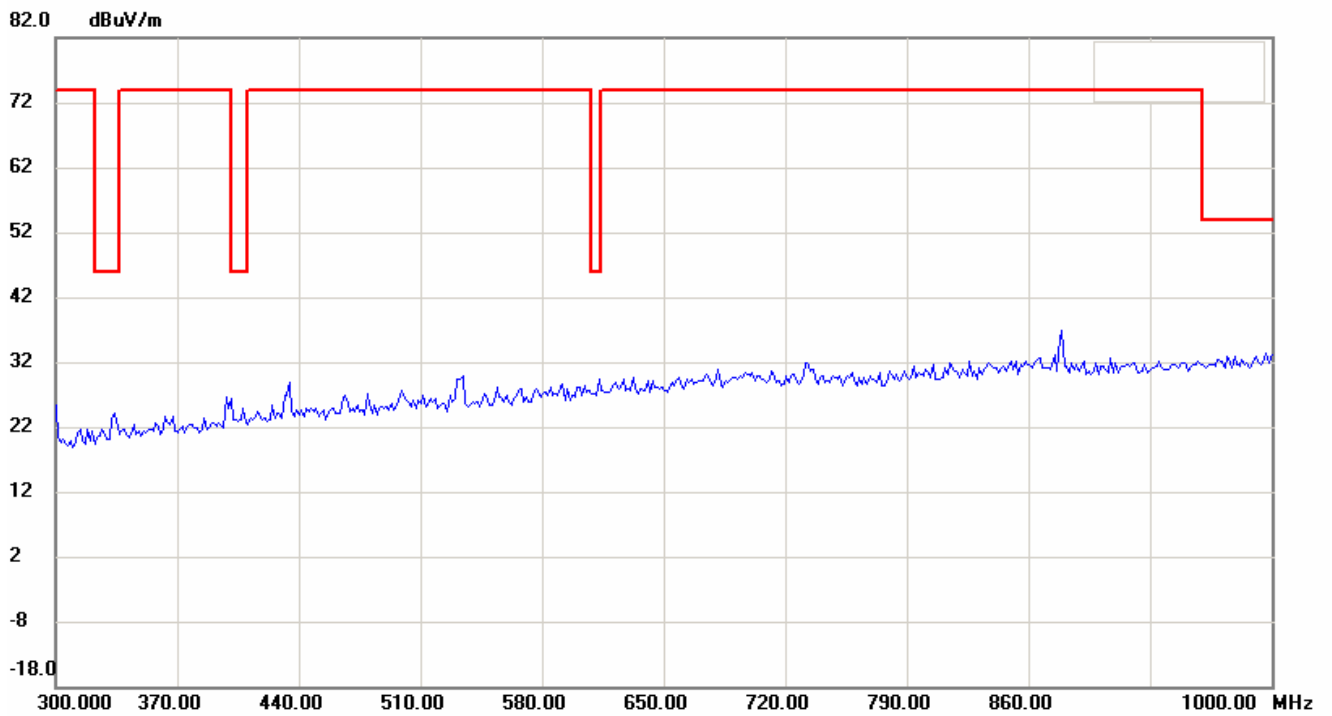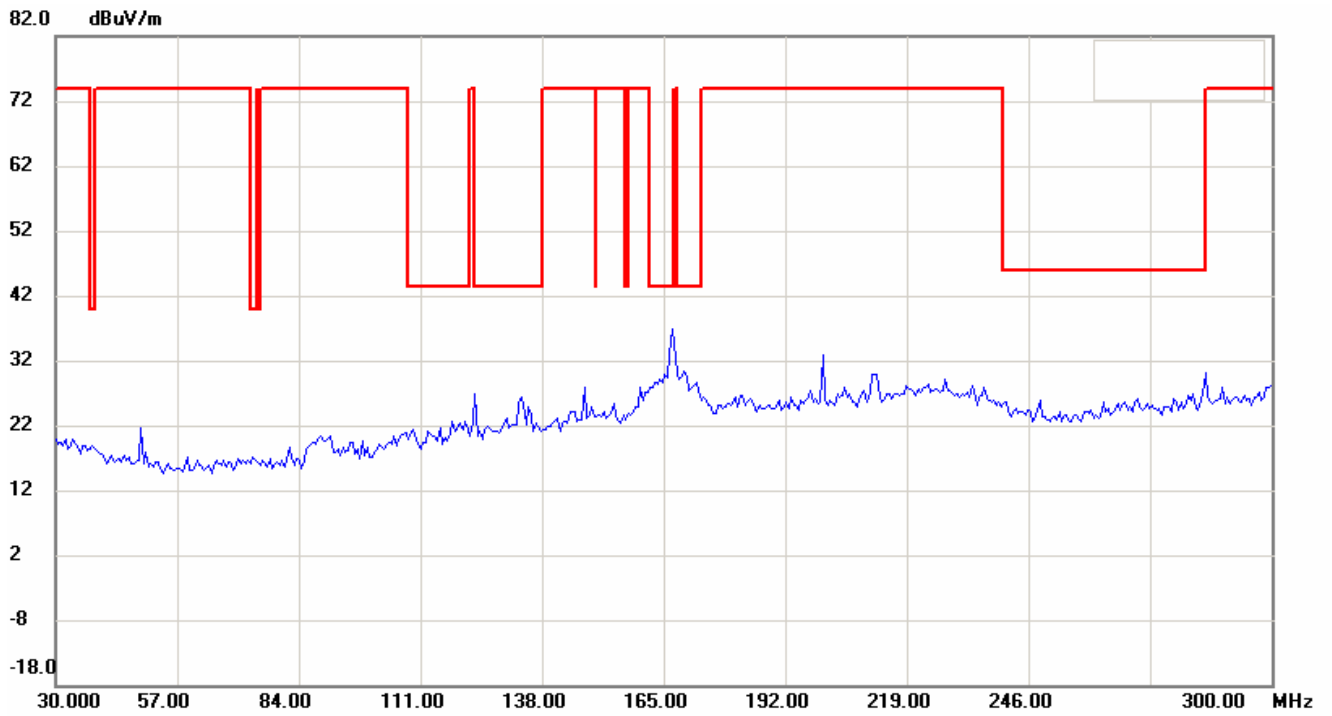





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

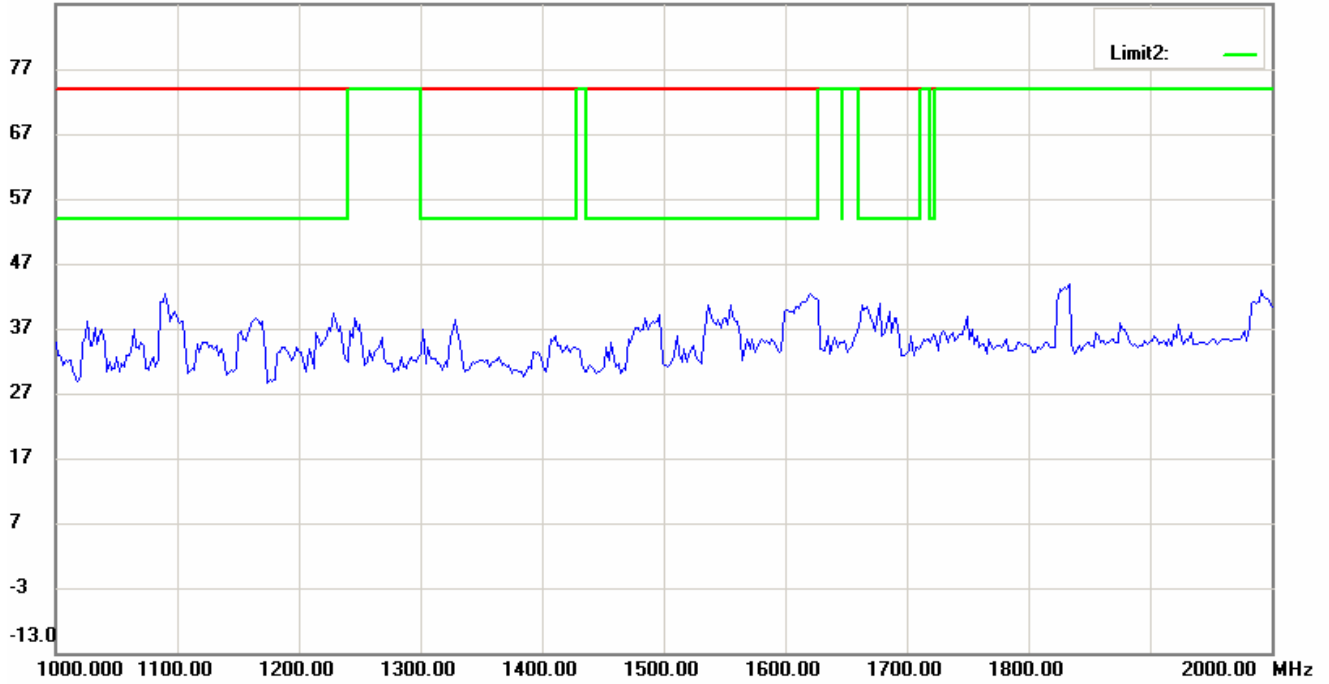


87.0 dBuV/m

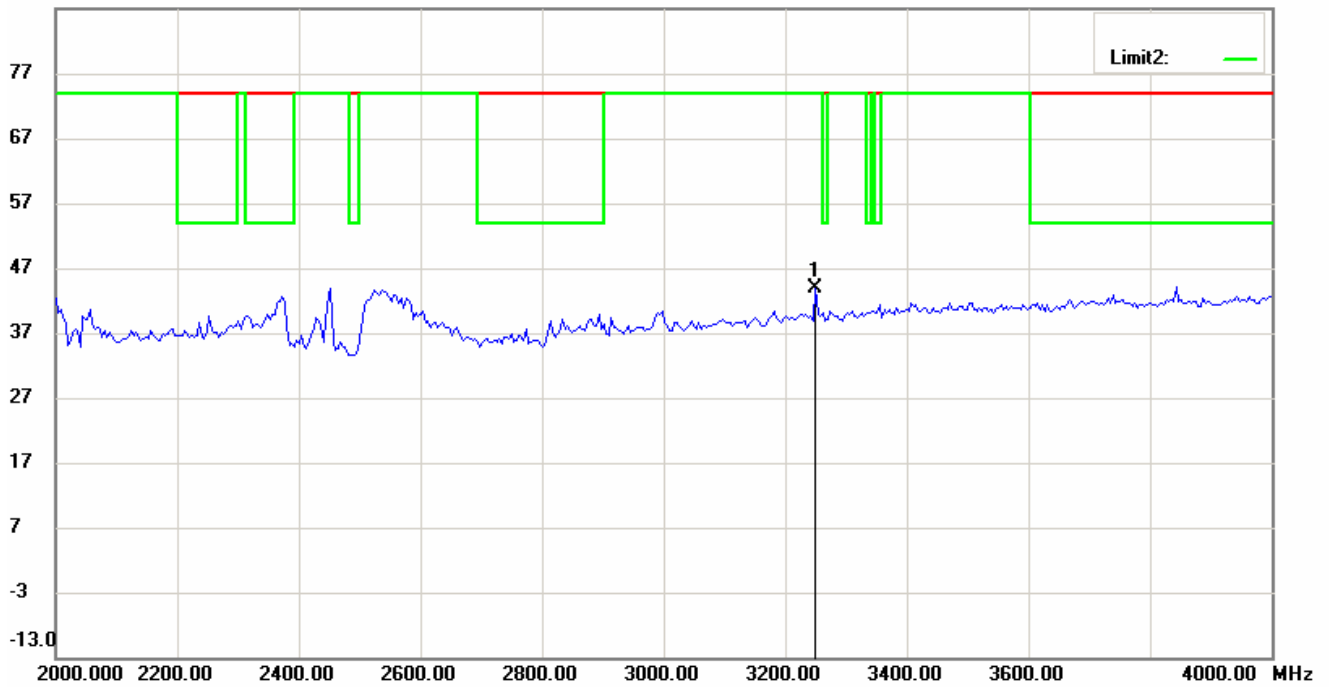


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

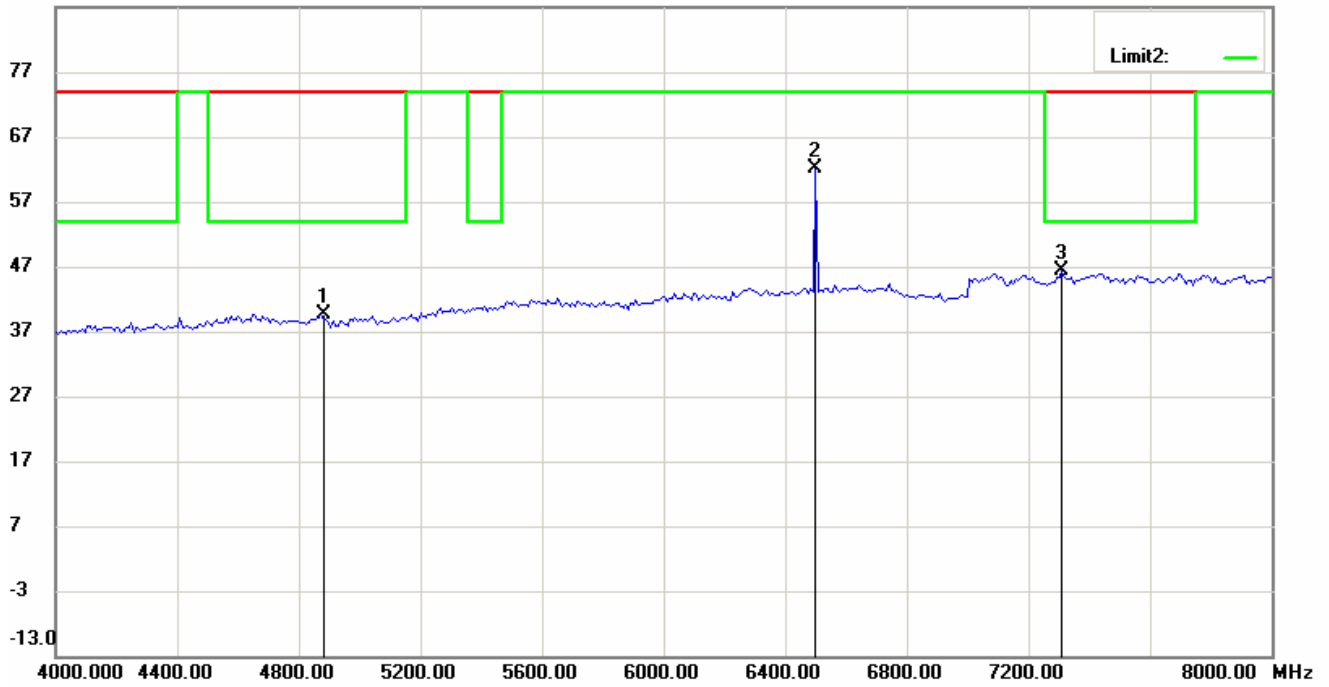


87.0 dBuV/m

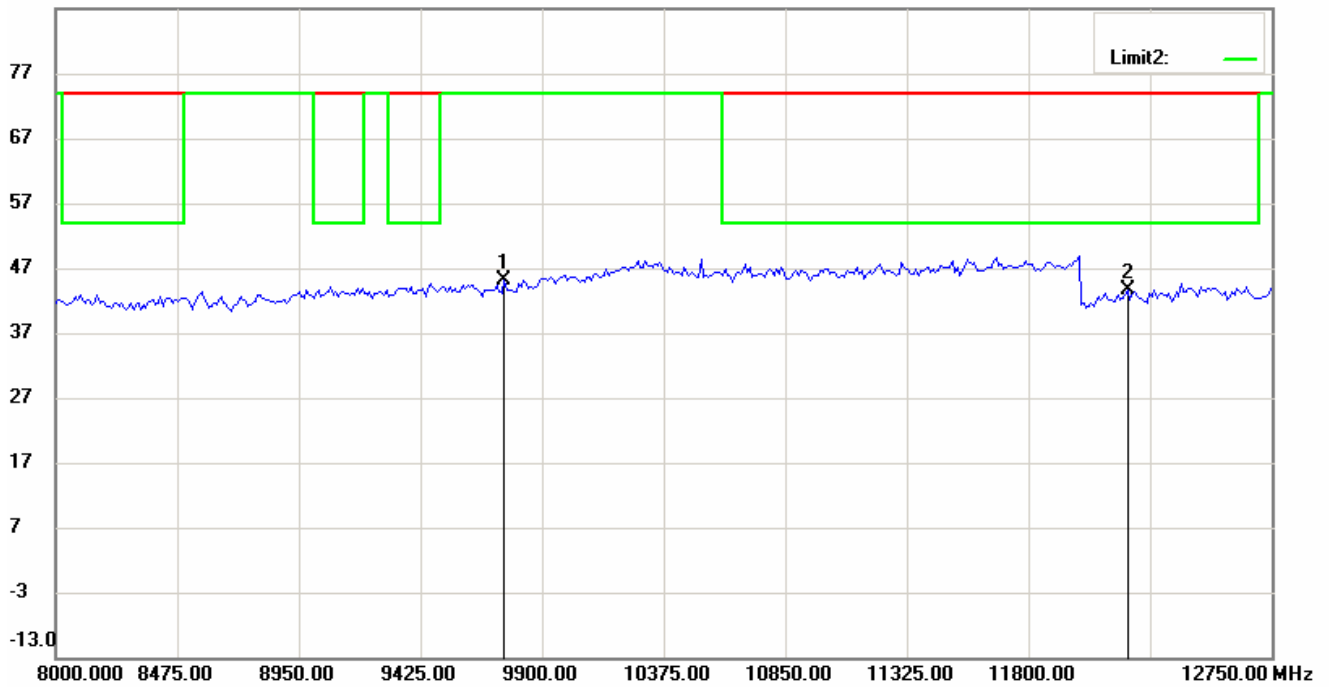


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m


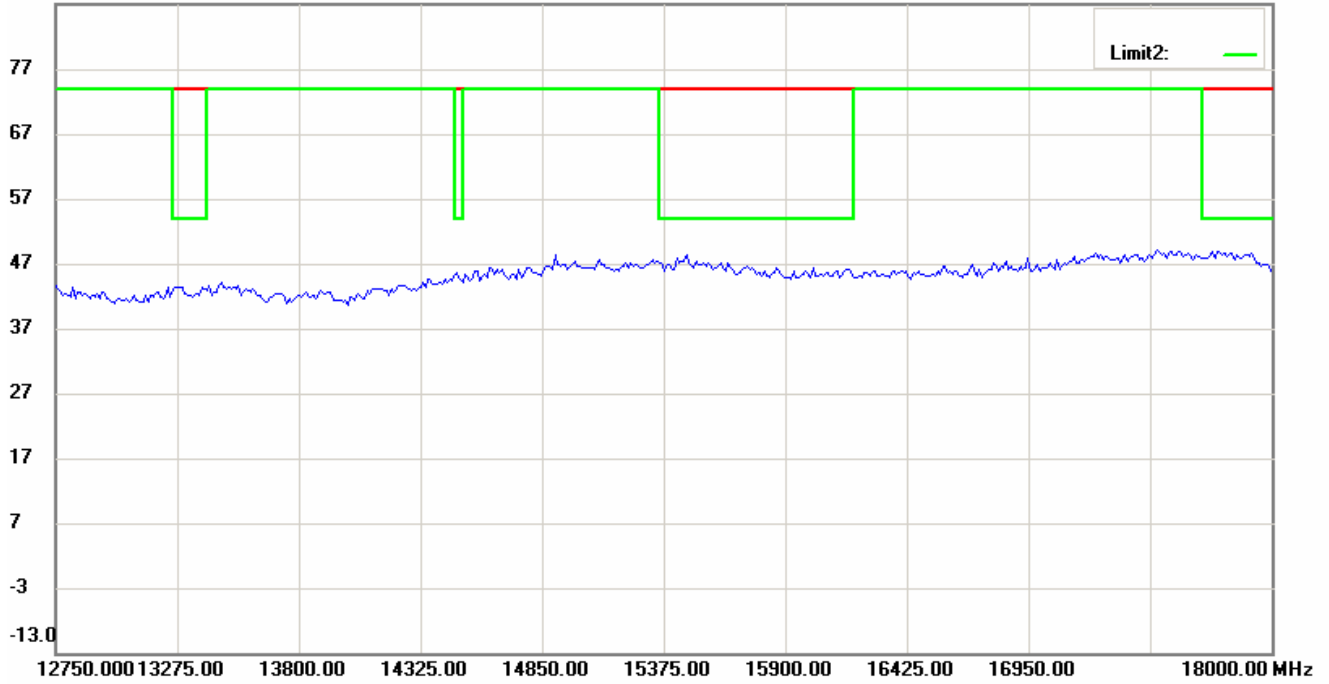


87.0 dBuV/m

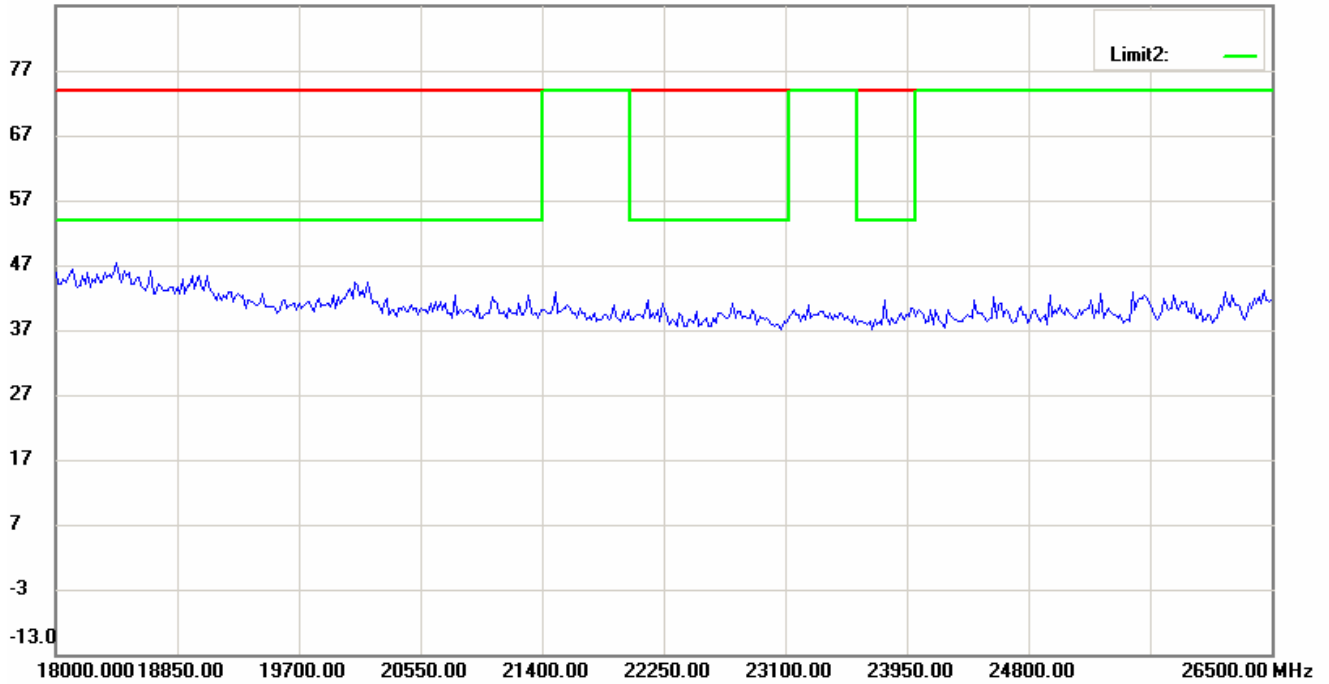

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### 11n(40MHz)\_Ch7 Antenna Polarization H

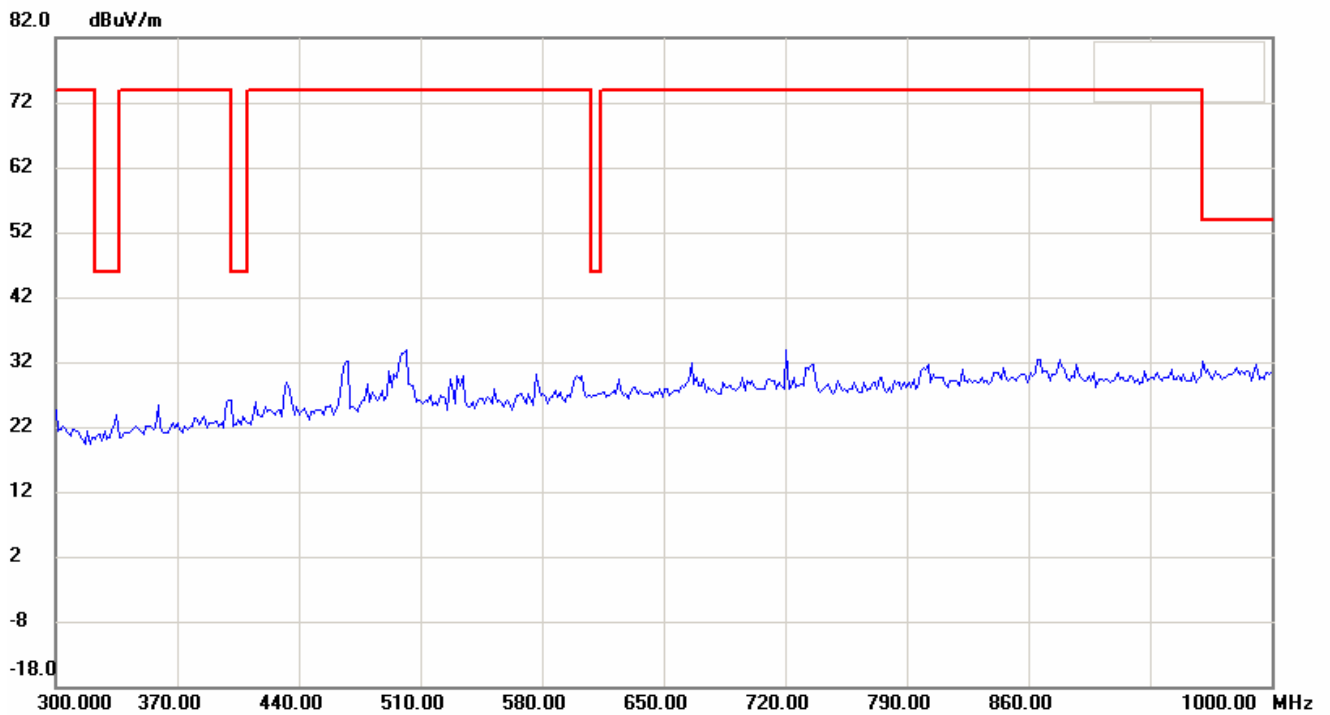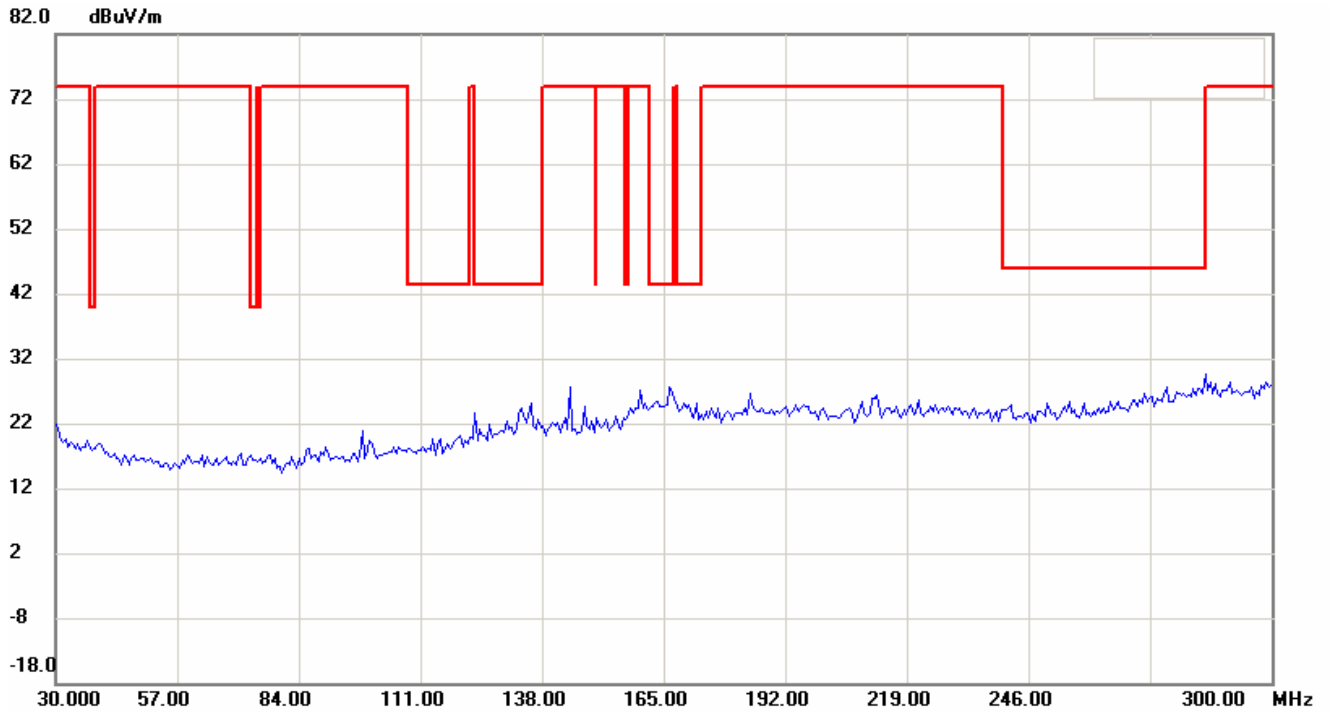


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

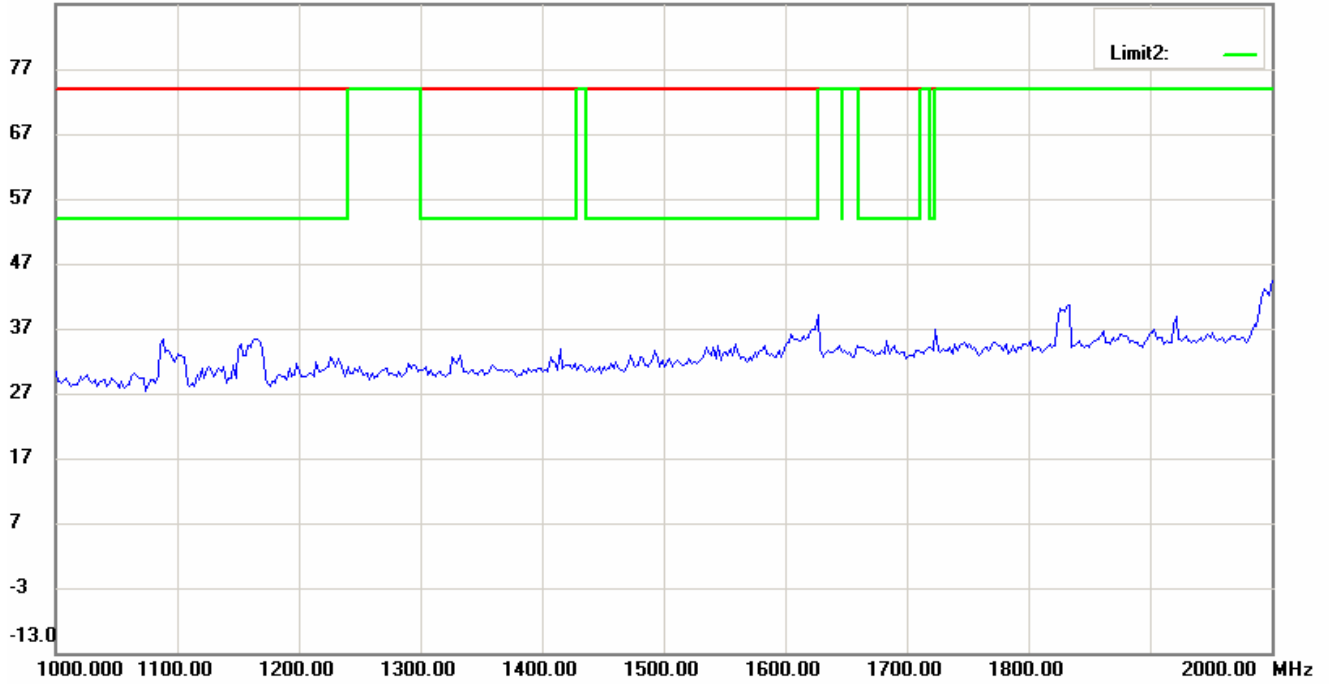


87.0 dBuV/m

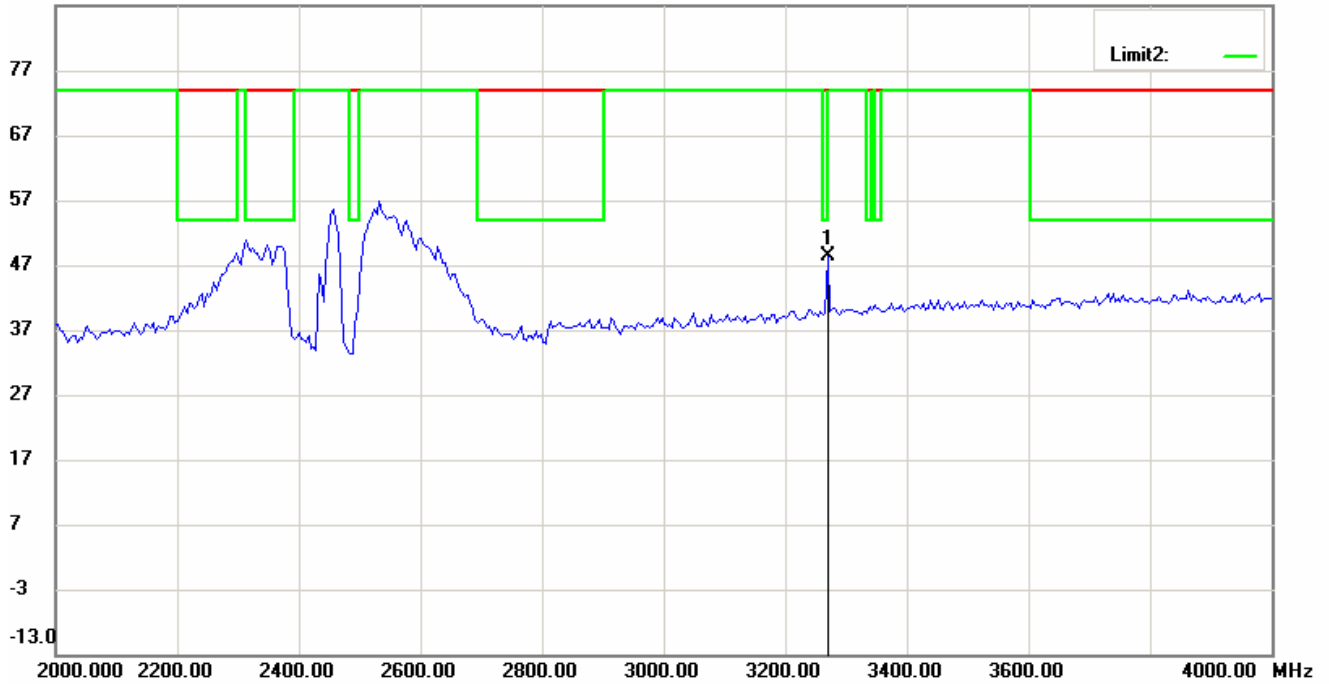


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

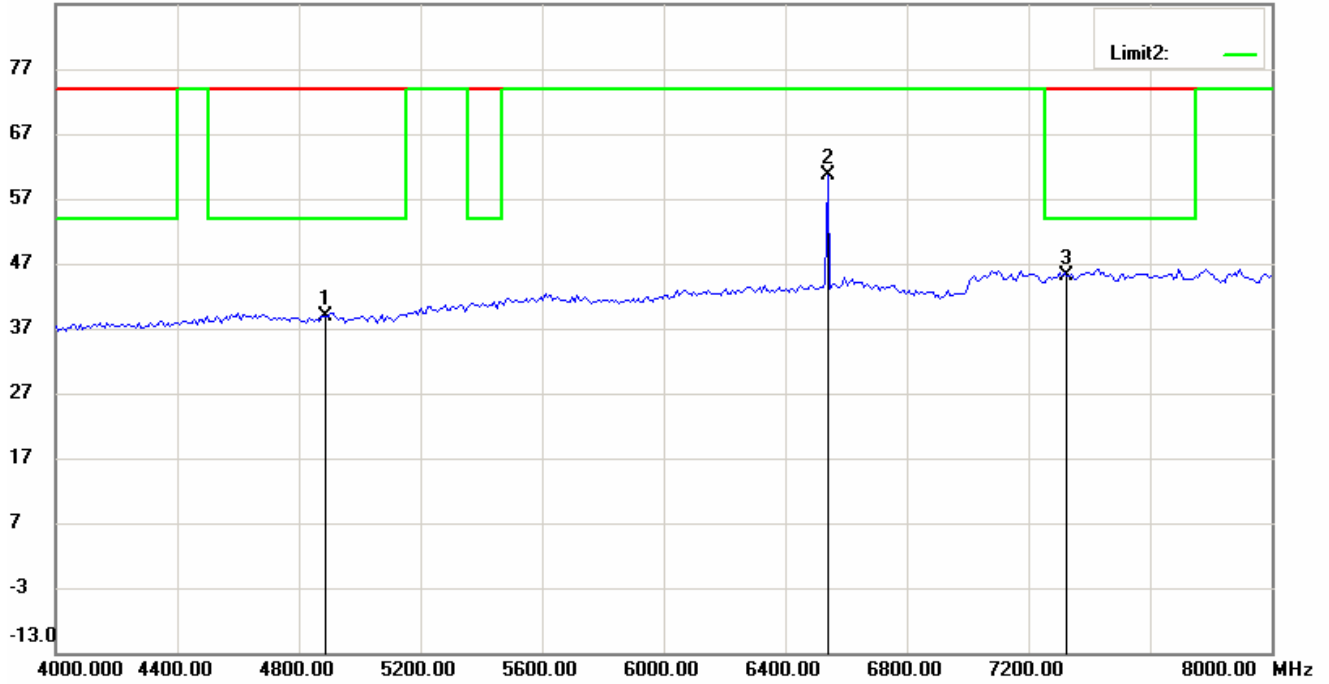


87.0 dBuV/m

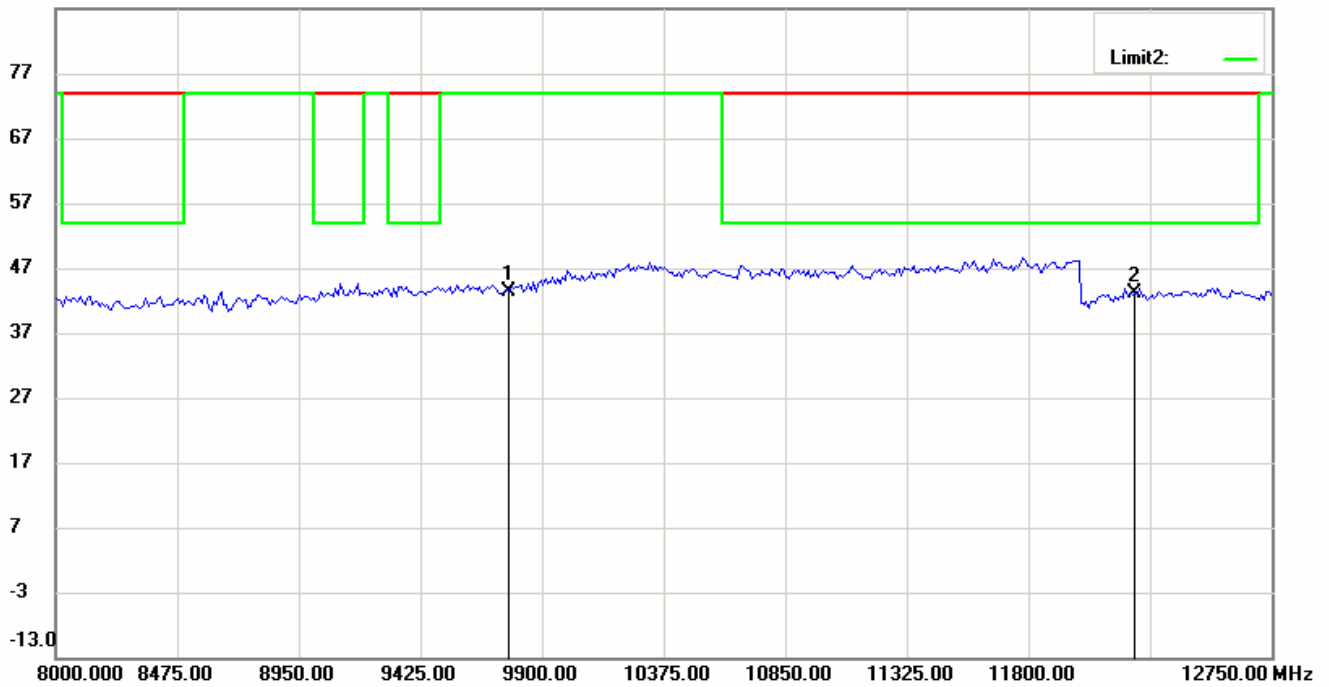


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

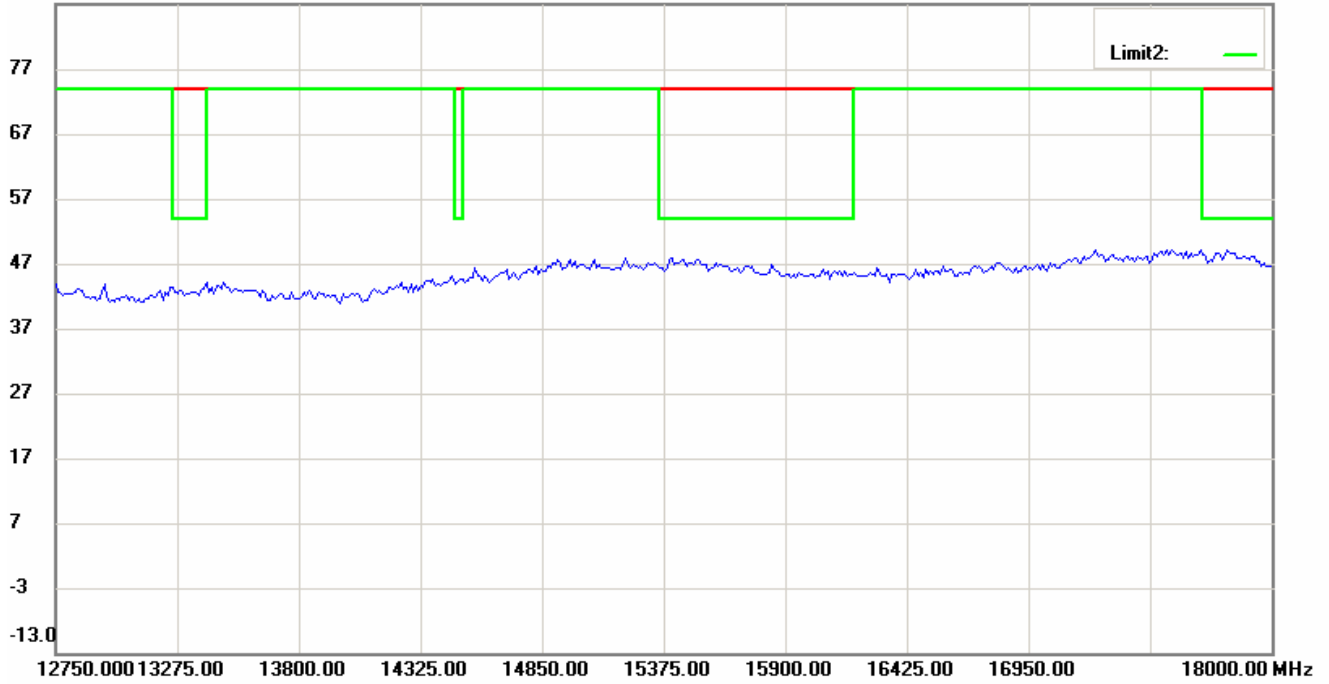



87.0 dBuV/m

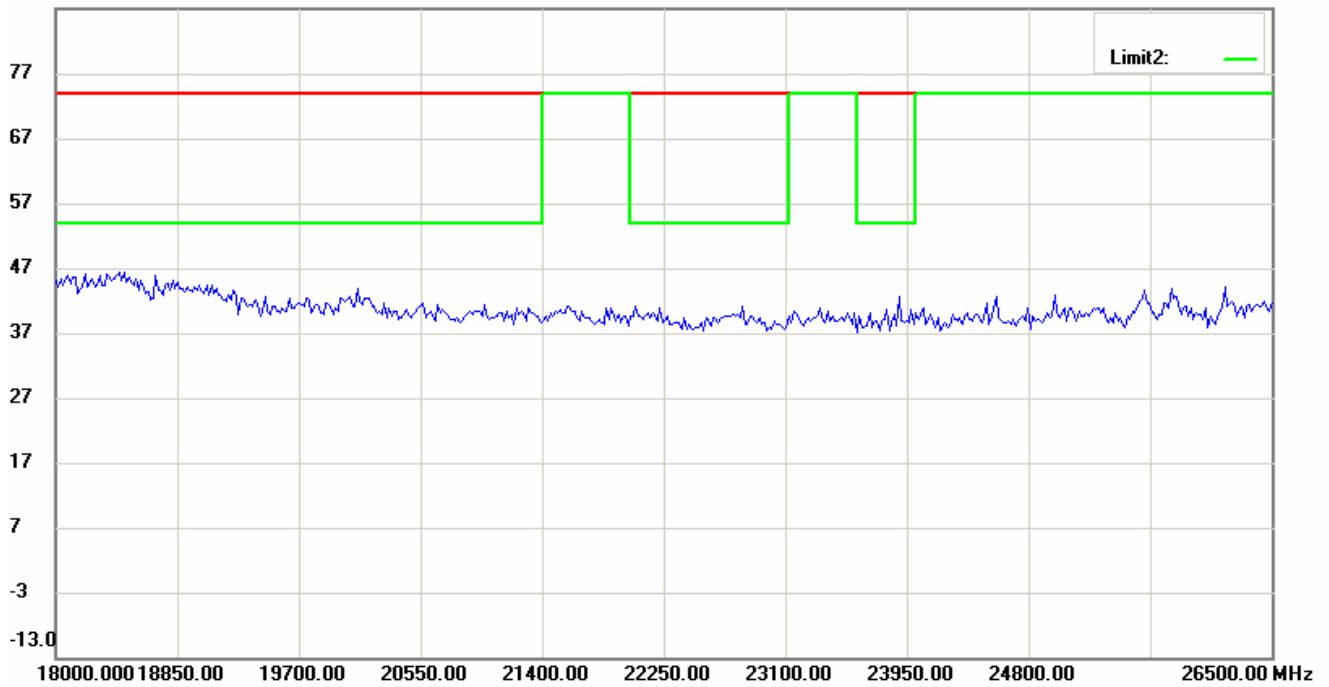

Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

### Antenna Polarization V

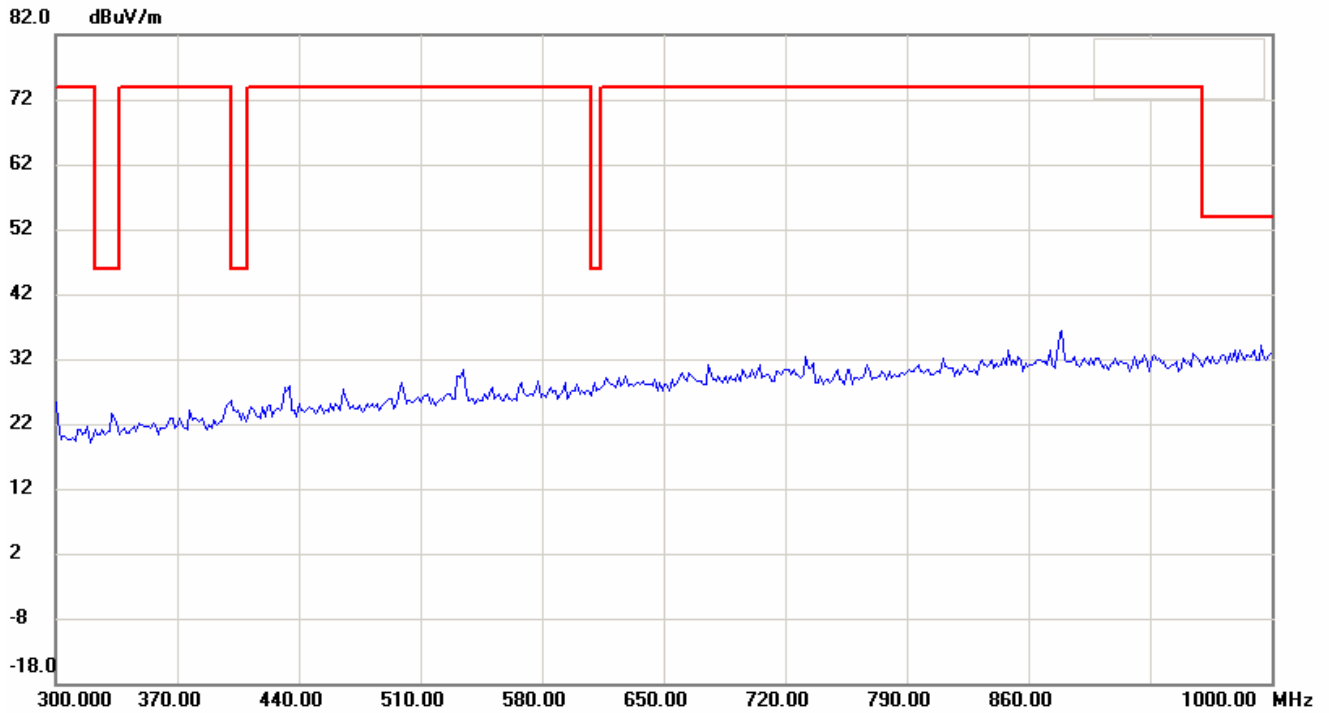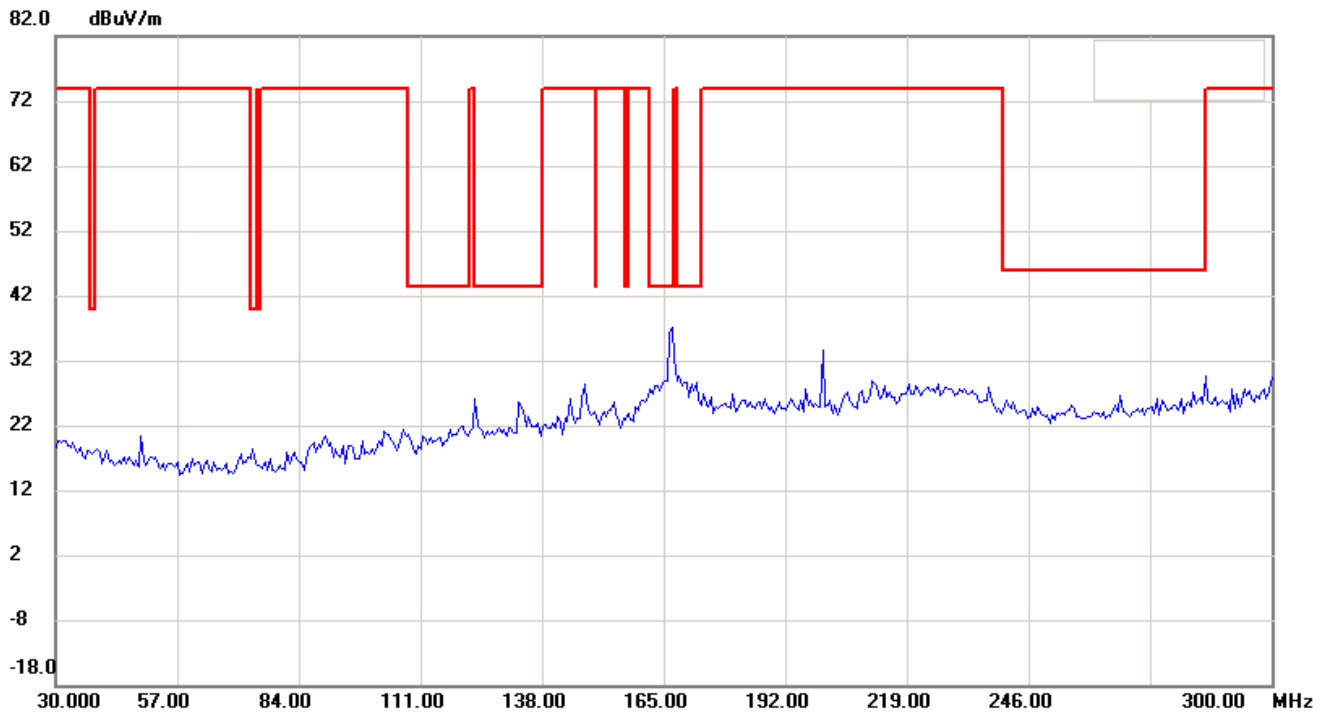





Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

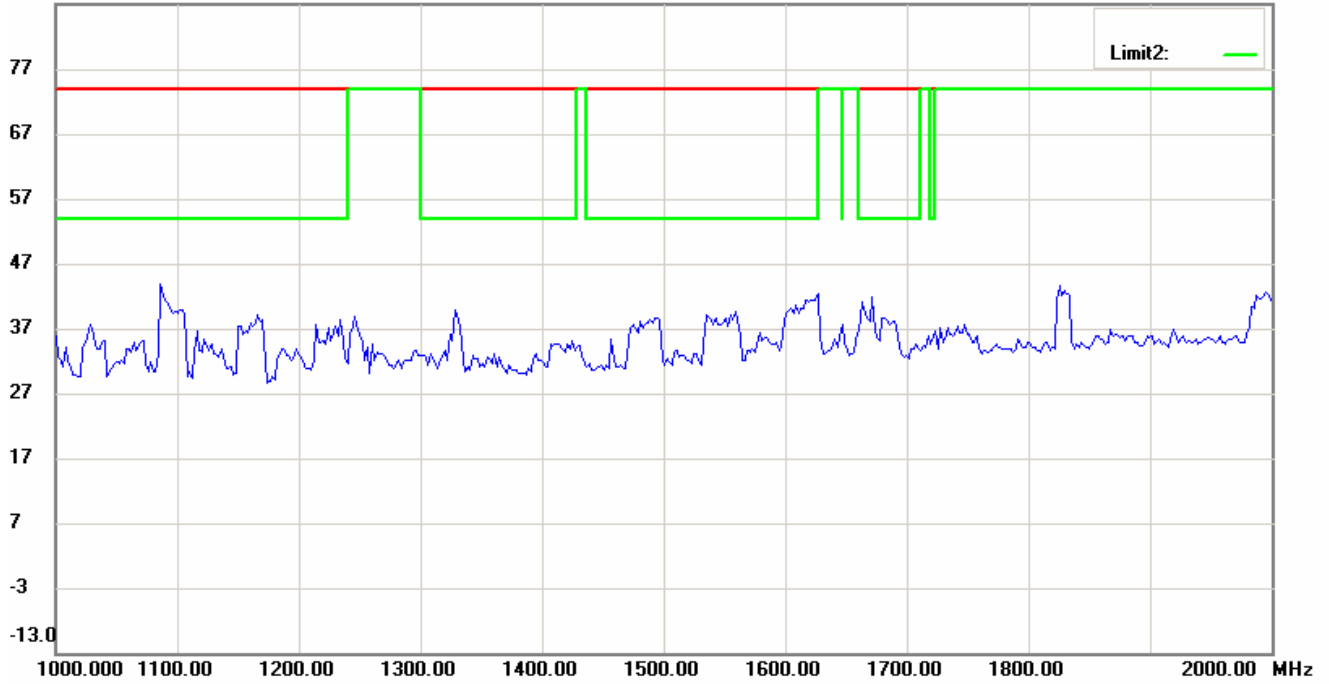


87.0 dBuV/m

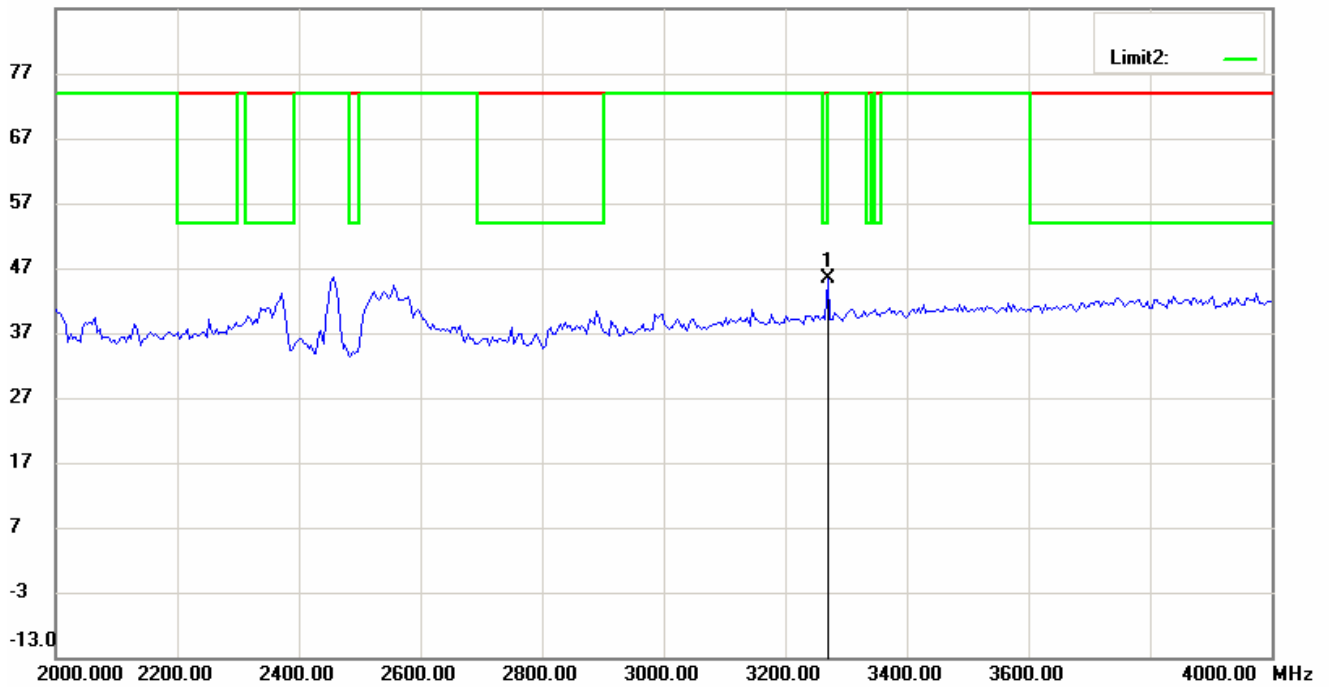


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

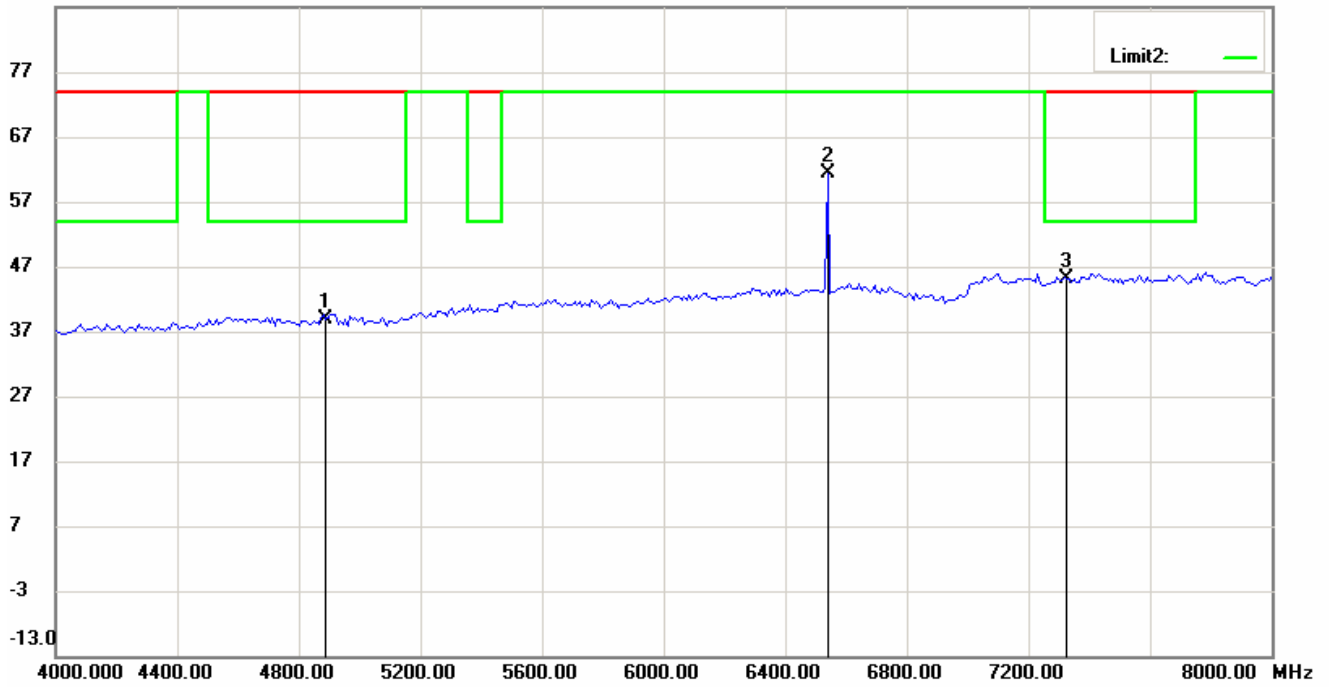


87.0 dBuV/m

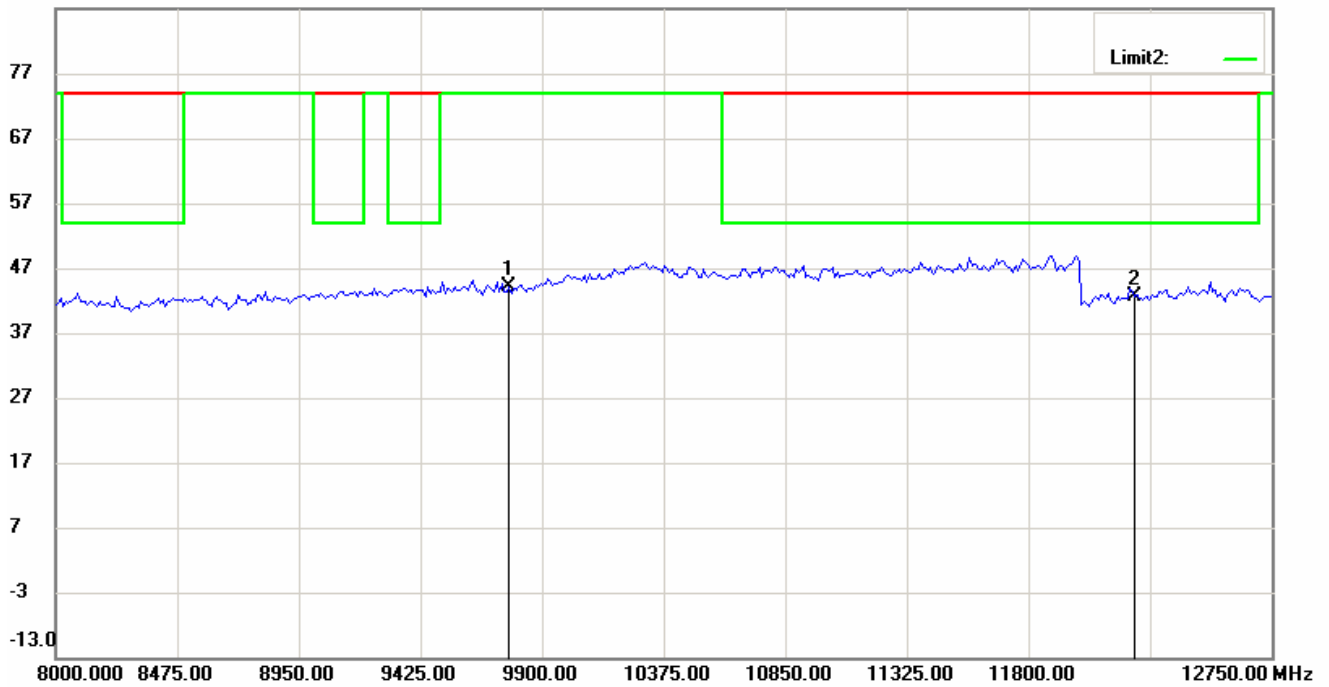


Registration number: W6M20710-8577-C-1

FCC ID: RXZ-WU81RL

87.0 dBuV/m

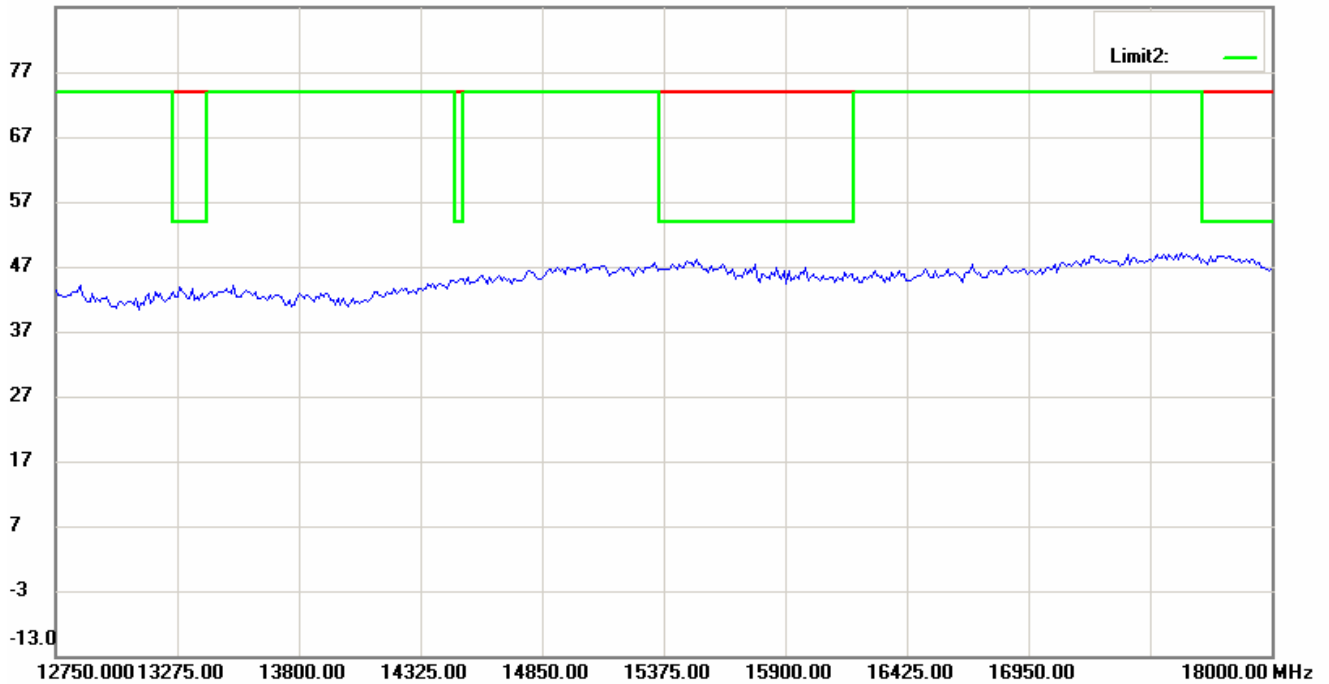

87.0 dBuV/m

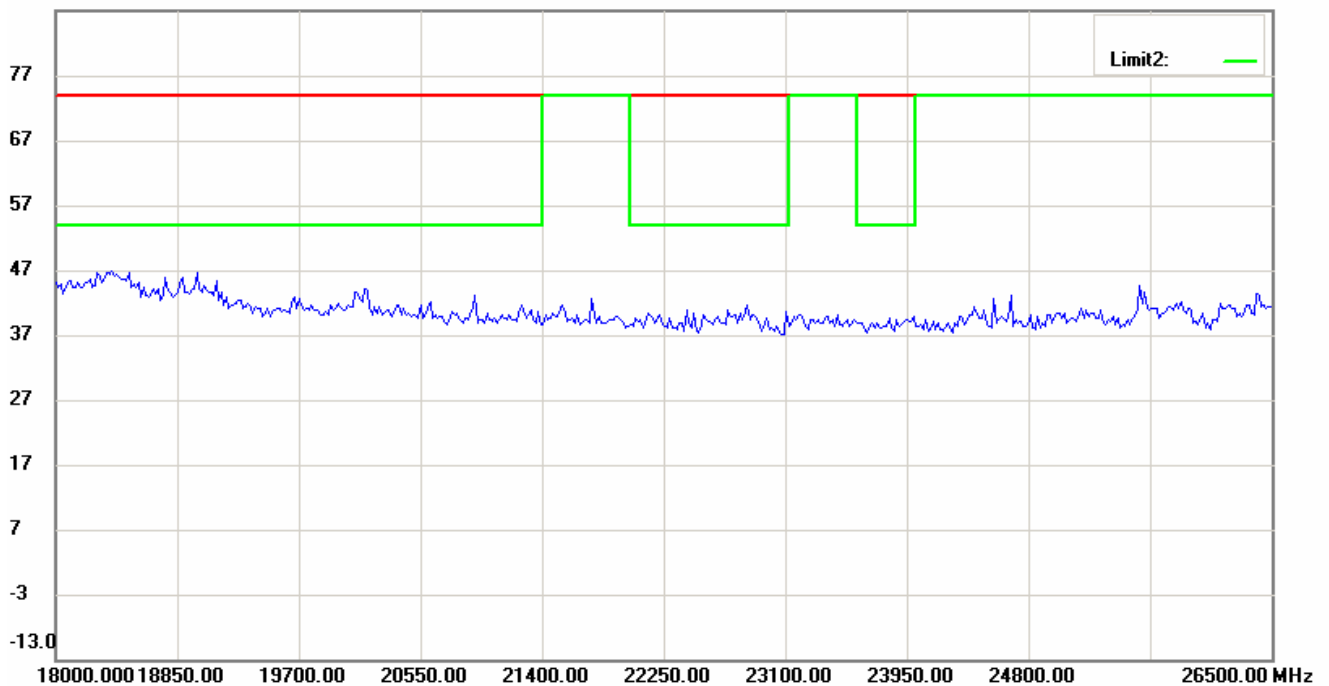


Up Line: Peak Limit Line  
Down Line: Ave Limit Line

**Note:**

1. The plots are pre-scanned data for determining the tested points and for reference only.
2. The exact test result is shown in the data table of Radiated emission test of this test report.


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Band Edge Measurement

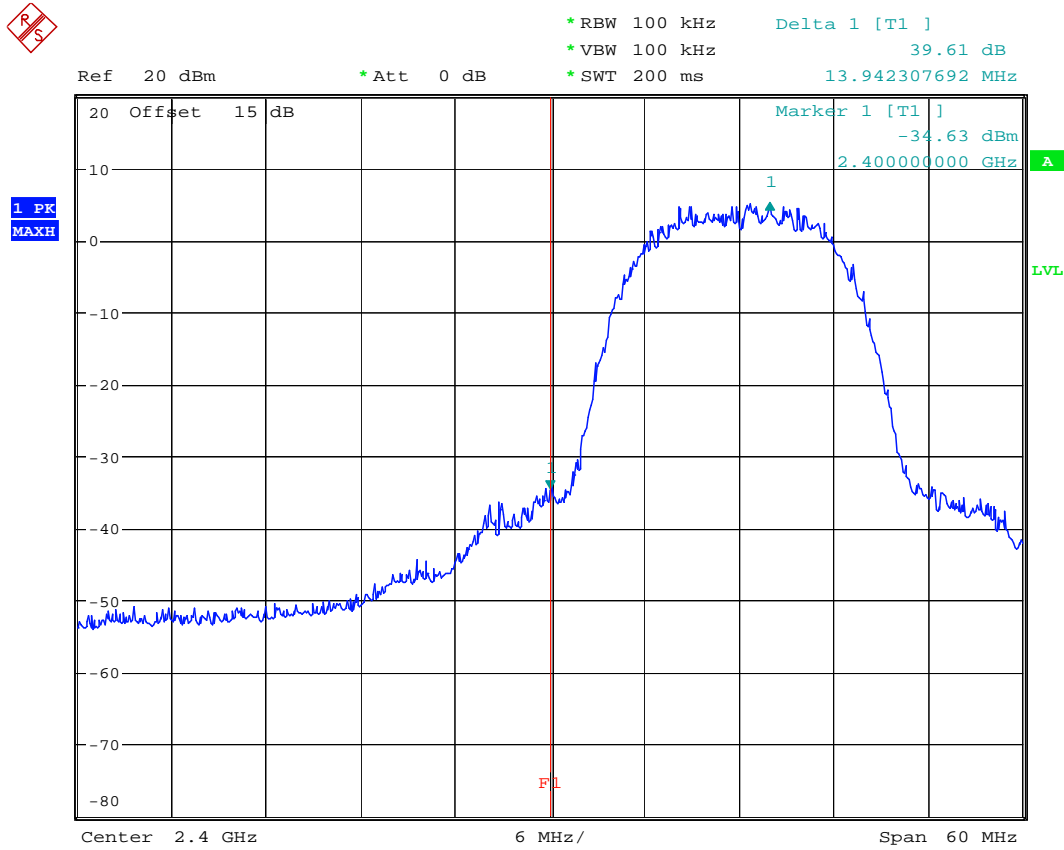

BANDEDGE 802.11B CH1  
Date: 18.OCT.2007 15:16:02


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

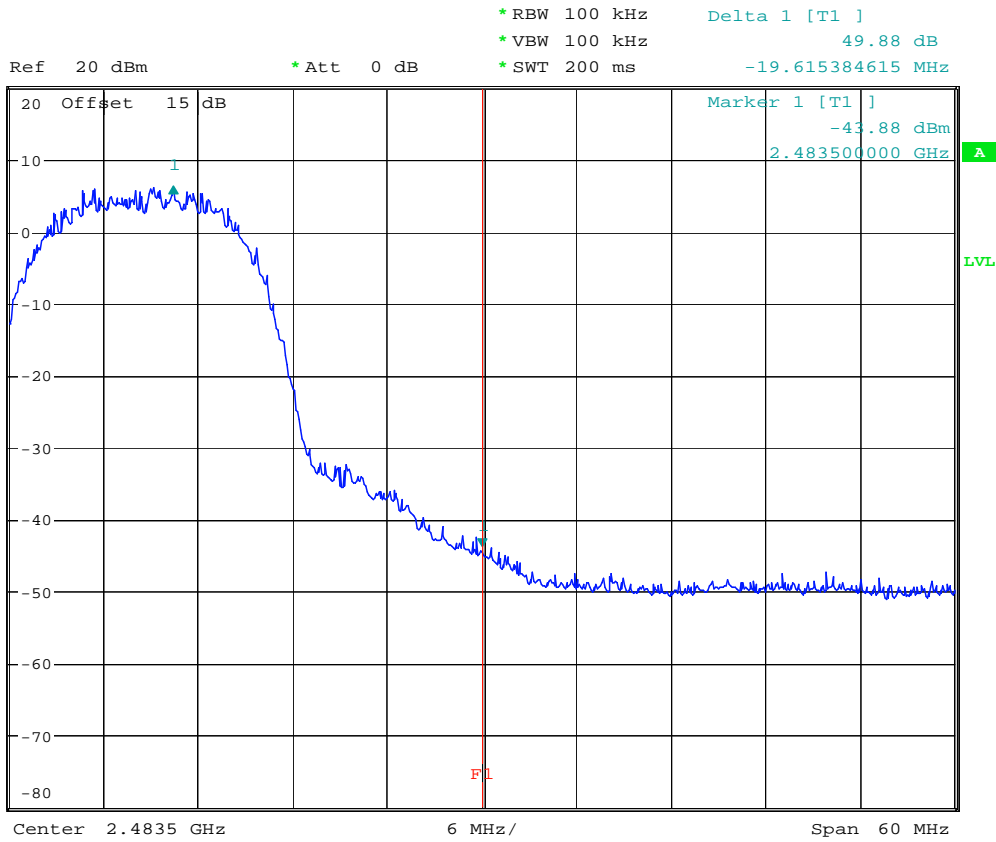

BANDEDGE 802.11B CH11

Date: 18.OCT.2007 15:15:32


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

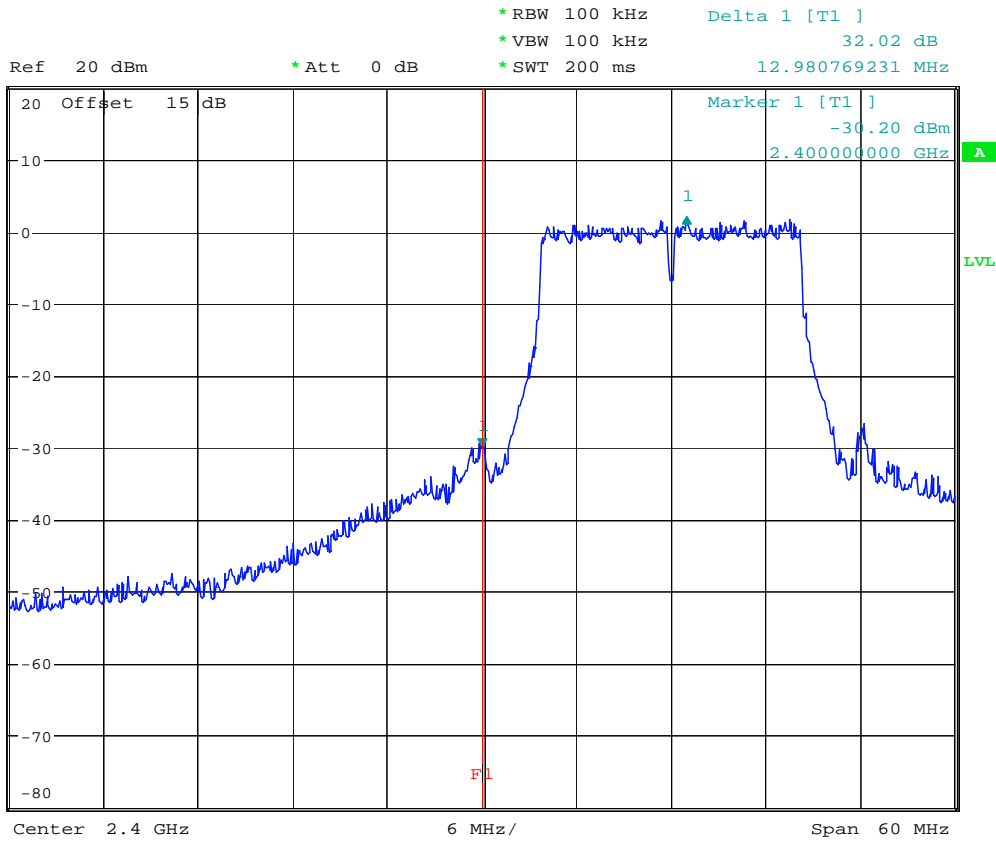

BANDEDGE 802.11G CH1

Date: 18.OCT.2007 15:13:59


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

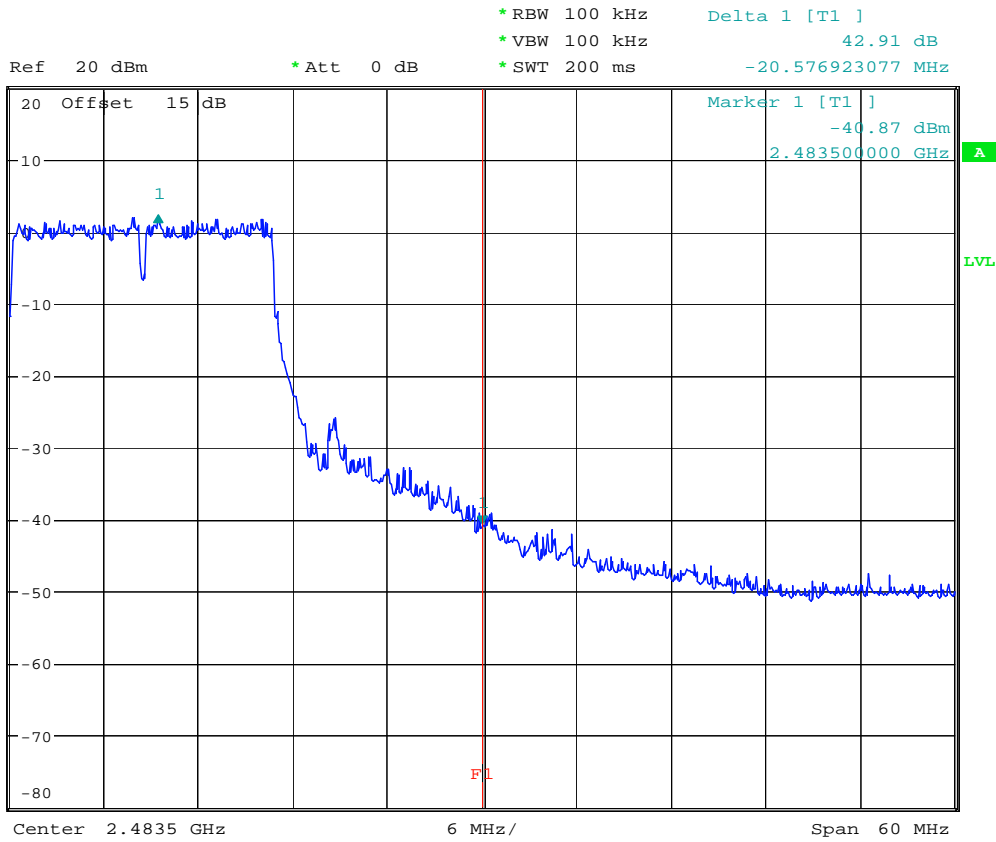

BANDEDGE 802.11G CH11

Date: 18.OCT.2007 15:14:43

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

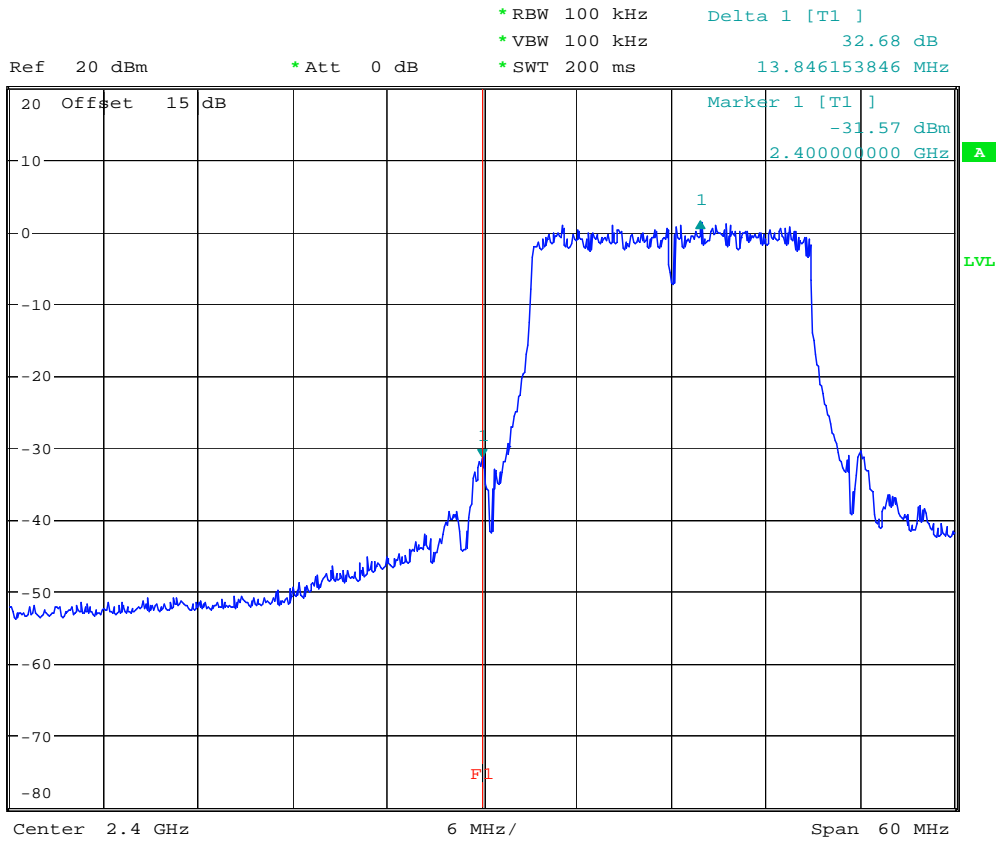


BANDEDGE 802.11N20MHz CH1

Date: 18.OCT.2007 15:13:06




Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

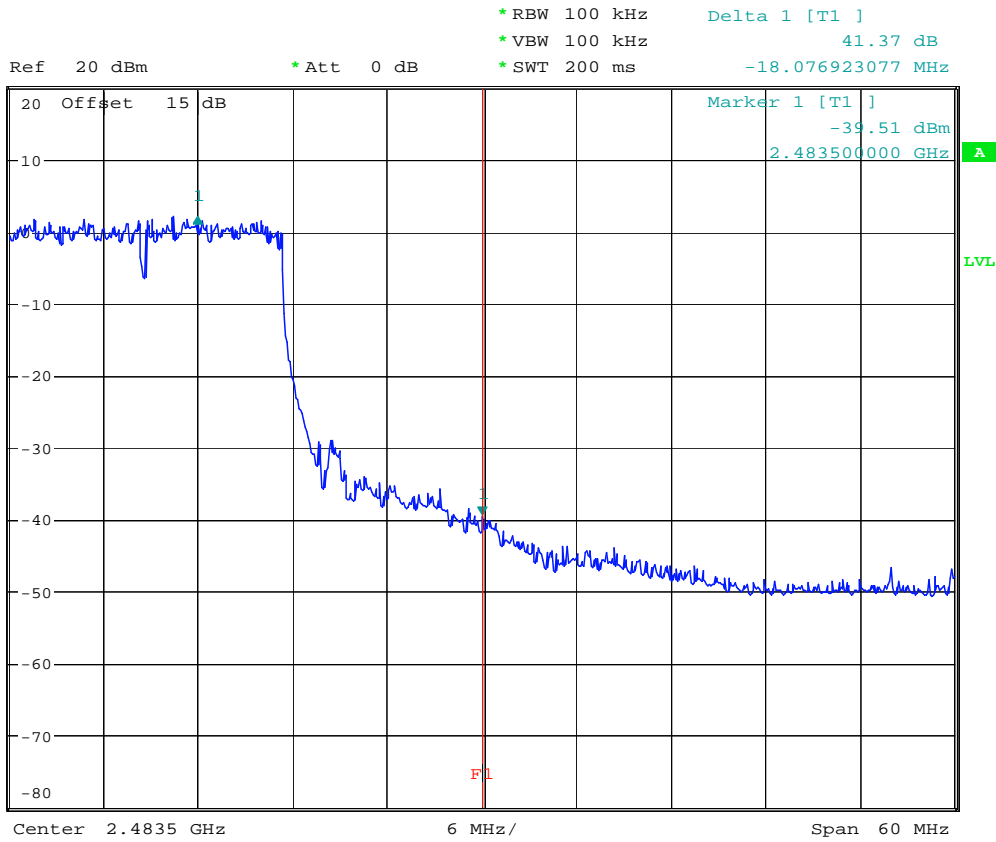

BANDEDGE 802.11N20MHz CH11

Date: 18.OCT.2007 15:12:42


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

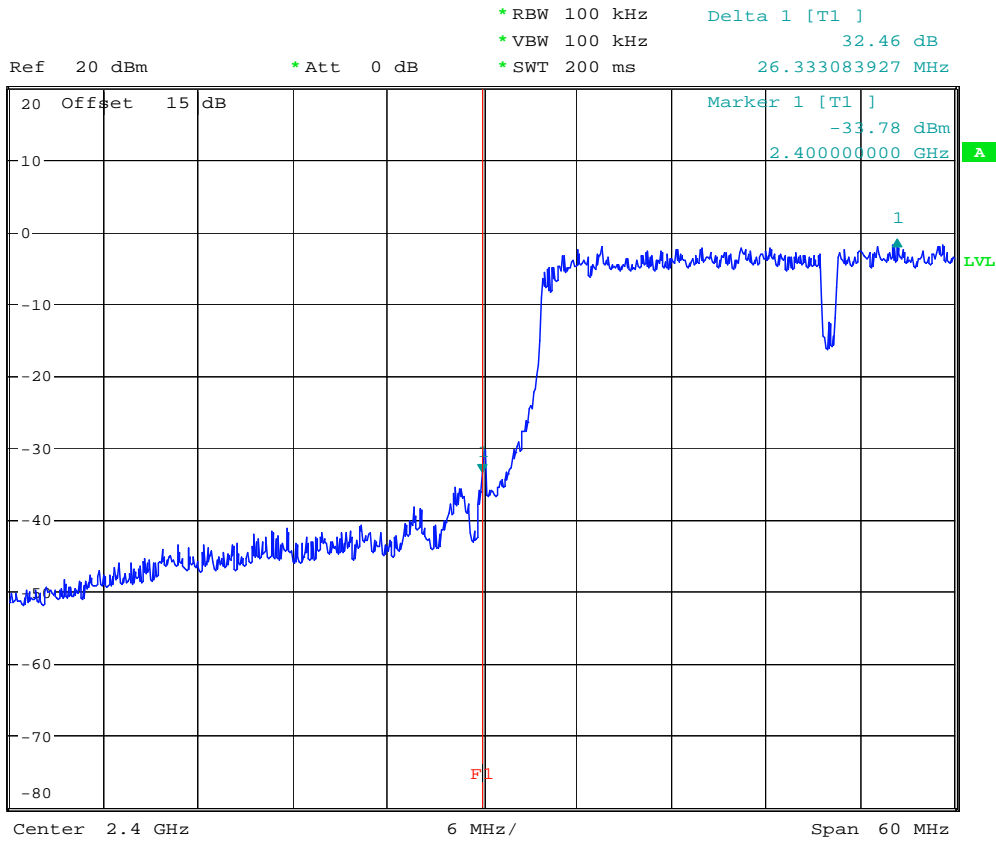

BANDEDGE 802.11N40MHz CH1

Date: 18.OCT.2007 15:11:02

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

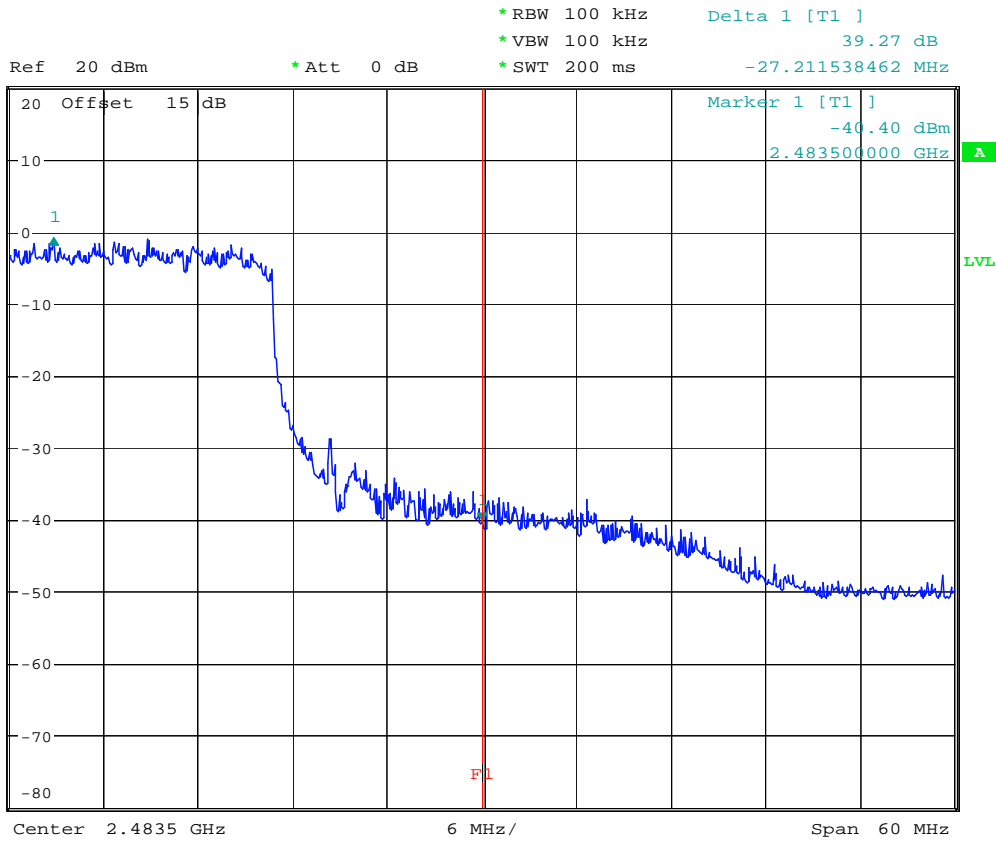


BANDEDGE 802.11N40MHz CH7

Date: 18.OCT.2007 15:11:44


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### Minimum 6dB Bandwidth

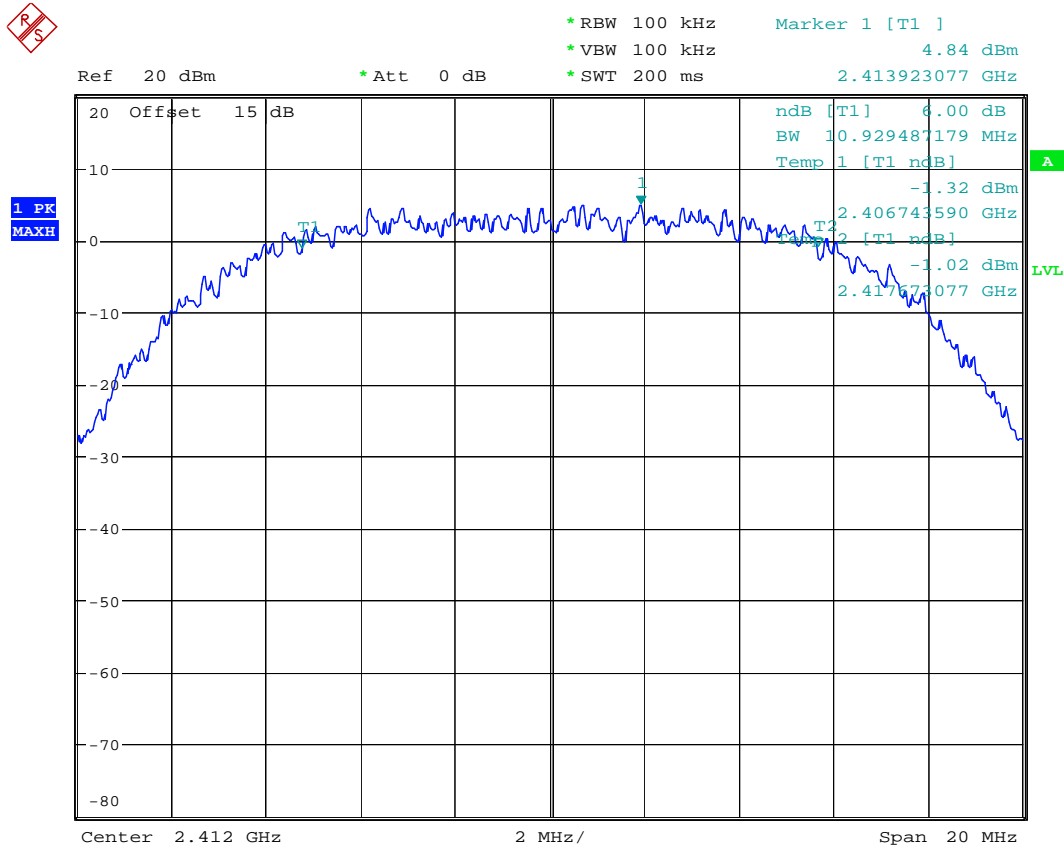

6dB BANDWIDTH 802.11B CH1  
 Date: 18.OCT.2007 16:40:48


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

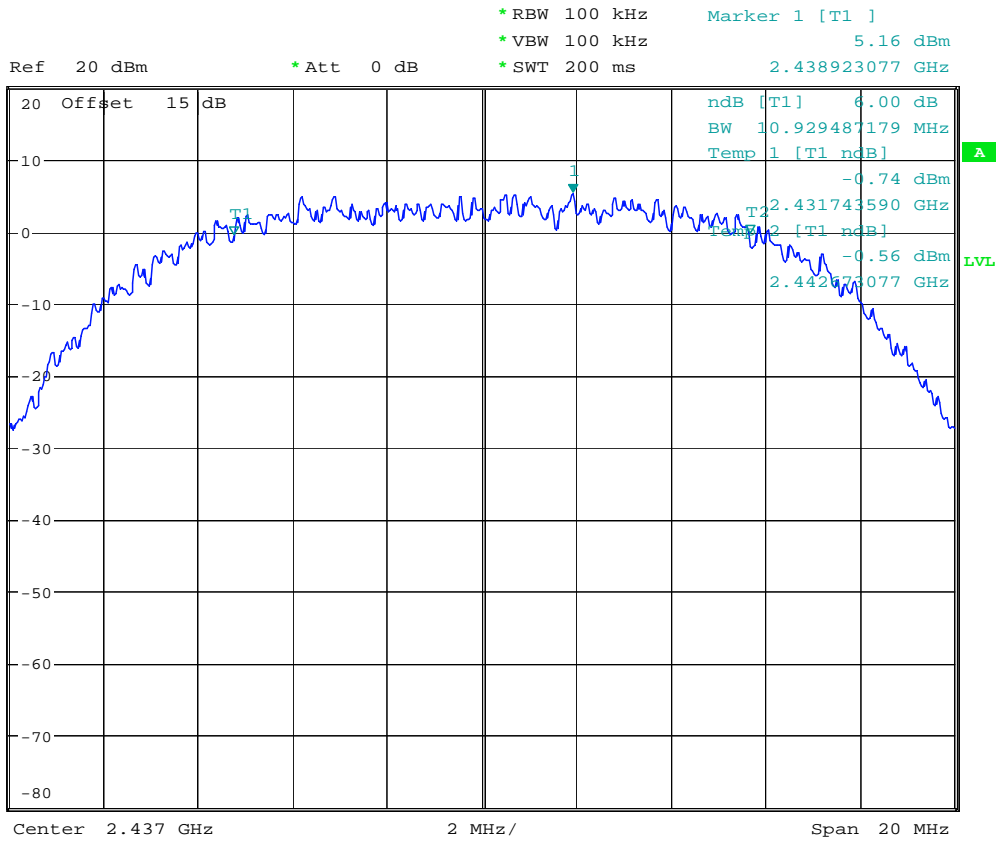

6dB BANDWIDTH 802.11B CH6

Date: 18.OCT.2007 16:41:20


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

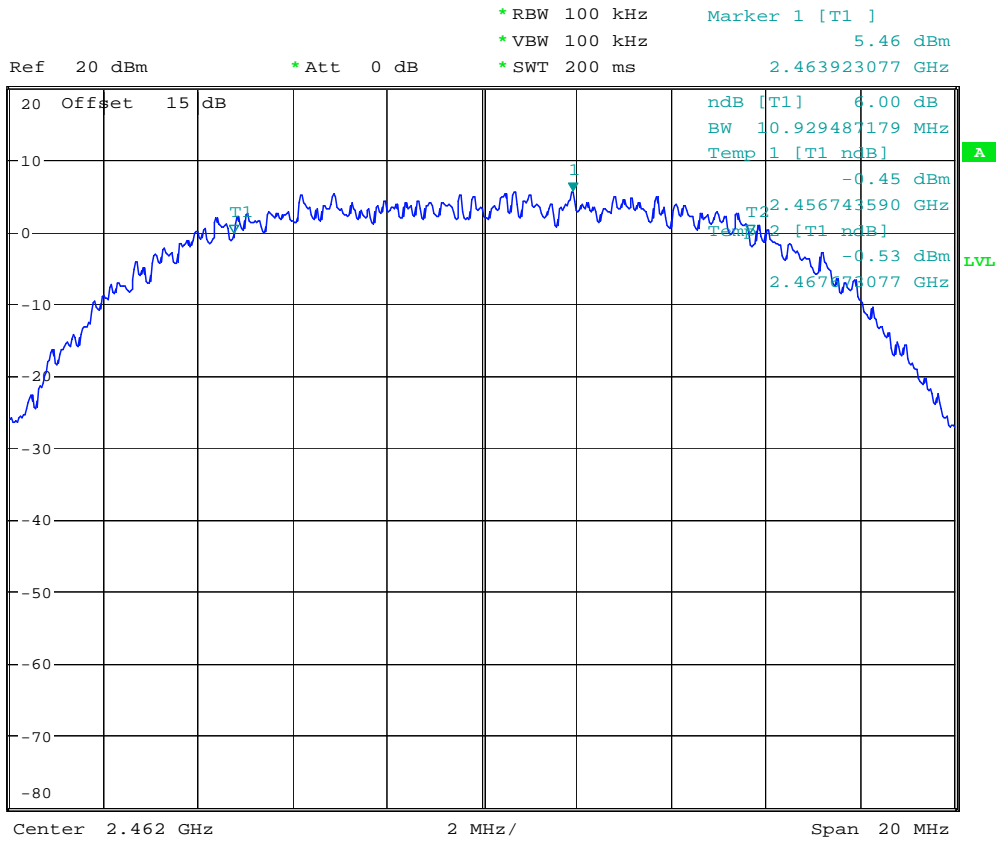

6dB BANDWIDTH 802.11B CH11

Date: 18.OCT.2007 16:41:44


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

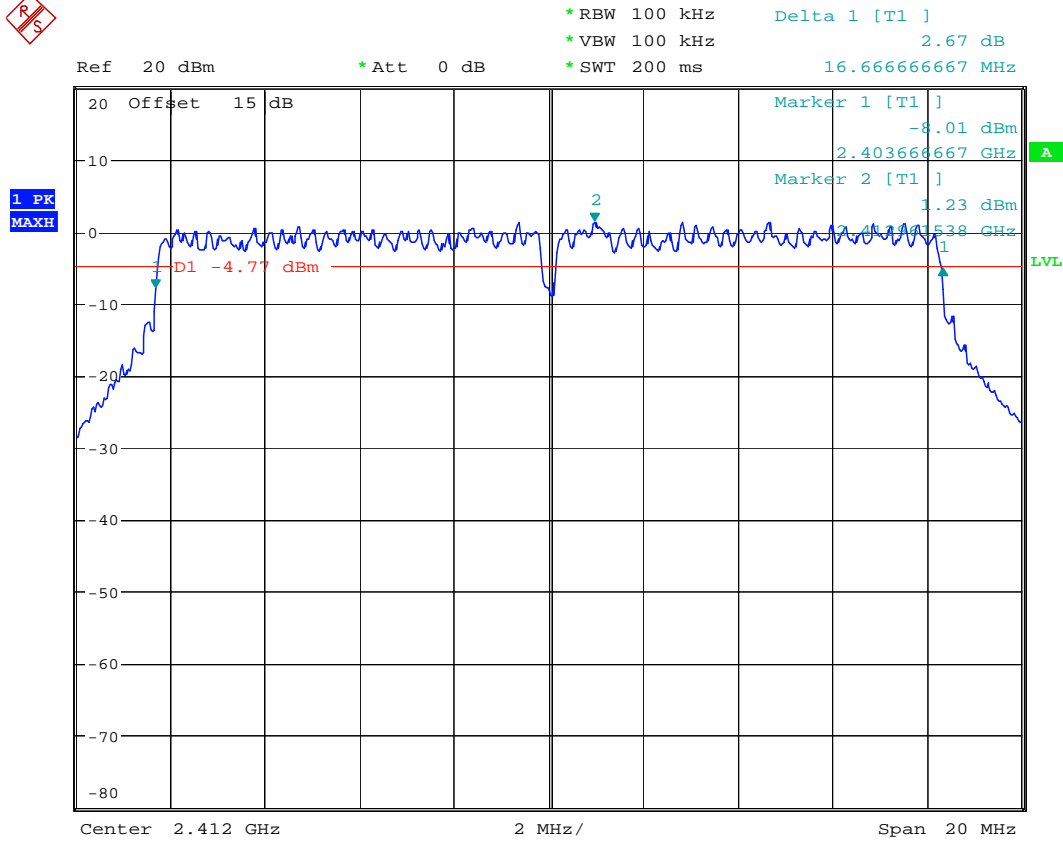

6dB BANDWIDTH 802.11G CH1

Date: 18.OCT.2007 17:47:47

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

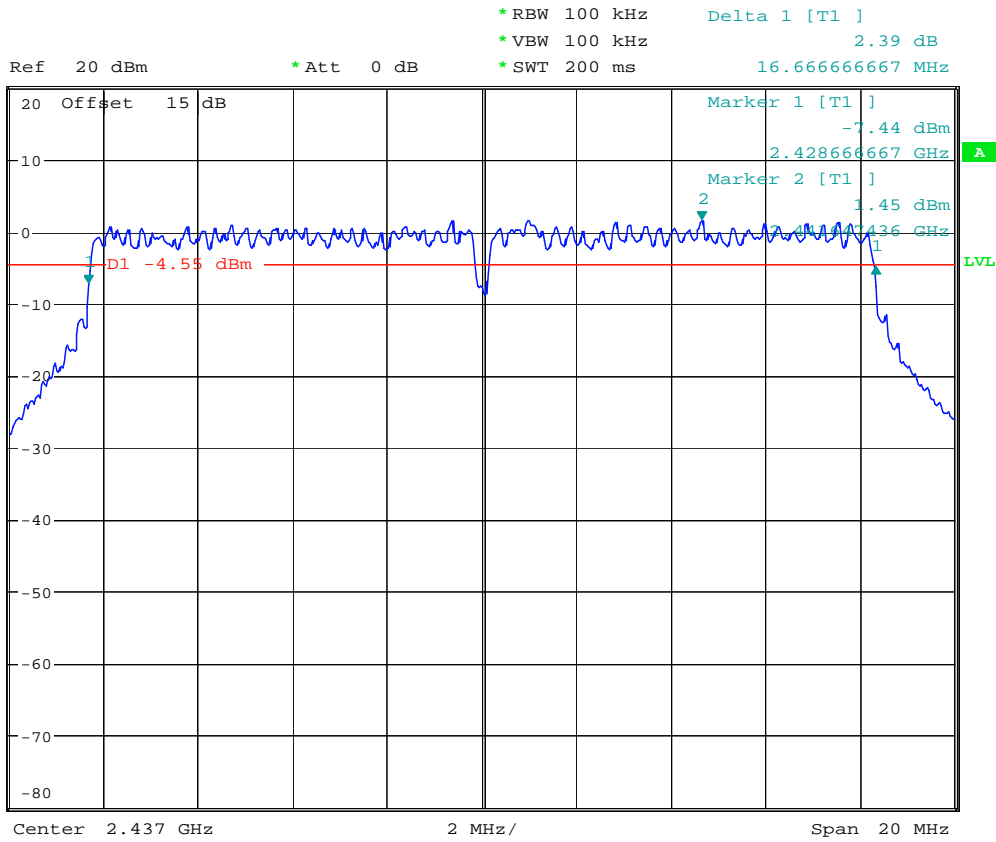


6dB BANDWIDTH 802.11G CH6

Date: 18.OCT.2007 17:48:42




Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

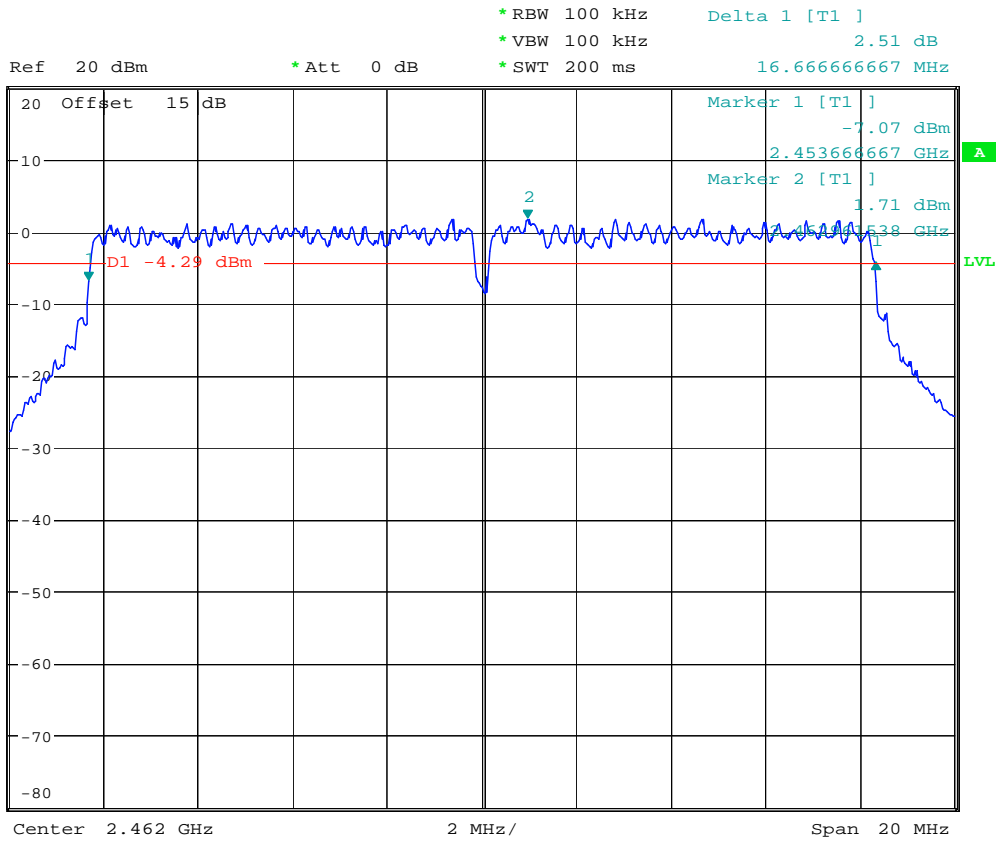

6dB BANDWIDTH 802.11G CH11  
 Date: 18.OCT.2007 17:49:30


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

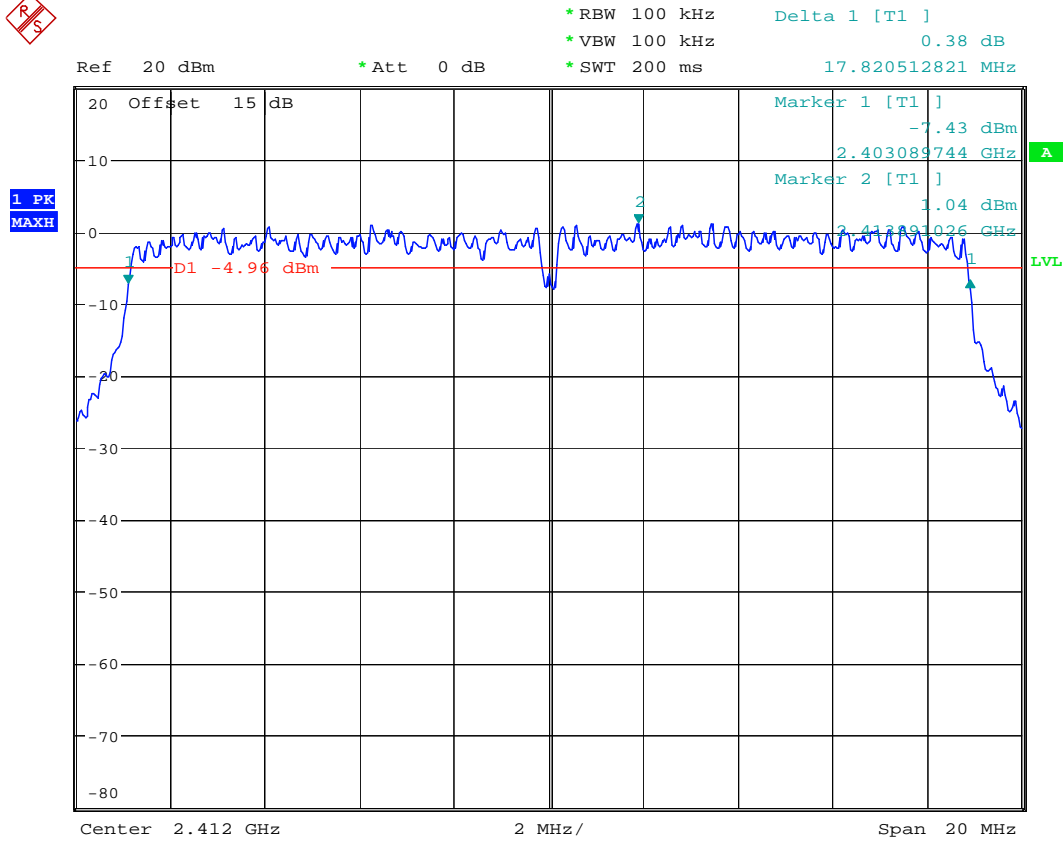

6dB BANDWIDTH 802.11N20MHz CH1

Date: 18.OCT.2007 17:52:42


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

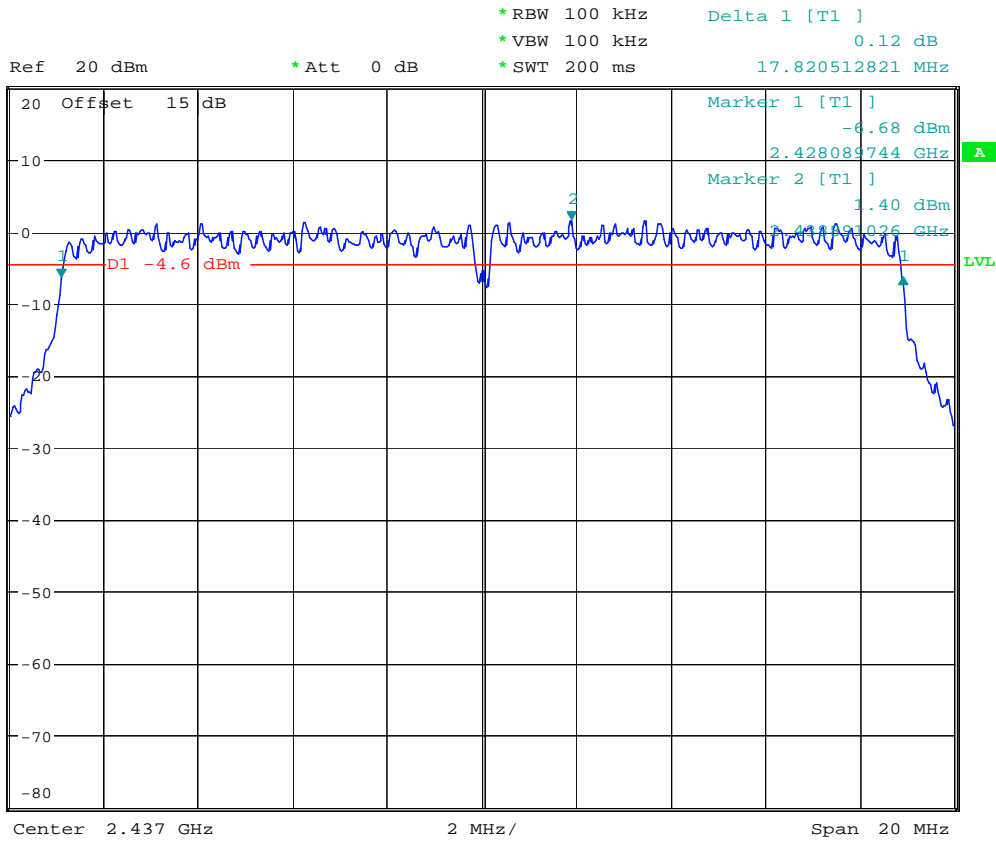

6dB BANDWIDTH 802.11N20MHz CH6

Date: 18.OCT.2007 17:51:49


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

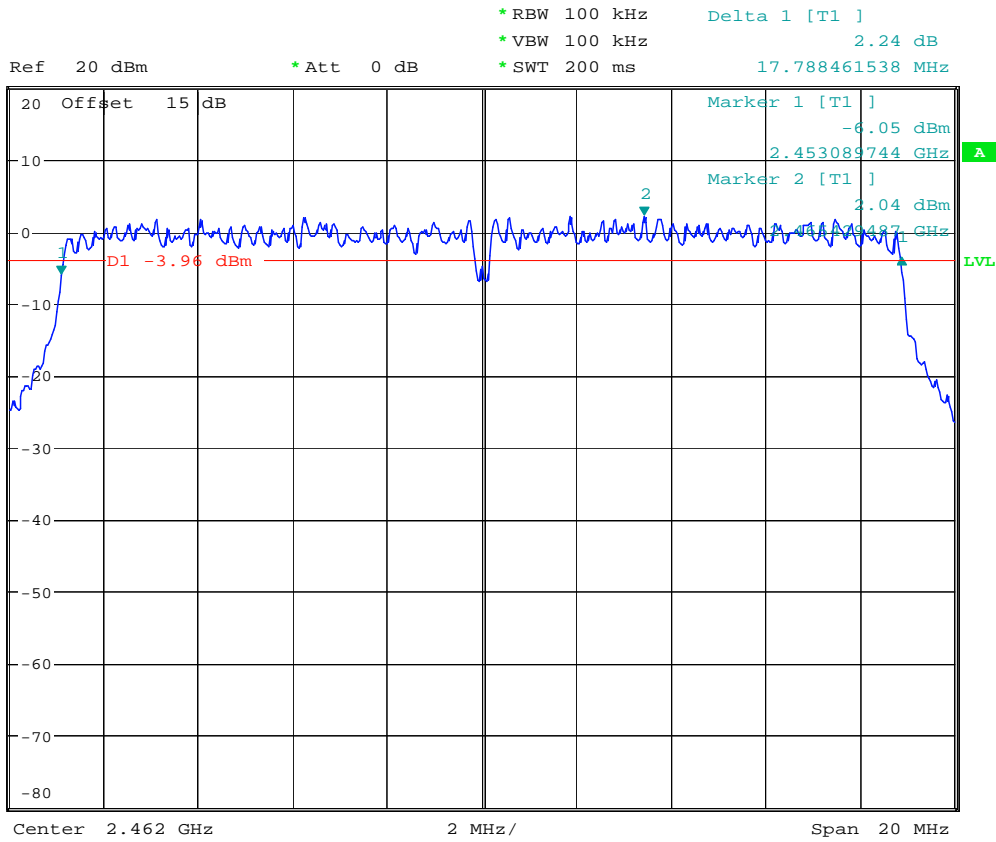

6dB BANDWIDTH 802.11N20MHz CH11

Date: 18.OCT.2007 17:50:49


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

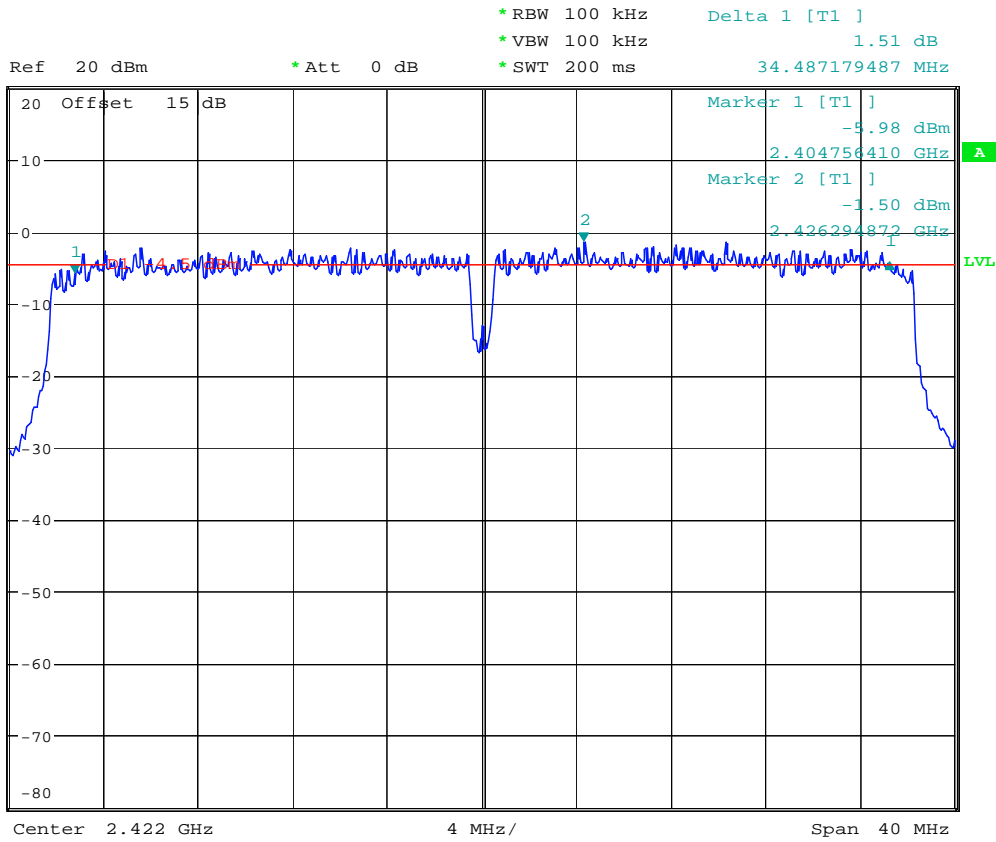

6dB BANDWIDTH 802.11N40MHz CH1

Date: 18.OCT.2007 16:02:39


Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

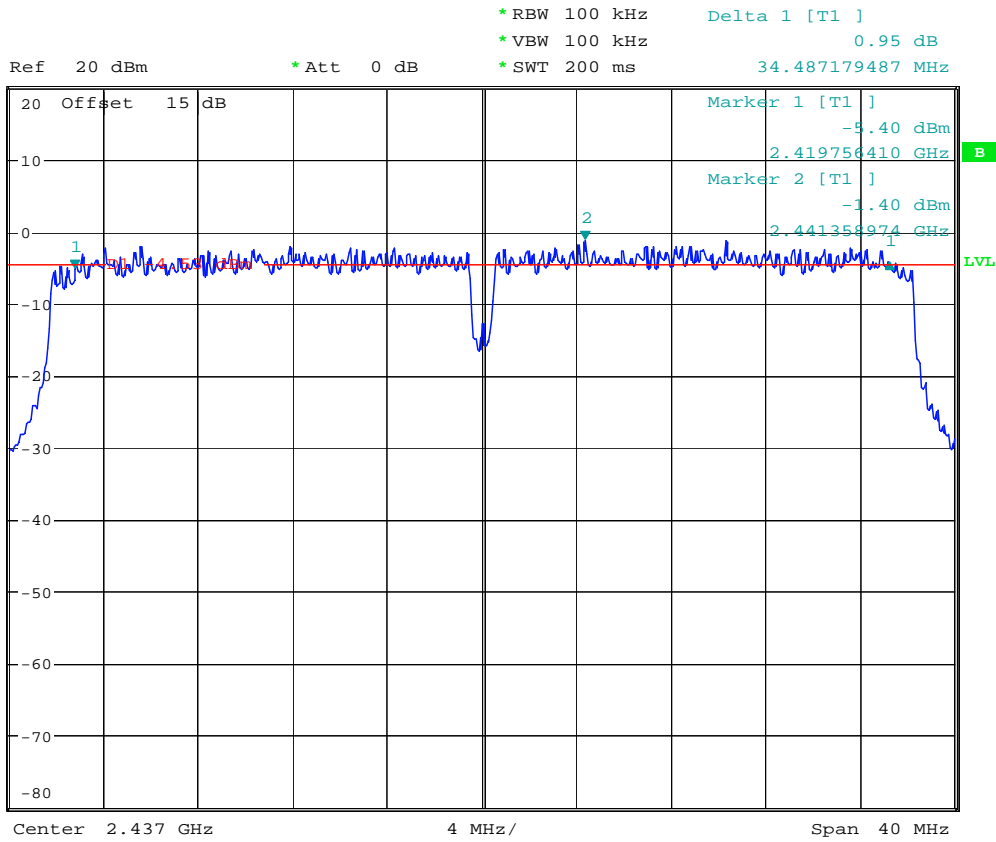

6dB BANDWIDTH 802.11N40MHz CH4

Date: 18.OCT.2007 19:32:44

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

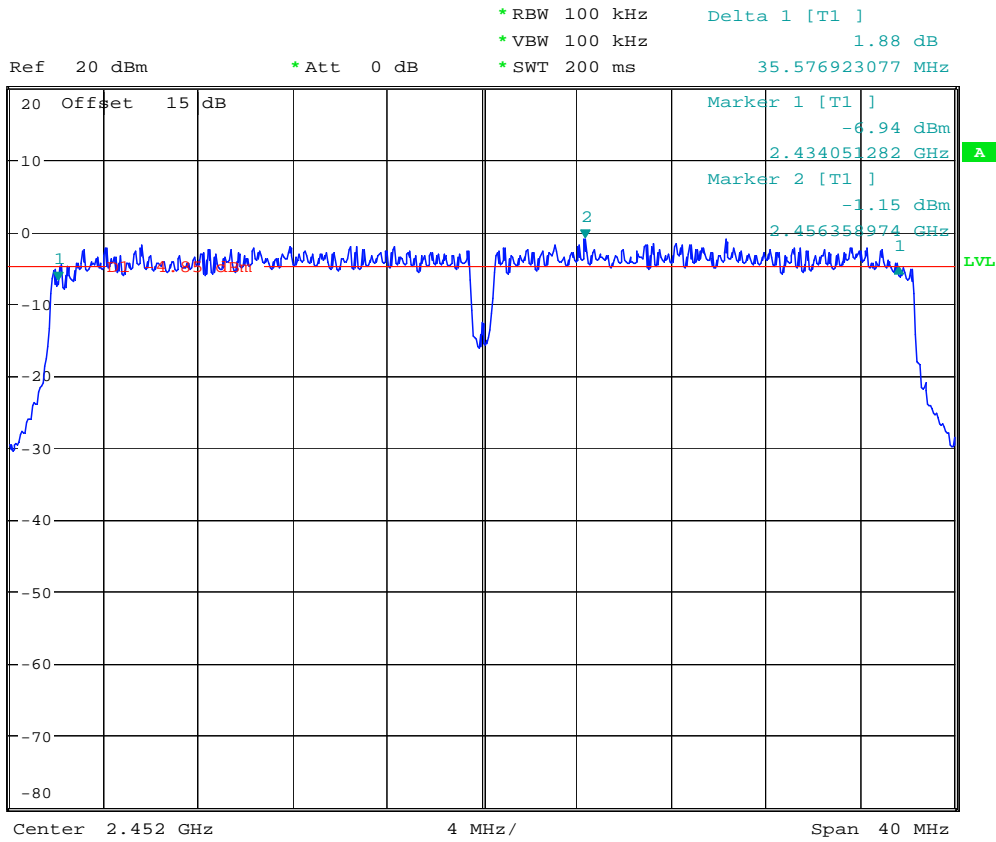


6dB BANDWIDTH 802.11N40MHz CH7

Date: 18.OCT.2007 15:59:02

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


### Peak Power Spectral Density

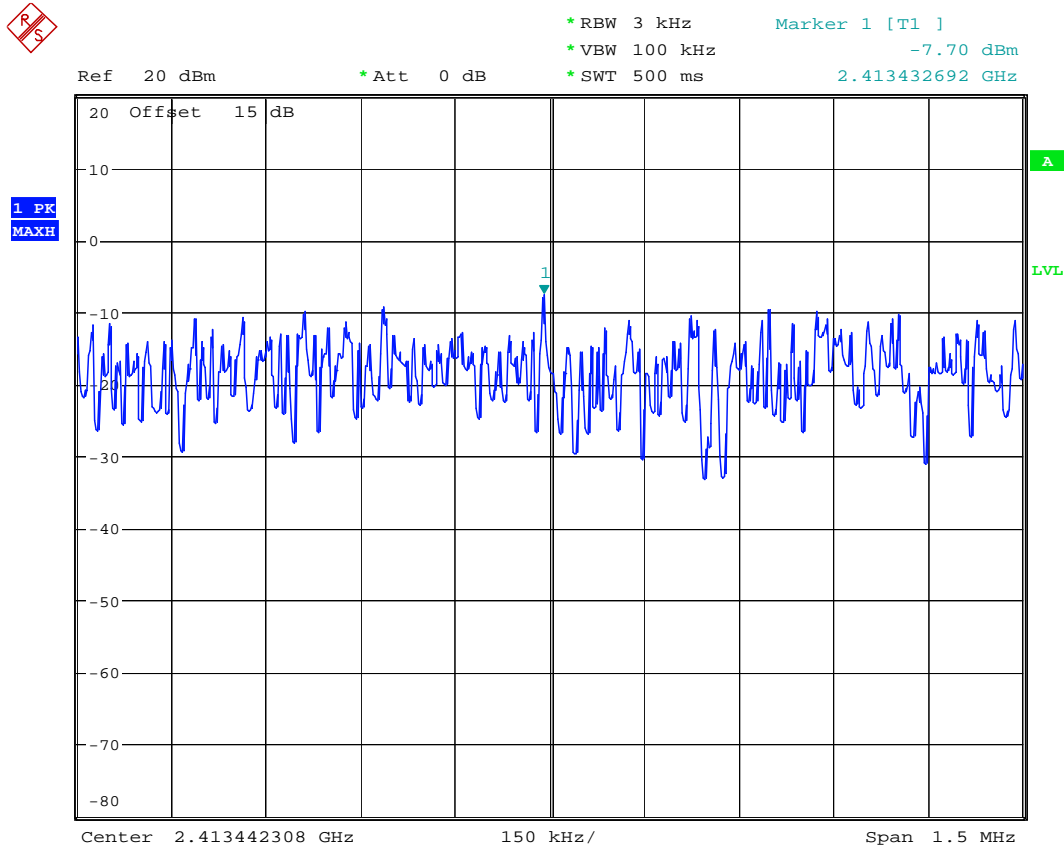

POWER DENSITY 802.11B CH1  
Date: 18.OCT.2007 15:37:20




Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

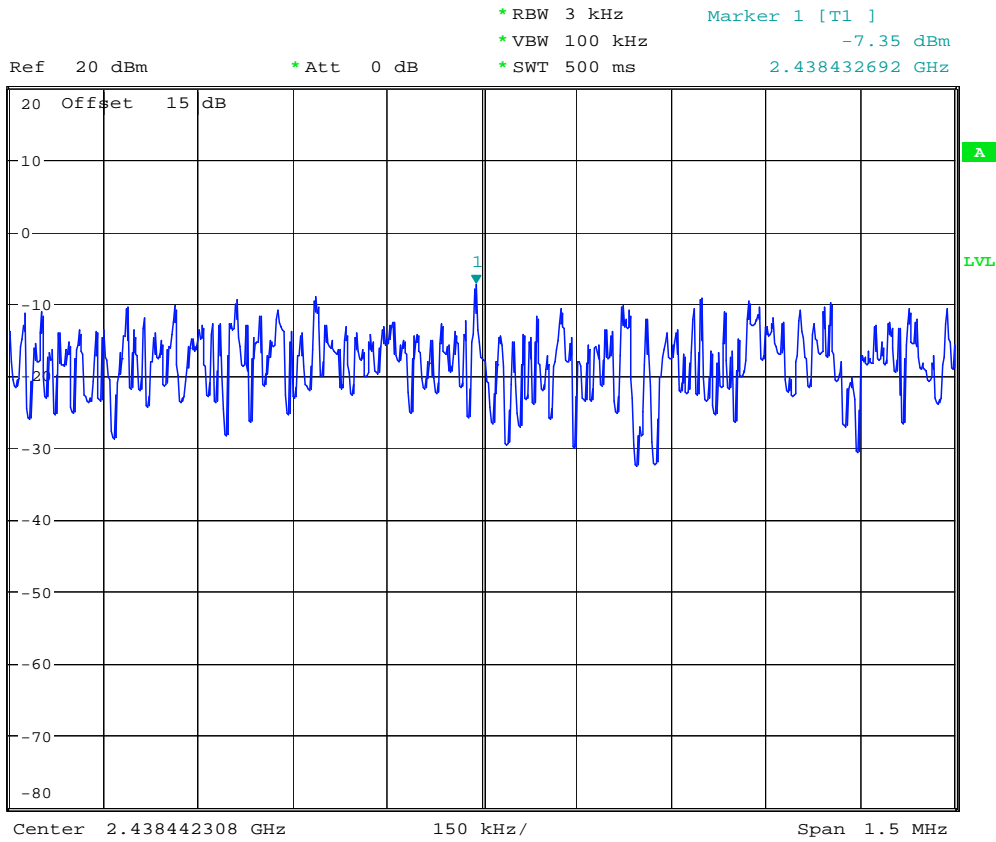

POWER DENSITY 802.11B CH6


Date: 18.OCT.2007 15:36:43

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

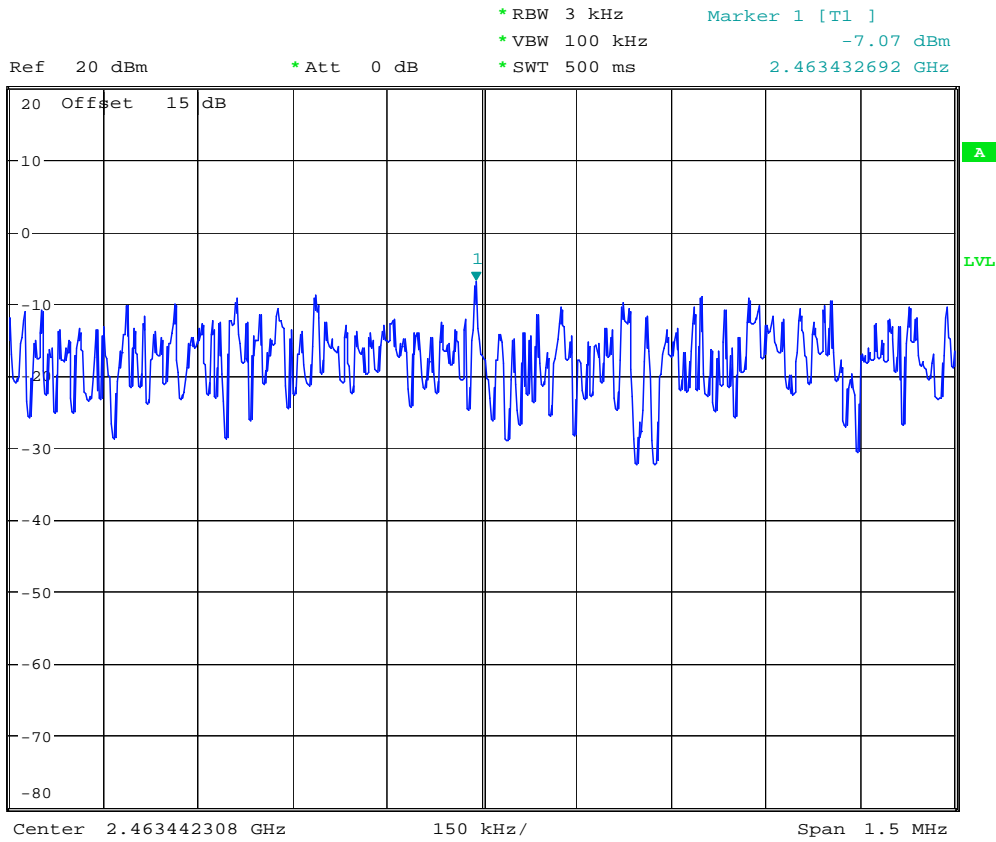

POWER DENSITY 802.11B CH11  
Date: 18.OCT.2007 15:35:51


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

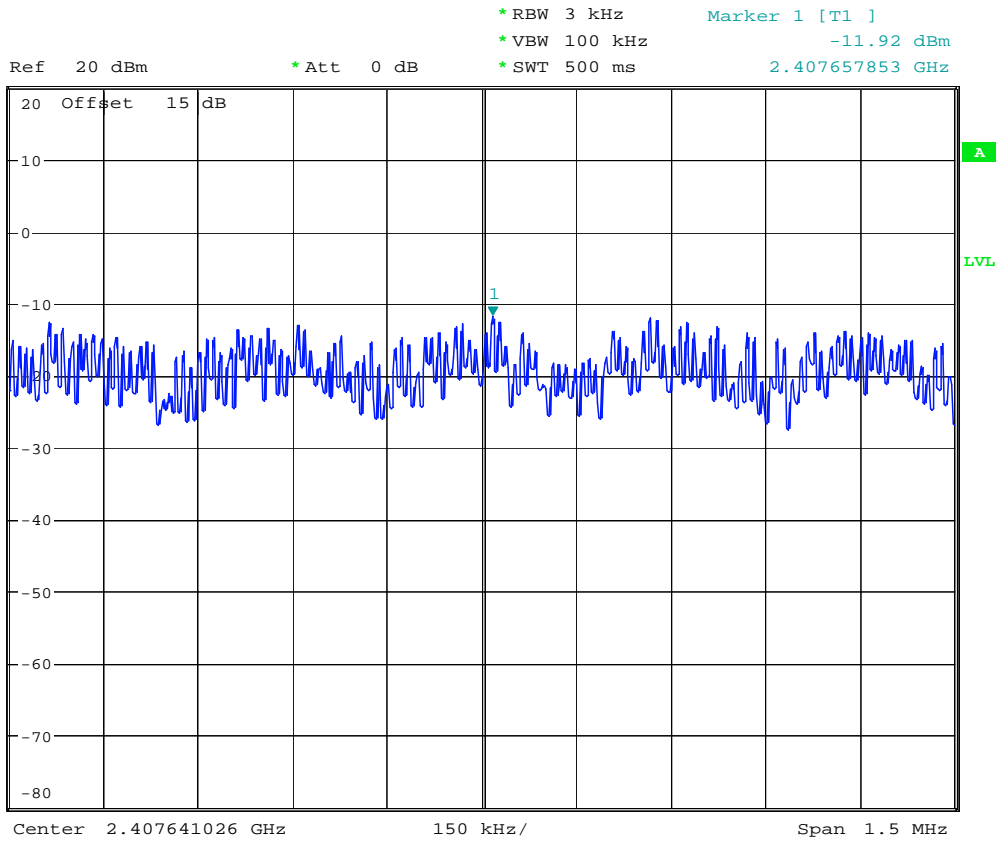

POWER DENSITY 802.11G CH1

Date: 18.OCT.2007 15:39:09


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

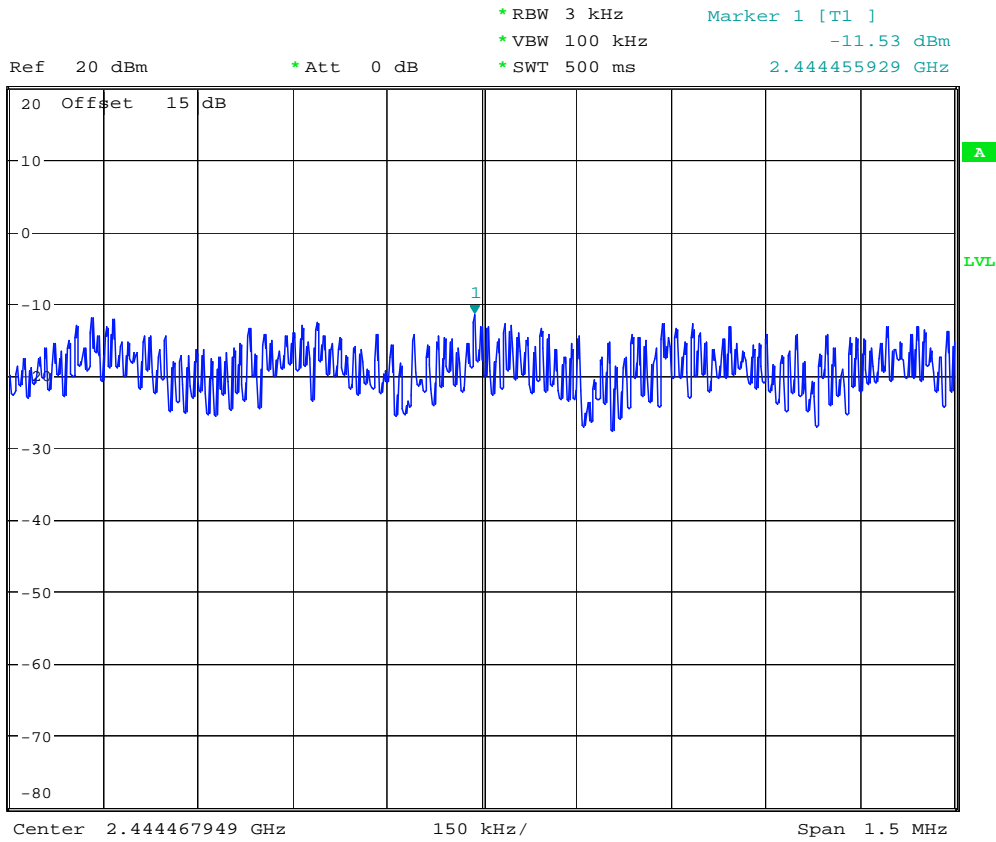

POWER DENSITY 802.11G CH6


Date: 18.OCT.2007 15:40:18

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

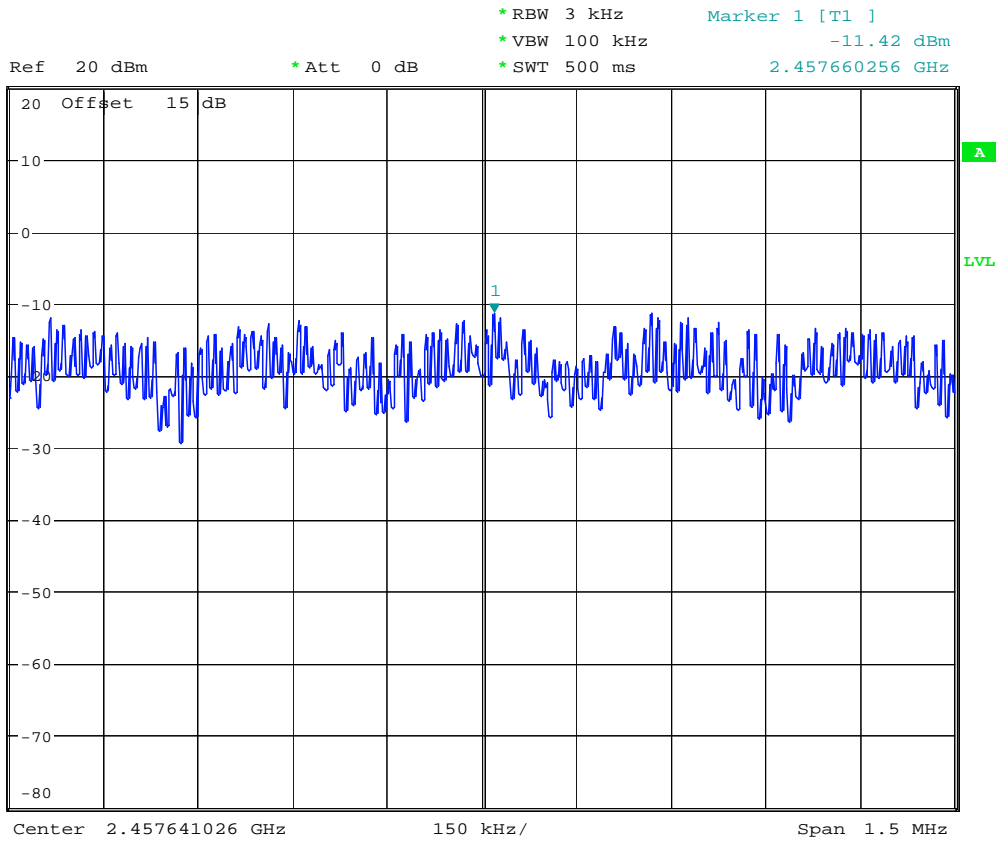

POWER DENSITY 802.11G CH11  
Date: 18.OCT.2007 15:41:43


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

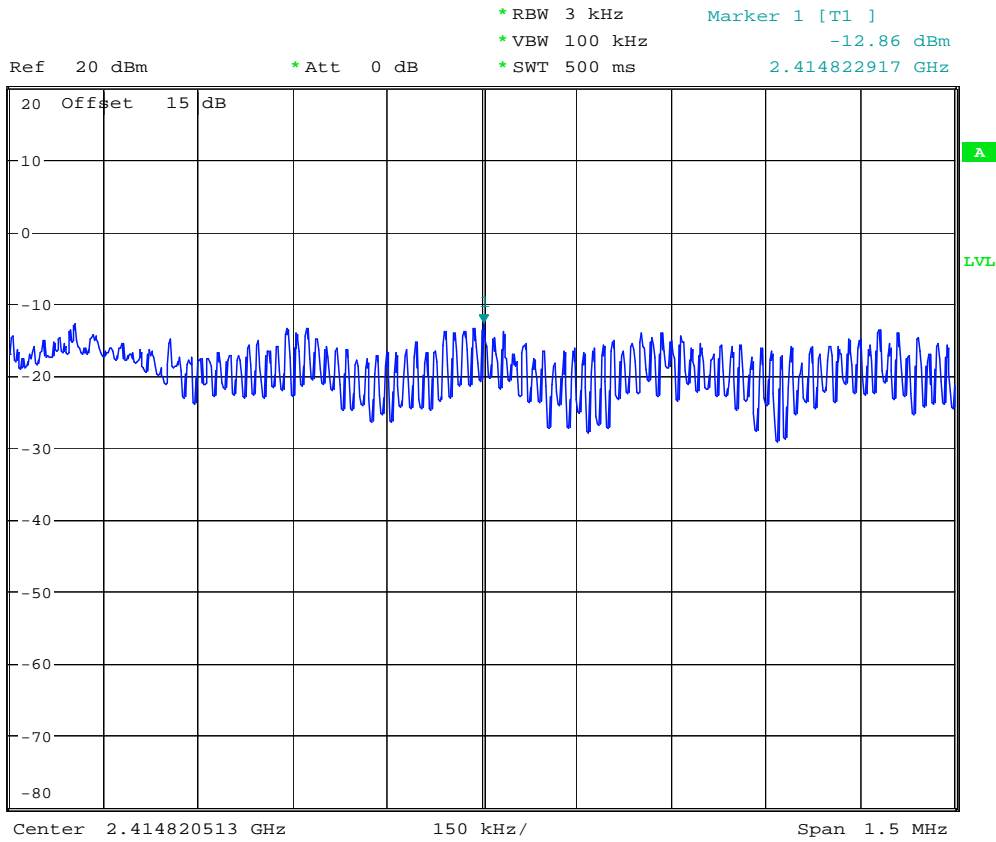

POWER DENSITY 802.11N20MHz CH1

Date: 18.OCT.2007 15:47:27


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

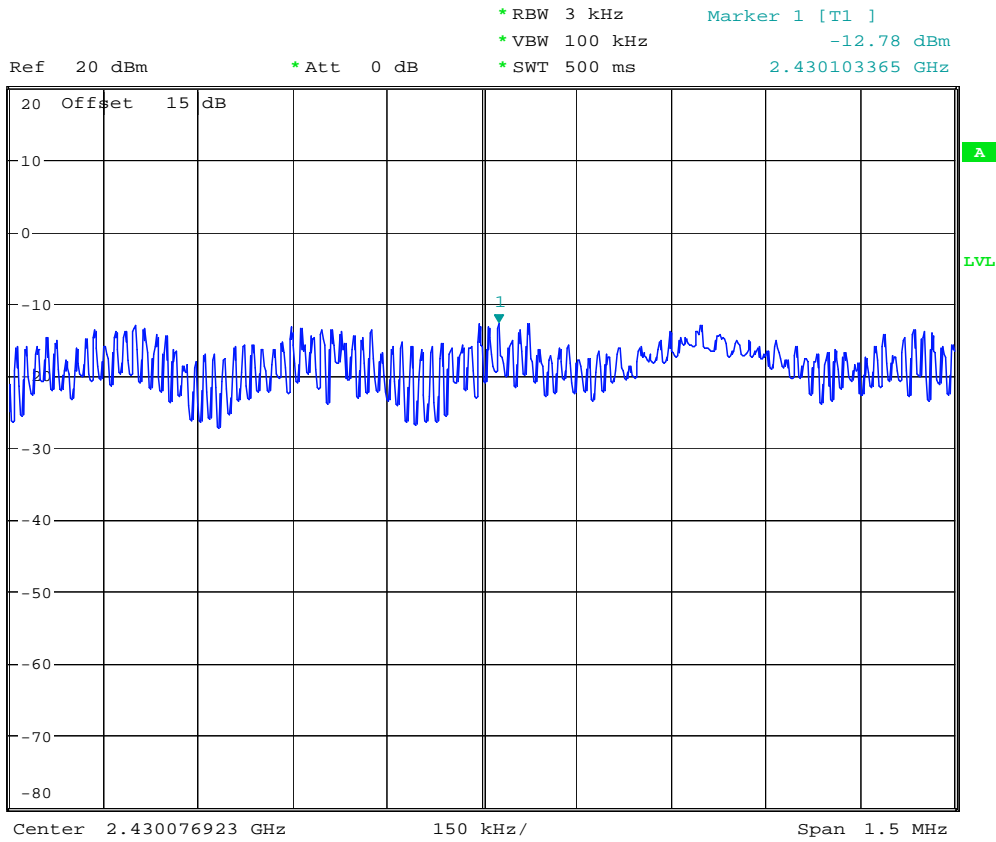

POWER DENSITY 802.11N20MHz CH6

Date: 18.OCT.2007 15:46:05

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

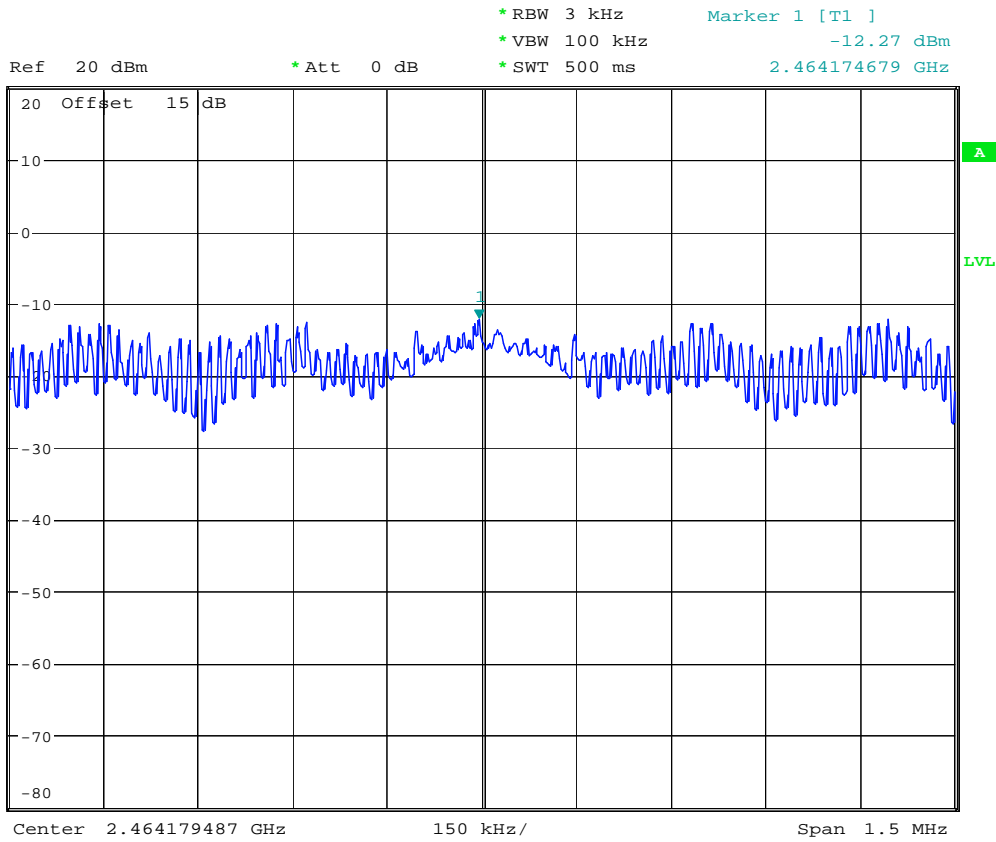


POWER DENSITY 802.11N20MHz CH11

Date: 18.OCT.2007 15:46:52




Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

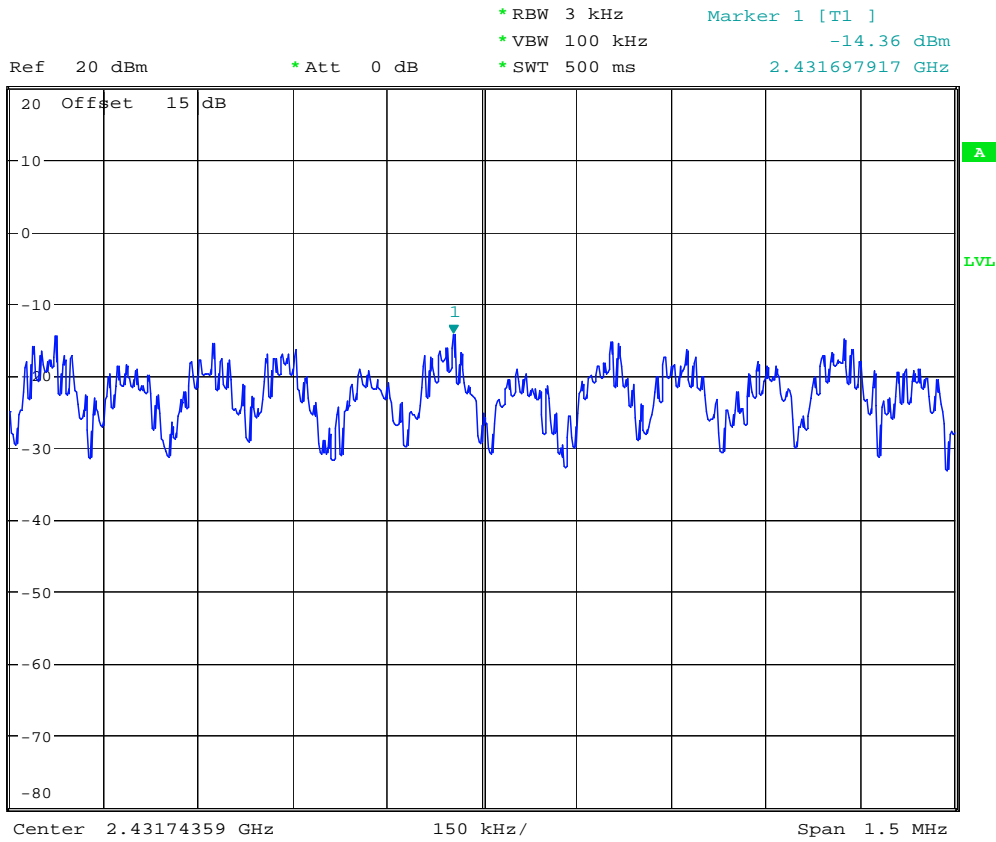

POWER DENSITY 802.11N40MHz CH1

Date: 18.OCT.2007 15:49:34


Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

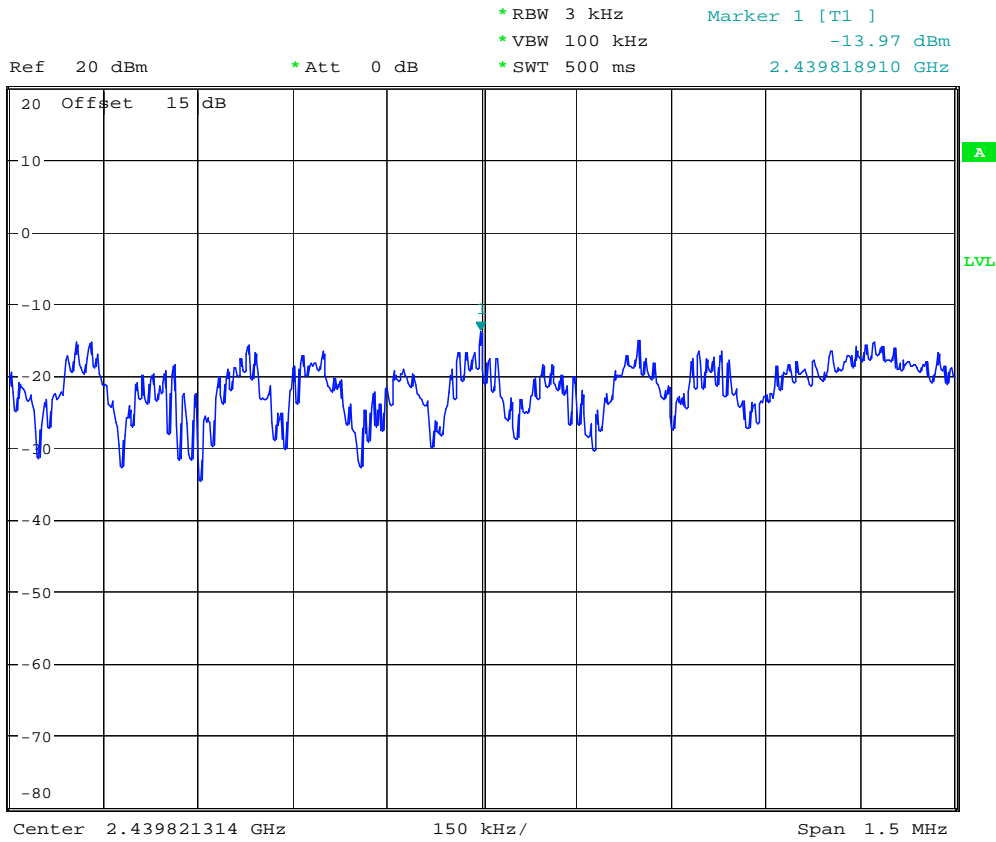

POWER DENSITY 802.11N40MHz CH4

Date: 18.OCT.2007 15:50:28

Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL


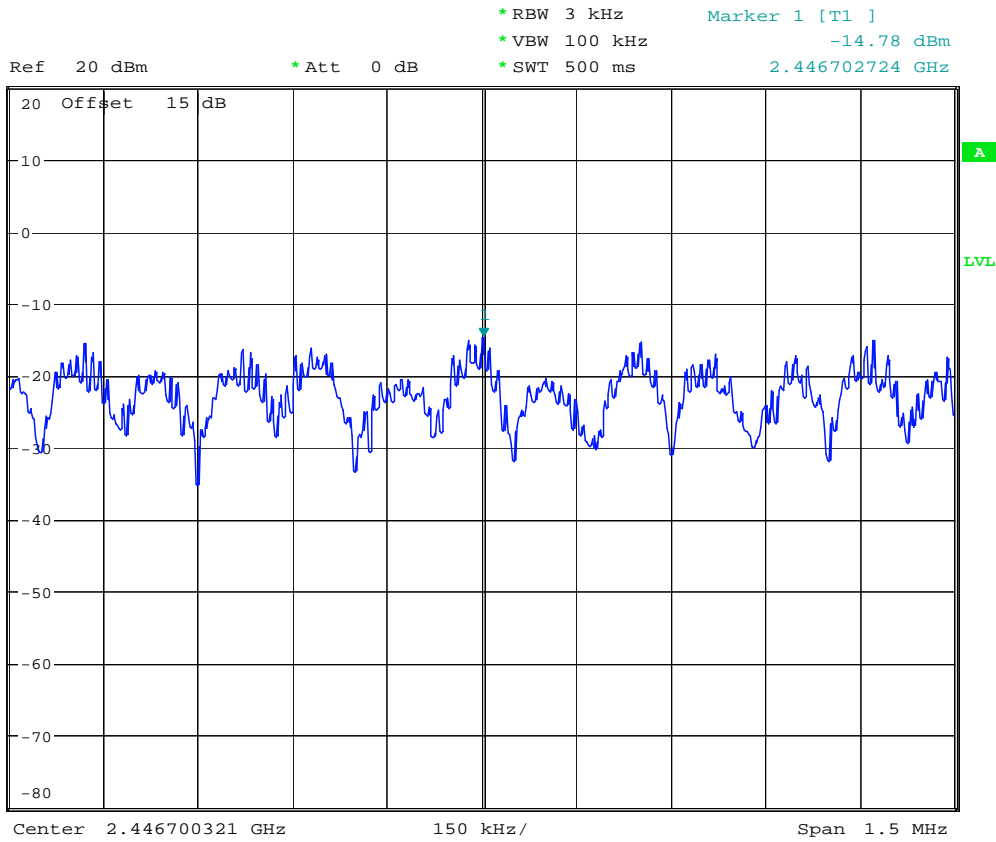


POWER DENSITY 802.11N40MHz CH7

Date: 18.OCT.2007 15:51:16



Registration number: W6M20710-8577-C-1  
FCC ID: RXZ-WU81RL

### Radiated Emission from Digital Part Antenna Polarization H

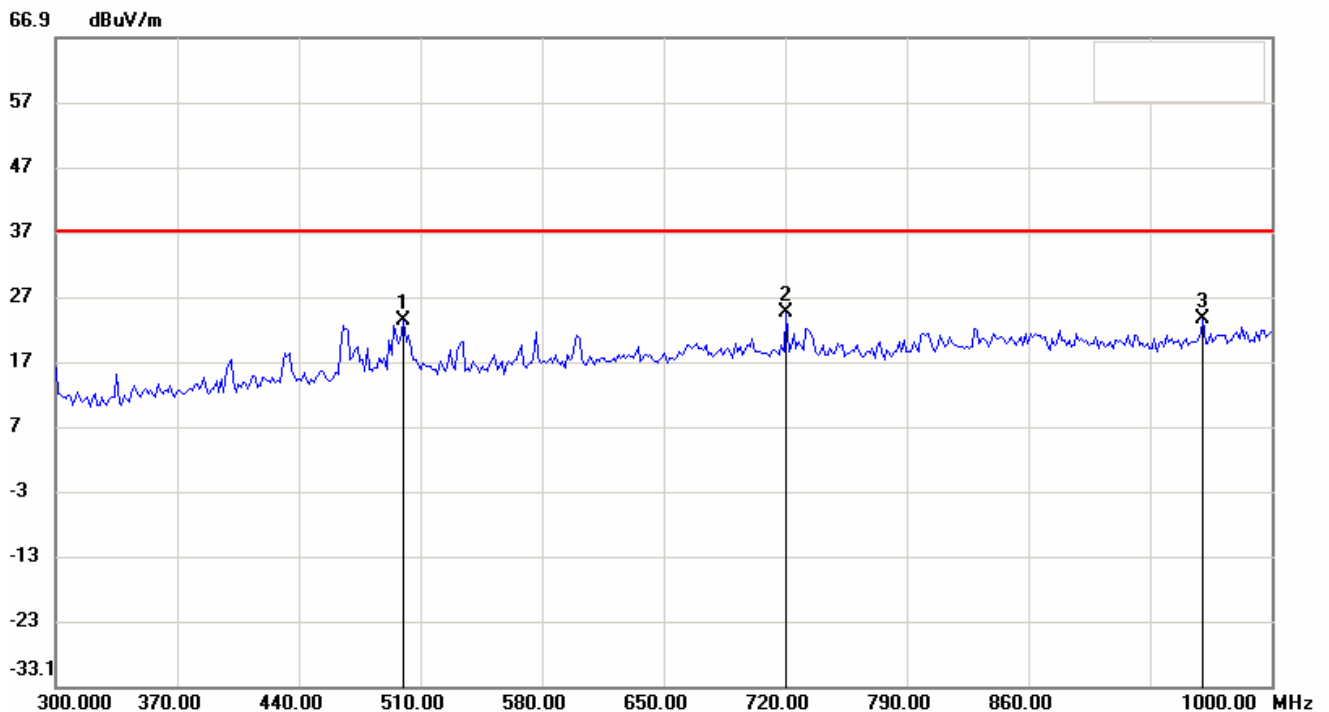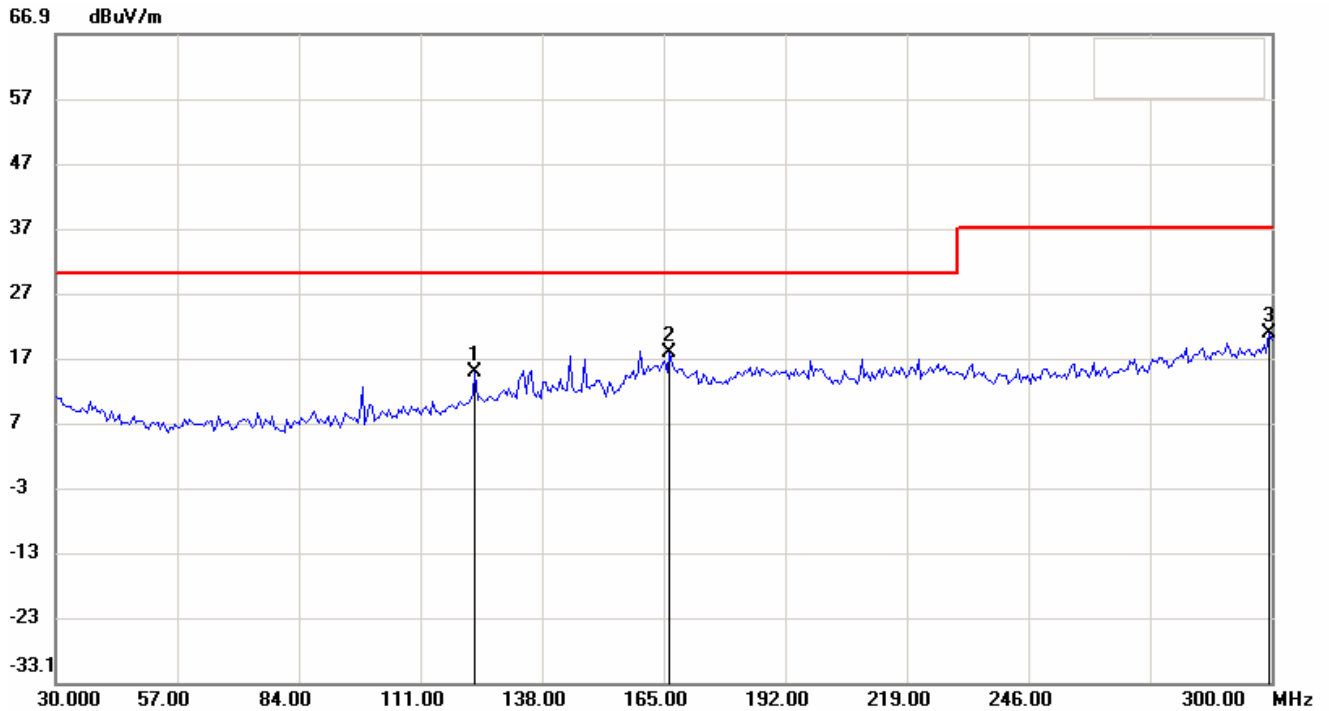

Registration number: W6M20710-8577-C-1  
 FCC ID: RXZ-WU81RL

### Antenna Polarization V

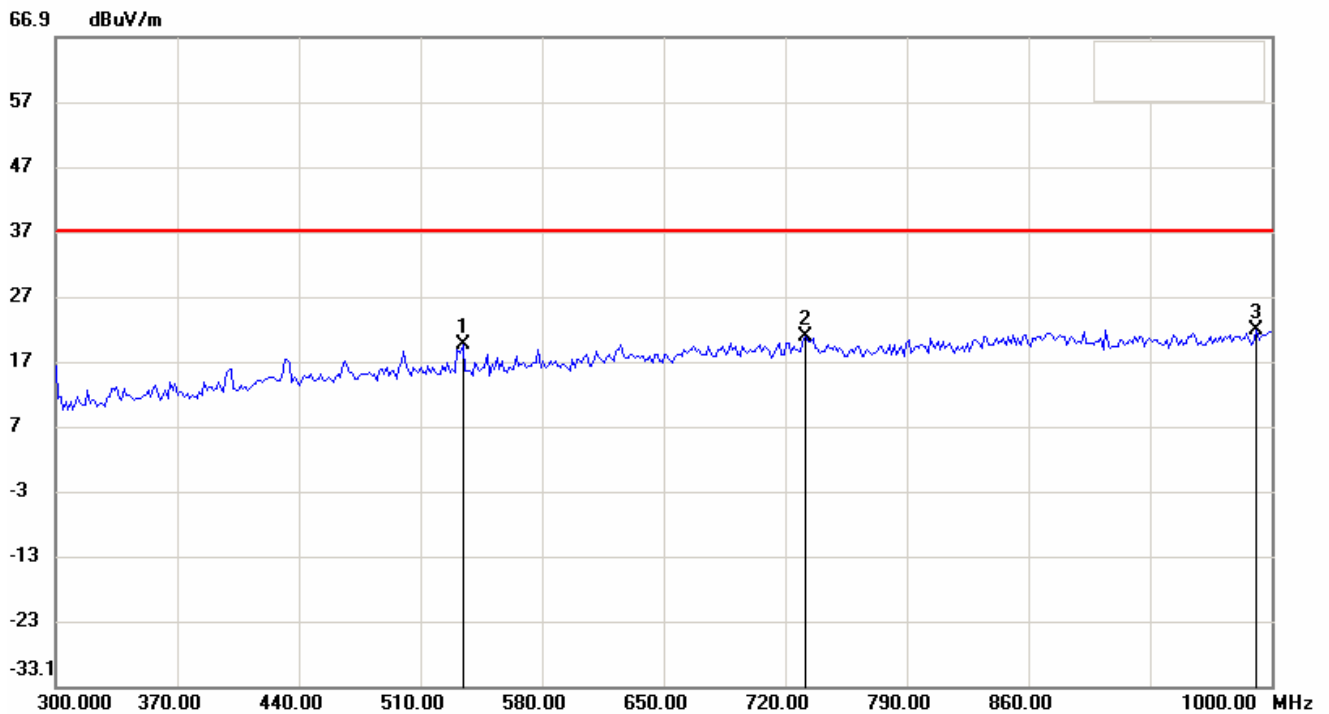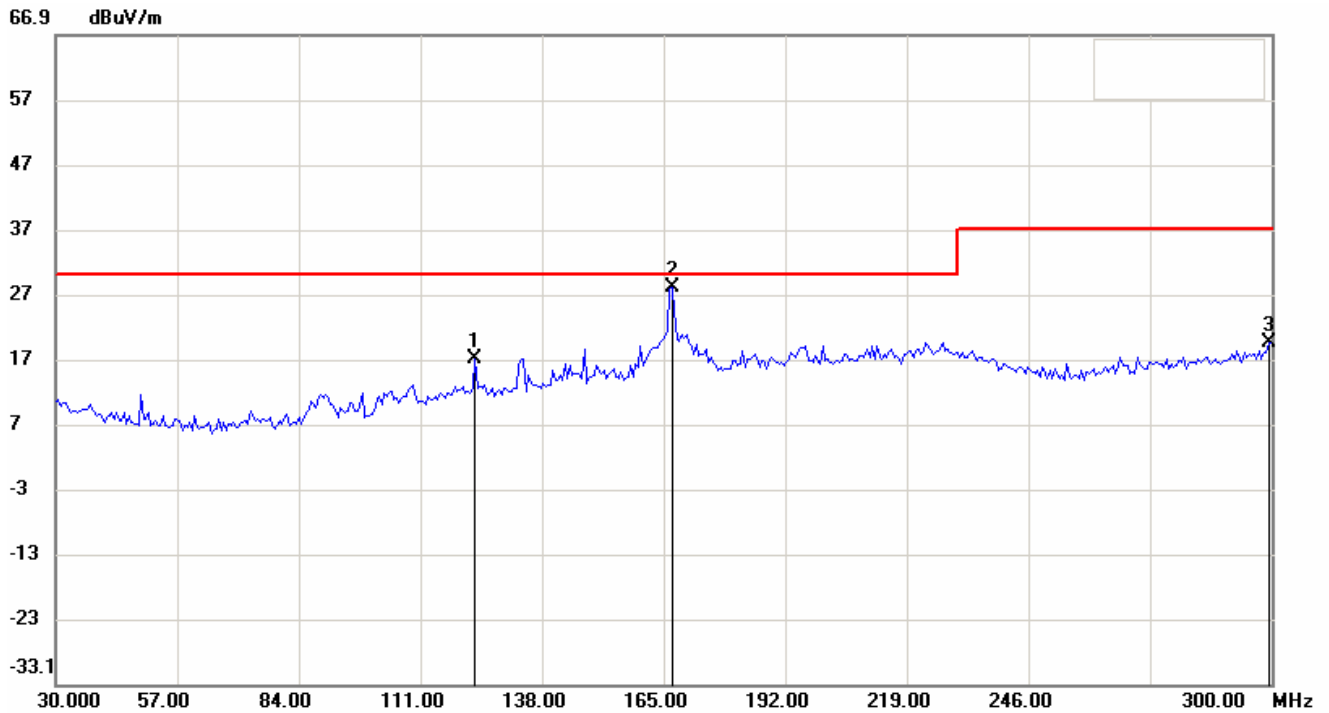

**Up Line: Peak Limit Line**  
**Down Line: Ave Limit Line**  
**Note:**


1. The plots are pre-scanned data for determining the tested points and for reference only.
2. The exact test result is shown in the data table of Radiated emission test of this test report.

Registration number: W6M20710-8577-C-1


FCC ID: RXZ-WU81RL

Power Line Conducted Emission

LISN N

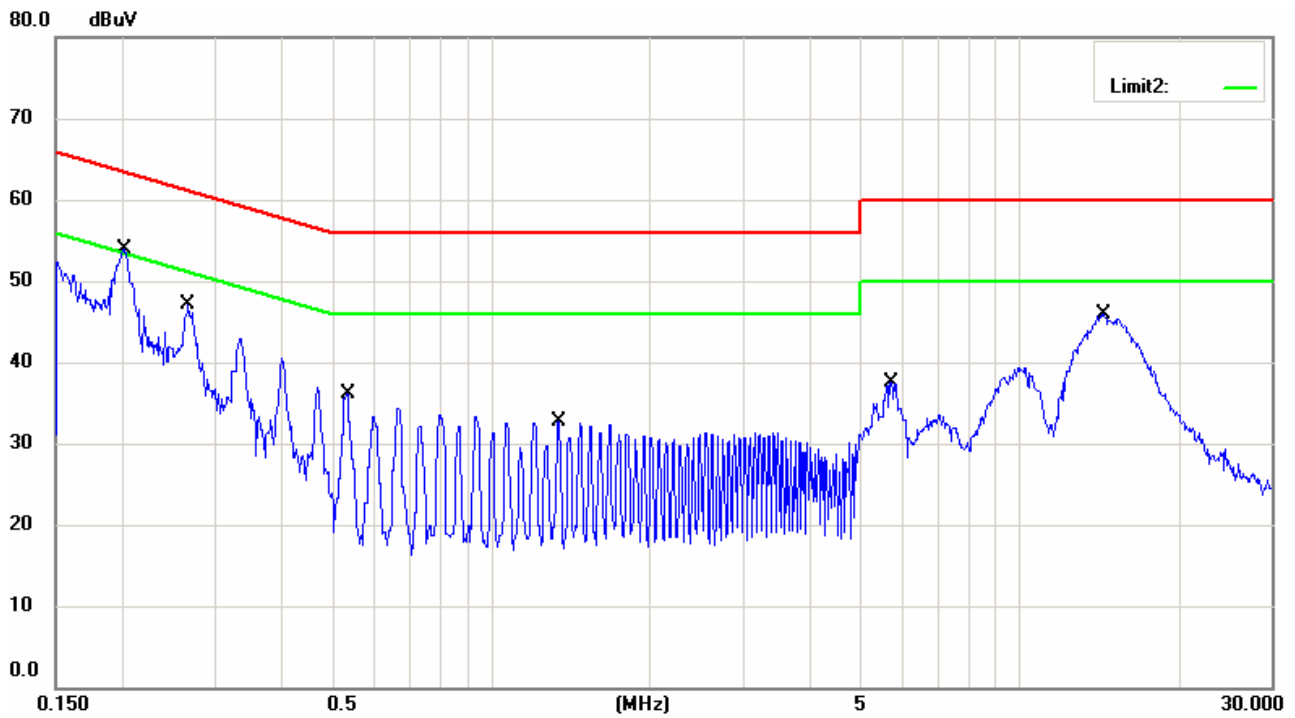

LISN L1

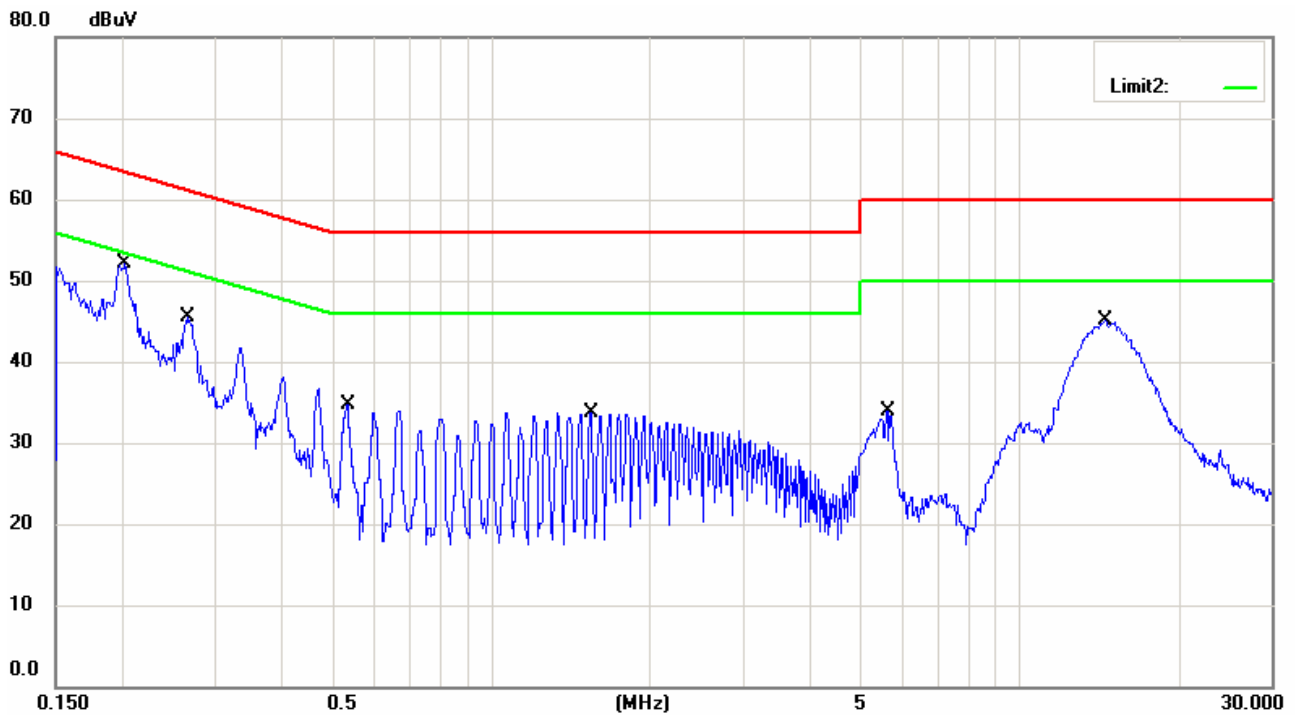

Up Line: QP Limit Line

Down Line: Ave Limit Line

Note:

1. The plots are pre-scanned data for determining the tested points and for reference only.
2. The exact test result is shown in the data table of AC conducted emission test of this test report.