
Inverted F Antenna Specification

Summary


ITEM	ANT SPEC						
Model Name	2.4G ANT						
Center Frequency	Horizontal			Vertical			
	2400MHz	2400MHz	2500MHz	2400MHz	2400MHz	2500MHz	
	-1.26	-0.76	-0.58	-5.25	-2.46	-1.86	
MAX. Gain	-0.58 dBi						
Polarization	Horizontal and Vertical						
Azimuth Beam Pattern	Omni-directional						
Impedance	50 Ohm						
Antenna Length	38.20mm						
Manufacture	ZHUHAI JIELI TECHNOLOGY CO.,LTD						
Address	No. 333 Kexing Road, Xiangzhou District, Zhuhai, China						

Antenna Photo & Length (mm)

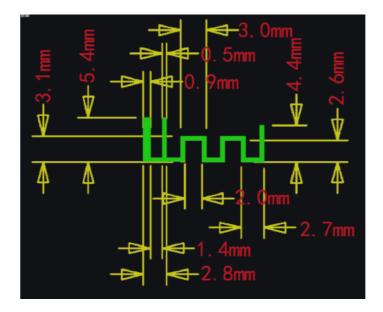


Horizontal: 2400 MHz 2450 MHz 2500 MHz

Power (dBm) Max: 0 Min: -40 Scale: 5/div

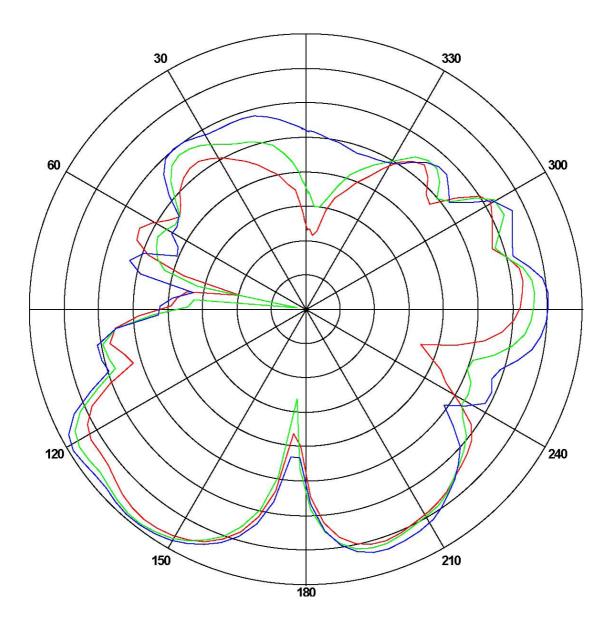

Frequency	Gain(dB)				
(MHz)	Max	Min	Avg		
2400	-1.26174	-30.0801	-7.18716		
2450	-0.765802	-36.5604	-7.48023		
2500	-0.585582	-22.0315	-6.59127		

Vertical: 2400 MHz 2450 MHz 2500 MHz Power (dBm) Max: 0 Min: -30 Scale: 5/div

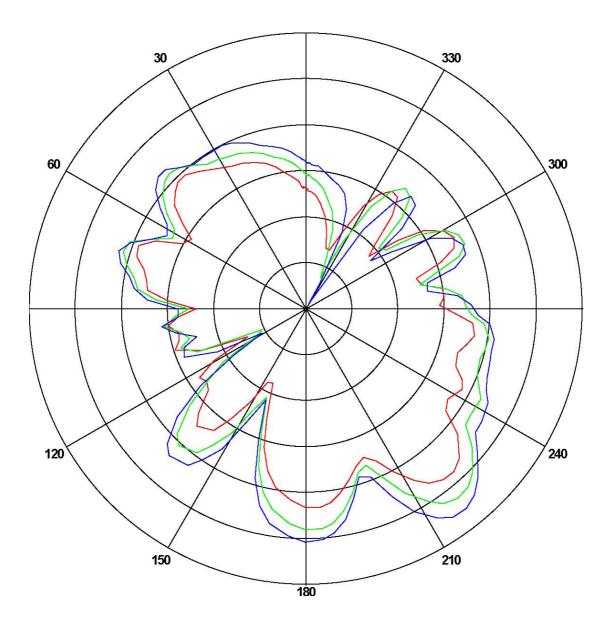

Frequency	Gain(dB)				
(MHz)	Max	Min	Avg		
2400	-5.2537	-22.1424	-12.4294		
2450	-2.4652	-24.5837	-10.4702		
2500	-1.86120	-29.5214	-9.20432		

ANT Test Labs: Attestation of Global Compliance Co., Ltd.