



# FCC TEST REPORT

**REPORT NO.:** RF931104L08B

**MODEL NO.:** EP-6615 (refer to page 6 for other models)

**RECEIVED:** NA

**TESTED:** Sep. 27 ~ Dec. 10, 2004

**ISSUE:** Aug. 25, 2005

**APPLICANT:** SparkLAN Communications, Inc.

**ADDRESS:** 3Fl., No. 246, Sec. 1, Neihu Road., Neihu Chiu,  
Taipei Taiwan 114, R.O.C.

**ISSUED BY:** Advance Data Technology Corporation

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou  
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2<sup>nd</sup> Rd., Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan,  
R.O.C.

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01



0528  
ILAC MRA



## Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS .....	5
2.1	MEASUREMENT UNCERTAINTY .....	5
3	GENERAL INFORMATION.....	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST .....	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	10
3.4	DESCRIPTION OF SUPPORT UNITS.....	10
4	TEST TYPES AND RESULTS .....	11
4.1	CONDUCTED EMISSION MEASUREMENT .....	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	11
4.1.2	TEST INSTRUMENTS.....	11
4.1.3	TEST PROCEDURES .....	12
4.1.4	DEVIATION FROM TEST STANDARD .....	12
4.1.5	TEST SETUP .....	13
4.1.6	EUT OPERATING CONDITIONS .....	13
4.1.7	TEST RESULTS .....	14
4.2	RADIATED EMISSION MEASUREMENT .....	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	20
4.2.2	TEST INSTRUMENTS.....	21
4.2.3	TEST PROCEDURES .....	22
4.2.4	DEVIATION FROM TEST STANDARD .....	22
4.2.5	TEST SETUP .....	23
4.2.6	EUT OPERATING CONDITIONS .....	23
4.2.7	TEST RESULTS .....	24
4.3	6dB BANDWIDTH MEASUREMENT .....	37
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT .....	37
4.3.2	TEST INSTRUMENTS.....	37
4.3.3	TEST PROCEDURE.....	38
4.3.4	DEVIATION FROM TEST STANDARD .....	38
4.3.5	TEST SETUP .....	38
4.3.6	EUT OPERATING CONDITIONS .....	38
4.3.7	TEST RESULTS .....	39
4.4	MAXIMUM PEAK OUTPUT POWER .....	45
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	45
4.4.2	TEST INSTRUMENTS.....	45
4.4.3	TEST PROCEDURES .....	46
4.4.4	DEVIATION FROM TEST STANDARD .....	46
4.4.5	TEST SETUP .....	46
4.4.6	EUT OPERATING CONDITIONS .....	46
4.4.7	TEST RESULTS .....	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	48
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	48
4.5.2	TEST INSTRUMENTS.....	48
4.5.3	TEST PROCEDURE.....	49
4.5.4	DEVIATION FROM TEST STANDARD .....	49



4.5.5	TEST SETUP .....	49
4.5.6	EUT OPERATING CONDITIONS .....	49
4.5.7	TEST RESULTS .....	50
4.6	BAND EDGES MEASUREMENT .....	56
4.6.1	LIMITS OF BAND EDGES MEASUREMENT .....	56
4.6.2	TEST INSTRUMENTS.....	56
4.6.3	TEST PROCEDURE.....	56
4.6.4	DEVIATION FROM TEST STANDARD .....	56
4.6.5	EUT OPERATING CONDITION .....	56
4.6.6	TEST RESULTS .....	57
4.7	ANTENNA REQUIREMENT .....	65
4.7.1	STANDARD APPLICABLE .....	65
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	65
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	66
6	INFORMATION ON THE TESTING LABORATORIES .....	68



## 1 CERTIFICATION

**PRODUCT:** 125 Mbps 802.11g Wireless Powerline Router  
**BRAND NAME:** SparkLAN (refer to page 6 for other brand)  
**MODEL NO. :** EP-6615 (refer to page 6 for other model)  
**APPLICANT :** SparkLAN Technology Co., Ltd.  
**TEST SAMPLE :** ENGINEERING SAMPLE  
**STANDARDS :** FCC Part 15, Subpart C (Section 15.247),  
ANSI C63.4-2003

The above equipment (model no.: EP-6615) is identical to model no. WHRTC-100GW, which has been tested by **Advance Data Technology Corporation** from Sep. 27 ~ Dec. 10, 2004, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Andrea Hsia , **DATE:** Aug. 25, 2005  
( Andrea Hsia )

**TECHNICAL**  
**ACCEPTANCE :** Gary Chang , **DATE:** Aug. 25, 2005  
Responsible for RF ( Gary Chang )

**APPROVED BY :** Cody Chang , **DATE:** Aug. 25, 2005  
( Cody Chang, Deputy Manager )

## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.07dB at 0.615MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit : min. 500kHz	PASS	MEET THE REQUIREMENT OF LIMIT.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	MEET THE REQUIREMENT OF LIMIT.
15.247(d)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.22dB at 400.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	MEET THE REQUIREMENT OF LIMIT.
15.247(d)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

### 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.63 dB
	200MHz ~1000MHz	3.65 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	125 Mbps 802.11g Wireless Powerline Router
<b>MODEL NO.</b>	EP-6615
<b>POWER SUPPLY</b>	120Vac, 60Hz from AC line
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>TRANSFER RATE</b>	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
<b>FREQUENCY RANGE</b>	2412MHz ~ 2462MHz
<b>NUMBER OF CHANNEL</b>	11
<b>MAXIMUM OUTPUT POWER</b>	26.303mW
<b>ANTENNA TYPE</b>	Monopole antenna with 2.0dBi gain
<b>DATA CABLE</b>	NA
<b>I/O PORTS</b>	RJ45
<b>ASSOCIATED DEVICES</b>	NA

**NOTE:**

1. This is a duplicate report of RF930821L01, the differences are changing the product name, brand name, model name, applicant and appearance due to marketing requirement.
2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards and backwards compatible with IEEE 802.11b products.
4. The models as below are identical to each other except for their model designation, brand name and product name, due to marketing requirement.

Model Name	Brand	Product name	Description
EP-6615	SparkLAN	125 Mbps 802.11g Wireless Powerline Router	For marketing different
TPL-111BR	TRENDnet	125 Mbps 802.11g Wireless Powerline Router	For marketing different


5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

### 3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

#### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

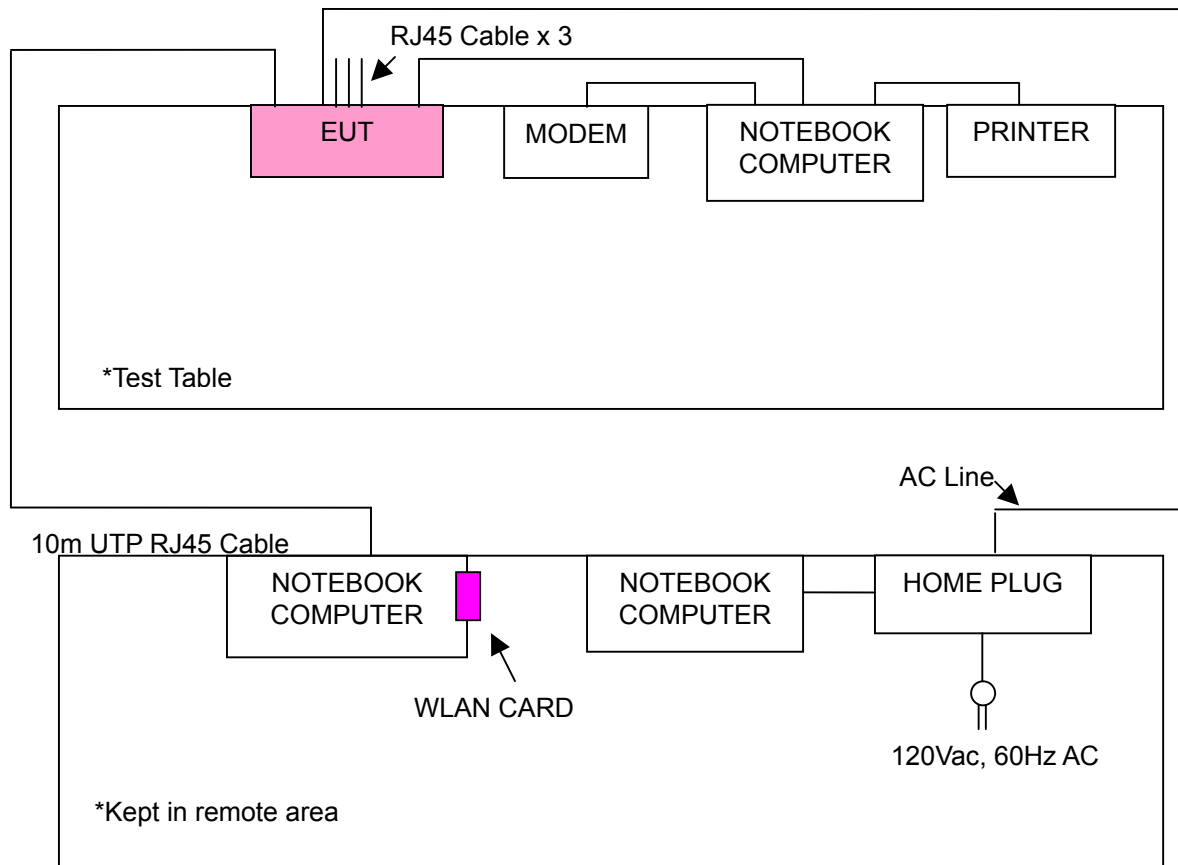



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission      **RE<1G**: Radiated Emission below 1GHz  
**RE≥1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement

**POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

**RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6





### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

### **BANDEDGE MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6

### **ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 125 Mbps 802.11g Wireless Powerline Router. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.247)**  
**ANSI C63.4-2003**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	12130898320	E2K24CLNS
2	MODEM	ACEEX	1414V/3	0401008269	IFAXDM1414
3	PRINTER	EPSON	LQ-300+	DCGY054147	FCC DoC Approved
4	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS
5	NOTEBOOK COMPUTER	DELL	PP05L	33898721680	E2K24CLNS
6	WLAN CARD (Insert into NB)	NA	WN825G	NA	ACQWN825Gv2
7	HOME PLUG				

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.8 m shielded cable
3	1.8 m shielded cable
4	NA
5	NA
6	NA
7	NA

**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).  
2. Item 4 ~ 7 act as a communication partner to transfer data.



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 06, 2005
RF signal cable Woken	5D-FB	Cable-HyC02-01	Mar. 07, 2005
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Mar. 10, 2005
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Mar. 04, 2005
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Shielded Room 2.
  3. The VCCI Site Registration No. is C-2047.




#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under Limit – 20dB was not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

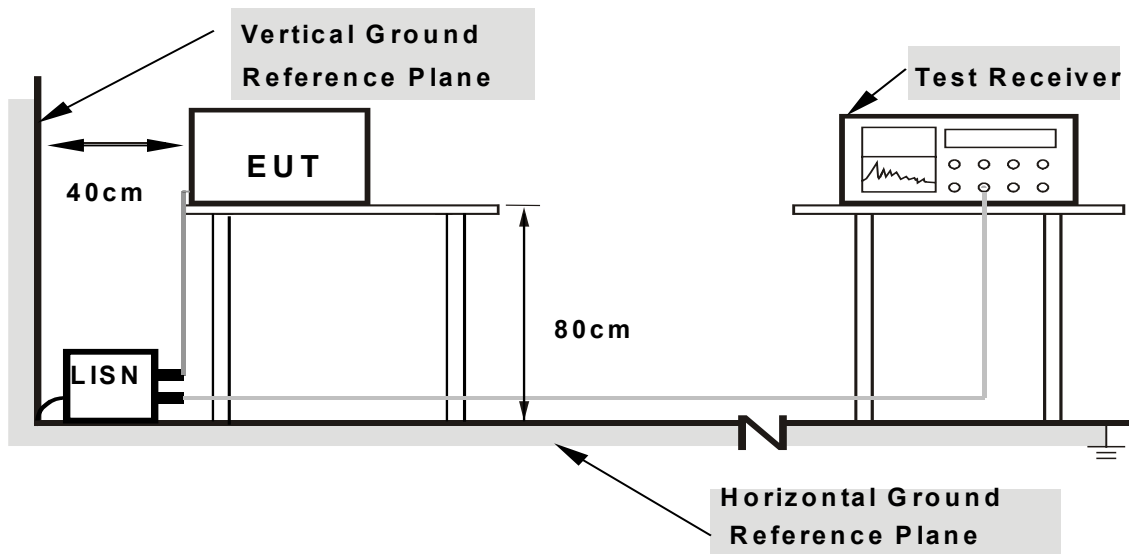

- Note:**
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared another Notebook system to act as a communication partner and placed it outside of testing area.
- c. The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- d. The communication partner sent data to EUT by command "PING".



4.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA

<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>PHASE</b>	Line 1
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 69% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.201	0.10	46.00	-	46.10	-	63.58
2	0.270	0.10	45.52	-	45.62	-	61.13	51.13	-15.50	-
3	0.338	0.11	38.05	-	38.16	-	59.26	49.26	-21.11	-
4	0.611	0.16	39.45	-	39.61	-	56.00	46.00	-16.39	-
5	0.943	0.24	35.43	-	35.67	-	56.00	46.00	-20.33	-
6	2.070	0.26	34.90	-	35.16	-	56.00	46.00	-20.84	-

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

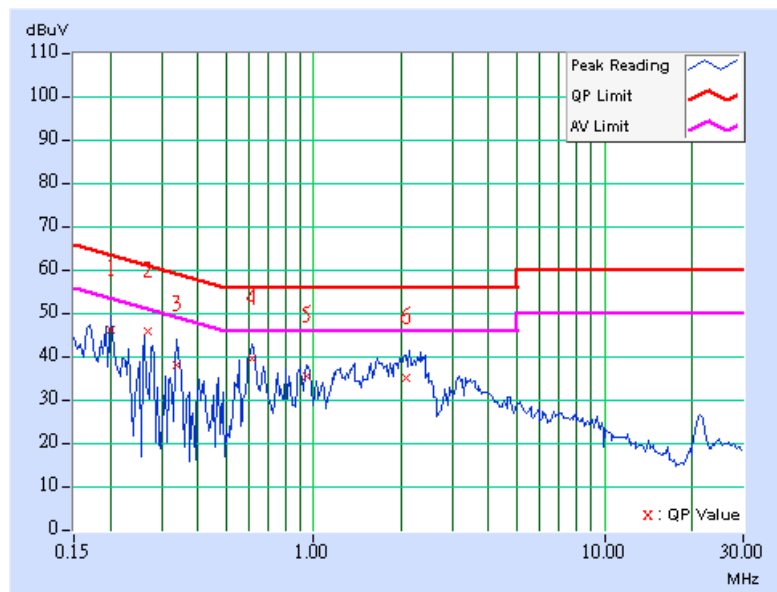




<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	1	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 69% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.10	41.46	-	41.56	-	65.79
2	0.202	0.10	44.55	-	44.65	-	63.51	53.51	-18.86	-
3	0.275	0.10	42.47	-	42.57	-	60.97	50.97	-18.40	-
4	0.412	0.12	33.48	-	33.60	-	57.61	47.61	-24.02	-
5	0.611	0.16	36.54	-	36.70	-	56.00	46.00	-19.30	-
6	2.035	0.25	31.94	-	32.19	-	56.00	46.00	-23.81	-

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

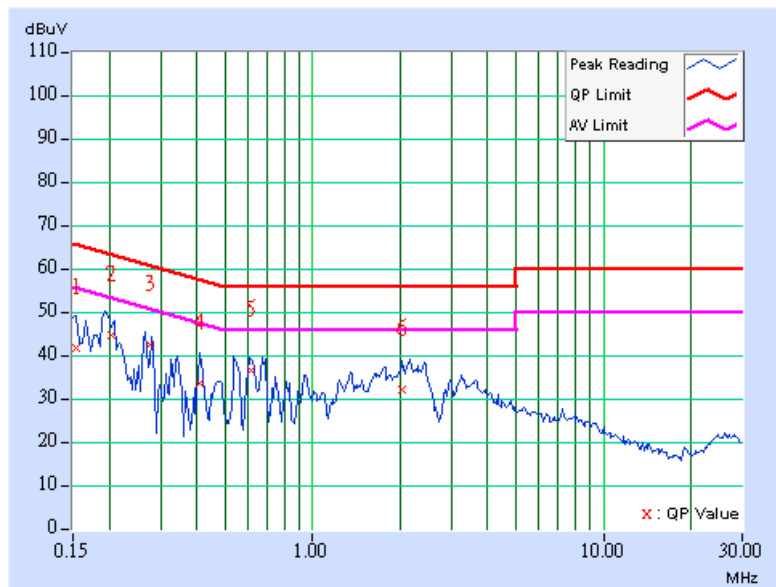




<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 69% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	0.10	44.97	-	45.07	-	63.42	53.42	-18.35	-
2	0.267	0.10	45.95	-	46.05	-	61.20	51.20	-15.15	-
3	0.406	0.11	34.10	-	34.21	-	57.72	47.72	-23.51	-
4	0.611	0.16	38.90	-	39.06	-	56.00	46.00	-16.94	-
5	0.931	0.23	36.69	-	36.92	-	56.00	46.00	-19.08	-
6	2.293	0.27	35.18	-	35.45	-	56.00	46.00	-20.55	-

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

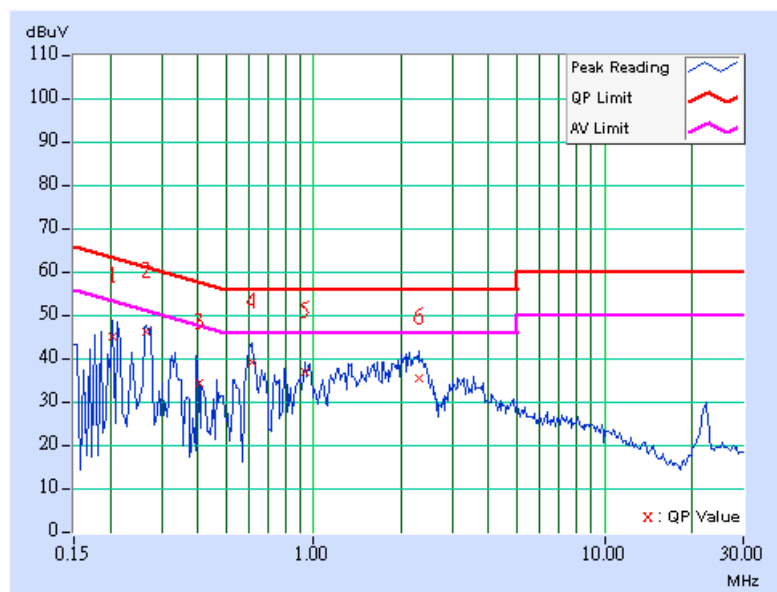






<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	6	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>PHASE</b>	Neutral (N)
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 69% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.10	39.58	-	39.68	-	65.79
2	0.201	0.10	44.71	-	44.81	-	63.57	53.57	-18.76	-
3	0.275	0.11	42.27	-	42.38	-	60.97	50.97	-18.59	-
4	0.408	0.12	34.55	-	34.67	-	57.69	47.69	-23.02	-
5	0.615	0.16	37.94	-	38.10	-	56.00	46.00	-17.90	-
6	2.082	0.25	35.49	-	35.74	-	56.00	46.00	-20.26	-

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

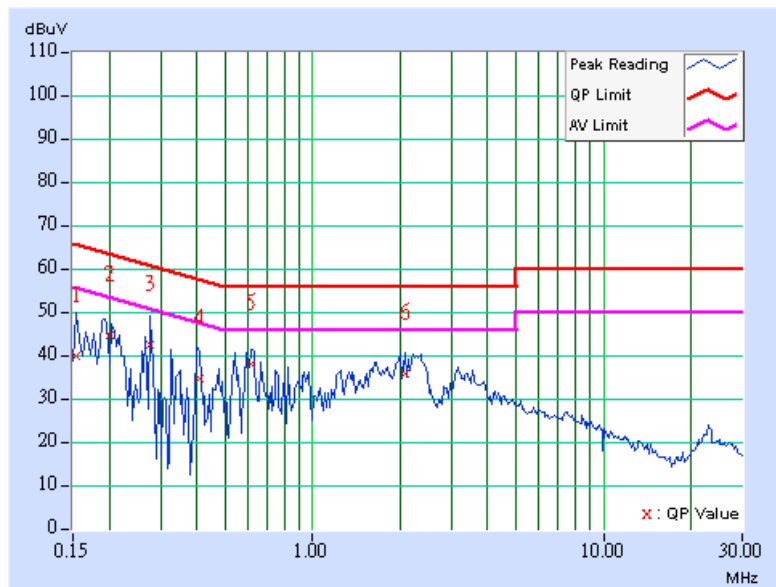




<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>PHASE</b>	Line (L)
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 69% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.209	0.10	45.78	-	45.88	-	63.26
2	0.271	0.10	46.03	-	46.13	-	61.08	51.08	-14.95	-
3	0.338	0.11	39.70	-	39.81	-	59.26	49.26	-19.45	-
<b>4</b>	<b>0.615</b>	<b>0.16</b>	<b>41.77</b>	-	<b>41.93</b>	-	<b>56.00</b>	<b>46.00</b>	<b>-14.07</b>	-
5	0.963	0.24	38.16	-	38.40	-	56.00	46.00	-17.60	-
6	2.211	0.27	37.84	-	38.11	-	56.00	46.00	-17.89	-

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

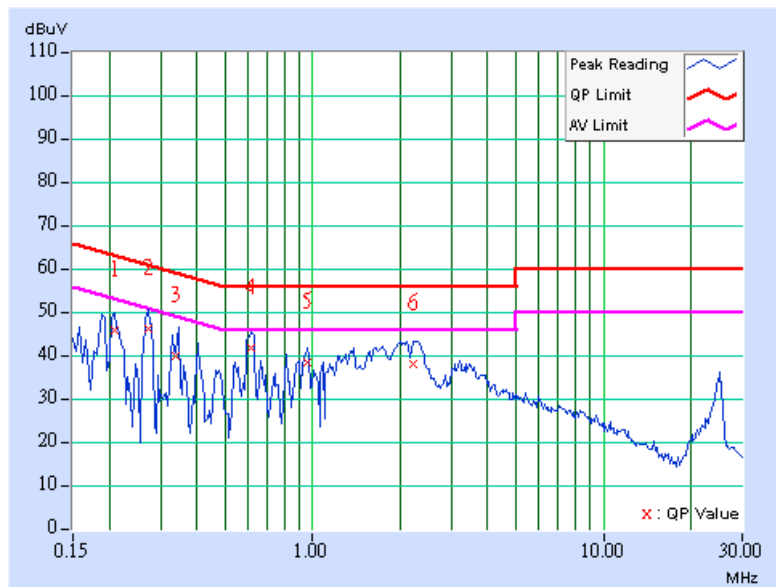




<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>6dB BANDWIDTH</b>	9 kHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>PHASE</b>	Netural (N)
<b>ENVIRONMENTAL CONDITIONS</b>	23deg. C, 69% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.198	0.10	46.38	-	46.48	-	63.69	53.69	-17.21	-
2	0.275	0.11	42.29	-	42.40	-	60.97	50.97	-18.57	-
3	0.341	0.11	36.63	-	36.74	-	59.17	49.17	-22.43	-
4	0.615	0.16	39.29	-	39.45	-	56.00	46.00	-16.55	-
5	0.819	0.20	31.29	-	31.49	-	56.00	46.00	-24.51	-
6	2.254	0.26	35.20	-	35.46	-	56.00	46.00	-20.54	-

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

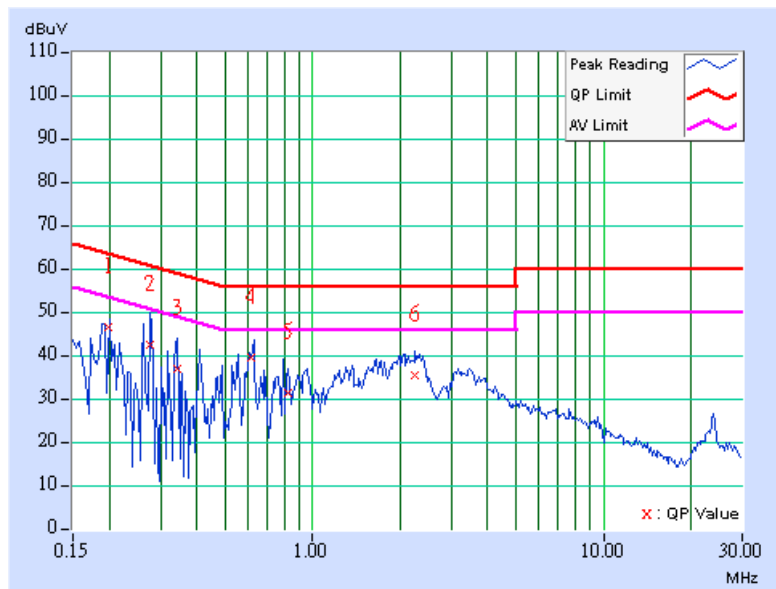



## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



## 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	838496/016	Feb. 09, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Nov. 29, 2005
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Feb. 03, 2005
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170242	Feb. 23, 2005
Preamplifier Agilent	8447D	2944A10631	Nov. 17, 2005
Preamplifier Agilent	8449B	3008A01960	Nov. 14, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219272/4	Mar. 04, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	219275/4	Mar. 04, 2005
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA
Turn Table ADT.	TT100.	TT93021704	NA
Turn Table Controller ADT.	SC100.	SC93021704	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
  2. The test was performed in HwaYa Chamber 3.
  3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
  4. The IC Site Registration No. is IC4924-4.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

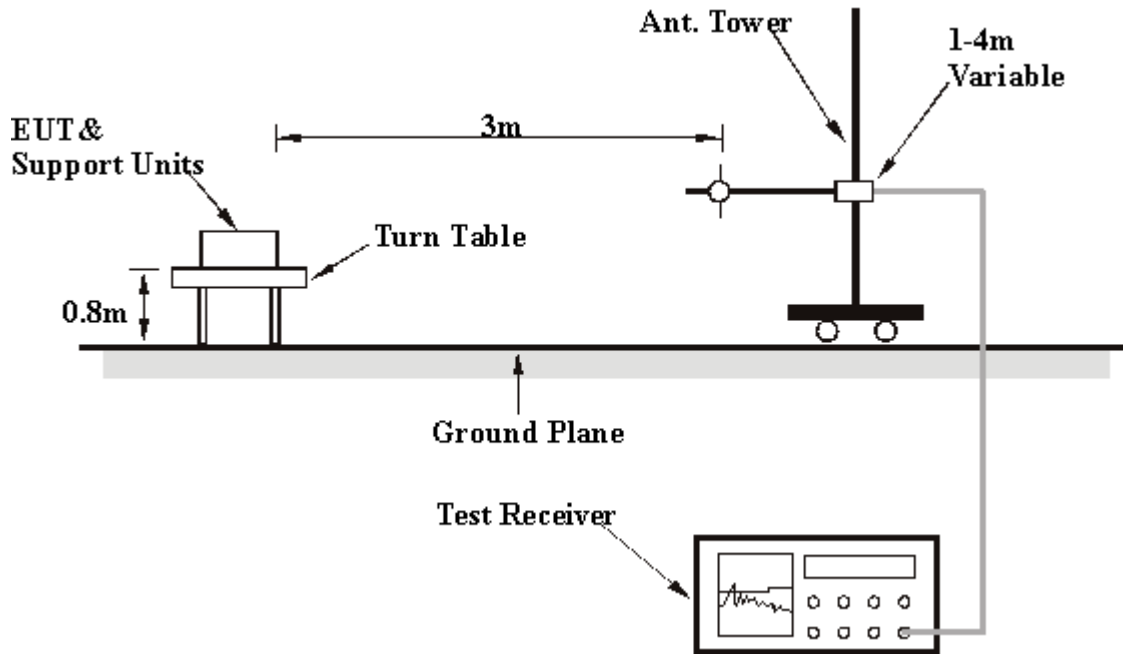

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

## 4.2.7 TEST RESULTS

**RADIATED WORST-CASE DATA: BELOW 1GHZ**

<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>FREQUENCY RANGE</b>	Below 1000 MHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60Hz	<b>DETECTOR FUNCTION</b>	Quasi-Peak
<b>ENVIRONMENTAL CONDITIONS</b>	25 deg. C, 63% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	199.12	38.73 QP	43.50	-4.77	1.00 H	7	27.39	11.34
2	249.66	39.45 QP	46.00	-6.55	1.00 H	223	26.35	13.11
3	300.20	44.34 QP	46.00	-1.66	1.00 H	259	29.93	14.41
<b>4</b>	<b>400.00</b>	<b>44.78 QP</b>	<b>46.00</b>	<b>-1.22</b>	<b>2.00 H</b>	<b>28</b>	<b>28.05</b>	<b>16.73</b>
5	449.88	40.02 QP	46.00	-5.98	1.00 H	226	22.03	18.00
6	500.42	42.45 QP	46.00	-3.55	1.50 H	319	23.88	18.58
7	599.56	40.33 QP	46.00	-5.67	1.50 H	154	19.52	20.82
8	700.64	41.93 QP	46.00	-4.07	1.25 H	286	19.90	22.03
9	799.78	38.95 QP	46.00	-7.05	1.00 H	19	15.49	23.46
10	900.86	38.18 QP	46.00	-7.82	1.50 H	280	13.36	24.82

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.61	35.39 QP	40.00	-4.61	1.00 V	334	20.01	15.39
2	84.43	35.99 QP	40.00	-4.01	1.25 V	25	26.02	9.97
3	199.12	39.61 QP	43.50	-3.89	1.00 V	127	28.27	11.34
4	249.66	41.72 QP	46.00	-4.28	1.00 V	244	28.62	13.11
5	300.00	44.36 QP	46.00	-1.64	1.04 V	24	29.95	14.41
6	399.34	44.48 QP	46.00	-1.52	1.00 V	352	27.77	16.71
7	500.42	39.45 QP	46.00	-6.55	1.00 V	124	20.87	18.58
8	599.56	36.19 QP	46.00	-9.81	1.00 V	76	15.38	20.82
9	700.64	39.28 QP	46.00	-6.72	1.00 V	163	17.26	22.03
10	900.86	38.75 QP	46.00	-7.25	1.00 V	7	13.93	24.82

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.





**802.11b DSSS modulation**

<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	1	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	46.94 PK	74.00	-27.06	1.33 H	244	18.01	28.93
1	1100.00	41.42 AV	54.00	-12.58	1.33 H	244	12.49	28.93
2	1300.00	46.08 PK	74.00	-27.92	1.21 H	186	15.94	30.14
2	1300.00	40.03 AV	54.00	-13.97	1.21 H	186	9.89	30.14
3	1608.00	45.56 PK	74.00	-28.44	1.19 H	319	15.43	30.13
3	1608.00	40.65 AV	54.00	-13.35	1.19 H	319	10.52	30.13
4	2390.00	40.66 PK	74.00	-33.34	1.52 H	349	6.83	33.83
4	2390.00	33.37 AV	54.00	-20.63	1.52 H	349	-0.46	33.83
5	*2412.00	99.18 PK			1.52 H	349	65.25	33.93
5	*2412.00	91.89 AV			1.52 H	349	57.96	33.93
6	3216.00	52.56 PK	74.00	-21.44	1.06 H	128	16.22	36.33
6	3216.00	48.28 AV	54.00	-5.72	1.06 H	128	11.94	36.33
7	4824.00	53.81 PK	74.00	-20.19	1.47 H	69	13.15	40.66
7	4824.00	49.38 AV	54.00	-4.62	1.47 H	69	8.72	40.66

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	1	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak (PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	43.48 PK	74.00	-30.52	1.02 V	247	14.55	28.93
1	1100.00	39.22 AV	54.00	-14.78	1.02 V	247	10.29	28.93
2	1300.00	42.67 PK	74.00	-31.33	1.08 V	303	12.53	30.14
2	1300.00	35.05 AV	54.00	-18.95	1.08 V	303	4.91	30.14
3	1608.00	36.05 PK	74.00	-37.95	1.09 V	111	5.92	30.13
3	1608.00	40.08 AV	54.00	-13.92	1.09 V	111	9.95	30.13
4	2390.00	52.56 PK	74.00	-21.44	1.04 V	0	18.73	33.83
4	2390.00	45.85 AV	54.00	-8.15	1.04 V	0	12.02	33.83
5	*2412.00	111.08 PK			1.04 V	0	77.15	33.93
5	*2412.00	104.37 AV			1.04 V	0	70.44	33.93
6	3216.00	57.22 PK	91.08	-33.86	1.17 V	293	20.89	36.33
6	3216.00	54.75 AV	84.37	-29.62	1.17 V	293	18.42	36.33
7	4824.00	55.55 PK	74.00	-18.45	1.60 V	253	14.89	40.66
7	4824.00	52.51 AV	54.00	-1.49	1.60 V	253	11.85	40.66

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	6	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	45.91 PK	74.00	-28.09	1.48 H	124	16.98	28.93
1	1100.00	41.38 AV	54.00	-12.62	1.48 H	124	12.45	28.93
2	1300.00	46.23 PK	74.00	-27.77	1.14 H	190	16.09	30.14
2	1300.00	39.86 AV	54.00	-14.14	1.14 H	190	9.72	30.14
3	1624.00	44.64 PK	74.00	-29.36	1.16 H	312	14.48	30.16
3	1624.00	40.50 AV	54.00	-13.50	1.16 H	312	10.34	30.16
4	*2437.00	98.46 PK			1.00 H	348	64.41	34.05
4	*2437.00	92.11 AV			1.00 H	348	58.06	34.05
5	3248.00	49.92 PK	74.00	-24.08	1.16 H	89	13.56	36.36
5	3248.00	42.86 AV	54.00	-11.14	1.16 H	89	6.50	36.36
6	4874.00	54.44 PK	74.00	-19.56	1.21 H	228	13.75	40.69
6	4874.00	48.85 AV	54.00	-5.15	1.21 H	228	8.16	40.69

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	6	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	43.63 PK	74.00	-30.37	1.00 V	261	14.70	28.93
1	1100.00	38.96 AV	54.00	-15.04	1.00 V	261	10.03	28.93
2	1300.00	44.59 PK	74.00	-29.41	1.59 V	329	14.45	30.14
2	1300.00	37.01 AV	54.00	-16.99	1.59 V	329	6.87	30.14
3	1624.00	45.74 PK	74.00	-28.26	1.03 V	75	15.58	30.16
3	1624.00	42.20 AV	54.00	-11.80	1.03 V	75	12.04	30.16
4	*2437.00	111.71 PK			1.00 V	360	77.66	34.05
4	*2437.00	104.99 AV			1.00 V	360	70.94	34.05
5	3248.00	57.34 PK	91.71	-34.37	1.10 V	312	20.98	36.36
5	3248.00	54.33 AV	84.99	-30.66	1.10 V	312	17.97	36.36
6	4874.00	54.54 PK	74.00	-19.46	1.51 V	210	13.85	40.69
6	4874.00	51.46 AV	54.00	-2.54	1.51 V	210	10.77	40.69

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	46.33 PK	74.00	-27.67	1.40 H	128	17.40	28.93
1	1100.00	41.12 AV	54.00	-12.88	1.40 H	128	12.19	28.93
2	1300.00	45.89 PK	74.00	-28.11	1.16 H	185	15.75	30.14
2	1300.00	40.00 AV	54.00	-14.00	1.16 H	185	9.86	30.14
3	1641.00	44.20 PK	74.00	-29.80	1.17 H	322	14.02	30.18
3	1641.00	38.92 AV	54.00	-15.08	1.17 H	322	8.74	30.18
4	2280.00	46.47 PK	74.00	-27.53	1.59 H	100	13.19	33.28
4	2280.00	34.76 AV	54.00	-19.24	1.59 H	100	1.48	33.28
5	*2462.00	99.87 PK			1.00 H	350	65.71	34.16
5	*2462.00	92.78 AV			1.00 H	350	58.62	34.16
6	2483.50	41.95 PK	74.00	-32.05	1.00 H	350	7.69	34.26
6	2483.50	34.86 AV	54.00	-19.14	1.00 H	350	0.60	34.26
7	3282.00	49.01 PK	74.00	-24.99	1.18 H	86	12.62	36.40
7	3282.00	41.10 AV	54.00	-12.90	1.18 H	86	4.71	36.40
8	4924.00	54.16 PK	74.00	-19.84	1.17 H	224	13.30	40.86
8	4924.00	48.41 AV	54.00	-5.59	1.17 H	224	7.55	40.86

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 60% RH, 991 hPa	<b>TESTED BY</b>	Rush Kao

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	44.22 PK	74.00	-29.78	1.00 V	253	15.29	28.93
1	1100.00	39.46 AV	54.00	-14.54	1.00 V	253	10.53	28.93
2	1300.00	43.10 PK	74.00	-30.90	1.45 V	267	12.96	30.14
2	1300.00	34.45 AV	54.00	-19.55	1.45 V	267	4.31	30.14
3	1641.00	45.52 PK	74.00	-28.48	1.00 V	75	15.34	30.18
3	1641.00	38.88 AV	54.00	-15.12	1.00 V	75	8.70	30.18
4	2280.00	49.73 PK	74.00	-24.27	1.00 V	253	16.45	33.28
4	2280.00	37.51 AV	54.00	-16.49	1.00 V	253	4.23	33.28
5	*2462.00	111.23 PK			1.00 V	360	77.07	34.16
5	*2462.00	104.49 AV			1.00 V	360	70.33	34.16
6	2483.50	53.31 PK	74.00	-20.69	1.00 V	360	19.05	34.26
6	2483.50	46.57 AV	54.00	-7.43	1.00 V	360	12.31	34.26
7	3282.00	54.22 PK	74.00	-19.78	1.00 V	34	17.83	36.40
7	3282.00	50.99 AV	54.00	-3.01	1.00 V	34	14.60	36.40
8	4924.00	55.75 PK	74.00	-18.25	1.00 V	352	14.89	40.86
8	4924.00	51.21 AV	54.00	-2.79	1.00 V	352	10.35	40.86

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



### 802.11g OFDM modulation

<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	1	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 67% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	45.25 PK	74.00	-28.75	1.27 H	300	16.32	28.93
1	1100.00	40.34 AV	54.00	-13.66	1.27 H	300	11.41	28.93
2	1608.00	45.40 PK	74.00	-28.60	1.25 H	240	15.27	30.13
2	1608.00	40.54 AV	54.00	-13.46	1.25 H	240	10.41	30.13
3	2280.00	49.16 PK	74.00	-24.84	1.01 H	193	15.88	33.28
3	2280.00	38.13 AV	54.00	-15.87	1.01 H	193	4.85	33.28
4	2390.00	47.14 PK	74.00	-26.86	1.00 H	195	13.31	33.83
4	2390.00	40.96 AV	54.00	-13.04	1.00 H	195	7.13	33.83
5	*2412.00	102.25 PK			1.00 H	195	68.32	33.93
5	*2412.00	96.07 AV			1.00 H	195	62.14	33.93
6	3216.00	52.96 PK	74.00	-21.04	1.10 H	230	16.62	36.33
6	3216.00	48.23 AV	54.00	-5.77	1.10 H	230	11.89	36.33
7	4824.00	53.66 PK	74.00	-20.34	1.28 H	352	13.00	40.66
7	4824.00	44.61 AV	54.00	-9.39	1.28 H	352	3.95	40.66

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	1	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 67% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	45.96 PK	74.00	-28.04	1.12 V	70	17.03	28.93
1	1100.00	40.97 AV	54.00	-13.03	1.12 V	70	12.04	28.93
2	1608.00	46.84 PK	74.00	-27.16	1.00 V	243	16.71	30.13
2	1608.00	43.35 AV	54.00	-10.65	1.00 V	243	13.22	30.13
3	2280.40	54.42 PK	74.00	-19.58	1.08 V	178	21.14	33.28
3	2280.40	42.21 AV	54.00	-11.79	1.08 V	178	8.93	33.28
4	2390.00	51.54 PK	74.00	-22.46	1.02 V	197	17.71	33.83
4	2390.00	44.70 AV	54.00	-9.30	1.02 V	197	10.87	33.83
5	*2412.00	106.65 PK			1.02 V	197	72.72	33.93
5	*2412.00	99.79 AV			1.02 V	197	65.86	33.93
6	3216.00	57.37 PK	86.65	-29.28	1.00 V	148	21.04	36.33
6	3216.00	54.46 AV	79.79	-25.33	1.00 V	148	18.13	36.33
7	4824.00	55.02 PK	74.00	-18.98	1.08 V	150	14.36	40.66
7	4824.00	49.10 AV	54.00	-4.90	1.08 V	150	8.44	40.66

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.





<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	6	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 67% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	45.38 PK	74.00	-28.62	1.24 H	300	16.45	28.93
1	1100.00	40.86 AV	54.00	-13.14	1.24 H	300	11.93	28.93
2	1300.00	42.35 PK	74.00	-31.65	1.20 H	214	12.21	30.14
2	1300.00	38.32 AV	54.00	-15.68	1.20 H	214	8.18	30.14
3	1624.00	45.32 PK	74.00	-28.68	1.24 H	147	15.16	30.16
3	1624.00	40.68 AV	54.00	-13.32	1.24 H	147	10.52	30.16
4	2280.40	49.32 PK	74.00	-24.68	1.25 H	240	16.04	33.28
4	2280.40	39.68 AV	54.00	-14.32	1.25 H	240	6.40	33.28
5	*2437.00	102.35 PK			1.01 H	186	68.30	34.05
5	*2437.00	96.38 AV			1.01 H	186	62.33	34.05
6	3248.36	52.96 PK	74.00	-21.04	1.10 H	241	16.60	36.36
6	3248.36	48.67 AV	54.00	-5.33	1.10 H	241	12.31	36.36
7	4874.00	53.32 PK	74.00	-20.68	1.02 H	252	12.63	40.69
7	4874.00	46.68 AV	54.00	-7.32	1.02 H	252	5.99	40.69

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	6	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 67% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	45.96 PK	74.00	-28.04	1.23 V	125	17.03	28.93
1	1100.00	40.68 AV	54.00	-13.32	1.23 V	125	11.75	28.93
2	1300.00	42.32 PK	74.00	-31.68	1.10 V	241	12.18	30.14
2	1300.00	38.32 AV	54.00	-15.68	1.10 V	241	8.18	30.14
3	1624.62	47.32 PK	74.00	-26.68	1.00 V	241	17.16	30.16
3	1624.62	43.68 AV	54.00	-10.32	1.00 V	241	13.52	30.16
4	2280.40	53.80 PK	74.00	-20.20	1.07 V	210	20.52	33.28
4	2280.40	42.72 AV	54.00	-11.28	1.07 V	210	9.44	33.28
5	*2437.00	106.35 PK			1.02 V	120	72.30	34.05
5	*2437.00	99.78 AV			1.02 V	120	65.73	34.05
6	3249.32	57.68 PK	86.35	-28.67	1.00 V	125	21.32	36.36
6	3249.32	54.69 AV	79.78	-25.09	1.00 V	125	18.33	36.36
7	4874.00	55.32 PK	74.00	-18.68	1.05 V	152	14.63	40.69
7	4874.00	49.68 AV	54.00	-4.32	1.05 V	152	8.99	40.69

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* “ : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 67% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	46.35 PK	74.00	-27.65	1.27 H	276	17.42	28.93
1	1100.00	40.85 AV	54.00	-13.15	1.27 H	276	11.92	28.93
2	1300.00	42.92 PK	74.00	-31.08	1.30 H	232	12.78	30.14
2	1300.00	37.89 AV	54.00	-16.11	1.30 H	232	7.75	30.14
3	1641.23	45.85 PK	74.00	-28.15	1.20 H	242	15.67	30.18
3	1641.23	40.37 AV	54.00	-13.63	1.20 H	242	10.19	30.18
4	2280.40	52.85 PK	74.00	-21.15	1.02 H	210	19.57	33.28
4	2280.40	42.06 AV	54.00	-11.94	1.02 H	210	8.78	33.28
5	*2462.00	102.35 PK			1.00 H	186	68.42	33.93
5	*2462.00	96.14 AV			1.00 H	186	62.21	33.93
6	2483.50	45.35 PK	74.00	-28.65	1.00 H	186	11.09	34.26
6	2483.50	39.14 AV	54.00	-14.86	1.00 H	186	4.88	34.26
7	3282.65	53.36 PK	74.00	-20.64	1.12 H	231	16.96	36.40
7	3282.65	48.75 AV	54.00	-5.25	1.12 H	231	12.35	36.40
8	4924.00	53.63 PK	74.00	-20.37	1.24 H	324	12.77	40.86
8	4924.00	45.32 AV	54.00	-8.68	1.24 H	324	4.46	40.86

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. “ \* ” : Fundamental frequency.



<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>CHANNEL</b>	11	<b>FREQUENCY RANGE</b>	1~25 GHz
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>DETECTOR FUNCTION</b>	Peak(PK) Average (AV)
<b>ENVIRONMENTAL CONDITIONS</b>	25deg. C, 67% RH, 991 hPa	<b>TESTED BY</b>	Steven Lu

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1100.00	46.71 PK	74.00	-27.29	1.08 V	76	17.78	28.93
1	1100.00	40.96 AV	54.00	-13.04	1.08 V	76	12.03	28.93
2	1300.00	42.88 PK	74.00	-31.12	1.26 V	145	12.74	30.14
2	1300.00	37.86 AV	54.00	-16.14	1.26 V	145	7.72	30.14
3	1641.34	47.87 PK	74.00	-26.13	1.30 V	341	17.69	30.18
3	1641.34	42.47 AV	54.00	-11.53	1.30 V	341	12.29	30.18
4	2280.40	55.85 PK	74.00	-18.15	1.32 V	174	22.57	33.28
4	2280.40	45.83 AV	54.00	-8.17	1.32 V	174	12.55	33.28
5	*2462.00	106.11 PK			1.00 V	176	71.95	34.16
5	*2462.00	99.03 AV			1.00 V	176	64.87	34.16
6	2483.50	49.11 PK	74.00	-24.89	1.00 V	176	14.85	34.26
6	2483.50	42.03 AV	54.00	-11.97	1.00 V	176	7.77	34.26
7	3282.67	57.36 PK	86.11	-28.75	1.11 V	158	20.96	36.40
7	3282.67	54.63 AV	79.03	-24.40	1.11 V	158	18.23	36.40
8	4924.00	55.21 PK	74.00	-18.79	1.08 V	154	14.35	40.86
8	4924.00	49.87 AV	54.00	-4.13	1.08 V	154	9.01	40.86

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
  2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
  3. The other emission levels were very low against the limit.
  4. Margin value = Emission level – Limit value.
  5. " \* " : Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


#### 4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



## 4.3.7 TEST RESULTS

**802.11b DSSS MODULATION**


<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>MODULATION TYPE</b>	CCK	<b>TRANSFER RATE</b>	11Mbps
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 69% RH, 991 hPa
<b>TESTED BY</b>	Rush Kao		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	11.48	0.5	PASS
6	2437	10.88	0.5	PASS
11	2462	10.52	0.5	PASS


\*(The test data is in accordance with ADT Report No.: RF931104L08.)



CH1

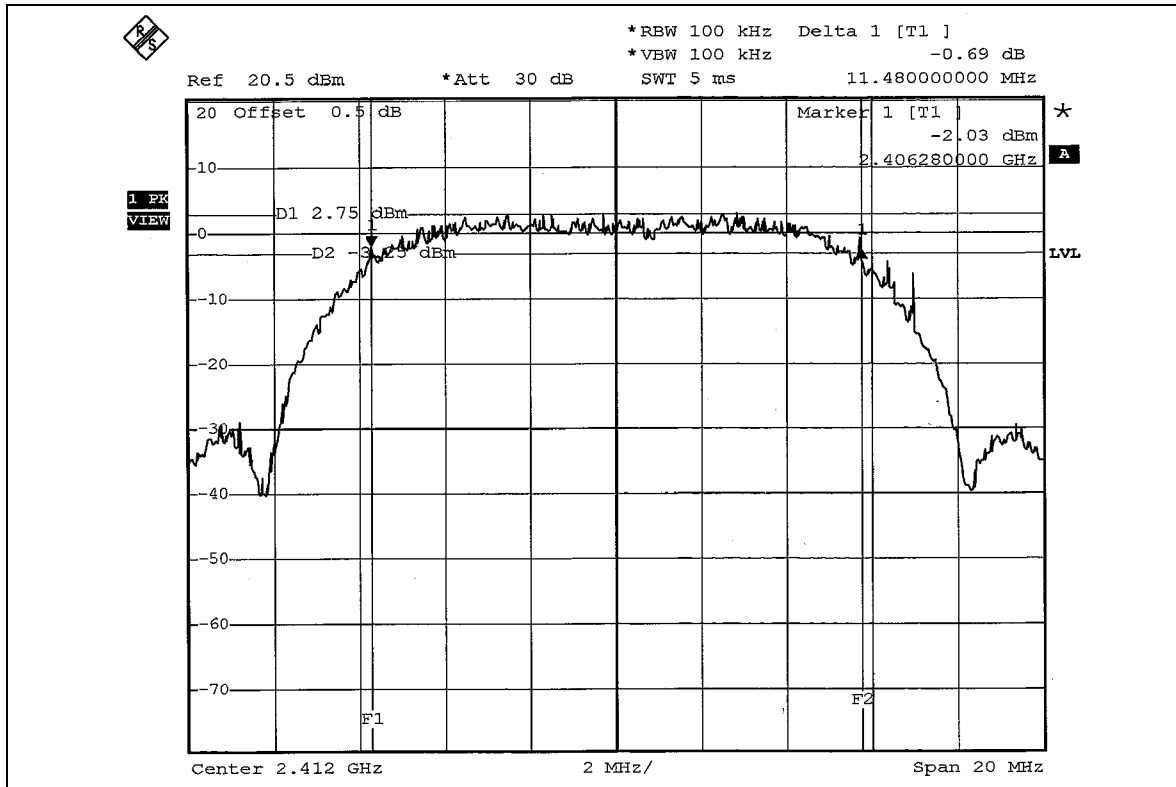


CH6

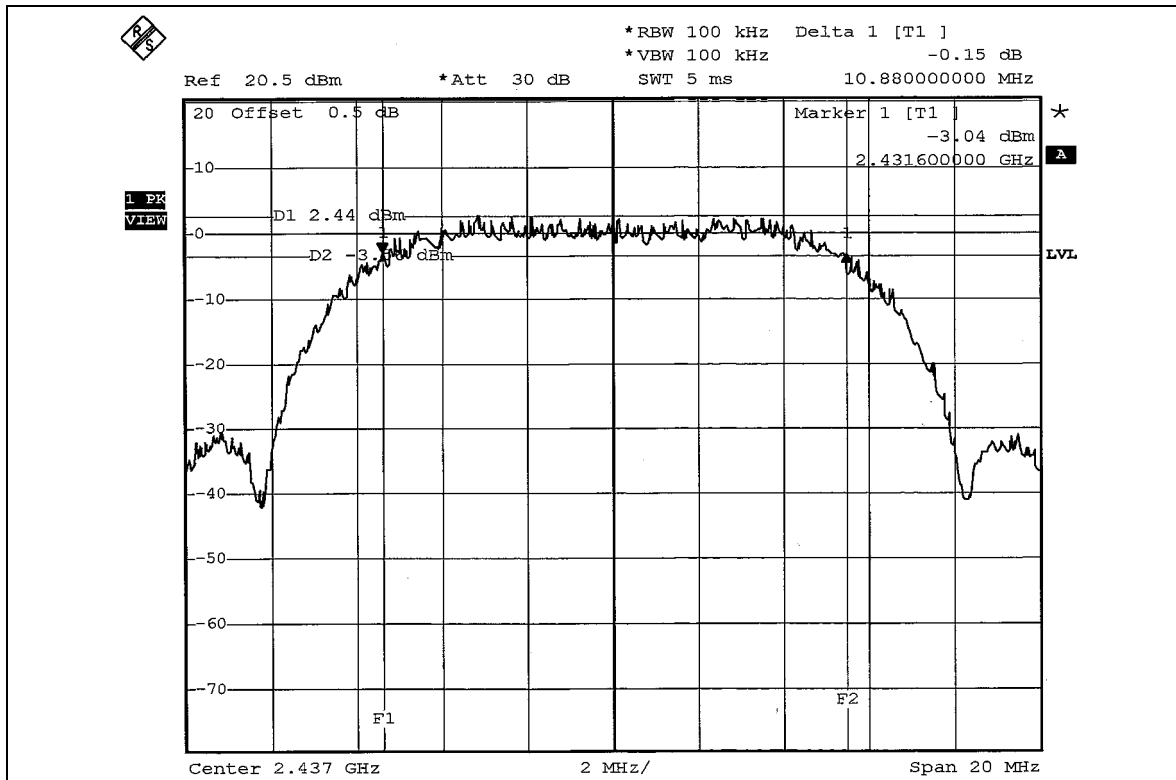





CH11

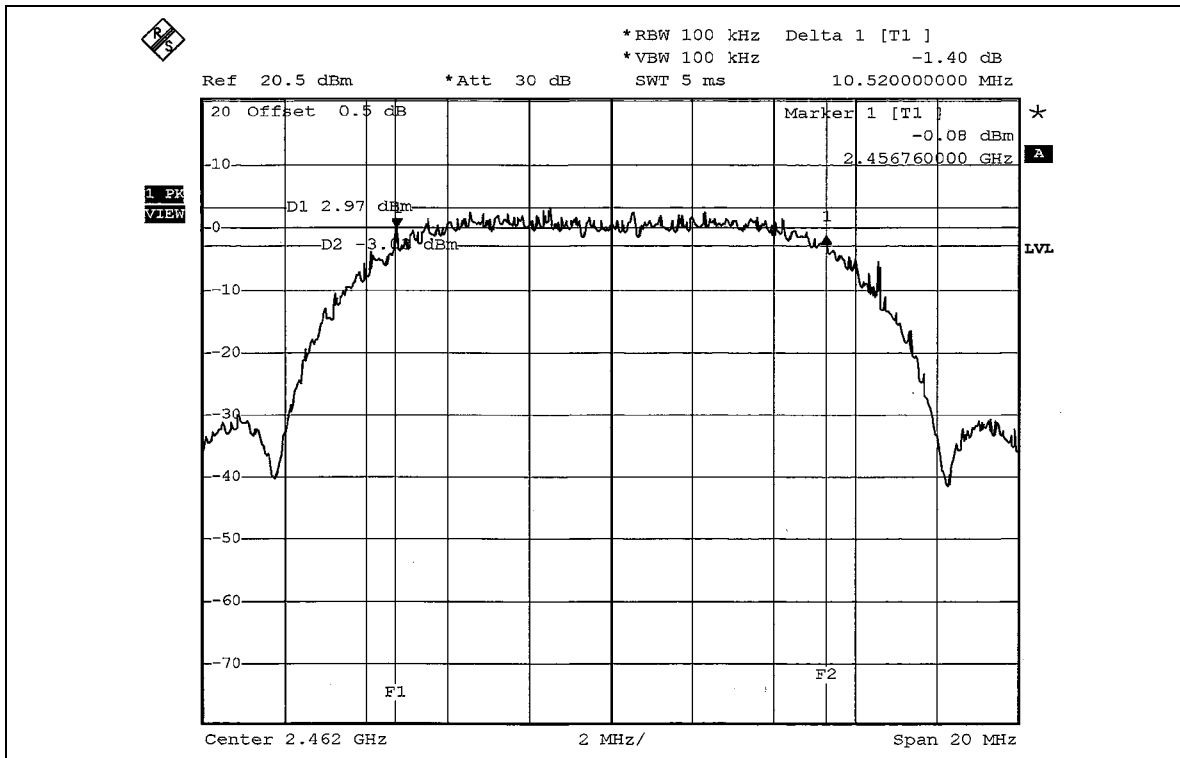

**802.11g OFDM MODULATION**


<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 69% RH, 991 hPa
<b>TESTED BY</b>	Rush Kao		

<b>CHANNEL</b>	<b>CHANNEL FREQUENCY (MHz)</b>	<b>6 dB BANDWIDTH (MHz)</b>	<b>MINIMUM LIMIT (MHz)</b>	<b>PASS/FAIL</b>
1	2412	16.36	0.5	PASS
6	2437	16.32	0.5	PASS
11	2462	16.36	0.5	PASS


\*(The test data is in accordance with ADT Report No.: RF931104L08.)



CH1

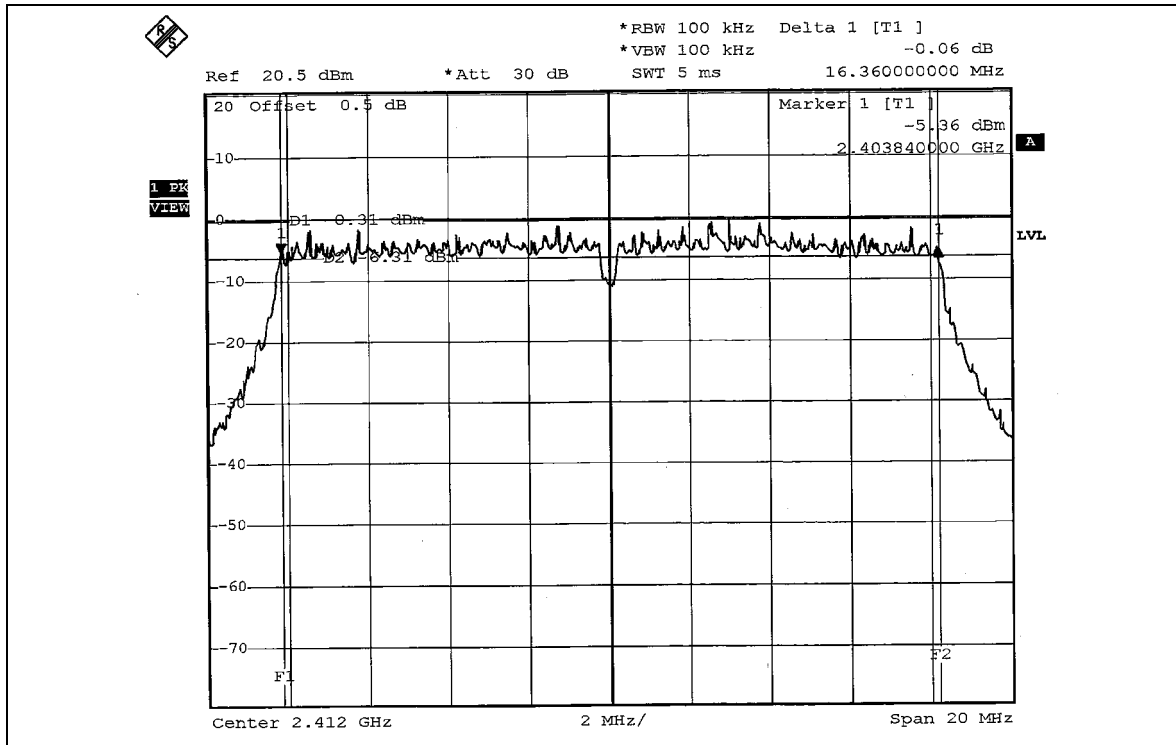


CH6

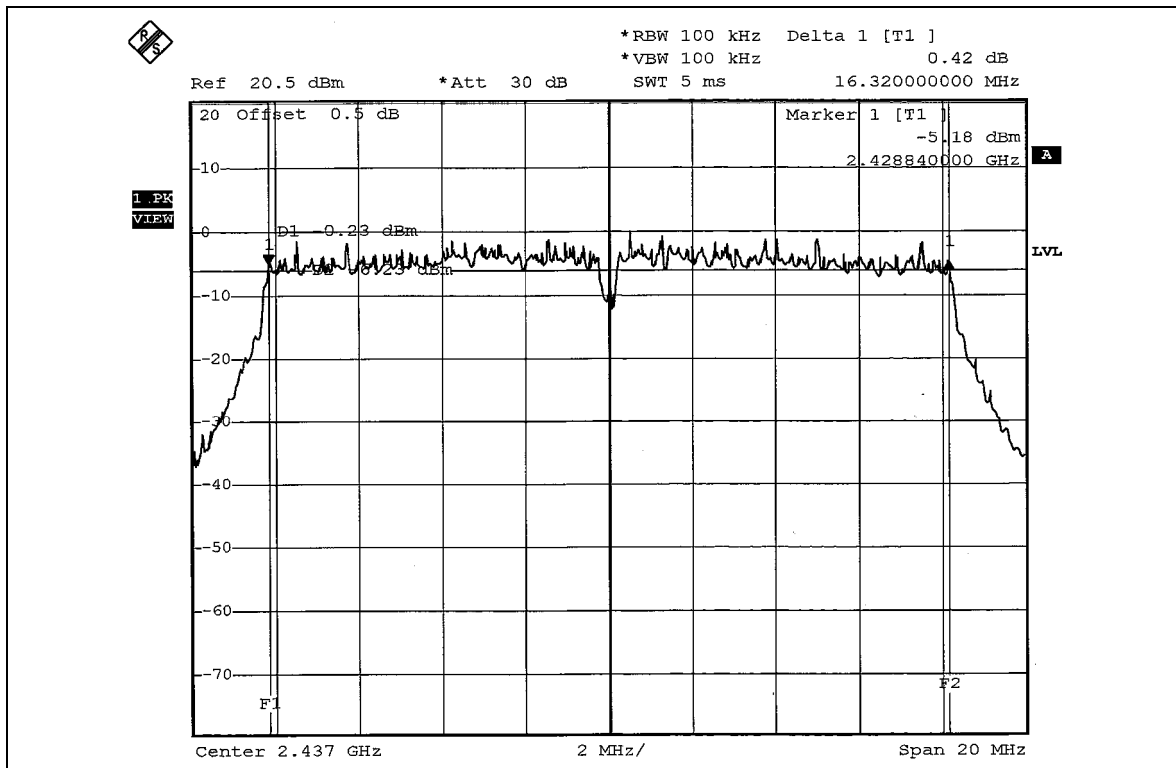



CH11

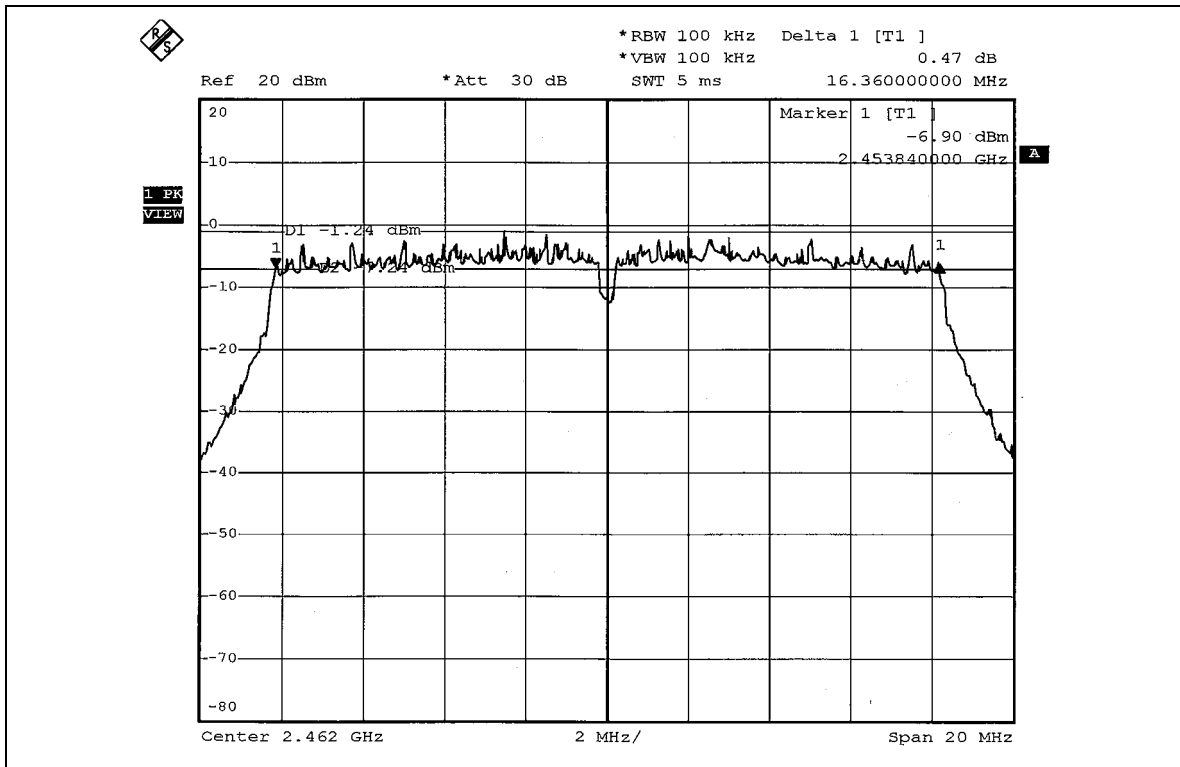

#### 4.4 MAXIMUM PEAK OUTPUT POWER

##### 4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

##### 4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2004
TEKTRONIX OSCILLOSCOPE	TDS 220	C019167	Feb. 1, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

**NOTE:**

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

#### 4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to peak the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same peak reading on oscilloscope. Record the power level.

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

**802.11b DSSS MODULATION**

<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>MODULATION TYPE</b>	CCK	<b>TRANSFER RATE</b>	11Mbps
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 69% RH, 991 hPa
<b>TESTED BY</b>	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	25.704	14.10	30	PASS
6	2437	26.303	14.20	30	PASS
11	2462	25.119	14.00	30	PASS

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

**802.11g OFDM MODULATION**

<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 69% RH, 991 hPa
<b>TESTED BY</b>	Rush Kao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	25.704	14.10	30	PASS
6	2437	25.119	14.00	30	PASS
11	2462	20.893	13.20	30	PASS

\*(The test data is in accordance with ADT Report No.: RF931104L08.)



## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.




#### 4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

#### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6

## 4.5.7 TEST RESULTS

**802.11b DSSS MODULATION**


<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>MODULATION TYPE</b>	CCK	<b>TRANSFER RATE</b>	11Mbps
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 69% RH, 991 hPa
<b>TESTED BY</b>	Rush Kao		

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-10.29	8	PASS
6	2437	-10.19	8	PASS
11	2462	-11.49	8	PASS


\*(The test data is in accordance with ADT Report No.: RF931104L08.)



CH1

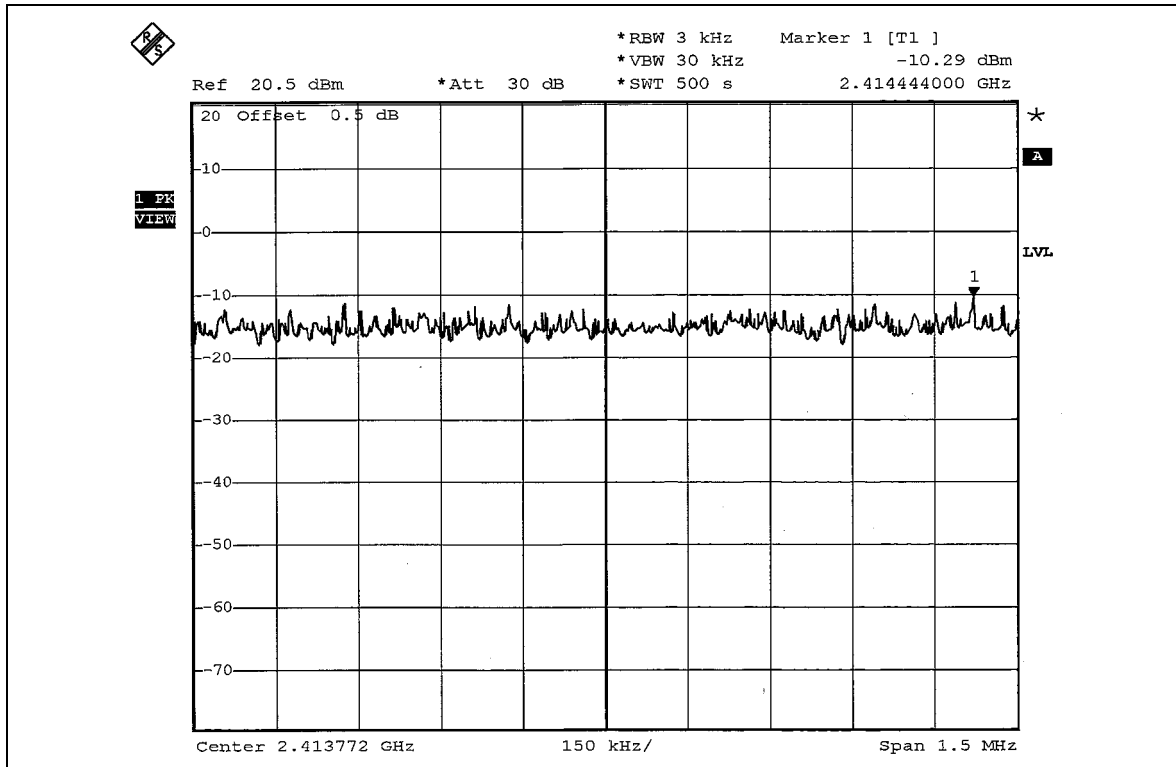

CH6

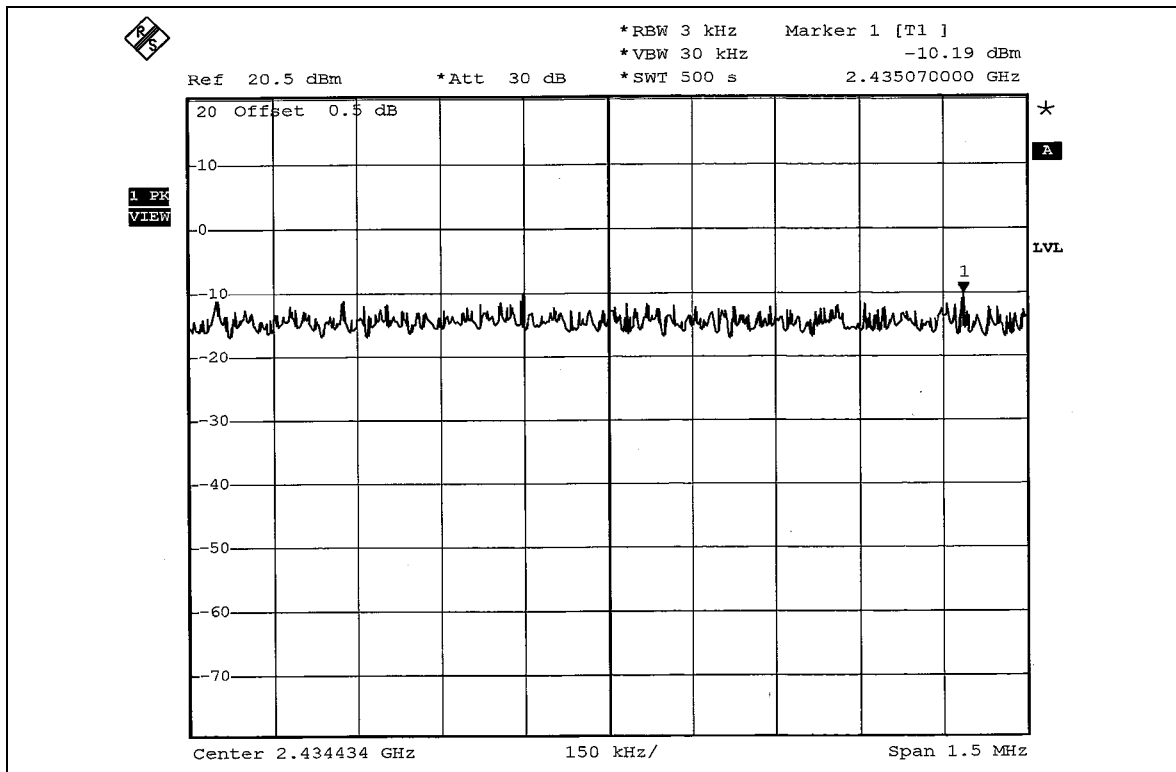



**802.11g OFDM MODULATION**


<b>EUT</b>	125 Mbps 802.11g Wireless Powerline Router	<b>MODEL</b>	EP-6615
<b>MODULATION TYPE</b>	BPSK	<b>TRANSFER RATE</b>	6Mbps
<b>INPUT POWER (SYSTEM)</b>	120 Vac, 60 Hz	<b>ENVIRONMENTAL CONDITIONS</b>	23 deg. C, 69% RH, 991 hPa
<b>TESTED BY</b>	Rush Kao		

<b>CHANNEL NUMBER</b>	<b>CHANNEL FREQUENCY (MHz )</b>	<b>RF POWER LEVEL IN 3KHz BW (dBm)</b>	<b>MAXIMUM LIMIT (dBm)</b>	<b>PASS/FAIL</b>
1	2412	-15.94	8	PASS
6	2437	-15.05	8	PASS
11	2462	-16.03	8	PASS


\*(The test data is in accordance with ADT Report No.: RF931104L08.)



CH1

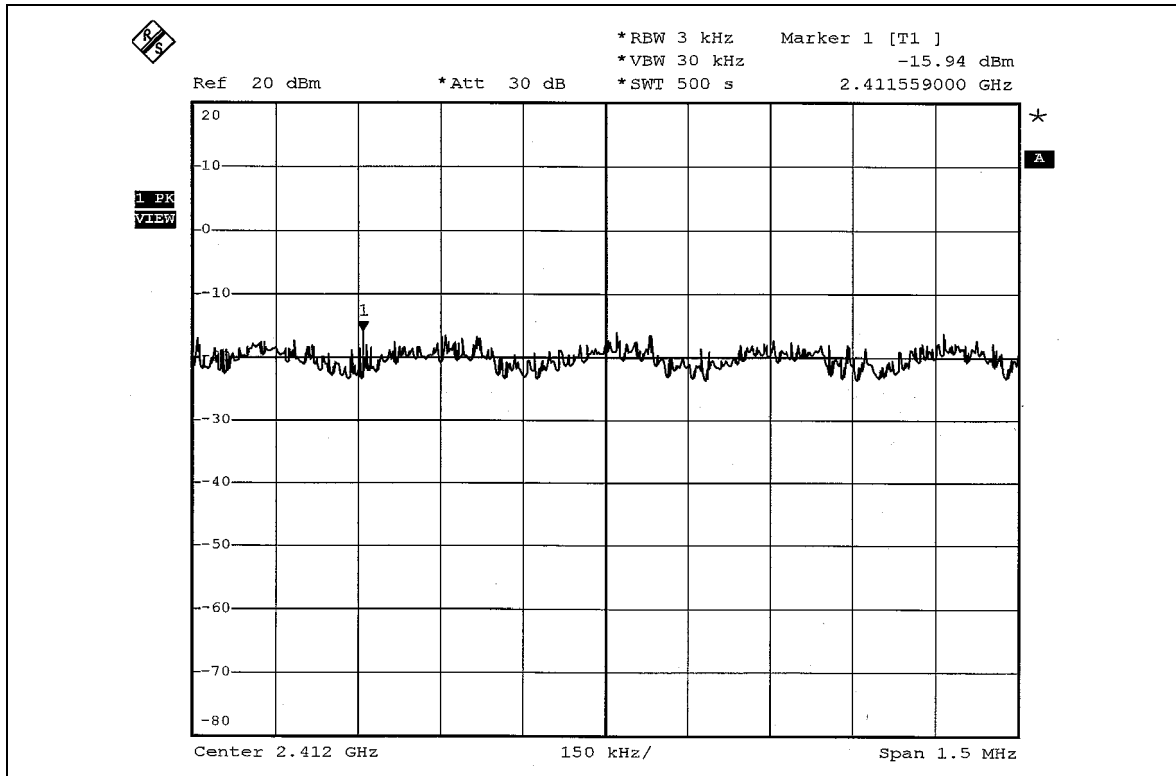


CH6

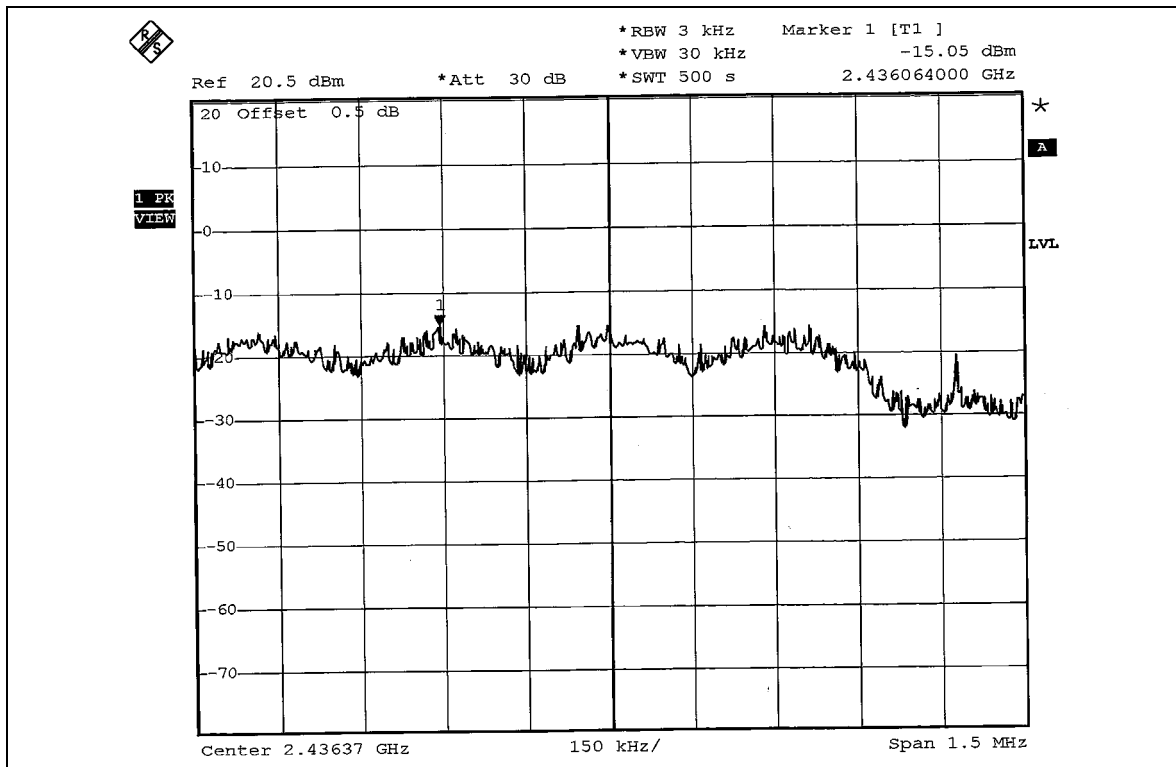



CH11

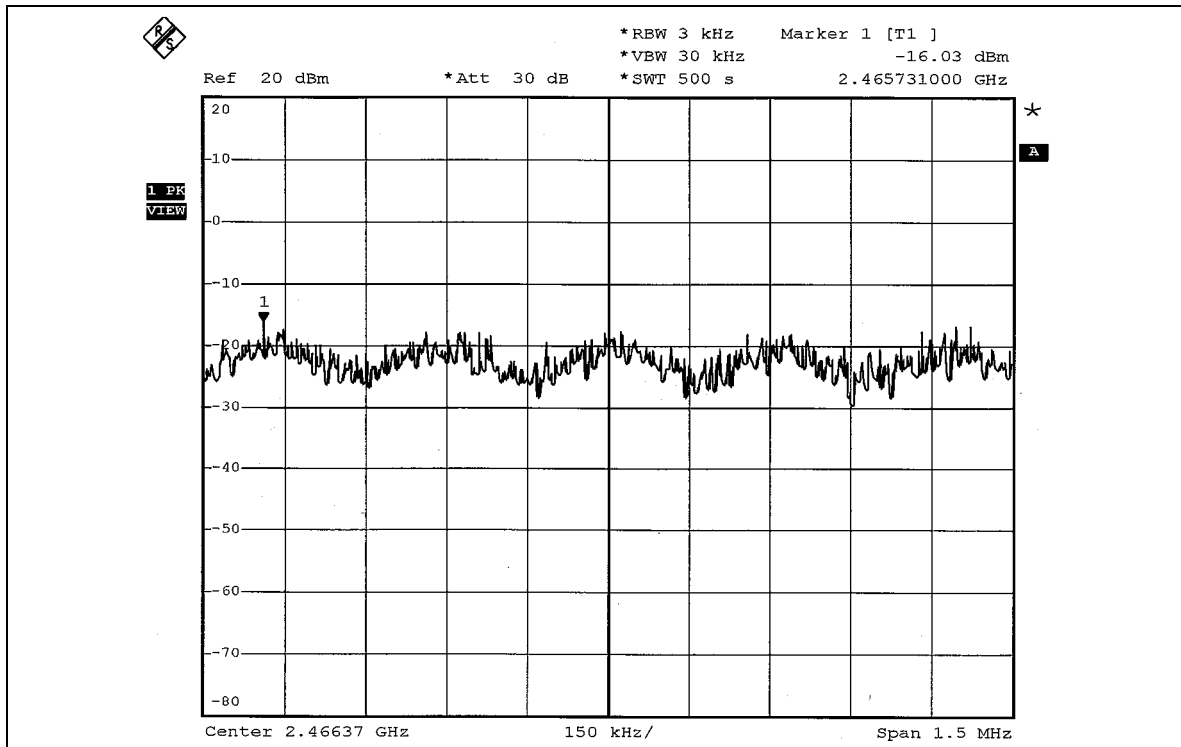

## 4.6 BAND EDGES MEASUREMENT

### 4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

**NOTE:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

### 4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



#### 4.6.6 TEST RESULTS

The spectrum plots are attached on the following 12 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

#### 802.11b DSSS MODULATION

##### NOTE 1:

The band edge emission plot on page 58 show 51.10dBc delta between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.08dBuV/m (Peak), so the maximum field strength in restrict band is  $111.08 - 51.10 = 59.98$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 58 show 58.15dBc delta between carrier maximum power and local maximum emission in restrict band (2.3892GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 104.37dBuV/m (Average), so the maximum field strength in restrict band is  $104.37 - 58.15 = 46.22$ dBuV/m, which is under 54dBuV/m limit.



##### NOTE 2:



The band edge emission plot on the page 59 show 51.48dBc delta between carrier maximum power and local maximum emission in restrict band (2.4851GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.23dBuV/m (Peak), so the maximum field strength in restrict band is  $111.23 - 51.48 = 59.75$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 60 show 58.95dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 104.49dBuV/m (Average), so the maximum field strength in restrict band is  $104.49 - 58.95 = 45.54$ dBuV/m, which is under 54dBuV/m limit.

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

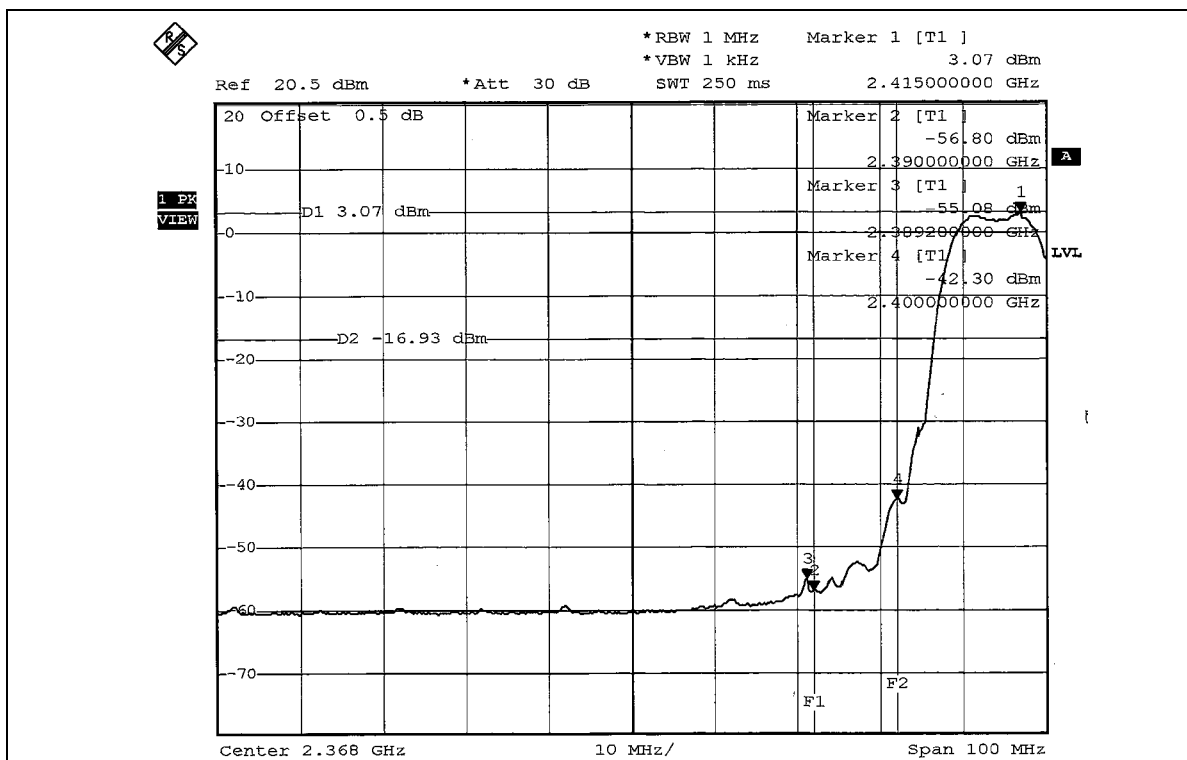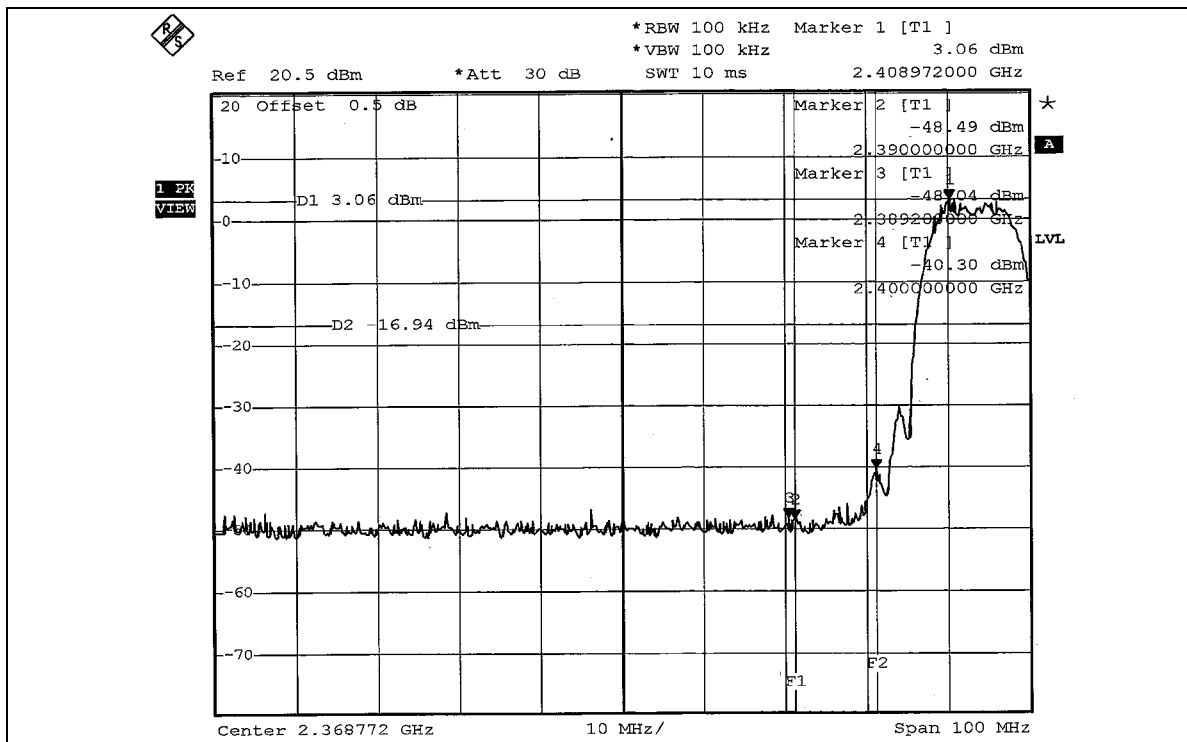

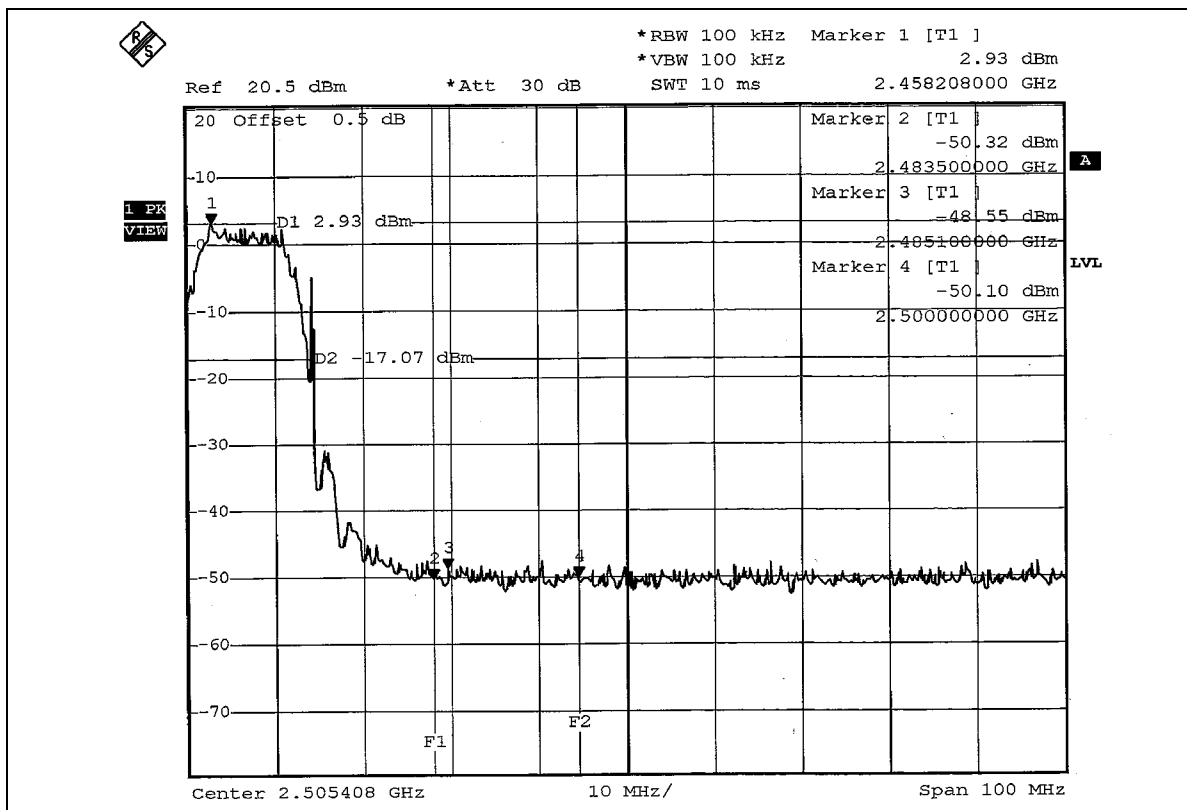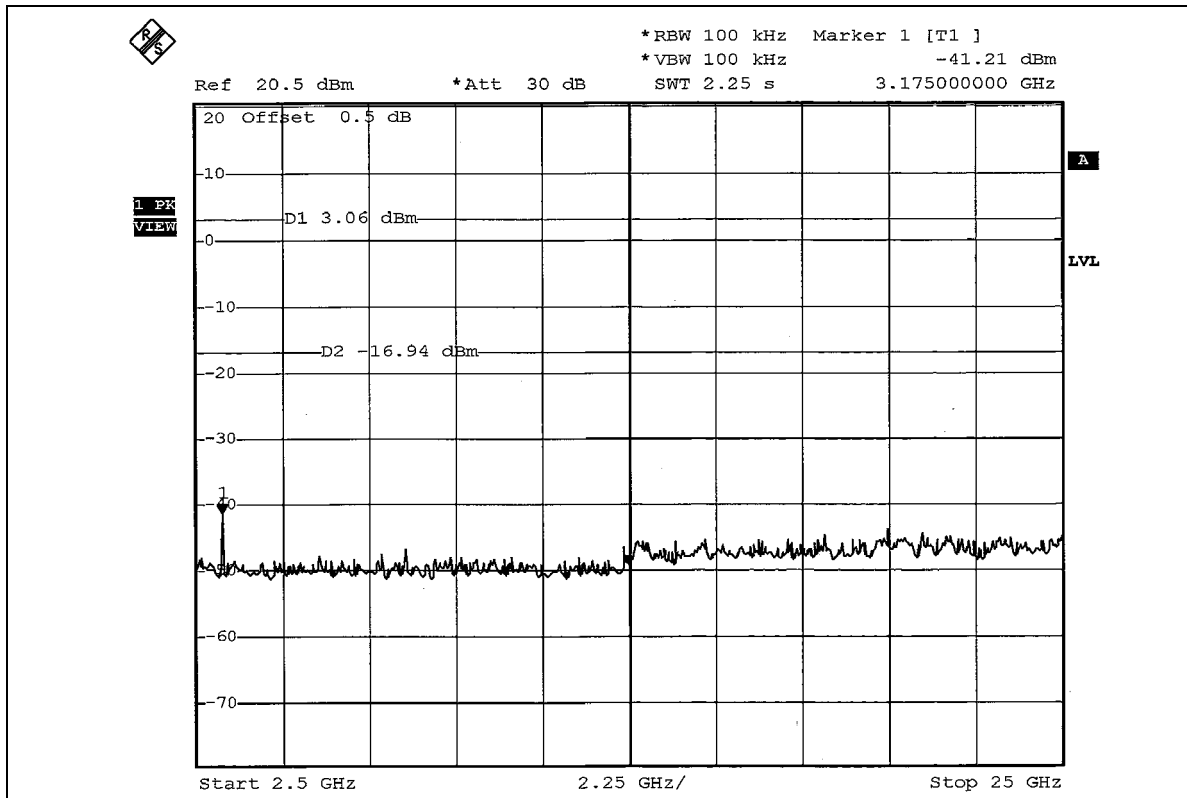

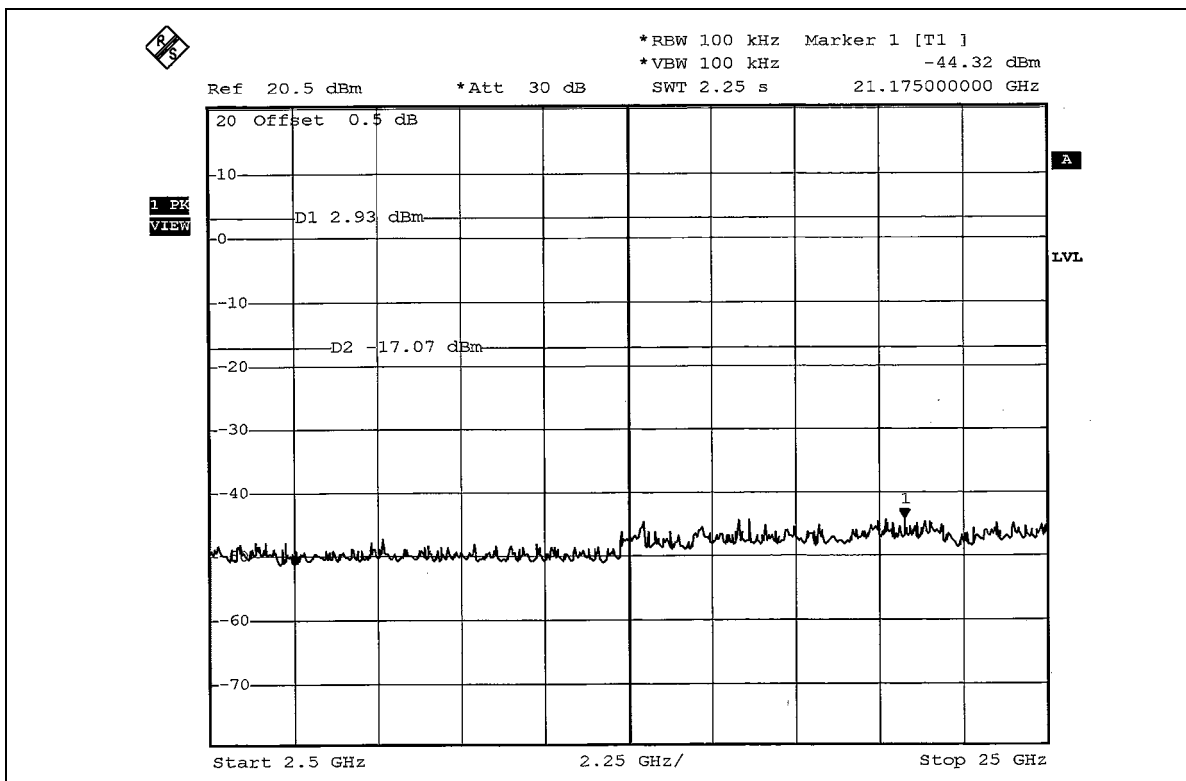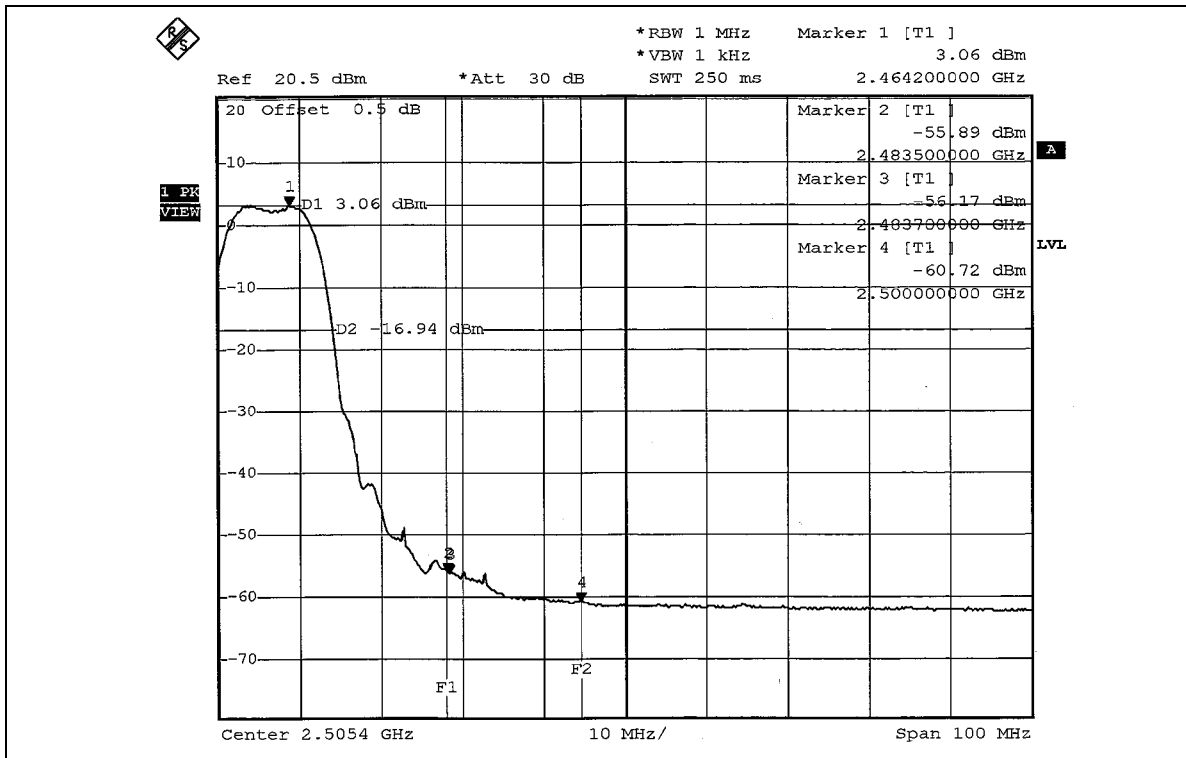



## 802.11g OFDM MODULATION

### NOTE 1:

The band edge emission plot on page 62 show 46.03dBc delta between carrier maximum power and local maximum emission in restrict band (2.3898GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.65dBuV/m (Peak), so the maximum field strength in restrict band is  $106.65 - 46.03 = 60.62$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 62 show 54.68dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.79dBuV/m (Average), so the maximum field strength in restrict band is  $99.79 - 54.68 = 45.11$ dBuV/m, which is under 54dBuV/m limit.



### NOTE 2:



The band edge emission plot on the page 63 show 46.87dBc delta between carrier maximum power and local maximum emission in restrict band (2.4843GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.11dBuV/m (Peak), so the maximum field strength in restrict band is  $106.11 - 46.87 = 59.24$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 64 show 53.21dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 99.03dBuV/m (Average), so the maximum field strength in restrict band is  $99.03 - 53.21 = 45.82$ dBuV/m, which is under 54dBuV/m limit.

\*(The test data is in accordance with ADT Report No.: RF931104L08.)

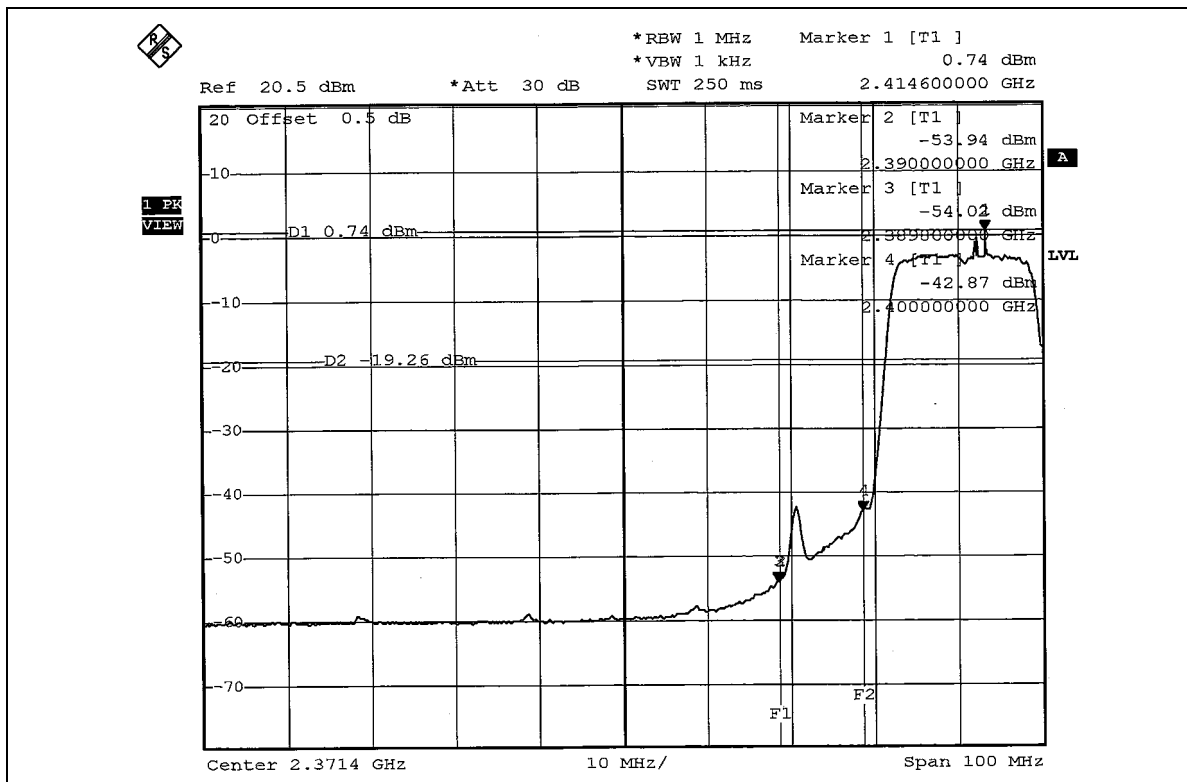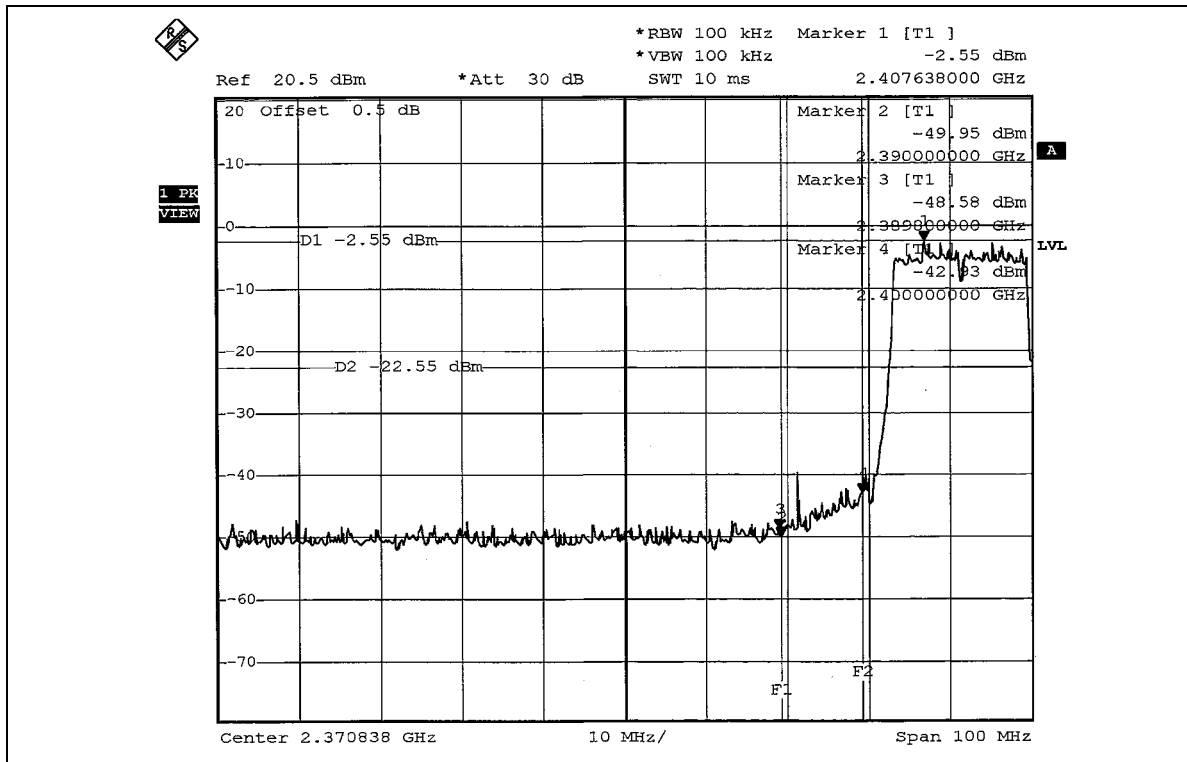

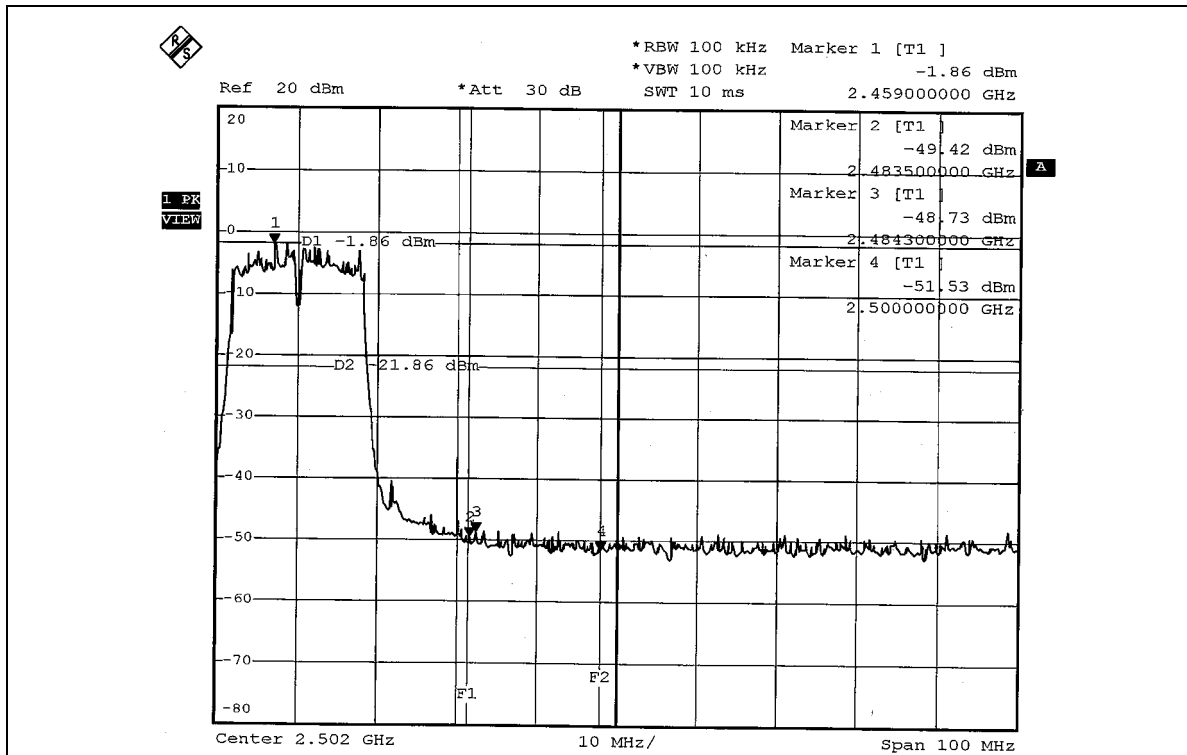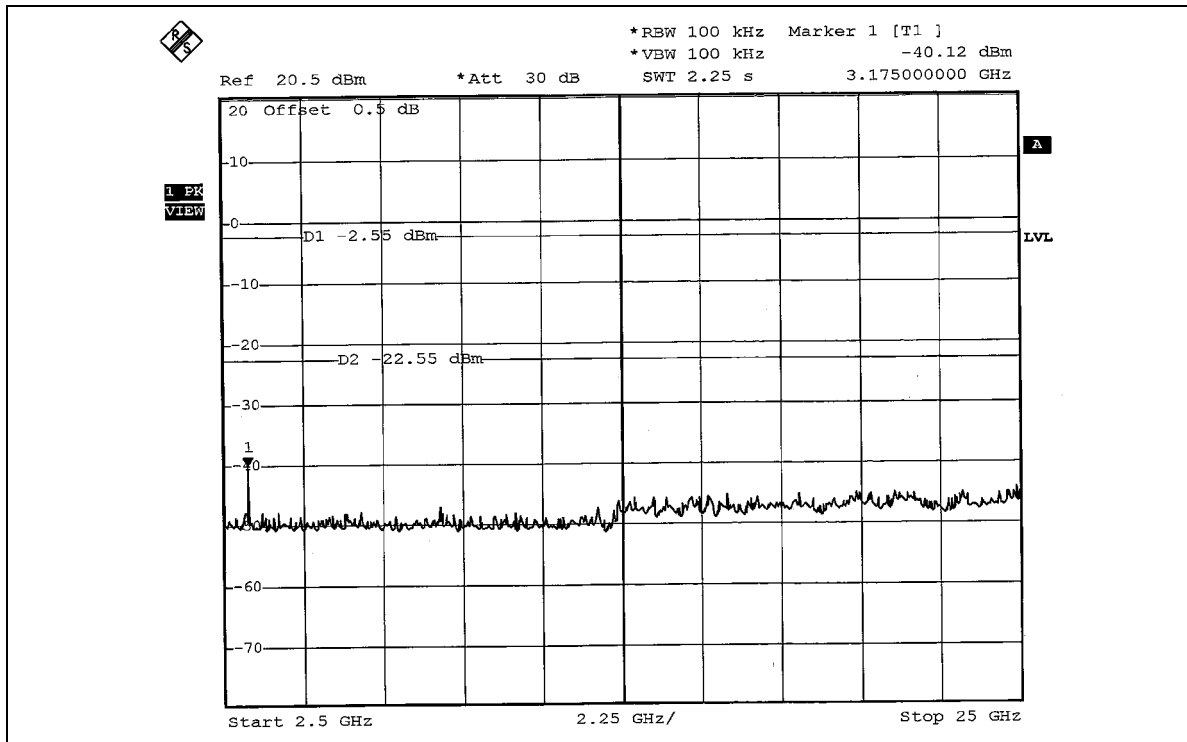

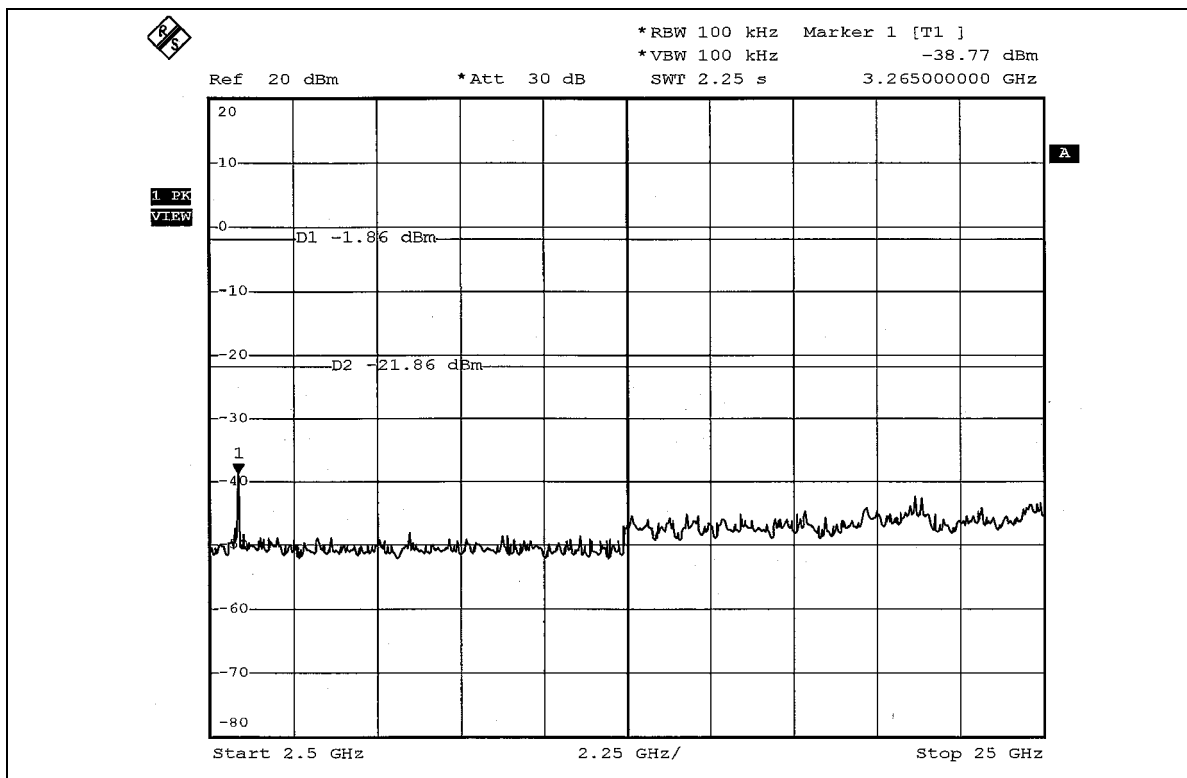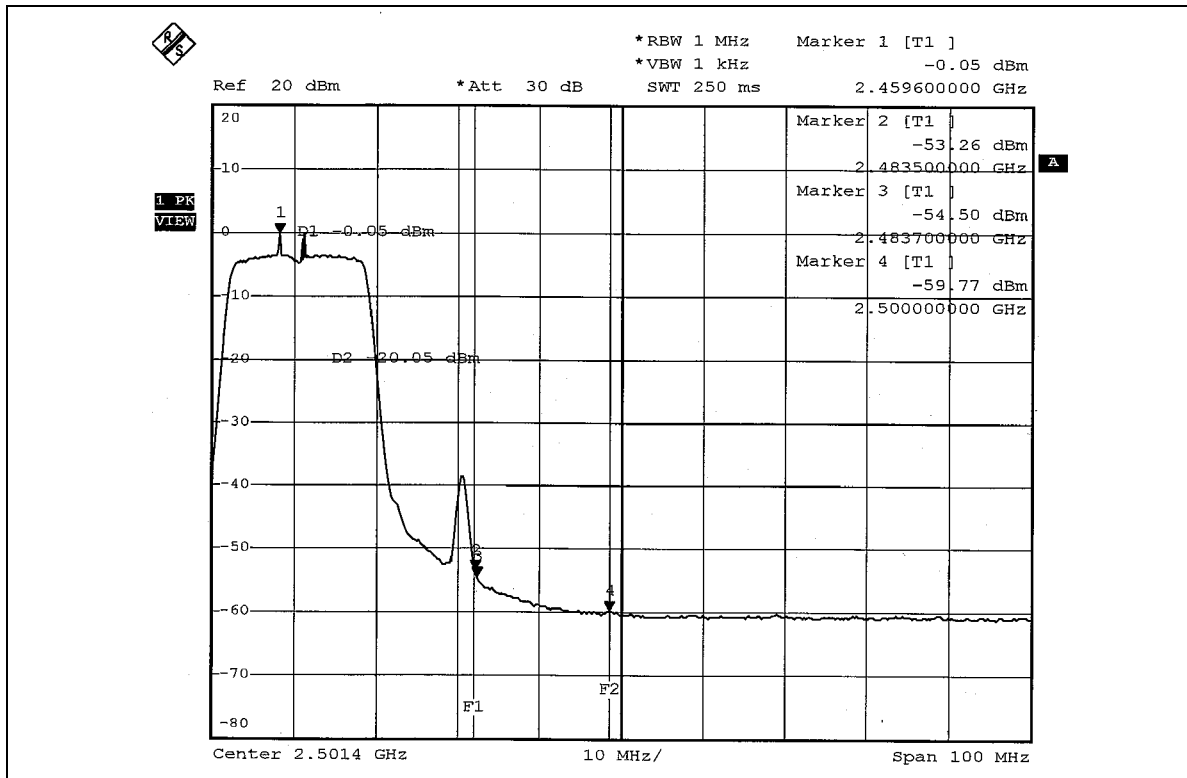





## **4.7 ANTENNA REQUIREMENT**

### **4.7.1 STANDARD APPLICABLE**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### **4.7.2 ANTENNA CONNECTED CONSTRUCTION**

The antenna used in this product is Monopole antenna with UFL connector. And the maximum Gain of this antenna is 2.0dBi.

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

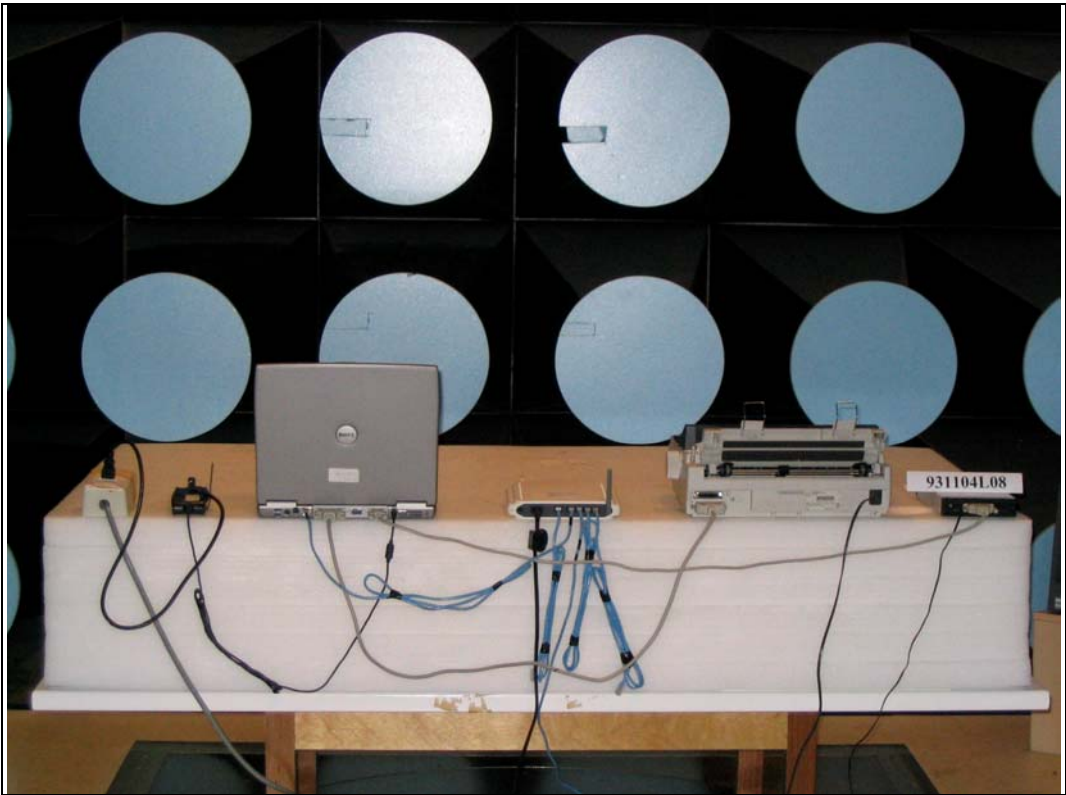



## 6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025:

<b>USA</b>	FCC, NVLAP, UL, A2LA
<b>Germany</b>	TUV Rheinland
<b>Japan</b>	VCCI
<b>Norway</b>	NEMKO
<b>Canada</b>	INDUSTRY CANADA , CSA
<b>R.O.C.</b>	CNLA, BSMI, DGT
<b>Netherlands</b>	Telefication
<b>Singapore</b>	PSB , GOST-ASIA(MOU)
<b>Russia</b>	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Linko RF Lab.**

Tel: 886-3-3270910

Fax: 886-3-3270892

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.