

FCC PART 15.227

EMI MEASUREMENT AND TEST REPORT


For

Dyna Point (Dong Guan) Inc.

The Sixth Industrial Park. Shangsha, South Area ChangAn, DongGuan, GuangDong, China 523880

FCC ID: RYLKN998

May 24, 2005

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Transmitter, wireless keyboard
Test Engineer: Lisa Zhu 	
Report No.: RSZ05051607	
Test Date: May 20, 2005	
Reviewed By: Chris Zeng 	
Prepared By: Bay Area Compliance Lab Corp. (ShenZhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: The test report is specially limited to the above company and this particular sample only.
It may not be duplicated without prior written consent of Bay Area Compliance Lab Corp.
(ShenZhen). This report **must not** be used by the client to claim product certification,
approval, or endorsement by NVLAP, NIST or any agency of the US Government.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
EUT EXERCISE SOFTWARE.....	4
SPECIAL ACCESSORIES.....	4
EQUIPMENT MODIFICATIONS	4
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF TEST SETUP	5
SUMMARY OF TEST RESULTS	6
§15.203 - ANTENNA REQUIREMENT	7
STANDARD APPLICABLE	7
§15.205, §15.209, §15.227(A) - RADIATED EMISSIONS TEST	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP.....	8
EMI TEST RECEIVER SETUP	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE	错误！未定义书签。
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST RESULTS SUMMARY.....	9
TEST DATA	9
DUTY CYCLE	错误！未定义书签。
§15.227(B) - OUT OF BAND EMISSION	10
EMI TEST RECEIVER SETUP	10
TEST EQUIPMENT LIST AND DETAILS.....	10
TEST PROCEDURE	10
TEST DATA	10

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The *Dyna Point (Dong Guan) Inc.*'s product, model number: KN998 or the "EUT" as referred to in this report is a Transmitter of wireless keyboard. The EUT is measured approximately 44.0cm L x 20.5cm W x 2.5cm H. rated input voltage: DC 3 V battery.

** The test data gathered are from production sample, serial number: 0505011, provided by the manufacturer, we receive the EUT on 2005-5-16.*

Objective

This Type approval report is prepared on behalf of *Dyna Point (Dong Guan) Inc.* in accordance with Part 2, Subpart J, and Part 15, Subparts A , B and C of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC rules, sec 15.203, 15.205, 15.209 and sec 15.227.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Lab Corp. (ShenZhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, ShenZhen, Guangdong 518038, P.R.China.

Test site at Bay Area Compliance Lab Corp. (ShenZhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Lab Corp. (ShenZhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0). The current scope of accreditations can be found at <http://ts.nist.gov/ts/htdocs/210/214/scopes/2007070.htm>.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

N/A.

Special Accessories

N/A.

Equipment Modifications


Bay Area Compliance Lab Corp. (ShenZhen) has not done any modification on the EUT.

Configuration of Test Setup



EUT

Block Diagram of Test Setup

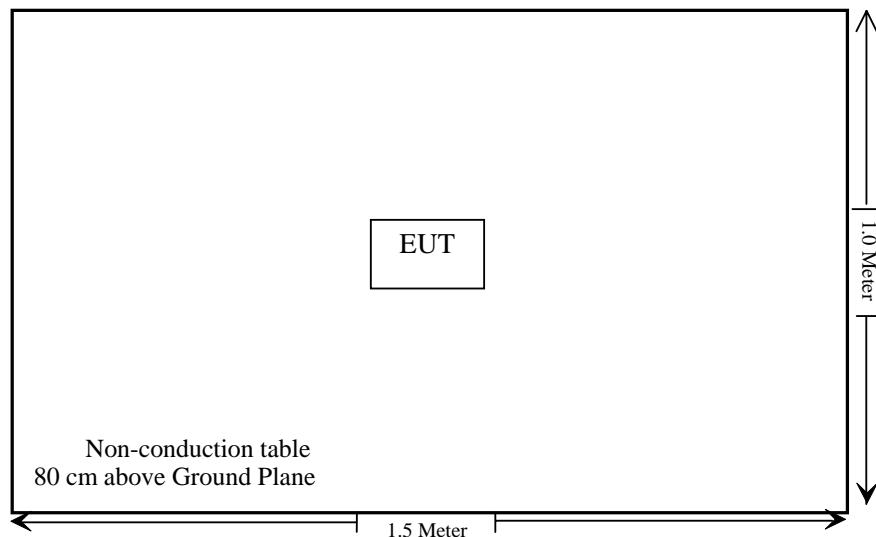

SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna requirement	Compliant
§15.205	Restricted Band of operation	Compliant
§15.209	Radiated Emission Test	Compliant
§15.227(a)	Field Strength	Compliant
§15.227(b)	Out of Band Emission	Compliant

§15.203 - ANTENNA REQUIREMENT

Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a permanent antenna, fulfill the requirement of this section.

Test Result: Pass

§15.205, §15.209, §15.227(a) - RADIATED EMISSIONS TEST**Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Lab Corp. (ShenZhen) is ± 4.0 dB.

EUT Setup

The radiated emission tests were performed in the chamber A test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15 Subpart C section 15.227 limits.

EMI Test Receiver Setup

According to FCC Rules, 47 CFR 15.33, the EUT emissions were investigated from 27 to 1000 MHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency	RB/W	VB/W	IF B/W
9 kHz-30 MHz	10 kHz	10 kHz	9 kHz
30 MHz-1 GHz	100 kHz	300 kHz	120 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2004-9-15	2005-9-15
HP	Amplifier	HP8447D	2944A09795	2004-9-1	2005-8-31
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2005-4-28	2006-4-28
ETS	Passive Loop Antenna	6512	00029604	2005-4-26	2006-4-26

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed per the NVLAP requirements, traceable to NIST.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

Test Results Summary

According to the data in the following table, the EUT complied with the FCC Part 15.227 & 15.209, with the worst margin reading of:

-2.10 dB at 54.290 MHz in the **Horizontal** polarization.

Test Data

Environmental Conditions

Temperature:	22° C
Relative Humidity:	58%
ATM Pressure:	1016mbar

Testing was performed by Lisa Zhu on 2005-5-20.

Test Mode: Transmitting

INDICATED		TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC PART 15.227&15.209		
Frequency MHz	Meter Reading dB μ V/m		Angle Degree	Height Meter	Polar H/V	Antenna Loss dB	Cable Loss dB	Amplifier Gain dB	Corr. Ampl. dB μ V/m	Limit dB μ V/m	Margin dB
54.290	55.37	45	1.2	H	10.5	0.7	28.7	37.90	40.0	-2.10*	Harmonics
135.725	55.65	45	1.2	H	12.9	1.1	28.5	41.20	43.5	-2.40*	Harmonics
54.290	50.52	90	1.0	V	10.5	0.7	28.7	33.00	40.0	-7.00	Harmonics
81.435	50.33	45	1.2	H	9.6	0.9	28.7	32.10	40.0	-7.90	Harmonics
81.435	48.93	60	1.0	V	9.6	0.9	28.7	30.70	40.0	-9.30	Harmonics
135.725	48.04	60	1.0	V	12.9	1.1	28.5	33.50	43.5	-10.00	Harmonics
190.015	45.27	45	1.2	H	14.4	1.3	28.0	33.00	43.5	-10.50	Harmonics
36.001	43.41	45	1.2	V	13.3	0.6	28.8	28.50	40.0	-11.50	Harmonics
108.580	46.04	45	1.2	H	11.4	1.0	28.5	29.90	43.5	-13.60	Harmonics
108.580	43.93	60	1.2	V	11.4	1.0	28.5	27.80	43.5	-15.70	Harmonics
27.145	75.70	45	1.2	H	15.3	0.6	28.8	62.80	80.0	-17.20	Fund(AVE)
27.145	73.00	180	1.2	V	15.3	0.6	28.8	60.10	80.0	-19.90	Fund(AVE)
27.145	78.11	45	1.2	H	15.3	0.6	28.8	65.20	100.0	-34.80	Fund(Peak)
27.145	75.42	180	1.2	V	15.3	0.6	28.8	62.50	100.0	-37.50	Fund(Peak)

* Within measurement uncertainty.

§15.227(b) - Out of Band Emission

EMI Test Receiver Setup

The system was investigated from 26.8 MHz to 27.3 MHz.

During the out of band emission test, the EMI test receiver was set with the following configurations:

Frequency	RB/W	VB/W	SWT
26.8 MHz-27.3 MHz	10 kHz	10 kHz	Auto

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447D	2994A09795	2004-9-1	2005-8-31
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2004-9-15	2005-9-15
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2005-4-28	2006-4-28

* **Statement of Traceability:** Bay Area Compliance Lab Corp. (ShenZhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

Reading the emission of 26.96 MHz and 27.28 MHz to ensure that the EUT complied with the FCC PART 15.227.

All data was recorded in the Peak detection mode.

Test Data

Environmental Conditions

Temperature:	22° C
Relative Humidity:	58%
ATM Pressure:	1016mbar


Testing was performed by Lisa Zhu on 2005-5-20.

Test Mode: Transmitting


The result has been complied with the 15.227(b), see the following plot:

Frequency MHz	Emission dB μ V/m	Limit dB μ V/m
26.96	17.50	40
27.28	22.39	40

Test Result: Pass

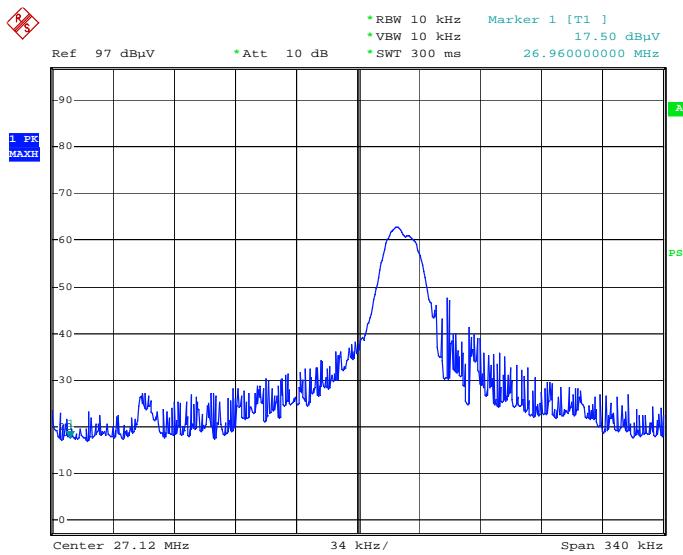

Date: 20.MAY.2005 10:07:24

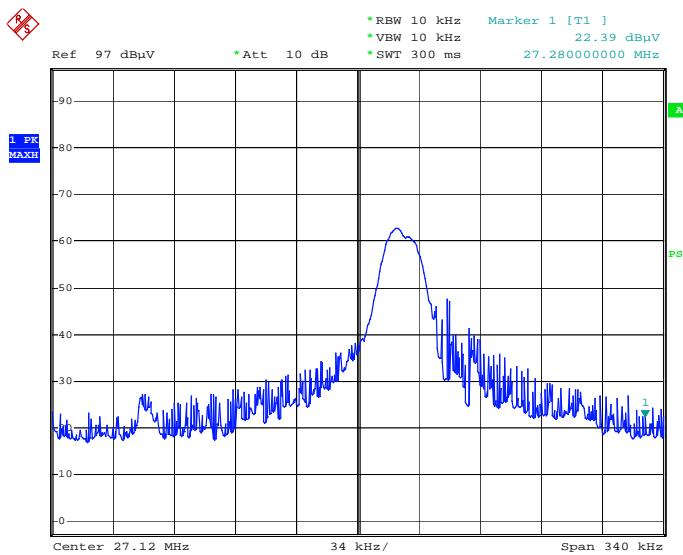

Date: 20.MAY.2005 10:08:02