

FCC ID: S29DEVO-6

RF Exposure requirements

MPE Evaluation

$$S = PG * \text{Duty factor} / 4\pi R^2$$

P = Peak Power Input to antenna (Watts)

G =Antenna Gain (numeric)

R = distance to the center of radiation of antenna (in meter) = 0.20 m

Note:

1) $P \text{ (Watts)} = (10 A \text{ (dBm / 10)}) / 1000$

2) $G \text{ (Antenna gain in numeric)} = 10A \text{ (Antenna gain in dBi / 10)}$

3) Duty factor

4) $\pi = 3.142$

MPE Results


Antenna Gain (dBi)	Peak Output Power (dBm)	Peak Output Power (W)	Duty factor	Calculated RF Exposure @ 20cm (mW/cm ²)	Limit (mW/ cm ²)
≤ 0	14.50	0.028	1	0.014	1

The device complies with RF exposure requirements for body exposure at a separation distance of 20 cm.

FCC ID: S29DEVO-6

Device operation distance

The following picture demonstrate that this device meet the > 20cm Distance requirement in worst case operating conditions.

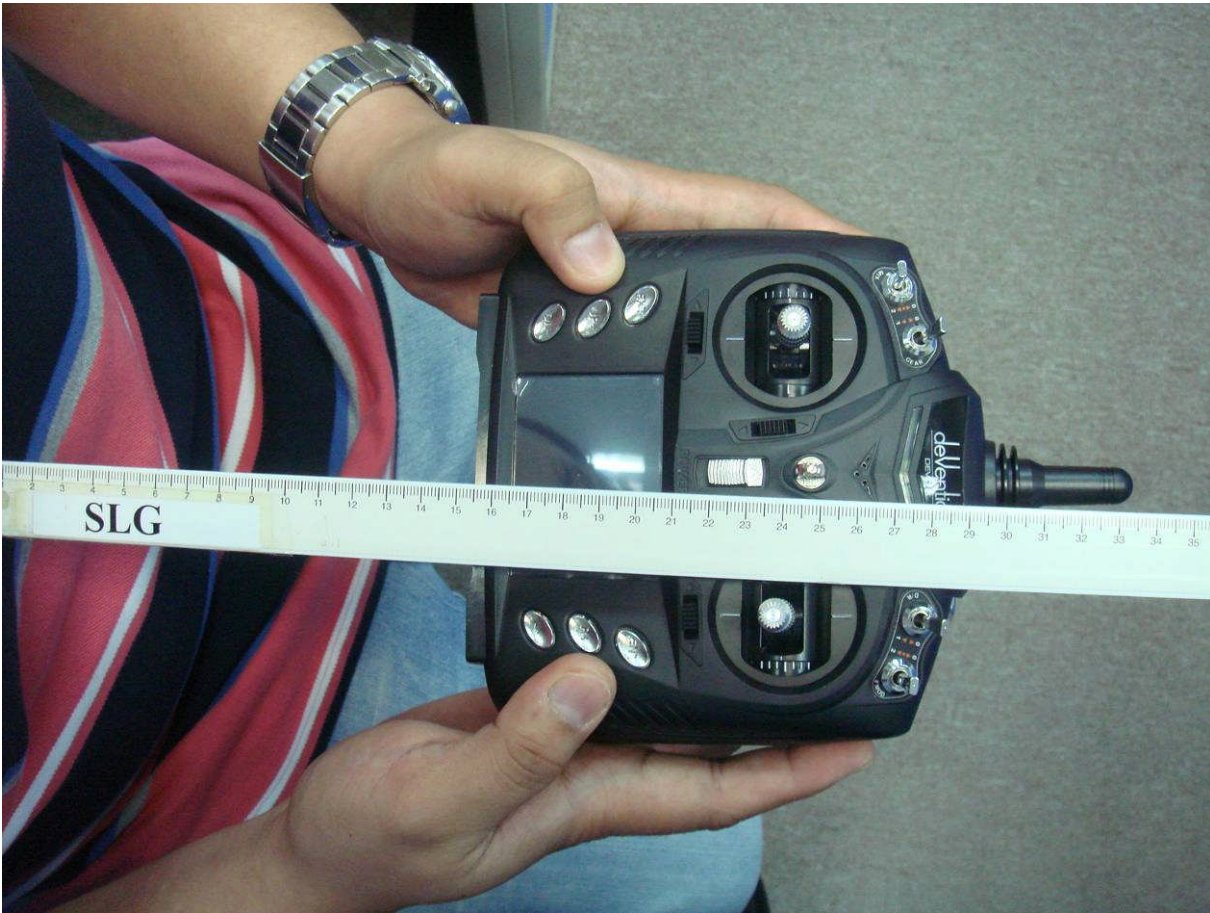

Picture1: Close to chest (30cm from antenna to torso) normal operation



Picture2: Close to chest (20.5cm from antenna to torso) worst case operation